



规格书 Specification

客户名称:

CUSTOMER:

环汇科技(福建)有限公司

客户料号:

CUSTOMER P/N:

客户品名:

DESCRIPTION:

捷雷料号:

P/N:

C168-JL-3867

捷雷品名:

PART NO:

NFC antenna; V1.4

核准	审核	编制
Frank	WenSen	Sean
2019. 09. 30	2019. 09. 30	2019. 09. 30

© 2019-2020 Fu Zhou Jie Lei Corporation. All rights reserved.

All content, materials, and programs in this document, including all code, text, graphics, and logos, unless otherwise noted, are the property of Jie Lei Corporation and cannot be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of Jie Lei Corporation.

Jie Lei Corporation may have patents or pending patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property rights except expressly provided in any written license agreement from Jie Lei.



目录

1. Electrical Performance.....	3
2. Measurement Setup.....	4
2.1 test equipment.....	5
3. Mechanical Dimension Drawing.....	6

版本描述

日期	批准	版本	描述
2020-06-05		V1.4	PCB 焊接线的焊盘由原来的 1.5*1.0 改为 2.7*1.5; 焊盘之间用白油丝印隔离
2020-03-17		V1.3	线圈尺寸公差修正
2019-12-27		V1.2	<u>增加 ROHS 资料</u>
2019-10-24		V1.1	线径改为 0.4mm, PCB 背面增加双面胶
2019-09-30		V1.0	初版



1. Electrical Performance

A.Electrical Characteristics	
Frequency Range(MHz)	13.5±1.5MHz
B.Chip parameters	
frequency (MHz)	13.56
material	Enameled wire
diameter (mm)	Φ0.4
inductance (uH)	0.8±0.1
C.Environmental	
Operation Temperature	-30℃~65℃
Storage Temperature	-30℃~85℃

2. Measurement Setup

(1) Reflection coefficient Measurement:

(a) **Instrument:** Network Analyzer

(b) Setup:

(I) Calibrate the Network Analyzer by one port calibration using Agilent calibration kits.

(II) Connect the antenna under test to the Network Analyzer

(III) Measure the S11 (reflection coefficient) shown in Fig.1

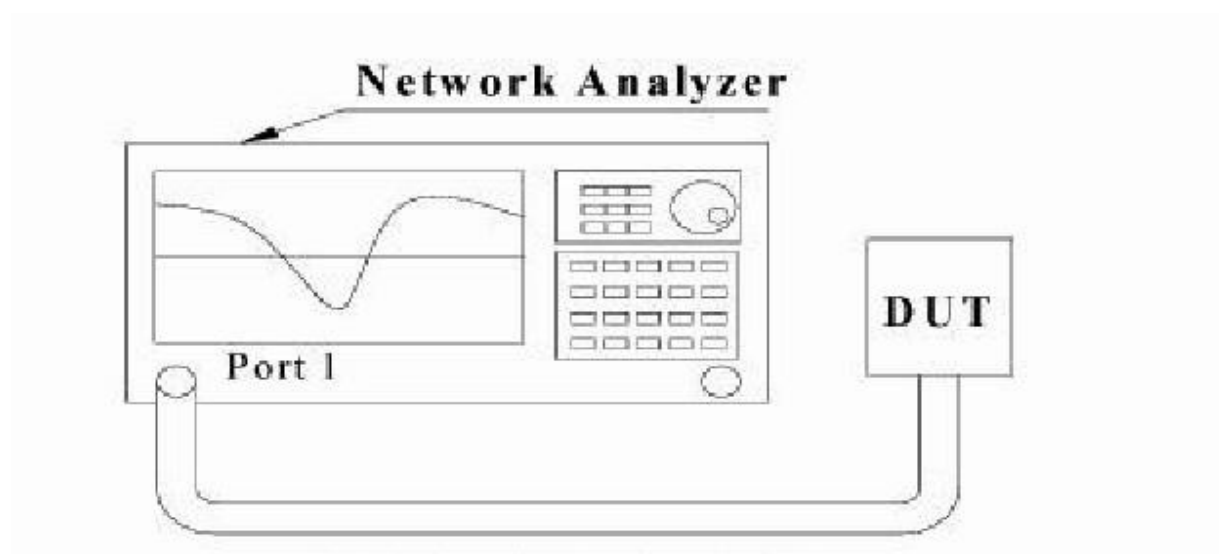


Fig.1 Measure S11 on Network Analyze



2.1 test equipment

Standing wave test equipment

VSWR was tested with an Agilent loss network analyzer E5071C. The subject is placed smoothly on a non-conductive material with a small dielectric constant, or suspended in the air.

Efficiency testing equipment

The efficiency test equipment was tested in a dark room set up by Terei Corporation. This includes active and passive testing of antenna 3D performance, as well as OTA performance tests (TRP&TIS) to CTIA standards. The external structure size of the anechoic chamber is $7\text{m} \times 5\text{m} \times 3\text{m}$ (L×W×H), which can test antennas in the frequency range from 700MHz to 6GHz. When testing, the test to be tested is fixed on the turntable.



3. Mechanical Dimension Drawing

