

**4788704908-SAR-2 System Performance Check-750MHz-Body-20181105**

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz;  
 Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.976 \text{ S/m}$ ;  $\epsilon_r = 55.632$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.6, 10.6, 10.6); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (5x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $2.46 \text{ W/kg}$


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $47.52 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $2.98 \text{ W/kg}$

**SAR(1 g) =  $2.06 \text{ W/kg}$ ; SAR(10 g) =  $1.39 \text{ W/kg}$**

Maximum value of SAR (measured) =  $2.48 \text{ W/kg}$

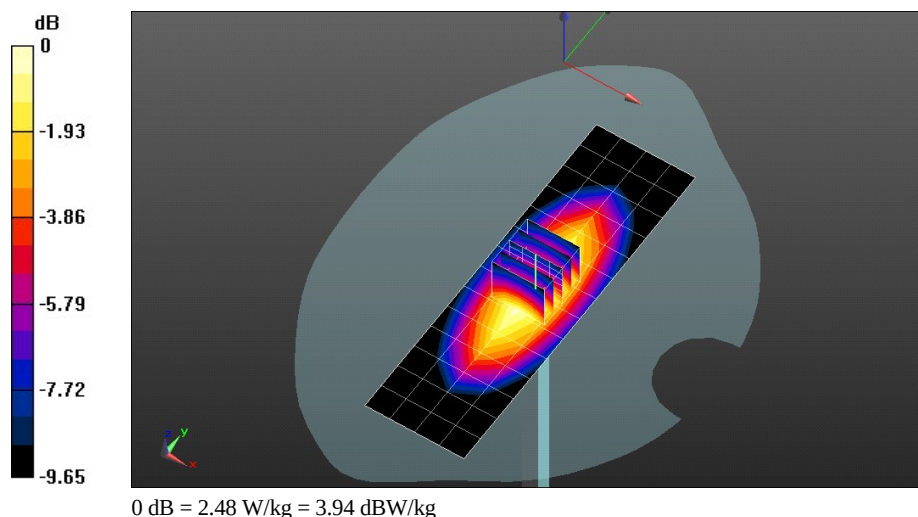

**4788704908-SAR-2 System Performance Check-835MHz-Body-20181102**

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz;

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.822$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.12, 10.12, 10.12); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (5x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.75 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 50.50 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.39 W/kg

**SAR(1 g) = 2.31 W/kg; SAR(10 g) = 1.53 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

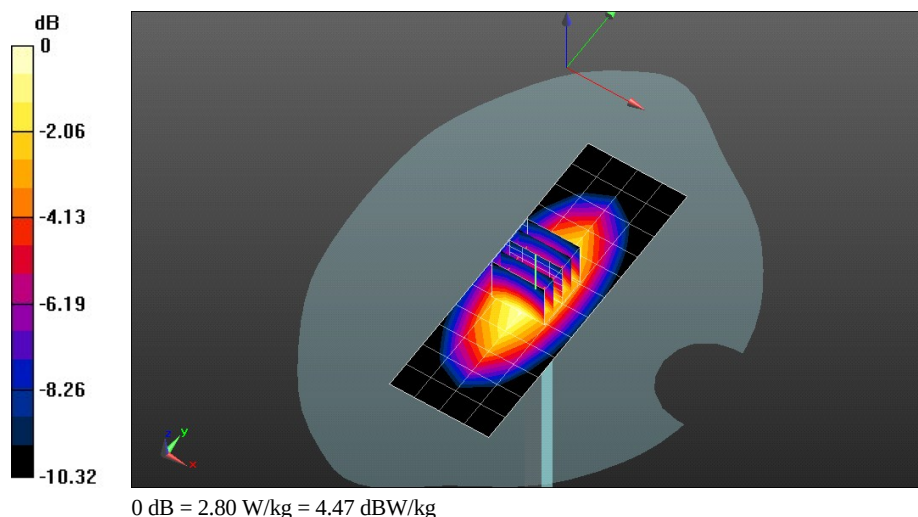

**4788704908-SAR-2 System Performance Check-835MHz-Body-20181105**

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz;

Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.993$  S/m;  $\epsilon_r = 54.826$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(10.12, 10.12, 10.12); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (5x13x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 2.78 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 50.23 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.37 W/kg

**SAR(1 g) = 2.3 W/kg; SAR(10 g) = 1.52 W/kg**

Maximum value of SAR (measured) = 2.79 W/kg

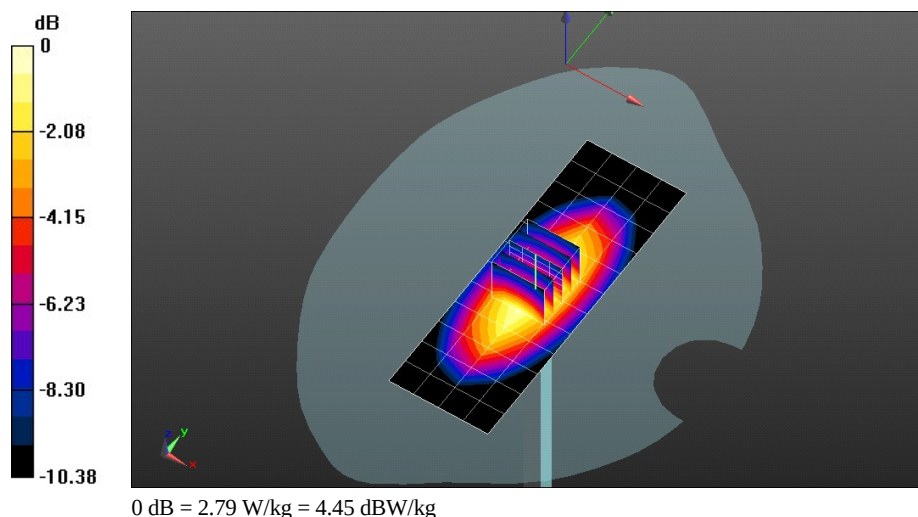

**4788704908-SAR-2 System Performance Check-1800MHz-Body-20181106**

Communication System: UID 0, CW (0); Communication System Band: D1800 (1800.0 MHz); Frequency: 1800 MHz;

Medium parameters used:  $f = 1800$  MHz;  $\sigma = 1.516$  S/m;  $\epsilon_r = 52.377$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.36, 8.36, 8.36); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (5x8x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 11.4 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 83.04 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 16.5 W/kg

**SAR(1 g) = 9.29 W/kg; SAR(10 g) = 4.9 W/kg**

Maximum value of SAR (measured) = 12.4 W/kg

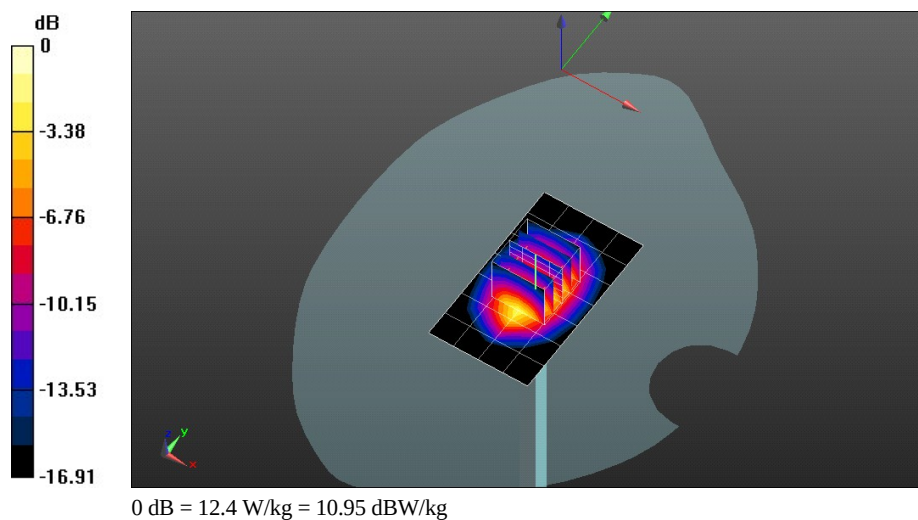

**4788704908-SAR-2 System Performance Check-1900MHz-Body-20181106**

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz;  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.569$  S/m;  $\epsilon_r = 52.155$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.26, 8.26, 8.26); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (5x8x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 12.7 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 83.67 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 17.4 W/kg

**SAR(1 g) = 9.69 W/kg; SAR(10 g) = 5.03 W/kg**

Maximum value of SAR (measured) = 13.0 W/kg

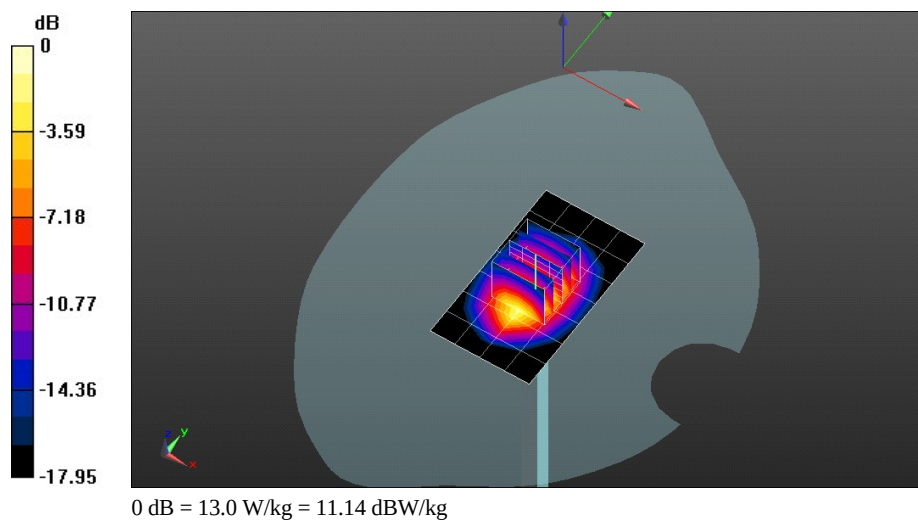

**4788704908-SAR-2 System Performance Check-1900MHz-Body-20181107**

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz;  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.543$  S/m;  $\epsilon_r = 52.495$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(8.26, 8.26, 8.26); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (5x8x1):** Measurement grid:  $dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 12.0 W/kg


**Configuration/Body/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 82.39 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 9.6 W/kg; SAR(10 g) = 4.96 W/kg**

Maximum value of SAR (measured) = 12.9 W/kg

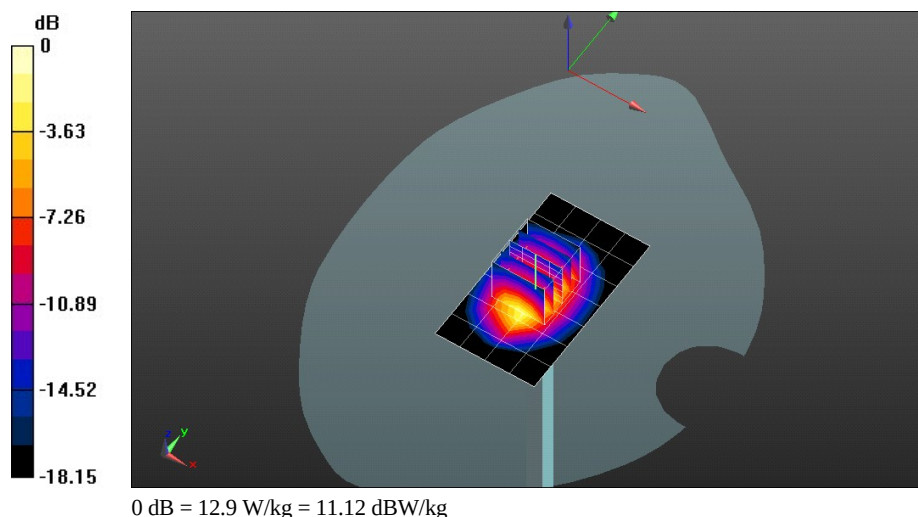

**4788704908-SAR-2 System Performance Check-2450MHz-Body-20181108**

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz;

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.041$  S/m;  $\epsilon_r = 50.456$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.82, 7.82, 7.82); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (6x8x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 14.4 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 80.76 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 24.0 W/kg

**SAR(1 g) = 12.2 W/kg; SAR(10 g) = 5.65 W/kg**

Maximum value of SAR (measured) = 17.1 W/kg

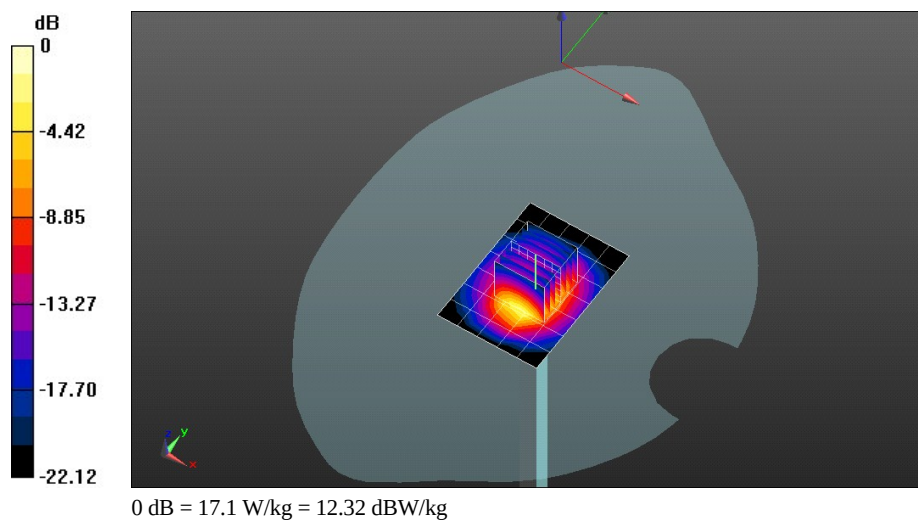

**4788704908-SAR-2 System Performance Check-2600MHz-Body-20181112**

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz;

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.191$  S/m;  $\epsilon_r = 52.493$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2017/12/14;
- Sensor-Surface: 2.5mm (Mechanical Surface Detection),  $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**Configuration/Body/Area Scan (6x8x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 17.2 W/kg


**Configuration/Body/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 77.80 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 28.0 W/kg

**SAR(1 g) = 13.3 W/kg; SAR(10 g) = 5.93 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

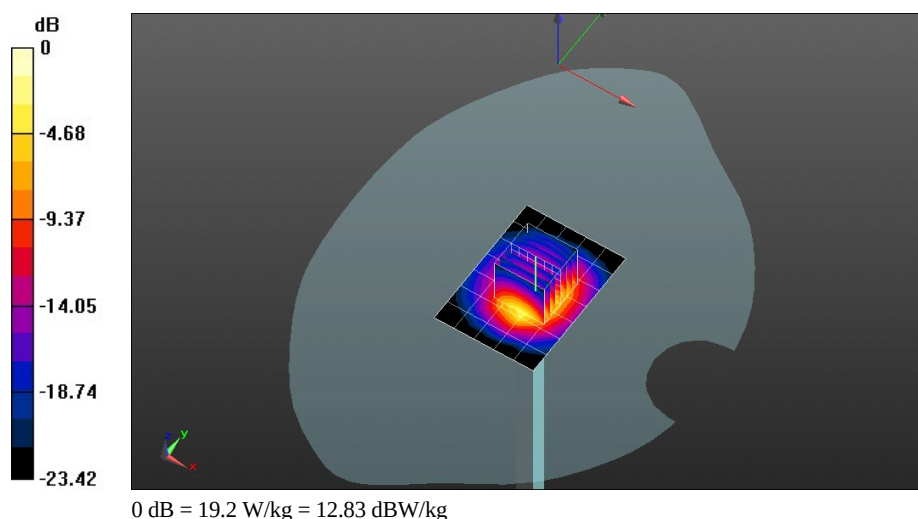



**4788704908-SAR-2 System Performance Check-D5GHz\_5250MHz-Body-20181108**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz;  
 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.58$  S/m;  $\epsilon_r = 48.522$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/12/14;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5250 MHz/Area Scan (6x6x1):**

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 13.2 W/kg


**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5250 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm**

Reference Value = 58.57 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 30.3 W/kg

**SAR(1 g) = 7.23 W/kg; SAR(10 g) = 2.03 W/kg**

Maximum value of SAR (measured) = 17.6 W/kg

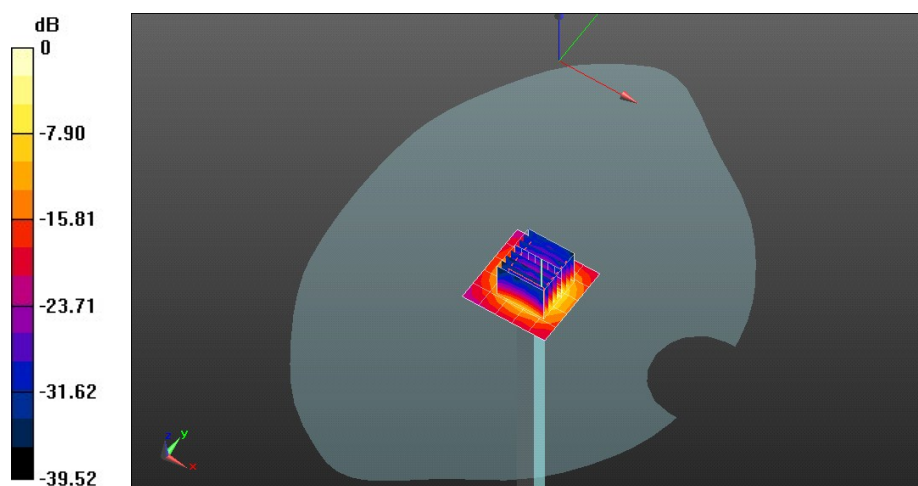

0 dB = 17.6 W/kg = 12.46 dBW/kg

**4788704908-SAR-2 System Performance Check-D5GHz\_5600MHz-Body-20181109**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz;

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.957$  S/m;  $\epsilon_r = 47.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(4.42, 4.42, 4.42); Calibrated: 2017/12/14;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (6x6x1):**

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 14.6 W/kg


**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm**

Reference Value = 62.85 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 33.6 W/kg

**SAR(1 g) = 7.51 W/kg; SAR(10 g) = 2.08 W/kg**

Maximum value of SAR (measured) = 18.4 W/kg

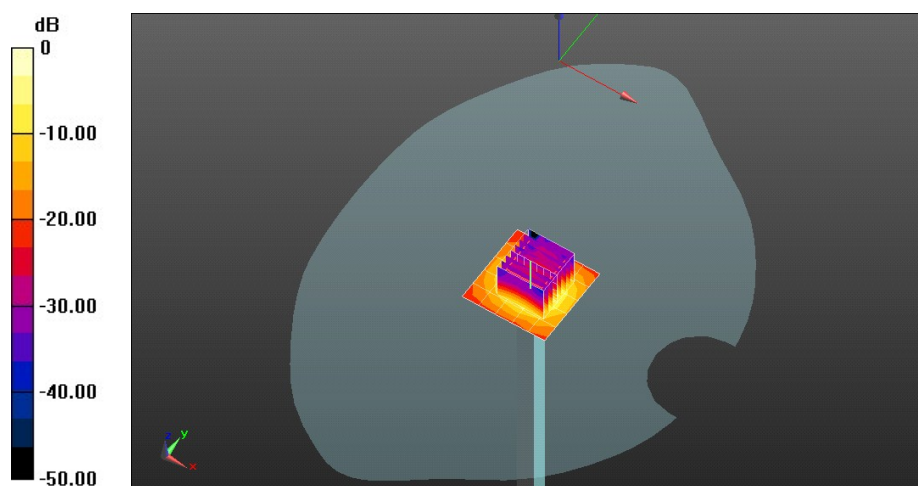

0 dB = 18.4 W/kg = 12.66 dBW/kg

**4788704908-SAR-2 System Performance Check-D5GHz\_5750MHz-Body-20181109**

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz;  
 Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.17$  S/m;  $\epsilon_r = 47.453$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(4.58, 4.58, 4.58); Calibrated: 2017/12/14;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = 1.0, 25.0$
- Electronics: DAE3 Sn427; Calibrated: 2017/12/4
- Phantom: SAM; Type: QD000P40CD; Serial: 1805

**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (6x6x1):**

Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 12.8 W/kg


**System Performance Check with D5GHzV2 Dipole (graded grid)/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm**

Reference Value = 62.18 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 33.4 W/kg

**SAR(1 g) = 7.1 W/kg; SAR(10 g) = 1.97 W/kg**

Maximum value of SAR (measured) = 17.3 W/kg

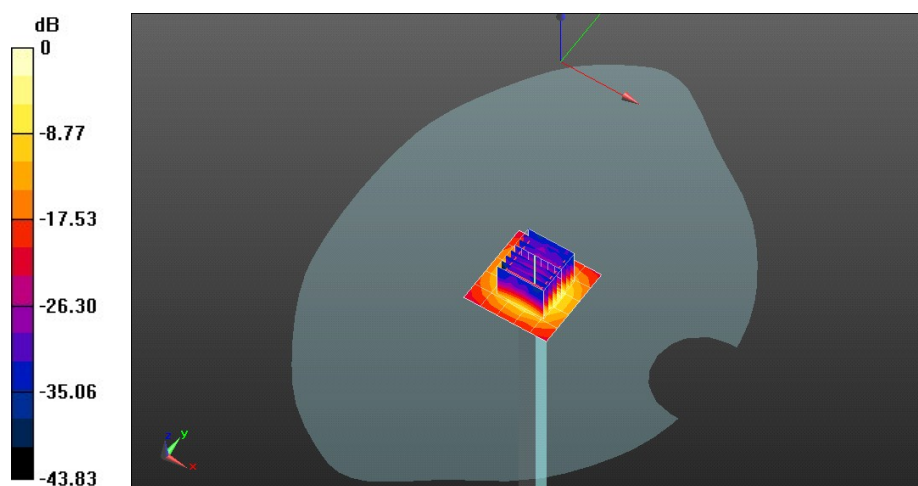

0 dB = 17.3 W/kg = 12.39 dBW/kg