



Shenzhen CTA Testing Technology Co., Ltd.

Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

TEST REPORT

Report Reference No......: **CTA24060500401**

FCC ID: **2AB8776101**

Compiled by
(position+printed name+signature)...: File administrators Zoey Cao

Supervised by
(position+printed name+signature)...: Project Engineer Amy Wen



Approved by
(position+printed name+signature)...: RF Manager Eric Wang

Date of issue.....: June 13, 2024

Testing Laboratory Name: **Shenzhen CTA Testing Technology Co., Ltd.**

Address.....: Room 106, Building 1, Yibaolai Industrial Park, Qiaotou Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name: **Iconnect**

Address.....: No.9, Aly. 58, Ln. 112, Ruiguang Rd., Neihu Dist., Taipei City, Taiwan

Test specification.....:

Standard: **IEC 62209-2:2010; IEEE 1528:2013; FCC 47 CFR Part 2.1093; ANSI/IEEE C95.1:2005; Reference FCC KDB 447498; KDB 248227; KDB 865664, KDB447498 D02&TCBC WORKSHOP 2019-11-13**

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: **802.11ac ultra-range USB adapter**

Trade Mark.....: ALFA

Manufacturer.....: ALFA NETWORK INC.

Model/Type reference.....: AWUS036ACHM

Listed Models: AWUS036AXMH, AWUS036AXMHL, AWUS036AXMHS

Rating: DC 5V from PC USB

Result.....: **PASS**

TEST REPORT

Equipment under Test : 802.11ac ultra-range USB adapter

Model /Type : AWUS036ACHM

Listed Models : AWUS036AXMH, AWUS036AXMHL, AWUS036AXMHS

Applicant : **Iconnect**

Address : No.9, Aly. 58, Ln. 112, Ruiguang Rd., Neihu Dist.,Taipei City,Taiwan

Manufacturer : **ALFA NETWORK INC.**

Address : 4F.-1, No. 106, Ruiguang Rd., Neihu Dist., Taipei City 11491, Taiwan
(R.O.C.)

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1	Statement of Compliance	6
2	General Information	7
2.1	General Remarks	7
2.2	Description of Equipment Under Test (EUT).....	7
2.3	Device Category and SAR Limits	7
2.4	Applied Standard.....	7
2.5	Test Facility.....	9
2.6	Environment of Test Site.....	9
2.7	Test Configuration.....	9
3	Specific Absorption Rate (SAR).....	10
3.1	Introduction.....	10
3.2	SAR Definition	10
4	SAR Measurement System.....	11
4.1	E-Field Probe.....	11
4.2	Data Acquisition Electronics (DAE).....	12
4.3	Robot.....	13
4.4	Measurement Server	13
4.5	Phantom	13
4.6	Device Holder.....	14
4.7	Data Storage and Evaluation.....	15
5	Test Equipment List	18
6	Tissue Simulating Liquids	19
7	System Verification Procedures.....	21
8	EUT Testing Position	23
8.1	Devices with hinged or swivel antenna(s).....	23
9	Measurement Procedures.....	24
9.1	Spatial Peak SAR Evaluation	24
9.2	Power Reference Measurement.....	24
9.3	Area Scan Procedures	25
9.4	Zoom Scan Procedures.....	25
9.5	Volume Scan Procedures	27
9.6	Power Drift Monitoring	27
10	TEST CONDITIONS AND RESULTS	28
10.1	Conducted Power	28
10.2	Transmit Antennas.....	29
10.3	Test Exclusion and Estimated SAR	30
10.4	SAR Test Results Summary	31
10.5	SAR Measurement Variability	35
10.6	Simultaneous Transmission Analysis.....	36
11	Measurement Uncertainty	37
Appendix A.	EUT Photos and Test Setup Photos	39

Appendix B.	Plots of SAR System Check.....	44
Appendix C.	Plots of SAR Test Data	47
Appendix D.	DASY System Calibration Certificate.....	50

Version

Version No.	Date	Description
R00	June 13, 2024	Original

1 Statement of Compliance

<Highest SAR Summary>

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2005, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013. The maximum results of Specific Absorption Rate (SAR) found during testing are as follows.

Frequency Band	Highest Reported 10g-SAR(W/Kg)	Simultaneous Reported SAR (W/Kg)
WLAN2.4G	0.543	N/A
WLAN5.2G	0.448	
WLAN5.8G	0.666	
SAR Test Limit (W/Kg)	4.0	
Test Result	PASS	

2 General Information

2.1 General Remarks

Date of receipt of test sample	:	June 05, 2024
Testing commenced on	:	June 07, 2024
Testing concluded on	:	June 12, 2024

2.2 Description of Equipment Under Test (EUT)

The Iconnect's Model: AWUS036ACHM or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Product Name:	802.11ac ultra-range USB adapter
Model/Type reference:	AWUS036ACHM
Power supply:	DC 5.0V From host PC
Testing sample ID:	CTA240605004-1# (Engineer sample) CTA240605004-2# (Normal sample)
Hardware version:	V100
Software version:	NA
Tx Frequency:	SRD: 2.4G WIFI: 2412~2462MHz 5G WIFI: 5180~5240MHz, 5745~5825MHz
Type of Modulation:	2.4G WIFI: BPSK,QPSK,16QAM,64QAM 5G WIFI: OFDM
Category of device:	Portable device
Remark:	The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

2.3 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

2.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093:2013)
- ANSI/IEEE C95.1:2005
- IEEE Std 1528:2013
- KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04

- KDB 865664 D02 RF Exposure Reporting v01r02
- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 248227 D01 802 11 Wi-Fi SAR v02r02
- KDB 447498 D02 SAR Procedures for Dongle Xmtr v02r01 &TCBCWORKSHOP 2019-11-13

2.5 Test Facility

FCC-Registration No.: 517856 Designation Number: CN1318

Shenzhen CTA Testing Technology Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

A2LA-Lab Cert. No.: 6534.01

Shenzhen CTA Testing Technology Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

ISED#: 27890 CAB identifier: CN0127

Shenzhen CTA Testing Technology Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

2.6 Environment of Test Site

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

2.7 Test Configuration

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during all tests. For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

3 Specific Absorption Rate (SAR)

3.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

3.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

4 SAR Measurement System

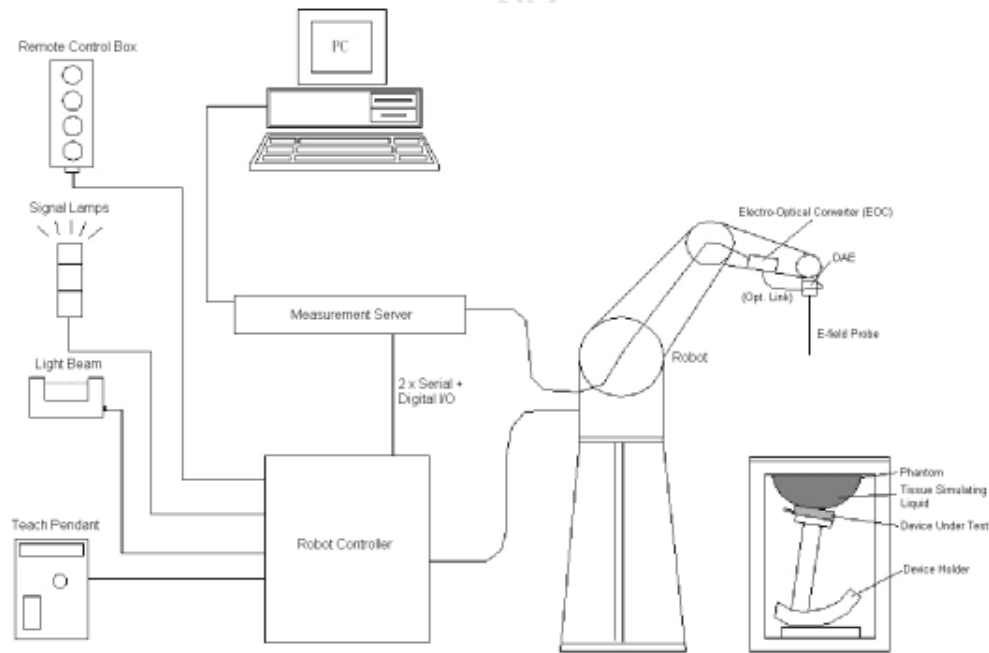

DASY System Configurations

The DASYS system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASYS software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

components are described in details in the following sub-sections.

4.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface

detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 W/kg; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm



Photo of EX3DV4

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

4.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Photo of DAE

4.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX60XL) type from Stäubli SA (France). For the 6-axis controllersystem, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäublirobot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Photo of DASY5

4.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

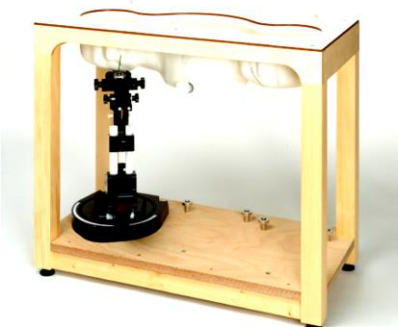


Photo of Server for DASY5

4.5 Phantom


<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm;	

Measurement Areas	Height: adjustable feet	 <p style="text-align: center;">Photo of SAM Phantom</p>
	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI4 Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	 <p style="text-align: center;">Photo of ELI4 Phantom</p>
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

4.6 Device Holder

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric

parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Device Holder

4.7 Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [W/kg]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i

Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)

U_i = input signal of channel i, (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i= x, y, z)

Norm_i= sensor sensitivity of channel i, (i= x, y, z), $\mu V/(V/m)^2$ for E-field Probes

ConvF= sensitivity enhancement in solution

a_{ij}= sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in W/kg

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz System Validation Kit	D2450V2	745	Aug. 28,2023	Aug. 27,2026
SPEAG	5GHz System Validation Kit	D5GHzV2	1301	Feb.16, 2023	Feb.15, 2026
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMW500	1201.0002K50-104209-JC	Nov.05, 2023	Nov.04, 2024
SPEAG	Data Acquisition Electronics	DAE3	428	Aug.30,2023	Aug.29,2024
SPEAG	Dosimetric E-Field Probe	EX3DV4	7380	June 21,2023	June 20,2024
Agilent	ENA Series Network Analyzer	E5071C	MY46317418	Oct.25, 2023	Oct.24, 2024
SPEAG	DAK	DAK-3.5	1226	NCR	NCR
SPEAG	SAM Twin Phantom	QD000P40CD	1802	NCR	NCR
SPEAG	ELI Phantom	QDOVA004AA	2058	NCR	NCR
AR	Amplifier	ZHL-42W	QA1118004	NCR	NCR
Agilent	Power Meter	N1914A	MY50001102	Oct.25, 2023	Oct.24, 2024
Agilent	Power Sensor	N8481H	MY51240001	Oct.25, 2023	Oct.24, 2024
R&S	Spectrum Analyzer	N9020A	MY51170037	Oct.25, 2023	Oct.24, 2024
Agilent	Signal Generation	N5182A	MY48180656	Oct.25, 2023	Oct.24, 2024
Worken	Directional Coupler	0110A05601O-10	COM5BNW1A2	Oct.25, 2023	Oct.24, 2024

Note:

1. The calibration certificate of DASY can be referred to appendix D of this report.
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
4. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
5. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it

6 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown as followed:



Photo of Liquid Height for Head SAR

Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	65.5	0	0	0	0	31.5	2.16	52.5

The following table shows the measuring results for simulating liquid.

Measured Frequency (MHz)	Target Tissue		Measured Tissue				Liquid Temp.	Test Data
	ϵ_r	σ	ϵ_r	Dev. (%)	σ	Dev. (%)		
2450	39.2	1.80	39.188	-0.03%	1.732	-3.79%	22.8	06/07/2024
5250	35.9	4.71	34.155	-4.86%	4.816	2.24%	22.2	06/11/2024
5750	35.4	5.22	35.152	-0.70%	5.349	2.47%	22.4	06/12/2024

7 System Verification Procedures


Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

➤ Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

➤ System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

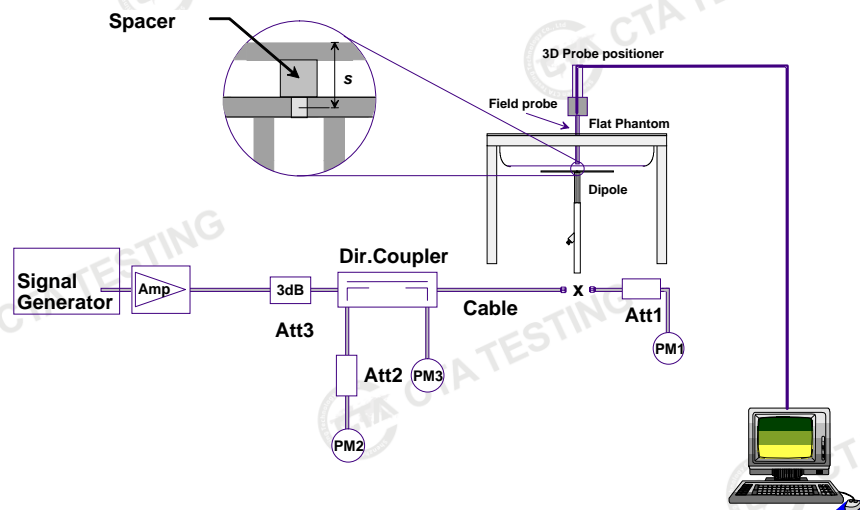

System Setup for System Evaluation

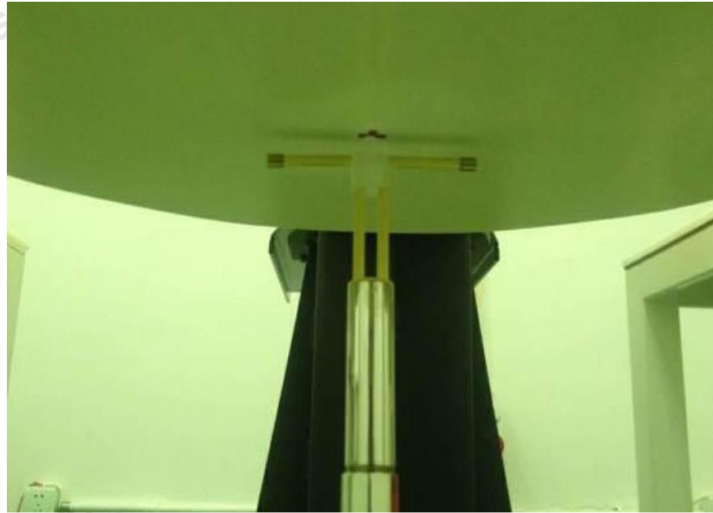


Photo of Dipole Setup

➤ **Validation Results**

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10%. The table below shows the target SAR and measured SAR after normalized to 1W input power. It indicates that the system performance check can meet the variation criterion and the plots can be referred to Appendix B of this report.

Date	Frequency (MHz)	Power fed onto reference dipole (mW)	Targeted SAR 1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR (W/kg)	Deviation (%)
05/21/2024	2450	250	52.7	13.36	53.44	1.38%
05/23/2024	5250	100	77.7	7.89	78.90	1.60%
06/07/2024	5750	100	78.0	7.48	74.80	-4.12%

8 EUT Testing Position

8.1 Devices with hinged or swivel antenna(s)

This EUT tests shall be performed if applicable in both the horizontal and vertical positions relative to the phantom, and with the antenna oriented away from the body of the DUT (Figure1) and/or with the antenna extended and retracted such as to obtain the highest exposure condition.

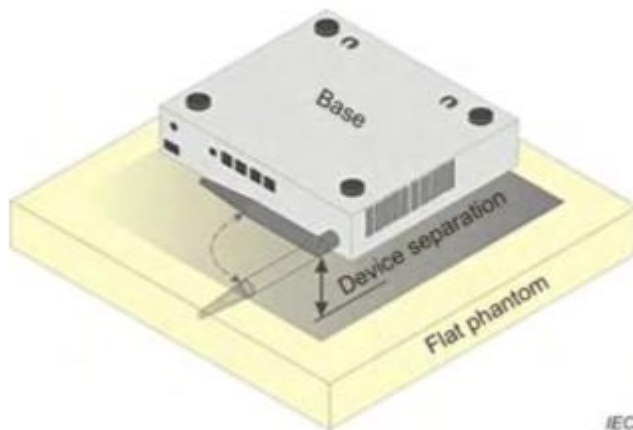


Figure 8.1 – Device with swivel antenna

9 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the middle channel.
- (b) Keep EUT to radiate maximum output power or 100% duty factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as setup photos demonstrates.
- (e) Set scan area, grid size and other setting on the DASY software.
- (f) Measure SAR transmitting at the middle channel for all applicable exposure positions.
- (g) Identify the exposure position and device configuration resulting the highest SAR
- (h) Measure SAR at the lowest and highest channels at the worst exposure position and device configuration if applicable.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller

than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan Procedures

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan Procedures

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		≤ 2 GHz: $\leq 15 \text{ mm}$ 2 – 3 GHz: $\leq 12 \text{ mm}$	3 – 4 GHz: $\leq 12 \text{ mm}$ 4 – 6 GHz: $\leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		≤ 2 GHz: $\leq 8 \text{ mm}$ 2 – 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: $\leq 5 \text{ mm}^*$ 4 – 6 GHz: $\leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	3 – 4 GHz: $\leq 4 \text{ mm}$ 4 – 5 GHz: $\leq 3 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	3 – 4 GHz: $\geq 28 \text{ mm}$ 4 – 5 GHz: $\geq 25 \text{ mm}$ 5 – 6 GHz: $\geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.			
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

10 TEST CONDITIONS AND RESULTS

10.1 Conducted Power

<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Conducted Peak Output Power(dBm)	Conducted Average Output Power(dBm)	Tune-up limit (dBm)
802.11b	1	2412	19.16	18.40	18.50
	6	2437	18.10	17.30	18.50
	11	2462	18.15	17.24	18.50
802.11g	1	2412	18.67	17.89	18.00
	6	2437	17.88	17.02	18.00
	11	2462	18.79	17.95	18.00
802.11n(HT20)	1	2412	18.63	17.85	18.00
	6	2437	17.91	17.04	18.00
	11	2462	17.98	17.10	18.00
802.11n(HT40)	3	2422	16.13	15.60	16.00
	6	2437	15.64	14.96	16.00
	9	2452	14.92	14.23	16.00


<WLAN 5.2GHz Conducted Power>

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up Power (dBm)
802.11a	36	5180	12.42	14.00
	40	5200	13.36	14.00
	48	5240	13.85	14.00
802.11n(HT20)	36	5180	12.31	14.00
	40	5200	12.98	14.00
	48	5240	13.74	14.00
802.11n(HT40)	38	5190	12.92	14.50
	46	5230	14.01	14.50
802.11ac(VHT20)	36	5180	12.18	14.00
	40	5200	13.09	14.00
	48	5240	13.90	14.00
802.11ac(VHT40)	38	5190	12.99	14.00
	46	5230	14.22	15.00
802.11ac(VHT80)	42	5210	14.67	15.00

<WLAN 5.8GHz Conducted Power>

Type	Channel	Frequency (MHz)	Conducted Average Output Power(dBm)	Tune-up Power (dBm)
802.11a	149	5745	17.71	18.00
	157	5785	16.89	18.00
	165	5825	17.23	18.00
802.11n(HT20)	149	5745	17.47	18.00
	157	5785	16.89	18.00
	165	5825	17.13	18.00
802.11n(HT40)	151	5755	17.71	18.00
	159	5795	17.47	18.00
802.11ac(VHT20)	149	5745	17.56	18.00
	157	5785	16.79	18.00
	165	5825	17.16	18.00
802.11ac(VHT40)	151	5755	17.72	18.00
	159	5795	17.32	18.00
802.11ac(VHT80)	155	5775	17.95	18.00

10.2 Transmit Antennas

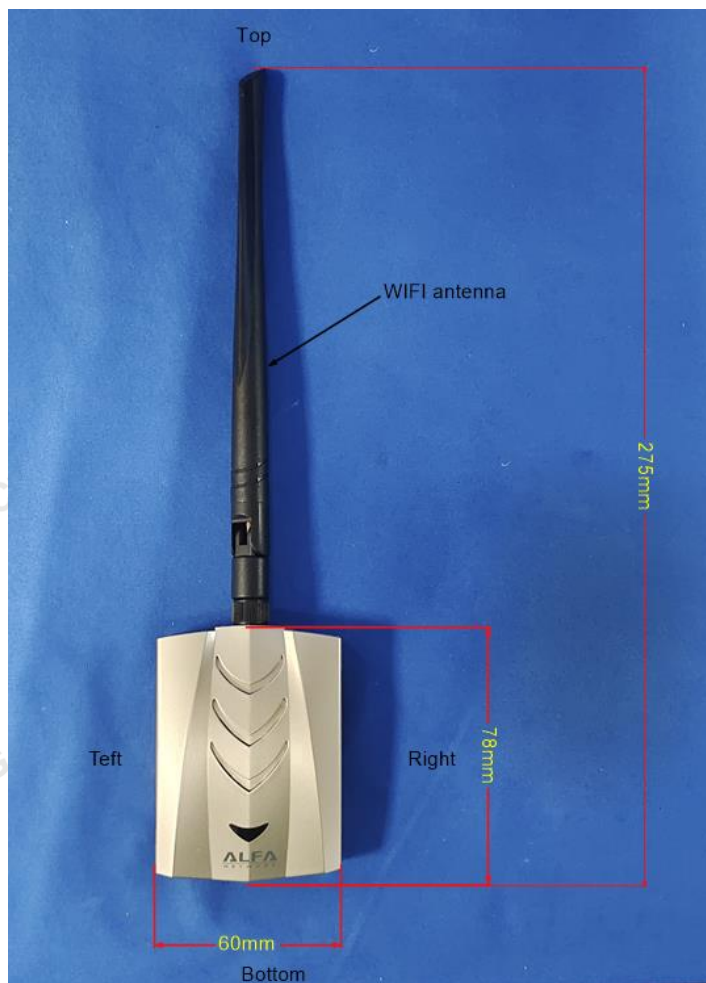

Test Configuration:

Configuration	Poison					
	Front	Back	Left side	Right side	Top side	Bottom side
Antenna direction	Extend	Extend	Extend	Extend	Extend	Extend
	Fold 90° #1	Fold 90° #1	Fold 90° #1	Fold 90° #1	Fold 90° #1	Fold 90° #1
	Fold 90° #2	Fold 90° #2	Fold 90° #2	Fold 90° #2	Fold 90° #2	Fold 90° #2
	Fold 90° #3	Fold 90° #3	Fold 90° #3	Fold 90° #3	Fold 90° #3	Fold 90° #3
	Fold 90° #4	Fold 90° #4	Fold 90° #4	Fold 90° #4	Fold 90° #4	Fold 90° #4

Note: The different antenna directions, please see the test photos.

10.3 Test Exclusion and Estimated SAR

SAR Test Exclusion Considerations

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$

- f(GHz) is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.

Per KDB 447498 D01v06, at 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

- [Threshold at 50mm)+(test separation distance-50mm)*(f(MHz)/150)]mW, at 100MHz to 1500MHz
- [Threshold at 50mm)+(test separation distance-50mm)*10]mW at > 1500 MHz and ≤ 6 GHz

Estimated SAR

Per KDB447498 requires when the standalone SAR test exclusion of section 4.3.1 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion;

- (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm) $\cdot [\sqrt{f(\text{GHz})/x}]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm

The below table, exemption limits for routine evaluation based on frequency and separation distance was according to SAR-based Exemption – §1.1307(b)(3)(i)(B).

Standalone SAR Test Exclusion and Estimated SAR _ Antenna direction any									
Wireless Interface	Frequency (MHz)	Configuration	Max. Power With tune-up		Distance (mm)	Calculation Result	SAR Exclusion Thresholds	Standalone SAR Exclusion	Estimated SAR (W/Kg)
			dBm	mW					
2.4GHz WLAN	2450	Bottom Side	18.50	70.795	78	70.795	376	Yes	0.400
5.2 GHz WLAN	5250	Bottom Side	13.50	22.387	78	22.387	345	Yes	0.400
5.8 GHz WLAN	5785	Bottom Side	17.00	50.119	78	50.119	342	Yes	0.400

Remark:

1. Maximum average power including tune-up tolerance;
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion
3. when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW".

10.4 SAR Test Results Summary

General Note:

- 1 Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a) Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b) For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c) For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2 Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3 Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg, The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

SAR Results

SAR Values [WIFI2.4G]

Mode	Test Position	Antenna direction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)	Plot No.
802.11b	Front	Extend	01	2412	18.40	18.50	1.023	0.03	0.522	0.534	
		Fold 90°#1	01	2412	18.40	18.50	1.023	0.09	0.343	0.351	
		Fold 90°#2	01	2412	18.40	18.50	1.023	0.12	0.498	0.510	
		Fold 90°#3	01	2412	18.40	18.50	1.023	-0.07	0.501	0.513	
		Fold 90°#4	01	2412	18.40	18.50	1.023	-0.02	0.517	0.529	
	Back	Extend	01	2412	18.40	18.50	1.023	0.11	0.531	0.543	#1
		Fold 90°#1	01	2412	18.40	18.50	1.023	0.09	0.325	0.333	
		Fold 90°#2	01	2412	18.40	18.50	1.023	0.01	0.514	0.526	
		Fold 90°#3	01	2412	18.40	18.50	1.023	0.10	0.508	0.520	
		Fold 90°#4	01	2412	18.40	18.50	1.023	-0.02	0.522	0.534	
	Left side	Extend	01	2412	18.40	18.50	1.023	-0.08	0.275	0.281	
		Fold 90°#1	01	2412	18.40	18.50	1.023	-0.07	0.265	0.271	
		Fold 90°#2	01	2412	18.40	18.50	1.023	-0.06	0.311	0.318	
		Fold 90°#3	01	2412	18.40	18.50	1.023	0.05	0.284	0.291	
		Fold 90°#4	01	2412	18.40	18.50	1.023	0.06	0.279	0.285	
	Right side	Extend	01	2412	18.40	18.50	1.023	0.06	0.283	0.290	
		Fold 90°#1	01	2412	18.40	18.50	1.023	0.13	0.271	0.277	
		Fold 90°#2	01	2412	18.40	18.50	1.023	-0.10	0.325	0.333	
		Fold 90°#3	01	2412	18.40	18.50	1.023	0.04	0.277	0.283	
		Fold 90°#4	01	2412	18.40	18.50	1.023	0.07	0.289	0.296	
Top side	Extend	01	2412	18.40	18.50	1.023	0.04	0.375	0.384		
	Fold 90°#1	01	2412	18.40	18.50	1.023	0.05	0.458	0.469		
	Fold 90°#2	01	2412	18.40	18.50	1.023	0.07	0.476	0.487		
	Fold 90°#3	01	2412	18.40	18.50	1.023	0.07	0.504	0.516		
	Fold 90°#4	01	2412	18.40	18.50	1.023	0.04	0.497	0.509		

Note: Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. these thresholds should be multiplied by 2.5 when 10-g extremity SAR is considered.

SAR Values [WIFI5.2G]

Mode	Test Position	Antenna direction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)	Plot No.
802.11ac(VH T80)	Front	Extend	42	5210	14.67	15.00	1.079	-0.05	0.407	0.439	
		Fold 90°#1	42	5210	14.67	15.00	1.079	0.11	0.404	0.436	
		Fold 90°#2	42	5210	14.67	15.00	1.079	-0.12	0.386	0.416	
		Fold 90°#3	42	5210	14.67	15.00	1.079	0.13	0.391	0.422	
		Fold 90°#4	42	5210	14.67	15.00	1.079	0.05	0.398	0.429	
	Back	Extend	42	5210	14.67	15.00	1.079	-0.06	0.415	0.448	#2
		Fold 90°#1	42	5210	14.67	15.00	1.079	0.04	0.414	0.447	
		Fold 90°#2	42	5210	14.67	15.00	1.079	-0.07	0.399	0.430	
		Fold 90°#3	42	5210	14.67	15.00	1.079	0.04	0.390	0.421	
		Fold 90°#4	42	5210	14.67	15.00	1.079	-0.03	0.403	0.435	
	Left side	Extend	42	5210	14.67	15.00	1.079	0.11	0.269	0.290	
		Fold 90°#1	42	5210	14.67	15.00	1.079	-0.06	0.254	0.274	
		Fold 90°#2	42	5210	14.67	15.00	1.079	0.11	0.301	0.325	
		Fold 90°#3	42	5210	14.67	15.00	1.079	-0.06	0.277	0.299	
		Fold 90°#4	42	5210	14.67	15.00	1.079	-0.06	0.271	0.292	
	Right side	Extend	42	5210	14.67	15.00	1.079	0.13	0.269	0.290	
		Fold 90°#1	42	5210	14.67	15.00	1.079	0.12	0.280	0.302	
		Fold 90°#2	42	5210	14.67	15.00	1.079	-0.01	0.330	0.356	
		Fold 90°#3	42	5210	14.67	15.00	1.079	0.05	0.274	0.296	
		Fold 90°#4	42	5210	14.67	15.00	1.079	-0.10	0.281	0.303	
Top side	Extend	42	5210	14.67	15.00	1.079	0.08	0.266	0.287		
	Fold 90°#1	42	5210	14.67	15.00	1.079	-0.04	0.328	0.354		
	Fold 90°#2	42	5210	14.67	15.00	1.079	-0.07	0.331	0.357		
	Fold 90°#3	42	5210	14.67	15.00	1.079	0.10	0.387	0.418		
	Fold 90°#4	42	5210	14.67	15.00	1.079	0.12	0.365	0.394		

SAR Values [WIFI5.8G]

Mode	Test Position	Antenna direction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Scaled SAR _{1g} (W/kg)	Plot No.
802.11ac(VH T80)	Front	Extend	155	5775	17.95	18.00	1.012	0.10	0.645	0.652	
		Fold 90°#1	155	5775	17.95	18.00	1.012	0.11	0.639	0.646	
		Fold 90°#2	155	5775	17.95	18.00	1.012	-0.06	0.622	0.629	
		Fold 90°#3	155	5775	17.95	18.00	1.012	0.08	0.617	0.624	
		Fold 90°#4	155	5775	17.95	18.00	1.012	-0.07	0.646	0.653	
	Back	Extend	155	5775	17.95	18.00	1.012	0.03	0.658	0.666	#3
		Fold 90°#1	155	5775	17.95	18.00	1.012	0.13	0.655	0.663	
		Fold 90°#2	155	5775	17.95	18.00	1.012	0.10	0.639	0.646	
		Fold 90°#3	155	5775	17.95	18.00	1.012	0.01	0.630	0.637	
		Fold 90°#4	155	5775	17.95	18.00	1.012	0.07	0.646	0.653	
	Left side	Extend	155	5775	17.95	18.00	1.012	-0.02	0.291	0.294	
		Fold 90°#1	155	5775	17.95	18.00	1.012	0.02	0.284	0.287	
		Fold 90°#2	155	5775	17.95	18.00	1.012	0.11	0.353	0.357	
		Fold 90°#3	155	5775	17.95	18.00	1.012	0.02	0.301	0.304	
		Fold 90°#4	155	5775	17.95	18.00	1.012	-0.13	0.315	0.319	
	Right side	Extend	155	5775	17.95	18.00	1.012	0.13	0.287	0.290	
		Fold 90°#1	155	5775	17.95	18.00	1.012	0.11	0.296	0.299	
		Fold 90°#2	155	5775	17.95	18.00	1.012	0.08	0.349	0.353	
		Fold 90°#3	155	5775	17.95	18.00	1.012	-0.10	0.315	0.319	
		Fold 90°#4	155	5775	17.95	18.00	1.012	0.11	0.324	0.328	
Top side	Extend	155	5775	17.95	18.00	1.012	0.07	0.435	0.440		
	Fold 90°#1	155	5775	17.95	18.00	1.012	0.03	0.522	0.528		
	Fold 90°#2	155	5775	17.95	18.00	1.012	0.10	0.531	0.537		
	Fold 90°#3	155	5775	17.95	18.00	1.012	-0.05	0.505	0.511		
	Fold 90°#4	155	5775	17.95	18.00	1.012	-0.01	0.518	0.524		

10.6 Simultaneous Transmission Analysis

Not applicable, the device support WIFI function only and only one antenna equipped.

11 Measurement Uncertainty

NO	Source	Uncert. ai (%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	Stand.U ncert. ui (1g)	Stand.U ncert. ui (10g)	Veff
1	Repeat	0.4	N	1	1	1	0.4	0.4	9
Instrument									
2	Probe calibration	7	N	2	1	1	3.5	3.5	∞
3	Axial isotropy	4.7	R	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
4	Hemispherical isotropy	9.4	R	$\sqrt{3}$	0.7	0.7	3.9	3.9	∞
5	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
6	Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7	∞
7	Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
8	Readout electronics	0.3	N	1	1	1	0.3	0.3	∞
9	Response time	0.8	R	$\sqrt{3}$	1	1	0.5	0.5	∞
10	Integration time	2.6	R	$\sqrt{3}$	1	1	1.5	1.5	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.7	1.7	∞
13	Probe positioner mech. restrictions	0.4	R	$\sqrt{3}$	1	1	0.2	0.2	∞
14	Probe positioning with respect to phantom shell	2.9	R	$\sqrt{3}$	1	1	1.7	1.7	∞
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞

Test sample related									
16	Device positioning	3.8	N	1	1	1	3.8	3.8	99
17	Device holder	5.1	N	1	1	1	5.1	5.1	5
18	Drift of output power	5.0	R	$\frac{1}{\sqrt{3}}$	1	1	2.9	2.9	∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\frac{1}{\sqrt{3}}$	1	1	2.3	2.3	∞
20	Liquid conductivity (target)	5.0	R	$\frac{1}{\sqrt{3}}$	0.64	0.43	1.8	1.2	∞
21	Liquid conductivity (meas)	2.5	N	1	0.64	0.43	1.6	1.2	∞
22	Liquid Permittivity (target)	5.0	R	$\frac{1}{\sqrt{3}}$	0.6	0.49	1.7	1.5	∞
23	Liquid Permittivity (meas)	2.5	N	1	0.6	0.49	1.5	1.2	∞
Combined standard			RSS	$u_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			11.4%	11.3%	236
Expanded uncertainty(P=95%)		$U = k U_c$					22.8%	22.6%	


Appendix A. EUT Photos and Test Setup Photos




Front_ Antenna Extend




Front_ Antenna Fold 90°#1

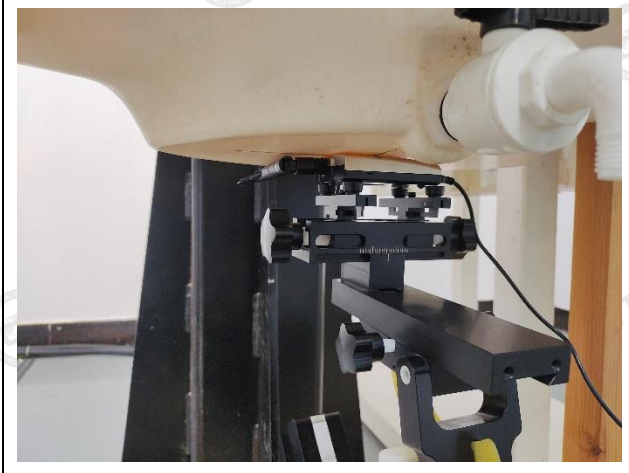

Front_ Antenna Fold 90°#2

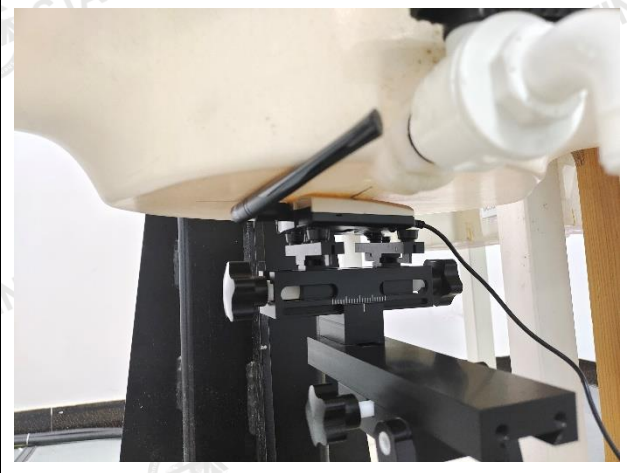

Front_ Antenna Fold 90°#3

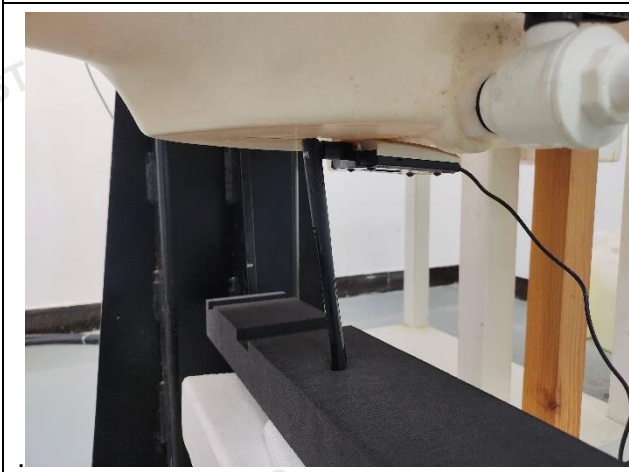

Front_ Antenna Fold 90°#4






Back_ Antenna Extend



Back_ Antenna Fold 90°#1

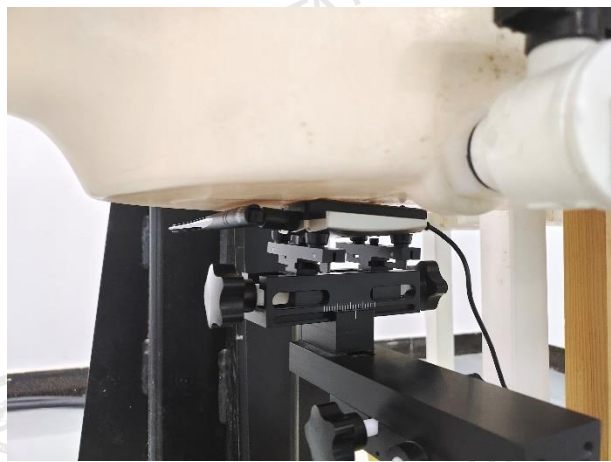

Back_ Antenna Fold 90°#2



Back_ Antenna Fold 90°#3



Back_ Antenna Fold 90°#4





Left_Antenna Extend



Left_Antenna Fold 90°#1



Left_Antenna Fold 90°#2



Left_Antenna Fold 90°#3




Left_Antenna Fold 90°#4



Right_Antenna Extend



Right_Antenna Fold 90°#1

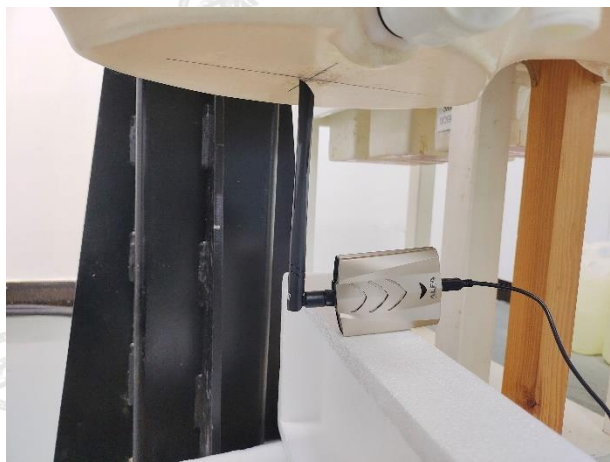

Right_Antenna Fold 90°#2




Right_Antenna Fold 90°#3




Right_Antenna Fold 90°#4



Top_Antenna Extend

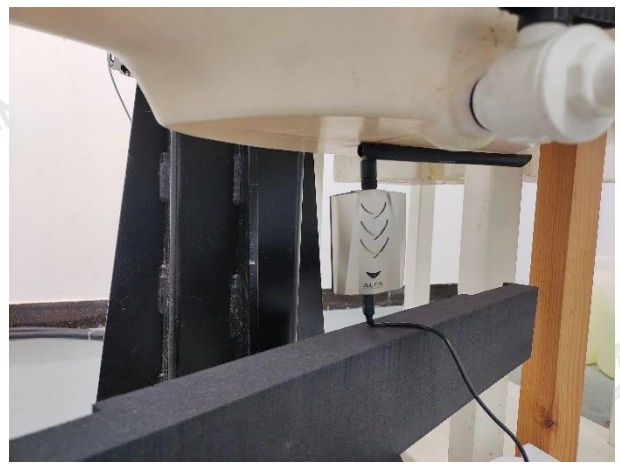


Top_Antenna Fold 90°#1

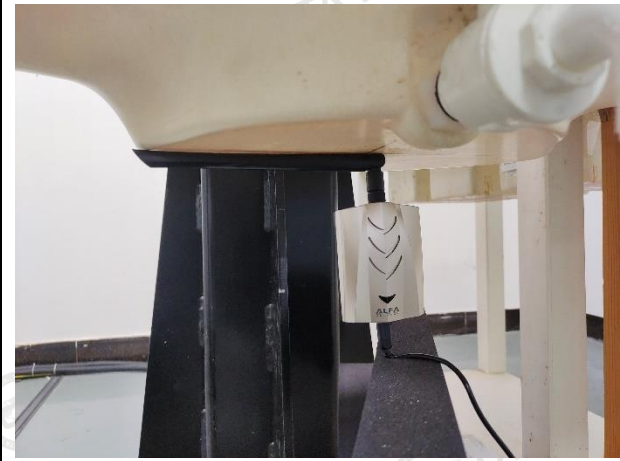

Top_Antenna Fold 90°#2



Top_Antenna Fold 90°#3

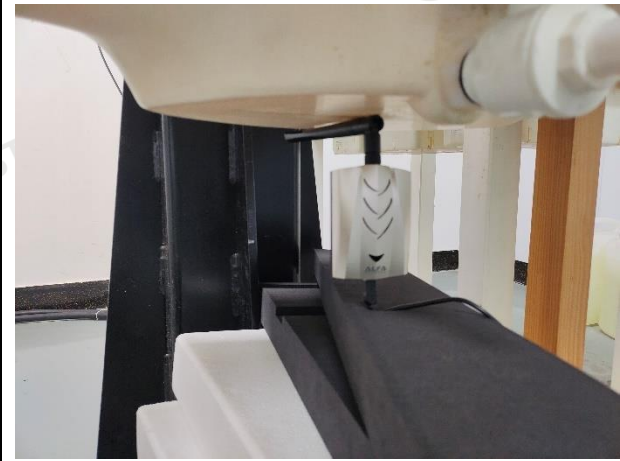

Top_Antenna Fold 90°#4

Appendix B. Plots of SAR System Check

2450MHz System Check

Date: 06/07/2024

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 745

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.732$ S/m; $\epsilon_r = 39.188$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN7380; ConvF(7.50, 7.50, 7.50); Calibrated: June 21, 2023;
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 19.3 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 105.5 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 25.1 W/kg

SAR(1 g) = 13.36 W/kg; SAR(10 g) = 6.22 W/kg

Maximum value of SAR (measured) = 18.5 W/kg

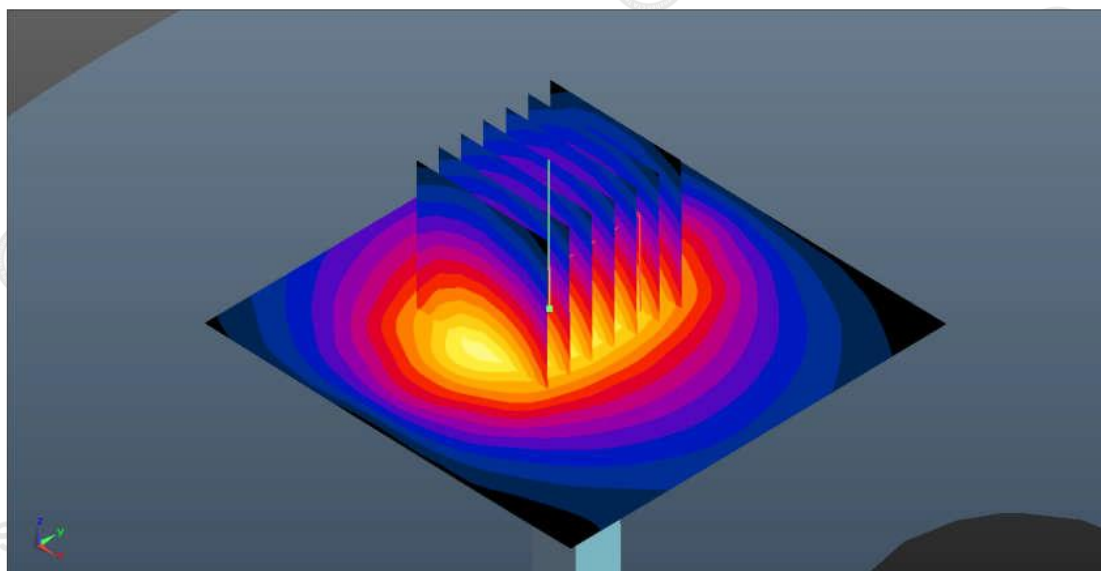

0 dB = 18.5 W/kg

System Performance Check 2450MHz 250mW

5250MHz System Check

Date: 06/11/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.816$ S/m; $\epsilon_r = 34.155$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(5.45, 5.45, 5.45) ; Calibrated: 6/21/2023
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.6 W/kg


Zoom Scan (8x8x7): Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 46.89 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 33.50 W/kg

SAR(1 g) = 7.89 W/kg; SAR(10 g) = 2.43 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

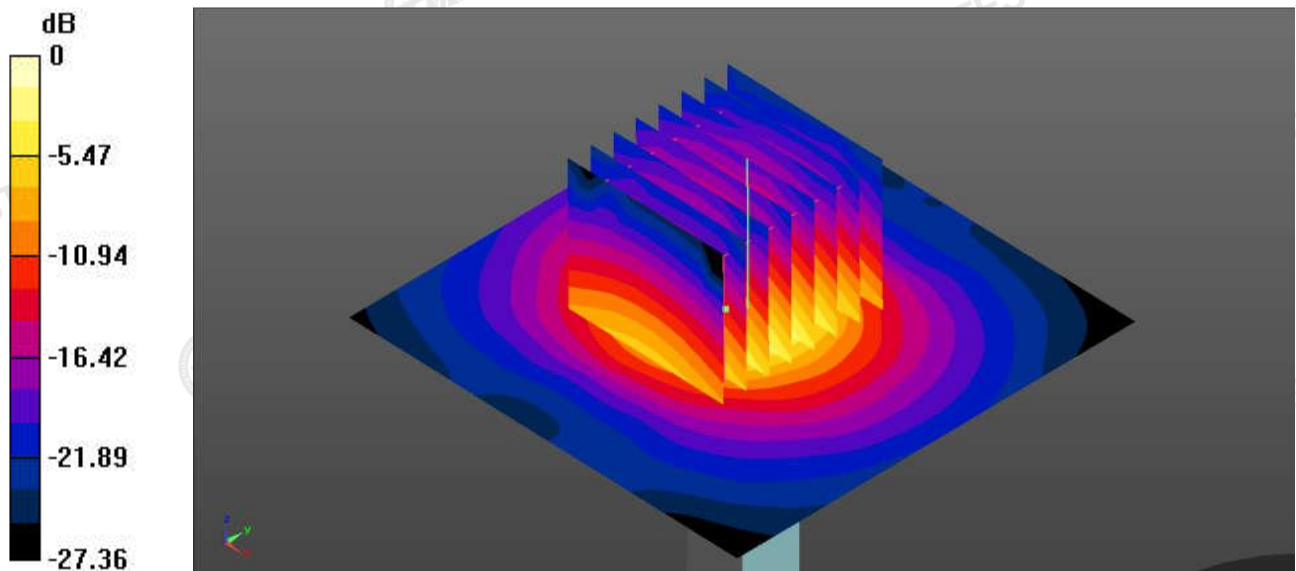

0 dB = 19.5 W/kg

System Performance Check 5250MHz 100mW

5750MHz System Check

Date: 06/12/2024

DUT: Dipole 5GHz; Type: D5GHzV2; Serial: 1301

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5750$ MHz; $\sigma = 5.349$ S/m; $\epsilon_r = 35.152$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(4.96, 4.96, 4.96) ; Calibrated: 6/21/2023
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: Aug.30,2023;
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974;
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.9 W/kg


Zoom Scan (8x8x7): Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 40.69 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 33.3 W/kg

SAR(1 g) = 7.48 W/kg; SAR(10 g) = 2.33 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

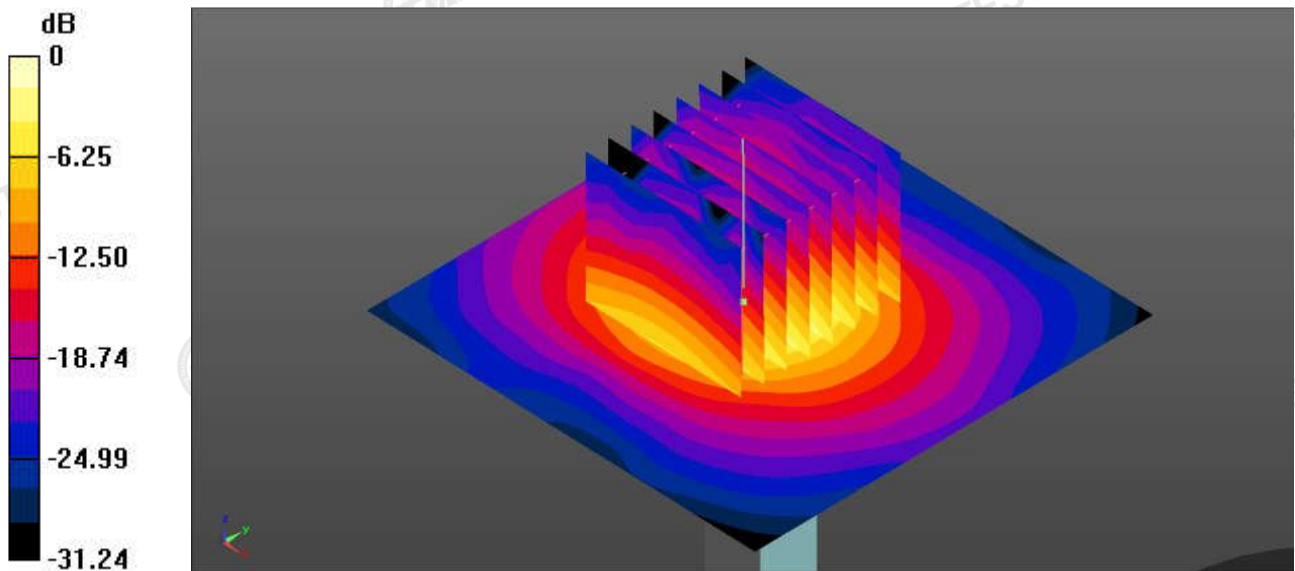

0 dB = 19.3 W/kg

System Performance Check 5750MHz 100mW

Appendix C. Plots of SAR Test Data

#1

Date: 06/07/2024

WIFI2.4G_ Back_ANT Extend _0mm_802.11b _Ch01

Communication System: UID 0, Generic WLAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.851$ S/m; $\epsilon_r = 38.426$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(7.50, 7.50, 7.50,) ; Calibrated: 6/21/2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (81x91x1): Measurement grid: dx=1.200mm, dy=1.200mm

Maximum value of SAR (interpolated) = 0.590 W/Kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.487 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.805 W/kg

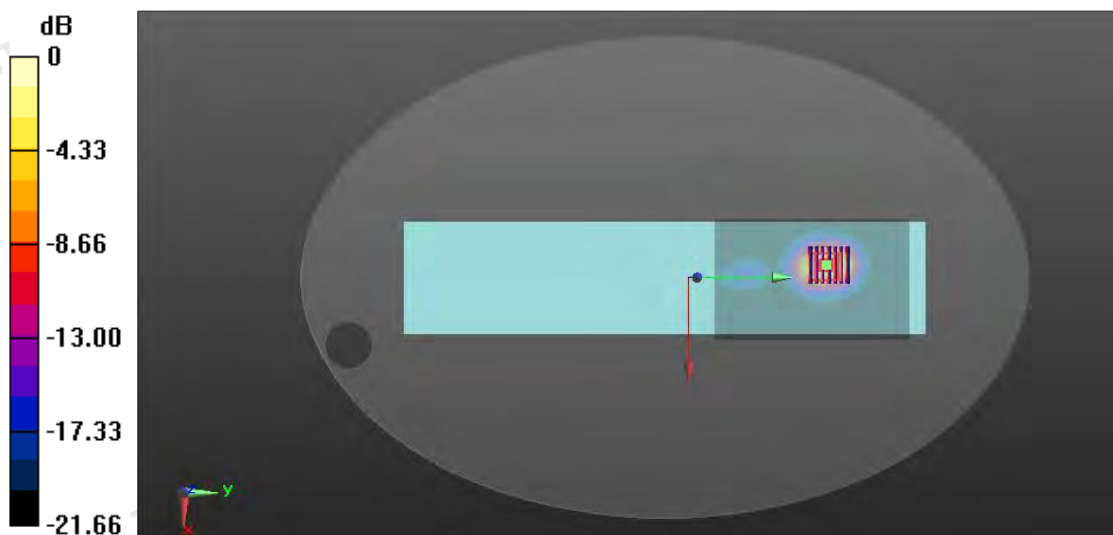

0 dB = 0.805 W/kg

#2

Date: 06/11/2024

WLAN 5.2GHz_ Back_ANT Extend _0mm_802.11ac(VHT80)_CH42

Communication System: UID 0, Generic WLAN (0); Frequency: 5210 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5210$ MHz; $\sigma = 5.125$ S/m; $\epsilon_r = 34.665$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(5.45, 5.45, 5.45) ; Calibrated: 6/21/2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x111x1): Measurement grid: dx=1.000mm, dy=1.000mm
 Maximum value of SAR (interpolated) = 0.502 W/Kg

Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.247 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.415 W/kg; SAR(10 g) = 0.202 W/kg
 Maximum value of SAR (measured) = 0.617 W/kg

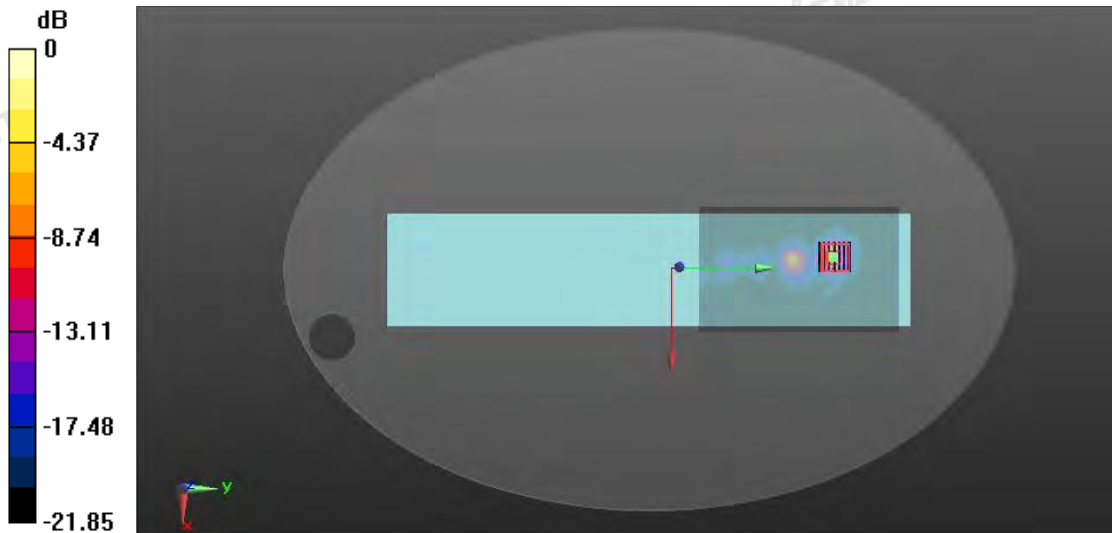

0 dB = 0.617 W/kg

#3

Date: 06/12/2024

WLAN 5.8GHz_ Back_ANT Extend _0mm_802.11ac(VHT80)_CH155

Communication System: UID 0, Generic WLAN (0); Frequency: 5775 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 5775$ MHz; $\sigma = 5.348$ S/m; $\epsilon_r = 34.674$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7380; ConvF(4.96, 4.96, 4.96) ; Calibrated: 6/21/2023
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn428; Calibrated: 08/30/2023
- Phantom: Twin-SAM V8.0 ; Type: QD 000 P41 AA; Serial: 1974
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (101x101x1): Measurement grid: dx=1.000mm, dy=1.000mm
 Maximum value of SAR (interpolated) = 0.775 W/Kg


Zoom Scan (7x7x12): Measurement grid: dx=4mm, dy=4mm, dz=2mm
 Reference Value = 1.657 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 2.91 W/kg

SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.313 W/kg
 Maximum value of SAR (measured) = 1.50 W/kg

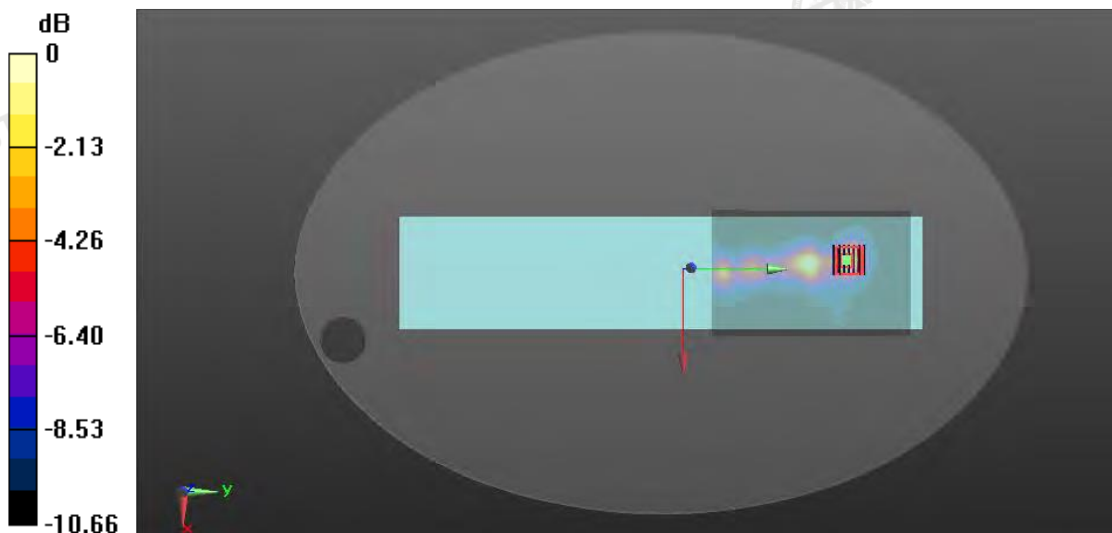



0 dB = 1.50 W/kg

Appendix D. DASY System Calibration Certificate



In Collaboration with
TTL Speag
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn http://www.caict.ac.cn

中国认可
国际互认
校准
CALIBRATION
CNAS L0570

Client **ruixiang** Certificate No: **J23Z60276**

CALIBRATION CERTIFICATE

Object: EX3DV4 - SN : 7380

Calibration Procedure(s): FF-Z11-004-02
Calibration Procedures for Dosimetric E-field Probes




Calibration date: June 21, 2023

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101547	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Power sensor NRP-Z91	101548	12-Jun-23(CTTL, No.J23X05435)	Jun-24
Reference 10dBAttenuator	18N50W-10dB	19-Jan-23(CTTL, No.J23X00212)	Jan-25
Reference 20dBAttenuator	18N50W-20dB	19-Jan-23(CTTL, No.J23X00211)	Jan-25
Reference Probe EX3DV4	SN 7517	27-Jan-23(SPEAG, No.EX-7517_Jan23)	Jan-24
DAE4	SN 1555	25-Aug-22(SPEAG, No DAE4-1555_Aug22)	Aug-23
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	12-Jun-23(CTTL, No.J23X05434)	Jun-24
Network Analyzer E5071C	MY46110673	10-Jan-23(CTTL, No.J23X00104)	Jan-24
Reference 10dBAttenuator	BT0520	11-May-23(CTTL, No.J23X04061)	May-25
Reference 20dBAttenuator	BT0267	11-May-23(CTTL, No.J23X04062)	May-25
OCF DAK-3.5	SN 1040	18-Jan-23(SPEAG, No OCF-DAK3.5-1040_Jan23)	Jan-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: June 27, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: J23Z60276
Page 1 of 9