



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Iconnect

Address: NO.9, Aly.68, Ln,112.Ruiguand Rd, Neihu District, Taipei City, Taiwan

FCC ID: 2AB8788321

Product Name: WiFi 6 Wireless LAN USB adapter

Model Number: AWUS036AX

**Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR221261851-00B

Date Of Issue: 2023/5/10

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:	8
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	10
1.3 MEASUREMENT UNCERTAINTY	11
2. SUMMARY OF TEST RESULTS	12
3. REQUIREMENTS AND TEST PROCEDURES	13
3.1 AC LINE CONDUCTED EMISSIONS.....	13
3.1.1 Applicable Standard.....	13
3.1.2 EUT Setup.....	14
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	15
3.1.5 Corrected Amplitude & Margin Calculation.....	15
3.2 RADIATION SPURIOUS EMISSIONS	16
3.2.1 Applicable Standard.....	16
3.2.2 EUT Setup.....	17
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 EMISSION BANDWIDTH:	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY:	22
3.5.1 Applicable Standard.....	22
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	23
3.7 DUTY CYCLE:.....	23
3.7.1 EUT Setup.....	23
3.7.2 Test Procedure	23
3.8 ANTENNA REQUIREMENT.....	24
3.8.1 Applicable Standard.....	24

3.8.2 Judgment.....24

4. Test DATA AND RESULTS 25

4.1 AC LINE CONDUCTED EMISSIONS.....25

4.2 RADIATION SPURIOUS EMISSIONS28

4.3 EMISSION BANDWIDTH:46

4.4 MAXIMUM CONDUCTED OUTPUT POWER: 70

4.5 MAXIMUM POWER SPECTRAL DENSITY:73

4.6 DUTY CYCLE:.....96

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR221261851-00B	Original Report	2023/5/10

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	WiFi 6 Wireless LAN USB adapter
Trade Name:	ALFA
EUT Model:	AWUS036AX
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20/ax hew20) 5190-5230 MHz(802.11n ht40/ac vht40/ax hew40) 5210 MHz(802.11ac vht80/ax hew80) 5745-5825 MHz (802.11a/n ht20/ac vht20/ax hew20) 5755-5795 MHz(802.11n ht40/ac vht40/ax hew40) 5775 MHz(802.11ac vht80/ax hew80)
Maximum Average Output Power (Conducted):	17.05 dBm (5150-5250 MHz) 14.08 dBm (5725-5850 MHz)
Modulation Type:	802.11a/n/ac/ax: OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM, 1024QAM
Rated Input Voltage:	5Vdc
Serial Number:	1VMU-1
EUT Received Date:	2022/12/19
EUT Received Status:	Good

1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20/ax hew20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m), the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n ht40/ac vht40/ax hew40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

For 802.11ac vht80/ax hew80:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

1.1.3 Antenna Information Detail▲:

Antenna Chain	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chain 0	Dipole	50	5150-5250MHz	4.8 dBi
			5725-5850MHz	4.64 dBi
Chain 1	Dipole	50	5150-5250MHz	4.8 dBi
			5725-5850MHz	4.64 dBi

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
 Antenna must use a unique type of connector to attach to the EUT.
 Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.				
Equipment Modifications:	No				
EUT Exercise Software:	AX Series MP Toolkit.exe				
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:					
5150-5250 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5180	6Mbps	20	19
	Middle	5200	6Mbps	20	19
	Highest	5240	6Mbps	20	19
802.11n ht20	Lowest	5180	MCS8	15	15
	Middle	5200	MCS8	15	15
	Highest	5240	MCS8	15	15
802.11n ht40	Lowest	5190	MCS8	15	15
	Highest	5230	MCS8	15	15
802.11ac vht80	Middle	5210	MCS8	18	18
802.11ax hew20	Lowest	5180	MCS8	18	18
	Middle	5200	MCS8	18	18
	Highest	5240	MCS8	18	18
802.11ax hew40	Lowest	5190	MCS8	18	18
	Highest	5230	MCS8	18	18
802.11ax hew80	Middle	5210	MCS8	18	18

5725-5850 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting	
802.11a	Lowest	5745	6Mbps	15	15
	Middle	5785	6Mbps	15	15
	Highest	5825	6Mbps	15	15
802.11n ht20	Lowest	5745	MCS8	15	15
	Middle	5785	MCS8	15	15
	Highest	5825	MCS8	15	15
802.11n ht40	Lowest	5755	MCS8	15	15
	Highest	5795	MCS8	15	15
802.11ac vht80	Middle	5775	MCS8	15	15
802.11ax hew20	Lowest	5745	MCS8	12	12
	Middle	5785	MCS8	12	12
	Highest	5825	MCS8	12	12
802.11ax hew40	Lowest	5755	MCS8	12	12
	Highest	5795	MCS8	12	12
802.11ax hew80	Middle	5775	MCS8	12	12

The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80/ax20/ax40/ax80, the ac vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.
The device supports SISO in all modes, and MIMO 2T2R in 802.11n/ac/ax modes, per pretest, 2T2R mode was the worst mode and reported for 802.11n/ac/ax modes.
The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	T460S	60PDTEK8
Lenovo	Adapter	ADLX45DLC3A	00HM613

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	Yes	1.2	Laptop	Adapter
Power Cable	No	No	1.2	LISN1	Adapter
USB Cable	No	No	10	EUT	Laptop

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

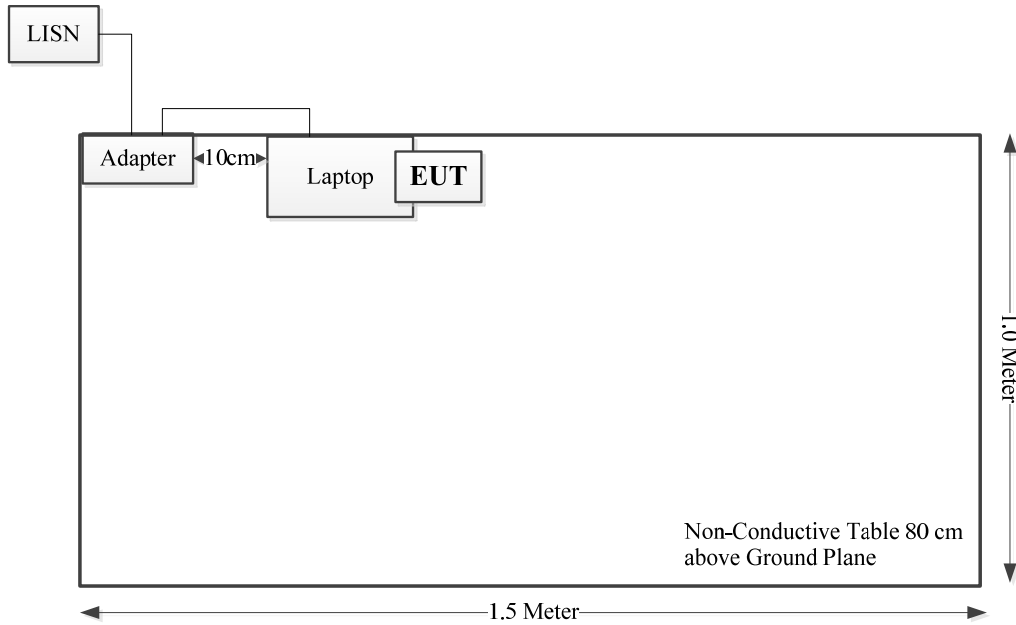

Spurious Emissions

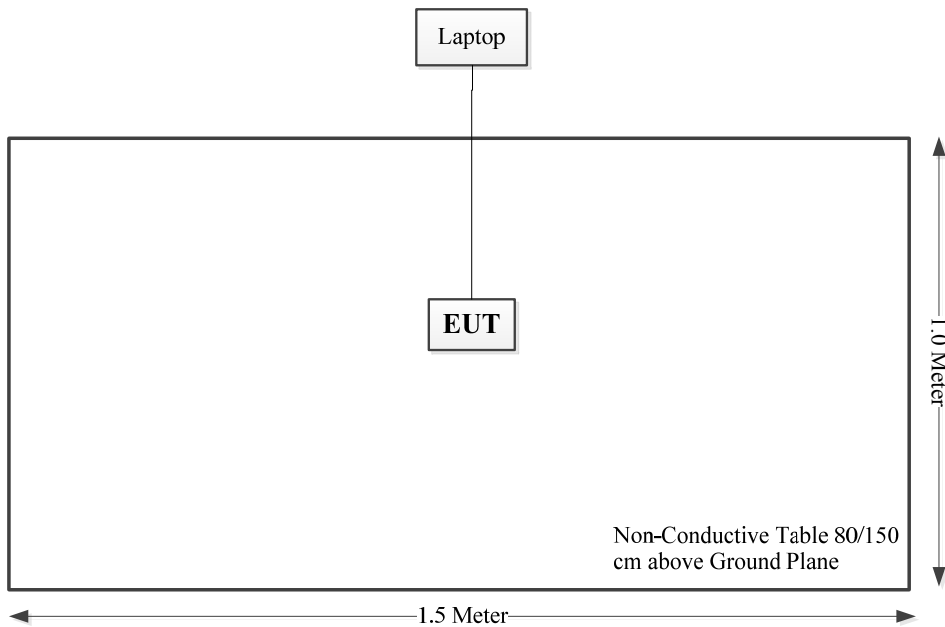

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Conducted Transmitter Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.203	Antenna Requirement	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

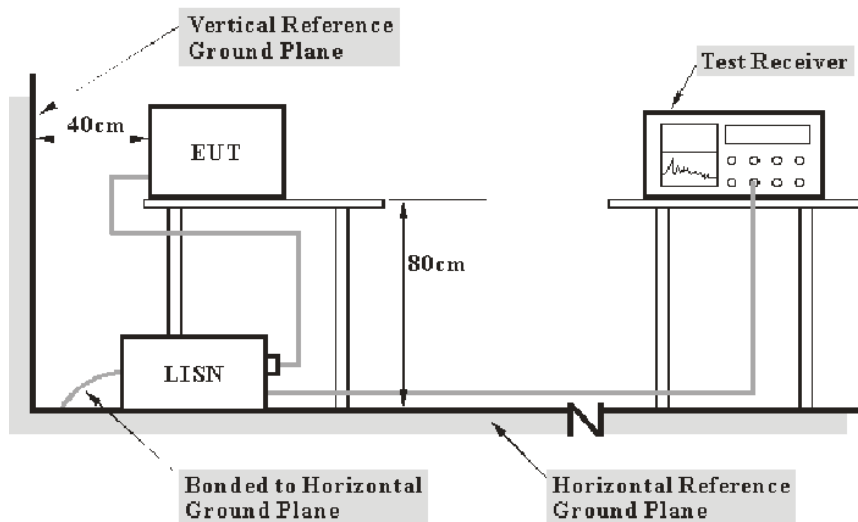

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup

Below 1GHz:

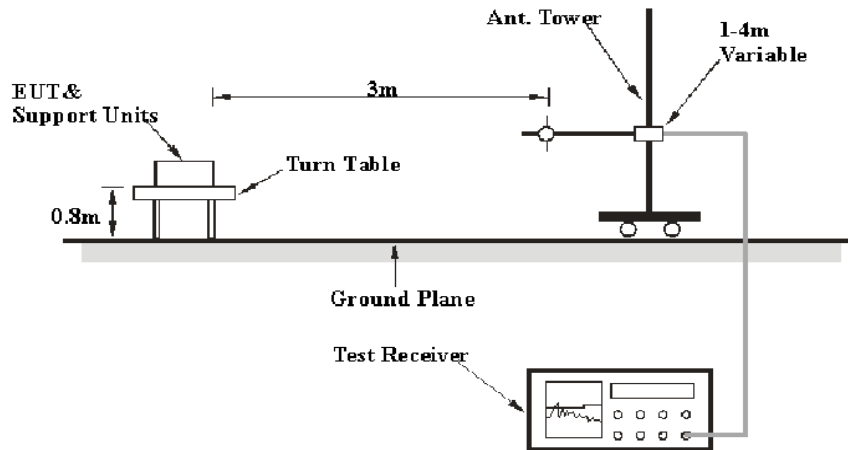

1-40 GHz:

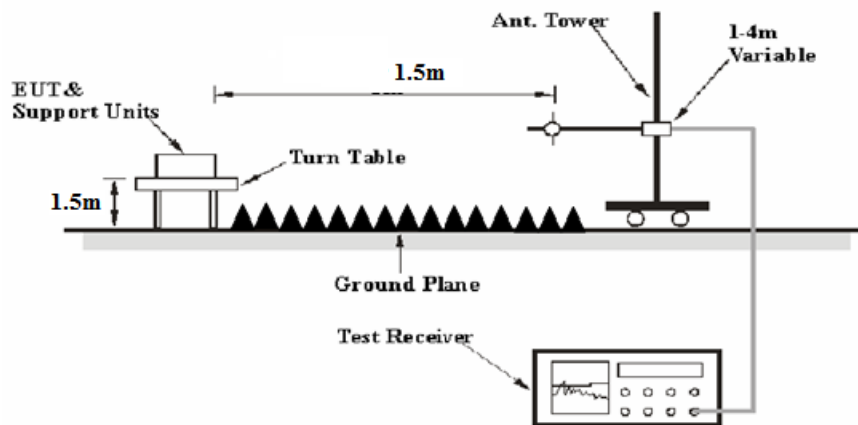

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Detector	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss - Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor - Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth:

3.3.1 Applicable Standard


FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup

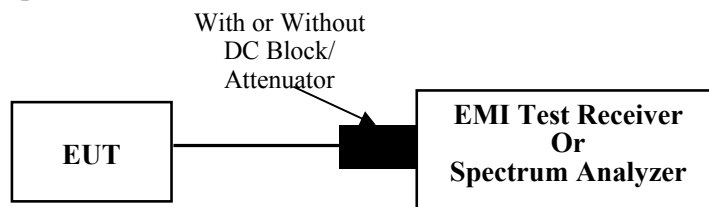

3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = peak.
- d) Trace mode = max hold
- e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum conducted output power:

3.4.1 Applicable Standard

FCC §15.407(a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).


(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup

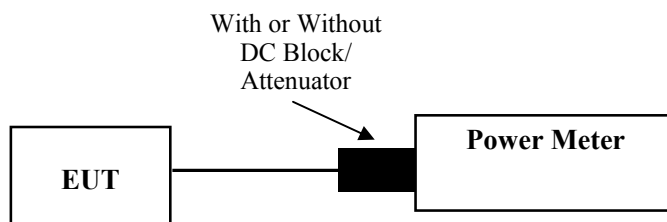

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.2

Method PM-G is measurement using a gated RF average power meter. Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.407(a) (1)

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).


(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup

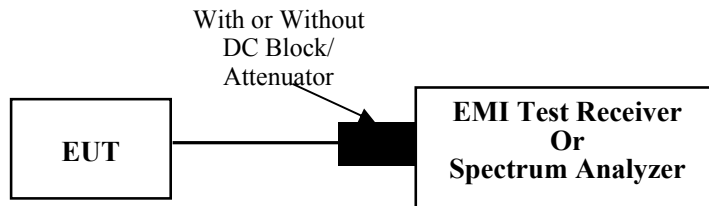

3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.7 Duty Cycle:

3.7.1 EUT Setup

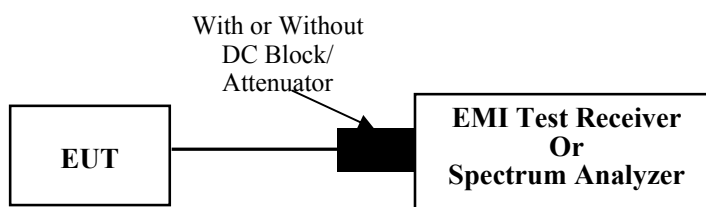

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	1VMU-1	Test Date:	2022/12/26
Test Site:	CE	Test Mode:	Transmitting(802.11a Chain 0 5200 MHz was the worst)
Tester:	Vic Du	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.7	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.4
----------------------	------	------------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2022/04/01	2023/03/31
R&S	EMI Test Receiver	ESR3	102726	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2022/08/07	2023/08/06
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Mode: Transmitting
 Port: Line
 Note:


Date: 2022-12-26

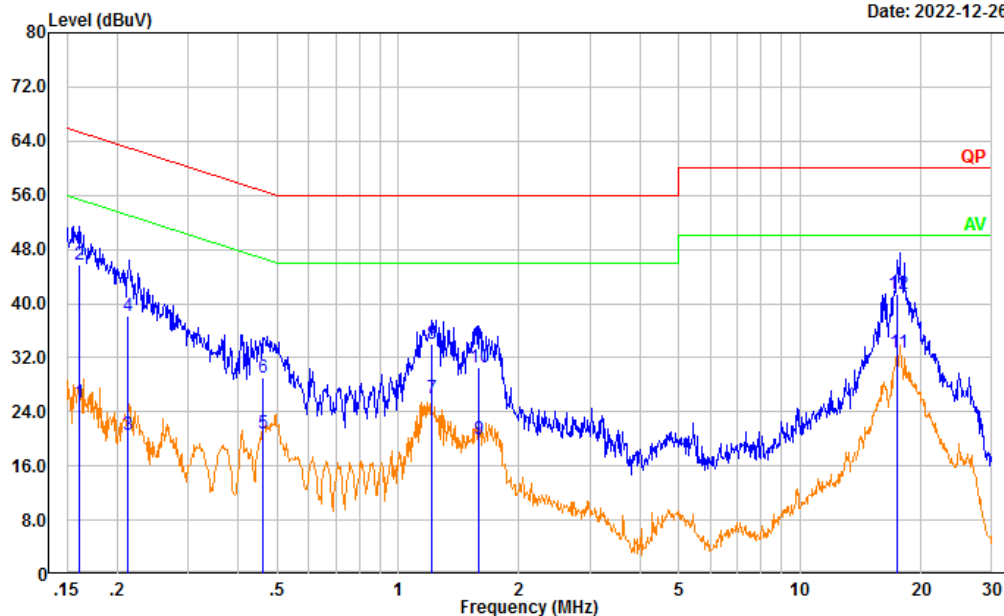

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.161	15.80	9.61	25.41	55.41	30.00	Average
2	0.161	36.12	9.61	45.73	65.41	19.68	QP
3	0.212	11.08	9.61	20.69	53.14	32.45	Average
4	0.212	28.58	9.61	38.19	63.14	24.95	QP
5	0.462	11.22	9.61	20.83	46.66	25.83	Average
6	0.462	19.33	9.61	28.94	56.66	27.72	QP
7	1.215	16.40	9.62	26.02	46.00	19.98	Average
8	1.215	24.37	9.62	33.99	56.00	22.01	QP
9	1.584	10.38	9.63	20.01	46.00	25.99	Average
10	1.584	21.03	9.63	30.66	56.00	25.34	QP
11	17.522	22.98	9.74	32.72	50.00	17.28	Average
12	17.522	31.60	9.74	41.34	60.00	18.66	QP

Test Mode: Transmitting
 Port: neutral
 Note:

Date: 2022-12-26

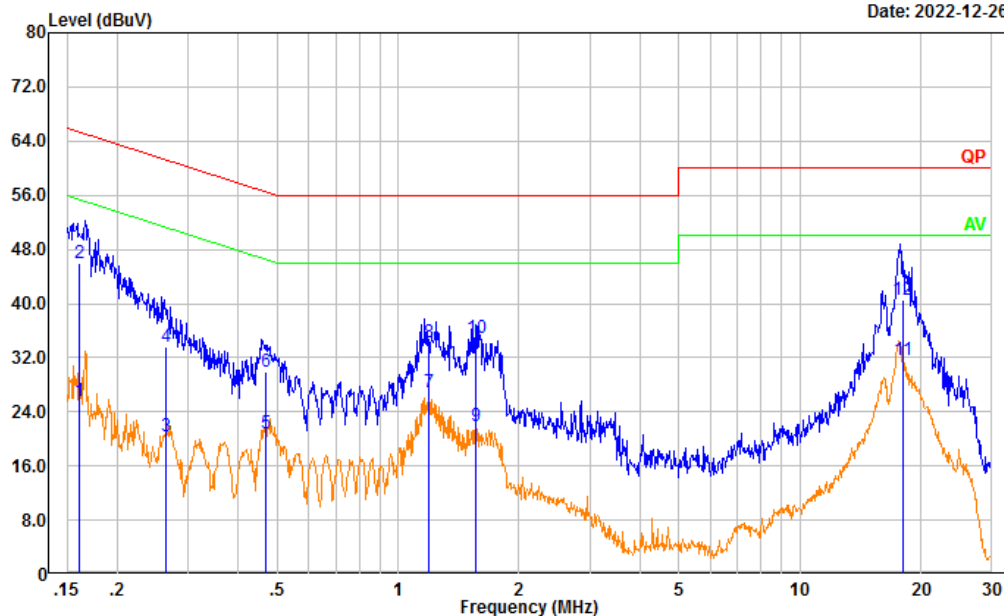

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.162	16.05	9.61	25.66	55.38	29.72	Average
2	0.162	36.32	9.61	45.93	65.38	19.45	QP
3	0.265	10.84	9.61	20.45	51.28	30.83	Average
4	0.265	24.00	9.61	33.61	61.28	27.67	QP
5	0.468	11.23	9.61	20.84	46.54	25.70	Average
6	0.468	20.28	9.61	29.89	56.54	26.65	QP
7	1.193	17.18	9.62	26.80	46.00	19.20	Average
8	1.193	24.68	9.62	34.30	56.00	21.70	QP
9	1.565	12.17	9.63	21.80	46.00	24.20	Average
10	1.565	25.30	9.63	34.93	56.00	21.07	QP
11	17.984	21.87	9.69	31.56	50.00	18.44	Average
12	17.984	30.96	9.69	40.65	60.00	19.35	QP

4.2 Radiation Spurious Emissions

Serial Number:	1VMU-1	Test Date:	2022/12/27~2023/1/19
Test Site:	966-1/966-2	Test Mode:	Transmitting
Tester:	Mack Huang, Carl Xue	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.8~21.4	Relative Humidity: (%)	40~44	ATM Pressure: (kPa)	101.7~101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2022/07/15	2023/07/14
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2022/08/07	2023/08/06
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2022/08/07	2023/08/06
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/9/16	2023/9/15
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2022/08/07	2023/08/06
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2022/08/07	2023/08/06
Mini Circuits	High Pass Filter	VHF-6010+	31119	2022/08/07	2023/08/06
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/02/05	2024/02/04
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2022/07/15	2023/07/14
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2022/07/17	2023/07/16
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2022/07/17	2023/07/16
Sonoma	Amplifier	310N	186165	2022/07/17	2023/07/16

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Please refer to the below table and plots.

Note: The device can be mounted in multiple orientations, test was performed with X, Y, Z Axis according to C63.10 Figure 8, the worst orientation was photographed and it's data was recorded.

1) 30MHz-1GHz(802.11a Chain 0 5200 MHz was the worst)

Test Mode: Transmitting
 Polarization: horizontal
 Note:


Date: 2022-12-27

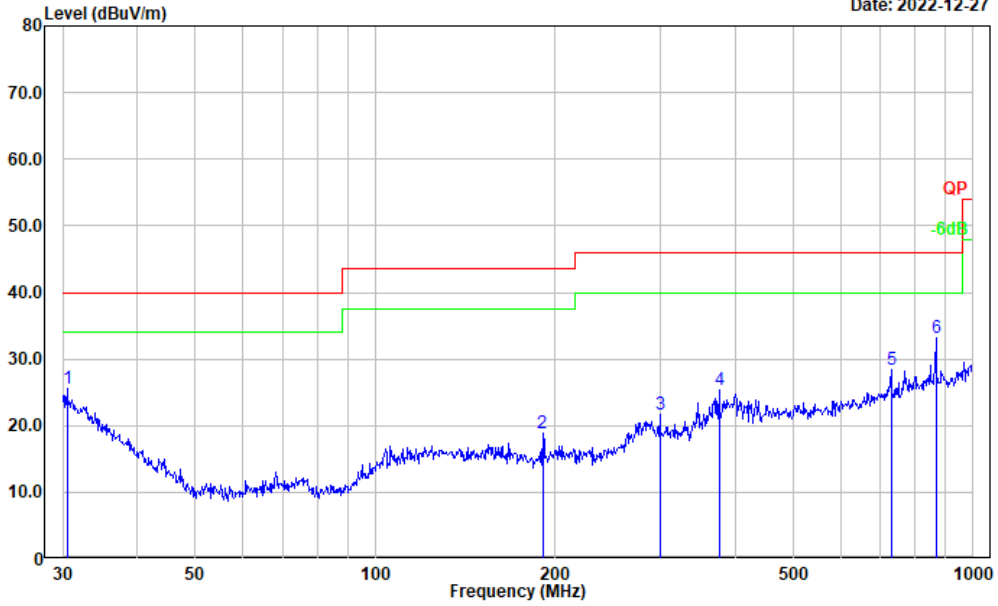

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	29.50	-4.00	25.50	40.00	14.50	Peak
2	190.405	32.29	-13.41	18.88	43.50	24.62	Peak
3	299.316	32.29	-10.65	21.64	46.00	24.36	Peak
4	375.939	34.61	-9.29	25.32	46.00	20.68	Peak
5	729.358	31.42	-2.99	28.43	46.00	17.57	Peak
6	866.088	34.44	-1.19	33.25	46.00	12.75	Peak

Test Mode: Transmitting
 Polarization: vertical
 Note:

Date: 2022-12-27

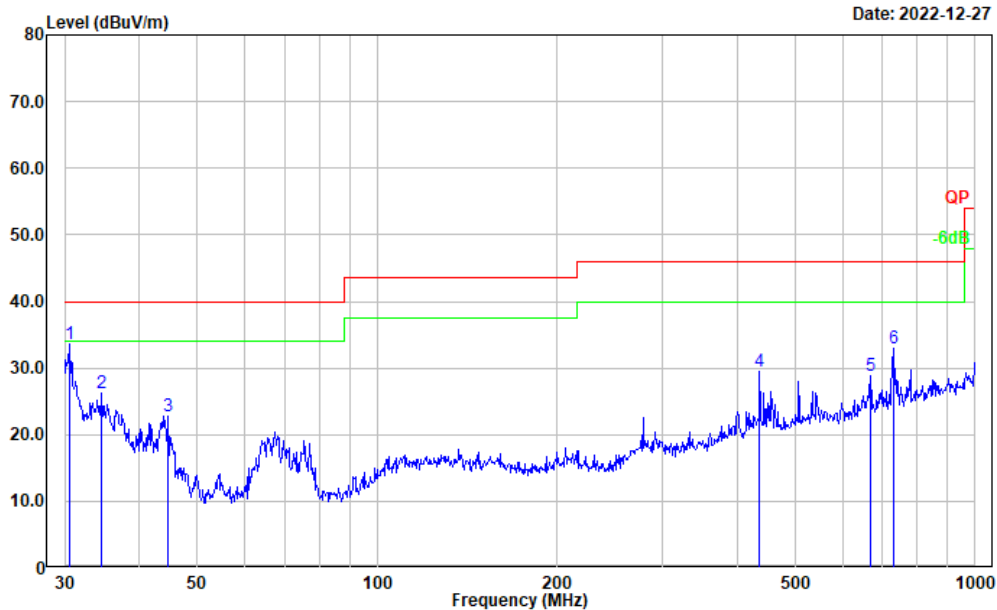

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	37.52	-4.00	33.52	40.00	6.48	Peak
2	34.639	33.53	-7.19	26.34	40.00	13.66	Peak
3	44.743	36.89	-14.08	22.81	40.00	17.19	Peak
4	435.590	36.94	-7.35	29.59	46.00	16.41	Peak
5	668.142	33.00	-4.12	28.88	46.00	17.12	Peak
6	729.358	35.91	-2.99	32.92	46.00	13.08	Peak

2) 1GHz-40GHz:
 5150-5250MHz
 802.11a, Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180MHz							
5180.000	69.30	PK	H	38.68	101.96	N/A	N/A
5180.000	59.28	AV	H	38.68	91.94	N/A	N/A
5180.000	75.27	PK	V	38.68	107.93	N/A	N/A
5180.000	65.67	AV	V	38.68	98.33	N/A	N/A
5150.000	36.33	PK	V	38.64	68.95	74.00	5.05
5150.000	19.59	AV	V	38.64	52.21	54.00	1.79
10360.000	35.56	PK	V	19.18	48.72	68.20	19.48
15540.000	45.84	PK	V	22.44	62.26	74.00	11.74
15540.000	32.42	AV	V	22.44	48.84	54.00	5.16
Middle Channel: 5200 MHz							
5200.000	70.50	PK	H	38.70	103.18	N/A	N/A
5200.000	60.46	AV	H	38.70	93.14	N/A	N/A
5200.000	75.29	PK	V	38.70	107.97	N/A	N/A
5200.000	65.17	AV	V	38.70	97.85	N/A	N/A
10400.000	34.59	PK	V	19.16	47.73	68.20	20.47
15600.000	49.51	PK	V	22.41	65.90	74.00	8.10
15600.000	36.26	AV	V	22.41	52.65	54.00	1.35
High Channel: 5240 MHz							
5240.000	71.70	PK	H	38.85	104.53	N/A	N/A
5240.000	61.38	AV	H	38.85	94.21	N/A	N/A
5240.000	75.83	PK	V	38.85	108.66	N/A	N/A
5240.000	65.26	AV	V	38.85	98.09	N/A	N/A
5350.000	29.75	PK	V	39.03	62.76	74.00	11.24
5350.000	16.67	AV	V	39.03	49.68	54.00	4.32
10480.000	35.47	PK	V	18.86	48.31	68.20	19.89
15720.000	49.33	PK	V	22.28	65.59	74.00	8.41
15720.000	36.16	AV	V	22.28	52.42	54.00	1.58

802.11a, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector					
Low Channel: 5180MHz							
5180.000	70.94	PK	H	38.68	103.60	N/A	N/A
5180.000	61.23	AV	H	38.68	93.89	N/A	N/A
5180.000	76.88	PK	V	38.68	109.54	N/A	N/A
5180.000	67.28	AV	V	38.68	99.94	N/A	N/A
5150.000	36.46	PK	V	38.64	69.08	74.00	4.92
5150.000	19.27	AV	V	38.64	51.89	54.00	2.11
10360.000	34.78	PK	V	19.18	47.94	68.20	20.26
15540.000	47.14	PK	V	22.44	63.56	74.00	10.44
15540.000	34.46	AV	V	22.44	50.88	54.00	3.12
Middle Channel: 5200 MHz							
5200.000	70.14	PK	H	38.70	102.82	N/A	N/A
5200.000	60.38	AV	H	38.70	93.06	N/A	N/A
5200.000	76.37	PK	V	38.70	109.05	N/A	N/A
5200.000	66.14	AV	V	38.70	98.82	N/A	N/A
10400.000	35.07	PK	V	19.16	48.21	68.20	19.99
15600.000	46.41	PK	V	22.41	62.80	74.00	11.20
15600.000	33.21	AV	V	22.41	49.60	54.00	4.40
High Channel: 5240 MHz							
5240.000	71.41	PK	H	38.85	104.24	N/A	N/A
5240.000	61.72	AV	H	38.85	94.55	N/A	N/A
5240.000	77.05	PK	V	38.85	109.88	N/A	N/A
5240.000	67.46	AV	V	38.85	100.29	N/A	N/A
5350.000	29.82	PK	V	39.03	62.83	74.00	11.17
5350.000	16.62	AV	V	39.03	49.63	54.00	4.37
10480.000	34.56	PK	V	18.86	47.40	68.20	20.80
15720.000	46.70	PK	V	22.28	62.96	74.00	11.04
15720.000	33.35	AV	V	22.28	49.61	54.00	4.39

802.11n ht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5190MHz							
5190.000	67.09	PK	H	38.69	99.76	N/A	N/A
5190.000	56.27	AV	H	38.69	88.94	N/A	N/A
5190.000	75.42	PK	V	38.69	108.09	N/A	N/A
5190.000	64.17	AV	V	38.69	96.84	N/A	N/A
5150.000	38.37	PK	V	38.64	70.99	74.00	3.01
5150.000	19.66	AV	V	38.64	52.28	54.00	1.72
10380.000	35.12	PK	V	19.17	48.27	68.20	19.93
15570.000	42.73	PK	V	22.43	59.14	74.00	14.86
15570.000	30.37	AV	V	22.43	46.78	54.00	7.22
High Channel: 5230 MHz							
5230.000	70.48	PK	H	38.81	103.27	N/A	N/A
5230.000	59.31	AV	H	38.81	92.10	N/A	N/A
5230.000	78.88	PK	V	38.81	111.67	N/A	N/A
5230.000	67.37	AV	V	38.81	100.16	N/A	N/A
5350.000	29.58	PK	V	39.03	62.59	74.00	11.41
5350.000	16.80	AV	V	39.03	49.81	54.00	4.19
10460.000	35.46	PK	V	18.94	48.38	68.20	19.82
15690.000	47.85	PK	V	22.29	64.12	74.00	9.88
15690.000	35.43	AV	V	22.29	51.70	54.00	2.30

802.11ac vht80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Middle Channel: 5210 MHz							
5210.000	64.99	PK	H	38.74	97.71	N/A	N/A
5210.000	52.38	AV	H	38.74	85.10	N/A	N/A
5210.000	73.05	PK	V	38.74	105.77	N/A	N/A
5210.000	61.58	AV	V	38.74	94.30	N/A	N/A
5150.000	37.03	PK	V	38.64	69.65	74.00	4.35
5150.000	19.63	AV	V	38.64	52.25	54.00	1.75
5350.000	29.60	PK	V	39.03	62.61	74.00	11.39
5350.000	16.82	AV	V	39.03	49.83	54.00	4.17
10420.000	34.78	PK	V	19.09	47.85	68.20	20.35
15630.000	42.60	PK	V	22.37	58.95	74.00	15.05
15630.000	30.30	AV	V	22.37	46.65	54.00	7.35

802.11ax hew20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180MHz							
5180.000	73.12	PK	H	38.68	105.78	N/A	N/A
5180.000	61.42	AV	H	38.68	94.08	N/A	N/A
5180.000	79.78	PK	V	38.68	112.44	N/A	N/A
5180.000	67.48	AV	V	38.68	100.14	N/A	N/A
5150.000	36.29	PK	V	38.64	68.91	74.00	5.09
5150.000	19.69	AV	V	38.64	52.31	54.00	1.69
10360.000	34.28	PK	V	19.18	47.44	68.20	20.76
15540.000	48.44	PK	V	22.44	64.86	74.00	9.14
15540.000	35.22	AV	V	22.44	51.64	54.00	2.36
Middle Channel: 5200 MHz							
5200.000	74.06	PK	H	38.70	106.74	N/A	N/A
5200.000	62.31	AV	H	38.70	94.99	N/A	N/A
5200.000	80.89	PK	V	38.70	113.57	N/A	N/A
5200.000	68.51	AV	V	38.70	101.19	N/A	N/A
10400.000	35.11	PK	V	19.16	48.25	68.20	19.95
15600.000	48.94	PK	V	22.41	65.33	74.00	8.67
15600.000	35.47	AV	V	22.41	51.86	54.00	2.14
High Channel: 5240 MHz							
5240.000	74.51	PK	H	38.85	107.34	N/A	N/A
5240.000	62.27	AV	H	38.85	95.10	N/A	N/A
5240.000	80.81	PK	V	38.85	113.64	N/A	N/A
5240.000	68.36	AV	V	38.85	101.19	N/A	N/A
5350.000	30.39	PK	V	39.03	63.40	74.00	10.60
5350.000	16.64	AV	V	39.03	49.65	54.00	4.35
10480.000	38.56	PK	V	18.86	51.40	68.20	16.80
15720.000	49.26	PK	V	22.28	65.52	74.00	8.48
15720.000	36.13	AV	V	22.28	52.39	54.00	1.61

802.11ax hew40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5190 MHz							
5190.000	67.78	PK	H	38.69	100.45	N/A	N/A
5190.000	57.42	AV	H	38.69	90.09	N/A	N/A
5190.000	74.45	PK	V	38.69	107.12	N/A	N/A
5190.000	64.37	AV	V	38.69	97.04	N/A	N/A
5150.000	35.46	PK	V	38.64	68.08	74.00	5.92
5150.000	17.23	AV	V	38.64	49.85	54.00	4.15
10380.000	35.12	PK	V	19.17	48.27	68.20	19.93
15570.000	39.42	PK	V	22.43	55.83	74.00	18.17
15570.000	27.21	AV	V	22.43	43.62	54.00	10.38
High Channel: 5230 MHz							
5230.000	65.37	PK	H	38.81	98.16	N/A	N/A
5230.000	55.44	AV	H	38.81	88.23	N/A	N/A
5230.000	73.38	PK	V	38.81	106.17	N/A	N/A
5230.000	63.46	AV	V	38.81	96.25	N/A	N/A
5350.000	30.12	PK	V	39.03	63.13	74.00	10.87
5350.000	16.24	AV	V	39.03	49.25	54.00	4.75
10460.000	35.11	PK	V	18.94	48.03	68.20	20.17
15690.000	42.78	PK	V	22.29	59.05	74.00	14.95
15690.000	30.39	AV	V	22.29	46.66	54.00	7.34

802.11ax hew80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Middle Channel: 5210 MHz							
5210.000	64.16	PK	H	38.74	96.88	N/A	N/A
5210.000	52.78	AV	H	38.74	85.50	N/A	N/A
5210.000	71.46	PK	V	38.74	104.18	N/A	N/A
5210.000	59.23	AV	V	38.74	91.95	N/A	N/A
5150.000	36.47	PK	V	38.64	69.09	74.00	4.91
5150.000	18.22	AV	V	38.64	50.84	54.00	3.16
5350.000	28.31	PK	V	39.03	61.32	74.00	12.68
5350.000	17.04	AV	V	39.03	50.05	54.00	3.95
10420.000	35.36	PK	V	19.09	48.43	68.20	19.77
15630.000	43.21	PK	V	22.37	59.56	74.00	14.44
15630.000	31.11	AV	V	22.37	47.46	54.00	6.54

Note:

Result = Reading + Factor- Distance extrapolation Factor

For 1-40GHz:

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.02 dB

5725-5850MHz:**802.11a, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745MHz							
5745.000	74.84	PK	H	39.46	108.28	N/A	N/A
5745.000	64.43	AV	H	39.46	97.87	N/A	N/A
5745.000	79.30	PK	V	39.46	112.74	N/A	N/A
5745.000	69.66	AV	V	39.46	103.10	N/A	N/A
5725.000	48.78	PK	V	39.48	82.24	122.20	39.96
5720.000	39.29	PK	V	39.49	72.76	110.80	38.04
5700.000	34.73	PK	V	39.51	68.22	105.20	36.98
5650.000	30.25	PK	V	39.49	63.72	68.20	4.48
11490.000	38.08	PK	V	20.67	52.73	74.00	21.27
11490.000	26.04	AV	V	20.67	40.69	54.00	13.31
17235.000	37.93	PK	V	26.76	58.67	68.20	9.53
Middle Channel: 5785 MHz							
5785.000	74.79	PK	H	39.44	108.21	N/A	N/A
5785.000	64.36	AV	H	39.44	97.78	N/A	N/A
5785.000	78.72	PK	V	39.44	112.14	N/A	N/A
5785.000	68.37	AV	V	39.44	101.79	N/A	N/A
11570.000	36.93	PK	V	20.83	51.74	74.00	22.26
11570.000	24.47	AV	V	20.83	39.28	54.00	14.72
17355.000	36.32	PK	V	27.74	58.04	68.20	10.16
High Channel: 5825 MHz							
5825.000	75.13	PK	H	39.46	108.57	N/A	N/A
5825.000	65.28	AV	H	39.46	98.72	N/A	N/A
5825.000	78.77	PK	V	39.46	112.21	N/A	N/A
5825.000	68.11	AV	V	39.46	101.55	N/A	N/A
5850.000	50.89	PK	V	39.49	84.36	122.20	37.84
5855.000	44.05	PK	V	39.51	77.54	110.80	33.26
5875.000	35.36	PK	V	39.60	68.94	105.20	36.26
5925.000	32.09	PK	V	39.68	65.75	68.20	2.45
11650.000	37.85	PK	V	21.07	52.90	74.00	21.10
11650.000	25.43	AV	V	21.07	40.48	54.00	13.52
17475.000	34.41	PK	V	28.61	57.00	68.20	11.20

802.11a, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745MHz							
5745.000	73.34	PK	H	39.46	106.78	N/A	N/A
5745.000	63.51	AV	H	39.46	96.95	N/A	N/A
5745.000	75.51	PK	V	39.46	108.95	N/A	N/A
5745.000	65.89	AV	V	39.46	99.33	N/A	N/A
5725.000	44.47	PK	V	39.48	77.93	122.20	44.27
5720.000	35.62	PK	V	39.49	69.09	110.80	41.71
5700.000	31.49	PK	V	39.51	64.98	105.20	40.22
5650.000	30.12	PK	V	39.49	63.59	68.20	4.61
11490.000	39.60	PK	V	20.67	54.25	74.00	19.75
11490.000	27.30	AV	V	20.67	41.95	54.00	12.05
17235.000	36.06	PK	V	26.76	56.80	68.20	11.40
Middle Channel: 5785 MHz							
5785.000	73.56	PK	H	39.44	106.98	N/A	N/A
5785.000	63.43	AV	H	39.44	96.85	N/A	N/A
5785.000	74.37	PK	V	39.44	107.79	N/A	N/A
5785.000	64.21	AV	V	39.44	97.63	N/A	N/A
11570.000	36.99	PK	V	20.83	51.80	74.00	22.20
11570.000	24.50	AV	V	20.83	39.31	54.00	14.69
17355.000	35.28	PK	V	27.74	57.00	68.20	11.20
High Channel: 5825 MHz							
5825.000	73.31	PK	H	39.46	106.75	N/A	N/A
5825.000	63.27	AV	H	39.46	96.71	N/A	N/A
5825.000	74.13	PK	V	39.46	107.57	N/A	N/A
5825.000	64.44	AV	V	39.46	97.88	N/A	N/A
5850.000	36.00	PK	V	39.49	69.47	122.20	52.73
5855.000	34.01	PK	V	39.51	67.50	110.80	43.30
5875.000	32.38	PK	V	39.60	65.96	105.20	39.24
5925.000	31.55	PK	V	39.68	65.21	68.20	2.99
11650.000	39.11	PK	V	21.07	54.16	74.00	19.84
11650.000	27.06	AV	V	21.07	42.11	54.00	11.89
17475.000	35.09	PK	V	28.61	57.68	68.20	10.52

802.11n ht20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745MHz							
5745.000	75.81	PK	H	39.46	109.25	N/A	N/A
5745.000	63.46	AV	H	39.46	96.90	N/A	N/A
5745.000	80.74	PK	V	39.46	114.18	N/A	N/A
5745.000	68.12	AV	V	39.46	101.56	N/A	N/A
5725.000	47.37	PK	V	39.48	80.83	122.20	41.37
5720.000	39.42	PK	V	39.49	72.89	110.80	37.91
5700.000	32.78	PK	V	39.51	66.27	105.20	38.93
5650.000	30.62	PK	V	39.49	64.09	68.20	4.11
11490.000	40.54	PK	V	20.67	55.19	74.00	18.81
11490.000	28.27	AV	V	20.67	42.92	54.00	11.08
17235.000	37.79	PK	V	26.76	58.53	68.20	9.67
Middle Channel: 5785 MHz							
5785.000	76.49	PK	H	39.44	109.91	N/A	N/A
5785.000	64.12	AV	H	39.44	97.54	N/A	N/A
5785.000	81.50	PK	V	39.44	114.92	N/A	N/A
5785.000	69.21	AV	V	39.44	102.63	N/A	N/A
11570.000	37.61	PK	V	20.83	52.42	74.00	21.58
11570.000	25.31	AV	V	20.83	40.12	54.00	13.88
17355.000	35.58	PK	V	27.74	57.30	68.20	10.90
High Channel: 5825 MHz							
5825.000	74.39	PK	H	39.46	107.83	N/A	N/A
5825.000	62.75	AV	H	39.46	96.19	N/A	N/A
5825.000	80.70	PK	V	39.46	114.14	N/A	N/A
5825.000	68.34	AV	V	39.46	101.78	N/A	N/A
5850.000	42.46	PK	V	39.49	75.93	122.20	46.27
5855.000	38.03	PK	V	39.51	71.52	110.80	39.28
5875.000	31.77	PK	V	39.60	65.35	105.20	39.85
5925.000	31.19	PK	V	39.68	64.85	68.20	3.35
11650.000	40.68	PK	V	21.07	55.73	74.00	18.27
11650.000	28.34	AV	V	21.07	43.39	54.00	10.61
17475.000	34.17	PK	V	28.61	56.76	68.20	11.44

802.11n ht40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5755 MHz							
5755.000	74.72	PK	H	39.45	108.15	N/A	N/A
5755.000	63.45	AV	H	39.45	96.88	N/A	N/A
5755.000	78.14	PK	V	39.45	111.57	N/A	N/A
5755.000	67.24	AV	V	39.45	100.67	N/A	N/A
5725.000	50.09	PK	V	39.48	83.55	122.20	38.65
5720.000	54.76	PK	V	39.49	88.23	110.80	22.57
5700.000	39.90	PK	V	39.51	73.39	105.20	31.81
5650.000	30.59	PK	V	39.49	64.06	68.20	4.14
11510.000	39.14	PK	V	20.67	53.79	74.00	20.21
11510.000	27.07	AV	V	20.67	41.72	54.00	12.28
17265.000	35.59	PK	V	26.94	56.51	68.20	11.69
High Channel: 5795 MHz							
5795.000	74.67	PK	H	39.43	108.08	N/A	N/A
5795.000	63.13	AV	H	39.43	96.54	N/A	N/A
5795.000	78.83	PK	V	39.43	112.24	N/A	N/A
5795.000	67.48	AV	V	39.43	100.89	N/A	N/A
5850.000	41.40	PK	V	39.49	74.87	122.20	47.33
5855.000	39.04	PK	V	39.51	72.53	110.80	38.27
5875.000	35.22	PK	V	39.60	68.80	105.20	36.40
5925.000	31.55	PK	V	39.68	65.21	68.20	2.99
11590.000	36.18	PK	V	20.88	51.04	74.00	22.96
11590.000	24.09	AV	V	20.88	38.95	54.00	15.05
17385.000	35.05	PK	V	28.07	57.10	68.20	11.10

802.11ac vht80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Middle Channel: 5775 MHz							
5775.000	69.59	PK	H	39.44	103.01	N/A	N/A
5775.000	57.46	AV	H	39.44	90.88	N/A	N/A
5775.000	72.63	PK	V	39.44	106.05	N/A	N/A
5775.000	60.28	AV	V	39.44	93.70	N/A	N/A
5725.000	39.42	PK	V	39.48	72.88	122.20	49.32
5720.000	39.62	PK	V	39.49	73.09	110.80	37.71
5700.000	46.01	PK	V	39.51	79.50	105.20	25.70
5650.000	32.18	PK	V	39.49	65.65	68.20	2.55
5850.000	42.40	PK	V	39.49	75.87	122.20	46.33
5855.000	36.41	PK	V	39.51	69.90	110.80	40.90
5875.000	42.19	PK	V	39.60	75.77	105.20	29.43
5925.000	32.19	PK	V	39.68	65.85	68.20	2.35
11550.000	35.70	PK	V	20.78	50.46	74.00	23.54
11550.000	23.35	AV	V	20.78	38.11	54.00	15.89
17325.000	34.79	PK	V	27.41	56.18	68.20	12.02

802.11ax hew20:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745MHz							
5745.000	71.75	PK	H	39.46	105.19	N/A	N/A
5745.000	59.39	AV	H	39.46	92.83	N/A	N/A
5745.000	75.87	PK	V	39.46	109.31	N/A	N/A
5745.000	63.24	AV	V	39.46	96.68	N/A	N/A
5725.000	37.61	PK	V	39.48	71.07	122.20	51.13
5720.000	32.82	PK	V	39.49	66.29	110.80	44.51
5700.000	31.74	PK	V	39.51	65.23	105.20	39.97
5650.000	29.92	PK	V	39.49	63.39	68.20	4.81
11490.000	36.09	PK	V	20.67	50.74	74.00	23.26
11490.000	24.05	AV	V	20.67	38.70	54.00	15.30
17235.000	34.36	PK	V	26.76	55.10	68.20	13.10
Middle Channel: 5785 MHz							
5785.000	73.50	PK	H	39.44	106.92	N/A	N/A
5785.000	61.19	AV	H	39.44	94.61	N/A	N/A
5785.000	76.15	PK	V	39.44	109.57	N/A	N/A
5785.000	64.38	AV	V	39.44	97.80	N/A	N/A
11570.000	36.90	PK	V	20.83	51.71	74.00	22.29
11570.000	24.45	AV	V	20.83	39.26	54.00	14.74
17355.000	33.44	PK	V	27.74	55.16	68.20	13.04
High Channel: 5825 MHz							
5825.000	74.63	PK	H	39.46	108.07	N/A	N/A
5825.000	62.31	AV	H	39.46	95.75	N/A	N/A
5825.000	75.89	PK	V	39.46	109.33	N/A	N/A
5825.000	63.71	AV	V	39.46	97.15	N/A	N/A
5850.000	34.76	PK	V	39.49	68.23	122.20	53.97
5855.000	32.89	PK	V	39.51	66.38	110.80	44.42
5875.000	31.09	PK	V	39.60	64.67	105.20	40.53
5925.000	31.11	PK	V	39.68	64.77	68.20	3.43
11650.000	37.43	PK	V	21.07	52.48	74.00	21.52
11650.000	25.22	AV	V	21.07	40.27	54.00	13.73
17475.000	33.65	PK	V	28.61	56.24	68.20	11.96

802.11ax hew40:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5755 MHz							
5755.000	69.58	PK	H	39.45	103.01	N/A	N/A
5755.000	59.46	AV	H	39.45	92.89	N/A	N/A
5755.000	74.78	PK	V	39.45	108.21	N/A	N/A
5755.000	64.23	AV	V	39.45	97.66	N/A	N/A
5725.000	48.35	PK	V	39.48	81.81	122.20	40.39
5720.000	50.22	PK	V	39.49	83.69	110.80	27.11
5700.000	40.12	PK	V	39.51	73.61	105.20	31.59
5650.000	31.12	PK	V	39.49	64.59	68.20	3.61
11510.000	38.46	PK	V	20.67	53.11	74.00	20.89
11510.000	26.23	AV	V	20.67	40.88	54.00	13.12
17265.000	34.12	PK	V	26.94	55.04	68.20	13.16
High Channel: 5795 MHz							
5795.000	70.13	PK	H	39.43	103.54	N/A	N/A
5795.000	60.23	AV	H	39.43	93.64	N/A	N/A
5795.000	75.41	PK	V	39.43	108.82	N/A	N/A
5795.000	65.37	AV	V	39.43	98.78	N/A	N/A
5850.000	40.78	PK	V	39.49	74.25	122.20	47.95
5855.000	38.28	PK	V	39.51	71.77	110.80	39.03
5875.000	36.13	PK	V	39.60	69.71	105.20	35.49
5925.000	30.55	PK	V	39.68	64.21	68.20	3.99
11590.000	35.12	PK	V	20.88	49.98	74.00	24.02
11590.000	23.06	AV	V	20.88	37.92	54.00	16.08
17385.000	35.11	PK	V	28.07	57.16	68.20	11.04

802.11ax hew80:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel: 5775 MHz							
5775.000	67.34	PK	H	39.44	100.76	N/A	N/A
5775.000	55.41	AV	H	39.44	88.83	N/A	N/A
5775.000	71.69	PK	V	39.44	105.11	N/A	N/A
5775.000	59.37	AV	V	39.44	92.79	N/A	N/A
5725.000	38.45	PK	V	39.48	71.91	122.20	50.29
5720.000	42.13	PK	V	39.49	75.60	110.80	35.20
5700.000	43.11	PK	V	39.51	76.60	105.20	28.60
5650.000	31.74	PK	V	39.49	65.21	68.20	2.99
5850.000	40.23	PK	V	39.49	73.70	122.20	48.50
5855.000	35.12	PK	V	39.51	68.61	110.80	42.19
5875.000	40.12	PK	V	39.60	73.70	105.20	31.50
5925.000	31.05	PK	V	39.68	64.71	68.20	3.49
11550.000	35.78	PK	V	20.78	50.54	74.00	23.46
11550.000	23.39	AV	V	20.78	38.15	54.00	15.85
17325.000	34.66	PK	V	27.41	56.05	68.20	12.15


Note:

Result = Reading + Factor- Distance extrapolation Factor


For 1-40GHz:

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.02 dB


Worst Test plots(802.11a chain 0 5200 MHz was the worst)

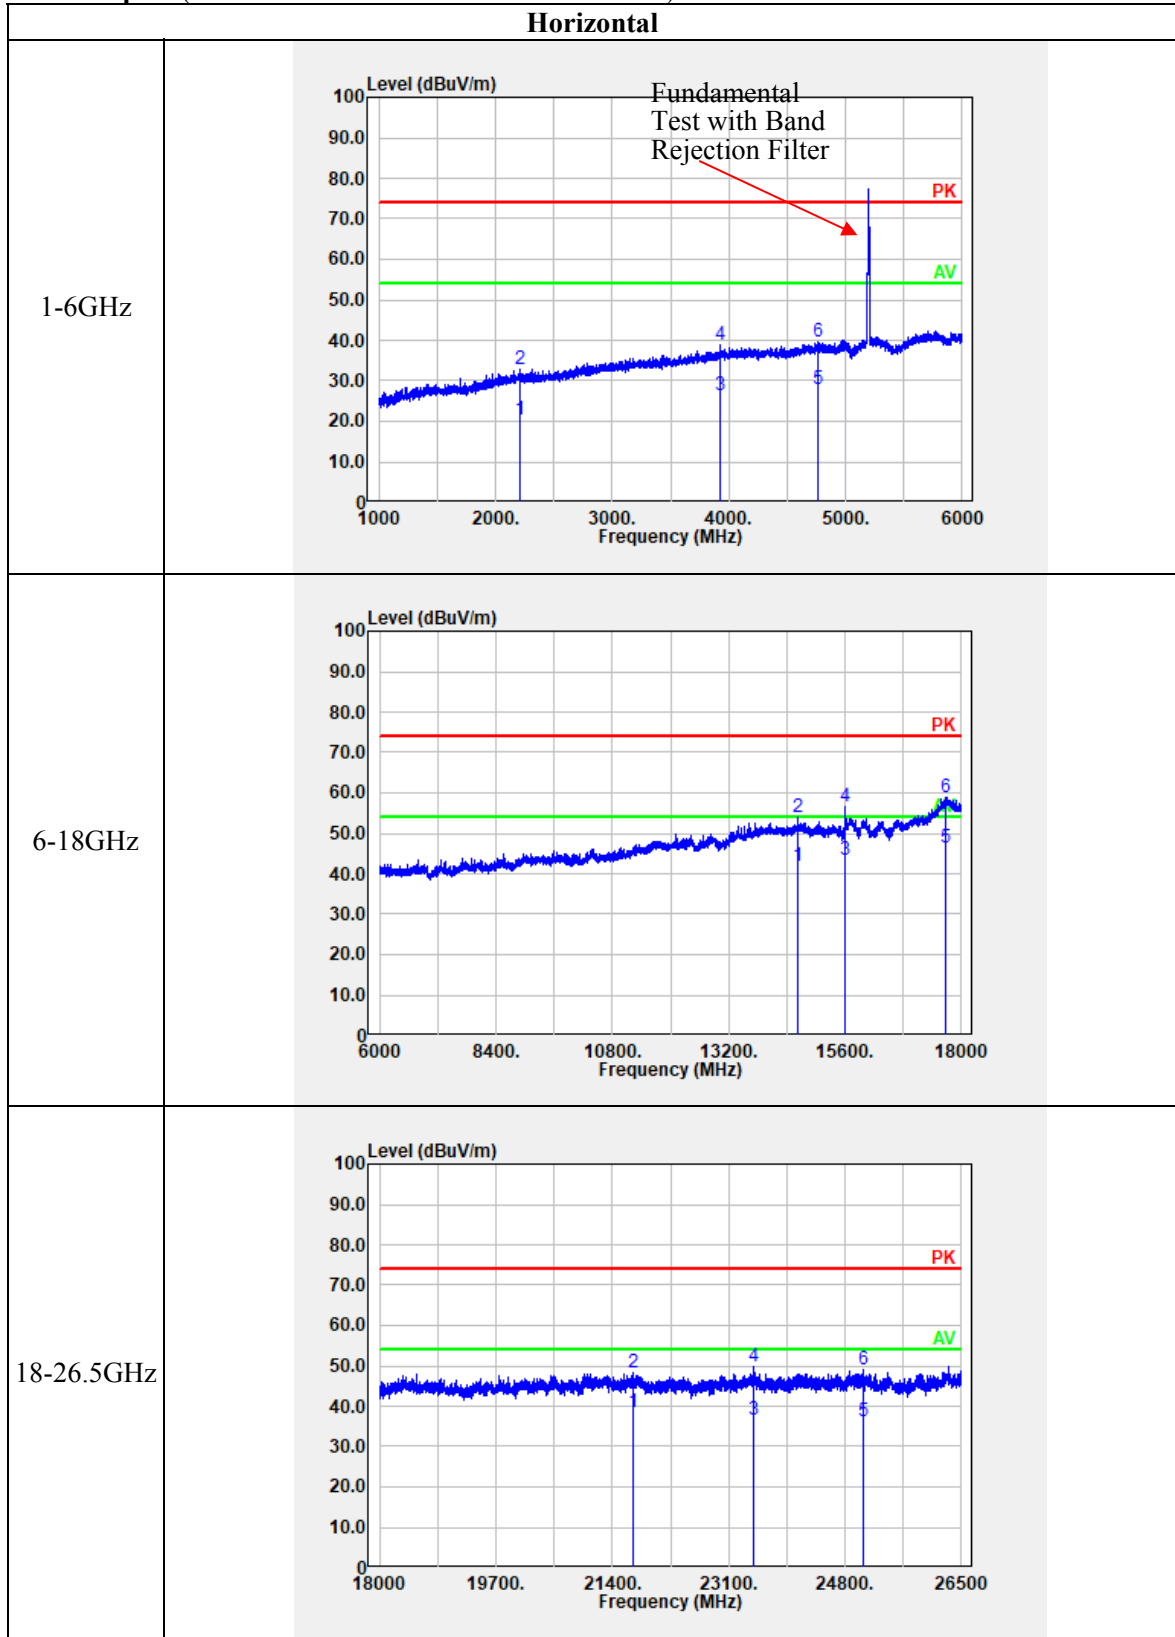


26.5-40GHz

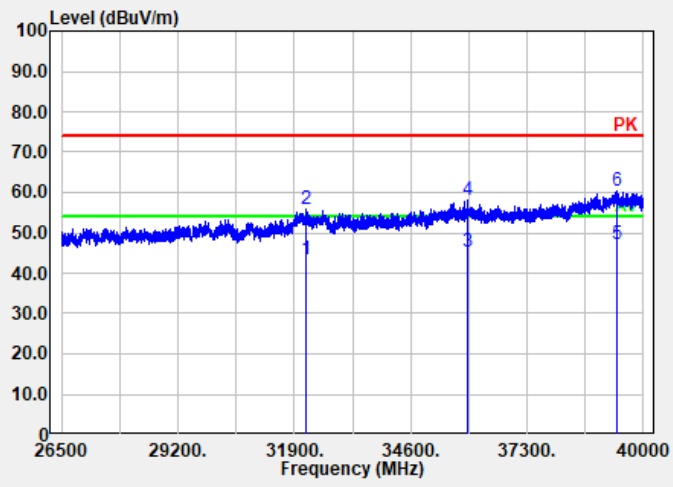

Vertical

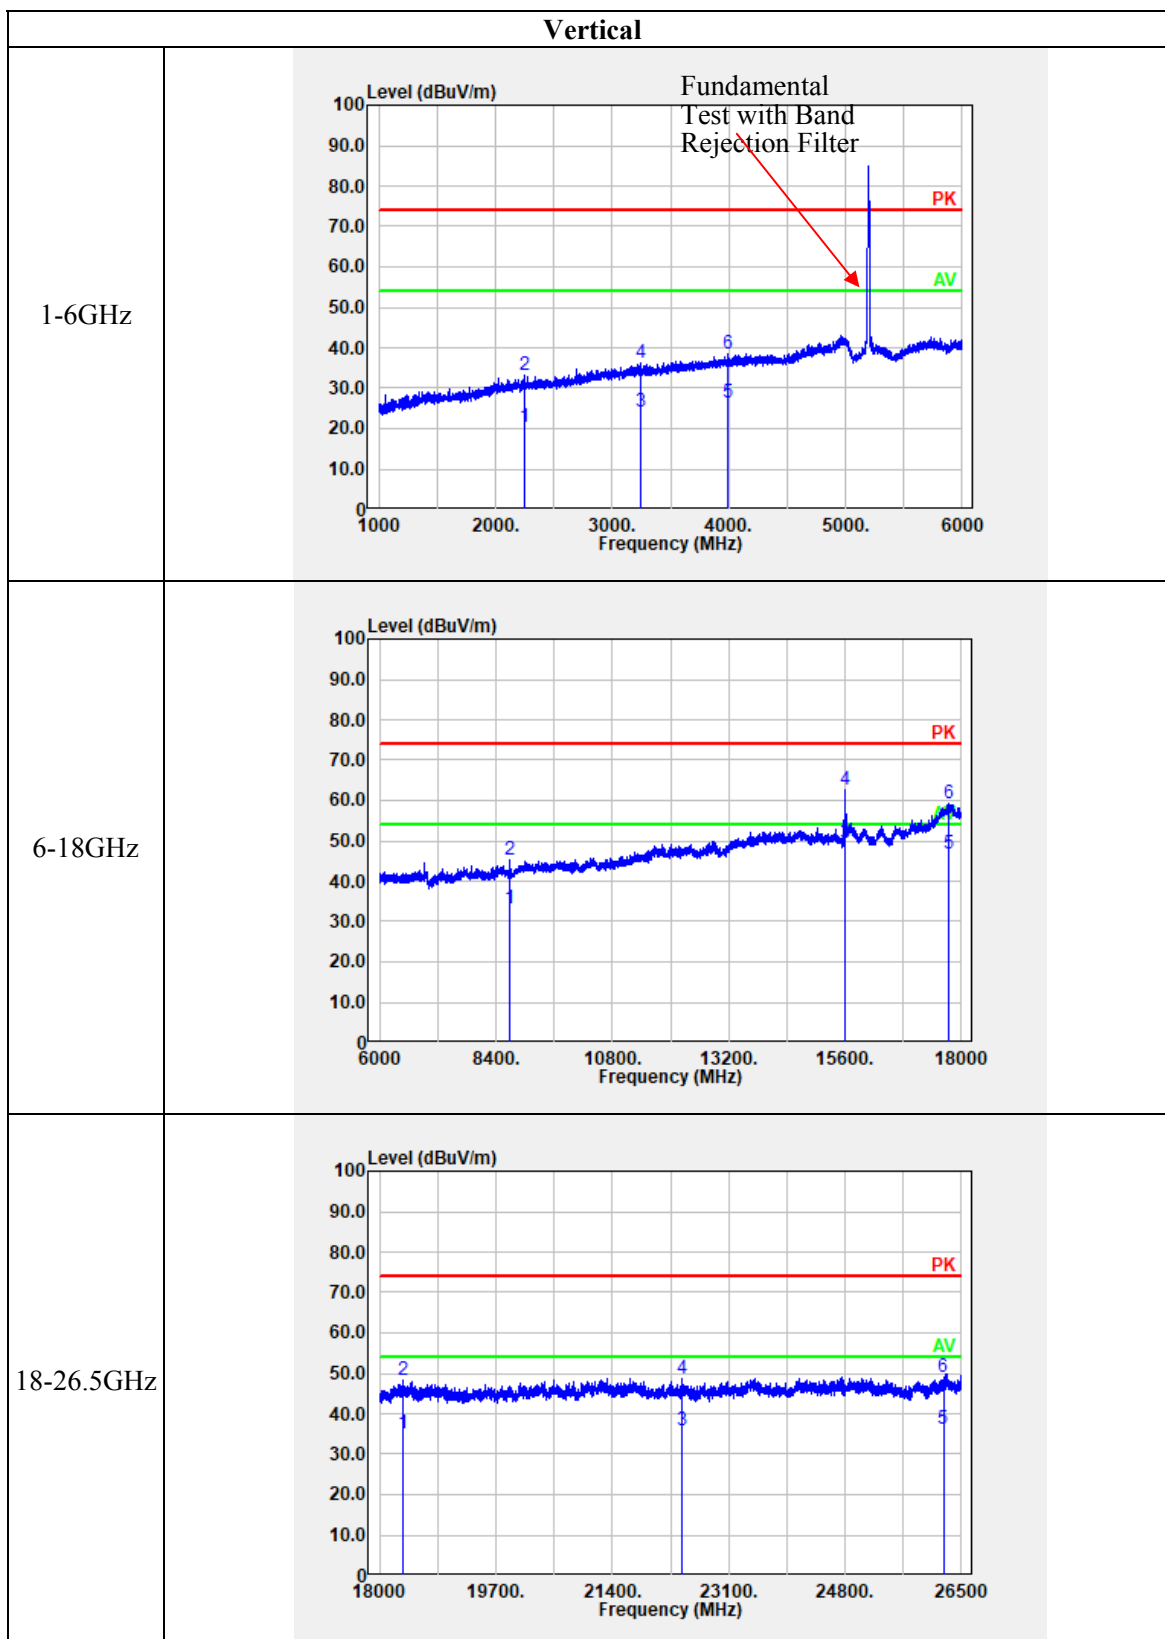

26.5-40GHz

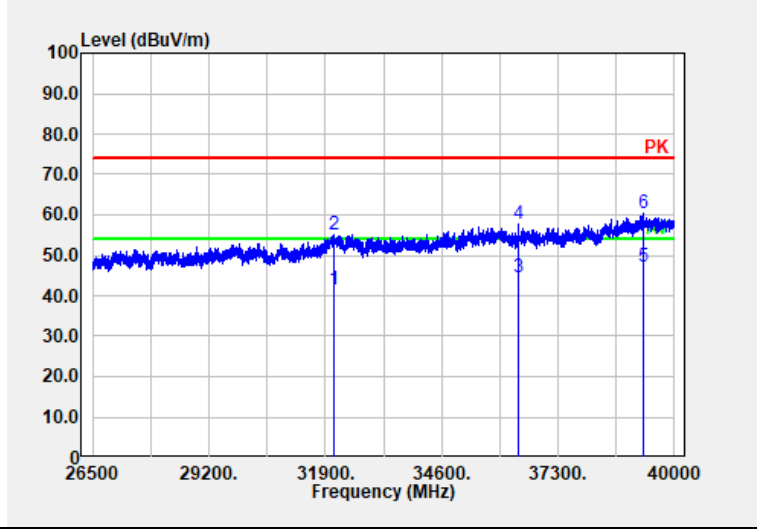

4.3 Emission Bandwidth:

Serial Number:	1VMU-1	Test Date:	2023/4/12~2023/4/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.3-22.5	Relative Humidity: (%)	48-50	ATM Pressure: (kPa)	100.5-100.6
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	18.88	16.48
	5200	18.96	16.48
	5240	18.96	16.48
802.11n ht20	5180	19.68	17.6
	5200	19.6	17.6
	5240	19.52	17.6
802.11n ht40	5190	38.88	36.16
	5230	38.72	36.16
802.11ac vht80	5210	85.76	76.8
802.11ax hew20	5180	20.64	18.96
	5200	20.64	18.96
	5240	20.56	18.96
802.11ax hew40	5190	40	37.92
	5230	40	37.92
802.11ax hew80	5210	82.56	77.76

Note:

Test only was performed at Chain 0.

The 99% Occupied Bandwidth have not fallen into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.32	16.56
	5785	16.32	16.56
	5825	16.32	16.56
802.11n ht20	5745	17.28	17.6
	5785	17.12	17.6
	5825	17.28	17.6
802.11n ht40	5755	35.68	36.16
	5795	35.68	36.16
802.11ac vht80	5775	76.48	76.8
802.11ax hew20	5745	18.48	19.04
	5785	18.48	19.04
	5825	18.48	19.04
802.11ax hew40	5755	37.76	37.92
	5795	37.76	37.92
802.11ax hew80	5775	77.44	77.76

Note:

6dB Emission Bandwidth Limit: ≥ 0.5 MHz

Test only was performed at Chain 0.

The 99% Occupied Bandwidth have not fallen into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

5150-5250 MHz:(Chain 0)

26dB Emission Bandwidth	
802.11a Lowest Channel	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] -0.68 dB * VBW 1 MHz 18.88000000 MHz SWT 20 ms Marker 1 [T1] -1.15 dBm 5.17056000 GHz</p> <p>D1 8.28 dBm D2 -7.72 dBm</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 22:57:57</p>
802.11a Middle Channel	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] 0.03 dB * VBW 1 MHz 18.96000000 MHz SWT 20 ms Marker 1 [T1] -1.62 dBm 5.19048000 GHz</p> <p>D1 8.62 dBm D2 -7.38 dBm</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 21:38:33</p>
802.11a Highest Channel	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] -0.13 dB * VBW 1 MHz 18.96000000 MHz SWT 20 ms Marker 1 [T1] -1.69 dBm 5.23048000 GHz</p> <p>D1 8.58 dBm D2 -7.42 dBm</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 21:40:53</p>




26dB Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] * VBW 1 MHz -0.28 dB * SWT 20 ms 19.600000000 MHz</p> <p>Offset 0.4 dB Marker 1 [T1] -22.27 dBm 5.170160000 GHz</p> <p>d1 3.51 dBm -32.43 dBm</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 23:07:49</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] * VBW 1 MHz 0.53 dB * SWT 20 ms 19.600000000 MHz</p> <p>Offset 0.4 dB Marker 1 [T1] -22.32 dBm 5.190160000 GHz</p> <p>d1 3.84 dBm -32.17 dBm</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 23:10:14</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] * VBW 1 MHz -0.47 dB * SWT 20 ms 19.520000000 MHz</p> <p>Offset 0.4 dB Marker 1 [T1] -21.58 dBm 5.230240000 GHz</p> <p>d1 3.92 dBm -32.00 dBm</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 23:15:21</p>

26dB Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Date: 12.APR.2023 23:20:49</p>
<p>802.11n ht40 Highest Channel</p>	<p>Date: 12.APR.2023 23:22:58</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Date: 12.APR.2023 22:40:58</p>

26dB Emission Bandwidth
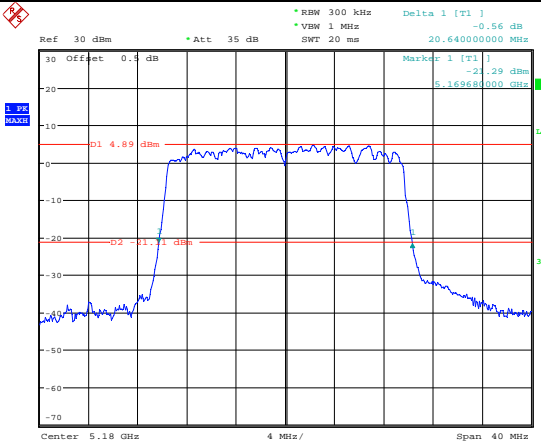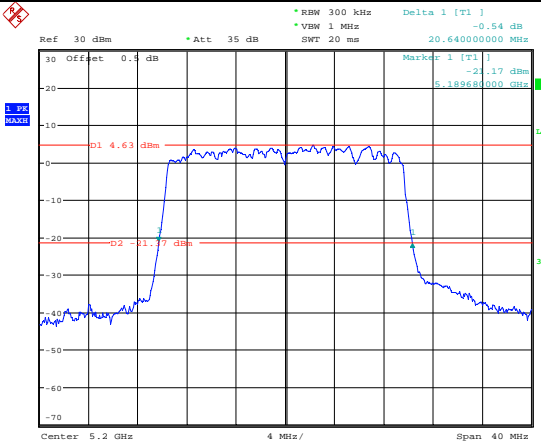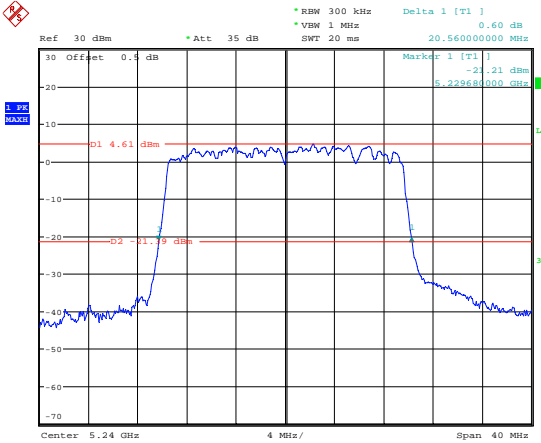
<p>802.11ax hew20 Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] -0.56 dB * VBW 1 MHz 20.640000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -21.29 dBm 5.169680000 GHz</p> <p>D1 4.89 dBm D2 -21.29 dBm</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 20:26:58</p>
<p>802.11ax hew20 Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] -0.54 dB * VBW 1 MHz 20.640000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -21.17 dBm 5.189680000 GHz</p> <p>D1 4.63 dBm D2 -21.17 dBm</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 20:32:45</p>
<p>802.11ax hew20 Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Delta 1 [T1] 0.60 dB * VBW 1 MHz 20.560000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -21.21 dBm 5.229680000 GHz</p> <p>D1 4.61 dBm D2 -21.21 dBm</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 20:38:12</p>

26dB Emission Bandwidth

<p>802.11ax hew40 Lowest Channel</p>	<p>Date: 18.APR.2023 20:43:10</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Date: 18.APR.2023 20:46:36</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Date: 18.APR.2023 20:50:43</p>




99% Emission Bandwidth


<p>802.11a Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] * VBW 1 MHz 8.27 dBm SWF 20 ms 5.175840000 GHz</p> <p>30 Offset 0.4 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>OSW 6.480000000 MHz Temp 1 [T1 OSW] 1.06 dBm 5.171760000 GHz Temp 2 [T1 OSW] 1.56 dBm 5.188240000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 22:58:14</p>
<p>802.11a Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] * VBW 1 MHz 8.58 dBm SWF 20 ms 5.195840000 GHz</p> <p>30 Offset 0.4 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>OSW 6.480000000 MHz Temp 1 [T1 OSW] 1.87 dBm 5.191760000 GHz Temp 2 [T1 OSW] 1.56 dBm 5.208240000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 21:38:49</p>
<p>802.11a Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] * VBW 1 MHz 8.41 dBm SWF 20 ms 5.235840000 GHz</p> <p>30 Offset 0.4 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>OSW 6.480000000 MHz Temp 1 [T1 OSW] 1.51 dBm 5.231760000 GHz Temp 2 [T1 OSW] 1.54 dBm 5.248240000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 21:41:06</p>

99% Emission Bandwidth




<p>802.11n ht20 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 3.48 dBm * VBW 1 MHz 5.194240000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 7.600000000 MHz Temp 1 [T1] OSW] -13 dBm 5.171200000 GHz Temp 2 [T1] OSW] -54 dBm 5.188800000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 23:08:05</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 3.81 dBm * VBW 1 MHz 5.206800000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 7.600000000 MHz Temp 1 [T1] OSW] -27 dBm 5.191200000 GHz Temp 2 [T1] OSW] -39 dBm 5.208800000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 23:10:27</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 3.75 dBm * VBW 1 MHz 5.244240000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 7.600000000 MHz Temp 1 [T1] OSW] -74 dBm 5.231200000 GHz Temp 2 [T1] OSW] -80 dBm 5.248800000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 12.APR.2023 23:15:37</p>

99% Emission Bandwidth

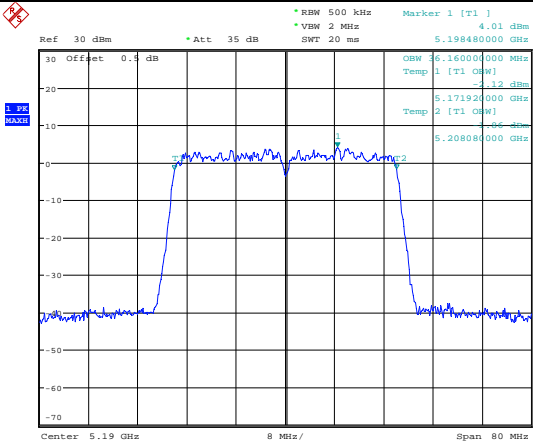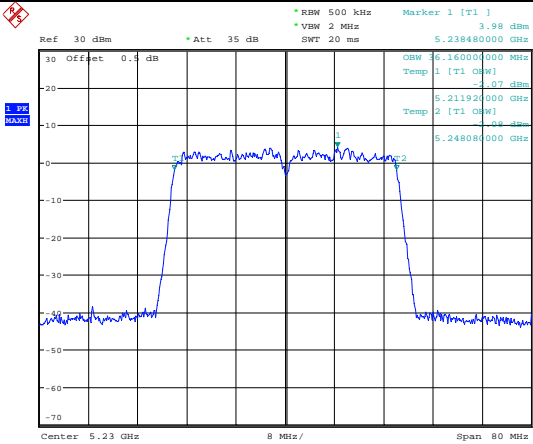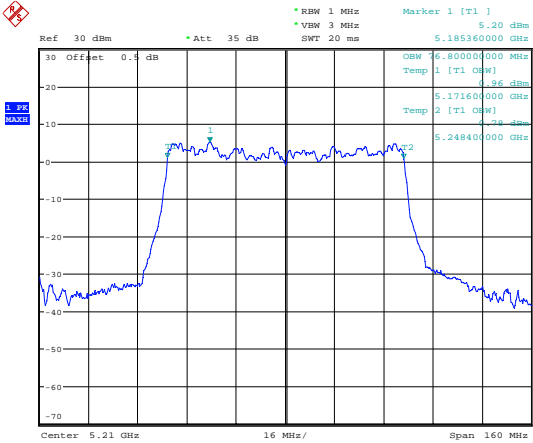
<p>802.11n ht40 Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 4.01 dBm * VBW 2 MHz 5.198480000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>30 Offset 0.4 dB</p> <p>OSW 5.160000000 MHz Temp 1 [T1] OSW] -12 dBm</p> <p>5.171920000 GHz Temp 2 [T1] OSW] -86 dBm</p> <p>5.208080000 GHz</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 12.APR.2023 23:21:05</p>
<p>802.11n ht40 Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 3.98 dBm * VBW 2 MHz 5.238480000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>30 Offset 0.4 dB</p> <p>OSW 5.160000000 MHz Temp 1 [T1] OSW] -07 dBm</p> <p>5.211920000 GHz Temp 2 [T1] OSW] -23 dBm</p> <p>5.248080000 GHz</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 12.APR.2023 23:23:15</p>
<p>802.11n ht40 Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] 5.20 dBm * VBW 3 MHz 5.185360000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>30 Offset 0.4 dB</p> <p>OSW 5.800000000 MHz Temp 1 [T1] OSW] -1.86 dBm</p> <p>5.171600000 GHz Temp 2 [T1] OSW] -1.78 dBm</p> <p>5.248400000 GHz</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 12.APR.2023 22:41:11</p>

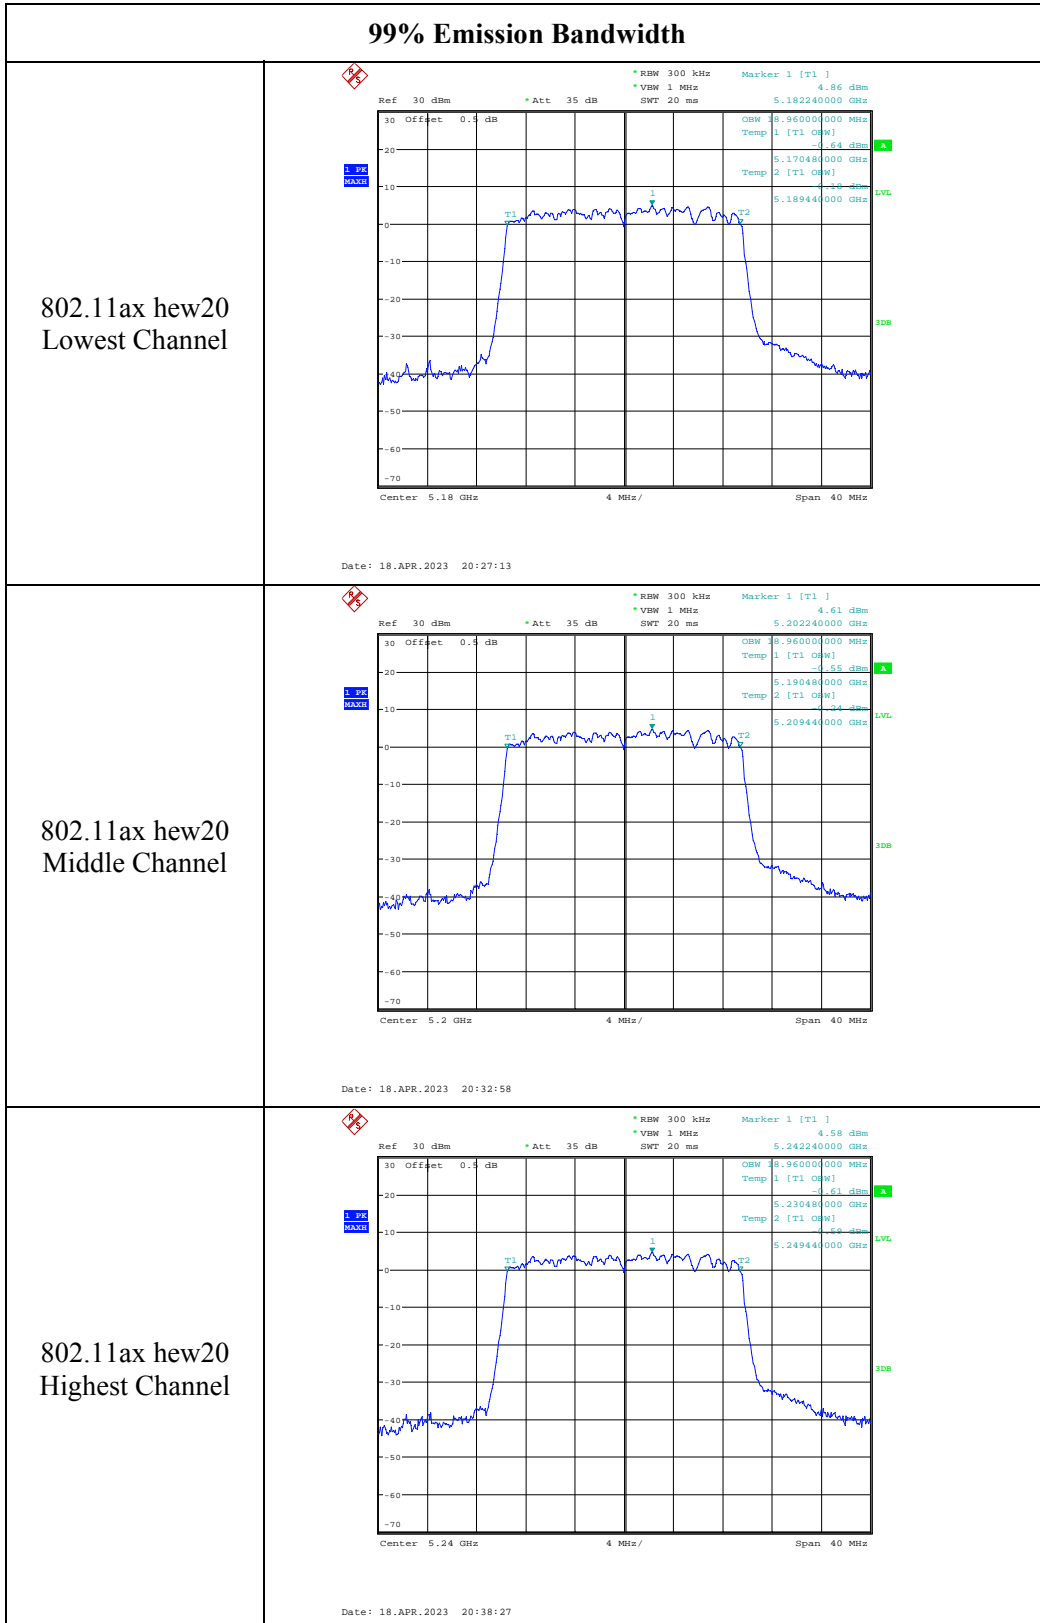



99% Emission Bandwidth

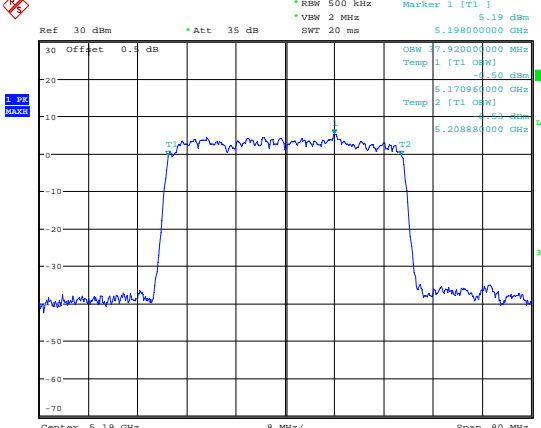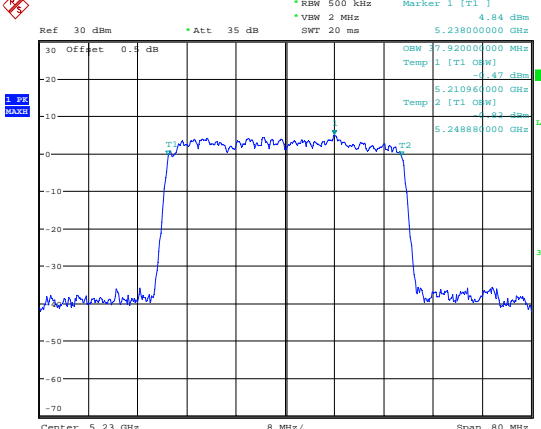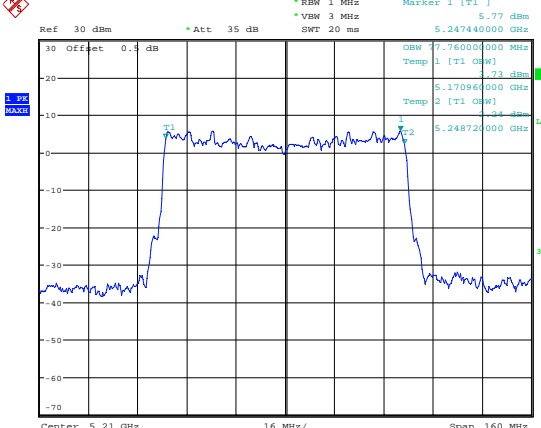
<p>802.11ax hew40 Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 5.19 dBm * VBW 2 MHz 5.198000000 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB OSW 7.920000000 MHz Temp 1 [T1 OSW] 5.198000000 GHz Temp 2 [T1 OSW] 5.170960000 GHz Temp 3 [T1 OSW] 5.208880000 GHz</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 20:43:24</p>
<p>802.11ax hew40 Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 4.84 dBm * VBW 2 MHz 5.238000000 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB OSW 7.920000000 MHz Temp 1 [T1 OSW] 5.238000000 GHz Temp 2 [T1 OSW] 5.210960000 GHz Temp 3 [T1 OSW] 5.248880000 GHz</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 20:46:50</p>
<p>802.11ax hew80 Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] 5.77 dBm * VBW 3 MHz 5.247440000 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB OSW 7.760000000 MHz Temp 1 [T1 OSW] 5.247440000 GHz Temp 2 [T1 OSW] 5.170960000 GHz Temp 3 [T1 OSW] 5.248720000 GHz</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 18.APR.2023 20:50:58</p>


5725-5850MHz: (Chain 0)

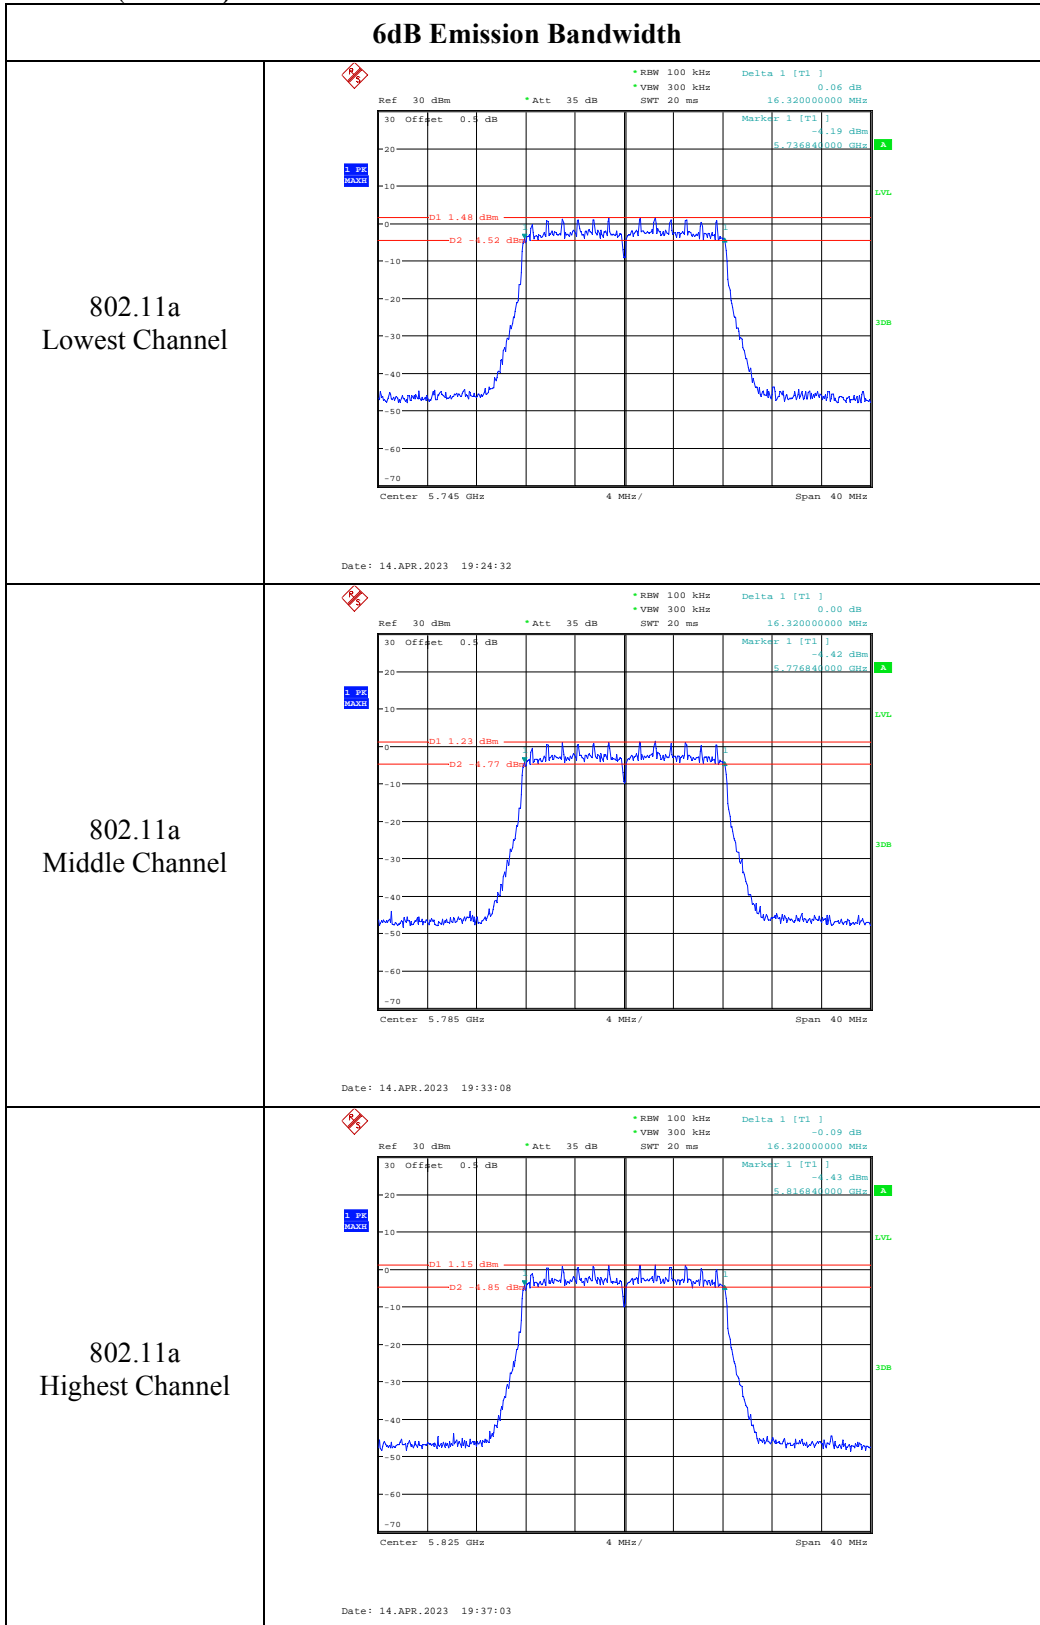


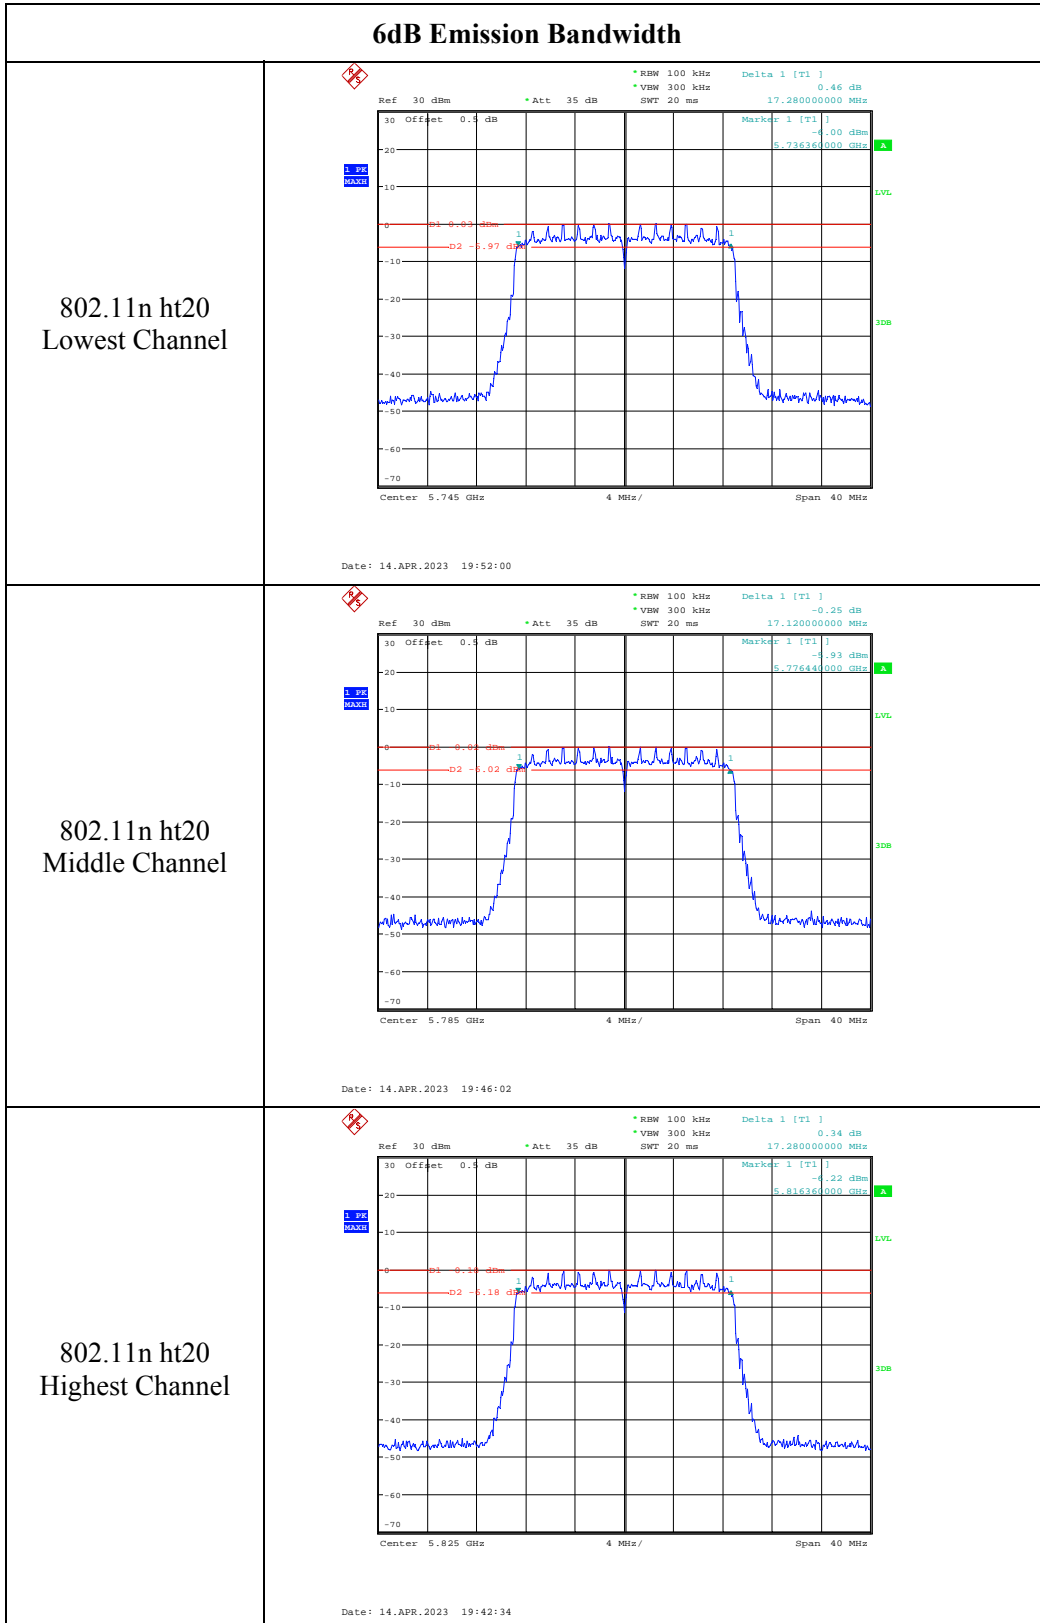

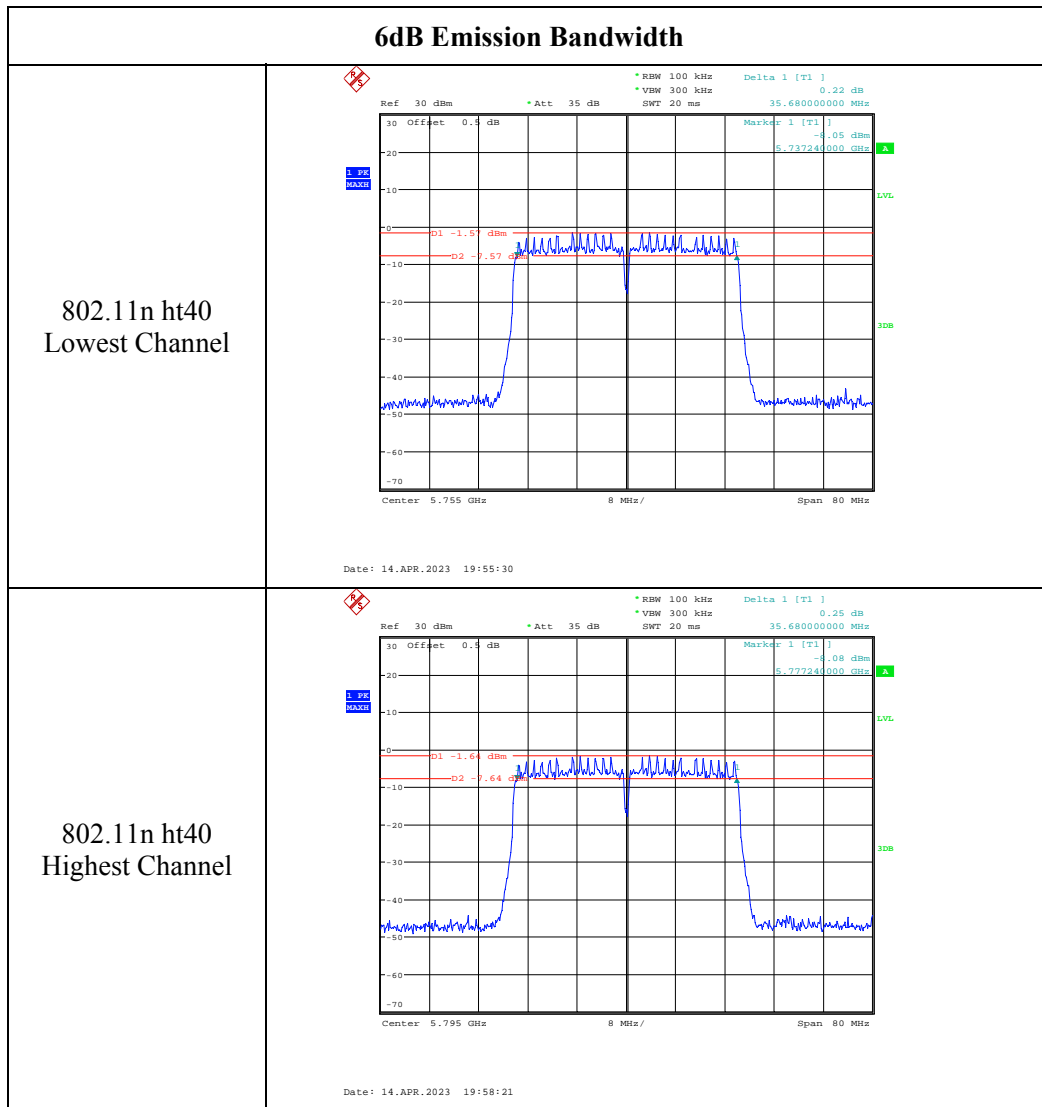

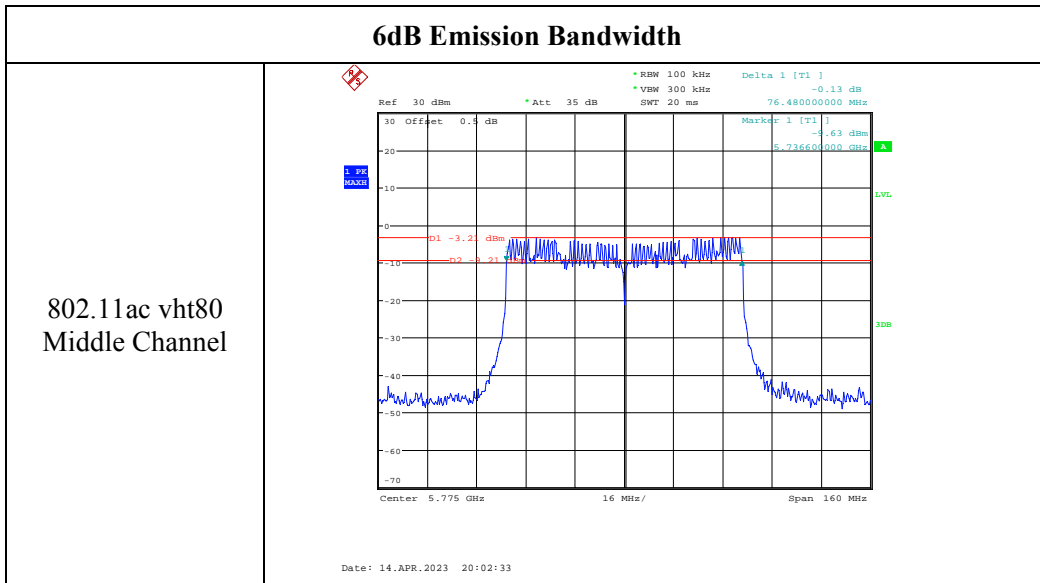

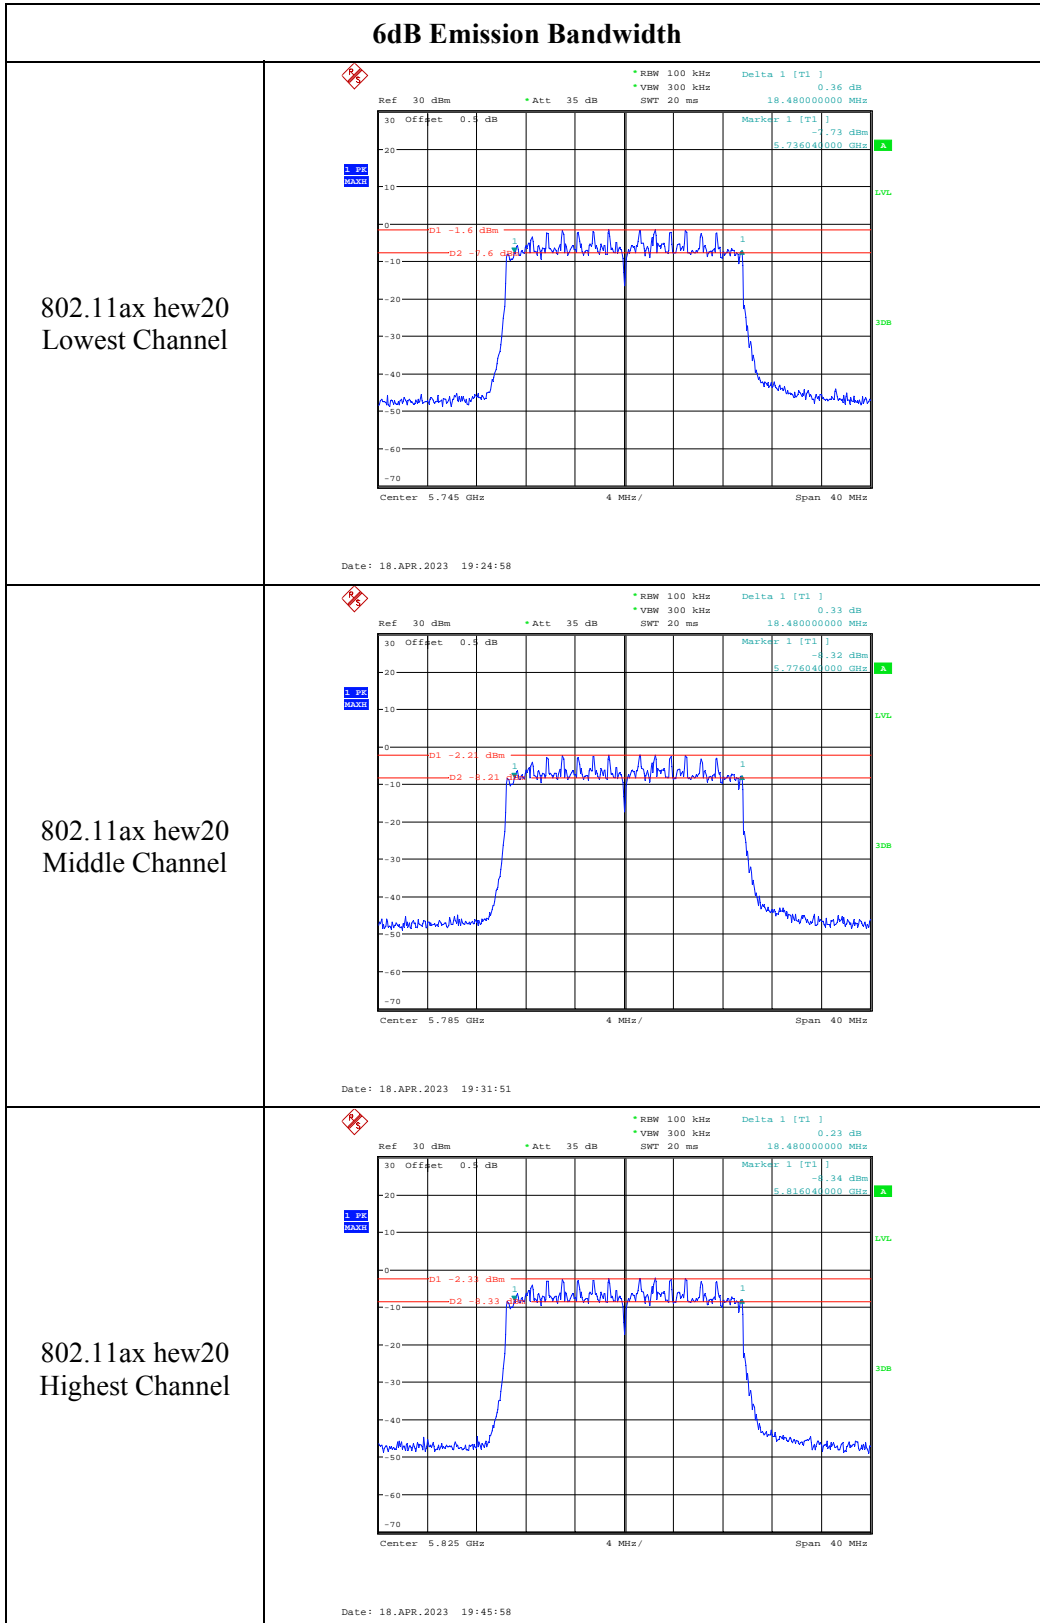

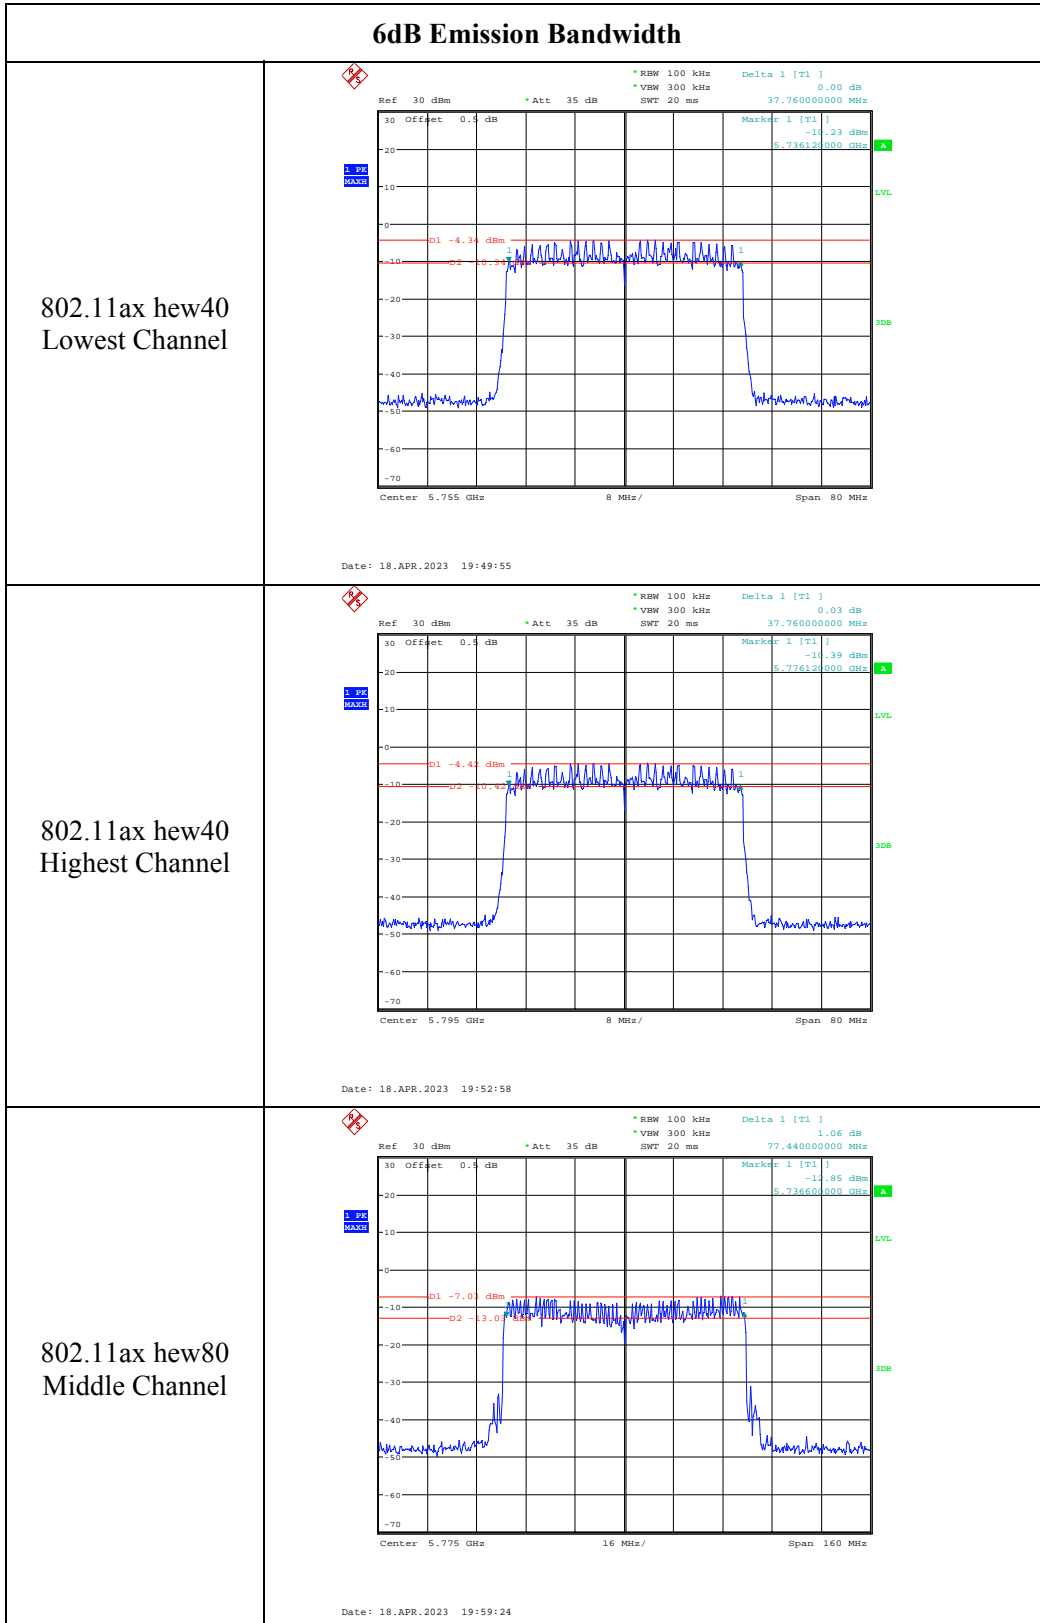


99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.79 dBm * VBW 1 MHz 5.740940000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 6.560000000 MHz Temp 1 [T1] OSW] -54 dBm 5.736680000 GHz Temp 2 [T1] OSW] -54 dBm 5.753240000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:24:46</p>
<p>802.11a Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.51 dBm * VBW 1 MHz 5.780840000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 6.560000000 MHz Temp 1 [T1] OSW] -53 dBm 5.776680000 GHz Temp 2 [T1] OSW] -53 dBm 5.793240000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:33:21</p>
<p>802.11a Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 4.45 dBm * VBW 1 MHz 5.820840000 GHz * SWT 20 ms</p> <p>30 Offset 0.4 dB</p> <p>OSW 6.560000000 MHz Temp 1 [T1] OSW] -53 dBm 5.816680000 GHz Temp 2 [T1] OSW] -53 dBm 5.833240000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:37:17</p>


99% Emission Bandwidth

802.11n ht20
Lowest Channel

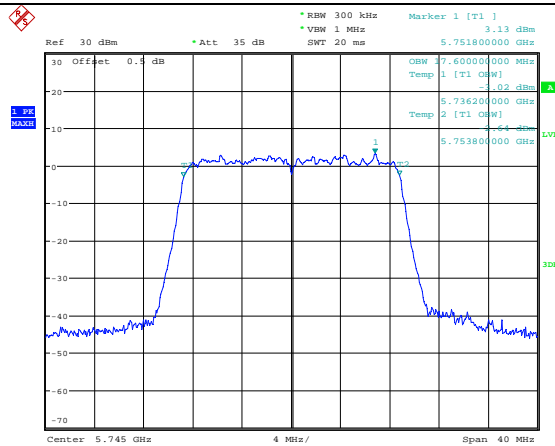


Date: 14.APR.2023 19:52:14

802.11n ht20
Middle Channel

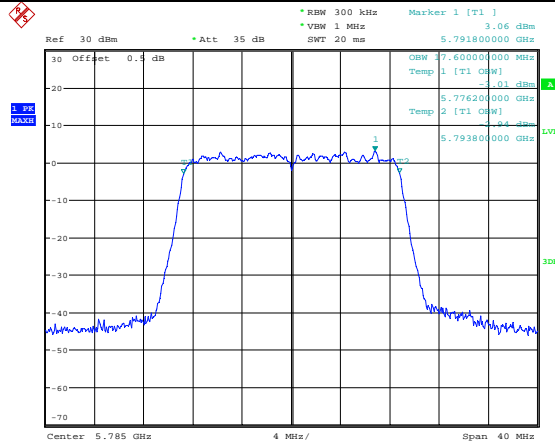


Date: 14.APR.2023 19:46:17


802.11n ht20
Highest Channel

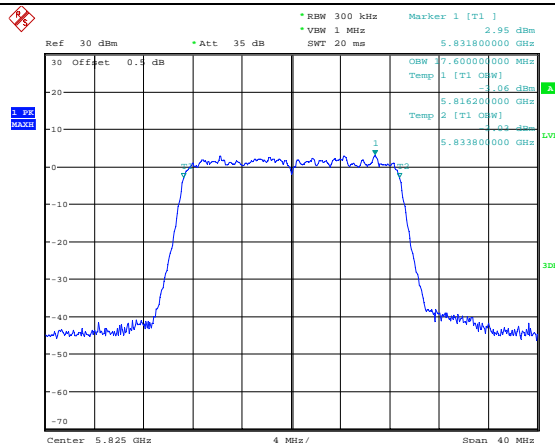




Date: 14.APR.2023 19:42:47

99% Emission Bandwidth



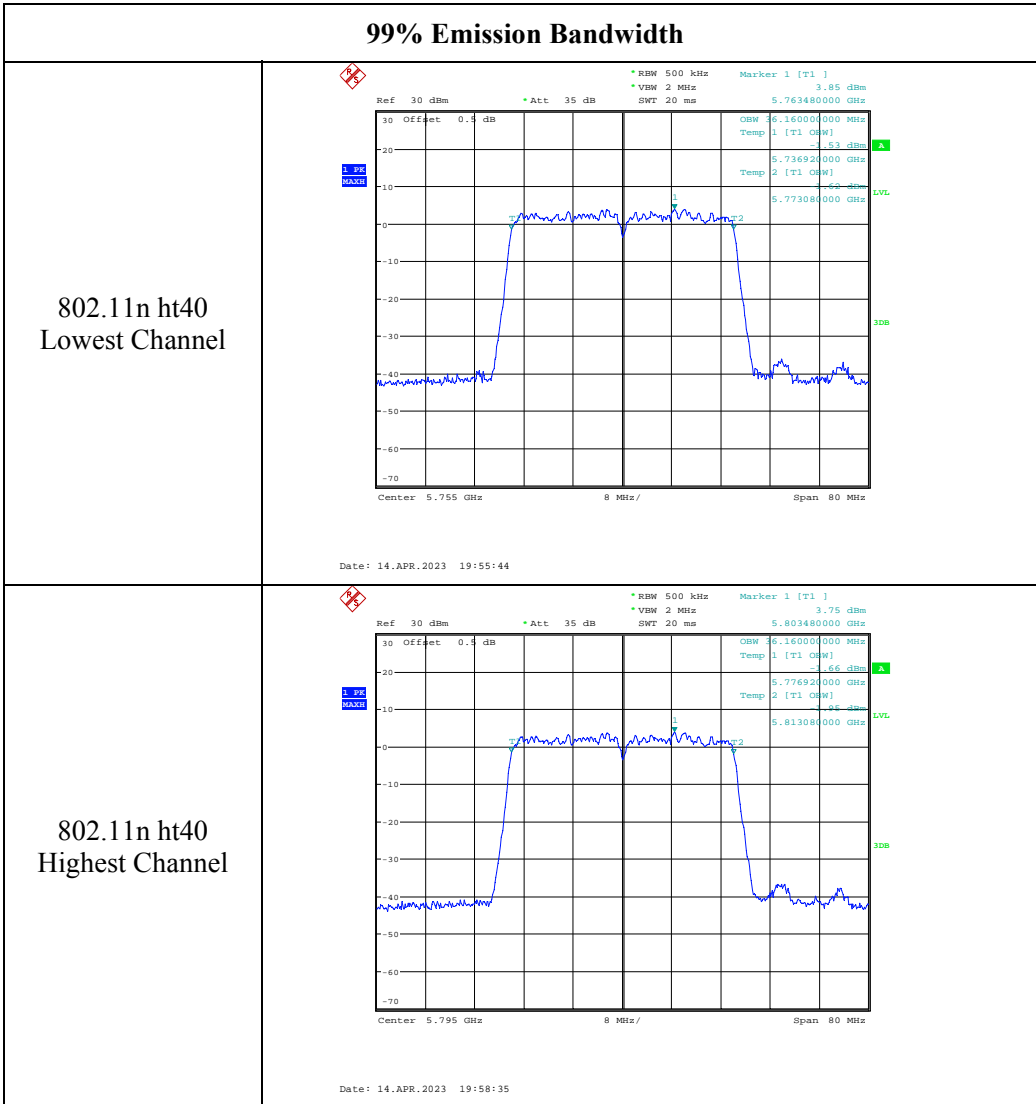


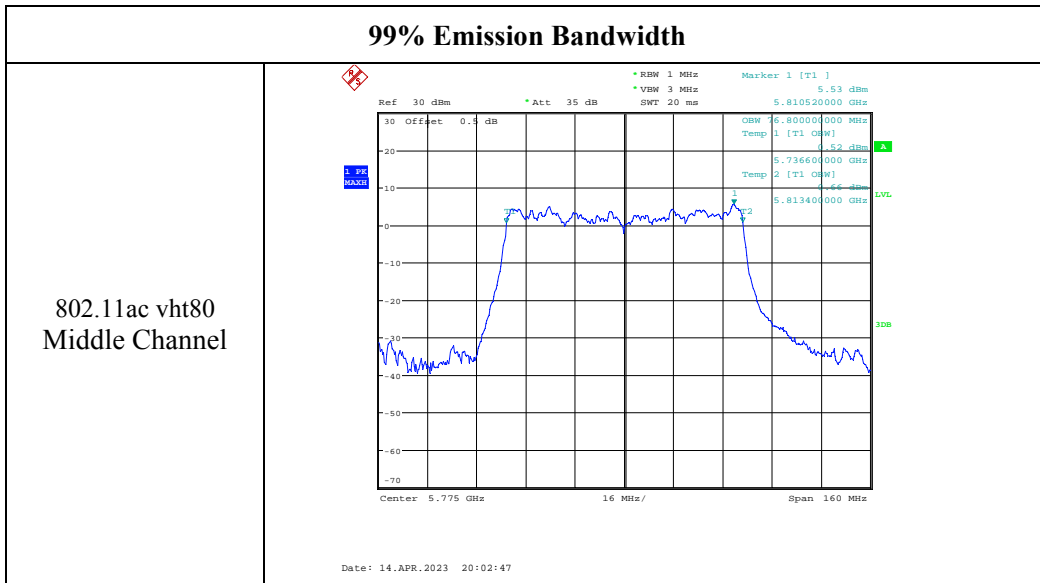

99% Emission Bandwidth
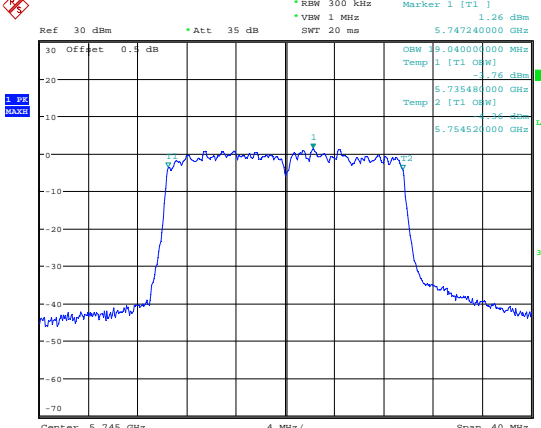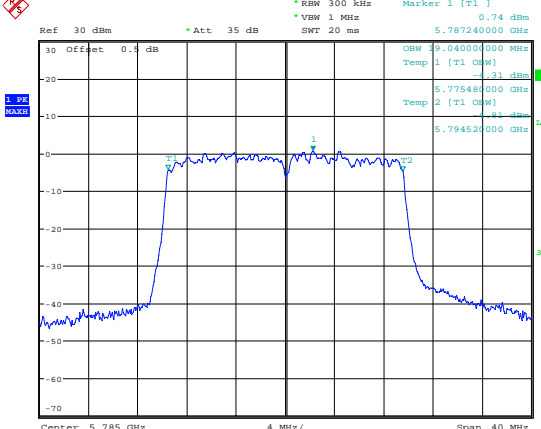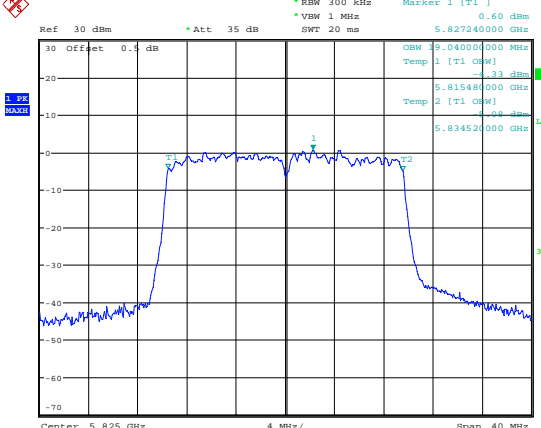
<p>802.11ax hew20 Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 1.26 dBm * VBW 1 MHz 5.747240000 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB OSW 9.040000000 MHz Temp 1 [T1] OSW] -1.76 dBm 5.735480000 GHz Temp 2 [T1] OSW] -3.36 dBm 5.754520000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 19:25:12</p>
<p>802.11ax hew20 Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 0.74 dBm * VBW 1 MHz 5.787240000 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB OSW 9.040000000 MHz Temp 1 [T1] OSW] -1.31 dBm 5.775480000 GHz Temp 2 [T1] OSW] -3.31 dBm 5.794520000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 19:32:04</p>
<p>802.11ax hew20 Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 300 kHz Marker 1 [T1] 0.60 dBm * VBW 1 MHz 5.827240000 GHz SWT 20 ms</p> <p>30 Offset 0.4 dB OSW 9.040000000 MHz Temp 1 [T1] OSW] -1.33 dBm 5.815480000 GHz Temp 2 [T1] OSW] -3.28 dBm 5.834520000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 19:46:13</p>

99% Emission Bandwidth
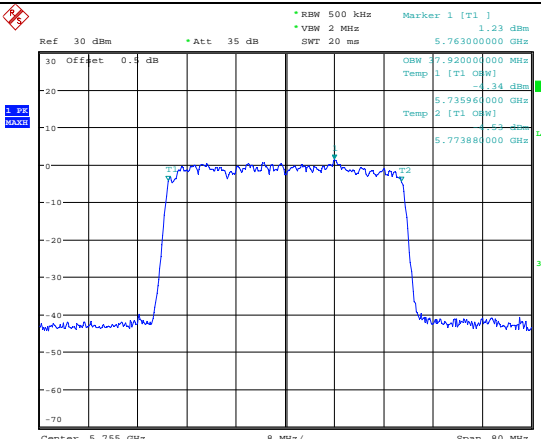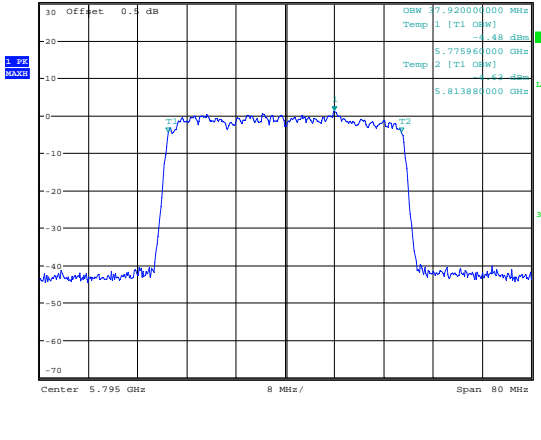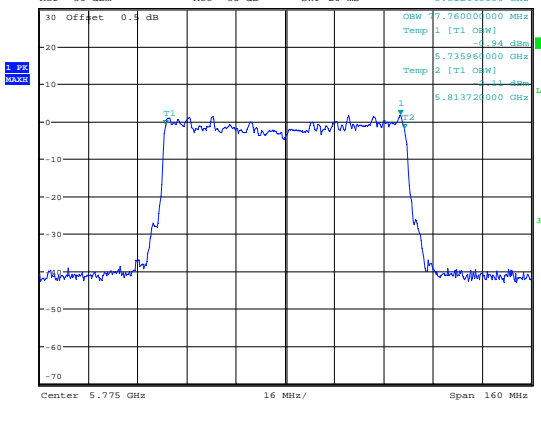
<p>802.11ax hew40 Lowest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 1.23 dBm * VBW 2 MHz 5.763000000 GHz * SWT 20 ms</p> <p>OSW 7.920000000 MHz Temp 1 [T1] OSW] -1.34 dBm 5.735960000 GHz Temp 2 [T1] OSW] -5.3 dBm 5.773880000 GHz</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 19:50:10</p>
<p>802.11ax hew40 Highest Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 500 kHz Marker 1 [T1] 1.16 dBm * VBW 2 MHz 5.803000000 GHz * SWT 20 ms</p> <p>OSW 7.920000000 MHz Temp 1 [T1] OSW] -1.48 dBm 5.775960000 GHz Temp 2 [T1] OSW] -4.3 dBm 5.813880000 GHz</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 19:53:13</p>
<p>802.11ax hew80 Middle Channel</p>	 <p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] 1.66 dBm * VBW 3 MHz 5.812440000 GHz * SWT 20 ms</p> <p>OSW 7.760000000 MHz Temp 1 [T1] OSW] -1.84 dBm 5.735960000 GHz Temp 2 [T1] OSW] -1.11 dBm 5.813720000 GHz</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 18.APR.2023 19:59:39</p>

4.4 Maximum Conducted Output Power:

Serial Number:	1VMU-1	Test Date:	2023/4/12-2023/4/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.3-22.5	Relative Humidity: (%)	48-50	ATM Pressure: (kPa)	100.5-100.6
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2022/07/15	2023/07/14

* *Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:**5150-5250 MHz:**

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5180	16.92	16.16	/	24
	5200	16.99	16.23	/	24
	5240	17.05	16.31	/	24
802.11n ht20	5180	12.36	12.48	15.43	24
	5200	12.52	12.52	15.53	24
	5240	12.69	12.63	15.67	24
802.11n ht40	5190	12.82	12.82	15.83	24
	5230	12.85	12.88	15.88	24
802.11ac vht80	5210	10.99	12.19	14.64	24
802.11ax hew20	5180	13.53	13.58	16.57	24
	5200	13.43	13.47	16.46	24
	5240	13.32	13.74	16.55	24
802.11ax hew40	5190	13.08	13.23	16.17	24
	5230	12.94	12.99	15.98	24
802.11ax hew80	5210	12.61	13.05	15.85	24
<p>Note: The device is a client device. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices: Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$</p>					
Antenna Gain:	4.8	dBi	Directional gain:	4.8	dBi

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)			
		Chain 0	Chain 1	Total	Limit
802.11a	5745	11.49	11.9	/	30
	5785	11.26	11.9	/	30
	5825	11.05	11.54	/	30
802.11n ht20	5745	10.1	10.89	13.52	30
	5785	10	11.33	13.73	30
	5825	9.97	11.09	13.58	30
802.11n ht40	5755	10.98	10.32	13.67	30
	5795	10.89	11.25	14.08	30
802.11ac vht80	5775	9.41	10.51	13.01	30
802.11ax hew20	5745	10.01	10.35	13.19	30
	5785	9.5	9.97	12.75	30
	5825	9.4	9.47	12.45	30
802.11ax hew40	5755	9.22	9.46	12.35	30
	5795	9.09	9.23	12.17	30
802.11ax hew80	5775	8.38	8.43	11.42	30
Note: The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices: Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$					
Antenna Gain:	4.64	dBi	Directional gain:	4.64	dBi

4.5 Maximum power spectral density:

Serial Number:	1VMU-1	Test Date:	2023/4/12-2023/4/18
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.3-22.5	Relative Humidity: (%)	48-50	ATM Pressure: (kPa)	100.5-100.6
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/MHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5180	2.91	2.21	0.25	3.16	11
	5200	3.11	2.82	0.25	3.36	11
	5240	2.99	2.43	0.25	3.24	11
802.11n ht20	5180	-3.85	-4.09	0.58	-0.38	9.2
	5200	-3.48	-3.66	0.58	0.02	9.2
	5240	-2.52	-3.2	0.58	0.74	9.2
802.11n ht40	5190	-10.01	-9.36	1.14	-5.52	9.2
	5230	-8.78	-8.21	1.14	-4.34	9.2
802.11ac vht80	5210	-19.9	-17.94	4.25	-11.55	9.2
802.11ax he20	5180	-13.63	-12.33	2.84	-7.08	9.2
	5200	-14.4	-13.23	2.84	-7.93	9.2
	5240	-13.33	-12.85	2.84	-7.23	9.2
802.11ax he40	5190	-18.47	-17.75	3.43	-11.65	9.2
	5230	-17.11	-16.9	3.43	-10.56	9.2
802.11ax he80	5210	-18.41	-16.94	4.25	-10.36	9.2

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.8 + 10 * \log(2/1) = 7.8 \text{ dBi}$$

Duty cycle ≥98%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 was used.

Duty cycle <98%, duty cycle variations are less than ±2%

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 was used.

The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)		Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
		Chain 0	Chain 1		Result	Limit
802.11a	5745	-1.89	-1.42	0.25	-1.17	30.00
	5785	-2.46	-1.8	0.25	-1.55	30.00
	5825	-2.79	-2.3	0.25	-2.05	30.00
802.11n ht20	5745	-4.98	-4.16	0.58	-0.96	28.36
	5785	-5.99	-4.63	0.58	-1.67	28.36
	5825	-5.89	-4.71	0.58	-1.67	28.36
802.11n ht40	5755	-8.73	-9.35	1.14	-4.88	28.36
	5795	-8.68	-8.32	1.14	-4.35	28.36
802.11ac vht80	5775	-23	-21.89	4.25	-15.15	28.36
802.11ax he20	5745	-18	-19.1	2.84	-12.66	28.36
	5785	-18.46	-19.43	2.84	-13.07	28.36
	5825	-17.87	-18.4	2.84	-12.28	28.36
802.11ax he40	5755	-21.21	-20.61	3.43	-14.46	28.36
	5795	-20.84	-21.46	3.43	-14.70	28.36
802.11ax he80	5775	-24.14	-23.58	4.25	-16.59	28.36

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.64 + 10 \cdot \log(2/1) = 7.64 \text{ dBi}$$

If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz} / \text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement

Duty cycle $\geq 98\%$




KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 was used.

Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 was used.

The maximum Power Spectral Density was calculated the result of the maximum chain for SISO mode, and Total chains for MIMO mode.

5150-5250MHz:
Chain0:

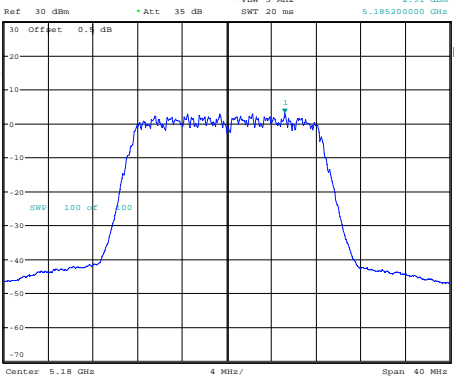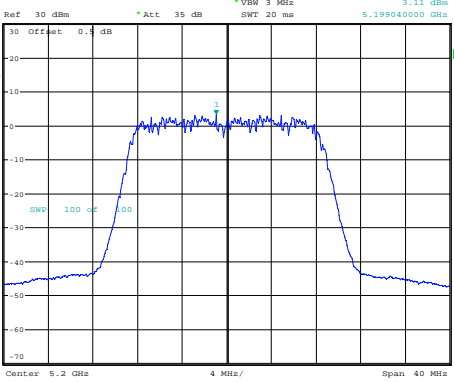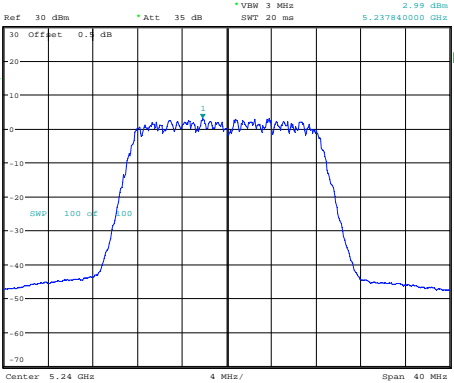Maximum power spectral density	
802.11a Lowest Channel	 <p>Ref: 30 dBm, *Att: 35 dB, *RBW: 1 MHz, *VBW: 3 MHz, SWF: 20 ms, Marker 1 [T1]: 2.91 dBm, 5.185200000 GHz</p> <p>Center: 5.18 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 12.APR.2023 23:36:22</p>
802.11a Middle Channel	 <p>Ref: 30 dBm, *Att: 35 dB, *RBW: 1 MHz, *VBW: 3 MHz, SWF: 20 ms, Marker 1 [T1]: 3.13 dBm, 5.199040000 GHz</p> <p>Center: 5.2 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 12.APR.2023 23:37:27</p>
802.11a Highest Channel	 <p>Ref: 30 dBm, *Att: 35 dB, *RBW: 1 MHz, *VBW: 3 MHz, SWF: 20 ms, Marker 1 [T1]: 2.99 dBm, 5.237840000 GHz</p> <p>Center: 5.24 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 12.APR.2023 23:38:01</p>

Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Ref: 30 dBm * Att: 35 dB * RBW: 1 MHz Marker 1 [T1] -3.85 dBm * VBW: 3 MHz 5.191200000 GHz SWT: 20 ms</p> <p>30 Offset: 0.4 dB 3dB 1dB 0dB -10dB -20dB -30dB -40dB -50dB -60dB -70dB</p> <p>Center: 5.18 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 12.APR.2023 23:47:15</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref: 30 dBm * Att: 35 dB * RBW: 1 MHz Marker 1 [T1] -3.48 dBm * VBW: 3 MHz 5.198160000 GHz SWT: 20 ms</p> <p>30 Offset: 0.4 dB 3dB 1dB 0dB -10dB -20dB -30dB -40dB -50dB -60dB -70dB</p> <p>Center: 5.2 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 12.APR.2023 23:45:37</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref: 30 dBm * Att: 35 dB * RBW: 1 MHz Marker 1 [T1] -2.52 dBm * VBW: 3 MHz 5.245040000 GHz SWT: 20 ms</p> <p>30 Offset: 0.4 dB 3dB 1dB 0dB -10dB -20dB -30dB -40dB -50dB -60dB -70dB</p> <p>Center: 5.24 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 12.APR.2023 23:39:07</p>

Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] -10.01 dBm * VBW 3 MHz * SWT 20 ms 5.19520000 GHz</p> <p>30 Offset 0.4 dB</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 12.APR.2023 23:49:09</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] -8.78 dBm * VBW 3 MHz * SWT 20 ms 5.227600000 GHz</p> <p>30 Offset 0.4 dB</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 12.APR.2023 23:51:36</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] -19.90 dBm * VBW 3 MHz * SWT 20 ms 5.227600000 GHz</p> <p>30 Offset 0.4 dB</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 12.APR.2023 23:53:02</p>

Maximum power spectral density

<p>802.11ax hew20 Lowest Channel</p>	<p>Ref: 30 dBm * Att: 30 dB * RBW: 1 MHz Marker 1 [T1] -13.63 dBm * VBW: 3 MHz SWT: 20 ms 5.182240000 GHz</p> <p>Center: 5.18 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 18.APR.2023 20:29:51</p>
<p>802.11ax hew20 Middle Channel</p>	<p>Ref: 30 dBm * Att: 30 dB * RBW: 1 MHz Marker 1 [T1] -14.40 dBm * VBW: 3 MHz SWT: 20 ms 5.201360000 GHz</p> <p>Center: 5.2 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 18.APR.2023 20:37:36</p>
<p>802.11ax hew20 Highest Channel</p>	<p>Ref: 30 dBm * Att: 30 dB * RBW: 1 MHz Marker 1 [T1] -13.33 dBm * VBW: 3 MHz SWT: 20 ms 5.242800000 GHz</p> <p>Center: 5.24 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 18.APR.2023 20:42:08</p>

Maximum power spectral density

<p>802.11ax hew40 Lowest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 1 MHz Marker 1 [T1] -18.47 dBm * VBW 3 MHz SWT 20 ms 5.197120000 GHz</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 20:45:46</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 1 MHz Marker 1 [T1] -17.11 dBm * VBW 3 MHz SWT 20 ms 5.227600000 GHz</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 20:49:08</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 1 MHz Marker 1 [T1] -18.41 dBm * VBW 3 MHz SWT 20 ms 5.227600000 GHz</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 18.APR.2023 20:54:31</p>

Chain1:

Maximum power spectral density	
<p>802.11a Lowest Channel</p>	<p style="text-align: right;">Date: 13.APR.2023 00:03:36</p>
<p>802.11a Middle Channel</p>	<p style="text-align: right;">Date: 13.APR.2023 00:04:11</p>
<p>802.11a Highest Channel</p>	<p style="text-align: right;">Date: 13.APR.2023 00:04:49</p>

Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Ref: 30 dBm *Att: 35 dB *RBW: 1 MHz Marker 1 [T1] -4.09 dBm *VBW: 3 MHz SWT: 20 ms 5.176800000 GHz</p> <p>Center: 5.18 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 13.APR.2023 00:07:49</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref: 30 dBm *Att: 35 dB *RBW: 1 MHz Marker 1 [T1] -3.66 dBm *VBW: 3 MHz SWT: 20 ms 5.196800000 GHz</p> <p>Center: 5.2 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 13.APR.2023 00:06:46</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref: 30 dBm *Att: 35 dB *RBW: 1 MHz Marker 1 [T1] -3.20 dBm *VBW: 3 MHz SWT: 20 ms 5.244000000 GHz</p> <p>Center: 5.24 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 13.APR.2023 00:06:15</p>

Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] -9.36 dBm * VBW 3 MHz SWT 20 ms 5.194880000 GHz</p> <p>30 Offset 0.4 dB 3dB 100 dB 100 dB</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.APR.2023 00:00:26</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] -8.21 dBm * VBW 3 MHz SWT 20 ms 5.227600000 GHz</p> <p>30 Offset 0.4 dB 3dB 100 dB 100 dB</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 13.APR.2023 00:02:23</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 30 dBm * Att 35 dB * RBW 1 MHz Marker 1 [T1] -17.94 dBm * VBW 3 MHz SWT 20 ms 5.227600000 GHz</p> <p>30 Offset 0.4 dB 3dB 100 dB 100 dB</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 12.APR.2023 23:56:07</p>




Maximum power spectral density

<p>802.11ax hew20 Lowest Channel</p>	<p>Ref: 30 dBm *Att: 30 dB *RBW: 1 MHz Marker 1 [T1] -12.93 dBm *VBW: 3 MHz SWT: 20 ms 5.182560000 GHz</p> <p>Center: 5.18 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 18.APR.2023 21:11:08</p>
<p>802.11ax hew20 Middle Channel</p>	<p>Ref: 30 dBm *Att: 30 dB *RBW: 1 MHz Marker 1 [T1] -13.23 dBm *VBW: 3 MHz SWT: 20 ms 5.202960000 GHz</p> <p>Center: 5.2 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 18.APR.2023 21:12:06</p>
<p>802.11ax hew20 Highest Channel</p>	<p>Ref: 30 dBm *Att: 30 dB *RBW: 1 MHz Marker 1 [T1] -12.85 dBm *VBW: 3 MHz SWT: 20 ms 5.242560000 GHz</p> <p>Center: 5.24 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 18.APR.2023 21:13:02</p>

Maximum power spectral density

<p>802.11ax hew40 Lowest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 1 MHz Marker 1 [T1] -17.75 dBm * VBW 3 MHz SWT 20 ms 5.194800000 GHz</p> <p>Center 5.19 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 21:03:02</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 1 MHz Marker 1 [T1] -16.90 dBm * VBW 3 MHz SWT 20 ms 5.227600000 GHz</p> <p>Center 5.23 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 21:09:53</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 1 MHz Marker 1 [T1] -16.94 dBm * VBW 3 MHz SWT 20 ms 5.227600000 GHz</p> <p>Center 5.21 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 18.APR.2023 21:00:32</p>




5725-5850MHz
Chain0:

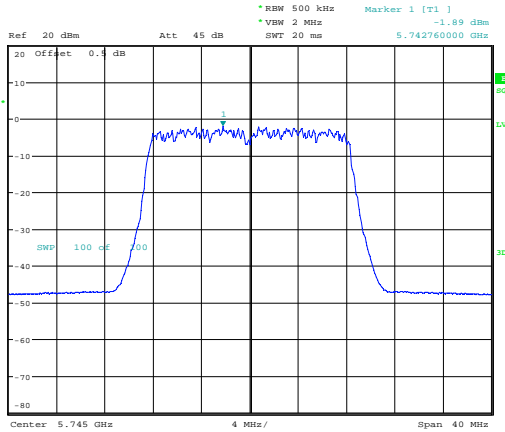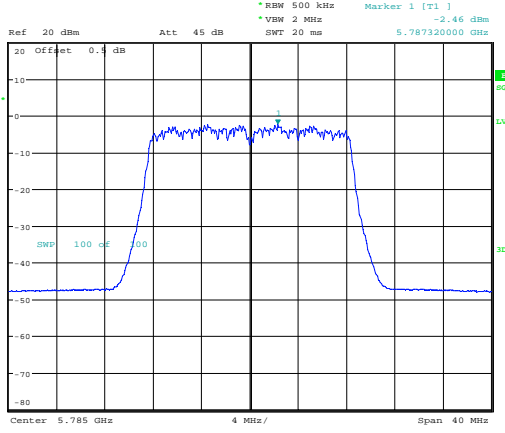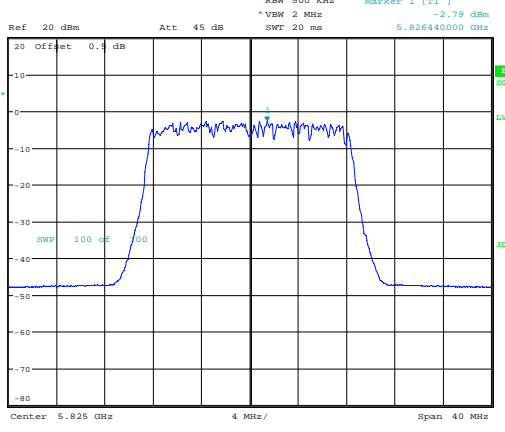Maximum power spectral density	
802.11a Lowest Channel	 <p>Ref 20 dBm Att 45 dB *RBW 500 kHz Marker 1 [T1] -1.89 dBm *VBW 2 MHz SWT 20 ms 5.742760000 GHz</p> <p>20 Offset 0.3 dB</p> <p>1.00 dBm AVG</p> <p>SWP 100 Hz 200</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:26:59</p>
802.11a Middle Channel	 <p>Ref 20 dBm Att 45 dB *RBW 500 kHz Marker 1 [T1] -2.46 dBm *VBW 2 MHz SWT 20 ms 5.787320000 GHz</p> <p>20 Offset 0.3 dB</p> <p>1.00 dBm AVG</p> <p>SWP 100 Hz 200</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:35:16</p>
802.11a Highest Channel	 <p>Ref 20 dBm Att 45 dB *RBW 500 kHz Marker 1 [T1] -2.79 dBm *VBW 2 MHz SWT 20 ms 5.826440000 GHz</p> <p>20 Offset 0.3 dB</p> <p>1.00 dBm AVG</p> <p>SWP 100 Hz 200</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:39:07</p>

Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm Att 45 dB RBW 500 kHz Marker 1 [T1] -4.98 dBm * VBW 2 MHz * SWT 20 ms 5.747480000 GHz</p> <p>20 Offset 0.4 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:54:09</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm Att 45 dB RBW 500 kHz Marker 1 [T1] -5.99 dBm * VBW 2 MHz * SWT 20 ms 5.787560000 GHz</p> <p>20 Offset 0.4 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:48:54</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm Att 45 dB RBW 500 kHz Marker 1 [T1] -5.89 dBm * VBW 2 MHz * SWT 20 ms 5.824600000 GHz</p> <p>20 Offset 0.4 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 19:45:10</p>

Maximum power spectral density
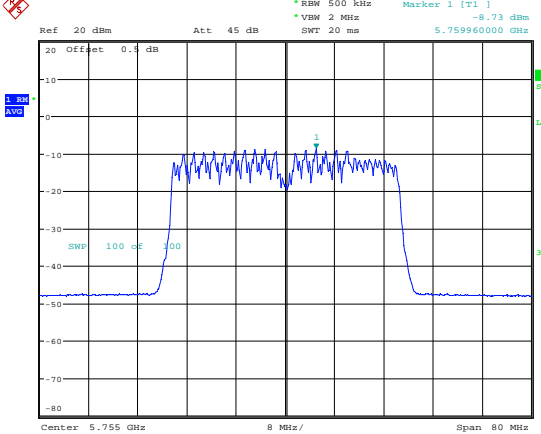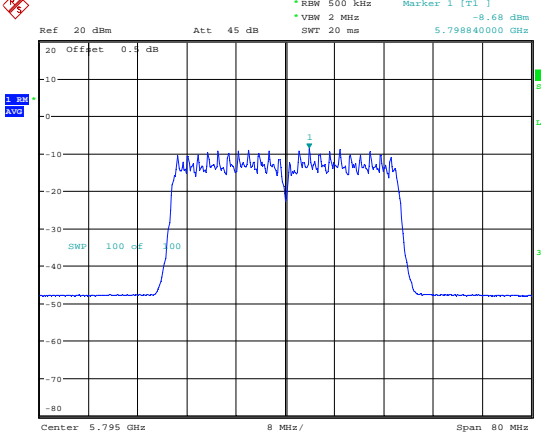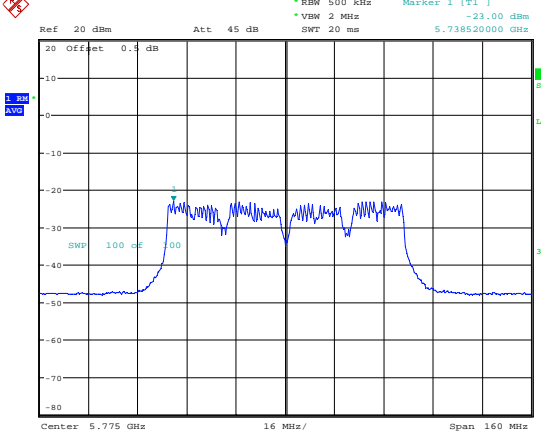
<p>802.11n ht40 Lowest Channel</p>	 <p>Ref 20 dBm Att 45 dB * RBW 500 kHz Marker 1 [T1] -8.73 dBm * VBW 2 MHz SWT 20 ms 5.759960000 GHz</p> <p>20 Offset 0.4 dB</p> <p>100 dB</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 14.APR.2023 19:57:36</p>
<p>802.11n ht40 Highest Channel</p>	 <p>Ref 20 dBm Att 45 dB * RBW 500 kHz Marker 1 [T1] -8.68 dBm * VBW 2 MHz SWT 20 ms 5.798840000 GHz</p> <p>20 Offset 0.4 dB</p> <p>100 dB</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 14.APR.2023 20:01:18</p>
<p>802.11ac vht80 Middle Channel</p>	 <p>Ref 20 dBm Att 45 dB * RBW 500 kHz Marker 1 [T1] -23.00 dBm * VBW 2 MHz SWT 20 ms 5.738520000 GHz</p> <p>20 Offset 0.4 dB</p> <p>100 dB</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 14.APR.2023 20:06:27</p>

Maximum power spectral density

<p>802.11ax hew20 Lowest Channel</p>	<p>Date: 18.APR.2023 19:45:11</p>
<p>802.11ax hew20 Middle Channel</p>	<p>Date: 18.APR.2023 19:43:35</p>
<p>802.11ax hew20 Highest Channel</p>	<p>Date: 18.APR.2023 19:48:27</p>

Maximum power spectral density

<p>802.11ax hew40 Lowest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -21.21 dBm * VBW 2 MHz SWT 20 ms 5.762360000 GHz</p> <p>30 Offset 0.4 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 19:52:14</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -20.84 dBm * VBW 2 MHz SWT 20 ms 5.803640000 GHz</p> <p>30 Offset 0.4 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 19:55:06</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -24.14 dBm * VBW 2 MHz SWT 20 ms 5.765080000 GHz</p> <p>30 Offset 0.4 dB 20 10 0 -10 -20 -30 -40 -50 -60 -70</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 18.APR.2023 20:01:32</p>

Chain1:

Maximum power spectral density	
802.11a Lowest Channel	<p style="text-align: center;">Date: 14.APR.2023 20:19:30</p>
802.11a Middle Channel	<p style="text-align: center;">Date: 14.APR.2023 20:18:43</p>
802.11a Highest Channel	<p style="text-align: center;">Date: 14.APR.2023 20:17:28</p>

Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm Att 45 dB RBW 500 kHz Marker 1 [T1] -4.16 dBm VBW 2 MHz SWT 20 ms 5.747320000 GHz</p> <p>20 Offset 0.4 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 20:13:54</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm Att 45 dB RBW 500 kHz Marker 1 [T1] -4.63 dBm VBW 2 MHz SWT 20 ms 5.787240000 GHz</p> <p>20 Offset 0.4 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 20:14:36</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm Att 45 dB RBW 500 kHz Marker 1 [T1] -4.71 dBm VBW 2 MHz SWT 20 ms 5.827400000 GHz</p> <p>20 Offset 0.4 dB 10 0 -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 14.APR.2023 20:15:30</p>

Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm Att 45 dB * RBW 500 kHz Marker 1 [T1] -9.35 dBm * VBW 2 MHz * SWT 20 ms 5.760280000 GHz</p> <p>20 Offset 0.4 dB 1. PM AVG SGL LVL 3dB SWP 100 cF 100</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 14.APR.2023 20:10:04</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm Att 45 dB * RBW 500 kHz Marker 1 [T1] -8.32 dBm * VBW 2 MHz * SWT 20 ms 5.791000000 GHz</p> <p>20 Offset 0.4 dB 1. PM AVG SGL LVL 3dB SWP 100 cF 100</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 14.APR.2023 20:11:23</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm Att 45 dB * RBW 500 kHz Marker 1 [T1] -21.89 dBm * VBW 2 MHz * SWT 20 ms 5.799960000 GHz</p> <p>20 Offset 0.4 dB 1. PM AVG SGL LVL 3dB SWP 100 cF 100</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 14.APR.2023 20:08:13</p>

Maximum power spectral density

<p>802.11ax hew20 Lowest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -19.10 dBm * VBM 2 MHz SWT 20 ms 5.747400000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 20:13:11</p>
<p>802.11ax hew20 Middle Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -19.43 dBm * VBM 2 MHz SWT 20 ms 5.787480000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 20:14:36</p>
<p>802.11ax hew20 Highest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -18.40 dBm * VBM 2 MHz SWT 20 ms 5.821080000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 18.APR.2023 20:17:46</p>

Maximum power spectral density

<p>802.11ax hew40 Lowest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -20.61 dBm * VBM 2 MHz * SWT 20 ms 5.765000000 GHz</p> <p>30 Offset 0.4 dB 1. PM AVG SGL LVL 3dB SWP 100 cF 100 Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 20:09:45</p>
<p>802.11ax hew40 Highest Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -21.46 dBm * VBM 2 MHz * SWT 20 ms 5.788400000 GHz</p> <p>30 Offset 0.4 dB 1. PM AVG SGL LVL 3dB SWP 100 cF 100 Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 18.APR.2023 20:11:17</p>
<p>802.11ax hew80 Middle Channel</p>	<p>Ref 30 dBm * Att 30 dB * RBW 500 kHz Marker 1 [T1] -23.58 dBm * VBM 2 MHz * SWT 20 ms 5.807320000 GHz</p> <p>30 Offset 0.4 dB 1. PM AVG SGL LVL 3dB SWP 100 cF 100 Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 18.APR.2023 20:07:32</p>

4.6 Duty Cycle:

Serial Number:	1VMU-1	Test Date:	2023/1/9-2023/2/22
Test Site:	RF	Test Mode:	Transmitting
Tester:	Eden Huang	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	21.3-25.2	Relative Humidity: (%)	50-60	ATM Pressure: (kPa)	100.1-101.7
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty cycle Factor (dB)
802.11a	1.388	1.471	94.36	720	0.25
802.11n ht20	0.617	0.705	87.52	1621	0.58
802.11n ht40	0.318	0.413	77.00	3145	1.14
802.11ac vht80	0.057	0.168	33.93	17544	4.69
802.11ax hew20	0.106	0.204	51.96	9434	2.84
802.11ax hew40	0.083	0.183	45.36	12048	3.43
802.11ax hew80	0.059	0.157	37.58	16949	4.25

Duty Cycle	
802.11a	<p>Ref 30 dBm *Att 35 dB RBW 10 MHz Delta 2 [T1] -1.03 dB *VBW 10 MHz 1.471474 ms SWT 5 ms Marker 1 [T1] -34.29 dBm Delta 1 [T1] -1.63 dB 1.471474 ms 3dB 3dB Center 5.2 GHz 500 μs/</p> <p>Date: 9.JAN.2023 09:41:04</p>
802.11n ht20	<p>Ref 30 dBm *Att 35 dB RBW 10 MHz Marker 1 [T1] -37.49 dBm *VBW 10 MHz -79.647436 μs SWT 2.5 ms Delta 2 [T1] 0.23 dB Delta 1 [T1] 1.61 dB 79.647436 μs 3dB 3dB Center 5.2 GHz 250 μs/</p> <p>Date: 9.JAN.2023 09:43:40</p>
802.11n ht40	<p>Ref 30 dBm *Att 35 dB RBW 10 MHz Delta 2 [T1] 0.32 dB *VBW 10 MHz 413.108974 μs SWT 1.7 ms Marker 1 [T1] -38.81 dBm Delta 1 [T1] -410.384635 μs Delta 2 [T1] 1.37 dB 413.108974 μs 3dB 3dB Center 5.19 GHz 170 μs/</p> <p>Date: 9.JAN.2023 09:46:41</p>

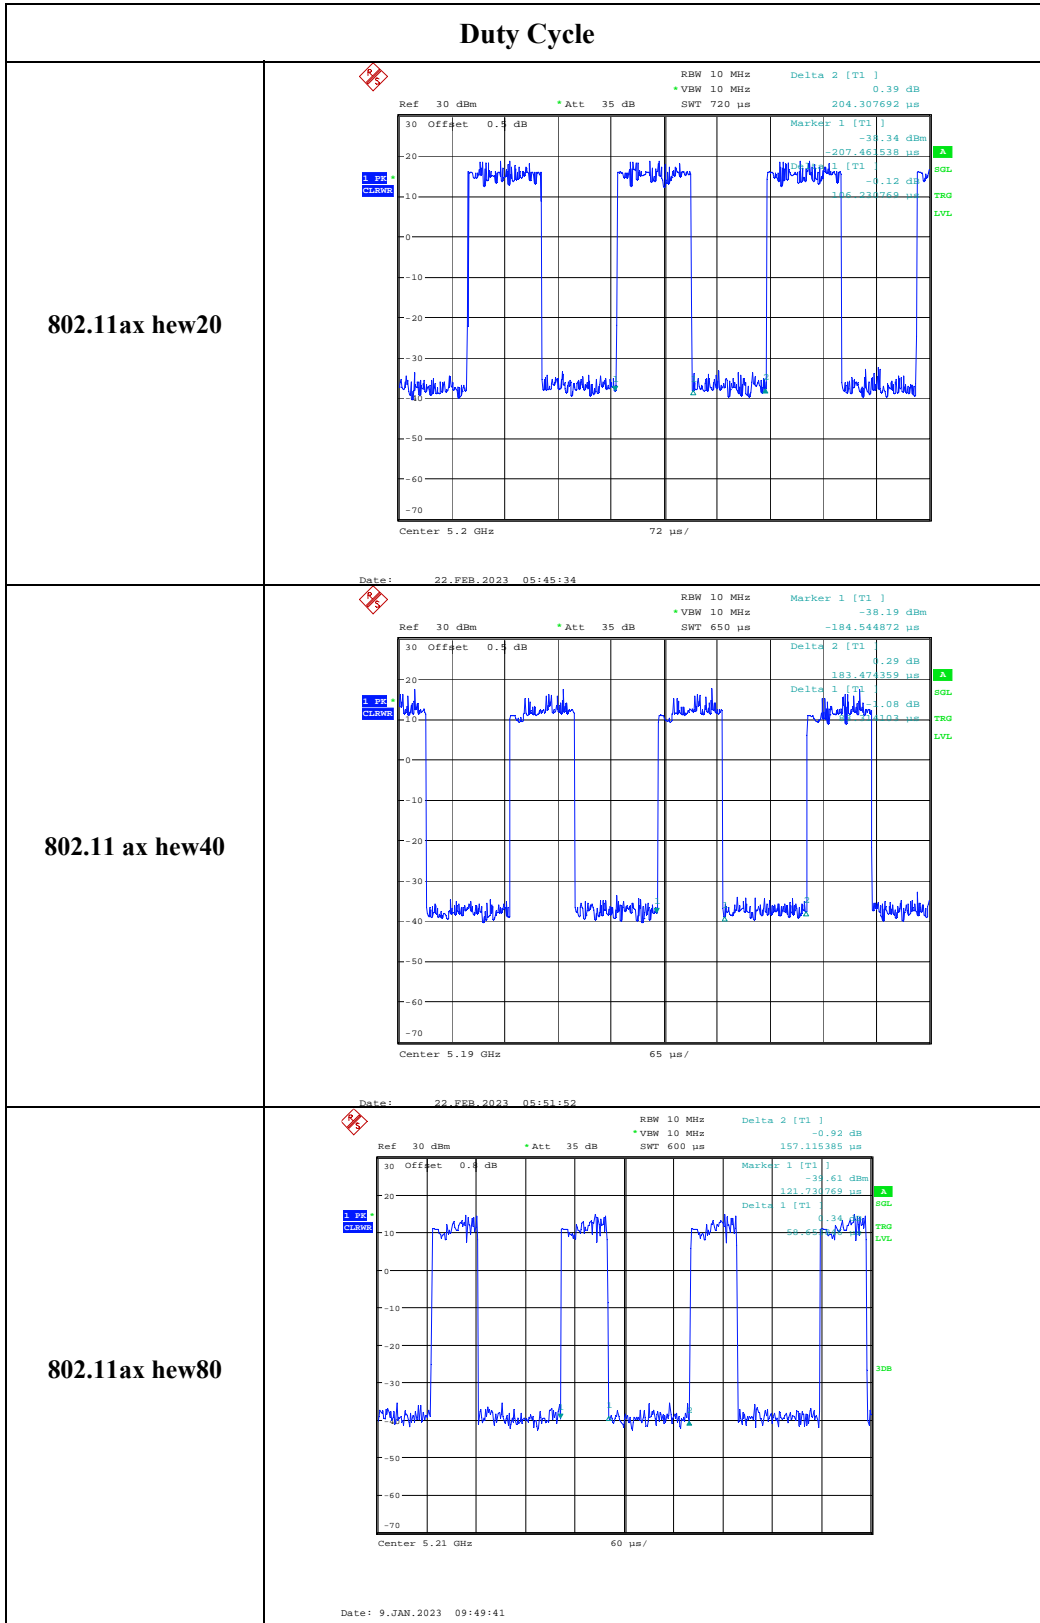

==== END OF REPORT ====