

SAR EVALUATION REPORT

For

Maysun Info Technology Co., Limited

10th floor, B10 Building, Lilang Industrial Zone, Buji Town,

Longgang District Shenzhen China

FCC ID: 2AB8PMID5005L

Report Type: Original Report	Product Type: WCDMA Mobile Phone
Test Engineer: Wilson Chen	<i>Wilson Chen</i>
Report Number: RSZ140819003-20	
Report Date: 2014-09-11	
Reviewed By: SAR Engineer	<i>Bell Hu</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

Attestation of Test Results		
EUT Information	Company Name	Maysun Info Technology Co., Limited
	EUT Description	WCDMA Mobile Phone
	FCC ID	2AB8PMID5005L
	Model Number	LY Max 5.0
	Test Date	2014-08-23
Frequency	Max. SAR Level(s) Reported	Limit(W/Kg)
GSM 850	0.210 W/kg 1g Head SAR 0.797 W/kg 1g Body SAR	1.6
PCS 1900	0.203 W/kg 1g Head SAR 0.837 W/kg 1g Body SAR	
WCDMA850	0.181 W/kg 1g Head SAR 0.391 W/kg 1g Body SAR	
WCDMA1700	0.138 W/kg 1g Head SAR 0.428 W/kg 1g Body SAR	
WCDMA1900	0.144 W/kg 1g Head SAR 0.665 W/kg 1g Body SAR	
802.11b	0.098 W/kg 1g Head SAR 0.204 W/kg 1g Body SAR	
Simultaneous	0.357 W/kg 1g Head SAR 1.041 W/kg 1g Body SAR	
Applicable Standards	ANSI / IEEE C95.1 : 2005 IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fileds,3 kHz to 300 GHz.	
	ANSI / IEEE C95.3 : 2002 IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields With Respect to Human Exposure to SuchFields,100 kHz—300 GHz.	
	IEEE1528:2003 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	
	KDB procedures KDB 447498 D01 Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies. KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets KDB 865664 D01SAR Measurement Requirements for 100 MHz to 6 GHz KDB 941225 D01 SAR Measurement Procedures for 3G Devices-CDMA 2000/EV-Do WCDMA/HSDPA/HSUPA KDB 941225 D06 SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities.	
Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in IEEE 1528-2003 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated.		

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUIDELINES	7
SAR LIMITS	8
FACILITIES.....	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	17
EQUIPMENTS LIST & CALIBRATION INFORMATION	17
SAR MEASUREMENT SYSTEM VERIFICATION	18
LIQUID VERIFICATION	18
SYSTEM ACCURACY VERIFICATION.....	24
SAR SYSTEM VALIDATION DATA	25
EUT TEST STRATEGY AND METHODOLOGY	41
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR.....	41
CHEEK/TOUCH POSITION	42
EAR/TILT POSITION	42
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	43
SAR EVALUATION PROCEDURE.....	44
TEST METHODOLOGY	44
CONDUCTED OUTPUT POWER MEASUREMENT	45
PROVISION APPLICABLE	45
TEST PROCEDURE	45
MAXIMUM OUTPUT POWER AMONG PRODUCTION UNITS	45
TEST RESULTS:	46
SAR MEASUREMENT RESULTS.....	51
SAR TEST DATA.....	51
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	59
SAR PLOTS (SUMMARY OF THE HIGHEST SAR VALUES)	63
APPENDIX A MEASUREMENT UNCERTAINTY	75
APPENDIX B – PROBE CALIBRATION CERTIFICATES.....	76
APPENDIX C DIPOLE CALIBRATION CERTIFICATES	86
APPENDIX D EUT TEST POSITION PHOTOS	125
LIQUID DEPTH $\geq 15\text{CM}$	125
BODY-WORN BACK SETUP PHOTO (10MM)	125
BODY-WORN LEFT SETUP PHOTO (10MM)	126
BODY-WORN RIGHT SETUP PHOTO (10MM)	126
BODY-WORN BOTTOM SETUP PHOTO (10MM)	127
BODY-WORN TOP SETUP PHOTO (10MM).....	127
LEFT HEAD TOUCH SETUP PHOTO	128
LEFT HEAD TILT SETUP PHOTO	128
RIGHT HEAD TOUCH SETUP PHOTO	129
RIGHT HEAD TILT SETUP PHOTO	129
APPENDIX E EUT PHOTOS.....	130
EUT – FRONT VIEW.....	130

EUT – BACK VIEW 130

EUT –LEFT SIDE VIEW 131

EUT – RIGHT SIDE VIEW 131

EUT – TOP VIEW 132

EUT – BOTTOM VIEW..... 132

EUT – UNCOVER VIEW..... 133

PRODUCT SIMILARITY DECLARATION LETTER..... 134

APPENDIX F INFORMATIVE REFERENCES 135

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	RSZ140819003-20	Original Report	2014-09-11

EUT DESCRIPTION

This report has been prepared on behalf of Maysun Info Technology Co., Limited and their product, FCC ID: 2AB8PMID5005L , Model: LY Max 5.0 or the EUT (Equipment under Test) as referred to in the rest of this report.

***Note:** This series products model: LY Max 5.0, maysunm MID5005L, maysunm Max 5.0 , we select model: LY Max 5.0 to test, there is no electrical change has been made to the equipment, please refer to the product similarity letter.

Technical Specification

Product Type	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
Body-Worn Accessories:	Headset
Face-Head Accessories:	None
Multi-slot Class:	Class12
Operation Mode :	GSM Voice, GPRS Data, WCDMA, WiFi and Bluetooth
Frequency Band:	GSM 850 : 824-849 MHz(TX) ; 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) WCDMA850: 824-849 MHz(TX) ; 869-894 MHz(RX) WCDMA1700: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX) WCDMA1900: 1850-1910 MHz(TX) ; 1930-1990 MHz(RX) WiFi: 2412MHz-2462MHz Bluetooth : 2402MHz-2480MHz
Conducted RF Power:	GSM 850 : 31.54 dBm PCS 1900: 28.84 dBm WCDMA 850: 22.45 dBm WCDMA 1700: 22.81 dBm WCDMA 1900: 22.74 dBm WiFi: 20.27 dBm Bluetooth: 5.39dBm
Dimensions (L*W*H):	145 mm (L) × 74 mm (W) × 10 mm (H)
Power Source:	3.7 V _{DC} Rechargeable Battery
Normal Operation:	Head and Body-worn

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

CE:

The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by EN62209-1 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

SAR Limits**FCC Limit (1g Tissue)**

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

CE Limit (10g Tissue)

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 10 g of tissue)	2.0	10
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) & 2 W/kg (CE) applied to the EUT.

FACILITIES

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect data is located at 6/F, the 3rd Phase of WanLi Industrial Building, Shi Hua Road, Fu Tian Free Trade Zone, Shenzhen, Guangdong, P.R. of China

DESCRIPTION OF TEST SYSTEM

These measurements were performed with ALSAS 10 Universal Integrated SAR Measurement system from APREL Laboratories.

ALSAS-10U System Description

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller.

ALSAS-10U uses the latest methodologies. And FDTD modeling to provide a platform which is repeatable with minimum uncertainty.

Applications

Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently available up-to 6 GHz in simulated tissue.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm² step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the ALSAS-10U software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 5x5x8 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 35mm in the Z axis.



ALSAS-10U Interpolation and Extrapolation Uncertainty


The overall uncertainty for the methodology and algorithms the used during the SAR calculation was evaluated using the data from IEEE 1528 based on the example f3 algorithm:

$$f_3(x, y, z) = A \frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2} \cdot \left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a + 2z)^2} \right)$$

Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

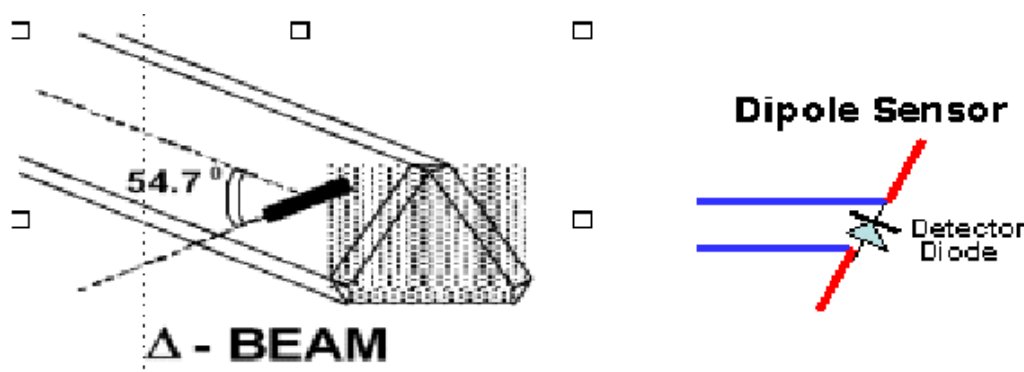

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Isotropic E-Field Probe Specification

Calibration Method	Frequency Dependent Below 1 GHz Calibration in air performed in a TEM Cell Above 1 GHz Calibration in air performed in waveguide
Sensitivity	$0.70 \mu\text{V}/(\text{V}/\text{m})^2$ to $0.85 \mu\text{V}/(\text{V}/\text{m})^2$
Dynamic Range	0.0005 W/kg to 100 W/kg
Isotropic Response	Better than 0.1 dB
Diode Compression Point (DCP)	Calibration for Specific Frequency
Probe Tip Diameter	< 2.9 mm
Sensor Offset	1.56 (+/- 0.02 mm)
Probe Length	289 mm
Video Bandwidth	@ 500 Hz: 1 dB @ 1.02 kHz: 3 dB
Boundary Effect	Less than 2.1% for distance greater than 0.58 mm
Spatial Resolution	The spatial resolution uncertainty is less than 1.5% for 4.9mm diameter probe. The spatial resolution uncertainty is less than 1.0% for 2.5mm diameter probe

Boundary Detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detection during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are fed directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, & Z).

The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connect to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)

ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from 5 μV to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via an RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20 mV to 200 mV and 150 mV to 800 mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

Axis Articulated Robot

ALSAS-10U utilizes a six axis articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelope. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.



Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05 mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710 mm
Communication	RS232 and LAN compatible

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurements using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt indicator is included for the of aid cheek to tilt movements for head SAR analysis. Overall uncertainty for measurements have been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.




Phantom Types

The ALSAS-10U allows the integration of multiple phantom types. SAM Phantoms fully compliant with IEEE 1528, Universal Phantom, and Universal Flat.

APREL SAM Phantoms

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

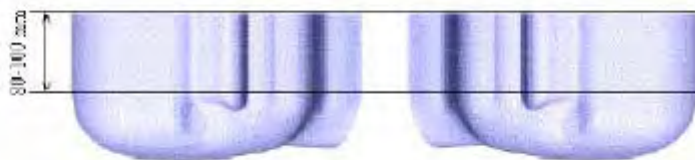

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software.

The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Recommended Tissue Dielectric Parameters for Head and Body

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	Calibration Date	S/N
CRS F3 robot	ALS-F3	N/A	RAF0805352
CRS F3 Software	ALS-F3-SW	N/A	N/A
CRS C500C controller	ALS-C500	N/A	RCF0805379
Probe mounting device & Boundary Detection Sensor System	ALS-PMDPS-3	N/A	120-00270
Universal Work Station	ALS-UWS	N/A	100-00157
Data Acquisition Package	ALS-DAQ-PAQ-3	2013-10-08	110-00212
Miniature E-Field Probe	ALS-E-020	2013-10-08	500-00283
Dipole, 835MHz	ALS-D-835-S-2	2011-08-25	180-00558
Dipole, 1750MHz	ALS-D-1750-S-2	2011-08-25	198-00304
Dipole, 1900MHz	ALS-D-1900-S-2	2011-08-25	210-00710
Dipole, 2450MHz	ALS-D-2450-S-2	2011-08-25	220-00758
Dipole Spacer	ALS-DS-U	N/A	250-00907
Device holder/Positioner	ALS-H-E-SET-2	N/A	170-00510
Left ear SAM phantom	ALS-P-SAM-L	N/A	130-00311
Right ear SAM phantom	ALS-P-SAM-R	N/A	140-00359
UniPhantom	ALS-P-UP-1	N/A	150-00413
Simulated Tissue 835 MHz Head	ALS-TS-835-H	Each Time	270-01002
Simulated Tissue 835 MHz Body	ALS-TS-835-B	Each Time	270-02101
Simulated Tissue 1750 MHz Head	ALS-TS-1750-H	Each Time	295-01103
Simulated Tissue 1750 MHz Body	ALS-TS-1750-B	Each Time	295-02102
Simulated Tissue 1900 MHz Head	ALS-TS-1900-H	Each Time	295-01103
Simulated Tissue 1900 MHz Body	ALS-TS-1900-B	Each Time	295-02102
Simulated Tissue 2450 MHz Head	ALS-TS-2450-H	Each Time	290-01108
Simulated Tissue 2450 MHz Body	ALS-TS-2450-B	Each Time	290-01109
Power Amplifier	5S1G4	N/A	71377
Directional couple	DC6180A	2013-11-12	0325849
Attenuator	3dB	2014-05-08	5402
Network analyzer	8752C	2014-06-13	3410A02356
Dielectric probe kit	HP85070B	2014-06-13	N/A
Synthesized Sweeper	HP 8341B	2014-05-08	2624A00116
UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	2013-11-23	106891
EMI Test Receiver	ESCI	2013-11-12	101120

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

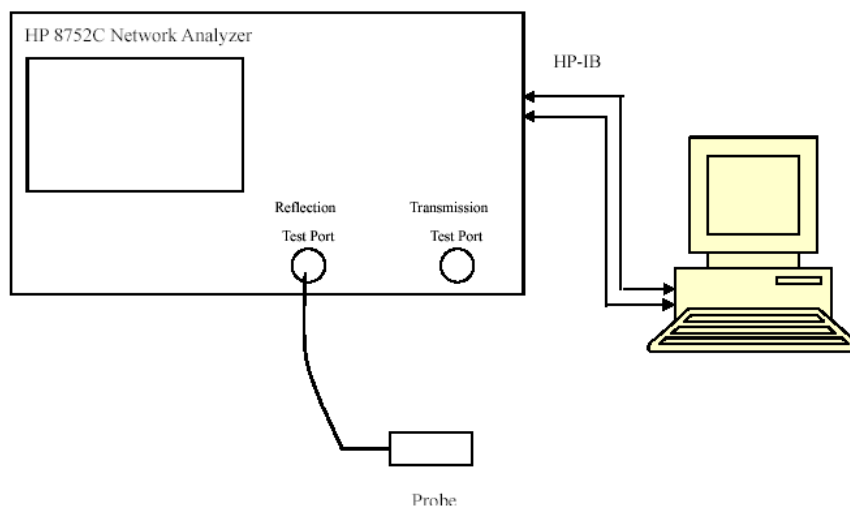

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		ϵ_r	O (S/m)	ϵ_r	O (S/m)	$\Delta\epsilon_r$	ΔO (S/m)	
824.2	Head	41.08	0.90	41.50	0.90	-1.012	0.000	±5
	Body	53.87	0.94	55.20	0.97	-2.409	-3.093	±5
826.4	Head	41.10	0.91	41.50	0.90	-0.964	1.111	±5
	Body	53.85	0.94	55.20	0.97	-2.446	-3.093	±5
836.6	Head	41.09	0.91	41.50	0.90	-0.988	1.111	±5
	Body	53.86	0.95	55.20	0.97	-2.428	-2.062	±5
846.6	Head	41.09	0.91	41.50	0.90	-0.988	1.111	±5
	Body	53.85	0.97	55.20	0.97	-2.446	0.000	±5
848.8	Head	41.06	0.91	41.50	0.90	-1.060	1.111	±5
	Body	53.81	0.97	55.20	0.97	-2.518	0.000	±5
1712.4	Head	40.27	1.41	40.08	1.37	0.474	2.920	±5
	Body	52.16	1.48	53.43	1.49	-2.377	-0.671	±5
1732.4	Head	40.22	1.41	40.08	1.37	0.349	2.920	±5
	Body	52.55	1.52	53.43	1.49	-1.647	2.013	±5
1752.6	Head	40.21	1.38	40.08	1.37	0.324	0.730	±5
	Body	52.56	1.54	53.43	1.49	-1.628	3.356	±5
1850.2	Head	39.77	1.38	40.00	1.40	-0.575	-1.429	±5
	Body	52.12	1.47	53.30	1.52	-2.214	-3.289	±5
1852.4	Head	39.65	1.36	40.00	1.40	-0.875	-2.857	±5
	Body	51.92	1.46	53.30	1.52	-2.589	-3.947	±5
1880.0	Head	39.70	1.39	40.00	1.40	-0.750	-0.714	±5
	Body	51.93	1.49	53.30	1.52	-2.570	-1.974	±5
1907.6	Head	39.59	1.42	40.00	1.40	-1.025	1.429	±5
	Body	51.83	1.51	53.30	1.52	-2.758	-0.658	±5
1909.8	Head	39.63	1.42	40.00	1.40	-0.925	1.429	±5
	Body	51.85	1.51	53.30	1.52	-2.720	-0.658	±5
2412	Head	40.16	1.80	39.20	1.80	2.449	0.000	±5
	Body	51.93	1.93	52.70	1.95	-1.461	-1.026	±5
2437	Head	40.21	1.82	39.20	1.80	2.577	1.111	±5
	Body	51.70	1.97	52.70	1.95	-1.898	1.026	±5
2462	Head	40.31	1.84	39.20	1.80	2.832	2.222	±5
	Body	51.56	2.01	52.70	1.95	-2.163	3.077	±5

*Liquid Verification was performed on 2014-08-23.

Please refer to the following tables.

835 MHz Head				835 MHz Body		
Frequency (MHz)	e'	e''		Frequency (MHz)	e'	e''
824.0	41.0803	19.6502		824.0	53.8711	20.4858
824.5	41.1417	19.6287		824.5	53.9175	20.4247
825.0	41.0378	19.6419		825.0	53.8513	20.4913
825.5	41.0541	19.6821		825.5	53.9302	20.4607
826.0	41.0162	19.7317		826.0	53.8241	20.5008
826.5	41.1040	19.7404		826.5	53.8525	20.4778
827.0	41.0641	19.6788		827.0	53.9111	20.4376
827.5	41.0464	19.6469		827.5	53.9455	20.5023
828.0	41.0906	19.7422		828.0	53.8700	20.4991
828.5	41.0836	19.7230		828.5	53.9131	20.4131
829.0	41.1054	19.6388		829.0	53.8610	20.4660
829.5	41.0720	19.7614		829.5	53.8656	20.4906
830.0	41.1074	19.6896		830.0	53.8285	20.5345
830.5	41.1069	19.6717		830.5	53.8256	20.5141
831.0	41.0765	19.6831		831.0	53.8609	20.5113
831.5	41.0092	19.6512		831.5	53.9387	20.4712
832.0	41.0550	19.7217		832.0	53.9214	20.5163
832.5	41.0499	19.6365		832.5	53.8972	20.4459
833.0	41.0715	19.6623		833.0	53.8387	20.4846
833.5	41.1025	19.7040		833.5	53.9263	20.4732
834.0	41.0969	19.6190		834.0	53.8798	20.4872
834.5	41.1025	19.6332		834.5	53.8906	20.4714
835.0	41.0870	19.6992		835.0	53.9326	20.4316
835.5	41.0264	19.6931		835.5	53.8790	20.5034
836.0	41.1158	19.7222		836.0	53.8340	20.4675
836.5	41.0894	19.6600		836.5	53.8636	20.4433
837.0	41.0798	19.6306		837.0	53.8779	20.5097
837.5	41.0690	19.6199		837.5	53.8878	20.4778
838.0	41.1055	19.6298		838.0	53.8695	20.5050
838.5	41.0716	19.6999		838.5	53.8844	20.4945
839.0	41.0657	19.6185		839.0	53.8671	20.4636
839.5	41.0686	19.6131		839.5	53.9368	20.5149
840.0	41.0609	19.4163		840.0	53.8948	20.4987
840.5	41.1168	19.4586		840.5	53.8588	20.4840
841.0	41.1014	19.4140		841.0	53.8897	20.4379
841.5	41.0929	19.3432		841.5	53.8793	20.5247
842.0	41.0571	19.3773		842.0	53.9358	20.4419
842.5	41.0975	19.4355		842.5	53.8696	20.4755
843.0	41.1048	19.4480		843.0	53.8916	20.4733
843.5	41.1176	19.3241		843.5	53.8392	20.4646
844.0	41.0714	19.3321		844.0	53.8908	20.4961
844.5	41.0747	19.3769		844.5	53.9434	20.5271
845.0	41.1243	19.4100		845.0	53.9080	20.4301
845.5	41.1380	19.3593		845.5	53.8551	20.4267
846.0	41.0733	19.4149		846.0	53.8398	20.4625
846.5	41.0930	19.4026		846.5	53.8470	20.5470
847.0	41.1063	19.3752		847.0	53.8268	20.5309
847.5	41.0981	19.4262		847.5	53.8749	20.4793
848.0	41.1227	19.4084		848.0	53.9154	20.5192
848.5	41.0407	19.3654		848.5	53.8838	20.4853
849.0	41.0617	19.3366		849.0	53.8105	20.5510

1700 MHz Head				1700 MHz Body		
Frequency (MHz)	e'	e''		Frequency (MHz)	e'	e''
1710.0	40.1263	14.7847		1710.0	52.1463	15.6295
1711.5	40.1807	14.7463		1711.5	52.0898	15.5613
1713.0	40.2739	14.8250		1713.0	52.1619	15.5462
1714.5	40.3082	14.6156		1714.5	52.2818	15.5855
1716.0	40.3134	14.7347		1716.0	52.4800	15.7060
1717.5	40.1422	15.0341		1717.5	52.6990	15.7772
1719.0	40.2421	15.1368		1719.0	52.3732	15.7068
1720.5	40.3094	14.9389		1720.5	52.2781	15.5875
1722.0	40.3558	14.8199		1722.0	52.2695	15.6008
1723.5	40.2796	14.7851		1723.5	52.2158	15.5342
1725.0	40.2719	14.8011		1725.0	52.4600	15.6465
1726.5	40.2921	14.5572		1726.5	52.3698	15.6190
1728.0	40.3287	14.5053		1728.0	52.1438	15.4919
1729.5	40.3064	14.4322		1729.5	52.2880	15.5379
1731.0	40.2488	14.4125		1731.0	52.1937	15.5266
1732.5	40.2243	14.6206		1732.5	52.5534	15.7503
1734.0	40.1998	14.8692		1734.0	52.5889	15.7358
1735.5	40.2536	14.7230		1735.5	52.1230	15.4825
1737.0	40.2686	14.5781		1737.0	52.0029	15.4192
1738.5	40.2773	14.5118		1738.5	52.3126	15.5597
1740.0	40.2266	14.3508		1740.0	52.5416	15.7159
1741.5	40.1713	14.3892		1741.5	52.3556	15.5669
1743.0	40.1318	14.3478		1743.0	52.1811	15.5034
1744.5	40.1540	14.2618		1744.5	52.5739	15.7673
1746.0	40.1143	14.2363		1746.0	52.6213	15.7694
1747.5	40.1951	14.2366		1747.5	52.2910	15.6522
1749.0	40.2131	14.1775		1749.0	51.9388	15.4463
1750.5	40.2410	14.2398		1750.5	51.9850	15.5049
1752.0	40.2148	14.1802		1752.0	52.5624	15.8026
1753.5	40.2290	14.1337		1753.5	52.6873	15.7853
1755.0	40.1853	14.2218		1755.0	52.4572	15.7096
1756.5	40.2388	14.1718		1756.5	52.3293	15.6401
1758.0	40.1962	14.1663		1758.0	52.5245	15.7111
1759.5	40.1858	14.2067		1759.5	52.6102	15.7639
1761.0	40.1637	14.1999		1761.0	52.3919	15.7252
1762.5	40.2176	14.2695		1762.5	52.4466	15.6620
1764.0	40.0779	14.5054		1764.0	52.7221	15.8530
1765.5	40.2654	14.7207		1765.5	52.6741	15.7972
1767.0	40.1823	14.6292		1767.0	52.5483	15.7545
1768.5	40.2237	14.3974		1768.5	52.3531	15.7437
1770.0	40.1544	14.2817		1770.0	52.5950	15.7495
1771.5	40.1716	14.3033		1771.5	52.6456	15.7515
1773.0	40.1269	14.3047		1773.0	52.3546	15.6818
1774.5	40.1315	14.2540		1774.5	52.3208	15.6430
1776.0	40.1377	14.2497		1776.0	52.6550	15.7872
1777.5	40.1334	14.2372		1777.5	52.7254	15.8787
1779.0	40.1373	14.2033		1779.0	52.6610	15.7959
1780.5	40.0958	14.1839		1780.5	52.4856	15.7328
1782.0	40.0552	14.0924		1782.0	52.6089	15.8156
1783.5	40.0554	14.0553		1783.5	52.7747	15.9088
1785.0	40.0375	14.0384		1785.0	52.8093	15.8736


1900 MHz Head				1900 MHz Body		
Frequency (MHz)	e'	e''		Frequency (MHz)	e'	e''
1850.0	39.7655	13.3910		1850.0	52.1241	14.2719
1851.2	39.6905	13.2379		1851.2	52.0375	14.1452
1852.4	39.6505	13.2374		1852.4	51.9174	14.2212
1853.6	39.7114	13.3419		1853.6	51.8814	14.2283
1854.8	39.6713	13.3573		1854.8	51.8697	14.2503
1856.0	39.6919	13.3351		1856.0	52.0637	14.1955
1857.2	39.7331	13.2565		1857.2	51.8958	14.2534
1858.4	39.7415	13.2375		1858.4	52.0222	14.1618
1859.6	39.6399	13.3491		1859.6	51.8460	14.2455
1860.8	39.7540	13.2308		1860.8	51.8991	14.3033
1862.0	39.7257	13.3482		1862.0	52.0545	14.2549
1863.2	39.7012	13.3492		1863.2	52.1037	14.2494
1864.4	39.5904	13.2882		1864.4	51.9564	14.1617
1865.6	39.5921	13.2382		1865.6	52.0811	14.2180
1866.8	39.6717	13.3878		1866.8	52.1416	14.1867
1868.0	39.6757	13.3591		1868.0	51.8918	14.1595
1869.2	39.7799	13.3372		1869.2	51.8012	14.1825
1870.4	39.5872	13.2507		1870.4	51.8247	14.2300
1871.6	39.6541	13.2810		1871.6	52.0263	14.2810
1872.8	39.6769	13.3412		1872.8	52.1392	14.2114
1874.0	39.7207	13.3583		1874.0	52.1661	14.1526
1875.2	39.7607	13.4103		1875.2	51.9719	14.2039
1876.4	39.5917	13.3620		1876.4	52.0748	14.2496
1877.6	39.6286	13.2677		1877.6	52.1021	14.2016
1878.8	39.6418	13.3652		1878.8	52.1032	14.1643
1880.0	39.7018	13.2777		1880.0	51.9260	14.2686
1881.2	39.7367	13.2963		1881.2	51.8360	14.2163
1882.4	39.7331	13.2640		1882.4	52.0221	14.2562
1883.6	39.7107	13.2317		1883.6	51.9353	14.1333
1884.8	39.7614	13.2071		1884.8	52.0324	14.2487
1886.0	39.6263	13.2047		1886.0	52.0615	14.1810
1887.2	39.6020	13.3422		1887.2	51.9802	14.2577
1888.4	39.7228	13.3645		1888.4	51.9354	14.2614
1889.6	39.6902	13.3911		1889.6	52.0544	14.1728
1890.8	39.7750	13.3805		1890.8	51.8995	14.1726
1892.0	39.5867	13.3995		1892.0	51.8446	14.3359
1893.2	39.6673	13.2570		1893.2	51.8856	14.3131
1894.4	39.6513	13.2384		1894.4	51.9948	14.2331
1895.6	39.7531	13.3763		1895.6	52.0339	14.2592
1896.8	39.7706	13.2619		1896.8	52.0041	14.1638
1898.0	39.5831	13.2608		1898.0	52.1030	14.2511
1899.2	39.7350	13.3299		1899.2	52.1631	14.1875
1900.4	39.6900	13.3845		1900.4	52.1816	14.2473
1901.6	39.7649	13.2664		1901.6	52.0528	14.1821
1902.8	39.7086	13.2987		1902.8	52.0677	14.3273
1904.0	39.6178	13.2249		1904.0	51.9519	14.1498
1905.2	39.6028	13.3429		1905.2	52.0747	14.1669
1906.4	39.7546	13.2546		1906.4	52.0888	14.3197
1907.6	39.5944	13.3510		1907.6	51.8322	14.1908
1908.8	39.7636	13.2320		1908.8	52.1314	14.2059
1910.0	39.6267	13.3564		1910.0	51.8501	14.2600

2450 MHz Head				2450 MHz Body		
Frequency (MHz)	e'	e''		Frequency (MHz)	e'	e''
2410.0	40.1481	13.3935		2410.0	51.9454	14.3841
2411.0	40.1530	13.4020		2411.0	51.9314	14.3540
2412.0	40.1631	13.4018		2412.0	51.9252	14.3788
2413.0	40.1580	13.4264		2413.0	51.8888	14.3638
2414.0	40.1274	13.4138		2414.0	51.8632	14.3916
2415.0	40.1293	13.4353		2415.0	51.8640	14.4202
2416.0	40.1586	13.4064		2416.0	51.8623	14.3962
2417.0	40.1357	13.4072		2417.0	51.8652	14.4274
2418.0	40.1390	13.4209		2418.0	51.8306	14.4278
2419.0	40.1548	13.4186		2419.0	51.8425	14.4013
2420.0	40.1633	13.4121		2420.0	51.8259	14.4249
2421.0	40.1735	13.3944		2421.0	51.8227	14.4430
2422.0	40.1835	13.3934		2422.0	51.8269	14.4617
2423.0	40.1643	13.4052		2423.0	51.7880	14.4568
2424.0	40.1526	13.4060		2424.0	51.8181	14.4478
2425.0	40.1947	13.4218		2425.0	51.7872	14.4687
2426.0	40.1739	13.4100		2426.0	51.7949	14.4668
2427.0	40.2023	13.4318		2427.0	51.7902	14.5075
2428.0	40.1716	13.4325		2428.0	51.7520	14.4823
2429.0	40.1977	13.4175		2429.0	51.7578	14.5144
2430.0	40.1912	13.4221		2430.0	51.7510	14.5213
2431.0	40.2101	13.4048		2431.0	51.7366	14.5022
2432.0	40.2075	13.3993		2432.0	51.7375	14.5151
2433.0	40.1927	13.3942		2433.0	51.7398	14.5381
2434.0	40.2201	13.3994		2434.0	51.7223	14.5411
2435.0	40.2082	13.4068		2435.0	51.7041	14.5418
2436.0	40.2010	13.4111		2436.0	51.7380	14.5726
2437.0	40.2126	13.4356		2437.0	51.6977	14.5442
2438.0	40.1999	13.4325		2438.0	51.7215	14.5487
2440.0	40.2339	13.4102		2440.0	51.7040	14.5592
2441.0	40.1943	13.4327		2441.0	51.6990	14.5636
2442.0	40.2042	13.4040		2442.0	51.6874	14.5700
2443.0	40.2353	13.4080		2443.0	51.6788	14.5930
2444.0	40.2515	13.4113		2444.0	51.6635	14.6108
2445.0	40.2300	13.4299		2445.0	51.6523	14.6031
2446.0	40.2458	13.4291		2446.0	51.6665	14.5921
2447.0	40.2353	13.4349		2447.0	51.6530	14.6037
2448.0	40.2388	13.4417		2448.0	51.6379	14.6312
2449.0	40.2684	13.4102		2449.0	51.6322	14.6259
2450.0	40.2377	13.4423		2450.0	51.6334	14.6263
2451.0	40.2845	13.4236		2451.0	51.6037	14.6350
2452.0	40.2445	13.4194		2452.0	51.6284	14.6224
2453.0	40.2722	13.4019		2453.0	51.6297	14.6143
2454.0	40.2743	13.4083		2454.0	51.5939	14.6393
2455.0	40.2829	13.4220		2455.0	51.6099	14.6599
2456.0	40.2928	13.4047		2456.0	51.5675	14.6403
2457.0	40.2714	13.4231		2457.0	51.5920	14.6286
2458.0	40.3056	13.4116		2458.0	51.5712	14.6545
2459.0	40.2987	13.4206		2459.0	51.5855	14.6491
2460.0	40.3071	13.4088		2460.0	51.5648	14.6786
2461.0	40.2513	13.4316		2461.0	51.5735	14.6492
2462.0	40.3112	13.4434		2462.0	51.5632	14.6868

System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

System Verification Setup Block Diagram

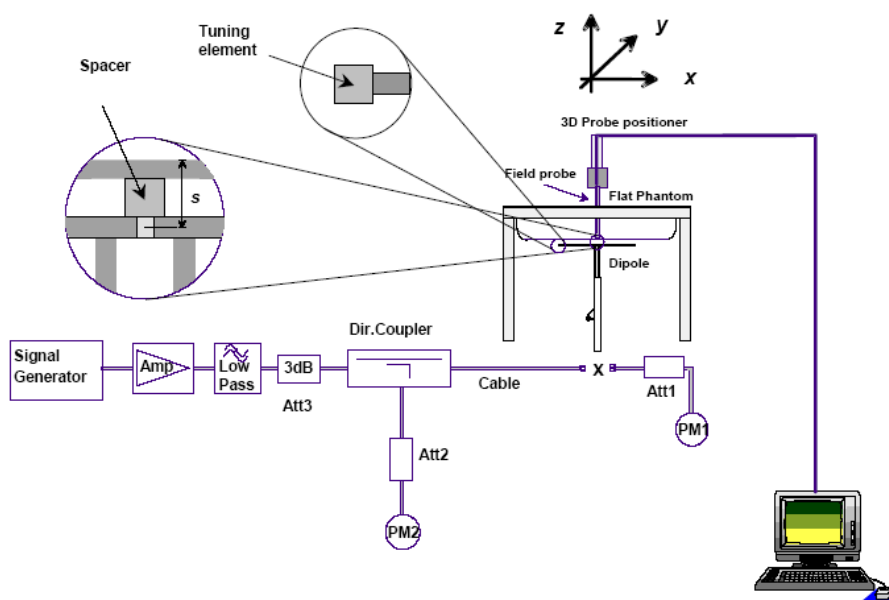

Probe and dipole antenna List and Detail

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
APREL	Probe	ALS-E-020	500-00283	2013-10-08	2014-10-07
APREL	Dipole antenna(850MHz)	ALS-D-835-S-2	180-00558	2011-08-25	2014-08-24
APREL	Dipole antenna(1700MHz)	ALS-D-1900-S-2	198-00304	2011-08-25	2014-08-24
APREL	Dipole antenna(1900MHz)	ALS-D-1900-S-2	210-00710	2011-08-25	2014-08-24
APREL	Dipole antenna(2450MHz)	ALS-D-2450-S-2	220-00758	2011-08-25	2014-08-24

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Measured SAR (W/Kg)		Target Value (W/Kg)	Delta (%)	Tolerance (%)
2014-08-23	835	Head	1g	9.813	9.590	2.325	± 10
		Body	1g	10.113	9.684	4.430	± 10
	1750	Head	1g	39.537	37.020	6.799	± 10
		Body	1g	38.015	36.650	3.724	± 10
	1900	Head	1g	40.631	39.648	2.479	± 10
		Body	1g	41.023	39.769	3.153	± 10
	2450	Head	1g	52.397	52.667	-0.513	± 10
		Body	1g	54.031	52.561	2.797	± 10

*All SAR values are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****System Performance Check 835 MHz Head Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558****Product Data**

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency Band : 835
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 9.725 W/kg
Power Drift-Finish : 9.765 W/kg
Power Drift (%) : 0.411

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Head
Serial No. : 270-01002
Frequency : 835.0 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 41.08 F/m
Sigma : 0.92 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 9.813 W/kg
10 gram SAR value : 6.255 W/kg
Area Scan Peak SAR : 10.225 W/kg
Zoom Scan Peak SAR : 16.327 W/kg

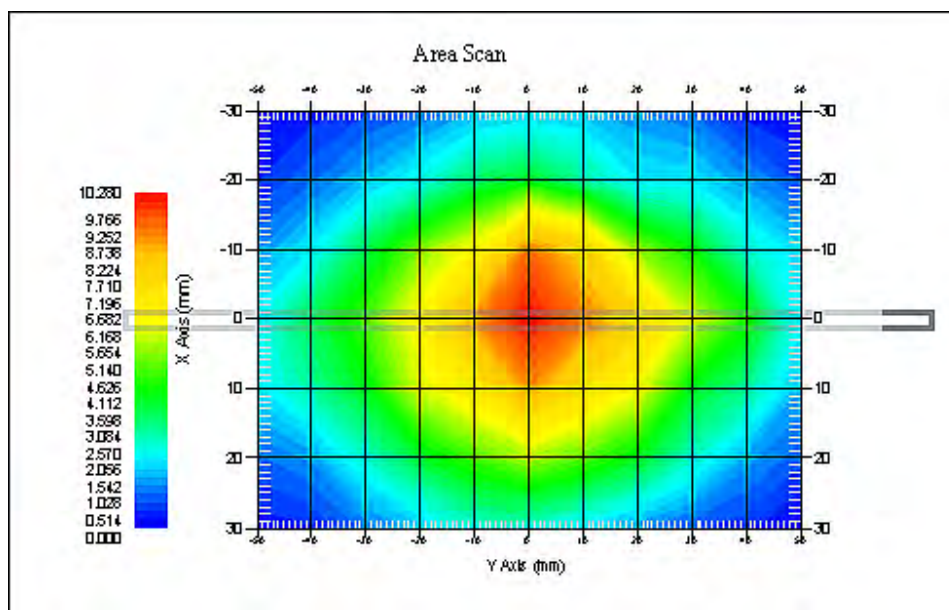

835 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 835 MHz Body Liquid****Dipole 835 MHz; Type: ALS-D-835-S-2; S/N: 180-00558**

Product Data

Device Name : Dipole 835 MHz
Serial No. : 180-00558
Type : Dipole
Model : ALS-D-835-S-2
Frequency Band : 835
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 10.557 W/kg
Power Drift-Finish : 10.422 W/kg
Power Drift (%) : -1.279

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default
Phantom Data

Tissue Data

Type : Body
Serial No. : 270-02101
Frequency : 835.0 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 53.91 F/m
Sigma : 0.96 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 21.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 10.113 W/kg
10 gram SAR value : 6.592 W/kg
Area Scan Peak SAR : 11.360 W/kg
Zoom Scan Peak SAR : 15.858 W/kg

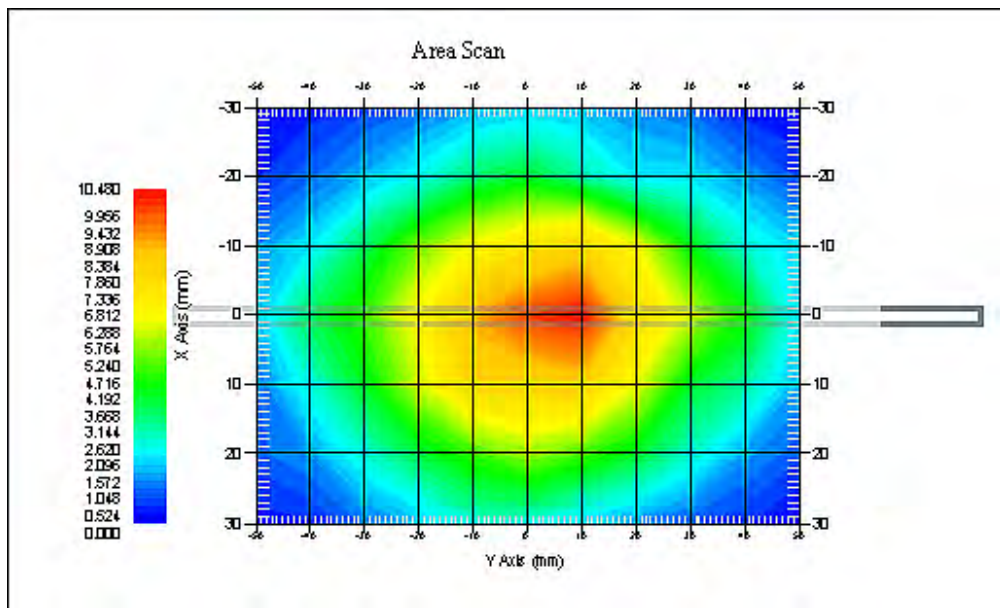

835 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1750 MHz Head Liquid****Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304****Product Data**

Device Name : Dipole 1750MHz
Serial No. : 198-00304
Type : Dipole
Model : ALS-D-1750-S-2
Frequency Band : 1700
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 39.732 W/kg
Power Drift-Finish : 39.531 W/kg
Power Drift (%) : -0.751

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 295-01101
Frequency : 1750.00 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 40.21 F/m
Sigma : 1.42 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 1750
Duty Cycle Factor : 1
Conversion Factor : 5.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 39.537 W/kg
10 gram SAR value : 22.139 W/kg
Area Scan Peak SAR : 39.818 W/kg
Zoom Scan Peak SAR : 75.793 W/kg

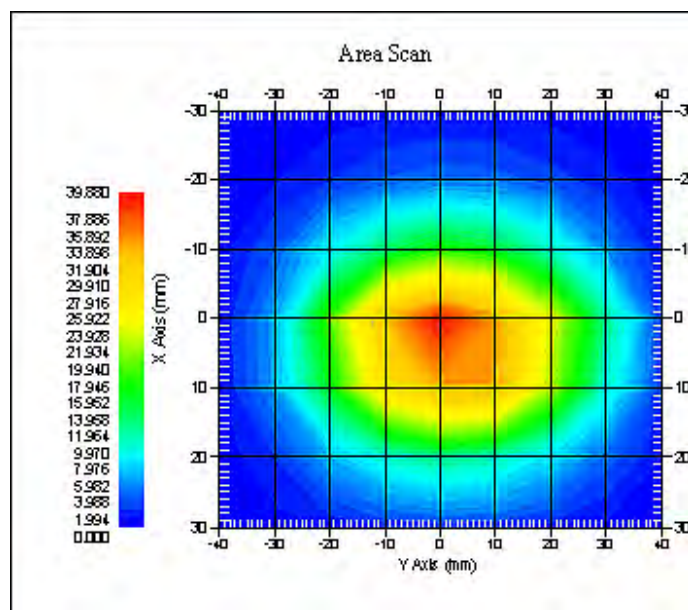

1750 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Body Liquid****Dipole 1750 MHz; Type: ALS-D-1750-S-2; S/N: 198-00304**

Product Data

Device Name : Dipole 1750MHz
Serial No. : 198-00304
Type : Dipole
Model : ALS-D-1750-S-2
Frequency Band : 1700
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 40.219 W/kg
Power Drift-Finish : 40.733 W/kg
Power Drift (%) : 1.639

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02105
Frequency : 1750.00 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 52.15 F/m
Sigma : 1.50 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 1700
Duty Cycle Factor : 1
Conversion Factor : 5.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 38.015 W/kg
10 gram SAR value : 23.137 W/kg
Area Scan Peak SAR : 40.857 W/kg
Zoom Scan Peak SAR : 72.537 W/kg

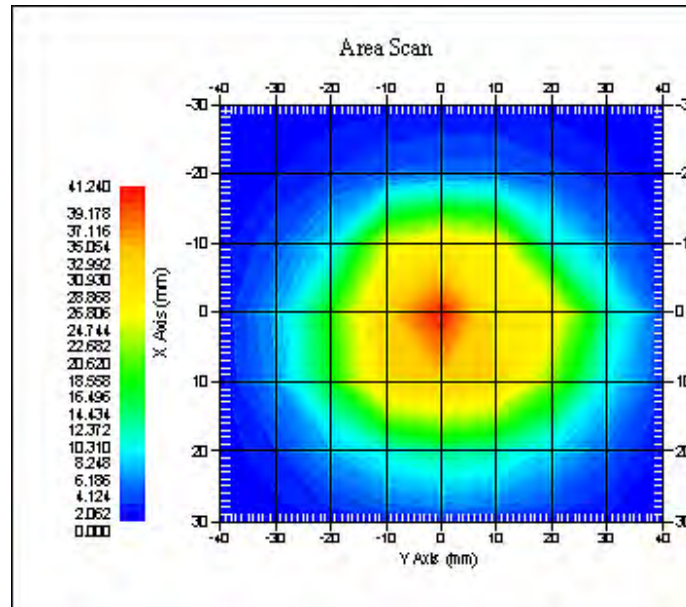

1750 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Head Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710****Product Data**

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 39.862 W/kg
Power Drift-Finish : 39.631 W/kg
Power Drift (%) : -0.579

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 295-01103
Frequency : 1900.00 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 39.68 F/m
Sigma : 1.42 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 40.631 W/kg
10 gram SAR value : 21.531 W/kg
Area Scan Peak SAR : 42.117 W/kg
Zoom Scan Peak SAR : 79.857 W/kg

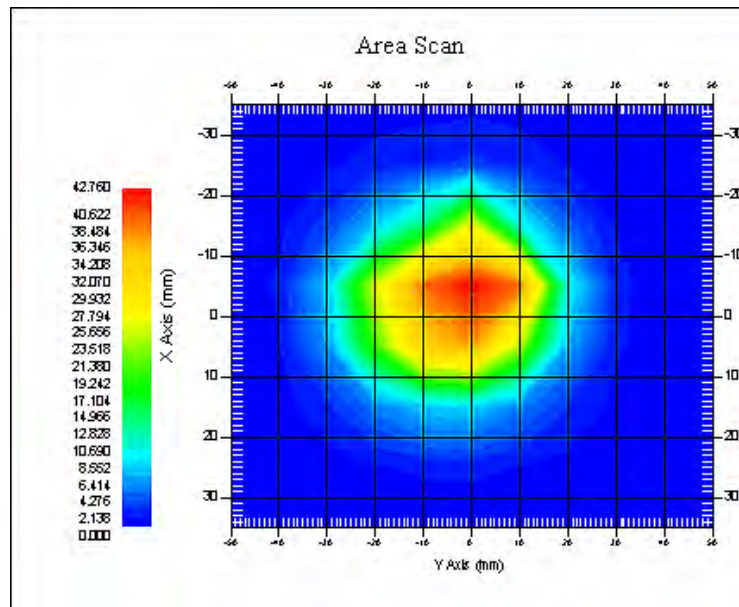

1900 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 1900 MHz Body Liquid****Dipole 1900 MHz; Type: ALS-D-1900-S-2; S/N: 210-00710**

Product Data

Device Name : Dipole 1900MHz
Serial No. : 210-00710
Type : Dipole
Model : ALS-D-1900-S-2
Frequency Band : 1900
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 40.119 W/kg
Power Drift-Finish : 40.825 W/kg
Power Drift (%) : 1.760

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Body
Serial No. : 295-02102
Frequency : 1900.00 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 56.00 RH%
Epsilon : 52.13 F/m
Sigma : 1.51 S/m
Density : 1000.00 kg/cu. m


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.5
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 21.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 41.023 W/kg
10 gram SAR value : 21.315 W/kg
Area Scan Peak SAR : 42.857 W/kg
Zoom Scan Peak SAR : 79.852 W/kg

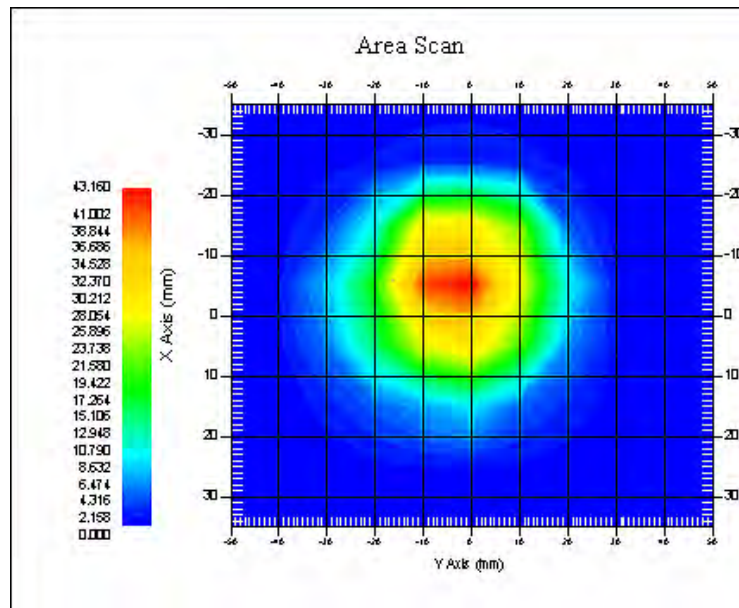

1900 MHz System Validation with Body Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 2450 MHz Head Liquid****Dipole 2450 MHz; Type: ALS-D-2450-S-2; S/N: 220-00758****Product Data**

Device Name : Dipole 2450MHz
Serial No. : 220-00758
Type : Dipole
Model : ALS-D-2450-S-2
Frequency Band : 2450 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 56.738 W/kg
Power Drift-Finish : 57.820 W/kg
Power Drift (%) : 1.876

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : Head
Serial No. : 290-01109
Frequency : 2450.0 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 50.00 RH%
Epsilon : 40.23 F/m
Sigma : 1.83 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 7x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 52.397 W/kg
10 gram SAR value : 23.227 W/kg
Area Scan Peak SAR : 59.693 W/kg
Zoom Scan Peak SAR : 100.295 W/kg

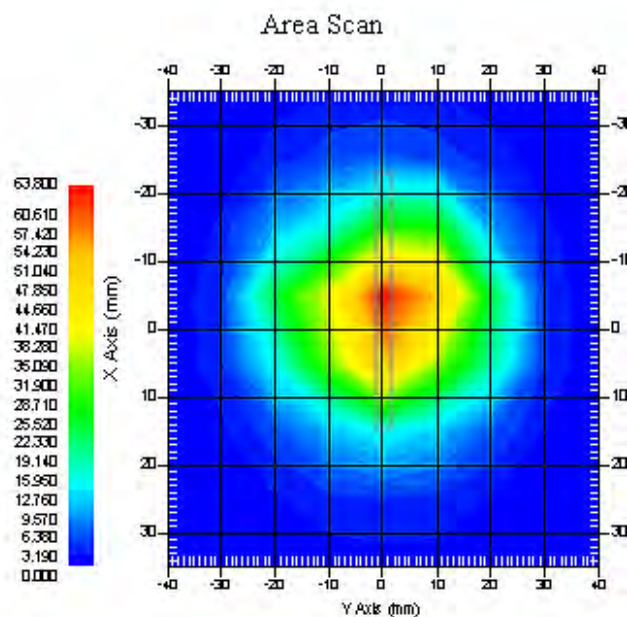

2450 MHz System Validation with Head Tissue

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**System Performance Check 2450 MHz Body Liquid****Dipole 2450 MHz; Type: ALS-D-2450-S-2; S/N: 220-00758**

Product Data

Device Name : Dipole 2450MHz
Serial No. : 220-00758
Type : Dipole
Model : ALS-D-2450-S-2
Frequency Band : 2450 MHz
Max. Transmit Pwr : 1 W
Drift Time : 3 min(s)
Power Drift-Start : 52.114 W/kg
Power Drift-Finish : 52.496 W/kg
Power Drift (%) : 1.168

Phantom Data

Name : APREL-Uni
Type : Uni-Phantom
Serial No. : System Default
Location : Center
Description : Default

Tissue Data

Type : BODY
Serial No. : 290-01109
Frequency : 2450.0 MHz
Last Calib. Date : 23-Aug-2014
Temperature : 20.00 °C
Ambient Temp. : 21.00 °C
Humidity : 50.00 RH%
Epsilon : 51.60 F/m
Sigma : 1.99 S/m
Density : 1000.00 kg/cu. M


Probe Data

Name : E-Field
Model : E-020
Type : E-Field Triangle
Serial No. : 500-00283
Last Calib. Date : 08-Oct-2013
Frequency Band : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

Measurement Data

Crest Factor : 1
Scan Type : Complete
Tissue Temp. : 20.00 °C
Ambient Temp. : 20.00 °C
Area Scan : 8x9x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm

1 gram SAR value : 54.031 W/kg
10 gram SAR value : 24.399 W/kg
Area Scan Peak SAR : 56.723 W/kg
Zoom Scan Peak SAR : 95.936 W/kg

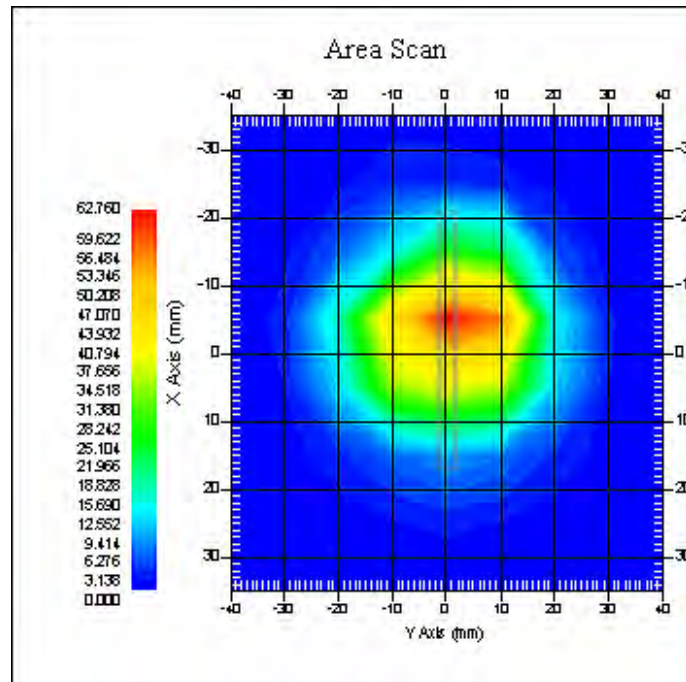



2450 MHz System Validation with Body Tissue

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. A "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

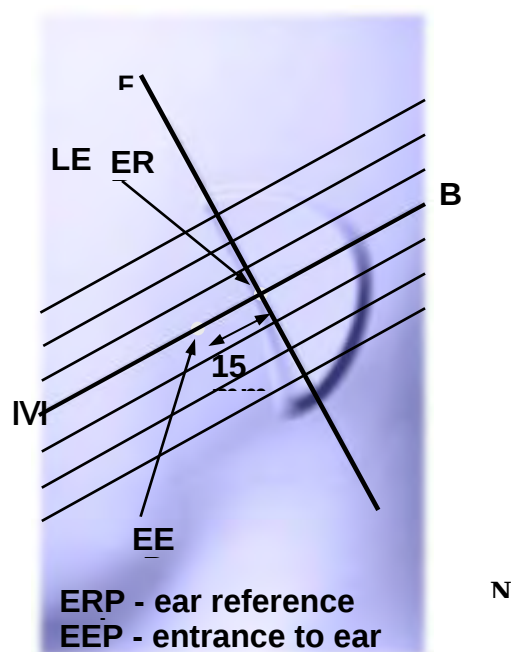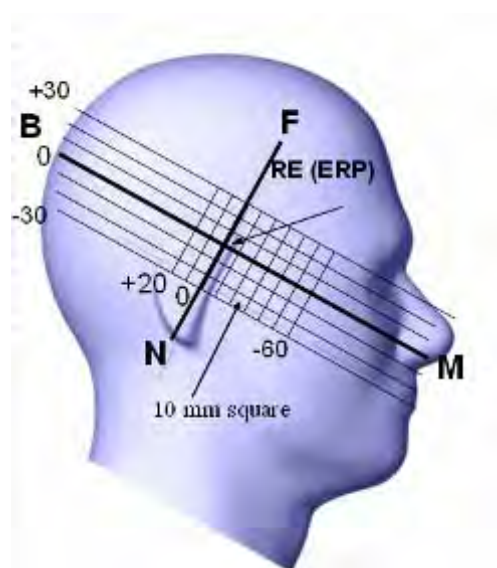

Cheek/Touch Position


The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.

This test position is established:

- o When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

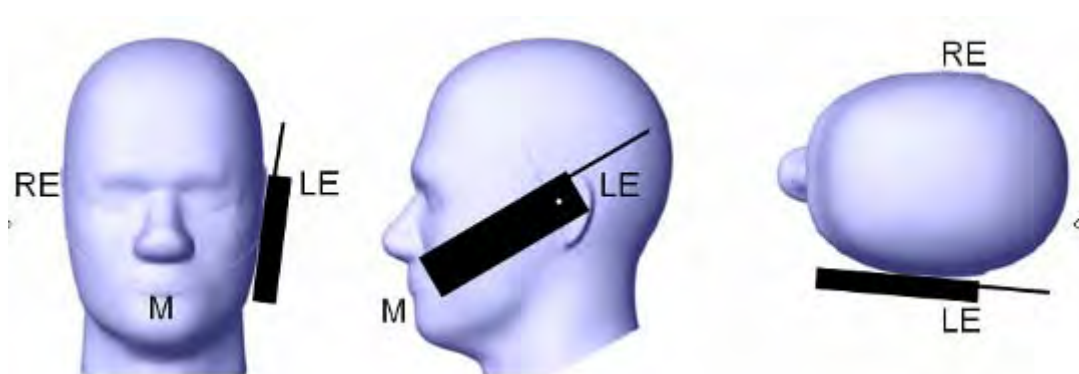

Ear/Tilt Position


With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15° to 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

Ear /Tilt 15° Position

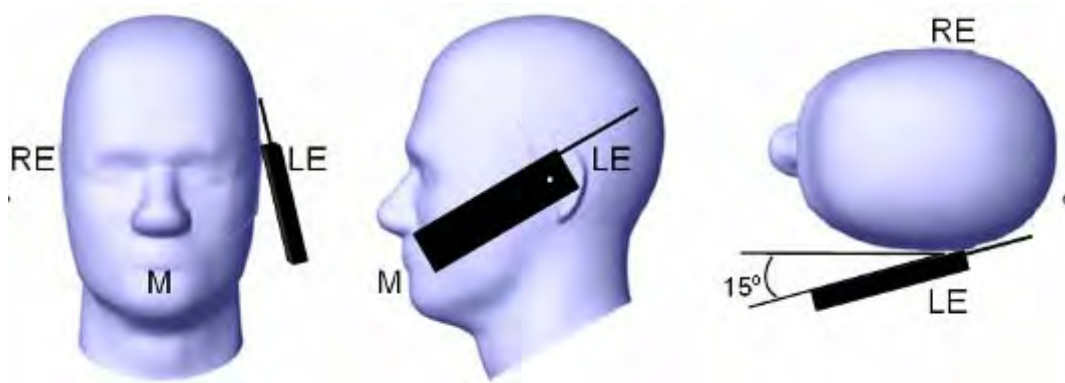

Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

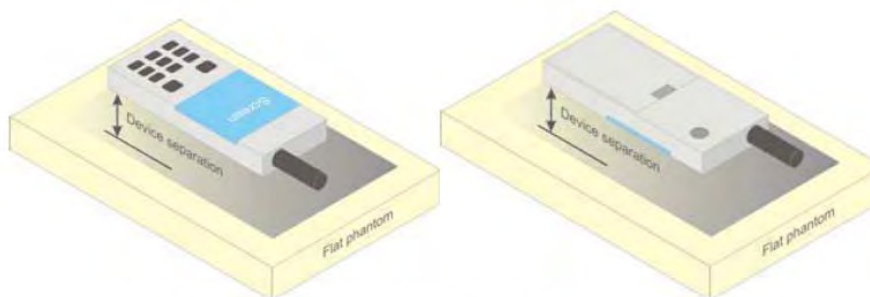


Figure 5 – Test positions for body-worn devices

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 10 mm x 10 mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 35 mm x 35 mm x 35 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

Test methodology

KDB 447498 D01.
KDB 648474 D04
KDB 865664 D01
KDB 941225 D01
KDB 941225 D06


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through sufficient attenuation.

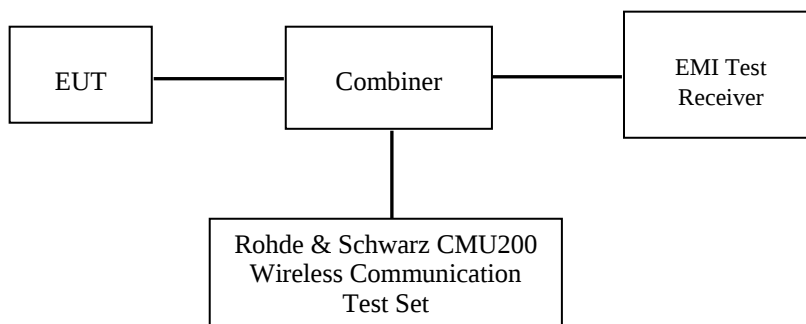

GSM&3G

Maximum Output Power among production units

Max Target Power for Production Unit (dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM 850	31.60	31.60	31.60
GPRS 1 slot	31.60	31.60	31.60
GPRS 2 slot	30.70	30.70	30.70
GPRS 3 slot	29.00	29.00	29.00
GPRS 4 slot	28.20	28.20	28.20
PCS 1900	28.90	28.90	28.90
GPRS 1 slot	28.80	28.80	28.80
GPRS 2 slot	28.20	28.20	28.20
GPRS 3 slot	26.80	26.80	26.80
GPRS 4 slot	26.00	26.00	26.00
WCDMA850	22.50	22.00	22.00
WCDMA1700	22.90	22.90	22.00
WCDMA1900	22.30	22.30	22.80
WiFi	20.30	20.30	20.30
Bluetooth	5.40	5.40	5.40

Test Results:**GSM:**

Band	Frequency (MHz)	Conducted Output Power	
		Meas. Power (dBm)	Meas. Power (W)
GSM 850	824.2	31.54	1.426
	836.6	31.40	1.380
	848.8	31.54	1.426
PCS 1900	1850.2	28.47	0.703
	1880.0	28.60	0.724
	1909.8	28.84	0.766

GPRS :

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	31.54	30.65	28.99	28.18
	190	836.6	31.46	30.53	28.83	28.05
	251	848.8	31.54	30.60	28.94	28.13
PCS 1900	512	1850.2	28.44	27.76	26.43	25.55
	661	1880.0	28.57	27.96	26.61	25.77
	810	1909.8	28.79	28.18	26.73	25.94

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	22.54	24.65	24.74	25.18
	190	836.6	22.46	24.53	24.58	25.05
	251	848.8	22.54	24.60	24.69	25.13
PCS 1900	512	1850.2	19.44	21.76	22.18	22.55
	661	1880.0	19.57	21.96	22.36	22.77
	810	1909.8	19.79	22.18	22.48	22.94

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. For EGPRS mode, only downlink is supported.

WCDMA-Release 99:

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	D_{CQI}	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI _s	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	

Results (12.2kbps RMC)

Band	Frequency (MHz)	Channel NO.	Conducted Output Power	
			(dBm)	(Watt)
WCDMA 850	826.4	4132	22.45	0.176
	836.6	4183	21.83	0.152
	846.6	4233	21.88	0.154
WCDMA 1700	1712.4	8562	22.81	0.191
	1732.4	8662	22.73	0.187
	1752.6	8763	21.91	0.155
WCDMA 1900	1852.4	9262	22.26	0.168
	1880.0	9400	21.83	0.152
	1907.6	9538	22.74	0.188

Results (HSDPA)

Band	Frequency (MHz)	Channel NO.	Conducted Output Power (dBm)				
			Subset 1	Subset 2	Subset 3	Subset 4	Subset 5
WCDMA 850	826.4	4132	22.20	22.09	22.30	22.16	22.27
	836.6	4183	21.79	21.74	21.92	21.67	21.88
	846.6	4233	21.81	21.73	21.90	21.77	21.93
WCDMA 170	1712.4	8562	22.33	22.24	22.41	22.24	22.42
	1732.4	8662	21.57	21.47	21.70	21.45	21.69
	1752.6	8763	21.69	21.62	21.77	21.61	21.74
WCDMA 1900	1852.4	9262	21.70	21.59	21.82	21.61	21.80
	1880.0	9400	22.22	22.15	22.33	22.13	22.32
	1907.6	9538	21.73	21.66	21.80	21.70	21.78

Results (HSUPA)

Band	Frequency (MHz)	Channel NO.	Conducted Output Power (dBm)				
			Subset 1	Subset 2	Subset 3	Subset 4	Subset 5
WCDMA 850	826.4	4132	22.26	22.15	22.34	22.15	22.31
	836.6	4183	21.63	21.58	21.72	21.59	21.73
	846.6	4233	21.74	21.62	21.85	21.64	21.85
WCDMA 170	1712.4	8562	22.29	22.23	22.36	22.19	22.38
	1732.4	8662	21.57	21.51	21.68	21.44	21.64
	1752.6	8763	21.72	21.60	21.76	21.61	21.80
WCDMA 1900	1852.4	9262	21.71	21.63	21.79	21.61	21.77
	1880.0	9400	22.18	22.06	22.27	22.06	22.27
	1907.6	9538	21.78	21.69	21.88	21.70	21.82

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA when the maximum average output of each RF channel with HSDPA active is less than ¼ dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

3. KDB 941225 D01-Body SAR is not required for HSUPA when the maximum average output of each RF channel with HSUPA active is less than ¼ dB higher than measured without HSUPA using 12.2kbps RMC and the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

Bluetooth

Mode	Channel frequency (MHz)	Conducted Output Power	
		(dBm)	(mw)
BDR(GFSK)	(Low)2402	4.57	2.864
	(Middle)2441	5.28	3.373
	(High)2480	5.39	3.459
EDR(4-DQPSK)	(Low)2402	4.17	2.612
	(Middle)2441	4.91	3.097
	(High)2480	5.04	3.192
EDR-8DPSK	(Low)2402	4.49	2.812
	(Middle)2441	5.22	3.327
	(High)2480	5.34	3.420
BT4.0	(Low)2402	-2.93	0.509
	(Middle)2440	-2.39	0.577
	(High)2480	-2.54	0.557

WiFi

Band	Frequency (MHz)	Conducted Output Power	
		(dBm)	(mw)
802.11b	2412	20.06	101.391
	2437	20.02	100.462
	2462	20.27	106.414
802.11g	2412	15.60	36.308
	2437	17.48	55.976
	2462	16.05	40.272
802.11n HT20	2412	15.88	38.726
	2437	17.54	56.754
	2462	15.73	37.411
802.11n HT40	2422	12.55	17.989
	2437	14.43	27.733
	2452	14.49	28.119

Note:

1. The output power was tested under data rate 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n HT20, 13.5Mbps for 802.11n HT40.

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	21-24 °C
Relative Humidity:	50-53 %
ATM Pressure:	1001-1002 mbar

Testing was performed by Wilson Chen on 2014-08-23

GSM 850:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	824.2	GSM	-3.014	31.54	31.60	1.014	0.192	0.195	/
	836.6	GSM	3.131	31.40	31.60	1.047	0.201	0.210	1#
	848.8	GSM	-3.158	31.54	31.60	1.014	0.171	0.173	/
Left Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	-2.979	31.40	31.60	1.047	0.127	0.133	/
	848.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	2.392	31.40	31.60	1.047	0.183	0.192	/
	848.8	GSM	/	/	/	/	/	/	/
Right Head Tilt	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	3.680	31.40	31.60	1.047	0.112	0.117	/
	848.8	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	824.2	GSM	/	/	/	/	/	/	/
	836.6	GSM	3.417	31.40	31.60	1.047	0.293	0.307	/
	848.8	GSM	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

PCS Band:

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1850.2	GSM	-0.416	28.47	28.90	1.104	0.149	0.164	/
	1880.0	GSM	-1.301	28.60	28.90	1.072	0.189	0.203	2#
	1909.8	GSM	-0.732	28.84	28.90	1.014	0.193	0.196	/
Left Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	-1.051	28.60	28.90	1.072	0.115	0.123	/
	1909.8	GSM	/	/	/	/	/	/	/
Right Head Cheek	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	-1.846	28.60	28.90	1.072	0.181	0.194	/
	1909.8	GSM	/	/	/	/	/	/	/
Right Head Tilt	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	-2.536	28.60	28.90	1.072	0.110	0.118	/
	1909.8	GSM	/	/	/	/	/	/	/
Body-Back-Headset (10mm)	1850.2	GSM	/	/	/	/	/	/	/
	1880.0	GSM	1.166	28.60	28.90	1.072	0.353	0.378	/
	1909.8	GSM	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used.

WCDMA 850

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	826.4	WCDMA 850	-4.110	22.45	22.50	1.012	0.162	0.164	/
	836.6	WCDMA 850	/	/	/	/	/	/	/
	846.6	WCDMA 850	/	/	/	/	/	/	/
Left Head Tilt	826.4	WCDMA 850	1.425	22.45	22.50	1.012	0.089	0.090	/
	836.6	WCDMA 850	/	/	/	/	/	/	/
	846.6	WCDMA 850	/	/	/	/	/	/	/
Right Head Cheek	826.4	WCDMA 850	-0.307	22.45	22.50	1.012	0.179	0.181	3#
	836.6	WCDMA 850	/	/	/	/	/	/	/
	846.6	WCDMA 850	/	/	/	/	/	/	/
Right Head Tilt	826.4	WCDMA 850	0.790	22.45	22.50	1.012	0.091	0.092	/
	836.6	WCDMA 850	/	/	/	/	/	/	/
	846.6	WCDMA 850	/	/	/	/	/	/	/

WCDMA 1700

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1712.4	WCDMA1700	-1.266	22.81	22.90	1.021	0.135	0.138	4#
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/
Left Head Tilt	1712.4	WCDMA1700	3.813	22.81	22.90	1.021	0.075	0.077	/
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/
Right Head Cheek	1712.4	WCDMA1700	2.102	22.81	22.90	1.021	0.122	0.125	/
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/
Right Head Tilt	1712.4	WCDMA1700	0.429	22.81	22.90	1.021	0.069	0.070	/
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/

WCDMA1900

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	3.921	22.74	22.80	1.014	0.128	0.130	/
Left Head Tilt	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	-0.833	22.74	22.80	1.014	0.061	0.062	/
Right Head Cheek	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	-2.037	22.74	22.80	1.014	0.142	0.144	5#
Right Head Tilt	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	0.213	22.74	22.80	1.014	0.059	0.060	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

WiFi 802.11b

EUT Position	Frequency (MHz)	Power Drift (%)	Meas. Avg. Power (dBm)	Max. Rated Avg. Power (dBm)	1 g SAR Value (W/Kg)			
					Scaled Factor	Meas. SAR	Scaled SAR	Plot
Left Head Cheek	2412	/	/	/	/	/	/	/
	2437	/	/	/	/	/	/	/
	2462	-1.923	20.27	20.30	1.007	0.097	0.098	6#
Left Head Tilt	2412	/	/	/	/	/	/	/
	2437	/	/	/	/	/	/	/
	2462	-1.718	20.27	20.30	1.007	0.062	0.062	/
Right Head Cheek	2412	/	/	/	/	/	/	/
	2437	/	/	/	/	/	/	/
	2462	2.192	20.27	20.30	1.007	0.088	0.089	/
Right Head Tilt	2412	/	/	/	/	/	/	/
	2437	/	/	/	/	/	/	/
	2462	-3.499	20.27	20.30	1.007	0.061	0.061	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB248227-SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Mobile Hot-Spot Test Result

The DUT is capable of functioning as a WiFi to Cellular Mobile hotspot. Additional SAR testing was performed according to KDB 941225 D06. Testing was performed with a separation of 1cm between the DUT and the flat phantom. The DUT was positioned for SAR tests with the front and back surfaces facing the phantom, and also with the edges facing the phantom in which the transmitting antenna is <2.5 cm from the edge. Each transmit band was utilized for SAR testing. The tested mode has been selected within each band that exhibits the highest time average output power.

Hot spot-GPRS (Frequency Band: 835)

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	824.2	GPRS	0.752	28.18	28.20	1.005	0.793	0.797	7#
	836.6	GPRS	/	/	/	/	/	/	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Left (10mm)	824.2	GPRS	1.722	28.18	28.20	1.005	0.372	0.374	/
	836.6	GPRS	/	/	/	/	/	/	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Right (10mm)	824.2	GPRS	0.743	28.18	28.20	1.005	0.259	0.260	/
	836.6	GPRS	/	/	/	/	/	/	/
	848.8	GPRS	/	/	/	/	/	/	/
Body-Bottom (10mm)	824.2	GPRS	-3.000	28.18	28.20	1.005	0.463	0.465	/
	836.6	GPRS	/	/	/	/	/	/	/
	848.8	GPRS	/	/	/	/	/	/	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
3. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
4. The EUT transmit and receive through the same GSM antenna while testing SAR.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

Hot spot-GPRS (Frequency Band: 1900)

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1850.2	GPRS	1.528	25.55	26.00	1.005	0.715	0.719	/
	1880.0	GPRS	0.399	25.77	26.00	1.072	0.756	0.810	/
	1909.8	GPRS	4.037	25.94	26.00	1.014	0.825	0.837	8#
Body-Left (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	/	/	/	/	/	/	/
	1909.8	GPRS	3.115	25.94	26.00	1.014	0.427	0.433	/
Body-Right (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	/	/	/	/	/	/	/
	1909.8	GPRS	4.455	25.94	26.00	1.014	0.389	0.394	/
Body-Bottom (10mm)	1850.2	GPRS	/	/	/	/	/	/	/
	1880.0	GPRS	/	/	/	/	/	/	/
	1909.8	GPRS	3.194	25.94	26.00	1.014	0.511	0.518	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The EUT is a Capability Class B mobile phone which can be attached to both GPRS and GSM services.
3. The Multi-slot Classes of EUT is Class12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 1DL+4UL is the worst case.
4. The EUT transmit and receive through the same GSM antenna while testing SAR.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

Hot Spot-WCDMA850

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	826.4	WCDMA850	-1.408	22.45	22.50	1.012	0.387	0.391	9#
	836.6	WCDMA850	/	/	/	/	/	/	/
	846.6	WCDMA850	/	/	/	/	/	/	/
Body-Left (10mm)	826.4	WCDMA850	-0.425	22.45	22.50	1.012	0.138	0.140	/
	836.6	WCDMA850	/	/	/	/	/	/	/
	846.6	WCDMA850	/	/	/	/	/	/	/
Body-Right (10mm)	826.4	WCDMA850	1.016	22.45	22.50	1.012	0.125	0.126	/
	836.6	WCDMA850	/	/	/	/	/	/	/
	846.6	WCDMA850	/	/	/	/	/	/	/
Body-Bottom (10mm)	826.4	WCDMA850	-4.292	22.45	22.50	1.012	0.237	0.240	/
	836.6	WCDMA850	/	/	/	/	/	/	/
	846.6	WCDMA850	/	/	/	/	/	/	/

Hot Spot-WCDMA1700

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1712.4	WCDMA1700	2.827	22.81	22.90	1.021	0.419	0.428	10#
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/
Body-Left (10mm)	1712.4	WCDMA1700	-3.351	22.81	22.90	1.021	0.311	0.318	/
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/
Body-Right (10mm)	1712.4	WCDMA1700	1.579	22.81	22.90	1.021	0.286	0.292	
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/
Body-Bottom (10mm)	1712.4	WCDMA1700	-2.839	22.81	22.90	1.021	0.328	0.335	/
	1732.4	WCDMA1700	/	/	/	/	/	/	/
	1752.6	WCDMA1700	/	/	/	/	/	/	/

Hot Spot-WCDMA1900

EUT Position	Frequency (MHz)	Test Mode	Power Drift (%)	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	FCC 1g SAR (W/Kg)			
						Scaled Factor	Meas. SAR	Scaled SAR	Plot
Body-Back (10mm)	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	-1.563	22.74	22.80	1.014	0.656	0.665	11#
Body-Left (10mm)	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	-1.822	22.74	22.80	1.014	0.439	0.445	/
Body-Right (10mm)	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	1.575	22.74	22.80	1.014	0.319	0.323	
Body-Bottom (10mm)	1852.4	WCDMA1900	/	/	/	/	/	/	/
	1880.0	WCDMA1900	/	/	/	/	/	/	/
	1907.6	WCDMA1900	3.838	22.74	22.80	1.014	0.415	0.421	/

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channels are optional.
2. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

WiFi 802.11b (2412-2462MHz)

EUT Position	Frequency (MHz)		Power Drift (%)	Meas. Avg. Power (dBm)	Max. Rated Avg. Power (dBm)	1 g SAR Value (W/Kg)		
	Channel	MHz				Scaled Factor	Meas. SAR	Scaled SAR
Body-worn-Back (10mm)	1	2412	/	/	/	/	/	/
	6	2437	/	/	/	/	/	/
	11	2462	-4.201	20.27	20.30	1.007	0.203	0.204
Body-worn-Right (10mm)	1	2412	/	/	/	/	/	/
	6	2437	/	/	/	/	/	/
	11	2462	-2.997	20.27	20.30	1.007	0.092	0.093
Body-worn-Top (10mm)	1	2412	/	/	/	/	/	/
	6	2437	/	/	/	/	/	/
	11	2462	1.104	20.27	20.30	1.007	0.137	0.138

Note:

1. When the 1-g SAR is $\leq 0.8\text{W/Kg}$, testing for other channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB248227-SAR is not required for 802.11g channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

BT&WiFi and GSM&3G Antennas Location:



Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities			Antennas Distance (mm)
Transmitter Combination	Simultaneous?	Hotspot?	
GSM + WCDMA	×	×	0
GSM + Bluetooth	√	×	115
GSM + WiFi	√	×	115
GPRS + WCDMA	×	×	0
GPRS + Bluetooth	√	×	0
GPRS + WiFi	√	√	115
WCDMA + Bluetooth	√	×	115
WCDMA + WiFi	√	√	115

Standalone SAR test exclusion considerations

Head Position:

Mode	Frequency (MHz)	P _{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
GSM850	850	22.60	181.970	0	33.6	3.0	No
PCS1900	1900	19.90	97.724	0	26.9	3.0	No
WCDMA850	850	22.50	177.828	0	32.8	3.0	No
WCDMA1700	1700	22.90	194.984	0	50.8	3.0	No
WCDMA1900	1900	22.80	190.546	0	52.5	3.0	No
WiFi	2450	20.30	107.152	0	33.5	3.0	No
Bluetooth	2450	5.40	3.467	0	1.1	3.0	Yes

Body Position:

Mode	Frequency (MHz)	P _{avg} (dBm)	P _{avg} (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
GPRS850	850	25.20	331.131	10.00	30.5	3.0	No
GPRS1900	1900	23.00	199.526	10.00	27.5	3.0	No
WCDMSA850	850	22.50	177.828	10.00	16.4	3.0	No
WCDMSA1700	1700	22.90	194.984	10.00	25.4	3.0	No
WCDMSA1900	1900	22.80	190.546	10.00	26.3	3.0	No
WiFi	2450	20.30	107.152	10.00	16.8	3.0	No
Bluetooth	2450	5.40	3.467	10.00	0.5	3.0	Yes

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (GHz)	Distance (mm)	P _{avg} (dBm)	P _{avg} (mW)	Estimated 1-g (W/kg)
BT Head	2.45	0	5.40	3.467	0.147
BT Body	2.45	10	5.40	3.467	0.074

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including **tune-up tolerance**, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}/x]$
W/kg for *test separation distances* ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

Simultaneous SAR test exclusion considerations:**GSM with BT:**

Mode	Position	Reported SAR (W/kg)		ΣSAR
		GSM	BT	< 1.6W/kg
GSM850	Left Head Cheek	0.210	0.147	0.357
	Left Head Tile	0.133	0.147	0.280
	Right Head Cheek	0.192	0.147	0.339
	Right Head Tilt	0.117	0.147	0.264
	Body-Headset-Back	0.307	0.074	0.381
PCS1900	Left Head Cheek	0.203	0.147	0.350
	Left Head Tile	0.123	0.147	0.270
	Right Head Cheek	0.194	0.147	0.341
	Right Head Tilt	0.118	0.147	0.265
	Body-Headset-Back	0.378	0.074	0.452

WCDMA with BT:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		WCDMA	BT	< 1.6W/kg
WCDMA 850	Left Head Cheek	0.164	0.147	0.311
	Left Head Tile	0.090	0.147	0.237
	Right Head Cheek	0.181	0.147	0.328
	Right Head Tilt	0.092	0.147	0.239
WCDMA 1700	Left Head Cheek	0.138	0.147	0.285
	Left Head Tile	0.077	0.147	0.224
	Right Head Cheek	0.125	0.147	0.272
	Right Head Tilt	0.070	0.147	0.217
WCDMA 1900	Left Head Cheek	0.130	0.147	0.277
	Left Head Tile	0.062	0.147	0.209
	Right Head Cheek	0.144	0.147	0.291
	Right Head Tilt	0.060	0.147	0.207

GSM with WiFi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		GSM	WiFi	< 1.6W/kg
GSM850	Left Head Cheek	0.210	0.098	0.308
	Left Head Tile	0.133	0.062	0.195
	Right Head Cheek	0.192	0.089	0.281
	Right Head Tilt	0.117	0.061	0.178
	Body-Headset-Back	0.307	0.204	0.511
PCS1900	Left Head Cheek	0.203	0.098	0.301
	Left Head Tile	0.123	0.062	0.185
	Right Head Cheek	0.194	0.089	0.283
	Right Head Tilt	0.118	0.061	0.179
	Body-Headset-Back	0.378	0.204	0.582

WCDMA with WiFi:

Mode	Position	Reported SAR (W/kg)		ΣSAR
		WCDMA	WiFi	< 1.6W/kg
WCDMA 850	Left Head Cheek	0.164	0.098	0.262
	Left Head Tile	0.090	0.062	0.152
	Right Head Cheek	0.181	0.089	0.270
	Right Head Tilt	0.092	0.061	0.153
WCDMA 1700	Left Head Cheek	0.138	0.098	0.236
	Left Head Tile	0.077	0.062	0.139
	Right Head Cheek	0.125	0.089	0.214
	Right Head Tilt	0.070	0.061	0.131
WCDMA 1900	Left Head Cheek	0.130	0.098	0.228
	Left Head Tile	0.062	0.062	0.124
	Right Head Cheek	0.144	0.089	0.233
	Right Head Tilt	0.060	0.061	0.121

Conclusion:

ΣSAR < 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not** required.

Hotspot:

Evaluations for Simultaneous SAR, Mobile Hot Spot Positions					
Test Position	Body-Back (1.0cm)	Body-Left (1.0cm)	Body-Right (1.0cm)	Body-Bottom (1.0cm)	Body-Top (1.0cm)
Mode	Stand Alone 1-g SAR (W/Kg)				
GPRS 850	0.797	0.374	0.260	0.465	/
GPRS 1900	0.837	0.433	0.394	0.518	/
WCDMA850	0.391	0.140	0.126	0.240	/
WCDMA850	0.428	0.318	0.292	0.335	/
WCDMA 1900	0.665	0.445	0.323	0.421	/
WiFi	0.204	/	0.093	/	0.138
	Σ 1-g SAR(W/Kg)				
GPRS850 + WiFi	1.001	/	0.353	/	/
GPRS1900 + WiFi	1.041	/	0.487	/	/
WCDMA850 + WiFi	0.595	/	0.219	/	/
WCDMA1700 + WiFi	0.632	/	0.385	/	/
WCDMA 1900 + WiFi	0.869	/	0.416	/	/

Note:

If the sum of the 1g SAR measured for the simultaneously transmitting antennas is less than the SAR limit, SAR measurement for simultaneous transmission is not required.

SAR Plots (Summary of the Highest SAR Values)**Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)****Left Head Cheek (836.6 MHz Middle Channel)****Measurement Data**

Test mode : GSM
Crest Factor : 8
Scan Type : Complete
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.007 W/kg
Power Drift-Finish : 0.007 W/kg
Power Drift (%) : 3.131


Tissue Data

Type : Head
Frequency : 836.6 MHz
Epsilon : 41.09 F/m
Sigma : 0.91 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 8
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.201 W/kg
10 gram SAR value : 0.106 W/kg
Area Scan Peak SAR : 0.214 W/kg
Zoom Scan Peak SAR : 0.399 W/kg

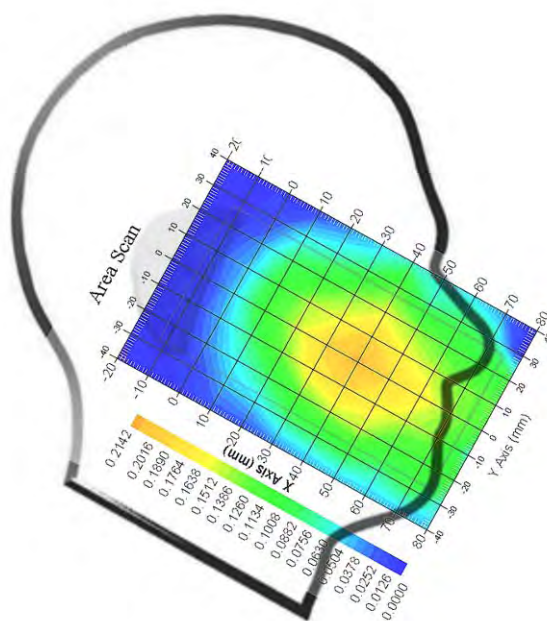Plot 1#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**Left Head Cheek(1880MHz Middle Channel)****Measurement Data**

Test mode : GSM
Crest Factor : 8
Scan Type : Complete
Area Scan : 11x8x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.001 W/kg
Power Drift-Finish : 0.001 W/kg
Power Drift (%) : -1.301


Tissue Data

Type : Head
Frequency : 1880 MHz
Epsilon : 39.70 F/m
Sigma : 1.39 S/m
Density : 1000.00 kg/cu. M

Probe Data

Serial No. : 500-00283
Frequency Band : 1900
Duty Cycle Factor : 8
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.189 W/kg
10 gram SAR value : 0.087 W/kg
Area Scan Peak SAR : 0.217 W/kg
Zoom Scan Peak SAR : 0.339 W/kg

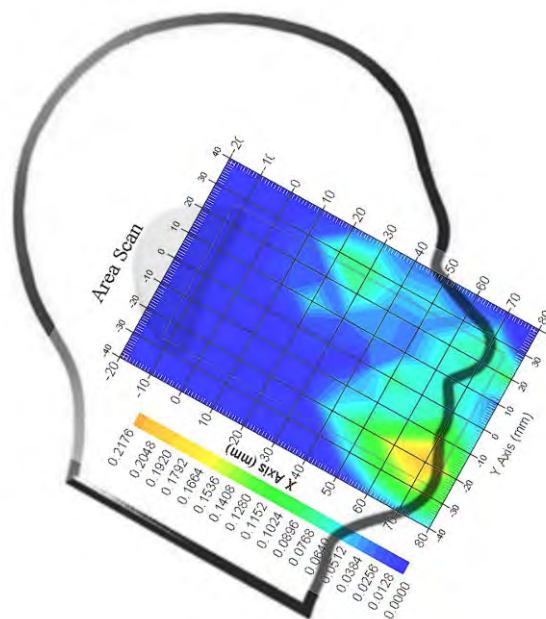Plot 2#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**WCDMA850; Right Head Cheek (826.4 MHz Low Channel)****Measurement Data**

Test mode : WCDMA850
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.009 W/kg
Power Drift-Finish : 0.009 W/kg
Power Drift (%) : -0.307


Tissue Data

Type : Head
Frequency : 826.4 MHz
Epsilon : 41.10 F/m
Sigma : 0.91 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.179 W/kg
10 gram SAR value : 0.092 W/kg
Area Scan Peak SAR : 0.182 W/kg
Zoom Scan Peak SAR : 0.251 W/kg

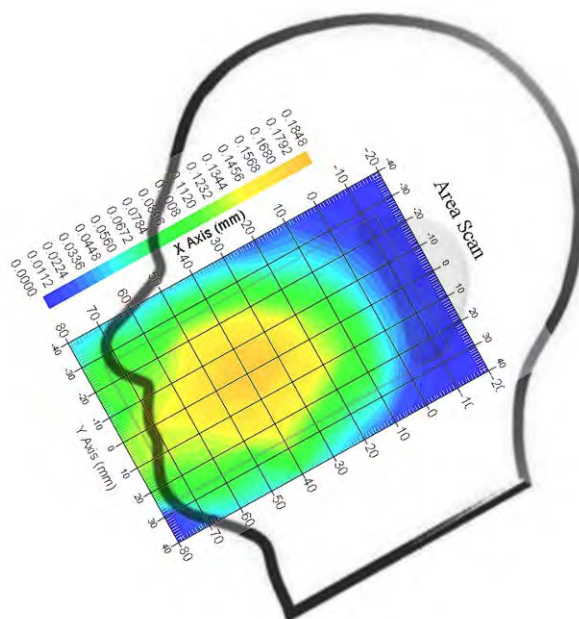Plot 3#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**WCDMA1700; Left Head Cheek (1712.4 MHz Low Channel)****Measurement Data**

Test mode : WCDMA1700
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.009 W/kg
Power Drift-Finish : 0.009 W/kg
Power Drift (%) : -1.266


Tissue Data

Type : Head
Frequency : 1712.4 MHz
Epsilon : 40.27 F/m
Sigma : 1.41 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 1700
Duty Cycle Factor : 1
Conversion Factor : 5.4
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.135 W/kg
10 gram SAR value : 0.063 W/kg
Area Scan Peak SAR : 0.137 W/kg
Zoom Scan Peak SAR : 0.217 W/kg

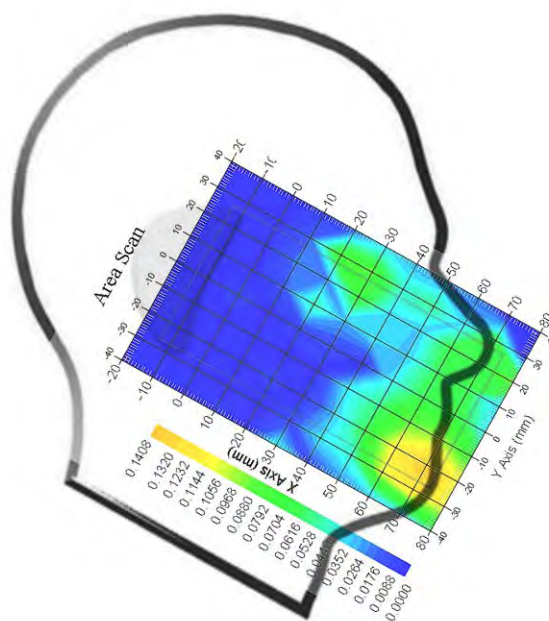Plot 4#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**WCDMA1900; Right Head Cheek (1907.6 MHz High Channel)****Measurement Data**

Test mode : WCDMA1900
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.001 W/kg
Power Drift-Finish : 0.001 W/kg
Power Drift (%) : -2.037


Tissue Data

Type : Head
Frequency : 1907.6 MHz
Epsilon : 39.59 F/m
Sigma : 1.42 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.142 W/kg
10 gram SAR value : 0.073 W/kg
Area Scan Peak SAR : 0.153 W/kg
Zoom Scan Peak SAR : 0.269 W/kg

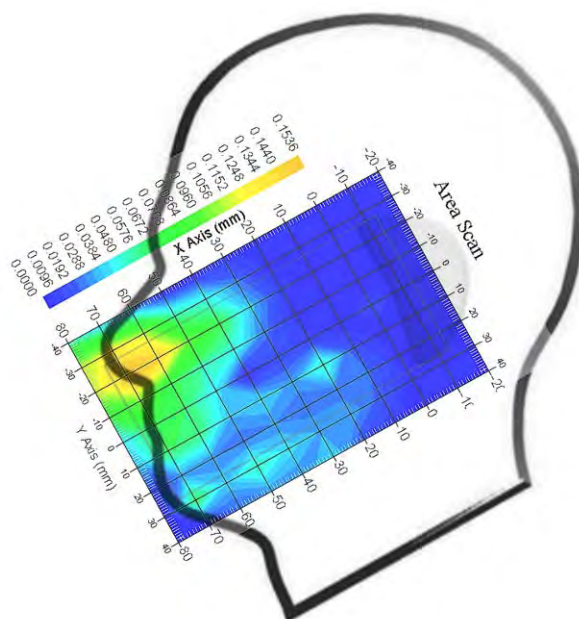Plot 5#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**802.11b; Left Head Cheek (2462 MHz Channel 11)****Measurement Data**

Test mode : 802.11b
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.052 W/kg
Power Drift-Finish : 0.051 W/kg
Power Drift (%) : -1.923


Tissue Data

Type : Head
Frequency : 2462 MHz
Epsilon : 40.31 F/m
Sigma : 1.84 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 2450
Duty Cycle Factor : 1
Conversion Factor : 4.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.097 W/kg
10 gram SAR value : 0.041 W/kg
Area Scan Peak SAR : 0.111 W/kg
Zoom Scan Peak SAR : 0.167 W/kg

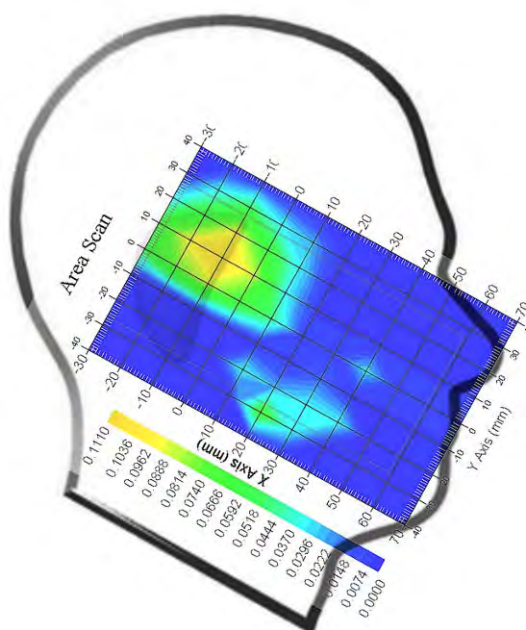Plot 6#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**Body-worn-Back (824.2 MHz Low Channel)**

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : Complete
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.532 W/kg
Power Drift-Finish : 0.536 W/kg
Power Drift (%) : 0.752


Tissue Data

Type : Body
Frequency : 824.2 MHz
Epsilon : 53.87 F/m
Sigma : 0.94 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 2
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.793 W/kg
10 gram SAR value : 0.395 W/kg
Area Scan Peak SAR : 0.807 W/kg
Zoom Scan Peak SAR : 0.921 W/kg

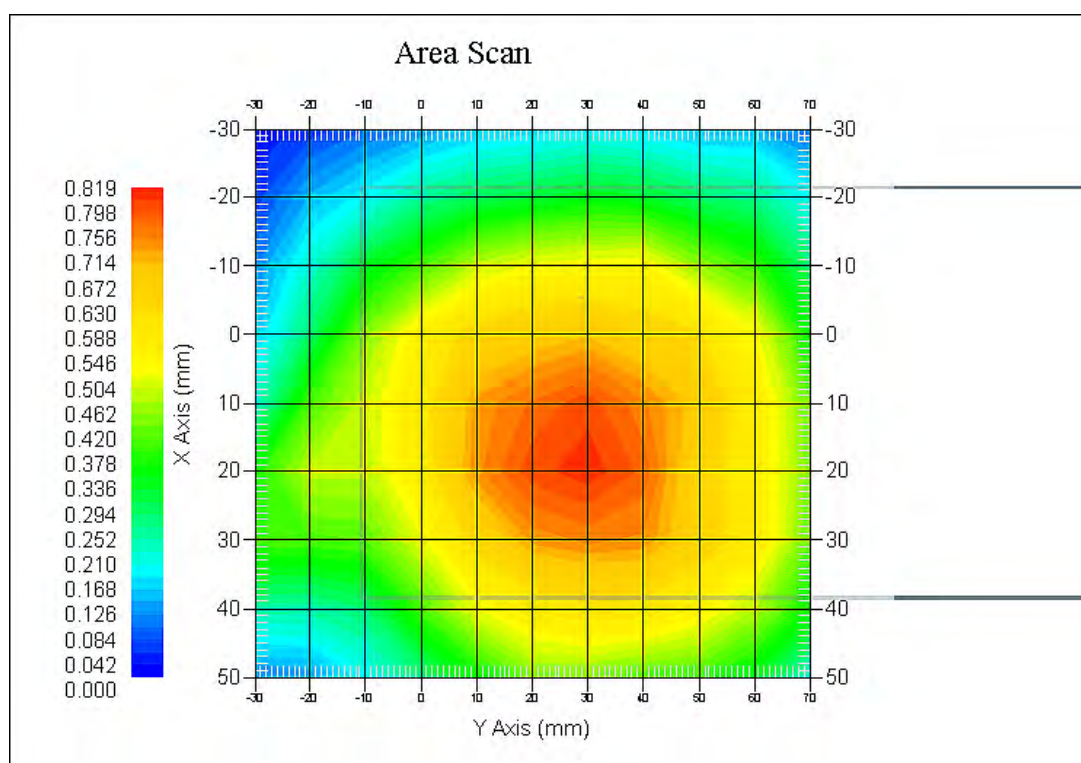Plot 7#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**Body-worn-Back (1909.8MHz High Channel)**

Measurement Data

Test mode : GPRS
Crest Factor : 2
Scan Type : Complete
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.322 W/kg
Power Drift-Finish : 0.335 W/kg
Power Drift (%) : 4.037


Tissue Data

Type : Body
Frequency : 1909.8 MHz
Epsilon : 51.85 F/m
Sigma : 1.51 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 1900
Duty Cycle Factor : 2
Conversion Factor : 4.5
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.825 W/kg
10 gram SAR value : 0.453 W/kg
Area Scan Peak SAR : 0.917 W/kg
Zoom Scan Peak SAR : 0.961 W/kg

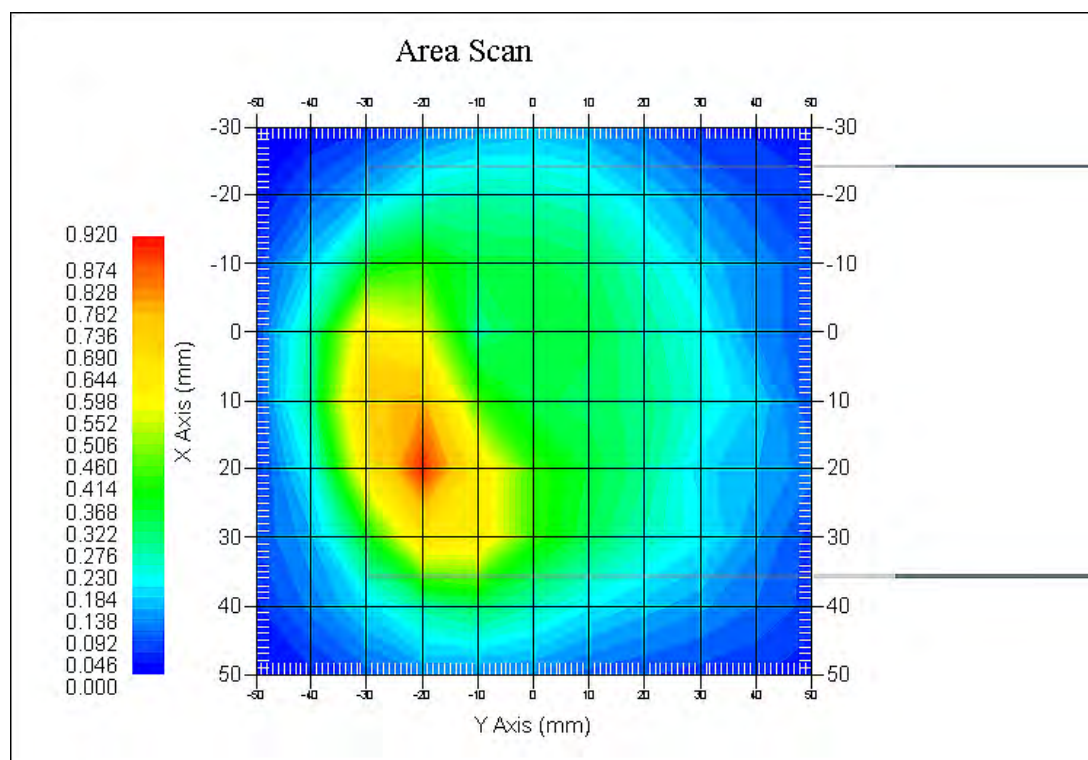Plot 8#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**WCDMA850; Body-Worn-Back (826.4 MHz Low Channel)**

Measurement Data

Test mode : WCDMA850
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x8x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.213 W/kg
Power Drift-Finish : 0.210 W/kg
Power Drift (%) : -1.408


Tissue Data

Type : Body
Frequency : 826.4 MHz
Epsilon : 53.85 F/m
Sigma : 0.94 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 835
Duty Cycle Factor : 1
Conversion Factor : 5.9
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.387 W/kg
10 gram SAR value : 0.213 W/kg
Area Scan Peak SAR : 0.400 W/kg
Zoom Scan Peak SAR : 0.690 W/kg

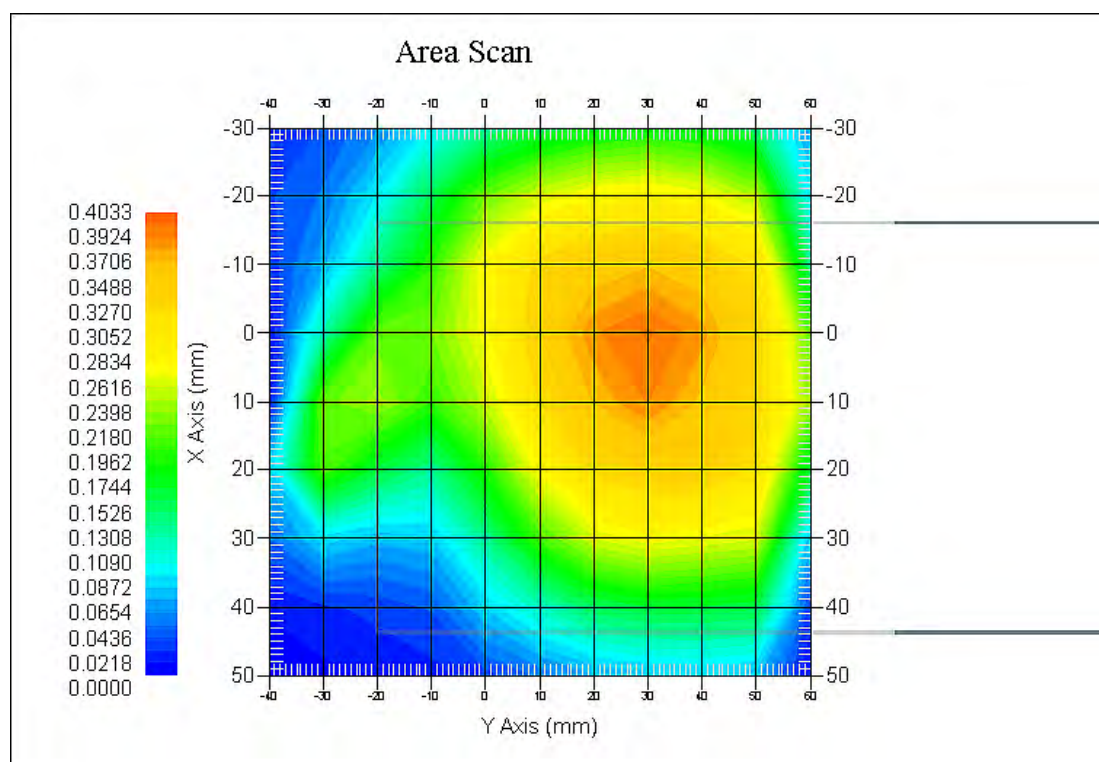Plot 9#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**WCDMA1700; Body-Worn-Back (1712.4 MHz Low Channel)**

Measurement Data

Test mode : WCDMA1700
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.283 W/kg
Power Drift-Finish : 0.291 W/kg
Power Drift (%) : 2.827


Tissue Data

Type : Body
Frequency : 1712.4 MHz
Epsilon : 52.16 F/m
Sigma : 1.48 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 1700
Duty Cycle Factor : 1
Conversion Factor : 5.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.419 W/kg
10 gram SAR value : 0.257 W/kg
Area Scan Peak SAR : 0.435 W/kg
Zoom Scan Peak SAR : 0.766 W/kg

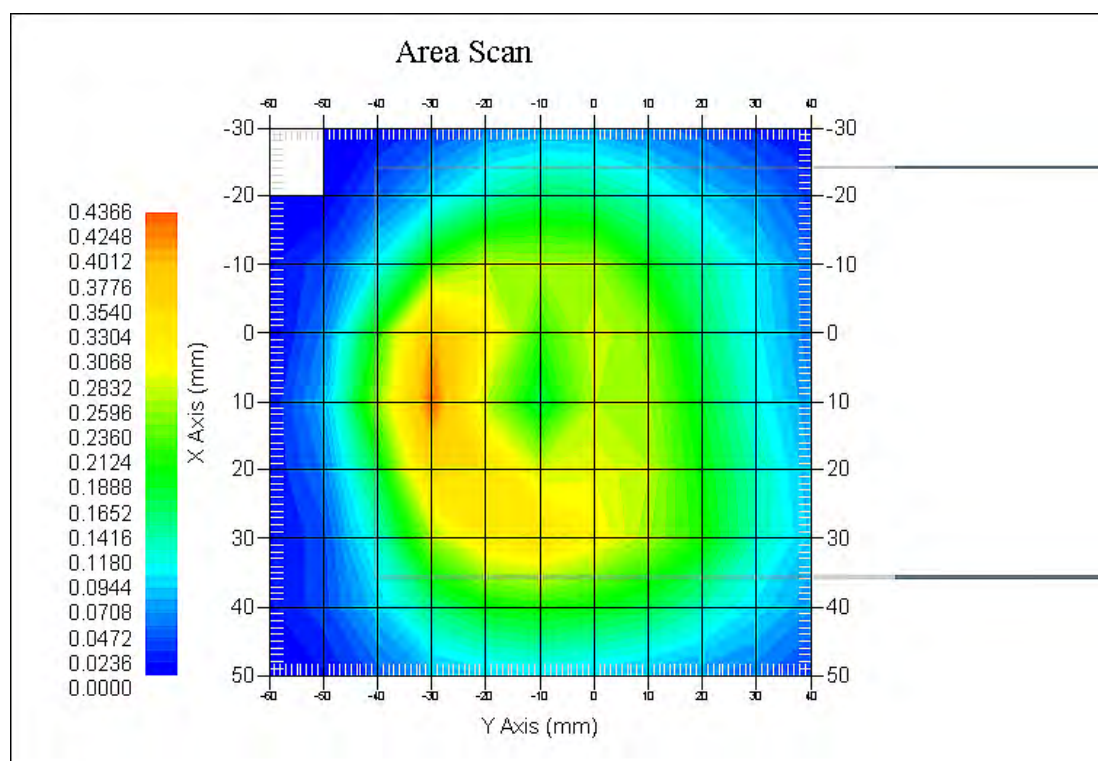Plot 10#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**WCDMA1900; Body-Worn-Back (1907.6 MHz High Channel)****Measurement Data**

Test mode : WCDMA1900
Crest Factor : 1
Scan Type : Complete
Area Scan : 11x9x1: Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7: Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.192 W/kg
Power Drift-Finish : 0.189 W/kg
Power Drift (%) : -1.563


Tissue Data

Type : Body
Frequency : 1907.6 MHz
Epsilon : 51.83 F/m
Sigma : 1.51 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 1900
Duty Cycle Factor : 1
Conversion Factor : 4.8
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.656 W/kg
10 gram SAR value : 0.388 W/kg
Area Scan Peak SAR : 0.729 W/kg
Zoom Scan Peak SAR : 0.926 W/kg

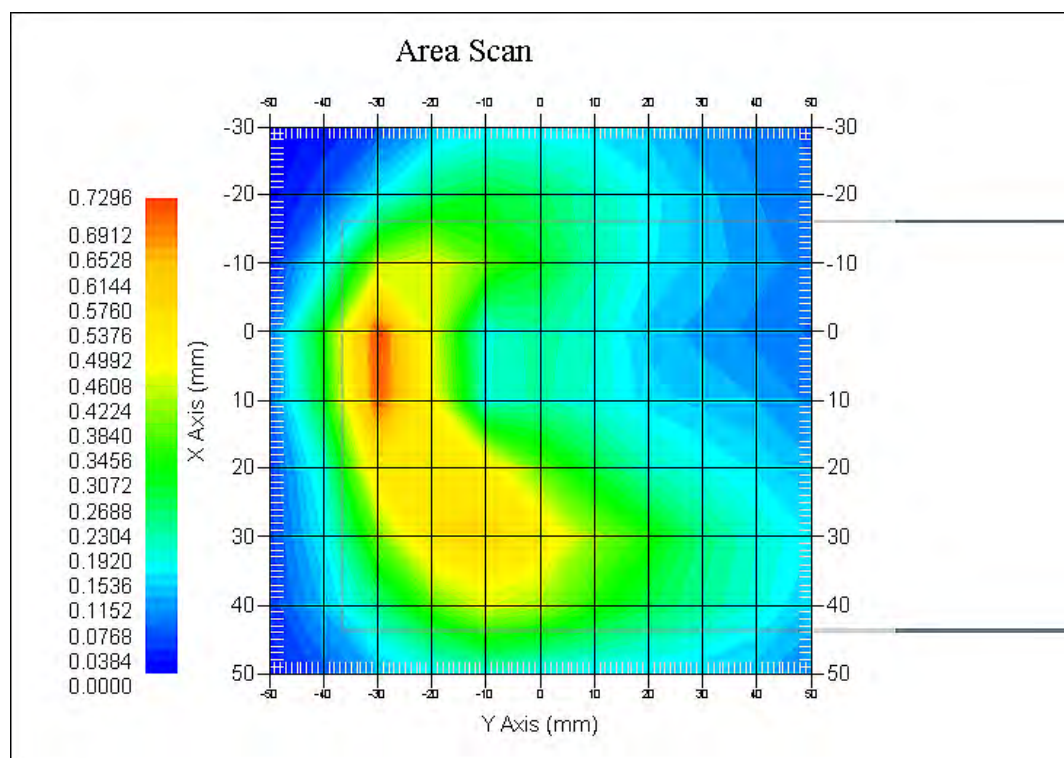Plot 11#

Test Laboratory: Bay Area Compliance Lab Corp. (Shenzhen)**802.11b; Body-Worn-Back (2462MHz, Channel 11)**

Measurement Data

Crest Factor : 1
Scan Type : Complete
Area Scan : 8x11x1 : Measurement x=10mm, y=10mm, z=4mm
Zoom Scan : 7x7x7 : Measurement x=5mm, y=5mm, z=5mm
Power Drift-Start : 0.046 W/kg
Power Drift-Finish : 0.044 W/kg
Power Drift (%) : -4.201


Tissue Data

Type : Body
Frequency : 2462 MHz
Epsilon : 51.56 F/m
Sigma : 2.01 S/m
Density : 1000.00 kg/cu. m

Probe Data

Serial No. : 500-00283
Frequency Band : 2450 MHz
Duty Cycle Factor : 1
Conversion Factor : 4.3
Probe Sensitivity : 1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Compression Point : 95.00 mV
Offset : 1.56 mm

1 gram SAR value : 0.203 W/kg
10 gram SAR value : 0.134 W/kg
Area Scan Peak SAR : 0.210 W/kg
Zoom Scan Peak SAR : 0.357 W/kg

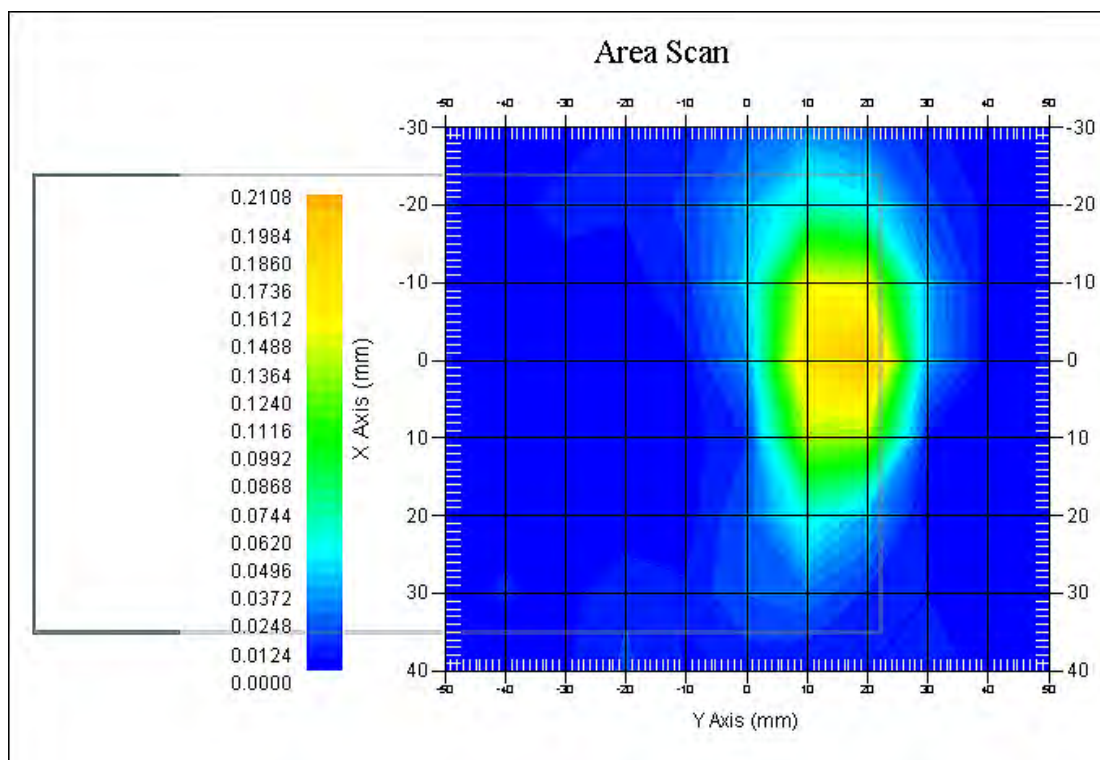Plot 12#

APPENDIX A MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement Uncertainty for 30MHz to 6GHz

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	c_1^1 (1-g)	c_1^1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	$\sqrt{cp}$	$\sqrt{cp}$	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition -Noise	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
RF Ambient Condition - Reflections	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech. Restrictions	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1
Test Sample Positioning	2.3	normal	1	1	1	2.3	2.3
Device Holder Uncertainty	6.215	normal	1	1	1	6.215	6.215
Drift of Output Power	4.627	rectangular	$\sqrt{3}$	1	1	2.67	2.67
Phantom and Setup							
Phantom Uncertainty(shape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	1.938	normal	1	0.7	0.5	1.36	0.97
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	3.093	normal	1	0.6	0.5	1.86	1.55
Combined Uncertainty		RSS				10.78	10.55
Expanded uncertainty (coverage factor=2)		Normal(k=2)				21.56	21.10

APPENDIX B – PROBE CALIBRATION CERTIFICATES

NCL CALIBRATION LABORATORIES

Calibration File No.: PC-1537

Task No: BACL-5745

CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the
NCL CALIBRATION LABORATORIES by qualified personnel following recognized
procedures and using transfer standards traceable to NRC/NIST.

Equipment: Miniature Isotropic RF Probe

Record of Calibration

Head and Body

Manufacturer: APREL Laboratories

Model No.: E-020

Serial No.: 500-00283

Calibration Procedure: D01-032-E020-V2, D22-012-Tissue, D28-002-Dipole
Project No: BACL-5745

Calibrated: 8th October 2013

Released on: 8th October 2013

This Calibration Certificate is Incomplete Unless Accompanied with the Calibration Results Summary

Released By:



Art Brennan, Quality Manager

NCL CALIBRATION LABORATORIES

Suite 102, 303 Terry Fox Dr,
OTTAWA, ONTARIO
CANADA K2K 3J1

Division of APREL Lab.
TEL: (613) 435-8300
FAX: (613) 435-8306