

# EMI - TEST REPORT

- FCC Part 15.407, 5150-5250 MHz, indoor -

**Type / Model Name** : Xirium Pro NXP2RX (NXP2RX-C)

**Product Description** : Digital Wireless Audio Network

**Applicant** : Neutrik AG

**Address** : Im alten Riet 143

9494 SCHAAN, LIECHTENSTEIN

**Manufacturer** : Neutrik AG

**Address** : Im alten Riet 143

9494 SCHAAN, LIECHTENSTEIN

**Licence holder** : Neutrik AG

**Address** : Im alten Riet 143

9494 SCHAAN, LIECHTENSTEIN

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------

<b>Test Report No. :</b> <b>T40632-02-00HS</b>	<u>06. July 2017</u> Date of issue
--	---------------------------------------



Deutsche  
Akkreditierungsstelle  
D-PL-12030-01-01  
D-PL-12030-01-02

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

## Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>4</b>
<b>3</b>	<b><u>TEST RESULT SUMMARY</u></b>	<b>6</b>
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1	Address of the test laboratory	7
4.2	Environmental conditions	7
4.3	Statement of the measurement uncertainty	7
4.4	Measurement protocol for FCC	8
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>9</b>
5.1	AC power line conducted emissions	9
5.2	EBW and OBW	15
5.3	Maximum conducted output power	16
5.4	Maximum power spectral density	17
5.5	Defacto limit	18
5.6	Unwanted emissions	20
5.7	Frequency stability	30
5.8	Antenna application	30
<b>6</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>31</b>



## **2 EQUIPMENT UNDER TEST**

### **2.1 Photo documentation of the EUT – Detailed photos see ATTACHMENT A**

### **2.2 General remarks:**

The motherboard is manufactured by another manufacturer, the PCB material has changed. Additionally a new type of antenna, SOA-2456/360/1/0/V, 2.0 dBi gain (radiation pattern Omni), will be used. The intention of this test report is to demonstrate the further compliance to the FCC Part 15.407.

Therefore the radiated output power and spurious emissions  $f > 1$  GHz are re-measured.

### **2.3 Equipment category**

WLAN - AP

### **2.4 Short description of the equipment under test (EUT)**

The EUT is part of a digital wireless audio network. The product consists out of a RX base station and a repeater module. It is used to extend the range of the XIRIUM wireless transmission system. The audio stream is transmitted in the band 5180 MHz to 5240 MHz. The EUT is controlled via 2.4 GHz WLAN interface. The 2.4 GHz functionality is not part of this test report.

Number of tested samples: 1 RP  
 Serial number: Host module 620007, RP module 515547  
 Firmware version: 3.0

#### **EUT configuration:**

(The CDF filled by the applicant can be viewed at the test laboratory.)

### **2.5 Variants of the EUT**

There are no variants.

### **2.6 Operation frequency and channel plan**

The operating frequency is 5150 MHz to 5250 MHz.

#### **Channel plan:**

WLAN Standard 802.11a:

Channel	Frequency (MHz)
36	5180
40	5200
44	5220
48	5240

Note: The marked frequencies are determined for final testing.

### **2.7 Transmit operating modes**

The module use OFDM modulation and is capable to provide following data rates:

- 802.11a 24, 6 Mbps

## 2.8 Antenna

The following antennas shall be used with the EUT:

Number	Manufacturer Number	Characteristic	Model number	Connector	Frequency (GHz)	Gain 5 GHz	Cable loss (dB)	effective Gain 5 GHz (dBi)
1	ECO9-5500 Series	Omni	ECO9-5500-BLK-RN	N-male	5 GHz	9.0	0	9.0
2	WiFi Antenna 1399.17.0225	Omni	SOA-2456/360/1/0/V	N-male	5 GHz	2.0	0	2.0

## 2.9 Power supply system utilised

Power supply voltage,  $V_{nom}$  : 5 VDC Li-ion battery  
 Power supply voltage (alternative) : Input: 100-240 V, 50-60 Hz, 1 $\phi$  Power supply,  
 Output: +5 VDC (charging and operation)

## 2.10 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- \_\_\_\_\_ Model : \_\_\_\_\_  
 - \_\_\_\_\_ Model : \_\_\_\_\_  
 - \_\_\_\_\_ Model : \_\_\_\_\_

## 2.11 Determination of worst case conditions for final measurement

Measurements are made in all three orthogonal axes and the settings of the EUT are changed to locate at which position and at what setting of the EUT produce the maximum of the emissions.  
 The tests are carried out in the following frequency band:

**5150 - 5250 MHz**

Preliminary tests are performed to find the worst-case mode from all possible combinations between available modulations and data rates. The maximum output power depends on used data rate.  
 Following channels and test modes are selected for the final test as listed below:

WLAN	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
802.11a	36 to 48	36, 44, 48	Pmax	OFDM	BPSK	6 Mbps

- TX continuous mode, 802.11a

### 2.11.1 Test jig

No test jig is used.

### 2.11.2 Test software

The test software for the EUT provides the special test mode TX continuous mode, modulated, after switch on. The switch "XROC" is used for switch the channels 36, 44, 48. No other settings are available.

### **3 TEST RESULT SUMMARY**

UNII device using the operating band 5150 MHz - 5250 MHz:

FCC Rule Part	RSS Rule Part	Description	Result
15.407(b)(6)	-	AC power line conducted emissions	passed
15.407(a)(5)	-	EBW 26 dB	Not tested
15.407(a)(1)	-	Maximum conducted output power	passed
15.407(a)(1)	-	Maximum PSD	Not tested
15.407(b)(1)	-	Undesirable emissions	Not tested
15.407(b)(7)	-	Emissions in restricted bands	passed
15.407(a)	-	Antenna requirement	passed
15.407(g)	-	Frequency stability	Not tested

#### **3.1 Final assessment**

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 18 April 2017

Testing concluded on : 19 April 2017

Checked by:

Tested by:

\_\_\_\_\_  
Klaus Gegenfurtner  
Teamleader Radio

\_\_\_\_\_  
Hermann Smetana  
Radio Team

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**CSA Group Bayern GmbH  
Ohmstrasse 1-4  
94342 STRASSKIRCHEN  
GERMANY**

### **4.2 Environmental conditions**

During the measurement, the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### **4.3 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor  $k = 2$ . The true value is located in the corresponding interval with a probability of 95 % The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

<b>Measurement Type</b>	<b>Range</b>	<b>Confidence Level</b>	<b>Calculated Uncertainty</b>
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29$ dB
EBW and OBW	2400 MHz to 3000 MHz	95%	$\pm 2.5 \times 10^{-7}$
Maximum peak conducted output power	2400 MHz to 3000 MHz	95%	$\pm 0.62$ dB
Power spectral density	2400 MHz to 3000 MHz	95%	$\pm 0.62$ dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15$ dB
Conducted Spurious Emissions	10000 MHz to 40000 MHz	95%	$\pm 3.47$ dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53$ dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71$ dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34$ dB
Field strength of the fundamental	100 kHz to 100 MHz	95%	$\pm 3.53$ dB

## 4.4 Measurement protocol for FCC

### 4.4.1 General information

#### 4.4.1.1 Test methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

#### 4.4.1.2 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left without termination. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

#### 4.4.1.3 Details of test procedures

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.10 - "American national standard of procedures for compliance testing of unlicensed wireless devices". In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.10 and applying the CISPR 22 limits.



## **5 TEST CONDITIONS AND RESULTS**


### **5.1 AC power line conducted emissions**

For test instruments and accessories used see section 6 Part A 4.

#### **5.1.1 Description of the test location**

Test location:                   Shielded Room S2

#### **5.1.2 Photo documentation of the test set-up**

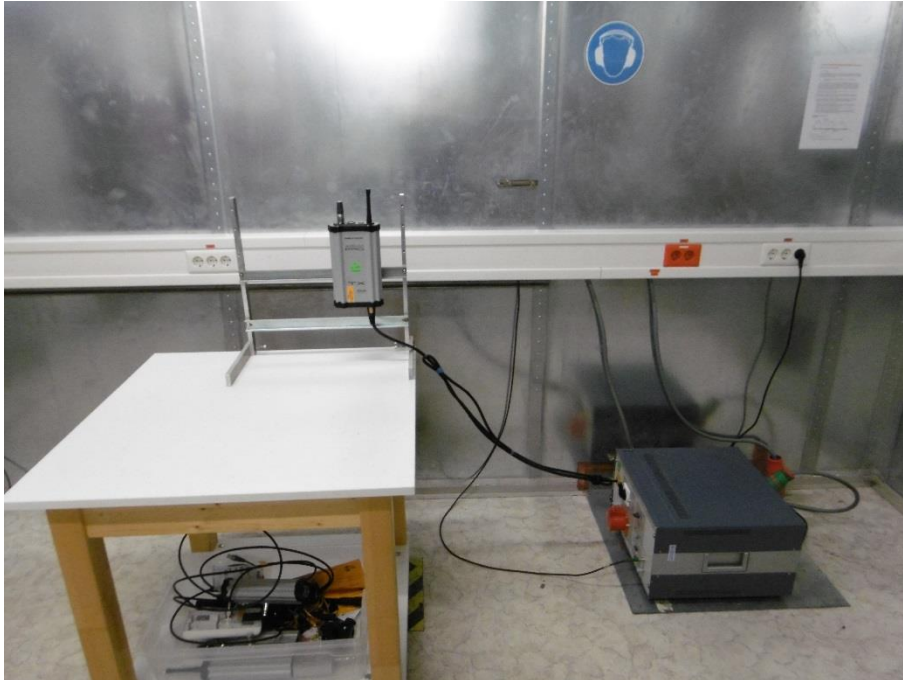

#### **5.1.3 Applicable standard**

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

#### **5.1.4 Description of Measurement**

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

#### **5.1.5 Test result**

Frequency range:                   0.15 MHz - 30 MHz

Min. limit margin                   12.4 dB at 0.208 MHz

**FCC ID: 2ABA7XPR**

Limit according to FCC Part 15, Section 15.207(a):

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.

**Remarks:** For detailed test result please refer to following test protocols


---

---

5.1.6 Test protocol

Test point: L1  
 Operation mode: TX continuous mode 5 GHz  
 Remarks:

Result: passed

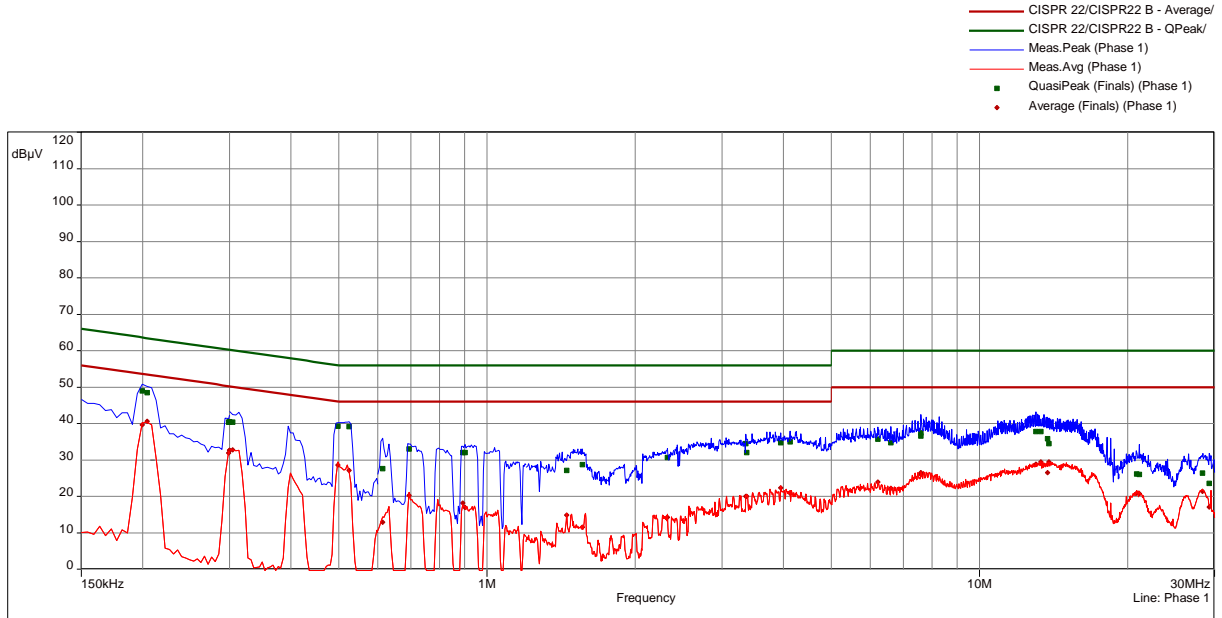


**FCC ID: 2ABA7XPR**

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.200	1	48.9	14.7	63.6	39.6	14.0	53.6	Phase 1	9.8
0.204	1	48.5	15.0	63.5	40.6	12.8	53.5	Phase 1	9.8
0.299	1	40.4	19.9	60.3	32.0	18.3	50.3	Phase 1	9.8
0.300	1	40.5	19.8	60.2	32.6	17.6	50.2	Phase 1	9.8
0.300	2	40.4	19.8	60.2	32.6	17.6	50.2	Phase 1	9.8
0.305	2	40.4	19.7	60.1	32.8	17.3	50.1	Phase 1	9.8
0.498	2	39.3	16.7	56.0	28.7	17.4	46.0	Phase 1	9.8
0.525	2	39.2	16.8	56.0	27.1	18.9	46.0	Phase 1	9.8
0.614	3	27.6	28.4	56.0	12.9	33.1	46.0	Phase 1	9.8
0.695	3	33.0	23.0	56.0	20.3	25.7	46.0	Phase 1	9.8
0.893	3	32.0	24.0	56.0	18.1	27.9	46.0	Phase 1	9.8
0.902	3	32.0	24.0	56.0	17.0	29.0	46.0	Phase 1	9.8
1.452	4	27.2	28.8	56.0	14.9	31.1	46.0	Phase 1	9.8
1.560	4	28.8	27.2	56.0	11.6	34.4	46.0	Phase 1	9.8
2.325	4	30.7	25.3	56.0	14.2	31.8	46.0	Phase 1	9.8
3.354	5	34.5	21.5	56.0	20.0	26.0	46.0	Phase 1	9.8
3.363	5	32.0	24.0	56.0	20.1	26.0	46.0	Phase 1	9.8
3.948	5	34.8	21.2	56.0	22.4	23.6	46.0	Phase 1	9.8
4.124	5	34.9	21.1	56.0	20.9	25.1	46.0	Phase 1	9.8
6.218	6	35.7	24.3	60.0	23.9	26.1	50.0	Phase 1	9.8
6.609	6	34.7	25.3	60.0	22.3	27.7	50.0	Phase 1	9.8
7.595	6	36.6	23.4	60.0	26.0	24.0	50.0	Phase 1	9.9
7.599	6	37.4	22.6	60.0	26.5	23.5	50.0	Phase 1	9.9
13.025	7	37.8	22.2	60.0	28.9	21.2	50.0	Phase 1	10.0
13.322	7	37.8	22.2	60.0	29.5	20.5	50.0	Phase 1	10.0
13.745	7	35.8	24.2	60.0	26.5	23.5	50.0	Phase 1	10.1
13.826	7	34.5	25.5	60.0	29.4	20.6	50.0	Phase 1	10.1
20.847	8	26.2	33.8	60.0	20.9	29.1	50.0	Phase 1	10.3
21.095	8	26.0	34.0	60.0	20.7	29.3	50.0	Phase 1	10.3
28.371	8	26.4	33.6	60.0	21.3	28.7	50.0	Phase 1	10.3
29.267	8	23.6	36.4	60.0	17.1	32.9	50.0	Phase 1	10.3

Test point: N  
 Operation mode: TX continuous mode 5 GHz  
 Remarks:

Result: passed

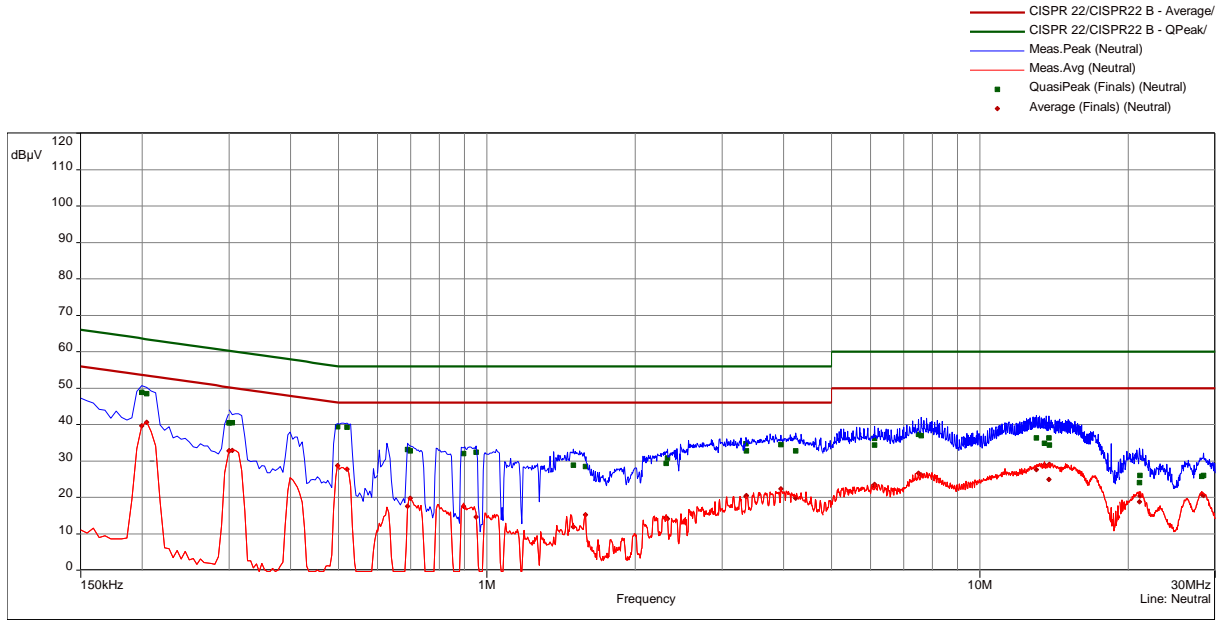

CISPR 22/CISPR22B

**FCC ID: 2ABA7XPR**

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB( $\mu$ V)	dB	dB	dB( $\mu$ V)	dB	dB		dB
0.200	9	48.9	14.8	63.6	39.6	14.0	53.6	Neutral	9.8
0.204	9	48.4	15.0	63.5	40.6	12.9	53.5	Neutral	9.8
0.300	9	40.5	19.8	60.2	32.7	17.5	50.2	Neutral	9.8
0.300	10	40.5	19.8	60.2	32.7	17.5	50.2	Neutral	9.8
0.305	10	40.5	19.6	60.1	32.9	17.2	50.1	Neutral	9.8
0.498	10	39.3	16.7	56.0	28.7	17.3	46.0	Neutral	9.8
0.521	10	39.3	16.7	56.0	27.8	18.2	46.0	Neutral	9.8
0.690	11	33.2	22.8	56.0	17.6	28.5	46.0	Neutral	9.8
0.699	11	32.7	23.3	56.0	19.7	26.3	46.0	Neutral	9.8
0.897	11	32.0	24.0	56.0	17.6	28.4	46.0	Neutral	9.8
0.951	11	32.4	23.6	56.0	14.6	31.4	46.0	Neutral	9.8
1.497	12	28.9	27.1	56.0	11.9	34.1	46.0	Neutral	9.8
1.583	12	28.5	27.5	56.0	15.3	30.7	46.0	Neutral	9.8
2.312	12	29.3	26.7	56.0	14.5	31.6	46.0	Neutral	9.8
2.325	12	30.8	25.3	56.0	14.1	31.9	46.0	Neutral	9.8
3.354	13	34.7	21.3	56.0	20.3	25.8	46.0	Neutral	9.8
3.359	13	32.8	23.2	56.0	20.5	25.5	46.0	Neutral	9.8
3.948	13	34.5	21.5	56.0	22.4	23.6	46.0	Neutral	9.8
4.232	13	32.8	23.2	56.0	19.8	26.2	46.0	Neutral	9.8
6.114	14	34.4	25.7	60.0	23.1	26.9	50.0	Neutral	9.8
6.119	14	36.2	23.8	60.0	23.6	26.4	50.0	Neutral	9.8
7.500	14	37.3	22.7	60.0	26.7	23.3	50.0	Neutral	9.8
7.595	14	37.0	23.0	60.0	26.2	23.8	50.0	Neutral	9.8
13.007	15	36.3	23.7	60.0	27.6	22.4	50.0	Neutral	9.9
13.524	15	34.9	25.2	60.0	29.0	21.0	50.0	Neutral	9.9
13.812	15	36.3	23.7	60.0	24.9	25.1	50.0	Neutral	9.9
13.826	15	34.4	25.7	60.0	29.1	20.9	50.0	Neutral	9.9
21.077	16	24.1	35.9	60.0	18.7	31.3	50.0	Neutral	10.1
21.090	16	26.0	34.0	60.0	20.4	29.6	50.0	Neutral	10.1
28.160	16	25.8	34.2	60.0	20.8	29.2	50.0	Neutral	9.8
28.407	16	26.0	34.0	60.0	20.5	29.6	50.0	Neutral	9.8

## 5.2 EBW and OBW

For test instruments and accessories used see section 6 Part **MB**.

### 5.2.1 Description of the test location

Test location: NONE

Remarks: Not tested.

---

---


### 5.3 Maximum conducted output power

For test instruments and accessories used see section 6 Part **CPC 3**.

#### 5.3.1 Description of the test location

Test location:                   Shielded Room S6

#### 5.3.2 Photo documentation of the test set-up

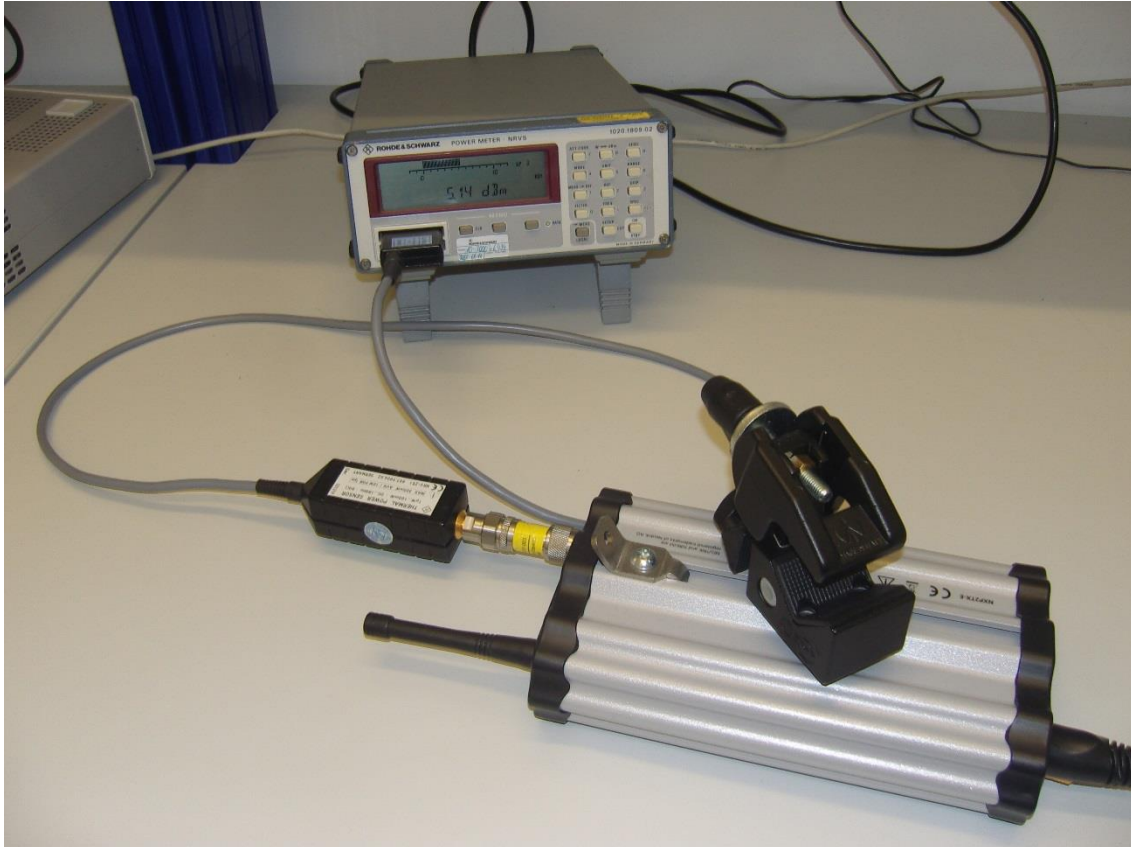

#### 5.3.3 Applicable standard

According to FCC Part 15E, Section 15.407(a):

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

#### 5.3.4 Description of Measurement

The maximum conducted output power is measured using a PM following the procedure set out in KDB 789033 D02, item E 3a) Method PM. The EUT is set in TX continuous mode while measuring. The resulting values are listed in the following tables.



**5.3.5 Test result**

802.11a, 6 Mbps, 1TX				
Port 1		A [max] (dBm)	Limit (dBm)	Min Margin (dB)
Lowest frequency: CH36				
$T_{nom}$	$V_{nom}$	9.8	30.0	-20.2
Middle frequency: CH44				
$T_{nom}$	$V_{nom}$	24.2	30.0	-5.8
Highest CH48				
$T_{nom}$	$V_{nom}$	24.2	30.0	-5.8

Peak power limit according to FCC Part 15E, Section 15.407(a):

Frequency (MHz)	Maximum conducted power limit	
	(dBm)	(Watt)
5150 - 5250	30	1.0

The requirements are **FULFILLED**.

**Remarks:** The EUT complies with the indoor requirements.

For detailed test results please see the following test protocols.

**5.4 Maximum power spectral density**

For test instruments and accessories used see section 6 Part **CPC 3**.

**5.4.1 Description of the test location**

Test location: NONE

**Remarks:** Not tested.



## 5.5 Defacto limit

For test instruments and accessories used see section 6 Part CPR 3.

### 5.5.1 Description of the test location

Test location: Anechoic chamber 1  
Test distance: 3 m

### 5.5.2 Photo documentation of the test set-up

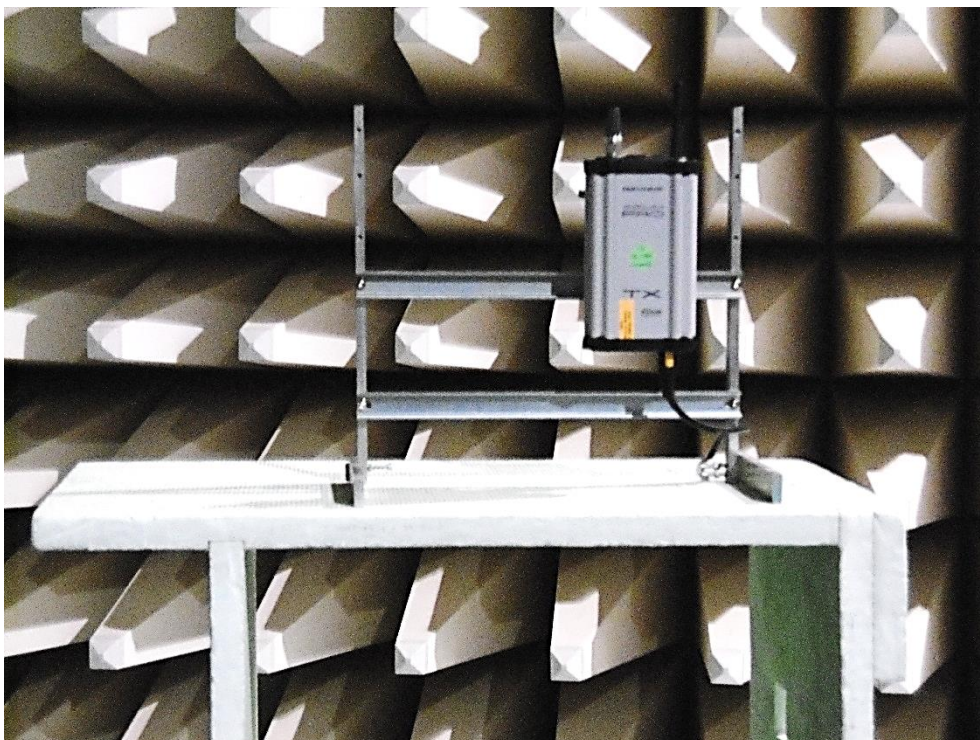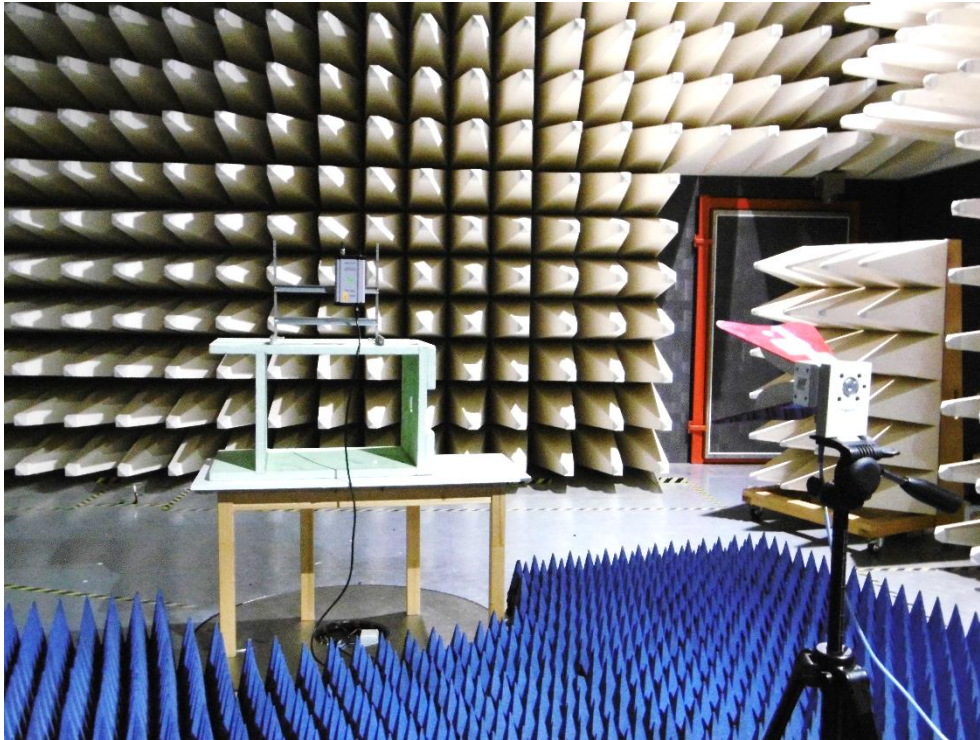

**5.5.3 Applicable standard**

According to FCC Part 15, Section 15.407(a)(1):

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

**5.5.4 Test result**

Antenna	Gx (dBi)	Cond. limit (dBm)	G (dBi)	Amax (dBm)	Limit P <sub>out</sub> (dBm)	Reduction (dB)	P set 5 GHz
SOA-2456/360/1/0/V	2.0	30.0	6.0	24.4	34.0	0.0	Pmax

Defacto limit according to FCC Part 15, Section 15.407(a)(1):

If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Frequency (MHz)	Defacto EIRP limit	
	(dBm)	(Watt)
5150 - 5250	36	4.0

The requirements are **FULFILLED**.

**Remarks:** No power reduction results using the listed antennas in combination with the mentioned power settings.



## 5.6 Unwanted emissions

For test instruments and accessories used see section 6 Part **SER 2** and **SER 3**.

### 5.6.1 Description of the test location

Test location: OATS 1  
Test location: Anechoic chamber 1  
Test distance: 3 m



### 5.6.2 Photo documentation of the test set-up

30 MHz – 1 GHz




FCC ID: 2ABA7XPR

1 GHz – 18 GHz

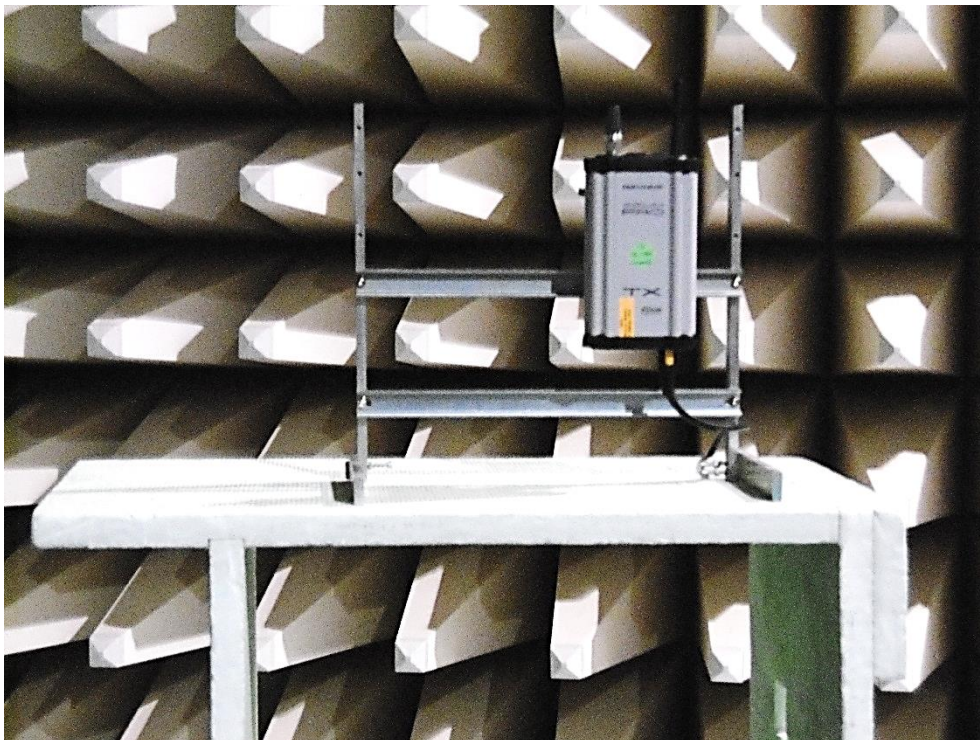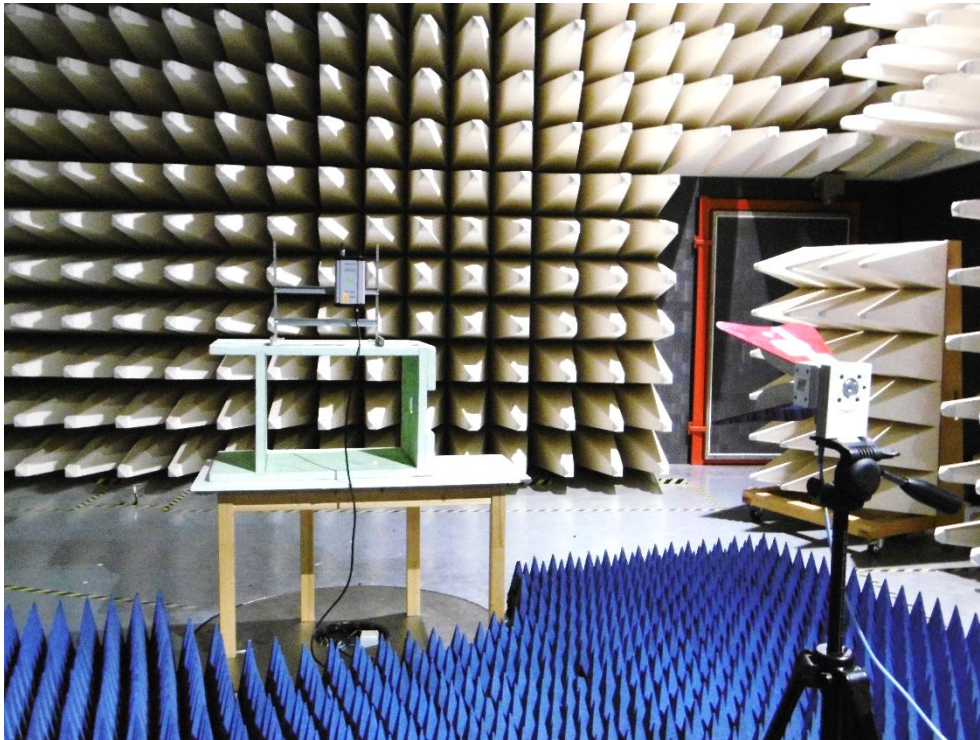



18 GHz – 40 GHz

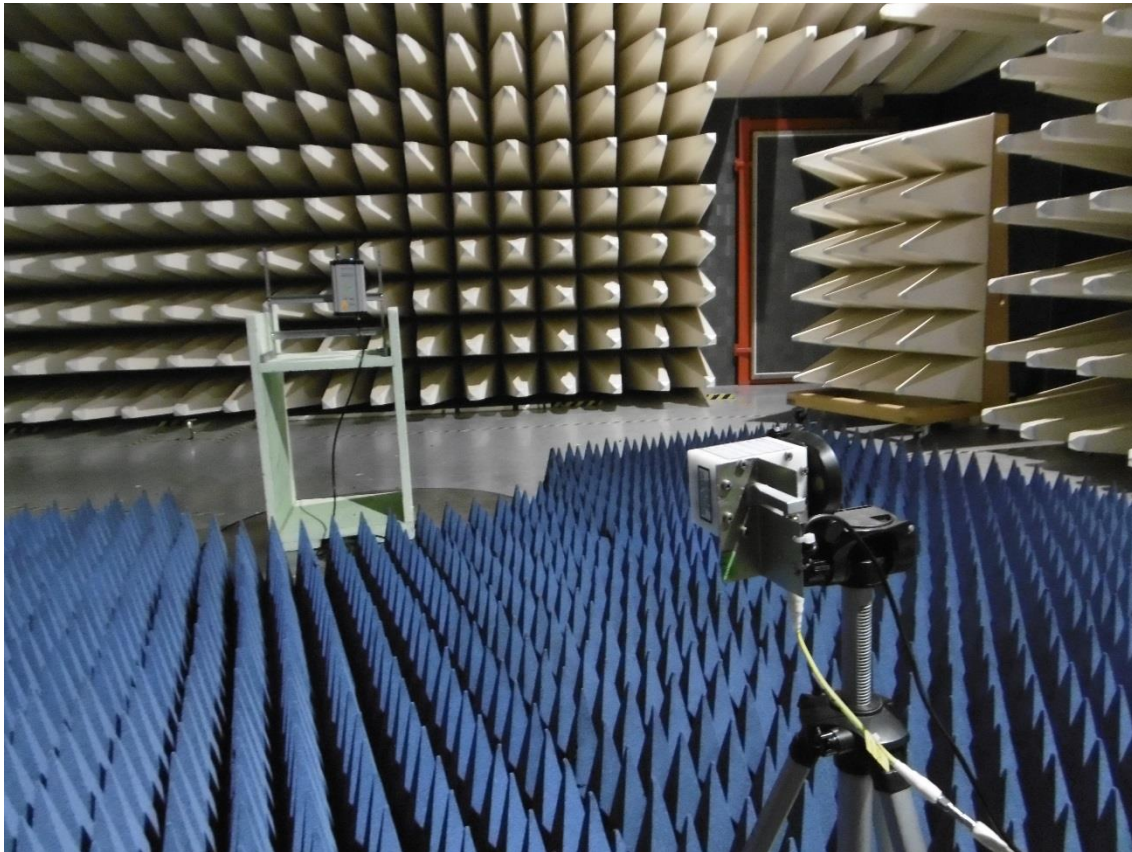

### 5.6.1 Applicable standard

According to FCC Part 15E, Section 15.407(b):

For transmitters operating in the defined bands shall not exceed the appropriate emission limit outside of the operating bands.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

Section 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and 2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the average and peak limits of Section 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit.

### 5.6.2 Description of Measurement

Undesirable emissions are measured using a spectrum analyser and following the procedures according to the OET 789033, item G Up from 4-8 GHz a 3 HP filter is used. If the emission level of the EUT in peak mode complies with the average limit then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.

Spectrum analyser settings for peak values 1 GHz – 40 GHz:

RBW: 1 MHz, VBW: 3 MHz, Detector: max peak, Sweep: 100 ms, Trace mode: max hold;

Spectrum analyser settings for average values 1 GHz – 40 GHz:

RBW: 1 MHz VBW: 3 MHz Detector: RMS, Sweep: 100 ms, Trace mode: max hold;

**5.6.3 Test result**



f &lt; 1 GHz

Frequency (MHz)	Reading Vert. (dBµV)	Reading Hor. (dBµV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBµV/m)	Level Hor. (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
39.11	9.7	-1.6	14.5	13.3	24.2	11.7	40.0	-15.8
49.20	9.4	-0.6	15.2	14.1	24.6	13.5	40.0	-15.4
114.88	23.6	20.6	11.5	12.2	35.1	32.8	43.5	-8.4
117.79	21.1	18.8	12.0	12.6	33.1	31.4	43.5	-10.4
250.00	27.3	23.6	13.8	14.0	41.1	37.6	46.0	-4.9
350.00	10.0	10.5	18.4	18.0	28.4	28.5	46.0	-17.5


f &gt; 1 GHz

**801.11a:**

Channel 36 (5180 MHz):

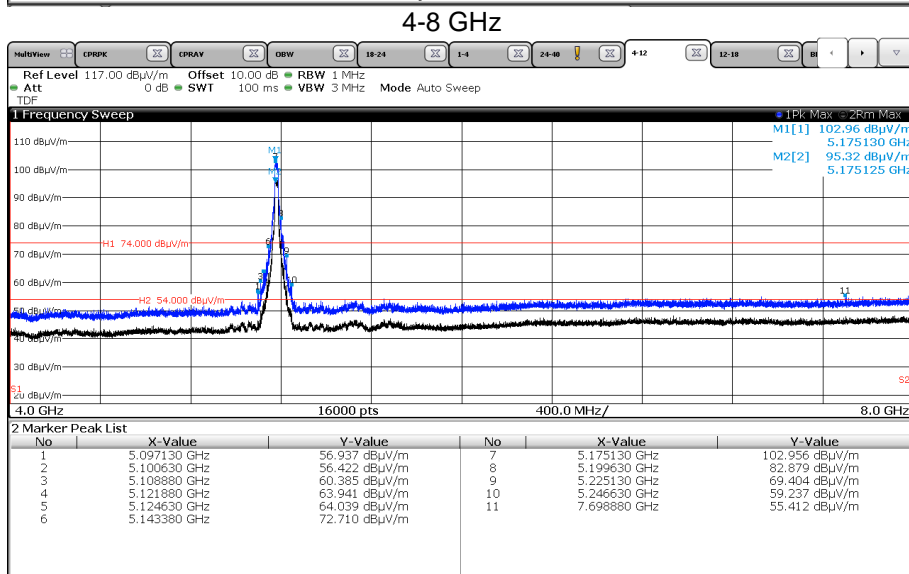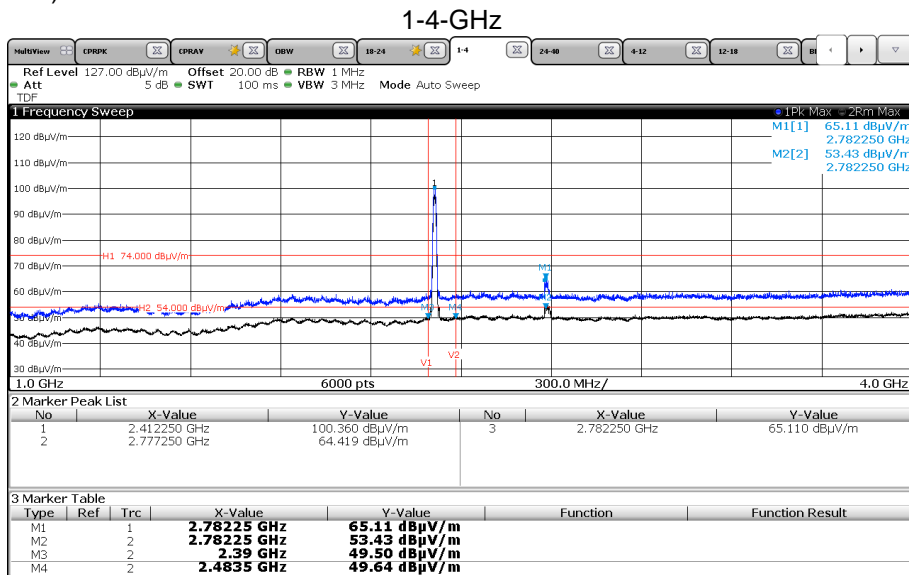


FCC ID: 2ABA7XPR

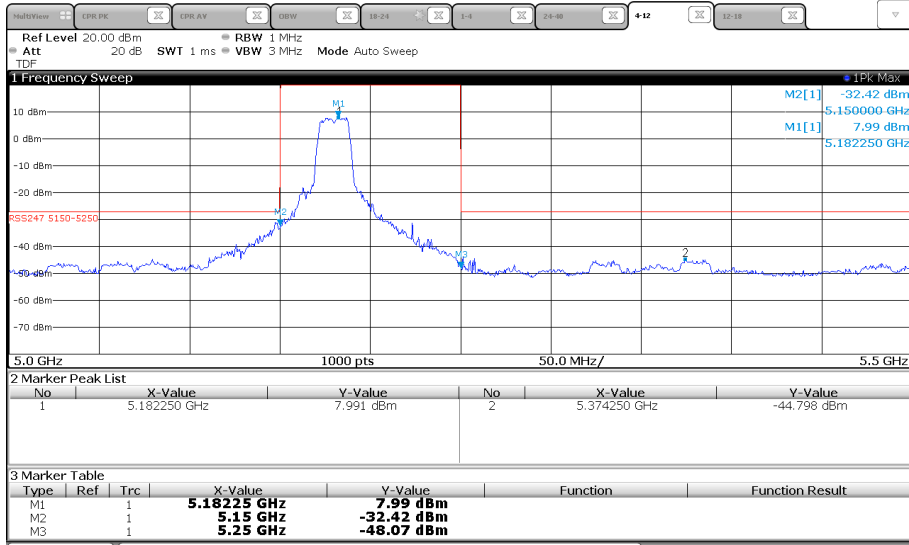




# FCC ID: 2ABA7XPR


## 8-12 GHz

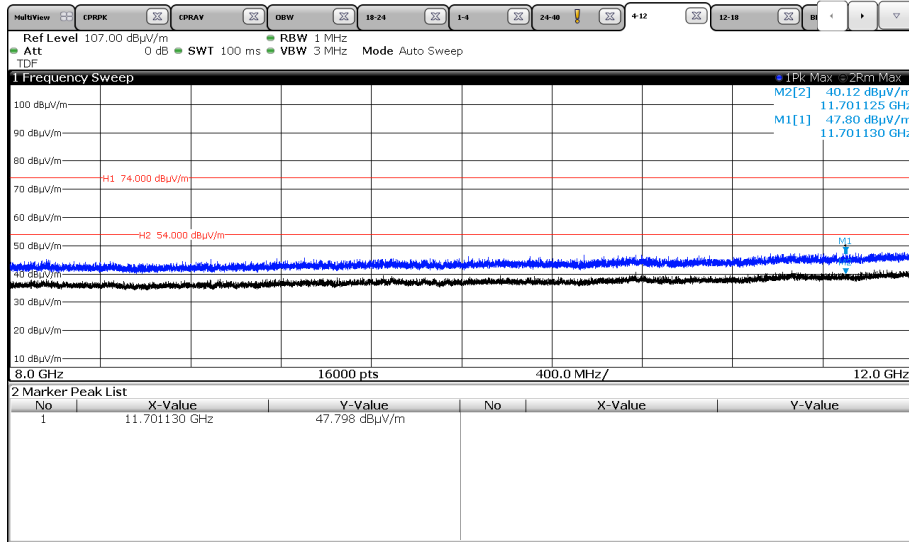

## 12-18 GHz

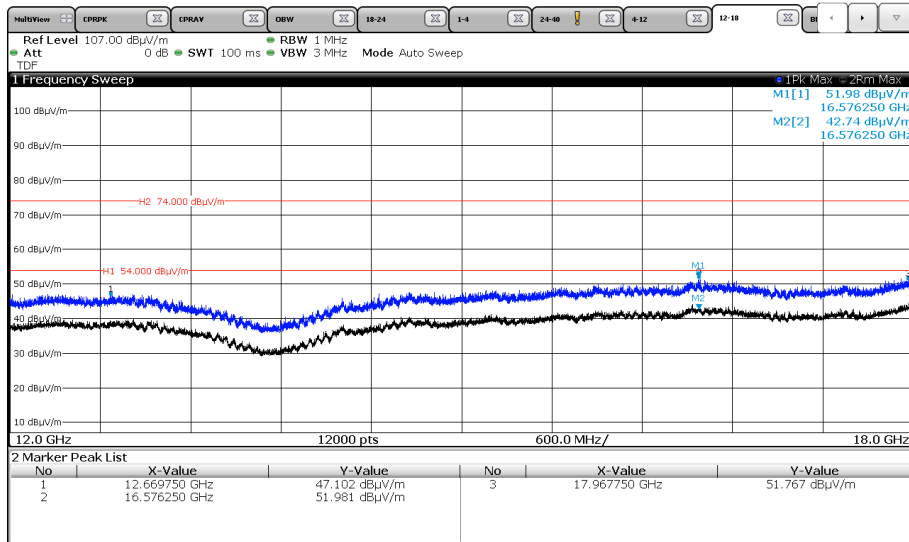


## 18-40 GHz

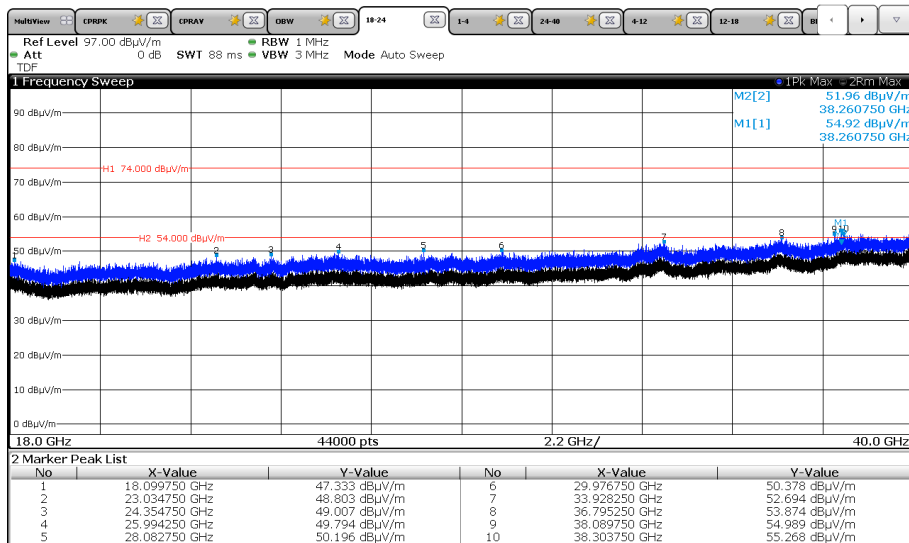


Channel 44 (5220 MHz)


1-4 GHz

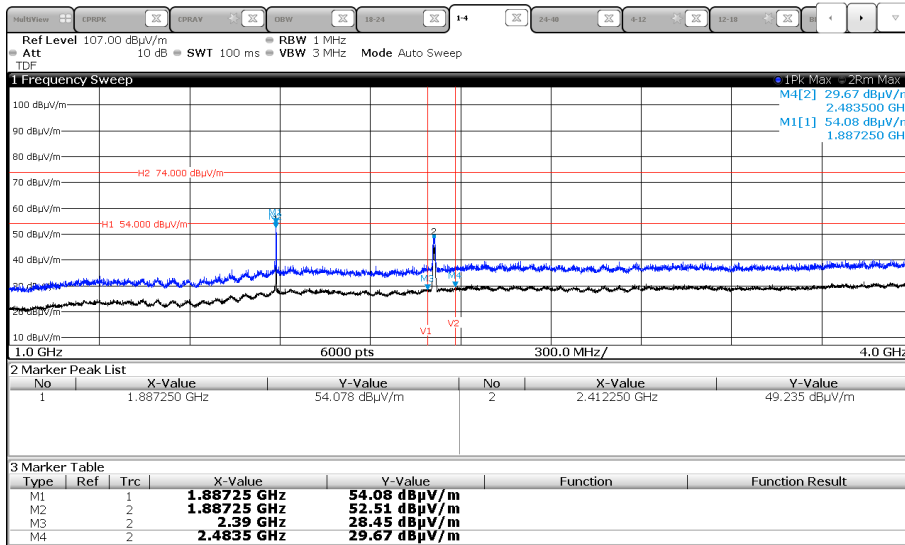

4-8 GHz

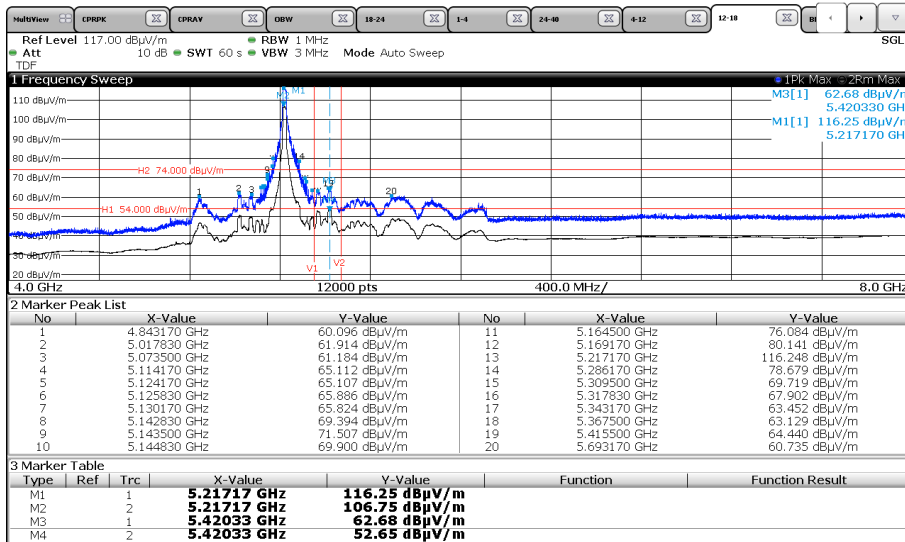


8-12 GHz

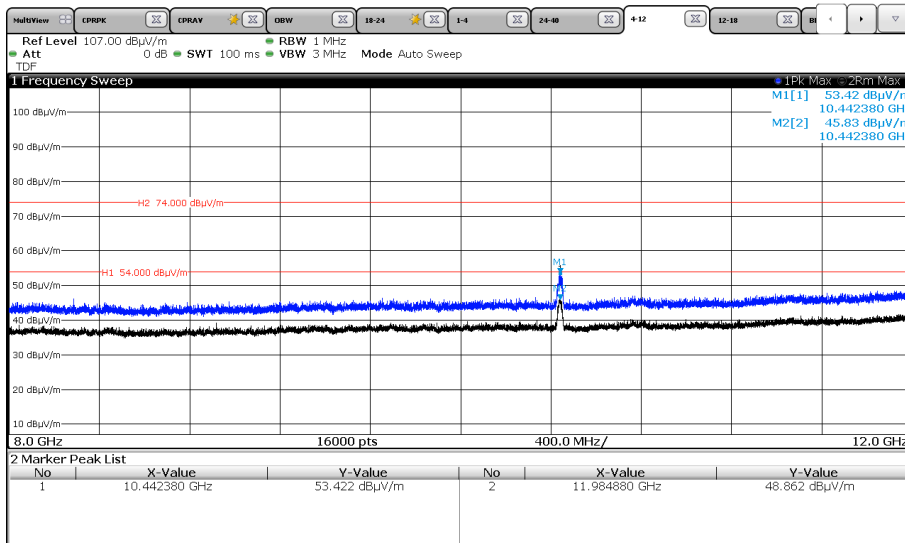


FCC ID: 2ABA7XPR

12-18 GHz

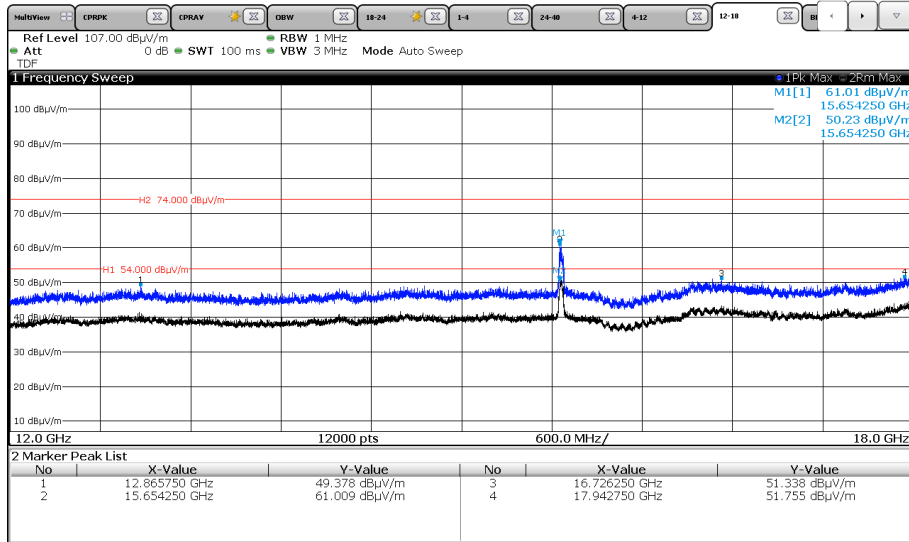


18-40 GHz

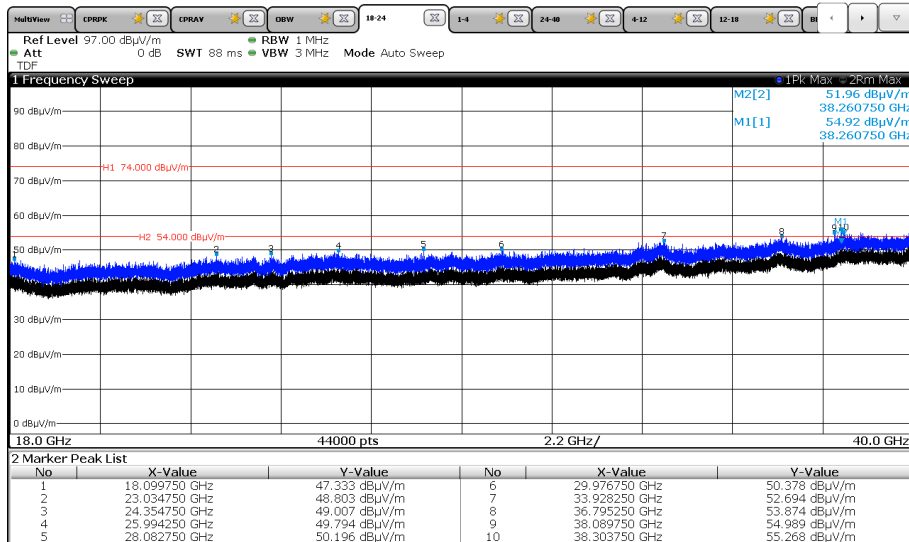


Channel 48 (5240 MHz)

1-4-GHz

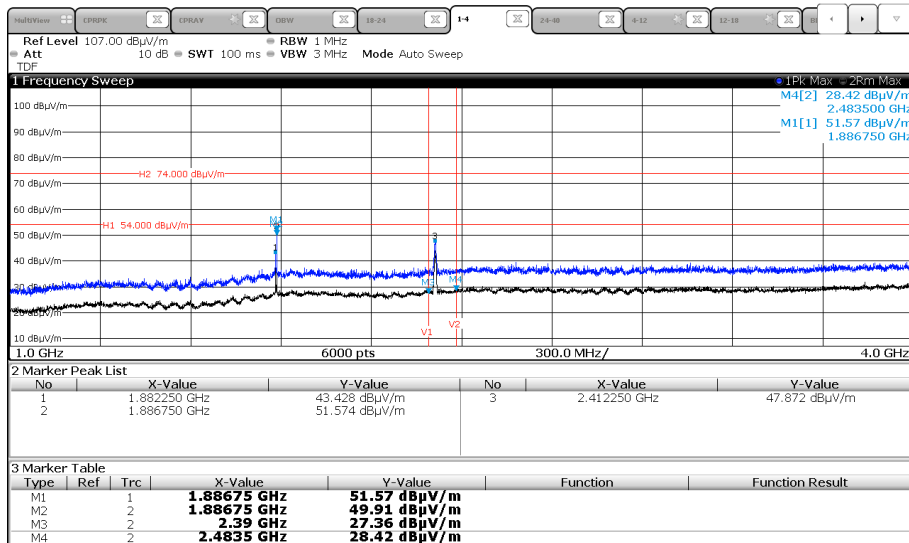


# FCC ID: 2ABA7XPR


## 4-8 GHz

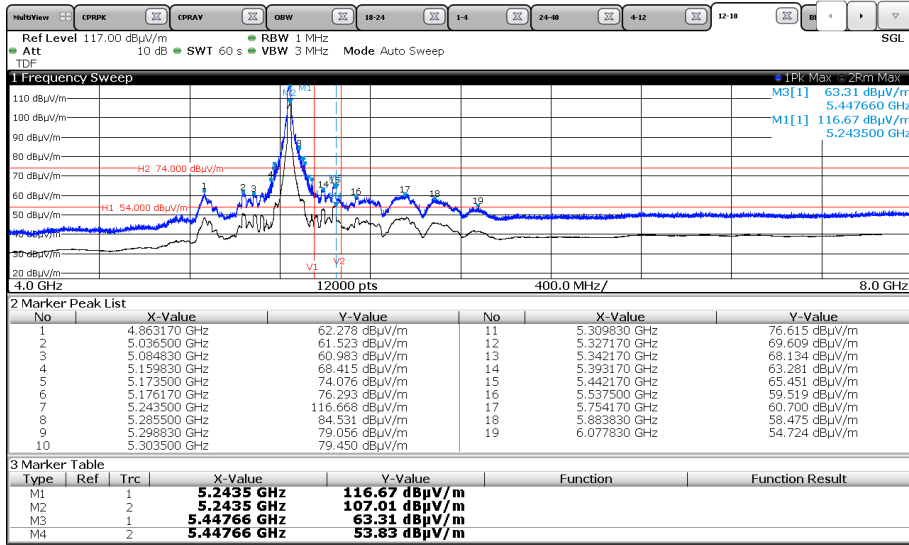

## 8-12 GHz

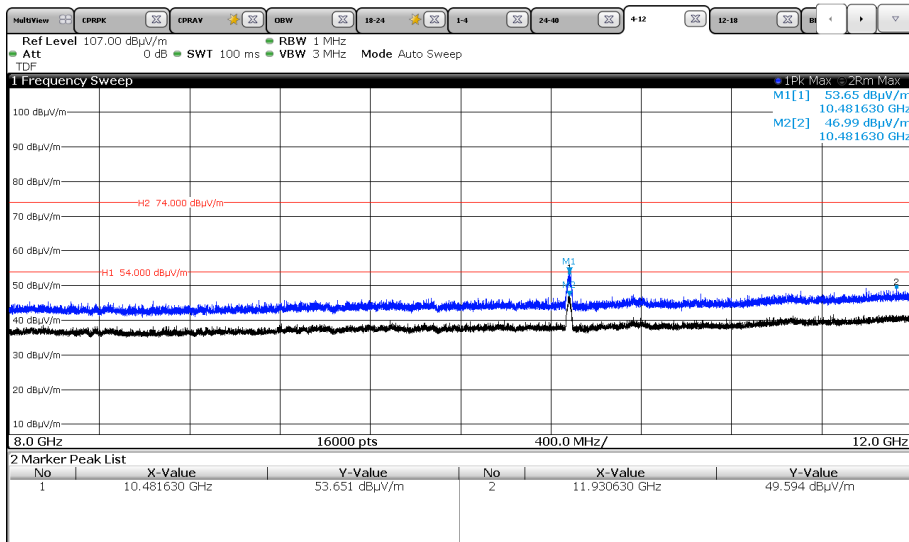


## 12-18 GHz

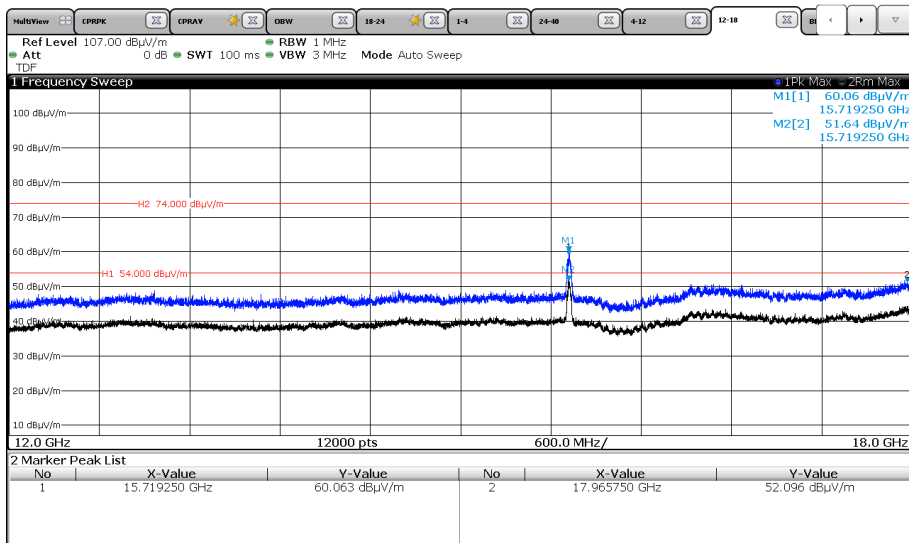

## FCC ID: 2ABA7XPR

18-40 GHz

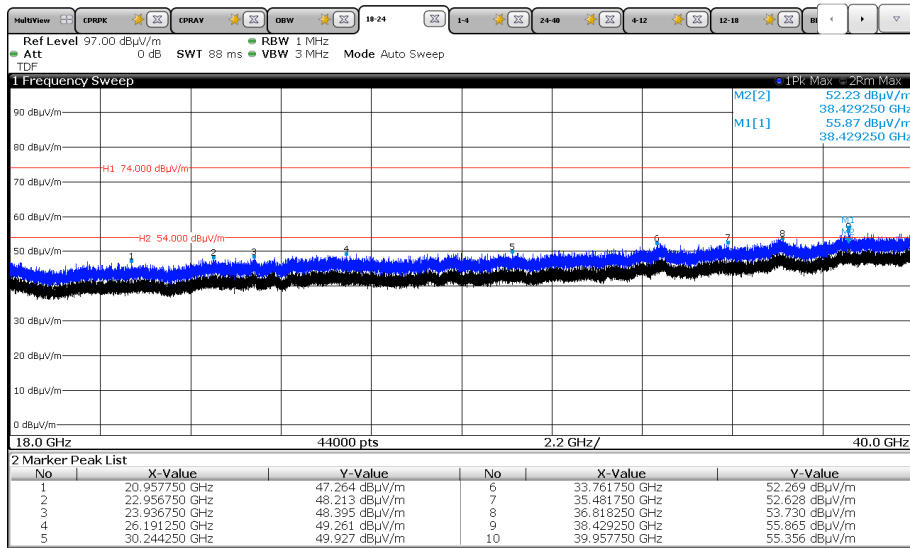

Limit according to FCC Part 15E, Section 15.407(b) for undesirable emissions:

Operating Frequency range (MHz)	Undesirable emission limit, EIRP (dBm/MHz)
5150 - 5250	-27.0

**Remarks:** The EUT holds the general limits of Part 15.209 and therefore the emission limits part 15.407(b), too.

## 5.7 Frequency stability

For test instruments and accessories used see section 6 Part **MB**.

### 5.7.1 Description of the test location

Test location: NONE

Remarks: Not tested.

---

---

## 5.8 Antenna application

### 5.8.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that the user can replace broken antennas, but the use of a standard antenna jack is prohibited.

The equipment connector for the 5 GHz Audio application is a N(f) connector for professional use.  
The WLAN antenna connector is a SMA-R connector.

Remarks: \_\_\_\_\_

---

---

## **6 USED TEST EQUIPMENT AND ACCESSORIES**

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

<b>Test ID</b>	<b>Model Type</b>	<b>Equipment No.</b>	<b>Next Calib.</b>	<b>Last Calib.</b>	<b>Next Verif.</b>	<b>Last Verif.</b>
A 4	ESCI	02-02/03-15-001	31/05/2018	31/05/2017		
	ESH 2 - Z 5	02-02/20-05-004	26/10/2017	26/10/2015	24/05/2017	24/11/2016
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155	18/11/2019	18/11/2016	21/10/2017	21/04/2017
CPC 3	NRVS	02-02/07-05-005				
	NRV-Z51	02-02/07-06-006	03/07/2018	03/07/2017		
	18N-20	02-02/50-17-003				
SER 2	ESVS 30	02-02/03-05-003	08/07/2017	08/07/2016		
	VULB 9168	02-02/24-05-005	12/04/2018	12/04/2017	12/10/2017	12/04/2017
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 3	FSP 40	02-02/11-11-001	13/10/2017	13/10/2016		
	FSW43	02-02/11-15-001	07/04/2018	07/04/2017		
	JS4-18004000-30-5A	02-02/17-05-017				
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	10/05/2018	10/05/2017		
	BBHA 9170	02-02/24-05-014	02/06/2018	02/06/2015	09/12/2017	09/12/2016
	KMS102-0.2 m	02-02/50-11-020				
	SF104/11N/11N/300MM	02-02/50-13-008				
	Ultimate 1000W	02-02/50-16-004				
	18N-20	02-02/50-17-003				
	NMS111-GL200SC01-NMS11	02-02/50-17-012				
	Bandpass Filter	02-02/50-17-019				