



# element


**CINCH Systems**

**RF-GBA-433-CLR**

**FCC 15.231:2020**

**433.95 MHz Periodic Transmitter**

**Report: CINC0055.1, Issue Date: October 28, 2020**

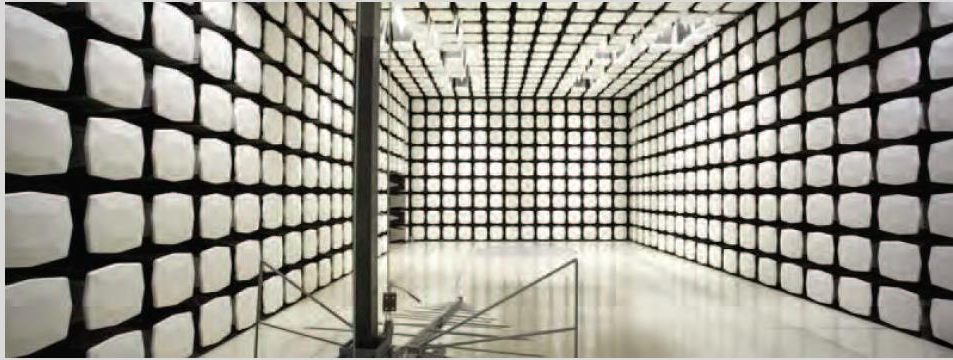

NVLAP LAB CODE: 200881-0



*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. This Report shall not be reproduced, except in full without written approval of the laboratory.*

# CERTIFICATE OF TEST

**Last Date of Test: September 9, 2020**  
**CINCH Systems**  
**EUT: RF-GBA-433-CLR**

## Radio Equipment Testing

### Standards

Specification	Method
FCC 15.231:2020	ANSI C63.10:2013

### Results

Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions (Transmitter)	No	N/A	Not required for a battery powered EUT.
6.5, 6.6	Field Strength of Fundamental	Yes	Pass	
6.5, 6.6	Spurious Radiated Emissions	Yes	Pass	
6.9.2	Occupied Bandwidth	Yes	Pass	
7.4e	Periodic Operation	No	N/A	Not required to test. If applicable, this is addressed by an attestation in the equipment theory of operation.
7.5	Duty Cycle	Yes	N/A	

### Deviations From Test Standards

None

### Approved By:



Eric Brandon, Department Manager

*Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.*

# REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		

# ACCREDITATIONS AND AUTHORIZATIONS



---

## United States

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

**ISED** - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

---

## European Union

**European Commission** – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

---

## Australia/New Zealand

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

**MSIT / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

**BSMI** – Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

**IDA** – Recognized by IDA as a CAB for the acceptance of test data.

---

## Israel

**MOC** – Recognized by MOC as a CAB for the acceptance of test data.

---

## Hong Kong

**OFCA** – Recognized by OFCA as a CAB for the acceptance of test data.

---

## Vietnam

**MIC** – Recognized by MIC as a CAB for the acceptance of test data.

---

## SCOPE

For details on the Scopes of our Accreditations, please visit:

<https://www.nwemc.com/emc-testing-accreditations>

# FACILITIES



<b>California</b> Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>Minnesota</b> Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	<b>Oregon</b> Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	<b>Texas</b> Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	<b>Washington</b> Labs NC01-05 19201 120 <sup>th</sup> Ave NE Bothell, WA 98011 (425)984-6600
<b>NVLAP</b>				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
<b>Innovation, Science and Economic Development Canada</b>				
2834B-1, 2834B-3	2834E-1, 2834E-3	2834D-1	2834G-1	2834F-1
<b>BSMI</b>				
SL2-IN-E-1154R	SL2-IN-E-1152R	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
<b>VCCI</b>				
A-0029	A-0109	A-0108	A-0201	A-0110
<b>Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA</b>				
US0158	US0175	US0017	US0191	US0157



# MEASUREMENT UNCERTAINTY



## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<b>Test</b>	<b>+ MU</b>	<b>- MU</b>
Frequency Accuracy	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	1.2 dB	-1.2 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.6 dB	-2.6 dB

# Test Setup Block Diagrams

## Antenna Port Conducted Measurements

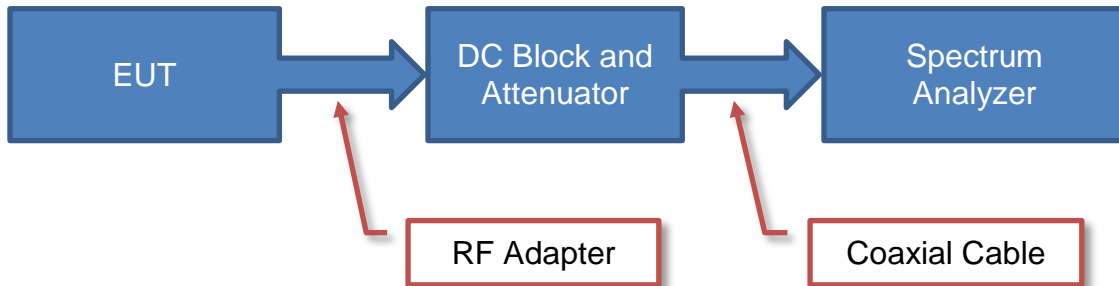

## Near Field Test Fixture Measurements



## Spurious Radiated Emissions



# PRODUCT DESCRIPTION

## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	CINCH Systems
<b>Address:</b>	12075 43rd Street NE Suite 300
<b>City, State, Zip:</b>	St. Michael, MN 55376
<b>Test Requested By:</b>	Jibril Aga
<b>EUT:</b>	RF-GBA-433-CLR
<b>First Date of Test:</b>	September 1, 2020
<b>Last Date of Test:</b>	September 1, 2020
<b>Receipt Date of Samples:</b>	September 1, 2020
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage
<b>Purchase Authorization:</b>	Verified

## Information Provided by the Party Requesting the Test

### Functional Description of the EUT:

Glass Break Sensor with a periodic radio, interfacing wirelessly to a security panel to provide property protection. The transmitter operates at a frequency of 433.950 MHz and utilizes AM modulation (OOK).

### Testing Objective:

To demonstrate compliance to FCC 15.231 specifications.



# CONFIGURATIONS



## Configuration CINC0055- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Glass Break Sensor	CINCH Systems	RF-GBA-433-CLR	E73590

## Configuration CINC0055- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Glass Break Sensor	CINCH Systems	RF-GBA-433-CLR	C8CA94

## Configuration CINC0055- 3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Glass Break Sensor	CINCH Systems	RF-GBA-433-CLR	4BD99B

# MODIFICATIONS



## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2020-09-01	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2020-09-01	Field Strength of Fundamental	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2020-09-01	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2020-09-01	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

# POWER SETTINGS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information.

No adjustable power settings were provided. The EUT was tested using power settings pre-defined by the manufacturer.

# FIELD STRENGTH OF FUNDAMENTAL



PSA-ESCI 2020.04.03.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting 433.95 MHz unmodulated

## POWER SETTINGS INVESTIGATED

Battery

## CONFIGURATIONS INVESTIGATED

CINC0055 - 3

## FREQUENCY RANGE INVESTIGATED

Start Frequency | 433 MHz | Stop Frequency | 435 MHz

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	Element	Biconilog Cable	MNX	2020-02-18	12 mo
Antenna - Biconilog	Ametek	CBL 6141B	AYS	2019-03-19	24 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2020-04-14	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The antennas to be used with the EUT were tested. The EUT was configured for continuous un-modulated CW operation at its single transmit frequency. The field strength of the transmit frequency was maximized by rotating the EUT, adjusting the measurement antenna height and polarization, and manipulating the EUT in 3 orthogonal planes (per ANSI C63.10:2013).

Peak measurements were made with a resolution bandwidth of 100 kHz and a video bandwidth of 300 kHz for measurements at or below 1 GHz. A duty cycle correction factor was added to the peak readings to mathematically derive the average levels. The supporting screen captures and duty cycle calculation is contained in the "Duty Cycle" module in this report.

# FIELD STRENGTH OF FUNDAMENTAL




EmiR5 2020.04.20.0 PSA-ESCI 2020.04.03.0

<b>Work Order:</b>	CINC0055	<b>Date:</b>	2020-09-01	<i>Dustin Sparks</i>
<b>Project:</b>	None	<b>Temperature:</b>	21.9 °C	
<b>Job Site:</b>	MN09	<b>Humidity:</b>	48.5% RH	
<b>Serial Number:</b>	4BD99B	<b>Barometric Pres.:</b>	1013 mbar	
<b>EUT:</b>	RF-GBA-433-CLR			
<b>Configuration:</b>	3			
<b>Customer:</b>	CINCH Systems			
<b>Attendees:</b>	Jibril Aga			
<b>EUT Power:</b>	Battery			
<b>Operating Mode:</b>	Transmitting 433.95 MHz unmodulated			
<b>Deviations:</b>	None			
<b>Comments:</b>	Duty Cycle Correction Factor = $20 \log \left[ \frac{((0.07647)(60) + (0.1963)(17))}{100} \right] = -22.0 \text{ dB}$			

<b>Test Specifications</b>	<b>Test Method</b>
FCC 15.231:2020	ANSI C63.10:2013

<b>Run #</b>	15	<b>Test Distance (m)</b>	3	<b>Antenna Height(s)</b>	1 to 4(m)	<b>Results</b>	Pass
--------------	----	--------------------------	---	--------------------------	-----------	----------------	------

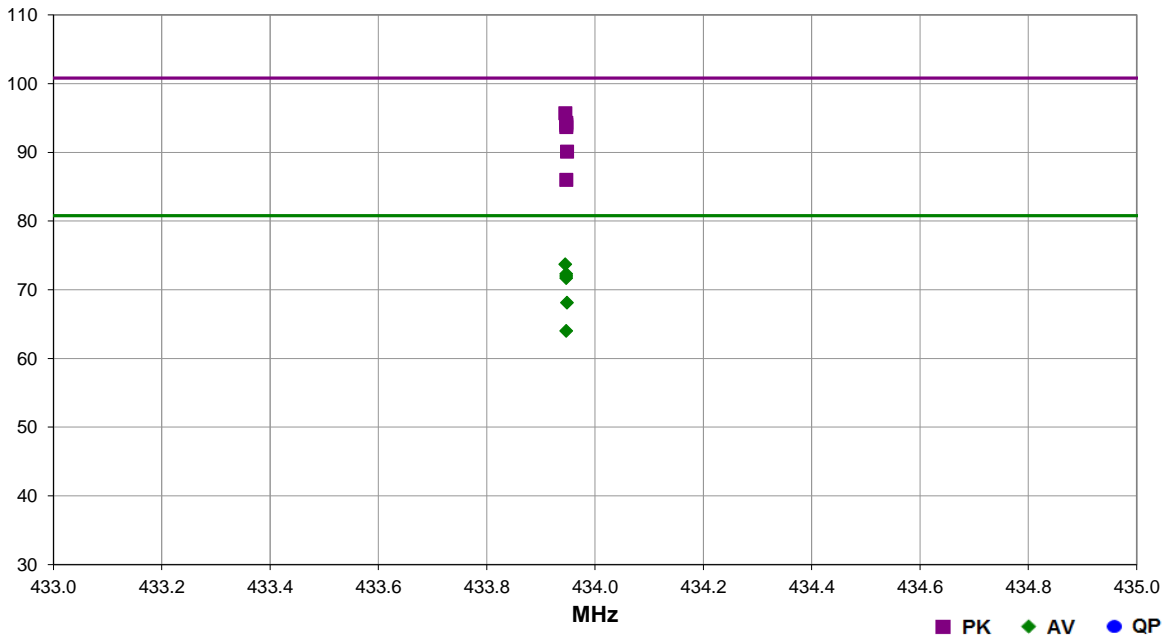

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
433.945	73.0	22.7	1.1	54.0		0.0	Vert	PK	0.0	95.7	100.8	-5.1	EUT on side
433.947	71.6	22.7	2.1	141.0		0.0	Horz	PK	0.0	94.3	100.8	-6.5	EUT horizontal
433.947	71.3	22.7	1.0	360.0		0.0	Horz	PK	0.0	94.0	100.8	-6.8	EUT vertical
433.945	73.0	22.7	1.1	54.0	-22.0	0.0	Vert	AV	0.0	73.7	80.8	-7.1	EUT on side
433.947	71.0	22.7	1.1	254.0		0.0	Vert	PK	0.0	93.7	100.8	-7.1	EUT vertical
433.947	71.6	22.7	2.1	141.0	-22.0	0.0	Horz	AV	0.0	72.3	80.8	-8.5	EUT horizontal
433.947	71.3	22.7	1.0	360.0		0.0	Horz	AV	0.0	72.0	80.8	-8.8	EUT vertical
433.947	71.0	22.7	1.1	254.0	-22.0	0.0	Vert	AV	0.0	71.7	80.8	-9.1	EUT vertical
433.948	67.4	22.7	1.0	221.0		0.0	Vert	PK	0.0	90.1	100.8	-10.7	EUT horizontal
433.948	67.4	22.7	1.0	221.0	-22.0	0.0	Vert	AV	0.0	68.1	80.8	-12.7	EUT horizontal
433.947	63.3	22.7	1.0	81.0		0.0	Horz	PK	0.0	86.0	100.8	-14.8	EUT on side
433.947	63.3	22.7	1.0	81.0	-22.0	0.0	Horz	AV	0.0	64.0	80.8	-16.8	EUT on side

# SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2020.04.03.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting 433.95 MHz unmodulated

## POWER SETTINGS INVESTIGATED

Battery

## CONFIGURATIONS INVESTIGATED

CINC0055 - 3

## FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	6000 MHz
-----------------	--------	----------------	----------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - High Pass	Micro-Tronics	HPM50108	HFW	2019-09-18	12 mo
Attenuator	Coaxicom	3910-20	AXY	2019-09-17	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVX	2020-02-18	12 mo
Cable	Element	Double Ridge Guide Horn Cables	MNV	2020-02-18	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	2019-08-28	24 mo
Filter - Low Pass	Micro-Tronics	LPM50003	HGL	2019-09-17	12 mo
Attenuator	Coaxicom	3910-10	AWZ	2019-09-17	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079 and SA18E-10	AOO	2020-02-18	12 mo
Cable	Element	Biconilog Cable	MNX	2020-02-18	12 mo
Antenna - Biconilog	Ametek	CBL 6141B	AYS	2019-03-19	24 mo
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2020-04-14	12 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequency in each operational band and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = Calculated Average based on Peak and Duty Cycle Correction Factor

Peak measurements were made with a resolution bandwidth of 100 kHz and a video bandwidth of 300 kHz for measurements at or below 1 GHz. Above 1 GHz, a resolution bandwidth of 1 MHz and a video bandwidth of 3 MHz was used.

A duty cycle correction factor was added to the peak readings to mathematically derive the average levels. The supporting screen captures and duty cycle calculation is contained in the "Duty Cycle" module in this report.

# SPURIOUS RADIATED EMISSIONS




EmiR5 2020.04.20.0 PSA-ESCI 2020.04.03.0

<b>Work Order:</b>	CINC0055	<b>Date:</b>	2020-09-01	
<b>Project:</b>	None	<b>Temperature:</b>	22.2 °C	
<b>Job Site:</b>	MN09	<b>Humidity:</b>	50.6% RH	
<b>Serial Number:</b>	4BD99B	<b>Barometric Pres.:</b>	1015 mbar	
<b>EUT:</b>	RF-GBA-433-CLR			
<b>Configuration:</b>	3			
<b>Customer:</b>	CINCH Systems			
<b>Attendees:</b>	Jibril Aga			
<b>EUT Power:</b>	Battery			
<b>Operating Mode:</b>	Transmitting 433.95 MHz unmodulated			
<b>Deviations:</b>	None			
<b>Comments:</b>	Duty Cycle Correction Factor = $20 \log \left[ \frac{(0.07647)(60) + (0.1963)(17)}{100} \right] = -22.0 \text{ dB}$			

<b>Test Specifications</b>	<b>Test Method</b>
FCC 15.231:2020	ANSI C63.10:2013

<b>Run #</b>	3	<b>Test Distance (m)</b>	3	<b>Antenna Height(s)</b>	1 to 4(m)	<b>Results</b>	Pass
--------------	---	--------------------------	---	--------------------------	-----------	----------------	------

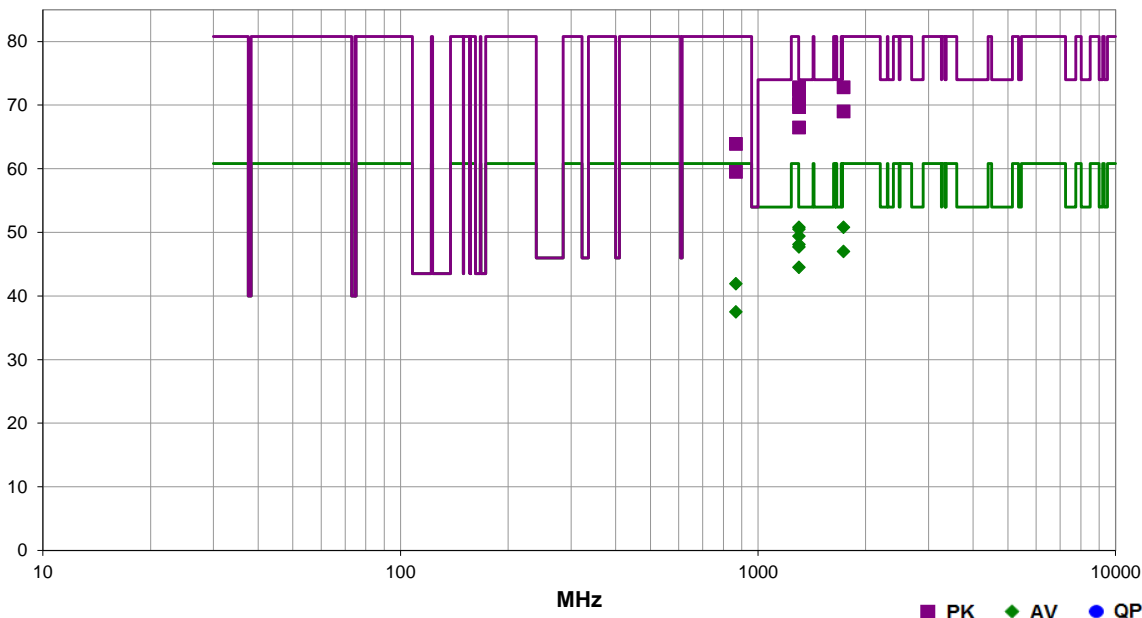

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
1301.858	79.6	-6.8	1.0	121.0		0.0	Horz	PK	0.0	72.8	74.0	-1.2	EUT on side
1301.867	79.3	-6.8	1.2	93.0		0.0	Vert	PK	0.0	72.5	74.0	-1.5	EUT vertical
1301.858	78.2	-6.8	3.8	147.0		0.0	Horz	PK	0.0	71.4	74.0	-2.6	EUT horizontal
1301.858	79.6	-6.8	1.0	121.0	-22.0	0.0	Horz	AV	0.0	50.8	54.0	-3.2	EUT on side
1301.867	79.3	-6.8	1.2	93.0	-22.0	0.0	Vert	AV	0.0	50.5	54.0	-3.5	EUT vertical
1301.867	76.9	-6.8	1.0	126.0		0.0	Horz	PK	0.0	70.1	74.0	-3.9	EUT vertical
1301.875	76.5	-6.8	1.2	91.0		0.0	Vert	PK	0.0	69.7	74.0	-4.3	EUT on side
1301.858	78.2	-6.8	3.8	147.0	-22.0	0.0	Horz	AV	0.0	49.4	54.0	-4.6	EUT horizontal
1301.867	76.9	-6.8	1.0	126.0	-22.0	0.0	Horz	AV	0.0	48.1	54.0	-5.9	EUT vertical
1301.875	76.5	-6.8	1.2	91.0	-22.0	0.0	Vert	AV	0.0	47.7	54.0	-6.3	EUT on side
1301.867	73.3	-6.8	1.2	320.0		0.0	Vert	PK	0.0	66.5	74.0	-7.5	EUT horizontal
1735.767	78.4	-5.6	4.0	351.0		0.0	Vert	PK	0.0	72.8	80.8	-8.0	EUT vertical
1301.867	73.3	-6.8	1.2	320.0	-22.0	0.0	Vert	AV	0.0	44.5	54.0	-9.5	EUT horizontal
1735.767	78.4	-5.6	4.0	351.0	-22.0	0.0	Vert	AV	0.0	50.8	60.8	-10.0	EUT vertical
1735.817	74.6	-5.6	4.0	341.0		0.0	Horz	PK	0.0	69.0	80.8	-11.8	EUT on side
1735.817	74.6	-5.6	4.0	341.0	-22.0	0.0	Horz	AV	0.0	47.0	60.8	-13.8	EUT on side
867.893	43.2	10.7	1.2	247.0		10.0	Vert	PK	0.0	63.9	80.8	-16.9	EUT vertical
867.893	43.2	10.7	1.2	247.0	-22.0	10.0	Vert	AV	0.0	41.9	60.8	-18.9	EUT vertical
867.901	38.8	10.7	1.0	167.0		10.0	Horz	PK	0.0	59.5	80.8	-21.3	EUT on side
867.901	38.8	10.7	1.0	167.0	-22.0	10.0	Horz	AV	0.0	37.5	60.8	-23.3	EUT on side



# OCCUPIED BANDWIDTH



XMH 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Element	Biconilog Cable	MNX	18-Feb-20	18-Feb-21
Antenna - Biconilog	Ametek	CBL 6141B	AYS	19-Mar-19	19-Mar-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	14-Apr-20	14-Apr-21

## TEST DESCRIPTION

The EUT was transmitting at its maximum data rate.

The 20 dB occupied bandwidth is required to be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.

# OCCUPIED BANDWIDTH



XMI: 2020.03.25.0


EUT: RF-GBA-433-CLR		Work Order: CINC0055	
Serial Number: C8CA94		Date: 1-Sep-20	
Customer: CINCH Systems		Temperature: 22 °C	
Attendees: Jibril Aga		Humidity: 46.7% RH	
Project: None		Barometric Pres.: 1011 mbar	
Tested by: Dustin Sparks		Power: Battery	
		Job Site: MN09	
TEST SPECIFICATIONS			
FCC 15.231:2020		Test Method	
		ANSI C63.10:2013	
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Value (kHz)	Limit (≤ kHz)
433.95 MHz	Occupied Bandwidth	54.84	1085
			Pass

# OCCUPIED BANDWIDTH



XMI 2020.03.25.0

433.95 MHz, Occupied Bandwidth			
	Value (kHz)	Limit ( $\leq$ kHz)	Result
	54.84	1085	Pass

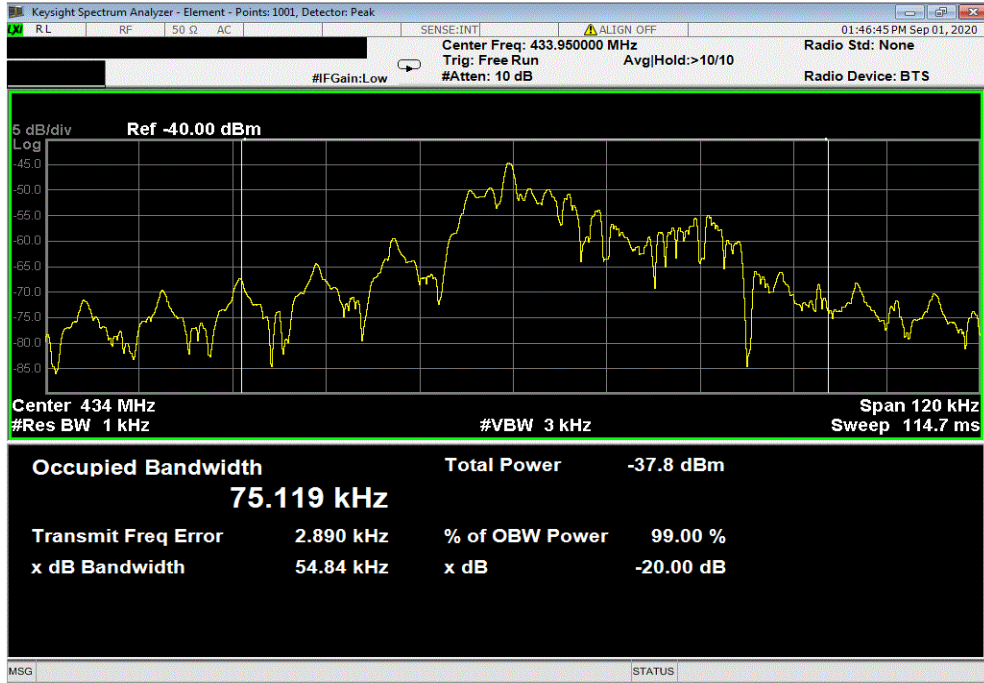

# DUTY CYCLE



XMH 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Element	Biconilog Cable	MNX	18-Feb-20	18-Feb-21
Antenna - Biconilog	Ametek	CBL 6141B	AYS	19-Mar-19	19-Mar-21
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	14-Apr-20	14-Apr-21

## TEST DESCRIPTION

For software controlled or pre-programmed devices, the manufacturer shall declare the duty cycle class or classes for the equipment under test. For manually operated or event dependant devices, with or without software controlled functions, the manufacturer shall declare whether the device once triggered, follows a pre-programmed cycle, or whether the transmission is constant until the trigger is released or manually reset. The manufacturer shall also give a description of the application for the device and include a typical usage pattern. The typical usage pattern as declared by the manufacturer shall be used to determine the duty cycle and hence the duty class.

Where an acknowledgement is required, the additional transmitter on-time shall be included and declared by the manufacturer.

To derive average emission measurements, a duty cycle correction factor was utilized:

Duty Cycle = On time/100 milliseconds (or the period, whichever is less)

Where "On time" =  $N1L1 + N2L2 + \dots$

Where N1 is the number of type 1 pulses, L1 is length of type 1 pulses, N2 is the number of type 2 pulses, L2 is the length of type 2 pulses, etc.

Therefore, Duty Cycle =  $(N1L1 + N2L2 + \dots)/100\text{mS}$  or T, whichever is less. (Where T is the period of the pulse train.)

The measured values for the EUT's pulse train are as follows:

Period = **100** mSec  
Pulsewidth of Type 1 Pulse = **0.07647** mSec  
Pulsewidth of Type 2 Pulse = **0.1963** mSec  
Number of Type 1 Pulses = **60**  
Number of Type 2 Pulses = **17**

Duty Cycle Correction Factor =  $20 \log [((0.07647)(60) + (0.1963)(17))/100] = -22.0$  dB

The duty cycle correction factor of **-22.0 dB** was added to the peak readings to mathematically derive the average levels. Peak measurements were made with a resolution bandwidth of 100kHz and a video bandwidth of 300kHz.

# DUTY CYCLE



XMI: 2020.03.25.0


EUT: RF-GBA-433-CLR		Work Order: CINC0055	
Serial Number: E73590		Date: 1-Sep-20	
Customer: CINCH Systems		Temperature: 21.9 °C	
Attendees: Jibril Aga		Humidity: 47% RH	
Project: None		Barometric Pres.: 1011 mbar	
Tested by: Dustin Sparks		Power: Battery	
Job Site: MN09		Test Method	
TEST SPECIFICATIONS		ANSI C63.10:2013	
FCC 15.231:2020			
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	
		Type 1 Pulse Width (ms)	Type 1 Pulse Count
		Type 2 Pulse Width (ms)	Type 2 Pulse Count
		On Time in 100 ms	DCCF (dB)
			Result
Sweep Time	20 s Sweep	N/A	N/A
	2 s Sweep	N/A	N/A
	100 ms Sweep	N/A	N/A
	20 ms Sweep	0.07647	60
		0.1963	17
		7.93	-22.0
			N/A

# DUTY CYCLE




XMI 2020.03.25.0

Sweep Time, 20 s Sweep						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

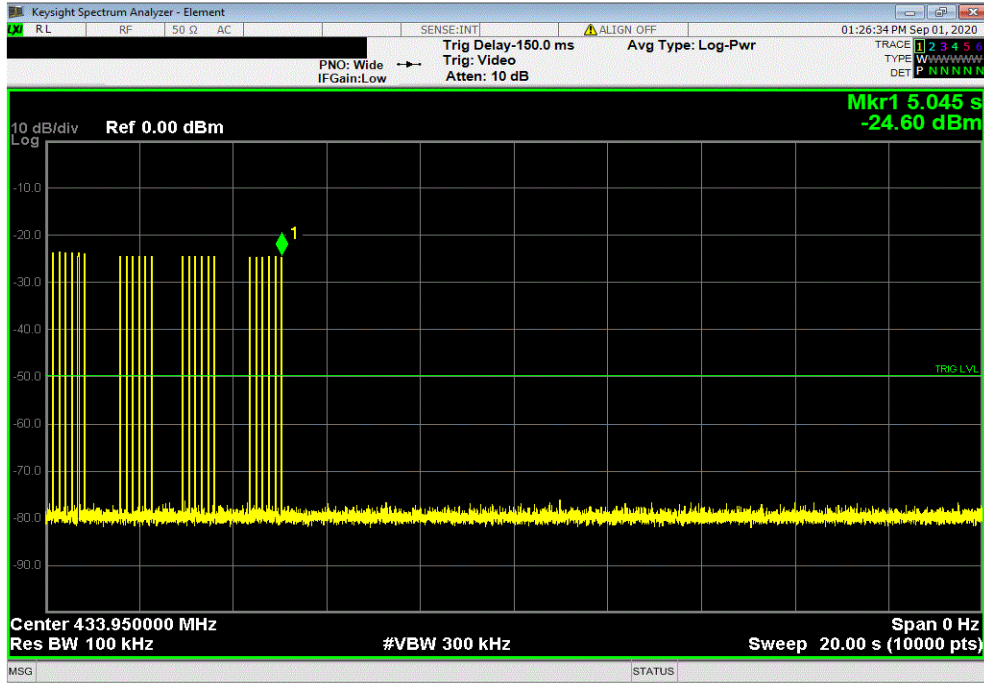

Sweep Time, 2 s Sweep						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

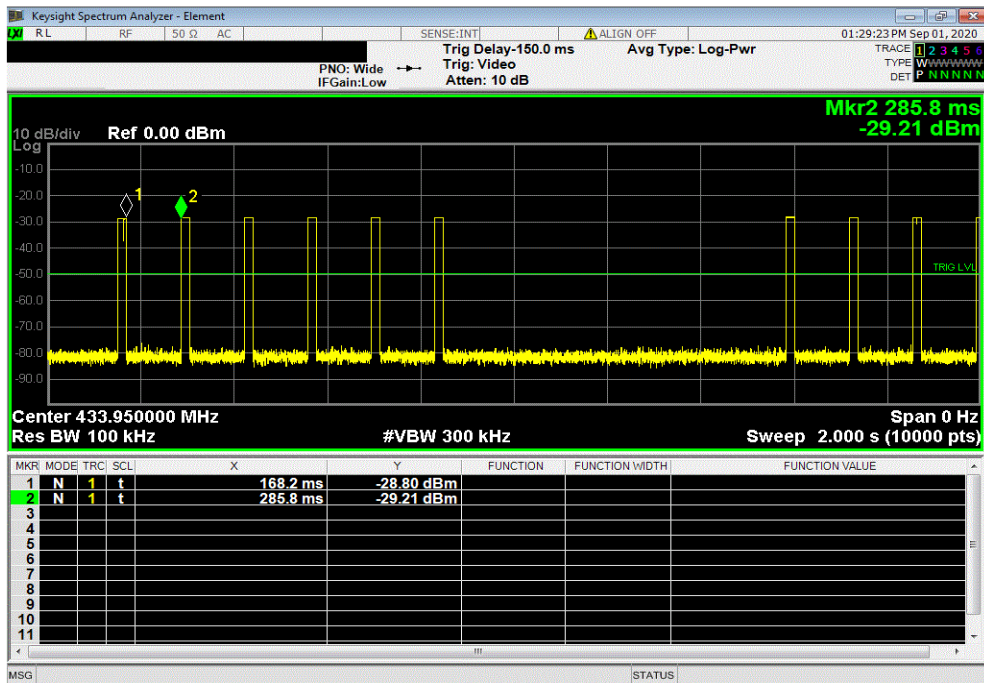


# DUTY CYCLE



XMI 2020.03.25.0

Sweep Time, 100 ms Sweep						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
N/A	N/A	N/A	N/A	N/A	N/A	N/A

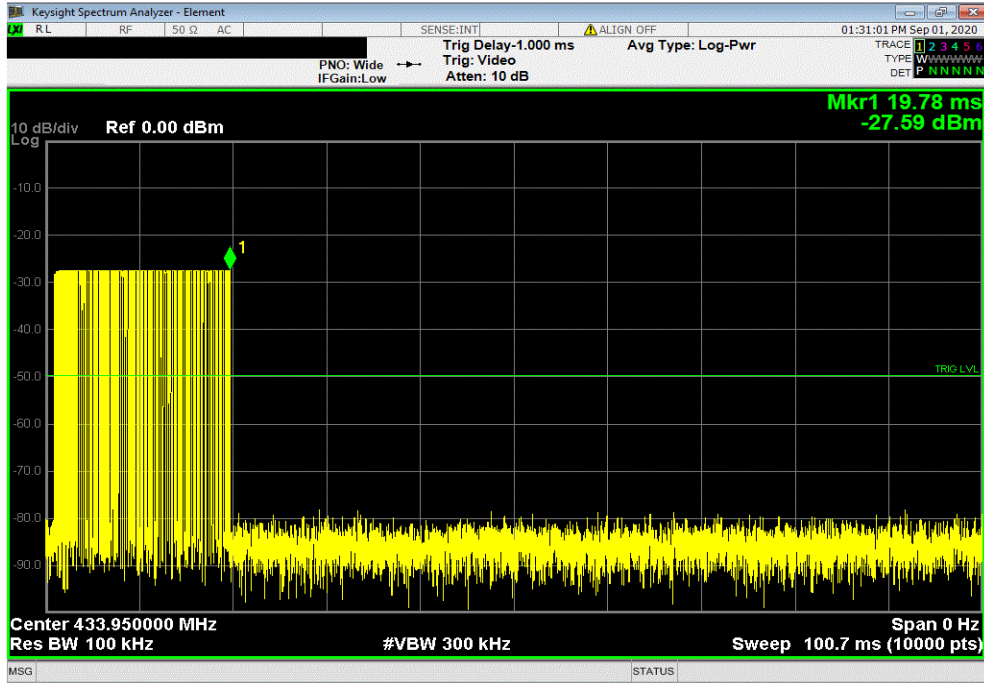

Sweep Time, 20 ms Sweep						
Type 1 Pulse Width (ms)	Type 1 Pulse Count	Type 2 Pulse Width (ms)	Type 2 Pulse Count	On Time in 100 ms	DCCF (dB)	Result
0.07647	60	0.1963	17	7.93	-22.0	N/A

