



FCC CFR47 PART 15 SUBPART H

DATABASE TEST REPORT

FOR

BROADBAND VHF/UHF NETWORKING RADIO SYSTEM

MODEL NUMBERS: RaptorX 50739, RaptorX-228

REPORT NUMBER: 14U18654-1

FCC ID: 2ABCU-50739

ISSUE DATE: May 1, 2015

Prepared for
METRIC SYSTEMS CORP.
3055 ENTERPRISE COURT
VISTA, CA 92081

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	5/1/2015	Initial Issue	F. de Anda

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>SAMPLE CALCULATION</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	6
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	7
5.2. <i>DATABASE information</i>	7
5.3. <i>MAXIMUM OUTPUT POWER</i>	7
5.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	7
5.5. <i>SOFTWARE AND FIRMWARE</i>	7
5.6. <i>DETAILS OF TESTED SYSTEM</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	11
7. DATABASE CERTIFICATION REQUIREMENTS	12
8. BASE STATION DATABASE CERTIFICATION TEST RESULTS	13
8.1. <i>§15.713(F)(3) FIXED TVBD REGISTRATION</i>	13
8.1.1. <i>SUCCESSFUL REGISTRATION</i>	14
8.1.2. <i>FAILED REGISTRATION – RESTRICTED COORDINATES</i>	17
8.1.3. <i>FAILED REGISTRATION – HAAT</i>	18
8.1.4. <i>FAILED REGISTRATION – ANTENNA HEIGHT AGL</i>	20
8.1.5. <i>FAILED REGISTRATION – INCOMPLETE CONTACT INFORMATION</i>	21
8.2. <i>§15.707(A) FIXED TVBD RELOCATED</i>	22
8.3. <i>§15.711(B)(3)(III) FIXED & MODE II TVDB DATABASE UPDATE</i>	24
8.4. <i>§15.711(B)(3)(I)(II), §15.713(A)(1) 48 HOUR CHANNEL SCHEDULING</i>	29
8.5. <i>§15.707, §15.711(B)(3)(I)(II)(IV), (C), §15.712 TVBD CHANNEL AVAILABILITY</i>	38
8.6. <i>§15.715(F) SECURITY</i>	42
9. REMOTE STATION - DATABASE CERTIFICATION TESTS	44
9.1. <i>§15.713(F)(3) FIXED TVBD REGISTRATION</i>	44
9.1.1. <i>SUCCESSFUL REGISTRATION</i>	47
9.1.2. <i>FAILED REGISTRATION – RESTRICTED COORDINATES</i>	49
9.1.3. <i>FAILED REGISTRATION – HAAT</i>	50
9.1.4. <i>FAILED REGISTRATION – ANTENNA HEIGHT AGL</i>	52

9.1.5. FAILED REGISTRATION – INCOMPLETE CONTACT INFORMATION	53
9.2. §15.707(A) <i>FIXED TVBD RELOCATED</i>	54
9.3. §15.711(B)(3)(I)(II), §15.713(A)(1) <i>48 HOUR CHANNEL SCHEDULING</i>	56
9.4. §15.711(B)(3)(III) <i>FIXED & MODE II TVDB DATABASE UPDATE</i>	66
9.5. §15.707, §15.711(B)(3)(I)(II)(IV),(C), §15.712 <i>TVBD CHANNEL AVAILABILITY</i>	71
9.6. §15.715(F) <i>SECURITY</i>	74
10. SETUP PHOTOS	75

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: METRIC SYSTEMS CORP.
3055 ENTERPRISE COURT
VISTA, CA 92081

EUT DESCRIPTION: BROADBAND VHF/UHF NETWORKING RADIO SYSTEM

MODEL NUMBERS: RaptorX 50739, RaptorX-228

SERIAL NUMBER: BASE STATION: X001
REMOTE STATION: X002


DATE TESTED: SEPTEMBER 23 to 24, 2014

APPLICABLE STANDARDS	
SECTION	TEST RESULTS
DATABASE PORTIONS OF FCC PART 15 SUBPART H	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



FRANCISCO DE ANDA
PROJECT LEAD
UL Verification Services Inc.

Tested By:



JOE VANG
EMC ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 15 Subpart H and KDB 416271 D01 White Space Test Procedures v02.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT is an unlicensed fixed mode White Space broadband half-duplex Tx/Rx networking radio system operating in the authorized high VHF (174 MHz -216 MHz) and UHF (470 MHz-698 MHz) bands, with the exception of channels 36-38.

EUT Assemblies					
Description	Manufacturer	Model	S/N	FCC ID	
Base Unit	Metric System Corp	Raptor X VHF/UHF Broadband Network Radio	X001	N/A	
Base Power Unit	Metric System Corp	50900 X1		Power Supply 1	N/A
Remote Unit	Metric System Corp	Raptor X VHF/UHF Broadband Network Radio	X002	N/A	
Remote Power Unit	Metric System Corp	50900 X2		Power Supply 2	N/A

5.2. DATABASE information

Telcordia's TV Bands White Space Database, iConectiv, provides a public interface that is available to entities authorized for protection under CFR Title 47 Part 15 Subpart H. The iConectiv registration system requires entities seeking protection to register for an account on the iConectiv site before they can create protected contours.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows;

28.7 dBm, 6 MHz bandwidth

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio can be configured with the following antenna types;

Type	Band	Gain
Directional	VHF	9 dBi
Directional	UHF	8 dBi

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was version 4.2.0.

5.6. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT & PERIPHERALS

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	S/N	FCC ID
Power Splitter	Mini-Circuits 1	ZAPD-2-252-N+	N N324901317	N/A
Power Splitter	Mini-Circuits 2	ZAPD-2-252-N+	N N324901317	N/A
LAN Switch	Netgear	GS 108 v2	1DR1783702C21	DoC
AC Adaptor (Switch)	A Qualities	MD481212	5G66-E184870	N/A
Laptop	Apple	A1398	C02J704ADKQ4	DoC

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	Ethernet	1	RJ45	Un-shielded	1	Internet
2	Ethernet	1	RJ45	Un-shielded	1	Base to Switch
3	Ethernet	1	RJ45	Un-shielded	1	Laptop to Switch
4	Ethernet	1	RJ45	Un-shielded	1	Remote to Switch
5	DC	1	Barrel	Un-shielded	1	
6	AC	1	2-Prong	Un-shielded	1	


TEST SETUP

As illustrated in the following setup diagram, the EUT is comprised of two independent fixed channel stations using a certified web-based White Space spectrum data base provider. Independently register each radio.

Base Unit Deployment: Deploy the base unit; reregister each radio and confirm channel availability. Modify if required. Place each radio in low duty cycle beacon mode.

Remote Unit Deployment: Upon start-up each unit will automatically link to its respectively assigned channel and establish a secure VPN to the base unit and to the internet. Re-register each radio.

Operation: each radio will independently manage its database reporting protocols according to Subpart H requirements.

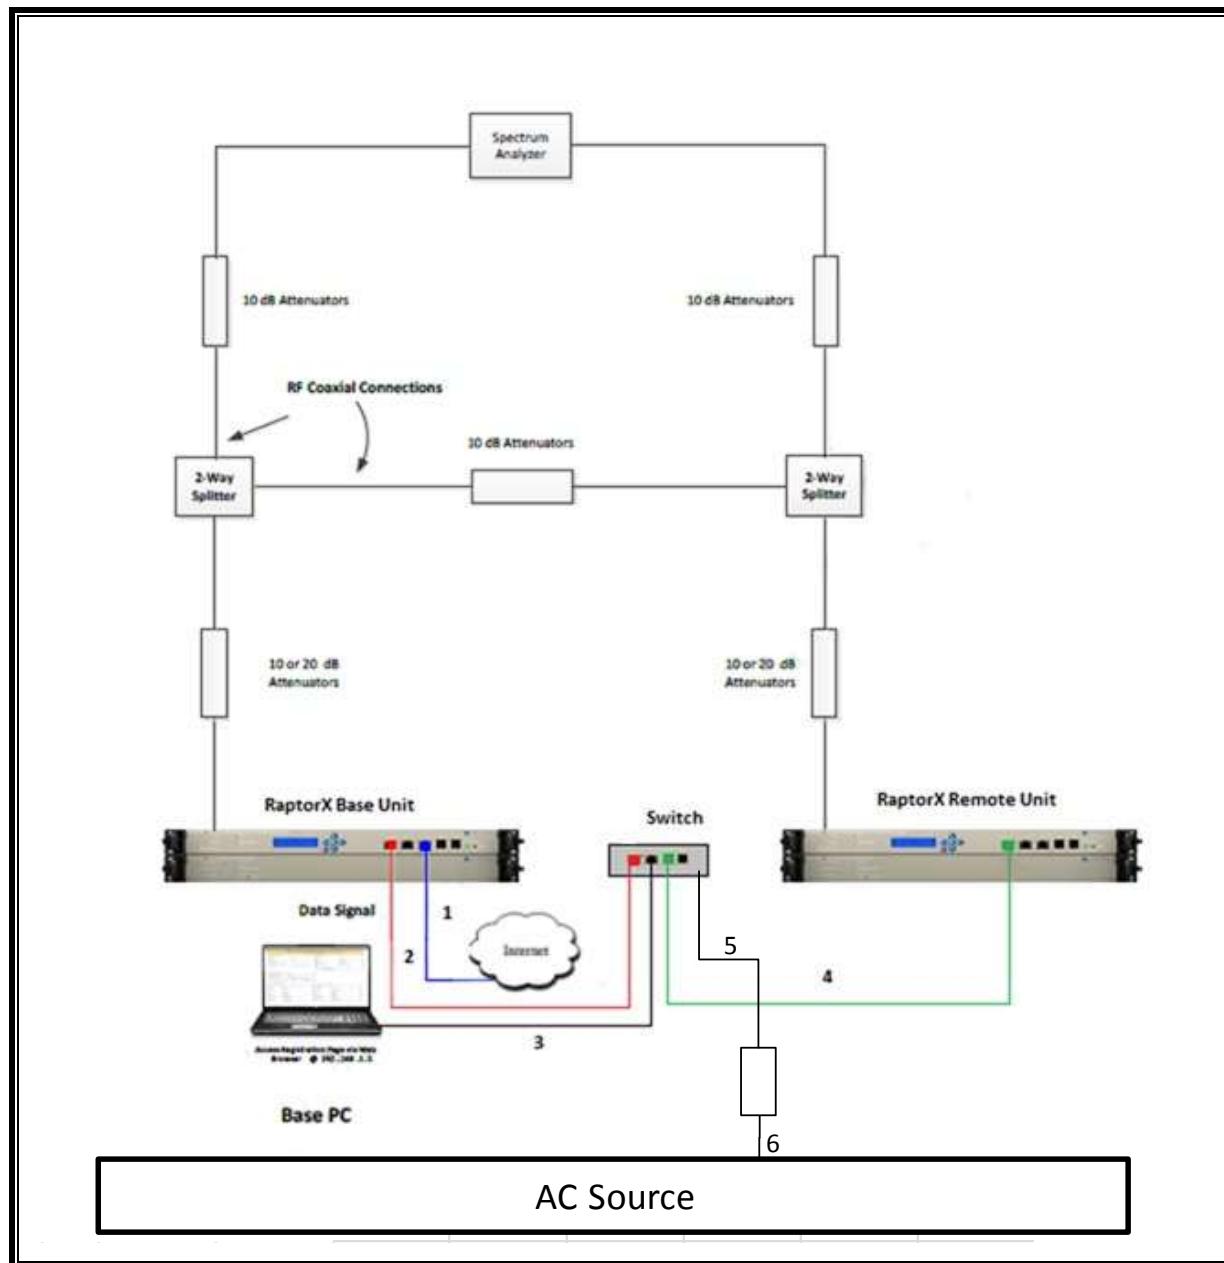TEST SETUP DIAGRAM

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial	Cal Due
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent	E4440A	MY46186329	5/9/2015

7. DATABASE CERTIFICATION REQUIREMENTS

The following database related rules apply to TV White Space Systems under FCC CFR47 PART 15 SUBPART H for Fixed TVBD devices per KDB 416721 D01 White Space Test Procedures v02, Part 2:

§15.713(f)(3) Fixed TVBD Registration
§15.707(a) Fixed TVBD Relocated
§15.711(b)(3)(iii) Fixed & Mode II TVDB Database Update
§15.711(b)(3)(i)(ii), §15.713(a)(1) 48 Hour Channel Scheduling
§15.707, §15.711(b)(3)(i)(ii)(iv),(c), §15.712 TVBD Channel Availability
§15.715(f) Security

8. BASE STATION DATABASE CERTIFICATION TEST RESULTS

8.1. §15.713(F)(3) FIXED TVBD REGISTRATION

REQUIREMENT

- The Fixed TVBD must be able to provide the required information to the TVWS database and obtain a successful registration:
- The database must indicate a failed device registration if any of the following data provided by the TVBD is invalid:
 - i. FCC ID
 - ii. Serial Number
 - iii. Restricted Coordinates
 - iv. HAAT > 250 m
 - v. Antenna Height AGL > 30 m
 - vi. Incomplete contact information
- For a fixed TVBD without a direct connection to the internet, confirm that registration through a registered fixed device takes place only on a channel available to that registered device.

PRE-REGISTRATION PROCESS

1. Both the Base Station and Remote Station are registered using an authorized database via the Internet at the depot facility. Following registration a common available channel between each site is selected as the initial transmitting channel for each site. This channel will be the initial “listening” channel for the Remote Station

8.1.1. SUCCESSFUL REGISTRATION

TEST PROCEDURE


- Configure the base EUT with correct registration information:
 - The FCC ID and serial number are permanently programmed to the device and cannot be modified.
 - Known acceptable geographic coordinates, antenna height AGL and contact information were entered into the EUT.
- The base EUT automatically contacts the TVWS Database to perform device registration.
- Upon successful registration, the base EUT automatically contacts the TVWS Database to retrieve device channel list.
- Selects a channel from the channel list returned from the TVWS Database and start normal radio operation on the selected channel.
- Verify base output signal on the selected channel on the spectrum analyzer.

RESULTS

The EUT successfully registered when correct registration information was submitted to the TVWS Database. The EUT transmission was observed on the spectrum analyzer on the selected TV channel (Channel 16) from the returned channel list from the TVWS Database.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

BASE SOFTWARE SHOWING SUCCESSFUL DEVICE REGISTRATION WITH THE ICONETIV DATABASE

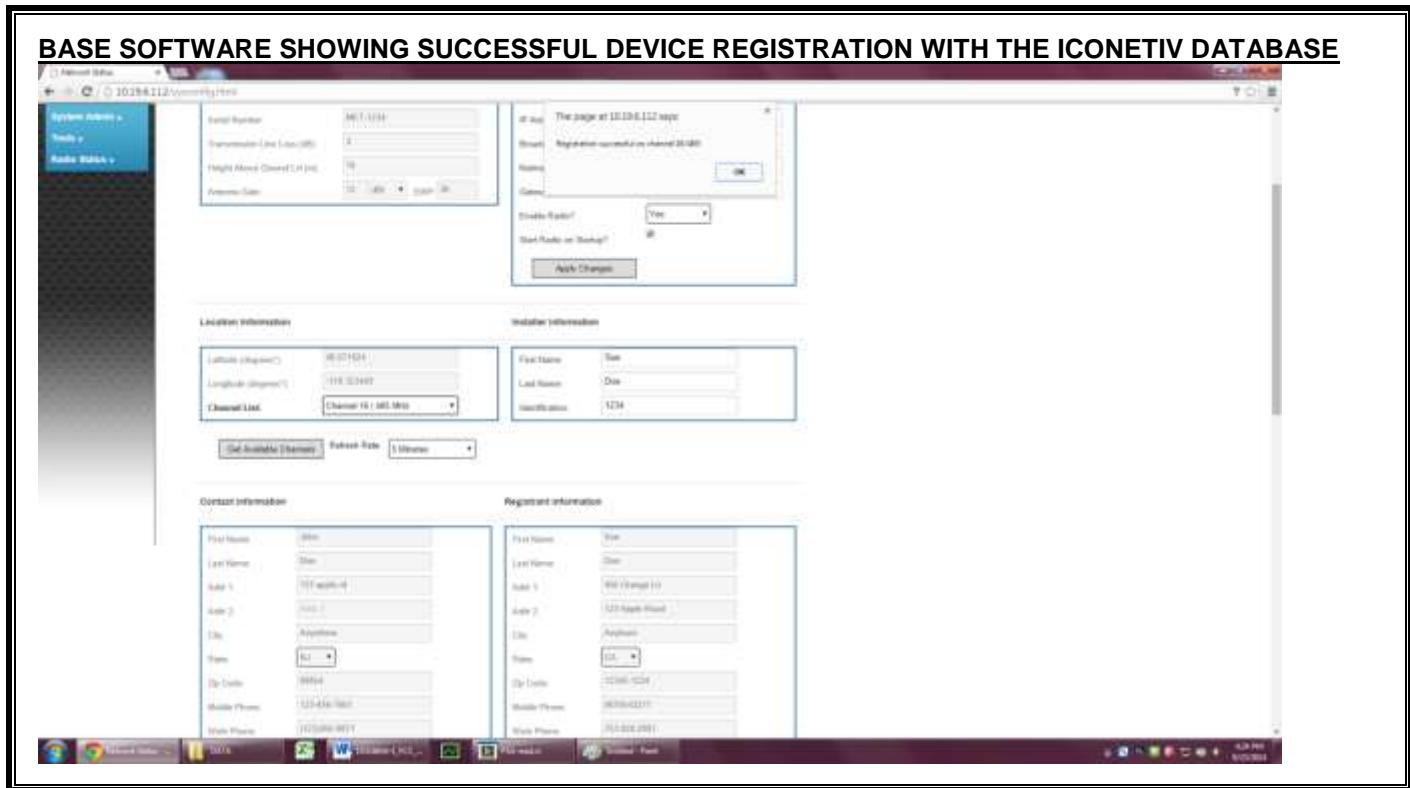

Device Status

Device Registration

Registration Line Location: 10194.112

Height Above Ground (H m): 10

Antenna Gain: 10

OK

Cancel

Device Radio? Yes

Start Radio on Startup? No

Apply Changes

Location Information

Latitude (Degrees): 40.021681

Longitude (Degrees): -105.339187

Channel Line: Channel 19 (403 MHz)

First Name: Tom

Last Name: Doe

Identification: 1234

Get Available Channel

Refresh Rate: 5 Minutes

Operator Information

First Name: John

Last Name: Doe

Address 1: 100 Main St

Address 2: Apt 2

City: Anytown

State: CA

Zip Code: 98001

Mobile Phone: 555-555-5555

Work Phone: 123-456-7890

Registrant Information

First Name: Tom

Last Name: Doe

Address 1: 800 Market St

Address 2: 123 Applewood

City: Anytown

State: CA

Zip Code: 12345-1234

Mobile Phone: 987-654-3210

Work Phone: 123-456-7890

SPECTRUM ANALYZER SHOWING ACTIVE BASE SIGNAL ON THE SELECTED CHANNEL (CHANNEL 16)

Agilent 16:31:12 Sep 23, 2014

R T

Freq/Channel

Ref -10 dBm

#Atten 0 dB

Mkr1 485.000 MHz

-49.22 dBm

#Peak Log 10 dB/

#PAvg

V1 S2


S3 FC

AA

d(f):

f>50k

Swp

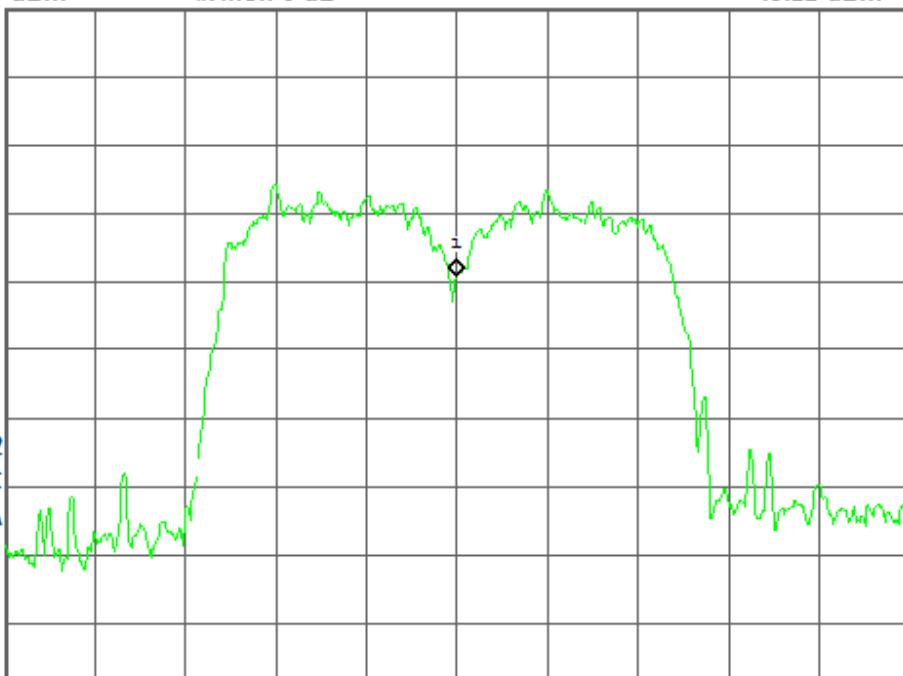

Center Freq 485.000000 MHz

Start Freq 480.000000 MHz

Stop Freq 490.000000 MHz

CF Step 1.00000000 MHz
Auto Man

Freq Offset 0.0000000 Hz

Signal Track On Cif

Center 485.000 MHz

Span 10 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 1 ms (601 pts)

Copyright 2000-2011 Agilent Technologies

8.1.2. FAILED REGISTRATION – RESTRICTED COORDINATES

TEST PROCEDURE

- Configure the EUT with restricted coordinates: (LAT= 40.571924, LNG= -130) which is a location outside US regulatory boundaries
- Observe the base EUT registration failure indicated by the database message

RESULT

The base EUT failed to register when restricted coordinates information were submitted to the TVWS Database.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

BASE SOFTWARE SHOWING FAILED DEVICE REGISTRATION DUE TO RESTRICTED COORDINATES

8.1.3. FAILED REGISTRATION – HAAT

TEST PROCEDURE


- Configure the EUT with Height Above Average Terrain(HAAT) > 250 m: the Mount Shasta coordinates (LAT=41.4092, LNG=-122.1949) were used.
- Observe the base registration failure indicated by the database message.


RESULTS

The base EUT failed to register when it is set to a location with HAAT above the limit.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

MOUNT SHASTA HAS NO TVWS CHANNELS DUE TO HAAT LIMIT AS INDICATED BY THE ICONECTIV TVWS DATABASE

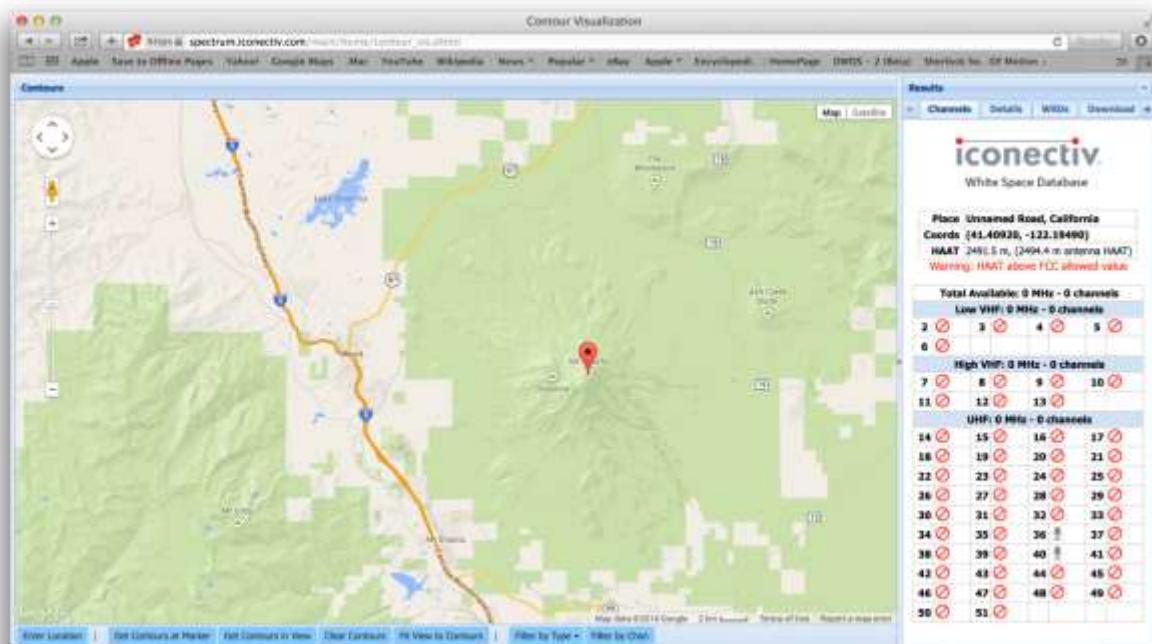

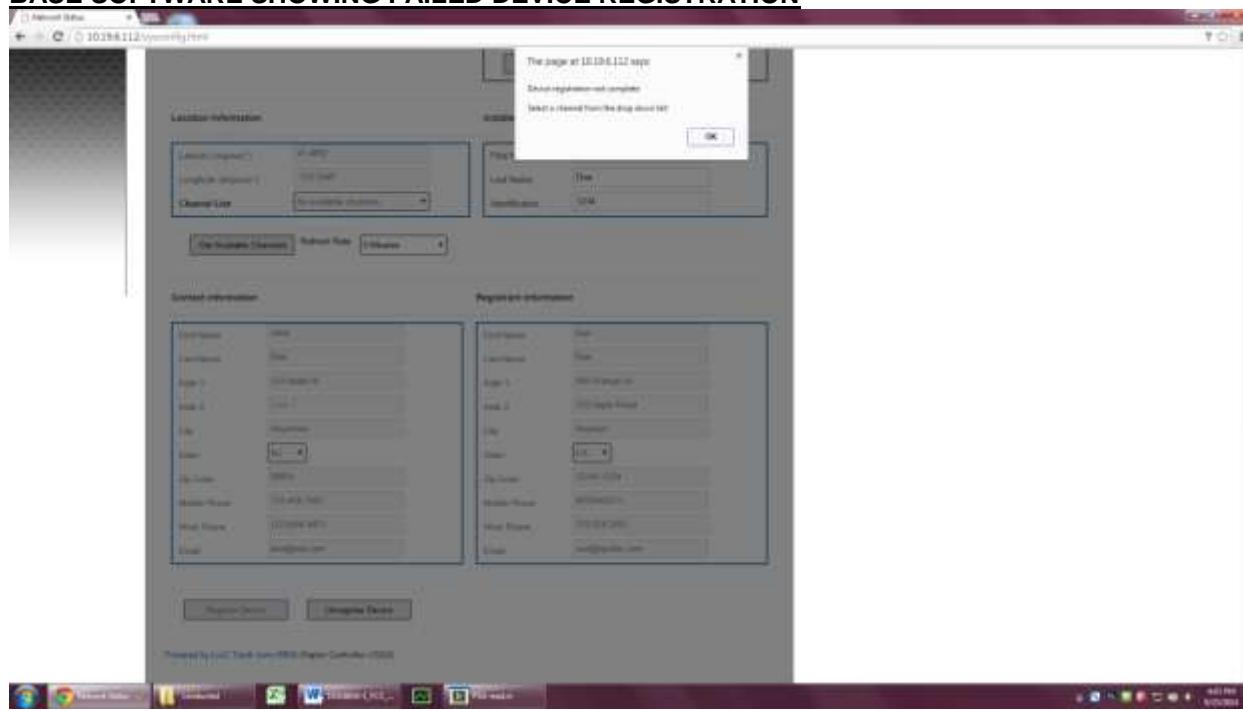BASE SOFTWARE SHOWING FAILED DEVICE REGISTRATION

8.1.4. FAILED REGISTRATION – ANTENNA HEIGHT AGL

TEST PROCEDURE


- Configure the EUT with antenna height Above Ground Level (AGL) > 30 meters.
- Observe the base registration failure indicated by the database message.

RESULTS

The base EUT failed to register when it is set to a location with antenna AGL above the limit.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

BASE SOFTWARE SHOWING FAILED DEVICE REGISTRATION DUE TO AGL LIMIT

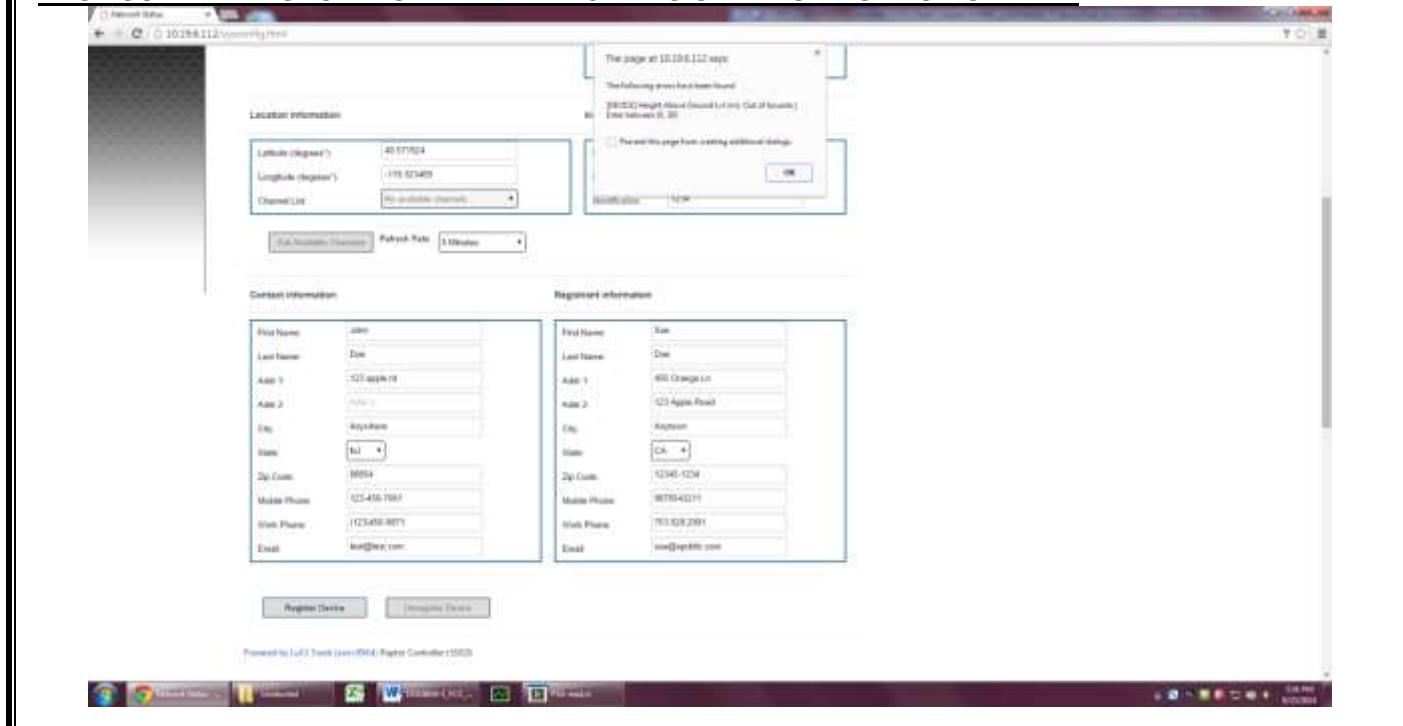

The screenshot shows a web-based registration interface. At the top, there is a message: "The page at 10.10.6.112 says: The following pages have been found: 398 (32) height above ground level limit. Out of 24 results. Zone between 0..30." Below this, there are two sets of registration fields: "Location Information" and "Contact Information".

Location Information:

- Latitude (degrees): 40.877824
- Longitude (degrees): -119.825403
- Channel List: No available channels
- Notification: None
- Cell Number: 11000000000
- Priority Rate: 1.000000

Contact Information:

Field	Value	Field	Value
First Name	John	First Name	John
Last Name	Doe	Last Name	Doe
Addr 1	123 Apple Rd	Addr 1	456 Orange Ln.
Addr 2	Unit 1	Addr 2	123 Apple Road
City	Anytown	City	Anytown
State	CA	State	CA
Zip Code	98054	Zip Code	98045-1234
Mobile Phone	(123)456-7890	Mobile Phone	(888)555-0123
Work Phone	(123)456-8976	Work Phone	(763)123-2345
Email	test@test.com	Email	test@rejekit.com

At the bottom, there are two buttons: "Register Device" and "Unregister Device". The status bar at the bottom of the window shows: "Powered by LoRaWAN (LoRaWAN Radio Controller 1.5.0)".

8.1.5. FAILED REGISTRATION – INCOMPLETE CONTACT INFORMATION

TEST PROCEDURE

- Configure the base EUT with missing contact information, e.g. email.
- The device software cannot proceed with registration and prompts user to enter the missing information.

RESULTS

Software didn't proceed with registration when contact information fields are missing.

Test Results	
Pass	Fail
☒	☐

BASE SOFTWARE PROMPTING THE USER TO ENTER MISSING CONTACT INFORMATION

8.2. §15.707(A) FIXED TVBD RELOCATED

REQUIREMENT

- Confirm that the database will not provide a channel list for Fixed TVBD at a location other than that registered.

TEST PROCEDURE


- The base EUT geographic coordinates are entered at registration time and stored in the device. The device channel list request uses the same coordinates established at registration time. No separate coordinates can be entered for channel list request.
- The device requires professional installation and device registration information including device location will be entered by the professional installer.
- Once the registration is complete, upon power cycling the device will use the stored registration location for channel list request.

RESULTS

The device only uses its registered location for channel list request. The device registered location will be established at installation time by a professional installer and cannot be altered after installation – see RaptorX-225 Installation and User Manual.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

BASE SOFTWARE ONLY ALLOWS DEVICE REGISTRATION LOCATION INFORMATION TO BE ENTERED DURING INSTALLATION AND THE SAME DEVICE LOCATION IS USED FOR CHANNEL LIST REQUEST

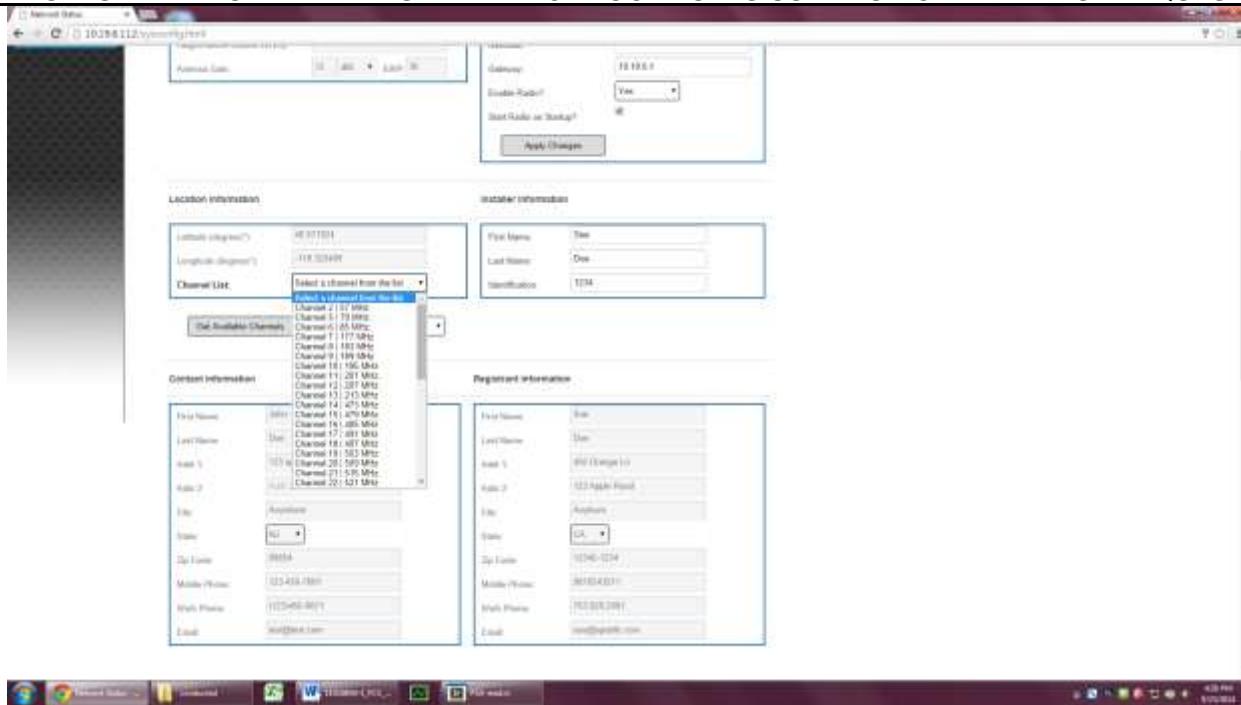

8.3. §15.711(B)(3)(III) FIXED & MODE II TVDB DATABASE UPDATE

REQUIREMENT

- §15.711(B)(3)(III) If a fixed or Mode II personal/portable TVBD fails to successfully contact the TV bands database during any given day, it may continue to operate until 11:59 p.m. of the following day at which time it must cease operations until it re-establishes contact with the TV bands database and re-verifies its list of available channels.

Block access to the database from the TVBD. All other radio functions, including internet connectivity should be maintained. Confirm that the TVBD shuts down by 11:59 PM on the following day. All other radio functions, including internet connectivity should be maintained.


TEST PROCEDURE


- Set the base EUT to normal operation mode:
 - Enter proper registration information on the base with an IP 10.0.0.228.
 - Base contacts the TVWS to perform registration.
 - Base contacts the TVWS to retrieve channel list.
 - Select an operating channel from returned channel list.
 - Enable base transmission.
- Observe the base EUT output signal on the spectrum analyzer.
- Use a programmable router or remove connection to network to block the database URL.
- Observe that there is no output signal from the base after 11:59 PM on the following day.


RESULTS


During normal operation, the base and client channel lists are updated periodically by sending channel list requests to the TVWS Database . For test purposes this time period was set to 5 minutes. After the database access was blocked, the next channel list requests failed and the EUTs stopped transmission immediately.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

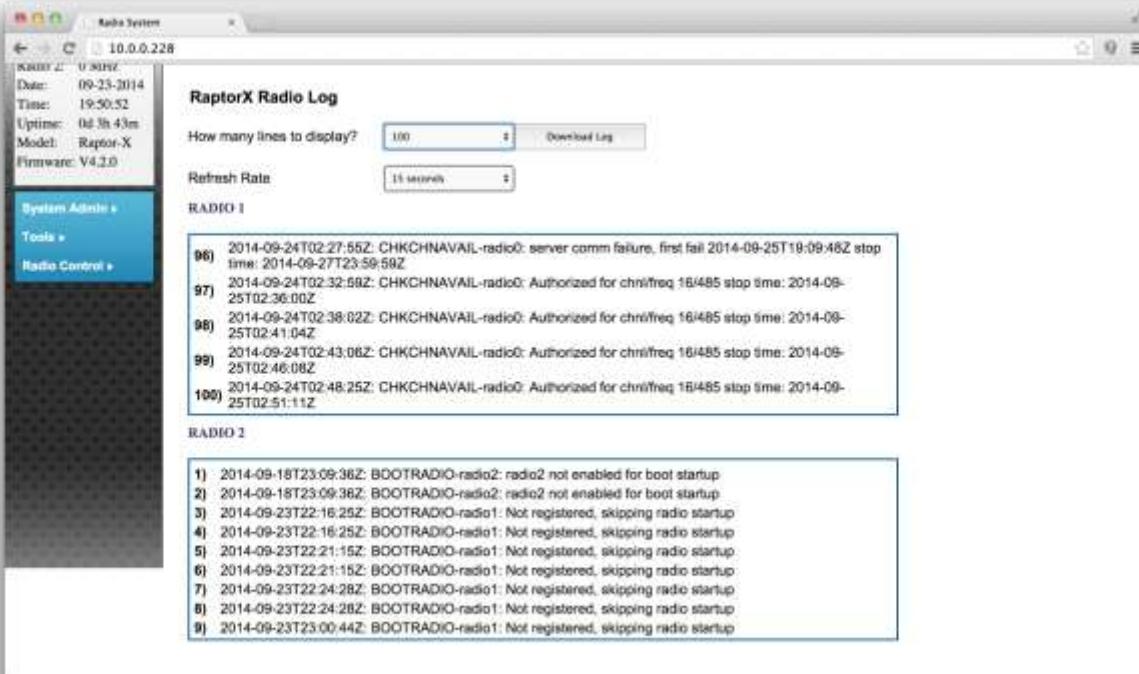BASE SOFTWARE BEFORE DATABASE BLOCKING (BASE ON CHANNEL 16)

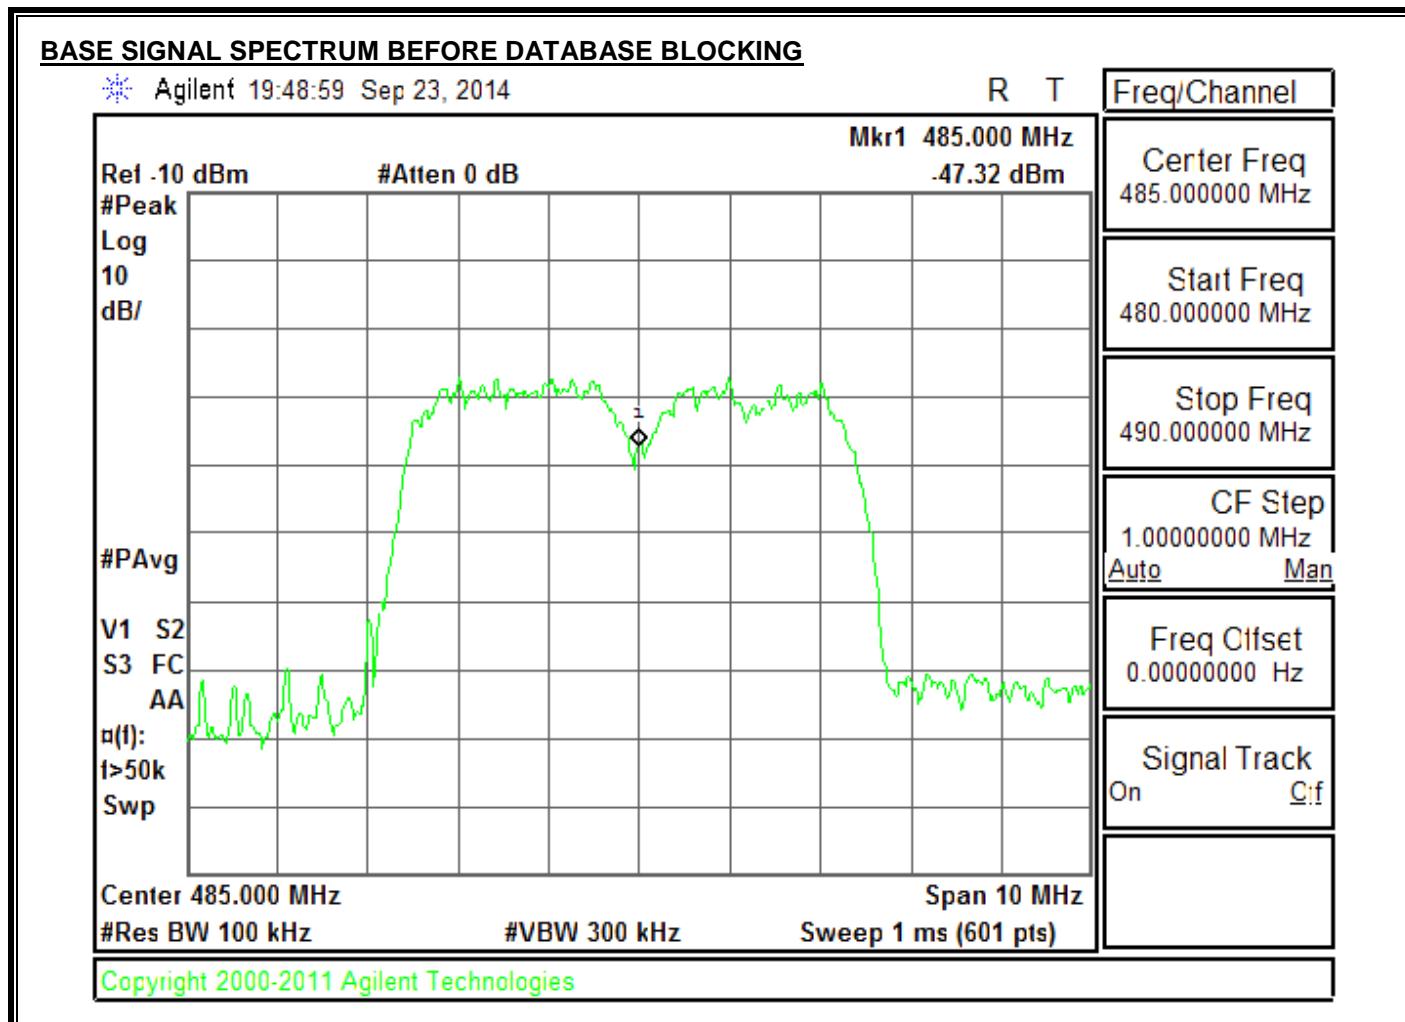

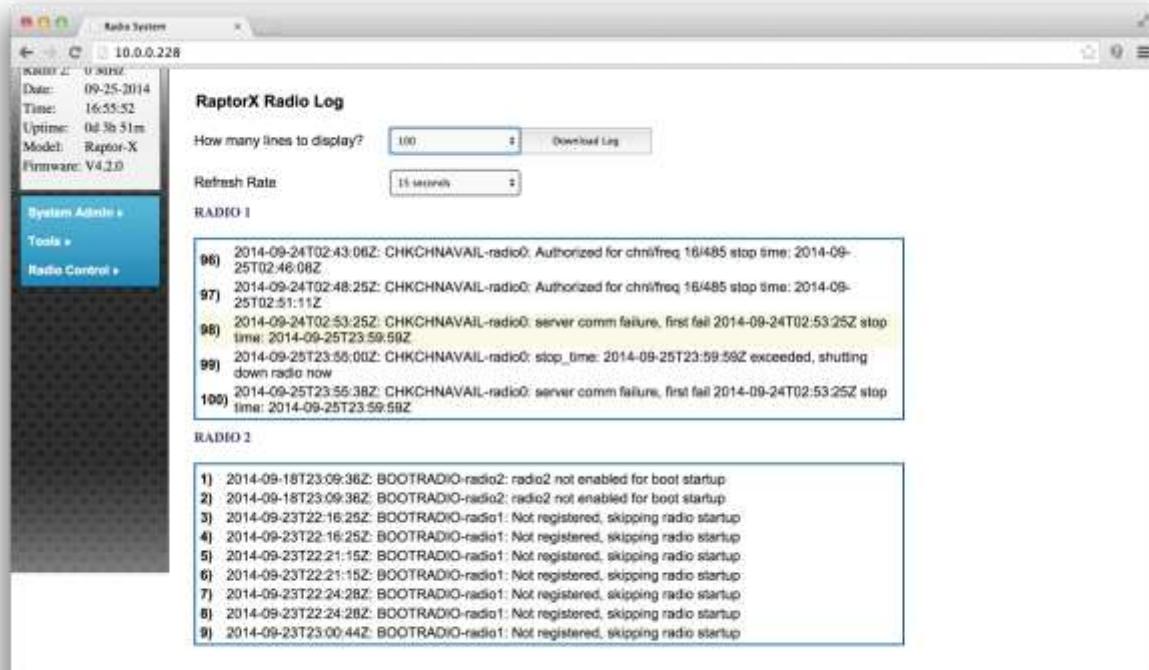BASE SOFTWARE 5 MINUTES AFTER DATABASE BLOCKING (BASE STOPPED)

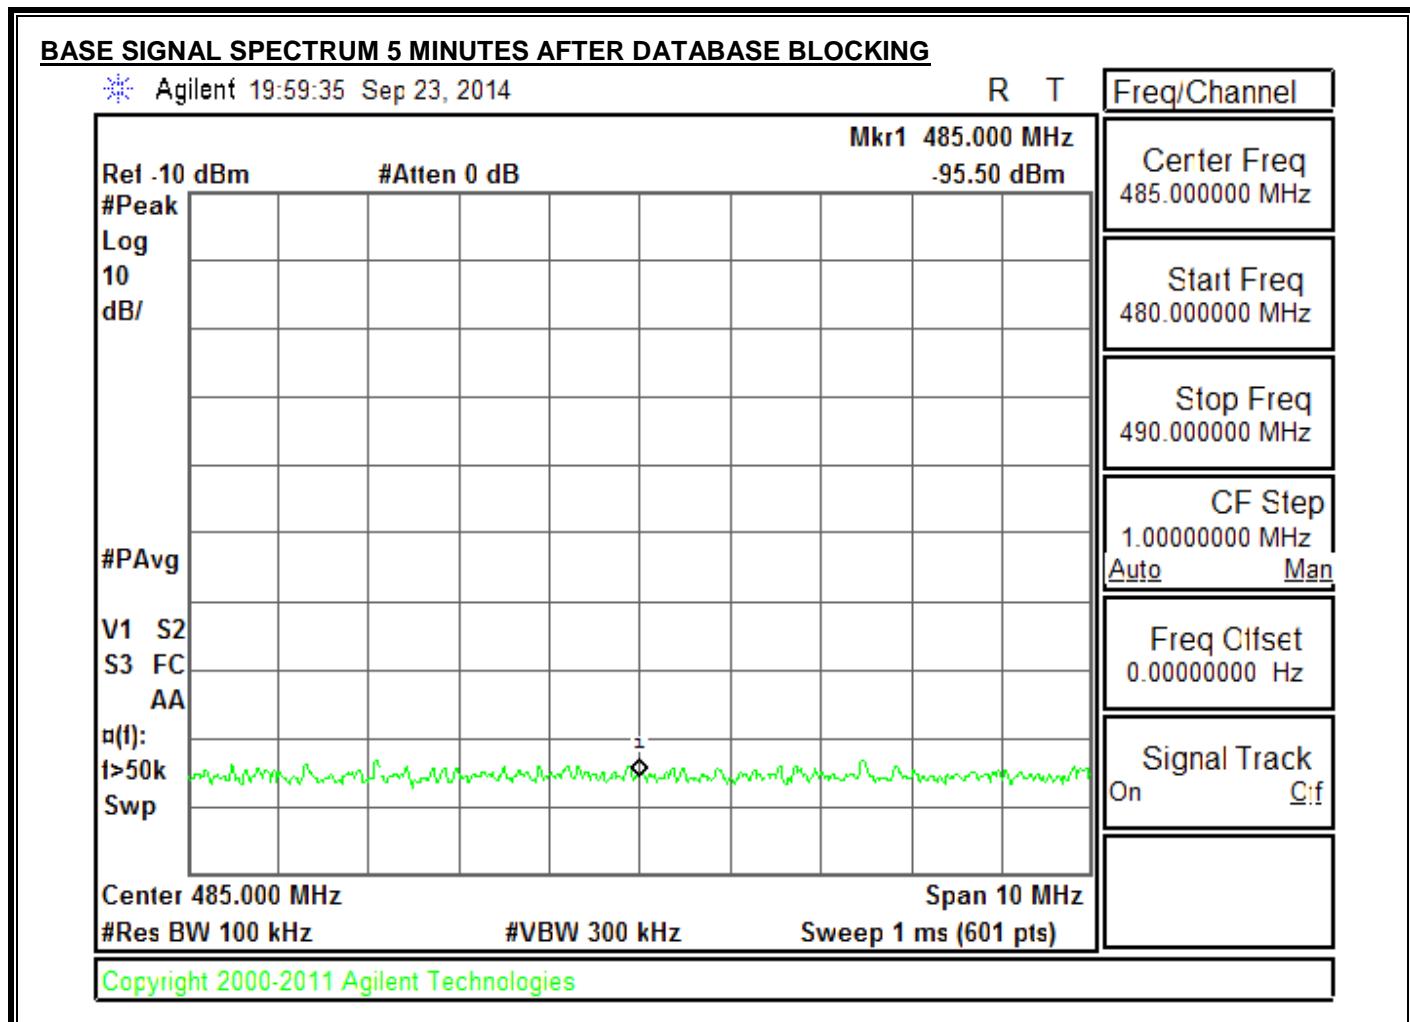

8.4. §15.711(B)(3)(I)(II), §15.713(A)(1) 48 HOUR CHANNEL SCHEDULING

REQUIREMENT

- §15.711(B)(3)(I) Fixed devices must access a TV bands database over the Internet to determine the TV channels that are available at their geographic coordinates, taking into consideration the fixed device's antenna height, prior to their initial service transmission at a given location. Operation is permitted only on channels that are indicated in the database as being available for such TVBDs. Fixed TVBDs shall access the database at least once a day to verify that the operating channels continue to remain available. Operation on a channel must cease immediately if the database indicates that the channel is no longer available. Fixed TVBD must adjust their use of channels in accordance with channel availability schedule information provided by their database for the 48-hour period beginning at the time of the device last accessed the database for a list of available channels.

After receiving an available channel list, register a low-power auxiliary device on the TVBD operating channel. Repeat the available channel request after the update interval and confirm that the low-power device is accounted for in the schedule. Using the system management software, confirm that the device changes channels at the scheduled time.

TEST PROCEDURE

- Referring to the following testing timeline diagram. Low Power Auxiliary Devices are registered and scheduled for protection at both base and remote locations, i.e. from 8 PM to 8:30 PM on 9/23/2014 at base location and from 9 PM to 9:30 PM on 9/23/2014 at remote location.
- Allow the base and remote EUT to enter normal operations prior to testing, i.e. on Channel 16 before 8 PM 9/23/2014.
- Upon channel list request to the TVWS Database, the base EUT obtains the channel list expiration time (at 8 PM on 9/23/2014) reflecting the Low Power Auxiliary Device's registered protection period.
- The base EUT requests new channel list upon the channel list expiration time (8 PM on 9/23/2014) and the base EUT's current operating channel (Channel 16) is no longer in the returned channel list.
- The base EUT ceases transmission on Channel 16 immediately.
- The remote EUT ceases operation on Channel 16 right after the base EUT since the remote EUT won't transmit without receiving the base signal.
- The base EUT continues sending periodic channel list requests to the TVWS Database . The returned channel list expiration time (9:30 PM on 9/23/2014) reflecting the ending time of the registered protection period for the Low Power Auxiliary Device.
- The base EUT requests new channel list upon the channel list expiration time (9:30 PM on 9/23/2014) and Channel 16 becomes available again in the returned channel list from the TVWS Database . The base EUT will resume transmission on Channel 16.
- The remote EUT will detect the base EUT signal on Channel 16 and reconnect with the base EUT.

RESULTS

The base EUT correctly ceased transmission on the protected channel over the protection period of the Low Power Auxiliary Device registered at the same location.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

48 HOUR CHANNEL SCHEDULING LOW POWER AUXILIAR DEVICE REGISTRATION RECORD AT BASE LOCATION

Telcordia TVWS Registration Site

REGISTRATION

Record 34980


You've successfully updated the registration record.


Details for LP-Aux Registration


Global Record ID: 140919TELCO000001


Owner:	Metric Systems (Vista, CA)
Contact:	Jon Clark
Operating mode:	Licensed
Region type:	Point
WKT Geometry:	GEOMETRYCOLLECTION (POINT (-119.32341 40.57192))
TV Channels:	16
Call Sign:	KABC-TV
Start:	2014-09-24 17:50 PT
Duration:	30 mins
Recurrence:	Once
Every:	
Until:	
Created Date:	2014-09-19 20:28 UTC
Modified Date:	2014-09-25 00:40 UTC
Processed Date:	2014-09-25 00:40 UTC

[View protective contour for 140919TELCO000001.](#)

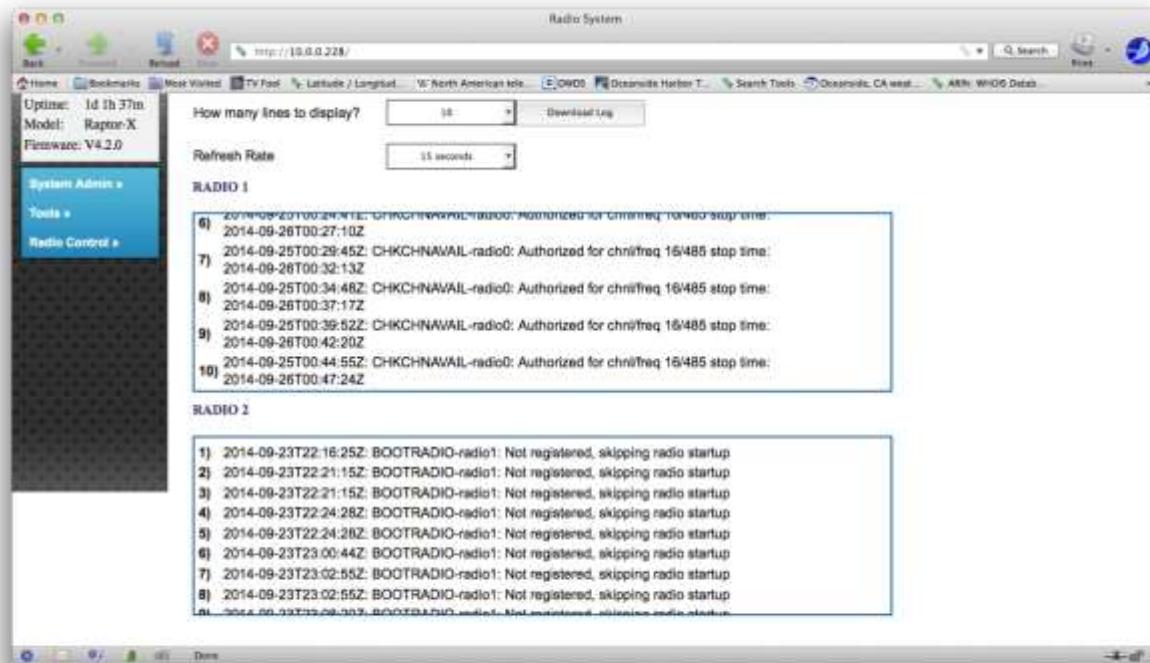48 HOUR CHANNEL SCHEDULING BASE SOFTWARE BEFORE PROTECTION PERIOD.

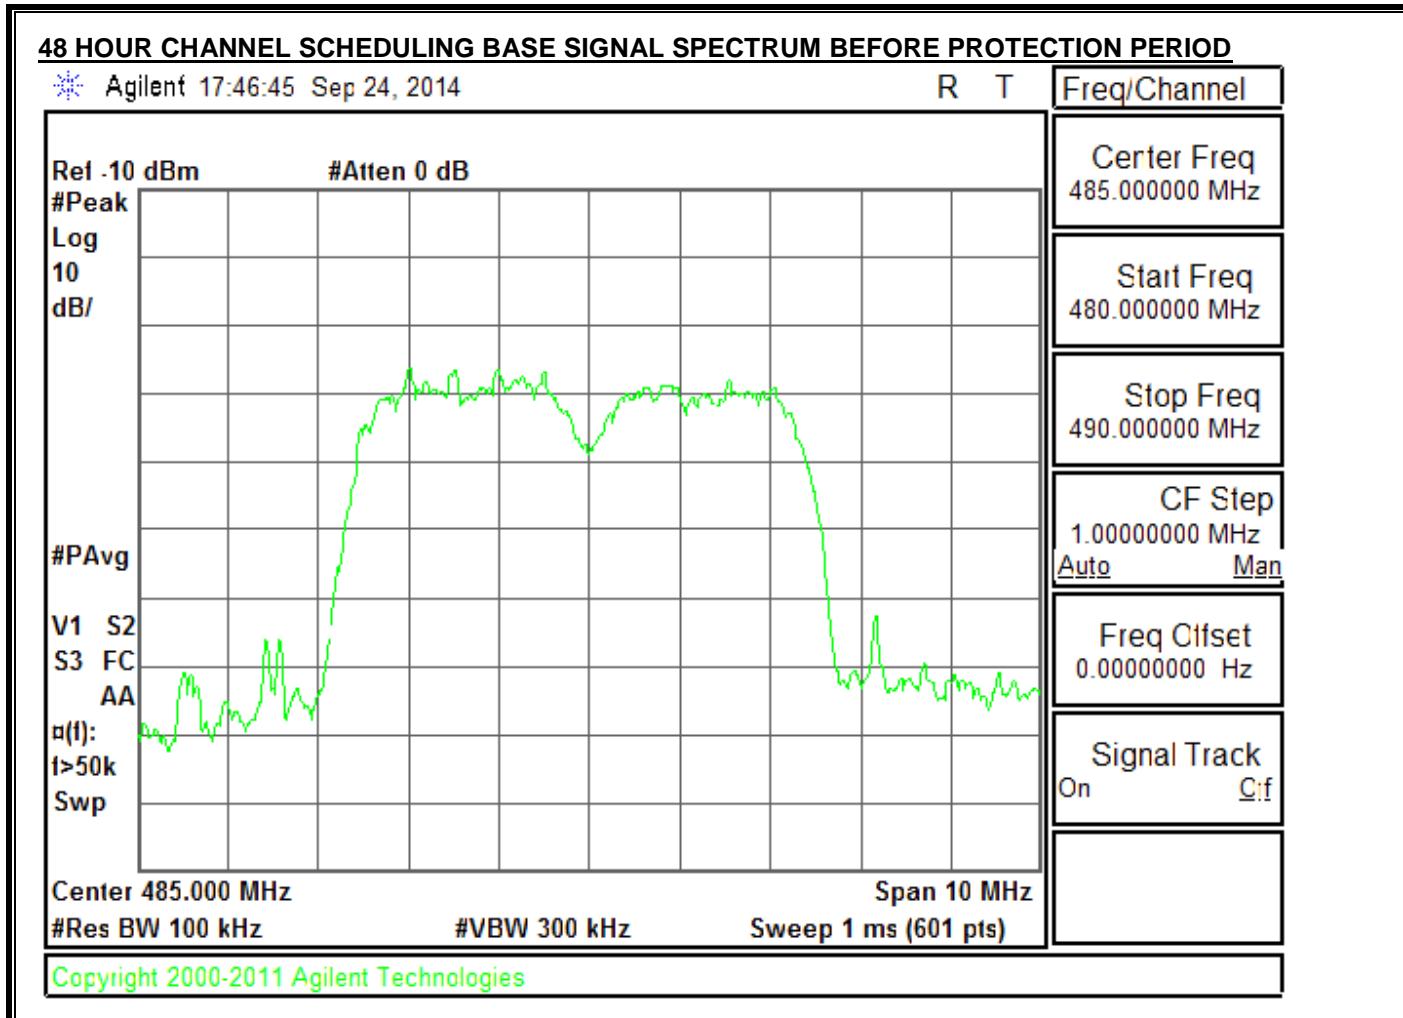

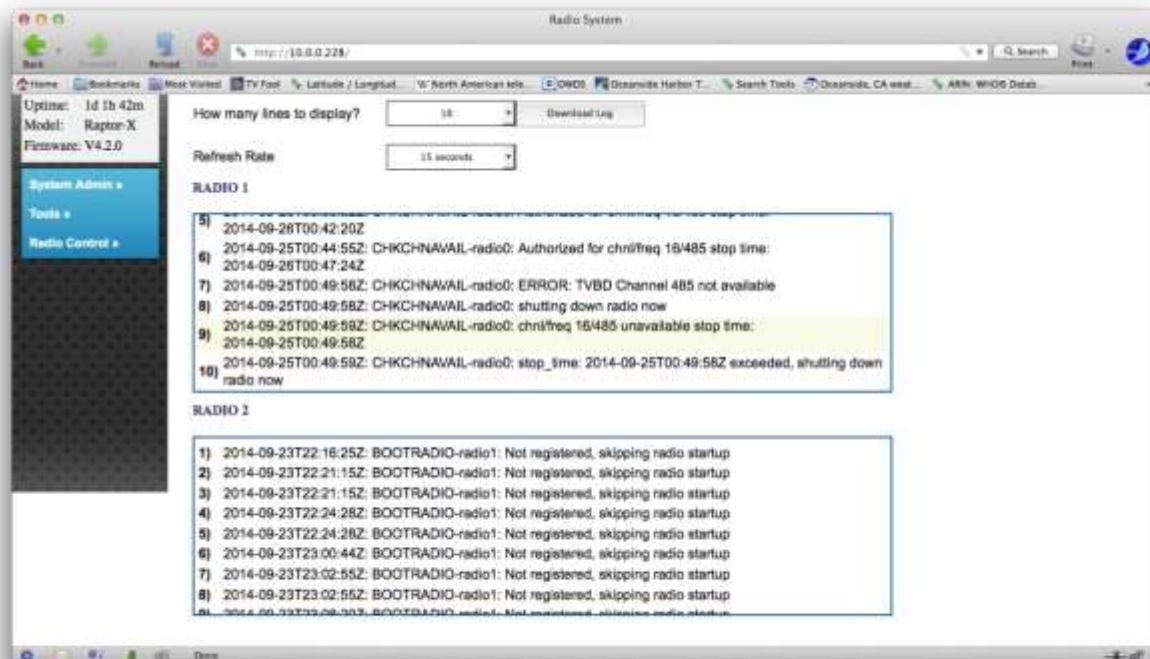48 HOUR CHANNEL SCHEDULING BASE SOFTWARE DURING PROTECTION PERIOD (CHANNEL 16 UNAVAILABLE)

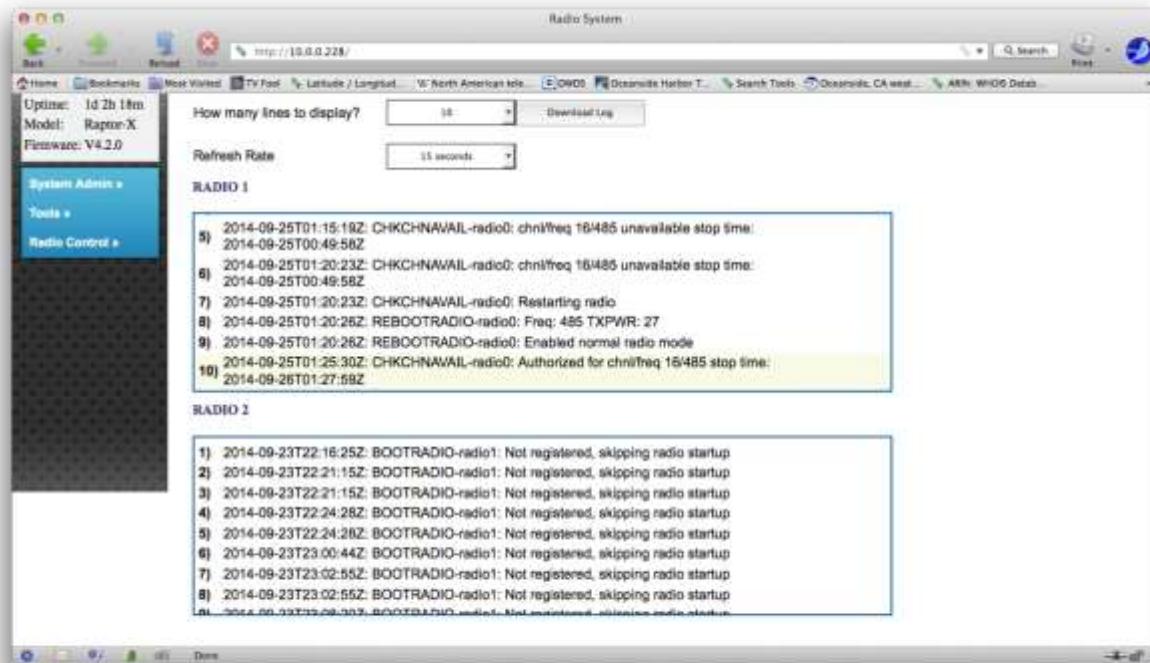
48 HOUR CHANNEL SCHEDULING BASE RESUMES ON CHANNEL 16 AFTER PROTECTION PERIOD

48 HOUR CHANNEL SCHEDULING BASE RESUMES TRANSMISSION ON CHANNEL 16 AFTER PROTECTION PERIOD

Agilent 18:21:29 Sep 24, 2014

R T

Freq/Channel

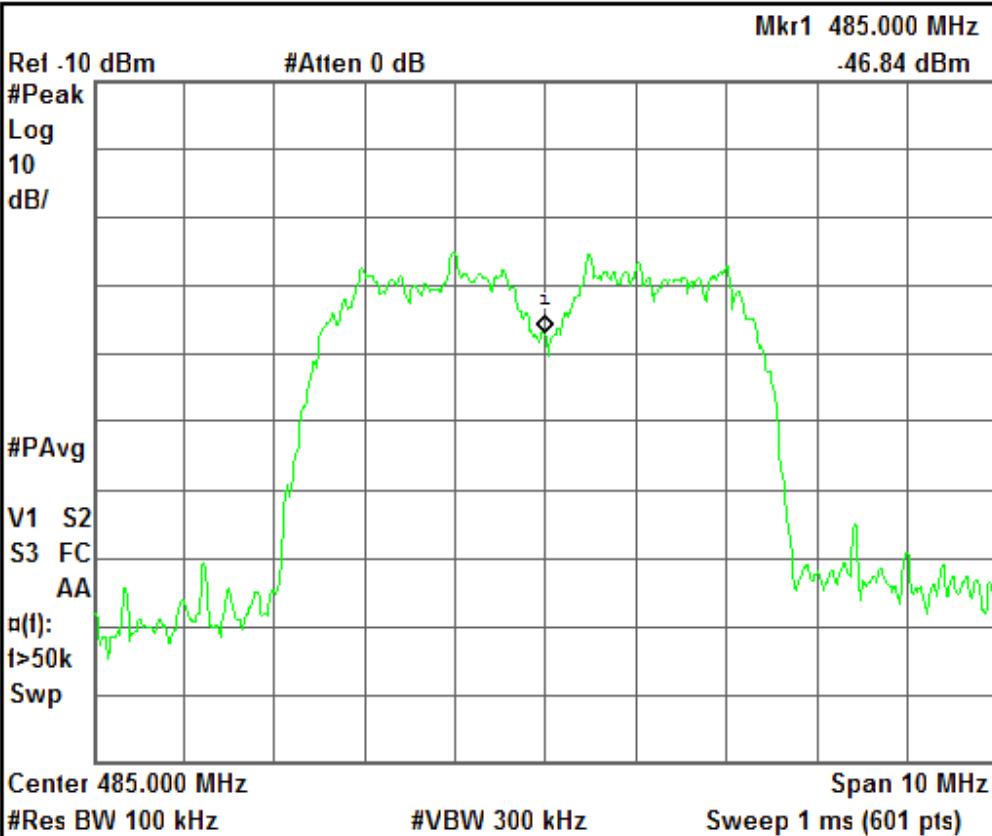

Center Freq
485.000000 MHz

Start Freq
480.000000 MHz

Stop Freq
490.000000 MHz

CF Step
1.00000000 MHz
 Auto Man

Freq Offset
0.0000000 Hz

Signal Track
On Off

Copyright 2000-2011 Agilent Technologies

8.5. §15.707, §15.711(B)(3)(I)(II)(IV),(C), §15.712 TVBD CHANNEL AVAILABILITY

REQUIREMENT

- Confirm that the channel list provided by the database conforms with those allowable to the class of TVBD under test. Confirm that the TVBD is operating on a channel from the list at authorized power and cannot be made to operate on an unauthorized channel.

TEST PROCEDURE

- Configure the base EUT with correct registration information.
- The base EUT automatically contacts the TVWS Database to perform device registration.
- Upon successful registration, base automatically contacts the TVWS Database to retrieve device channels.
- The base EUT software only allows the user to select a channel from the channel list returned from the database (see base software screen capture below) which are within the device operating frequency range 57 – 695 MHz.
- Test pre-condition: The device is configured to operate at a power level less than or equal to that which is authorized by the Grant.
- Upon successful registration the database returns the allowable power according to the device type.
- Verify on the spectrum analyzer that the base EUT is operating on the selected channel, i.e. Channel 16.

RESULTS

The EUT operates on a channel from the authorized channel list and at the authorized power level. The EUT cannot select and operate on any channel other than those within the authorized channel list returned from the TVWS Database, which are within the device operating frequency range.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

BASE SOFTWARE ONLY ALLOWS A CHANNEL FROM AUTHORIZED CHANNEL LISTS TO BE SELECTED FOR DEVICE OPERATION

TV Band Device Configuration

Device Information

Node: RaptorX-228
Radio 1: 16/485 MHz
Radio 2: 0 MHz
Date: 09-23-2014
Time: 22:55:57
Uptime: 0d 6h 48m
Model: Raptor-X
Firmware: V4.2.0

Radio Information

Status: Up
SSID: ssid_radio1
IP Address: 10.10.0.1
Broadcast Address: 10.10.255.255
Netmask: 255.255.0.0
Gateway: 10.19.6.1
Enable Radio?: Yes
Start Radio on Startup?: Yes

Installer Information

First Name: First Name
Last Name: Last Name
Identification: Identification

Location Information

Latitude (degrees):
Longitude (degrees):


Channel List:

Get Available Channels

Contact Information

First Name: First Name
Last Name: Last Name
Identification: Identification

14-08-21

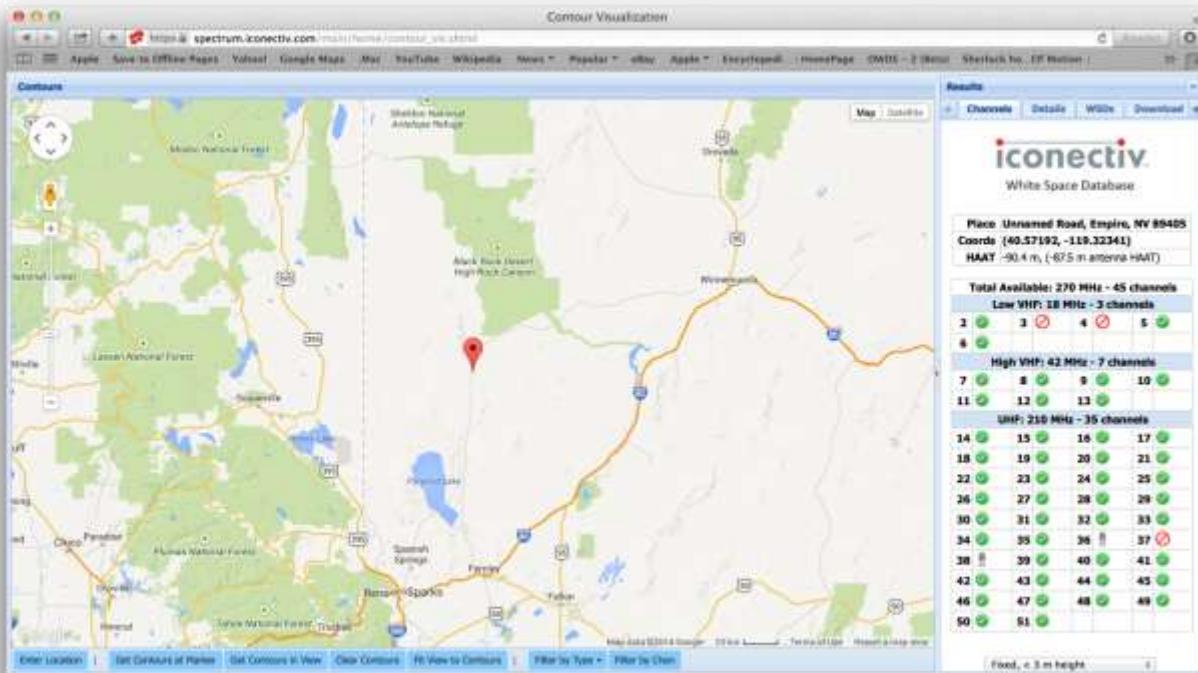
ICONNECTIV WEB INTERFACE SHOWING AUTHORIZED CHANNELS AT THE DEVICE LOCATION.

BASE SIGNAL SPECTRUM ON THE AUTHORIZED CHANNEL

Agilent 22:58:16 Sep 23, 2014

R T

Freq/Channel

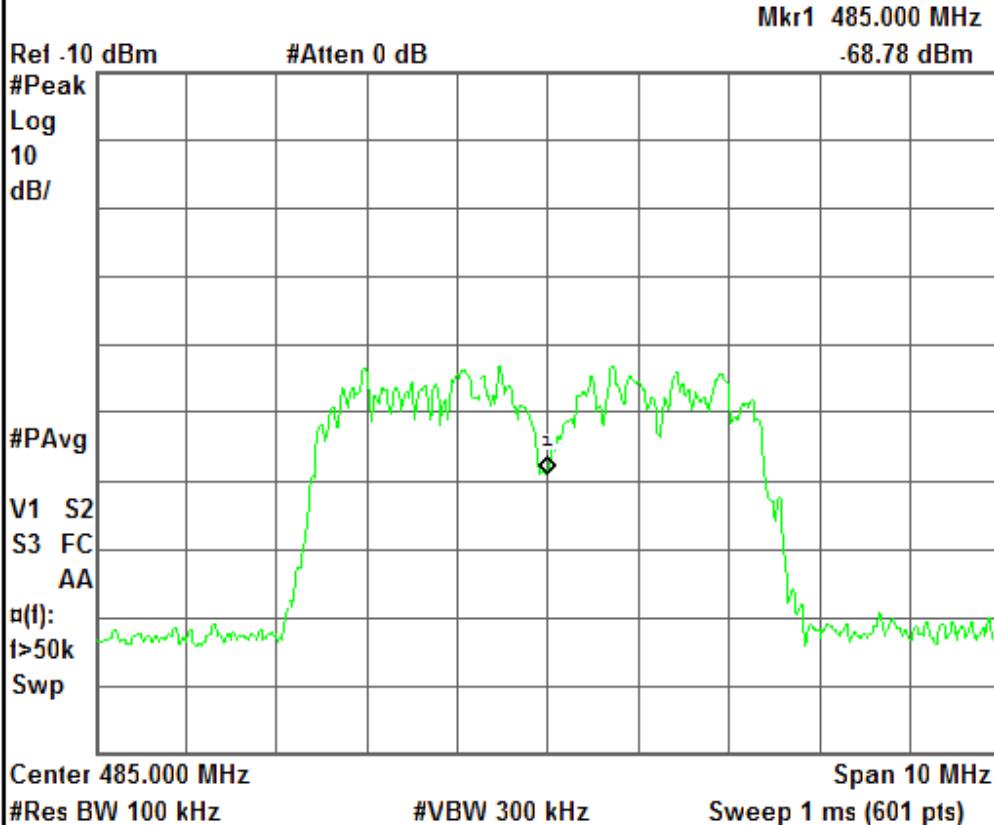Center Freq
485.000000 MHzStart Freq
480.000000 MHzStop Freq
490.000000 MHzCF Step
1.00000000 MHz
Auto ManFreq Offset
0.0000000 HzSignal Track
On Off

Copyright 2000-2011 Agilent Technologies

8.6. §15.715(F) SECURITY

REQUIREMENT

- The device operations procedures must include documentation with a detailed explanation of the following for each database the device is expected to work with:
 - i. What communication protocol is used between the database and the TVBD?
 - ii. How are communications initiated?
 - iii. How does the TVBD validate messages from the database?
 - iv. How does the device handle failure to communicate or authenticate the database?
 - v. How does the database validate messages from a TVBD?
 - vi. What encryption method is used?
 - vii. How does the database ensure secure registration of protected devices?

ANSWERS

i. What communication protocol is used between the database and the TVBD?

The TVBD connects to the iConectiv database using HTTP over SSL/TLS. The protocol used over this transport layer is specified by the IETF Protocol to Access White Space (PAWS) Draft-12 specification.

ii. How are communications initiated?

The TVBD initiates communication with the iConectiv database by first sending an INIT_REQ message containing a Device Descriptor. The Device Descriptor element contains the device serial number, manufacturer ID, and model ID, which in the US is FCC ID.

iii. How does the TVBD validate messages from the database?

The identity of the iConectiv database is validated through verification of the iConectiv SSL certificate through standard third-party certificate authority mechanisms, ensuring the communications are secure and authentic between the TVBD and the database.

At the application layer both the TVBD and database only handle messages that conform to the PAWS protocol specification. One additional message validation feature included in PAWS is the ability for the TVBD to correlate a response with a specific request by comparing the message's ID field with the ID field of the request that was sent.

iv. How does the device handle failure to communicate or authenticate the database?

If the TVBD has never communicated with or authenticated the database, then it will not begin operation. If once operating, experiences a communication or authentication failure, then it will cease operation at 11:59 PM on the following day.

v. How does the database validate messages from a TVBD?

The database validates messages from the TVBD by checking the serial number and FCC ID received in the Device Descriptor data element in every message versus a table of valid client devices that is populated when the device is manufactured. The list of valid serial numbers is communicated from device manufacturer to iConectiv via “out-of-band means,” such as email or telephone.

vi. What encryption method is used?

SSL/TLS standard encryption is used to encrypt packets send between TVBD and database.

vii. How does the database ensure secure registration of protected devices?

In this document, we interpret “protected devices” to mean entities authorized by the rules for protection from TVBDs, e.g., Temporary BAS, MVPD, Licensed and Unlicensed Microphones.

iConectiv provides a public interface that is available to entities authorized for protection under CFR Title 47 Part 15 Subpart H. The iConectiv registration system requires entities seeking protection to register for an account on the iConectiv site before they can create protected contours. Once a user creates an account, they can create new and view previously created registrations via the iConectiv registration site.

iConectiv maintains two parallel registration sites. The first, production registration site, is available to entities seeking protection from operational TVBDs. The second, test and integration site is available to those device manufacturers looking to integrate with the iConectiv database and to FCC and test laboratories looking to test functionality of a TVBD operating in conjunction with the iConectiv database. The test and integration site is provided so as to not corrupt data in the live production site with records used for testing only.

The two registration sites can be accessed via these addresses:

1. Live production registration site: <https://spectrum.iconectiv.com/main/reg/>
2. Test and integration registration site: <https://spectrum.iconectiv.com/dev/reg/>

Testers should note that while a device is being tested for certification, it will be connecting to the iConectiv test and integration server. To test the TVBD for operation in conjunction with registered protected entities, the tester must register for protection on the test and integration server (#2) listed above.

9. REMOTE STATION - DATABASE CERTIFICATION TESTS

9.1. §15.713(F)(3) FIXED TVBD REGISTRATION

REQUIREMENT

- The Fixed TVBD must be able to provide the required information to the TVWS database and obtain a successful registration.
- For a fixed TVBD without a direct connection to the internet, confirm that registration through a registered fixed device takes place only on a channel available to that registered device.

PRE-REGISTRATION PROCESS

1. Both the Base Station and Remote Station are registered using an authorized database via the Internet at the depot facility. Following registration a common available channel between each site is selected as the initial transmitting channel for each site. This channel will be the initial “listening” channel for the Remote Station.
2. The Remote Station is powered down and relocated to its permanent Fixed location.
3. The Remote Station upon power-up will monitor the channel, and when clear, transmit its status requesting direct connection to internet. When connected, the Remote Station will execute the registration procedure. The Remote Station will use a channel on which the Base Station is authorized to operate.
4. If the registration process fails, the remote station will immediately shut-down the Remote Station Radio.
5. If the registration is successfully the Remote Station will periodically re-validate available channels by registering.
6. If, upon registering, a previously available channel is unavailable, and the Remote Station is operating on the unavailable channel, the Remote Station will immediately cease Remote Station radio operation.

TEST PROCEDURE

- Pre-register the 'remote' Fixed device for operation using the 'remote' location, using a direct connection to the TVBD Database service, and select the channel that the 'Base' Fixed device is operating on.
- Remove the direct connection to Internet, and power cycle the 'remote' Fixed device
- Observe communication on the common channel between the 'Base' and 'Remote' stations.
- Confirm in the 'Remote' Fixed device's radio log, that the TVBD Database service was contacted, and the channel of operation was authorized.

RESULTS

The Remote Fixed device successfully contacted the TVWS Database and channel of operation was authorized.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

9.1.1. SUCCESSFUL REGISTRATION


TEST PROCEDURE

- Configure the Remote EUT with correct registration information:
 - The FCC ID and serial number are permanently programmed to the device and cannot be modified.
 - Known acceptable geographic coordinates, antenna height AGL and contact information were entered into the EUT.
- The Remote EUT automatically contacts the TVWS Database to perform device registration.
- Upon successful registration, the EUT automatically contacts the TVWS Database to retrieve device channel list.
- Selects a channel from the channel list returned from the TVWS Database and start normal radio operation on the selected channel.

RESULTS

The EUT successfully registered when correct registration information was submitted to the TVWS Database . The EUT transmission was observed on the spectrum analyzer on the selected TV channel (Channel 16) from the returned channel list from the TVWS Database.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

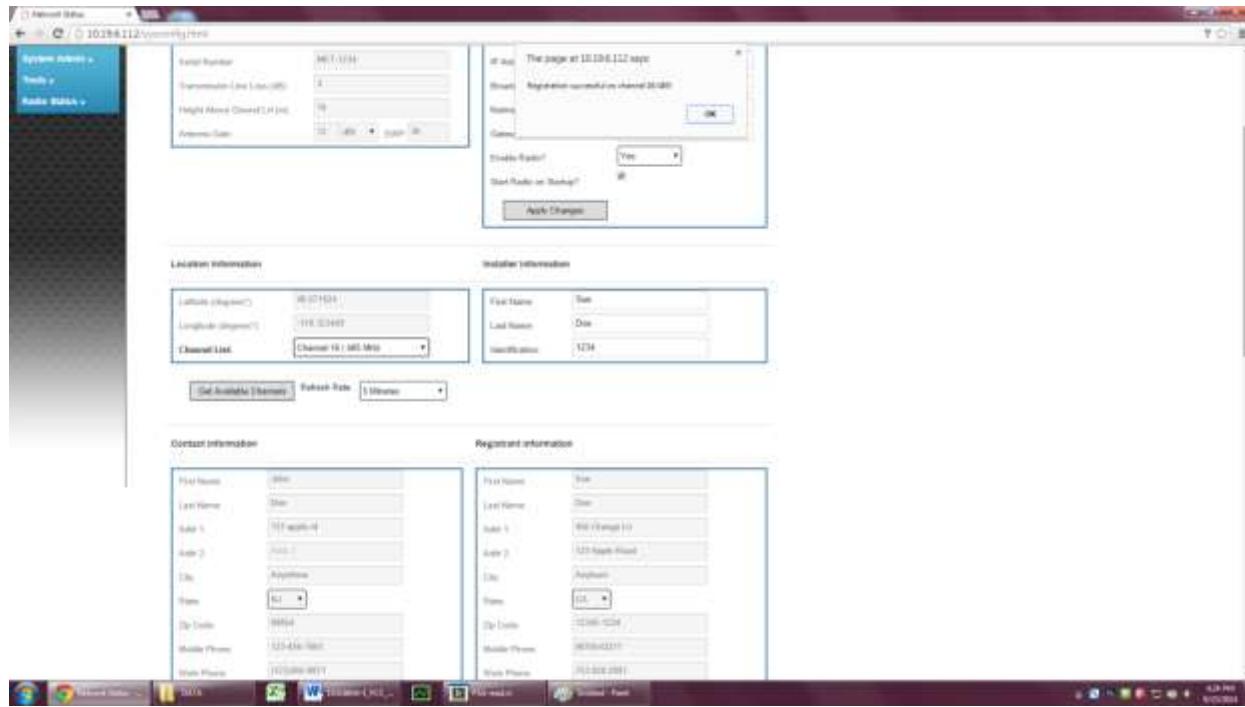REMOTE SOFTWARE SHOWING SUCCESSFUL DEVICE REGISTRATION WITH THE TVWS DATABASE

9.1.2. FAILED REGISTRATION – RESTRICTED COORDINATES

TEST PROCEDURE


- Configure the EUT with restricted coordinates: (LAT= 40.571924, LNG= -130) which is a location outside US regulatory boundaries
- Observe the base EUT registration failure indicated by the database message

RESULT

The Remote EUT failed to register when restricted coordinates information were submitted to the TVWS Database.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

REMOTE SOFTWARE SHOWING FAILED DEVICE REGISTRATION DUE TO RESTRICTED COORDINATES

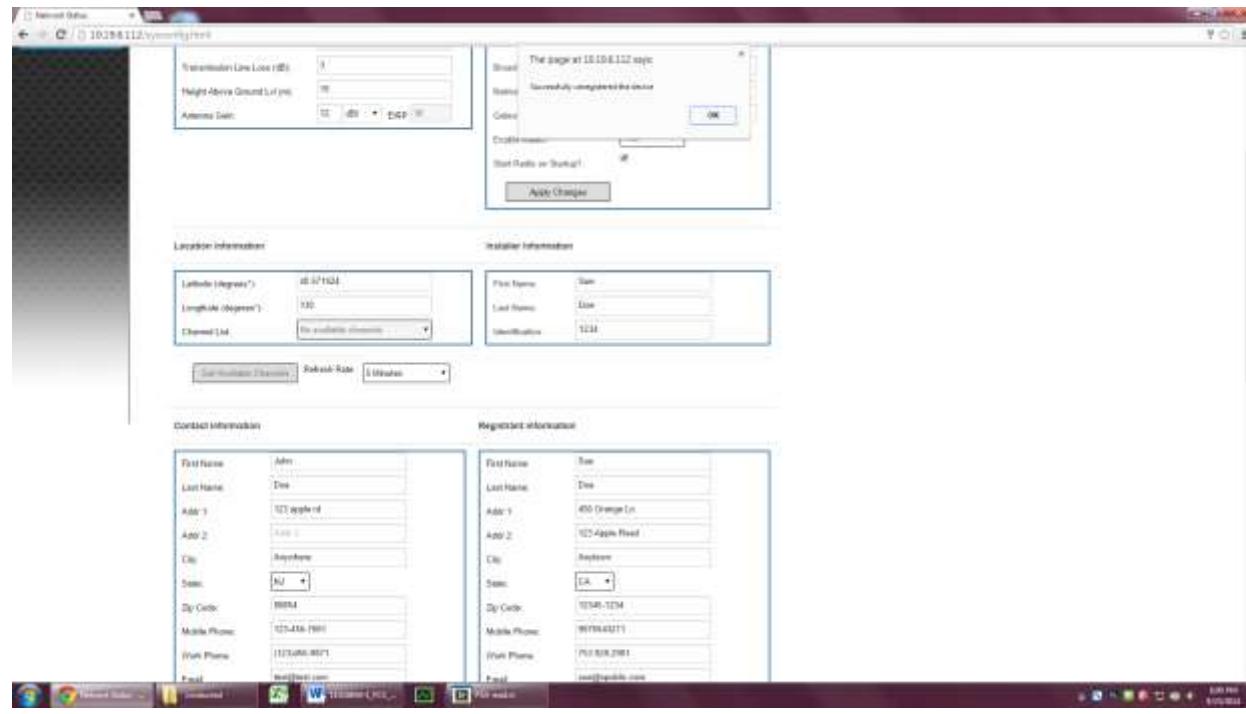

The screenshot shows a software window titled 'Network Status' with the URL '103.94.112.159:8080/index.html'. The main area displays a message: 'The radio at 10.10.8.122 says: Successfully registered the device'. Below this, there are sections for 'Location Information' and 'Installer Information'. Under 'Location Information', the Latitude is listed as '40.571924' and the Longitude as '-130'. Under 'Installer Information', the First Name is 'Tom' and the Last Name is 'Doe'. At the bottom of the window, there are sections for 'Contact Information' and 'Requester Information', both of which show identical data to the 'Installer Information' section. The software interface includes a toolbar at the top and a taskbar at the bottom with icons for Internet Explorer, Microsoft Word, and others.

9.1.3. FAILED REGISTRATION – HAAT

TEST PROCEDURE


- Configure the EUT with Height Above Average Terrain(HAAT) > 250 m: the Mount Shasta coordinates (LAT=41.4092, LNG=-122.1949) were used.
- Observe the base registration failure indicated by the database message.


RESULTS

The Remote EUT failed to register when it is set to a location with HAAT above the limit.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

MOUNT SHASTA HAS NO TVWS CHANNELS DUE TO HAAT LIMIT AS INDICATED BY THE TVWS DATABASE

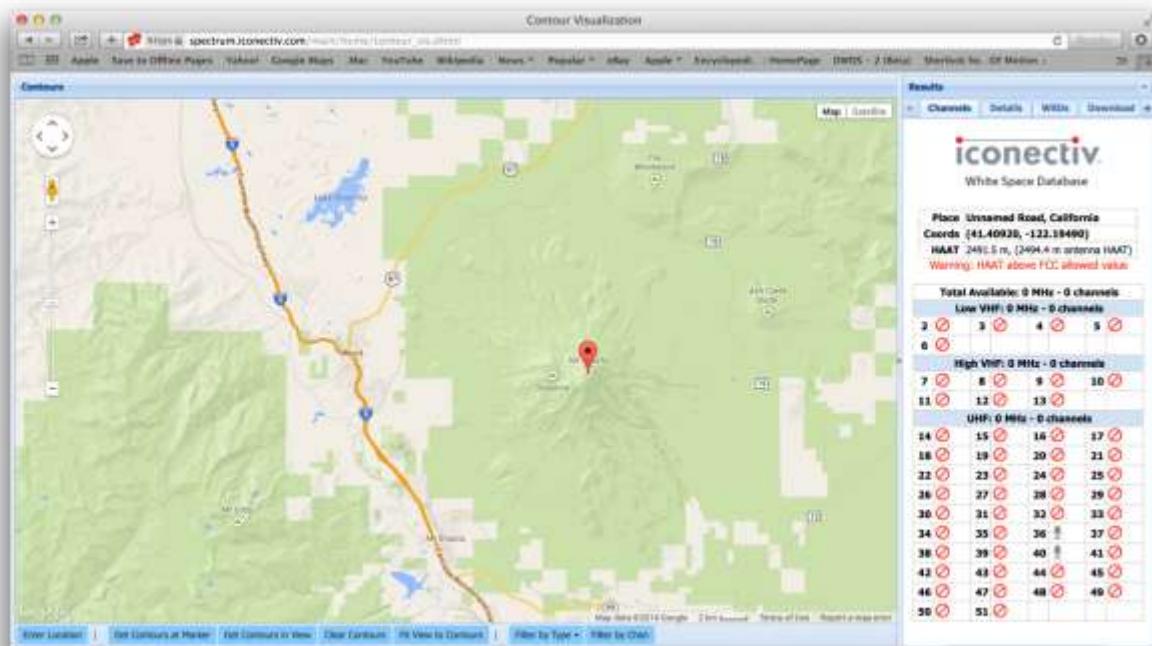

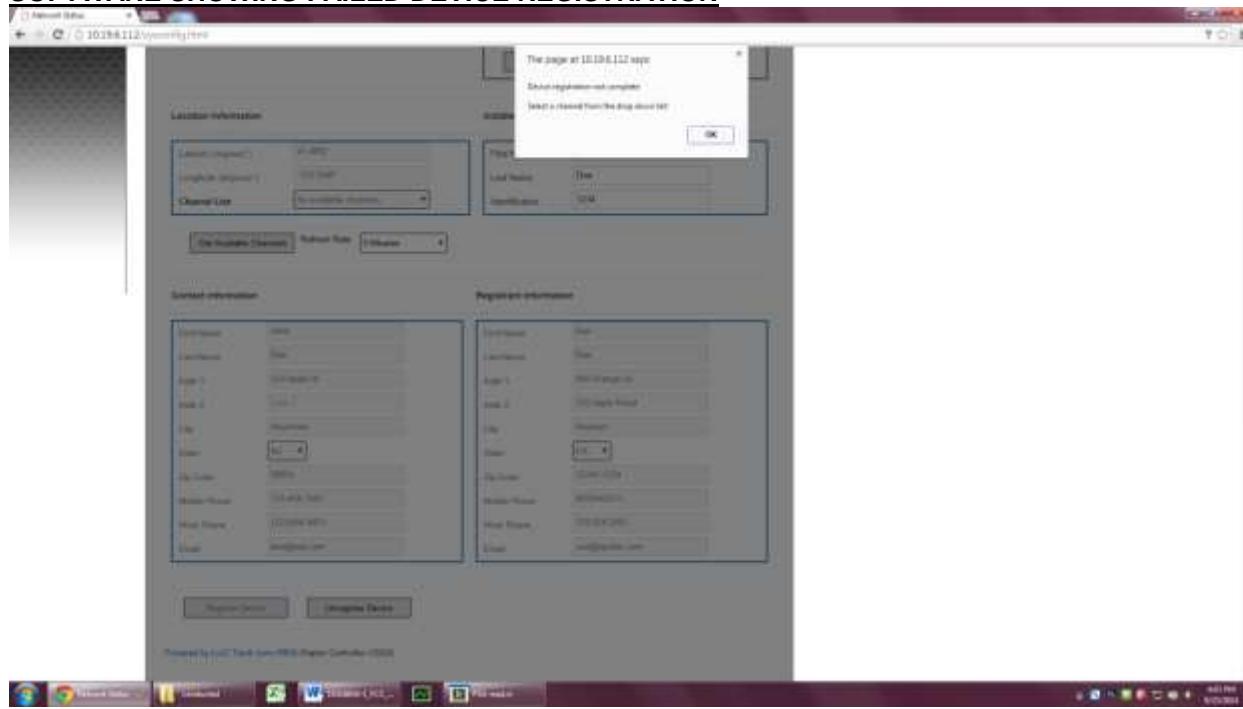SOFTWARE SHOWING FAILED DEVICE REGISTRATION

9.1.4. FAILED REGISTRATION – ANTENNA HEIGHT AGL

TEST PROCEDURE


- Configure the EUT with antenna height Above Ground Level (AGL) > 30 meters.
- Observe the base registration failure indicated by the database message.

RESULTS

The Remote EUT failed to register when it is set to a location with antenna AGL above the limit.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

REMOTE SOFTWARE SHOWING FAILED DEVICE REGISTRATION DUE TO AGL LIMIT

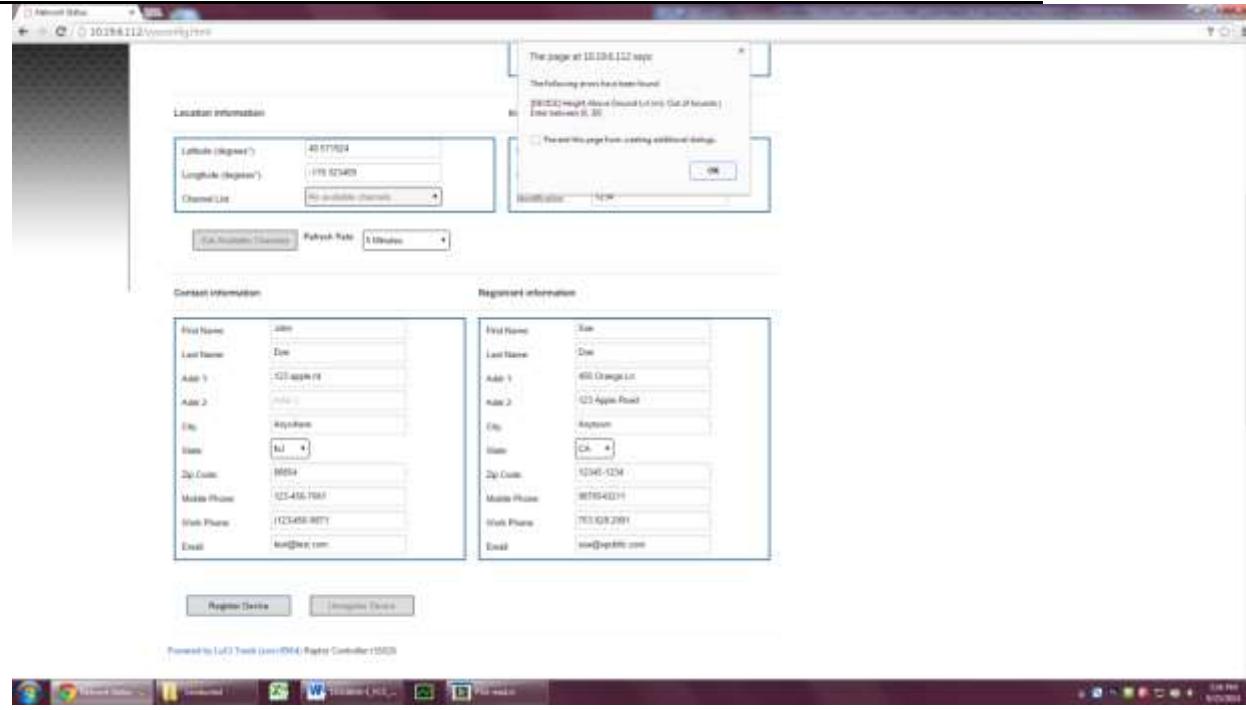

The screenshot shows a web-based registration interface. At the top, there is a message: "The page at 10.10.6.112 says: The following pages have been found: 398 (32) height above ground level limit. Out of 24 results. Zone between 0..30. Prevent this page from creating additional dialogs. OK". Below this, there are two side-by-side registration forms for "Location Information" and "Contact Information".

Location Information:

Latitude (degrees):	40.877824
Longitude (degrees):	-119.825403
Channel List:	No available channels
Notification:	None
LA Selection: Channel	Priority Rate: 1.00Mbps

Contact Information:

First Name:	John
Last Name:	Doe
Address 1:	123 Apple Rd
Address 2:	Apartment
City:	Anytown
State:	CA
Zip Code:	98054
Mobile Phone:	123-456-7890
Work Phone:	123456-8976
Email:	test@test.com

First Name:	Sam
Last Name:	Doe
Address 1:	456 Orange Ln.
Address 2:	123 Apple Road
City:	Anytown
State:	CA
Zip Code:	12345-1234
Mobile Phone:	9876543210
Work Phone:	765123-2345
Email:	test@test.com

At the bottom of the interface, there are two buttons: "Register Device" and "Unregister Device". The status bar at the bottom of the screen shows "Powered by LoRaWAN (LoRaWAN Radio Controller 1.5.0)".

9.1.5. FAILED REGISTRATION – INCOMPLETE CONTACT INFORMATION

TEST PROCEDURE

- Configure the EUT with missing contact information, e.g. email.
- The device software cannot proceed with registration and prompts user to enter the missing information.

RESULTS

Software didn't proceed with registration when contact information fields are missing.

Test Results	
Pass	Fail
☒	☐

SOFTWARE PROMPTING THE USER TO ENTER MISSING CONTACT INFORMATION

First Name:	Tom
Last Name:	Doe
Add 1:	123 Apple St.
Add 2:	
City:	Anywhere
State:	CA
Zip Code:	00000
Mobile Phone:	(123)456-7890
Work Phone:	(123)456-9871
Email:	tom@apple.com

First Name:	Tom
Last Name:	Doe
Add 1:	123 Orange Ln.
Add 2:	123 Apple Road
City:	Anywhere
State:	CA
Zip Code:	12345-1234
Mobile Phone:	(123)456-7890
Work Phone:	(123)456-9871
Email:	tom@apple.com

9.2. §15.707(A) FIXED TVBD RELOCATED

REQUIREMENT

- Confirm that the database will not provide a channel list for Fixed TVBD at a location other than that registered.

TEST PROCEDURE


- The Remote EUT geographic coordinates are entered at registration time and stored in the device. The device channel list request uses the same coordinates established at registration time. No separate coordinates can be entered for channel list request.
- The device requires professional installation and device registration information including device location will be entered by the professional installer.
- Once the registration is complete, upon power cycling the device will use the stored registration location for channel list request.

RESULTS

The device only uses its registered location for channel list request. The device registered location will be established at installation time by a professional installer and cannot be altered after installation – see RaptorX-225 Installation and User Manual.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

REMOTE SOFTWARE ONLY ALLOWS DEVICE REGISTRATION LOCATION INFORMATION TO BE ENTERED DURING INSTALLATION AND THE SAME DEVICE LOCATION IS USED FOR CHANNEL LIST REQUEST

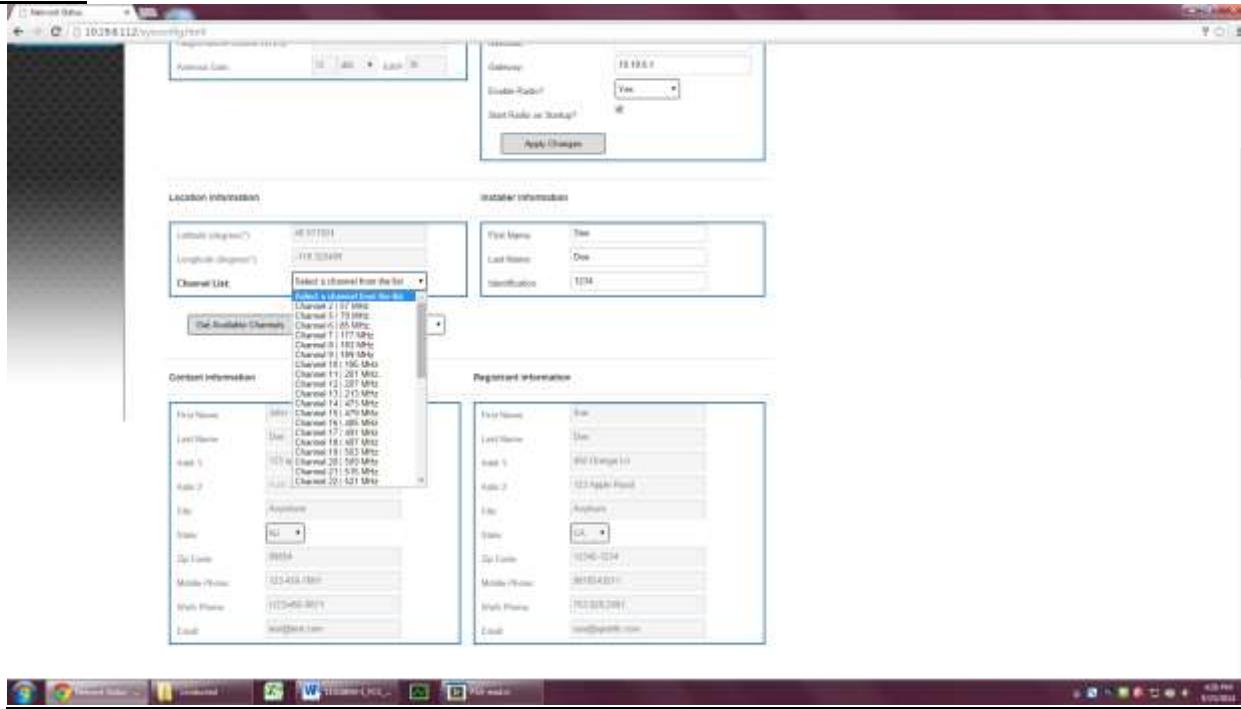

9.3. §15.711(B)(3)(I)(II), §15.713(A)(1) 48 HOUR CHANNEL SCHEDULING**REQUIREMENT**

- After receiving an available channel list, register a low-power auxiliary device on the TVBD operating channel. Repeat the available channel request after the update interval and confirm that the low-power device is accounted for in the schedule. Using the system management software, confirm that the device changes channels at the scheduled time.
- When a Low-Power Auxiliary device is registered on a channel in use by the Fixed device, the Fixed device is required to cease transmissions immediately.

TEST PROCEDURE


- A Low-Power Auxiliary device is registered and placed at the GPS location of the Remote Fixed device, with a scheduled time of operation.
- When the scheduled time for the Low-Power Auxiliary device to be in operation, observe that the Remote Fixed device ceases radio operation for the duration of the event period.
- Since the Remote Fixed device is 'Not Directly Connected to the Internet', manual intervention is required for the 'remote' Fixed device to restart radio operations.
- When the Remote Fixed device reconnects to the internet thru the base gateway, it starts normal operation after receiving the updated channel list that includes Channel 16 from the TVWS database.

RESULTS

The Remote Fixed device EUT correctly ceased transmission on the protected channel over the protection period of the Low Power Auxiliary Device at the same location.

Test Results	
Pass	Fail
☒	☐

48 HOUR CHANNEL SCHEDULING LOW POWER AUXILIAR DEVICE REGISTRATION RECORD AT REMOTE FIXED DEVICE LOCATION

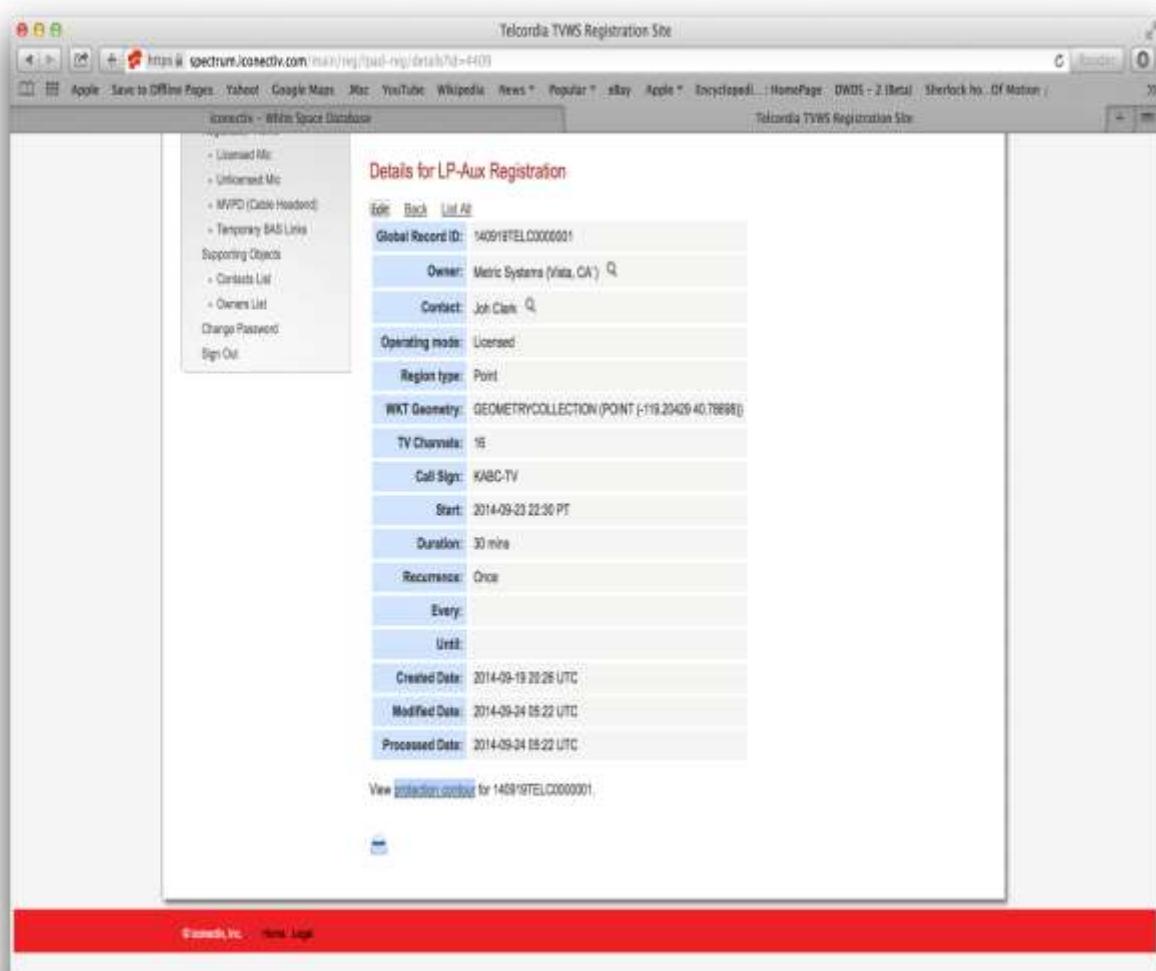

Details for LP-Aux Registration

Global Record ID: 140919TEL0000001

Owner: Metric Systems (Vista, CA)

Contact: John Clark

Operating mode: Licensed

Region type: Point

WKT Geometry: GEOMETRYCOLLECTION(POINT (-119.2040940.78696))

TV Channel: 16

Call Sign: KABC-TV

Start: 2014-09-23 22:30 PT

Duration: 30 mins

Recurrence: Once

Every:


Until:

Created Date: 2014-09-19 20:26 UTC

Modified Date: 2014-09-24 05:22 UTC

Processed Date: 2014-09-24 05:22 UTC

[View registration history for 140919TEL0000001](#)

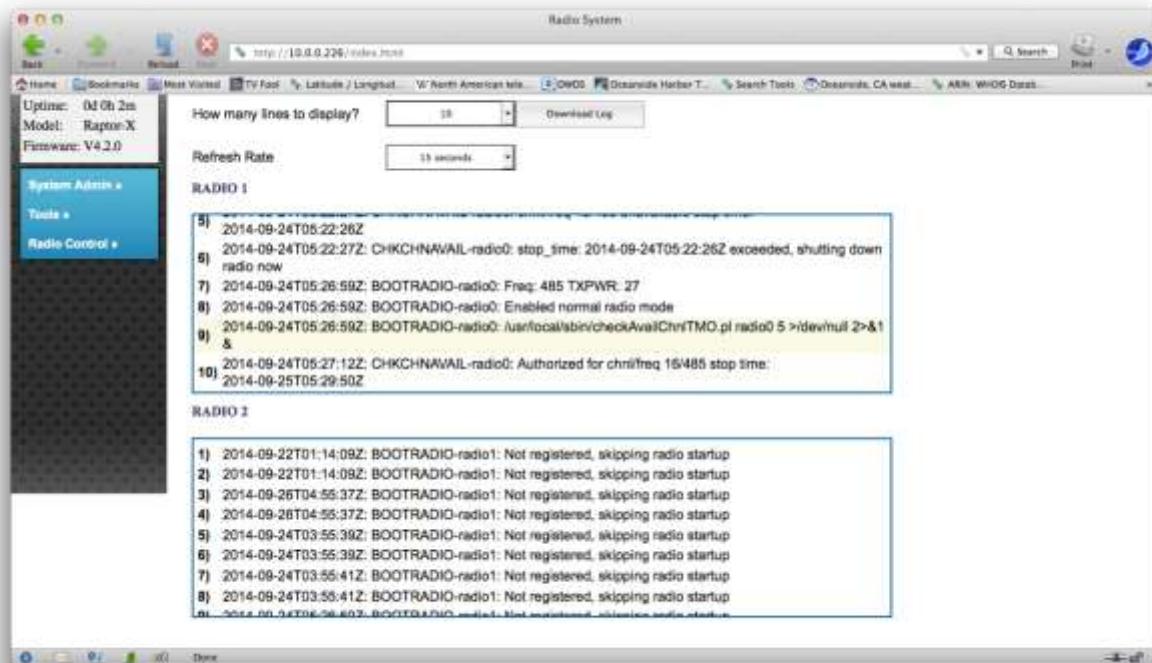
48 HOUR CHANNEL SCHEDULING BASE SOFTWARE BEFORE PROTECTION PERIOD FOR THE REMOTE FIXED DEVICE LOCATION

48 HOUR CHANNEL SCHEDULING ACTIVE REMOTE FIXED DEVICE SIGNAL SPECTRUM PRIOR TO PROTECTION PERIOD


Agilent 22:29:25 Sep 23, 2014


R T

Freq/Channel

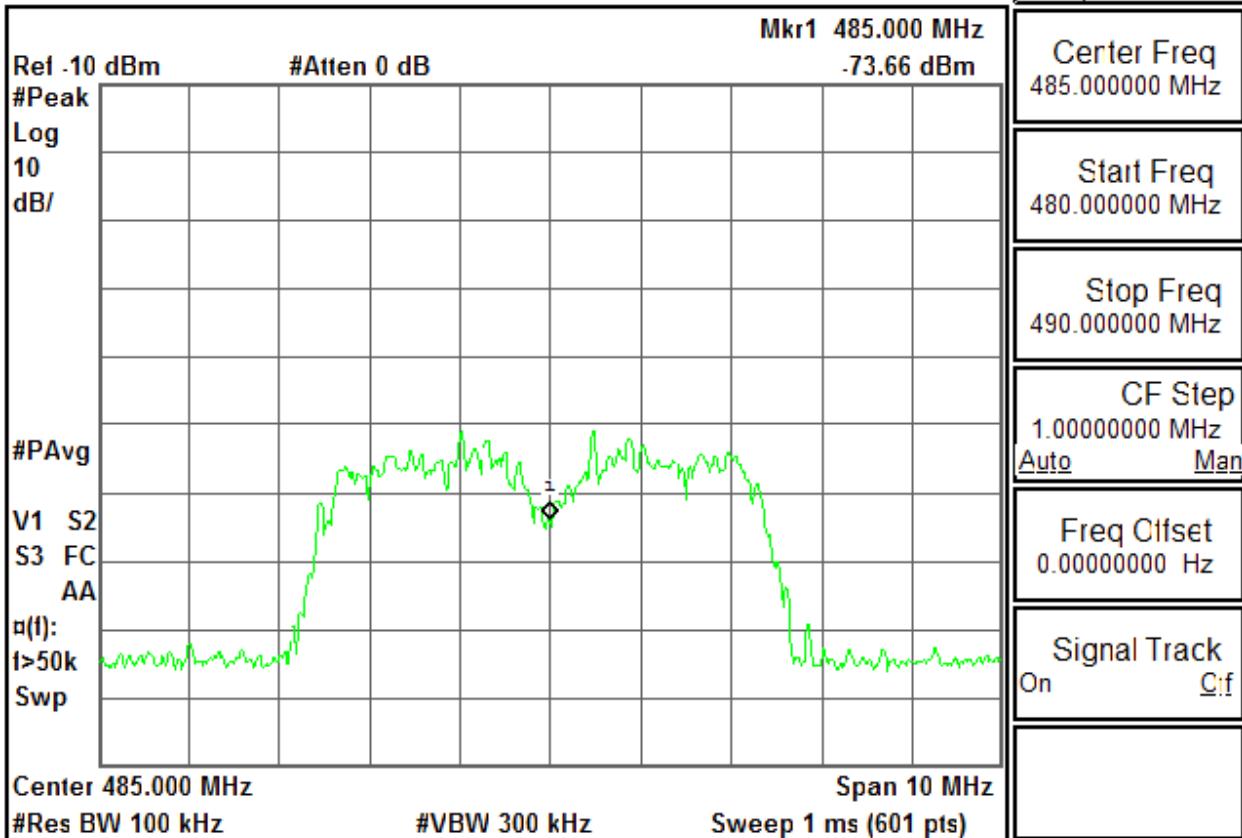

Copyright 2000-2011 Agilent Technologies

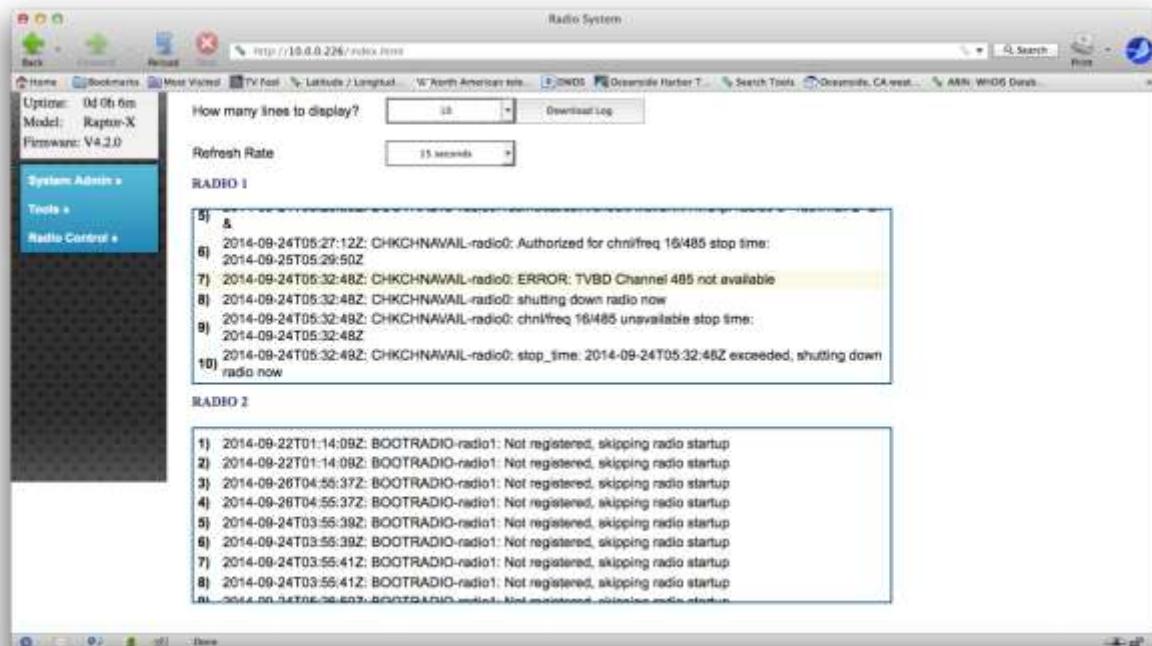48 HOUR CHANNEL SCHEDULING BASE SOFTWARE DURING PROTECTION PERIOD FOR THE REMOTE FIXED DEVICE LOCATION (CHANNEL 16 NOT AVAILABLE AT THE CLIENT LOCATION)

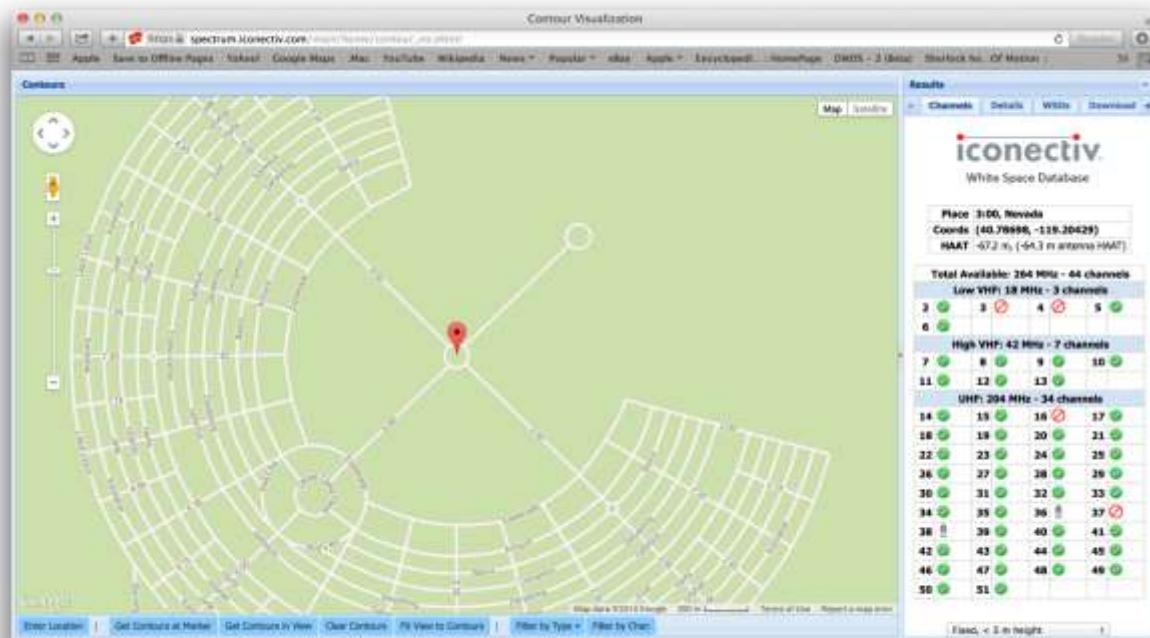
48 HOUR CHANNEL SCHEDULING CLIENT SOFTWARE DURING PROTECTION PERIOD (CHANNEL 16 NOT AVAILABLE AT THE REMOTE FIXED DEVICE LOCATION)

48 HOUR CHANNEL SCHEDULING REMOTE FIXED DEVICE SIGNAL NOT ACTIVE DURING THE PROTECTION PERIOD


Agilent 22:34:15 Sep 23, 2014

B T

Freq/Channel

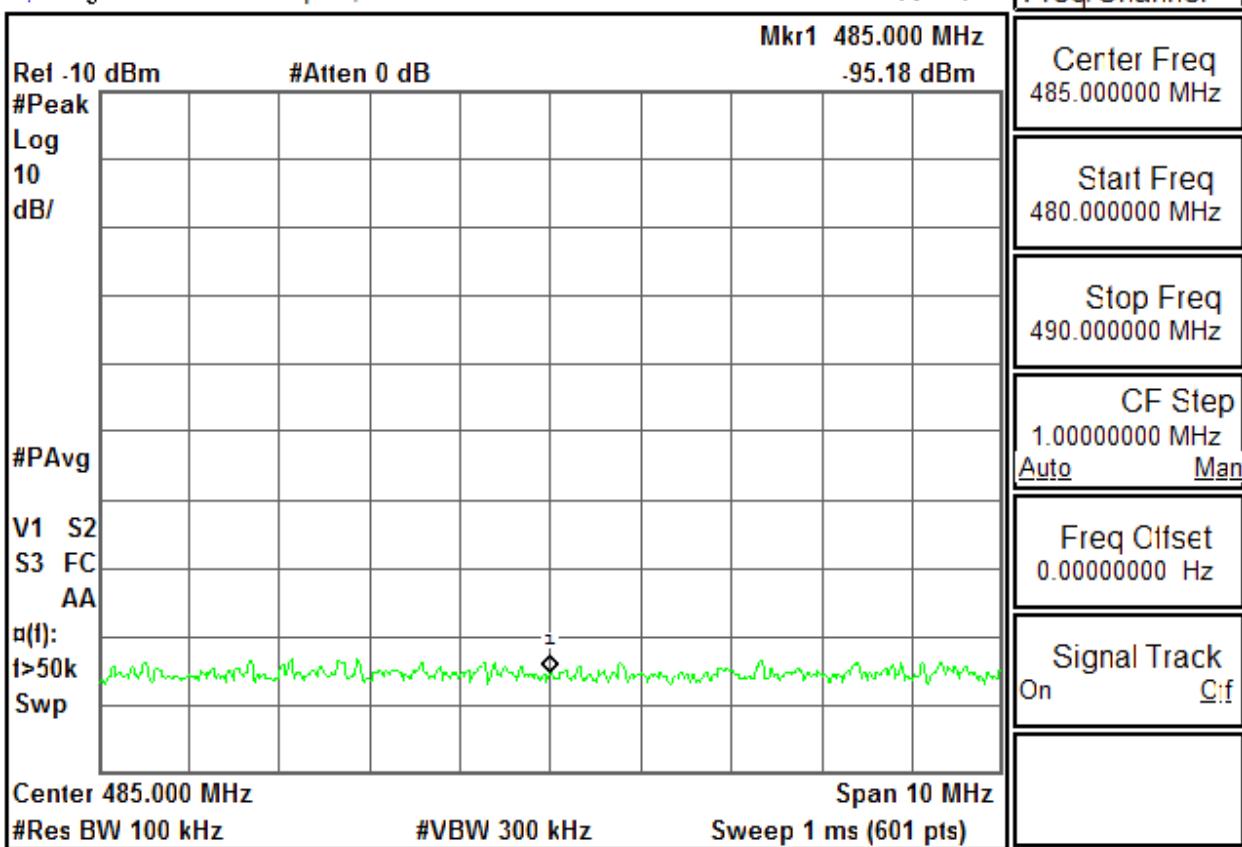

Copyright 2000-2011 Agilent Technologies

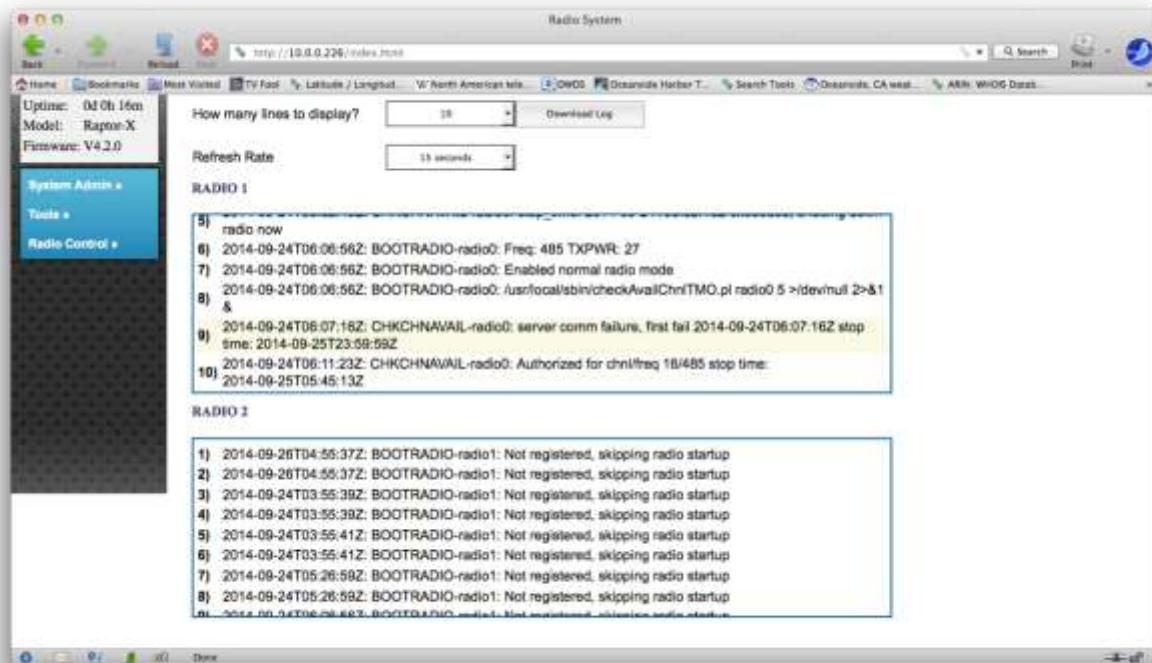48 HOUR CHANNEL SCHEDULING BASE SOFTWARE AFTER PROTECTION PERIOD FOR THE REMOTE FIXED DEVICE LOCATION (CHANNEL 16 AVAILABLE AGAIN)

48 HOUR CHANNEL SCHEDULING CLIENT SOFTWARE AFTER PROTECTION PERIOD (REMOTE FIXED DEVICE RECONNECTS WITH BASE ON CHANNEL 16)




48 HOUR CHANNEL SCHEDULING REMOTE FIXED DEVICE SIGNAL RESUMED AFTER THE PROTECTION PERIOD

Agilent 23:08:11 Sep 23, 2014

R T

Freq/Channel

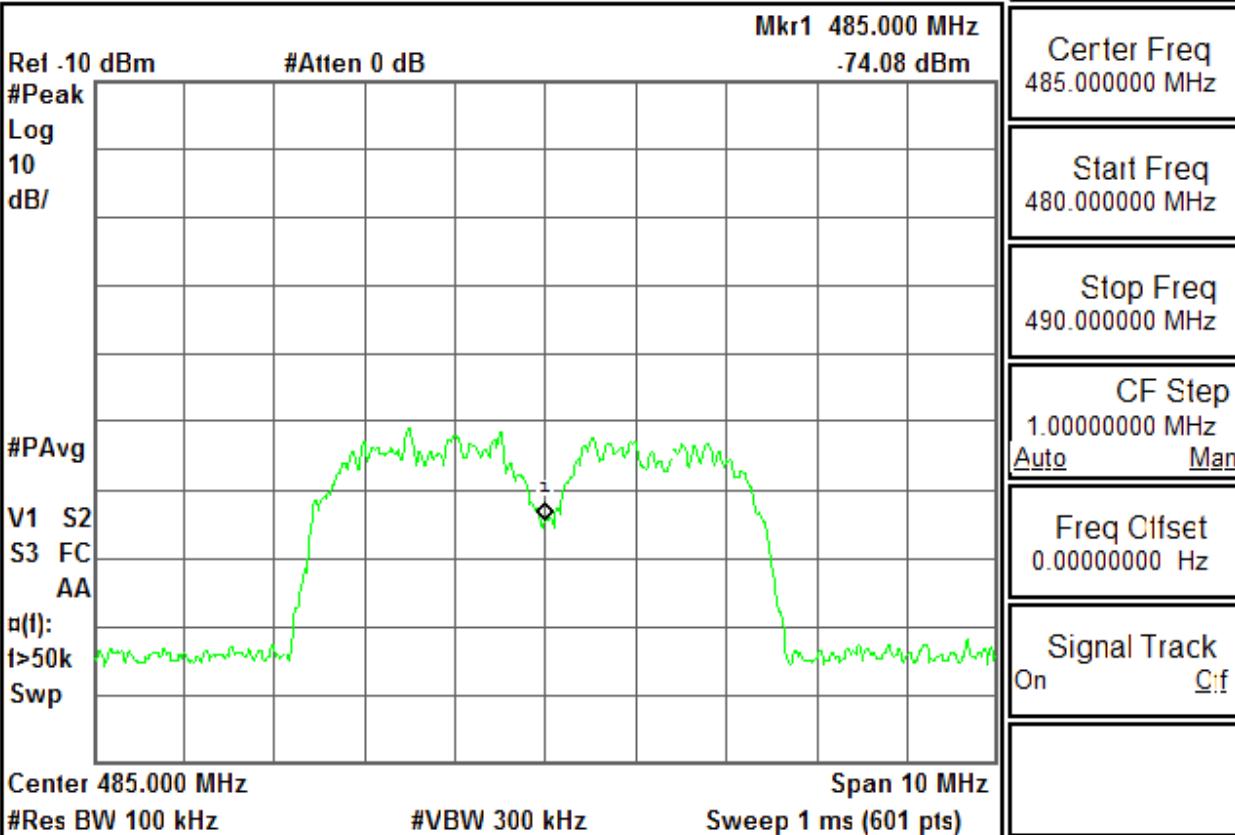

Copyright 2000-2011 Agilent Technologies

9.4. §15.711(B)(3)(III) FIXED & MODE II TVDB DATABASE UPDATE

REQUIREMENT

- §15.711(B)(3)(III) If a fixed or Mode II personal/portable TVBD fails to successfully contact the TV bands database during any given day, it may continue to operate until 11:59 p.m. of the following day at which time it must cease operations until it re-establishes contact with the TV bands database and re-verifies its list of available channels.

Confirm that the Remote Fixed device shuts down by 11:59 PM on the following day.


TEST PROCEDURE

- Set the base to normal operation mode.
- Set the Remote Fixed device EUT to normal operation mode:
 - Enter proper registration information on the Remote Fixed device with an IP 10.0.0.226.
 - Choose a proper set of scan channels on the Remote Fixed device that includes the base operating channel(16).
 - The Remote Fixed device is registered through the base gateway.
 - The Remote Fixed device verifies its operating channel and enters normal operation.
- Register a Low-Power Auxiliary device at the location of the 'base' Fixed device; schedule an event of 30 minutes in duration.
- Observe that the 'base' Fixed device ceases operation during the event period.
- Observe in the 'radio log' that the 'remote' Fixed device has set a timer to cease operations on 'Next Day, 11:59 pm'.
- After the event's 30 minute duration, observe that the 'base' Fixed device resumes operation on restored available channel.
- Observe in the 'radio log' that the 'remote' Fixed device has resumed receiving channel availability/authorization for use of the channel.

RESULTS

During normal operation, the base and Remote Fixed device(EUT) channel lists are updated periodically by sending channel list requests to the TVWS Database . After the database access was blocked, the next channel list requests failed and the EUTs stopped transmission immediately.


Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

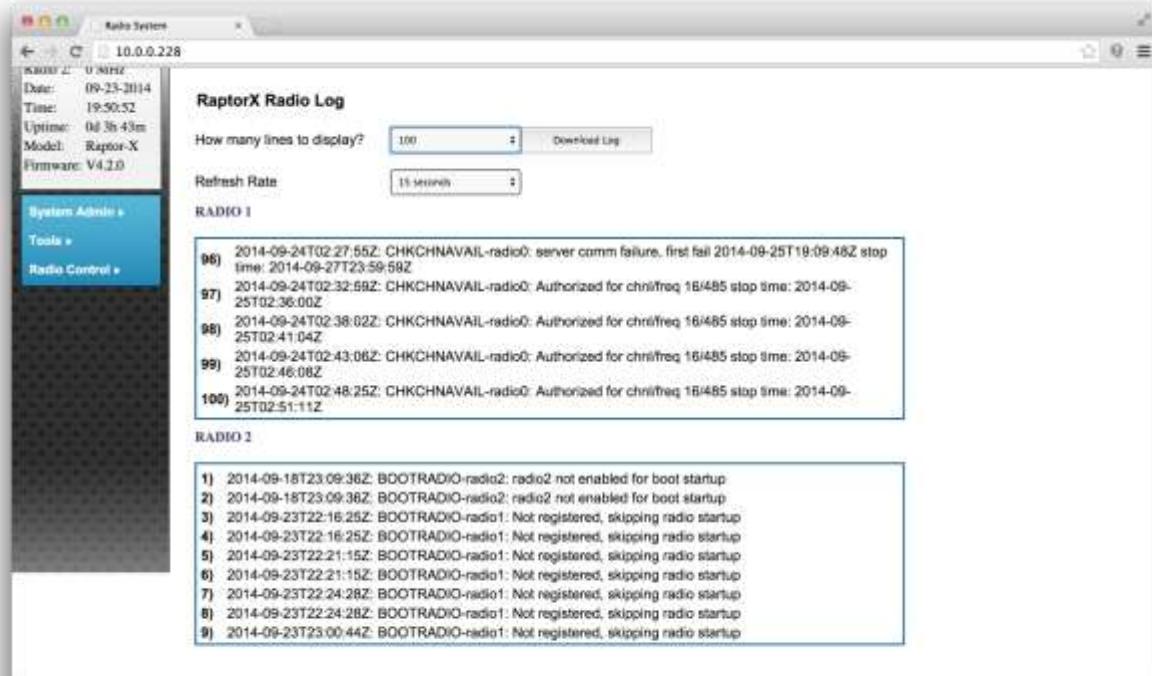BASE SOFTWARE BEFORE DATABASE BLOCKING (REMOTE FIXED DEVICE /BASE ON CHANNEL 16)

REMOTE FIXED DEVICE SIGNAL SPECTRUM BEFORE DATABASE BLOCKING

Agilent 18:31:00 Sep 24, 2014


R T

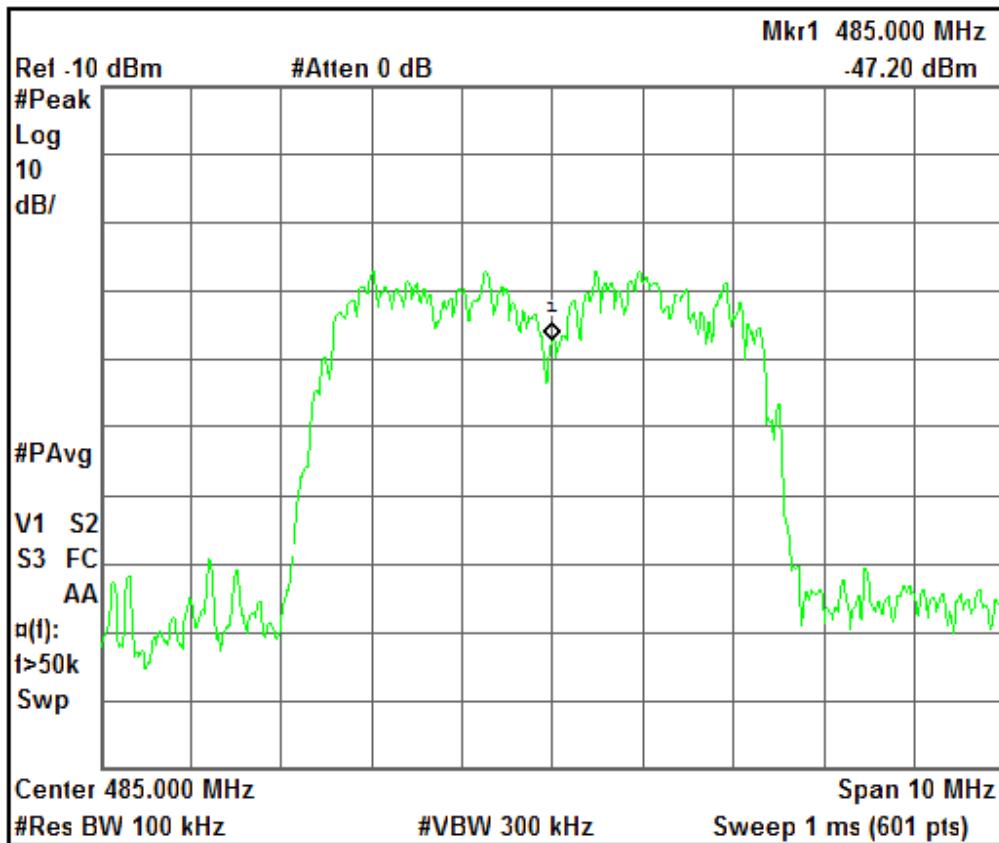

Freq/Channel

Center Freq
485.000000 MHzStart Freq
480.000000 MHzStop Freq
490.000000 MHzCF Step
1.00000000 MHz
Auto ManFreq Offset
0.0000000 HzSignal Track
On Off

Copyright 2000-2011 Agilent Technologies

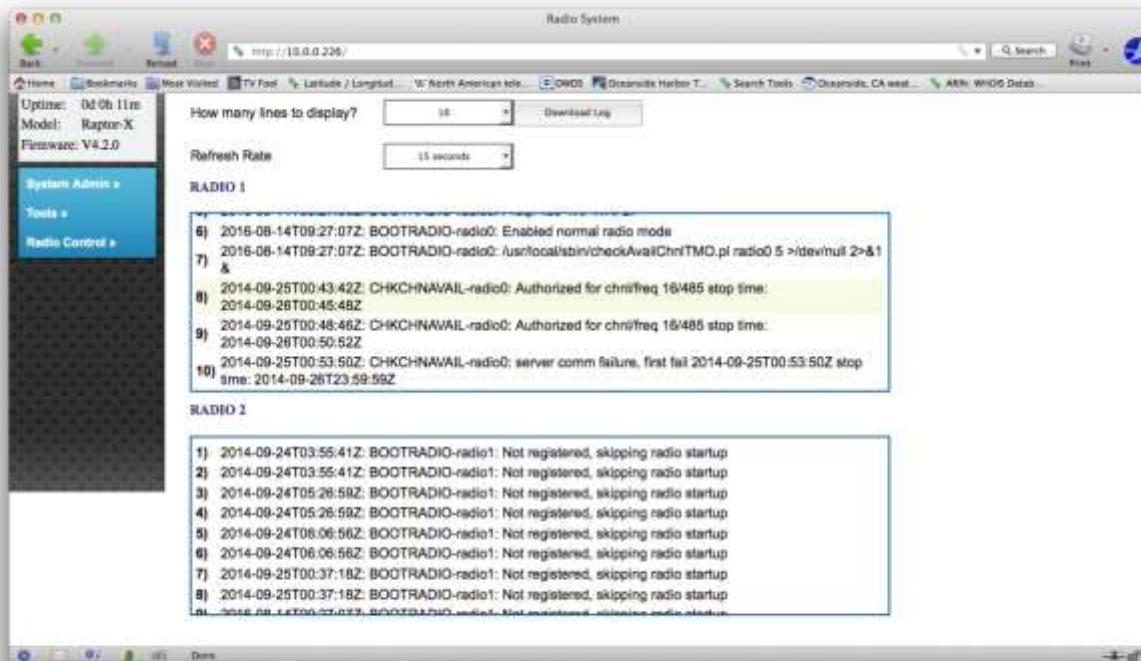REMOTE FIXED DEVICE STOPPED AFTER DATABASE BLOCKING

REMOTE FIXED DEVICE SIGNAL SPECTRUM AFTER DATABASE BLOCKING

Agilent 18:31:38 Sep 24, 2014

R T

Mkr1 485.000 MHz

-94.70 dBm

Ref -10 dBm

#Atten 0 dB

#Peak

Log
10
dB/

#PAvg

V1 S2


S3 FC

AA

#(1):

t>50k

Swp

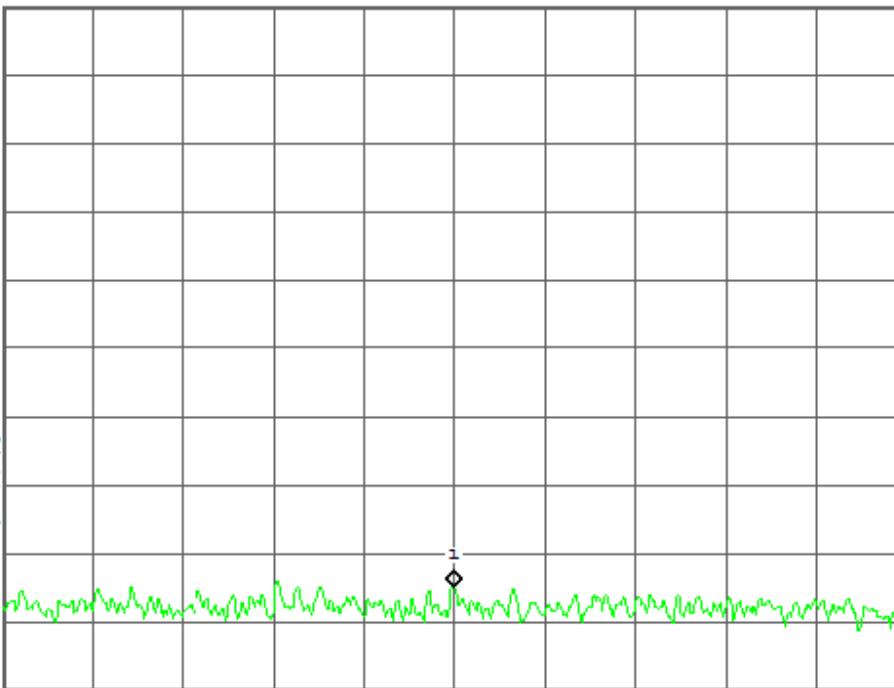

Freq/Channel

Center Freq
485.000000 MHzStart Freq
480.000000 MHzStop Freq
490.000000 MHzCF Step
1.00000000 MHz
Auto ManFreq Offset
0.0000000 HzSignal Track
On Cif

Copyright 2000-2011 Agilent Technologies

9.5. §15.707, §15.711(B)(3)(I)(II)(IV),(C), §15.712 TVBD CHANNEL AVAILABILITY

REQUIREMENT

- Confirm that the channel list provided by the database conforms with those allowable to the class of TVBD under test. Confirm that the TVBD is operating on a channel from the list at authorized power and cannot be made to operate on an unauthorized channel.

TEST PROCEDURE

- Set the base to normal operation (on Channel 19).
- Configure the Remote EUT with correct registration information.
- Configure the Remote EUT with proper scan channel set that includes the base operating channel. The Remote EUT will issue connection request to the base.
- Observe the Remote EUT performing device registration and channel list request. The operating channel is within the returned authorized channel list.
- The base grants connection request from the Remote EUT and the client starts normal operation on the channel (Channel 19).
- The Remote EUT can only operate on a channel if all of the following are true:
 - The channel is within the authorized channel list for the base
 - The channel is the current operating channel of the base
 - The channel is within the authorized channel list for the Remote EUT
 - The channel is within the Remote device operating frequency range, i.e. 470 – 698 MHz (Channels 14 – 51 excluding Channels 36 to 38) as approved by FCC for Fixed TVBD.
- Test pre-condition: The device is configured to operate at a power level less than or equal to that which is authorized by the Grant.
- Upon successful registration the database returns the allowable power according to the device type, Fixed 36 dBm eirp in this example.
- Verify the Remote EUT transmission on the spectrum analyzer.

RESULTS

The Remote EUT operates on a channel from the authorized channel list and at the authorized power level.

When the base EUT operating channel (Channel 19) was no longer in the channel list authorized for the Remote EUT, the Remote EUT ceased operation on the channel immediately. The testing verifies that the Remote EUT cannot operate on any channel other than those within the authorized channel list, returned from the TVWS Database, for the Remote EUT.

Test Results	
Pass	Fail
<input checked="" type="checkbox"/>	<input type="checkbox"/>

SUCCESSFUL REMOTE FIXED DEVICE CHANNEL LIST REQUEST

TV Band Device Configuration

Device Information

Node: RaptorX-228
Radio 1: 16/485 MHz
Radio 2: 0 MHz
Date: 09-23-2014
Time: 22:55:57
Uptime: 0d 6h 48m
Model: Raptor-X
Firmware: V4.2.0

TV Band Device Configuration

Select a channel from the list

Space Radio

Channel 7 | 177 MHz
Channel 8 | 183 MHz
Channel 9 | 189 MHz
Channel 10 | 195 MHz
Channel 11 | 201 MHz
Channel 12 | 207 MHz
Channel 13 | 213 MHz
Channel 14 | 273 MHz
Channel 15 | 479 MHz
Channel 16 | 485 MHz
Channel 17 | 491 MHz
Channel 18 | 497 MHz
Channel 19 | 503 MHz
Channel 20 | 509 MHz
Channel 21 | 515 MHz
Channel 22 | 521 MHz
Channel 23 | 533 MHz
Channel 24 | 539 MHz
Channel 25 | 545 MHz
Channel 26 | 551 MHz
Channel 27 | 557 MHz
Channel 28 | 563 MHz
Channel 29 | 569 MHz
Channel 30 | 575 MHz
Channel 31 | 581 MHz
Channel 32 | 587 MHz
Channel 33 | 593 MHz
Channel 34 | 599 MHz
Channel 35 | 621 MHz
Channel 40 | 629 MHz
Channel 41 | 635 MHz
Channel 42 | 641 MHz
Channel 43 | 647 MHz
Channel 44 | 653 MHz
Channel 45 | 659 MHz
Channel 46 | 665 MHz
Channel 47 | 671 MHz
Channel 48 | 677 MHz
Channel 49 | 683 MHz
Channel 50 | 689 MHz
Channel 51 | 695 MHz

Radio Information

Status: On
SSID: ssid_radio1
IP Address: 10.10.0.1
Broadcast Address: 10.10.255.255
Netmask: 255.255.0.0
Gateway: 10.19.6.1
Enable Radio?: Yes
Start Radio on Startup?

Location Information

Latitude (degrees*):
Longitude (degrees*):
Channel List:

Channel List:

Contact Information


First Name:
Last Name:
Identification:

Installer Information

Information

Y
14-09-23

ICONNECTIV WEB INTERFACE SHOWING AUTHORIZED CHANNELS AT THE REMOTE FIXED DEVICE LOCATION

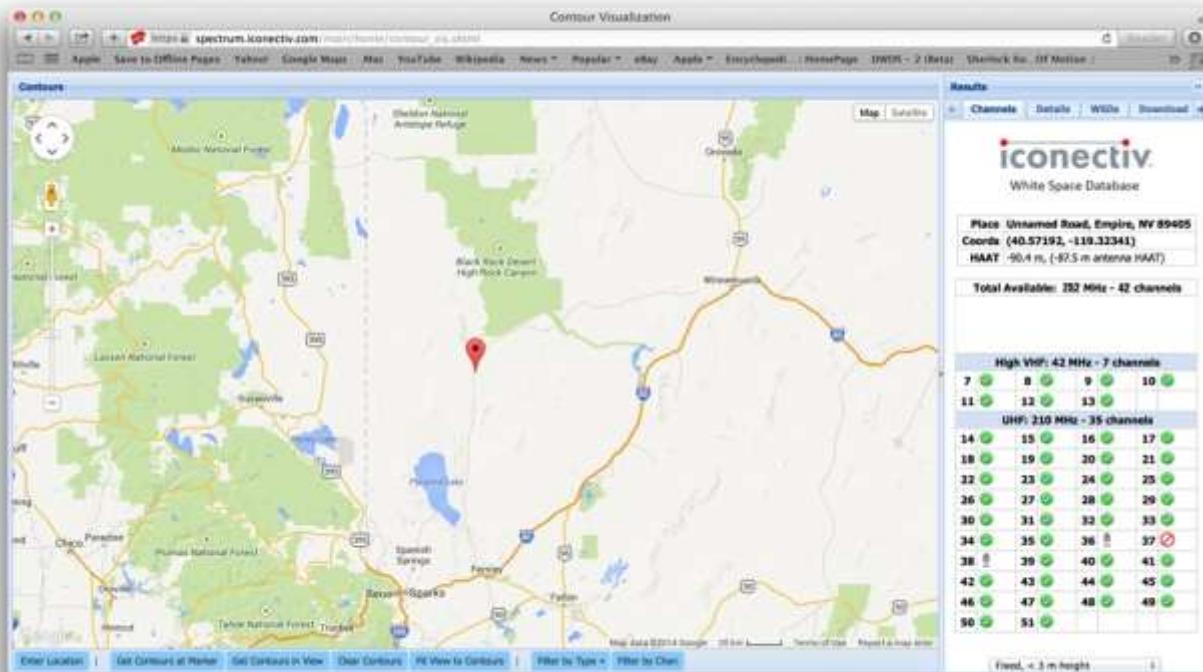

9.6. §15.715(F) SECURITY

REQUIREMENT

- The device operations procedures must include documentation with a detailed explanation of the following for each database the device is expected to work with:
 - i. What communication protocol is used between the database and the TVBD?
 - ii. How are communications initiated?
 - iii. How does the TVBD validate messages from the database?
 - iv. How does the device handle failure to communicate or authenticate the database?
 - v. How does the database validate messages from a TVBD?
 - vi. What encryption method is used?
 - vii. How does the database ensure secure registration of protected devices?

ANSWERS

See answers in Section 8.6. Applicable to BASE and Remote stations.