



Test Report No.: W7L-230313W001RF01



FCC TEST REPORT

(PART 22)

Applicant:	Borqs BeiJing Ltd.
Address:	Tower A, Building B23, Universal Business Park, No. 10 Jiuxianqiao Road, Chaoyang District Beijing, 100015 China

Manufacturer or Supplier:	Borqs BeiJing Ltd.
Address:	Tower A, Building B23, Universal Business Park, No. 10 Jiuxianqiao Road, Chaoyang District Beijing, 100015 China
Product:	Ecoport AC LTE-LP
Brand Name:	SkyCentrics
Model Name:	US08Ba
Serial Model Name:	US08B
FCC ID:	2ABDK-US08B
Date of tests:	Mar. 13, 2023 ~ Apr. 03, 2023

The tests have been carried out according to the requirements of the following standard:

- FCC PART 22, Subpart H
- FCC Part 2
- ANSI/TIA/EIA-603-D
- ANSI C63.26-2015
- ANSI/TIA/EIA-603-E

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
Date: Apr. 03, 2023	Date: Apr. 03, 2023

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

 1.1 MEASUREMENT UNCERTAINTY 6

 1.2 TEST SITE AND INSTRUMENTS 7

2 GENERAL INFORMATION 8

 2.1 GENERAL DESCRIPTION OF EUT 8

 2.2 CONFIGURATION OF SYSTEM UNDER TEST 11

 2.3 DESCRIPTION OF SUPPORT UNITS 12

 2.4 TEST ITEM AND TEST CONFIGURATION..... 12

 2.5 EUT OPERATING CONDITIONS 15

 2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS 16

3 TEST TYPES AND RESULTS..... 17

 3.1 OUTPUT POWER MEASUREMENT 17

 3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT 17

 3.1.2 TEST PROCEDURES 17

 3.1.3 TEST SETUP 18

 3.1.4 TEST RESULTS 18

 3.2 FREQUENCY STABILITY MEASUREMENT 36

 3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 36

 3.2.2 TEST PROCEDURE 36

 3.2.3 TEST SETUP 36

 3.2.4 TEST RESULTS 37

 3.3 OCCUPIED BANDWIDTH MEASUREMENT 38

 3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT 38

 3.3.2 TEST SETUP 38

 3.3.3 TEST PROCEDURES 38

 3.3.4 TEST RESULTS 39

 3.4 BAND EDGE MEASUREMENT 40

 3.4.1 LIMITS OF BAND EDGE MEASUREMENT 40

 3.4.2 TEST SETUP 40

 3.4.3 TEST PROCEDURES 41

 3.4.4 TEST RESULTS 42

 3.5 CONDUCTED SPURIOUS EMISSIONS..... 43

 3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT 43

 3.5.2 TEST PROCEDURE 43

 3.5.3 TEST SETUP 43

 3.5.4 TEST RESULTS 44

 3.6 RADIATED EMISSION MEASUREMENT 45

 3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT 45

 3.6.2 TEST PROCEDURES 45

 3.6.3 DEVIATION FROM TEST STANDARD 45

 3.6.4 TEST SETUP 46



**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

3.6.5	TEST RESULTS	48
3.7	PEAK TO AVERAGE RATIO	100
3.7.1	LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	100
3.7.2	TEST SETUP	100
3.7.3	TEST PROCEDURES	100
3.7.4	TEST RESULTS	101
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	102
5	INFORMATION ON THE TESTING LABORATORIES	103
6	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	104



BUREAU
VERITAS

Test Report No.: W7L-230313W001RF01

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-230313W001RF01	Original release	Apr. 03, 2023



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Conducted Output Power	Compliance
§22.913 (a)(5)	Effective Radiated Power	Compliance
§2.1055 §22.355	Frequency Stability	See Note
§2.1049	Occupied Bandwidth	See Note
§22.913 (d)	Peak to average ratio*	See Note
§22.917(a)	Band Edge Measurements	See Note
§2.1051 §22.917(a)	Conducted Spurious Emissions	See Note
§2.1053 §22.917(a)	Radiated Spurious Emissions	Compliance

* Refer to KDB 971168 D01 Power Meas License Digital Systems v03r01.

NOTE: Refer to Module report R1907A0448-R1V2/ R1907A0448-R7V2/ R1907A0448-R4V2, FCC ID: XMR2020BG95M2.



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	±2.06dB
Frequency Stability	±76.97Hz
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Band Edge Measurements	±4.70dB
Peak to average ratio	±0.76dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 20,23	Feb. 19,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.14,22	May.13,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,22	Sep.02,23
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.04, 22	Sep.03, 23
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	May. 07,22	May. 06,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 12,22	May. 11,23
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.12,22	May.11,23
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 12,22	Aug. 11,23

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Ecoport AC LTE-LP		
BRAND NAME	SkyCentrics		
MODEL NAME	US08Ba		
SERIAL MODEL NAME	US08B		
NOMINAL VOLTAGE	120V(adapter or host equipment) 3.0Vdc (Li-ion, battery)		
MODULATION TYPE	LTE CAT-M1/NB-IOT	QPSK, 16QAM, BPSK	
FREQUENCY RANGE	LTE CAT-M1	LTE Band 5 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
		LTE Band 5 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
		LTE Band 5 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
		LTE Band 5 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
		LTE Band 26 (Channel Bandwidth: 1.4MHz)	824.7MHz ~ 848.3MHz
		LTE Band 26 (Channel Bandwidth: 3MHz)	825.5MHz ~ 847.5MHz
		LTE Band 26 (Channel Bandwidth: 5MHz)	826.5MHz ~ 846.5MHz
		LTE Band 26 (Channel Bandwidth: 10MHz)	829MHz ~ 844MHz
		LTE Band 26 (Channel Bandwidth: 15MHz)	831.5MHz ~ 841.5MHz
		LTE NB-IOT	LTE Band 5 (SUB-CARRIER SPEACING: 3.75KHz)
LTE Band 5 (SUB-CARRIER SPEACING: 15KHz)	824.2MHz ~ 848.8MHz		
MAX. ERP POWER	LTE CAT-M1	LTE Band 5 (Channel Bandwidth: 1.4MHz)	31.77mW
		LTE Band 5 (Channel Bandwidth: 3MHz)	31.62mW
		LTE Band 5 (Channel Bandwidth: 5MHz)	31.62mW
		LTE Band 5 (Channel Bandwidth: 10MHz)	31.99mW
		LTE Band 26 (Channel Bandwidth: 1.4MHz)	25.41mW
		LTE Band 26 (Channel Bandwidth: 3MHz)	31.7mW



MAX. ERP POWER	LTE CAT-M1	LTE Band 26 (Channel Bandwidth: 5MHz)	32.28mW
		LTE Band 26 (Channel Bandwidth: 10MHz)	32.28mW
		LTE Band 26 (Channel Bandwidth: 15MHz)	32.36mW
	LTE NB-IOT	LTE Band 5 (SUB-CARRIER SPEACING: 3.75KHz)	36.48mW
		LTE Band 5 (SUB-CARRIER SPEACING: 15KHz)	36.56mW
EMISSION DESIGNATORGOGN	LTE CAT-M1	LTE Band 5 (Channel Bandwidth: 1.4MHz)	QPSK: 1M11G7D
			16QAM: 944KW7D
			64QAM: /
		LTE Band 5 (Channel Bandwidth: 3MHz)	QPSK: 1M10G7D
			16QAM: 953KW7D
			64QAM: /
		LTE Band 5 (Channel Bandwidth: 5MHz)	QPSK: 1M11G7D
			16QAM: 953KW7D
			64QAM: /
		LTE Band 5 (Channel Bandwidth: 10MHz)	QPSK: 1M12G7D
			16QAM: 968KW7D
			64QAM: /
		LTE Band 26 (Channel Bandwidth: 1.4MHz)	QPSK: 1M10G7D
			16QAM: 939KW7D
			64QAM: /
		LTE Band 26 (Channel Bandwidth: 3MHz)	QPSK: 1M11G7D
			16QAM: 948KW7D
			64QAM: /
		LTE Band 26 (Channel Bandwidth: 5MHz)	QPSK: 1M11G7D
			16QAM: 945KW7D
			64QAM: /
		LTE Band 26 (Channel Bandwidth: 10MHz)	QPSK: 1M12G7D
			16QAM: 964KW7D
			64QAM: /
LTE Band 26 (Channel Bandwidth: 15MHz)	QPSK: 1M12G7D		
	16QAM: 957KW7D		
	64QAM: /		



EMISSION DESIGNATOR	LTE NB-IOT	LTE Band 5 (SUB-CARRIER SPEACING: 3.75KHz)	BPSK: 61K3G7D
			QPSK: 68K4G7D
	LTE NB-IOT	LTE Band 5 (SUB-CARRIER SPEACING: 15KHz)	BPSK: 129KG7D
			QPSK: 183KG7D
ANTENNA TYPE	US08Ba: Internal Antenna with -3.94dBi gain for LTE B5/ LTE B26 US08Ba: External Antenna with -2.98dBi gain for LTE B5/ LTE B26 US08B: Internal Antenna with -3.94dBi gain for LTE B5/ LTE B26		
HW VERSION	DVT		
SW VERSION	PICO_SPARROW_20230315		
I/O PORTS	Refer to user's manual		
CABLE SUPPLIED	N/A		
EXTREME TEMPERATURE	-20-50 °C		
EXTREME VOLTAGE	110V - 240V		

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
- US08Ba and US08B Difference description:


No	Model ID	Difference Description
1	US08B (Verified sample)	Only supports Internal Antenna
2	US08Ba (Mainly tested Sample)	Supports both Internal Antenna and External Antenna There is an additional Sub board which is connected with main board by RF cable for External antenna assembly.

List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
Battery	CHAOCHU ANG	N/A	CR2032	Capacity: 3.0Vdc, 210mAh



2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION

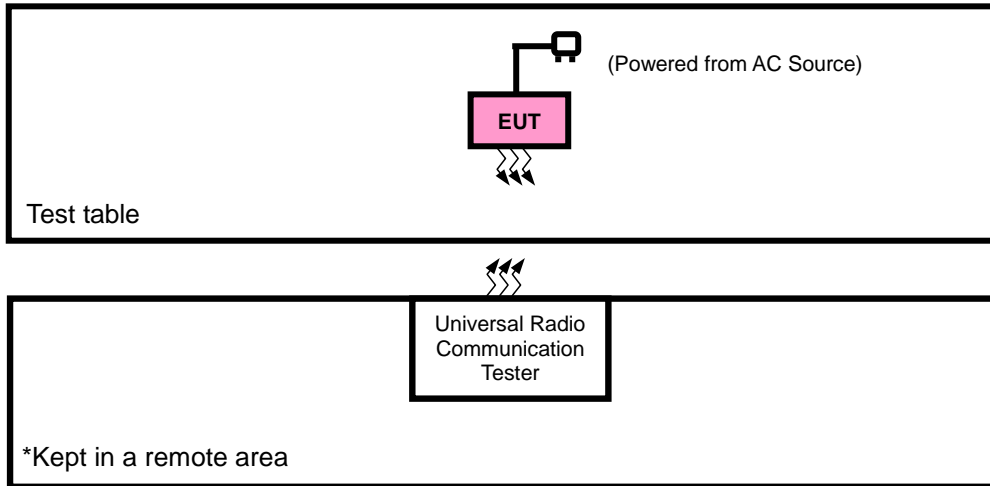



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case in ERP and radiated emission was found when positioned on X-plane for LTE. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with LTE link



LTE CAT-M1

LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20415 to 20635	20415, 20525, 20635	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20425 to 20625	20425, 20525, 20625	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		20450 to 20600	20450, 20525, 20600	10MHz	QPSK,16QAM	1 RB / 0 RB Offset

Note: 1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 5 are covered by LTE Band 26, Because it is a subset of LTE Band 26, So the RSE test data please refer to LTE Band 26.

LTE BAND 26 MODE

EUT CONFIGURE MODE	TEST ITEM	Available Channel	Tested Channel	Channel bandwidth	modulation	mode
A	ERP	26797 to 27033	26797, 26915, 27033	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26805 to 27025	26805, 26915, 27025	3MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26840 to 26990	26840, 26915, 26990	10MHz	QPSK,16QAM	1 RB / 0 RB Offset
		26865 to 26965	26865, 26915, 26965	15MHz	QPSK,16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	26797 to 27033	26915	1.4MHz	QPSK	1 RB / 0 RB Offset
		26805 to 27025	26915	3MHz	QPSK	1 RB / 0 RB Offset
		26815 to 27015	26815, 26915, 27015	5MHz	QPSK	1 RB / 0 RB Offset
		26840 to 26990	26915	10MHz	QPSK	1 RB / 0 RB Offset
		26865 to 26965	26915	15MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



LTE NB-IOT

LTE BAND 5 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	SUBCARRIER SPACING	MODULATION	MODE
A	ERP	20402 to 20648	20402, 20525, 20648	3.75KHz	BPSK,QPSK,	1 RB / 0 RB Offset
		20402 to 20648	20402, 20525, 20648	15KHz	BPSK,QPSK,	1 RB / 0 RB Offset
A	RADIATED EMISSION	20402 to 20648	20525	3.75KHz	QPSK,	1 RB / 0 RB Offset
		20402 to 20648	20402, 20525, 20648	15KHz	QPSK,	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	120Vac/60Hz	Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	120Vac/60Hz	Jace Hu

2.5 EUT OPERATING CONDITIONS

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency



**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

2.6 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



3.1.3 TEST SETUP

EIRP / ERP Measurement:

CONDUCTED POWER MEASUREMENT:



3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

LTE CAT-M1

LTE Band 5

Band/BW	Modulation	RB Size	RB Offset	Low CH 20407	Mid CH 20525	High CH 20643
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz
5/ 1.4	QPSK	1	0	20.09	19.97	19.91
		1	5	19.98	19.86	19.87
		3	0	20.05	20.11	19.99
		3	3	19.98	20.06	20.01
		6	0	20.06	20.06	19.95
	16QAM	1	0	20.02	19.78	19.84
		1	5	20.02	19.65	19.76
		3	0	20.15	20.10	19.89
		3	3	20.05	20.05	19.84
		6	0	20.09	20.07	19.94



Band/BW	Modulation	RB Size	RB Offset	Low CH 20415	Mid CH 20525	High CH 20635
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz
5/3	QPSK	1	0	20.13	19.96	19.94
		1	5	19.97	19.85	19.81
		3	0	20.07	20.11	19.99
		3	3	20.01	19.99	20.02
		6	0	20.06	20.06	19.98
	16QAM	1	0	20.02	19.77	19.81
		1	5	20.05	19.62	19.78
		3	0	20.09	20.12	19.82
		3	3	20.07	20.07	19.83
		6	0	20.07	20.05	19.95

Band/BW	Modulation	RB Size	RB Offset	Low CH 20425	Mid CH 20525	High CH 20625
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz
5/5	QPSK	1	0	20.10	19.97	19.91
		1	5	20.03	19.83	19.87
		3	0	20.08	20.05	20.04
		3	3	20.02	20.02	19.98
		6	0	20.02	20.10	19.98
	16QAM	1	0	20.06	19.74	19.85
		1	5	20.01	19.68	19.75
		3	0	20.10	20.13	19.88
		3	3	20.05	20.07	19.84
		6	0	20.10	20.05	19.94



Band/BW	Modulation	RB Size	RB Offset	Low CH 20450	Mid CH 20525	High CH 20600
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz
5/ 10	QPSK	1	0	20.15	20.04	19.96
		1	5	20.05	19.91	19.89
		3	0	20.13	20.13	20.05
		3	3	20.06	20.07	20.03
		6	0	20.10	20.11	20.03
	16QAM	1	0	20.10	19.79	19.86
		1	5	20.07	19.70	19.80
		3	0	20.17	20.18	19.90
		3	3	20.13	20.09	19.89
		6	0	20.12	20.13	19.96

LTE BAND 26

Band/BW	Modulation	RB Size	RB Offset	Low CH 26797	Mid CH 26915	High CH 27033
				Frequency 824.7 MHz	Frequency 836.5 MHz	Frequency 848.3 MHz
26/ 1.4	QPSK	1	0	20.00	20.08	20.07
		1	5	19.77	19.89	19.82
		3	0	19.85	19.93	19.79
		3	3	19.74	19.90	19.72
		6	0	19.96	19.99	19.83
	16QAM	1	0	19.96	20.04	19.63
		1	5	19.74	19.86	19.25
		3	0	20.01	20.07	20.11
		3	3	19.98	19.98	19.94
		6	0	20.05	19.97	20.14



Band/BW	Modulation	RB Size	RB Offset	Low CH 26805	Mid CH 26915	High CH 27025
				Frequency 825.5 MHz	Frequency 836.5 MHz	Frequency 847.5 MHz
26/ 3	QPSK	1	0	20.06	20.10	20.09
		1	5	19.84	19.94	19.87
		3	0	19.91	20.00	19.81
		3	3	19.81	19.95	19.80
		6	0	20.04	20.01	19.89
	16QAM	1	0	20.04	20.05	19.65
		1	5	19.78	19.91	19.33
		3	0	20.09	20.08	20.16
		3	3	20.02	20.03	19.96
		6	0	20.11	19.99	20.22

Band/BW	Modulation	RB Size	RB Offset	Low CH 26815	Mid CH 26915	High CH 27015
				Frequency 826.5 MHz	Frequency 836.5 MHz	Frequency 846.5 MHz
26/ 5	QPSK	1	0	20.01	20.13	20.10
		1	5	19.78	20.00	19.87
		3	0	19.89	20.07	19.81
		3	3	19.81	19.97	19.80
		6	0	20.02	19.99	19.87
	16QAM	1	0	20.04	20.11	19.61
		1	5	19.74	19.85	19.40
		3	0	20.12	20.10	20.13
		3	3	19.95	20.07	19.94
		6	0	20.09	20.02	20.22



Band/BW	Modulation	RB Size	RB Offset	Low CH 26840	Mid CH 26915	High CH 26990
				Frequency 829 MHz	Frequency 836.5 MHz	Frequency 844 MHz
26/10	QPSK	1	0	19.99	20.11	20.10
		1	5	19.86	19.98	19.81
		3	0	19.93	19.98	19.80
		3	3	19.82	19.98	19.80
	16QAM	6	0	20.01	20.02	19.90
		1	0	20.12	20.01	19.65
		1	5	19.70	19.89	19.40
		3	0	20.16	20.07	20.13
		3	3	19.94	20.11	19.95
		6	0	20.09	20.03	20.22

Band/BW	Modulation	RB Size	RB Offset	Low CH 26865	Mid CH 26915	High CH 26965
				Frequency 831.5 MHz	Frequency 836.5 MHz	Frequency 841.5 MHz
26/ 15	QPSK	1	0	20.12	20.15	20.15
		1	5	19.90	20.04	19.89
		3	0	19.99	20.04	19.86
		3	3	19.89	19.98	19.82
		6	0	20.11	20.08	19.95
	16QAM	1	0	20.17	20.10	19.67
		1	5	19.78	19.92	19.41
		3	0	20.20	20.15	20.18
		3	3	20.00	20.06	20.00
		6	0	20.17	20.06	20.23



LTE NB-IOT

LTE Band 5

Band/Su b-carrier Spacing	Modulation	RB Size	RB Offset	Low CH 20402	Mid CH 20525	High CH 20648
				Frequency 824.2 MHz	Frequency 836.5 MHz	Frequency 848.8 MHz
5/ 3.75	BPSK	1	0	20.63	20.53	20.51
		1	47	20.55	20.47	20.42
	QPSK	1	0	20.75	20.62	20.56
		1	47	20.58	20.56	20.49

Band/Su b-carrier Spacing	Modulation	RB Size	RB Offset	Low CH 20402	Mid CH 20525	High CH 20648
				Frequency 824.2 MHz	Frequency 836.5 MHz	Frequency 848.8 MHz
5/ 15	BPSK	1	0	20.40	20.45	20.64
		1	11	20.33	20.35	20.57
	QPSK	1	0	20.54	20.53	20.76
		1	11	20.42	20.45	20.67
		12	0	18.56	18.63	18.96



ERP POWER (dBm)

Internal Antenna:

LTE CAT-M1

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	20.09	-3.94	14	25.12	7
20525	836.5	20.11	-3.94	14.02	25.23	7
20643	848.3	20.01	-3.94	13.92	24.66	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	20.15	-3.94	14.06	25.47	7
20525	836.5	20.1	-3.94	14.01	25.18	7
20643	848.3	19.94	-3.94	13.85	24.27	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	20.13	-3.94	14.04	25.35	7
20525	836.5	20.11	-3.94	14.02	25.23	7
20635	847.5	20.02	-3.94	13.93	24.72	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	20.09	-3.94	14	25.12	7
20525	836.5	20.12	-3.94	14.03	25.29	7
20635	847.5	19.95	-3.94	13.86	24.32	7



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	20.1	-3.94	14.01	25.18	7
20525	836.5	20.1	-3.94	14.01	25.18	7
20625	846.5	20.04	-3.94	13.95	24.83	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	20.1	-3.94	14.01	25.18	7
20525	836.5	20.13	-3.94	14.04	25.35	7
20625	846.5	19.94	-3.94	13.85	24.27	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	20.15	-3.94	14.06	25.47	7
20525	836.5	20.13	-3.94	14.04	25.35	7
20600	844.0	20.05	-3.94	13.96	24.89	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	20.17	-3.94	14.08	25.59	7
20525	836.5	20.18	-3.94	14.09	25.64	7
20600	844.0	19.96	-3.94	13.87	24.38	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



LTE BAND 26

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26797	824.7	20	-3.94	13.91	24.6	7
26915	836.5	20.08	-3.94	13.99	25.06	7
27033	848.3	20.07	-3.94	13.98	25	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26797	824.7	20.05	-3.94	13.96	24.89	7
26915	836.5	20.07	-3.94	13.98	25	7
27033	848.3	20.14	-3.94	14.05	25.41	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26805	825.5	20.06	-3.94	13.97	24.95	7
26915	836.5	20.1	-3.94	14.01	25.18	7
27025	847.5	20.09	-3.94	14	25.12	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26805	825.5	20.11	-3.94	14.02	25.23	7
26915	836.5	20.08	-3.94	13.99	25.06	7
27025	847.5	20.22	-3.94	14.13	25.88	7



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26815	826.5	20.02	-3.94	13.93	24.72	7
26915	836.5	20.13	-3.94	14.04	25.35	7
27015	846.5	20.1	-3.94	14.01	25.18	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26815	826.5	20.12	-3.94	14.03	25.29	7
26915	836.5	20.11	-3.94	14.02	25.23	7
27015	846.5	20.22	-3.94	14.13	25.88	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26840	829	20.01	-3.94	13.92	24.66	7
26915	836.5	20.11	-3.94	14.02	25.23	7
26990	844	20.1	-3.94	14.01	25.18	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26840	829	20.16	-3.94	14.07	25.53	7
26915	836.5	20.11	-3.94	14.02	25.23	7
26990	844	20.22	-3.94	14.13	25.88	7



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26865	831.5	20.12	-3.94	14.03	25.29	7
26915	836.5	20.15	-3.94	14.06	25.47	7
26965	841.5	20.15	-3.94	14.06	25.47	7

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26865	831.5	20.2	-3.94	14.11	25.76	7
26915	836.5	20.15	-3.94	14.06	25.47	7
26965	841.5	20.23	-3.94	14.14	25.94	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



LTE NB-IOT

LTE BAND 5

SUBCARRIER SPACING: 3.75KHz BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.63	-3.94	14.54	28.44	7
20525	836.5	20.53	-3.94	14.44	27.8	7
20648	848.8	20.51	-3.94	14.42	27.67	7

SUBCARRIER SPACING: 3.75KHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.75	-3.94	14.66	29.24	7
20525	836.5	20.62	-3.94	14.53	28.38	7
20648	848.8	20.56	-3.94	14.47	27.99	7

SUBCARRIER SPACING: 15KHz BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.4	-3.94	14.31	26.98	7
20525	836.5	20.45	-3.94	14.36	27.29	7
20648	848.8	20.64	-3.94	14.55	28.51	7

SUBCARRIER SPACING: 15KHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.54	-3.94	14.45	27.86	7
20525	836.5	20.53	-3.94	14.44	27.8	7
20648	848.8	20.76	-3.94	14.67	29.31	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



External Antenna:

LTE CAT-M1

LTE BAND 5

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	20.09	-2.98	14.96	31.33	7
20525	836.5	20.11	-2.98	14.98	31.48	7
20643	848.3	20.01	-2.98	14.88	30.76	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20407	824.7	20.15	-2.98	15.02	31.77	7
20525	836.5	20.1	-2.98	14.97	31.41	7
20643	848.3	19.94	-2.98	14.81	30.27	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	20.13	-2.98	15	31.62	7
20525	836.5	20.11	-2.98	14.98	31.48	7
20635	847.5	20.02	-2.98	14.89	30.83	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20415	825.5	20.09	-2.98	14.96	31.33	7
20525	836.5	20.12	-2.98	14.99	31.55	7
20635	847.5	19.95	-2.98	14.82	30.34	7



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	20.1	-2.98	14.97	31.41	7
20525	836.5	20.1	-2.98	14.97	31.41	7
20625	846.5	20.04	-2.98	14.91	30.97	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20425	826.5	20.1	-2.98	14.97	31.41	7
20525	836.5	20.13	-2.98	15	31.62	7
20625	846.5	19.94	-2.98	14.81	30.27	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	20.15	-2.98	15.02	31.77	7
20525	836.5	20.13	-2.98	15	31.62	7
20600	844.0	20.05	-2.98	14.92	31.05	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20450	829.0	20.17	-2.98	15.04	31.92	7
20525	836.5	20.18	-2.98	15.05	31.99	7
20600	844.0	19.96	-2.98	14.83	30.41	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



LTE BAND 26

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26797	824.7	20	-2.98	14.87	30.69	7
26915	836.5	20.08	-2.98	14.95	31.26	7
27033	848.3	20.07	-2.98	14.94	31.19	7

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26797	824.7	20.05	-2.98	14.92	31.05	7
26915	836.5	20.07	-2.98	14.94	31.19	7
27033	848.3	20.14	-2.98	15.01	31.7	7

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26805	825.5	20.06	-2.98	14.93	31.12	7
26915	836.5	20.1	-2.98	14.97	31.41	7
27025	847.5	20.09	-2.98	14.96	31.33	7

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26805	825.5	20.11	-2.98	14.98	31.48	7
26915	836.5	20.08	-2.98	14.95	31.26	7
27025	847.5	20.22	-2.98	15.09	32.28	7



CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26815	826.5	20.02	-2.98	14.89	30.83	7
26915	836.5	20.13	-2.98	15	31.62	7
27015	846.5	20.1	-2.98	14.97	31.41	7

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26815	826.5	20.12	-2.98	14.99	31.55	7
26915	836.5	20.11	-2.98	14.98	31.48	7
27015	846.5	20.22	-2.98	15.09	32.28	7

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26840	829	20.01	-2.98	14.88	30.76	7
26915	836.5	20.11	-2.98	14.98	31.48	7
26990	844	20.1	-2.98	14.97	31.41	7

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-LC} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26840	829	20.16	-2.98	15.03	31.84	7
26915	836.5	20.11	-2.98	14.98	31.48	7
26990	844	20.22	-2.98	15.09	32.28	7



CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26865	831.5	20.12	-2.98	14.99	31.55	7
26915	836.5	20.15	-2.98	15.02	31.77	7
26965	841.5	20.15	-2.98	15.02	31.77	7

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _{T-L_C} (dB)	ERP (dBm)	ERP (mW)	Limit (W)
26865	831.5	20.2	-2.98	15.07	32.14	7
26915	836.5	20.15	-2.98	15.02	31.77	7
26965	841.5	20.23	-2.98	15.1	32.36	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



LTE NB-IOT

LTE BAND 5

SUBCARRIER SPACING: 3.75KHz BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.63	-2.98	15.5	35.48	7
20525	836.5	20.53	-2.98	15.4	34.67	7
20648	848.8	20.51	-2.98	15.38	34.51	7

SUBCARRIER SPACING: 3.75KHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.75	-2.98	15.62	36.48	7
20525	836.5	20.62	-2.98	15.49	35.4	7
20648	848.8	20.56	-2.98	15.43	34.91	7

SUBCARRIER SPACING: 15KHz BPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.4	-2.98	15.27	33.65	7
20525	836.5	20.45	-2.98	15.32	34.04	7
20648	848.8	20.64	-2.98	15.51	35.56	7

SUBCARRIER SPACING: 15KHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _C (dB)	ERP (dBm)	ERP (mW)	Limit (W)
20402	824.2	20.54	-2.98	15.41	34.75	7
20525	836.5	20.53	-2.98	15.4	34.67	7
20648	848.8	20.76	-2.98	15.63	36.56	7

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

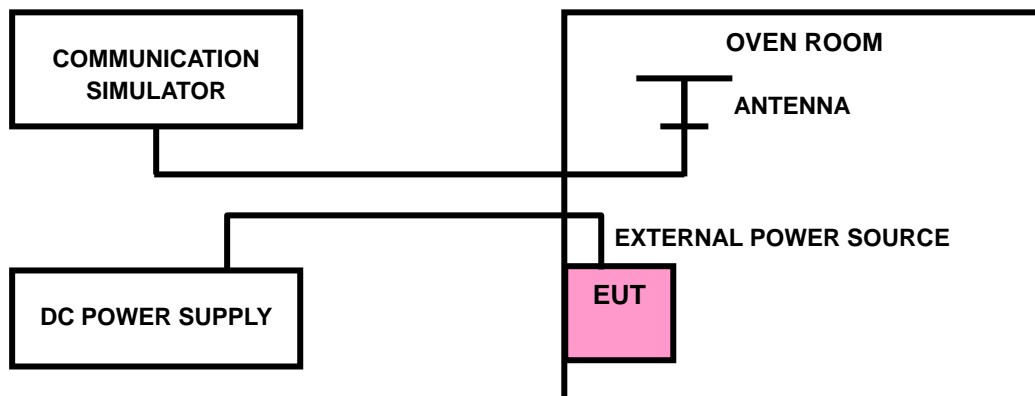



**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

3.2.4 TEST RESULTS

Please Refer to Module report R1907A0448-R1V2/ R1907A0448-R7V2/
R1907A0448-R4V2.




3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

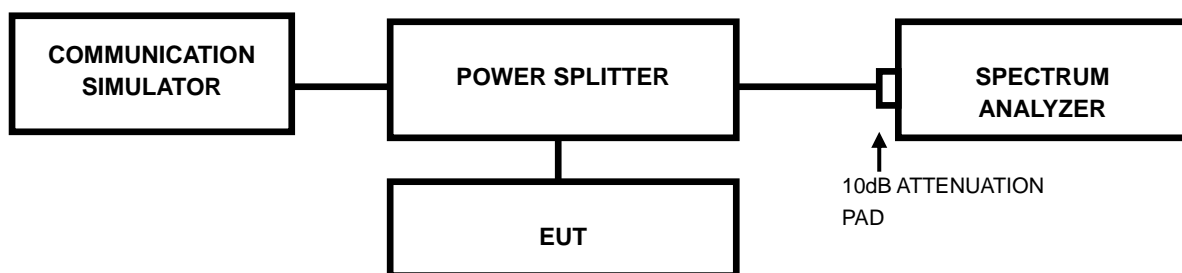

3.3.3 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-230313W001RF01

3.3.4 TEST RESULTS


Please Refer to Module report R1907A0448-R1V2/ R1907A0448-R7V2/
R1907A0448-R4V2.

3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.4.2 TEST SETUP

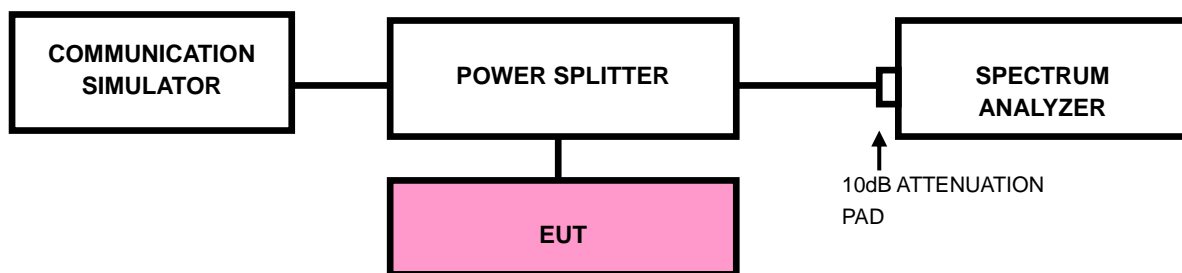



3.4.3 TEST PROCEDURES

- a) All measurements were done at low and high operational frequency range
- b) Connect the transmitter to the spectrum analyzer via coaxial cable while ensuring proper impedance matching.
- c) Tune the analyzer to the nominal center frequency of the emission bandwidth (EBW)
- d) .Set the resolution bandwidth (RBW) $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
- e) Beyond the 1MHz band from the band edge, RBW=1MHz was used.
- f) Set the video bandwidth (VBW) to $\geq 3 \times$ RBW.
- g) Select the average power (RMS) display detector.
- h) Set the number of measurement points to ≥ 1001 .
- i) Use auto-coupled sweep time.
- j) Perform the measurement over an interval of time when the transmission is continuous and at its maximum power level.
- k) The RF fundamental frequency should be excluded against the limit line in the operating frequency band and use RBW is 10KHz or 100KHz.
- l) Record the max trace plot into the test report.



BUREAU
VERITAS

Test Report No.: W7L-230313W001RF01

3.4.4 TEST RESULTS

Please Refer to Module report R1907A0448-R1V2/ R1907A0448-R7V2/
R1907A0448-R4V2.



3.5 CONDUCTED SPURIOUS EMISSIONS


3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9kHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

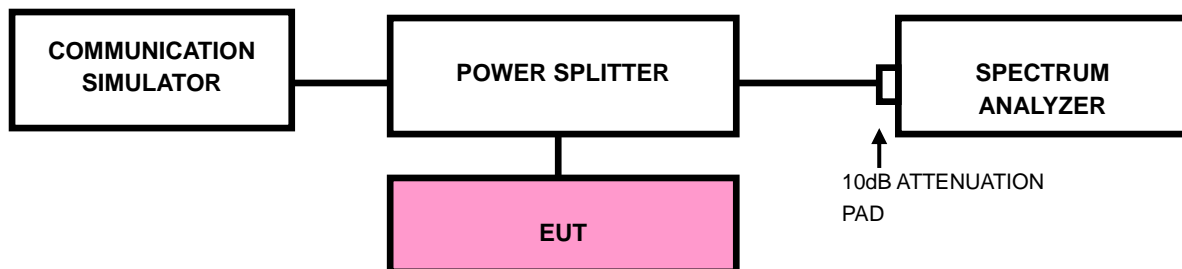



**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Module report R1907A0448-R1V2/ R1907A0448-R7V2/
R1907A0448-R4V2.



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,
 $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


3.6.3 DEVIATION FROM TEST STANDARD

No deviation




3.6.4 TEST SETUP

< Frequency Range below 30MHz >

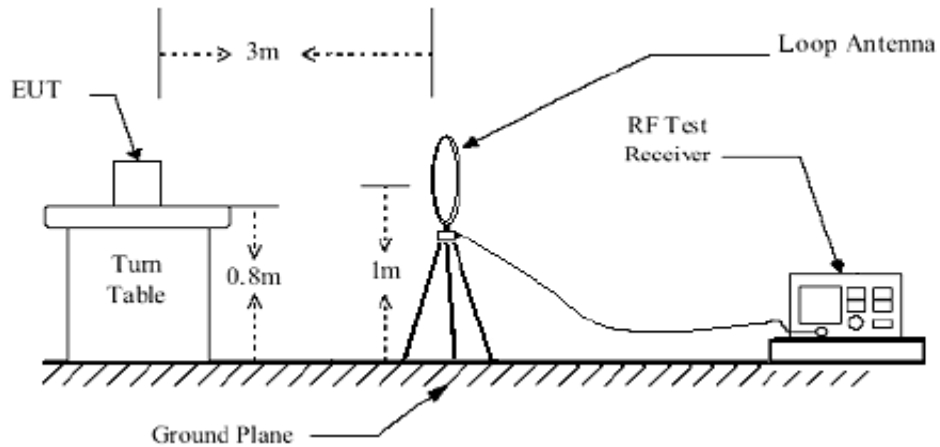


< Frequency Range 30MHz~1GHz >

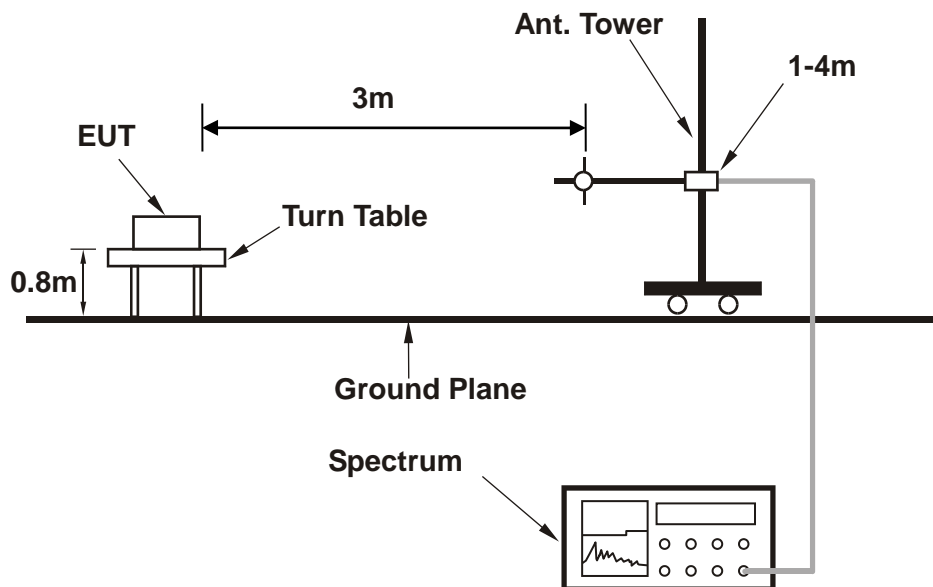



<Frequency Range above 1GHz>

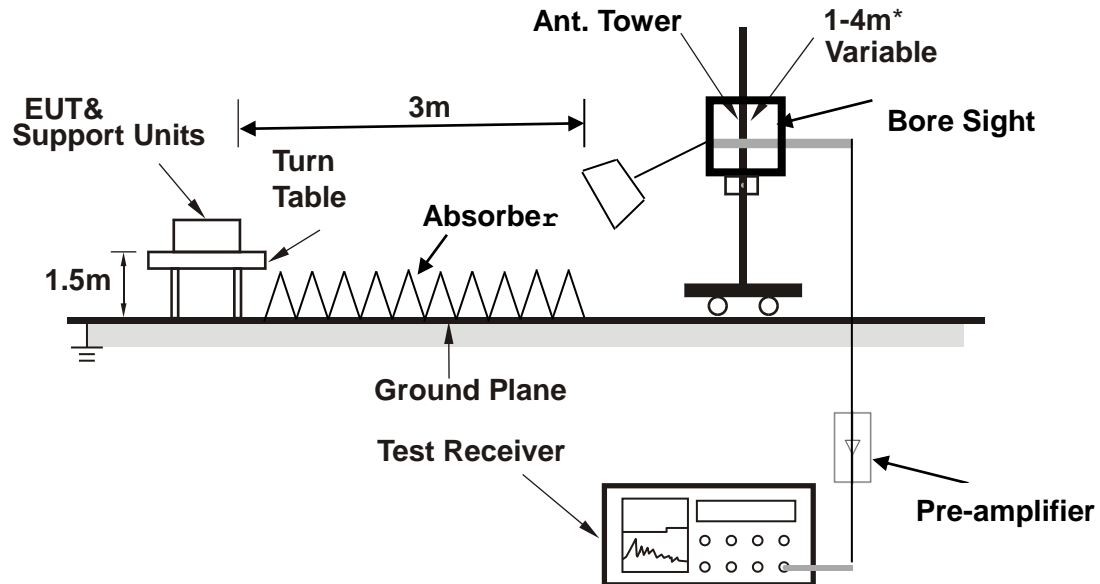

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Internal Antenna:

LTE CAT-M1

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 26:

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	62.333	-62.25	-42.92	-13.00	-49.25	-19.33	Peak	Horizontal
2	142.464	-62.61	-43.36	-13.00	-49.61	-19.25	Peak	Horizontal
3 PP	187.449	-60.41	-41.81	-13.00	-47.41	-18.60	Peak	Horizontal
4	222.594	-62.53	-47.80	-13.00	-49.53	-14.73	Peak	Horizontal
5	266.174	-64.30	-52.52	-13.00	-51.30	-11.78	Peak	Horizontal
6	423.623	-69.65	-60.05	-13.00	-56.65	-9.60	Peak	Horizontal

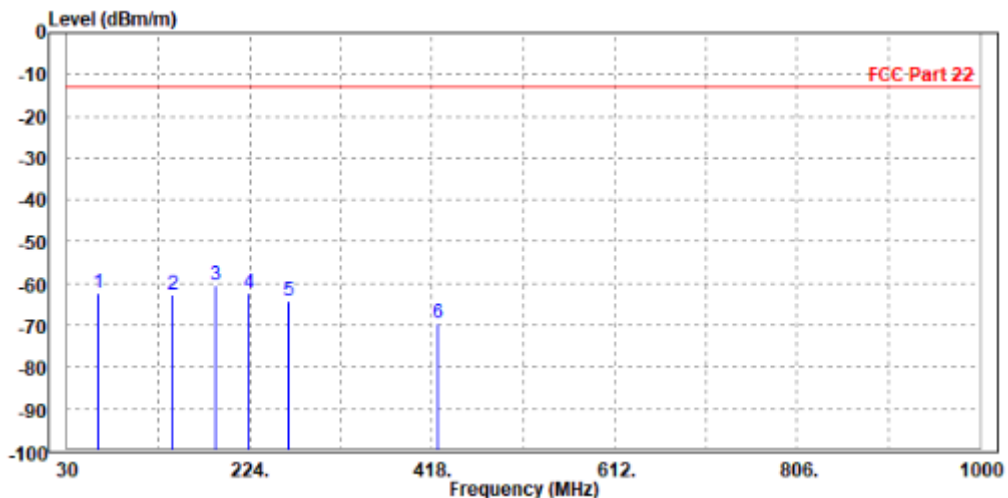



MODE	TX channel 26915	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	32.812	-65.22	-46.35	-13.00	-52.22	-18.87	Peak	Vertical
2	62.333	-63.21	-40.24	-13.00	-50.21	-22.97	Peak	Vertical
3 PP	98.884	-46.13	-38.72	-13.00	-33.13	-7.41	Peak	Vertical
4	142.464	-60.26	-46.03	-13.00	-47.26	-14.23	Peak	Vertical
5	188.855	-67.42	-48.68	-13.00	-54.42	-18.74	Peak	Vertical
6	500.942	-68.71	-60.65	-13.00	-55.71	-8.06	Peak	Vertical

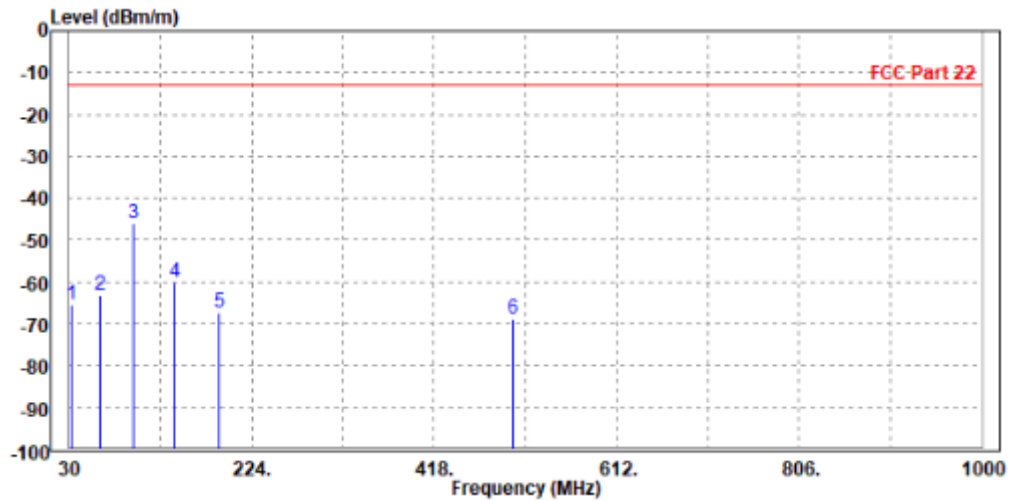



ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

LTE Band 26

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-57.34	-58.32	-13.00	-44.34	0.98	Peak	Horizontal
2 PP	2512.000	-52.16	-57.63	-13.00	-39.16	5.47	Peak	Horizontal

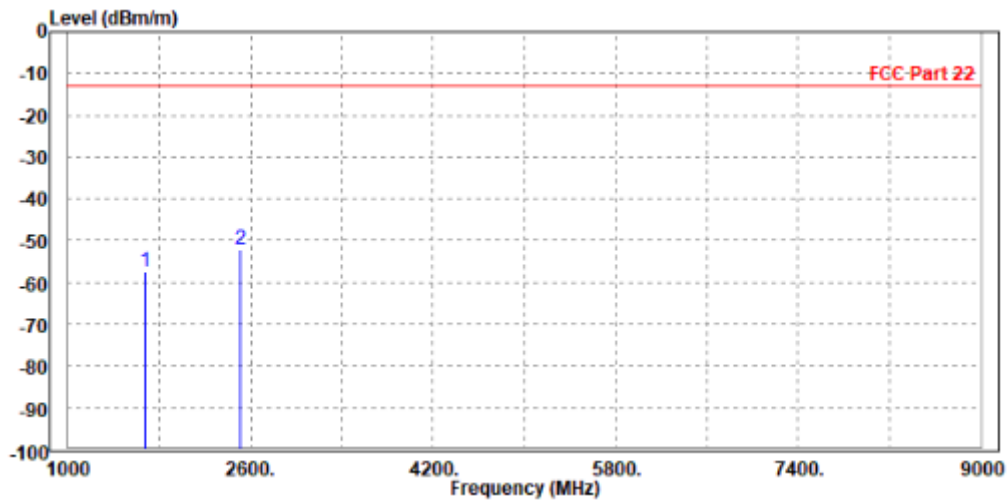



MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Read Level	Limit Level	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m	
1	1672.000	-55.87	-57.08	-13.00	-42.87	1.21 Peak	Vertical
2 PP	2509.500	-53.18	-58.15	-13.00	-40.18	4.97 Peak	Vertical

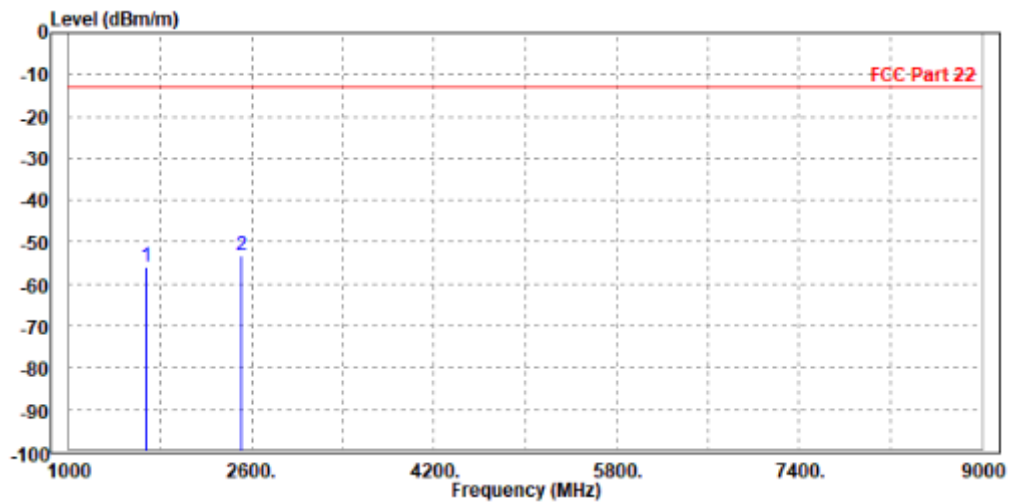




CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.33	-57.30	-13.00	-43.33	0.97	Peak	Horizontal
2 PP	2509.500	-52.91	-58.37	-13.00	-39.91	5.46	Peak	Horizontal

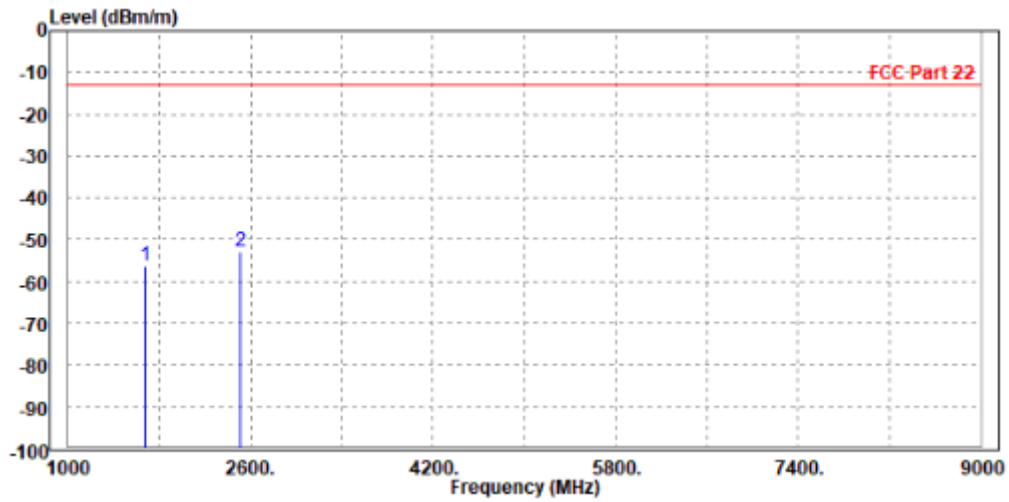



MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-56.96	-58.18	-13.00	-43.96	1.22	Peak	Vertical
2 PP	2512.000	-52.53	-57.51	-13.00	-39.53	4.98	Peak	Vertical

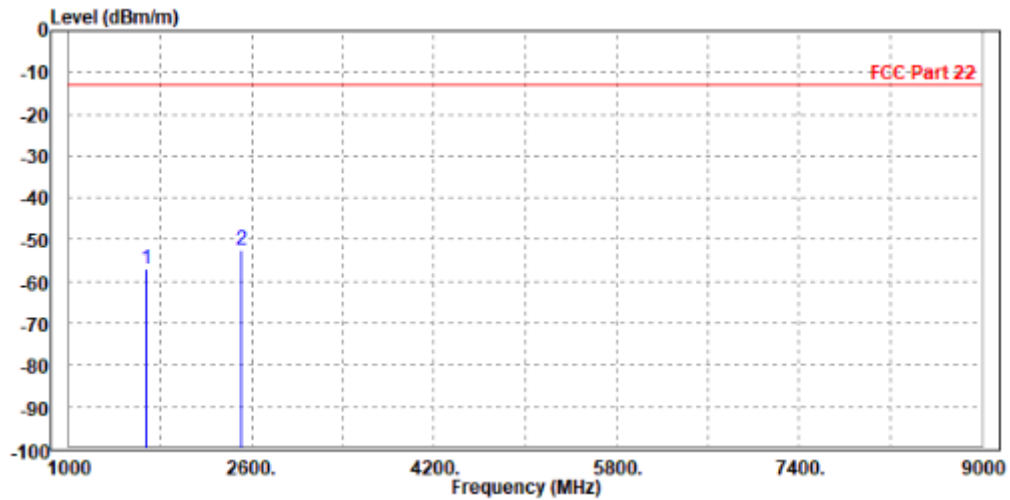




**CHANNEL BANDWIDTH: 5MHz / QPSK
CH26890**

MODE	TX channel 26890	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.83	-57.80	-13.00	-43.83	0.97	Peak	Horizontal
2 PP	2502.000	-51.66	-57.10	-13.00	-38.66	5.44	Peak	Horizontal

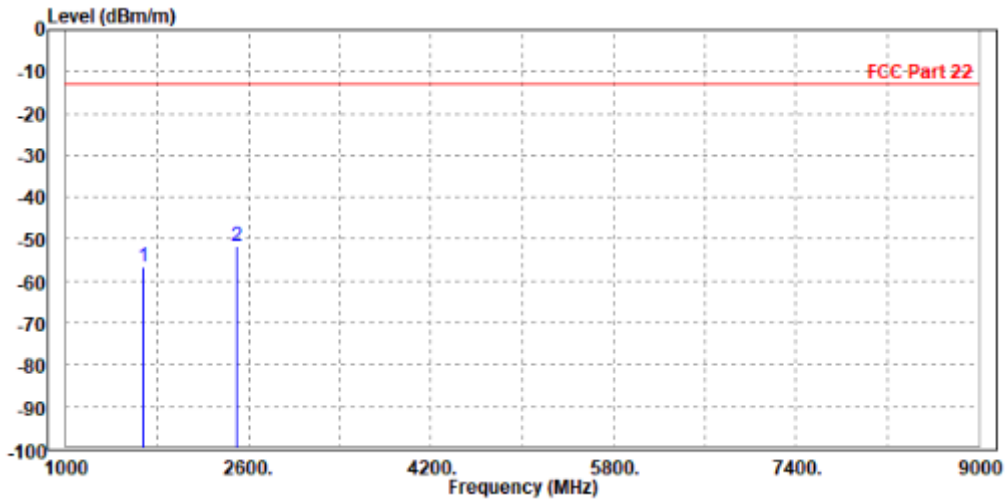




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26890	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1668.000	-55.68	-56.86	-13.00	-42.68	1.18	Peak	Vertical
2 PP	2504.000	-52.10	-57.05	-13.00	-39.10	4.95	Peak	Vertical

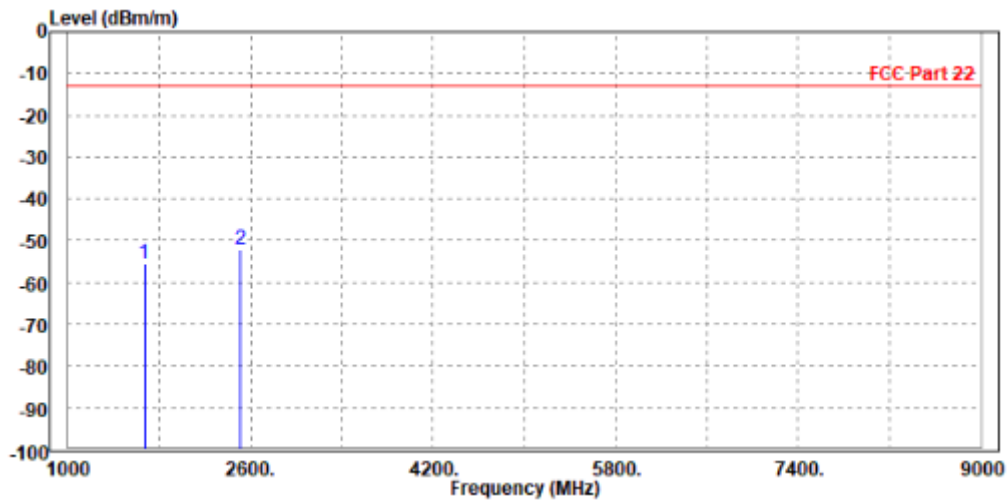




CH26915

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-56.94	-57.92	-13.00	-43.94	0.98	Peak	Horizontal
2 PP	2512.000	-51.48	-56.95	-13.00	-38.48	5.47	Peak	Horizontal

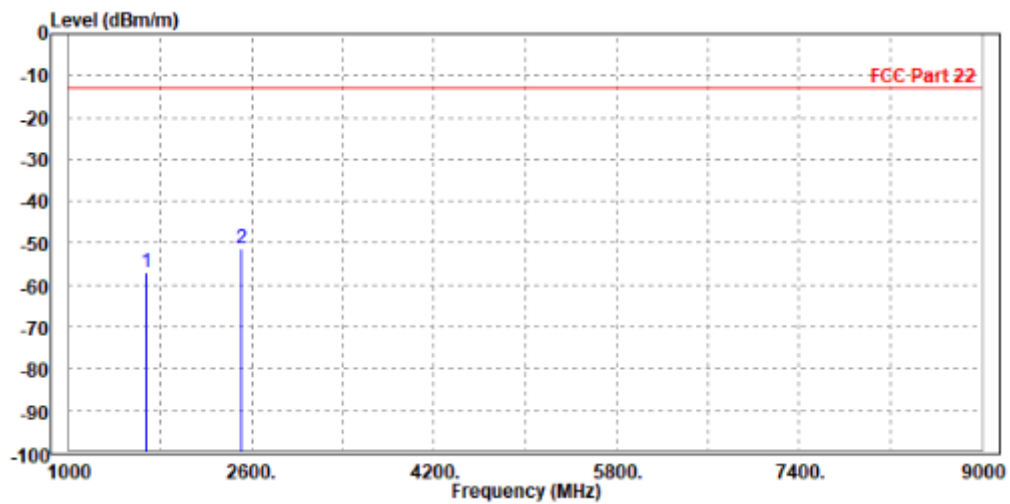




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.59	-57.80	-13.00	-43.59	1.21	Peak	Vertical
2 PP	2509.500	-52.79	-57.76	-13.00	-39.79	4.97	Peak	Vertical

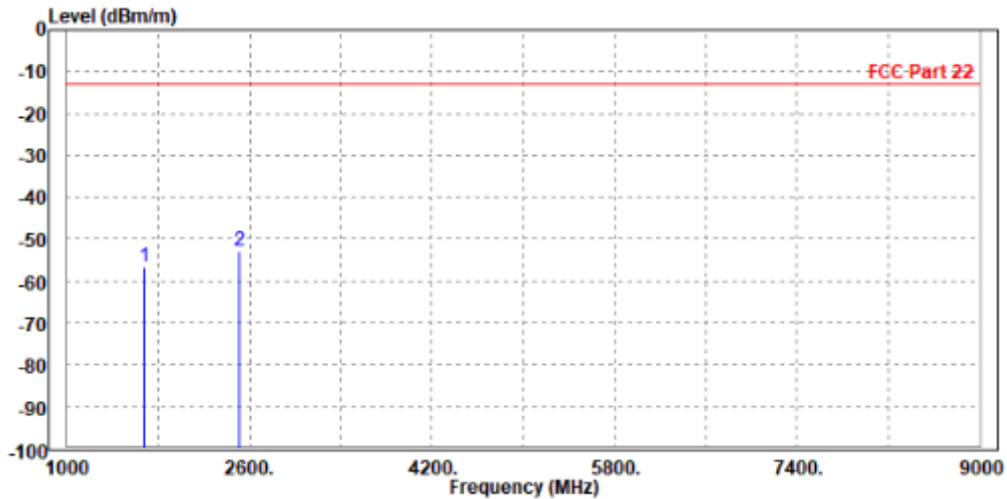




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

CH26940

MODE	TX channel 26940	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1678.000	-57.14	-58.16	-13.00	-44.14	1.02	Peak	Horizontal
2 PP	2520.000	-52.94	-58.43	-13.00	-39.94	5.49	Peak	Horizontal

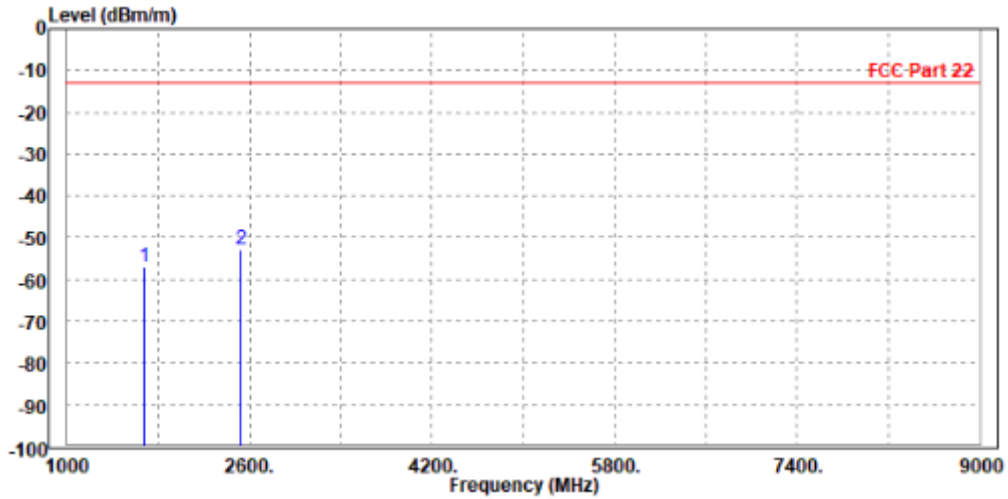




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26940	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1680.000	-55.34	-56.61	-13.00	-42.34	1.27	Peak	Vertical
2 PP	2517.000	-52.44	-57.43	-13.00	-39.44	4.99	Peak	Vertical

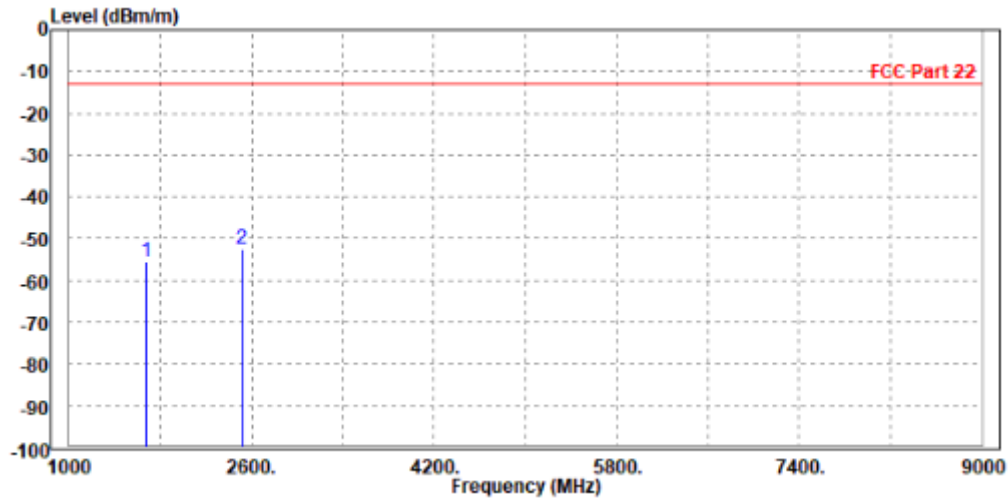




CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.90	-57.87	-13.00	-43.90	0.97	Peak	Horizontal
2 PP	2509.500	-51.59	-57.05	-13.00	-38.59	5.46	Peak	Horizontal

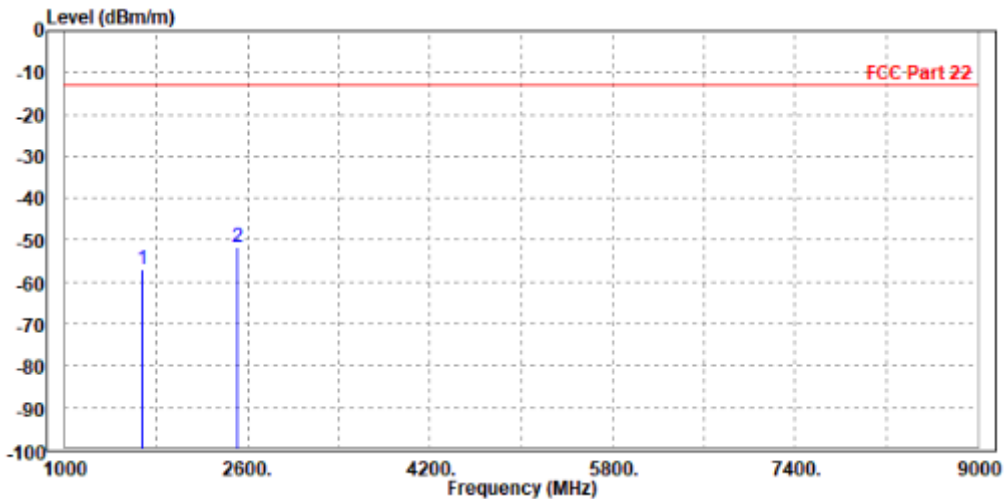




BUREAU VERITAS

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-56.13	-57.35	-13.00	-43.13	1.22	Peak	Vertical
2 PP	2512.000	-53.51	-58.49	-13.00	-40.51	4.98	Peak	Vertical

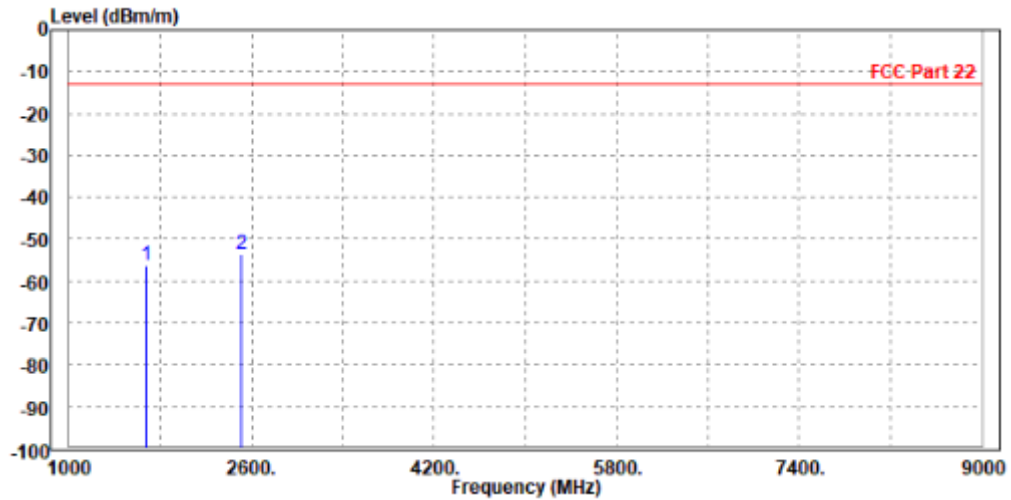




CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.48	-57.45	-13.00	-43.48	0.97	Peak	Horizontal
2 PP	2509.500	-52.92	-58.38	-13.00	-39.92	5.46	Peak	Horizontal

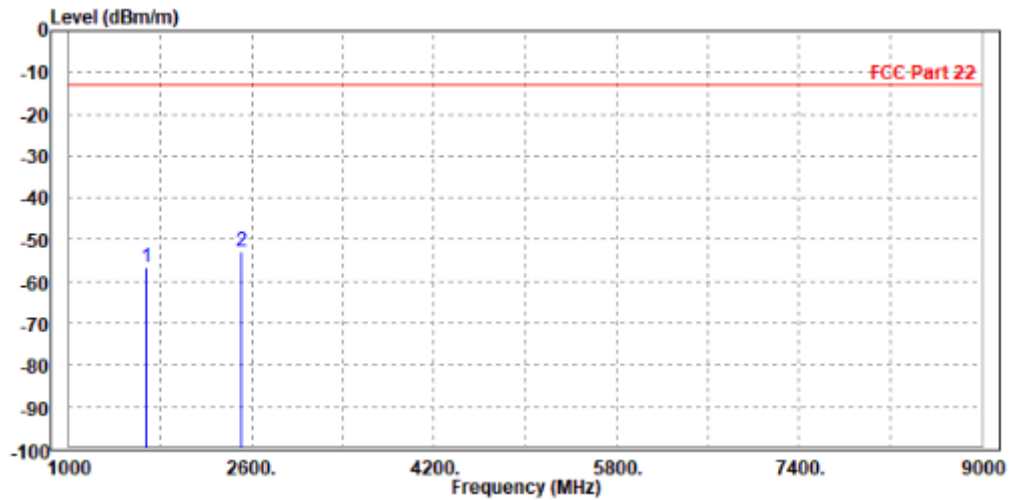




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-56.10	-57.32	-13.00	-43.10	1.22	Peak	Vertical
2 PP	2512.000	-52.35	-57.33	-13.00	-39.35	4.98	Peak	Vertical

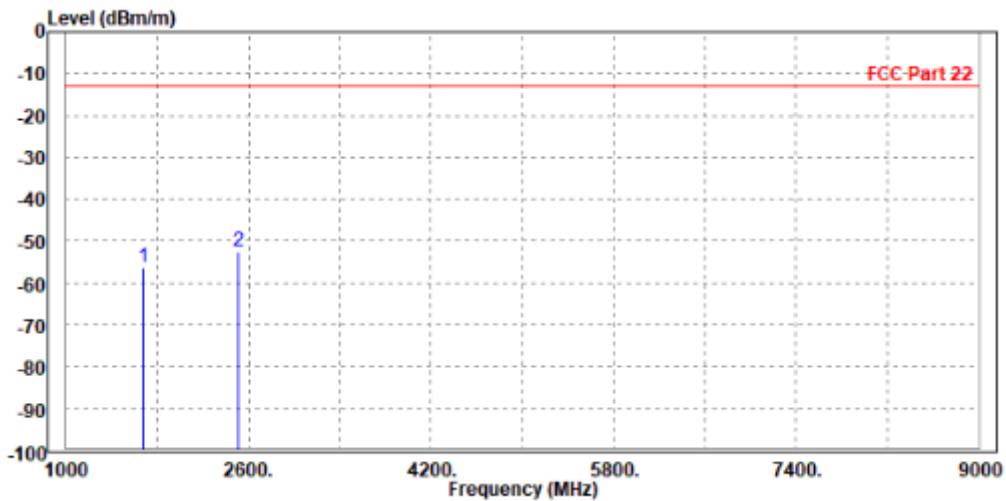



LTE NB-IOT

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 5:

SUBCARRIER SPACING: 15KHz / QPSK

MODE	TX channel 20648	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	33.880	-66.60	-55.37	-13.00	-53.60	-11.23	Peak	Horizontal
2 PP	62.010	-58.36	-39.11	-13.00	-45.36	-19.25	Peak	Horizontal
3	169.680	-58.94	-42.54	-13.00	-45.94	-16.40	Peak	Horizontal
4	263.770	-61.23	-49.50	-13.00	-48.23	-11.73	Peak	Horizontal
5	319.060	-67.06	-55.06	-13.00	-54.06	-12.00	Peak	Horizontal
6	423.820	-69.93	-60.33	-13.00	-56.93	-9.60	Peak	Horizontal

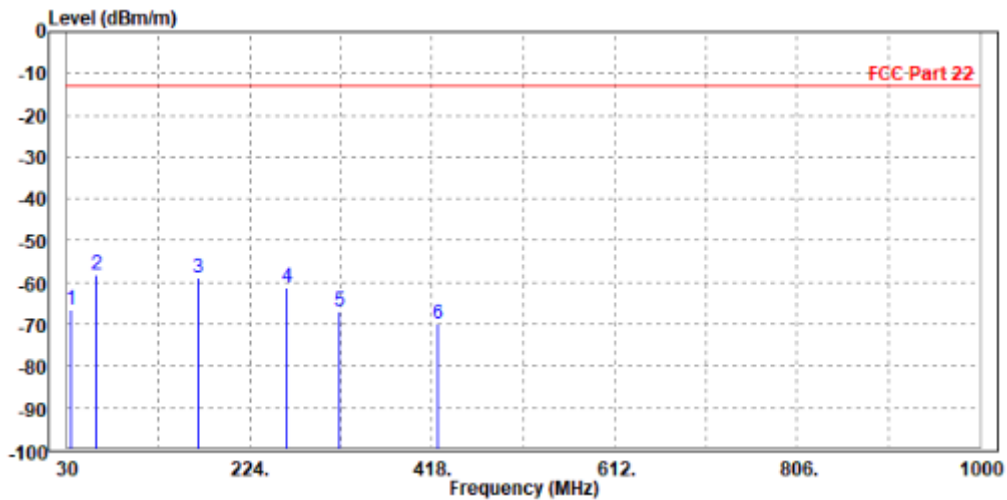



MODE	TX channel 20648	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	33.880	-64.24	-44.48	-13.00	-51.24	-19.76	Peak	Vertical
2	62.980	-58.92	-35.97	-13.00	-45.92	-22.95	Peak	Vertical
3 PP	99.840	-42.81	-36.30	-13.00	-29.81	-6.51	Peak	Vertical
4	169.680	-62.08	-44.45	-13.00	-49.08	-17.63	Peak	Vertical
5	267.650	-71.17	-58.55	-13.00	-58.17	-12.62	Peak	Vertical
6	423.820	-71.87	-63.09	-13.00	-58.87	-8.78	Peak	Vertical

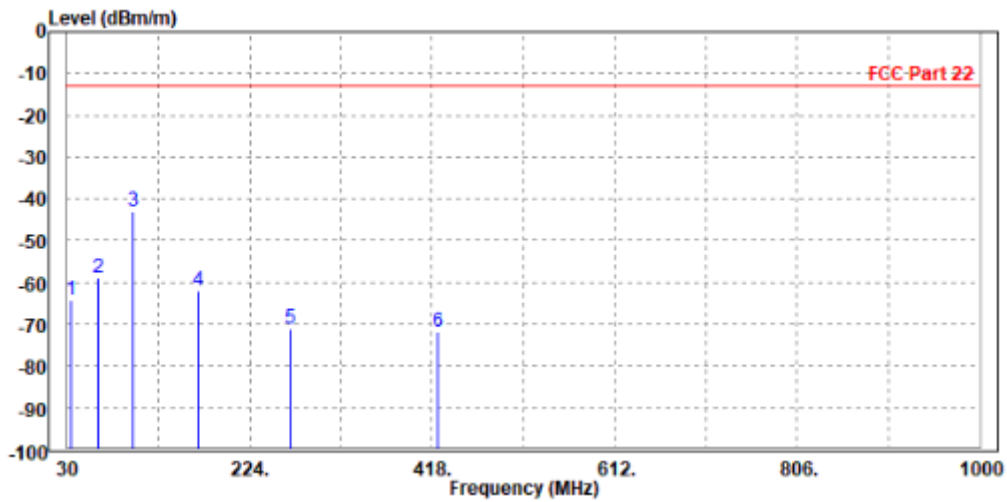



ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

LTE Band 5

SUBCARRIER SPACING: 3.75KHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1672.000	-42.58	-43.55	-13.00	-29.58	0.97	Peak	Horizontal
2	2509.500	-43.17	-48.63	-13.00	-30.17	5.46	Peak	Horizontal

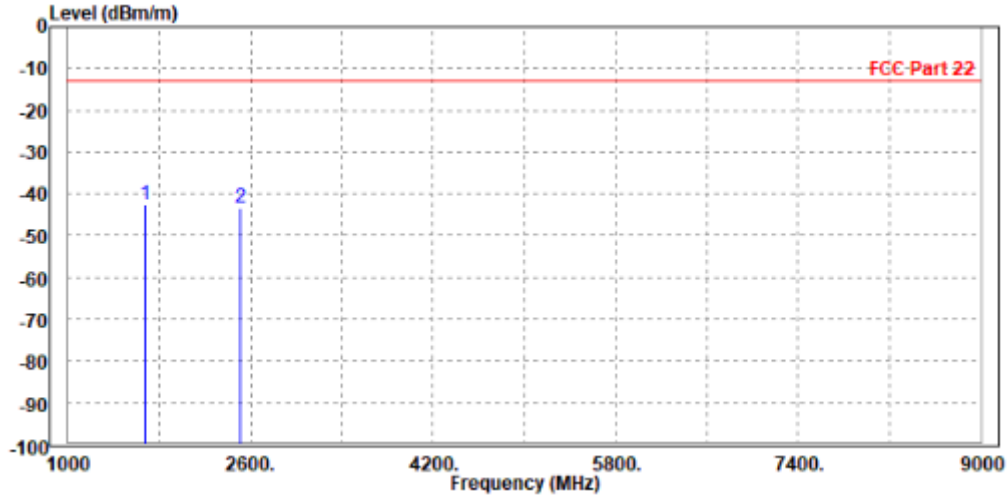



MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1672.000	-43.34	-44.55	-13.00	-30.34	1.21	Peak	Vertical
2	2509.500	-46.70	-51.67	-13.00	-33.70	4.97	Peak	Vertical

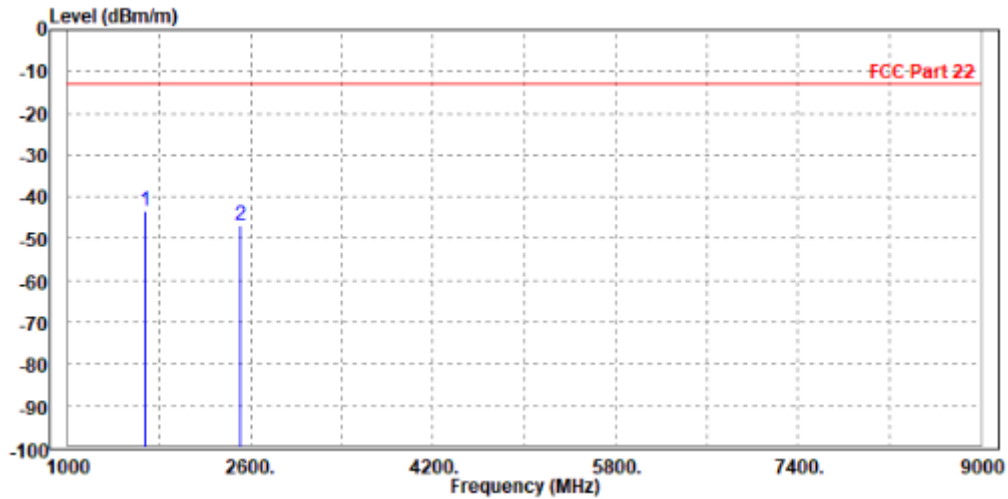




CHANNEL BANDWIDTH: 15KHz / QPSK

CH20402

MODE	TX channel 20402	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
		MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	1648.400	-44.16	-44.94	-13.00	-31.16	0.78	Peak	Horizontal
2		2472.000	-44.81	-50.15	-13.00	-31.81	5.34	Peak	Horizontal

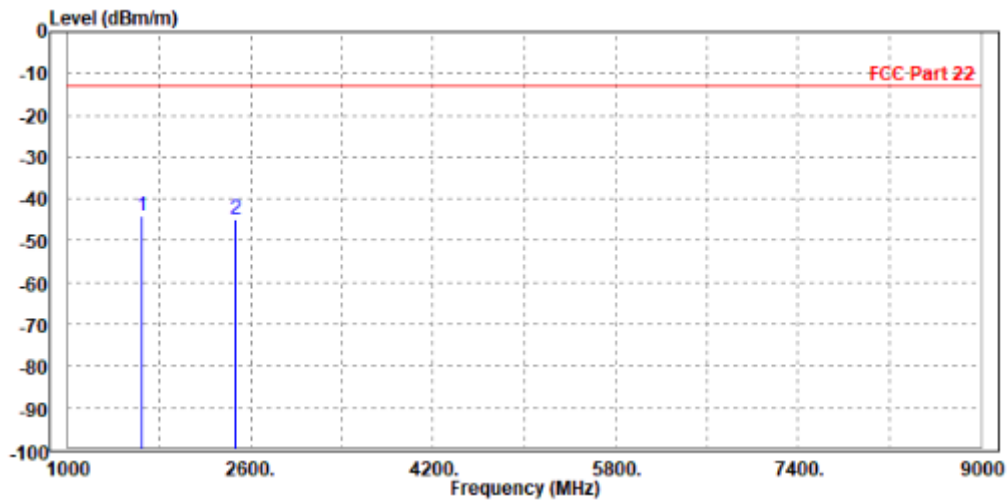




BUREAU VERITAS

Test Report No.: W7L-230313W001RF01

MODE	TX channel 20402	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1648.000	-45.87	-46.91	-13.00	-32.87	1.04	Peak	Vertical
2	2472.600	-50.18	-55.04	-13.00	-37.18	4.86	Peak	Vertical

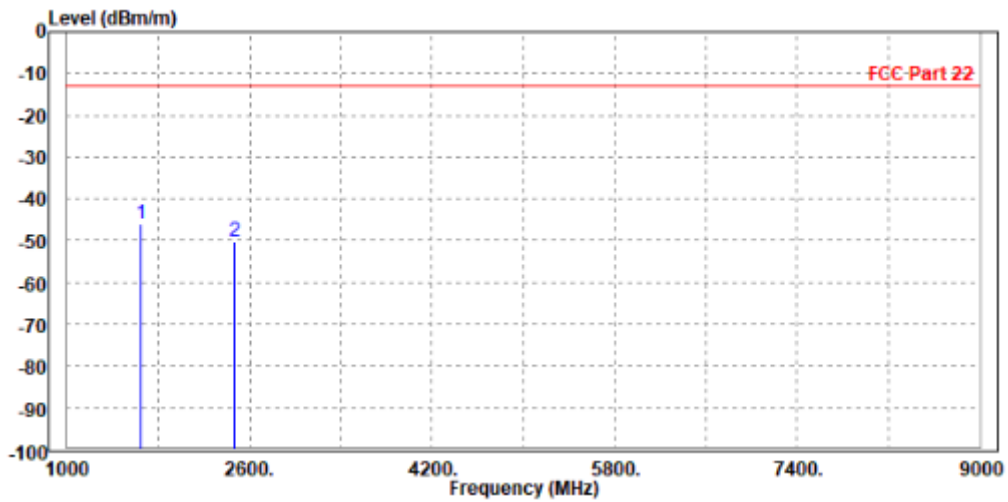




CH20525

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1673.000	-39.90	-40.88	-13.00	-26.90	0.98	Peak	Horizontal
2	2512.000	-42.53	-48.00	-13.00	-29.53	5.47	Peak	Horizontal

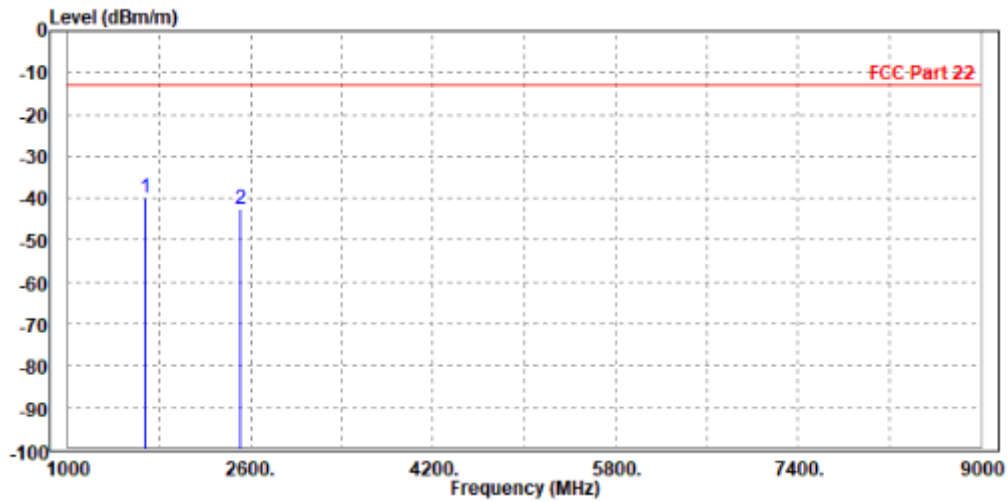



MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1672.000	-40.21	-41.42	-13.00	-27.21	1.21	Peak	Vertical
2	2509.500	-47.60	-52.57	-13.00	-34.60	4.97	Peak	Vertical

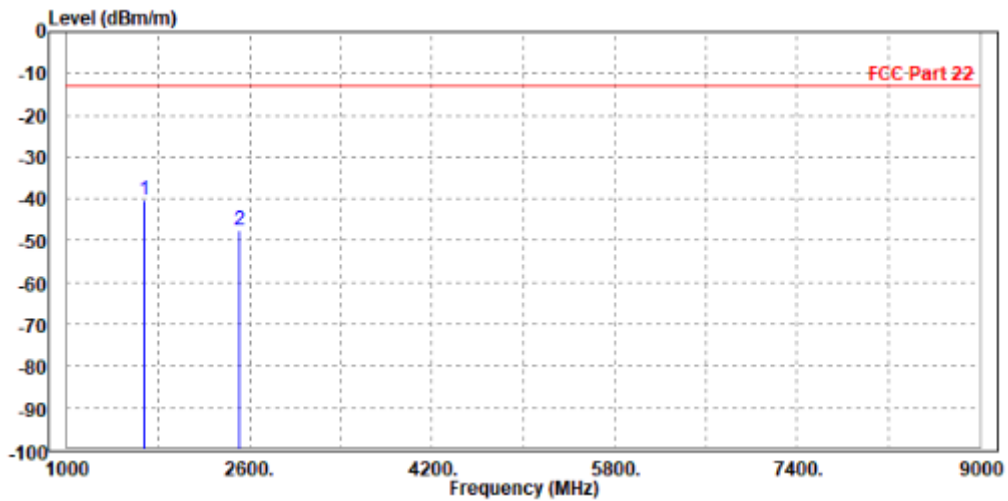




CH20648

MODE	TX channel 20648	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1696.000	-37.61	-38.77	-13.00	-24.61	1.16	Peak	Horizontal
2 PP	2546.400	-36.05	-41.60	-13.00	-23.05	5.55	Peak	Horizontal

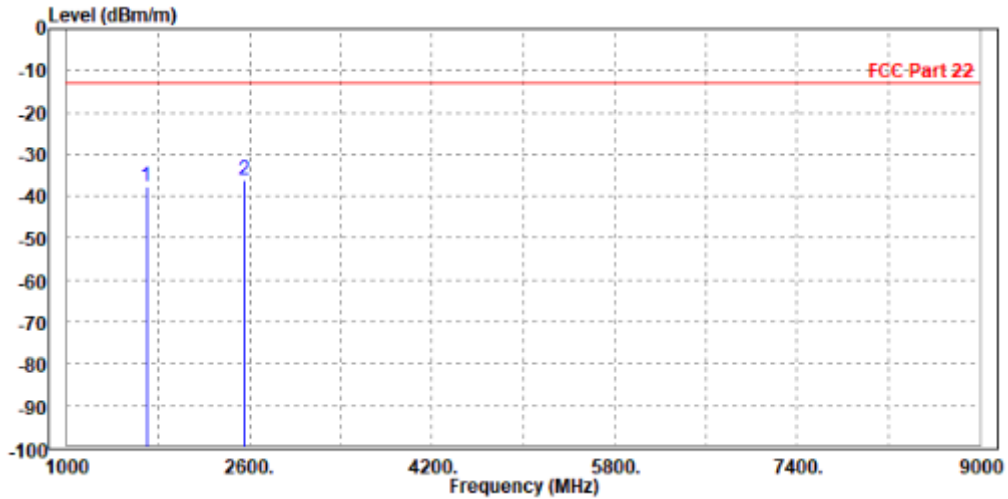




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 20648	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1697.600	-38.01	-39.41	-13.00	-25.01	1.40	Peak	Vertical
2	2544.000	-40.28	-45.36	-13.00	-27.28	5.08	Peak	Vertical

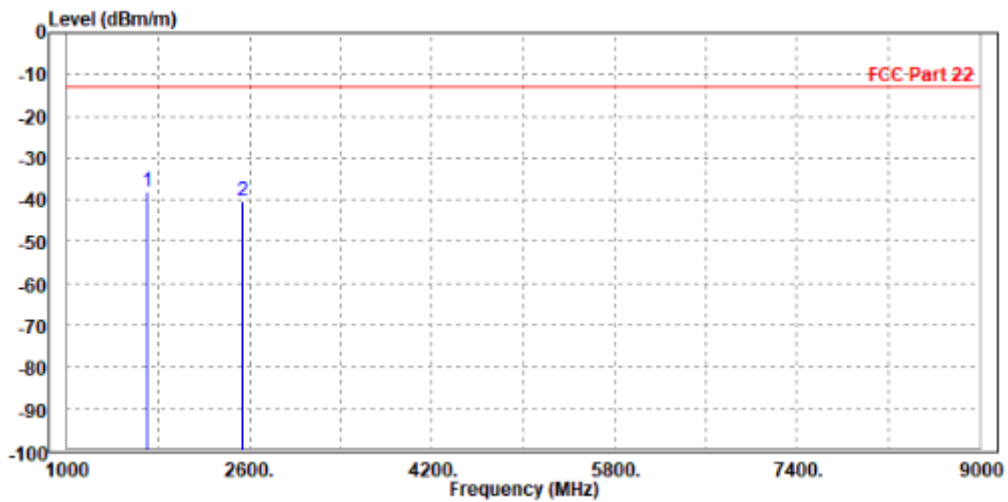



BUREAU VERITAS

Test Report No.: W7L-230313W001RF01

External Antenna:

LTE CAT-M1

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 26:

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	62.010	-62.16	-42.91	-13.00	-49.16	-19.25	Peak	Horizontal
2	141.550	-65.97	-46.71	-13.00	-52.97	-19.26	Peak	Horizontal
3	172.590	-63.31	-46.47	-13.00	-50.31	-16.84	Peak	Horizontal
4	218.180	-64.34	-49.09	-13.00	-51.34	-15.25	Peak	Horizontal
5 PP	275.410	-60.62	-48.65	-13.00	-47.62	-11.97	Peak	Horizontal
6	423.820	-69.55	-59.95	-13.00	-56.55	-9.60	Peak	Horizontal

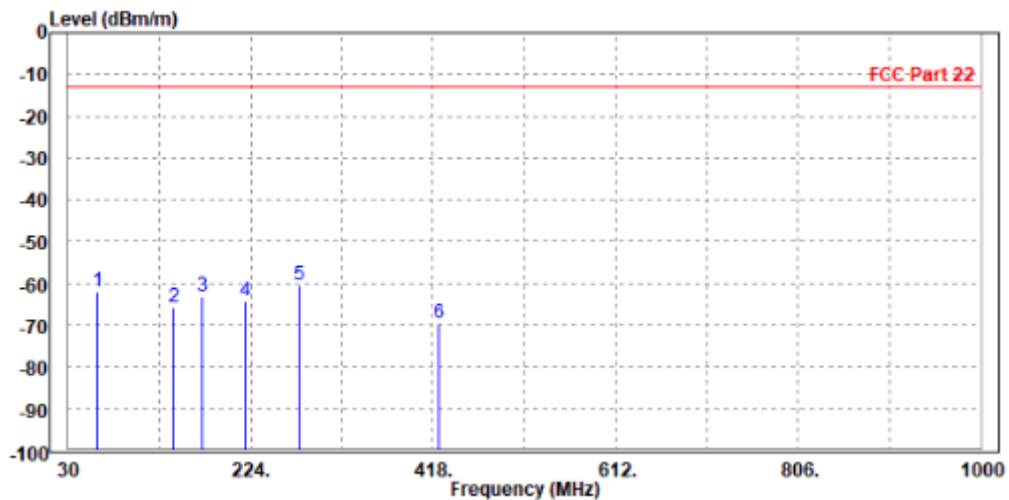



MODE	TX channel 26915	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	69.770	-60.21	-37.52	-13.00	-47.21	-22.69	Peak	Vertical
2 PP	99.840	-40.78	-34.27	-13.00	-27.78	-6.51	Peak	Vertical
3	142.520	-62.65	-48.40	-13.00	-49.65	-14.25	Peak	Vertical
4	179.380	-70.46	-51.78	-13.00	-57.46	-18.68	Peak	Vertical
5	219.150	-71.65	-55.32	-13.00	-58.65	-16.33	Peak	Vertical
6	272.500	-71.52	-59.17	-13.00	-58.52	-12.35	Peak	Vertical

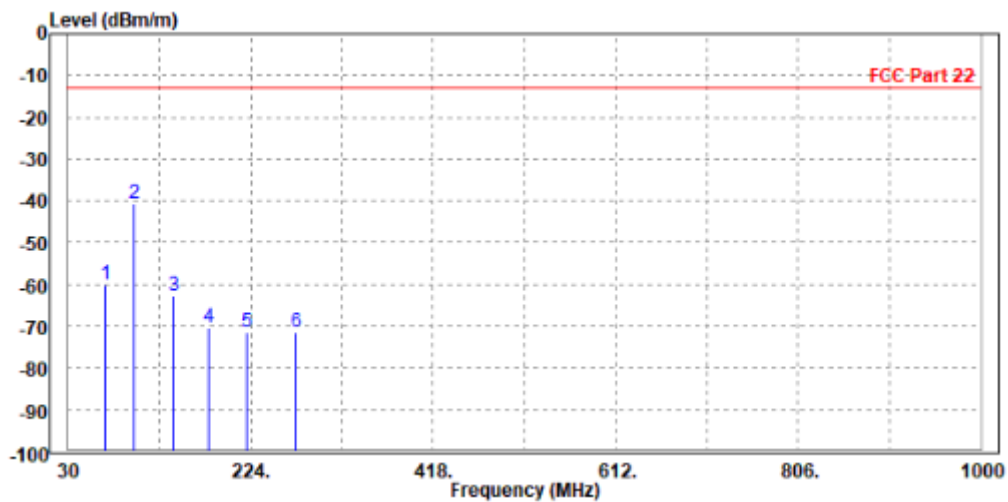



ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.


WORST-CASE DATA

LTE Band 26

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-57.05	-58.03	-13.00	-44.05	0.98	Peak	Horizontal
2 PP	2512.000	-52.37	-57.84	-13.00	-39.37	5.47	Peak	Horizontal

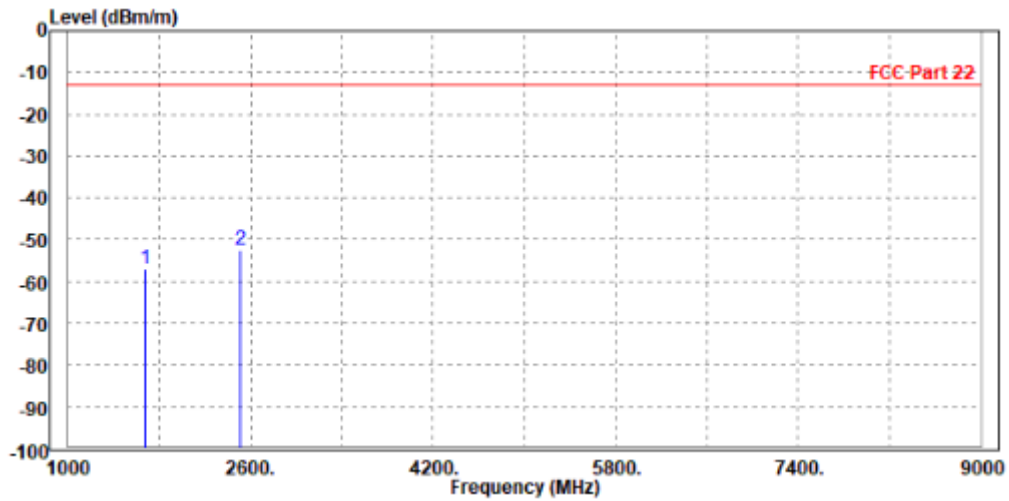



MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.64	-57.85	-13.00	-43.64	1.21	Peak	Vertical
2 PP	2509.500	-52.59	-57.56	-13.00	-39.59	4.97	Peak	Vertical

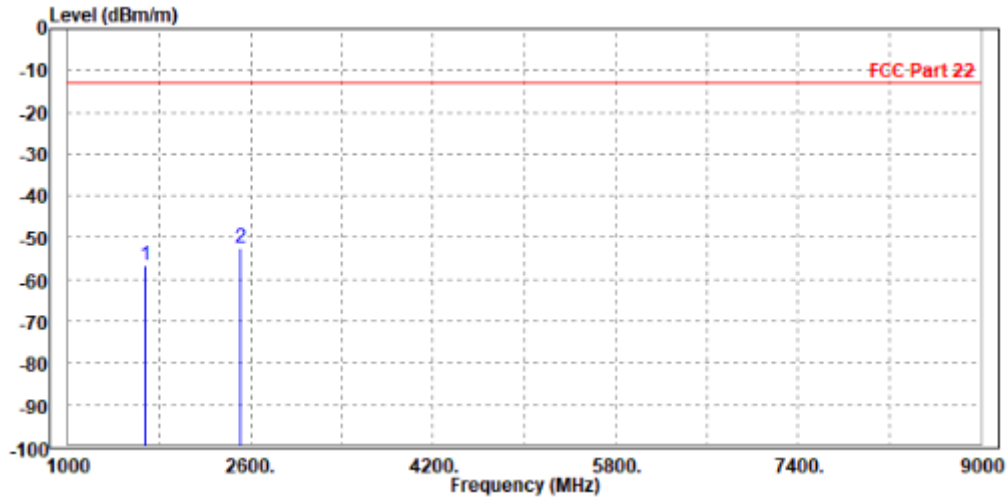




CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.71	-57.68	-13.00	-43.71	0.97	Peak	Horizontal
2 PP	2509.500	-52.34	-57.80	-13.00	-39.34	5.46	Peak	Horizontal

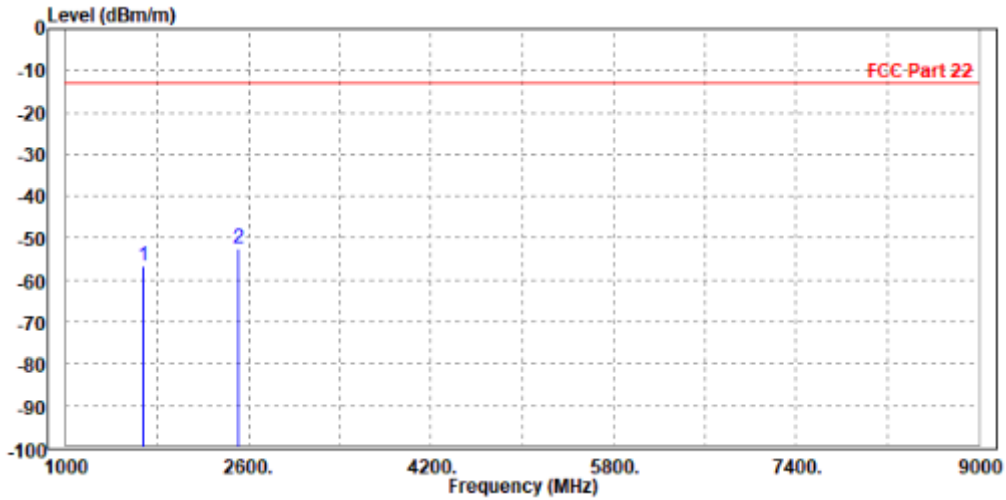




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-55.94	-57.16	-13.00	-42.94	1.22	Peak	Vertical
2 PP	2512.000	-52.43	-57.41	-13.00	-39.43	4.98	Peak	Vertical

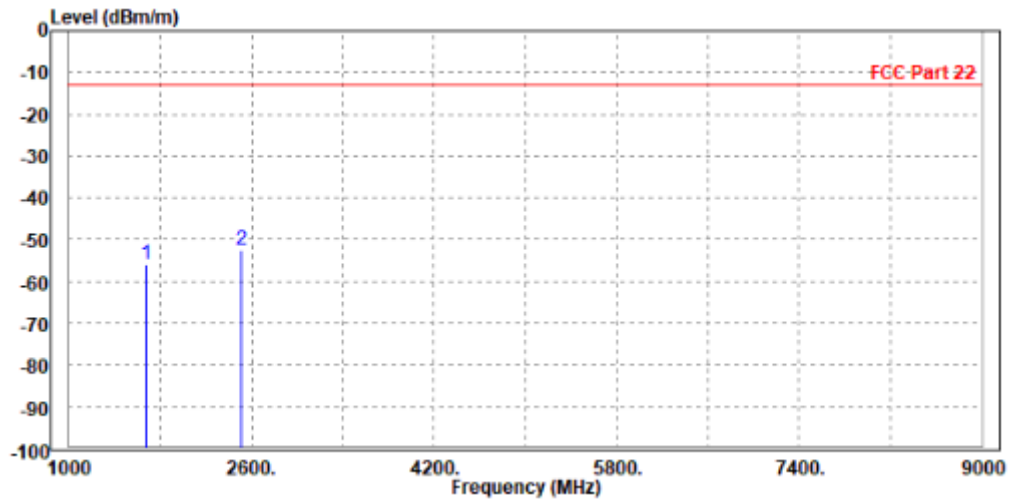




CHANNEL BANDWIDTH: 5MHz / QPSK
CH26890

MODE	TX channel 26890	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Po1/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.16	-57.13	-13.00	-43.16	0.97	Peak	Horizontal
2 PP	2502.000	-52.55	-57.99	-13.00	-39.55	5.44	Peak	Horizontal

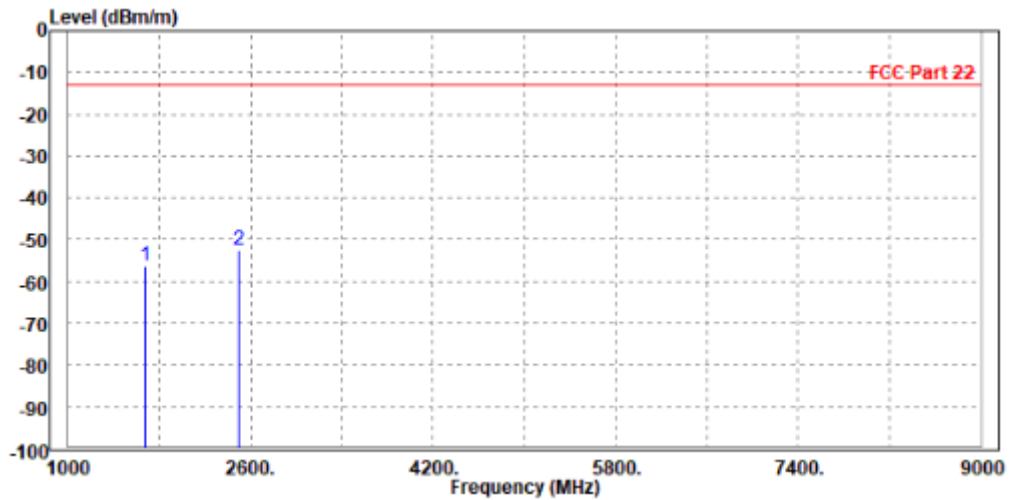




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26890	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.36	-57.57	-13.00	-43.36	1.21	Peak	Vertical
2 PP	2502.000	-52.65	-57.60	-13.00	-39.65	4.95	Peak	Vertical

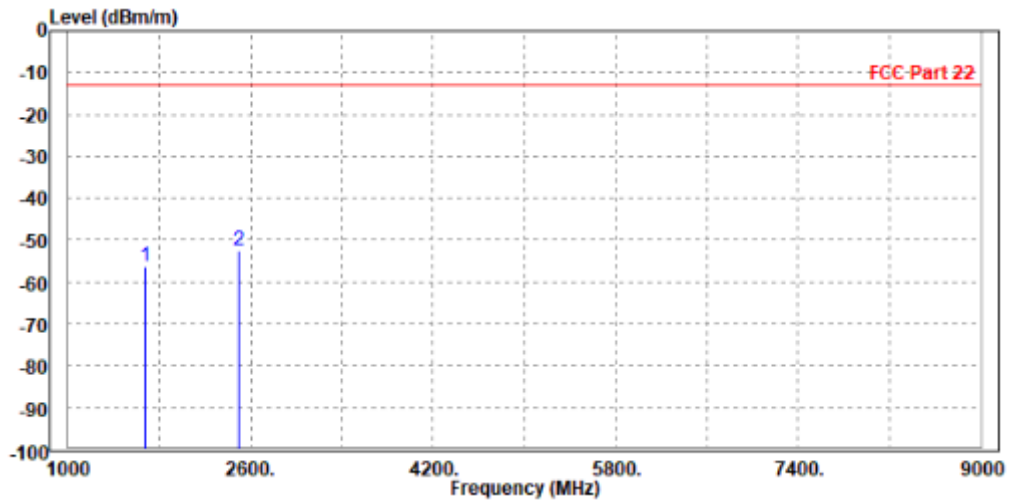




CH26915

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-56.92	-57.90	-13.00	-43.92	0.98	Peak	Horizontal
2 PP	2512.000	-53.00	-58.47	-13.00	-40.00	5.47	Peak	Horizontal

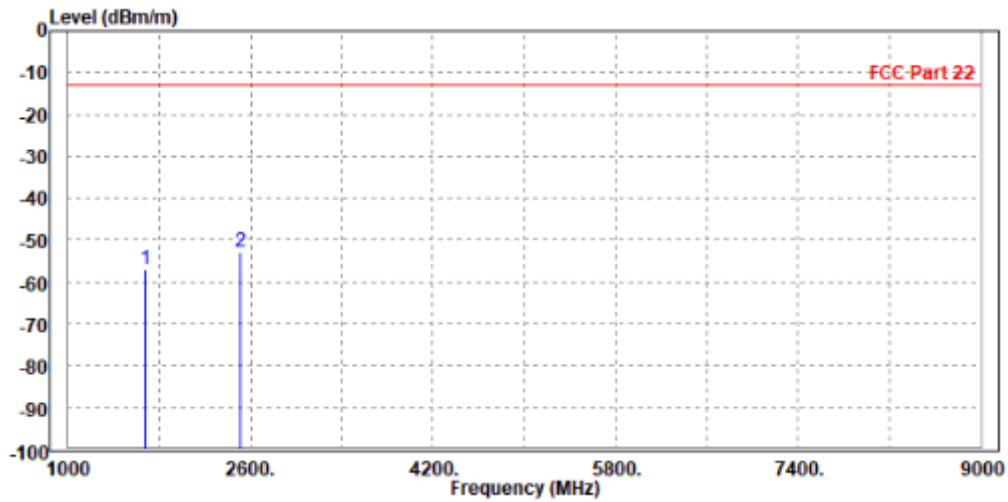




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.32	-57.53	-13.00	-43.32	1.21	Peak	Vertical
2 PP	2509.500	-51.69	-56.66	-13.00	-38.69	4.97	Peak	Vertical

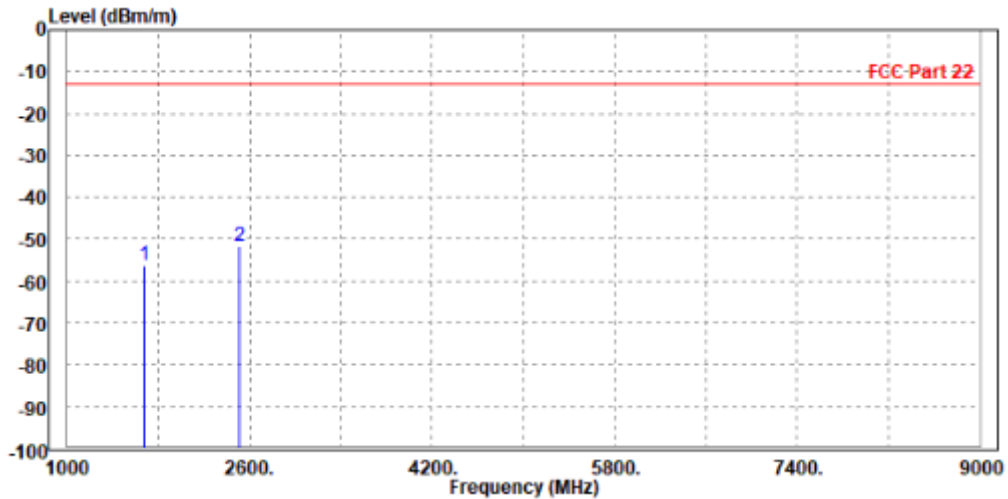




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

CH26940

MODE	TX channel 26940	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1678.000	-56.85	-57.87	-13.00	-43.85	1.02	Peak	Horizontal
2 PP	2520.000	-53.05	-58.54	-13.00	-40.05	5.49	Peak	Horizontal

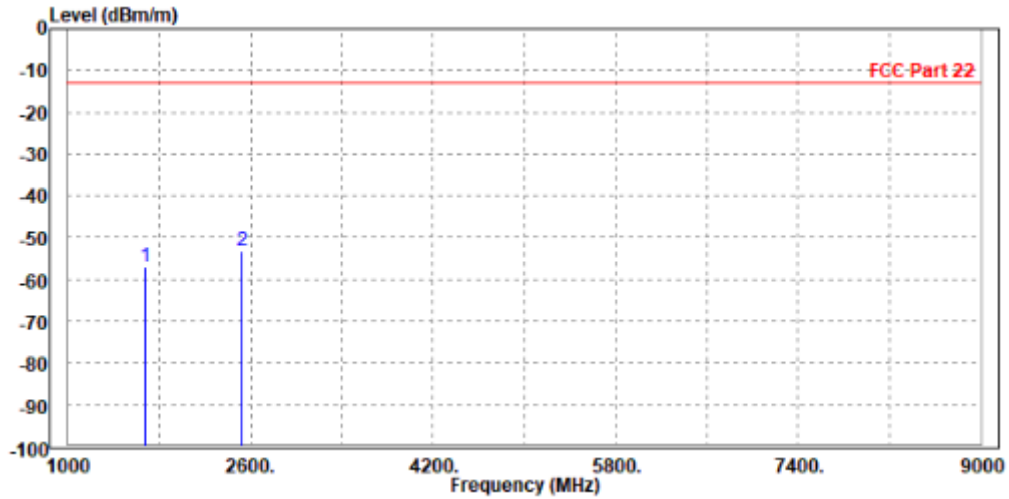



MODE	TX channel 26940	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1680.000	-56.29	-57.56	-13.00	-43.29	1.27	Peak	Vertical
2 PP	2517.000	-51.99	-56.98	-13.00	-38.99	4.99	Peak	Vertical

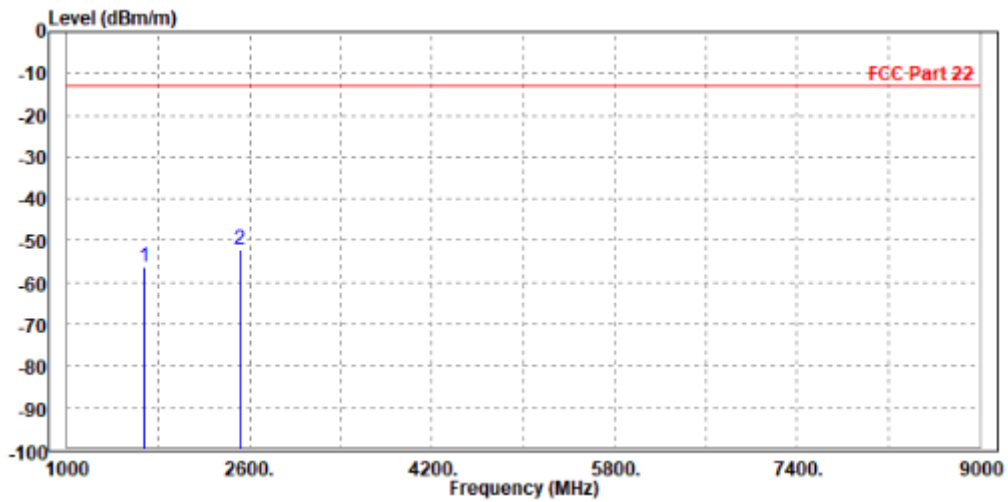




CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.69	-57.66	-13.00	-43.69	0.97	Peak	Horizontal
2 PP	2509.500	-52.01	-57.47	-13.00	-39.01	5.46	Peak	Horizontal

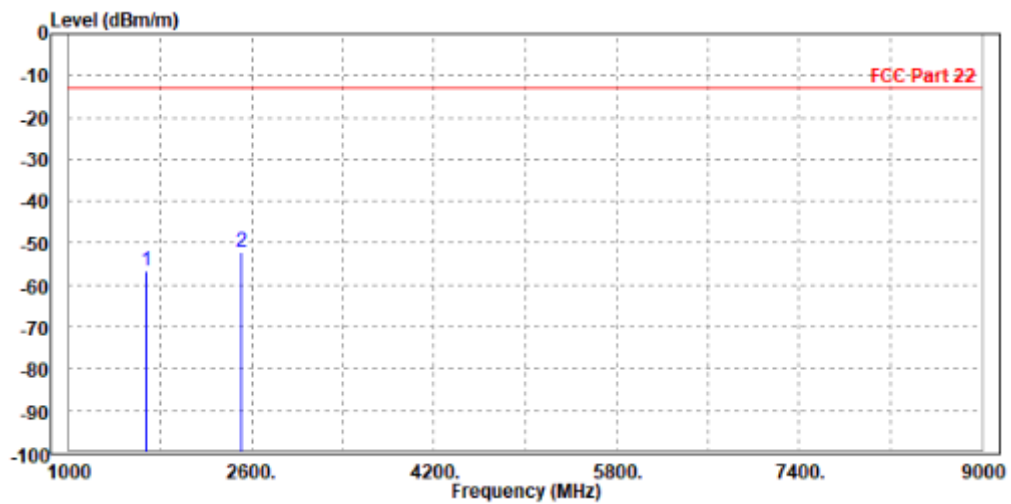



MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-56.15	-57.37	-13.00	-43.15	1.22	Peak	Vertical
2 PP	2512.000	-53.50	-58.48	-13.00	-40.50	4.98	Peak	Vertical

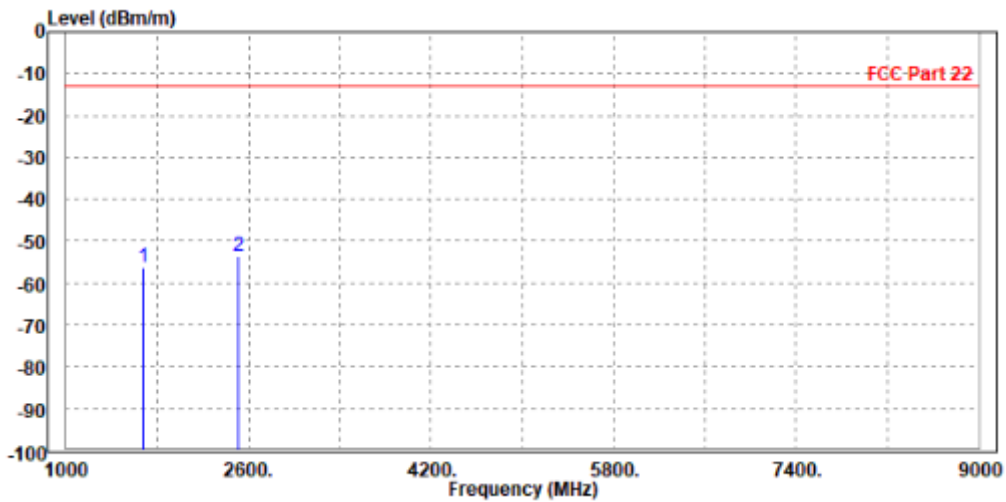




CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1672.000	-56.48	-57.45	-13.00	-43.48	0.97	Peak	Horizontal
2 PP	2509.500	-52.32	-57.78	-13.00	-39.32	5.46	Peak	Horizontal

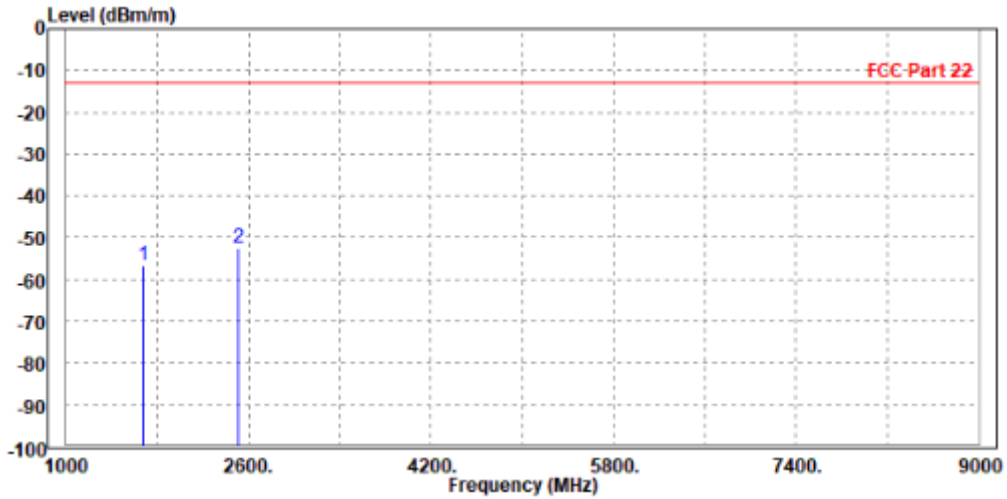




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 26915	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1673.000	-55.89	-57.11	-13.00	-42.89	1.22	Peak	Vertical
2 PP	2512.000	-52.73	-57.71	-13.00	-39.73	4.98	Peak	Vertical

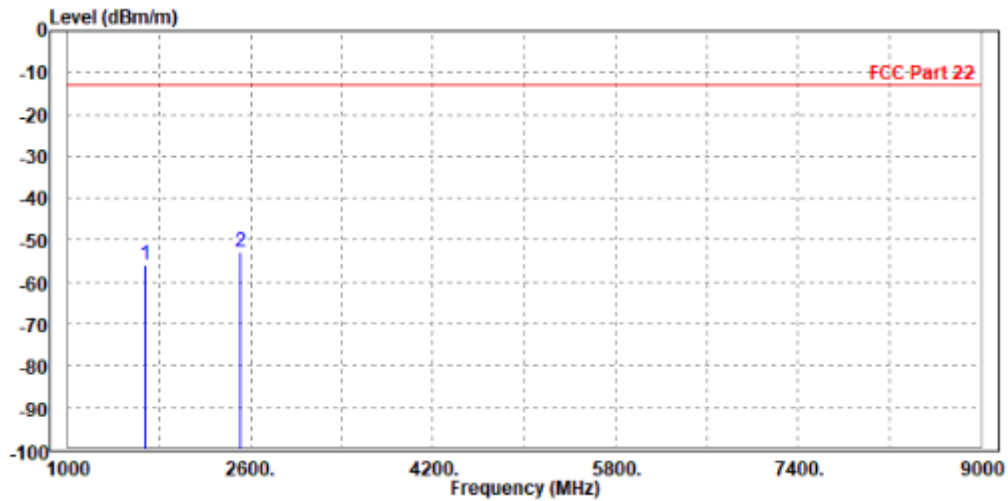



LTE NB-IOT

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 5:

SUBCARRIER SPACING: 3.75KHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	62.980	-61.94	-42.46	-13.00	-48.94	-19.48	Peak	Horizontal
2	142.520	-64.90	-45.65	-13.00	-51.90	-19.25	Peak	Horizontal
3	171.620	-63.68	-47.00	-13.00	-50.68	-16.68	Peak	Horizontal
4	220.120	-63.19	-48.17	-13.00	-50.19	-15.02	Peak	Horizontal
5 PP	275.410	-59.60	-47.63	-13.00	-46.60	-11.97	Peak	Horizontal
6	423.820	-70.39	-60.79	-13.00	-57.39	-9.60	Peak	Horizontal

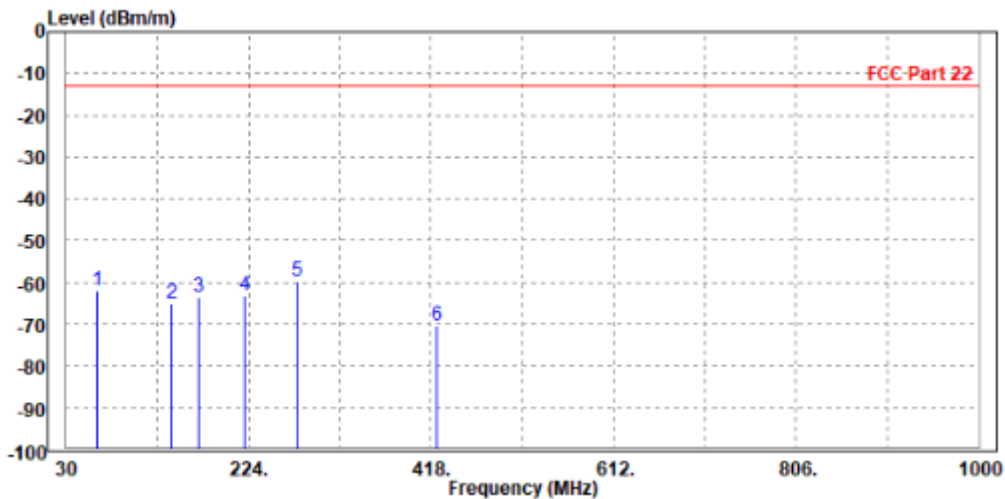




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 20525	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	33.880	-64.66	-44.90	-13.00	-51.66	-19.76	Peak	Vertical
2	69.770	-59.49	-36.80	-13.00	-46.49	-22.69	Peak	Vertical
3 PP	99.840	-40.89	-34.38	-13.00	-27.89	-6.51	Peak	Vertical
4	141.550	-62.94	-49.20	-13.00	-49.94	-13.74	Peak	Vertical
5	220.120	-70.06	-53.82	-13.00	-57.06	-16.24	Peak	Vertical
6	275.410	-70.50	-58.32	-13.00	-57.50	-12.18	Peak	Vertical

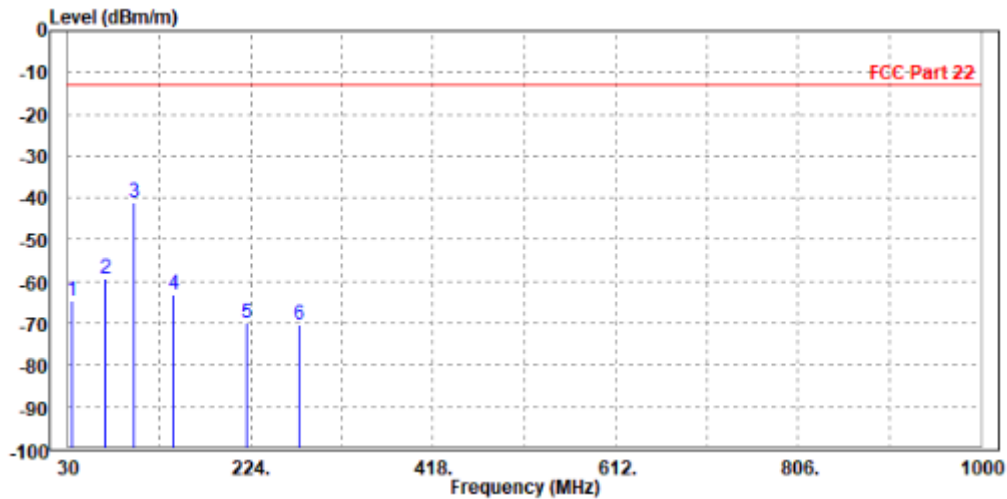



ABOVE 1GHz DATA

Note: For higher frequency, the emission is too low to be detected.

WORST-CASE DATA


LTE Band 5

SUBCARRIER SPACING: 3.75KHz / QPSK

CH20402

MODE	TX channel 20402	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-48.48	-49.25	-13.00	-35.48	0.77	Peak	Horizontal
2 PP	2476.000	-41.18	-46.53	-13.00	-28.18	5.35	Peak	Horizontal

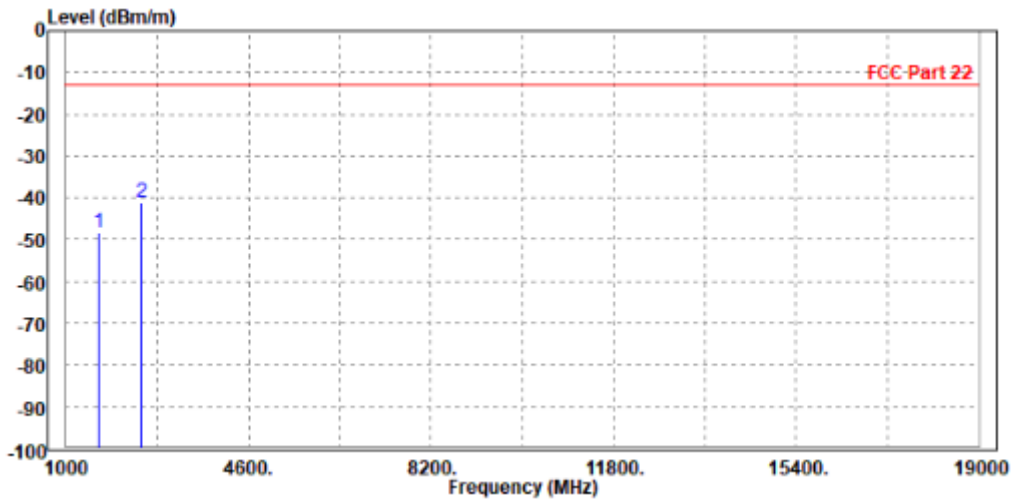




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 20402	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1648.000	-53.31	-54.35	-13.00	-40.31	1.04	Peak	Vertical
2	PP 2472.600	-49.00	-53.86	-13.00	-36.00	4.86	Peak	Vertical

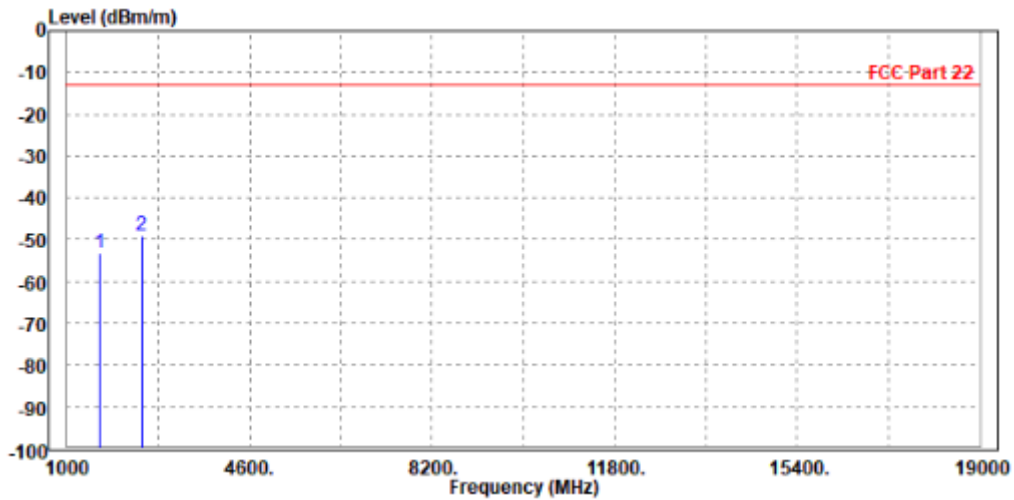




CH20525

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-49.24	-50.16	-13.00	-36.24	0.92	Peak	Horizontal
2 PP	2512.000	-39.68	-45.15	-13.00	-26.68	5.47	Peak	Horizontal

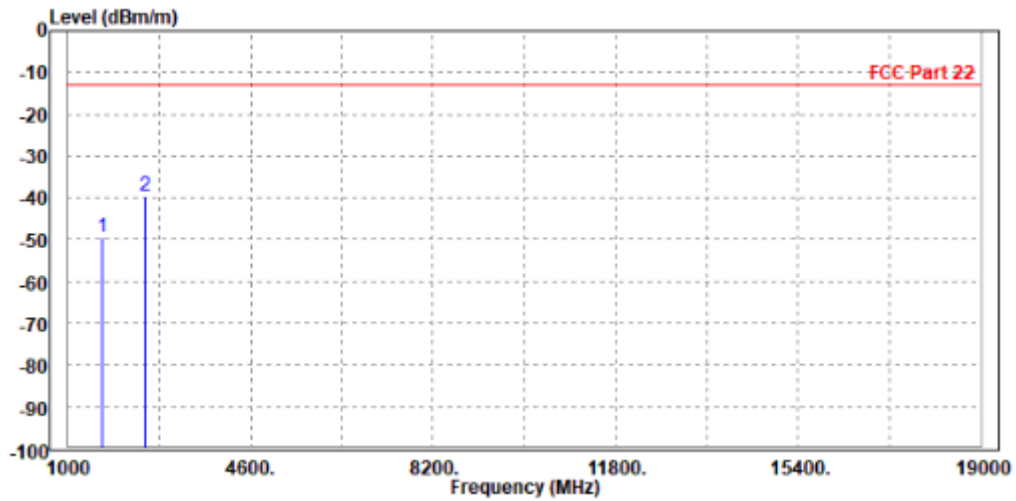



MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-50.43	-51.60	-13.00	-37.43	1.17	Peak	Vertical
2	PP 2512.000	-49.36	-54.34	-13.00	-36.36	4.98	Peak	Vertical

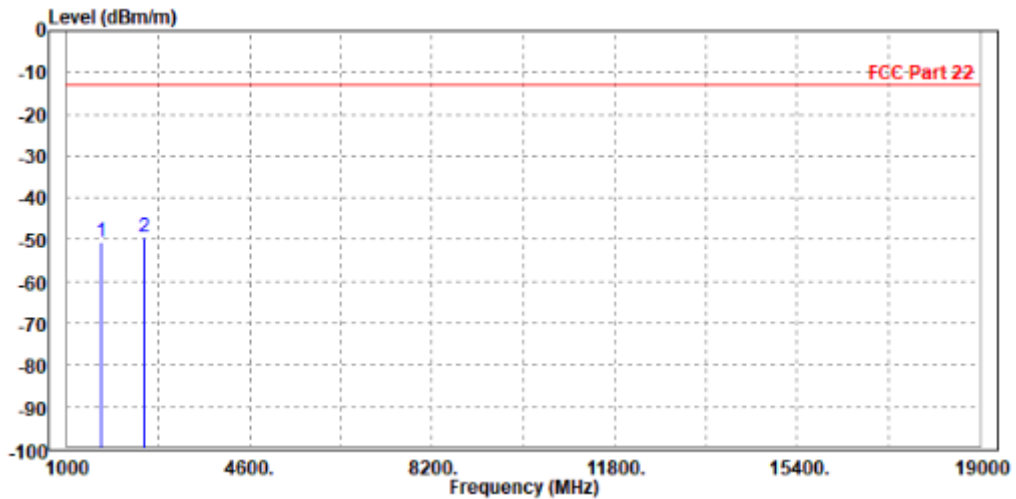




CH20648

MODE	TX channel 20648	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-54.94	-56.15	-13.00	-41.94	1.21	Peak	Horizontal
2 PP	2546.400	-40.02	-45.57	-13.00	-27.02	5.55	Peak	Horizontal

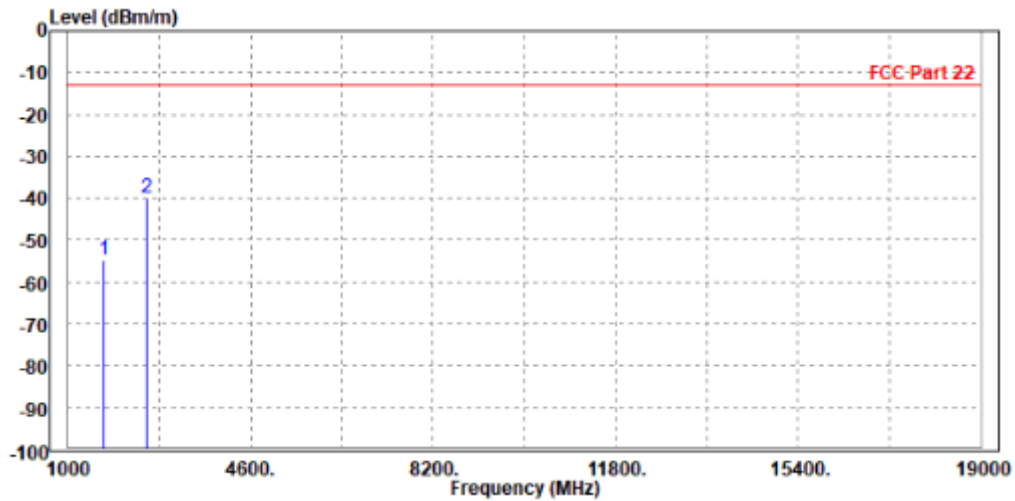




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 20648	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1702.000	-53.75	-55.18	-13.00	-40.75	1.43	Peak	Vertical
2 PP	2548.000	-49.99	-55.08	-13.00	-36.99	5.09	Peak	Vertical

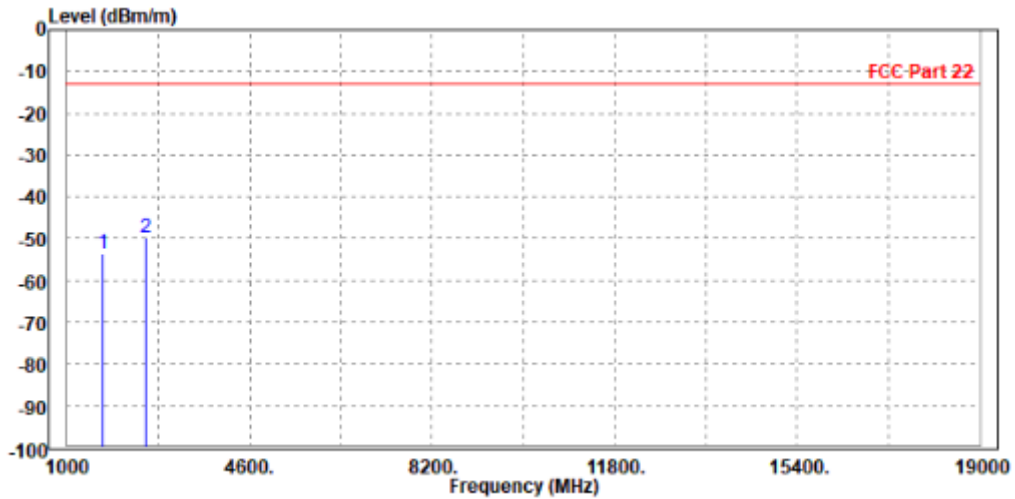




CHANNEL BANDWIDTH: 15KHz / QPSK

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-50.86	-51.78	-13.00	-37.86	0.92	Peak	Horizontal
2 PP	2512.000	-40.42	-45.89	-13.00	-27.42	5.47	Peak	Horizontal

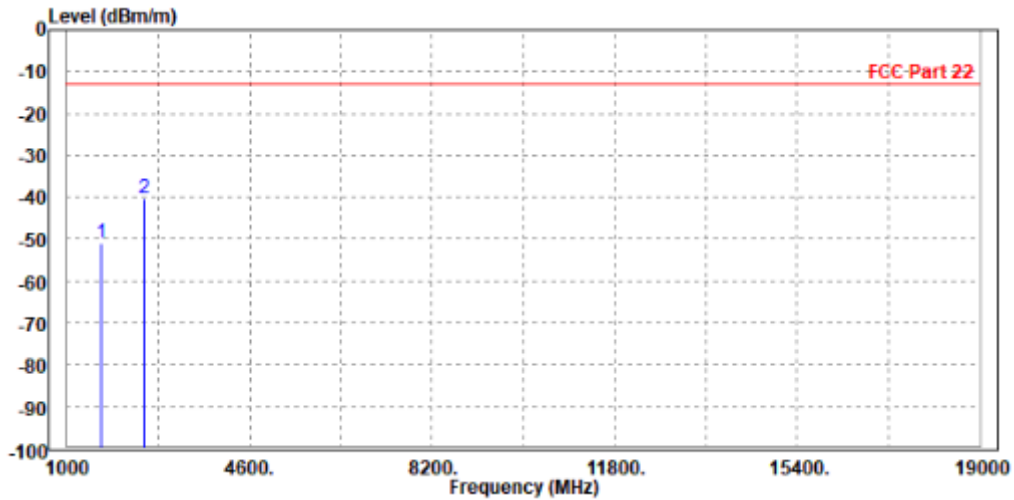




**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

MODE	TX channel 20525	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1666.000	-52.15	-53.32	-13.00	-39.15	1.17	Peak	Vertical
2 PP	2512.000	-48.10	-53.08	-13.00	-35.10	4.98	Peak	Vertical

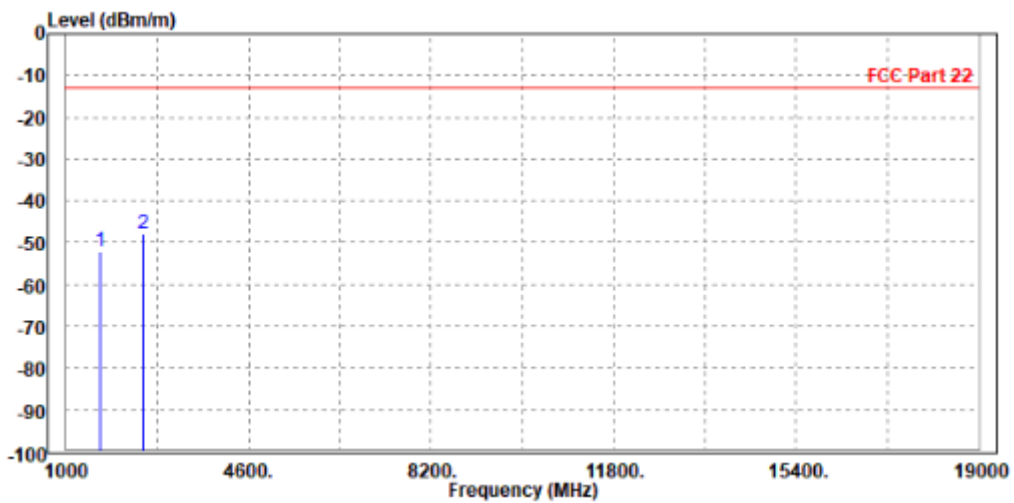




3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

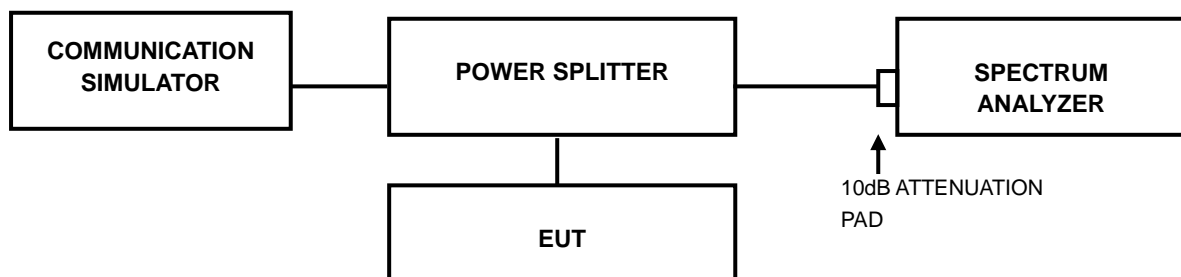

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

3.7.4 TEST RESULTS

Please Refer to Module report R1907A0448-R1V2/ R1907A0448-R7V2/
R1907A0448-R4V2.



BUREAU
VERITAS

Test Report No.: W7L-230313W001RF01

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: W7L-230313W001RF01

5 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



**BUREAU
VERITAS**

Test Report No.: W7L-230313W001RF01

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---