







ISO/IEC17025Accredited Lab.

Report No: FCC 1401119-01 File reference No: 2014-01-26

Applicant: JIANGSU SHUANGSHUANG TECHNOLOGY CO,LTD.

Product: MID

Model No: TD9802L

Trademark: N/A

Test Standards: FCC Part 15.247 and RSS-210 Issue 8

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4, FCC Part 15 Subpart C, Paragraph 15.247 regulations and RSS-210 Issue 8 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: January 26, 2014

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1401119-01 Page 2 of 118

Date: 2014-01-26



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 118

Report No: 1401119-01

Date: 2014-01-26



Test Report Conclusion Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
5.1	Test Method and Test Procedure.	13
5.2	Configuration of the EUT	13
6.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement.	38
8.0	Maximum Peak Output Power	58
9.0	Power Spectral Density Measurement.	61
10.0	Out of Band Measurement.	79
11.0	Antenna Requirement.	104
12.0	FCC Label.	103
13.0	Photo of Test Setup and EUT View.	106

Date: 2014-01-26



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: JIANGSU SHUANGSHUANG TECHNOLOGY CO,LTD.

Address: No.188,West Coastal Road,Haian County,Jiangsu, P.R.China.

Telephone: 0513-88355088 Fax: 0513-88355618

1.3 Description of EUT

Product: MID

Manufacturer: JIANGSU SHUANGSHUANG TECHNOLOGY CO,LTD.
Address: No.188,West Coastal Road,Haian County,Jiangsu,P.R.China.

Brand Name: N/A
Model Number: TD9802L

Additional Model Number: N/A

Power Adapter Model No.: JY-05200

Input: 100-240V, 50/60Hz,0.3A; Output: 5V,2A

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM(64QAM, 16QAM, QPSK, BPSK)

GFSK, JI/4DQPSK, 8DPSK for Bluetooth

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n(HT40): 2422-2452MHz

2402-2480MHz for Bluetooth

Channel Spacing 5MHz for IEEE 802.11b/g/n(HT20, HT40), 1MHz for Bluetooth

Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/40: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps

Frequency Selection By software

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1401119-01 Page 5 of 118

Date: 2014-01-26



Channel Number

IEEE 802.11b/g/n (HT20): 11 Channels

Antenna:

Integral Antenna with maximum gain 2.0dBi

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2013-12-20 to 2014-01-26

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 118

Report No: 1401119-01

Date: 2014-01-26



2.0	Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2013-08-23	2014-08-22		
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2013-08-23	2014-08-22		
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2013-08-23	2014-08-22		
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2013-08-25	2014-08-24		
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2013-08-23	2014-08-22		
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2013-08-24	2014-08-23		
System Controller	CT	SC100	•				
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		-		
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-		
Loop Antenna	EMCO	6502	00042960	2013-08-23	2014-08-22		
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2013-08-23	2014-08-22		
3m OATS			N/A	2013-08-22	2014-08-21		
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2013-08-24	2014-08-23		
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2013-08-24	2014-08-23		
Power meter	Anritsu	ML2487A	6K00003613	2013-08-24	2014-08-23		
Power sensor	Anritsu	MA2491A	32263	2013-08-24	2014-08-23		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2013-08-21	2014-08-20		
LISN	AFJ	LS16C	10010947251	2013-08-21	2014-08-20		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22		
9*6*6 Anechoic			N/A	2013-08-22	2014-08-21		
EMI Test Receiver	RS	ESCS30	100139	2013-08-23	2014-08-22		
LISN	AFJ	LS16C	10010947251	2013-08-23	2014-08-22		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2013-08-23	2014-08-22		

Report No: 1401119-01

Date: 2014-01-26



Page 7 of 118

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 65Mbps data rate (worst case) were chosen for full testing

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

IEEE 802.11n HT40

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Mid	2437
High	2452

IEEE 802.11n HT40 mode: 65Mbps data rate (worst case) was chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.

Report No: 1401119-01 Date: 2014-01-26



3.0 Technical Details

3.1 Summary of test results

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 EUT Modification

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 9 of 118

Report No: 1401119-01 Date: 2014-01-26



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

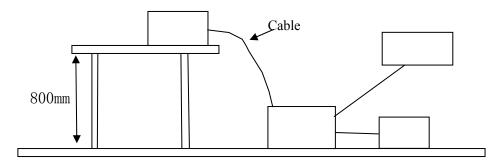

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device Manufacturer		Model	IC
MID	JIANGSU SHUANGSHUANG	TD00031	ECC ID:24 DDT TD09021
MID	TECHNOLOGY CO,LTD.	TD9802L	FCC ID:2ABDT-TD9802L

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1401119-01 Page 10 of 118

Date: 2014-01-26



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107 and RSS-210

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB \(\mu \) V)	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
$5.00 \sim 30.00$	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1401119-01 Page 11 of 118

Date: 2014-01-26



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

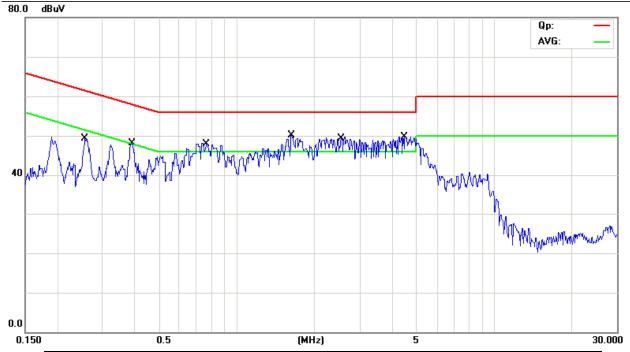

Frequency	Line	Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.2587	Live	47.92	37.77	61.47	51.47
0.3905	Live	46.45	36.91	58.05	48.05
0.7700	Live	45.71	31.46	56.00	46.00
1.6340	Live	45.60	32.70	56.00	46.00
2.5400	Live	43.57	31.57	56.00	46.00
4.4805	Live	44.84	31.39	56.00	46.00

Report No: 1401119-01 Page 12 of 118

Date: 2014-01-26



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

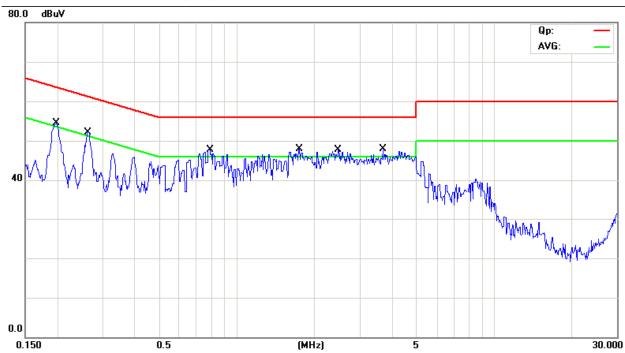

Frequency	Lina	Line Reading(dBµV)		Limit(dBµV)	
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.1980	Neutral	51.07	33.60	63.69	53.69
0.2632	Neutral	49.47	33.02	61.33	51.33
0.7855	Neutral	43.97	30.79	56.00	46.00
1.7285	Neutral	43.49	25.39	56.00	46.00
2.4698	Neutral	29.99	24.24	56.00	46.00
3.6705	Neutral	41.48	25.73	56.00	46.00

Report No: 1401119-01 Page 13 of 118

Date: 2014-01-26



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "**QP**" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre – Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1401119-01 Page 14 of 118

Date: 2014-01-26



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1401119-01 Page 15 of 118

Date: 2014-01-26



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Receiving

Results: Pass

		1	
Frequency (MHz)	Level@3m (dB \mu V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
216.000	38.51	Н	46.00
279.600	38.53	Н	46.00
398.080	35.60	Н	46.00
576.000	42.22	Н	46.00
35.680	34.17	V	40.00
181.440	39.03	V	43.50
575.960	39.58	V	46.00


Page 16 of 118

Report No: 1401119-01

Date: 2014-01-26



Test Figure:

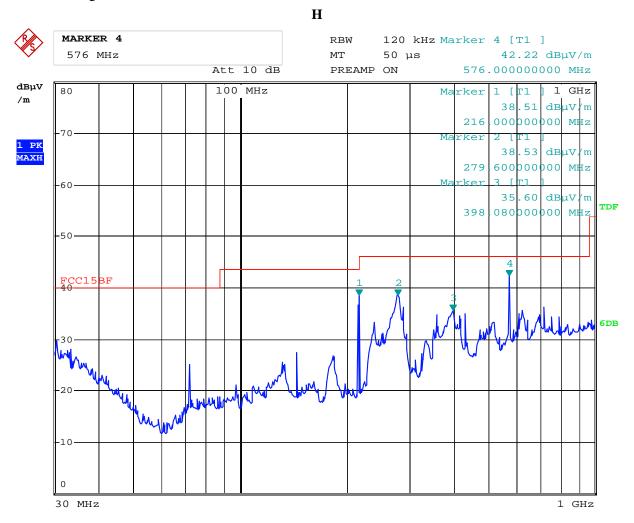

Date: 9.JAN.2014 14:46:45


Page 17 of 118

Report No: 1401119-01

Date: 2014-01-26



Test Figure:

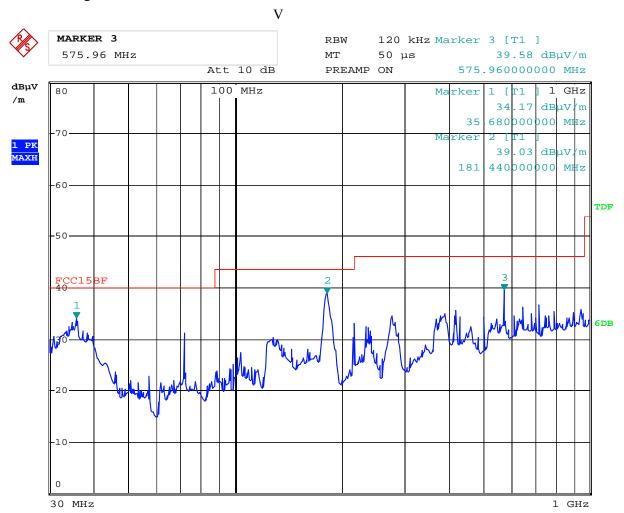

Date: 9.JAN.2014 14:45:12

Report No: 1401119-01 Page 18 of 118

Date: 2014-01-26



Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2412.00	92.05 (PK)	Н	E 1
2412.00	93.88 (PK)	V	Fundamental Frequency
4824.00	47.51 (PK)	Н	74(Peak)/ 54(AV)
4824.00	48.25 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54Mbps

Date: 2014-01-26



Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	92.16 (PK)	Н	Fundamental Frequency
2437.00	93.63 (PK)	V	
4874.00	47.32 (PK)	V	74(Peak)/ 54(AV)
4874.00	46.15 (PK)	Н	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	1	H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting under CH11 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2462.00	92.82 (PK)	Н	Fundamental Frequency
2462.00	93.75 (PK)	V	Fundamental Frequency
4924	48.08 (PK)	Н	74(Peak)/ 54(AV)
4924	47.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848	1	H/V	74(Peak)/ 54(AV)
12310	1	H/V	74(Peak)/ 54(AV)
14772	1	H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Report No: 1401119-01

Date: 2014-01-26




Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

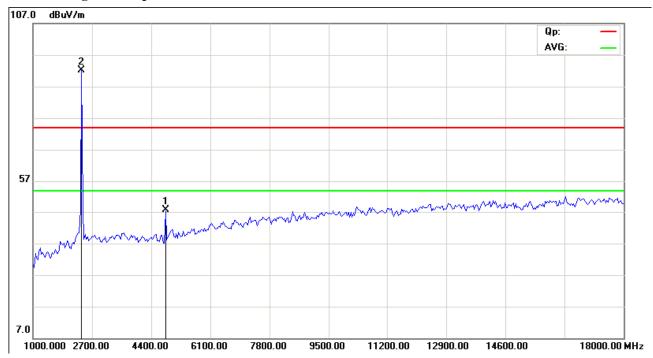

CH01 for 11g at 54Mbps: Vertical

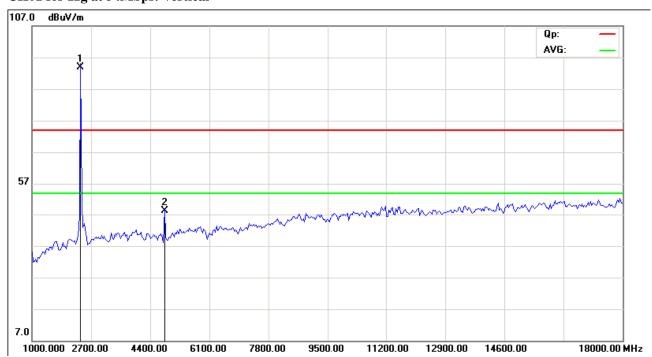


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1401119-01 Date: 2014-01-26 草 TIMEWAY Files With Land Man

CH06 for 11g at 54Mbps: Vertical

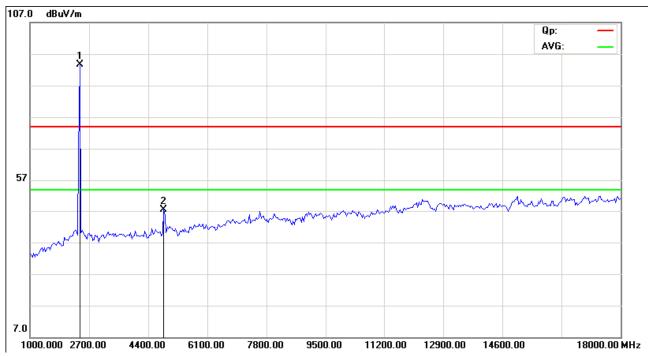

CH06 for 11g at 54Mbps: Horizontal

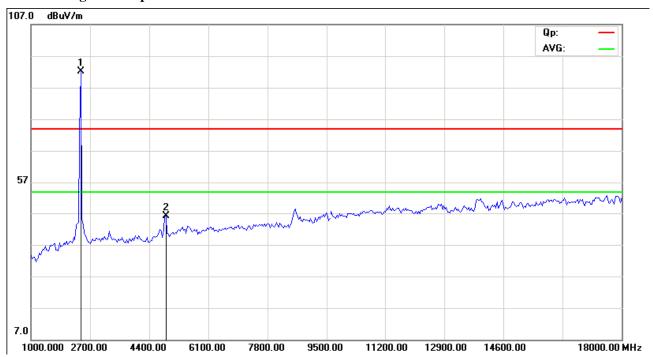

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 22 of 118


Report No: 1401119-01 Date: 2014-01-26



CH11 for 11g at 54Mbps: Vertical

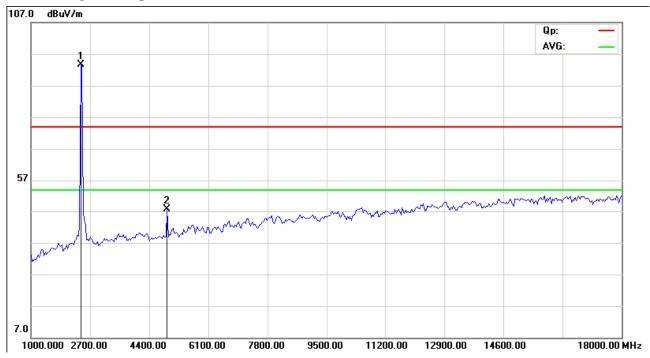

CH11 for 11g at 54Mbps: Horizontal

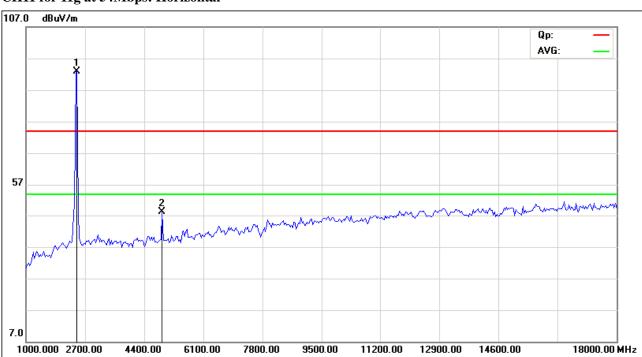

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1401119-01 Page 23 of 118

Date: 2014-01-26



Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	94.26 (PK)	Н	E1
2412.00	95.26 (PK)	V	Fundamental Frequency
4824.00	46.32 (PK)	Н	74(Peak)/ 54(AV)
4824.00	47.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	94.12 (PK)	Н	E 1 1-E
2437.00	95.03 (PK)	V	Fundamental Frequency
4874.00	47.51 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.26 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	1	H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1401119-01 Page 24 of 118

Date: 2014-01-26



Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2462.00	93.74 (PK)	Н	F 1
2462.00	95.17 (PK)	V	Fundamental Frequency
4924	46.79 (PK)	Н	74(Peak)/ 54(AV)
4924	49.13 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps


Report No: 1401119-01

Date: 2014-01-26




Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

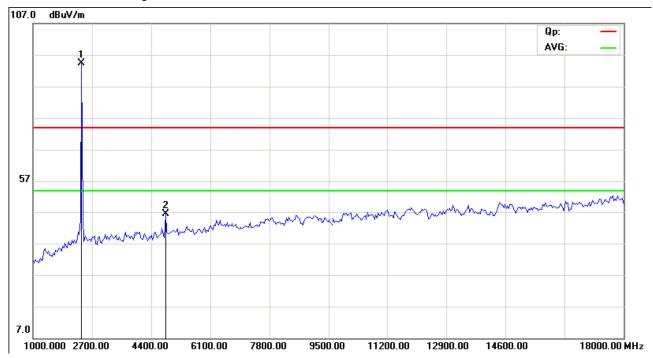

CH01 for 11b at 11Mbps: Vertical

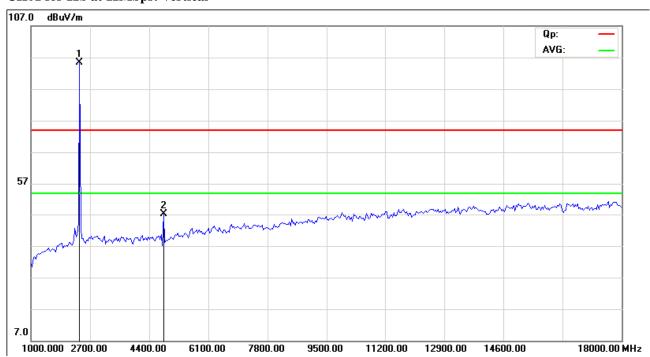

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 26 of 118

Report No: 1401119-01


Date: 2014-01-26



CH06 for 11b at 11Mbps: Vertical

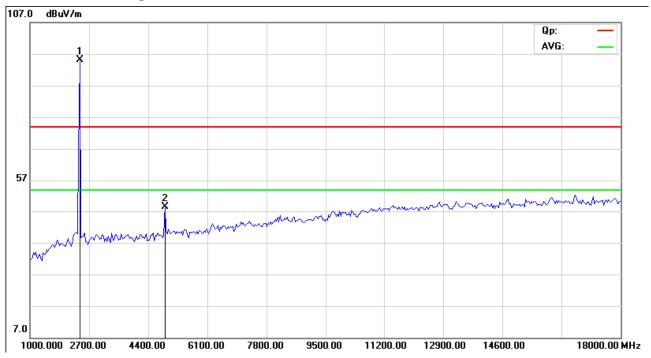

CH06 for 11b at 11Mbps: Horizontal

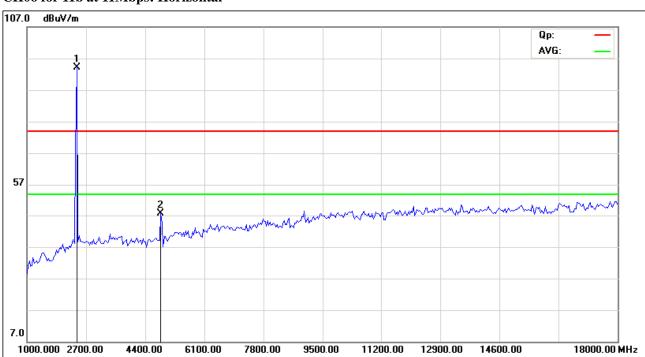

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 27 of 118


Report No: 1401119-01 Date: 2014-01-26



CH11 for 11b at 11Mbps: Vertical

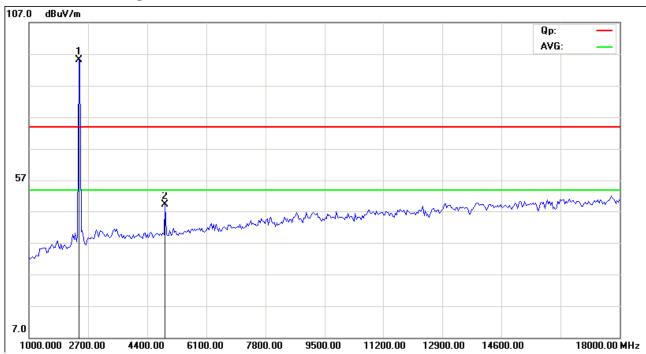

CH11 for 11b at 11Mbps: Horizontal

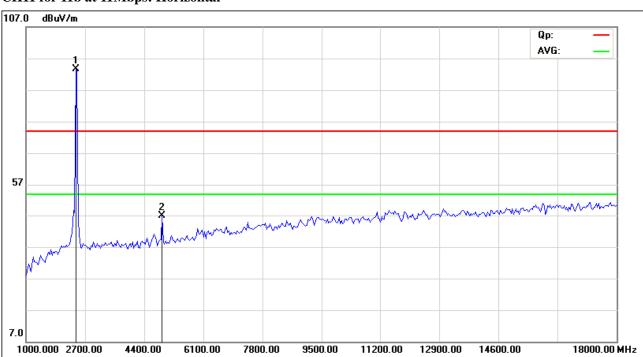

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-01-26



Operation Mode: Transmitting under CH01 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	93.12 (PK)	Н	Fundamental Frequency
2412.00	93.42 (PK)	V	Fundamental Frequency
4824.00	48.35 (PK)	Н	74(Peak)/ 54(AV)
4824.00	49.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting under CH06 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \) V/m)
2437.00	93.05 (PK)	Н	Fundamental Frequency
2437.00	94.51 (PK)	V	Fundamental Frequency
4874.00	46.04 (PK)	Н	74(Peak)/ 54(AV)
4874.00	47.88 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1401119-01 Page 29 of 118

Date: 2014-01-26



Operation Mode: Transmitting under CH11 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2462.00	93.12 (PK)	Н	Fundamental Frequency
2462.00	94.31 (PK)	V	Fundamental Frequency
4924	48.19 (PK)	Н	74(Peak)/ 54(AV)
4924	48.14 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps


Report No: 1401119-01

Date: 2014-01-26




Please refer to the following test plots for details:

CH01 for 11n HT20 at 65Mbps: Horizontal

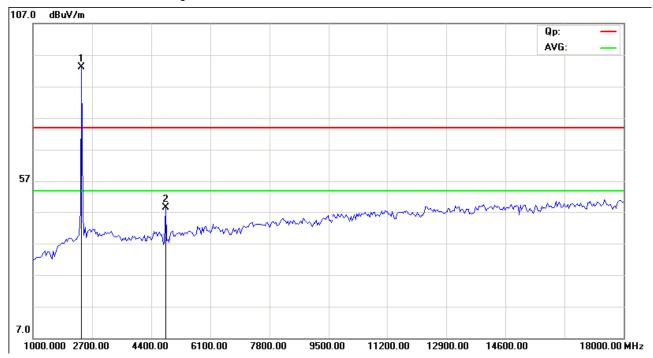

CH01 for 11n HT20 at 65Mbps: Vertical

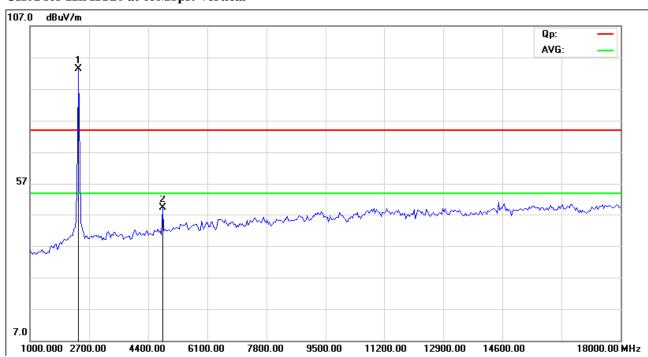


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


Page 31 of 118

Report No: 1401119-01 Date: 2014-01-26 草 TIMEWAY TEATROS LARGE

CH06 for 11n HT20 at 65Mbps: Vertical

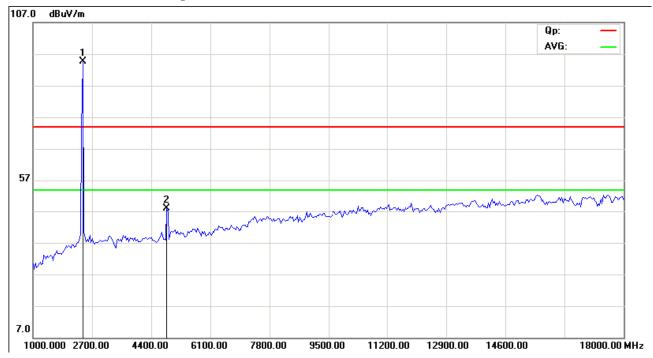

CH06 for 11n HT20 at 65Mbps: Horizontal

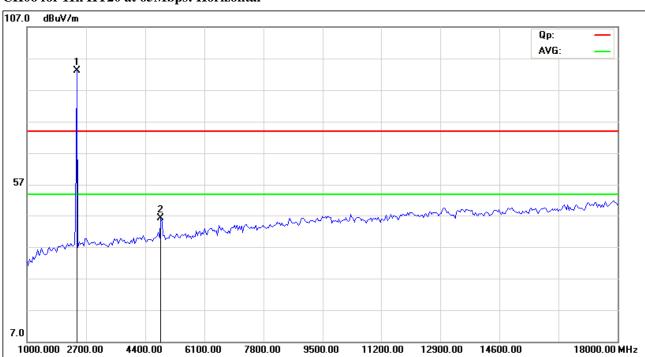

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 32 of 118


Report No: 1401119-01 Date: 2014-01-26



CH11 for 11n HT20 at 65Mbps: Vertical

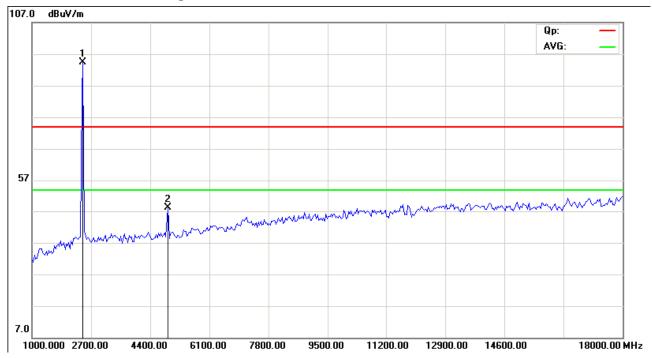

CH11 for 11n HT20 at 65Mbps: Horizontal

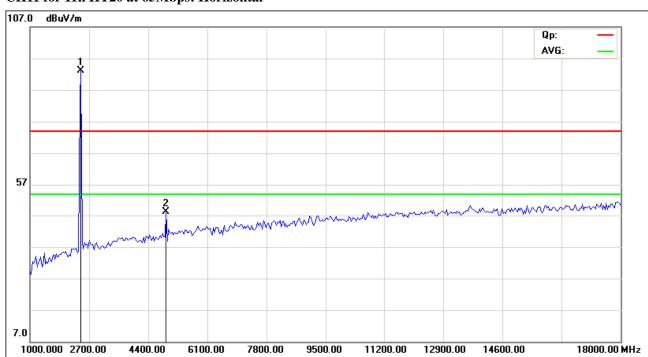

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Date: 2014-01-26



Operation Mode: Transmitting under CH01 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2422.00	89.01 (PK)	Н	Fundamental Frequency
2422.00	91.46 (PK)	V	Fundamental Frequency
4844.00	45.51 (PK)	Н	74(Peak)/ 54(AV)
4844.00	47.27 (PK)	V	74(Peak)/ 54(AV)
7266.00		H/V	74(Peak)/ 54(AV)
9688.00		H/V	74(Peak)/ 54(AV)
12110		H/V	74(Peak)/ 54(AV)
14532		H/V	74(Peak)/ 54(AV)
16954		H/V	74(Peak)/ 54(AV)
19376		H/V	74(Peak)/ 54(AV)
21798		H/V	74(Peak)/ 54(AV)
24220		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting under CH04 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	90.72 (PK)	Н	Fundamental Frequency
2437.00	91.65 (PK)	V	Fundamental Frequency
4874.00	46.88 (PK)	Н	74(Peak)/ 54(AV)
4874.00	47.53 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00	1	H/V	74(Peak)/ 54(AV)
12185	1	H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	1	H/V	74(Peak)/ 54(AV)
19496	-	H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370	-	H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1401119-01 Page 34 of 118

Date: 2014-01-26



Operation Mode: Transmitting under CH07 for 11n HT40 at 65Mbps

			_
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2452.00	89.85 (PK)	Н	Fundamental Frequency
2452.00	91.06 (PK)	V	
4904	46.82 (PK)	Н	74(Peak)/ 54(AV)
4904	47.08 (PK)	V	74(Peak)/ 54(AV)
7356		H/V	74(Peak)/ 54(AV)
9808		H/V	74(Peak)/ 54(AV)
12260		H/V	74(Peak)/ 54(AV)
14712		H/V	74(Peak)/ 54(AV)
17164		H/V	74(Peak)/ 54(AV)
19616		H/V	74(Peak)/ 54(AV)
22068		H/V	74(Peak)/ 54(AV)
24520		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps


Report No: 1401119-01

Date: 2014-01-26




Please refer to the following test plots for details:

CH01 for 11n HT40 at 65Mbps: Horizontal

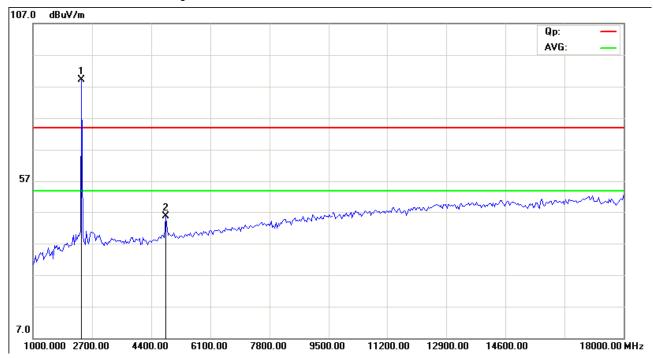

CH01 for 11n HT40 at 65Mbps: Vertical

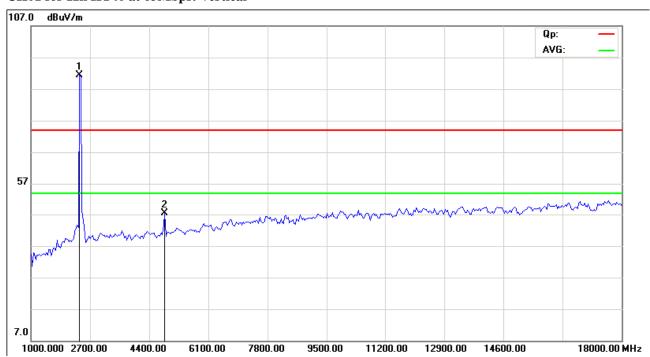

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 36 of 118


Report No: 1401119-01 Date: 2014-01-26



CH04 for 11n HT40 at 65Mbps: Vertical

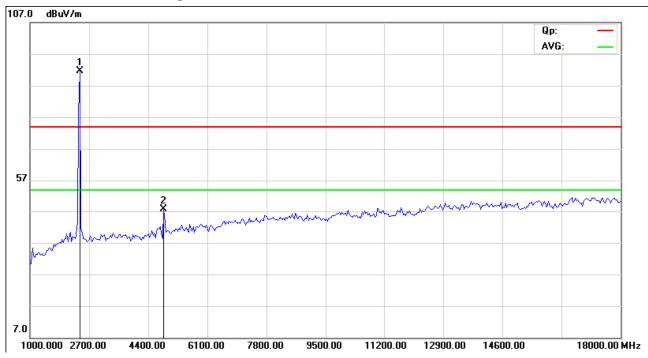

CH04 for 11n HT40 at 65Mbps: Horizontal

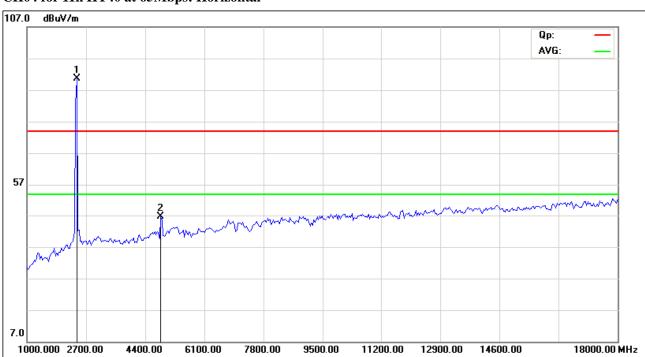

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 37 of 118


Report No: 1401119-01 Date: 2014-01-26



CH07 for 11n HT40 at 65Mbps: Vertical

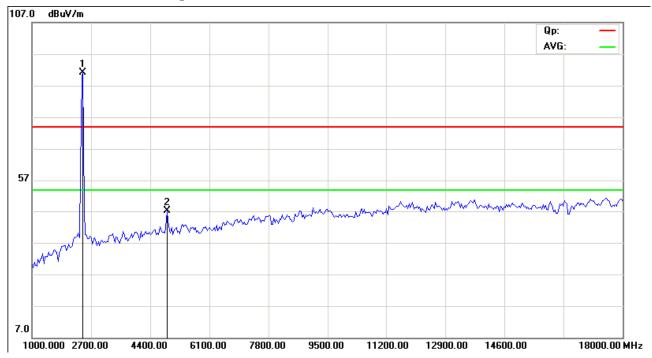

CH07 for 11n HT40 at 65Mbps: Horizontal

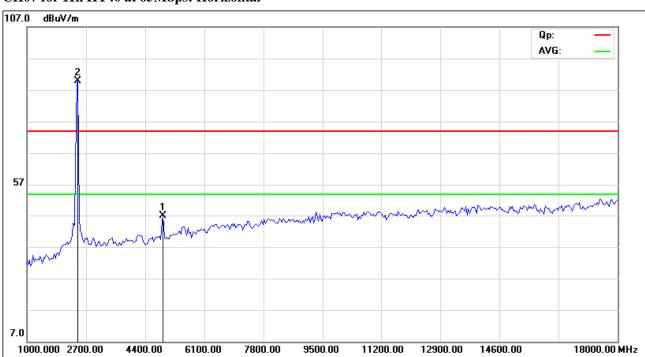

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1401119-01 Page 38 of 118

Date: 2014-01-26



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: 1401119-01 Page 39 of 118

Date: 2014-01-26



6dB Occupied Bandwidth


EUT			MID		Model		TD9	9802L
Mode		8	302.11b		Input Vol	tage	DC	3.7V
Temperature		24	4 deg. C,		Humidity	r	56% RH	
Channel		el Frequency (MHz)				mum Limit MHz)	Pass/ Fail	
1		2412	1	10	10.08		0.5	Pass
6		2437	1	10	.08	08		Pass
11		2462	1	10	.08		0.5	Pass
1		2412	11	8.	70		0.5	Pass
6		2437	11	8.70		70 0.5		Pass
11		2462	11	8.	70		0.5	Pass

Report No: 1401119-01 Page 40 of 118

Date: 2014-01-26



1. 802.11b at 1Mbps of CH01

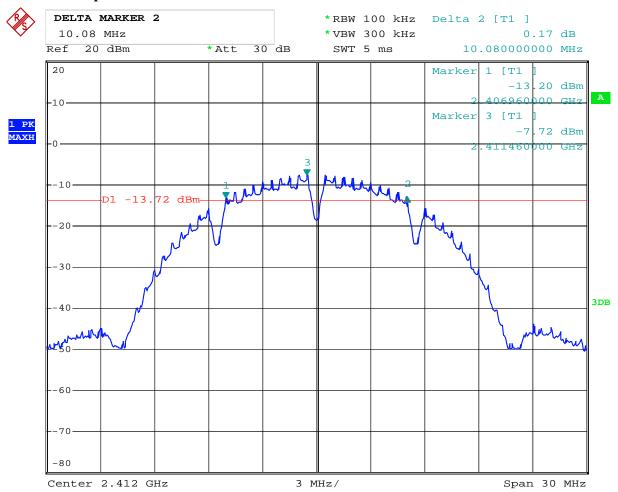


Date: 10.JAN.2014 10:07:04

Report No: 1401119-01 Page 41 of 118

Date: 2014-01-26



2. 802.11b at 1Mbps of CH06

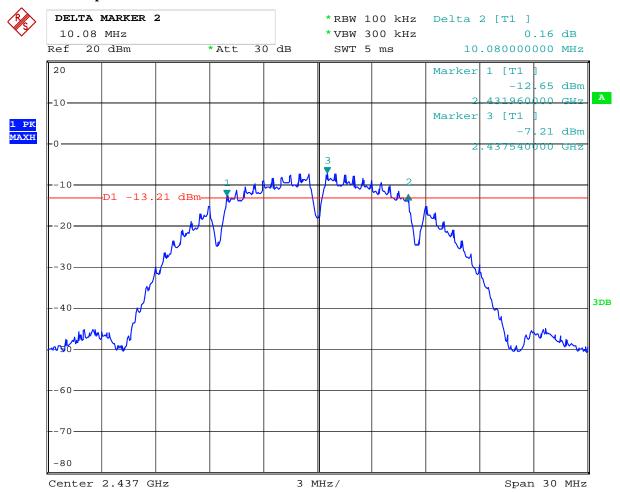


Date: 10.JAN.2014 10:09:45

Report No: 1401119-01 Page 42 of 118

Date: 2014-01-26



3. 802.11b at 1Mbps of CH11

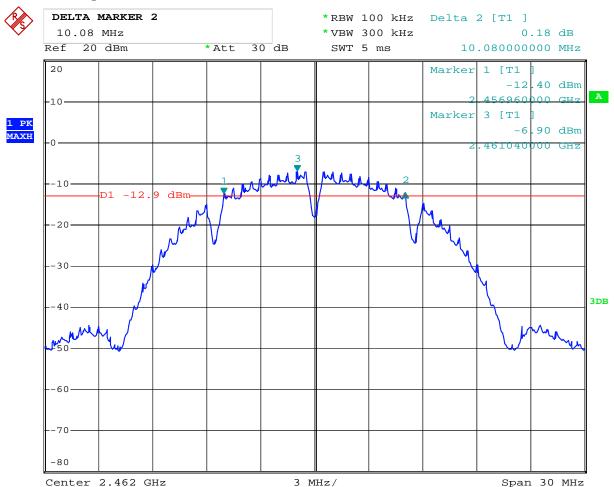


Date: 10.JAN.2014 10:10:38

Report No: 1401119-01 Page 43 of 118

Date: 2014-01-26



4. 802.11b at 11Mbps of CH01

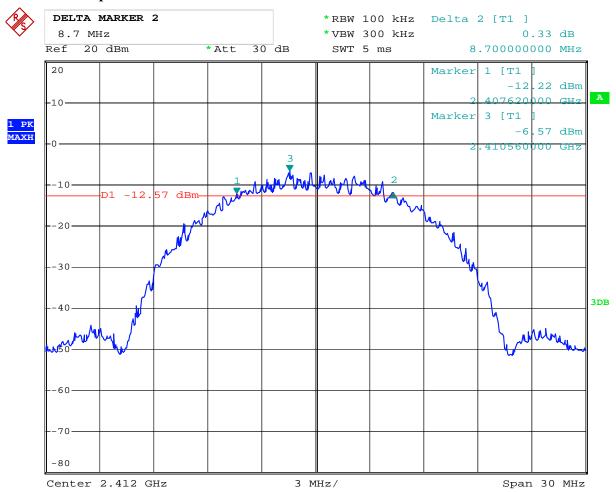


Date: 10.JAN.2014 10:14:26

Report No: 1401119-01 Page 44 of 118

Date: 2014-01-26



5. 802.11b at 11Mbps of CH06

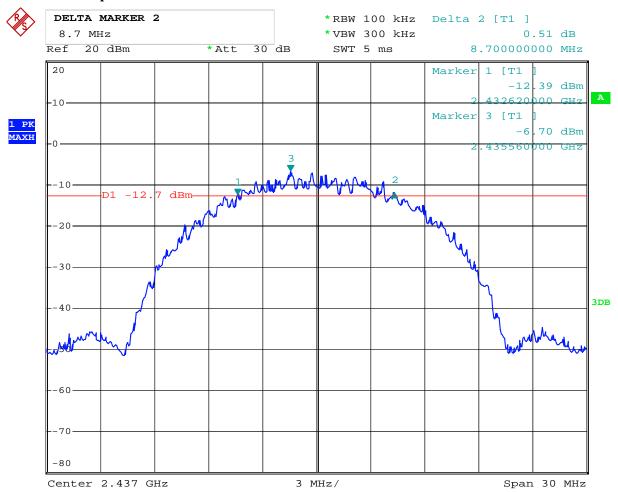


Date: 10.JAN.2014 10:13:46

Report No: 1401119-01 Page 45 of 118

Date: 2014-01-26



6. 802.11b at 11Mbps of CH11

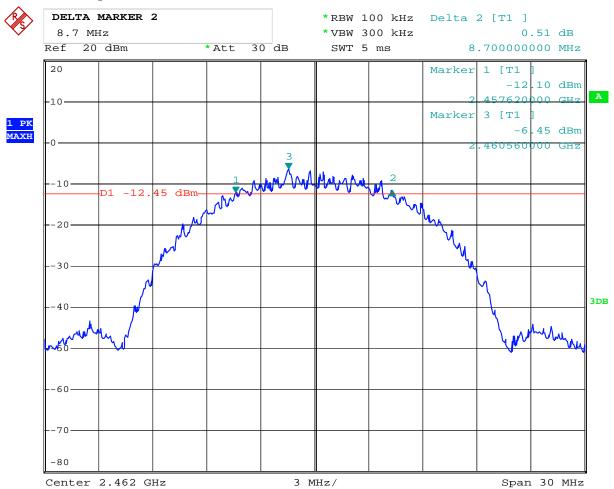

Date: 10.JAN.2014 10:12:33

Report No: 1401119-01 Page 46 of 118

Date: 2014-01-26



6dB Occupied Bandwidth

EUT			MID		Model		T	D9802L
Mode		8	302.11g		Input Vol	tage	Γ	DC3.7V
Temperat	ure	24	4 deg. C,		Humidity	,	5	6% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	54	16	5.56		0.5	Pass
6		2437	54	16	5.56	0.5		Pass
11		2462	54	16	5.56	0.5		Pass


Report No: 1401119-01 Page 47 of 118

Date: 2014-01-26



Test Plots:

1. 802.11g at 54Mbps of CH01

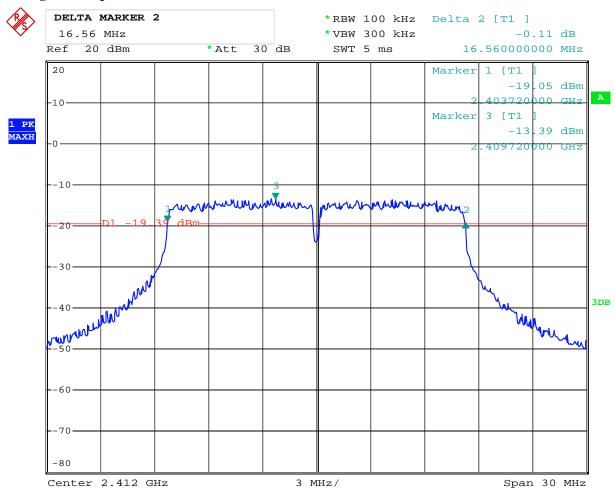


Date: 10.JAN.2014 10:17:07

Report No: 1401119-01 Page 48 of 118

Date: 2014-01-26



2. 802.11g at 54Mbps of CH06

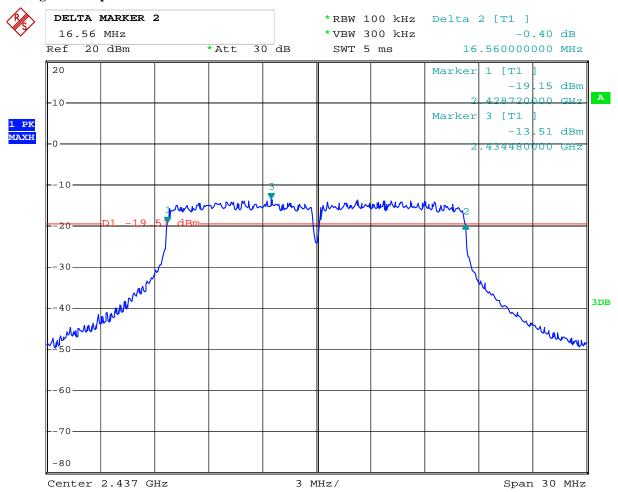


Date: 10.JAN.2014 10:18:30

Report No: 1401119-01 Page 49 of 118

Date: 2014-01-26



3. 802.11g at 54Mbps of CH11

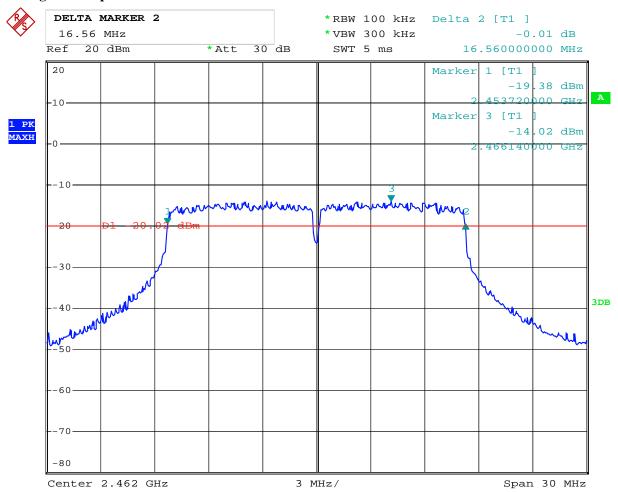

Date: 10.JAN.2014 10:19:16

Report No: 1401119-01 Page 50 of 118

Date: 2014-01-26



6dB Occupied Bandwidth

EUT			MID		Model		TD9	9802L
Mode		802	.11n HT20		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ındwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	65M	17	.76		0.5	Pass
6		2437	65M	17	.76		0.5	Pass
11		2462	65M	17	.76	0.5		Pass

Page 51 of 118


Report No: 1401119-01

Date: 2014-01-26



Test Plots:

1. 802.11n at HT20 of CH01

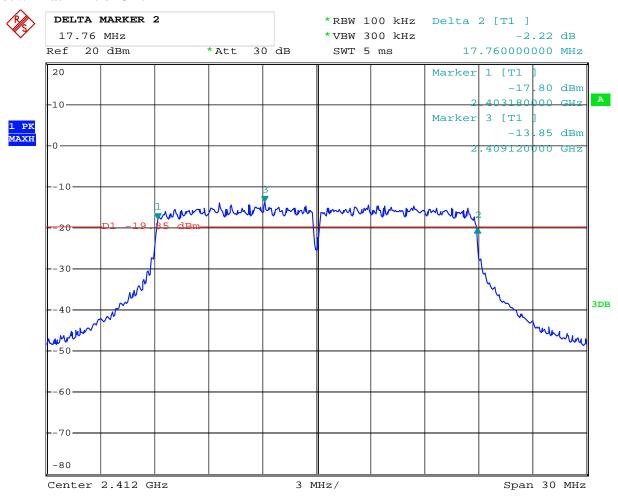


Date: 10.JAN.2014 10:23:08 Report No: 1401119-01 Page 52 of 118

Date: 2014-01-26



2. 802.11n at HT20 of CH06

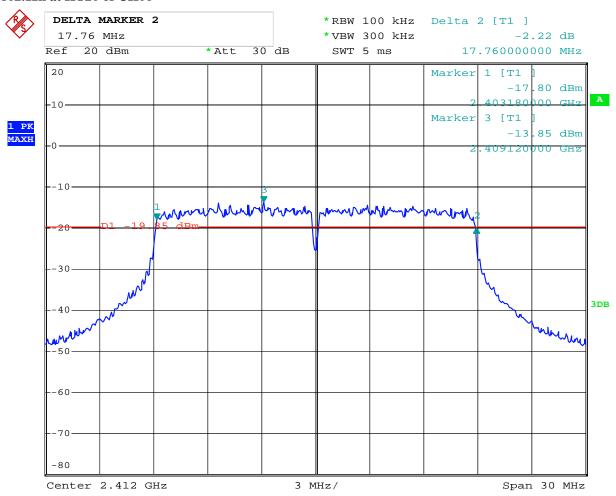


Date: 10.JAN.2014 10:23:08

Report No: 1401119-01 Page 53 of 118

Date: 2014-01-26



3. 802.11n at HT20 of CH11

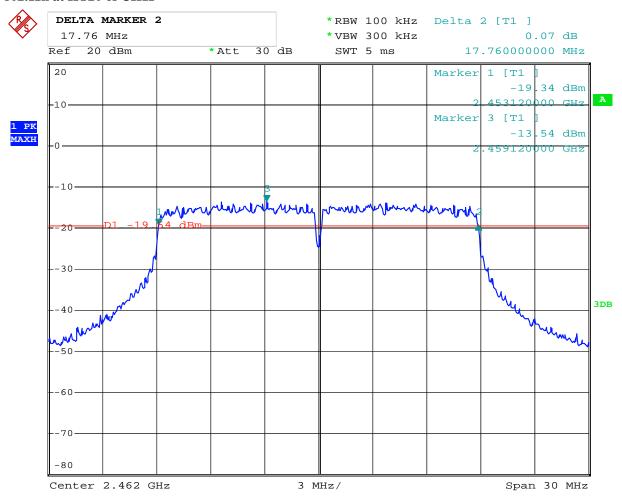

Date: 10.JAN.2014 10:20:31

Report No: 1401119-01 Page 54 of 118

Date: 2014-01-26



6dB Occupied Bandwidth

EUT			MID		Model		TD9	9802L
Mode		802	.11n HT40		Input Vol	tage	DC	3.7V
Temperat	ure	24	4 deg. C,		Humidity		56%	% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		ındwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2422	65M	36	.54		0.5	Pass
4		2437	65M	36	.54		0.5	Pass
7		2452	65M	36	.54	0.5		Pass

Page 55 of 118


Date: 2014-01-26

Report No: 1401119-01



Test Plots:

1. 802.11n at HT40 of CH01

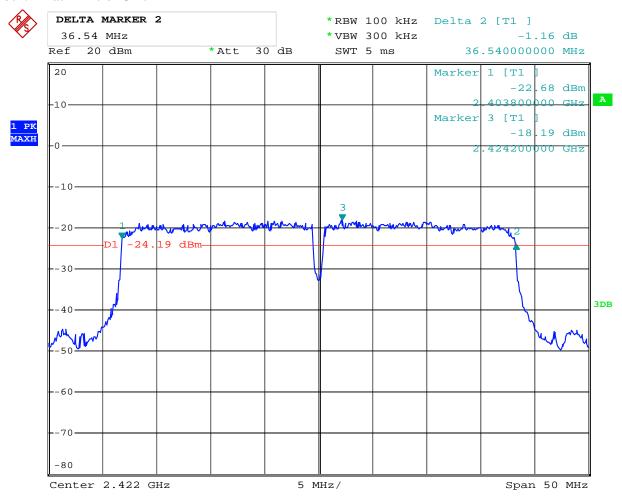


Date: 10.JAN.2014 10:28:41

Report No: 1401119-01 Page 56 of 118

Date: 2014-01-26



2. 802.11n at HT40 of CH04

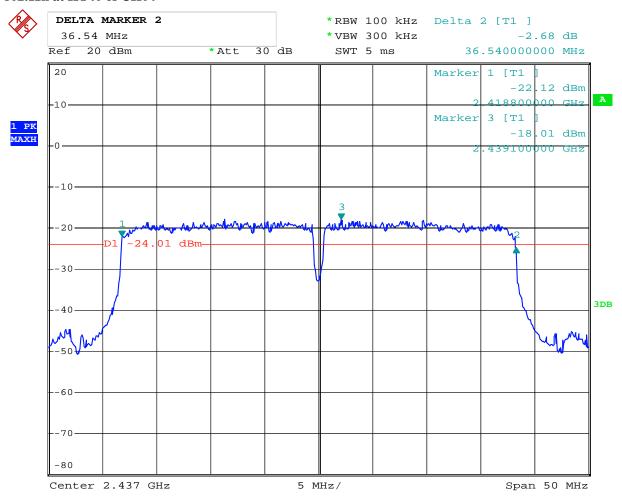


Date: 10.JAN.2014 10:29:41

Report No: 1401119-01 Page 57 of 118

Date: 2014-01-26



3. 802.11n at HT40 of CH07

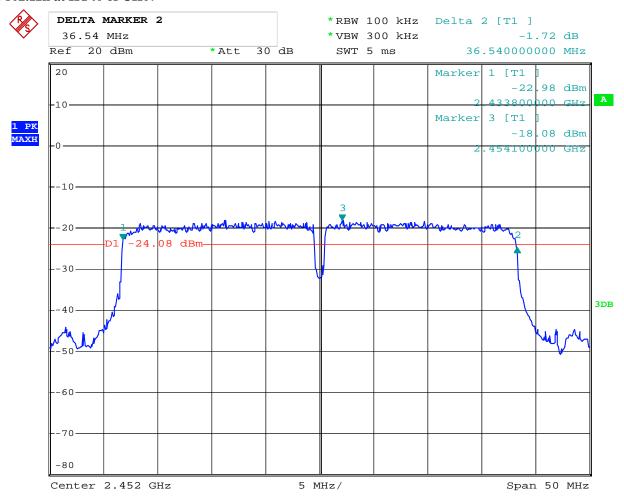

Date: 10.JAN.2014 10:30:27

Report No: 1401119-01

Date: 2014-01-26



Page 58 of 118

8. Maximum Peak Output Power

8.1 Test Setup



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Report No: 1401119-01 Page 59 of 118

Date: 2014-01-26



8.4Test Results

EUT		MII	D	M	odel	7	ГD9802L
Mode 802.1		Input Input I		Voltage	DC3.7V		
Temperati	Temperature		g. C,	Humidity		;	56% RH
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak F Lin (dB	nit	Pass/ Fail
1		2412	8.87		30		Pass
6	2437		9.17		30		Pass
11		2462	9.37		30)	Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		MII	D	M	odel	Т	TD9802L
Mode 802.1		Input V		Voltage	-	DC3.7V	
Temperature		24 deg	leg. C,		Humidity		56% RH
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak F Lin (dB	nit	Pass/ Fail
1	2412		7.07		30		Pass
6	2437		6.79		30)	Pass
11		2462	7.11		30)	Pass

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 60 of 118

Report No: 1401119-01

Date: 2014-01-26



EUT		MII)	M	odel	Г	TD9802L
Mode 802.11n		(HT20) Input V		Voltage		DC3.7V	
Temperature 24 de		g. C, Hum		midity :		56% RH	
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak P Lin (dB	nit	Pass/ Fail
1	2412		7.32		30		Pass
6	2437		7.13		30		Pass
11		2462	7.38		30)	Pass

Note: 1. At finial test to get the worst-case emission at 65Mbps of 11n HT20 for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT		MII	D	M	odel	Γ	TD9802L
Mode 802.11n		(HT40) Input V		Voltage		DC3.7V	
Temperature 24 de		g. C, Hum		midity		56% RH	
Channel	Channel Frequency (MHz)		Peak Power Output (dBm)		Peak Power Limit (dBm)		Pass/ Fail
1		2422	7.11		30		Pass
4		2437	7.36		30)	Pass
7	2452		7.27		30)	Pass

Note: 1. At finial test to get the worst-case emission at 65Mbps of 11n HT40 for CH01, CH04 and CH7

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The worse case was recorded


Report No: 1401119-01 Page 61 of 118

Date: 2014-01-26



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No: 1401119-01 Page 62 of 118

Date: 2014-01-26



9.4Test Result

EUT		MII	D	M	odel	Т	TD9802L
Mode		802.11b 11Mbps		Input Voltage		-	DC3.7V
Temperature		24 deg	24 deg. C,		Humidity		56% RH
Channel	Channel Channel Frequency (MHz)		Final RF Power Level (dBm)		Maximui (dB		Pass/ Fail
			11Mbps				
1	2412		-15.15		8		Pass
6	2437		-15.06		8		Pass
11	11 2462		-15.19		8		Pass

EUT		MII)	M	odel	Т	TD9802L
Mode		802.11b 1Mbps		Input Voltage		DC3.7V	
Temperature		24 deg	24 deg. C,		Humidity		56% RH
Channel	Cha	annel Frequency	Final RF Po	wer	Maximum Limit		Pass/ Fail
Channel		(MHz)	Level in (dBm)		(dB	m)	
			1Mbps				
1	1 2412		-16.78		8		Pass
6	6 2437		-16.97		8		Pass
11 2462		-16.99		8		Pass	

Page 63 of 118

Report No: 1401119-01

Date: 2014-01-26



EUT		MII)	M	odel	TD9802L	
Mode 802.11g 5		54Mbps Input V		Voltage]	DC3.7V	
Temperati	ure	24 deg	g. C,	Hur	Humidity		56% RH
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail
Chamie		(MHz)	Level in (dBm)		(dB	m)	
			6Mbps				
1		2412	-23.17		8		Pass
6		2437	-23.13		8		Pass
11		2462	-22.82		8		Pass

EUT		MII)	M	odel	Τ	TD9802L
Mode 802.11n HT		20 65Mbps Input		Input Voltage		DC3.7V	
Temperature		24 deg	24 deg. C,		Humidity		56% RH
Channel	Cha	annel Frequency	Final RF Power		Maximum Limit		Pass/ Fail
Chamici		(MHz)	Level (dB	m)	(dB	m)	
			HT20				
1		2412	-22.50		8		Pass
6		2437	-22.25		8		Pass
11		2462	-22.48		8	•	Pass

EUT		MID		Model		TD9802L	
Mode		802.11n HT40 65Mbps		Input Voltage		DC3.7V	
Temperature		24 deg. C,		Humidity		56% RH	
Channel	Channel Frequency		Final RF Power		Maximum Limit		Pass/ Fail
	(MHz)		Level (dBm)		(dBm)		
HT40							
1	2422		-24.64		8		Pass
4	2437		-24.53		8		Pass
7	2452		-26.01		8		Pass

Page 64 of 118


Date: 2014-01-26

Report No: 1401119-01



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

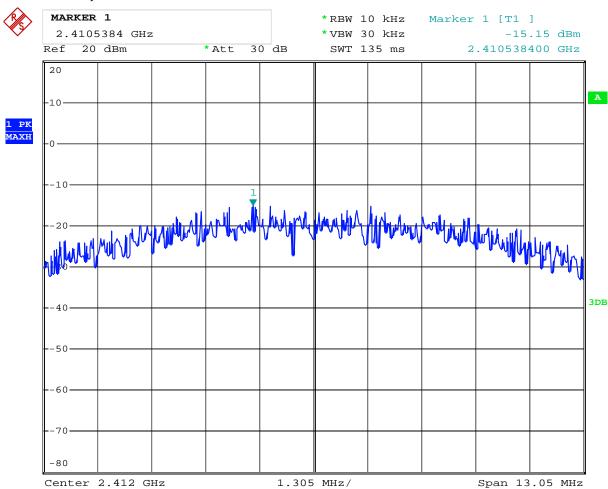

Date: 10.JAN.2014 10:39:56


Page 65 of 118

Report No: 1401119-01

Date: 2014-01-26



2. 802.11b at 11Mbps at CH06

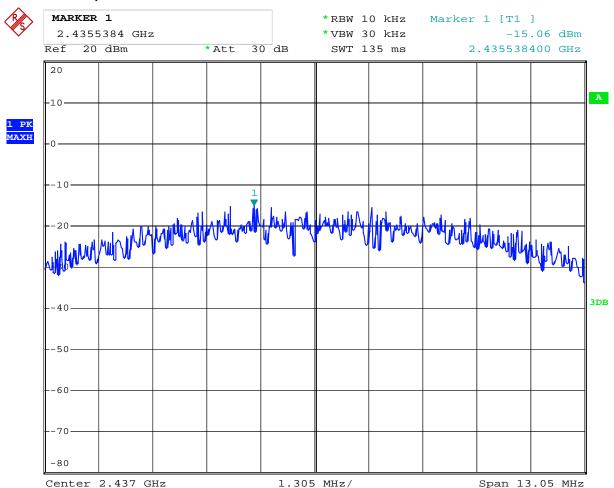

Date: 10.JAN.2014 10:40:15


Page 66 of 118

Report No: 1401119-01

Date: 2014-01-26



3. 802.11b at 11Mbps of CH11

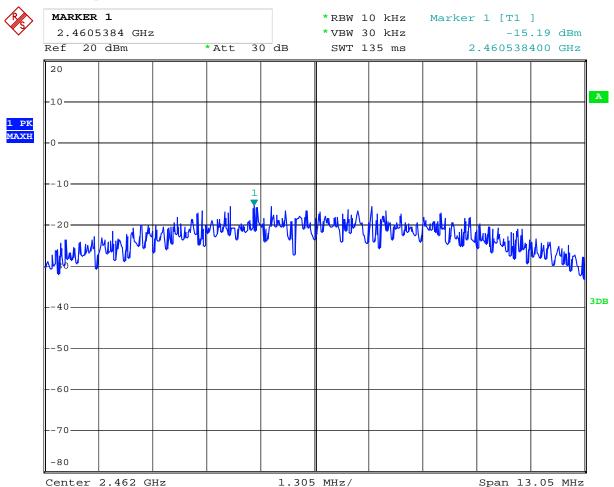

Date: 10.JAN.2014 10:40:35


Page 67 of 118

Report No: 1401119-01

Date: 2014-01-26



4. 802.11b at 1Mbps of CH1

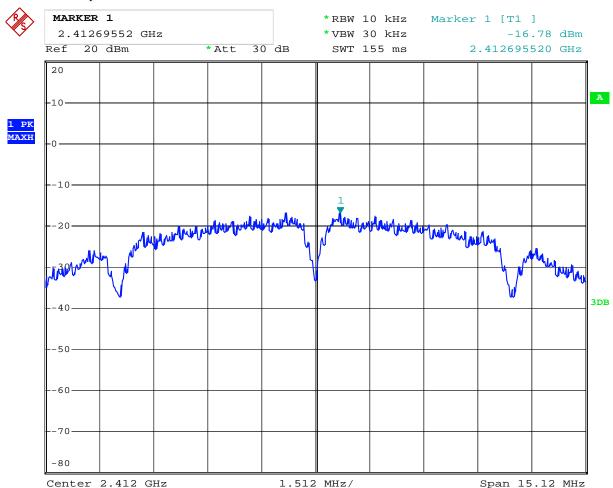

Date: 10.JAN.2014 10:39:19


Page 68 of 118

Report No: 1401119-01

Date: 2014-01-26



5. 802.11b at 1Mbps of CH6

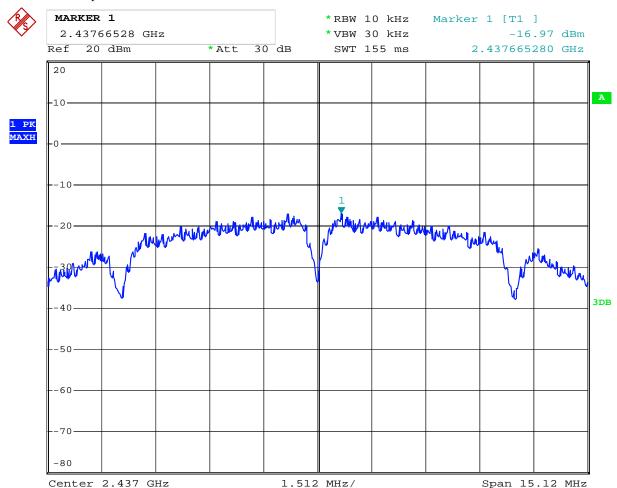

Date: 10.JAN.2014 10:39:01


Page 69 of 118

Report No: 1401119-01

Date: 2014-01-26



6. 802.11b at 1Mbps of CH11

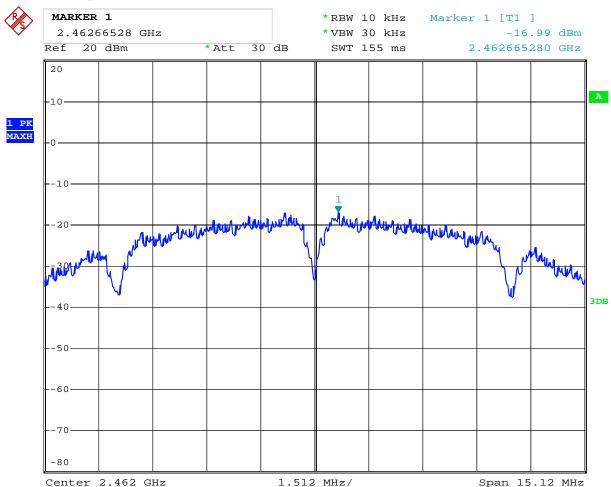

Date: 10.JAN.2014 10:38:39


Page 70 of 118

Report No: 1401119-01

Date: 2014-01-26



7. 802.11g at 54Mbps of CH1

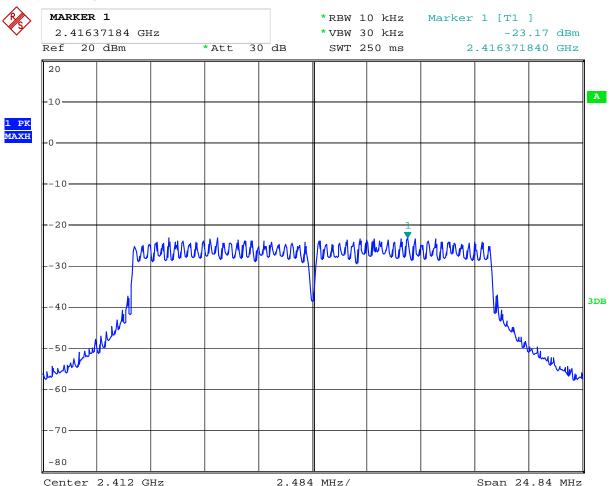

Date: 10.JAN.2014 10:42:05


Page 71 of 118

Report No: 1401119-01

Date: 2014-01-26



8. 802.11g at 54Mbps of CH6

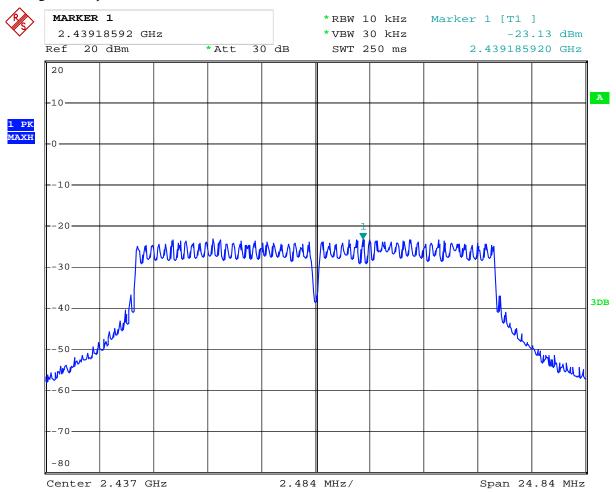

Date: 10.JAN.2014 10:41:43


Page 72 of 118

Date: 2014-01-26

Report No: 1401119-01



9. 802.11g at 54Mbps of CH11

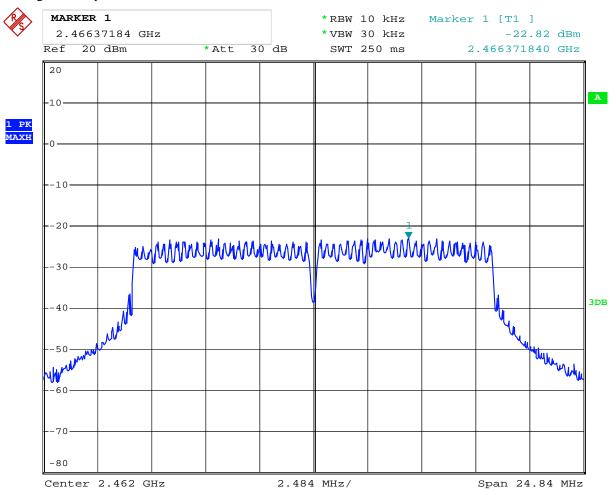


Date: 10.JAN.2014 10:41:09

Report No: 1401119-01 Page 73 of 118

Date: 2014-01-26



10. 802.11n at HT20 of CH01

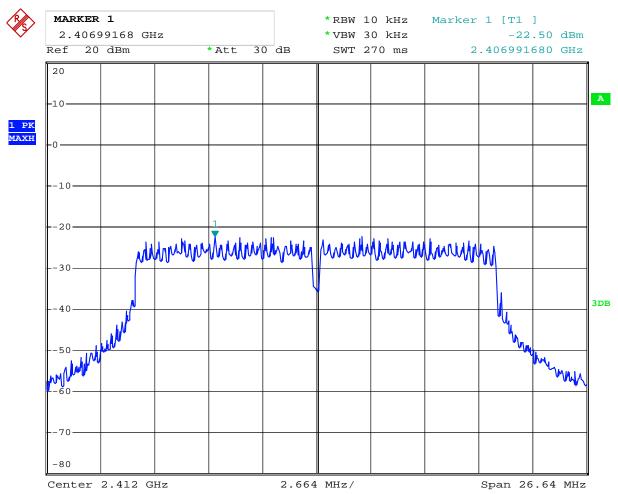


Date: 10.JAN.2014 10:43:56

Report No: 1401119-01 Page 74 of 118

Date: 2014-01-26



11. 802.11n at HT20 of CH06

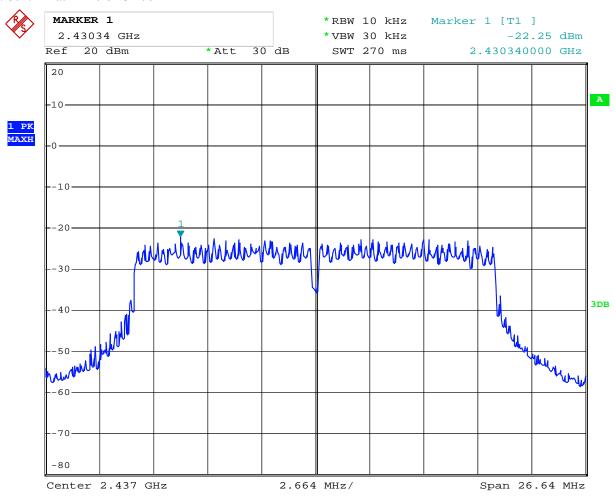


Date: 10.JAN.2014 10:44:36

Report No: 1401119-01 Page 75 of 118

Date: 2014-01-26



12. 802.11n at HT20 of CH11

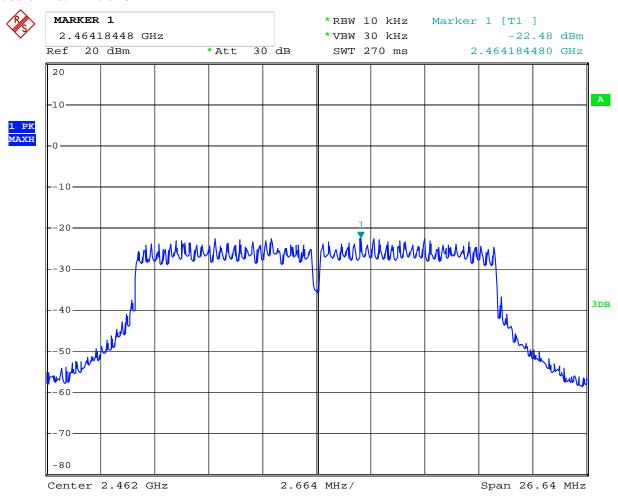


Date: 10.JAN.2014 10:45:02

Page 76 of 118

Report No: 1401119-01 Date: 2014-01-26



13. 802.11n at HT40 of CH01

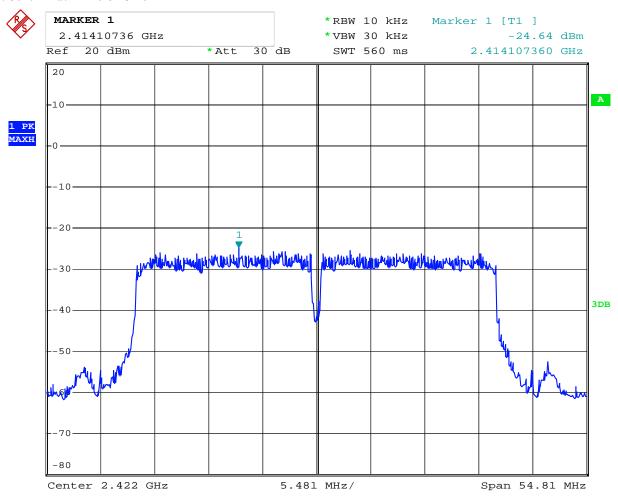


Date: 10.JAN.2014 10:49:13

Report No: 1401119-01 Page 77 of 118

Date: 2014-01-26



14. 802.11n at HT40 of CH04

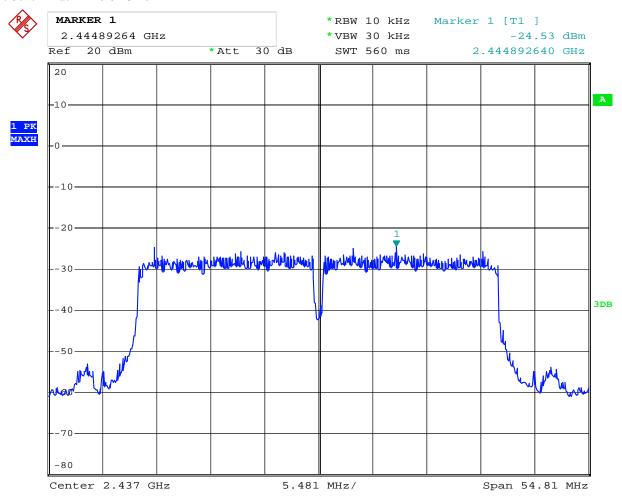

Date: 10.JAN.2014 10:48:28


Page 78 of 118

Report No: 1401119-01

Date: 2014-01-26



15. 802.11n at HT40 of CH07

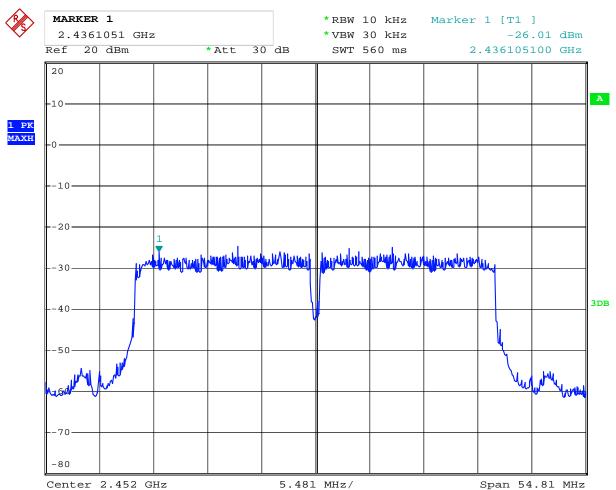

Date: 10.JAN.2014 10:47:10


Report No: 1401119-01 Page 79 of 118

Date: 2014-01-26



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 80 of 118

Report No: 1401119-01

Date: 2014-01-26




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

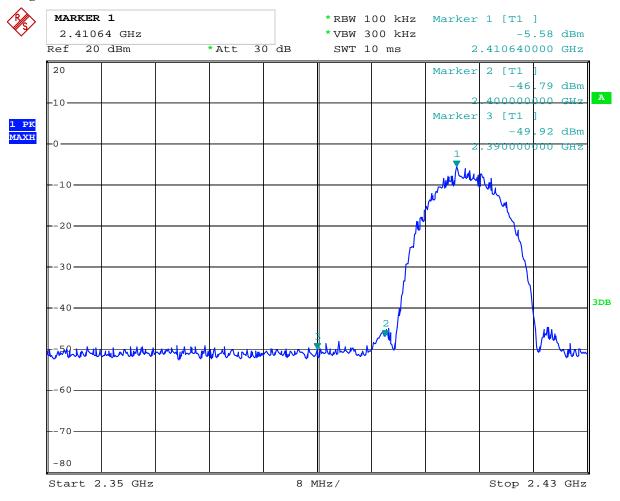

Date: 10.JAN.2014 10:33:21

Page 81 of 118

Report No: 1401119-01

Date: 2014-01-26




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

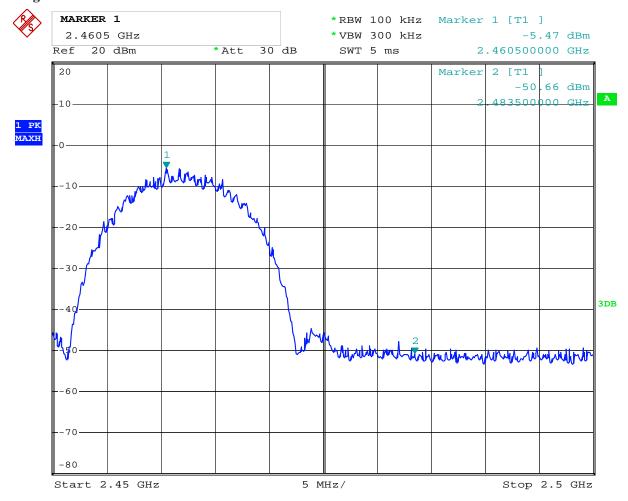

Date: 10.JAN.2014 10:37:40

Page 82 of 118

Report No: 1401119-01

Date: 2014-01-26




For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

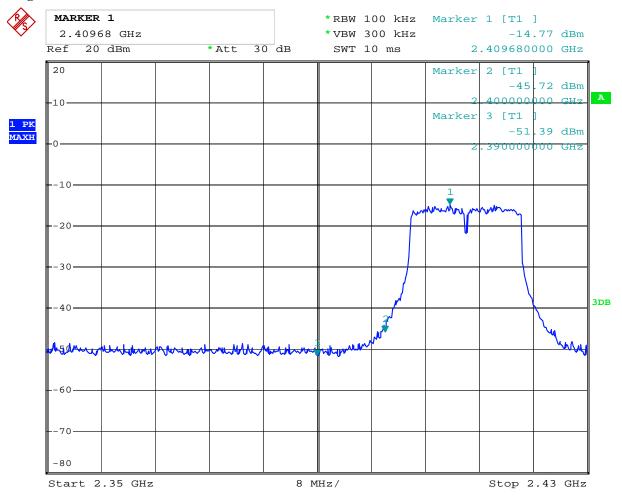

Date: 10.JAN.2014 10:34:17

Page 83 of 118

Report No: 1401119-01

Date: 2014-01-26




CH11 at 54Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

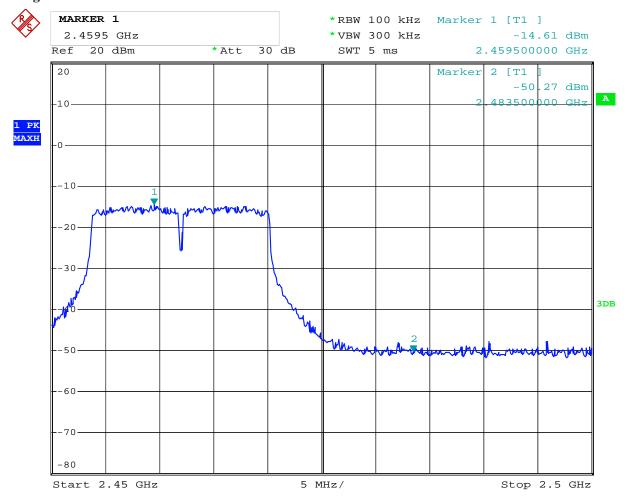

Date: 10.JAN.2014 10:36:57

Page 84 of 118

Report No: 1401119-01

Date: 2014-01-26




For 802.11n (HT20) mode

CH01 at 65Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

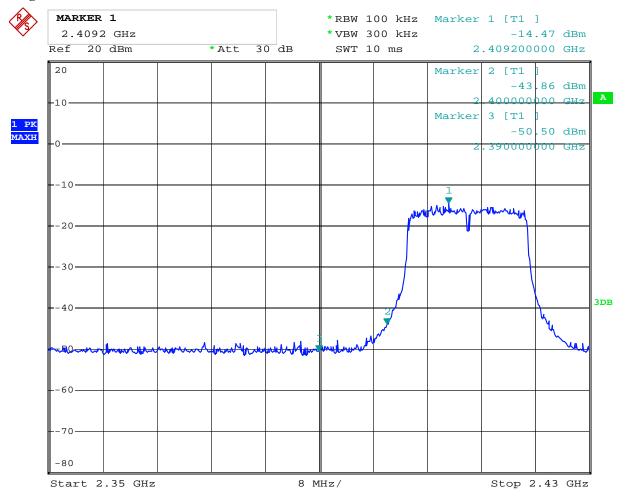

Date: 10.JAN.2014 10:35:16

Page 85 of 118

Report No: 1401119-01

Date: 2014-01-26




CH11 at 65Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

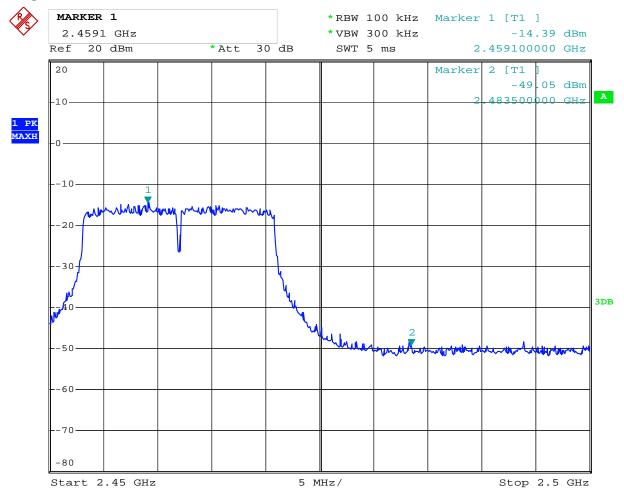

Date: 10.JAN.2014 10:36:08

Page 86 of 118

Report No: 1401119-01

Date: 2014-01-26




For 802.11n (HT40) mode

CH01 at 65Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

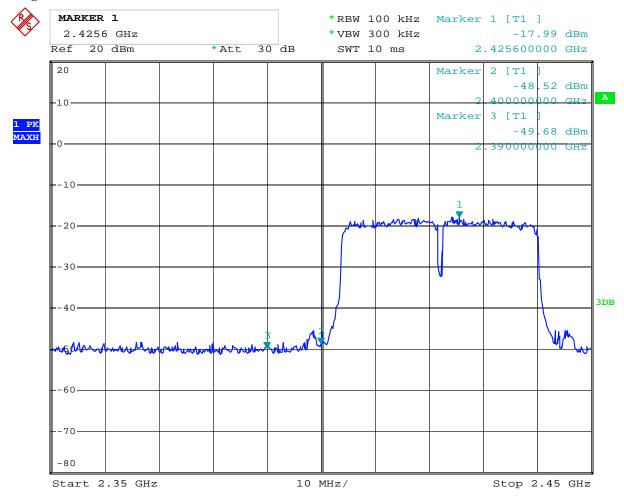

Date: 10.JAN.2014 10:31:56

Page 87 of 118

Report No: 1401119-01

Date: 2014-01-26




CH07 at 65Mbps

10.4 Band-edge Measurement

EUT	MID	Model	D9802L
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

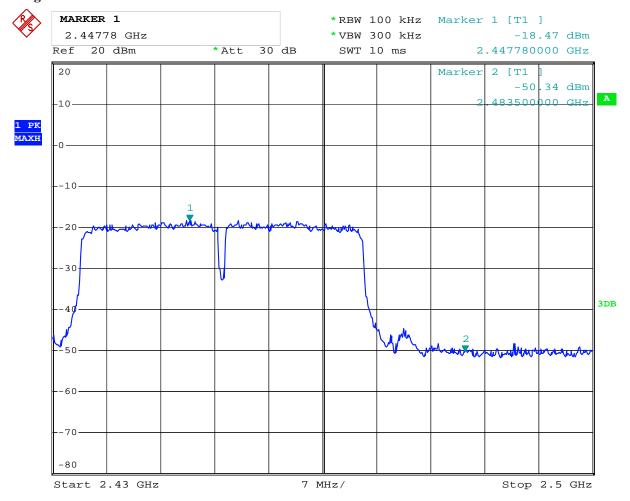

Date: 10.JAN.2014 10:31:00

Page 88 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11b 11Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24	4 deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	52.16	Limit	74(dBµV/m)
	AV ($dB\mu V/m$)	34.85		54(dBμV/m)
2390MHz	PK (dBμV/m)	43.68	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)
2396.815	PK (dBμV/m)	54.66	Limit	74(dBµV/m)
	AV (dBμV/m)	37.08	Limit	54(dBμV/m)

Test Figure: Horizontal

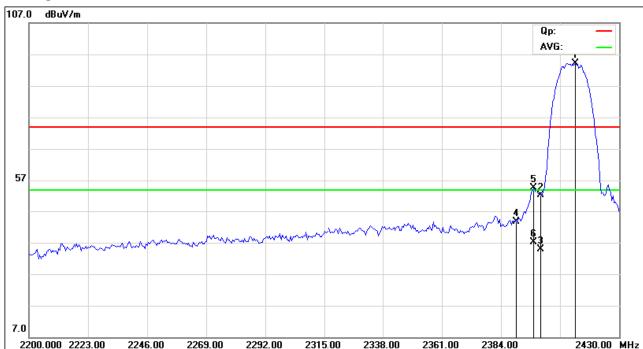

Page 89 of 118

Report No: 1401119-01

Date: 2014-01-26



802.11b 11Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24	deg. C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	55.54	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)	39.21	Limit	$54(dB\mu V/m)$
2390MHz	PK (dBµV/m)	45.10	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)
2397.273	PK (dBμV/m)	59.18	- Limit	74(dBμV/m)
	AV (dBμV/m)	43.69	Limit	54(dBμV/m)

Test Figure: Vertical



Page 90 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11b 11Mbps

Restricted band Measurement

Product:		MID	Test Mode:	High Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBμV/m) 40.06		T in it	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Vertical

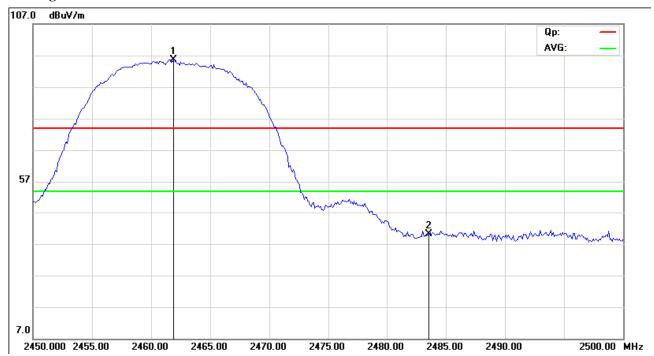

Page 91 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11b 11Mbps

Restricted band Measurement

Product:		MID	Test Mode:	High Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBμV/m) 37.07		T in it	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Horizontal

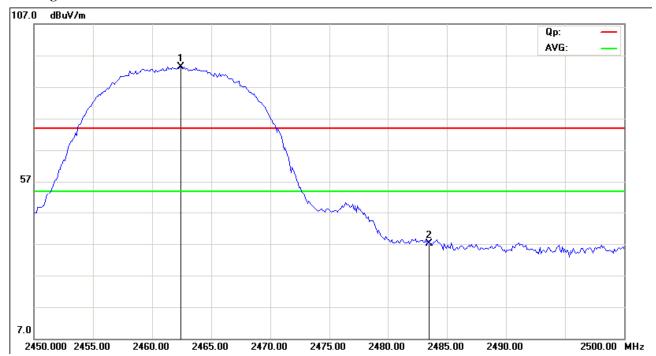

Page 92 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11g 54Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	66.20	T ::4	$74(dB\mu V/m)$
	AV $(dB\mu V/m)$	48.67	Limit	$54(dB\mu V/m)$
2390MHz	PK (dBµV/m)	48.36	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	$54(dB\mu V/m)$

Test Figure: Vertical

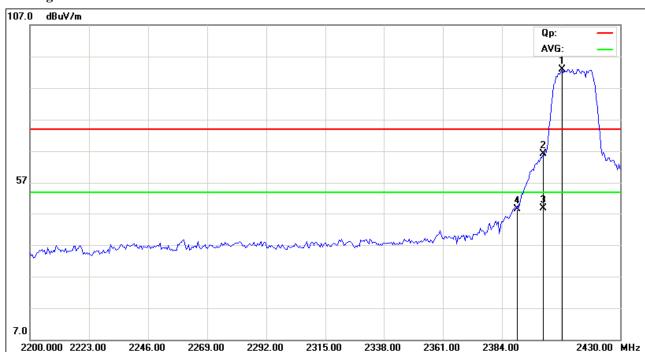

Page 93 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11g 54Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	59.33	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	43.02	Limit	$54(dB\mu V/m)$
2390MHz	PK (dBμV/m)	48.18	- Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Lillit	54(dBµV/m)

Test Figure: Horizontal

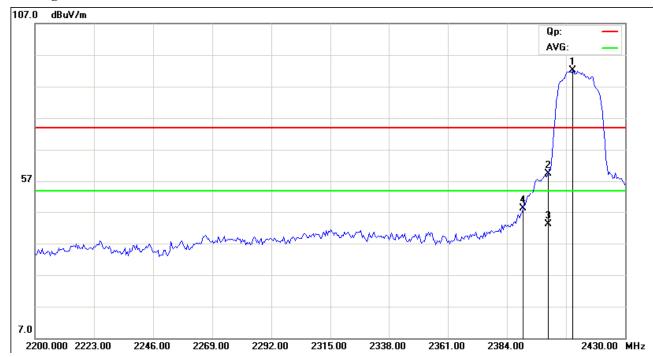

Page 94 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11g 54Mbps

Restricted band Measurement

Product:	MID		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	42.25	T in it	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure: Horizontal

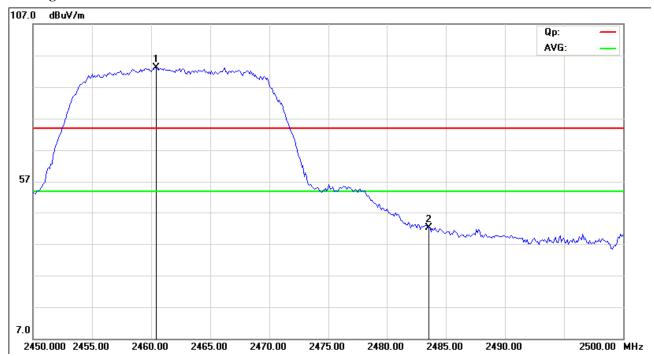

Page 95 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11g 54Mbps

Restricted band Measurement

Product:	MID		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	44.56	T in it	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure: Vertical

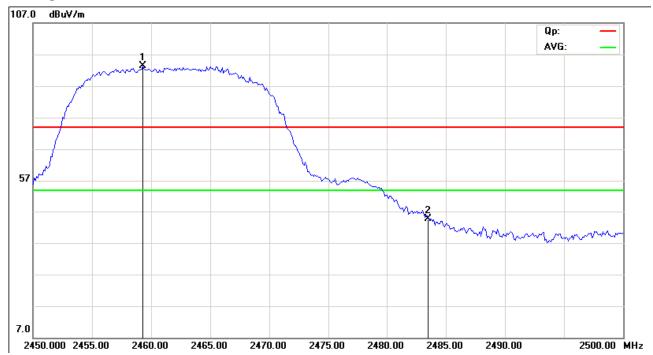

Page 96 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	63.85	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	45.26	Limit	54(dBμV/m)
2390MHz	PK (dBµV/m)	46.38	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)			54(dBμV/m)

Test Figure: Vertical

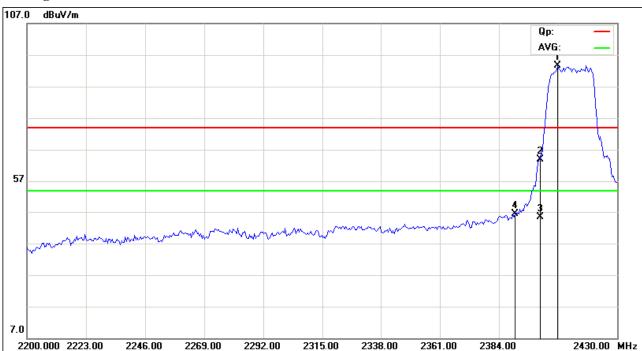

Page 97 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBμV/m)	62.36	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	44.30	Limit	$54(dB\mu V/m)$
2390MHz	PK (dBμV/m)	48.29	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Liffilt	54(dBμV/m)

Test Figure: Horizontal

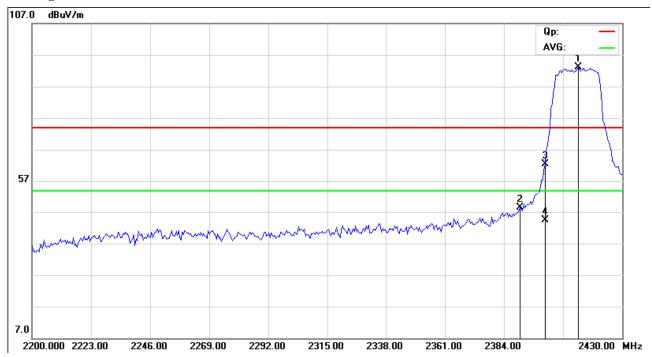

Page 98 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	41.78	T in it	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Horizontal

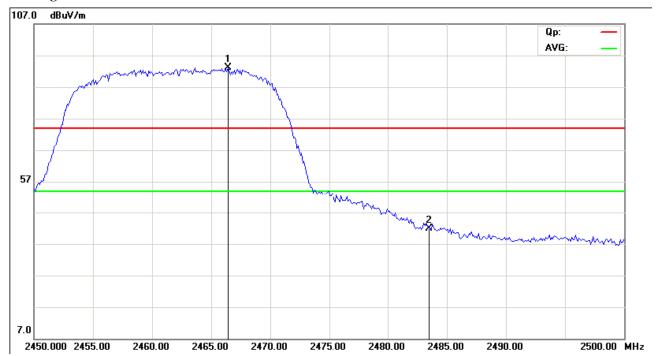

Page 99 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	48.99	T in it	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$

Test Figure: Vertical

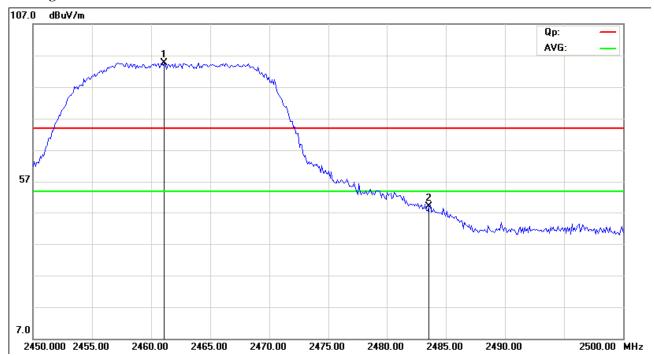

Page 100 of 118

Report No: 1401119-01

Date: 2014-01-26



802.11n HT40 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBμV/m)	63.57	T ::4	$74(dB\mu V/m)$
	AV ($dB\mu V/m$)	46.29	Limit	$54(dB\mu V/m)$
2390MHz	PK (dBμV/m)	55.87	Limit	$74(dB\mu V/m)$
	AV $(dB\mu V/m)$	38.63	Lillit	54(dBµV/m)

Test Figure: Vertical



Page 101 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	Low Channel
Mode	Keeping	g Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2400MHz	PK (dBµV/m)	65.04	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)	46.32	Limit	54(dBμV/m)
2390MHz	PK (dBµV/m)	57.55	Limit	74(dBμV/m)
	AV ($dB\mu V/m$)	39.26	Lillit	$54(dB\mu V/m)$

Test Figure: Horizontal

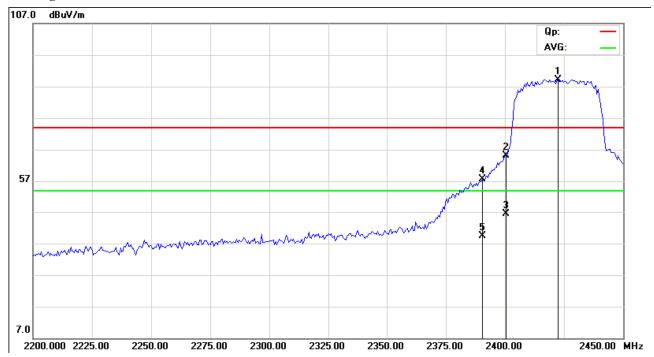

Page 102 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	54.30	T in it	$74(dB\mu V/m)$
	AV ($dB\mu V/m$)	36.16	Limit	$54(dB\mu V/m)$

Test Figure: Horizontal

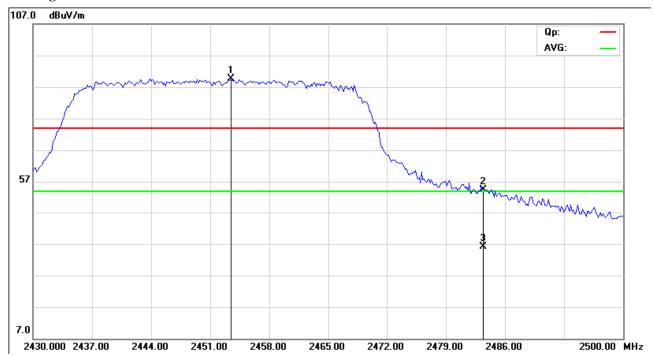

Page 103 of 118

Report No: 1401119-01

Date: 2014-01-26




802.11n HT20 65Mbps

Restricted band Measurement

Product:	MID		Test Mode:	High Channel
Mode	Keeping Transmitting		Input Voltage	DC3.7V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5MHz	PK (dBµV/m)	58.87	T in it	$74(dB\mu V/m)$
	AV ($dB\mu V/m$)	40.62	Limit	$54(dB\mu V/m)$

Test Figure: Vertical

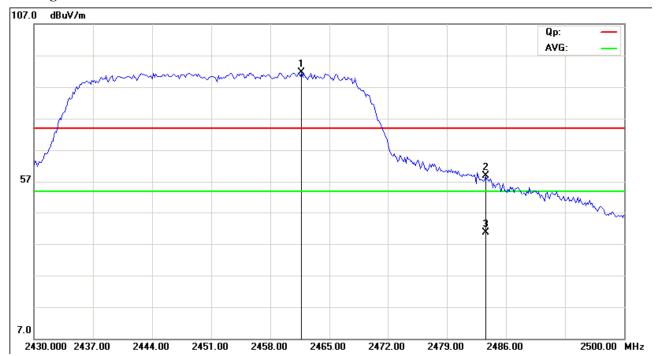

Report No: 1401119-01 Page 104 of 118

Date: 2014-01-26



11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Integral antenna used. The maximum Gain of the antennas is 2.0dBi.

Report No: 1401119-01 Page 105 of 118

Date: 2014-01-26




12.0 FCC ID Label

FCC ID: 2ABDT-TD9802L

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

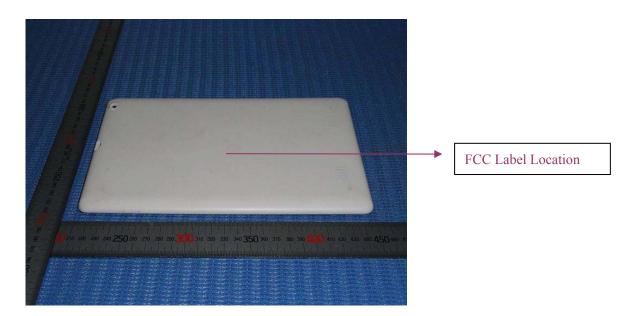

Page 106 of 118

Report No: 1401119-01

Date: 2014-01-26



13.0 Photo of testing

Conducted Emission Test Setup:



Page 107 of 118

Report No: 1401119-01

Date: 2014-01-26



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 108 of 118

Report No: 1401119-01

Date: 2014-01-26



Photographs - EUT

Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 109 of 118

Report No: 1401119-01

Date: 2014-01-26



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 110 of 118

Report No: 1401119-01

Date: 2014-01-26



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 111 of 118

Report No: 1401119-01

Date: 2014-01-26



Outside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 112 of 118

Report No: 1401119-01

Date: 2014-01-26



Outside view



Page 113 of 118

Report No: 1401119-01

Date: 2014-01-26



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 114 of 118

Report No: 1401119-01

Date: 2014-01-26



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 115 of 118

Report No: 1401119-01

Date: 2014-01-26



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Page 116 of 118

Report No: 1401119-01

Date: 2014-01-26



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


Page 117 of 118

Report No: 1401119-01

Date: 2014-01-26



Inside view

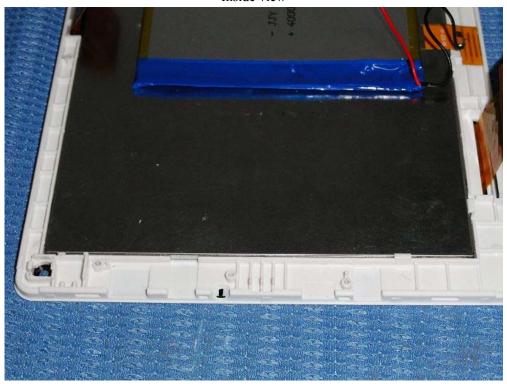



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

Report No: 1401119-01 Page 118 of 118

Date: 2014-01-26



Inside view

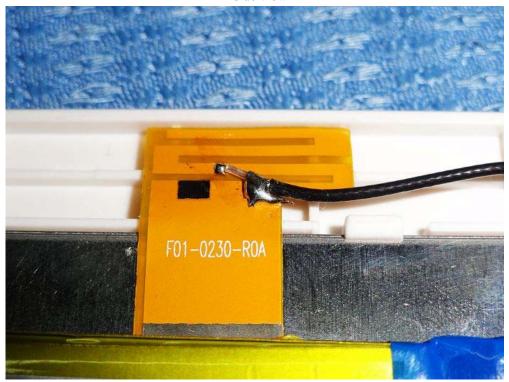

End of the report