



## FCC Test Report

**Report No.:** AAOG-ESH-P21124224B-2

**FCC ID:** 2ABEU-YLYK01YL

**Product:** Yeelight Remote Control

**Model:** YLYK01YL

**Received Date:** Dec.20, 2021

**Test Date:** Dec.20, 2021 to Jan.10, 2022

**Issued Date:** Feb.15, 2022

**Applicant:** Qingdao Yeelink Information Technology Co., Ltd.

**Address:** 10F-B4, Building B, Qingdao International Innovation Park, No.1 Keyuan Weiyi Road, Laoshan District, Qingdao City, Shandong Province, P.R.China.

**Manufacturer:** Qingdao Yeelink Information Technology Co., Ltd.

**Address:** 10F-B4, Building B, Qingdao International Innovation Park, No.1 Keyuan Weiyi Road, Laoshan District, Qingdao City, Shandong Province, P.R.China.

**Issued By:** BUREAU VERITAS ADT (Shanghai) Corporation

**Lab Address:** No. 829, Xinzhuan Road, Shanghai, P.R.China (201612)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



## Table of Contents

Release Control Record .....	4
1 Certificate of Conformity .....	5
2 Summary of Test Results .....	6
2.1 Test Instruments .....	7
2.2 Measurement Uncertainty .....	8
2.3 Modification Record .....	8
3 General Information .....	9
3.1 General Description of EUT .....	9
3.2 Description of Test Modes .....	10
3.2.1 Test Mode Applicability: .....	11
3.2.2 Test Condition: .....	12
3.3 Description of Support Units .....	13
3.4 General Description of Applied Standards .....	13
4 Test Procedure and Results .....	14
4.1 AC Power Conducted Emission .....	14
4.1.1 Limits .....	14
4.1.2 Test Procedures .....	14
4.1.3 Deviation from Test Standard .....	14
4.1.4 Test Setup .....	15
4.1.5 EUT Operating Conditions .....	15
4.1.6 Test Results .....	16
4.2 Minimum 6dB Bandwidth .....	17
4.2.1 Limit .....	17
4.2.2 Test Setup .....	17
4.2.3 Test Procedures .....	17
4.2.4 Deviation of Test Standard .....	17
4.2.5 Test Results .....	18
4.3 Conducted Output Power .....	21
4.3.1 Limit .....	21
4.3.2 Test Setup .....	21
4.3.3 Test Procedures .....	21
4.3.4 Deviation of Test Standard .....	21



4.3.5	Test Results .....	22
4.4	Power Spectral Density .....	25
4.4.1	Limit .....	25
4.4.2	Test Setup.....	25
4.4.3	Test Procedures.....	25
4.4.4	Deviation of Test Standard.....	25
4.4.5	Test Results .....	26
4.5	Conducted Band Edges Measurement .....	29
4.5.1	Limit .....	29
4.5.2	Test Setup.....	29
4.5.3	Test Procedures.....	29
4.5.4	Deviation of Test Standard.....	29
4.5.5	Test Results .....	30
4.6	Conducted Spurious Emissions .....	33
4.6.1	Limit .....	33
4.6.2	Test Setup.....	33
4.6.3	Test Procedures.....	33
4.6.4	Deviation of Test Standard.....	33
4.6.5	Test Results .....	34
4.7	Emissions in restricted frequency bands .....	41
4.7.1	Test Limit .....	41
4.7.2	Test Procedure Reference.....	42
4.7.3	Test Procedures.....	42
4.7.4	Test Setup.....	43
4.7.5	Test Results .....	44
4.8	Radiated Emission Measurement .....	52
4.8.1	Limits .....	52
4.8.2	Test Procedures.....	52
4.8.3	Deviation from Test Standard .....	53
4.8.4	Test Setup.....	54
4.8.5	EUT Operating Conditions.....	55
4.8.6	Test Results .....	55
5	Pictures of Test Arrangements .....	61



**Release Control Record**

<b>Issue No.</b>	<b>Description</b>	<b>Date Issued</b>
AAOG-ESH-P21124224B-2	Original release	Feb.15, 2022



**1 Certificate of Conformity**

**Product:** Yeelight Remote Control

**Brand:** YEELIGHT

**Model:** YLYK01YL

**Applicant:** Qingdao Yeelink Information Technology Co., Ltd.

**Test Date:** Dec.20, 2021 to Jan.10, 2022

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Yuan Zhang , Date: Feb.15, 2022  
Yuan ZHANG  
Project Engineer

Approved by : Daniel Sun , Date: Feb.15, 2022  
Daniel SUN  
EMC Lab Manager



## 2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	NA	The EUT is powered by battery.
15.247(a)(2)	Minimum 6dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions Measurement	PASS	Meet the requirement of limit.



## 2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Jul.29, 20	Jul.28, 22
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25, 20	Aug.24, 22
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.15, 20	Jul.14, 22
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Apr.19, 21	Apr.18, 22
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jul.05, 21	Jul.04, 22
Pre-Amplifier(18GHz-40GHz)	EMCI	EMC051845SE	E1A2008	Jul.05, 21	Jul.04, 22
EMI test receiver	R&S	ESR7	E1R1005	Apr.19, 21	Apr.18, 22
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.22, 21	Jul.21, 22
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.02, 21	Mar.01, 22
EMI test receiver	R&S	ESCS30	E1R1001	May.11, 21	May.10, 22
LISN	R&S	ENV216	E1L1011	May.11, 21	May.10, 22
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr. 02, 21	Apr. 01, 22
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	ADT	ADT_COND_V7 .3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A

## 2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Frequency	Expanded Uncertainty ( $k=2$ ) ( $\pm$ )
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

## 2.3 Modification Record

There were no modifications required for compliance.



### 3 General Information

#### 3.1 General Description of EUT

Product	Yeelight Remote Control
Brand	<b>YEELIGHT</b>
Model	YLYK01YL
Difference	--
Power Rating	DC 3.0V
Modulation Type	GFSK
Modulation Technology	Bluetooth Low Energy 5.0
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	40
Output Power	6.25dBm
Antenna Type	PCB Antenna
Antenna Connector	--
Antenna Gain	2dBi

Note:

1. For more details, please refer to the User's manual of the EUT.

### 3.2 Description of Test Modes

40 channels are provided for Bluetooth LE.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
0	2402 MHz	20	2442 MHz
1	2404 MHz	21	2444 MHz
2	2406 MHz	22	2446 MHz
3	2408 MHz	23	2448 MHz
4	2410 MHz	24	2450 MHz
5	2412 MHz	25	2452 MHz
6	2414 MHz	26	2454 MHz
7	2416 MHz	27	2456 MHz
8	2418 MHz	28	2458 MHz
9	2420 MHz	29	2460 MHz
10	2422 MHz	30	2462 MHz
11	2424 MHz	31	2464 MHz
12	2426 MHz	32	2466 MHz
13	2428 MHz	33	2468 MHz
14	2430 MHz	34	2470 MHz
15	2432 MHz	35	2472 MHz
16	2434 MHz	36	2474 MHz
17	2436 MHz	37	2476 MHz
18	2438 MHz	38	2478 MHz
19	2440 MHz	39	2480 MHz

### 3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G**: Radiated Emission above 1GHz      **RE< 1G**: Radiated Emission below 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0, 19, 39	GFSK

#### Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0	GFSK

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0	GFSK

### **Antenna Port Conducted Measurement**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE
-	BLE	0 to 39	0, 19, 39	GFSK

### **3.2.2 Test Condition:**

Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	23deg. C, 58%RH	Powered by battery
RE < 1G	23deg. C, 58%RH	Powered by battery
PLC	23deg. C, 58%RH	Powered by battery
APCM	25deg. C, 60%RH	Powered by battery



### **3.3 Description of Support Units**

The EUT has been tested as an independent unit together with other necessary accessories or support units.

### **3.4 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

**FCC Part 15, Subpart C (15.247)**

**KDB 558074 D01 DTS Meas Guidance v05r02**

**ANSI C63.10:2013**

All relaxed test items have been performed and recorded as per the above standard.

## 4 Test Procedure and Results

### 4.1 AC Power Conducted Emission

#### 4.1.1 Limits

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

#### 4.1.2 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

#### 4.1.3 Deviation from Test Standard

No deviation.

#### 4.1.4 Test Setup

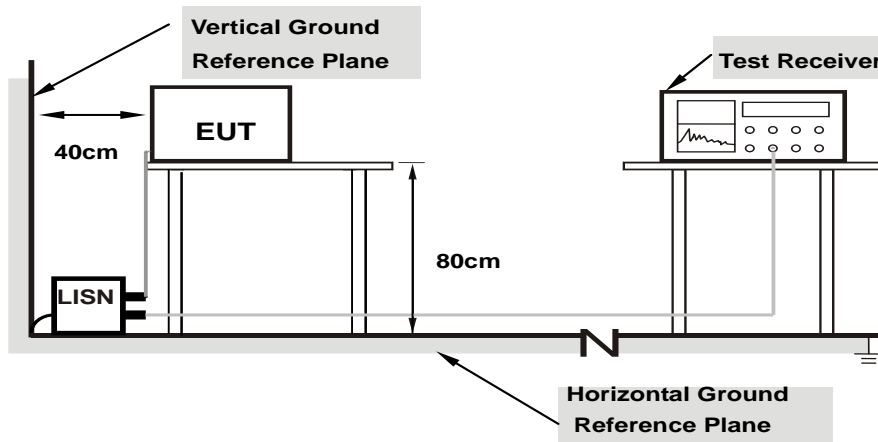

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.5 EUT Operating Conditions

Same as 4.1.6.

#### 4.1.6 Test Results

Not applicable. The EUT is powered by battery.




## 4.2 Minimum 6dB Bandwidth

### 4.2.1 Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz

### 4.2.2 Test Setup

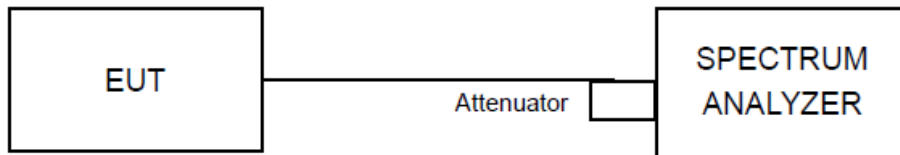

### 4.2.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 8.2).

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3$  · RBW, peak detector with maximum hold) is implemented by the instrumentation function.


### 4.2.4 Deviation of Test Standard

No deviation.


#### 4.2.5 Test Results

Test Mode	Antenna	Channel [MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit [MHz]	Verdict
BLE_1M	Ant1	2402	0.684	2401.688	2402.372	$\geq 0.5$	PASS
		2440	0.714	2439.676	2440.390	$\geq 0.5$	PASS
		2480	0.708	2479.694	2480.402	$\geq 0.5$	PASS
BLE_2M	Ant1	2402	1.388	2401.336	2402.724	$\geq 0.5$	PASS
		2440	1.340	2439.364	2440.704	$\geq 0.5$	PASS
		2480	1.396	2479.296	2480.692	$\geq 0.5$	PASS


### BLE\_1M\_Ant1\_2402

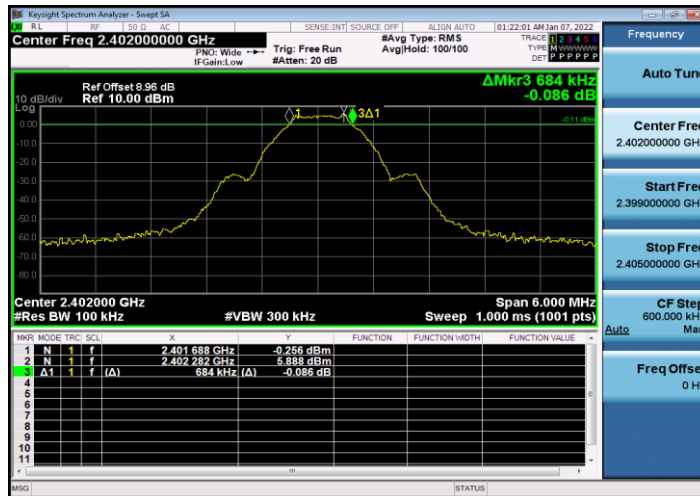

### BLE\_1M\_Ant1\_2440

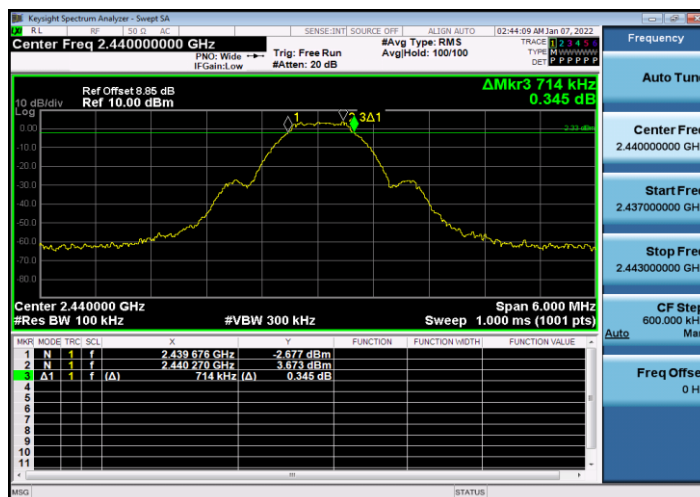


### BLE\_1M\_Ant1\_2480

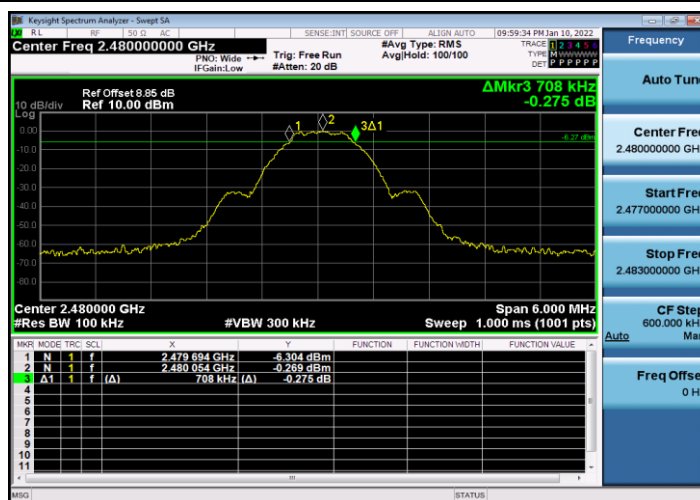


BLE\_2M\_Ant1\_2402



BLE\_2M\_Ant1\_2440

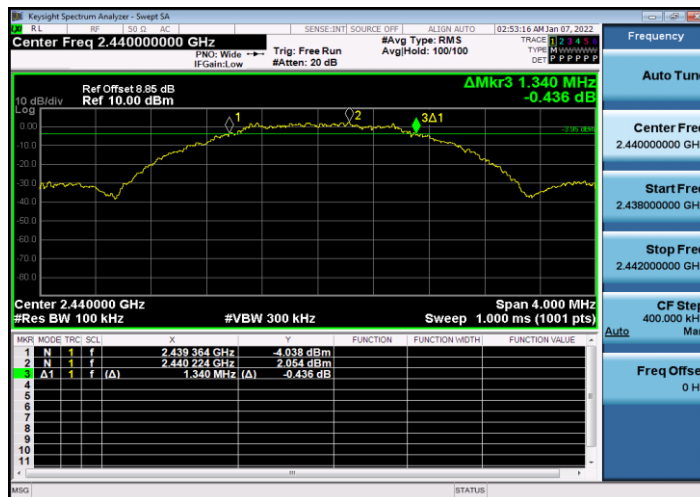

BLE\_2M\_Ant1\_2480

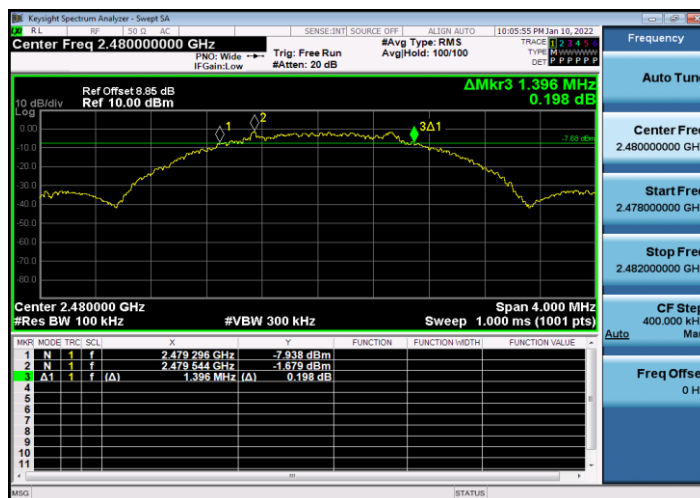


### 4.3 Conducted Output Power

#### 4.3.1 Limit

For systems using digital modulation in the 2400 – 2483.5 MHz bands: 1 Watt (30 dBm)

#### 4.3.2 Test Setup

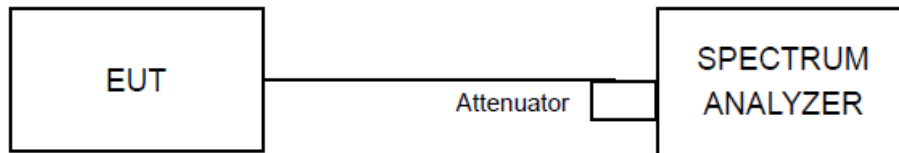

#### 4.3.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” for compliance to FCC 47CFR 15.247 requirements (clause 9.2.2.4).

- a) Set RBW  $\geq$  DTS bandwidth
- b) Set VBW  $\geq$  3 RBW.
- c) Set Span  $\geq$  3 RBW.
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize
- h) Use peak marker function to determine the peak amplitude level.


#### 4.3.4 Deviation of Test Standard

No deviation.


#### 4.3.5 Test Results

Test Mode	Antenna	Channel [MHz]	Power [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	6.25	<=30	PASS
		2440	4.59	<=30	PASS
		2480	0.79	<=30	PASS
BLE_2M	Ant1	2402	6.1	<=30	PASS
		2440	4.56	<=30	PASS
		2480	0.8	<=30	PASS


BLE\_1M\_Ant1\_2402

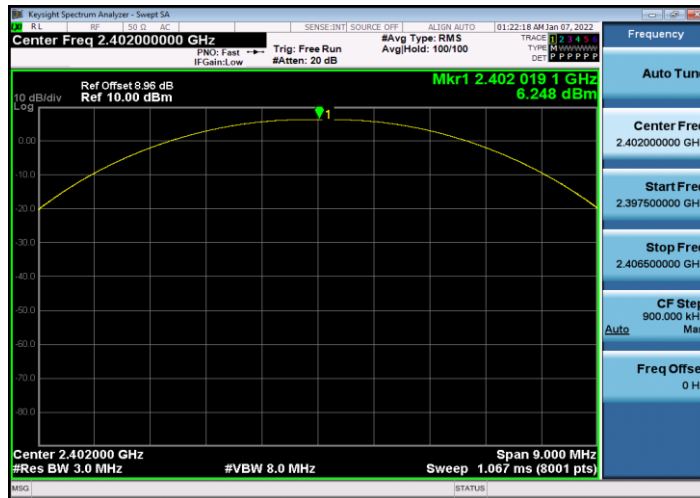

BLE\_1M\_Ant1\_2440

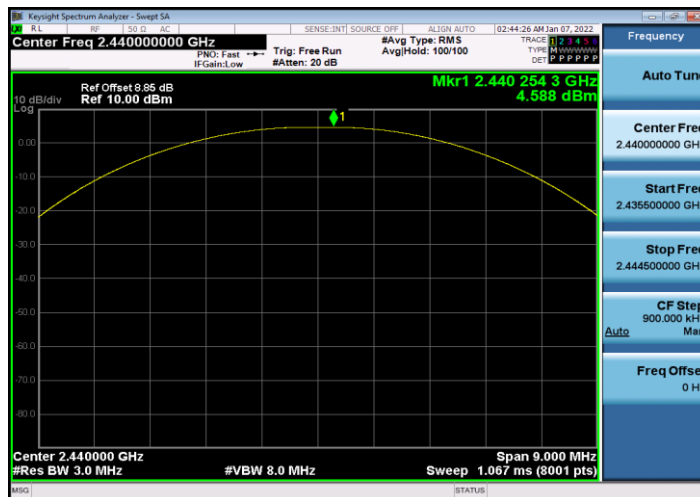


BLE\_1M\_Ant1\_2480

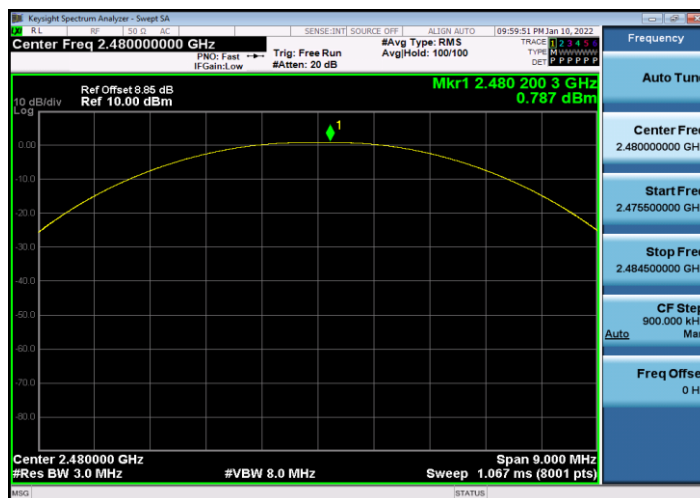




BUREAU  
VERITAS


### BLE\_2M\_Ant1\_2402

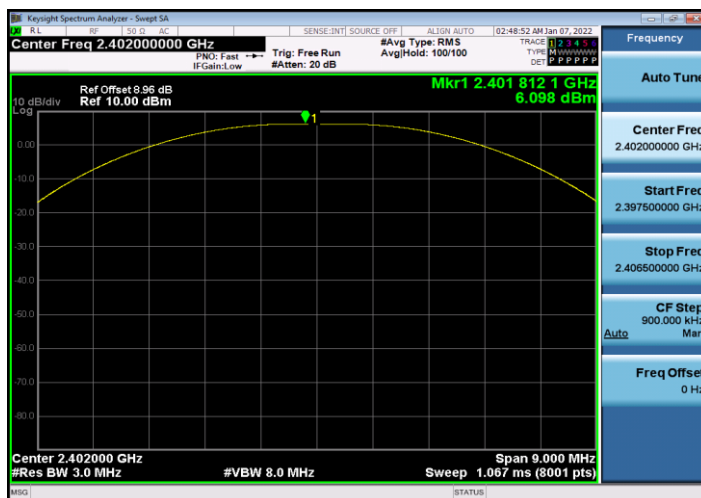

### BLE\_2M\_Ant1\_2440

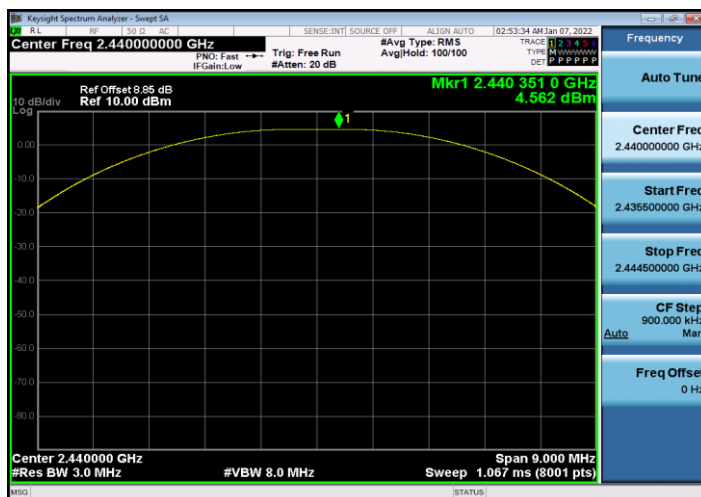

### BLE\_2M\_Ant1\_2480

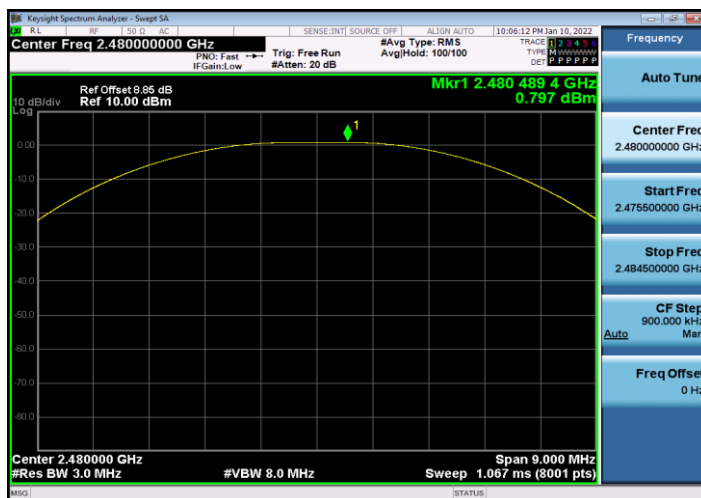




## 4.4 Power Spectral Density

### 4.4.1 Limit

The Maximum of Power Spectral Density Measurement is 8 dBm.

### 4.4.2 Test Setup

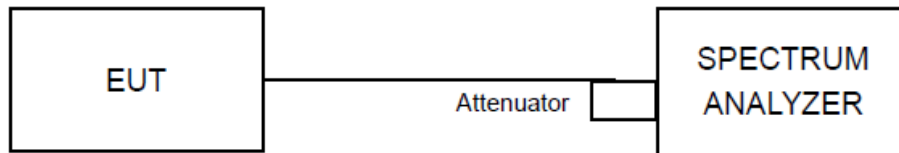

### 4.4.3 Test Procedures

The power output per FCC § 15.247(e) was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 10.5) for compliance to FCC 47CFR 15.247 requirements.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


### 4.4.4 Deviation of Test Standard

No deviation.


#### 4.4.5 Test Results

Test Mode	Antenna	Channel [MHz]	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-4.51	<=8	PASS
		2440	-6.08	<=8	PASS
		2480	-9.4	<=8	PASS
BLE_2M	Ant1	2402	-7.24	<=8	PASS
		2440	-9.19	<=8	PASS
		2480	-13.22	<=8	PASS


BLE\_1M\_Ant1\_2402

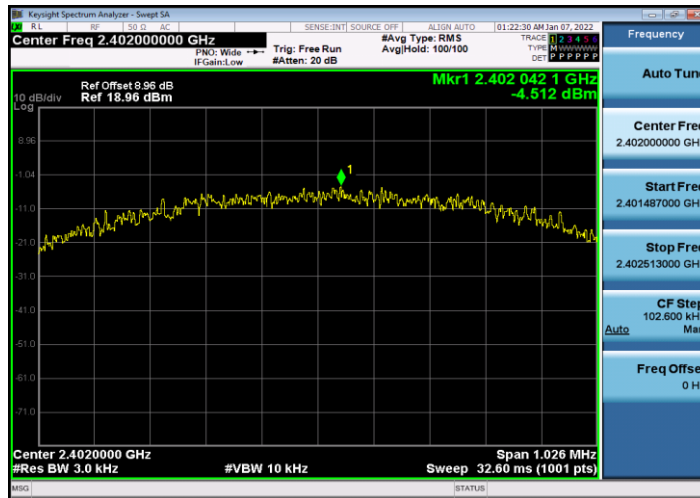


BLE\_1M\_Ant1\_2440

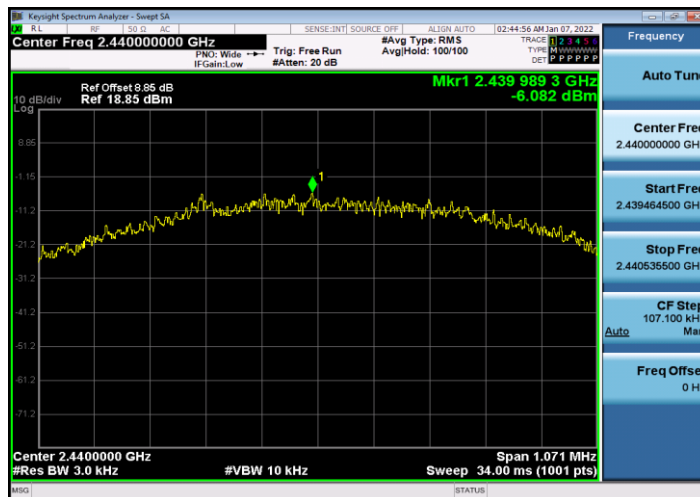


BLE\_1M\_Ant1\_2480

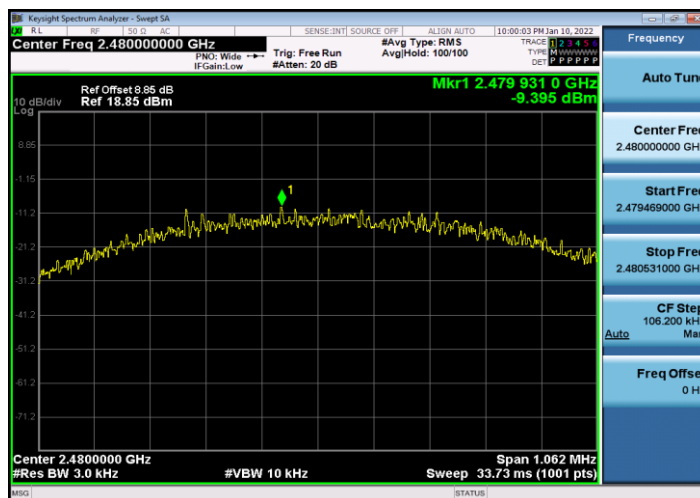


BLE\_2M\_Ant1\_2402

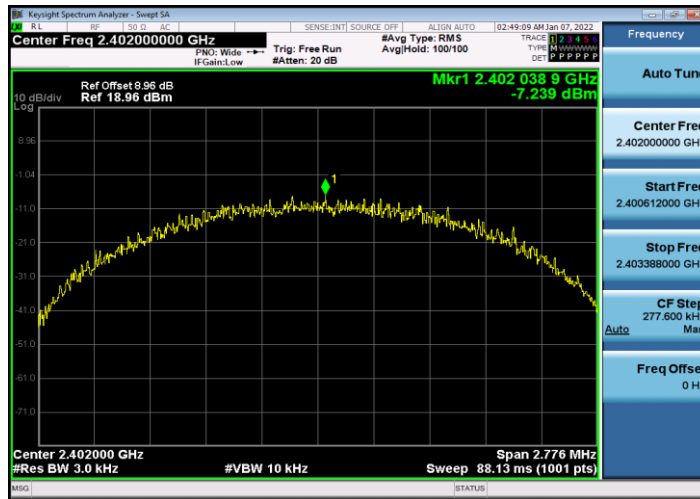

BLE\_2M\_Ant1\_2440

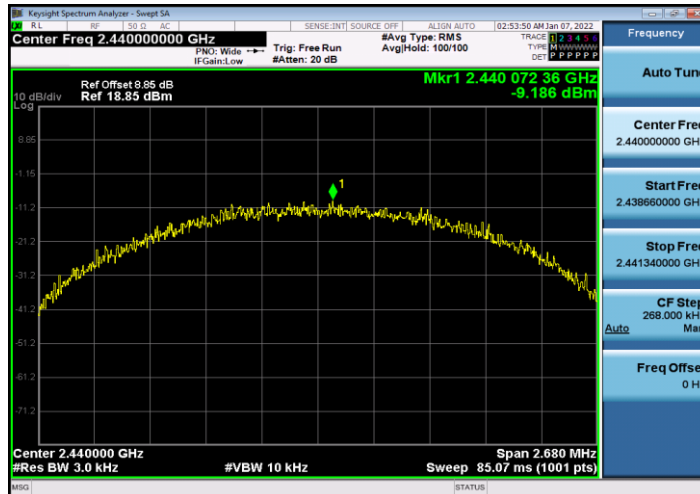

BLE\_2M\_Ant1\_2480

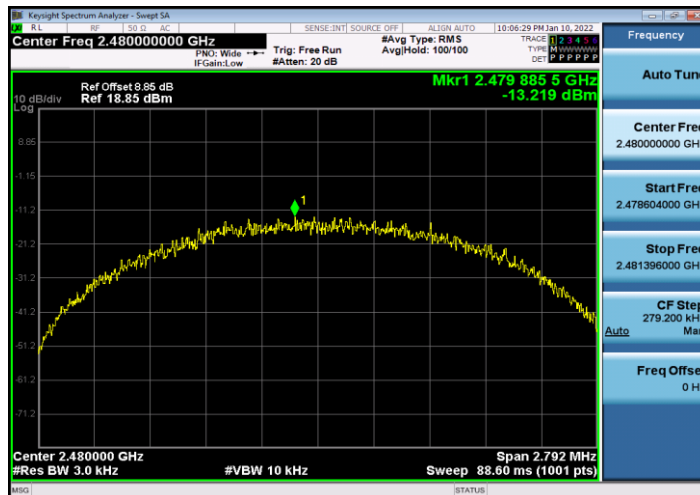


## 4.5 Conducted Band Edges Measurement

### 4.5.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.5.2 Test Setup

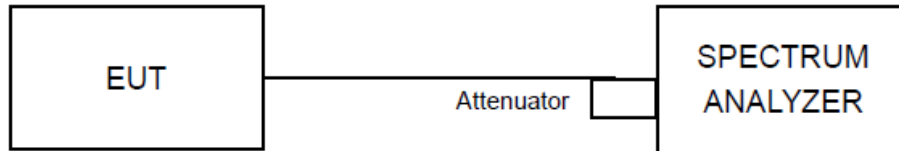

### 4.5.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.


### 4.5.4 Deviation of Test Standard

No deviation.


#### 4.5.5 Test Results

Test Mode	Antenna	ChName	Channel [MHz]	RefLevel [dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.48	-31.4	<=-14.52	PASS
		High	2480	0.23	-60.8	<=-19.77	PASS
BLE_2M	Ant1	Low	2402	3.61	-29.98	<=-16.39	PASS
		High	2480	-1.44	-60.24	<=-21.44	PASS


### BLE\_1M\_Ant1\_Low\_2402

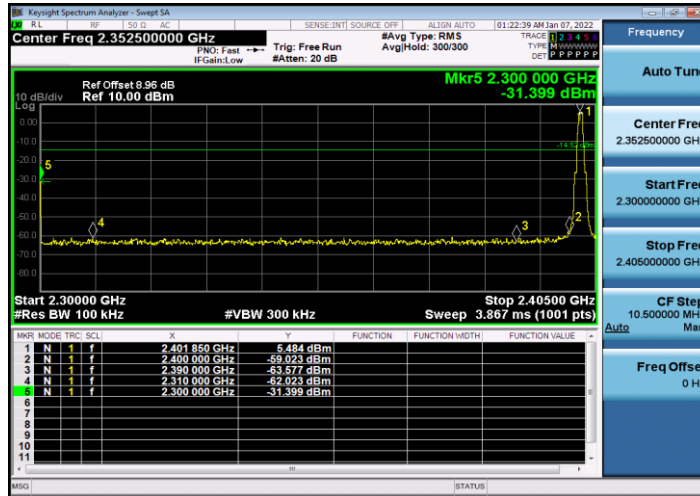

### BLE\_1M\_Ant1\_High\_2480

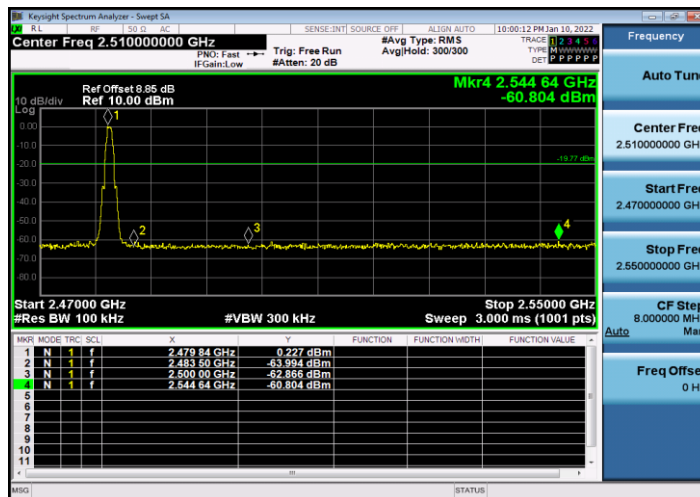


### BLE\_2M\_Ant1\_Low\_2402

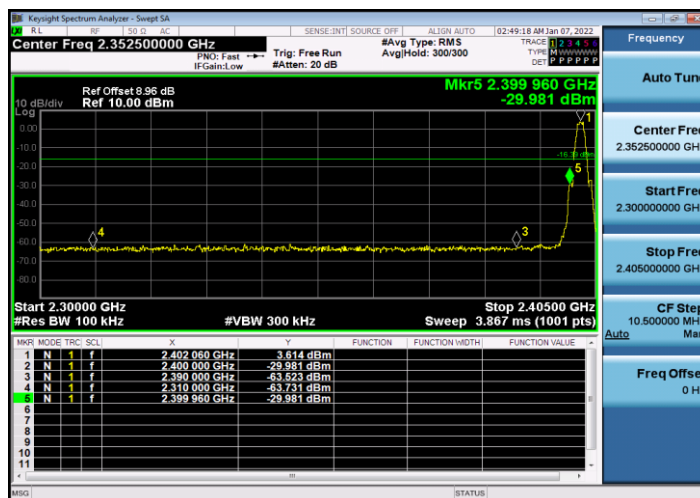



BUREAU  
VERITAS

### BLE\_2M\_Ant1\_High\_2480

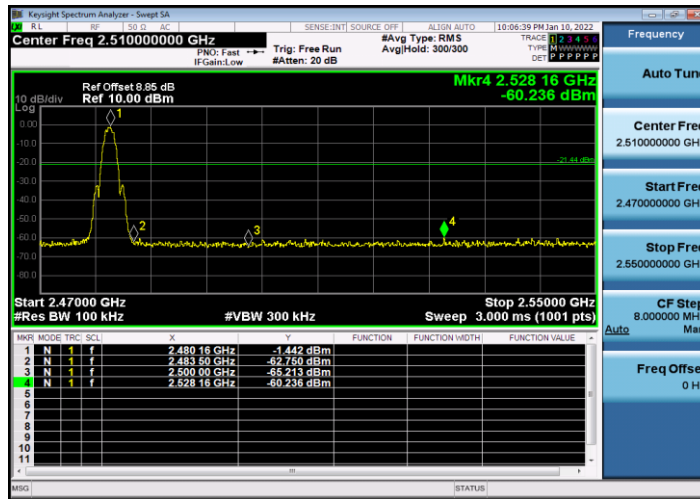




## 4.6 Conducted Spurious Emissions

### 4.6.1 Limit

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.6.2 Test Setup

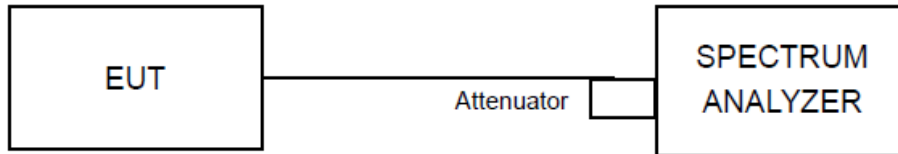

### 4.6.3 Test Procedures

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance to FCC 47CFR 15.247 requirements.

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOBE

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.6.4 Deviation of Test Standard

No deviation.


#### 4.6.5 Test Results

Test Mode	Antenna	Channel [MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	2402	Reference	6.16	6.16	---	PASS
			30~1000	6.16	-62.91	<=-13.84	PASS
			1000~26500	6.16	-31.48	<=-13.84	PASS
		2440	Reference	4.61	4.61	---	PASS
			30~1000	4.61	-63.06	<=-15.39	PASS
			1000~26500	4.61	-41.52	<=-15.39	PASS
		2480	Reference	0.72	0.72	---	PASS
			30~1000	0.72	-63.61	<=-19.29	PASS
			1000~26500	0.72	-44.28	<=-19.29	PASS
BLE_2M	Ant1	2402	Reference	3.52	3.52	---	PASS
			30~1000	3.52	-63.63	<=-16.48	PASS
			1000~26500	3.52	-43.91	<=-16.48	PASS
		2440	Reference	1.78	1.78	---	PASS
			30~1000	1.78	-62.34	<=-18.22	PASS
			1000~26500	1.78	-46	<=-18.22	PASS
		2480	Reference	-0.15	-0.15	---	PASS
			30~1000	-0.15	-63.25	<=-20.15	PASS
			1000~26500	-0.15	-46	<=-20.15	PASS


BLE\_1M\_Ant1\_2402\_0~Reference



BLE\_1M\_Ant1\_2402\_30~1000

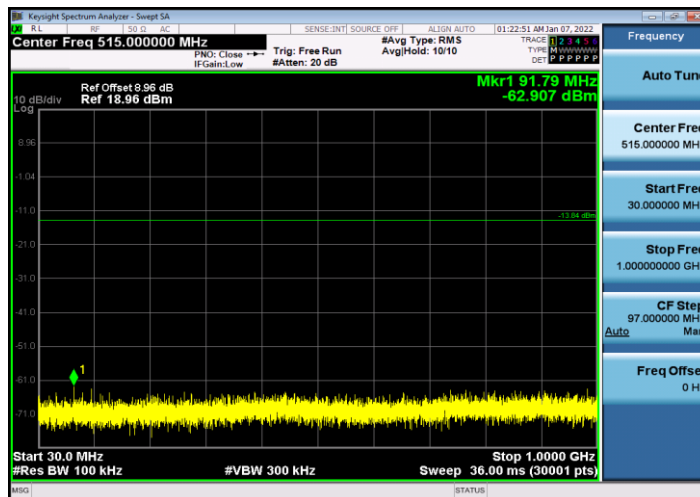


BLE\_1M\_Ant1\_2402\_1000~26500

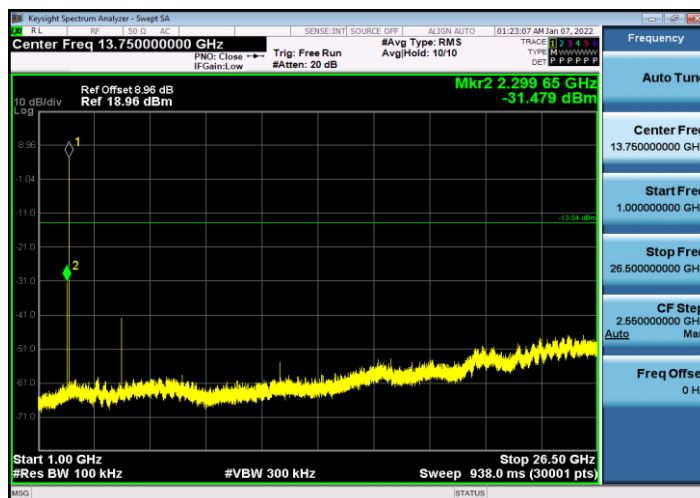


BLE\_1M\_Ant1\_2440\_0~Reference



BLE\_1M\_Ant1\_2440\_30~1000

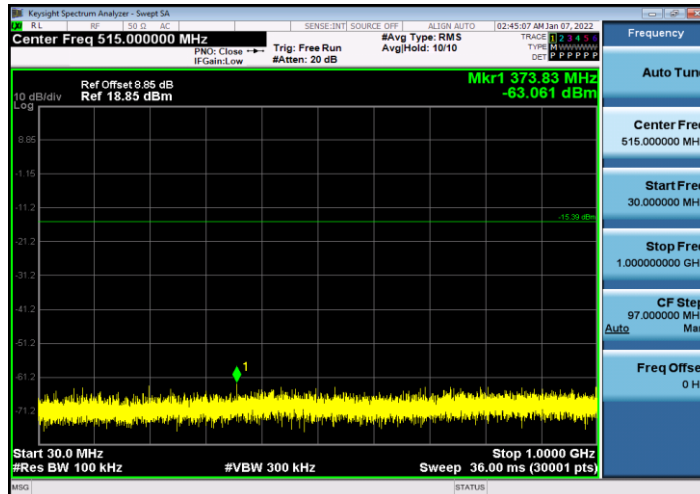

BLE\_1M\_Ant1\_2440\_1000~26500

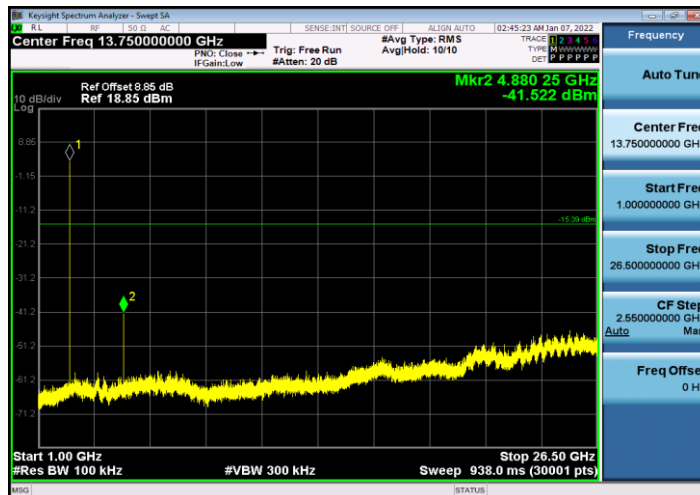




BUREAU  
VERITAS


### BLE\_1M\_Ant1\_2480\_0~Reference



### BLE\_1M\_Ant1\_2480\_30~1000

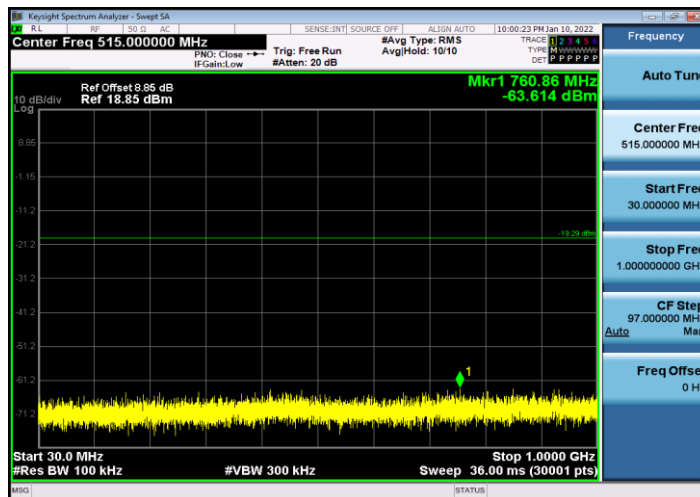


### BLE\_1M\_Ant1\_2480\_1000~26500

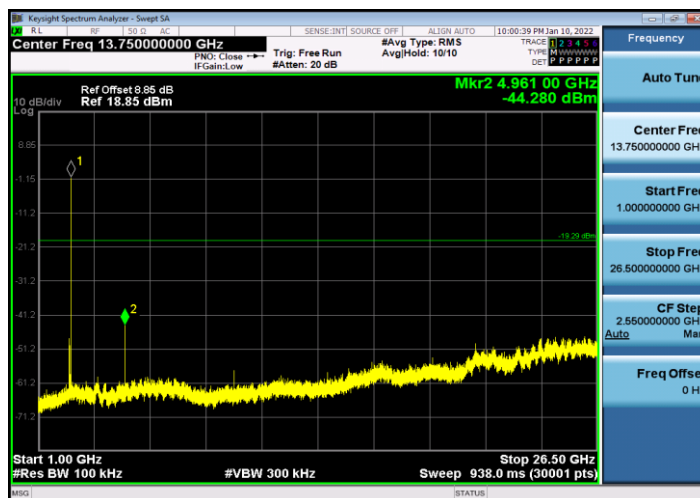


### BLE\_2M\_Ant1\_2402\_0~Reference




### BLE\_2M\_Ant1\_2402\_30~1000

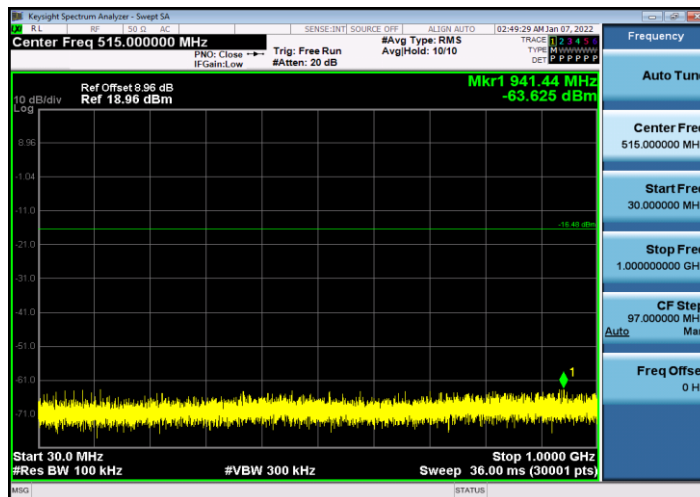


### BLE\_2M\_Ant1\_2402\_1000~26500

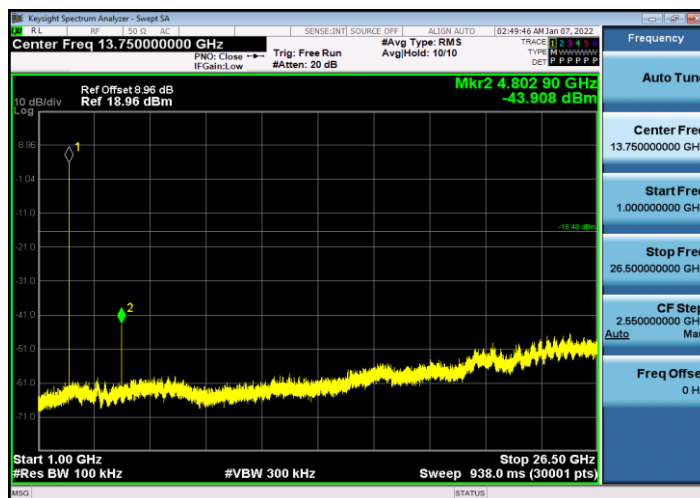


### BLE\_2M\_Ant1\_2440\_0~Reference

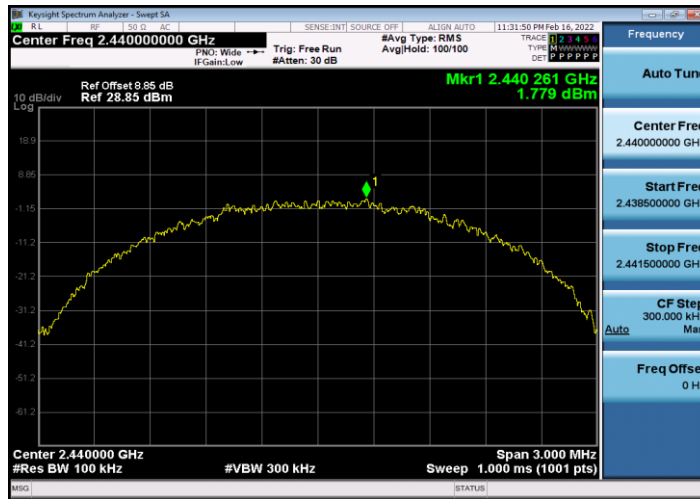

### BLE\_2M\_Ant1\_2440\_30~1000

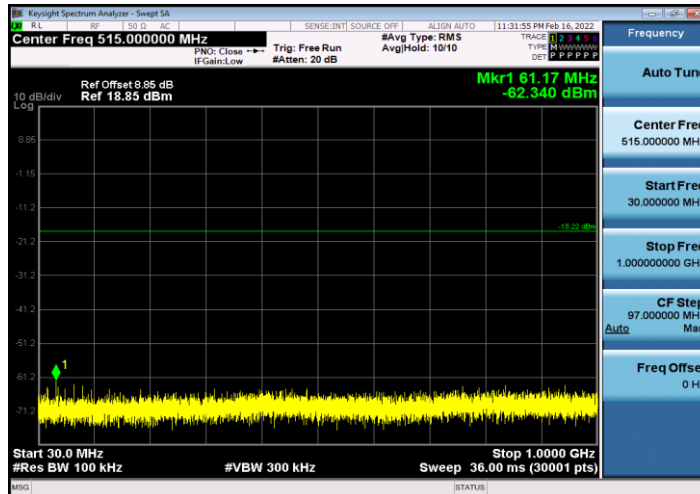


### BLE\_2M\_Ant1\_2440\_1000~26500

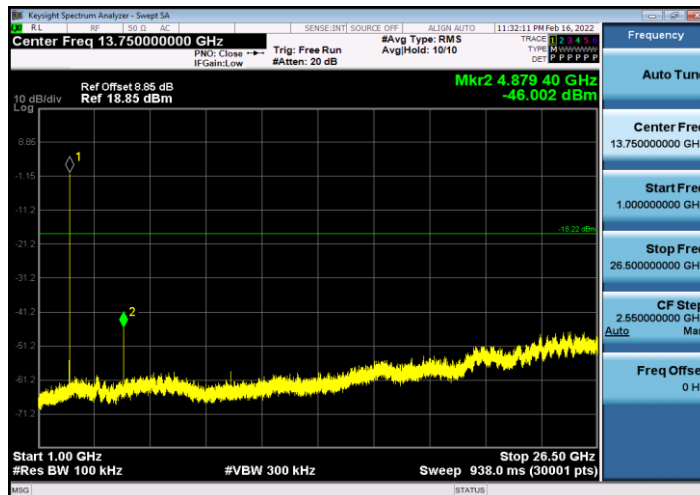


BLE\_2M\_Ant1\_2480\_0~Reference



BLE\_2M\_Ant1\_2480\_30~1000

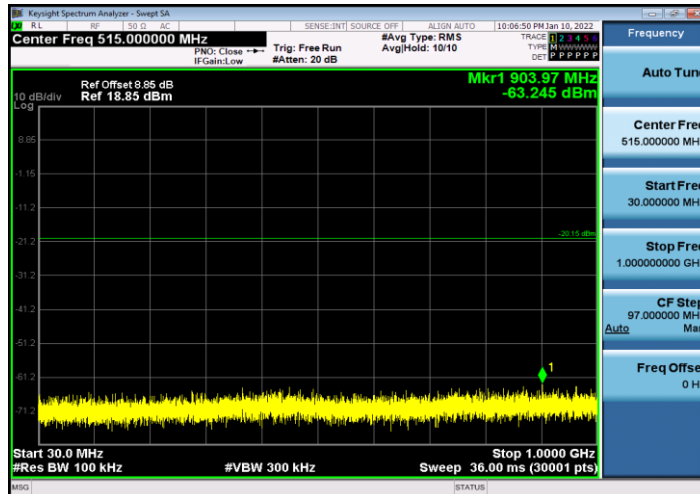

BLE\_2M\_Ant1\_2480\_1000~26500

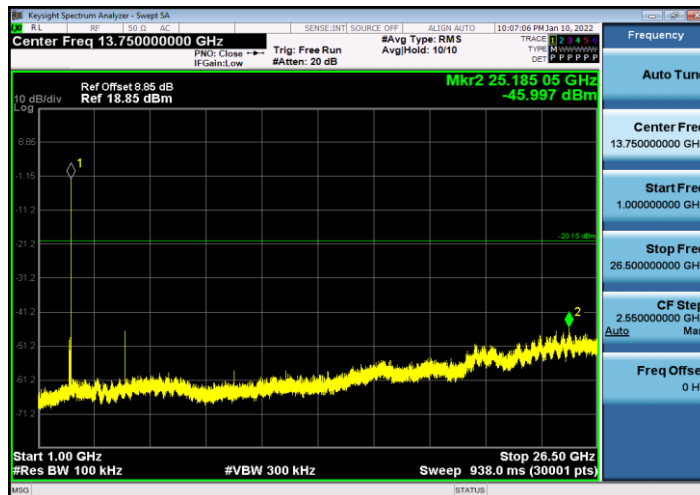





#### 4.7 Emissions in restricted frequency bands

##### 4.7.1 Test Limit

##### **For 15.205 requirement:**

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

<b>FCC Part 15 Subpart C Paragraph 15.209</b>		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### **4.7.2 Test Procedure Reference**

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

#### **4.7.3 Test Procedures**

##### **Peak Field Strength Measurements**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW = 10 Hz.  
If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ . T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


#### 4.7.4 Test Setup

For Radiated emission above 1GHz

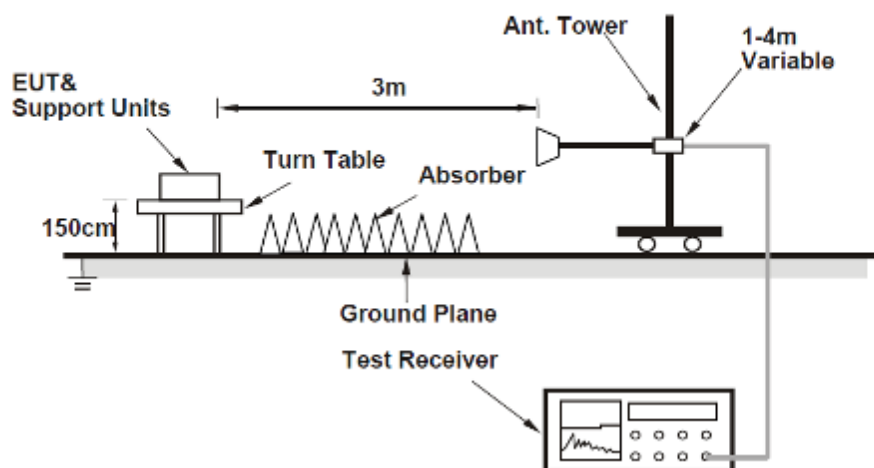

#### 4.7.5 Test Results

##### BLE\_1M\_2402\_Ant1/ Horizontal-PK

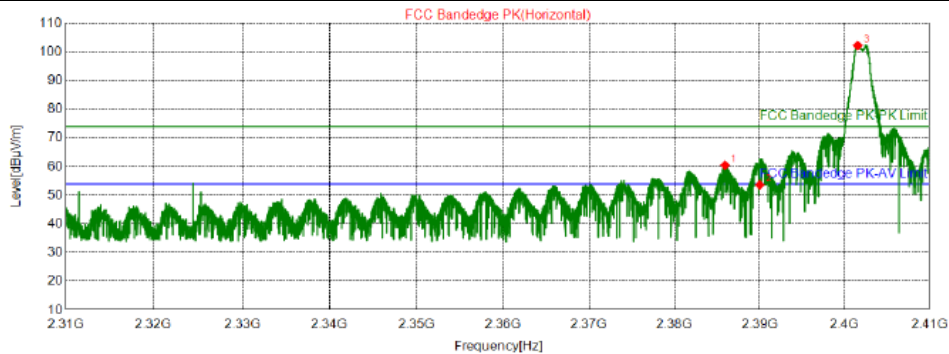


★ AV Detector

##### Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.9250	78.21	60.48	74.00	13.52	155	151	Horizontal	PK
2	2390.0000	71.32	53.60	74.00	20.40	155	282	Horizontal	PK
3	2401.5375	119.90	102.21	74.00	-28.21	155	234	Horizontal	PK

##### BLE\_1M\_2402\_Ant1/ Horizontal-AV

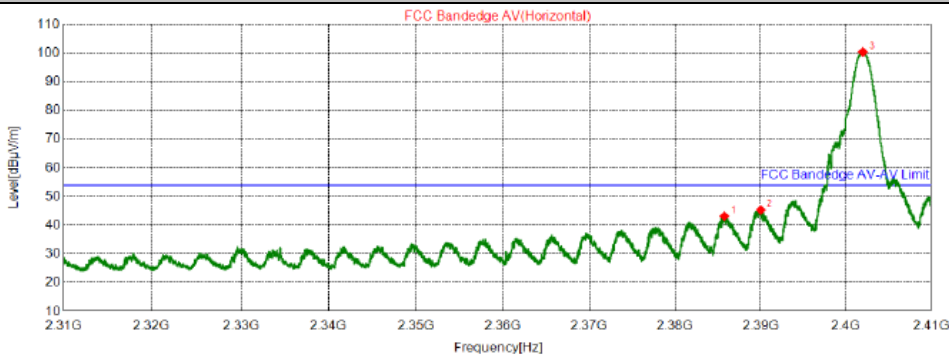


● QP Detector ★ AV Detector

##### Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.7500	60.64	43.16	54.00	10.84	150	228	Horizontal	PK
2	2390.0000	62.81	45.34	54.00	8.66	150	228	Horizontal	PK
3	2401.9750	117.81	100.38	54.00	-46.38	150	228	Horizontal	PK

BLE\_1M\_2402\_Ant1/ Vertical

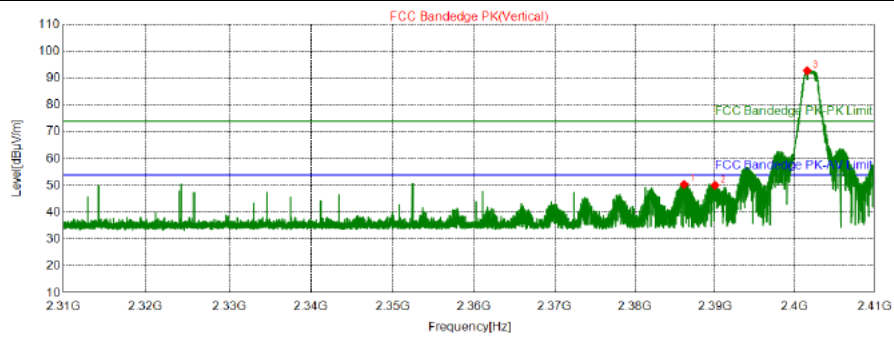


★ AV Detector

**Suspected List**

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2386.1500	68.15	50.42	74.00	23.58	155	257	Vertical	PK
2	2390.0000	67.81	50.09	74.00	23.91	155	286	Vertical	PK
3	2401.5500	110.45	92.76	74.00	-18.76	155	298	Vertical	PK

BLE\_1M\_2480\_Ant1/ Horizontal-PK

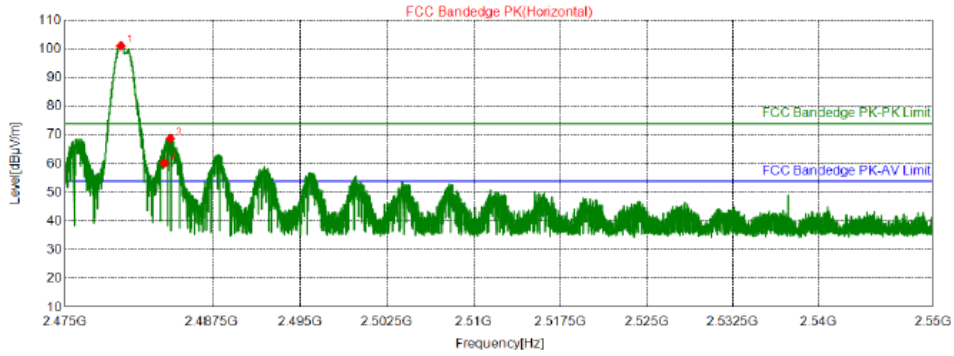


★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.7813	118.51	101.06	74.00	-27.06	155	138	Horizontal	PK
2	2483.5031	77.71	60.27	74.00	13.73	155	97	Horizontal	PK
3	2484.0094	86.23	68.80	74.00	5.20	155	144	Horizontal	PK

BLE\_1M\_2480\_Ant1/ Horizontal-AV

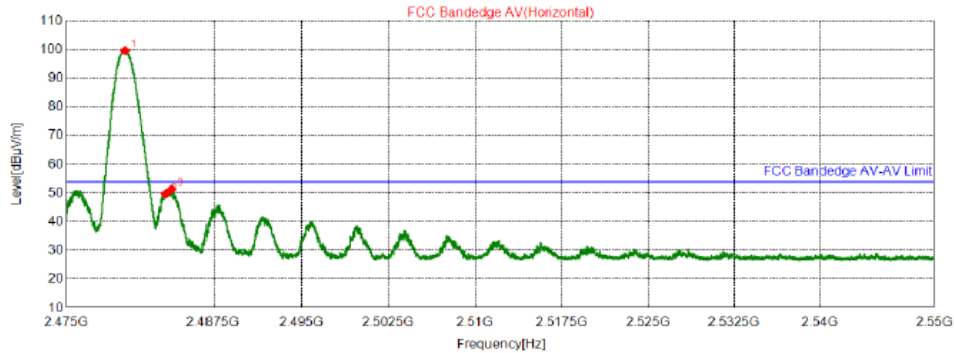


● QP Detector ★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.0156	116.79	99.61	54.00	-45.61	150	150	Horizontal	PK
2	2483.5031	66.89	49.73	54.00	4.27	150	150	Horizontal	PK
3	2484.0000	68.48	51.32	54.00	2.68	150	144	Horizontal	PK

BLE\_1M\_2480\_Ant1/ Vertical-PK

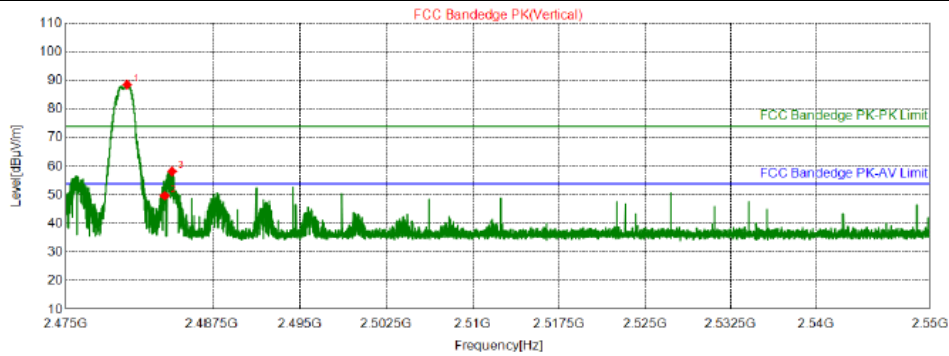


★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.2688	105.96	88.51	74.00	-14.51	155	275	Vertical	PK
2	2483.5031	67.16	49.72	74.00	24.28	155	1	Vertical	PK
3	2484.1313	75.64	58.21	74.00	15.79	155	281	Vertical	PK

BLE\_1M\_2480\_Ant1/ Vertical-AV

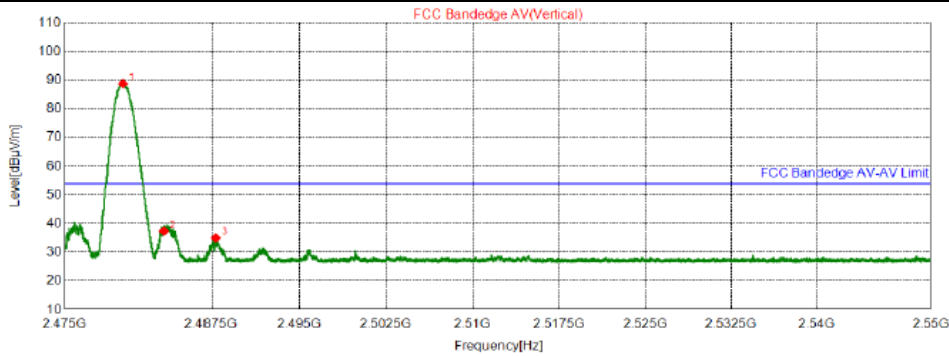


● QP Detector ★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.9969	105.92	88.74	54.00	-34.74	150	264	Vertical	PK
2	2483.5031	54.54	37.38	54.00	16.62	150	258	Vertical	PK
3	2487.8344	52.13	34.98	54.00	19.02	150	264	Vertical	PK

BLE\_2M\_2402\_Ant1/ Horizontal-PK

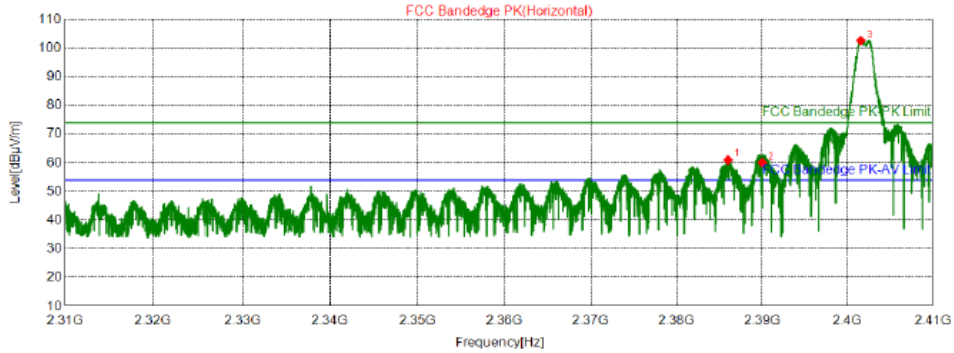


★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2386.0000	78.68	60.95	74.00	13.05	155	226	Horizontal	PK
2	2390.0000	77.78	60.06	74.00	13.94	155	101	Horizontal	PK
3	2401.5500	120.31	102.62	74.00	-28.62	155	226	Horizontal	PK

BLE\_2M\_2402\_Ant1/ Horizontal-AV

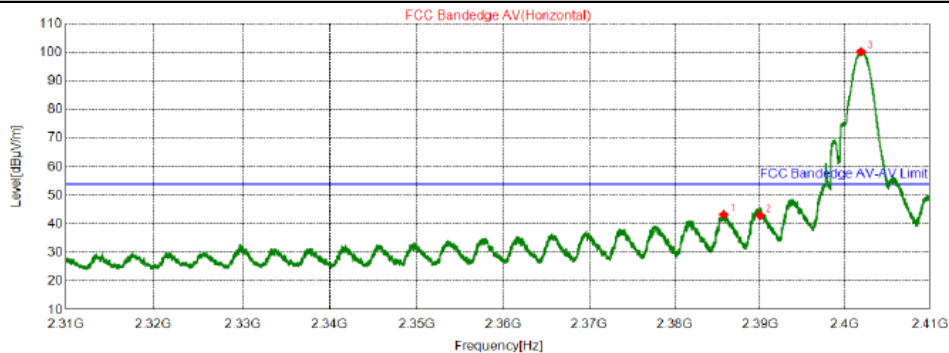


● QP Detector ★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.7375	60.77	43.29	54.00	10.71	150	227	Horizontal	PK
2	2390.0000	60.50	43.03	54.00	10.97	150	239	Horizontal	PK
3	2401.8875	117.67	100.24	54.00	-46.24	150	233	Horizontal	PK



BLE\_2M\_2402\_Ant1/ Vertical

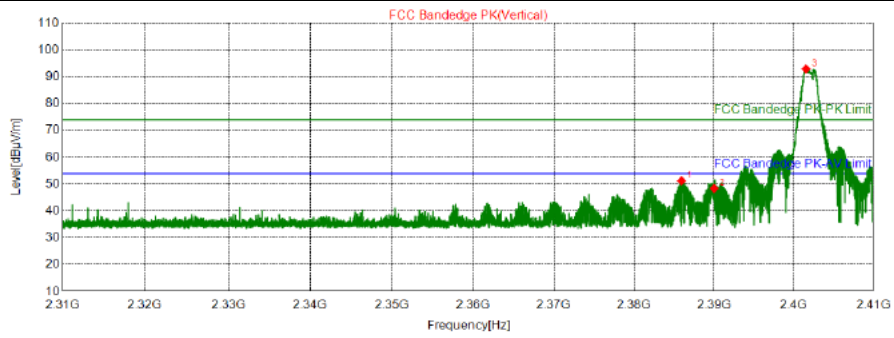


★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2385.9250	68.92	51.19	74.00	22.81	155	263	Vertical	PK
2	2390.0000	66.10	48.38	74.00	25.62	155	316	Vertical	PK
3	2401.5250	110.60	92.91	74.00	-18.91	155	263	Vertical	PK

BLE\_2M\_2480\_Ant1/ Horizontal-PK

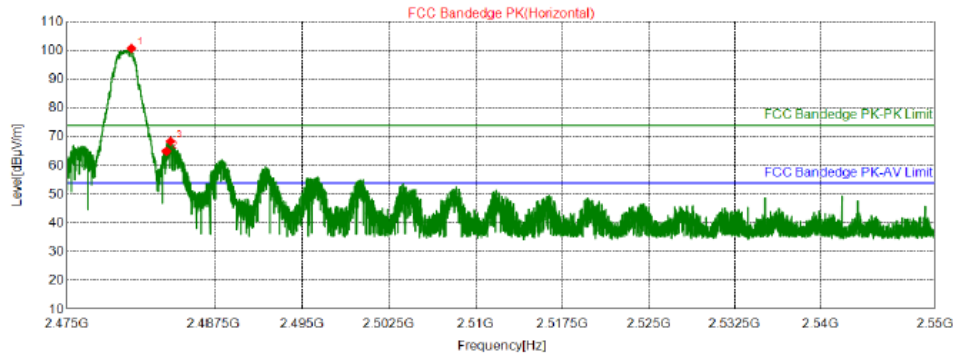


★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.5125	118.15	100.71	74.00	-26.71	155	150	Horizontal	PK
2	2483.5031	82.43	64.99	74.00	9.01	155	61	Horizontal	PK
3	2483.8594	85.84	68.41	74.00	5.59	155	150	Horizontal	PK

BLE\_2M\_2480\_Ant1/ Horizontal-AV

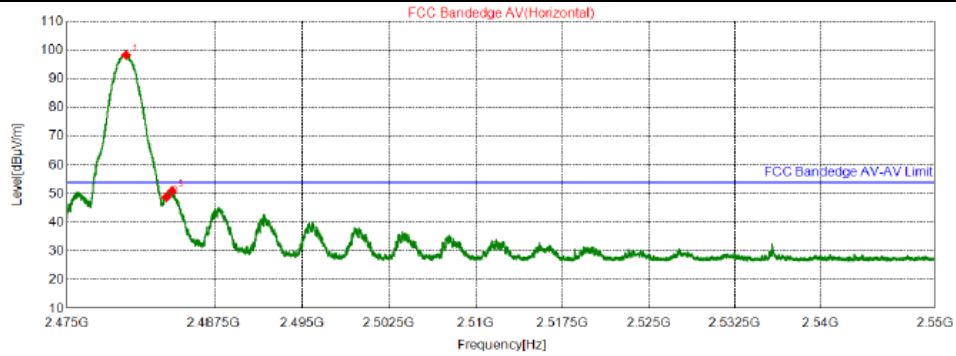


● QP Detector ★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.0531	115.46	98.28	54.00	-44.28	150	62	Horizontal	PK
2	2483.5031	65.94	48.78	54.00	5.22	150	239	Horizontal	PK
3	2483.9813	68.11	50.95	54.00	3.05	150	145	Horizontal	PK

BLE\_2M\_2480\_Ant1/ Vertical-PK

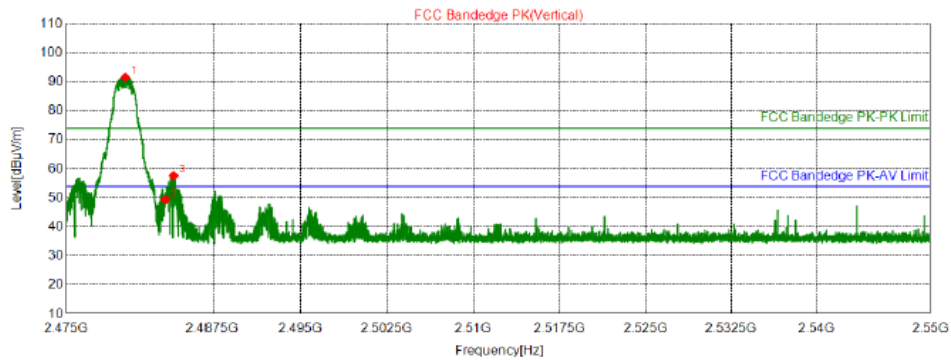


★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.0625	108.92	91.47	74.00	-17.47	155	192	Vertical	PK
2	2483.5031	66.78	49.34	74.00	24.66	155	156	Vertical	PK
3	2484.2156	75.06	57.63	74.00	16.37	155	288	Vertical	PK

BLE\_2M\_2480\_Ant1/ Vertical-AV

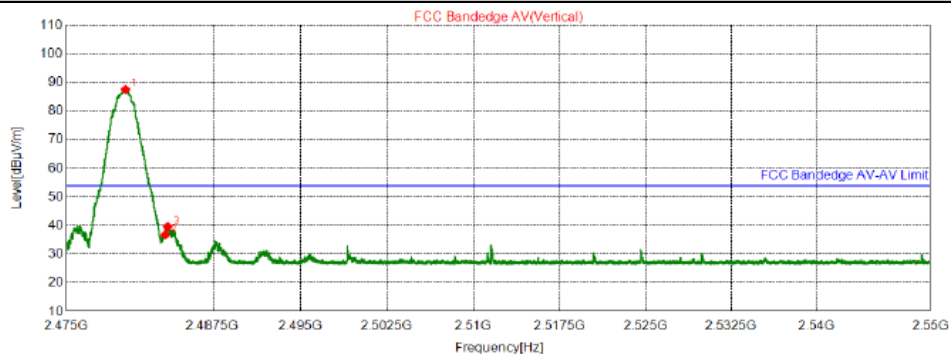

● QP Detector ★ AV Detector

Suspected List

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.0813	104.75	87.58	54.00	-33.58	150	257	Vertical	PK
2	2483.5031	53.91	36.75	54.00	17.25	150	179	Vertical	PK
3	2483.7094	56.77	39.61	54.00	14.39	150	257	Vertical	PK

## 4.8 Radiated Emission Measurement

### 4.8.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

### 4.8.2 Test Procedures

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degree to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**Note:**

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

### Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle  $\geq$  98 %) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

### 4.8.3 Deviation from Test Standard


No deviation.

#### 4.8.4 Test Setup


For Radiated emission below 30MHz

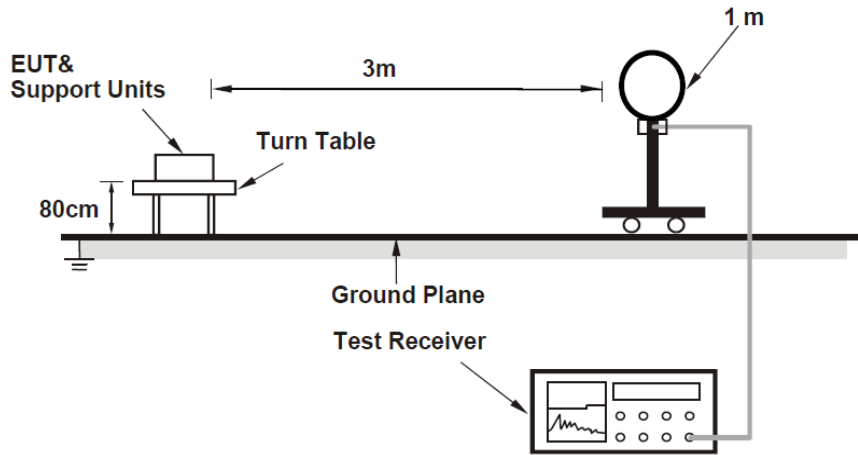

For Radiated emission 30MHz to 1GHz

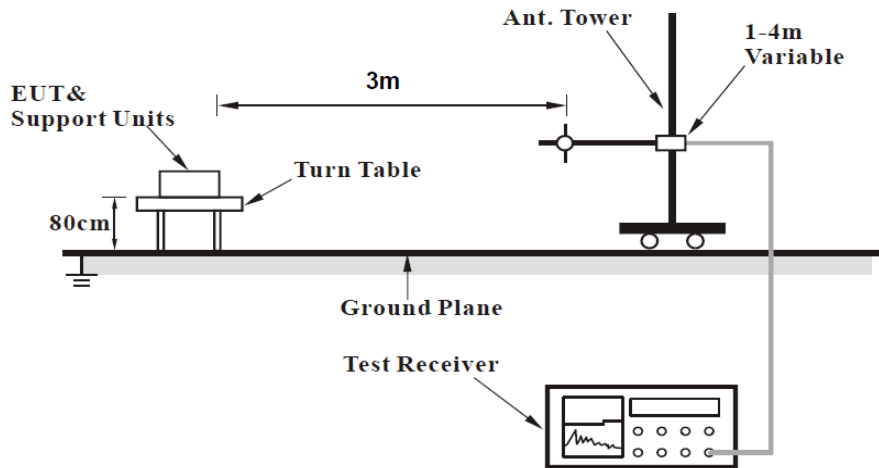

For Radiated emission above 1GHz

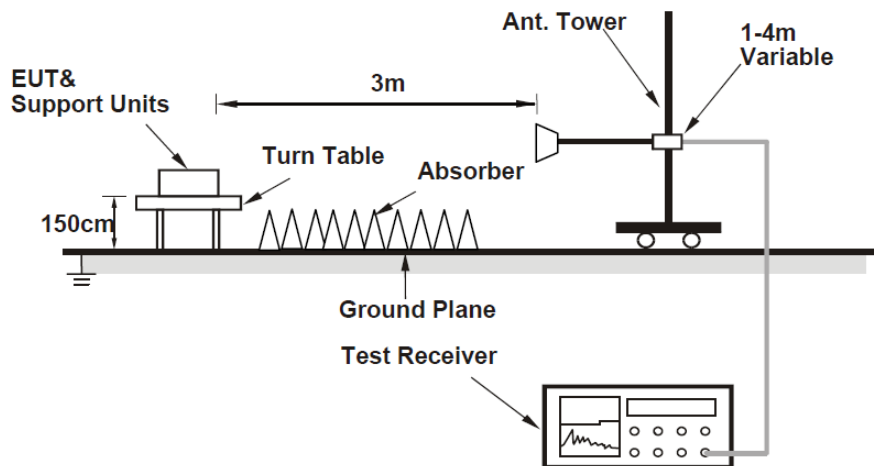

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.8.5 EUT Operating Conditions

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### 4.8.6 Test Results


##### Radiated Emissions Range 9kHz~30MHz

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

## Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

Channel	BLE_1M_2402_Ant1	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal
Power supply	Powered by battery		

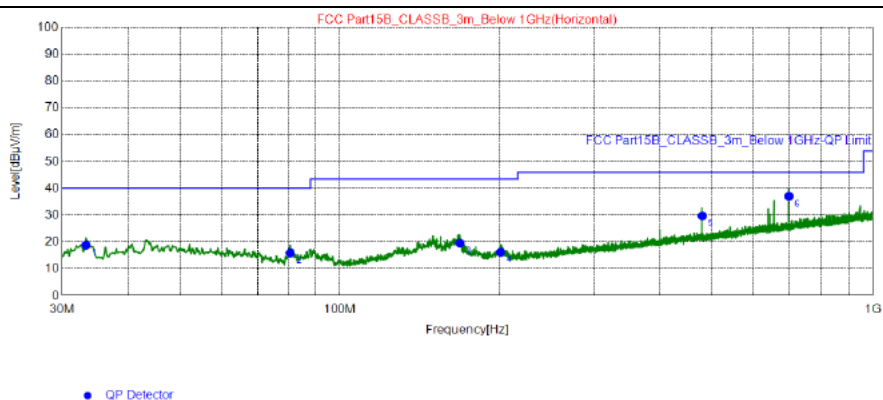

### Final Data List


NO.	Freq. [MHz]	QP Reading [dB $\mu$ V/m]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.29	30.12	-11.31	18.81	40.00	21.19	100	173	Horizontal
2	80.63	30	-14.07	15.93	40.00	24.07	200	214	Horizontal
3	168.1	29.43	-9.83	19.60	43.50	23.90	200	89	Horizontal
4	200.5	27.73	-11.53	16.20	43.50	27.30	200	309	Horizontal
5	480.0	34.16	-4.41	29.75	46.00	16.25	100	323	Horizontal
6	699.1	37.46	-0.41	37.05	46.00	8.95	100	83	Horizontal

### REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



Channel	BLE_1M_2402_Ant1	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical
Power supply	Powered by battery		

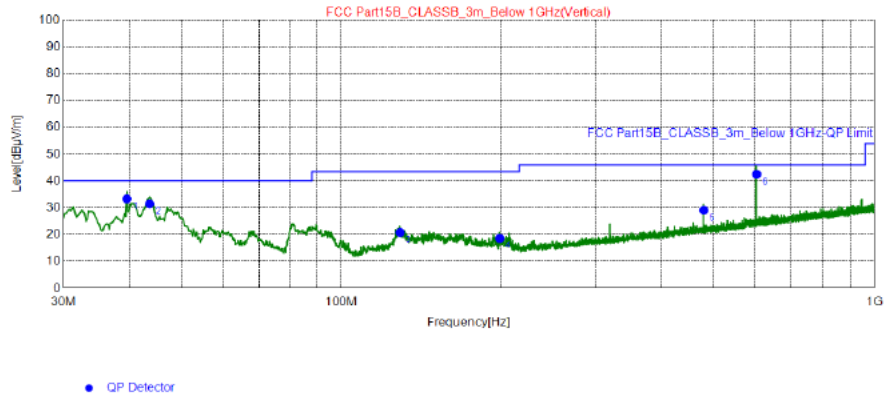

#### Final Data List

NO.	Freq. [MHz]	QP Reading [dB $\mu$ V/m]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.50	43.89	-10.55	33.34	40.00	6.66	200	94	Vertical
2	43.58	41.66	-10.23	31.43	40.00	8.57	100	164	Vertical
3	128.9	31.93	-11.12	20.81	43.50	22.69	100	117	Vertical
4	198.3	30.04	-11.45	18.59	43.50	24.91	100	356	Vertical
5	480.0	33.46	-4.41	29.05	46.00	16.95	200	23	Vertical
6	603.2	44.47	-1.92	42.55	46.00	3.45	100	81	Vertical

#### REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

### Radiated Emission Range 1GHz~10th Harmonic

Below is the worst test data

<b>Channel</b>	BLE_1M_2402_Ant1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4804.6000	53.94	74.00	20.06	-12.46	H	PK
2	4804.6000	47.91	54.00	6.09	-12.46	H	AV
3	7206.7000	50.01	74.00	23.99	-4.67	V	PK
4	7206.7000	44.95	54.00	9.05	-4.67	V	AV

#### REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

<b>Channel</b>	BLE_1M_2440_Ant1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7320.6000	57.70	74.00	16.30	-5.03	H	PK
2	7320.6000	52.45	54.00	1.55	-5.03	H	AV
3	7320.6000	51.13	74.00	22.87	-5.03	V	PK
4	7320.6000	47.77	54.00	6.23	-5.03	V	AV

#### REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

<b>Channel</b>	BLE_1M_2480_Ant1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4960.0000	50.84	74.00	23.16	-12.05	H	PK
2	4960.0000	47.29	54.00	6.71	-12.05	H	AV
3	4960.0000	49.63	74.00	24.37	-12.05	V	PK
4	4960.0000	44.79	54.00	9.21	-12.05	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

<b>Channel</b>	BLE_2M_2402_Ant1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4804.6000	51.86	74.00	22.14	-12.46	H	PK
2	4804.6000	47.60	54.00	6.40	-12.46	H	AV
3	7206.7000	50.76	74.00	23.24	-4.67	V	PK
4	7206.7000	47.43	54.00	6.57	-4.67	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

<b>Channel</b>	BLE_2M_2440_Ant1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	7320.6000	56.65	74.00	17.35	-5.03	H	PK
2	7320.6000	50.61	54.00	3.39	-5.03	H	AV
3	7320.6000	50.10	74.00	23.90	-5.03	V	PK
4	7320.6000	46.58	54.00	7.42	-5.03	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

<b>Channel</b>	BLE_2M_2480_Ant1	<b>Detector Function</b>	Peak (PK)
<b>Frequency Range</b>	1GHz ~ 25GHz		Average (AV)

Spurious Emission Level							
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector
1	4960.0000	49.60	74.00	24.40	-12.05	H	PK
2	4960.0000	46.22	54.00	7.78	-12.05	H	AV
3	4960.0000	47.73	74.00	26.27	-12.05	V	PK
4	4960.0000	43.92	54.00	10.08	-12.05	V	AV

**REMARKS:**

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

--- END ---