



Report No.: FCC 2005215-02 File reference No.: 2020-06-05

Applicant: SHENZHEN SURE THING INDUSTRY AND COMMERCE

DEVELOPMENT CO.,LTD.

Product: Bluetooth Receiver

Model No.: BTC21-RCA, BTC21A-RCA, BTC21B-RCA, BTC21C-RCA,

BTC21D-RCA, BTC21E-RCA, BTC21F-RCA

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: June 05, 2020

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC2005215-02

Date: 2020-06-05



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

Page 2 of 81

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 81

Report No.: FCC2005215-02

Date: 2020-06-05



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	4
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
6.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	20dB Bandwidth	25
8.0	Maximum Output Power.	37
9.0	Carrier Frequency Separation.	40
10.0	Number of Hopping Channel.	44
11.0	Time of Occupancy (Dwell Time)	48
12.0	Out of Band Measurement.	61
13.0	Antenna Requirement.	78
14.0	FCC ID Label	79
15.0	Photo of Test Setup and EUT View	80

Report No.: FCC2005215-02

Date: 2020-06-05



Page 4 of 81

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

1.2 Applicant Details

Applicant: SHENZHEN SURE THING INDUSTRY AND COMMERCE DEVELOPMENT CO.,LTD.

Address: Building 6,1st Phase of Fu'an Industrial City, 99th Dayang Road, Fuhai Town, Bao'an District,

Shenzhen, China.

Telephone: 86-755-26509966 Fax: 86-755-26617277

1.3 Description of EUT

Product: Bluetooth Receiver

Manufacturer: SHENZHEN SURE THING INDUSTRY AND COMMERCE

DEVELOPMENT CO.,LTD.

Address: Building 6,1st Phase of Fu'an Industrial City, 99th Dayang Road,Fuhai

Town, Bao'an District, Shenzhen, China.

Brand Name: N/A

Model Number: BTC21-RCA

Additional Model Number: BTC21A-RCA, BTC21B-RCA, BTC21C-RCA, BTC21D-RCA,

BTC21E-RCA,BTC21F-RCA

Type of Modulation GFSK, Л/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channels for Bluetooth

Antenna: Dipole antenna with revise polarity antenna connector. The gain of the antennas is

2.0dBi.

Rating: DC5V from USB port

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2020-05-22 to 2020-06-05

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC2005215-02 Page 5 of 81

Date: 2020-06-05



Test Uncertainty

Conducted Emissions Uncertainty =3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty = 6.0dB Occupied Channel Bandwidth Uncertainty =5%

Test Engineer 1.7

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 81

Report No.: FCC2005215-02

Date: 2020-06-05



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2020-06-20	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2020-01-16	2021-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

Page 7 of 81

Report No.: FCC2005215-02

Date: 2020-06-05



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 81


Report No.: FCC2005215-02

Date: 2020-06-05



5. Power Line Conducted Emission Test

5.1 Schematics of the test

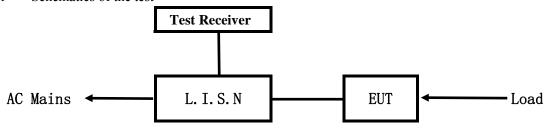


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~ 60Hz Block diagram of Test setup

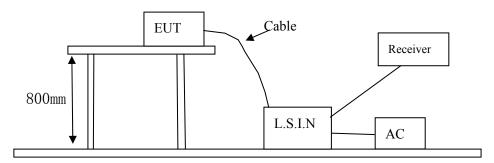

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Page 9 of 81

Report No.: FCC2005215-02

Date: 2020-06-05



A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth Receiver	SHENZHEN SURE THING INDUSTRY AND COMMERCE DEVELOPMENT CO.,LTD.	BTC21-RCA, BTC21A-RCA, BTC21B-RCA, BTC21C-RCA, BTC21D-RCA, BTC21E-RCA, BTC21F-RCA	2ABFFBTC21RCA

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	MerryKing	MKS-0501500	Input: 100-240V~ 50/60Hz, 0.3A;
			Output: DC5V, 1500mA

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.107, 15.207

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

The report refers only to the sample tested and does not apply to the bulk.

Date: 2020-06-05



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

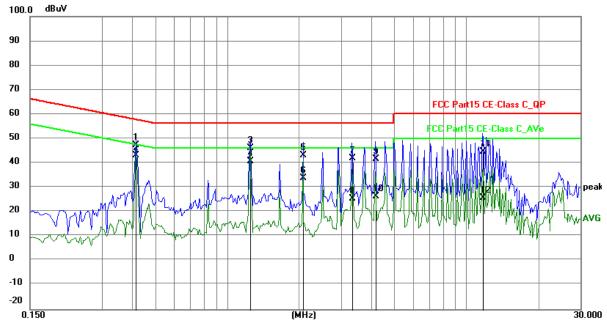

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4152	37.59	9.76	47.35	57.54	-10.19	QP	Р
2	0.4152	33.51	9.76	43.27	47.54	-4.27	AVG	Р
3	1.2498	36.28	9.79	46.07	56.00	-9.93	QP	Р
4	1.2498	31.06	9.79	40.85	46.00	-5.15	AVG	Р
5	2.0844	33.37	9.80	43.17	56.00	-12.83	QP	Р
6	2.0844	23.91	9.80	33.71	46.00	-12.29	AVG	Р
7	3.3354	32.17	9.86	42.03	56.00	-13.97	QP	Р
8	3.3354	15.71	9.86	25.57	46.00	-20.43	AVG	Р
9	4.1700	31.82	9.89	41.71	56.00	-14.29	QP	Р
10	4.1700	16.60	9.89	26.49	46.00	-19.51	AVG	Р
11	11.7204	34.37	10.24	44.61	60.00	-15.39	QP	Р
12	11.7204	15.64	10.24	25.88	50.00	-24.12	AVG	Р

Date: 2020-06-05



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

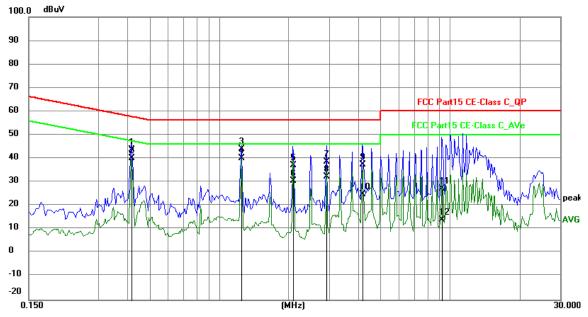

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4191	34.13	9.76	43.89	57.47	-13.58	QP	Р
2	0.4191	30.34	9.76	40.10	47.47	-7.37	AVG	Р
3	1.2536	34.31	9.79	44.10	56.00	-11.90	QP	Р
4	1.2536	30.22	9.79	40.01	46.00	-5.99	AVG	Р
5	2.0961	27.23	9.80	37.03	56.00	-18.97	QP	Р
6	2.0961	20.75	9.80	30.55	46.00	-15.45	AVG	Р
7	2.9229	28.86	9.84	38.70	56.00	-17.30	QP	Р
8	2.9229	22.59	9.84	32.43	46.00	-13.57	AVG	Р
9	4.1739	27.70	9.89	37.59	56.00	-18.41	QP	Р
10	4.1739	14.97	9.89	24.86	46.00	-21.14	AVG	Р
11	9.2400	17.18	10.12	27.30	60.00	-32.70	QP	Р
12	9.2400	4.03	10.12	14.15	50.00	-35.85	AVG	Р

Report No.: FCC2005215-02 Page 12 of 81


Date: 2020-06-05



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

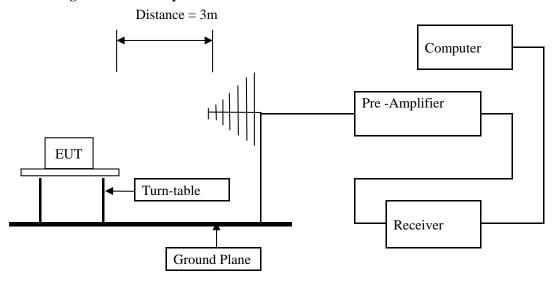

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC2005215-02 Page 13 of 81

Date: 2020-06-05



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. GFSK was the worse case because it has highest output power

Report No.: FCC2005215-02

Date: 2020-06-05



Page 14 of 81

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Page 15 of 81

Report No.: FCC2005215-02


Date: 2020-06-05



Test Figure:

H



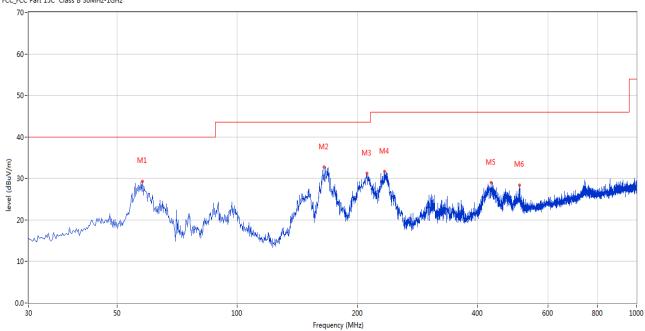


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	57.881	29.35	-12.61	40.0	-10.65	Peak	12.00	200	Н	Pass
2	165.039	32.69	-16.21	43.5	-10.81	Peak	18.00	200	Н	Pass
3	211.345	31.23	-13.68	43.5	-12.27	Peak	64.00	100	Н	Pass
4	233.649	31.67	-12.53	46.0	-14.33	Peak	75.00	100	Н	Pass
5	431.965	28.96	-8.09	46.0	-17.04	Peak	113.00	200	Н	Pass
6	509.788	28.45	-6.84	46.0	-17.55	Peak	241.00	200	Н	Pass

Page 16 of 81 Report No.: FCC2005215-02

Date: 2020-06-05



Test Figure:

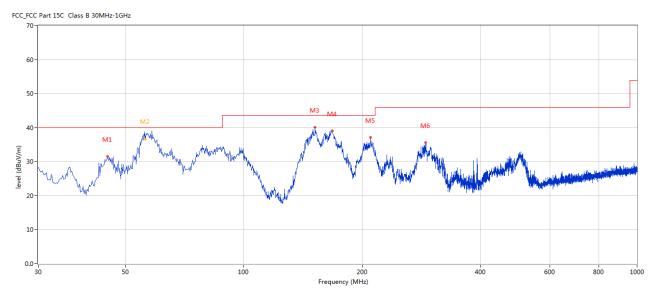

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	45.031	31.49	-11.41	40.0	-8.51	Peak	327.00	100	V	Pass
2	56.091	41.76	-12.00	40.0	1.76	Peak	0.00	123	V	N/A
2*	56.091	36.64	-12.00	40.0	-3.36	QP	0.00	123	V	Pass
3	151.705	40.14	-16.94	43.5	-3.36	Peak	47.00	100	V	Pass
4	167.948	39.04	-16.14	43.5	-4.46	Peak	360.00	100	V	Pass
5	210.132	37.09	-13.59	43.5	-6.41	Peak	341.00	100	V	Pass
6	290.137	35.58	-11.22	46.0	-10.42	Peak	360.00	100	V	Pass

Report No.: FCC2005215-02 Page 17 of 81

Date: 2020-06-05



Operation Mode: Transmitting under Low Channel (2402MHz)

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4804	-	Н	74(Peak)/ 54(AV)
4804	1	V	74(Peak)/ 54(AV)
7206	-	H/V	74(Peak)/ 54(AV)
9608	•	H/V	74(Peak)/ 54(AV)
12010	-	H/V	74(Peak)/ 54(AV)
14412	-	H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2441MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4882		Н	74(Peak)/ 54(AV)
4882		V	74(Peak)/ 54(AV)
7323		H/V	74(Peak)/ 54(AV)
9764		H/V	74(Peak)/ 54(AV)
12205		H/V	74(Peak)/ 54(AV)
14646		H/V	74(Peak)/ 54(AV)
17087		H/V	74(Peak)/ 54(AV)
19528		H/V	74(Peak)/ 54(AV)
21969		H/V	74(Peak)/ 54(AV)
24410		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Report No.: FCC2005215-02 Page 18 of 81

Date: 2020-06-05



Operation Mode: Transmitting under High Channel (2480MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		Н	74(Peak)/ 54(AV)
4960		V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

Page 19 of 81 Report No.: FCC2005215-02


Date: 2020-06-05



Please refer to the following test plots for details:

Low Channel: Vertical

FCC Part 15B Class B 1GHz-18GHz - 2

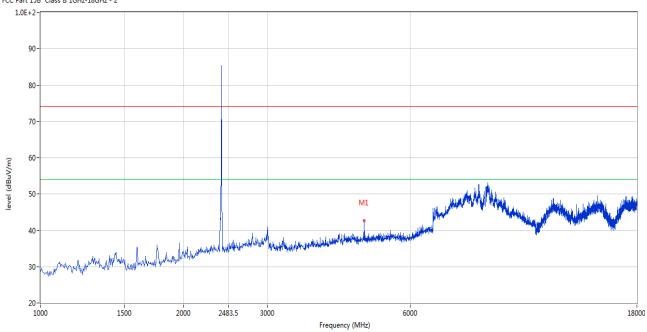


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4802.799	42.69	3.12	54.0	-11.31	Peak	318.00	100	V	Pass

Page 20 of 81 Report No.: FCC2005215-02

Date: 2020-06-05



Low Channel: Horizontal

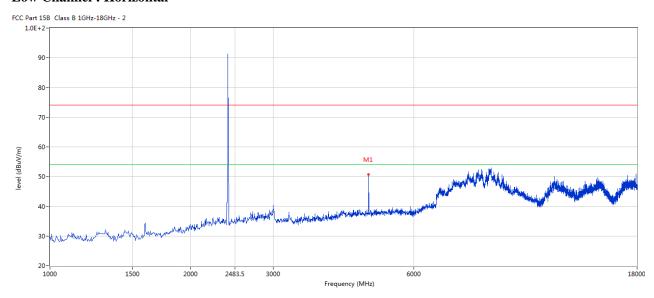


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4802.799	50.76	3.12	54.0	-3.24	Peak	243.00	100	Н	Pass

Page 21 of 81 Report No.: FCC2005215-02

Date: 2020-06-05



Middle Channel: Horizontal

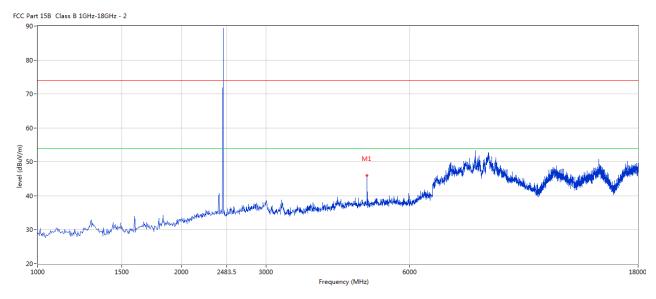


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	45.93	3.20	54.0	-8.07	Peak	242.00	100	Н	Pass

Report No.: FCC2005215-02 Page 22 of 81

Date: 2020-06-05



Middle Channel: Vertical

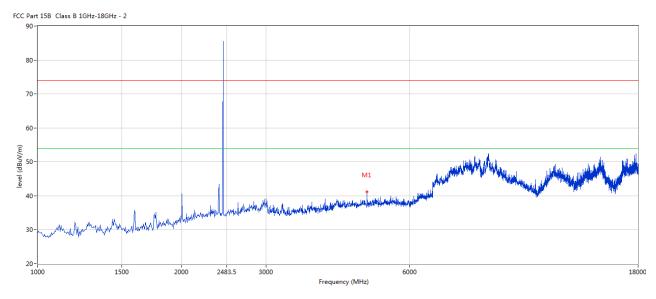

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4879.280	41.15	3.20	54.0	-12.85	Peak	351.00	100	V	Pass


Report No.: FCC2005215-02 Page 23 of 81

Date: 2020-06-05



High Channel: Horizontal

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

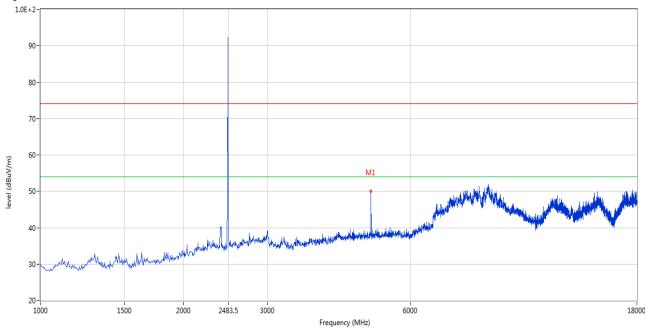


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4960.010	50.01	3.36	54.0	-3.99	Peak	240.00	100	Н	Pass

Report No.: FCC2005215-02 Page 24 of 81

Date: 2020-06-05



High Channel: Vertical

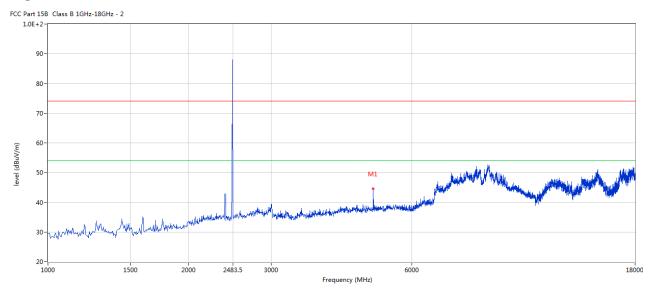

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	4960.010	44.48	3.36	54.0	-9.52	Peak	351.00	100	٧	Pass

Note: 1. for the radiated emissions above 18G and below 30MHz, it is the floor noise.

2. the measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Report No.: FCC2005215-02

Date: 2020-06-05



Page 25 of 81

7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

<u> </u>	oudinion of bit			
EUT	Blueto	ooth Receiver	Model	BTC21-RCA
Mode	Keep	Transmitting	Input Voltage	DC5V
Temperat	ure 2	4 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Minimum Limit (kHz)	Pass/ Fail
Low	2402	884		Pass
Middle	2441	878		Pass
High	2480	878		Pass

Page 26 of 81


Report No.: FCC2005215-02

Date: 2020-06-05



Test Figure:

1. Condition: Low Channel

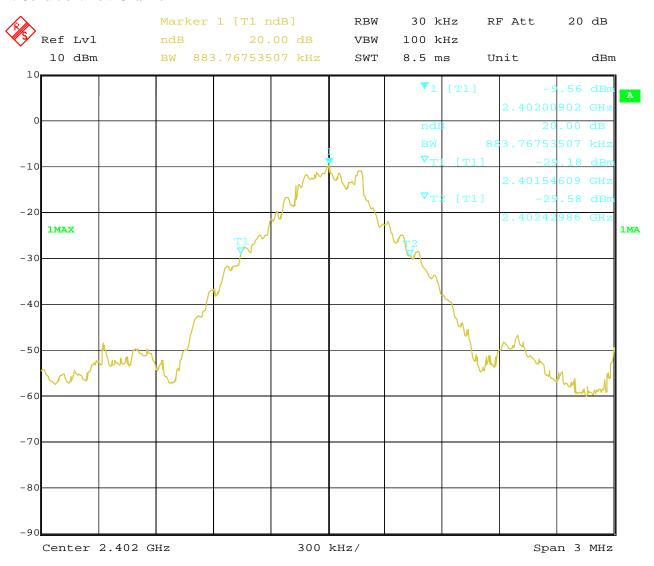

4.JUN.2020

17:07:06


Date:

Report No.: FCC2005215-02 Page 27 of 81

Date: 2020-06-05



2. Condition: Middle Channel

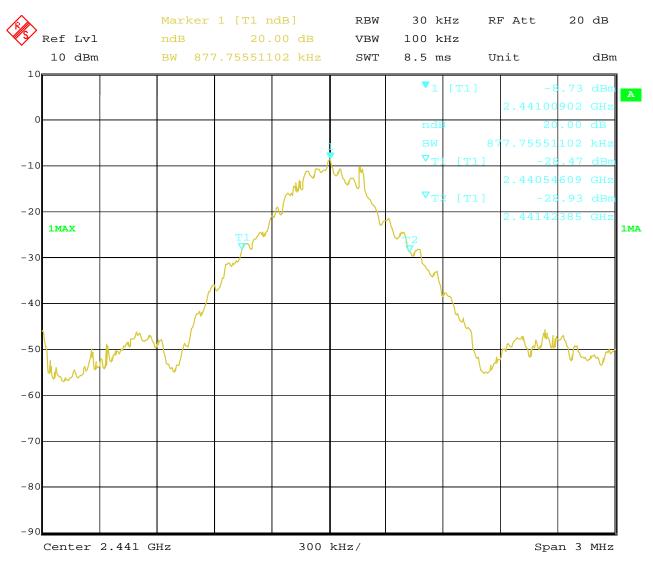


4.JUN.2020 17:06:38 Date:

Report No.: FCC2005215-02 Page 28 of 81

Date: 2020-06-05



3. High Channel

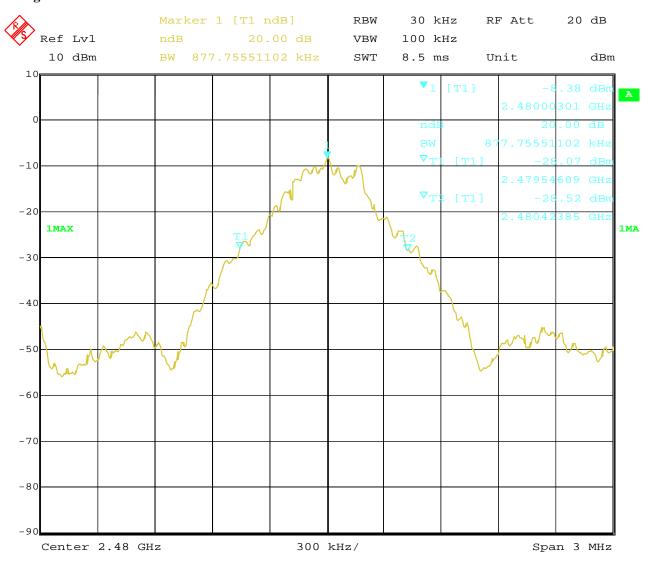

4.JUN.2020 17:06:06 Date:

Report No.: FCC2005215-02

Date: 2020-06-05



Page 29 of 81

Test Result

Type of Modulation: JI/4DQPSK

EUT	Bluet	tooth Receiver	Model	BTC21-RCA
Mode	Keep	Transmitting	Input Voltage	DC5V
Temperature	2	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	Frequency 20 dB Bandwidth (kHz)		Pass/ Fail
Low	2402	1208		Pass
Middle	2441	1251		Pass
High	2480	1287		Pass

Page 30 of 81


Report No.: FCC2005215-02

Date: 2020-06-05



Test Figure:

1. Condition: Low Channel

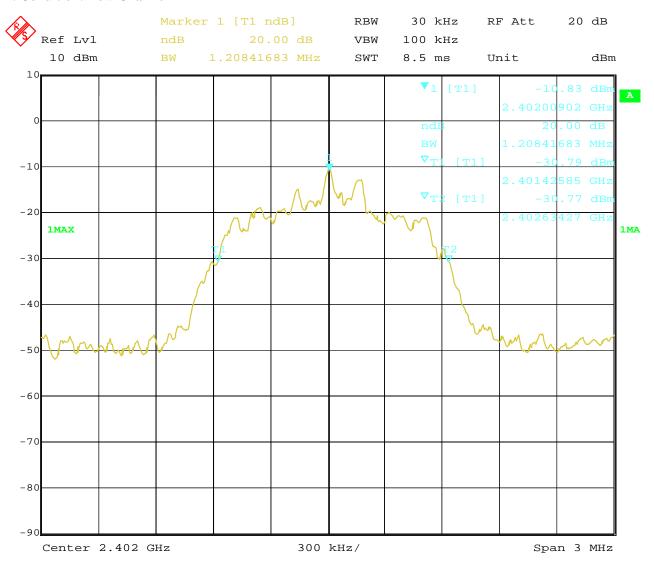


Date: 4.JUN.2020 16:50:07 Report No.: FCC2005215-02 Page 31 of 81

Date: 2020-06-05



2. Condition: Middle Channel

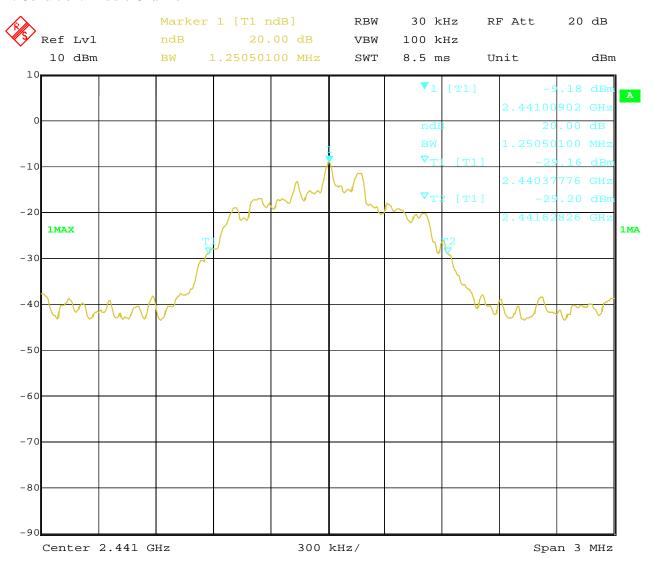


Date: 4.JUN.2020 16:49:31 Report No.: FCC2005215-02 Page 32 of 81

Date: 2020-06-05



3. High Channel

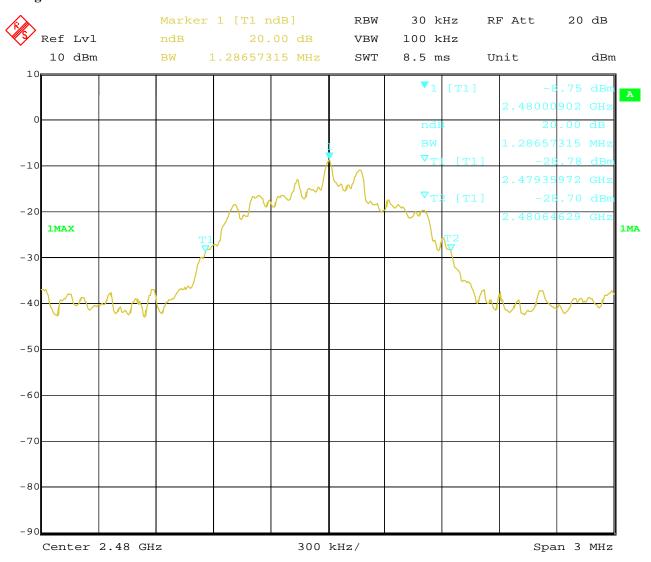

4.JUN.2020 Date: 16:47:59 Report No.: FCC2005215-02

Date: 2020-06-05



Page 33 of 81

Test Result

Type of Modulation: 8DPSK

EUT	Blueto	ooth Receiver	Model	BTC21-RCA
Mode	Keep	Transmitting	Input Voltage	DC5V
Temperature	24	4 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1208		Pass
Middle	2441	1257		Pass
High	2480	1293		Pass


Report No.: FCC2005215-02 Page 34 of 81

Date: 2020-06-05



Test Figure:

1. Condition: Low Channel

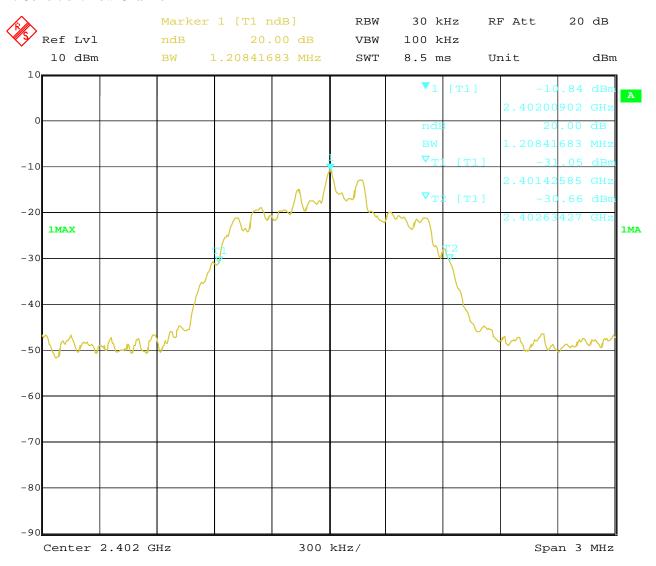


Date: 4.JUN.2020 16:50:37 Report No.: FCC2005215-02 Page 35 of 81

Date: 2020-06-05



2. Condition: Middle Channel

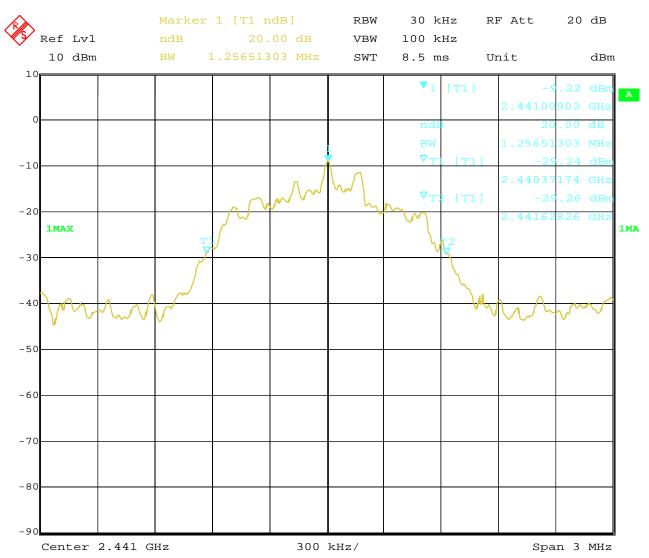


4.JUN.2020 16:48:56 Date:

Report No.: FCC2005215-02 Page 36 of 81

Date: 2020-06-05



3. High Channel

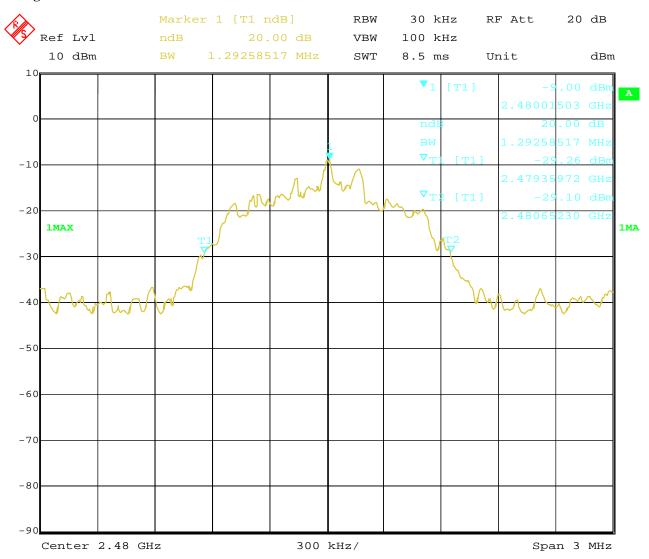

4.JUN.2020 16:48:19 Date:

Date: 2020-06-05



Page 37 of 81

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = Peak; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 38 of 81

Report No.: FCC2005215-02

Date: 2020-06-05



8.4Test Results

Type of Modulation: GFSK

EUT	Bluetooth Receiver		Model	BTC21-RCA
Mode	Keep Transmitting		Input Voltage	DC5V
Temperature	24 deg. C, H		Humidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-7.55	30	Pass
Middle	2441	-7.59	30	Pass
High	2480	-6.61	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

EUT		Bluetooth Receiver	Model	BTC21-RCA	
Mode		Keep Transmitting	Input Voltage	DC5V	
Temperature		24 deg. C,	Humidity	56% RH	
	Channel Frequency	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail	
	(MHz)	Peak	(dBm)		
Low	2402	-8.23	30	Pass	
Middle	2441	-7.29	30	Pass	
High	2480	-6.92	30	Pass	

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 39 of 81 Report No.: FCC2005215-02

Date: 2020-06-05



Type of Modulation: 8DPSK

EUT	Blı	netooth Receiver	Model	BTC21-RCA
Mode	Ke	Keep Transmitting		DC5V
Temperature	e	24 deg. C,		56% RH
Channel	Channel Frequency	Max. Power Output (dBm)	Peak Power Limit	Pass/ Fail
Chamier	(MHz)	Peak	(dBm)	
Low	2402	-8.30	30	Pass
Mid	2441	-7.35	30	Pass
High	2480 -7.02		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The **Peak** power was measured

Date: 2020-06-05



Page 40 of 81

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Date: 2020-06-05




9.4Test Result

Type of Modulation: GFSK

EUT	Bluetooth Reco	Model	B	ГС21-RCA	
Mode	Hopping On In		Input Voltage		DC5V
Temperature	24 deg. C,	, Humidity			56% RH
Carrier Frequency Separation			Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3	of the 20 dB ban	dwidth	Pass

Test Plots

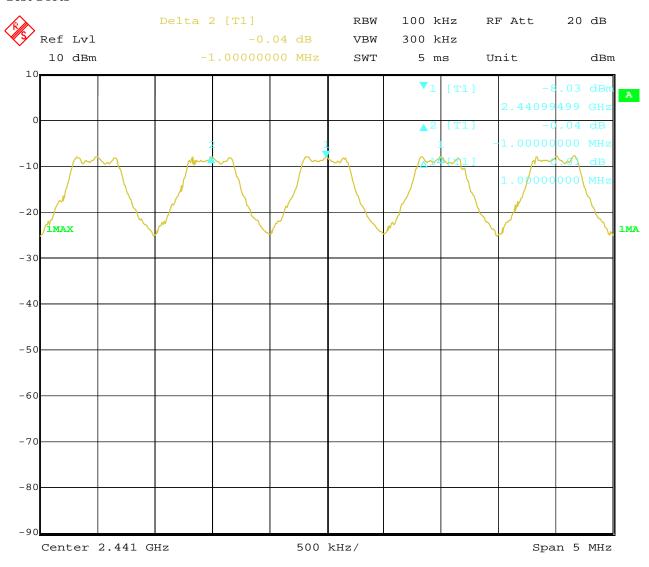

4.JUN.2020 Date: 14:42:58

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 42 of 81

Date: 2020-06-05




Type of Modulation: $\sqrt{J/4DQPSK}$

Report No.: FCC2005215-02

EUT	Bluetooth Reco	Model	В	TC21-RCA	
Mode	Hopping O	Input Voltage		DC5V	
Temperature	24 deg. C,		Humidity		56% RH
Carrier I	Frequency Separation		Limit		Pass/ Fail
	1.000MHz	≥ 25 kHz or 2	2/3 of 20 dB bandy	width	Pass

Test Plots

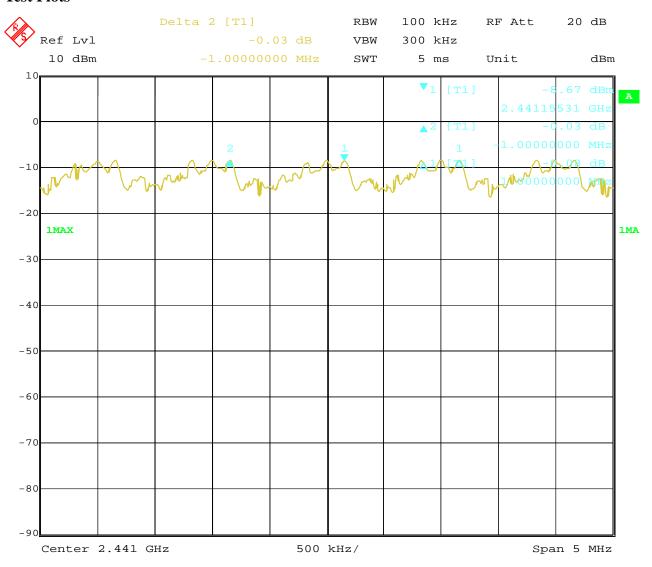

4.JUN.2020 15:42:22

Page 43 of 81

Report No.: FCC2005215-02


Date: 2020-06-05



Type of Modulation: 8DPSK

EUT	Bluetooth Reco	Model	В	TC21-RCA	
Mode	Hopping O	Hopping On In		DC5V	
Temperature	24 deg. C,		Humidity	56% RH	
Carrier I	Carrier Frequency Separation				Pass/ Fail
	1.000MHz	≥ 25 kHz or 2/3 of 20 dB bandwidth			Pass

Test Plots

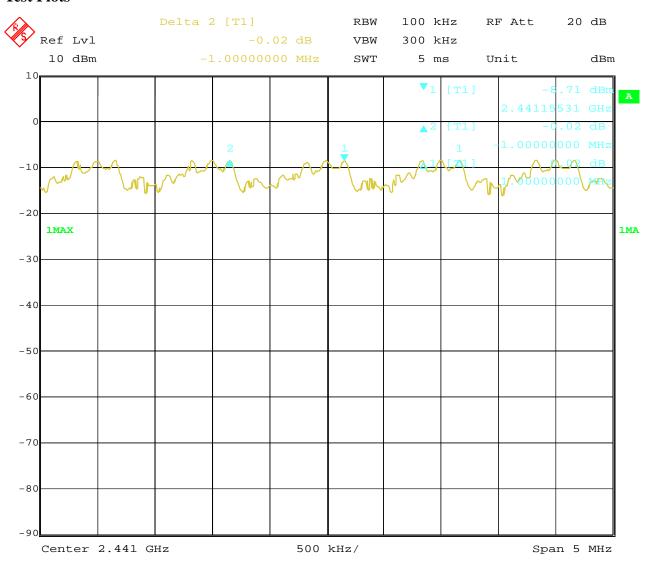

4.JUN.2020 15:31:43

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-06-05



Page 44 of 81

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Date: 2020-06-05




10.4Test Result

Type of Modulation: GFSK

EUT	Bluet	tooth Receiver	Model	В	TC21-RCA
Mode	Н	opping On	Input Voltage	DC5V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Frequency Number of hopping cha		oing channels	Limit	Pass/ Fail	
2402-2480MHz		79		≥ 15	Pass

Test Plot

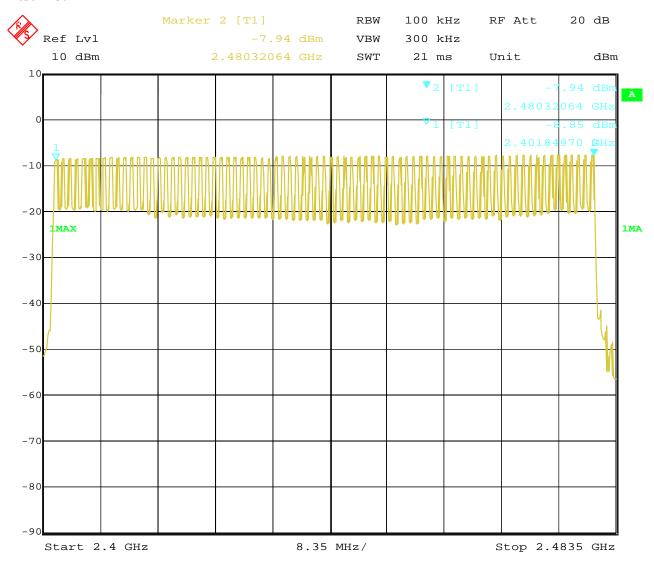

Date: 4.JUN.2020 14:26:39

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 46 of 81

Report No.: FCC2005215-02


Date: 2020-06-05



Type of Modulation: $\sqrt{J/4DQPSK}$

EUT	Bluetooth Receiver		Mode	Model		BTC21-RCA
Mode	Hopping On		Input Volta	nput /oltage		DC5V
Temperature	24 deg. C,		Hum	idity	56% RH	
Operating Frequency		Number of hopping channels		Lir	nit	Pass/ Fail
2402-2480MHz		79		<u>></u>	15	Pass

Test Plot

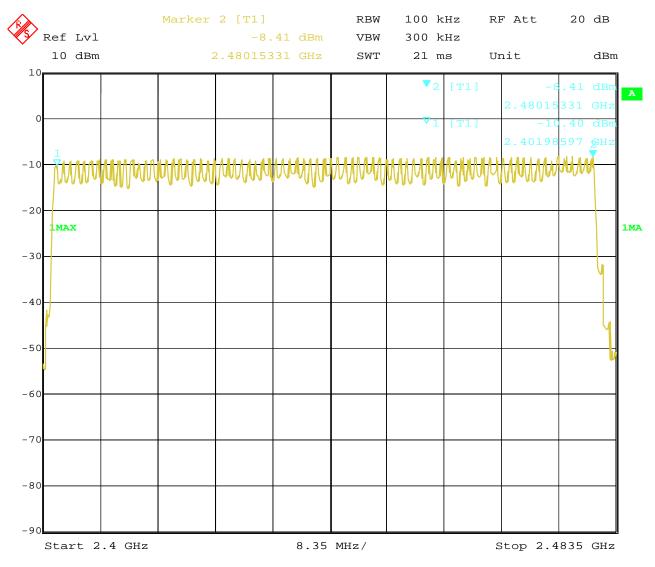

Date: 4.JUN.2020 16:25:29

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Report No.: FCC2005215-02 Page 47 of 81


Date: 2020-06-05



Type of Modulation: 8DPSK

EUT	Bluetooth Receiver		Model		BTC21-RCA	
Mode	Н	Hopping On		oltage		DC5V
Temperature	2	4 deg. C,	Humidi	ity		56% RH
Operating Frequency		Number of hopp channels	oing	Liı	mit	Pass/ Fail
2402-2480MI	Hz	79		<u> </u>	15	Pass

Test Plot

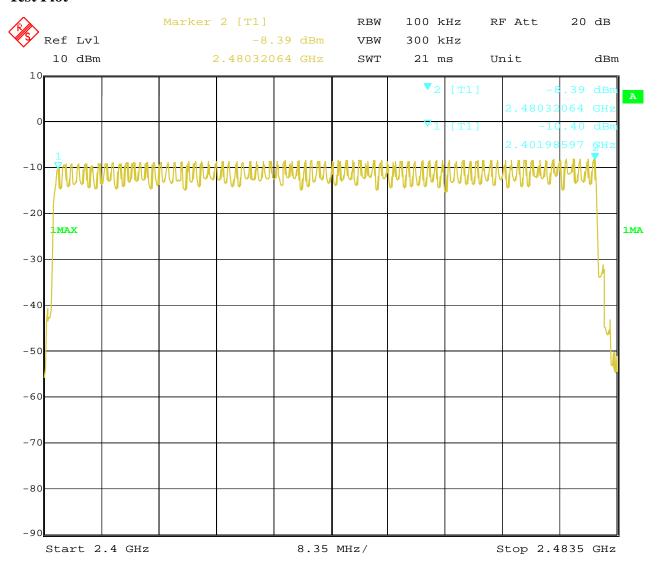

4.JUN.2020 16:20:16

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Date: 2020-06-05



Page 48 of 81

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geqslant RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Report No.: FCC2005215-02 Page 49 of 81

Date: 2020-06-05



11.4 Test Result

Type of Modulation: GFSK

EUT		Bluetooth Receiver		ВТ	C21-RCA				
Mode	Keep Tr	ansmitting	Input Voltage		DC5V				
Temperatur	re 24 d	leg. C, Humidity		5	56% RH				
Channel	Reading	Hoping	Hoping Rate		Limit				
	DH5								
Middle	2.986ms	266.66	7 hop/s	0.319s	0.4s				
			DH3						
Middle	1.723ms	400 h	nop/s	0.276s	0.4s				
	DH1								
Middle	0.461ms	800 l	nop/s	0.148s	0.4s				

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 50 of 81


Report No.: FCC2005215-02

Date: 2020-06-05



Test Plots:

DH5

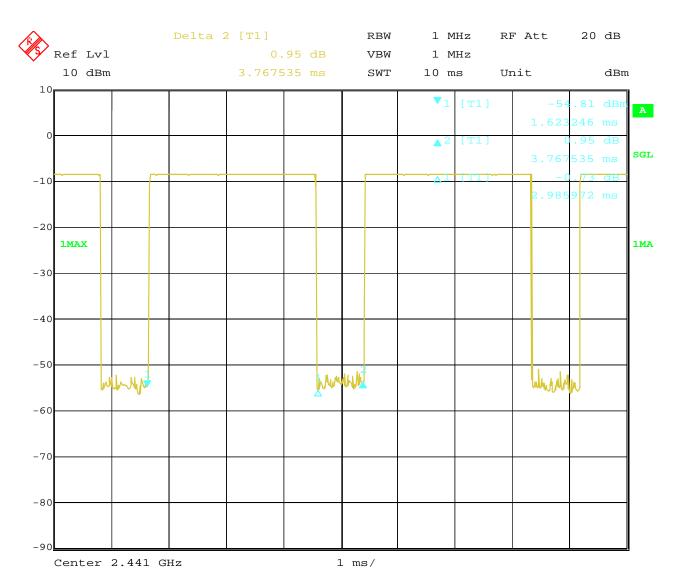


4.JUN.2020 17:00:27 Date:

Report No.: FCC2005215-02 Page 51 of 81

Date: 2020-06-05



DH3

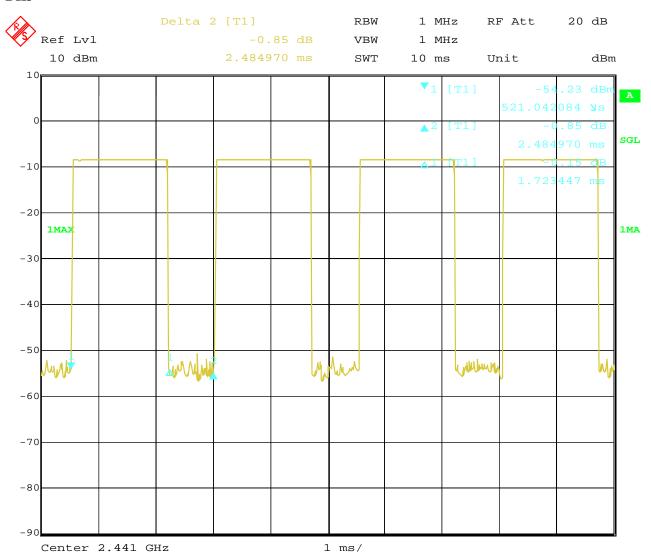


4.JUN.2020 Date: 16:59:45 Report No.: FCC2005215-02 Page 52 of 81

Date: 2020-06-05



DH1

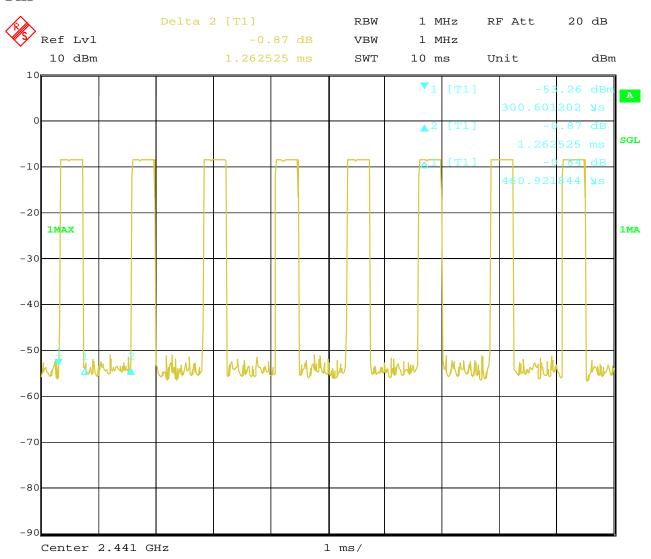

4.JUN.2020 Date: 16:58:47 Report No.: FCC2005215-02 Page 53 of 81

Date: 2020-06-05



Test Result

EUT	Bluetoot	Bluetooth Receiver		BTC	C21-RCA				
Mode	Keep Tr	ansmitting	Input Voltage	DC5V					
Temperature	e 24 d	deg. C, Humidity		24 deg. C,		56% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit				
	2DH5								
Middle	3.006ms	266.667	7 hop/s	0.321s	0.4s				
			2DH3						
Middle	1.743ms	400 h	nop/s	0.279s	0.4s				
	2DH1								
Middle	0.501ms	800 h	nop/s	0.160s	0.4s				

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 54 of 81


Report No.: FCC2005215-02

Date: 2020-06-05



Test Plots:

2DH5

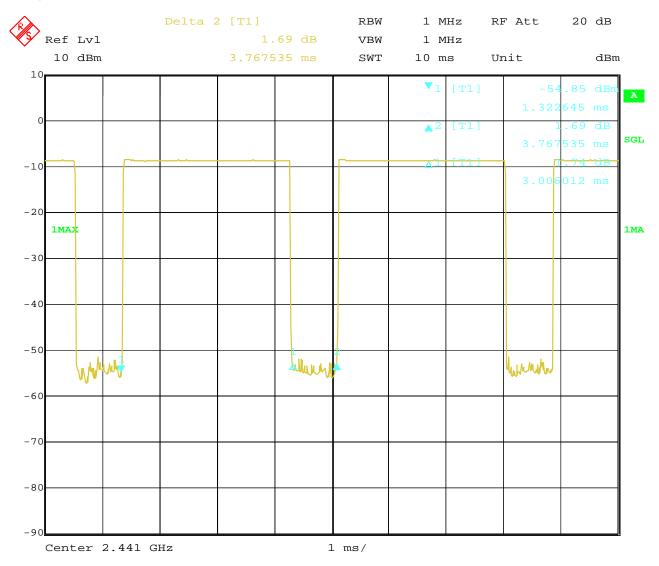

4.JUN.2020

16:57:46


Date:

Report No.: FCC2005215-02 Page 55 of 81

Date: 2020-06-05



2DH3

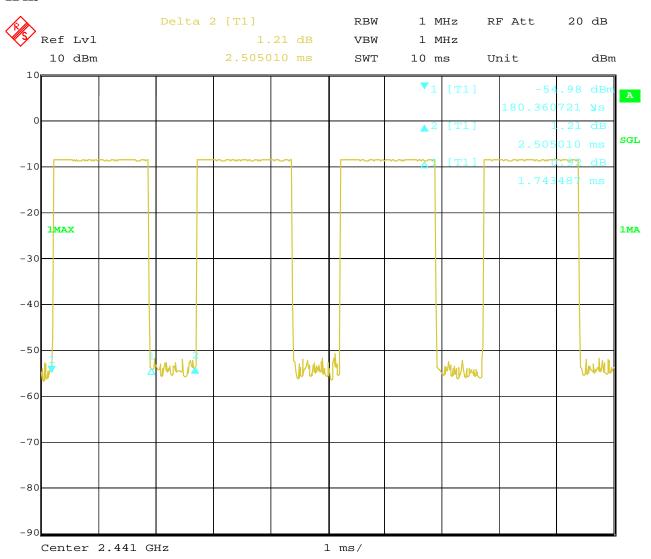


4.JUN.2020 Date: 16:56:07 Report No.: FCC2005215-02 Page 56 of 81

Date: 2020-06-05



2DH1

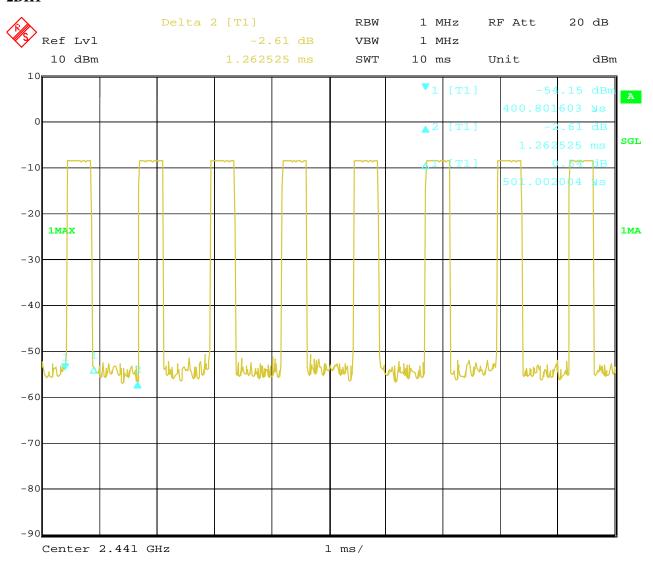

4.JUN.2020 Date: 16:55:22 Report No.: FCC2005215-02 Page 57 of 81

Date: 2020-06-05



Type of Modulation: 8DPSK

EUT	Bluetoot	Bluetooth Receiver		BT	C21-RCA				
Mode	Keep Tra	ansmitting	Input Voltage		DC5V				
Temperatur	re 24 d	eg. C,	Humidity	5	66% RH				
Channel	Reading	Hoping	g Rate	Actual	Limit				
	3DH5								
Middle	2.986ms	266.667	7 hop/s	0.319s	0.4s				
			3DH3						
Middle	1.764ms	400 h	nop/s	0.282s	0.4s				
	3DH1								
Middle	0.501ms	800 h	nop/s	0.160s	0.4s				

Actual = Reading × (Hopping rate / Number of channels) × Test period, Test period = 0.4 [seconds / channel] × 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 µs with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Page 58 of 81


Report No.: FCC2005215-02

Date: 2020-06-05



Test Plots:

3DH5

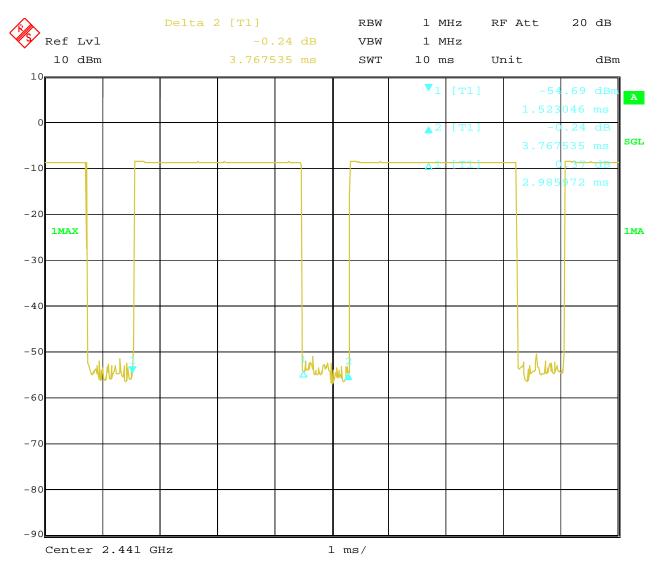


4.JUN.2020 16:57:17 Date:

Report No.: FCC2005215-02 Page 59 of 81

Date: 2020-06-05



3DH3

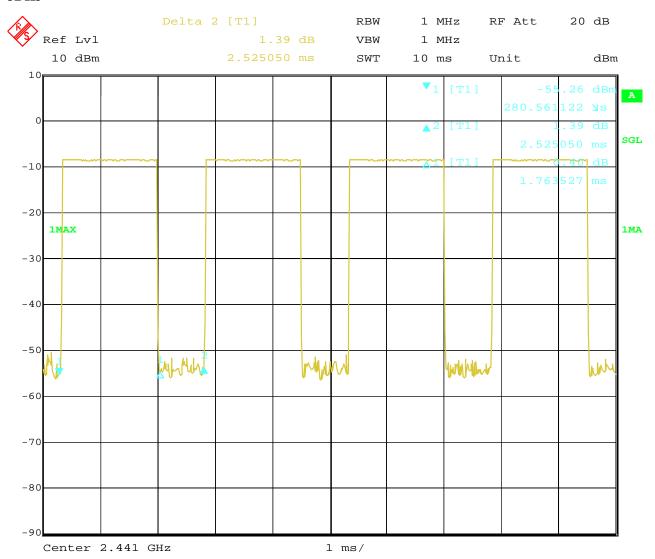


4.JUN.2020 Date: 16:56:29 Report No.: FCC2005215-02 Page 60 of 81

Date: 2020-06-05



3DH1

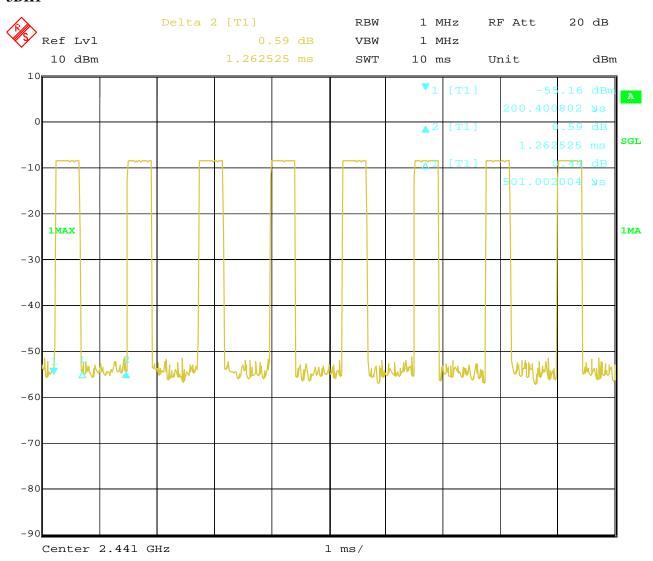

4.JUN.2020 Date: 16:55:02


Date: 2020-06-05



Page 61 of 81

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100kHz, VBW=300 kHz. A conducted measurement used

Note: For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 62 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Keeping Transmitting	Input Voltage	DC5V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

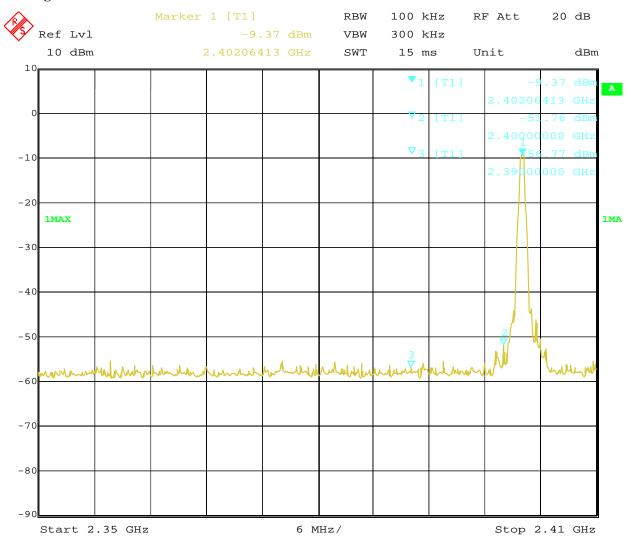

Date: 4.JUN.2020 17:07:40

Page 63 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: GFSK

12.4 Band Edge Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Keeping Transmitting	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

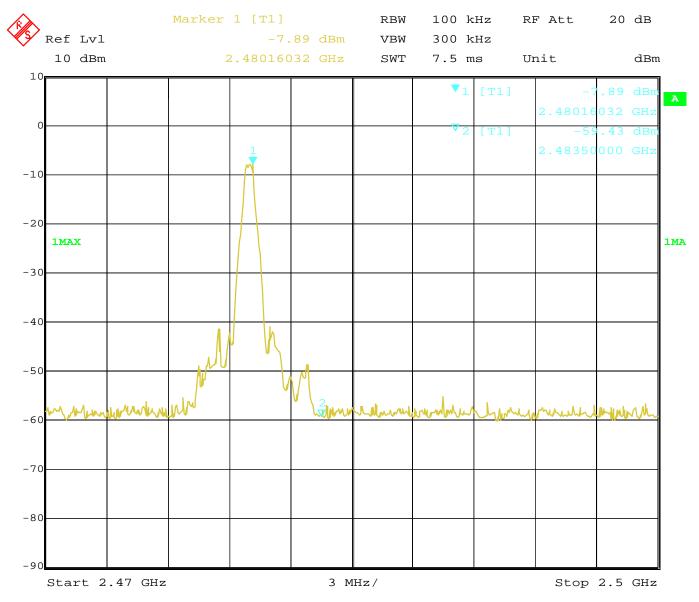

4.JUN.2020 17:09:39 Date:

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 64 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: GFSK

Band Edge Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Hopping On	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

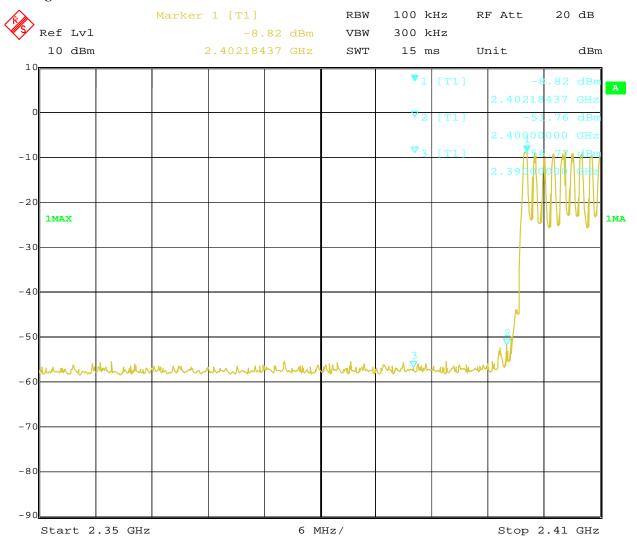

Date: 4.JUN.2020 17:08:09

Page 65 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: GFSK

Band Edge Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Hopping On	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

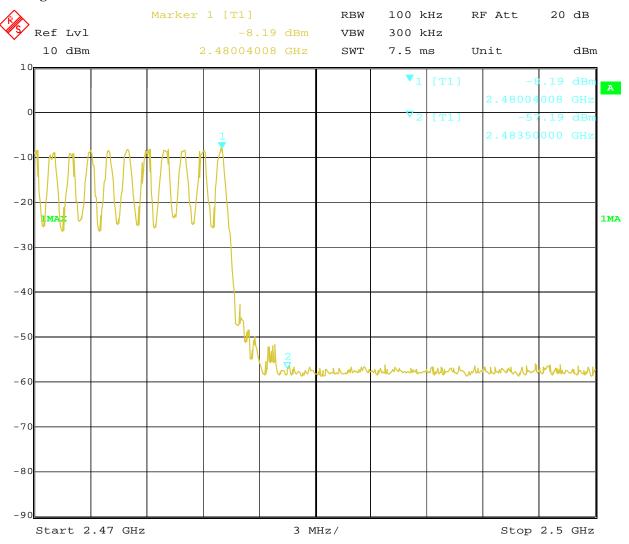

4.JUN.2020 17:09:03 Date:

Date: 2020-06-05




Type of Modulation: $\sqrt{1/4}$ DQPSK

12.4 Out of Band Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Keeping Transmitting	Input Voltage	DC5V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

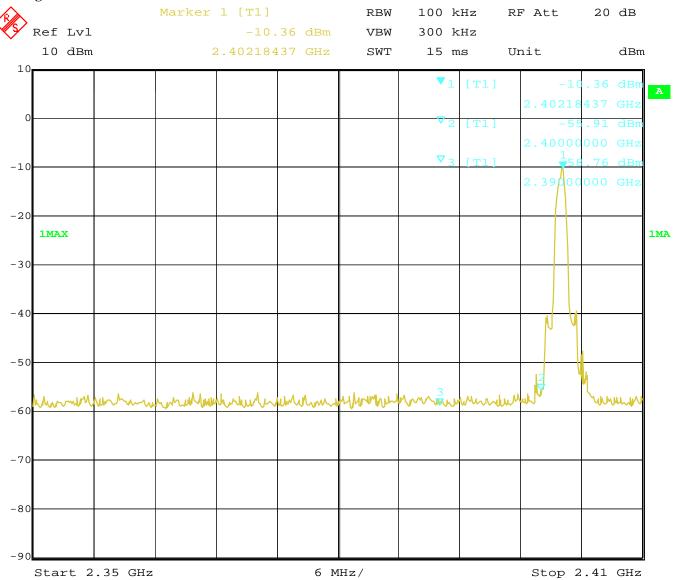

Date: 4.JUN.2020 16:46:19

Page 67 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: Л/4DQPSK

Band Edge Test Result 12.4

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Keeping Transmitting	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

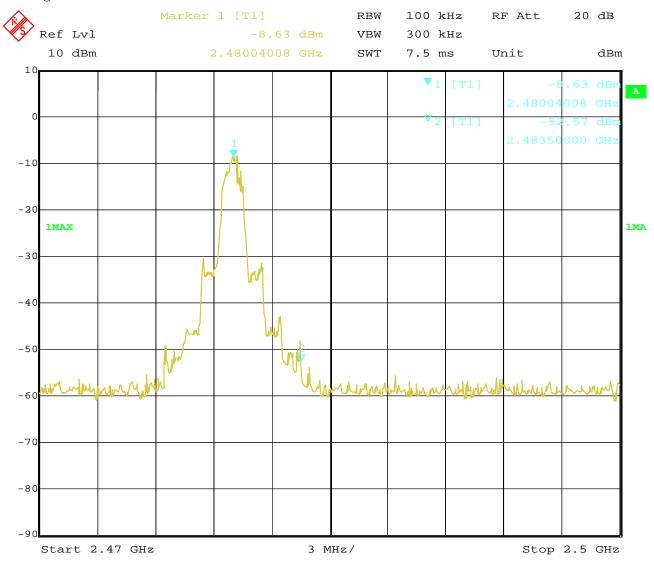

Date: 4.JUN.2020 16:47:27

Page 68 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Hopping On	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

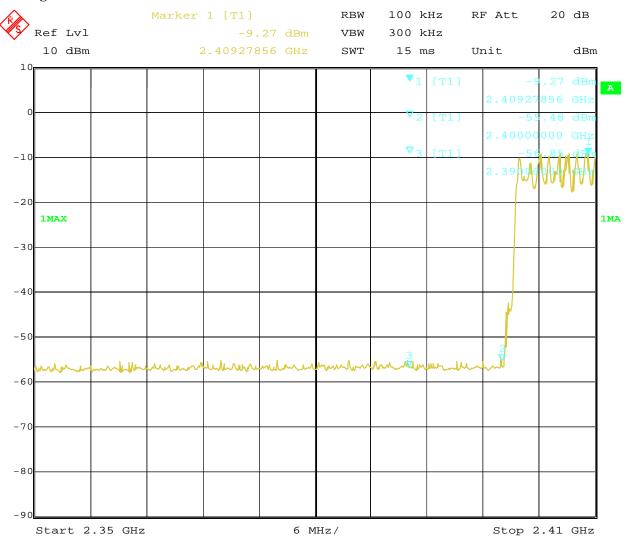

Date: 4.JUN.2020 16:45:48

Page 69 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: $\pi/4DQPSK$

Out of Band Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Hopping On	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

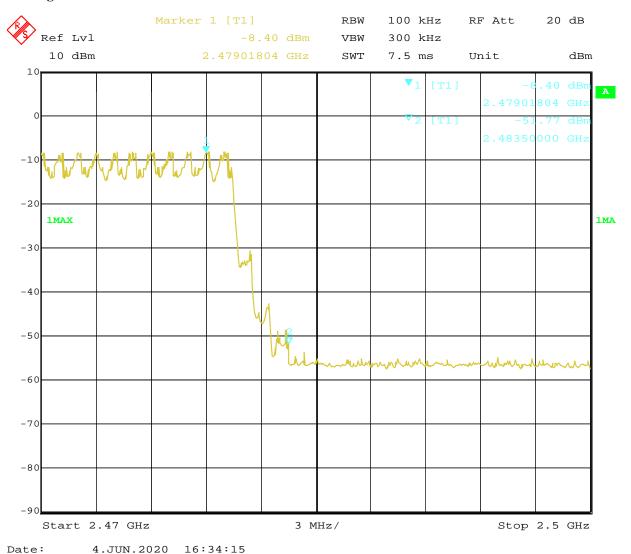

Page 70 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Keeping Transmitting	Input Voltage	DC5V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

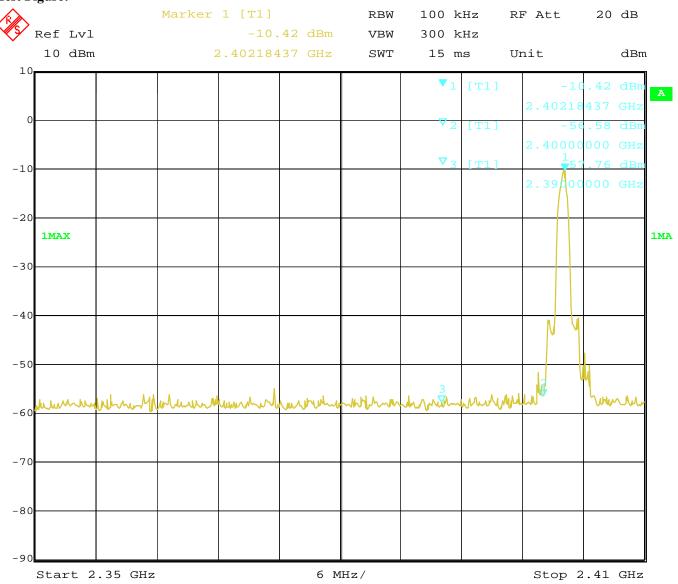

Date: 4.JUN.2020 16:46:38

Page 71 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Bluetooth Re	eceiver	Test Mode:	BTC21-RCA
Mode	Keeping Trans	smitting	Input Voltage	DC5V
Temperature	24 deg.	C,	Humidity	56% RH
Test Result:	Pass		Detector	PK
The Max. FS in	PK (dBμV/m)	44.8		74(dBμV/m)
Restrict Band	AV(dBμV/m)		Limit	54(dBµV/m)
2483.5MHz				

Test Figure:

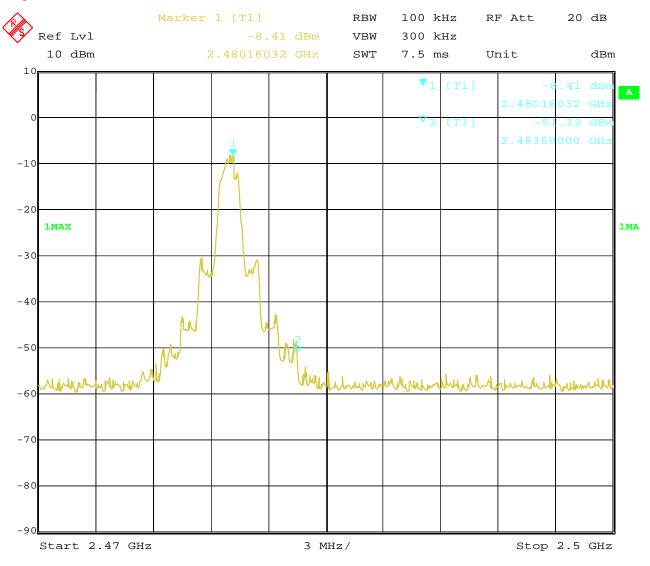

4.JUN.2020 Date: 16:47:16

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

Page 72 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Hopping On	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

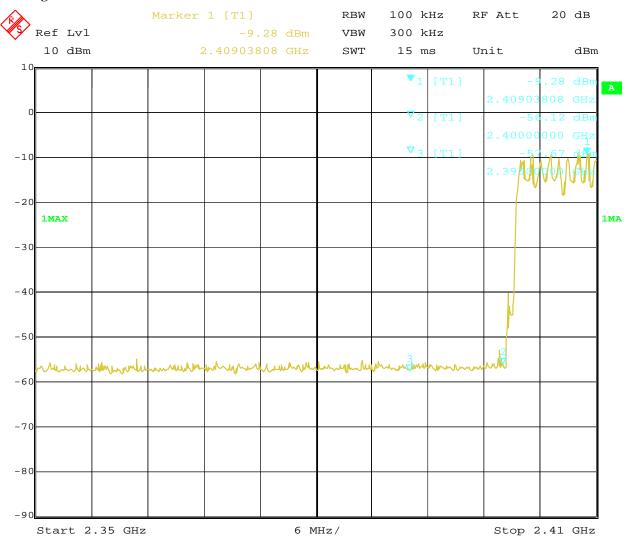

Date: 4.JUN.2020 16:43:45

Page 73 of 81

Report No.: FCC2005215-02

Date: 2020-06-05




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Bluetooth Receiver	Test Mode:	BTC21-RCA
Mode	Hopping On	Input Voltage	DC5V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

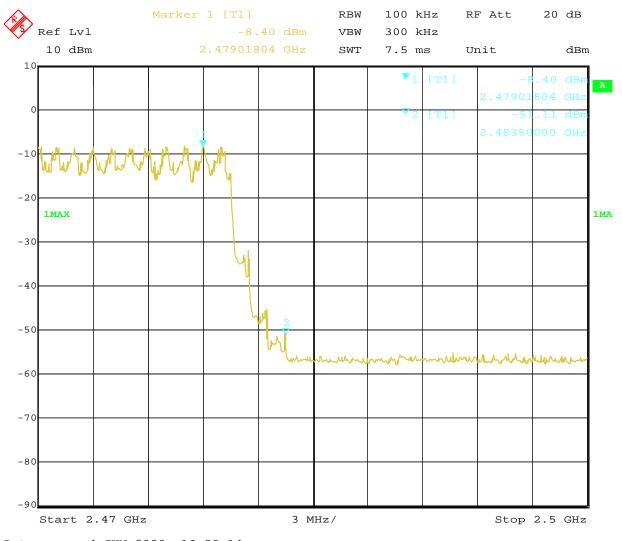

4.JUN.2020 16:38:14 Date:

Page 74 of 81 Report No.: FCC2005215-02

Date: 2020-06-05



Pastrict Rand Massurament

2.4	Restrict B	and Measur	ement								
	EUT	Bluetooth Receiver			Mo		BTC21-RCA				
Mode		Keep Transmitting			Input V	/oltage	DC5V				
Te	mperature	24 deg. C,		· ,	Humidity			5	6% RH		
Те	est Result:					GFSK					
	.5B Class B 1GHz-18GH	z - 2									
1.0E+	2-										
9(0-										
									/ \		
80	0-								+		
									+		
70	0-								/		
(m//m) 60	0-										
level (dBuV/m)											
<u>o</u> 50	0-									$\overline{}$	
							M1	and the state of t			
40							Market Comment of the	A PARTY OF THE PROPERTY OF			
			aleman de la companie	and the state of t		e dien frankrieben bei geber geber geber geber geber geben der geber geben der geber geben der g	ľ			THE REAL PROPERTY.	
	0- 2350									2410	
					Frequency (N	IHz)					
-											
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict	
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)			
										1_	


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2390.520	41.54	-3.53	54.0	-12.46	Peak	211.00	100	Н	Pass
	•	•	•						•	

Report No.: FCC2005215-02 Page 75 of 81

Date: 2020-06-05



12.4 Restrict Band Measurement

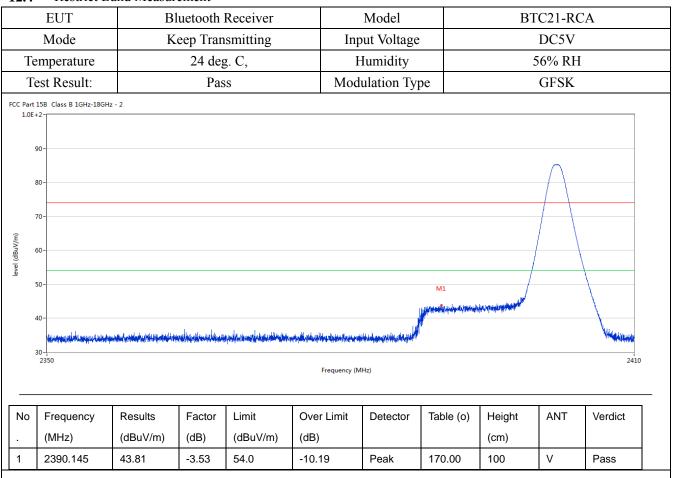

Page 76 of 81 Report No.: FCC2005215-02

Date: 2020-06-05



12.4 Restrict Band Measurement

EU	Γ	Bluet	ooth Receive	er	Model			BTC	21-RCA			
Mode Temperature		Keep Transmitting 24 deg. C,			Input Voltage Humidity			DC5V				
								56% RH				
Test Re	esult:		Pass		Modulation	Type		G	FSK			
CC_FCC Part 15B (Class B 1GHz-18	3GHz - 2										
90-												
80-												
70-												
E 60-				· · · · · · · · · · · · · · · · · · ·								
60 - Ggnn/one			/	1	W							
					^N C _M							
ha della		And the second			A STATE OF THE PARTY OF THE PAR							
30-												
20-				24	83.5					250		
				-	Frequency (MHz)							
		Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict		
No. Fre	equency			l	1	i	l	1	1			
	equency Hz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)				

Report No.: FCC2005215-02 Page 77 of 81

Date: 2020-06-05



12.4 Restrict Band Measurement

EUT Mode		Bluetooth Receiver Keep Transmitting			M	Model			BTC21-RCA			
					Input Voltage			DC5V				
Te	mperature	24 deg. C,			Humidity			56% RH				
Те	st Result:		Pass		Modula	Modulation Type GFSK						
CC Part 1	5B Class B 1GHz-18GH	z - 2										
90)-											
80)-		/									
7()-											
level (dbuv/m))-		-/-	\								
50)-											
40)-											
	had a large and in the large and	WHILE STATE SHE HAVE BEEN STATE OF THE SECOND SHE				had the state of t	to the state of the	independent in the last contract		Marie Landy Amerik		
3(2483.5					250		
					Frequency (N	/IHz)						
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict		
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)				
	2483.5	50.50	-3.57	54.0	-3.50	Peak	356.00	100	V	Pass		

Note: 1. For Restricted band test, all modulations have been tested ,only the worst case GFSK was reported.

2. The measured PK radiated emissions level less than the AV limit, so no necessary to take down the AV result

Date: 2020-06-05



Page 78 of 81

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

Dipole antenna with revised polarity antenna connector. The gain of the antennas is 2.0dBi.

Report No.: FCC2005215-02 Page 79 of 81

Date: 2020-06-05




14.0 FCC ID Label

FCC ID: 2ABFFBTC21RCA

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

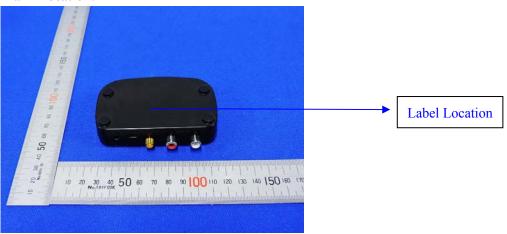

Page 80 of 81

Report No.: FCC2005215-02

Date: 2020-06-05



15.0 Photo of testing


Conducted Emission Test Setup:




Date: 2020-06-05



Radiated Emission Test Setup:

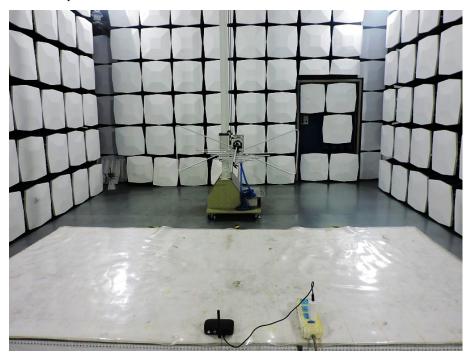

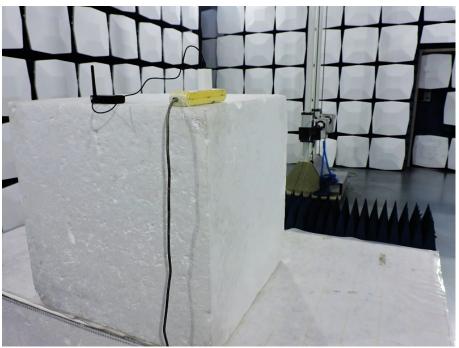

Photographs - EUT

Please see test report EMC2005215-01

End of Report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the propert. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to