

MEASUREMENT 29

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

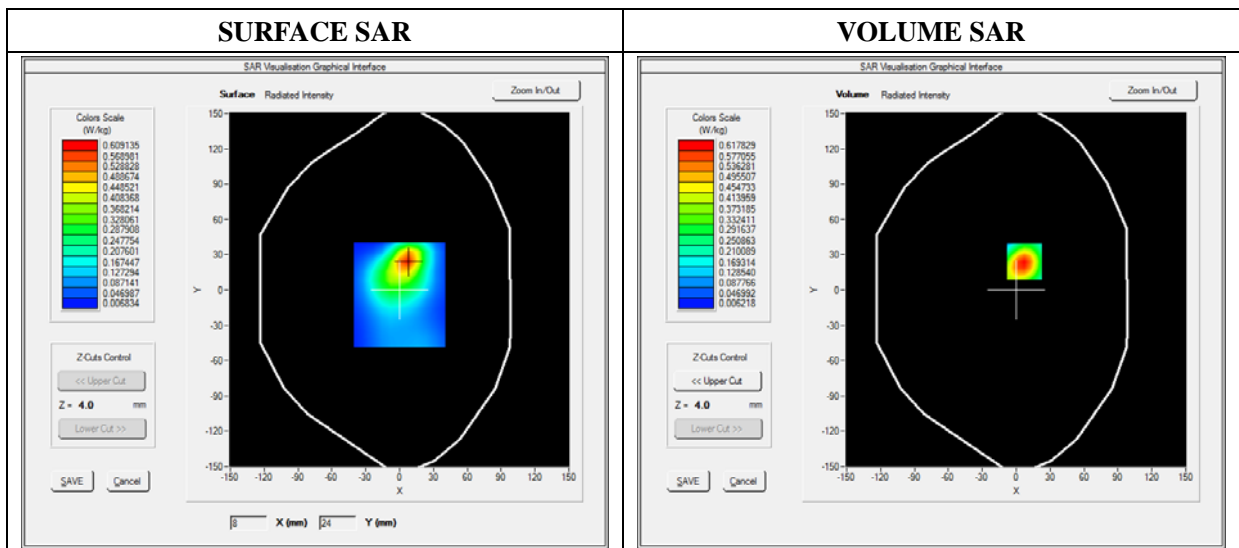

Maximum location: X=10.00, Y=-1.00

SAR 10g (W/Kg)	0.324558
SAR 1g (W/Kg)	0.459850

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4135	0.3452	0.2705	0.1957

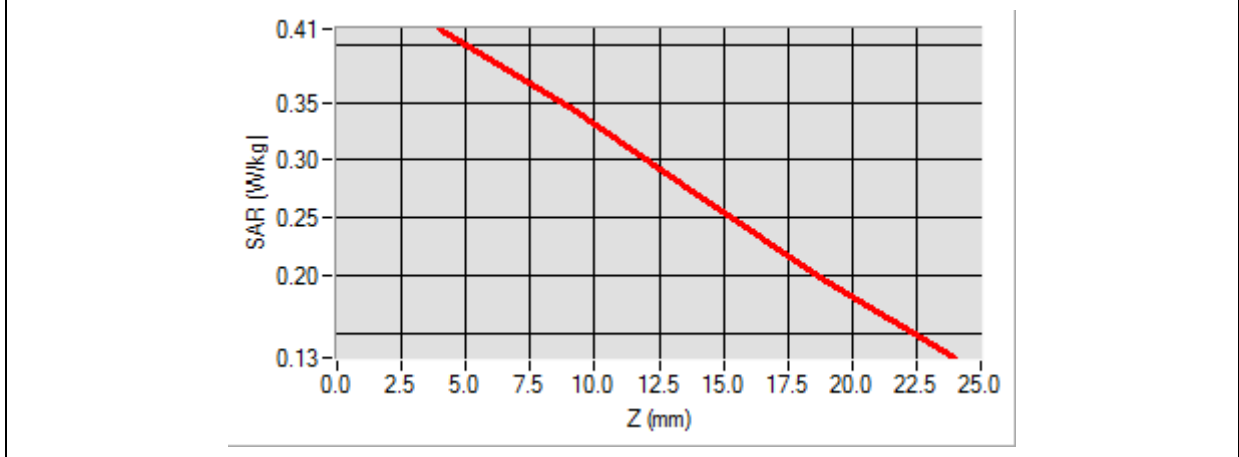

3D screen shot	Hot spot position

MEASUREMENT 30

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.960000
Power Variation (%)	0.800000
Ambient Temperature	21.1
Liquid Temperature	21.3

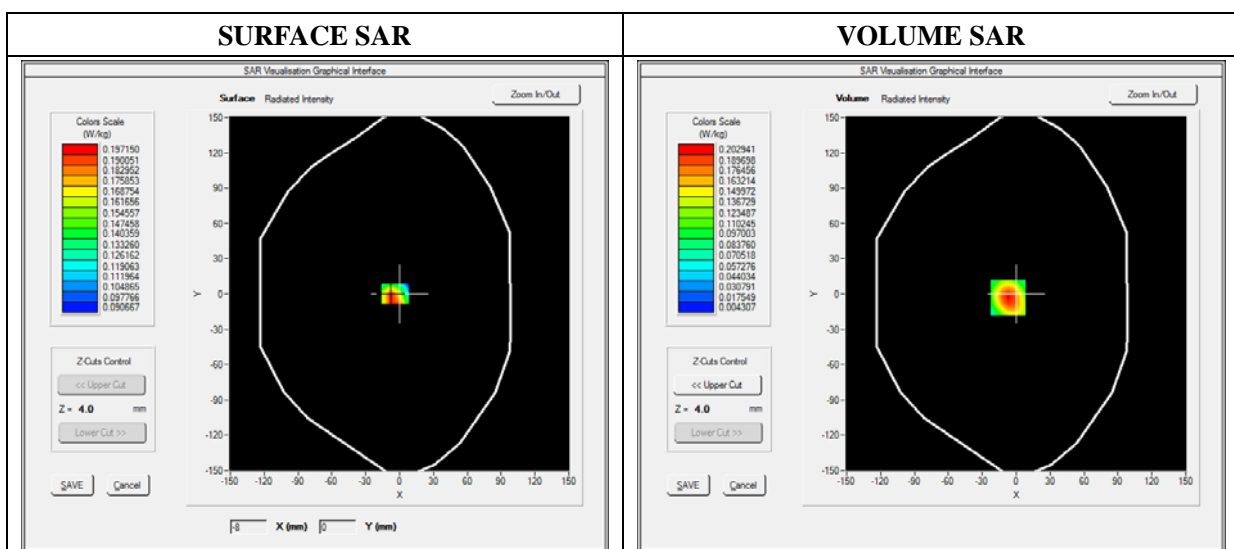

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.097938
SAR 1g (W/Kg)	0.186995

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2029	0.1076	0.0561	0.0298

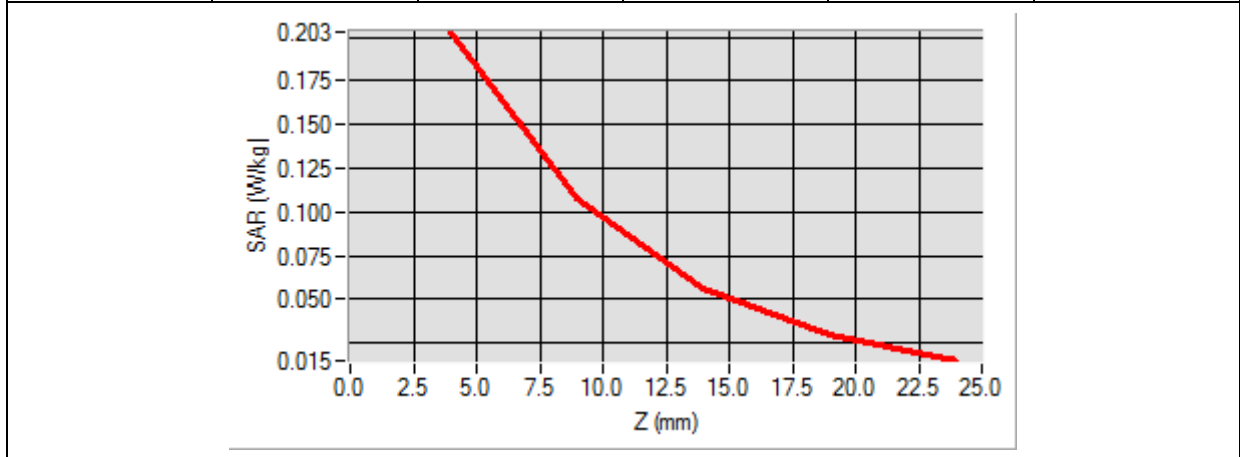

3D screen shot	Hot spot position

MEASUREMENT 31

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

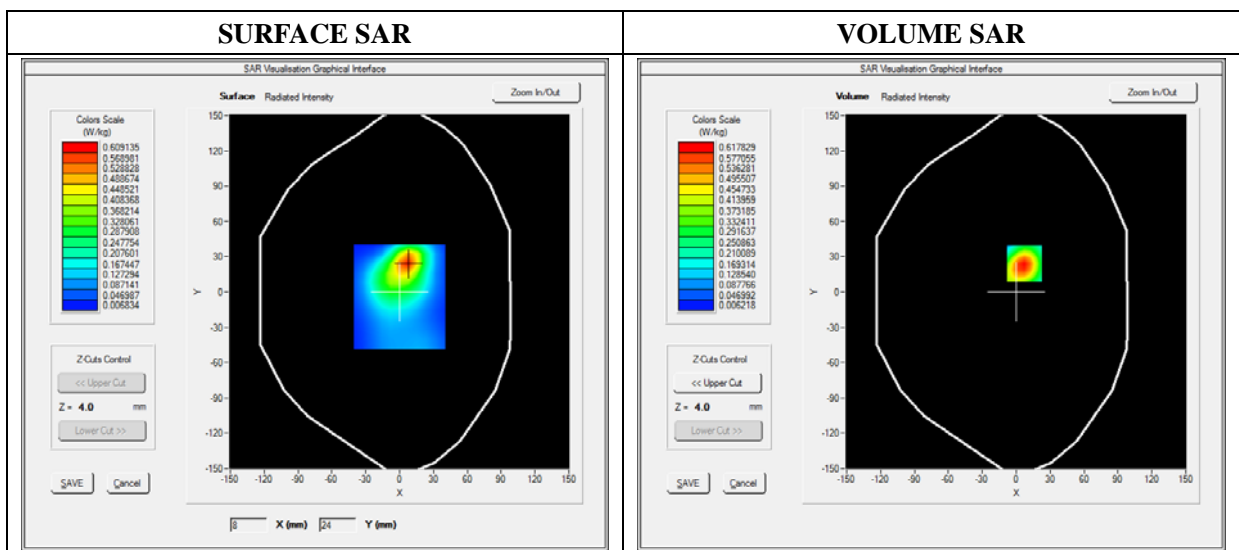

Maximum location: X=-56.00, Y=-32.00

SAR 10g (W/Kg)	0.079966
SAR 1g (W/Kg)	0.103557

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1063	0.0859	0.0706	0.0591

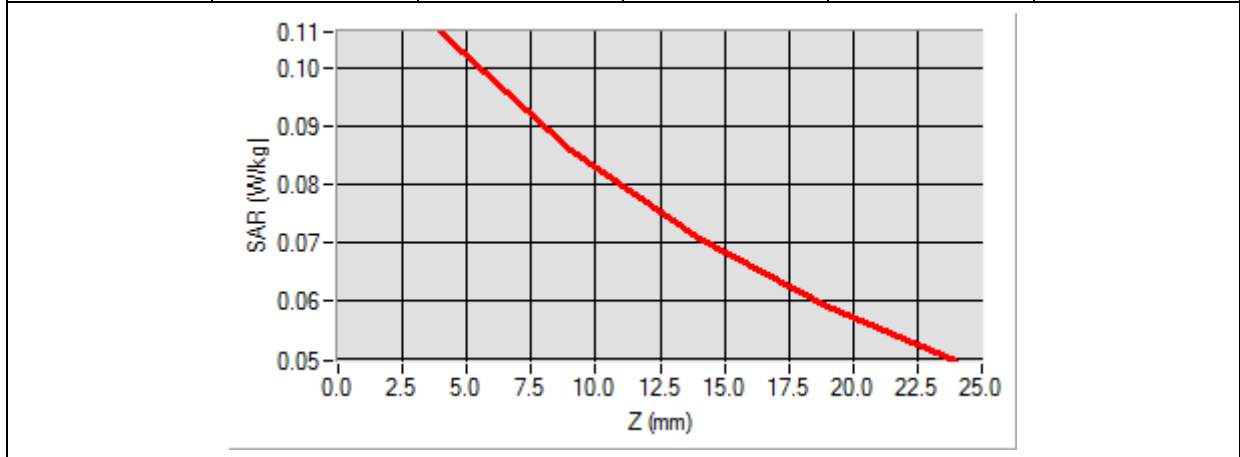

<p>3D screen shot</p>	<p>Hot spot position</p>

MEASUREMENT 33

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

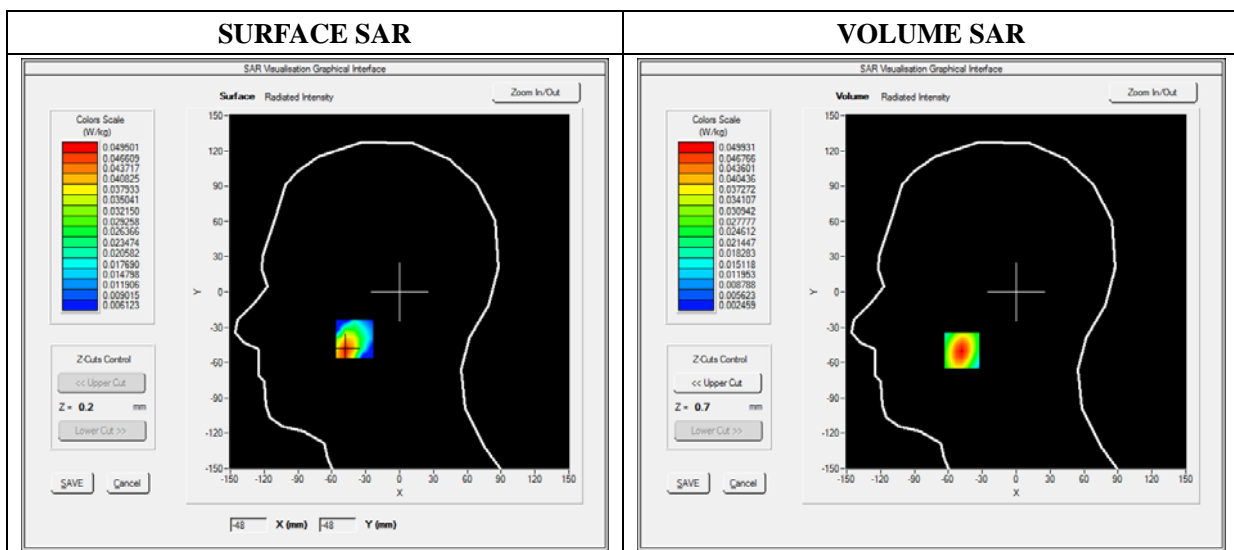

Maximum location: X=-48.00, Y=-50.00

SAR 10g (W/Kg)	0.024562
SAR 1g (W/Kg)	0.045257

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0442	0.0329	0.02219	0.01128

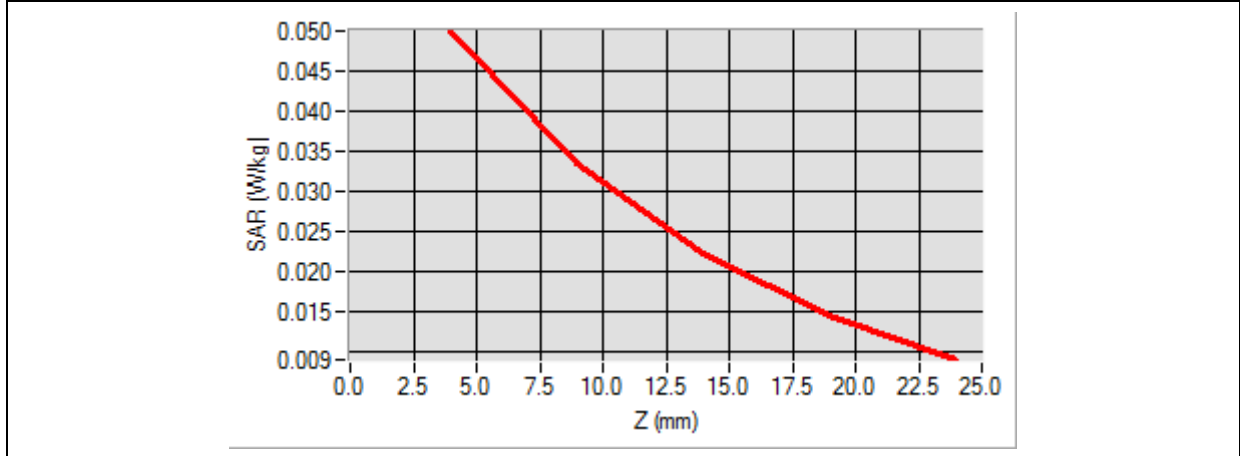

3D screen shot	Hot spot position

MEASUREMENT 34

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

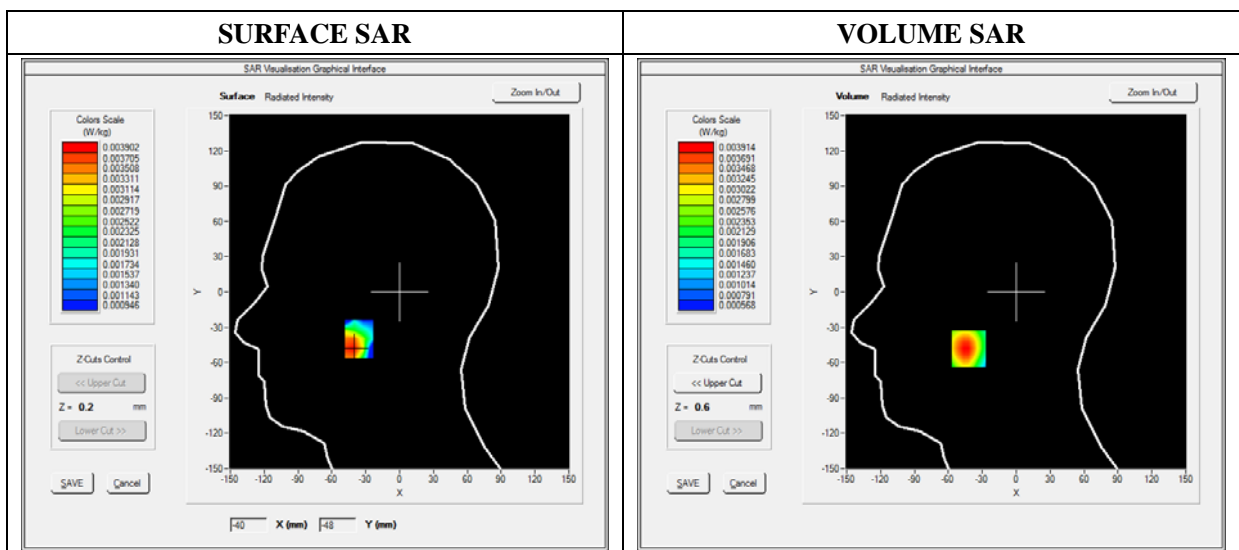

Maximum location: X=-42.00, Y=-48.00

SAR 10g (W/Kg)	0.002125
SAR 1g (W/Kg)	0.003795

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0049	0.0033	0.0025	0.0015

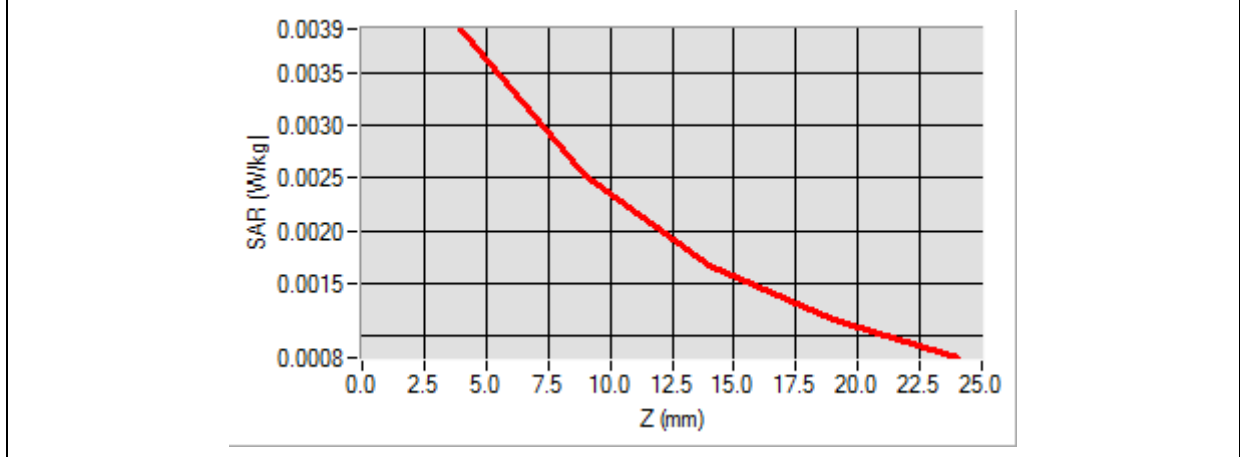

3D screen shot	Hot spot position

MEASUREMENT 35

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

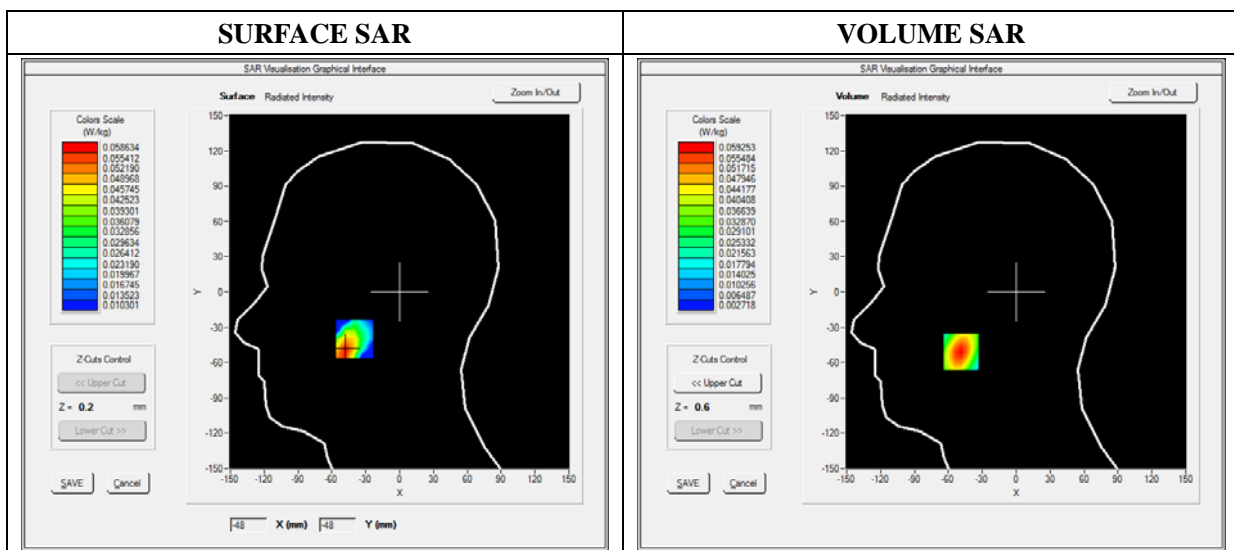

Maximum location: X=-49.00, Y=-51.00

SAR 10g (W/Kg)	0.032569
SAR 1g (W/Kg)	0.053369

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0589	0.0390	0.0260	0.0168

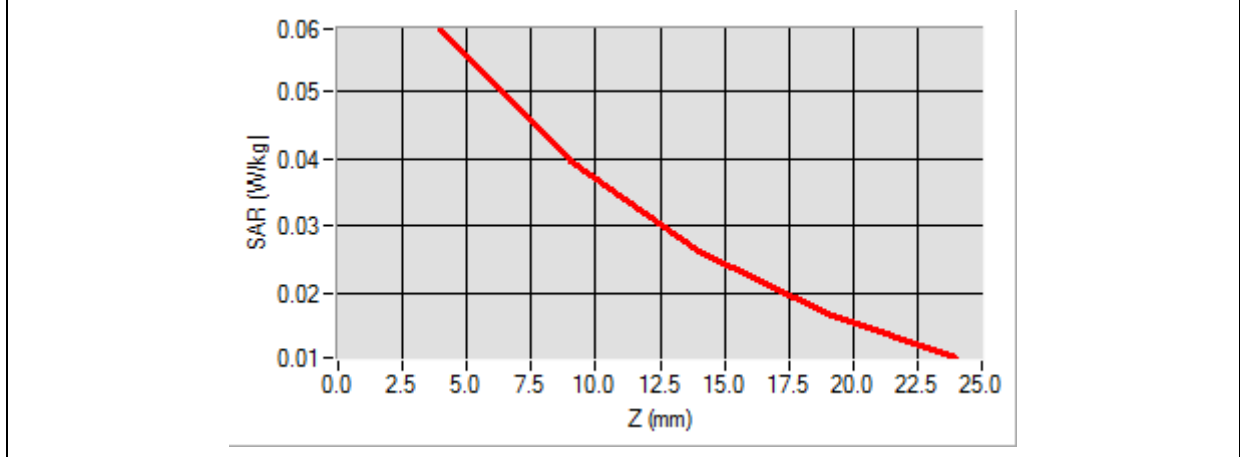

3D screen shot	Hot spot position

MEASUREMENT 36

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.16; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.0)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

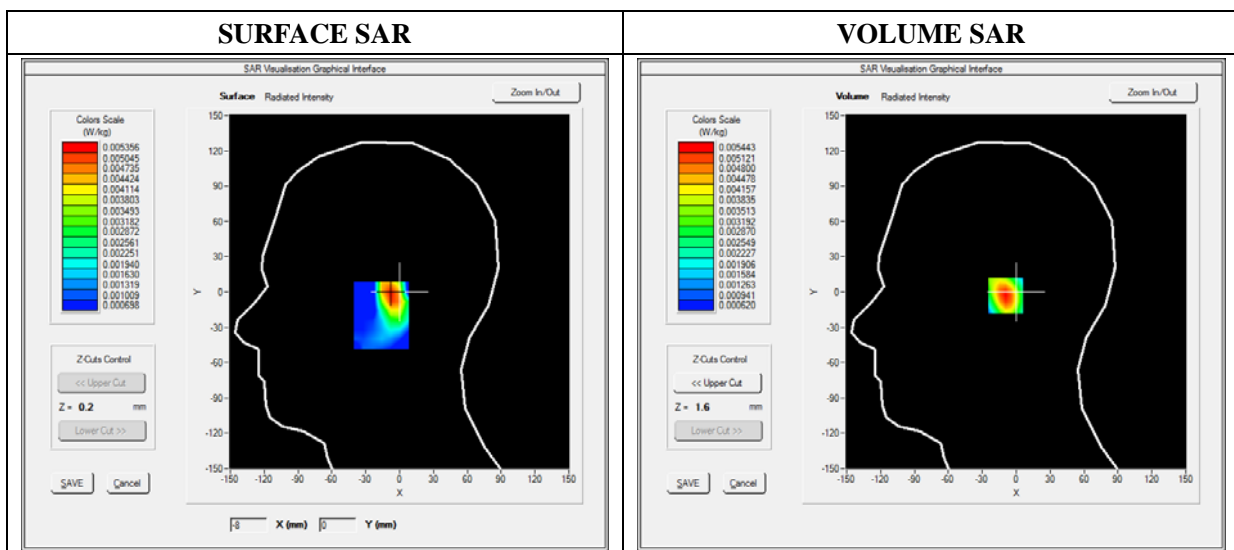

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.003026
SAR 1g (W/Kg)	0.006109

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0067	0.0040	0.0024	0.0018

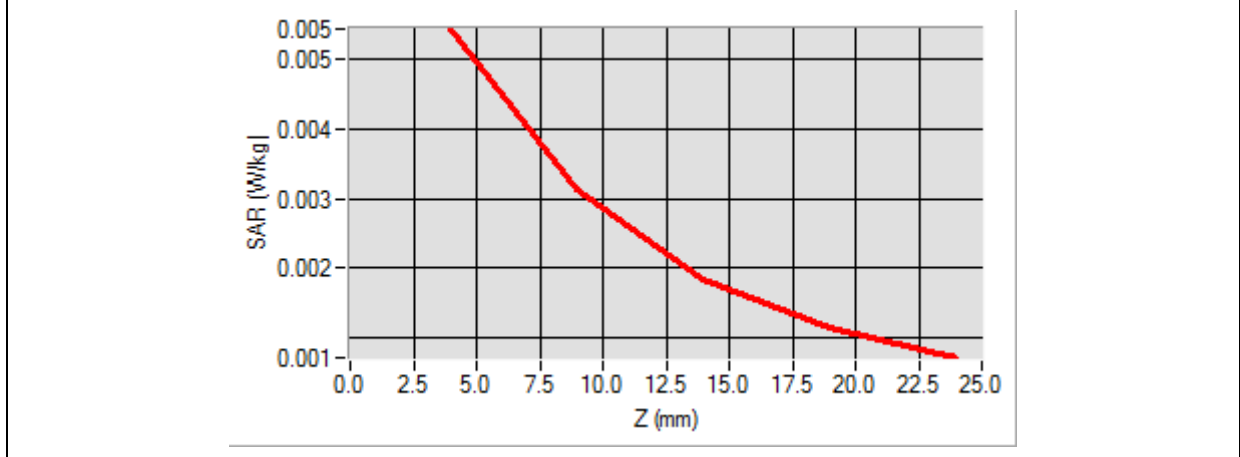

3D screen shot	Hot spot position

MEASUREMENT 37

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

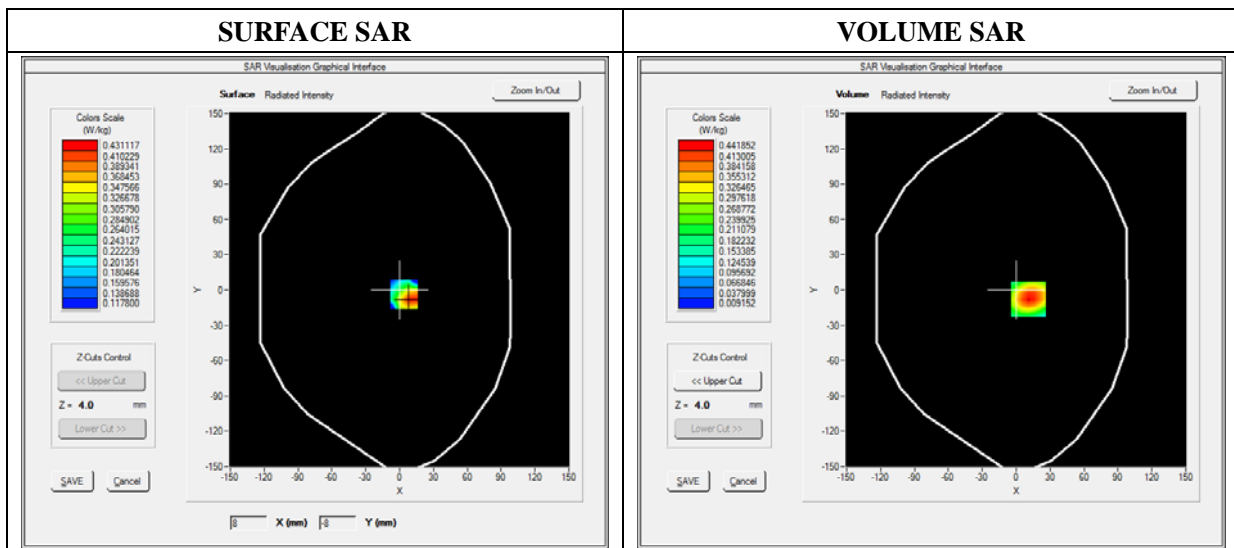

Maximum location: X=11.00, Y=-8.00

SAR 10g (W/Kg)	0.212571
SAR 1g (W/Kg)	0.410798

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4419	0.2288	0.1168	0.0615

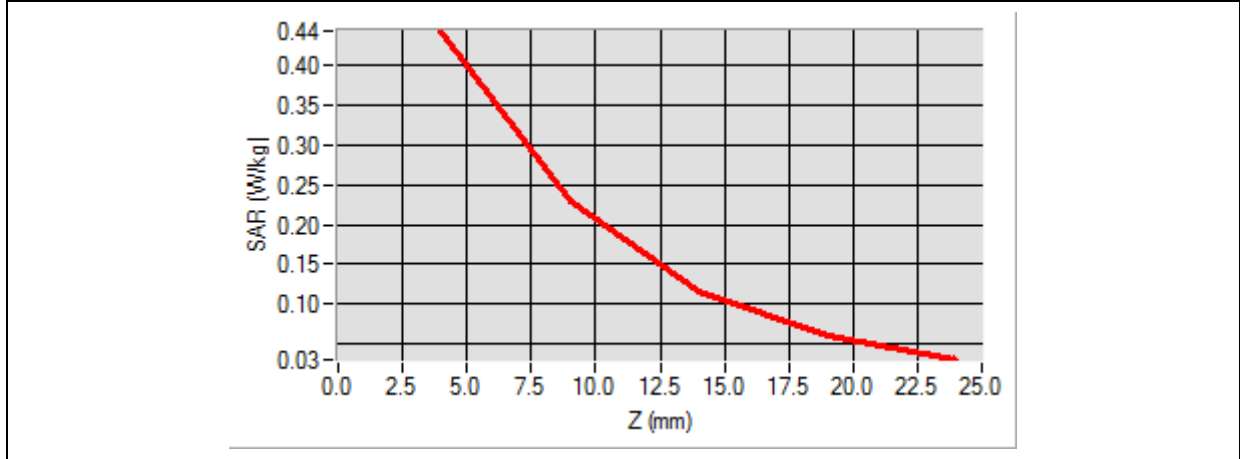

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey device. A grid of small blue dots is overlaid on the device's surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A 3D visualization of the hot spot, showing a color gradient from green (low SAR) to red (high SAR) on a rectangular prism shape.</p>

MEASUREMENT 39

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Bottom
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

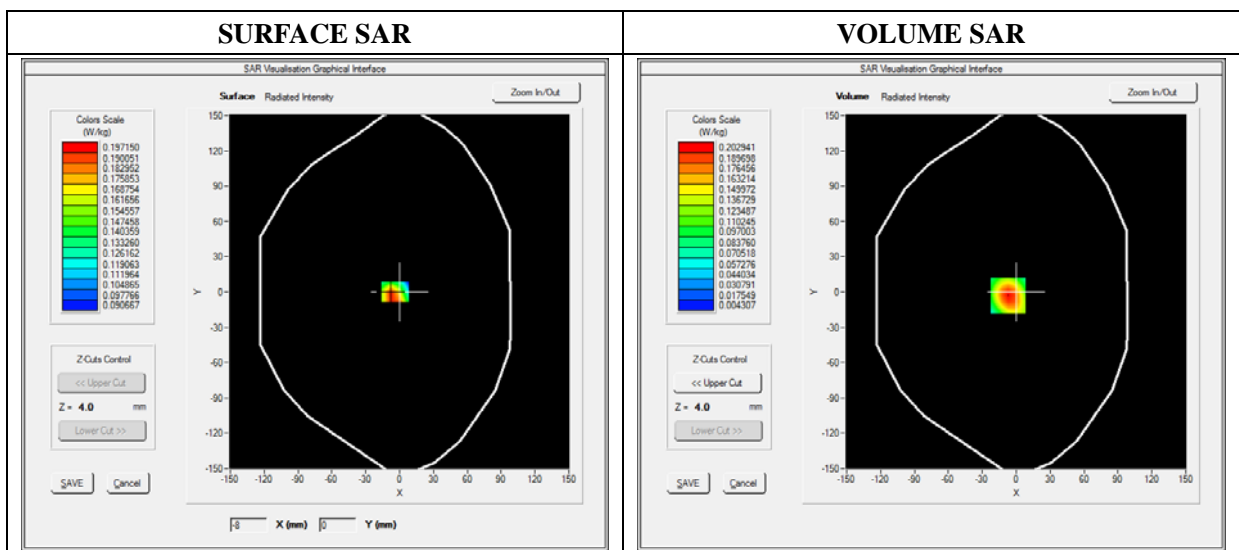

Maximum location: X=-7.00, Y=-3.00

SAR 10g (W/Kg)	0.097938
SAR 1g (W/Kg)	0.186995

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2029	0.1076	0.0561	0.0298

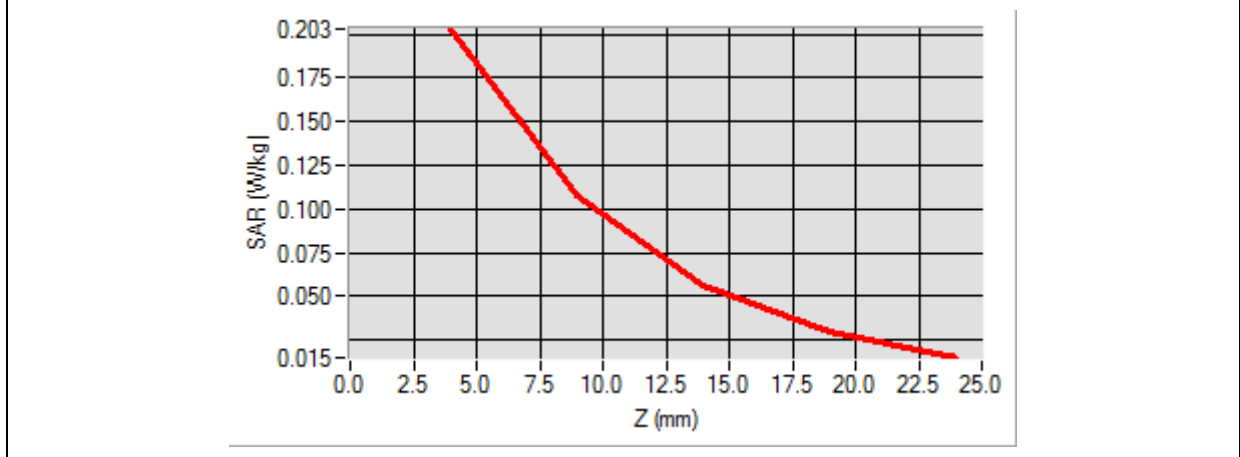

3D screen shot	Hot spot position

MEASUREMENT 40

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

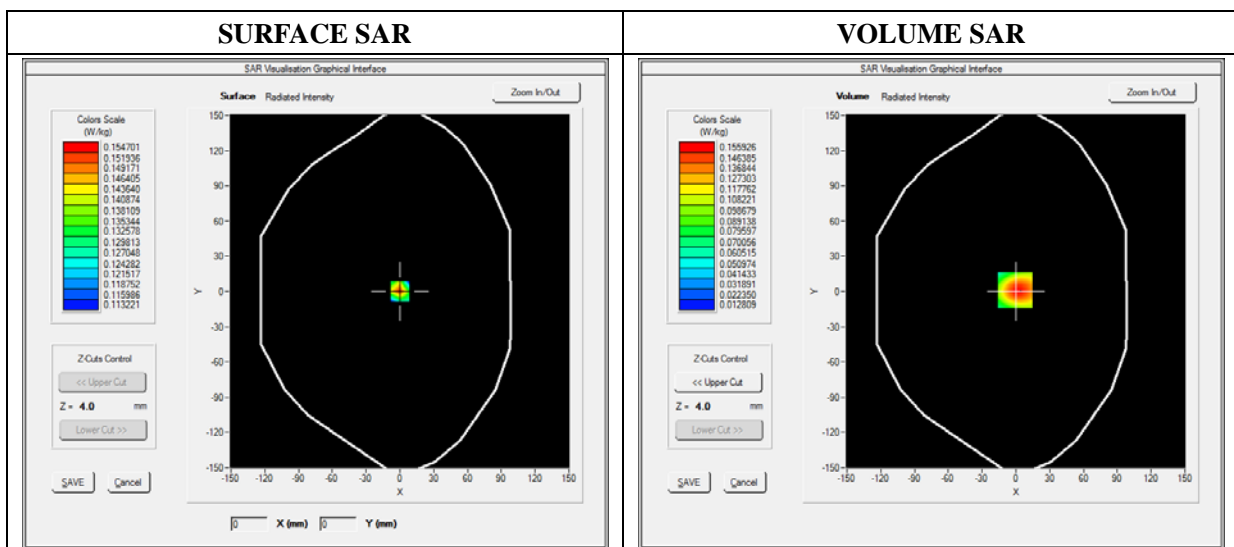

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.087767
SAR 1g (W/Kg)	0.146768

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1557	0.0967	0.0610	0.0399

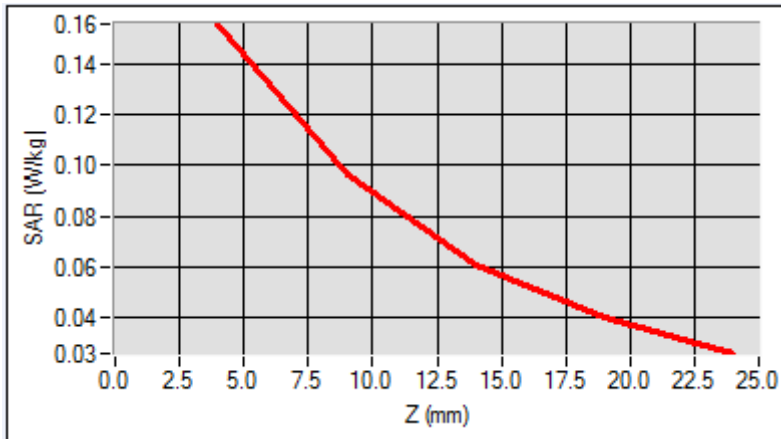

3D screen shot	Hot spot position

MEASUREMENT 41

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left side
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

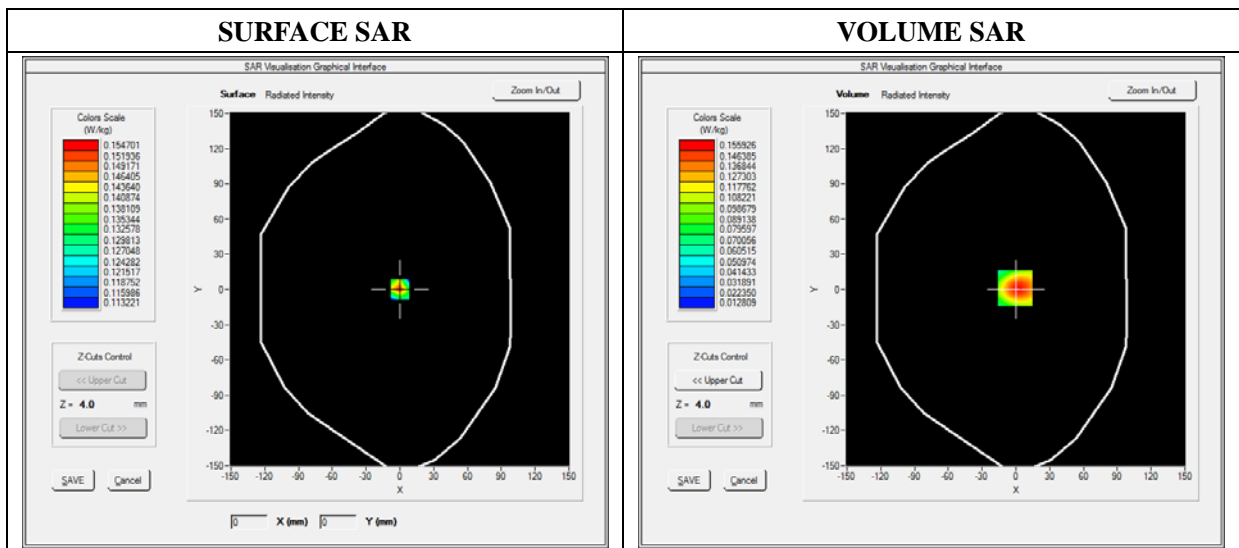

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.079120
SAR 1g (W/Kg)	0.132654

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1500	0.0942	0.0520	0.0312

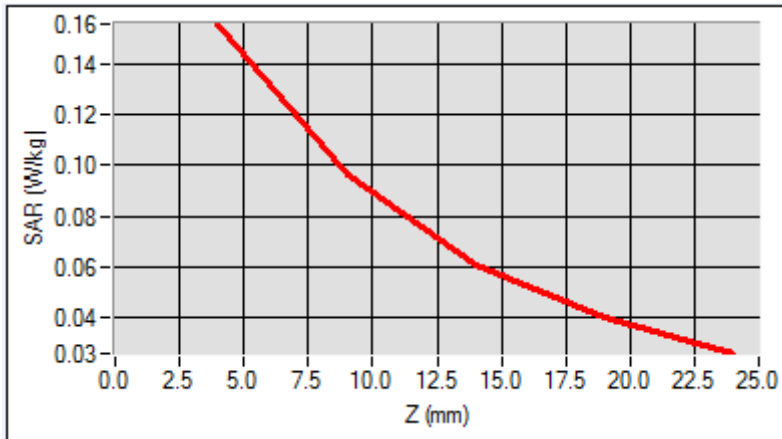

3D screen shot	Hot spot position

MEASUREMENT 43

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

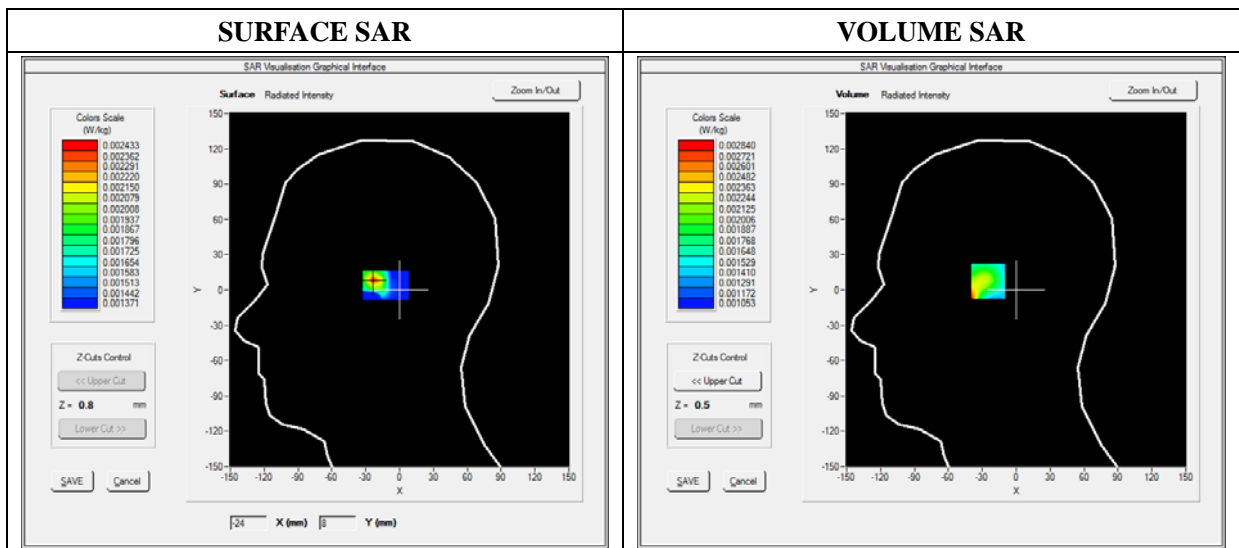

Maximum location: X=-24.00, Y=8.00

SAR 10g (W/Kg)	0.001624
SAR 1g (W/Kg)	0.002208

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0022	0.0014	0.0011	0.0011

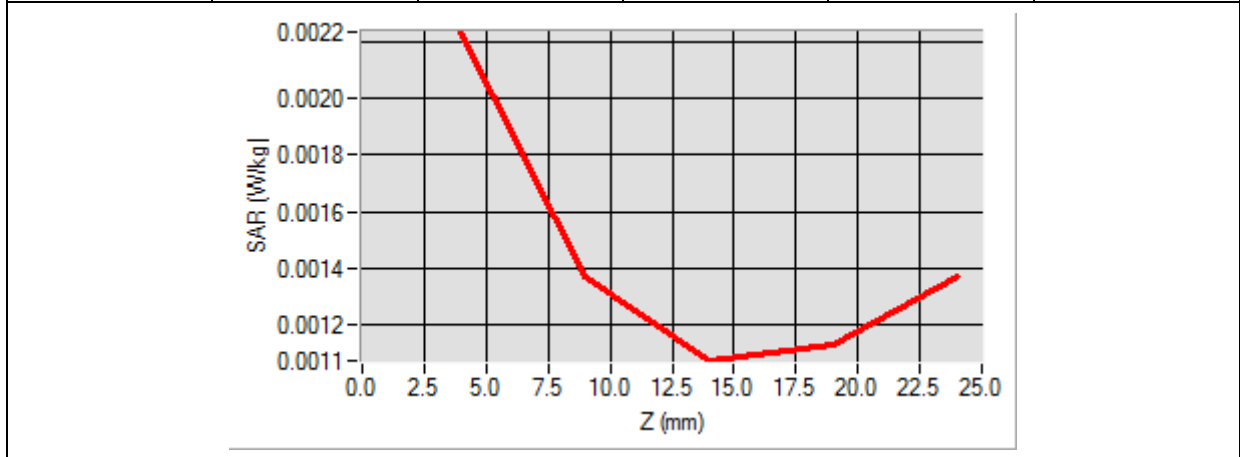

3D screen shot	Hot spot position

MEASUREMENT 44

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Right head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

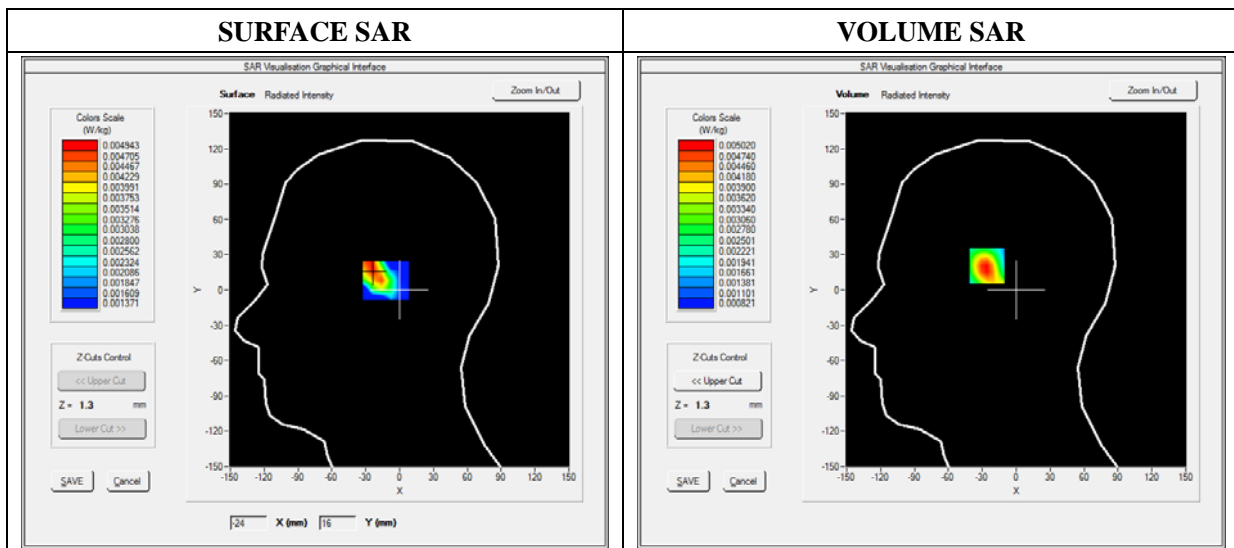

Maximum location: X=-26.00, Y=22.00

SAR 10g (W/Kg)	0.002523
SAR 1g (W/Kg)	0.004807

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0050	0.0019	0.0010	0.0010

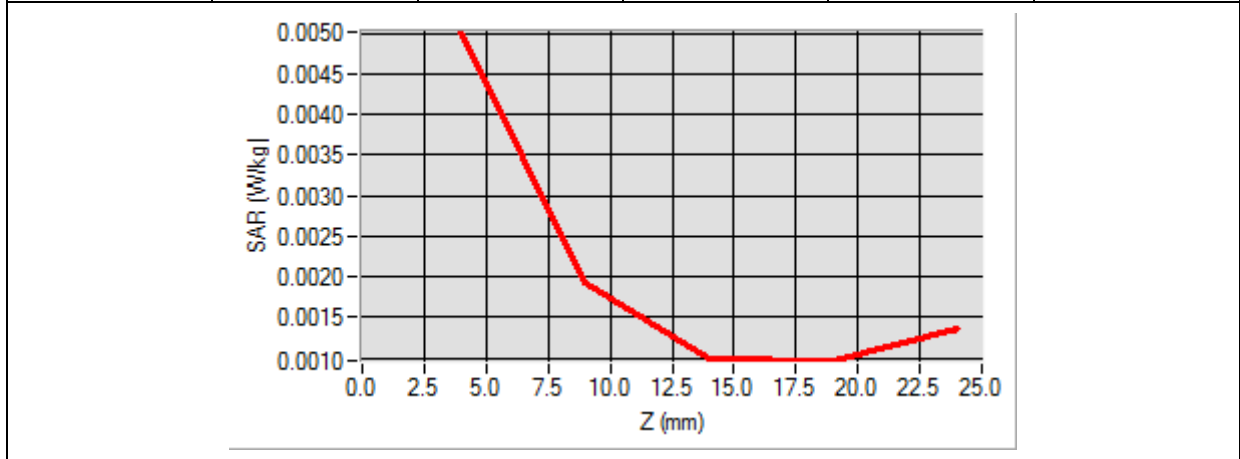

3D screen shot	Hot spot position

MEASUREMENT 45

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Cheek
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

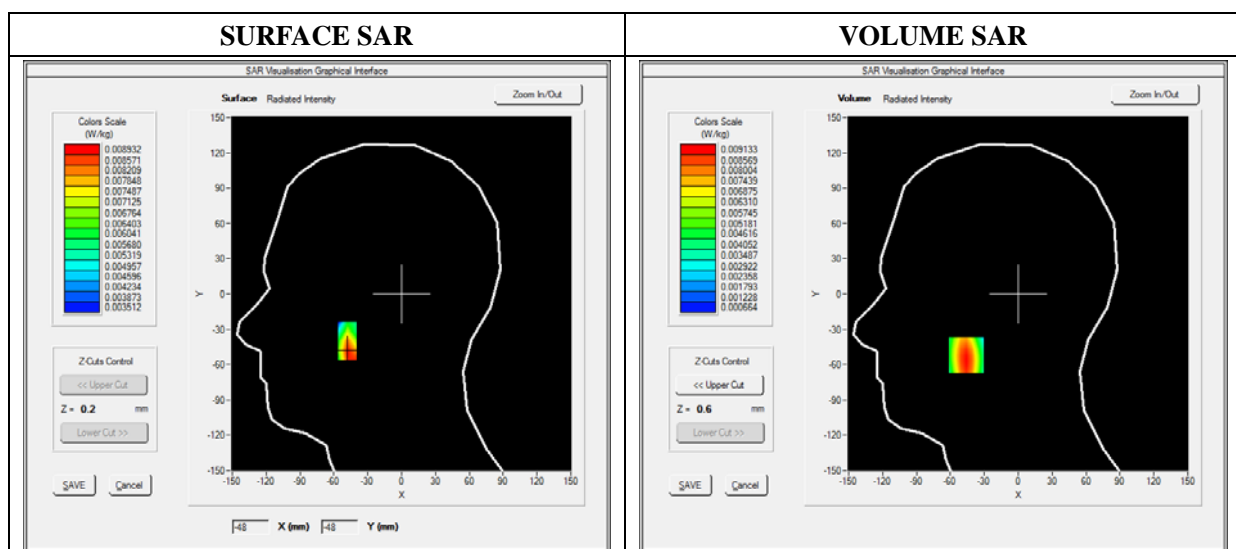

Maximum location: X=-46.00, Y=-52.00

SAR 10g (W/Kg)	0.004364
SAR 1g (W/Kg)	0.008790

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0091	0.0033	0.0014	0.0011

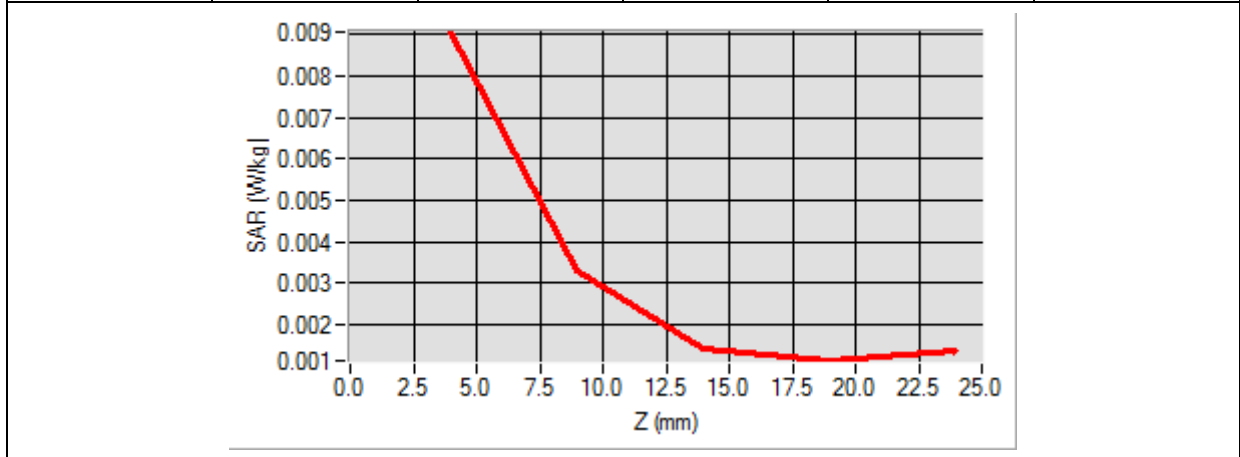

<p>3D screen shot</p>	<p>Hot spot position</p>

MEASUREMENT 46

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.51; Calibrated: 2013/03/21

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Left head
Device Position	Tilt
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	38.762140
Conductivity (S/m)	1.781240
Power Variation (%)	1.144120
Ambient Temperature	21.1
Liquid Temperature	21.2

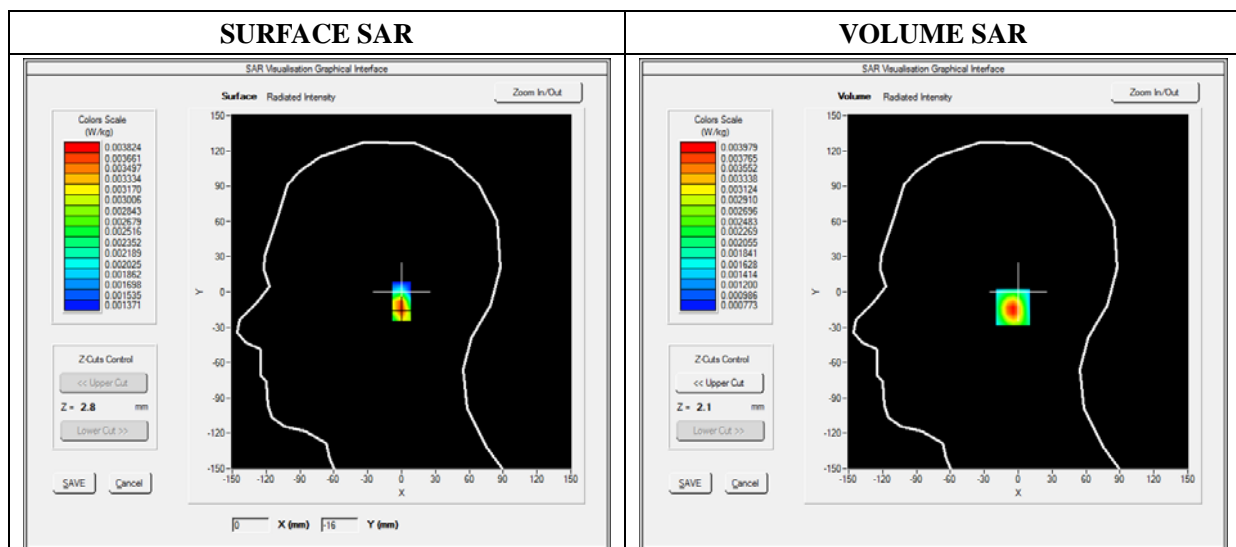

Maximum location: X=-1.00, Y=-13.00

SAR 10g (W/Kg)	0.002064
SAR 1g (W/Kg)	0.003779

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0040	0.0015	0.0008	0.0009

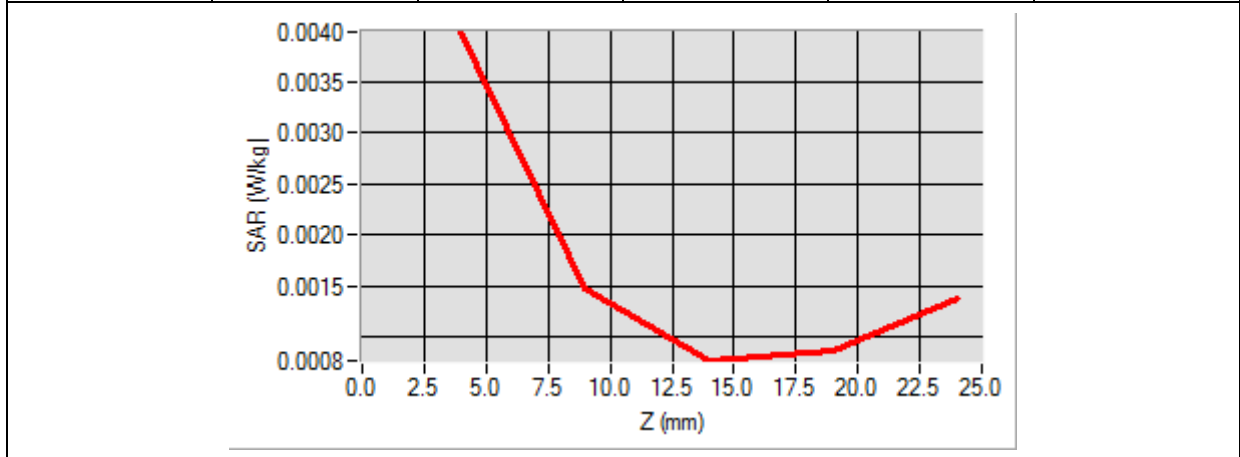

3D screen shot	Hot spot position

MEASUREMENT 47

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

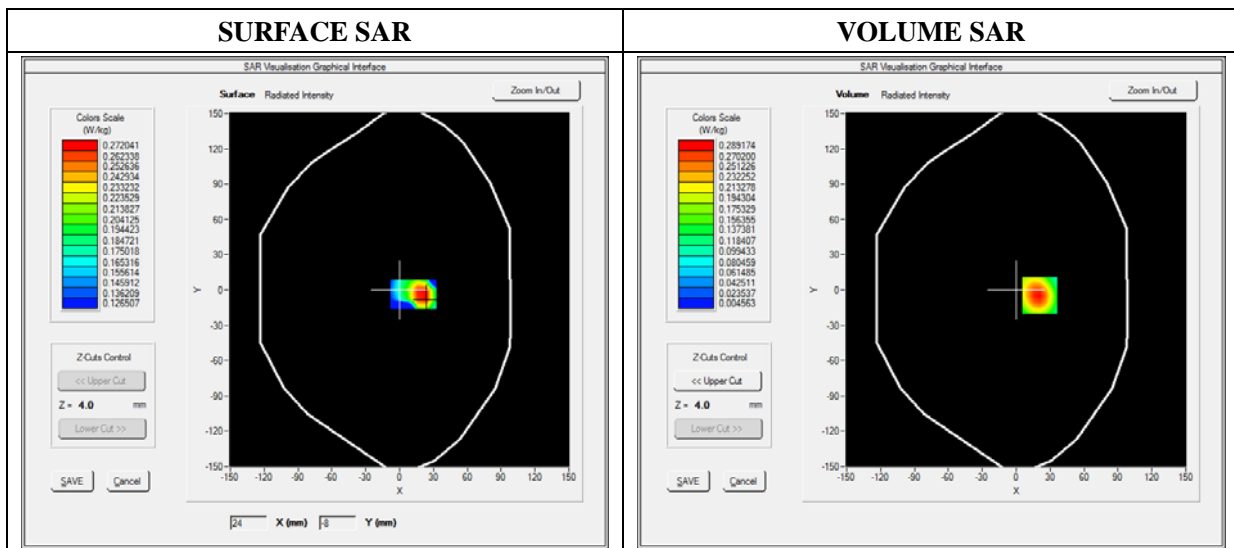

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.079120
SAR 1g (W/Kg)	0.112654

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1459	0.0942	0.0520	0.0312

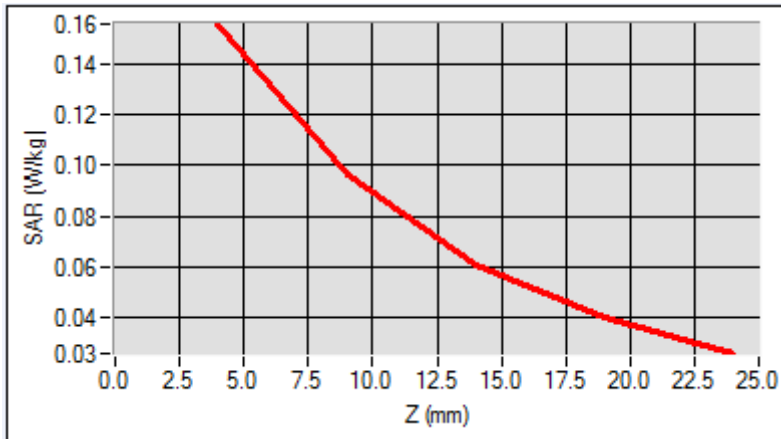

3D screen shot	Hot spot position

MEASUREMENT 49

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Top Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

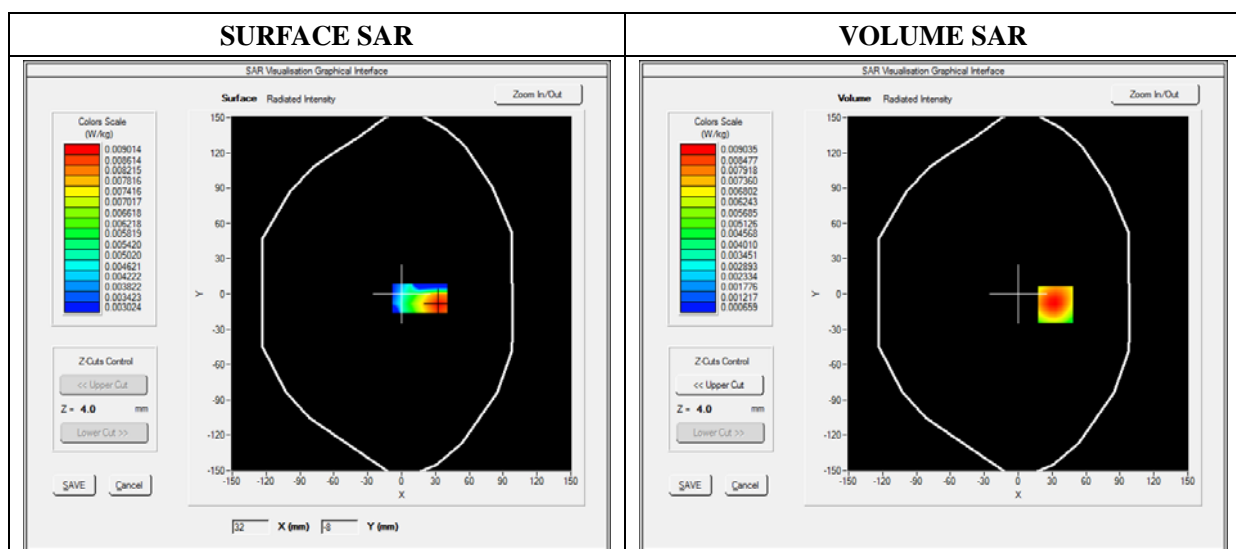

Maximum location: X=-10.00, Y=10.00

SAR 10g (W/Kg)	0.040672
SAR 1g (W/Kg)	0.076546

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0827	0.0435	0.0229	0.0127

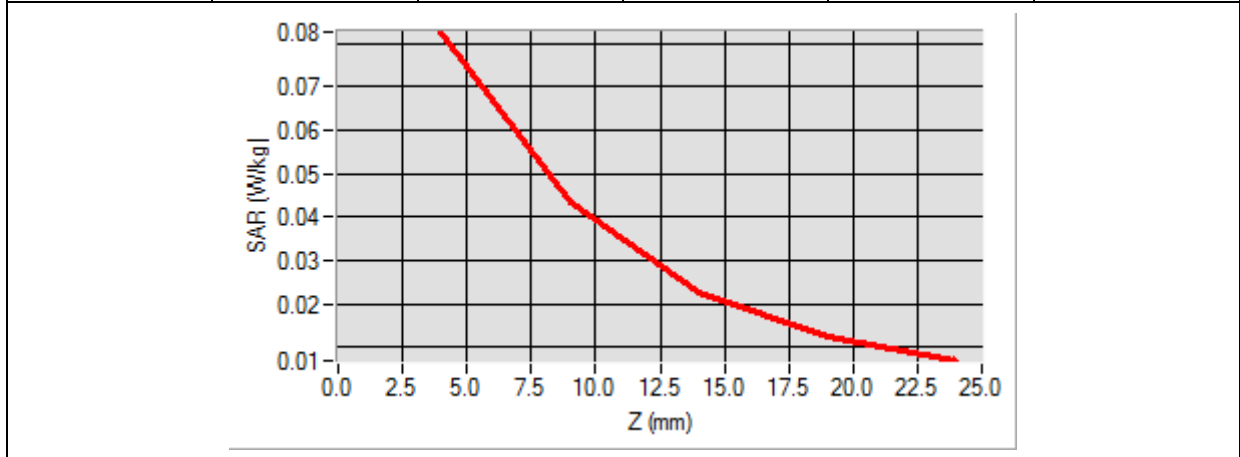

<p>3D screen shot</p>	<p>Hot spot position</p>
<p>A 3D perspective view of a hand holding a device. A grid of small blue dots is overlaid on the device's surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot position.</p>	<p>A close-up view of the hot spot position, showing a color gradient from green (low SAR) to red (high SAR) on a rectangular area.</p>

MEASUREMENT 50

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Right Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

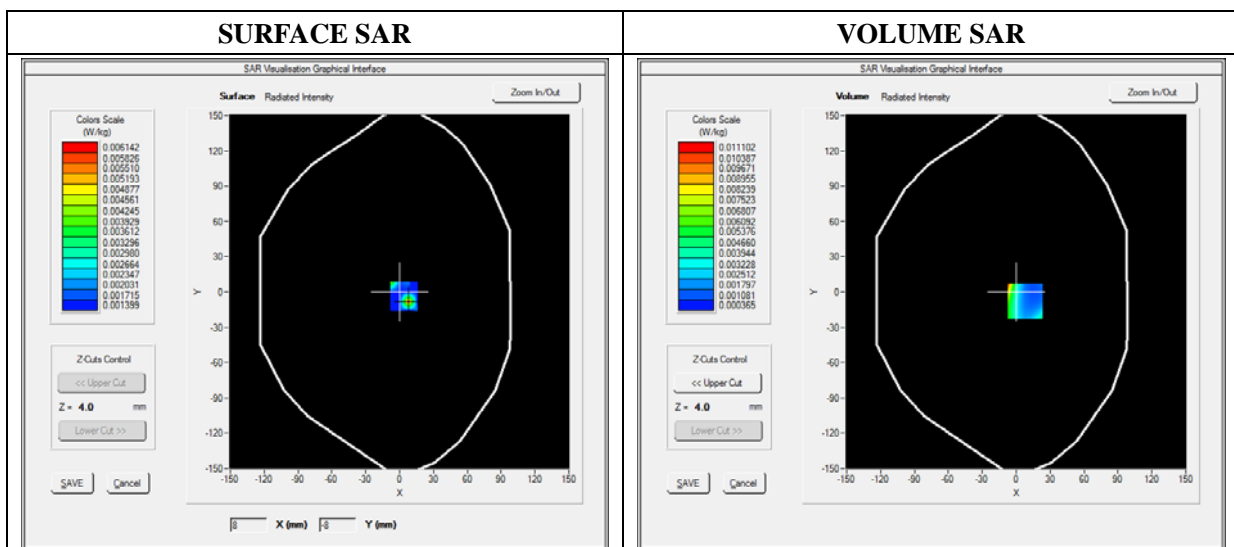

Maximum location: X=8.00, Y=-8.00

SAR 10g (W/Kg)	0.005425
SAR 1g (W/Kg)	0.006565

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0014	0.0064	0.0080	0.0050

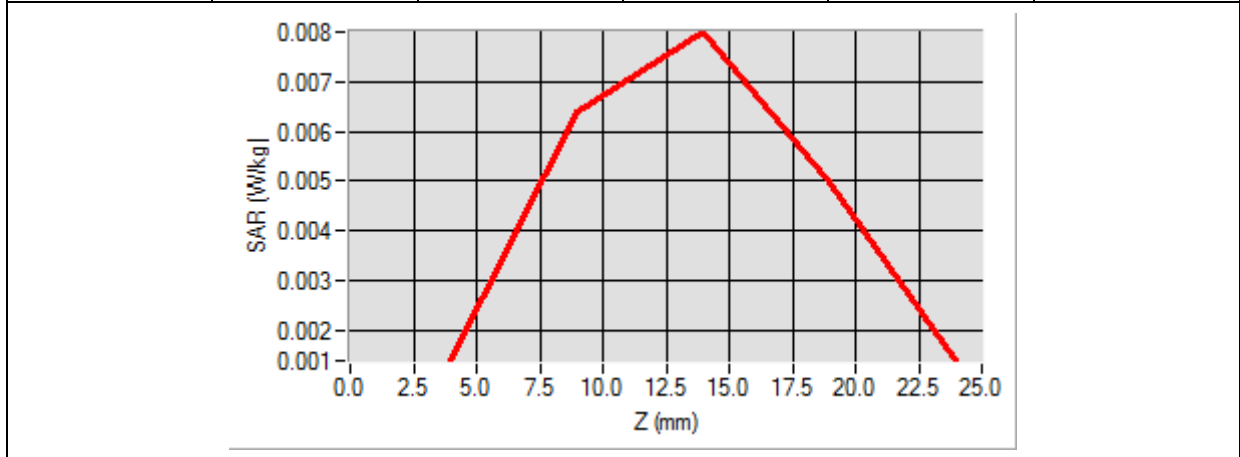

<p>3D screen shot</p>	<p>Hot spot position</p>

MEASUREMENT 51

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	Left Side
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

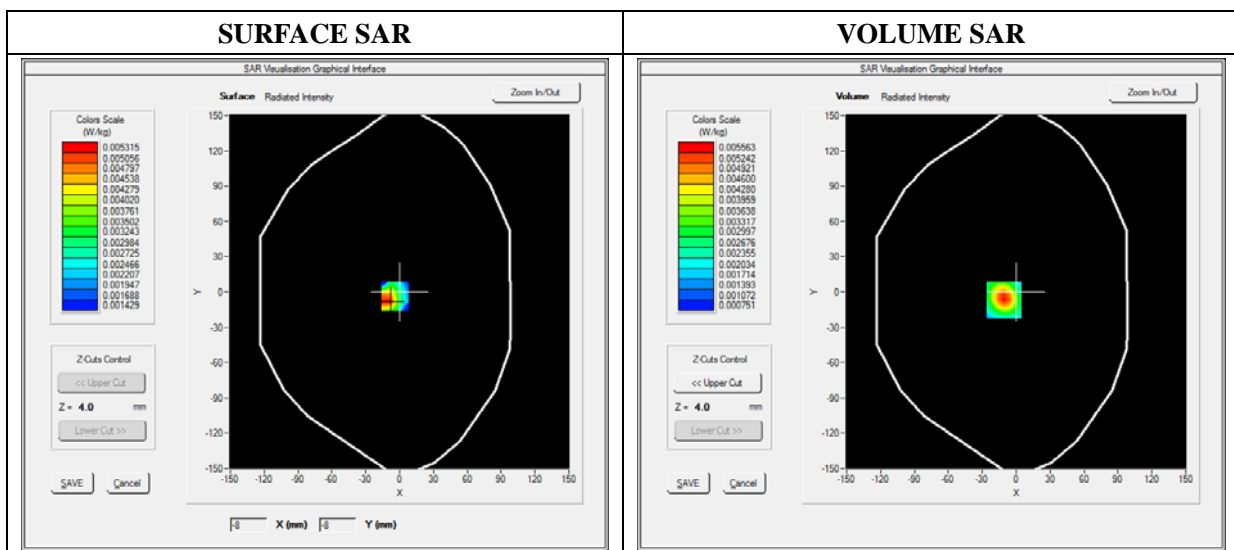

Maximum location: X=-11.00, Y=-7.00

SAR 10g (W/Kg)	0.002593
SAR 1g (W/Kg)	0.005331

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0056	0.0018	0.0008	0.0008

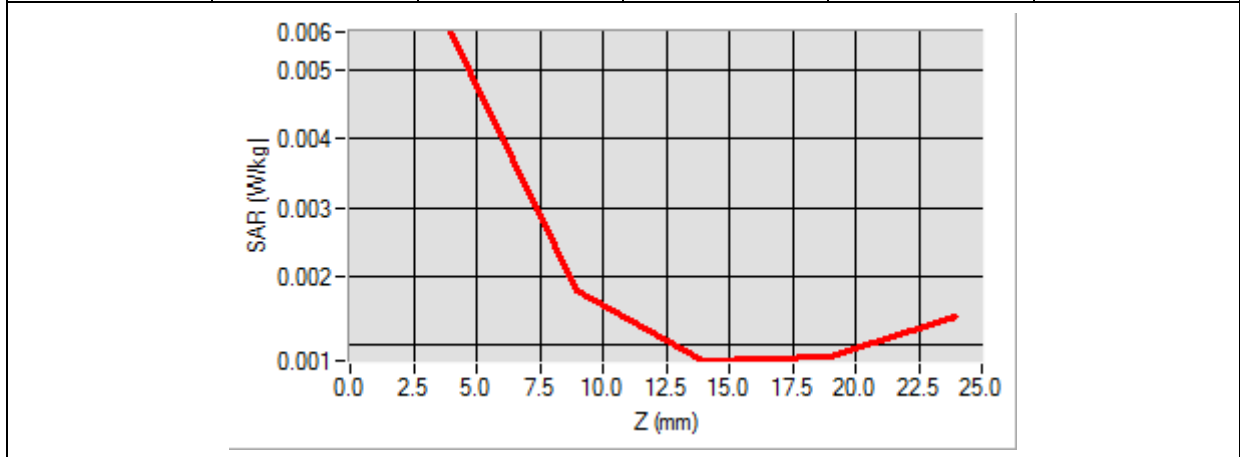

3D screen shot	Hot spot position

MEASUREMENT 52

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.5; Calibrated: 2012/11/26

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	824.200000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

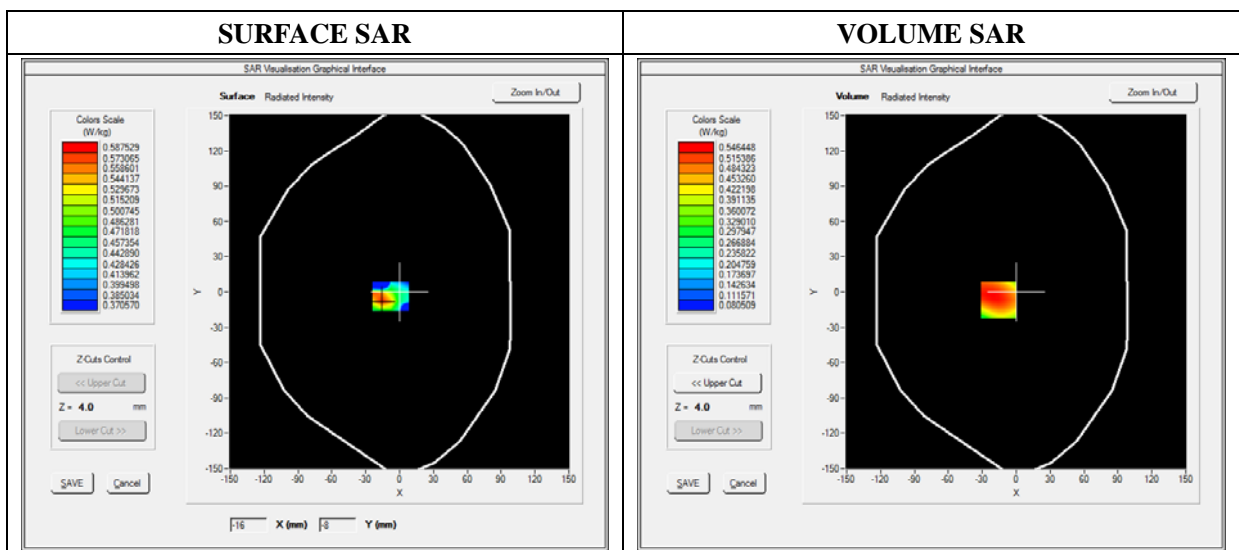

Maximum location: X=-16.00, Y=-7.00

SAR 10g (W/Kg)	0.356532
SAR 1g (W/Kg)	0.530660

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.5429	0.4023	0.2863	0.1926

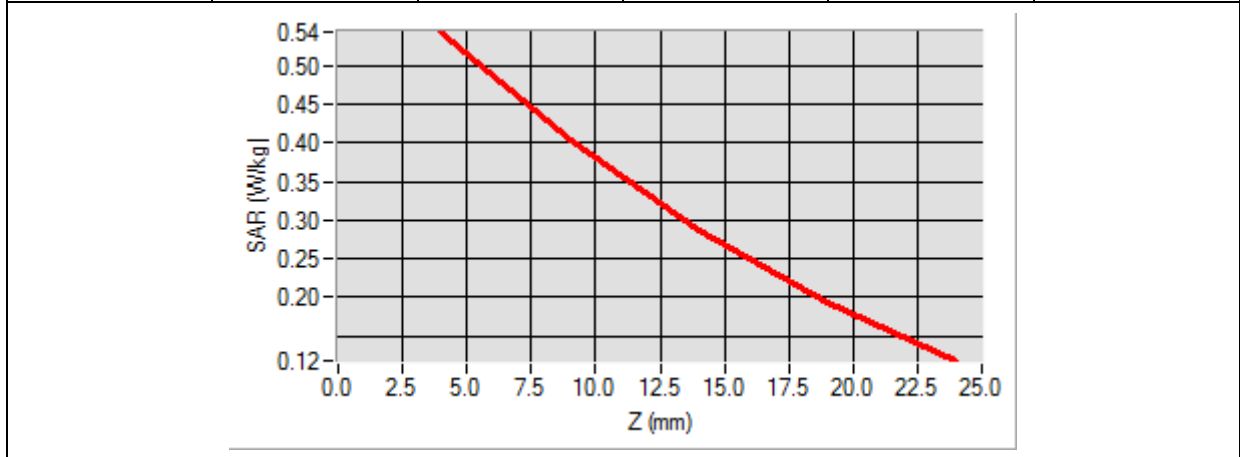

3D screen shot	Hot spot position

MEASUREMENT 53

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.5; Calibrated: 2012/11/26

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	824.200000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

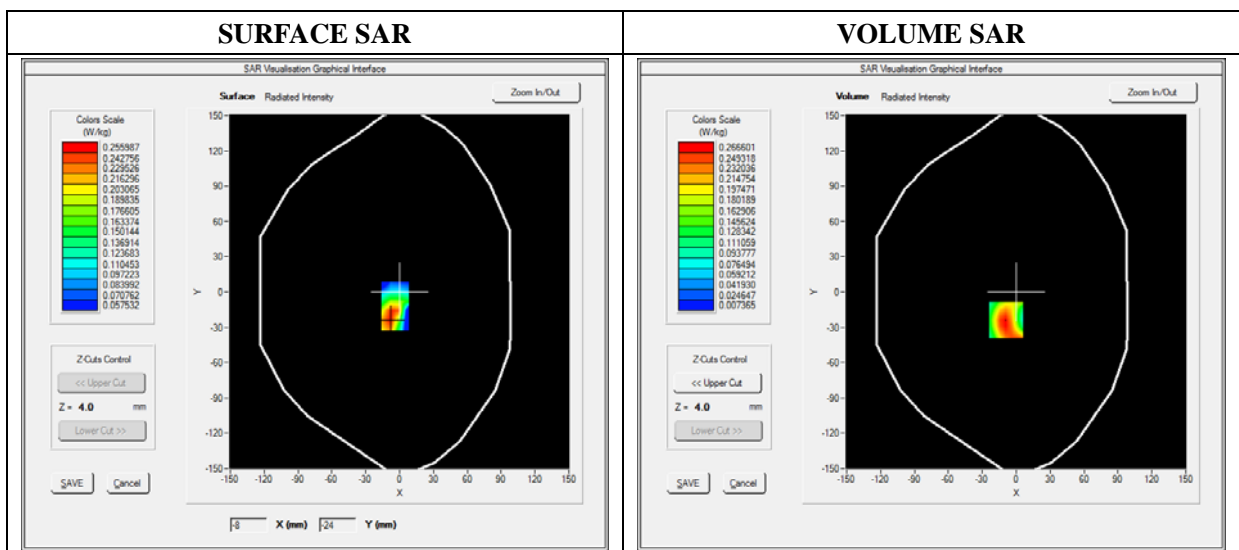

Maximum location: X=-9.00, Y=-24.00

SAR 10g (W/Kg)	0.132279
SAR 1g (W/Kg)	0.238901

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2666	0.1476	0.0835	0.0507

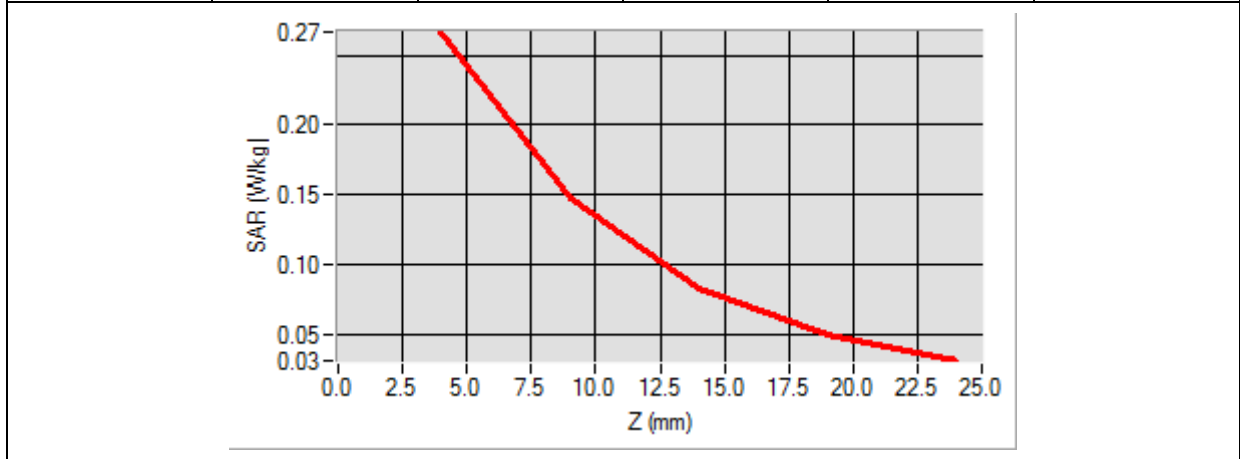

3D screen shot	Hot spot position

MEASUREMENT 54

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

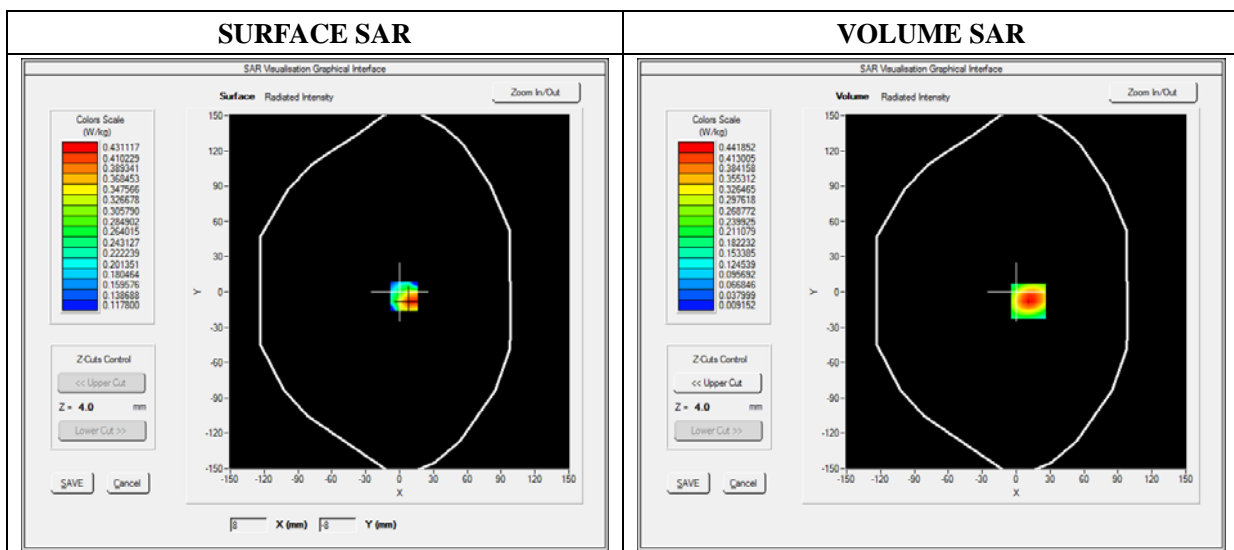

Maximum location: X=11.00, Y=-8.00

SAR 10g (W/Kg)	0.212571
SAR 1g (W/Kg)	0.410798

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4419	0.2288	0.1168	0.0615

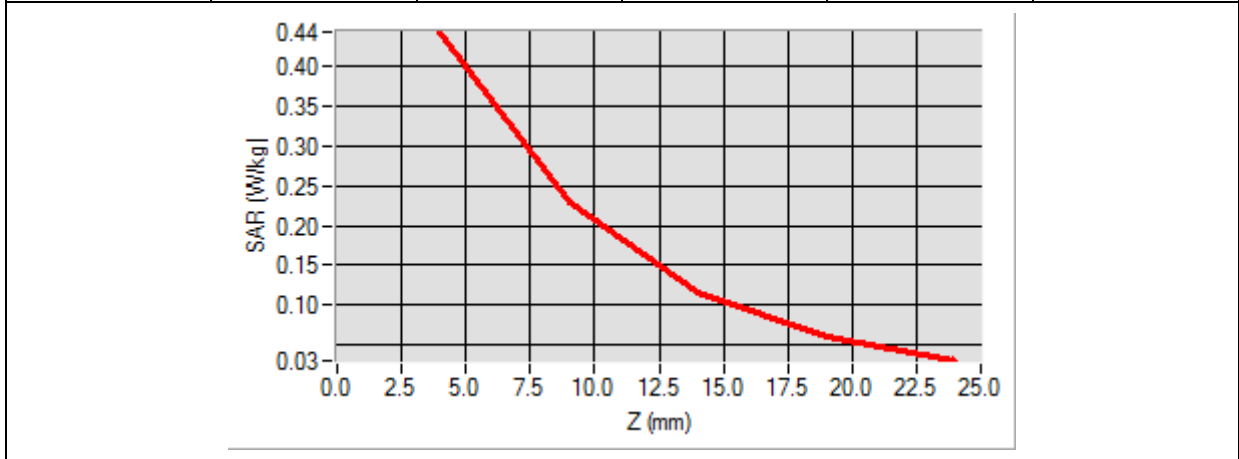

<p>3D screen shot</p>	<p>Hot spot position</p>
<p>A 3D perspective view of a hand holding a device. A grid of small blue dots is overlaid on the device's surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A close-up view of the hot spot area, showing a color gradient from green (low SAR) to red (high SAR) on a rectangular shape.</p>

MEASUREMENT 55

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	GSM1900
Channels	Low
Signal	TDMA (Crest factor: 8.0)

B. SAR Measurement Results


Frequency (MHz)	1850.200000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

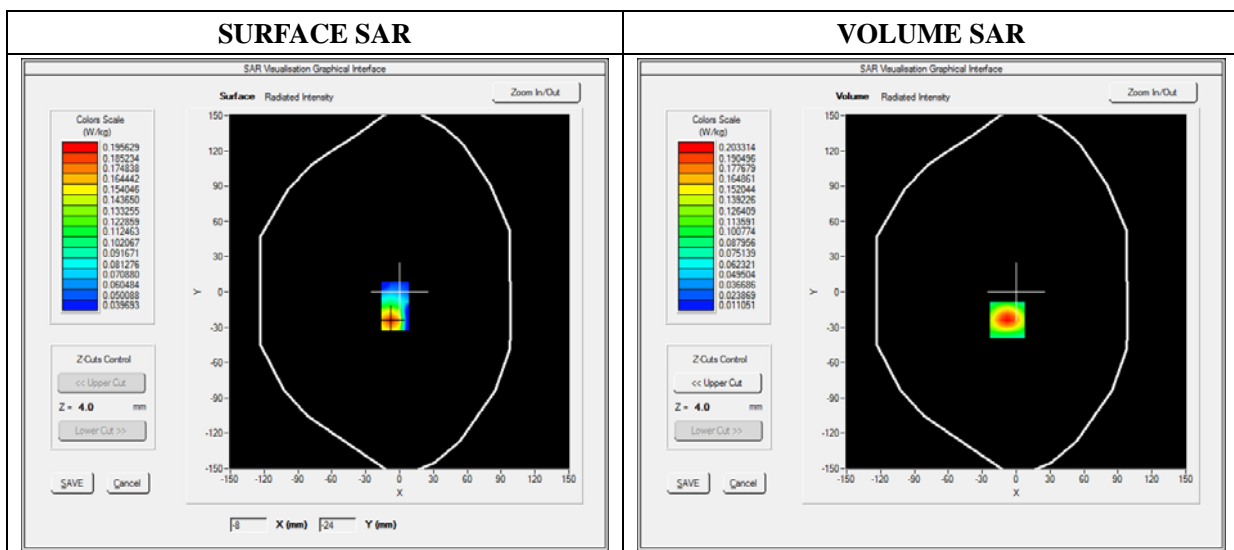

Maximum location: X=-8.00, Y=-24.00

SAR 10g (W/Kg)	0.106164
SAR 1g (W/Kg)	0.185920

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2033	0.1278	0.0804	0.0513

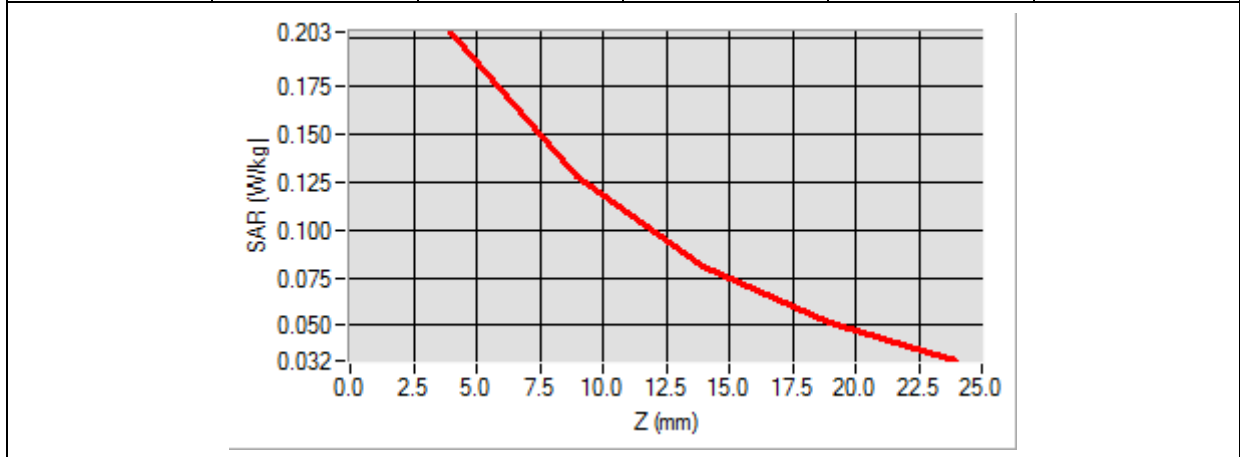

3D screen shot	Hot spot position

MEASUREMENT 56

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.960000
Power Variation (%)	0.800000
Ambient Temperature	21.1
Liquid Temperature	21.3

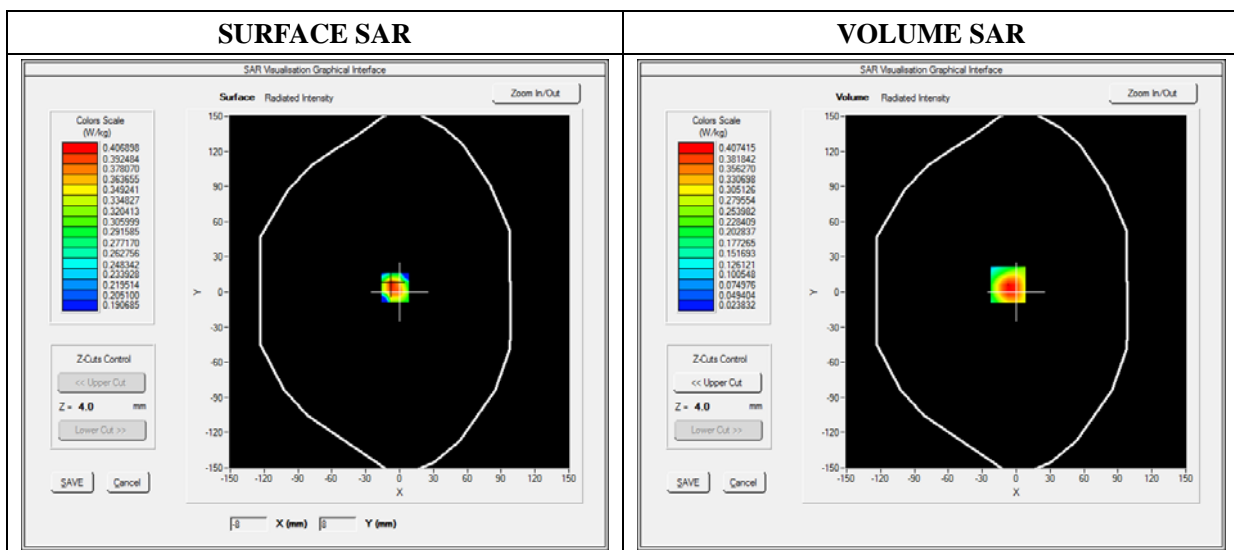

Maximum location: X=2.00, Y=-16.00

SAR 10g (W/Kg)	0.225476
SAR 1g (W/Kg)	0.384365

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.4074	0.2572	0.1637	0.1067

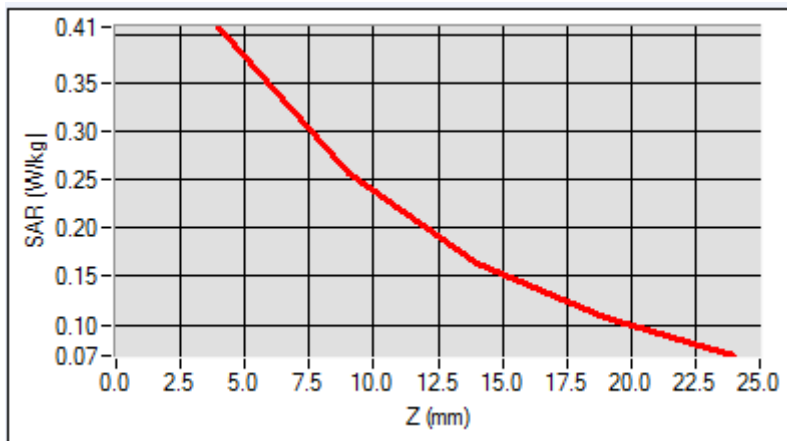

3D screen shot	Hot spot position

MEASUREMENT 57

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.50; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	WCDMA850_RMC
Channels	High
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	846.600000
Relative Permittivity (real part)	52.124510
Conductivity (S/m)	0.96000
Power Variation (%)	0.80000
Ambient Temperature	21.1
Liquid Temperature	21.3

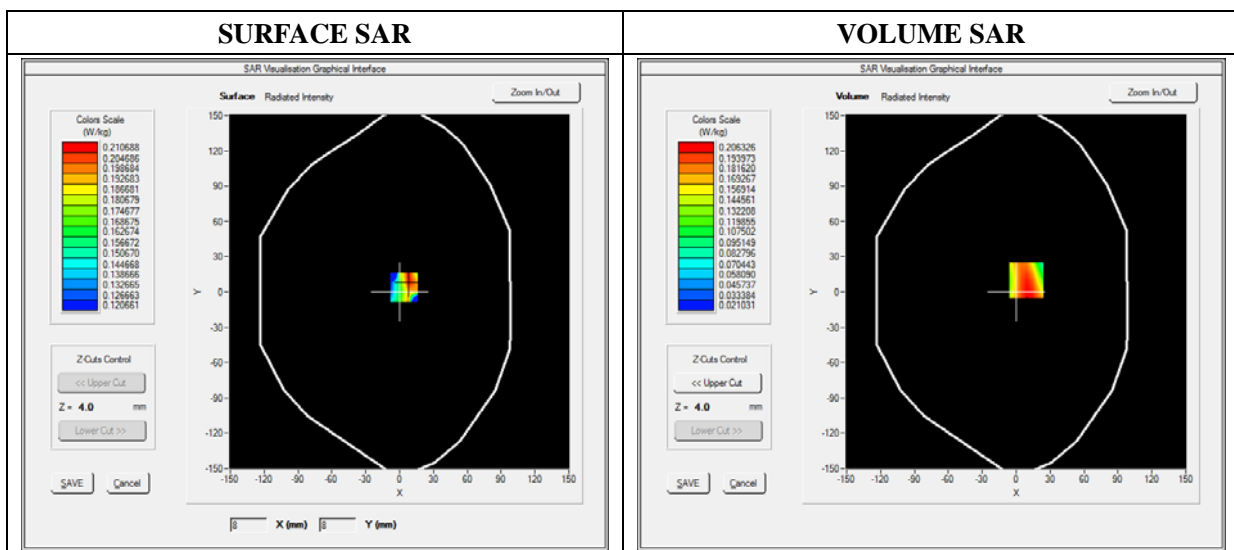

Maximum location: X=9.00, Y=10.00

SAR 10g (W/Kg)	0.136156
SAR 1g (W/Kg)	0.196825

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2019	0.1524	0.1125	0.0804

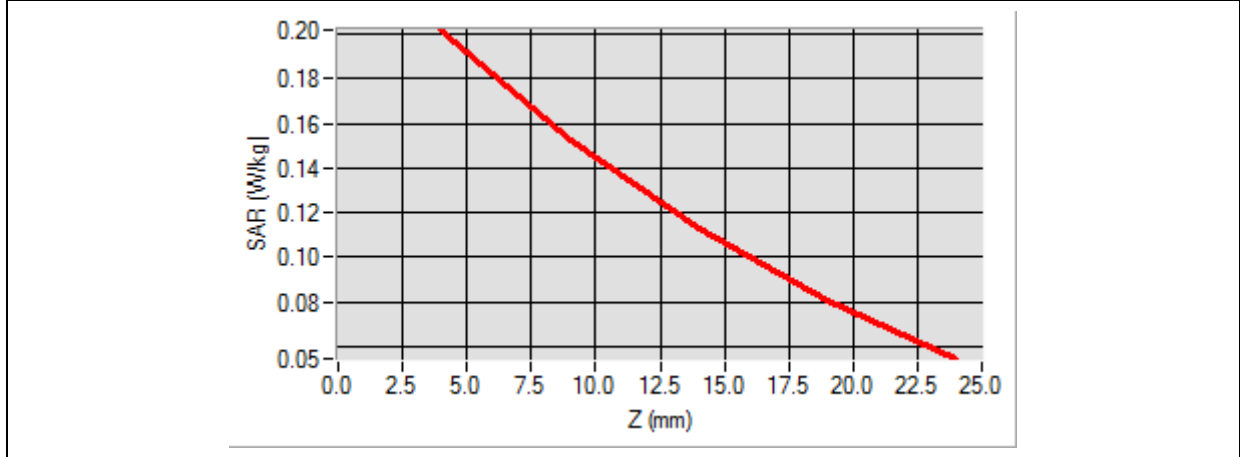

<p>3D screen shot</p>	<p>Hot spot position</p>
<p>A 3D perspective view of a grey device with a grid of green dots on its surface. A localized area of the grid is highlighted with a color gradient from green to red, indicating the hot spot location.</p>	<p>A close-up view of the hot spot area, showing a color gradient from yellow to red, representing the intensity of the SAR exposure.</p>

MEASUREMENT 58

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

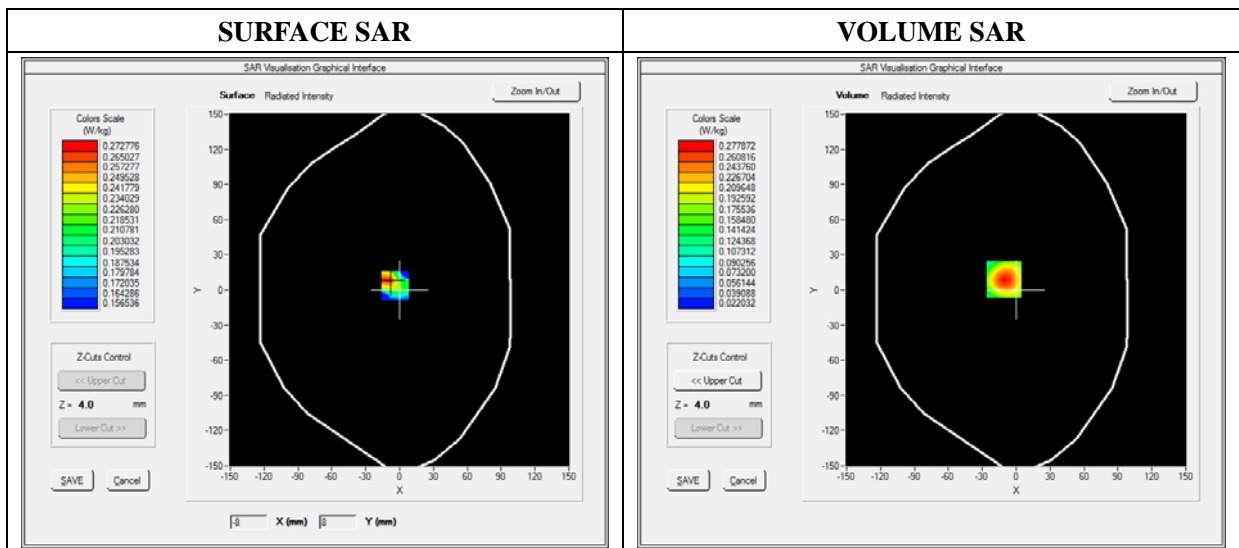

Maximum location: X=16.00, Y=24.00

SAR 10g (W/Kg)	0.153271
SAR 1g (W/Kg)	0.257619

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.2778	0.1771	0.1125	0.1125

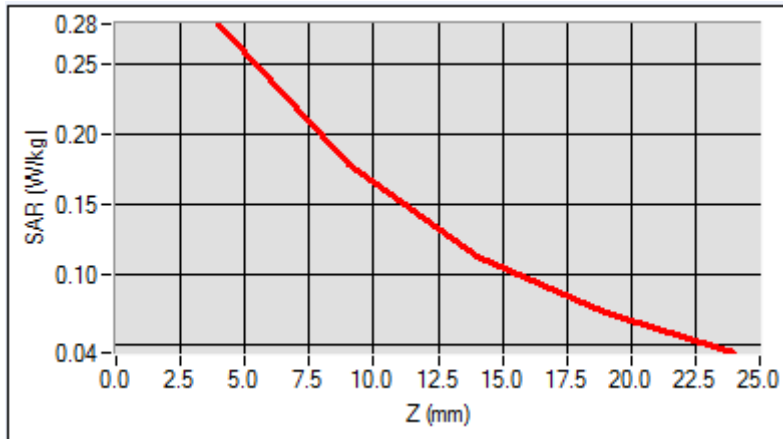

3D screen shot	Hot spot position

MEASUREMENT 59

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 6.30; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	WCDMA1900_RMC
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	1852.400000
Relative Permittivity (real part)	51.361240
Conductivity (S/m)	1.510000
Power Variation (%)	0.752100
Ambient Temperature	21.1
Liquid Temperature	21.3

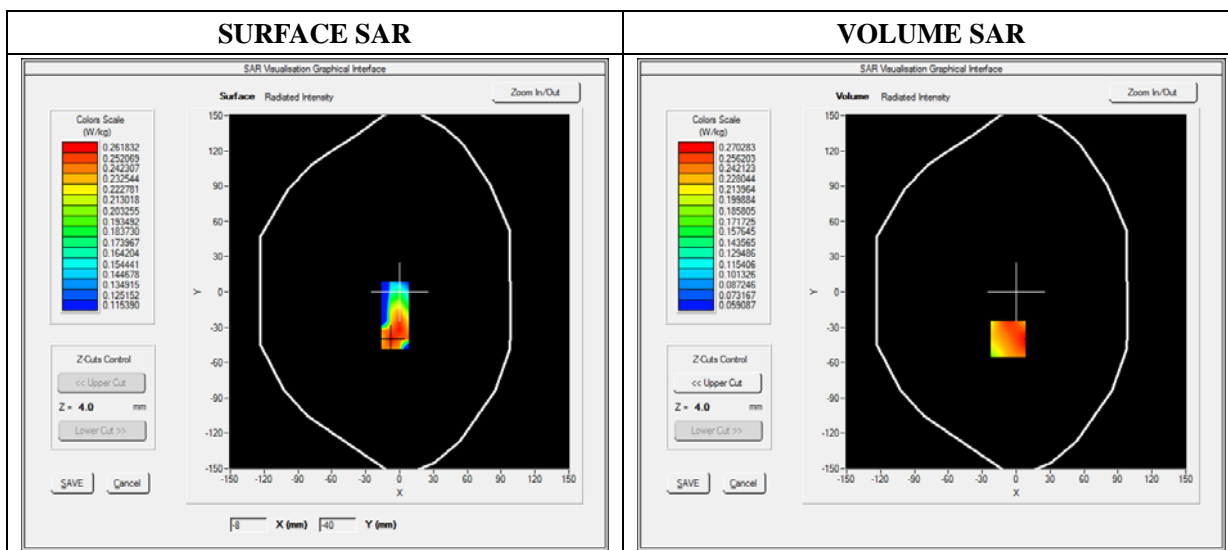

Maximum location: X=-47.00, Y=-8.00

SAR 10g (W/Kg)	0.091044
SAR 1g (W/Kg)	0.118086

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1217	0.0964	0.0775	0.0634

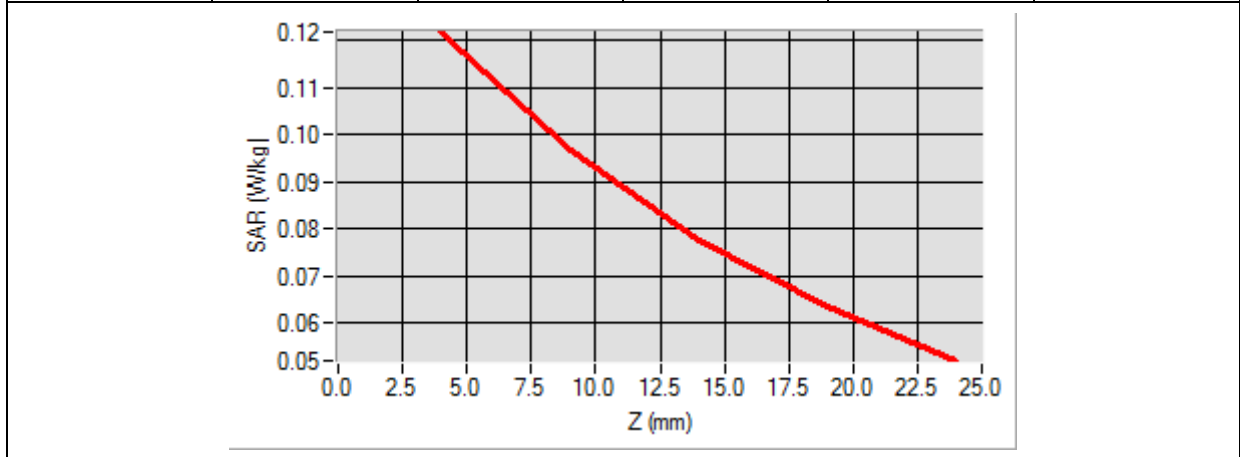

3D screen shot	Hot spot position

MEASUREMENT 60

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Back
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2

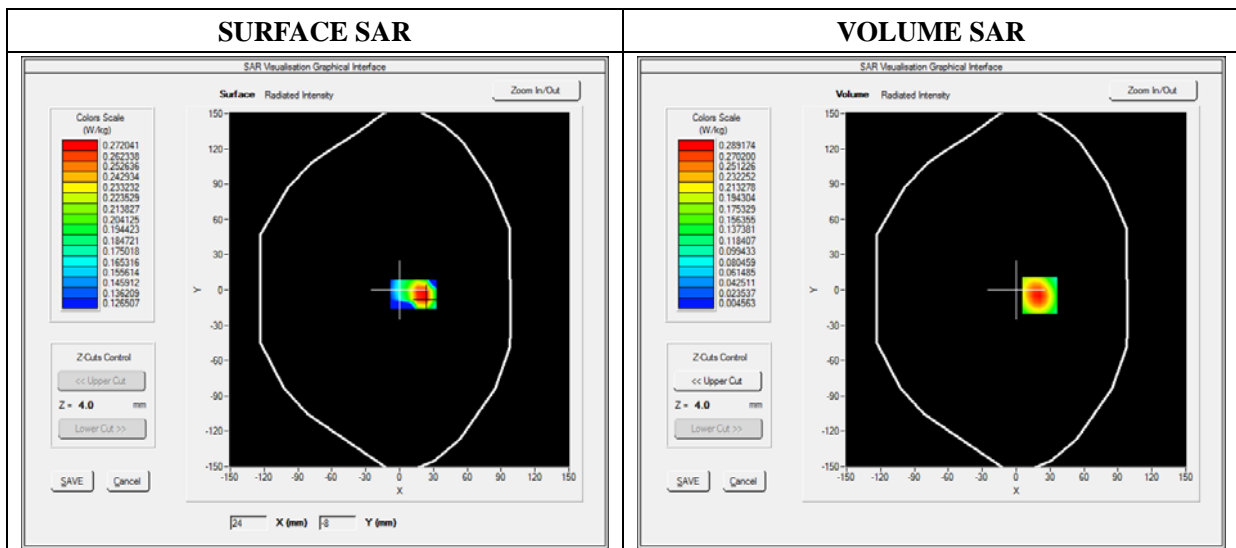

Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	0.071254
SAR 1g (W/Kg)	0.112235

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.1460	0.0895	0.0522	0.0342

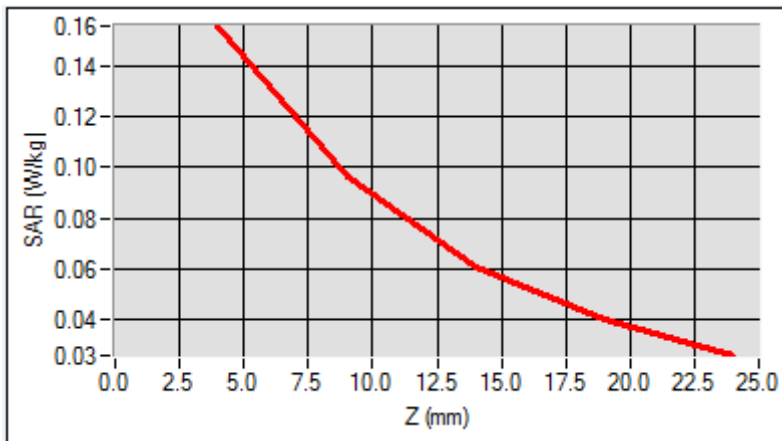

3D screen shot	Hot spot position

MEASUREMENT 61

Type: Phone measurement (Complete)

Date of measurement: 06/03/2014

Measurement duration: 12 minutes 3 seconds


E-field Probe: SSE5 - SN 09/13 EP168; ConvF: 5.70; Calibrated: 03/21/2014

A. Experimental conditions

Area Scan	sam_direct_droit2_surf8mm.txt
Phantom	Flat Plane
Device Position	(Voice mode)Front
Band	WiFi_802.11b
Channels	Low
Signal	Duty Cycle: 1.00 (Crest factor: 1.00)

B. SAR Measurement Results


Frequency (MHz)	2412.000000
Relative Permittivity (real part)	51.082401
Conductivity (S/m)	1.910245
Power Variation (%)	0.542660
Ambient Temperature	21.1
Liquid Temperature	21.2


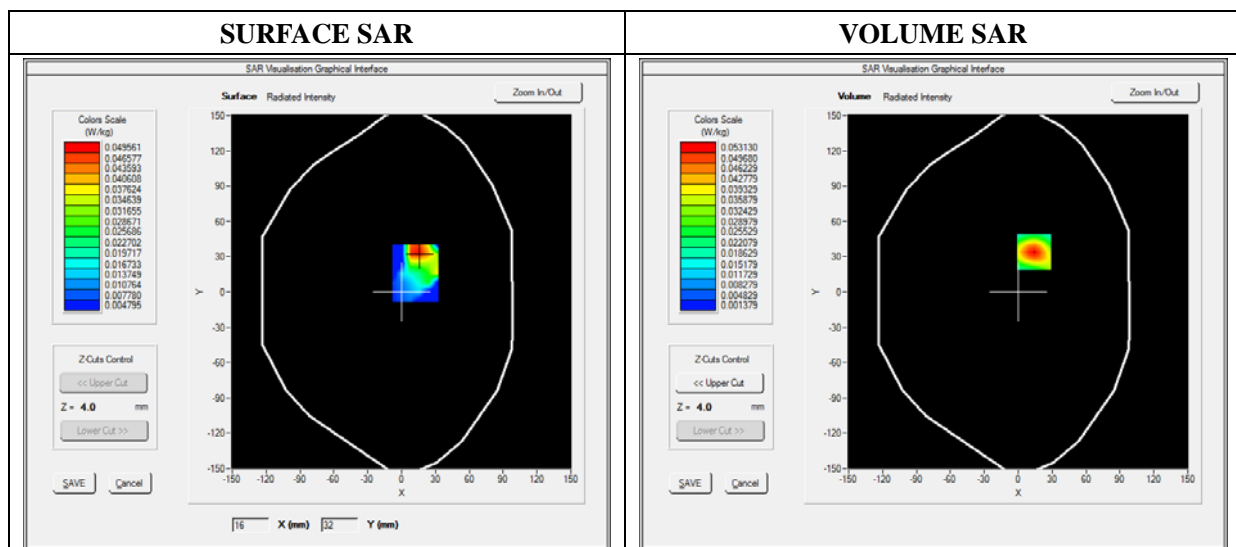


Maximum location: X=14.00, Y=34.00

SAR 10g (W/Kg)	0.024215
SAR 1g (W/Kg)	0.048456

Z (mm)	0.00	4.00	9.00	14.00	19.00
SAR (W/Kg)	0.0000	0.0544	0.0217	0.0119	0.0058

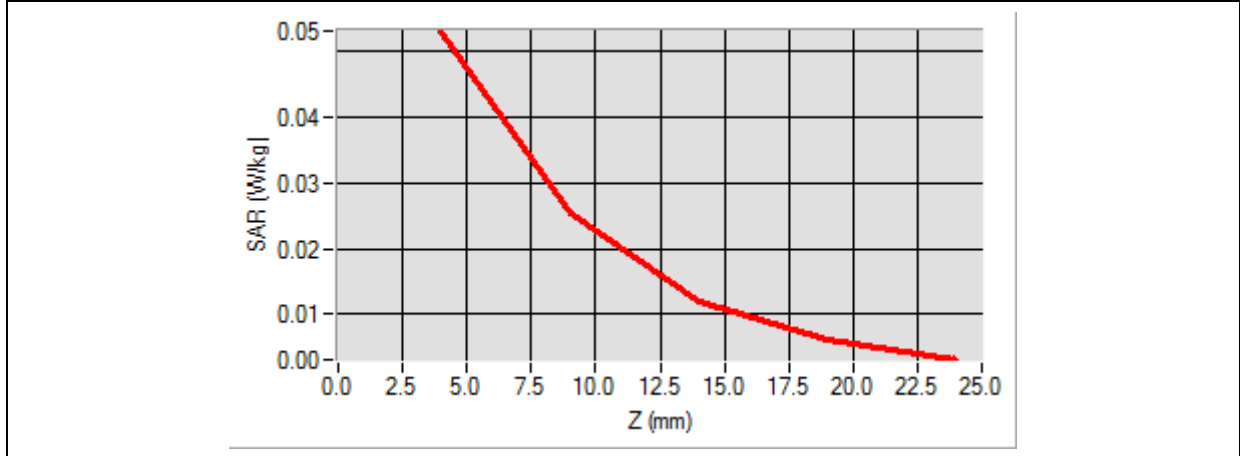

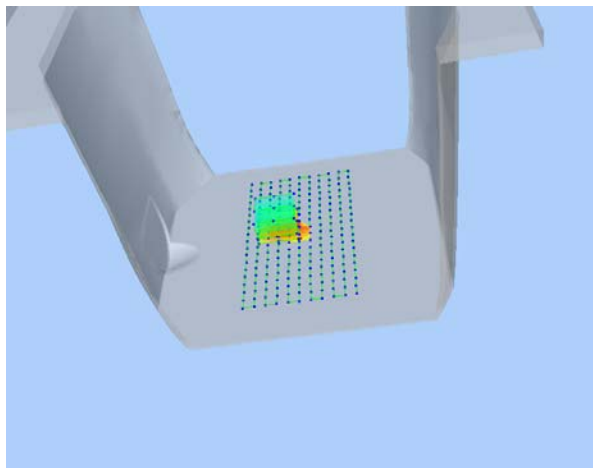3D screen shot	Hot spot position
	

Annex C. EUT Photos


EUT View_Front



EUT View_Back



Antenna View

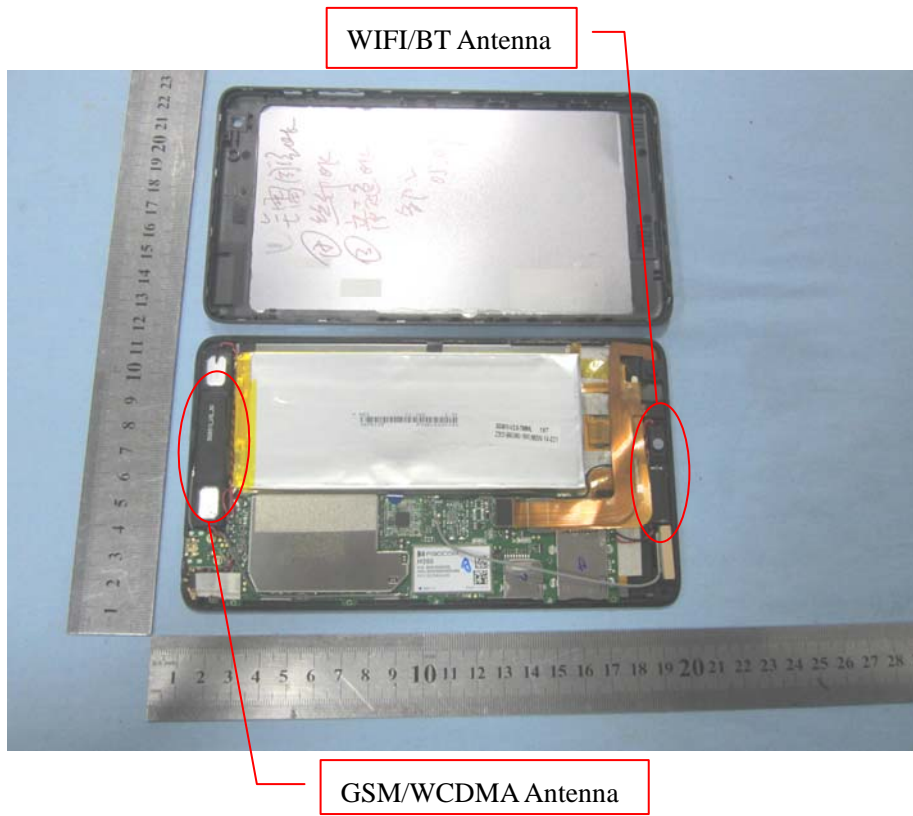


Annex D. Test Setup Photos

Test View 1 (Right Head)

Cheek




Tilt

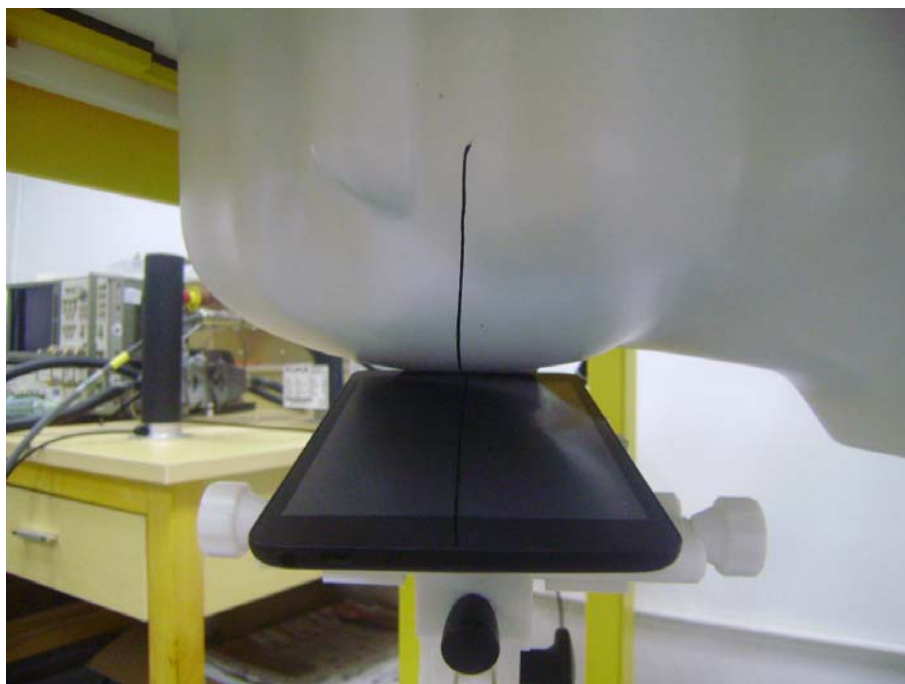

Test View 2 (Left Head)

Cheek

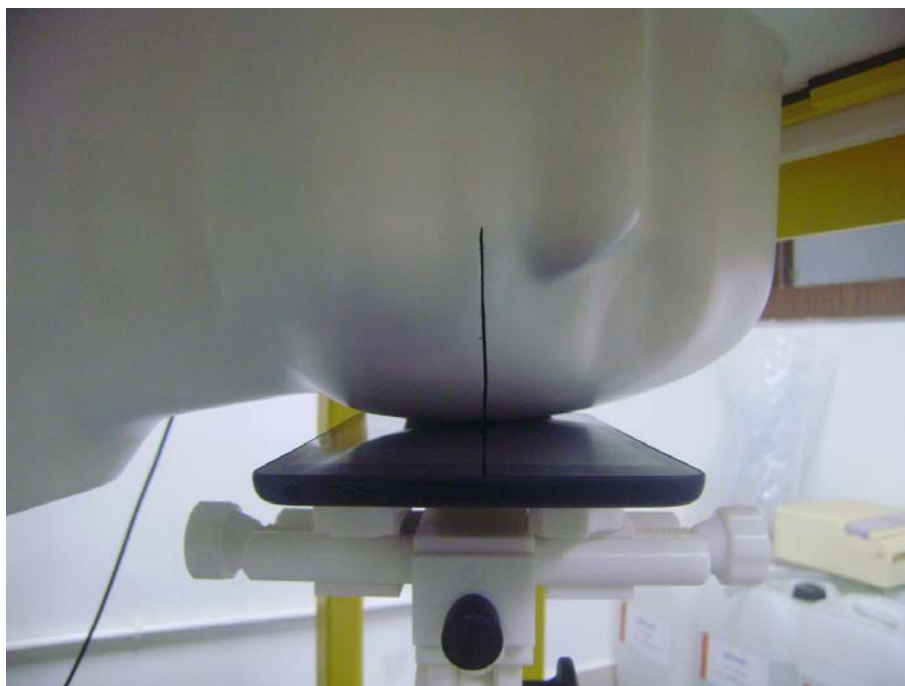

Tilt



Test View 3

Body Back



Right side



Left side



Top side



Bottom Side



Body-worn



Annex E. Calibration Certificate

Please refer to the exhibit for the calibration certificate

******* END OF REPORT *******