



# **FCC RADIO TEST REPORT-WIFI**

## **FCC ID:2ABFV-PGOB9**

**Product :** Pc smart

**Trade Name :** N/A

**Model Name :** PTSGOB09-A

**Serial Model :** N/A

**Report No. :** NTEK-2015NT06272141F1

### **Prepared for**

PC Smart S.A.

Carrera 116 no.15-25, Bogota, Colombia

### **Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street  
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website:www.ntek.org.cn



**Table of Contents**

	<b>Page</b>
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2 . GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
<b>3 . EMC EMISSION TEST</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
3.1.2 TEST PROCEDURE	15
3.1.3 DEVIATION FROM TEST STANDARD	15
3.1.4 TEST SETUP	15
3.1.5 EUT OPERATING CONDITIONS	15
3.1.6 TEST RESULTS	16
3.2 RADIATED EMISSION MEASUREMENT	24
3.2.1 RADIATED EMISSION LIMITS	24
3.2.2 TEST PROCEDURE	25
3.2.3 DEVIATION FROM TEST STANDARD	25
3.2.4 TEST SETUP	26
3.2.5 EUT OPERATING CONDITIONS	27
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	28
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	29
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	31
<b>4 . POWER SPECTRAL DENSITY TEST</b>	<b>32</b>
4.1 APPLIED PROCEDURES / LIMIT	32
4.1.1 TEST PROCEDURE	32
4.1.2 DEVIATION FROM STANDARD	32
4.1.3 TEST SETUP	32
4.1.4 EUT OPERATION CONDITIONS	32
4.1.5 TEST RESULTS	33
<b>5 . BANDWIDTH TEST</b>	<b>41</b>
5.1 APPLIED PROCEDURES / LIMIT	41
5.1.1 TEST PROCEDURE	41

**Table of Contents**

	<b>Page</b>
<b>TEST SETUP</b>	<b>41</b>
<b>5.1.2 EUT OPERATION CONDITIONS</b>	<b>41</b>
<b>5.1.3 TEST RESULTS</b>	<b>42</b>
<b>6 . PEAK OUTPUT POWER TEST</b>	<b>50</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>50</b>
<b>6.1.1 TEST PROCEDURE</b>	<b>50</b>
<b>6.1.2 DEVIATION FROM STANDARD</b>	<b>50</b>
<b>6.1.3 TEST SETUP</b>	<b>50</b>
<b>6.1.4 EUT OPERATION CONDITIONS</b>	<b>50</b>
<b>6.1.5 TEST RESULTS</b>	<b>51</b>
<b>7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>52</b>
<b>7.1 DEVIATION FROM STANDARD</b>	<b>52</b>
<b>7.2 TEST SETUP</b>	<b>52</b>
<b>7.3 EUT OPERATION CONDITIONS</b>	<b>52</b>
<b>7.4 TEST RESULTS</b>	<b>53</b>
<b>8 . ANTENNA REQUIREMENT</b>	<b>59</b>
<b>8.1 STANDARD REQUIREMENT</b>	<b>59</b>
<b>8.2 EUT ANTENNA</b>	<b>59</b>
<b>9 . EUT TEST PHOTO</b>	<b>60</b>
<b>APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	

### 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report

## 1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	Pc smart	
Trade Name	N/A	
Model Name	PTSGOB09-A	
Serial Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency:	802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz
	Modulation Type:	IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK)
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n(20MHz/40MHz):150/144.44/130/117/115.56/104/86.67/78/52/6.5Mbps
	Number Of Channel	802.11b/g/n20MHz:11CH 802.11n40MHz:7CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	1.0 dbi
	Channel List	Please refer to the Note 2.
Ratings	DC 3.7V	
Adapter	Mode: SJ-0525-U Input: 100-240V~, 50/60Hz, 0.5A Output: 5V $\overline{\text{---}}$ , 2.5A	
Battery	DC 3.7V	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g/n(20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

Channel List for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	06	2437	09	2452		
04	2427	07	2442				
05	2432	08	2447				

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
A	N/A	N/A	FPCB Antenna	N/A	1.0	Wifi Antenna



## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH9
Mode 5	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	802.11n20 CH1/ CH6/ CH11
Mode 4	802.11n40 CH3/ CH6/ CH 9
Mode 5	Link Mode


Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) EUT configured to transmit continuously:


Operated Mode for Worst Duty Cycle	
Test Signal Duty Cycle (x)	Average correction factor (dB)
100% - IEEE 802.11b	0
100% - IEEE 802.11g	0
100% - IEEE 802.11n (HT20)	0
100% - IEEE 802.11n (HT40)	0

### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

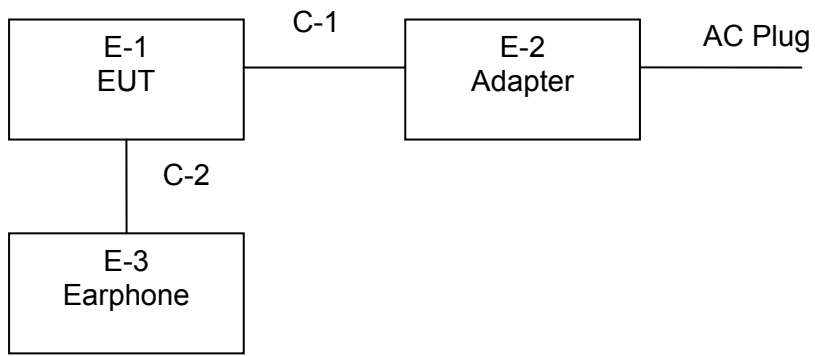

Radiated Spurious Emission Test



**2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)**

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Pc smart	N/A	PTSGOB09-A	N/A	EUT
E-2	Adapter	N/A	SJ-0525-U	N/A	
E-3	Earphone	N/A	2688		

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05	1 year
1*	Spectrum Analyzer	Agilent	E4407B	MY45108040	2014.07.06	2015.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05	1 year
3*	Bilog Antenna	TESEQ	CBL6111D	31216	2014.07.06	2015.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.07	2016.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2015.07.06	2016.07.05	1 year
6*	Horn Antenna	EM	EM-AH-10180	2011071402	2014.07.06	2015.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
7*	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2014.07.06	2015.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05	1 year
10*	Power Meter	R&S	NRVS	100696	2014.07.06	2015.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2015.07.06	2016.07.05	1 year
11*	Power Sensor	R&S	URV5-Z4	0395.1619.05	2014.07.06	2015.07.05	1 year
12	Test Cable	N/A	R-01	N/A	2015.07.06	2016.07.05	1 year
12*	Test Cable	N/A	R-01	N/A	2014.07.06	2015.07.05	1 year
13	Test Cable	N/A	R-02	N/A	2015.07.06	2016.07.05	1 year
13*	Test Cable	N/A	R-02	N/A	2014.07.06	2015.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.07	2016.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2015.06.08	2016.06.07	1 year
7	Test Cable	N/A	C01	N/A	2015.06.08	2016.06.07	1 year
8	Test Cable	N/A	C02	N/A	2015.06.08	2016.06.07	1 year
9	Test Cable	N/A	C03	N/A	2015.06.08	2016.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2015.06.08	2016.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


**3.1.2 TEST PROCEDURE**

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

**3.1.3 DEVIATION FROM TEST STANDARD**

No deviation

**3.1.4 TEST SETUP**

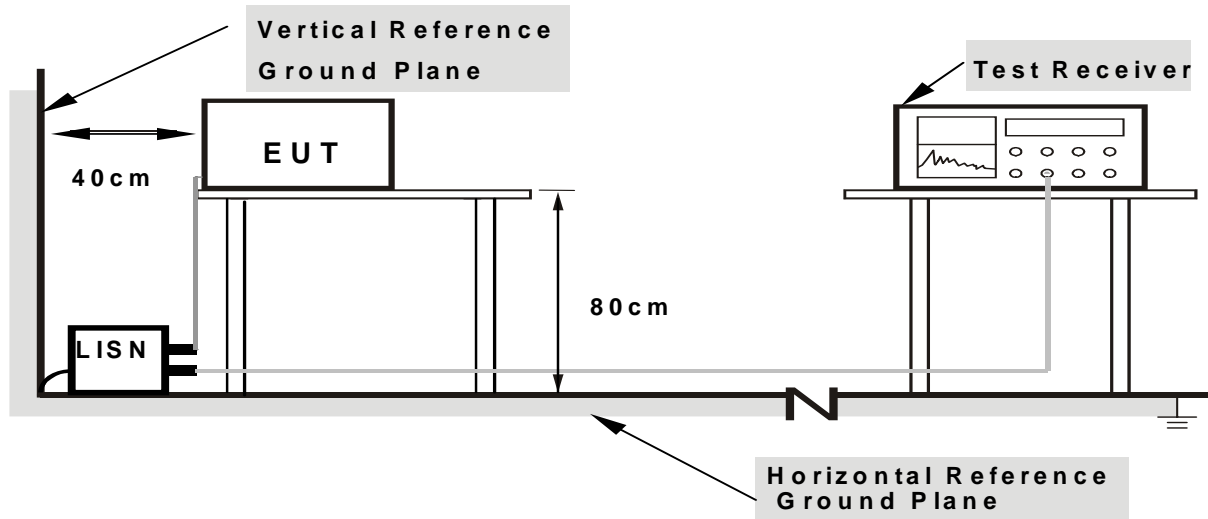

- Note:**
- 1. Support units were connected to second LISN.
  - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

**3.1.5 EUT OPERATING CONDITIONS**

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


### 3.1.6 TEST RESULTS

EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V From adapter AC120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2900	34.45	9.73	44.18	60.52	-16.34	QP
0.2900	30.42	9.73	40.15	50.52	-10.37	AVG
0.3860	39.51	9.41	48.92	58.15	-9.23	QP
0.3860	35.10	9.41	44.51	48.15	-3.64	AVG
0.6260	35.14	9.77	44.91	56.00	-11.09	QP
0.6260	29.00	9.77	38.77	46.00	-7.23	AVG
0.8300	36.13	9.77	45.90	56.00	-10.10	QP
0.8300	26.10	9.77	35.87	46.00	-10.13	AVG
1.9620	39.47	9.65	49.12	56.00	-6.88	QP
1.9620	27.79	9.65	37.44	46.00	-8.56	AVG
3.3700	34.57	9.68	44.25	56.00	-11.75	QP
3.3700	23.05	9.68	32.73	46.00	-13.27	AVG

**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

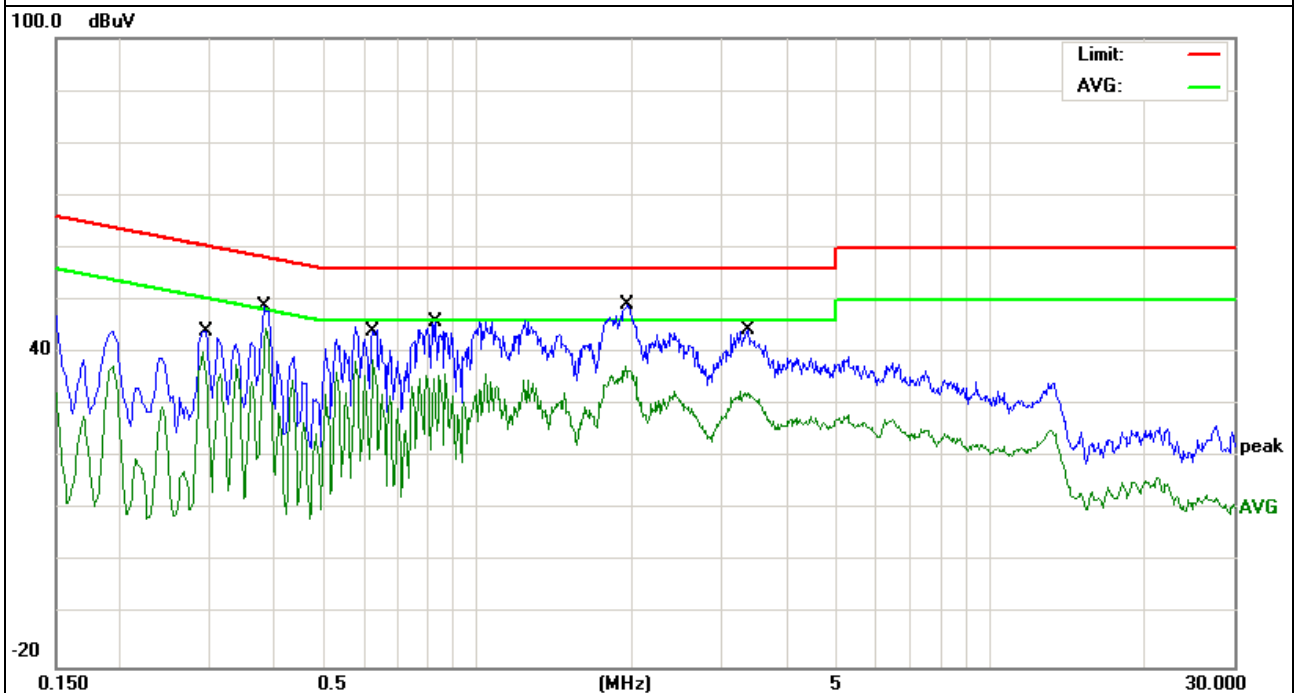




EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V From adapter AC120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2900	34.70	9.61	44.31	60.52	-16.21	QP
0.2900	30.87	9.61	40.48	50.52	-10.04	AVG
0.3860	39.31	9.63	48.94	58.15	-9.21	QP
0.3860	35.17	9.63	44.80	48.15	-3.35	AVG
0.6300	35.90	9.65	45.55	56.00	-10.45	QP
0.6300	27.98	9.65	37.63	46.00	-8.37	AVG
1.0180	36.78	9.61	46.39	56.00	-9.61	QP
1.0180	26.43	9.61	36.04	46.00	-9.96	AVG
1.9540	39.53	9.54	49.07	56.00	-6.93	QP
1.9540	27.97	9.54	37.51	46.00	-8.49	AVG
3.2220	35.02	9.52	44.54	56.00	-11.46	QP
3.2220	23.42	9.52	32.94	46.00	-13.06	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

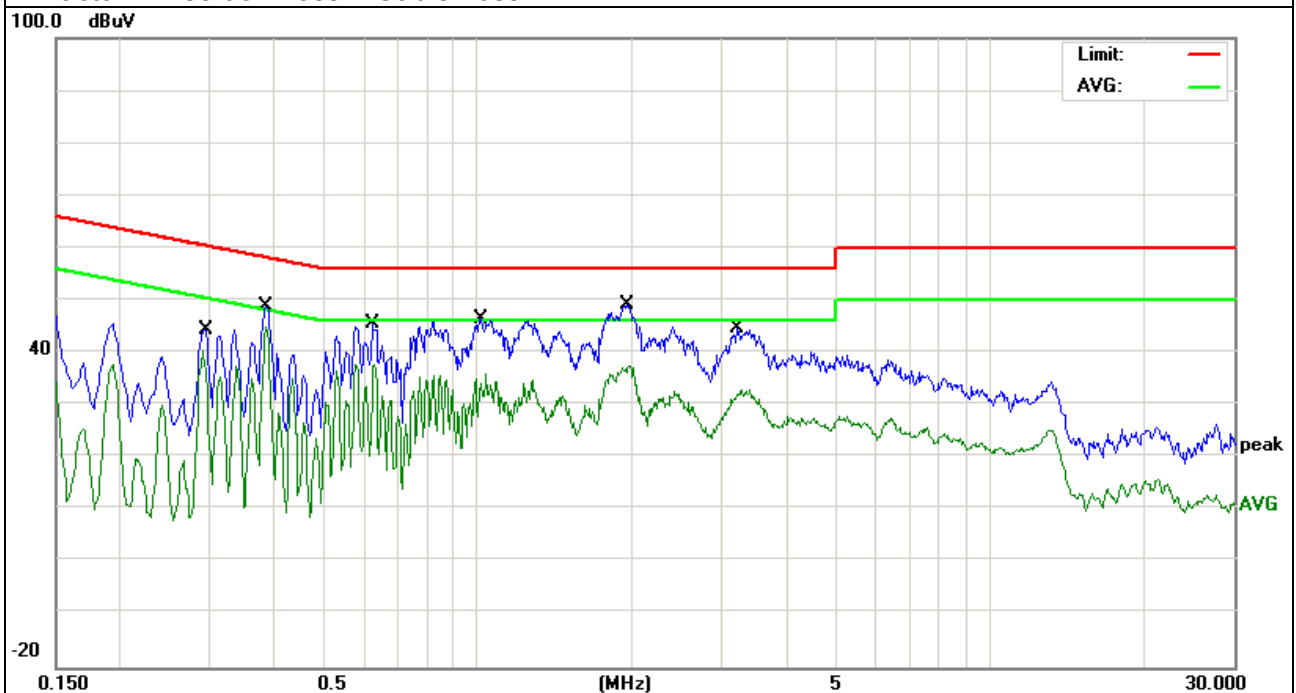


EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V form Adapter AC 240V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1940	36.60	9.60	46.20	63.86	-17.66	QP
0.1940	28.95	9.60	38.55	53.86	-15.31	AVG
0.2900	34.72	9.73	44.45	60.52	-16.07	QP
0.2900	30.54	9.73	40.27	50.52	-10.25	AVG
0.3860	39.07	9.41	48.48	58.15	-9.67	QP
0.3860	35.34	9.41	44.75	48.15	-3.40	AVG
0.6260	34.94	9.77	44.71	56.00	-11.29	QP
0.6260	28.31	9.77	38.08	46.00	-7.92	AVG
1.9500	39.48	9.65	49.13	56.00	-6.87	QP
1.9500	27.69	9.65	37.34	46.00	-8.66	AVG
3.3140	34.38	9.68	44.06	56.00	-11.94	QP
3.3140	23.00	9.68	32.68	46.00	-13.32	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

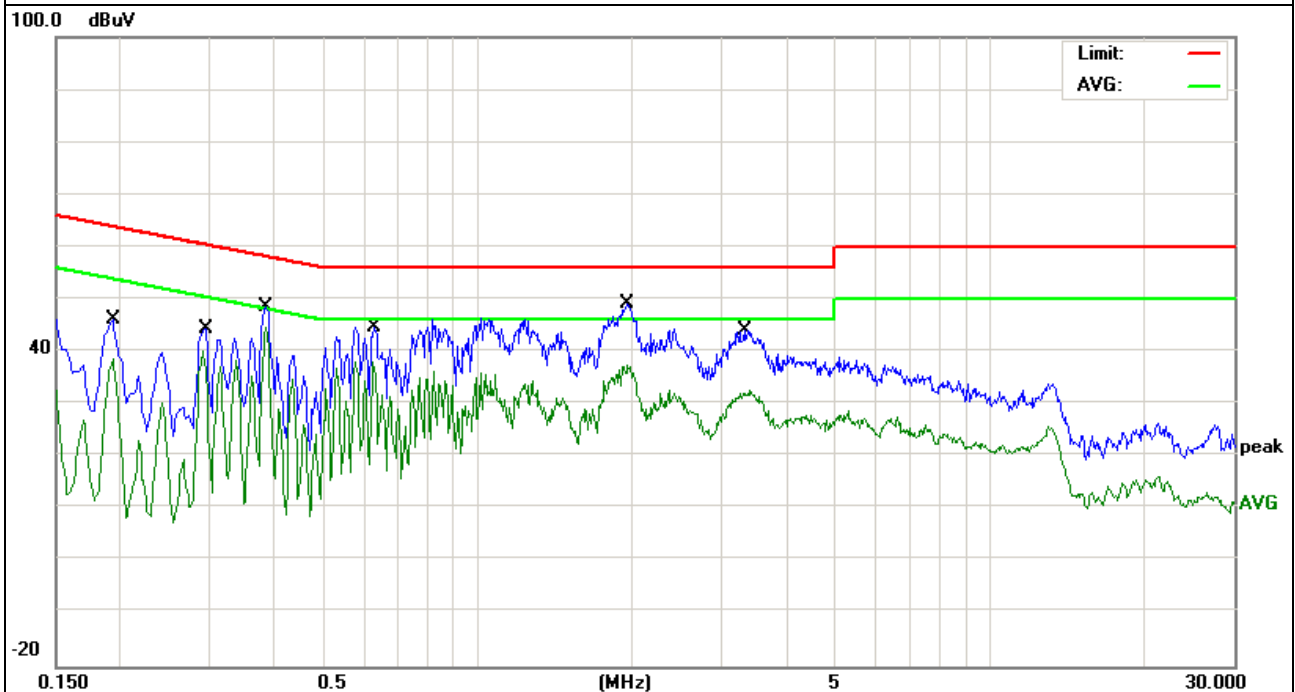


EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V form Adapter AC 240V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1940	36.27	9.61	45.88	63.86	-17.98	QP
0.1940	29.27	9.61	38.88	53.86	-14.98	AVG
0.3860	39.23	9.63	48.86	58.15	-9.29	QP
0.3860	35.10	9.63	44.73	48.15	-3.42	AVG
0.5780	34.86	9.66	44.52	56.00	-11.48	QP
0.5780	28.79	9.66	38.45	46.00	-7.55	AVG
0.6260	34.88	9.65	44.53	56.00	-11.47	QP
0.6260	28.01	9.65	37.66	46.00	-8.34	AVG
1.0380	36.50	9.61	46.11	56.00	-9.89	QP
1.0380	27.02	9.61	36.63	46.00	-9.37	AVG
1.9660	39.94	9.54	49.48	56.00	-6.52	QP
1.9660	29.31	9.54	38.85	46.00	-7.15	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

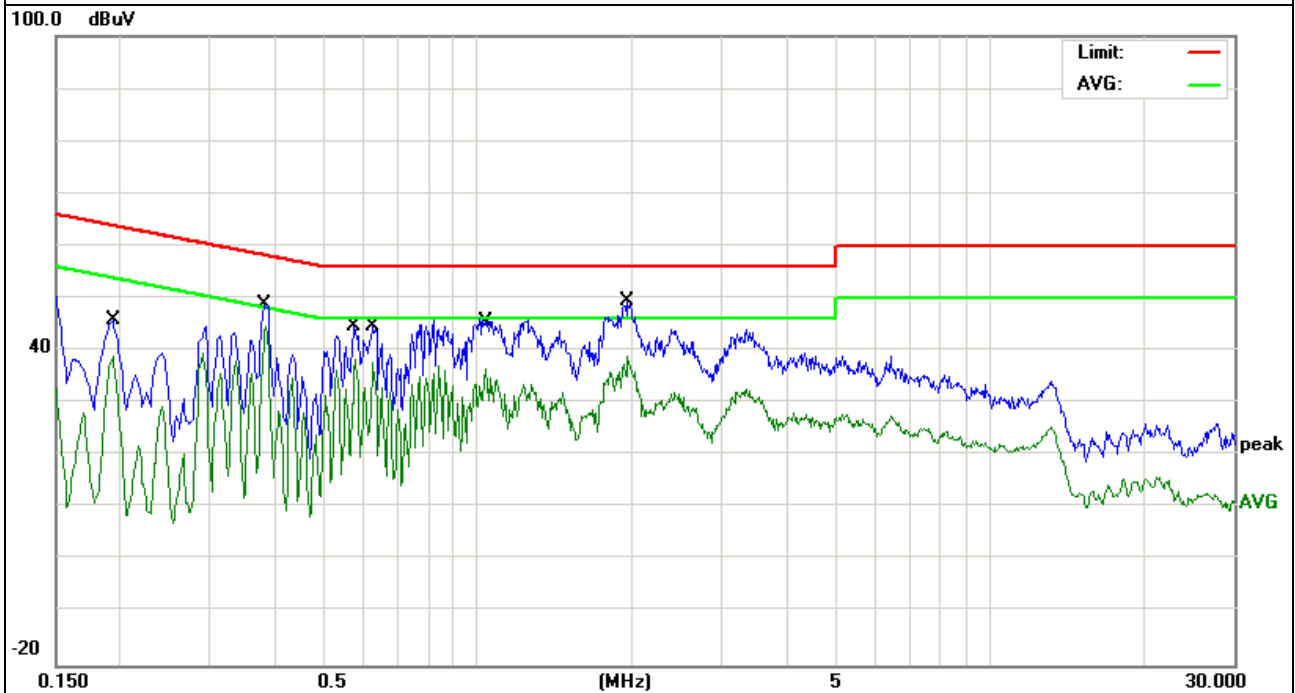


EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V form PC AC 120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2620	33.75	9.69	43.44	61.36	-17.92	QP
0.2620	21.28	9.69	30.97	51.36	-20.39	AVG
0.3660	32.35	9.49	41.84	58.59	-16.75	QP
0.3660	22.66	9.49	32.15	48.59	-16.44	AVG
0.5740	39.90	9.78	49.68	56.00	-6.32	QP
0.5740	23.57	9.78	33.35	46.00	-12.65	AVG
0.7340	36.27	9.77	46.04	56.00	-9.96	QP
0.7340	19.95	9.77	29.72	46.00	-16.28	AVG
1.0620	33.28	9.73	43.01	56.00	-12.99	QP
1.0620	15.33	9.73	25.06	46.00	-20.94	AVG
24.0020	21.10	9.93	31.03	60.00	-28.97	QP
24.0020	19.03	9.93	28.96	50.00	-21.04	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

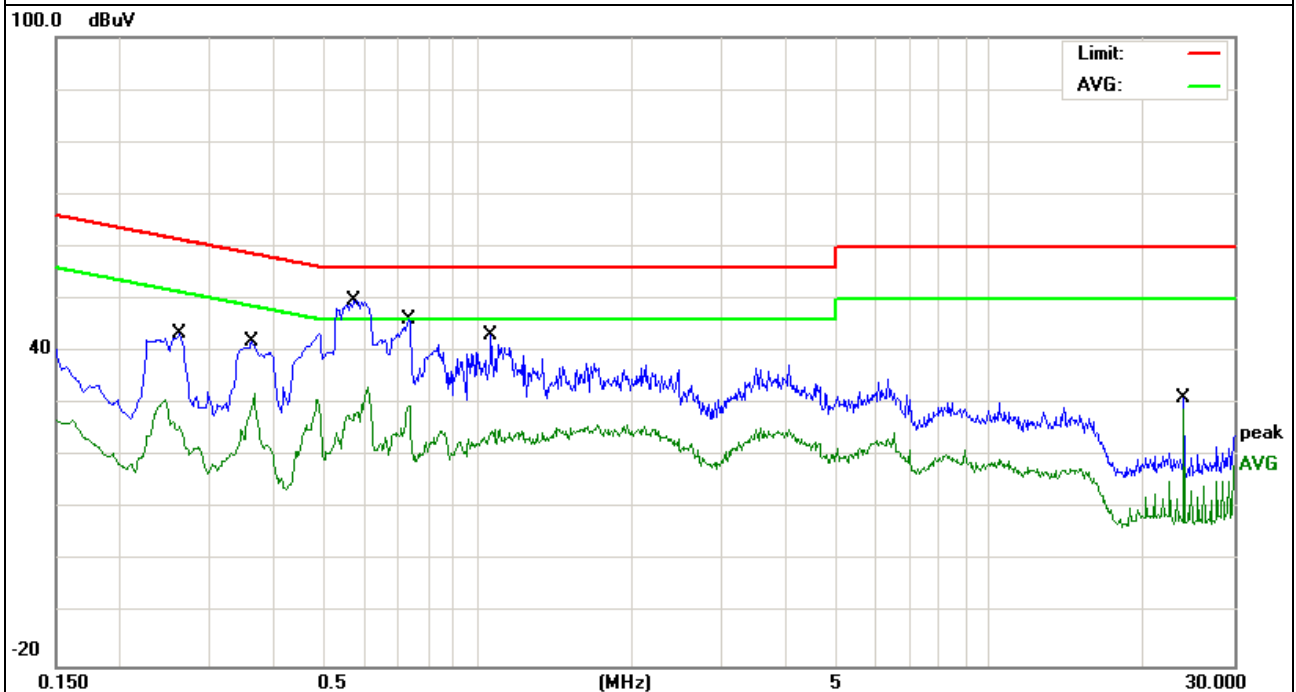


EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V form PC AC 120V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2620	34.00	9.62	43.62	61.36	-17.74	QP
0.2620	21.49	9.62	31.11	51.36	-20.25	AVG
0.3660	32.77	9.63	42.40	58.59	-16.19	QP
0.3660	21.17	9.63	30.80	48.59	-17.79	AVG
0.6020	40.02	9.65	49.67	56.00	-6.33	QP
0.6020	24.77	9.65	34.42	46.00	-11.58	AVG
0.7420	36.01	9.63	45.64	56.00	-10.36	QP
0.7420	20.30	9.63	29.93	46.00	-16.07	AVG
1.0660	34.70	9.61	44.31	56.00	-11.69	QP
1.0660	16.93	9.61	26.54	46.00	-19.46	AVG
2.2659	28.26	9.53	37.79	56.00	-18.21	QP
2.2659	15.73	9.53	25.26	46.00	-20.74	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

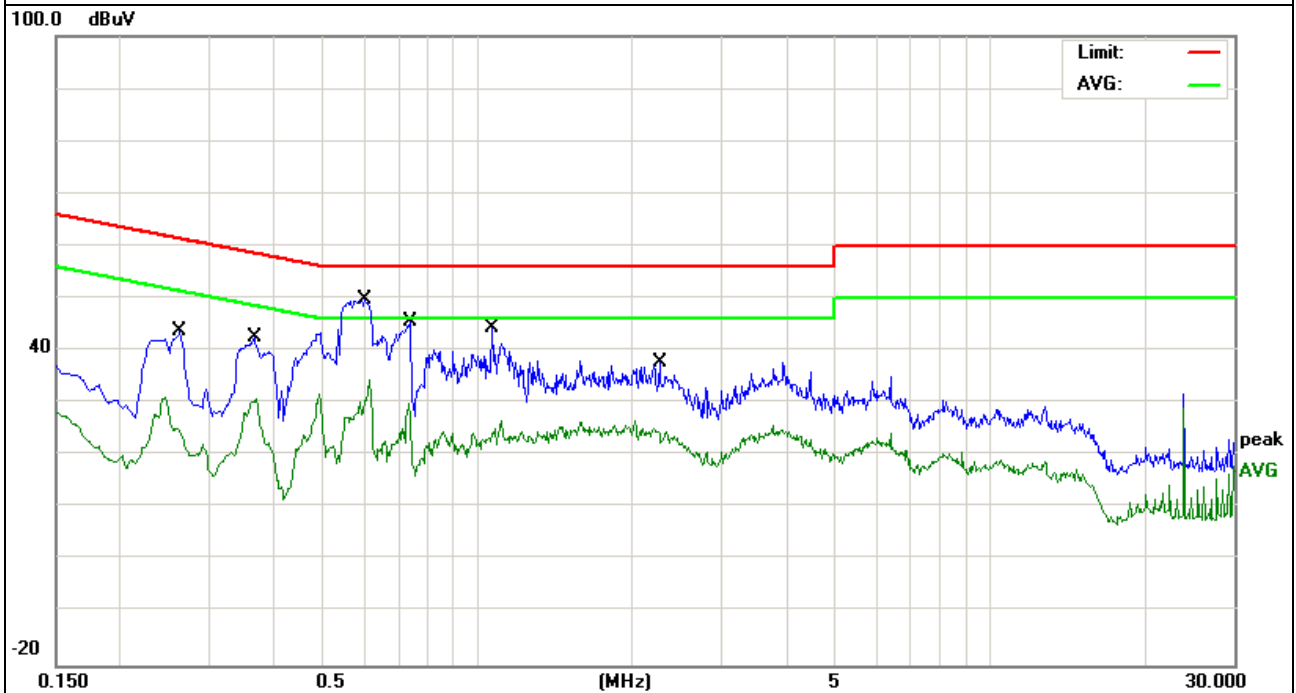


EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V form PC AC 240V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2340	32.94	9.65	42.59	62.30	-19.71	QP
0.2340	18.82	9.65	28.47	52.30	-23.83	AVG
0.3500	30.22	9.55	39.77	58.96	-19.19	QP
0.3500	13.12	9.55	22.67	48.96	-26.29	AVG
0.5100	32.67	9.77	42.44	56.00	-13.56	QP
0.5100	16.40	9.77	26.17	46.00	-19.83	AVG
0.6140	30.82	9.77	40.59	56.00	-15.41	QP
0.6140	13.82	9.77	23.59	46.00	-22.41	AVG
1.9340	30.64	9.65	40.29	56.00	-15.71	QP
1.9340	17.28	9.65	26.93	46.00	-19.07	AVG
3.9540	28.33	9.70	38.03	56.00	-17.97	QP
3.9540	18.30	9.70	28.00	46.00	-18.00	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

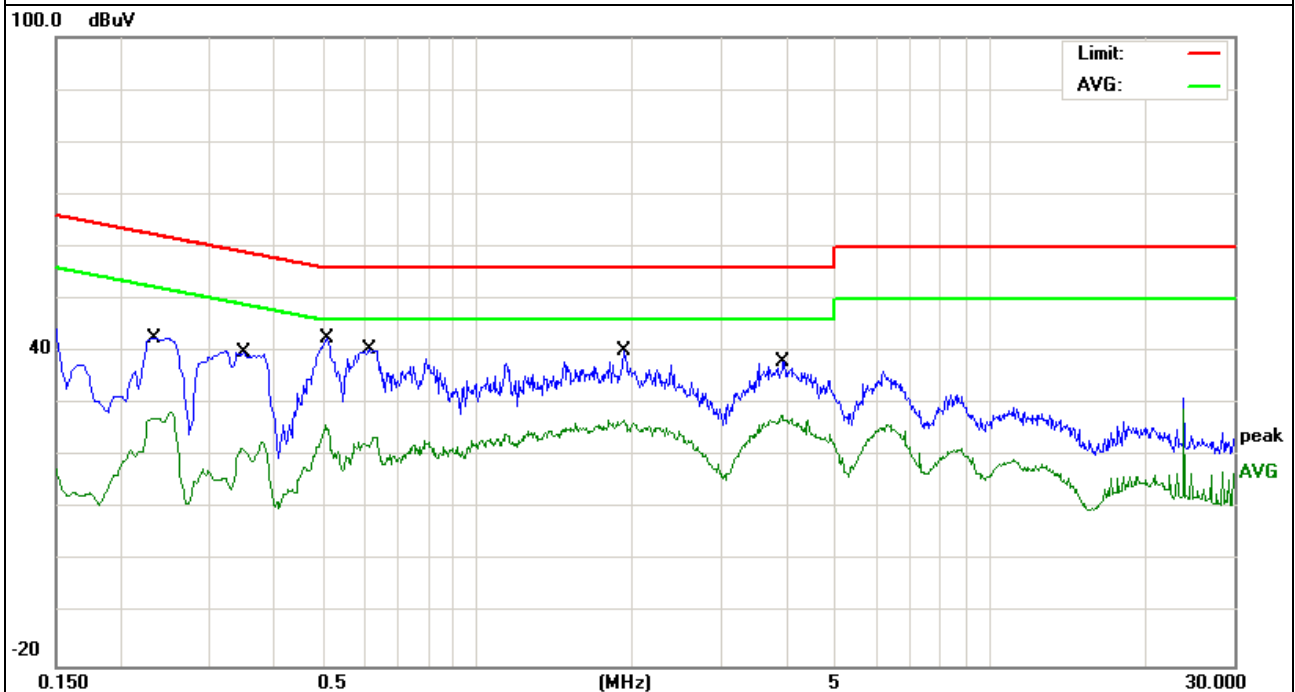


EUT :	Pc smart	Model Name. :	PTSGOB09-A
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V form PC AC 240V/60Hz	Test Mode :	Mode 5

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2340	34.27	9.61	43.88	62.30	-18.42	QP
0.2340	19.23	9.61	28.84	52.30	-23.46	AVG
0.3460	30.72	9.63	40.35	59.06	-18.71	QP
0.3460	13.31	9.63	22.94	49.06	-26.12	AVG
0.5220	32.67	9.68	42.35	56.00	-13.65	QP
0.5220	16.03	9.68	25.71	46.00	-20.29	AVG
0.5940	32.15	9.66	41.81	56.00	-14.19	QP
0.5940	15.05	9.66	24.71	46.00	-21.29	AVG
1.8500	29.51	9.55	39.06	56.00	-16.94	QP
1.8500	16.82	9.55	26.37	46.00	-19.63	AVG
3.7340	28.56	9.52	38.08	56.00	-17.92	QP
3.7340	18.37	9.52	27.89	46.00	-18.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

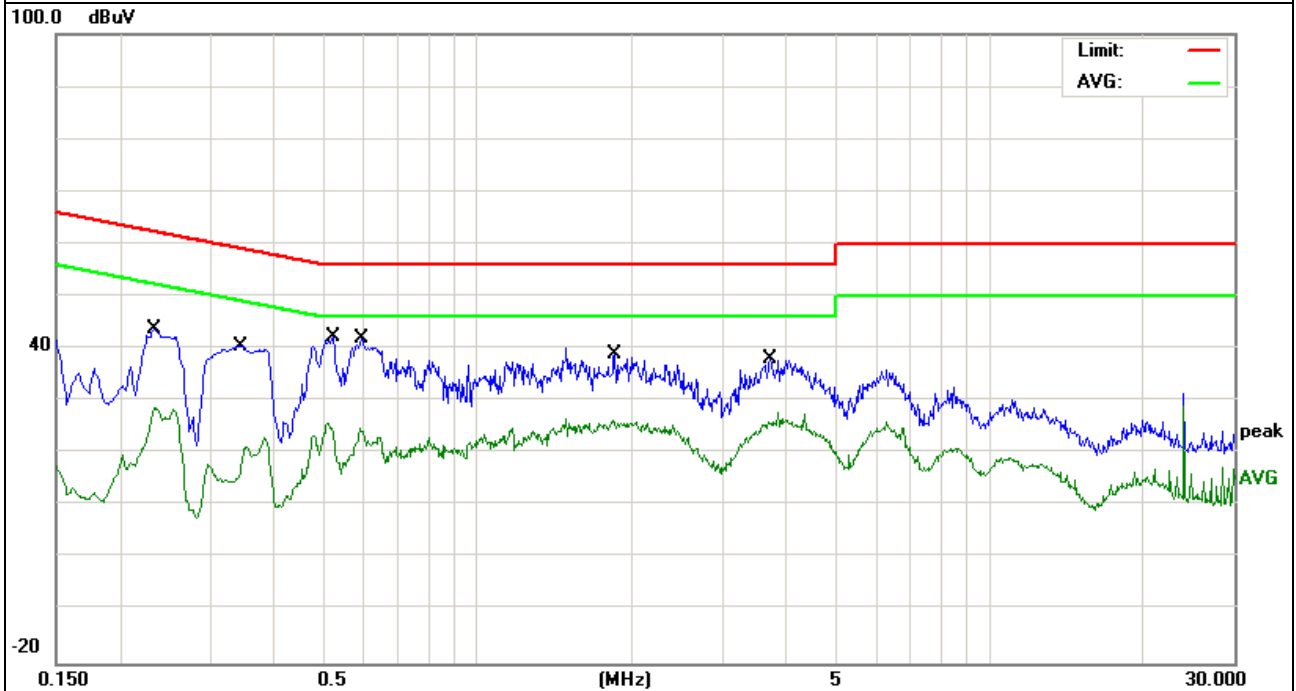

### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	dBuV/m@at 3M	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



**3.2.2 TEST PROCEDURE**

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

**3.2.3 DEVIATION FROM TEST STANDARD**


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

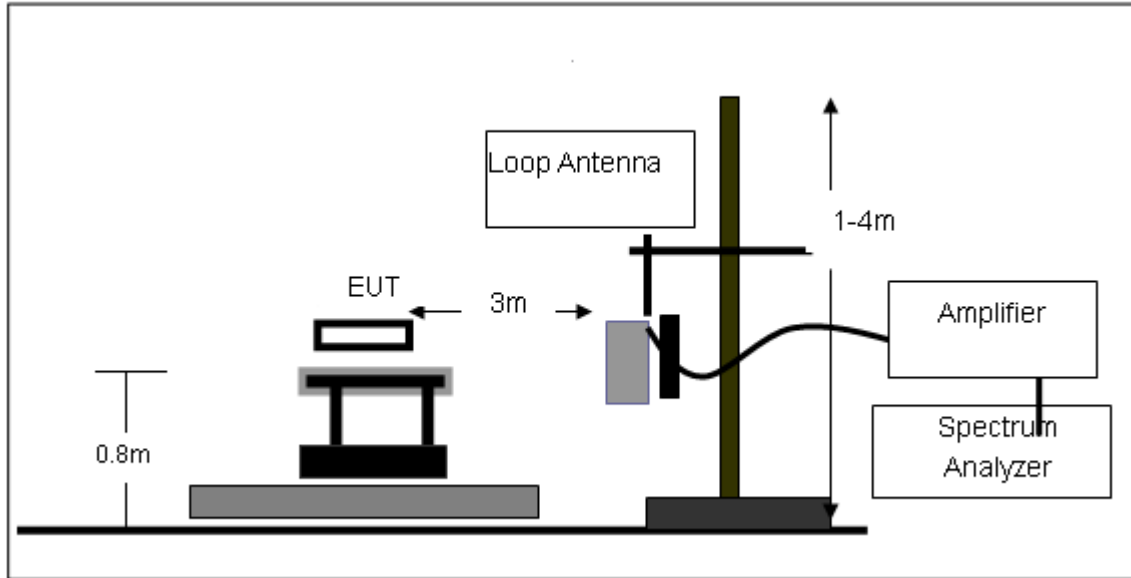

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

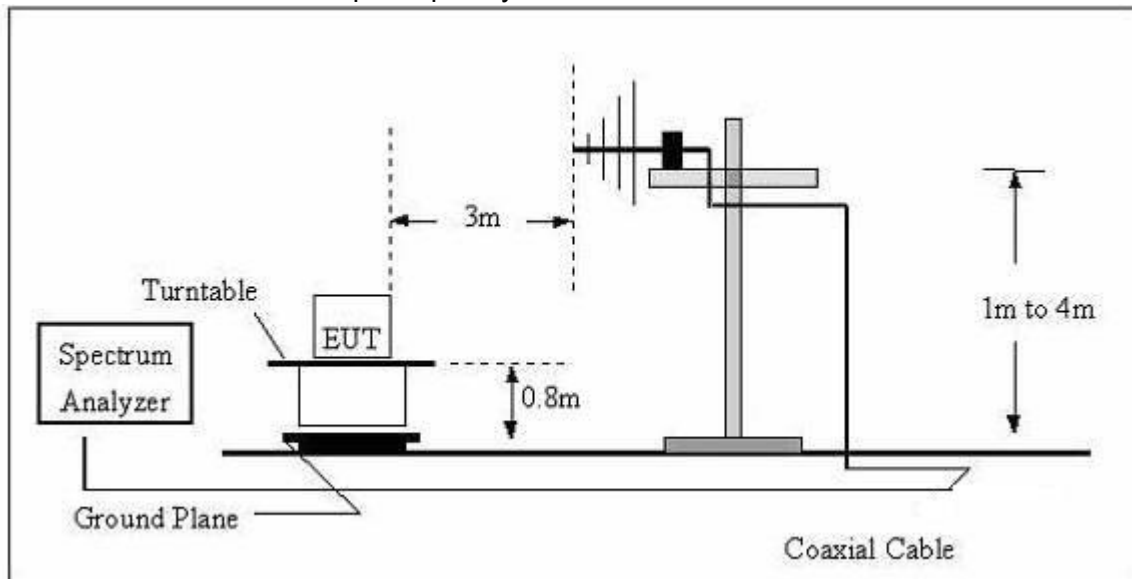

(C) Radiated Emission Test-Up Frequency Above 1GHz

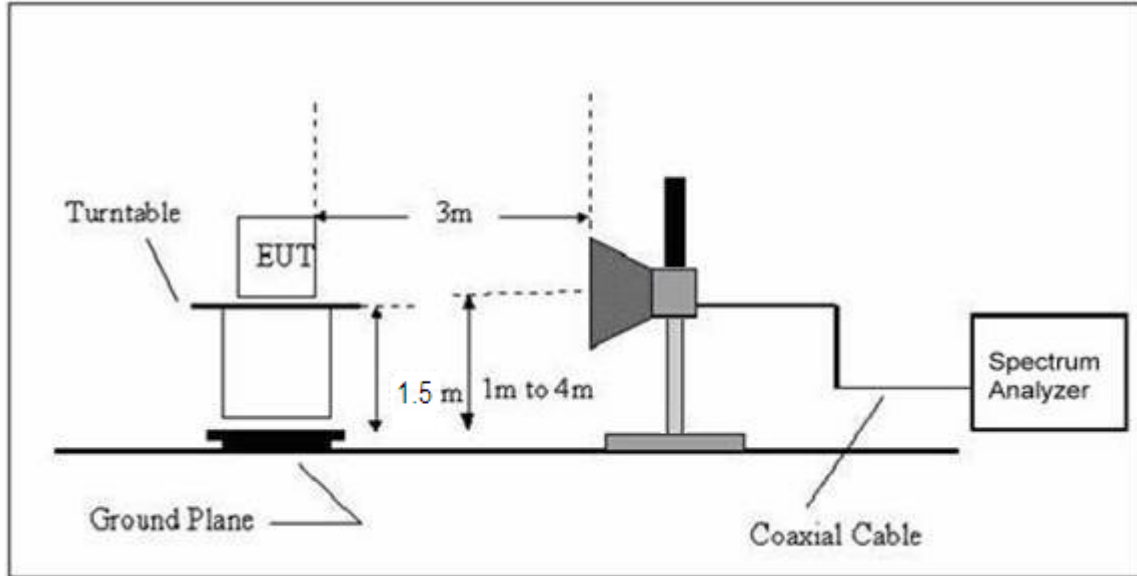

**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)**

EUT:	Pc smart	Model Name. :	PTSGOB09-A
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.


### 3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	30.8535	12.56	18.97	31.53	40.00	-8.47	QP
V	38.2120	16.01	14.66	30.67	40.00	-9.33	QP
V	45.3755	17.03	11.84	28.87	40.00	-11.13	QP
V	56.0007	16.90	8.97	25.87	40.00	-14.13	QP
V	112.5241	14.47	10.49	24.96	43.50	-18.54	QP
V	187.7529	14.85	10.68	25.53	43.50	-17.97	QP

**Remark:**


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

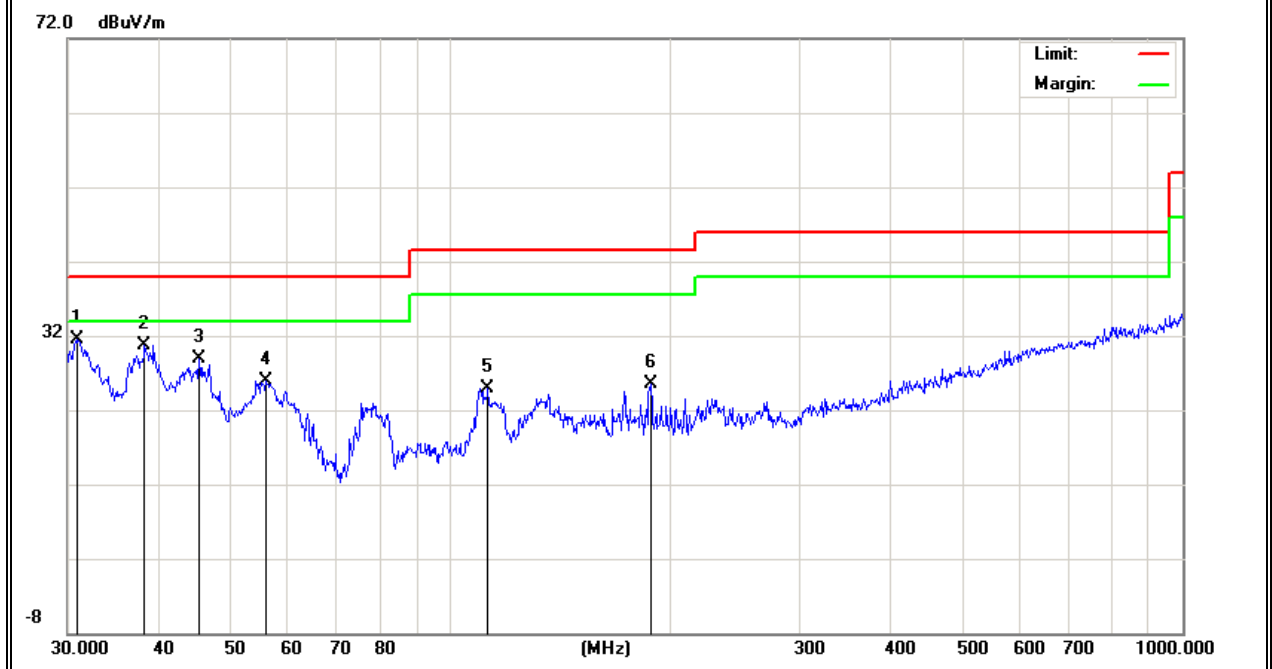

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	54.4515	14.68	9.42	24.10	40.00	-15.90	QP
H	115.3204	12.45	11.09	23.54	43.50	-19.96	QP
H	187.7529	15.37	10.68	26.05	43.50	-17.45	QP
H	468.8761	14.75	19.68	34.43	46.00	-11.57	QP
H	668.1422	10.63	23.91	34.54	46.00	-11.46	QP
H	962.1621	11.91	27.38	39.29	54.00	-14.71	QP

**Remark:**

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

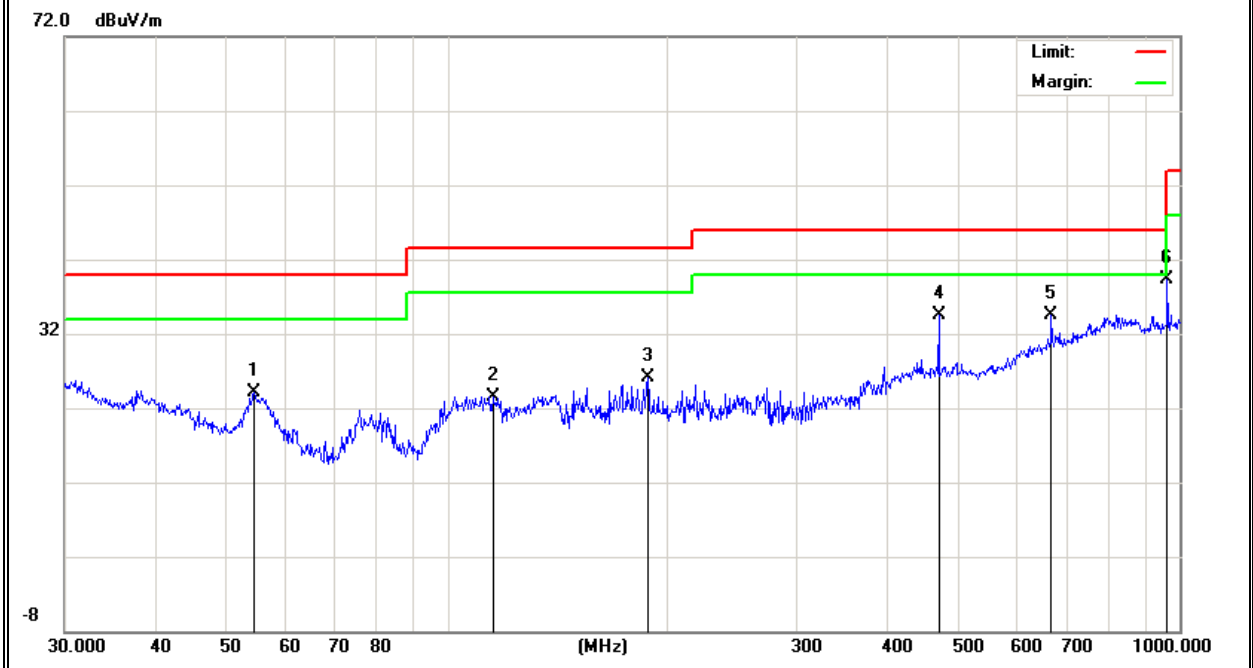

### 3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (2412 MHz)-Above 1G</b>							
Vertical	4824.239	51.24	10.44	61.68	74.00	-12.32	Pk
Vertical	4824.239	35.79	10.44	46.23	54.00	-7.77	Av
Vertical	7236.194	46.35	12.39	58.74	74.00	-15.26	Pk
Vertical	7236.194	30.07	12.39	42.46	54.00	-11.54	Av
Horizontal	4824.316	51.49	10.44	61.93	74.00	-12.07	Pk
Horizontal	4824.316	31.05	10.44	41.49	54.00	-12.51	Av
Horizontal	7236.079	47.17	12.39	59.56	74.00	-14.44	Pk
Horizontal	7236.079	29.3	12.39	41.69	54.00	-12.31	Av
<b>Mid Channel (2437 MHz)-Above 1G</b>							
Vertical	4874.182	51.63	10.40	62.03	74.00	-11.97	Pk
Vertical	4874.182	30.58	10.40	40.98	54.00	-13.02	Av
Vertical	7311.314	47.94	12.75	60.69	74.00	-13.31	Pk
Vertical	7311.314	30.51	12.75	43.26	54.00	-10.74	Av
Horizontal	4874.205	50.61	10.40	61.01	74.00	-12.99	Pk
Horizontal	4874.205	32.06	10.40	42.46	54.00	-11.54	Av
Horizontal	7311.266	47.34	12.75	60.09	74.00	-13.91	Pk
Horizontal	7311.266	30.62	12.75	43.37	54.00	-10.63	Av
<b>High Channel (2462 MHz)- Above 1G</b>							
Vertical	4924.298	51.01	10.39	61.40	74.00	-12.60	Pk
Vertical	4924.298	31.75	10.39	42.14	54.00	-11.86	Av
Vertical	7386.103	45.79	12.68	58.47	74.00	-15.53	Pk
Vertical	7386.103	30.22	12.68	42.90	54.00	-11.10	Av
Horizontal	4924.336	51.02	10.39	61.41	74.00	-12.59	Pk
Horizontal	4924.336	30.76	10.39	41.15	54.00	-12.85	Av
Horizontal	7386.326	48.88	12.68	61.56	74.00	-12.44	Pk
Horizontal	7386.326	30.24	12.68	42.92	54.00	-11.08	Av

Note: "802.11b" mode is the worst mode.

#### 4. POWER SPECTRAL DENSITY TEST

##### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

##### 4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz ≤ Set the RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

##### 4.1.2 DEVIATION FROM STANDARD

No deviation.

##### 4.1.3 TEST SETUP



##### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.





### 4.1.5 TEST RESULTS

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-17.72	8	PASS
2437 MHz	-18.37	8	PASS
2462 MHz	-18.72	8	PASS


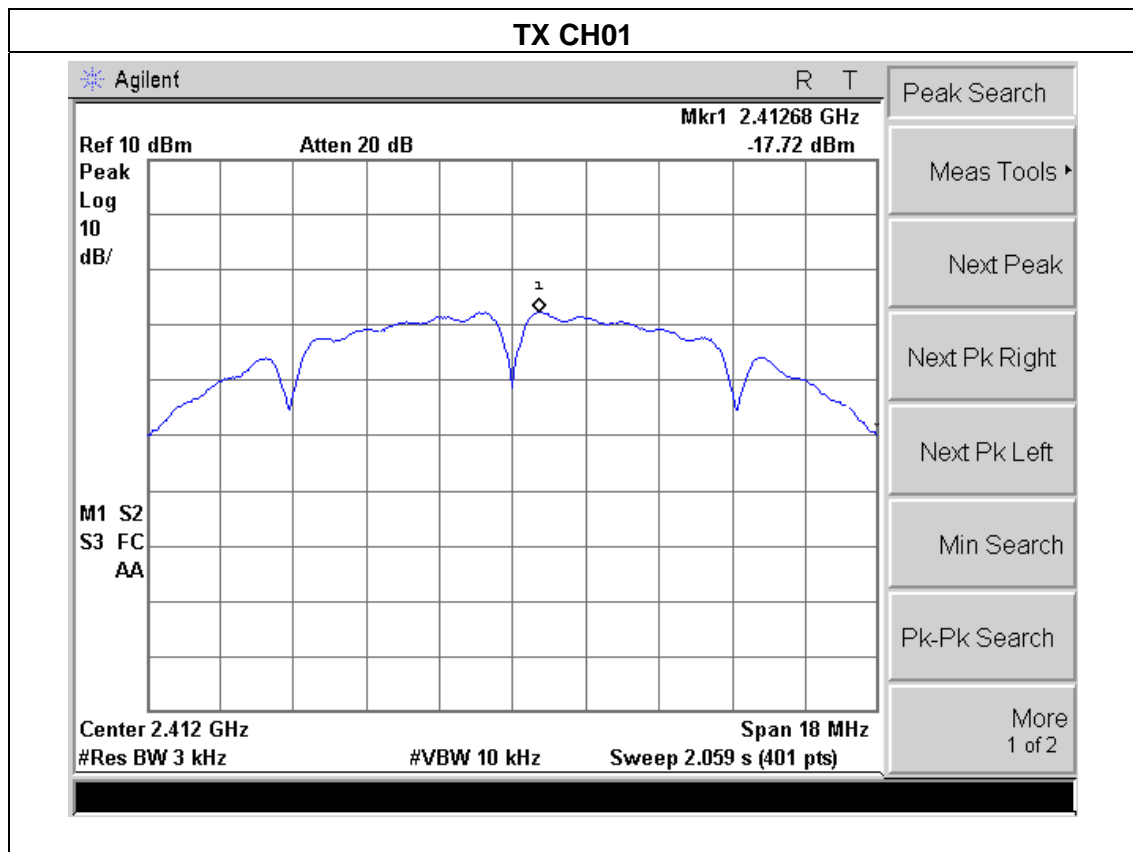


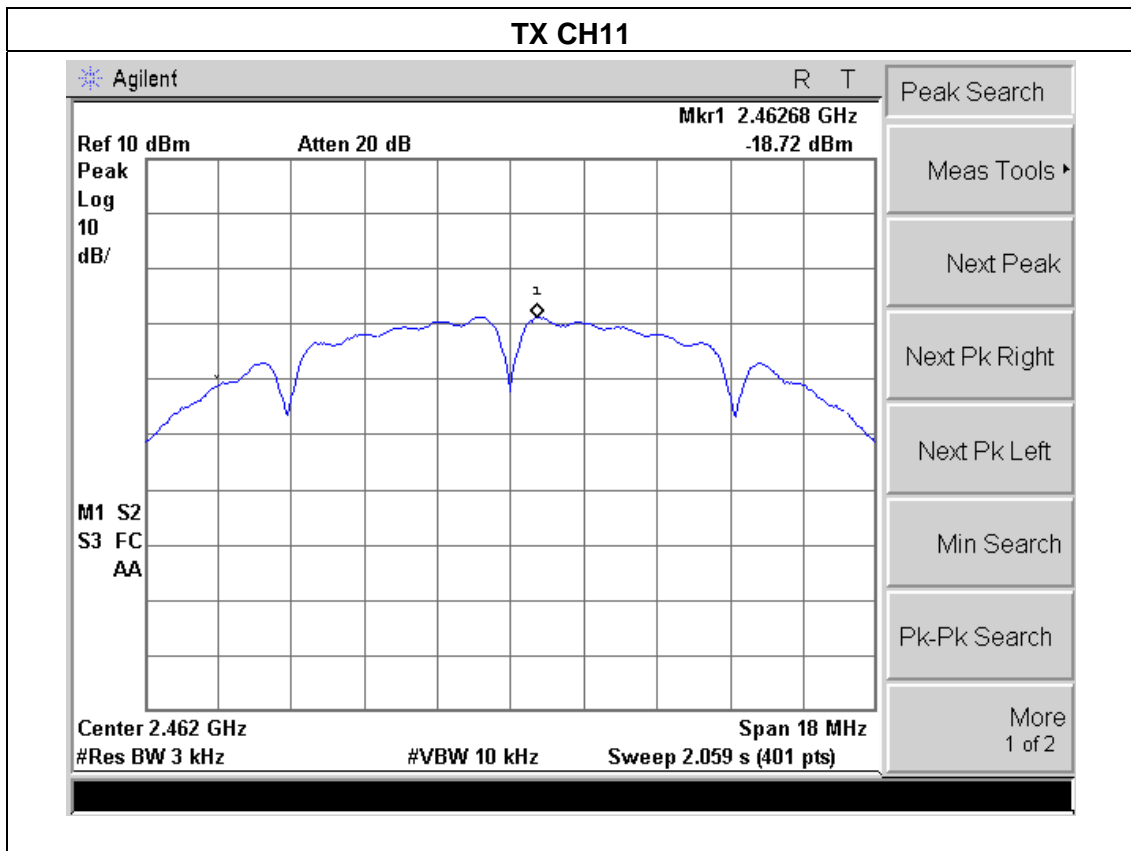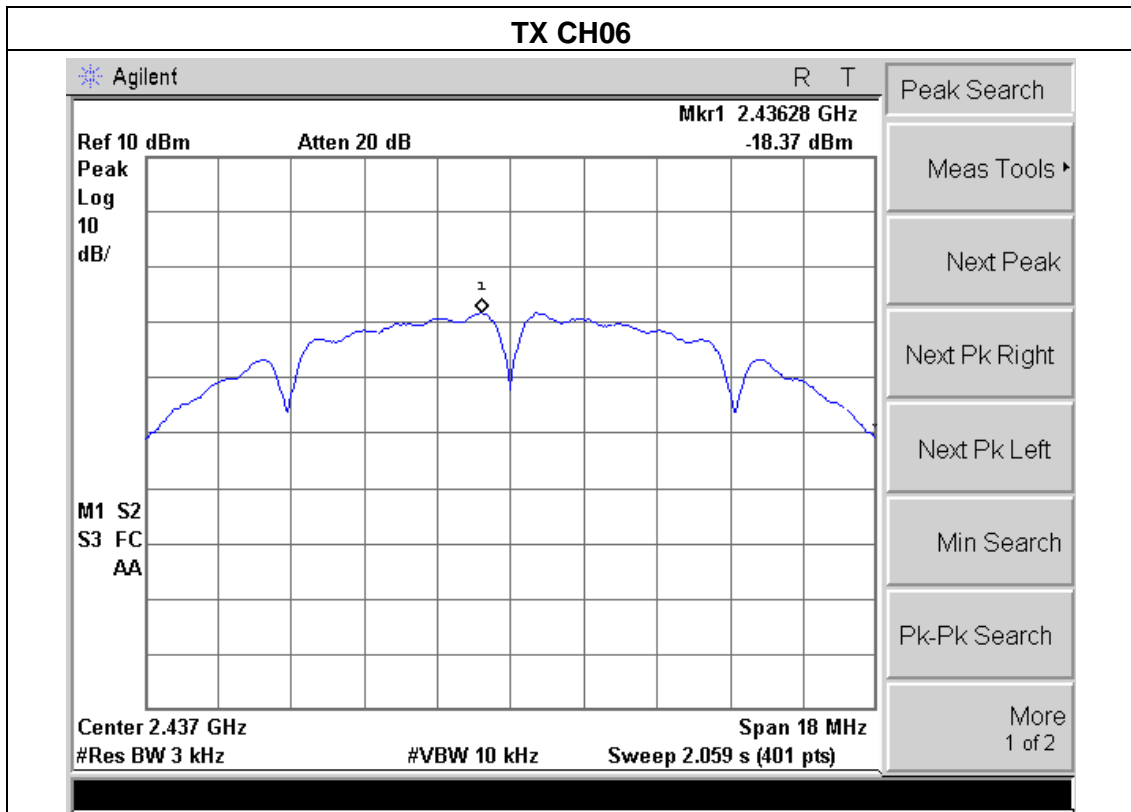

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-20.00	8	PASS
2437 MHz	-21.51	8	PASS
2462 MHz	-20.39	8	PASS


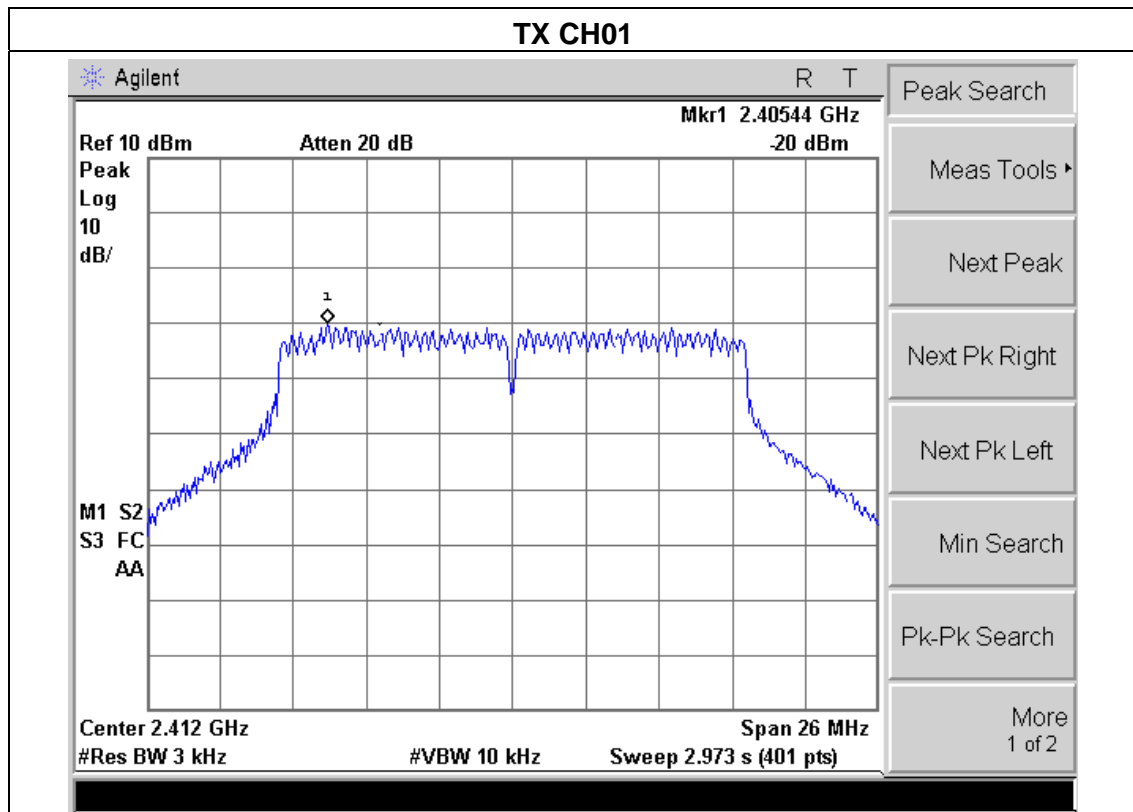


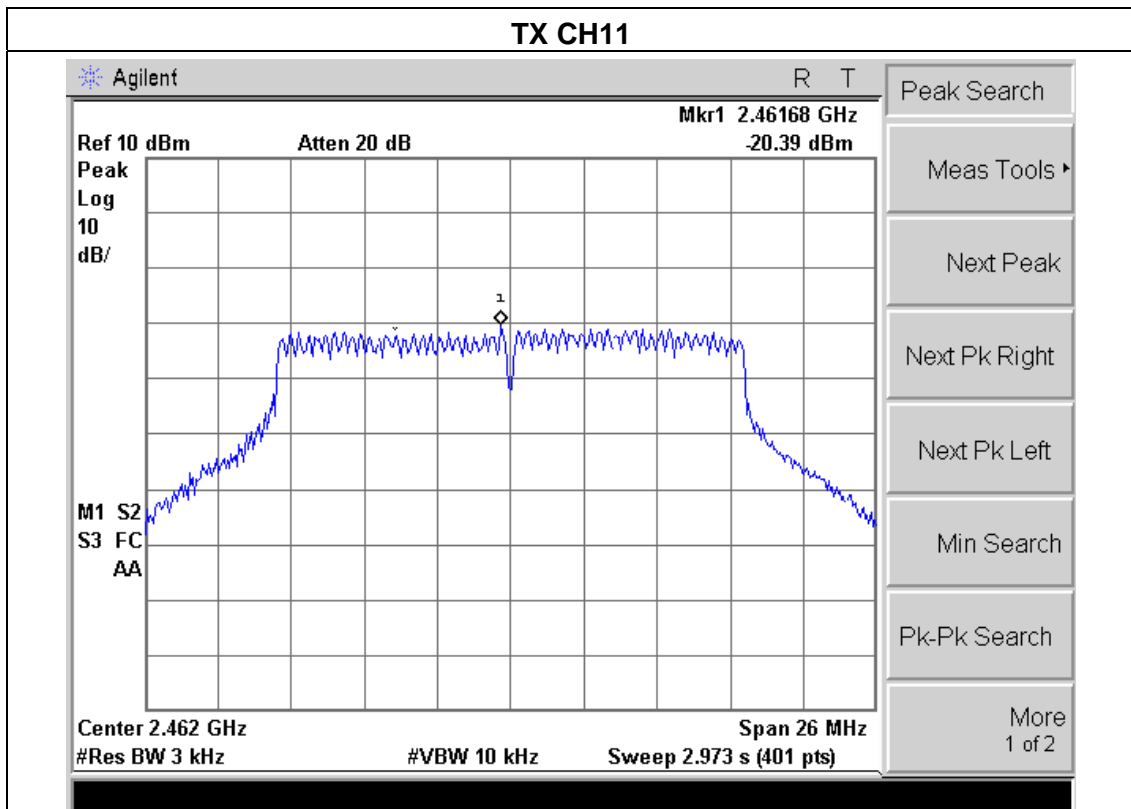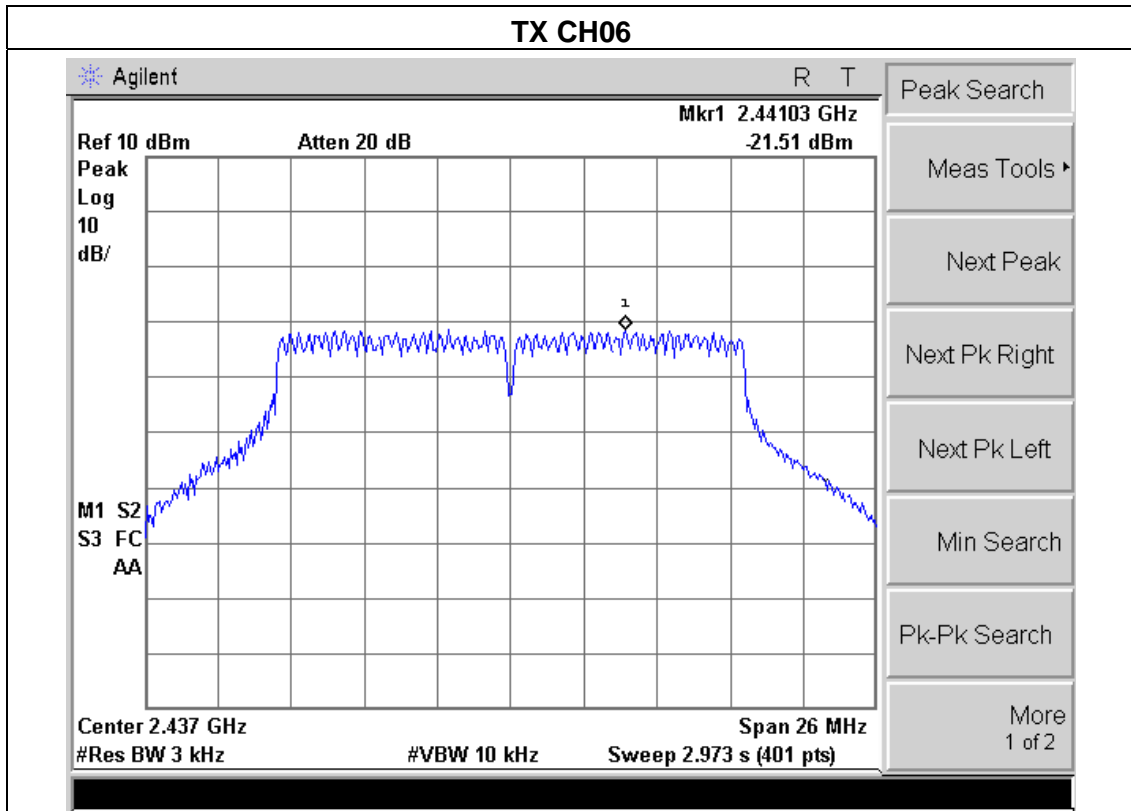

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode (20MHz)/CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-22.39	8	PASS
2437 MHz	-21.70	8	PASS
2462 MHz	-21.91	8	PASS


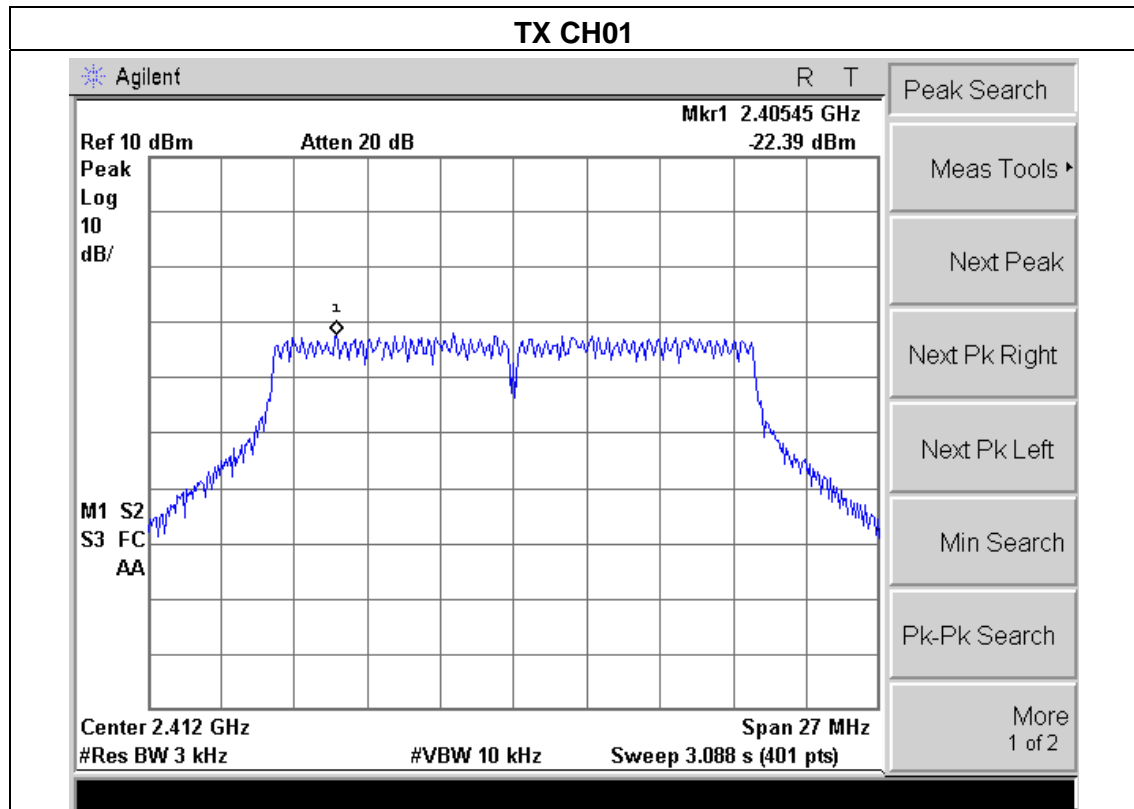


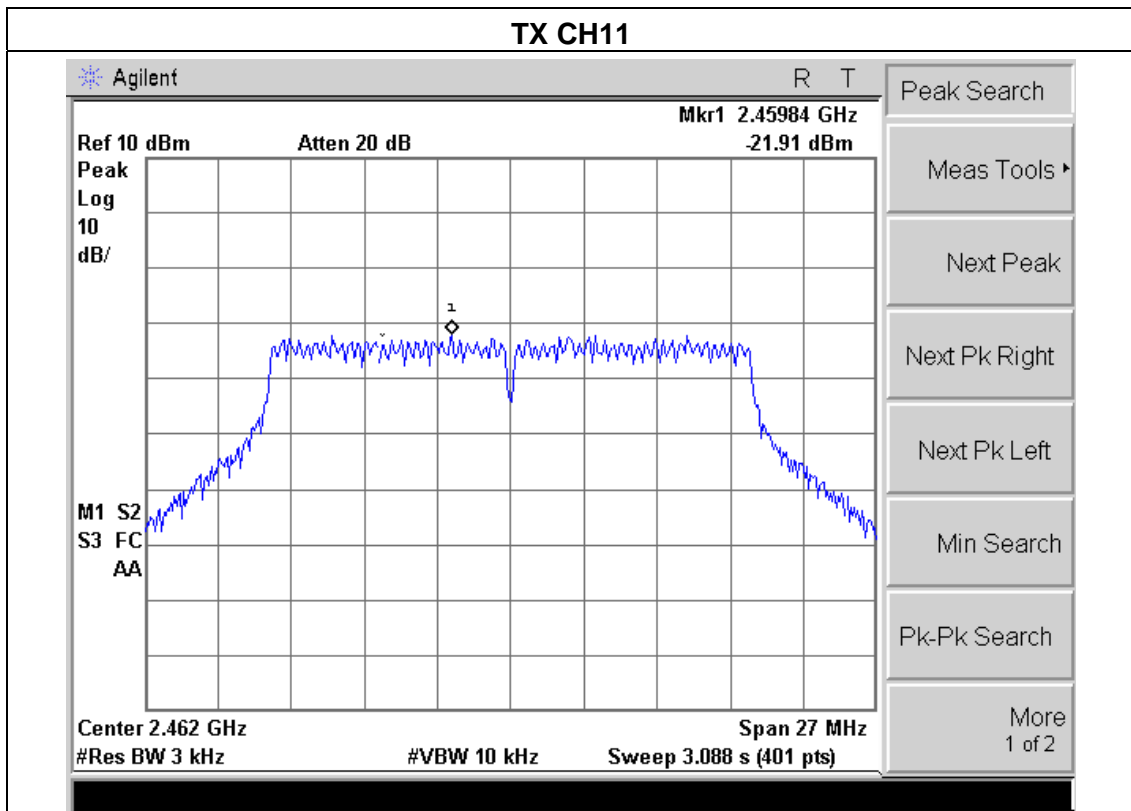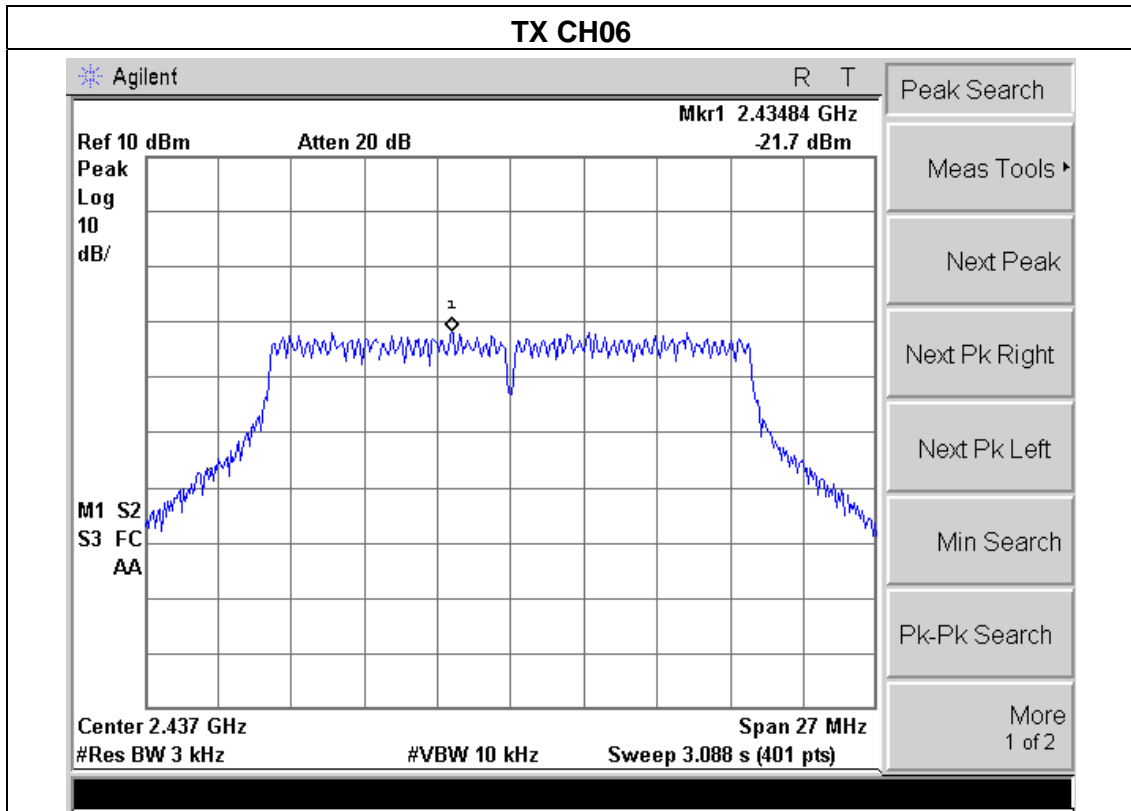

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode (40MHz)/CH03, CH06, CH09		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2422 MHz	-24.51	8	PASS
2437 MHz	-23.57	8	PASS
2452 MHz	-23.30	8	PASS

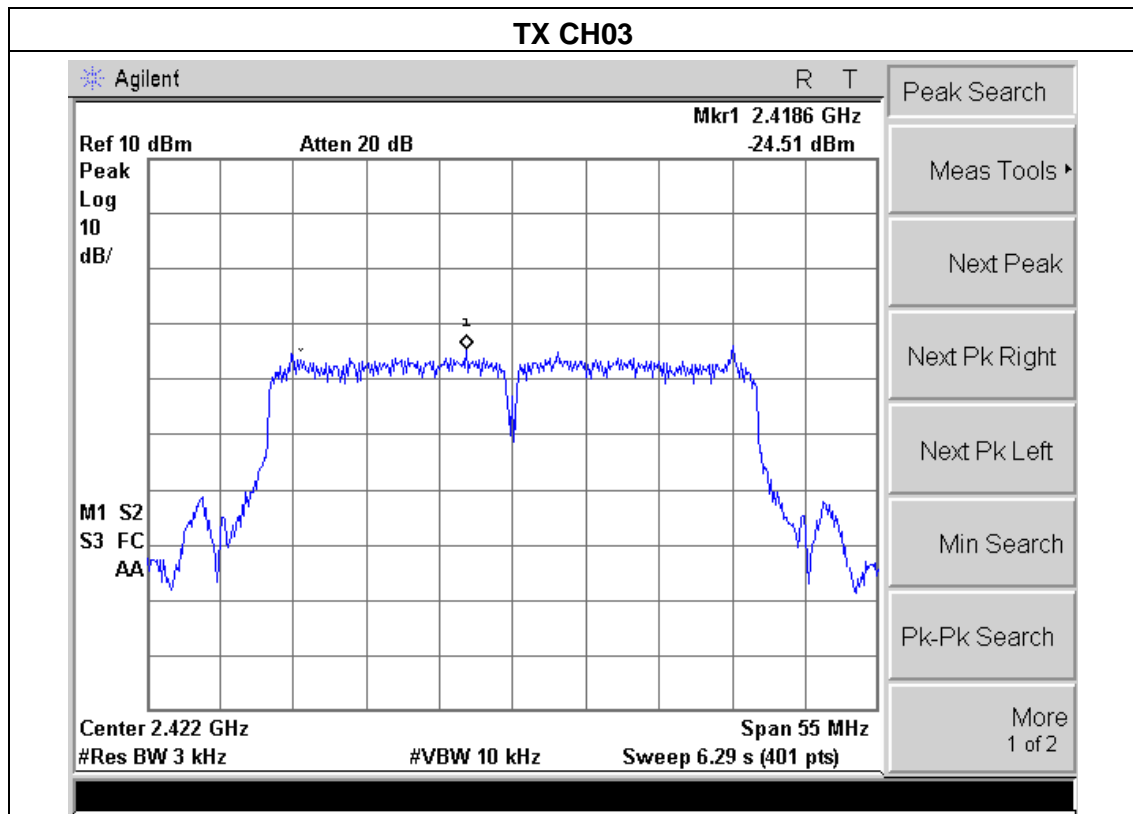

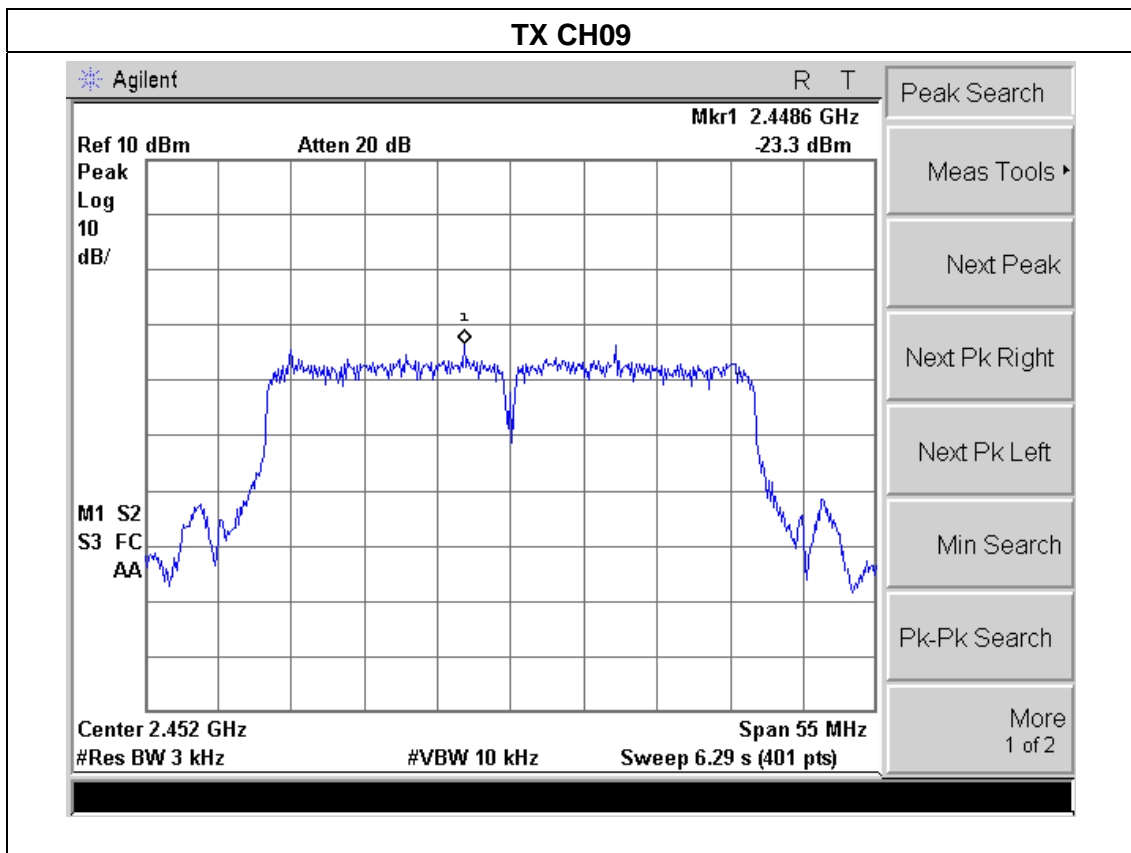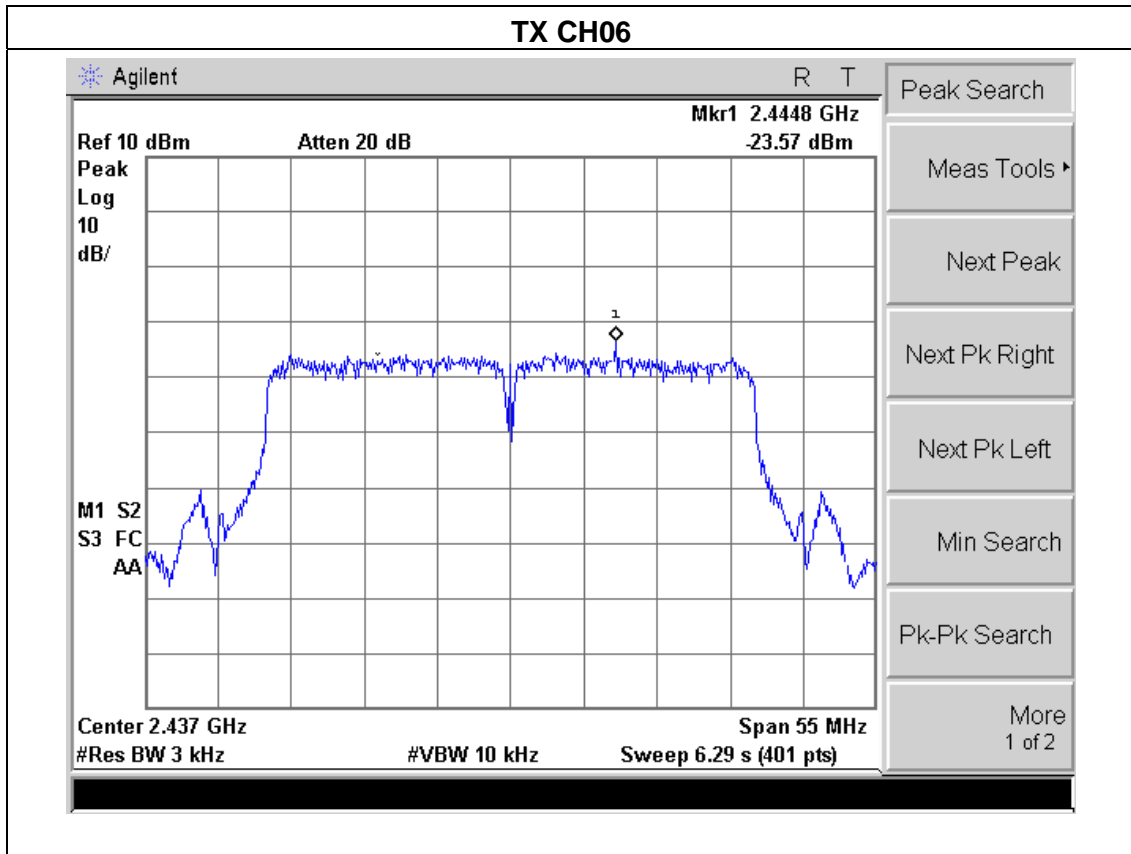



## 5. BANDWIDTH TEST


### 5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### TEST SETUP

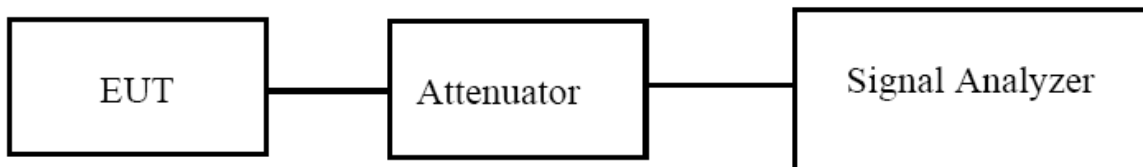


#### 5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 5.1.3 TEST RESULTS

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.089	500	Pass
Middle	2437	9.513	500	Pass
High	2462	10.066	500	Pass

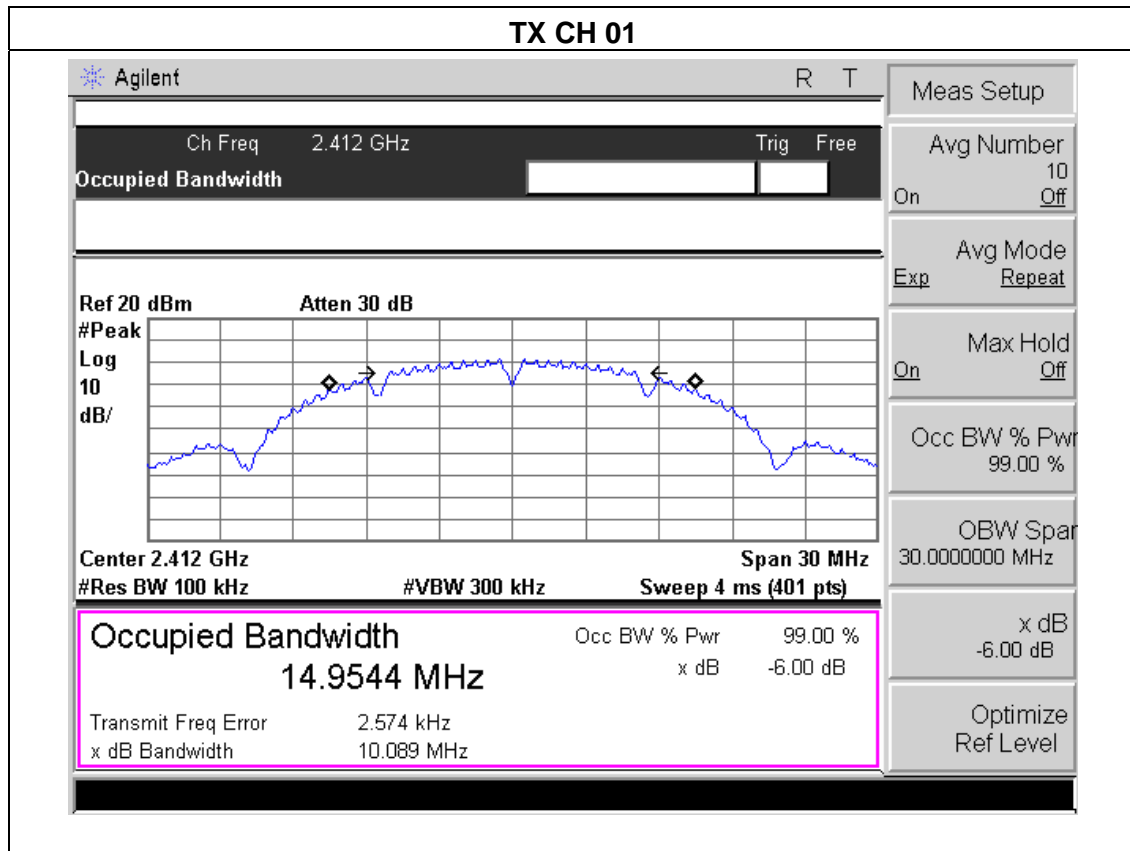

### TX CH 06

Agilent
R T

---

Ch Freq 2.437 GHz
Trig Free

**Occupied Bandwidth**

---

Ref 20 dBm
Atten 30 dB

#Peak  
Log  
10  
dB/

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.42200000 GHz

Stop Freq 2.45200000 GHz

CF Step 3.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

---

Center 2.437 GHz
Span 30 MHz

#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>14.9850 MHz</b>	x dB	-6.00 dB
Transmit Freq Error	32.221 kHz	
x dB Bandwidth	9.513 MHz	

### TX CH 11

Agilent
R T

---

Ch Freq 2.462 GHz
Trig Free

**Occupied Bandwidth**

---

Ref 20 dBm
Atten 30 dB

#Peak  
Log  
10  
dB/

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44700000 GHz

Stop Freq 2.47700000 GHz

CF Step 3.00000000 MHz  
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Scale Type Log Lin

---


Center 2.462 GHz
Span 30 MHz



#Res BW 100 kHz
#VBW 300 kHz
Sweep 4 ms (401 pts)

<b>Occupied Bandwidth</b>	Occ BW % Pwr	99.00 %
<b>14.9545 MHz</b>	x dB	-6.00 dB
Transmit Freq Error	1.782 kHz	
x dB Bandwidth	10.066 MHz	

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.591	500	Pass
Middle	2437	16.545	500	Pass
High	2462	16.568	500	Pass


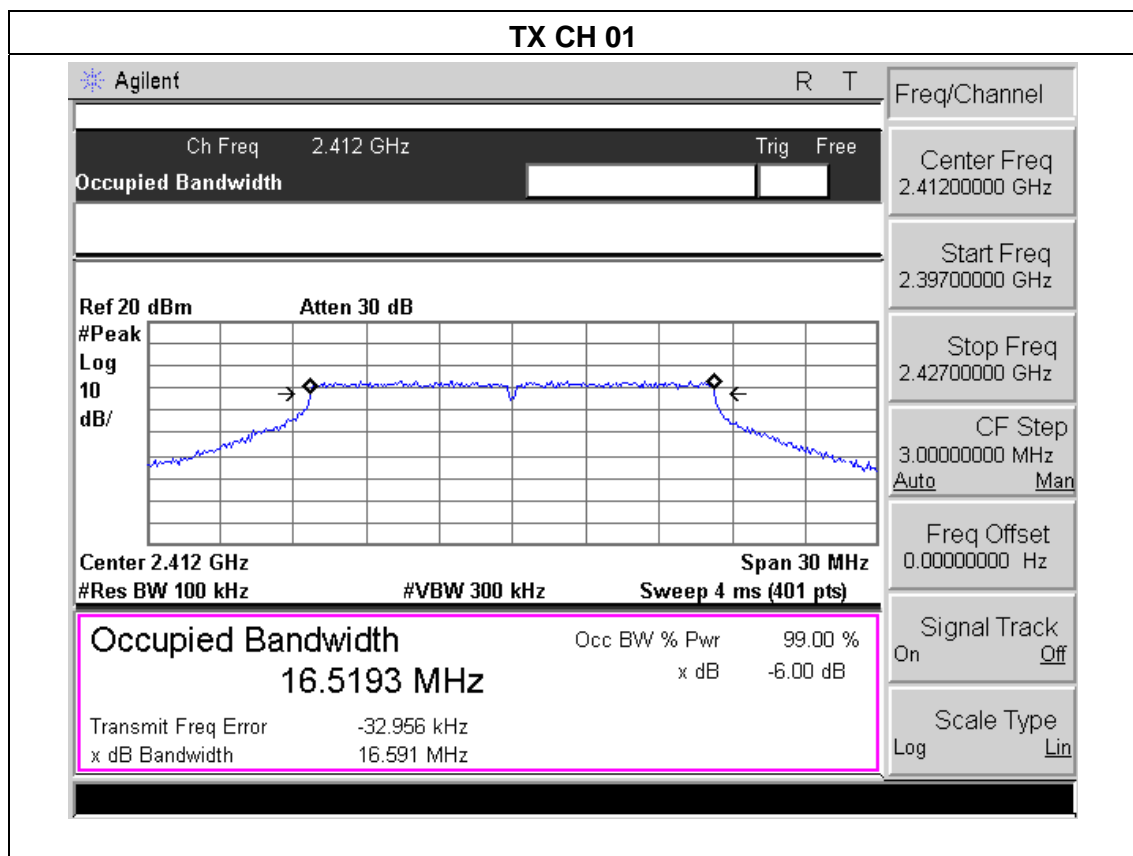


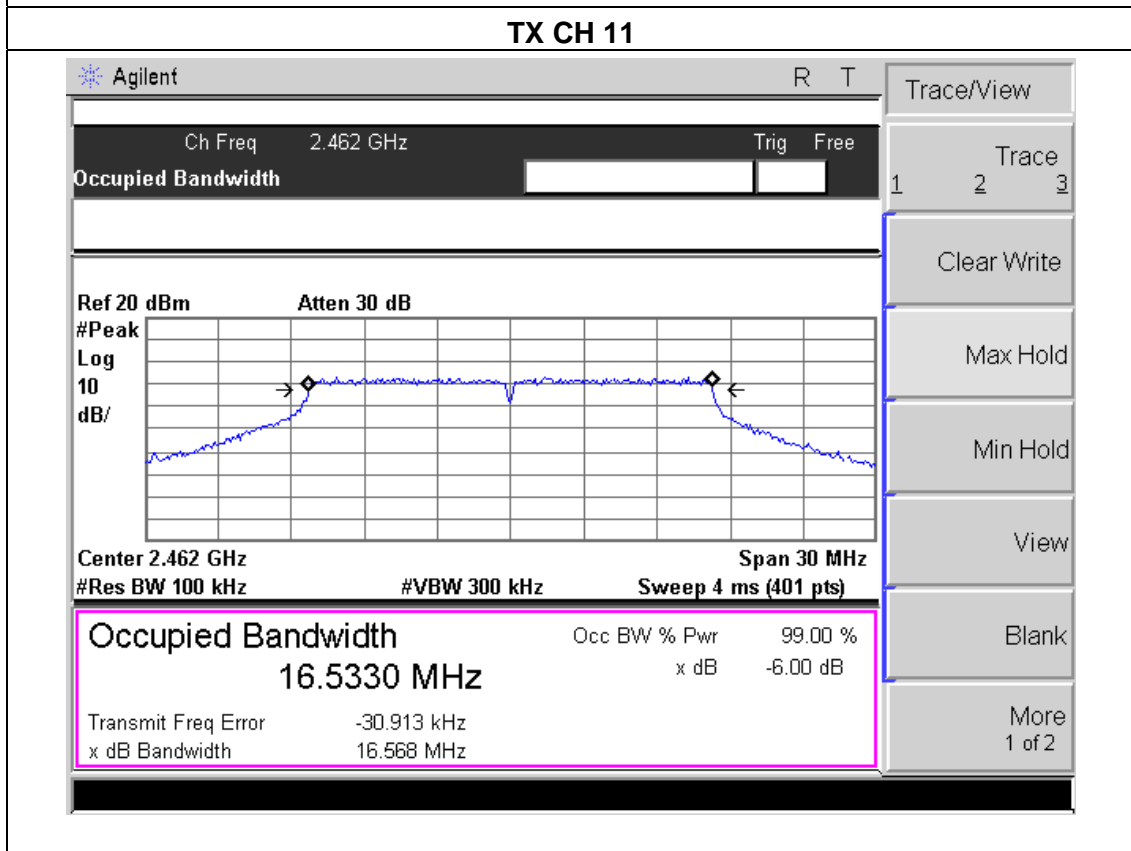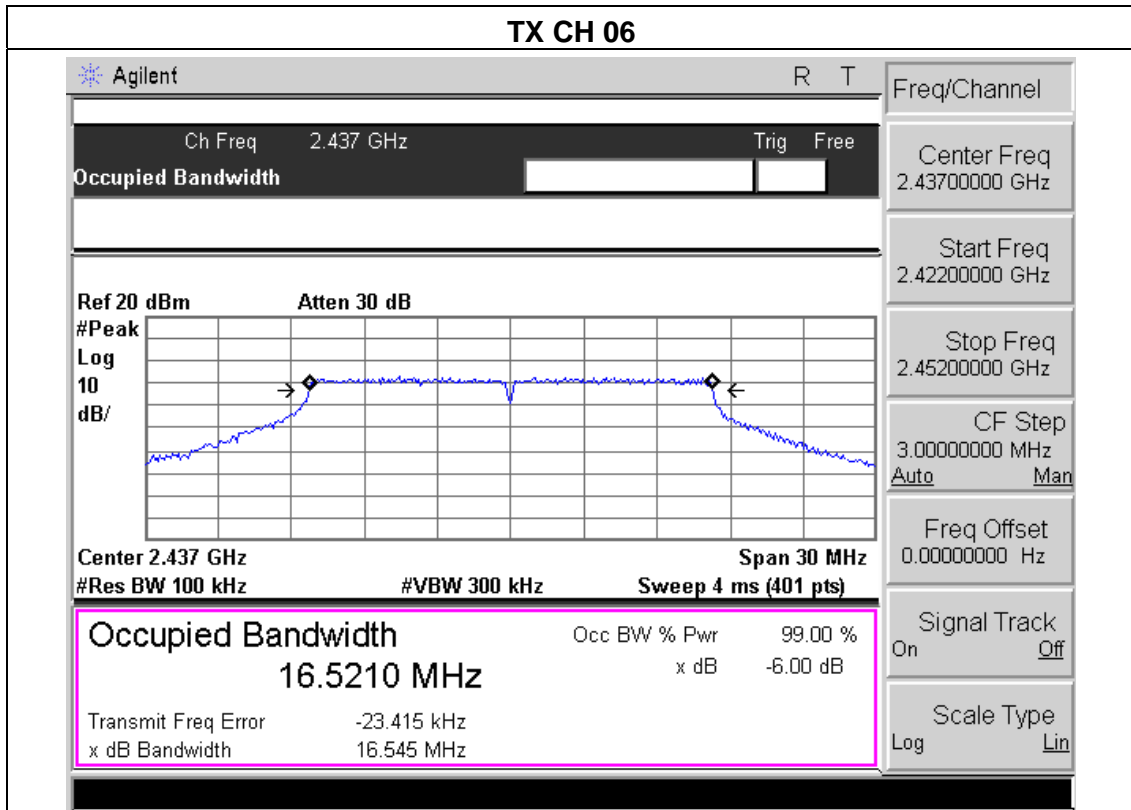

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(20M) /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.764	500	Pass
Middle	2437	17.860	500	Pass
High	2462	17.814	500	Pass

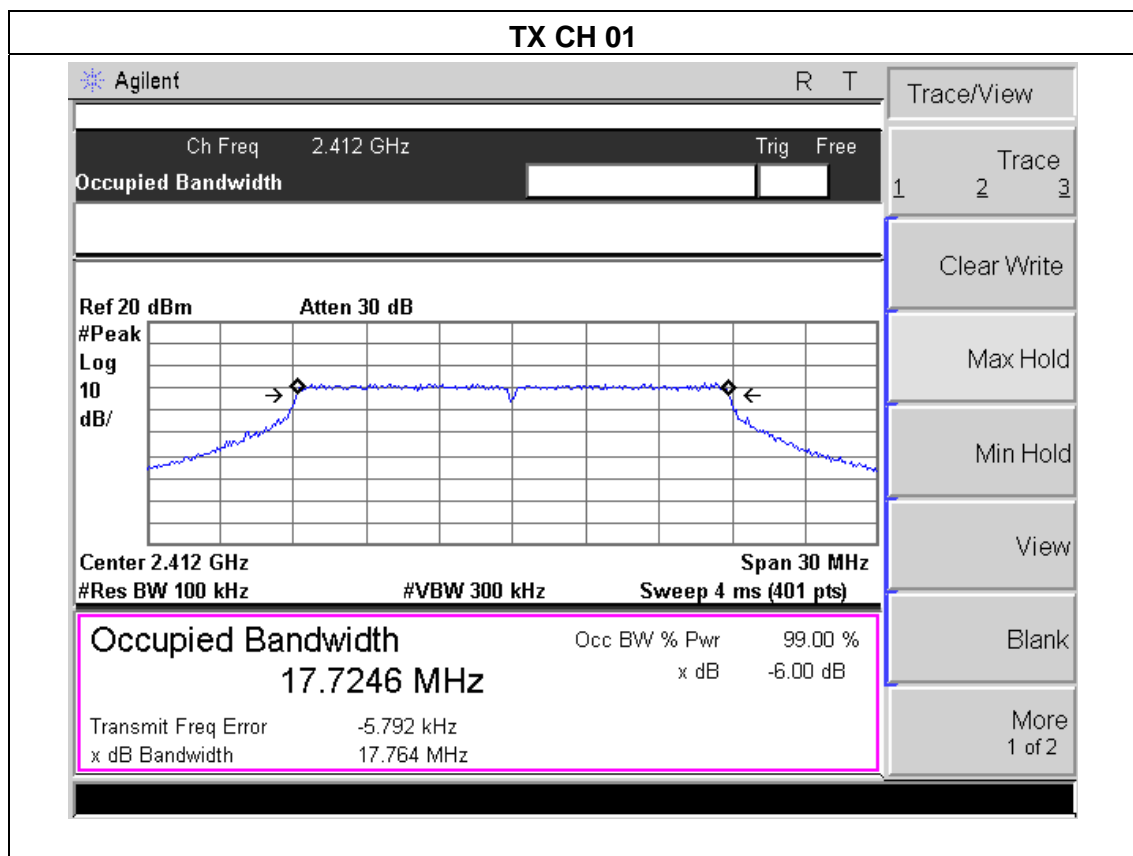

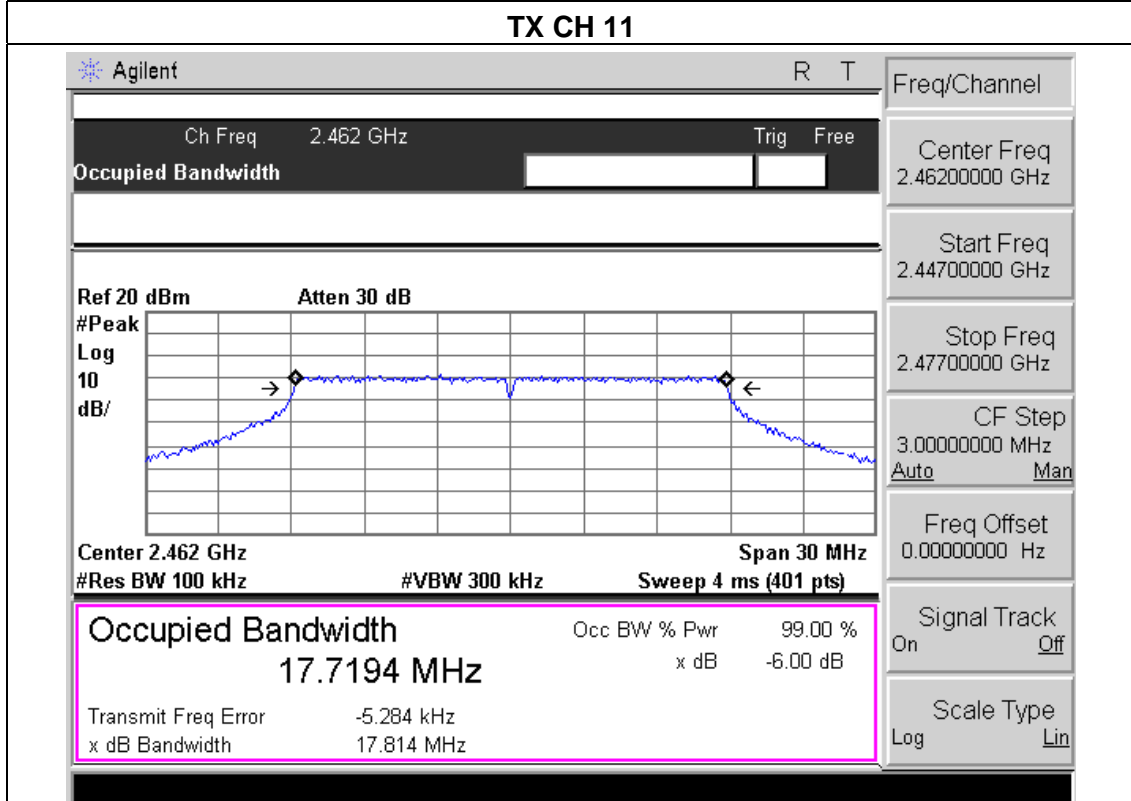
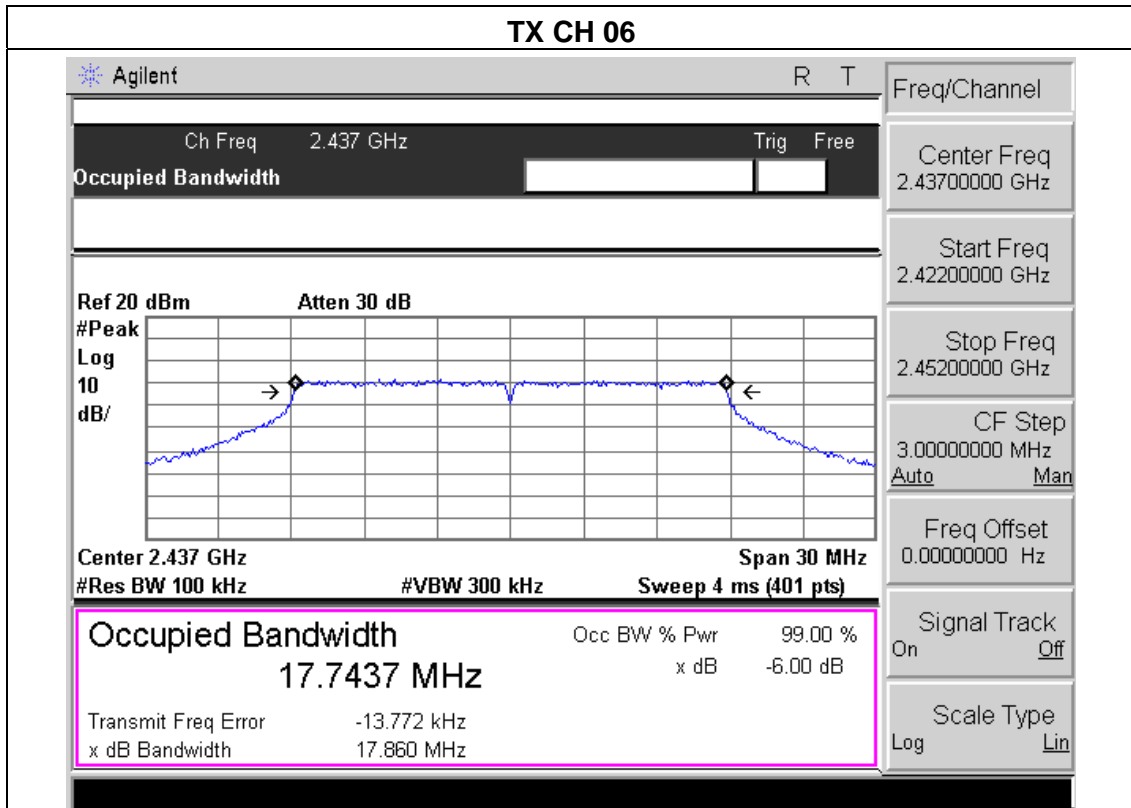


EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX n Mode(40M) /CH03, CH06, CH09		

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.458	500	Pass
Middle	2437	36.473	500	Pass
High	2452	36.467	500	Pass

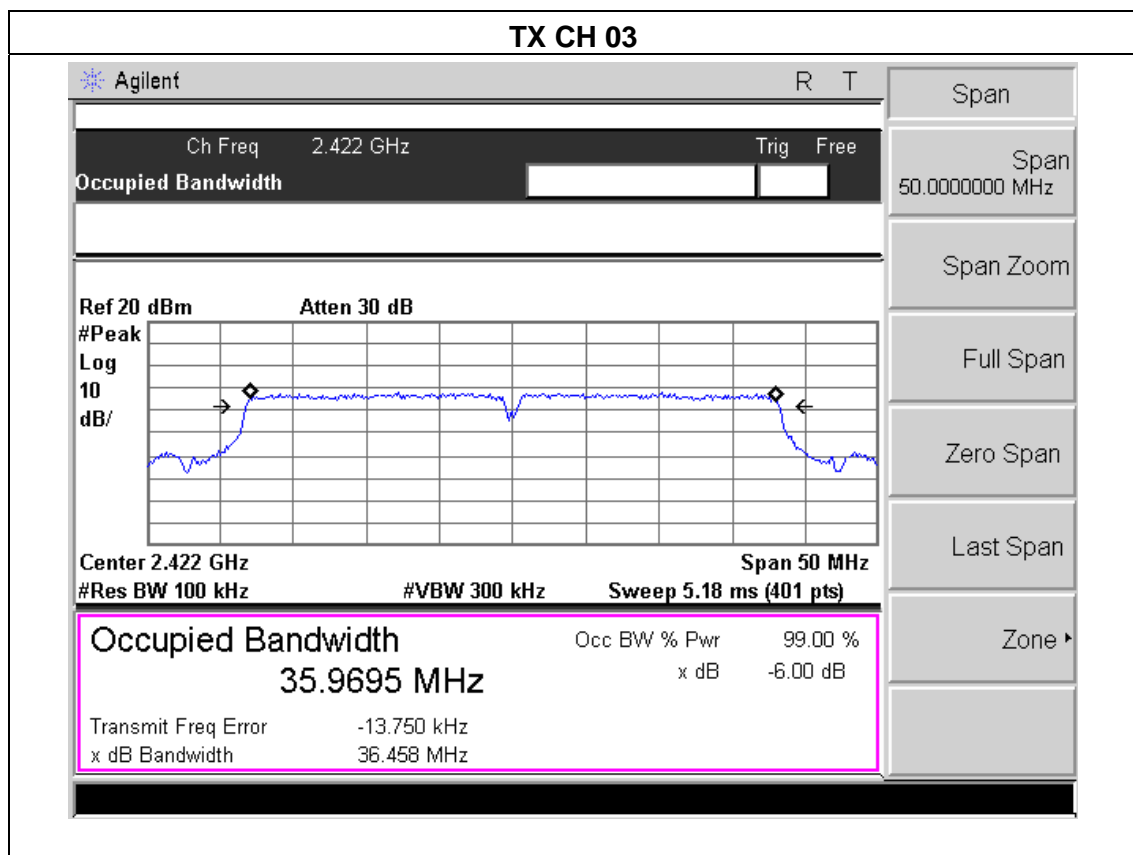



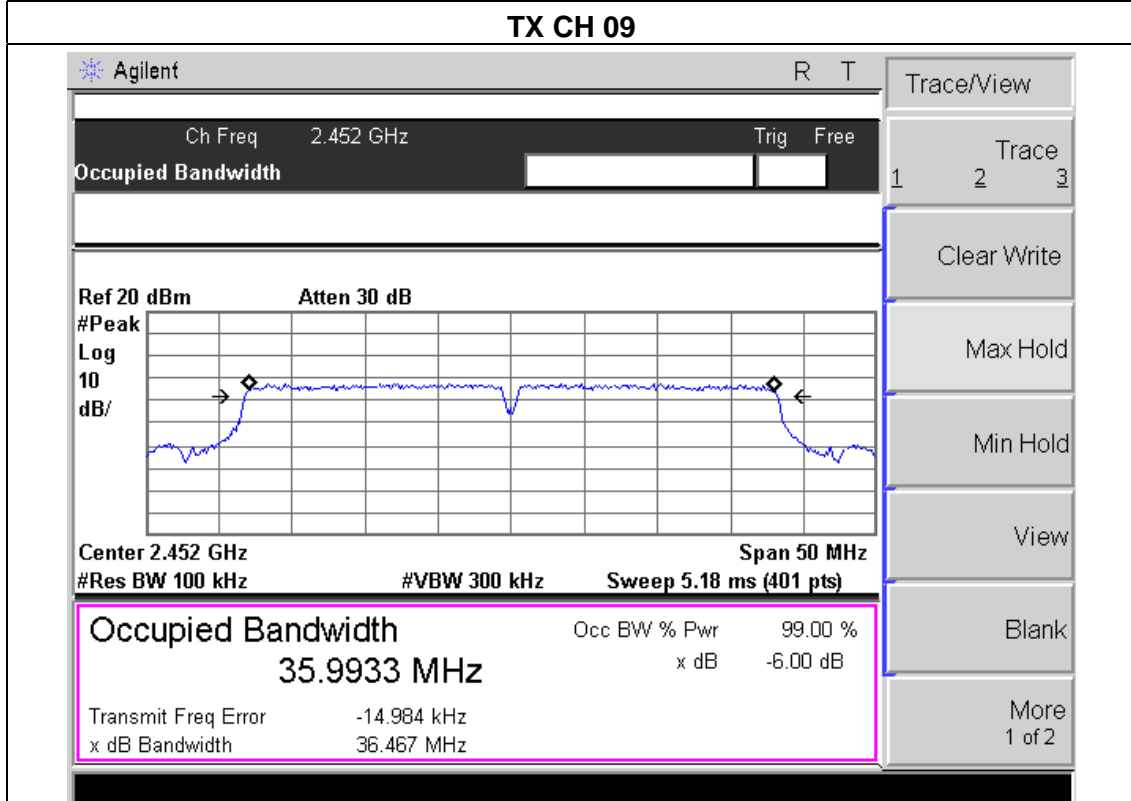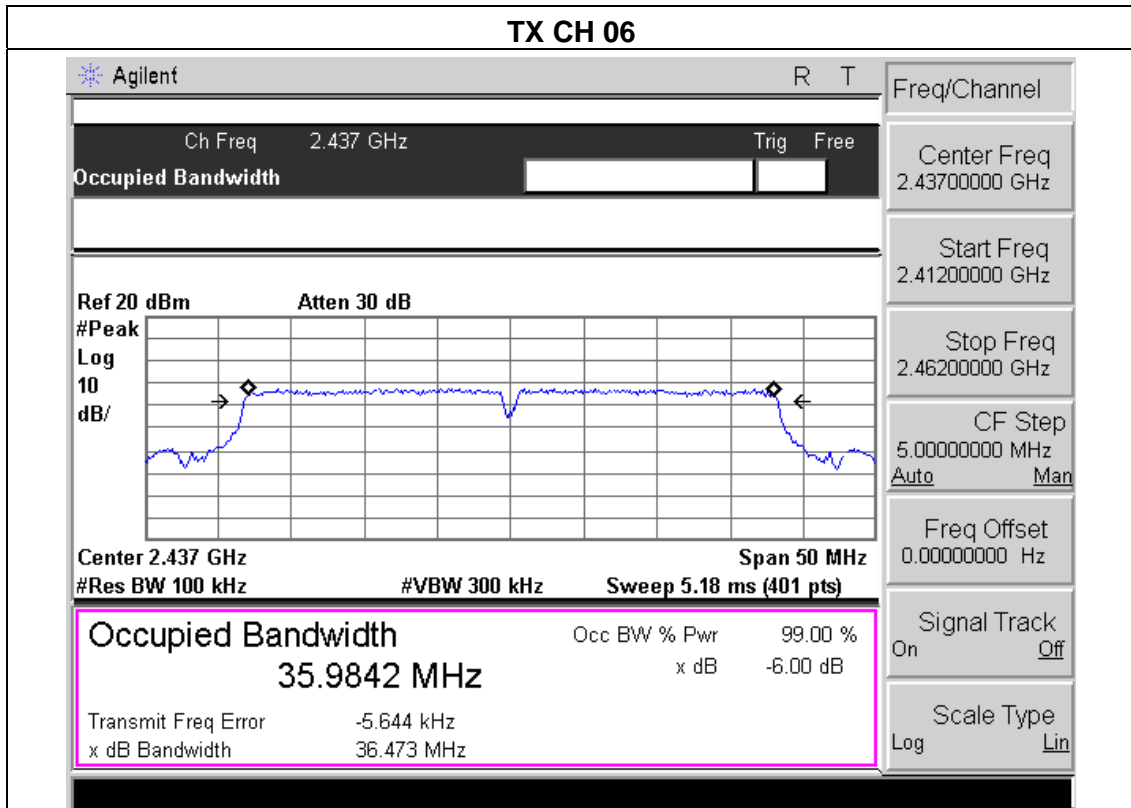

## 6. PEAK OUTPUT POWER TEST

### 6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


#### 6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

#### 6.1.2 DEVIATION FROM STANDARD

No deviation.

#### 6.1.3 TEST SETUP

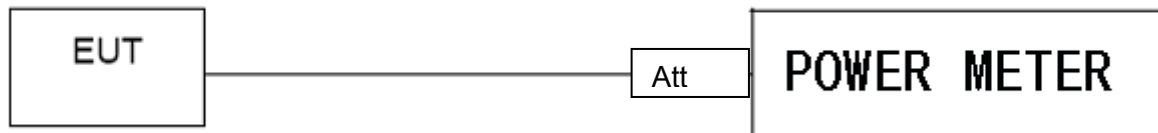

#### 6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**6.1.5 TEST RESULTS**

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b/g/n(20M/40M) Mode		

<b>TX 802.11b Mode</b>				
Test Channel	Frequency	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	12.57	9.49	30
CH06	2437	12.46	9.58	30
CH11	2462	12.81	9.53	30
<b>TX 802.11g Mode</b>				
CH01	2412	11.24	8.23	30
CH06	2437	11.03	8.02	30
CH11	2462	10.97	7.96	30
<b>TX 802.11n(20) Mode</b>				
CH01	2412	10.35	7.71	30
CH06	2437	10.07	7.43	30
CH11	2462	10.28	7.64	30
<b>TX 802.11n(40) Mode</b>				
CH03	2422	9.57	7.15	30
CH06	2437	9.36	6.94	30
CH09	2452	9.41	6.99	30

## 7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

### 7.1 DEVIATION FROM STANDARD

No deviation.

### 7.2 TEST SETUP

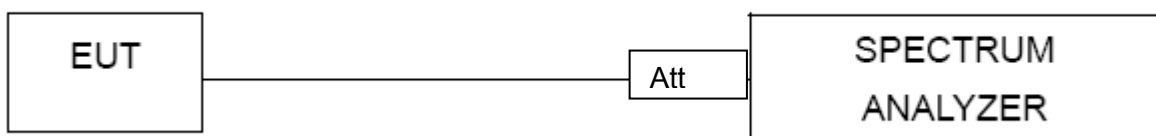

### 7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

### 7.4 TEST RESULTS

EUT :	Pc smart	Model Name :	PTSGOB09-A
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V


Frequency Band MHz	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
2400	37.47	20	Pass
2483.5	54.08	20	Pass
802.11g mode			
2400	28.29	20	Pass
2483.5	48.23	20	Pass
802.11n-HT20 mode			
2400	28.82	20	Pass
2483.5	44.94	20	Pass
802.11n-HT40 mode			
2400	29.33	20	Pass
2483.5	40.55	20	Pass

Radiated band edge:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
<b>802.11b</b>							
2390	59.23	-13.06	46.17	74	-27.83	peak	Vertical
2390	58.85	-13.06	45.79	74	-28.21	peak	Horizontal
2483.5	59.67	-12.78	46.89	74	-27.11	peak	Vertical
2483.5	60.11	-12.78	47.33	74	-26.67	peak	Horizontal
<b>802.11g</b>							
2390	59.1	-13.06	46.04	74	-27.96	peak	Vertical
2390	58.74	-13.06	45.68	74	-28.32	peak	Horizontal
2483.5	60.31	-12.78	47.53	74	-26.47	peak	Vertical
2483.5	58.64	-12.78	45.86	74	-28.14	peak	Horizontal
<b>802.11n (20)</b>							
2390	60.62	-13.06	47.56	74	-26.44	peak	Vertical
2390	60.73	-13.06	47.67	74	-26.33	peak	Horizontal
2483.5	59.76	-12.78	46.98	74	-27.02	peak	Vertical
2483.5	59.18	-12.78	46.4	74	-27.60	peak	Horizontal
<b>802.11n (40)</b>							
2390	60.25	-13.06	47.19	74	-26.81	peak	Vertical
2390	61.11	-13.06	48.05	74	-25.95	peak	Horizontal
2483.5	60.82	-12.78	48.04	74	-25.96	peak	Vertical
2483.5	60.37	-12.78	47.59	74	-26.41	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.


### 802.11b: Band Edge, Right Side

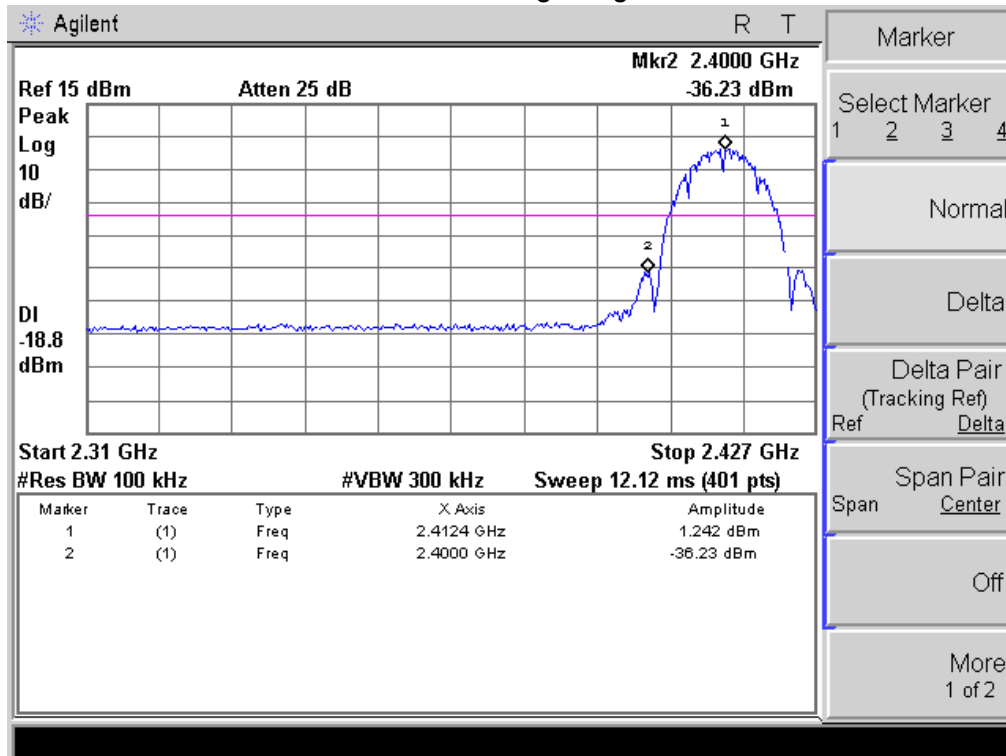


### 802.11b: Band Edge, Left Side

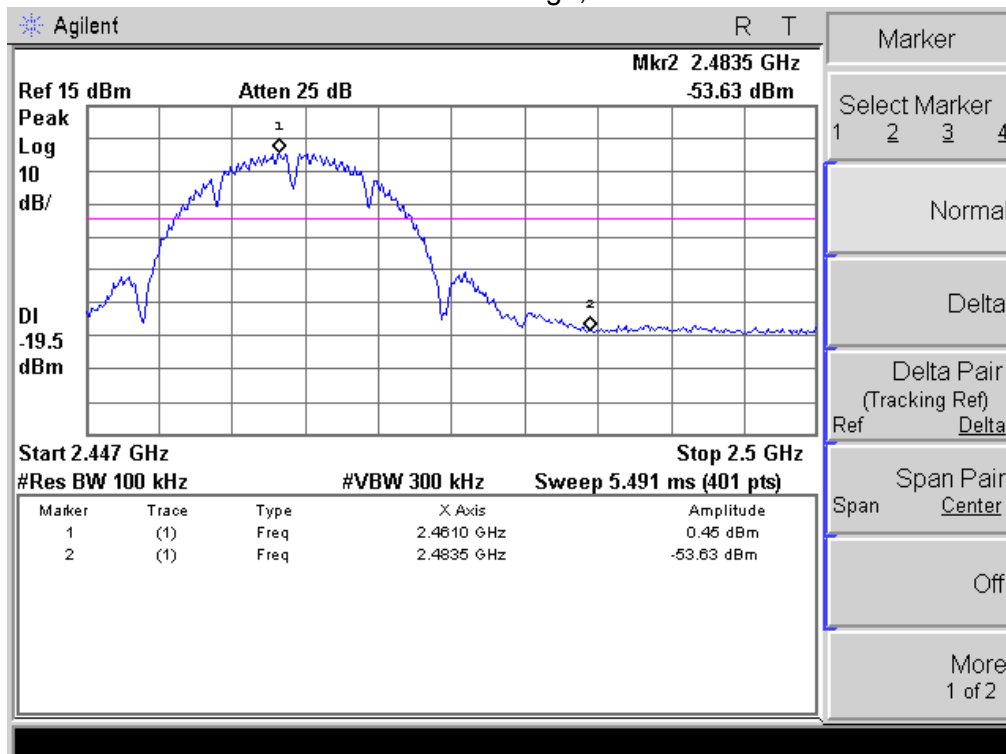

### 802.11g: Band Edge, Right Side

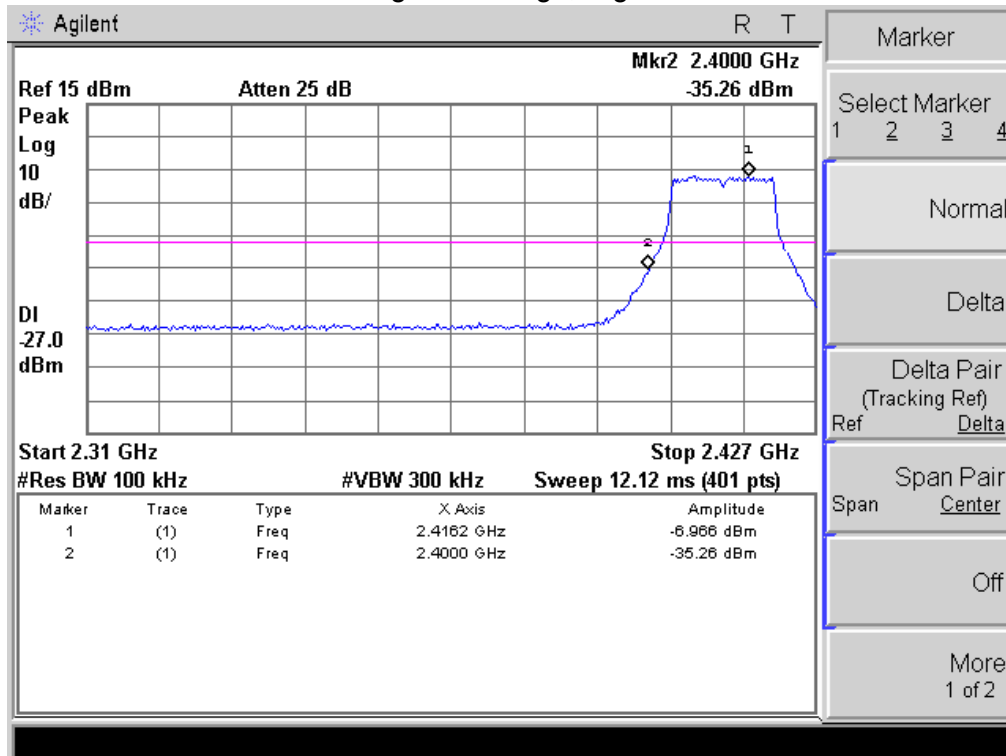


### 802.11g: Band Edge, Left Side

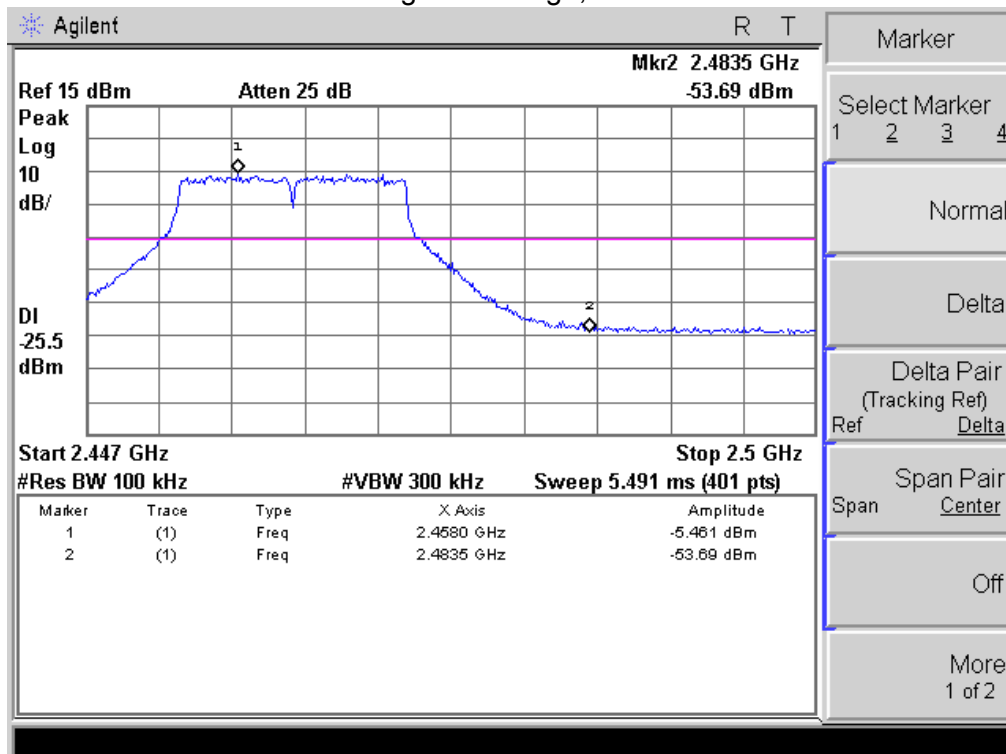





### 802.11n-HT20: Band Edge, Right Side

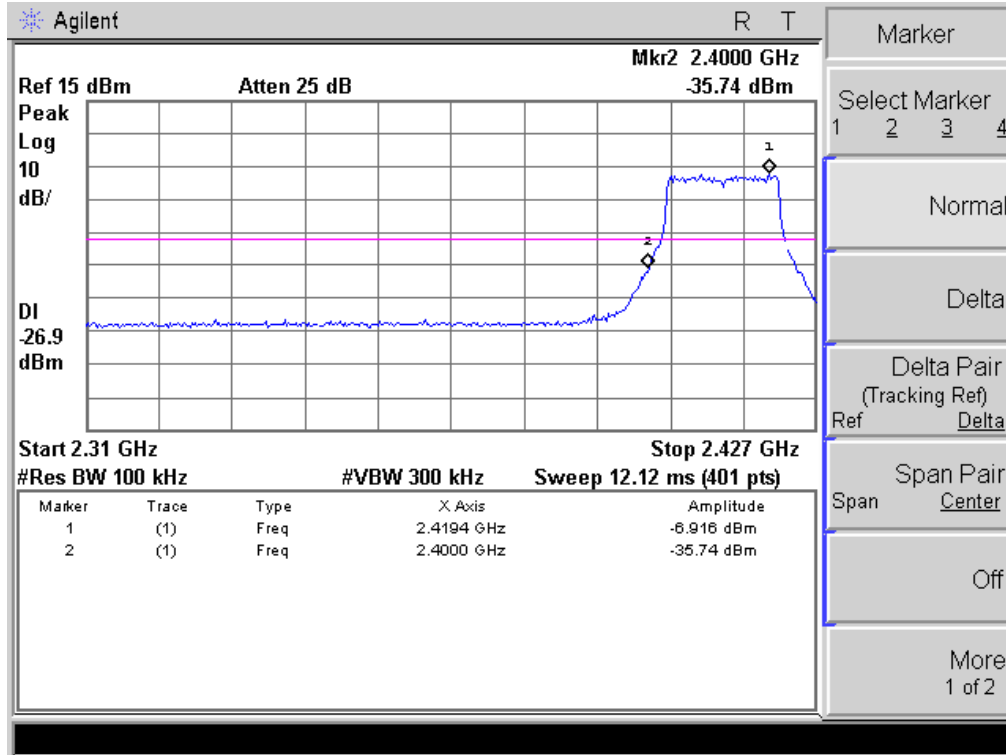


### 802.11n-HT20: Band Edge, Left Side

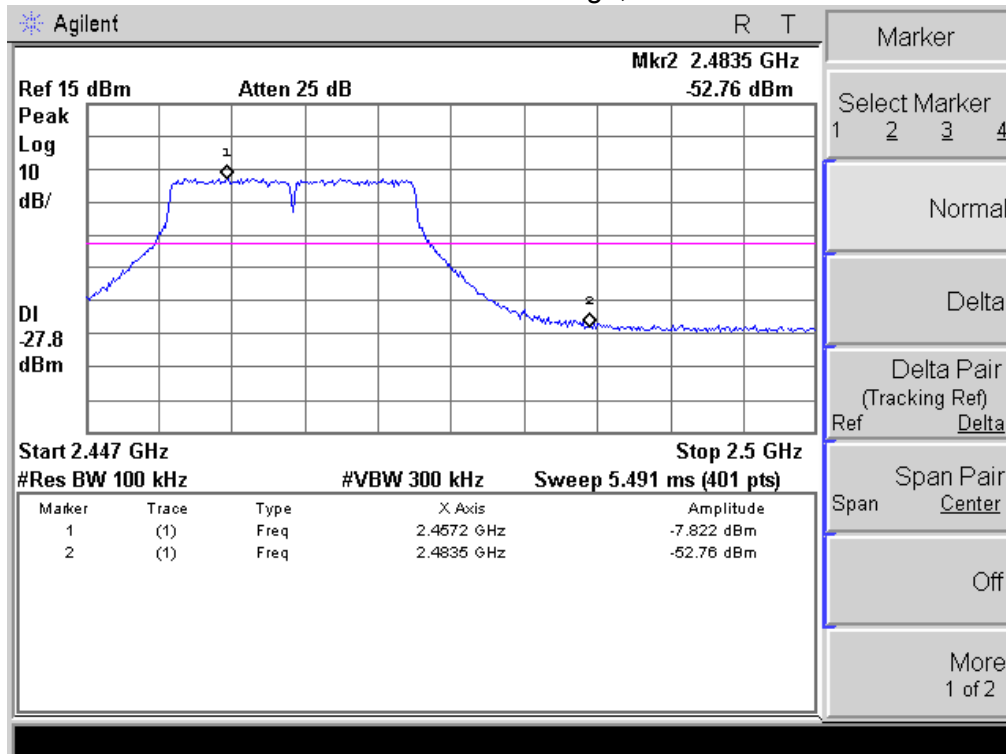

### 802.11n-HT40: Band Edge, Right Side

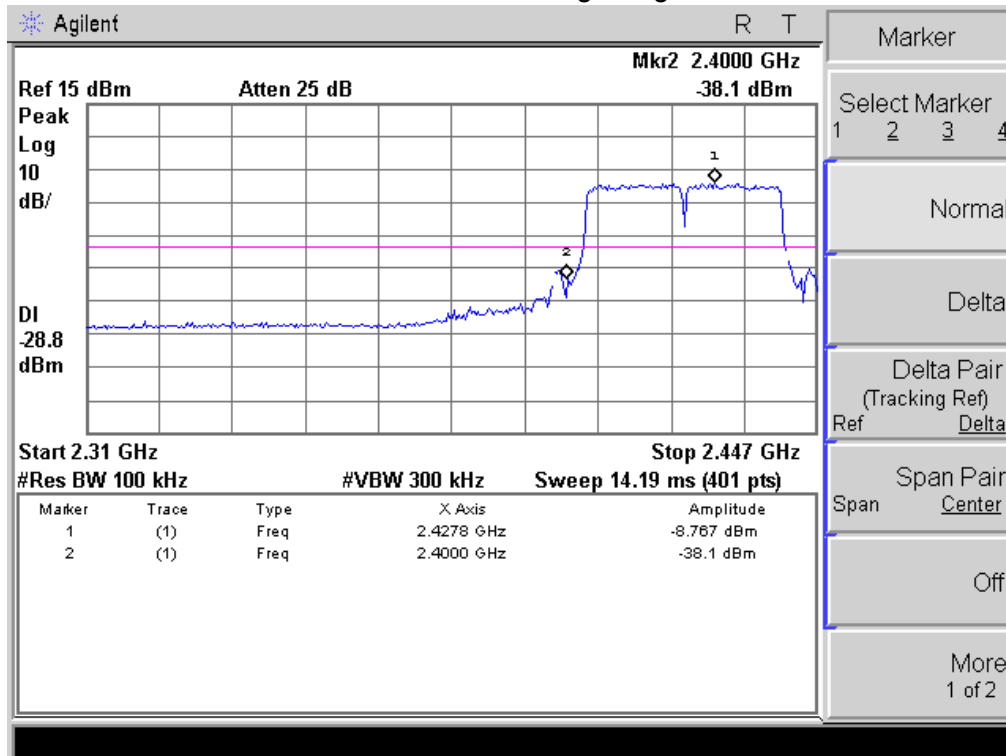

### 802.11n-HT40: Band Edge, Left Side

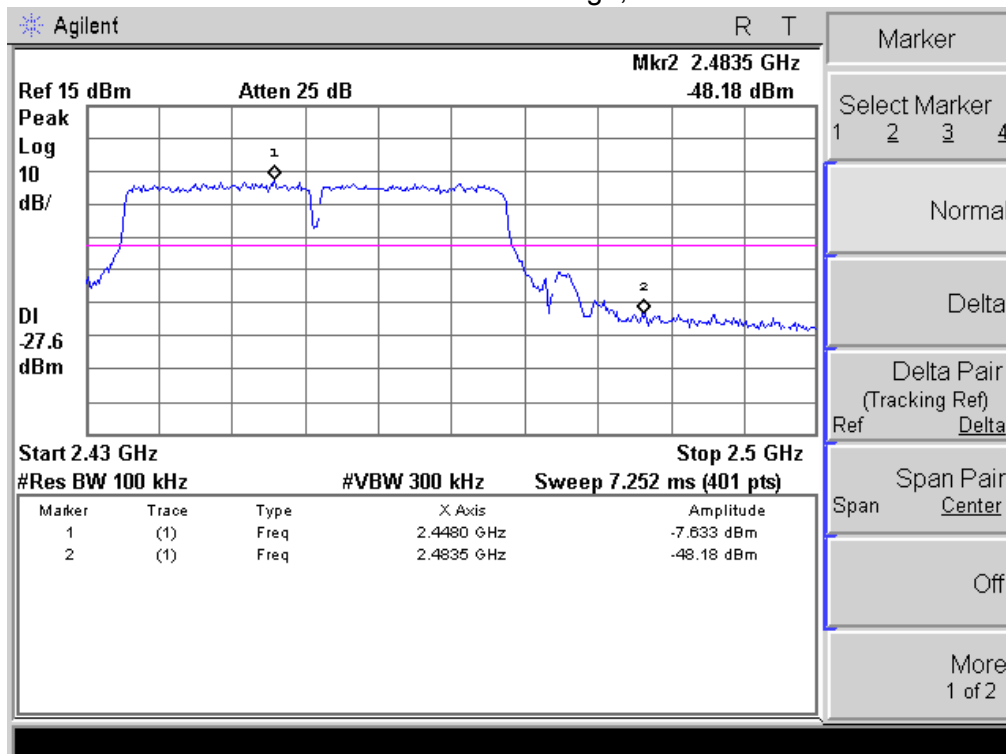

## **8. ANTENNA REQUIREMENT**

### **8.1 STANDARD REQUIREMENT**



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **8.2 EUT ANTENNA**

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

### 9. EUT TEST PHOTO

Radiated Measurement Photos

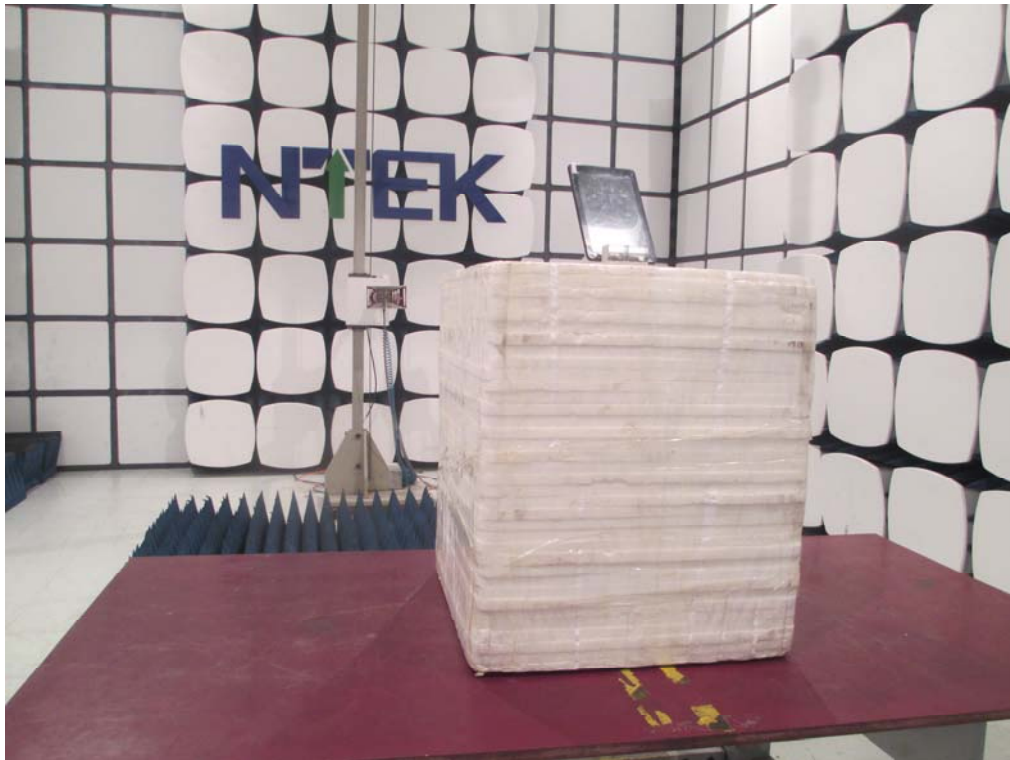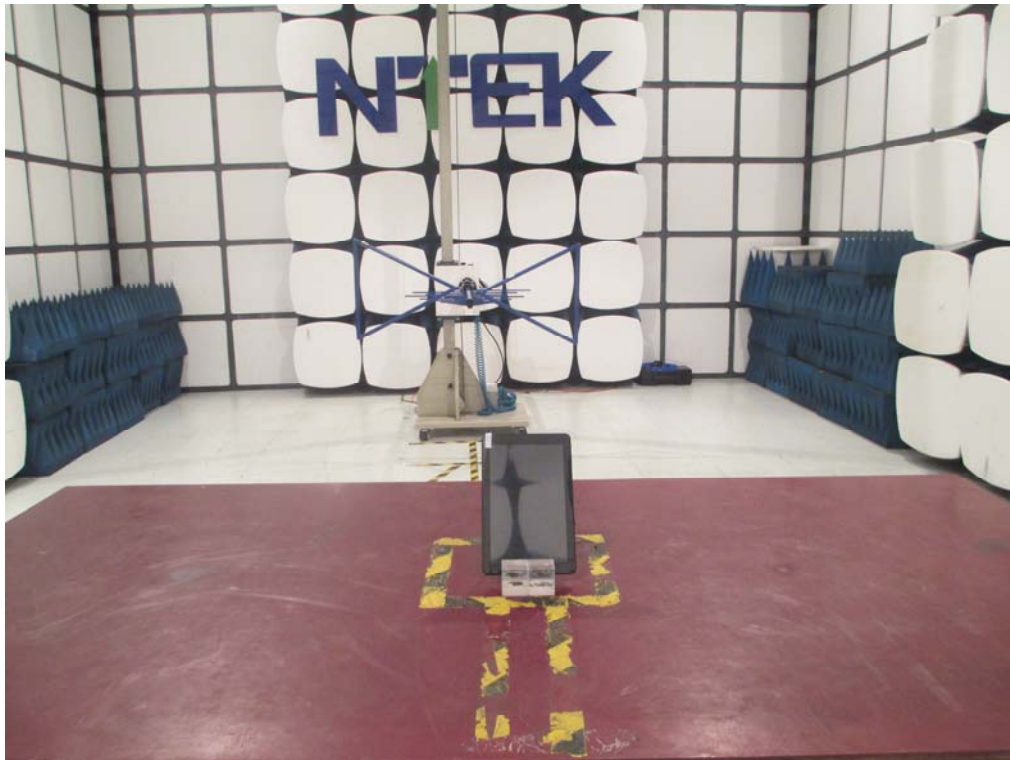

**CONDUCTED EMISSION Photos**

