

FCC Part 15B
Measurement and Test Report
For
PCSmart S.A.

Carrera 116 no. 15 - 25 Bogota - Colombia

FCC ID: 2ABFV-S3GI

Test Rule(s):	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Entertainment Tablet</u>
Tested Model:	<u>Touch Smart Slim 3Gi</u>
Report No.:	<u>STR14068118I-2</u>
Tested Date:	<u>2014-05-07 to 2014-06-20</u>
Issued Date:	<u>2014-06-20</u>
Tested By:	<u>Lebron Wang / Engineer</u> <i>Lebron Wang</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

- 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3
- 1.2 TEST STANDARDS.....4
- 1.3 TEST METHODOLOGY4
- 1.4 TEST FACILITY4
- 1.5 EUT SETUP AND OPERATION MODE5

2. SUMMARY OF TEST RESULTS6

3. CONDUCTED EMISSIONS7

- 3.1 MEASUREMENT UNCERTAINTY7
- 3.2 TEST EQUIPMENT LIST AND DETAILS7
- 3.3 TEST PROCEDURE.....7
- 3.4 BASIC TEST SETUP BLOCK DIAGRAM.....7
- 3.5 ENVIRONMENTAL CONDITIONS8
- 3.6 SUMMARY OF TEST RESULTS/PLOTS8
- 3.7 CONDUCTED EMISSIONS TEST DATA.....8

4. RADIATED EMISSIONS.....15

- 4.1 MEASUREMENT UNCERTAINTY15
- 4.2 TEST EQUIPMENT LIST AND DETAILS15
- 4.3 TEST PROCEDURE.....15
- 4.4 TEST RECEIVER SETUP16
- 4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....16
- 4.6 ENVIRONMENTAL CONDITIONS16
- 4.7 SUMMARY OF TEST RESULTS/PLOTS16

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: PCSmart S.A.
Address of applicant: Carrera 116 no. 25 - 25 Bogota - Colombia

Manufacturer: Shenzhen Wisky Technology Co., LTD
Address of manufacturer: 5th Floor, W2-A Building, Hi-Tech Park South 1st Road, Nanshan District, Shenzhen

General Description of EUT	
Product Name:	Entertainment Tablet
Trade Name:	PCSMART
Model No.:	Touch Smart Slim 3Gi
Adding Model(s):	Touch Smart Slim 3Gi Black Touch Smart Slim 3Gi white
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Touch Smart Slim 3Gi, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	5V
Rated Current:	2A
Rated Power:	/
Power Adapter Model:	FY0502000/SAPA05010US
Lowest Internal Frequency:	32.768KHz
Highest Internal Frequency:	1.0GHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the PCSmart S.A. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	Connect to Adapter Model: FY050200
TM2	Charging & Playing	Connect to Adapter Model: SAPA05010US
TM3	Downloading	Connect to PC

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook Computer	Lenovo	20007	EB12648265

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Unshielded	Without Core

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2014-05-28	2015-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2014-05-28	2015-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2014-05-28	2015-05-27

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Note: Base on the calibrated result, for the impedance characteristic and insertion loss, the effect shall be ignored from the placed multiple outlet power strip between the device and LISN.

3.4 Basic Test Setup Block Diagram

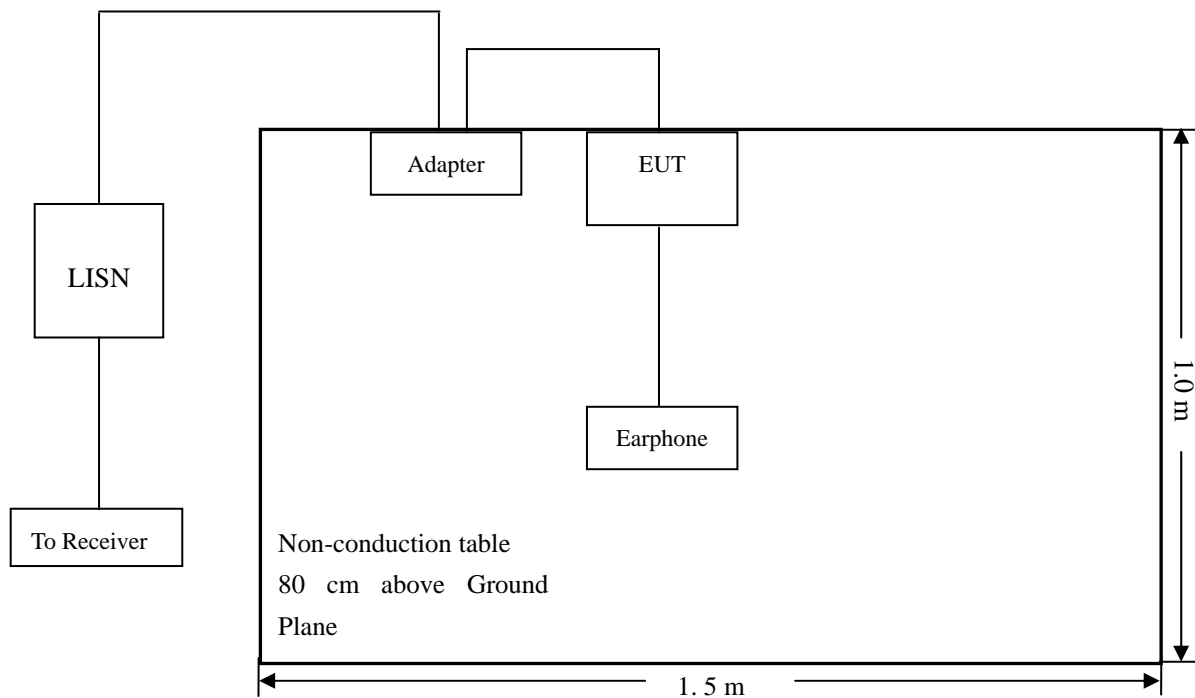

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots


According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:

-2.02 dB at 0.1620 MHz in the **Neutral, TM2** mode, **Peak** detector, 0.15-30MHz

3.7 Conducted Emissions Test Data


Plot of Conducted Emissions Test Data

EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condiation: AC 120V/60Hz; Adapter DC 5V/2A
 Comment: TMI (Adapter Model: FY050200)
 Test Specification: Neutral

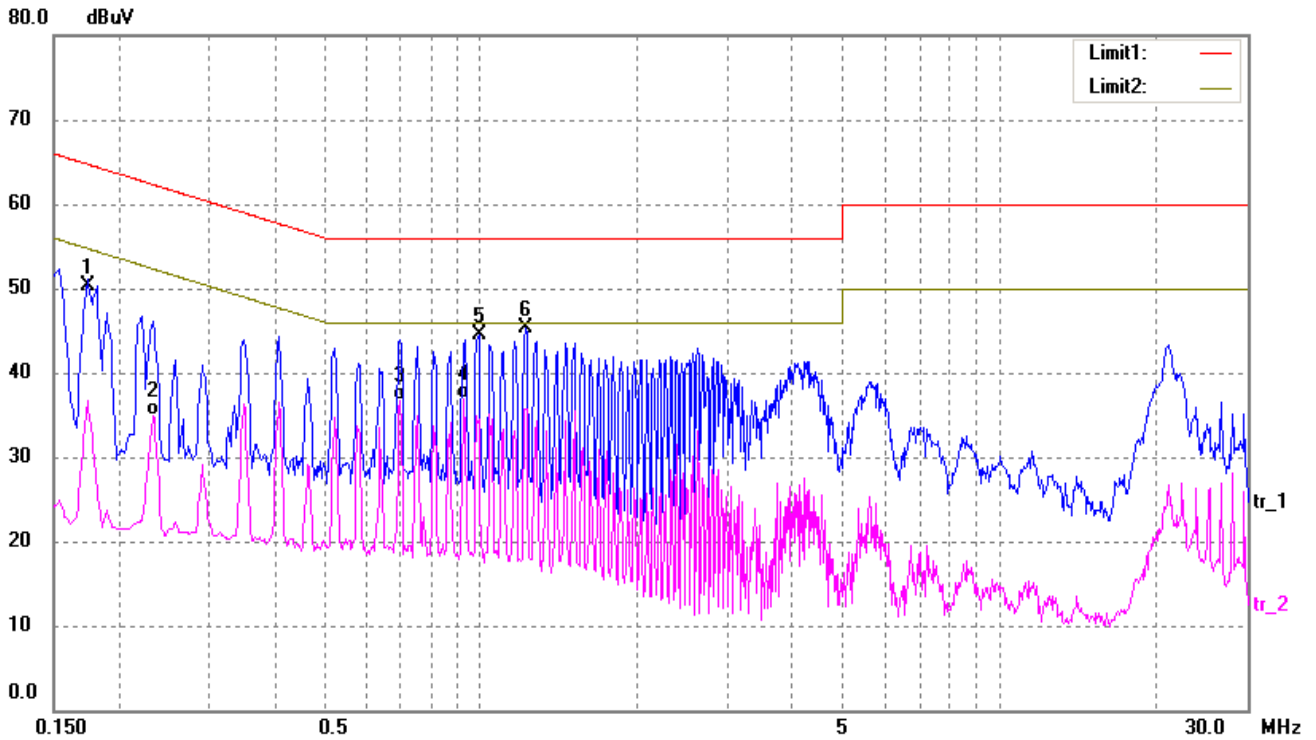

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1749	40.88	9.50	50.38	64.72	-14.34	peak
2	0.2340	25.43	9.50	34.93	52.31	-17.38	AVG
3	0.6980	27.09	9.70	36.79	46.00	-9.21	AVG
4	0.9260	26.96	9.93	36.89	46.00	-9.11	AVG
5	0.9900	34.54	9.99	44.53	56.00	-11.47	peak
6	1.2220	35.27	10.00	45.27	56.00	-10.73	peak


Test Specification: Line

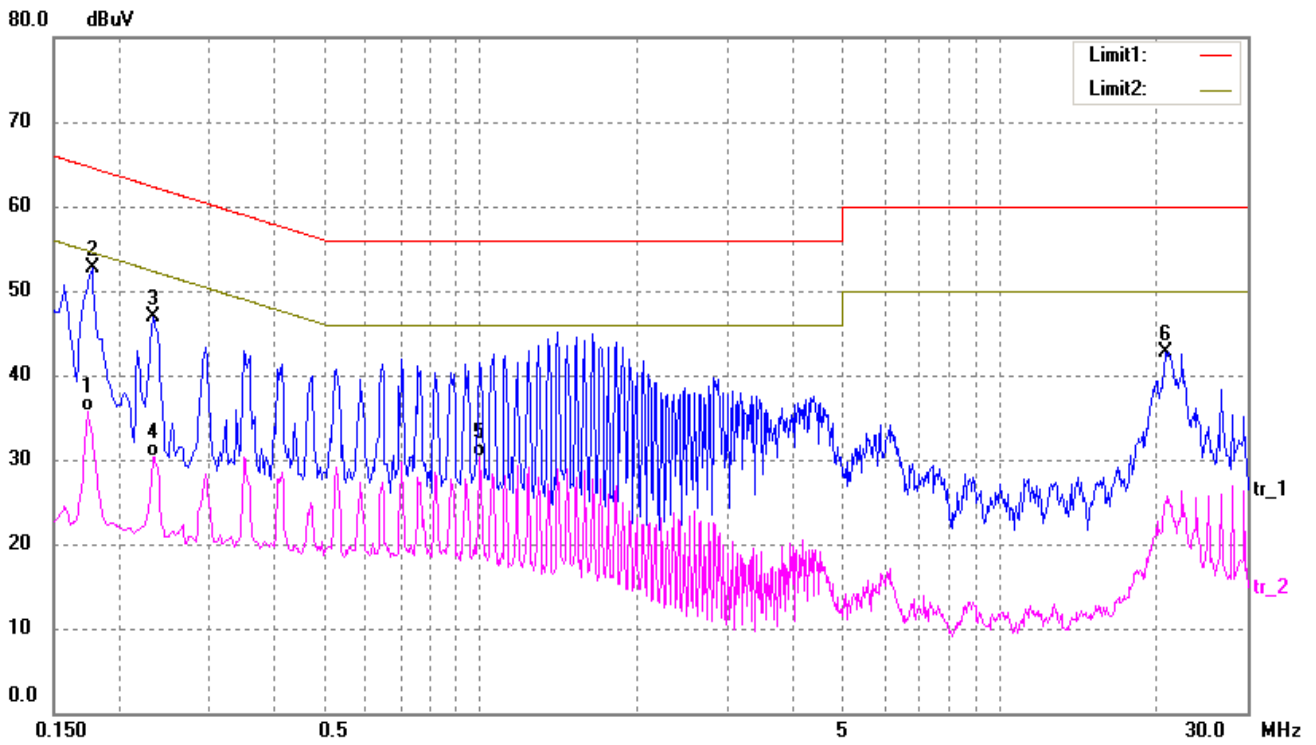

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	26.22	9.50	35.72	54.77	-19.05	AVG
2	0.1780	43.22	9.50	52.72	64.58	-11.86	peak
3	0.2340	37.39	9.50	46.89	62.31	-15.42	peak
4	0.2340	20.82	9.50	30.32	52.31	-21.99	AVG
5	0.9900	20.30	9.99	30.29	46.00	-15.71	AVG
6	20.8820	30.73	12.00	42.73	60.00	-17.27	peak


Plot of Conducted Emissions Test Data

EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condiation: AC 120V/60Hz; DC 5V
 Comment: TM2 (Adapter Model: SAPA05010US)
 Test Specification: Neutral

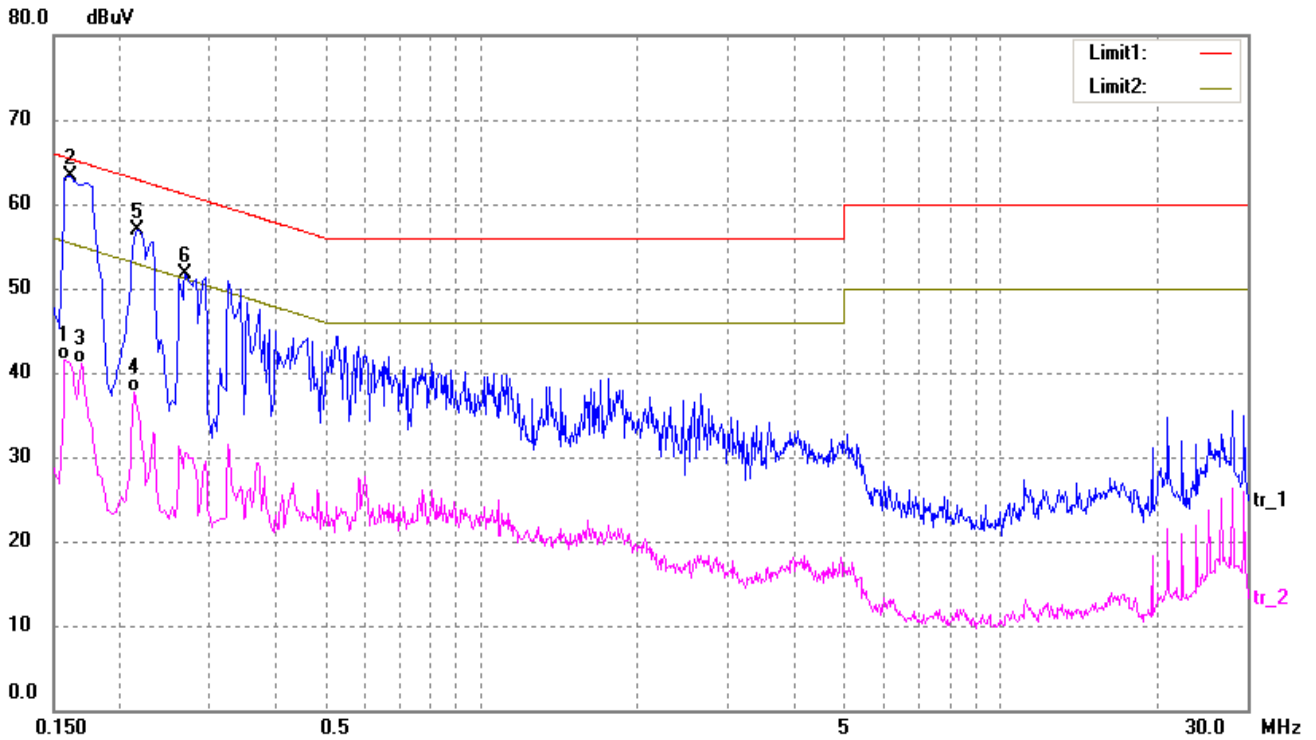

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	31.95	9.50	41.45	55.57	-14.12	AVG
2	0.1620	53.84	9.50	63.34	65.36	-2.02	peak
3	0.1700	31.67	9.50	41.17	54.96	-13.79	AVG
4	0.2140	28.26	9.50	37.76	53.05	-15.29	AVG
5	0.2180	47.45	9.50	56.95	62.89	-5.94	peak
6	0.2700	42.16	9.50	51.66	61.12	-9.46	peak


Test Specification: Line

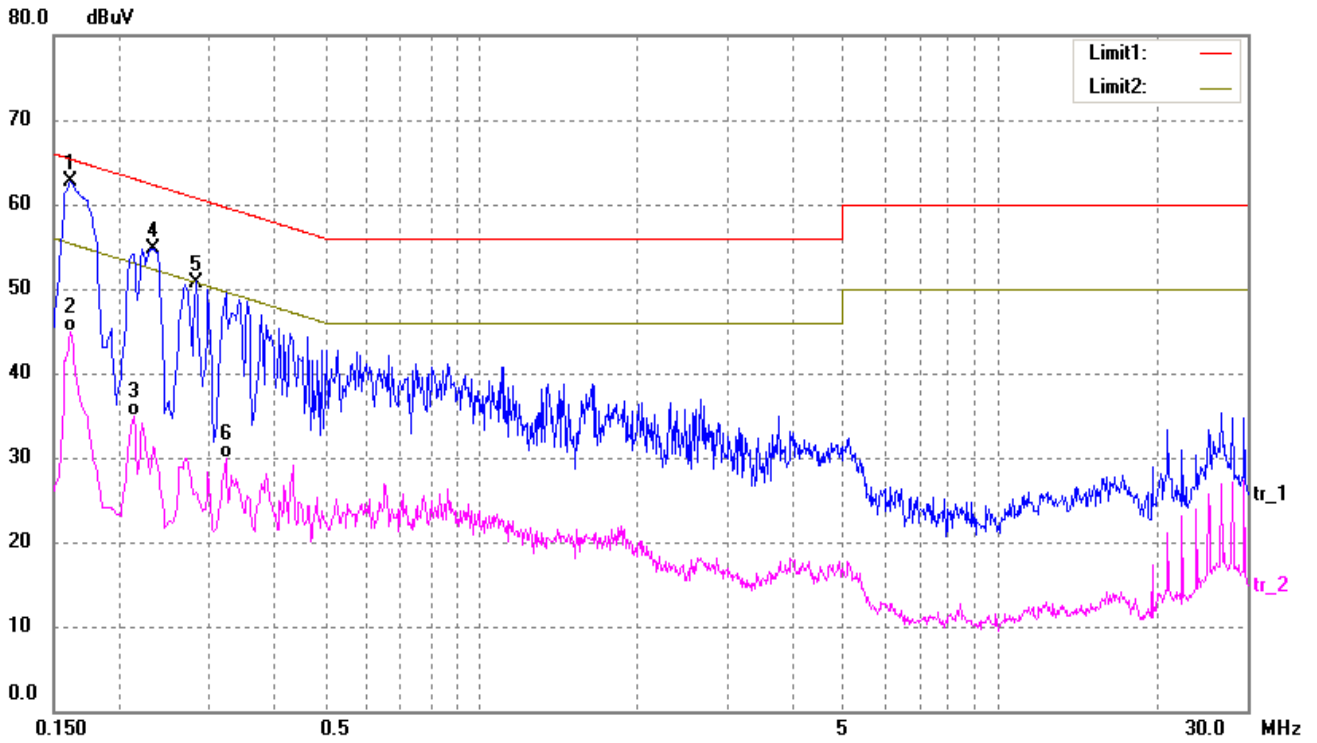

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	53.18	9.50	62.68	65.36	-2.68	peak
2	0.1620	35.41	9.50	44.91	55.36	-10.45	AVG
3	0.2140	25.49	9.50	34.99	53.05	-18.06	AVG
4	0.2340	45.25	9.50	54.75	62.31	-7.56	peak
5	0.2820	41.30	9.50	50.80	60.76	-9.96	peak
6	0.3220	20.39	9.50	29.89	49.66	-19.77	AVG


Plot of Conducted Emissions Test Data

EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condiation: AC 120V/60Hz; USB DC 5V
 Comment: TM3
 Test Specification: Neutral

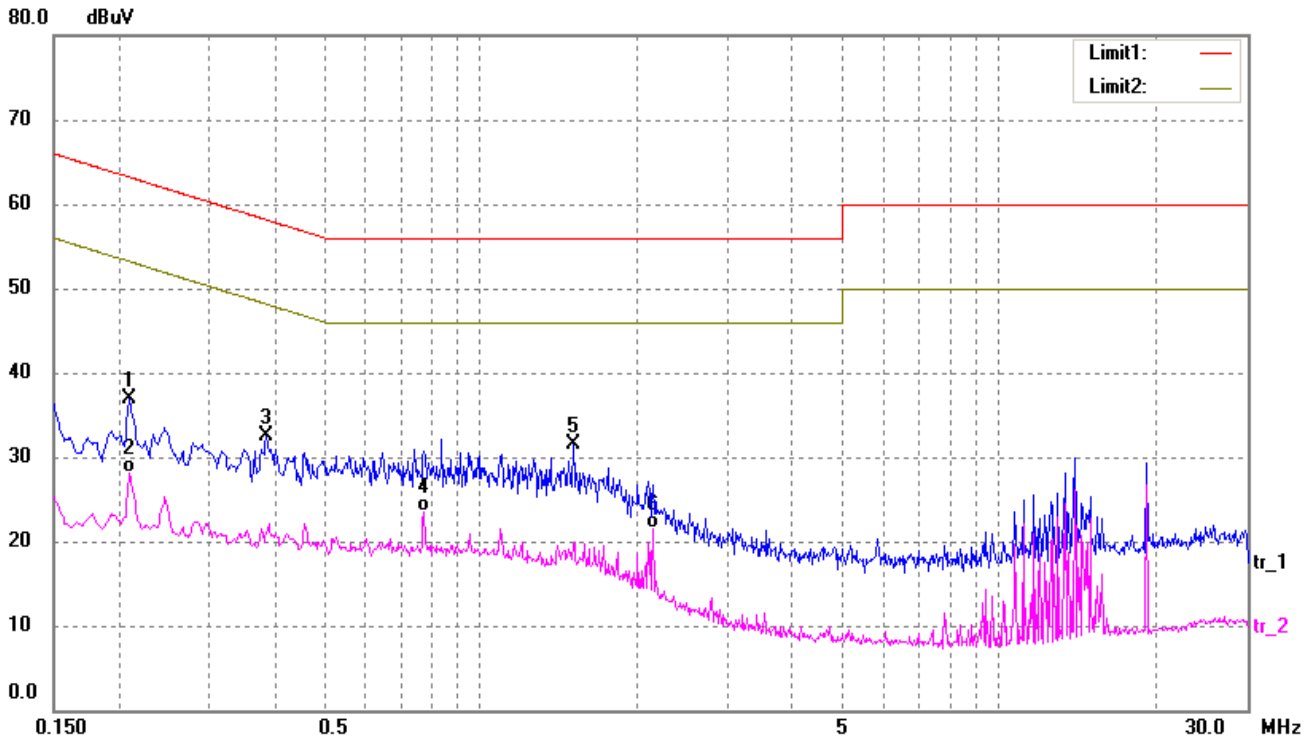

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2100	27.32	9.50	36.82	63.21	-26.39	peak
2	0.2100	18.67	9.50	28.17	53.21	-25.04	AVG
3	0.3860	22.95	9.50	32.45	58.15	-25.70	peak
4	0.7780	13.73	9.78	23.51	46.00	-22.49	AVG
5	1.5100	21.45	10.00	31.45	56.00	-24.55	peak
6	2.1460	11.51	10.00	21.51	46.00	-24.49	AVG

Test Specification: Line

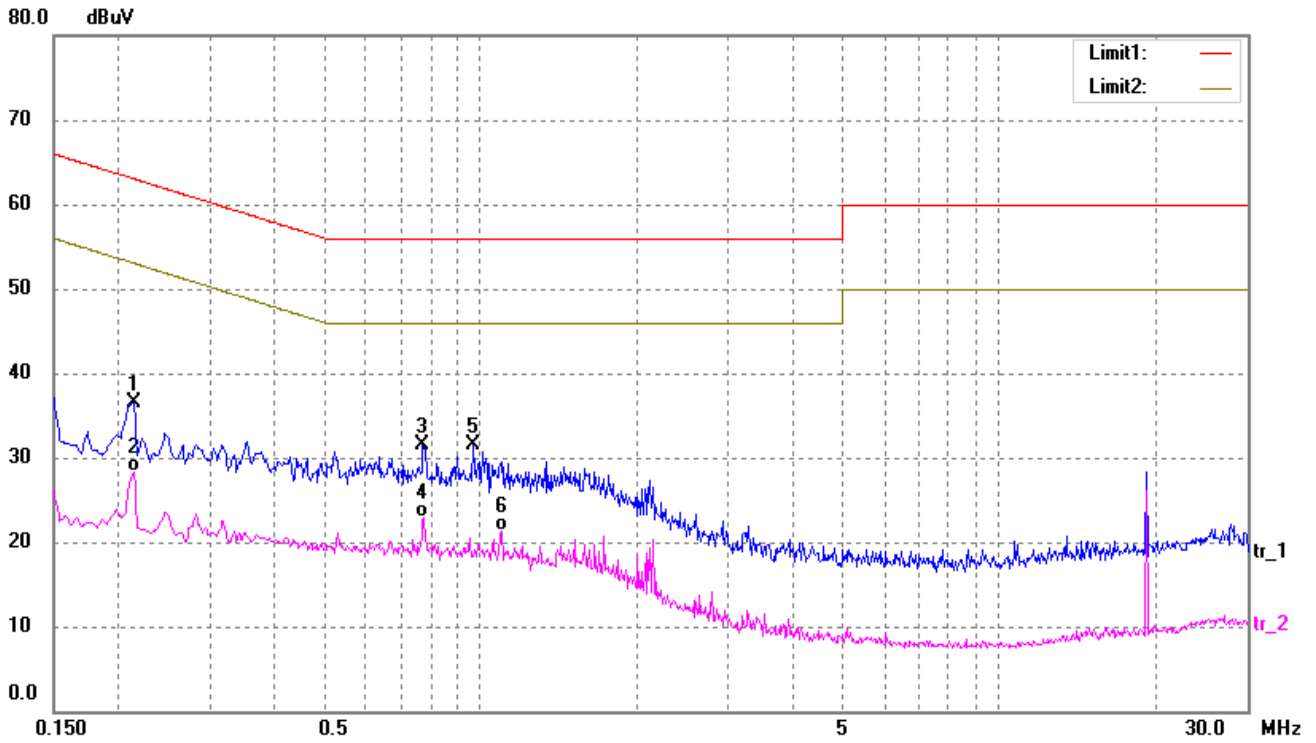

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2140	26.98	9.50	36.48	63.05	-26.57	peak
2	0.2140	18.77	9.50	28.27	53.05	-24.78	AVG
3	0.7740	21.67	9.77	31.44	56.00	-24.56	peak
4	0.7780	13.18	9.78	22.96	46.00	-23.04	AVG
5	0.9660	21.45	9.97	31.42	56.00	-24.58	peak
6	1.0940	11.37	10.00	21.37	46.00	-24.63	AVG

Note: Result= Reading+ Correct, Margin= Result- Limit

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2014-05-28	2015-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2014-05-28	2015-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2014-05-28	2015-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2014-05-28	2015-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2014-05-24	2015-05-23
Horn Antenna	ETS	3117	00086197	2014-05-24	2015-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2014-05-24	2015-05-23

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

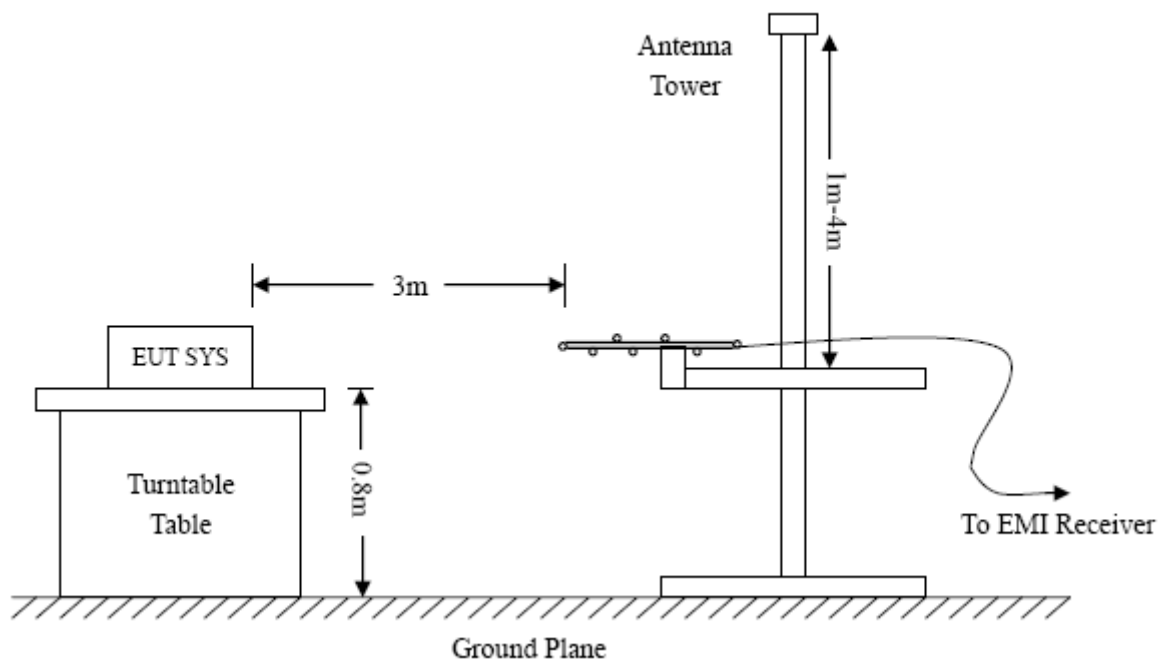

4.4 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-1.51 dB at 47.9939 MHz in the Vertical polarization, TM3 mode, 9 kHz to 6 GHz, 3Meters

Plot of Radiated Emissions Test Data (9kHz~30MHz)

EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condition: AC 120V/60Hz; Adapter DC 5V/2A
 Comment: TM1 (Adapter Model: FY050200)

Test Specification:

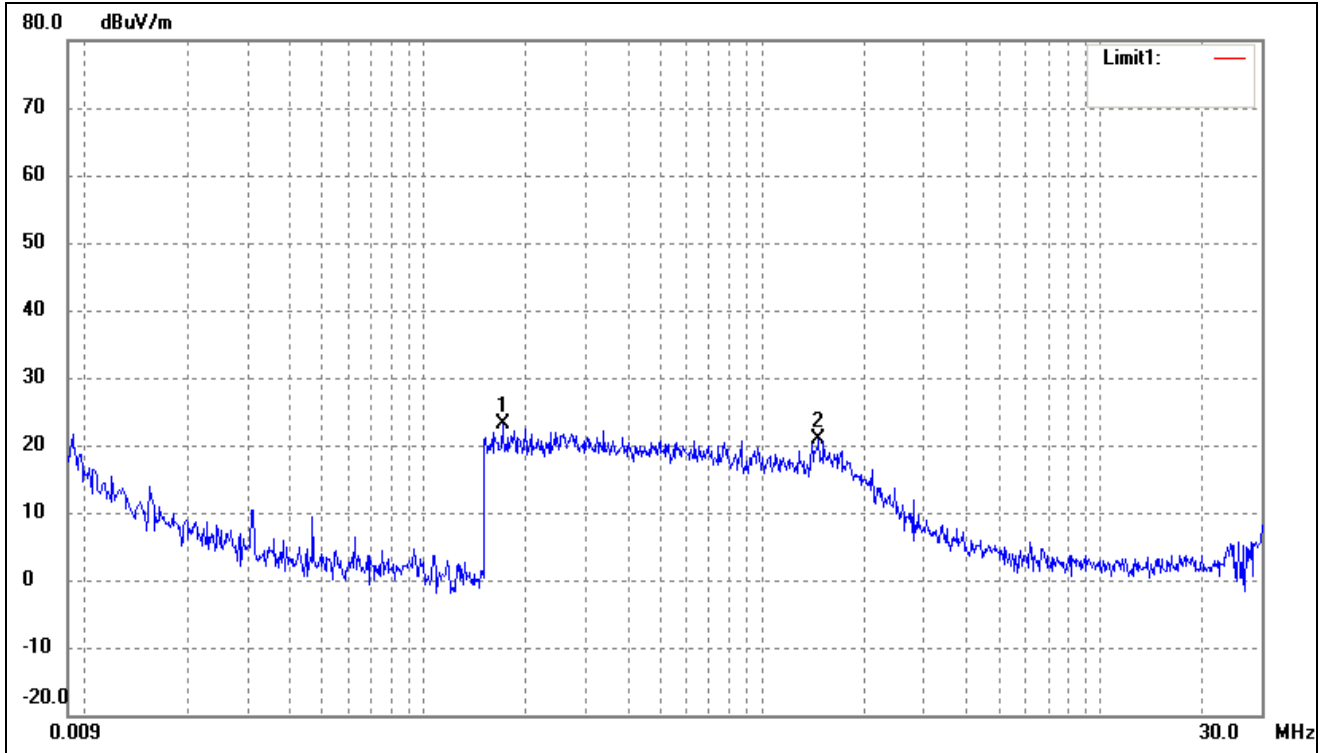


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	0.1712	3.52	19.63	23.15	102.94	-79.79	154	100	peak
2	1.4638	7.61	13.19	20.80	64.29	-43.49	108	100	peak

Plot of Radiated Emissions Test Data (9kHz~30MHz)

EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condition: AC 120V/60Hz; Adapter DC 5V/2A
 Comment: TM2 (Adapter Model: SAPA05010US)

Test Specification:

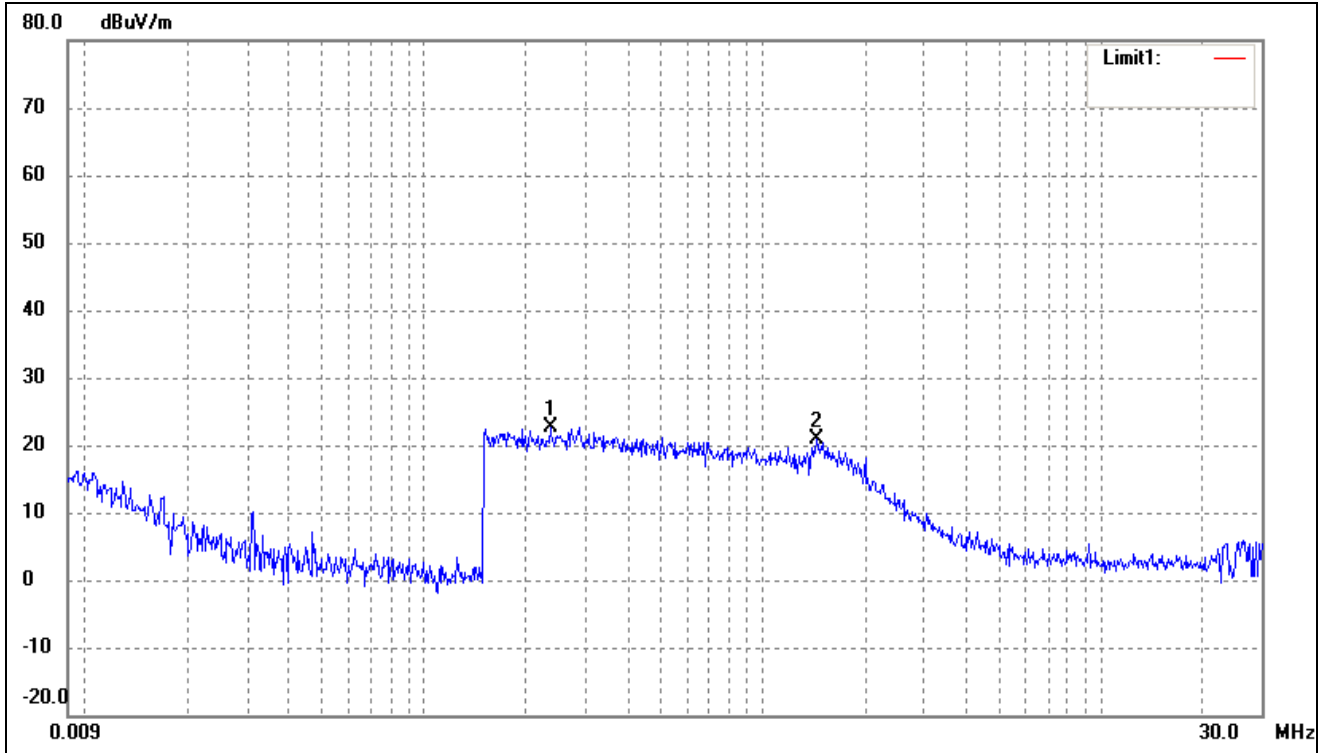


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	0.2353	3.15	19.56	22.71	100.17	-77.46	254	100	peak
2	1.4483	7.58	13.19	20.77	64.39	-43.62	116	100	peak

Plot of Radiated Emissions Test Data (9kHz~30MHz)

EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condition: AC 120V/60Hz; USB DC 5V
 Comment: TM3

Test Specification:

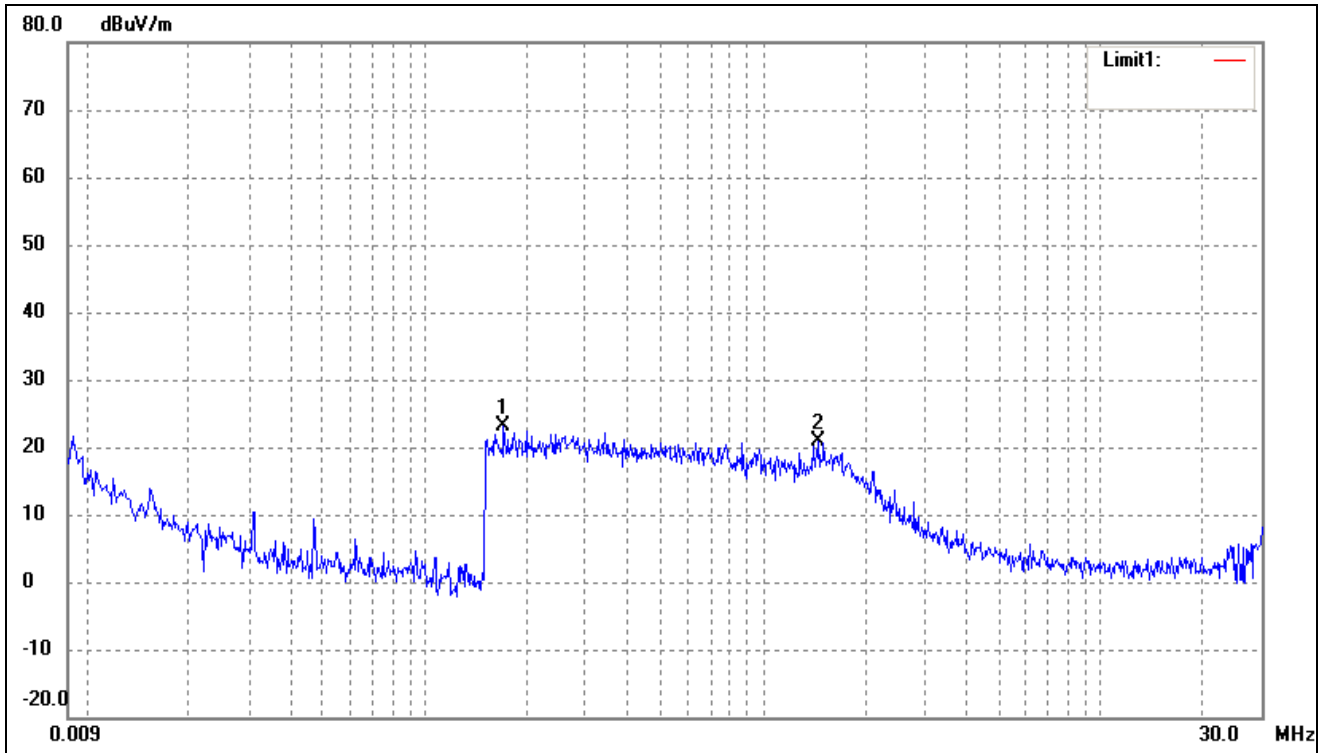


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	0.1711	3.52	19.63	23.15	102.94	-79.79	254	100	peak
2	1.4639	7.61	13.19	20.80	64.29	-43.49	116	100	peak

Plot of Radiated Emissions Test Data (30MHz~1GHz)


EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condition: AC 120V/60Hz; Adapter DC 5V/2A
 Comment: TMI (Adapter Model: FY050200)

Test Specification: Horizontal

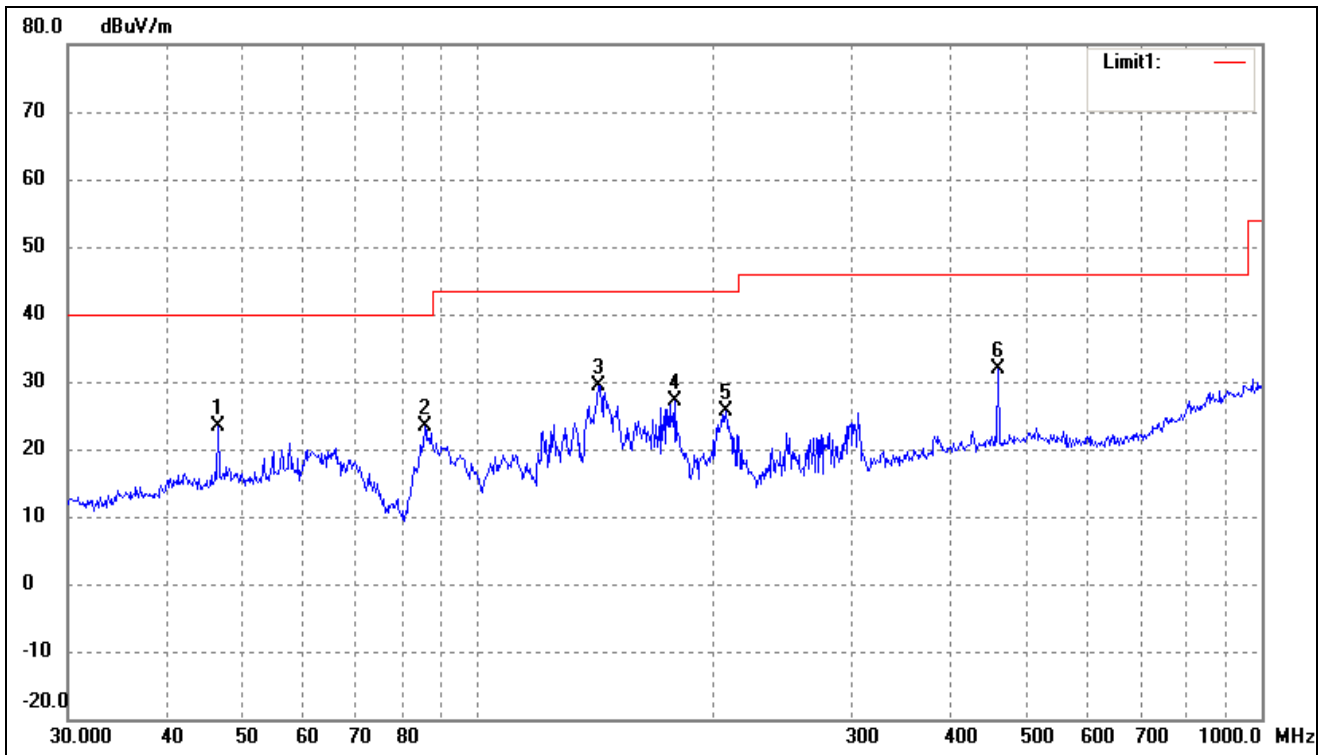

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.6664	30.78	-7.46	23.32	40.00	-16.68	58	150	peak
2	85.5977	35.67	-12.38	23.29	40.00	-16.71	326	100	peak
3	142.3244	42.60	-13.11	29.49	43.50	-14.01	29	150	peak
4	178.7584	38.41	-11.23	27.18	43.50	-16.32	209	100	peak
5	207.1226	34.65	-9.01	25.64	43.50	-17.86	145	100	peak
6	460.7271	33.80	-2.03	31.77	46.00	-14.23	359	200	peak

Test Specification: Vertical

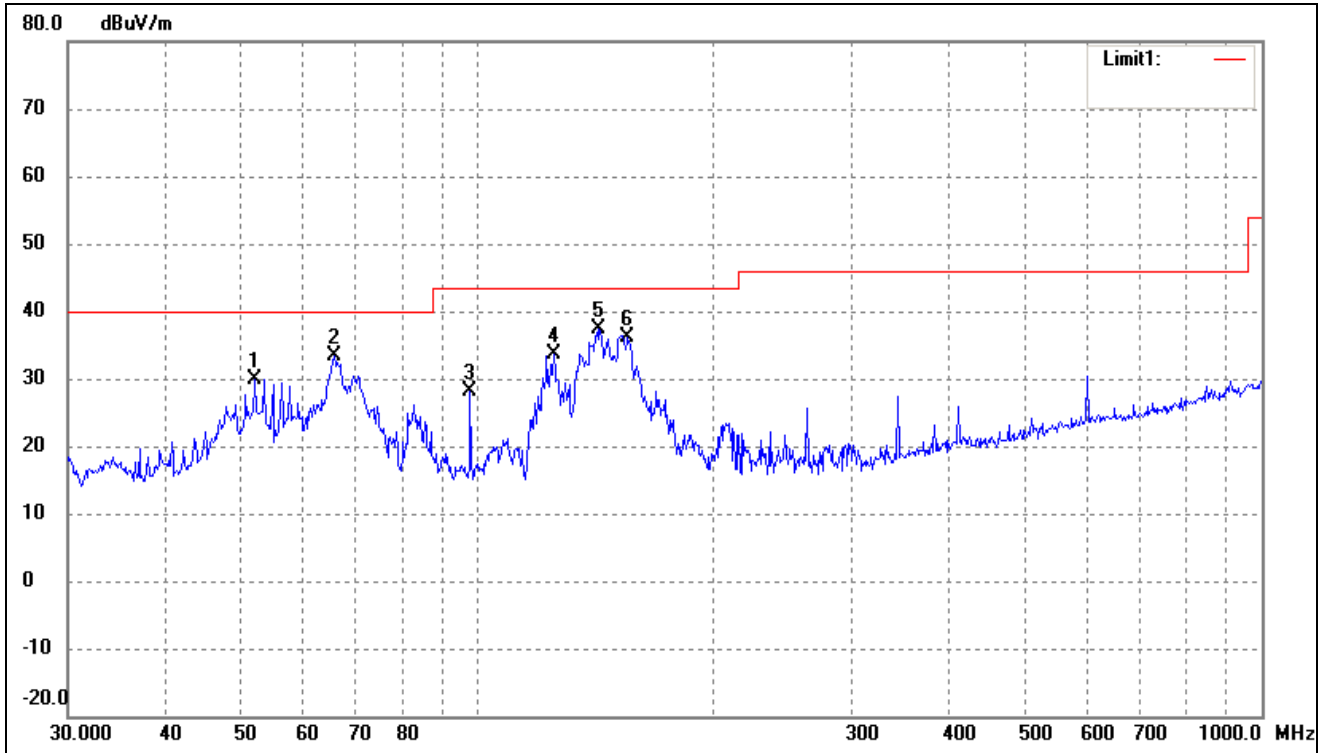


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	52.0251	37.64	-7.65	29.99	40.00	-10.01	51	100	peak
2	65.5727	43.27	-9.92	33.35	40.00	-6.65	308	100	peak
3	97.7983	37.84	-9.82	28.02	43.50	-15.48	120	100	peak
4	125.0066	45.53	-12.00	33.53	43.50	-9.97	359	100	peak
5	142.8244	50.43	-13.10	37.33	43.50	-6.17	145	100	peak
6	155.3644	48.72	-12.62	36.10	43.50	-7.40	359	100	peak

Plot of Radiated Emissions Test Data (30MHz~1GHz)


EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condition: AC 120V/60Hz;DC 5V
 Comment: TM2 (Adapter Model: SAPA05010US)

Test Specification: Horizontal

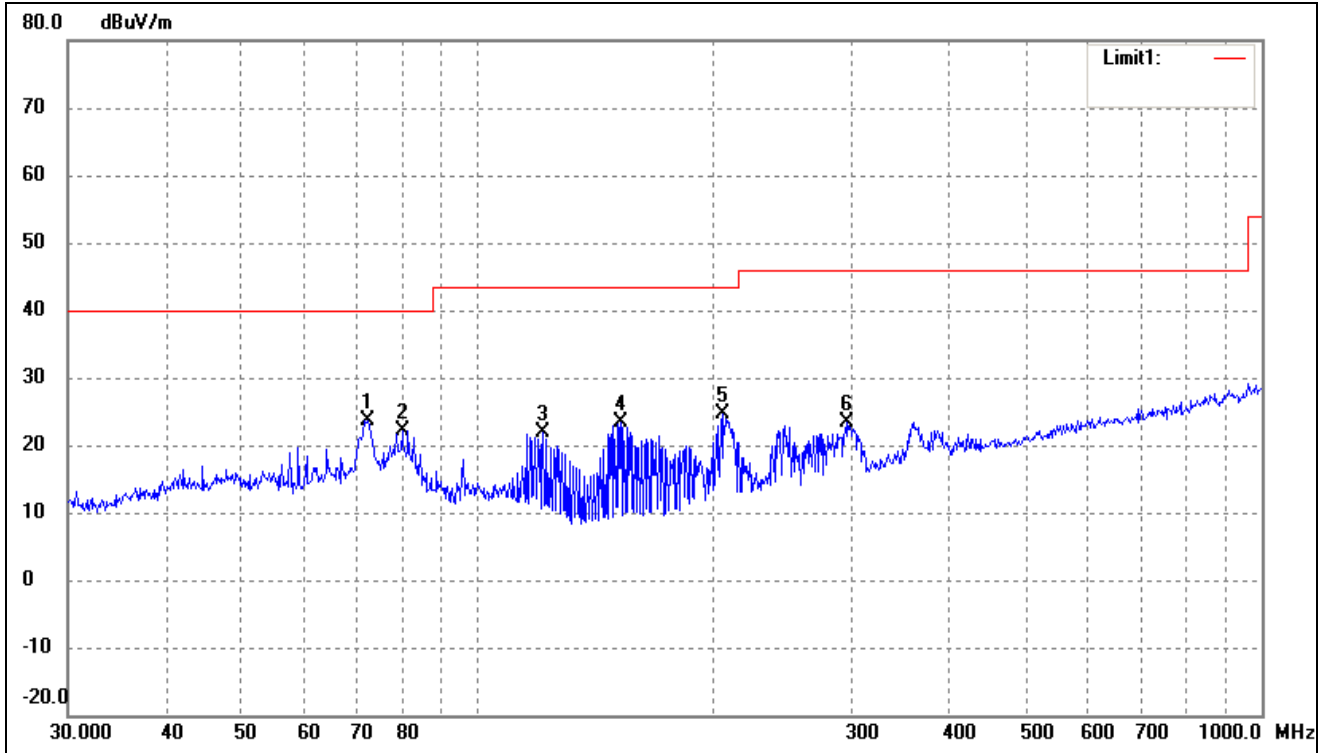

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	72.3376	36.02	-12.41	23.61	40.00	-16.39	58	150	peak
2	80.0806	35.66	-13.49	22.17	40.00	-17.83	326	100	peak
3	121.1231	33.37	-11.43	21.94	43.50	-21.56	29	120	peak
4	152.1297	36.20	-12.81	23.39	43.50	-20.11	209	100	peak
5	205.6751	33.59	-9.01	24.58	43.50	-18.92	178	100	peak
6	295.1469	29.76	-6.29	23.47	46.00	-22.53	359	200	peak

Test Specification: Vertical

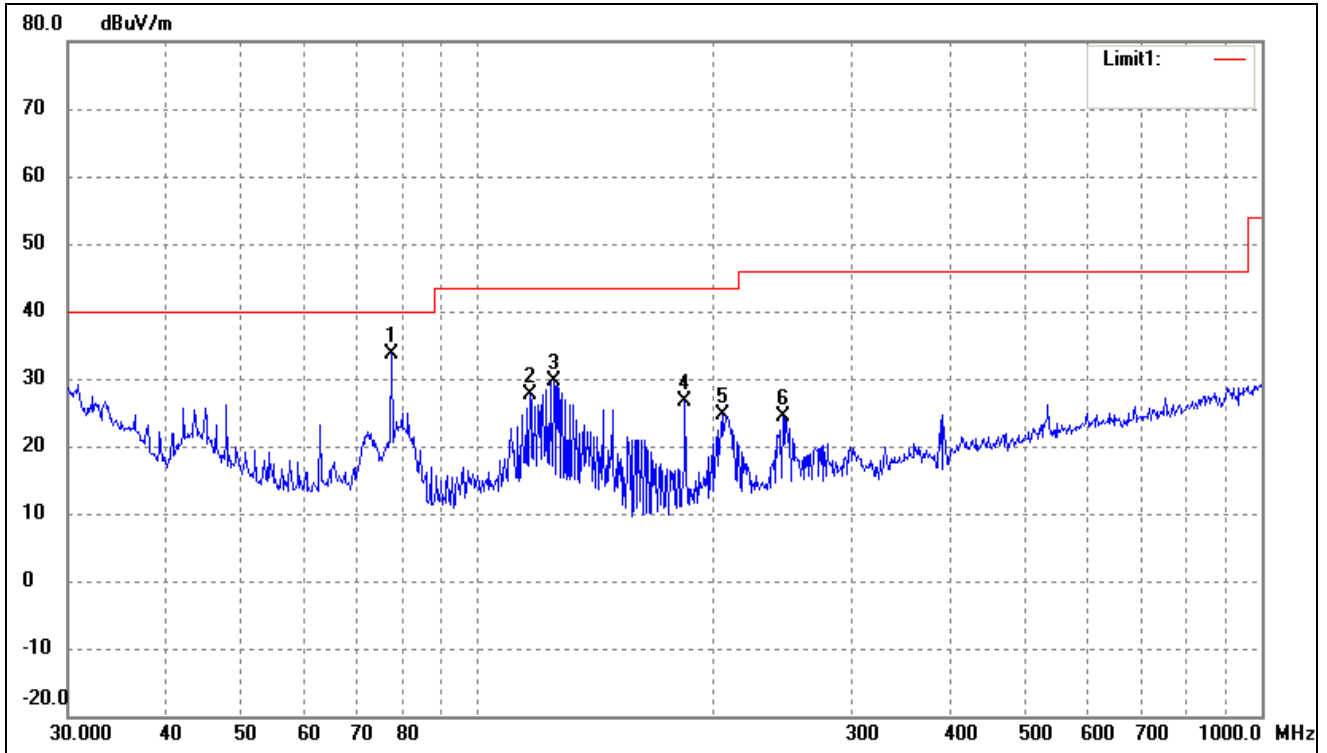


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	77.5928	47.25	-13.54	33.71	40.00	-6.29	51	100	peak
2	116.5401	38.43	-10.69	27.74	43.50	-15.76	308	100	peak
3	125.0066	41.62	-12.00	29.62	43.50	-13.88	120	100	peak
4	183.8440	37.40	-10.72	26.68	43.50	-16.82	359	100	peak
5	205.6751	33.64	-9.01	24.63	43.50	-18.87	178	100	Peak
6	245.0900	31.94	-7.63	24.31	46.00	-21.69	359	100	peak

Plot of Radiated Emissions Test Data (30MHz~1GHz)


EUT: Entertainment Tablet
 Tested Model: Touch Smart Slim 3Gi
 Operating Condition: AC 120V/60Hz;DC 5V
 Comment: TM3

Test Specification: Horizontal

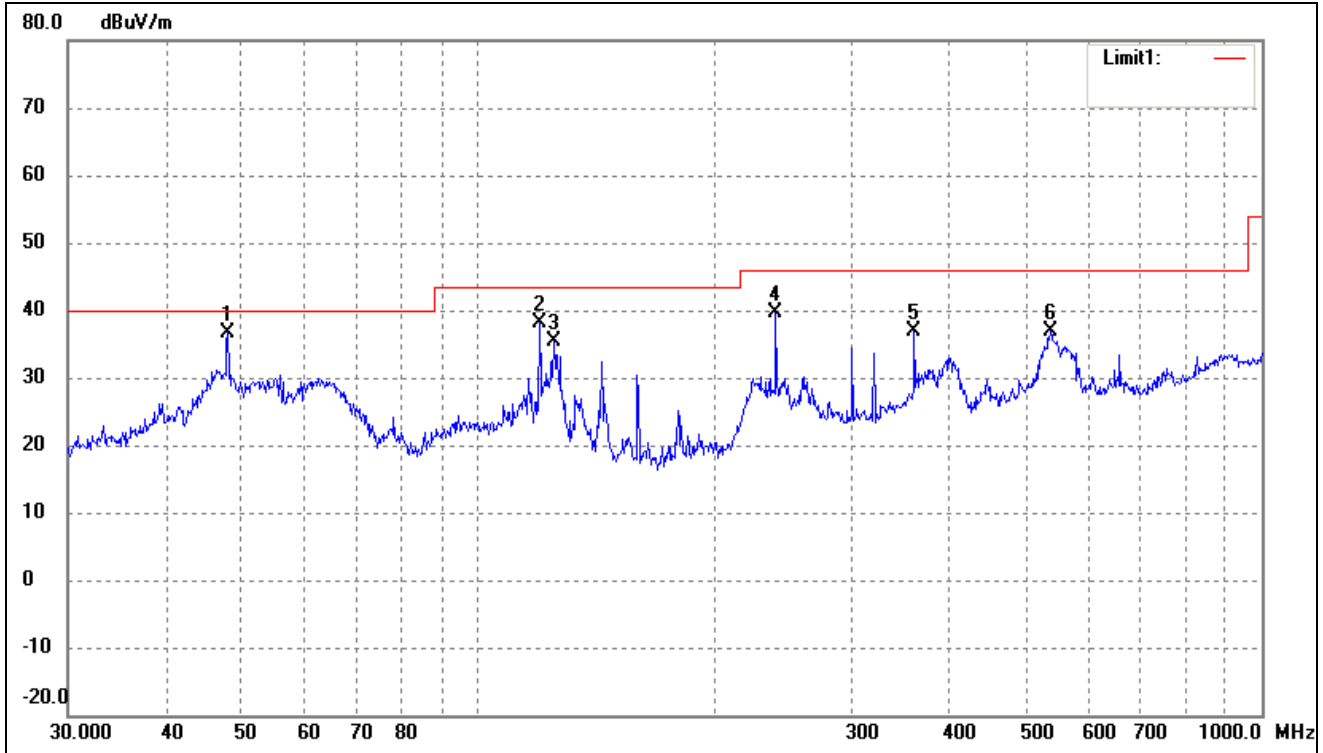

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	47.9939	30.05	6.46	36.51	40.00	-3.49	58	150	peak
2	119.8555	34.14	4.04	38.18	43.50	-5.32	326	100	peak
3	125.0066	31.88	3.61	35.49	43.50	-8.01	29	120	peak
4	239.9874	33.38	6.33	39.71	46.00	-6.29	209	100	peak
5	360.4476	27.75	9.24	36.99	46.00	-9.01	178	100	peak
6	537.5891	25.59	11.31	36.90	46.00	-9.10	359	200	peak

Test Specification: Vertical

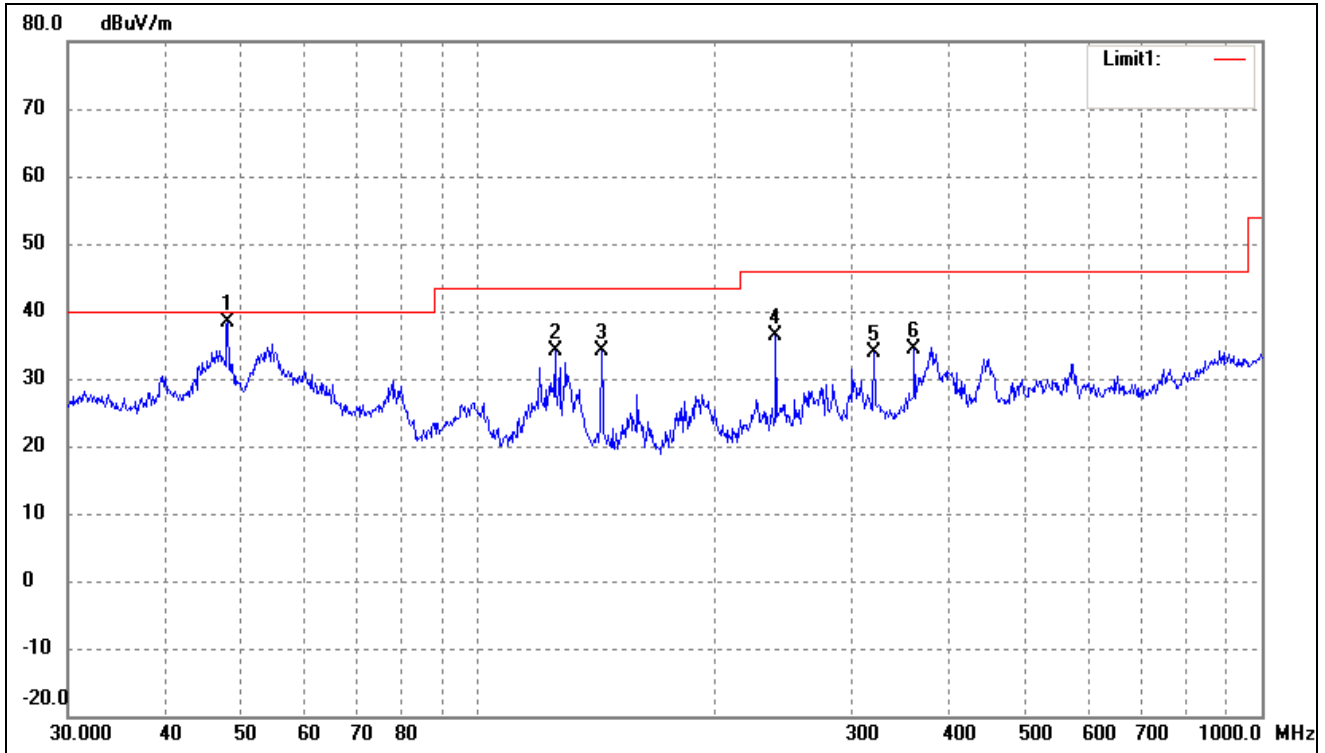

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	47.9938	31.63	6.86	38.49	40.00	-1.51	51	100	peak
2	125.4457	30.53	3.58	34.11	43.50	-9.39	308	100	peak
3	143.8293	31.73	2.45	34.18	43.50	-9.32	120	100	peak
4	239.9874	29.94	6.33	36.27	46.00	-9.73	359	100	peak
5	319.9370	24.71	9.29	34.00	46.00	-12.00	178	100	Peak
6	360.4476	25.03	9.24	34.27	46.00	-11.73	359	100	peak

Note: Testing is carried out with frequency rang 9kHz to the 6GHz, The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

***** END OF REPORT *****