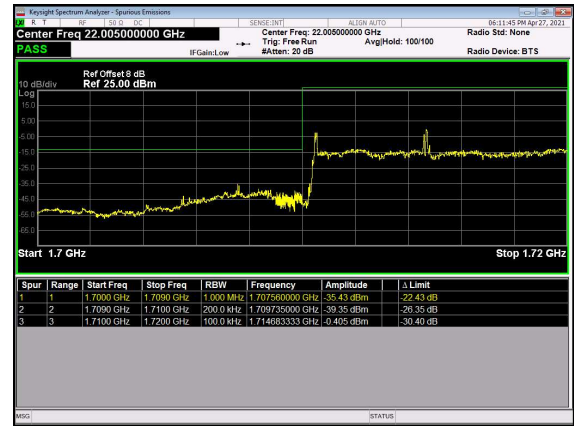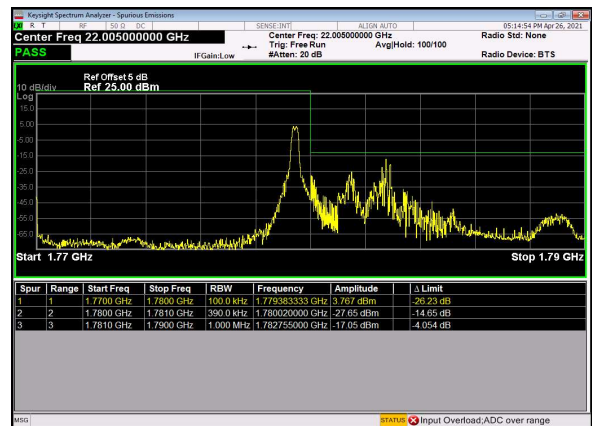| N66(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH	N66(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH
N66(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH	N66(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH
N66(20M)_DFT-s-OFDM_BPSK_Outer_Full_High_CH	N66(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH
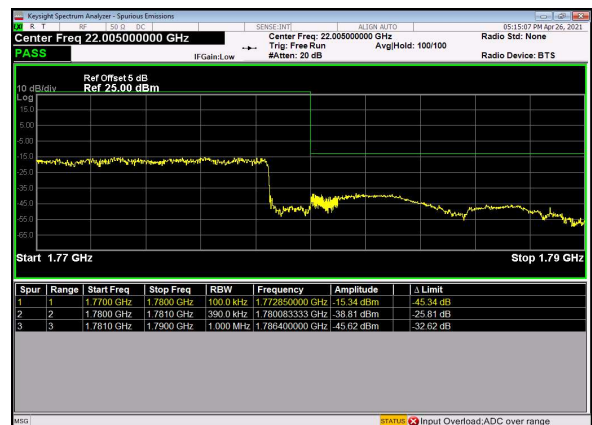
Shenzhen Morlab Communication Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555   Fax: 86-755-36698525
Http://www.morlab.cn   E-mail: service@morlab.cn

Page144of233

N71(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH
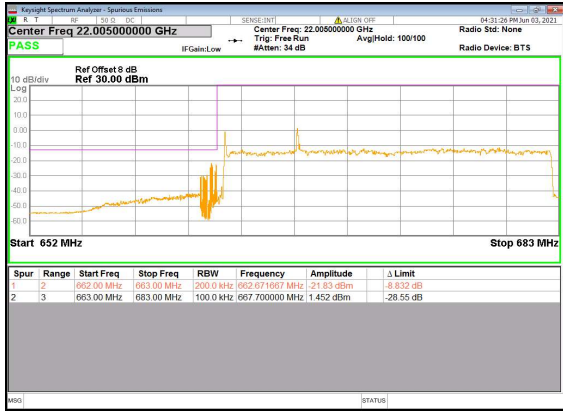
N71(5M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

N71(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_Low_CH

N71(5M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

N71(5M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

N71(5M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

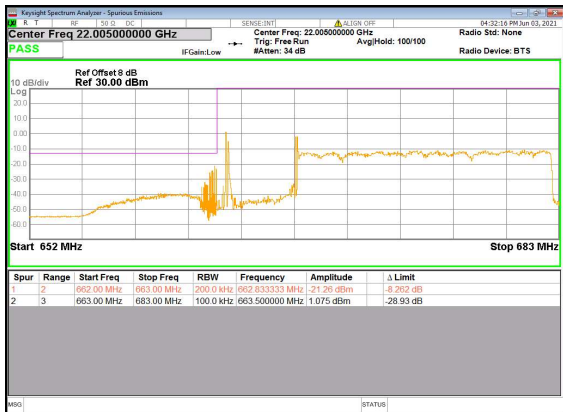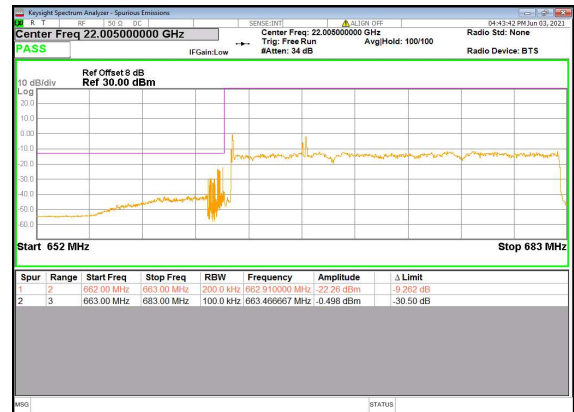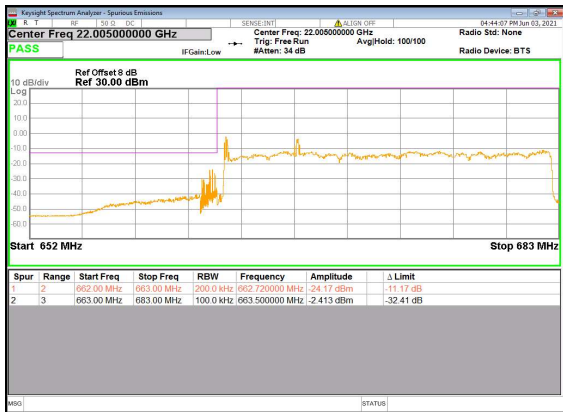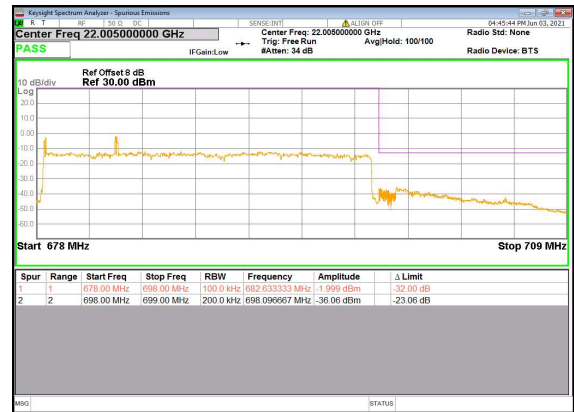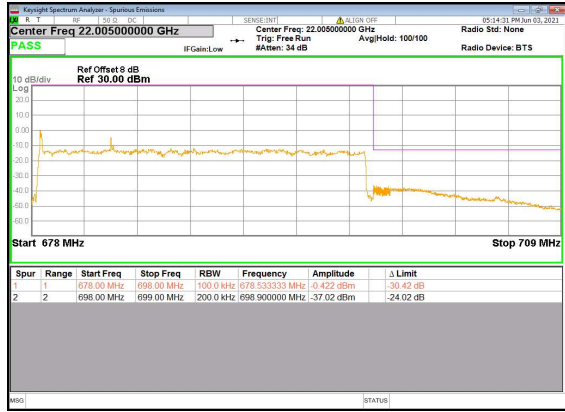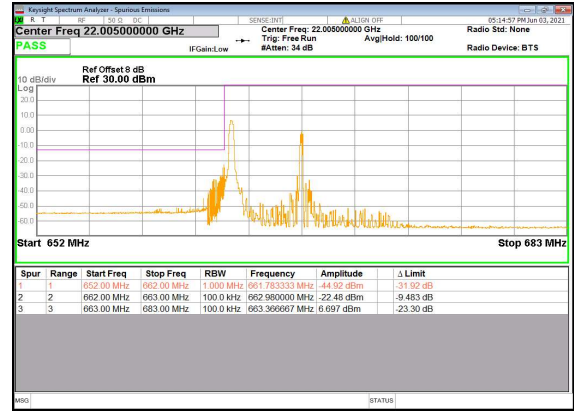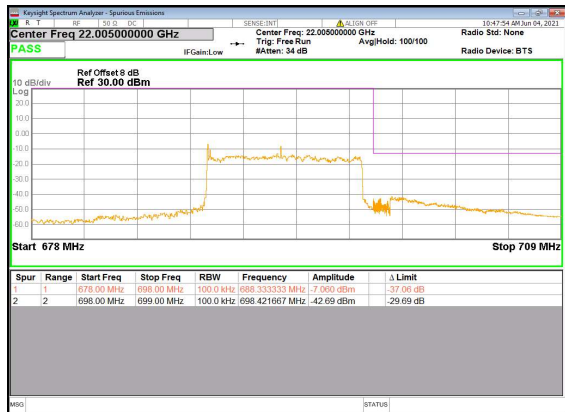## N71(5M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	678.00 MHz	698.00 MHz	100.0 kHz	678.533333 MHz	-0.422 dBm	-30.42 dB
2	2	698.00 MHz	699.00 MHz	200.0 kHz	698.900000 MHz	-37.02 dBm	-24.02 dB

N71(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	652.00 MHz	662.00 MHz	1.000 MHz	661.783333 MHz	-44.92 dBm	-31.92 dB
2	2	662.00 MHz	663.00 MHz	100.0 kHz	662.980000 MHz	-22.48 dBm	-9.483 dB
3	3	663.00 MHz	683.00 MHz	100.0 kHz	663.366667 MHz	6.697 dBm	-23.30 dB

N71(10M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	678.00 MHz	698.00 MHz	100.0 kHz	688.333333 MHz	-7.060 dBm	-37.06 dB
2	2	698.00 MHz	699.00 MHz	100.0 kHz	698.421667 MHz	-42.69 dBm	-29.69 dB

N71(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	652.00 MHz	662.00 MHz	1.000 MHz	661.383333 MHz	-45.33 dBm	-32.33 dB
2	2	662.00 MHz	663.00 MHz	150.0 kHz	662.816667 MHz	-21.79 dBm	-8.792 dB
3	3	663.00 MHz	683.00 MHz	100.0 kHz	663.500000 MHz	7.396 dBm	-22.60 dB

N71(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	652.00 MHz	662.00 MHz	1.000 MHz	661.616667 MHz	-47.13 dBm	-34.13 dB
2	2	662.00 MHz	663.00 MHz	150.0 kHz	662.831667 MHz	-23.60 dBm	-10.60 dB
3	3	663.00 MHz	683.00 MHz	100.0 kHz	663.466667 MHz	5.676 dBm	-24.32 dB

N71(15M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	2	662.00 MHz	663.00 MHz	150.0 kHz	662.745000 MHz	-24.75 dBm	-11.75 dB
2	3	663.00 MHz	683.00 MHz	100.0 kHz	667.633333 MHz	0.423 dBm	-29.58 dB

N71(15M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	2	662.00 MHz	663.00 MHz	150.0 kHz	662.993333 MHz	-24.75 dBm	-11.75 dB
2	3	663.00 MHz	683.00 MHz	100.0 kHz	663.466667 MHz	-1.017 dBm	-31.02 dB

N71(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	678.00 MHz	698.00 MHz	100.0 kHz	697.500000 MHz	7.736 dBm	-22.26 dB
2	2	698.00 MHz	699.00 MHz	150.0 kHz	698.005000 MHz	-24.83 dBm	-11.83 dB

N71(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	1	652.00 MHz	662.00 MHz	1.000 MHz	661.900000 MHz	-44.78 dBm	-31.78 dB
2	2	662.00 MHz	663.00 MHz	200.0 kHz	662.975000 MHz	-21.82 dBm	-8.819 dB
3	3	663.00 MHz	683.00 MHz	100.0 kHz	663.533333 MHz	6.393 dBm	-23.61 dB

N71(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	2	662.00 MHz	663.00 MHz	200.0 kHz	662.723333 MHz	-23.51 dBm	-10.51 dB
2	3	663.00 MHz	683.00 MHz	100.0 kHz	663.500000 MHz	7.653 dBm	-22.35 dB

N71(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	2	662.00 MHz	663.00 MHz	200.0 kHz	662.813333 MHz	-22.19 dBm	-9.195 dB
2	3	663.00 MHz	683.00 MHz	100.0 kHz	667.700000 MHz	-2.651 dBm	-32.65 dB

N71(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

Spur	Range	Start Freq	Stop Freq	RBW	Frequency	Amplitude	Δ Limit
1	2	662.00 MHz	663.00 MHz	200.0 kHz	662.826333 MHz	-22.79 dBm	-9.788 dB
2	3	663.00 MHz	683.00 MHz	100.0 kHz	663.466667 MHz	1.269 dBm	-28.73 dB

Shenzhen Morlab Communication Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555   Fax: 86-755-36698525

Http://www.morlab.cn   E-mail: service@morlab.cn

Page**147**of**233**

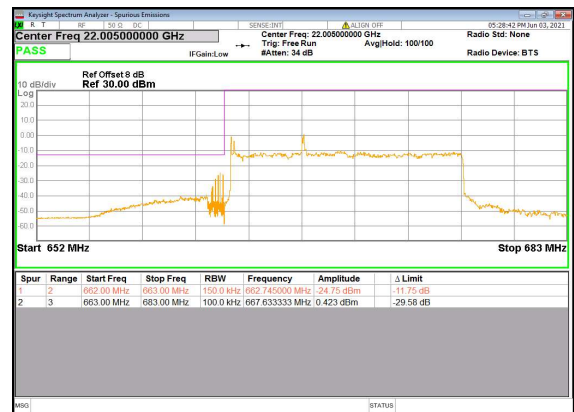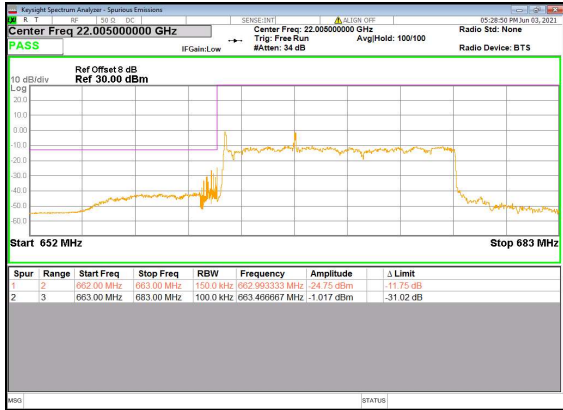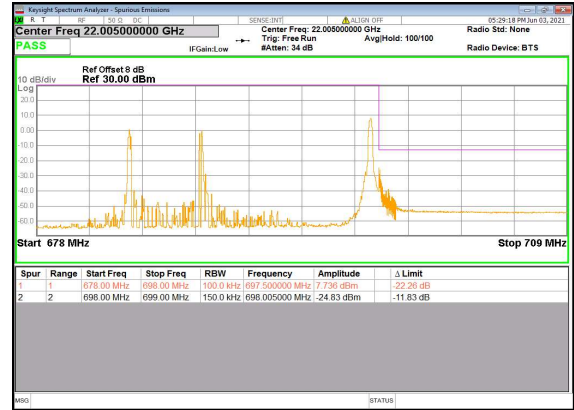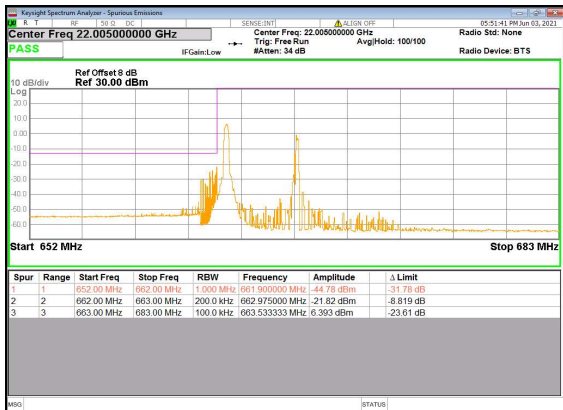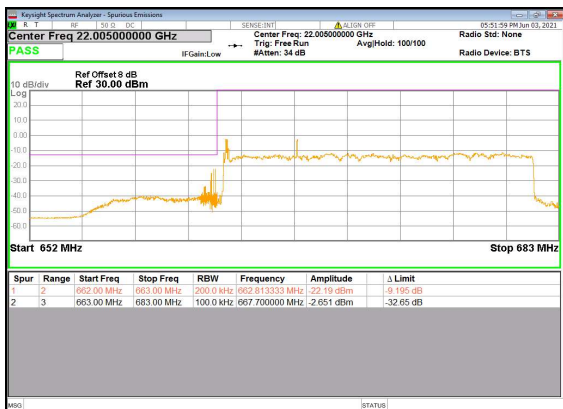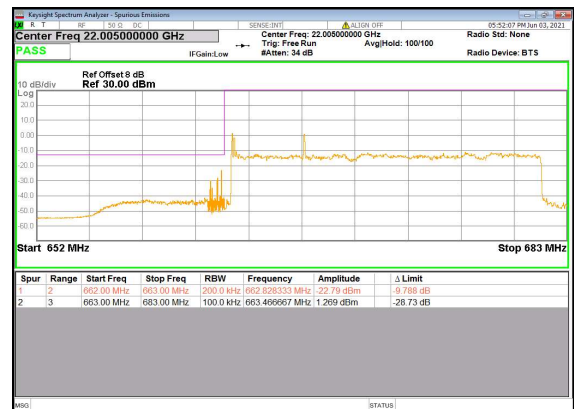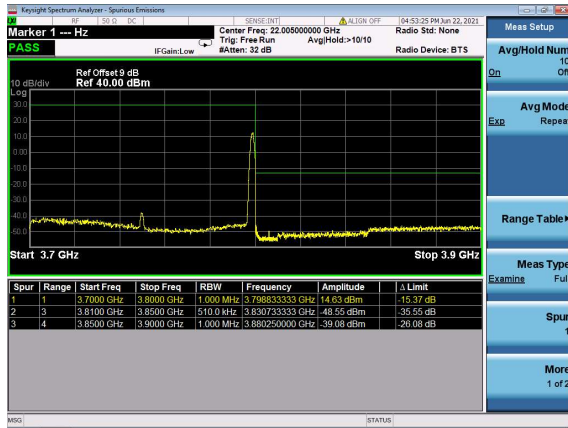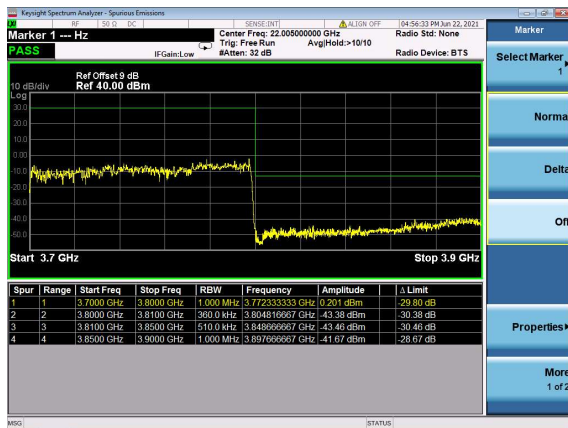| N71(20M)_DFT-s-OFDM_BPSK_Edge_1RB_Right_High_CH	N71(20M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH
N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH	N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH
N78(100M)_DFT-s-OFDM_BPSK_Outer_Full_Low_CH	N78(100M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

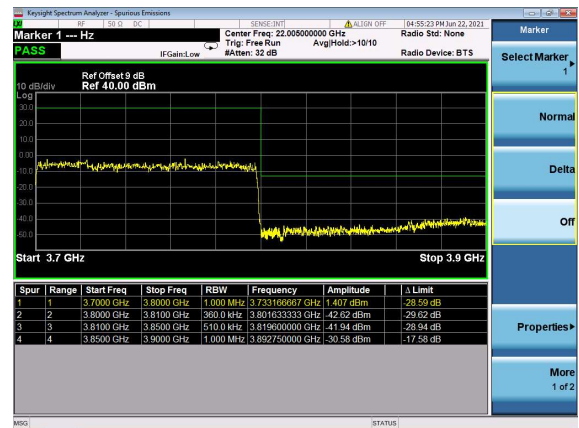| N78(100M)_DFT-s-OFDM_BPSK_Edge_1RB_ Right_High_CH	N78(100M)_DFT-s-OFDM_QPSK_Edge_1RB_ Right_High_CH
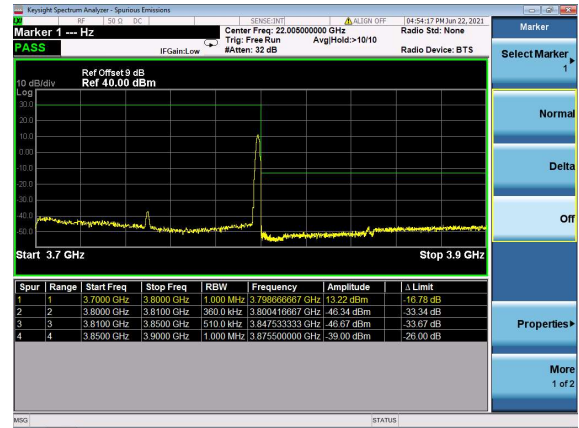
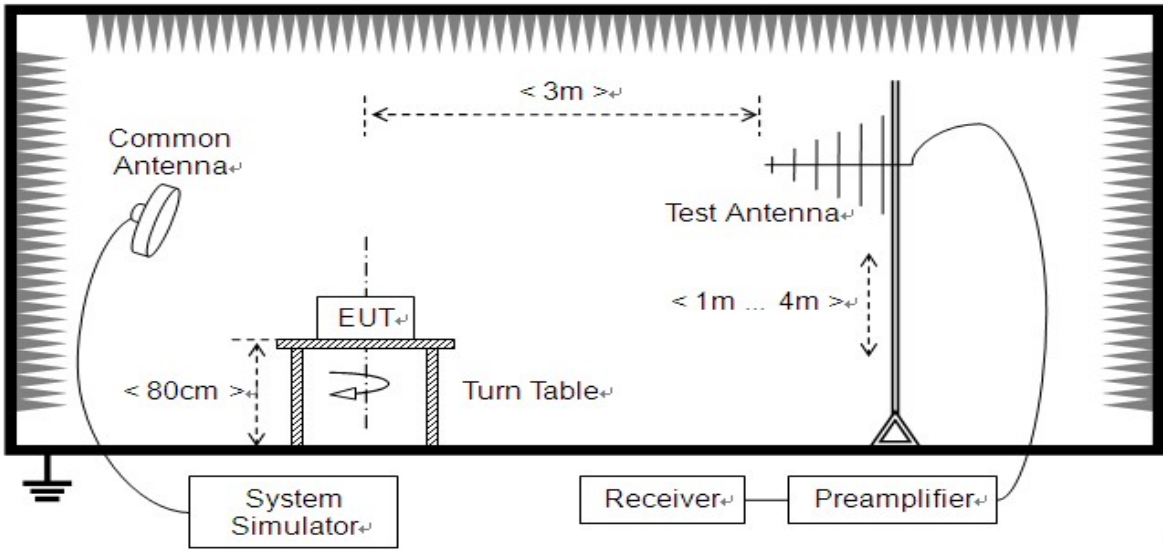| N78(100M)_DFT-s-OFDM_BPSK_Outer_Full_ High_CH	N78(100M)_DFT-s-OFDM_QPSK_Outer_Full_ High_CH

2.7. Radiated Spurious Emissions

2.7.1. Requirement

According to FCC section 2.1051, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43+10*log(P)dB. This calculated to be -13dBm.

Additional requirement for NR Band n41:
The power of any emission outside of the authorized operating frequency ranges must beattenuated below the transmitting power (P) by a factor of at least 55 + 10 log(P) dB. This calculated to be -25dBm.

Shenzhen Morlab Communication Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
Tel: 86-755-36698555   Fax: 86-755-36698525
Http://www.morlab.cn   E-mail: service@morlab.cn
Page149of233

2.7.2. Test Description

(For the test frequency from 30MHz to1GHz)
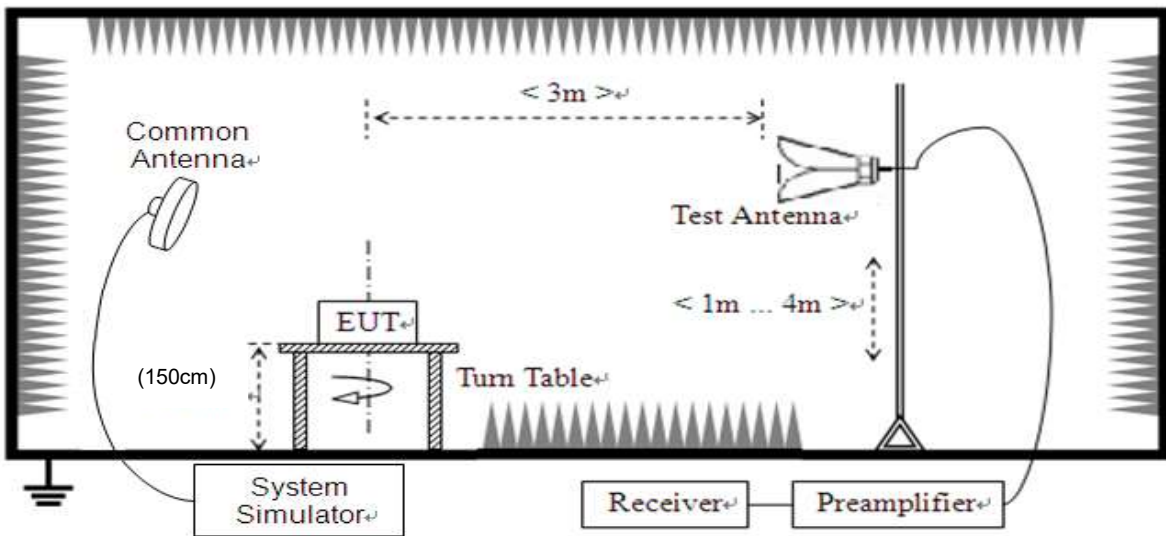
(For the test frequency above 1GHz)

The EUTis located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading.

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power, and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360°to

determine the maximum value of the radiated power.The emission levels at both horizontal and vertical polarizations should be tested.The Filters consists of Notch Filters and High Pass Filter.

Note: when doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.7.3. Test procedure

KDB 971168 D01v03 Section 5.8 and ANSI/TIA-603-E-2016.

2.7.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. Test Antenna height is varied from 1m to 4m above the ground, and the Turn Table is actuated to turn from 0° to 360°, both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The substitution corrections are obtained as described below:

$A_{SUBST} = P_{SUBST\_TX} - P_{SUBST\_RX} - L_{SUBST\_CABLES} + G_{SUBST\_TX\_ANT}$

$A_{TOT} = L_{CABLES} + A_{SUBST}$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

P_{SUBST_TX} is signal generator level,

P_{SUBST_RX} is receiver level,

L_{SUBST_CABLES} is cable losses including TX cable,

$G_{SUBST\_TX\_ANT}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the Test Spectrum Analyze, so Spectrum Analyze reading is the final values which contain the data of A_{TOT}.

Note1: The power of the EUT transmitting frequency should be ignored.

Shenzhen Morlab Communication Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555   Fax: 86-755-36698525

Http://www.morlab.cn   E-mail: service@morlab.cn

Page**151**of**233**

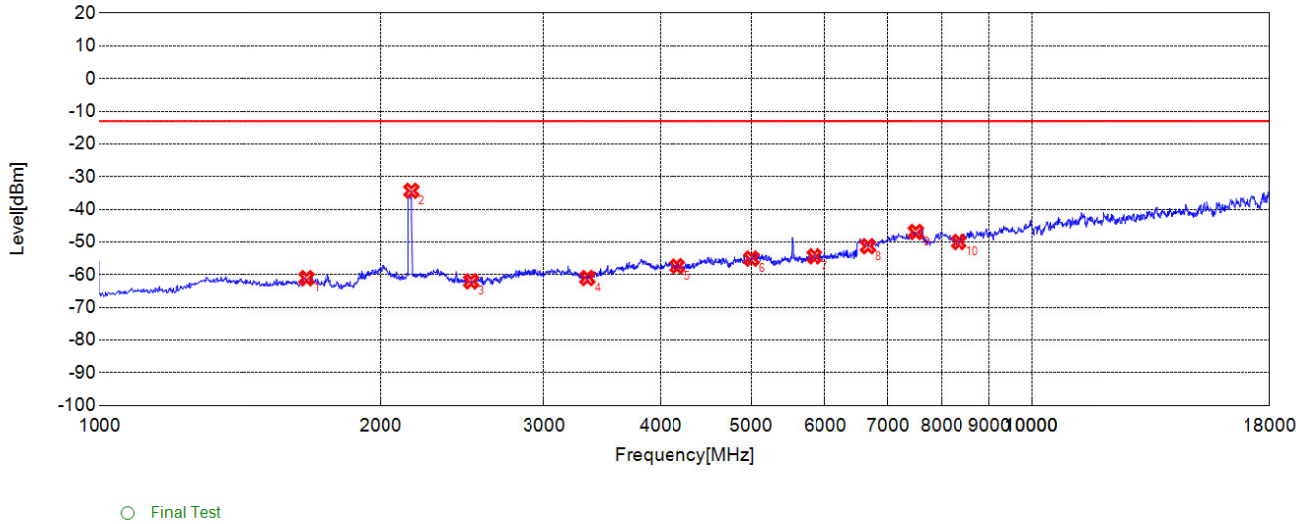**Note2:** All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note3: All bandwidth and modulationwere considered and evaluated respectively by performing full test for each band, only the worst cases (Max Bandwidth and QPSK mode) were recorded in this test report.

Shenzhen Morlab Communication Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555   Fax: 86-755-36698525

Http://www.morlab.cn   E-mail: service@morlab.cn

Page**152**of**233**

Test Graph

○ Final Test

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
Suspected List										
1	1666.6670	-61.07	-13.00	48.07	-8.79	-46.28	37.49	43	Z	Horizontal
2	2161.1610	-34.32	-13.00	21.32	-7.78	-46.76	38.98	154	Z	NA
3	2503.5040	-62.05	-13.00	49.05	-10.44	-47.13	36.69	200	Z	Horizontal
4	3339.8400	-61.02	-13.00	48.02	-9.95	-48.06	38.11	46	Z	Horizontal
5	4166.6670	-57.4	-13.00	44.40	-7.10	-46.86	39.76	18	Z	Horizontal
6	5004.0040	-55.07	-13.00	42.07	-2.44	-43.81	41.37	143	Z	Horizontal
7	5841.3410	-54.38	-13.00	41.38	-0.99	-42.35	41.36	98	Z	Horizontal
8	6672.6730	-51.29	-13.00	38.29	3.83	-39.20	43.03	345	Z	Horizontal
9	7501.5020	-46.95	-13.00	33.95	10.71	-35.48	46.19	61	Z	Horizontal
10	8341.8420	-49.99	-13.00	36.99	8.74	-36.18	44.92	227	Z	Horizontal

DC_66A-46A_N5 166800 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz
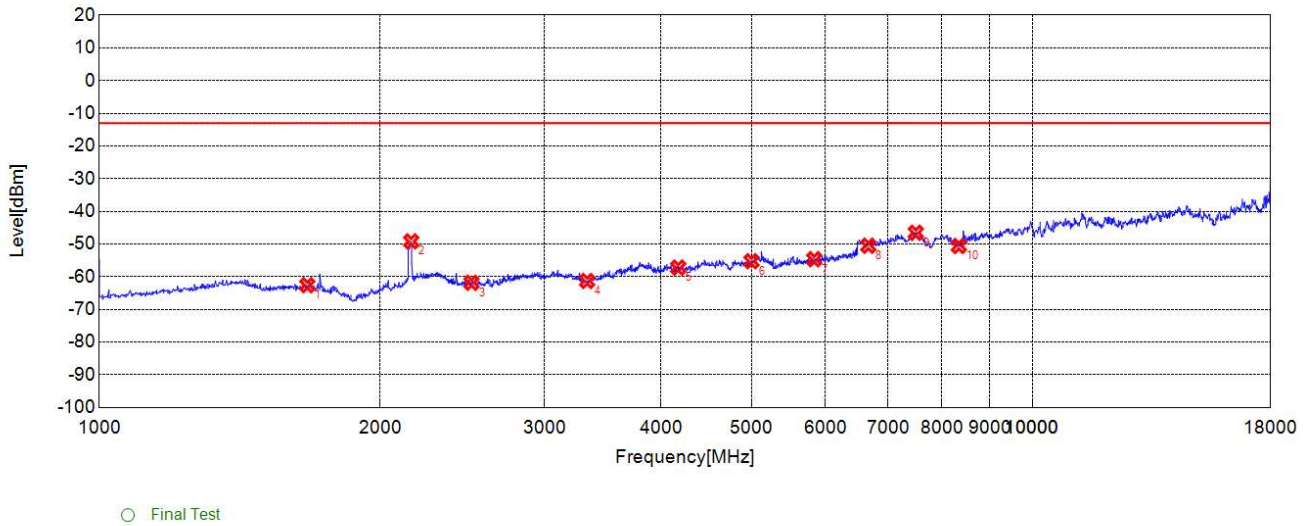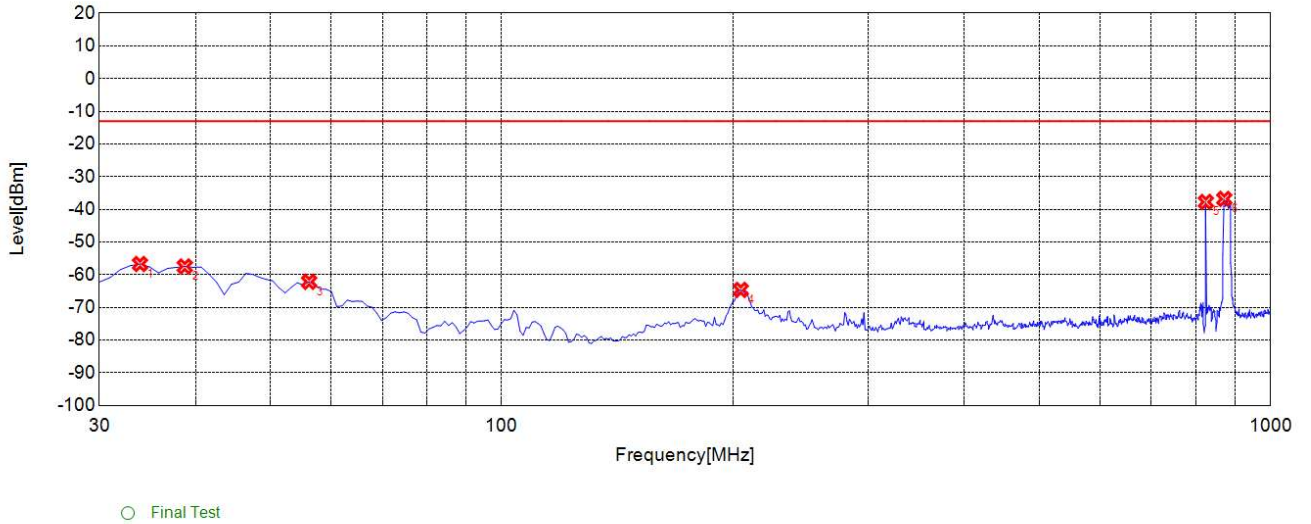
1-18G H

Test Graph

O   Final Test

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
Suspected List										
1	1670.6710	-62.61	-13.00	49.61	-9.66	-46.29	36.63	45	Z	Vertical
2	2159.1590	-49.19	-13.00	36.19	-8.30	-46.75	38.45	97	Z	NA
3	2505.5060	-61.86	-13.00	48.86	-10.60	-47.15	36.55	125	Z	Vertical
4	3332.8330	-61.31	-13.00	48.31	-10.54	-48.05	37.51	136	Z	Vertical
5	4173.6740	-57.21	-13.00	44.21	-7.25	-46.74	39.49	52	Z	Vertical
6	5000.5010	-55.26	-13.00	42.26	-3.05	-43.81	40.76	60	Z	Vertical
7	5837.8380	-54.65	-13.00	41.65	-1.34	-42.40	41.06	304	Z	Vertical
8	6672.6730	-50.53	-13.00	37.53	3.88	-39.20	43.08	168	Z	Vertical
9	7501.5020	-46.56	-13.00	33.56	10.30	-35.48	45.78	40	Z	Vertical
10	8341.8420	-50.6	-13.00	37.60	8.57	-36.18	44.75	55	Z	Vertical

DC_66A-46A_N5 166800 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz
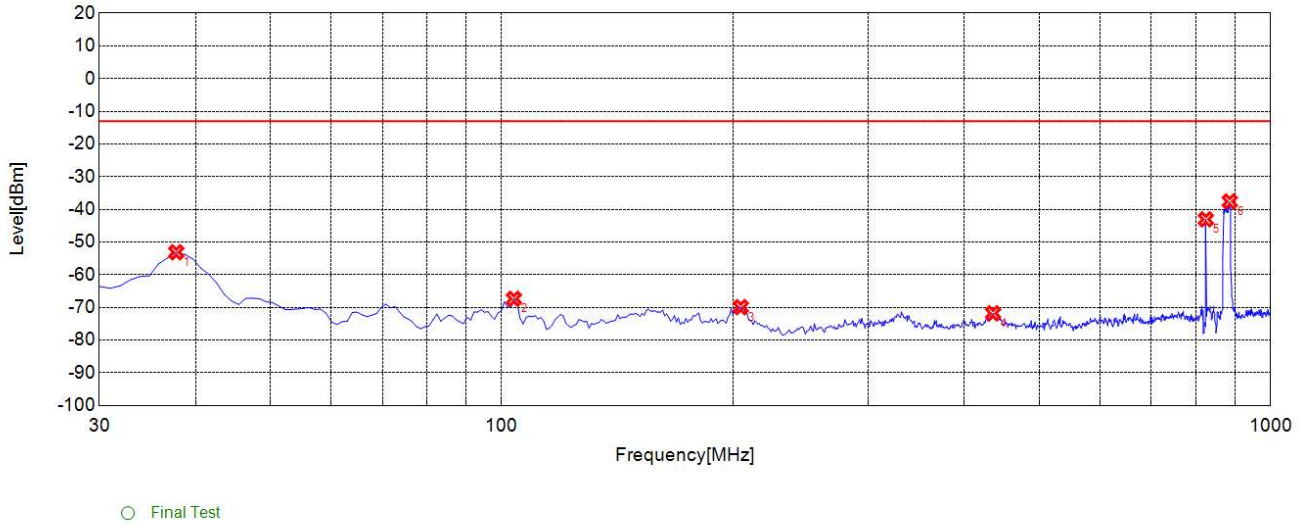
1-18G V

Test Graph

○ Final Test

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
Suspected List										
1	33.8840	-56.73	-13.00	43.73	-9.81	-39.59	29.78	354	Z	Horizontal
2	38.7390	-57.49	-13.00	44.49	-7.63	-39.55	31.92	55	Z	Horizontal
3	56.2160	-62.16	-13.00	49.16	-9.45	-39.48	30.03	94	Z	Horizontal
4	204.7750	-64.64	-13.00	51.64	-14.51	-37.71	23.20	301	Z	Horizontal
5	824.2540	-37.75	-13.00	24.75	-3.01	-34.17	31.16	50	Z	NA
6	870.8610	-36.81	-13.00	23.81	-2.19	-34.04	31.85	106	Z	NA

DC_66A-46A_N5 166800 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz
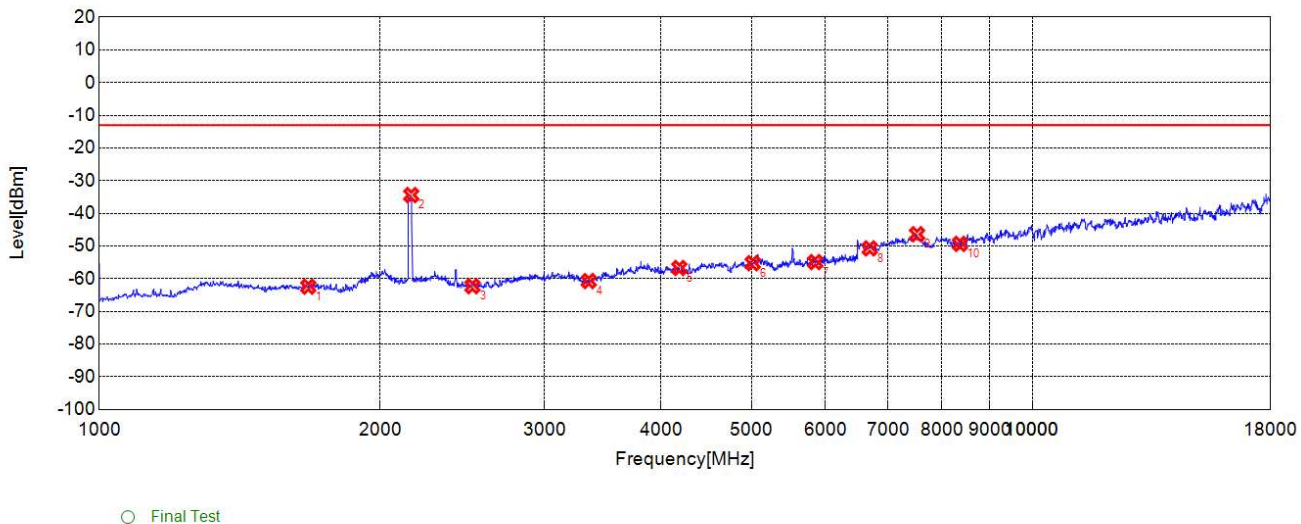
30M-1G H

Test Graph

○ Final Test

Suspected List										
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
1	37.7680	-53.14	-13.00	40.14	-16.48	-39.56	23.08	60	Z	Vertical
2	103.7940	-67.38	-13.00	54.38	-13.84	-38.70	24.86	157	Z	Vertical
3	204.7750	-69.93	-13.00	56.93	-16.40	-37.71	21.31	135	Z	Vertical
4	435.8660	-71.82	-13.00	58.82	-8.97	-35.59	26.62	160	Z	Vertical
5	824.2540	-43.06	-13.00	30.06	-2.81	-34.17	31.36	44	Z	NA
6	885.4250	-37.6	-13.00	24.60	-1.36	-34.00	32.64	325	Z	NA

DC_66A-46A_N5 166800 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz 30M-1G V
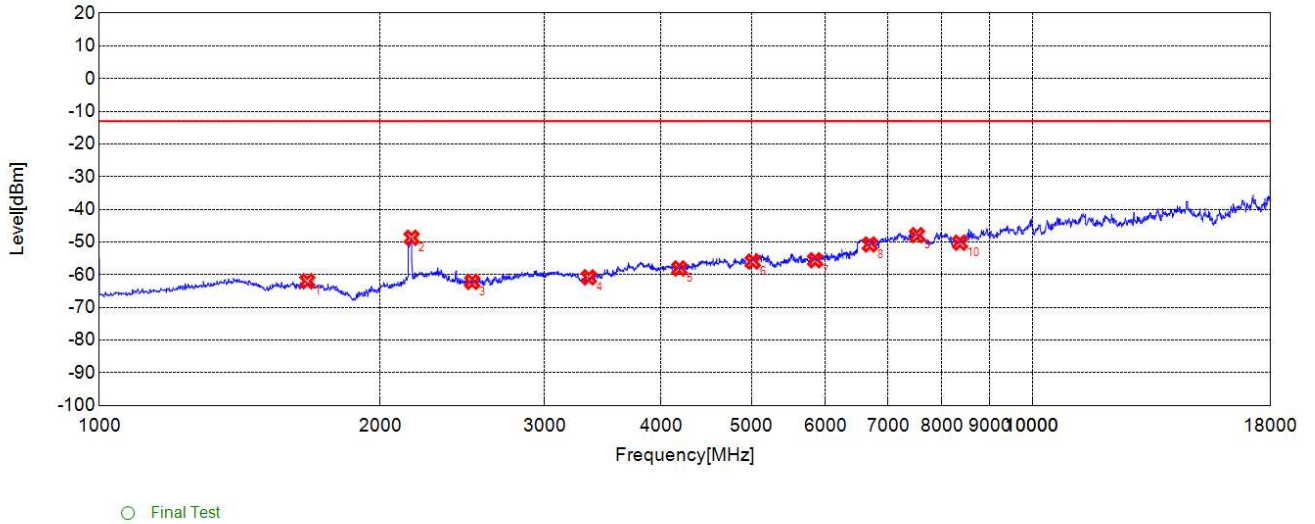
Test Graph

○ Final Test

Suspected List											
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
1	1674.6750	-62.43	-13.00	49.43	-8.70	-46.30	37.60	305	Z	Horizontal
2	2159.1590	-34.41	-13.00	21.41	-7.78	-46.75	38.97	154	Z	NA
3	2511.5120	-62.3	-13.00	49.30	-10.50	-47.21	36.71	135	Z	Horizontal
4	3346.8470	-60.73	-13.00	47.73	-9.93	-48.06	38.13	56	Z	Horizontal
5	4184.1840	-56.73	-13.00	43.73	-6.87	-46.57	39.70	360	Z	Horizontal
6	5014.5150	-55.25	-13.00	42.25	-2.43	-43.82	41.39	65	Z	Horizontal
7	5851.8520	-54.92	-13.00	41.92	-0.89	-42.24	41.35	167	Z	Horizontal
8	6695.6960	-50.74	-13.00	37.74	3.71	-39.17	42.88	204	Z	Horizontal
9	7524.5250	-46.41	-13.00	33.41	10.17	-35.76	45.93	268	Z	Horizontal
10	8364.8650	-49.35	-13.00	36.35	8.71	-36.15	44.86	50	Z	Horizontal

DC_66A-46A_N5 167300 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz

1-18G H

Test Graph

○ Final Test

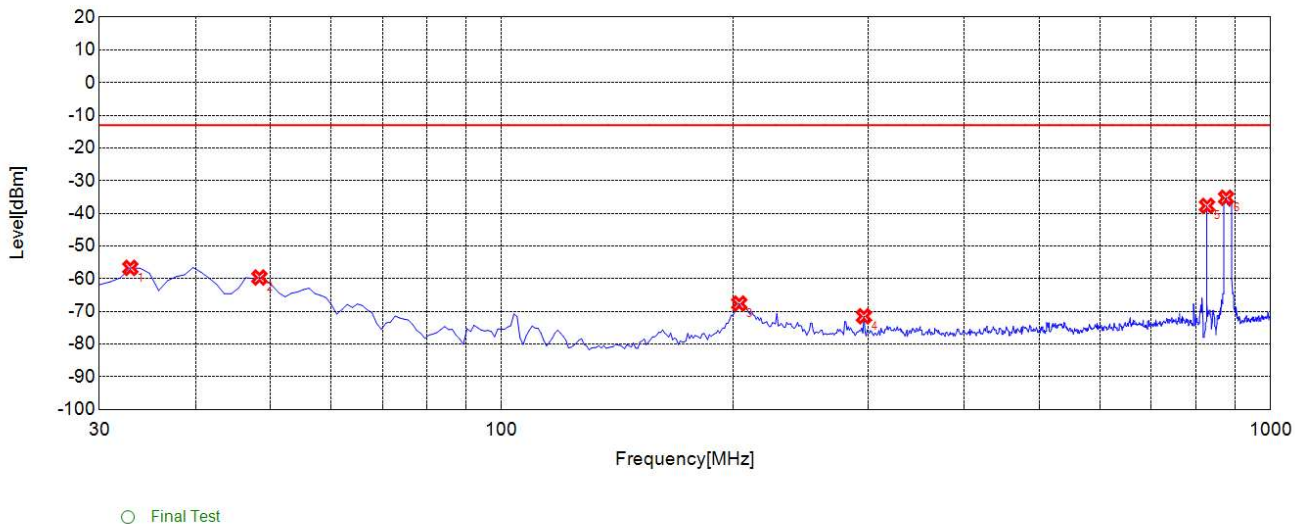| Suspected List										
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
1	1670.6710	-62	-13.00	49.00	-9.66	-46.29	36.63	60	Z	Vertical
2	2161.1610	-48.72	-13.00	35.72	-8.25	-46.76	38.51	135	Z	NA
3	2509.5100	-62.18	-13.00	49.18	-10.63	-47.19	36.56	154	Z	Vertical
4	3346.8470	-60.83	-13.00	47.83	-10.53	-48.06	37.53	135	Z	Vertical
5	4184.1840	-58.08	-13.00	45.08	-7.08	-46.57	39.49	225	Z	Vertical
6	5018.0180	-55.99	-13.00	42.99	-2.90	-43.83	40.93	13	Z	Vertical
7	5851.8520	-55.59	-13.00	42.59	-1.11	-42.24	41.13	354	Z	Vertical
8	6695.6960	-50.75	-13.00	37.75	3.73	-39.17	42.90	301	Z	Vertical
9	7524.5250	-47.9	-13.00	34.90	9.88	-35.76	45.64	64	Z	Vertical
10	8364.8650	-50.22	-13.00	37.22	8.58	-36.15	44.73	72	Z	Vertical

DC_66A-46A_N5 167300 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz
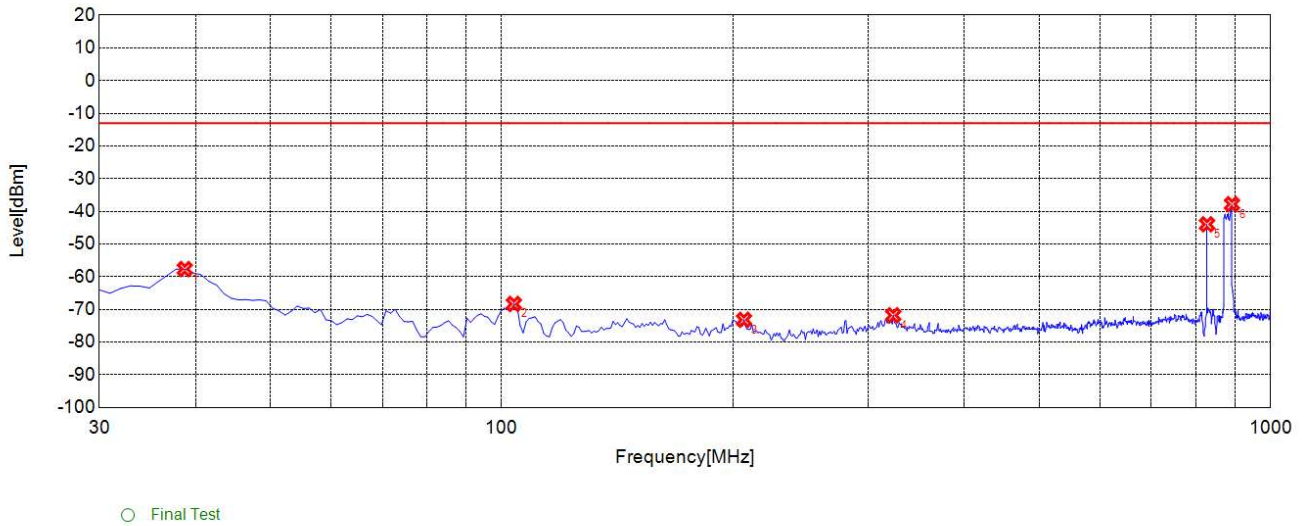
1-18G V

Test Graph

○ Final Test

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
Suspected List										
1	32.9130	-56.69	-13.00	43.69	-10.25	-39.60	29.35	60	Z	Horizontal
2	48.4480	-59.64	-13.00	46.64	-7.02	-39.47	32.45	324	Z	Horizontal
3	203.8040	-67.61	-13.00	54.61	-14.59	-37.73	23.14	22	Z	Horizontal
4	296.0460	-71.5	-13.00	58.50	-11.97	-36.97	25.00	108	Z	Horizontal
5	827.1670	-37.72	-13.00	24.72	-2.90	-34.16	31.26	48	Z	NA
6	875.7160	-35.24	-13.00	22.24	-2.17	-34.03	31.86	301	Z	NA

DC_66A-46A_N5 167300 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz
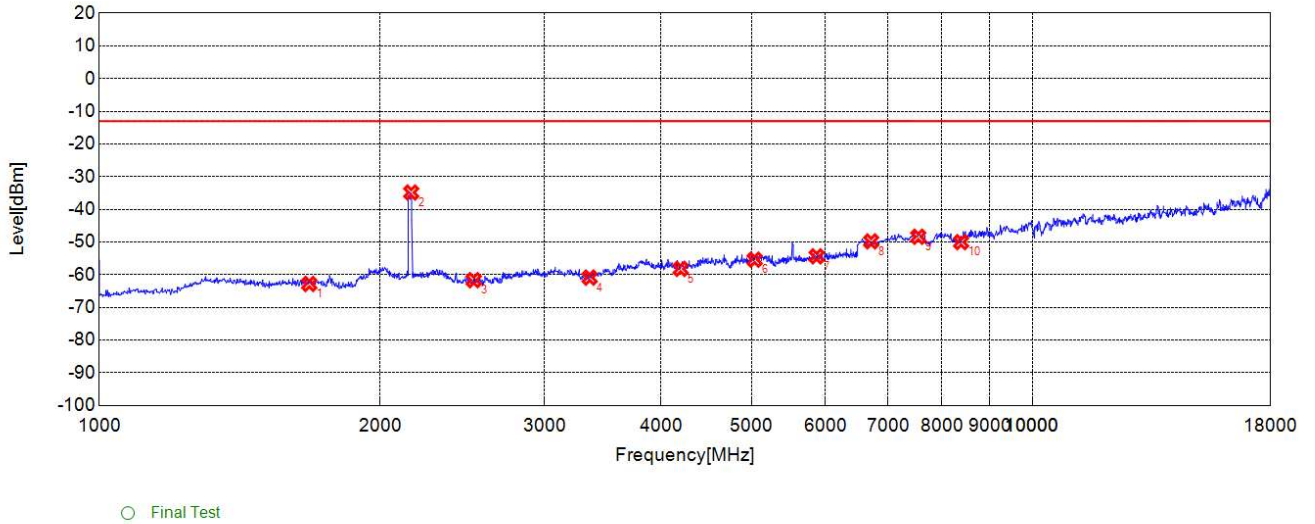30M-1G H

Test Graph

○ Final Test

Suspected List										
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
1	38.7390	-57.67	-13.00	44.67	-16.41	-39.55	23.14	34	Z	Vertical
2	103.7940	-68.35	-13.00	55.35	-13.84	-38.70	24.86	154	Z	Vertical
3	206.7170	-73.19	-13.00	60.19	-16.50	-37.66	21.16	228	Z	Vertical
4	323.2330	-71.82	-13.00	58.82	-11.38	-37.01	25.63	64	Z	Vertical
5	827.1670	-43.98	-13.00	30.98	-2.67	-34.16	31.49	49	Z	NA
6	891.2510	-37.82	-13.00	24.82	-1.25	-33.99	32.74	332	Z	NA

DC_66A-46A_N5 167300 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz 30M-1G V
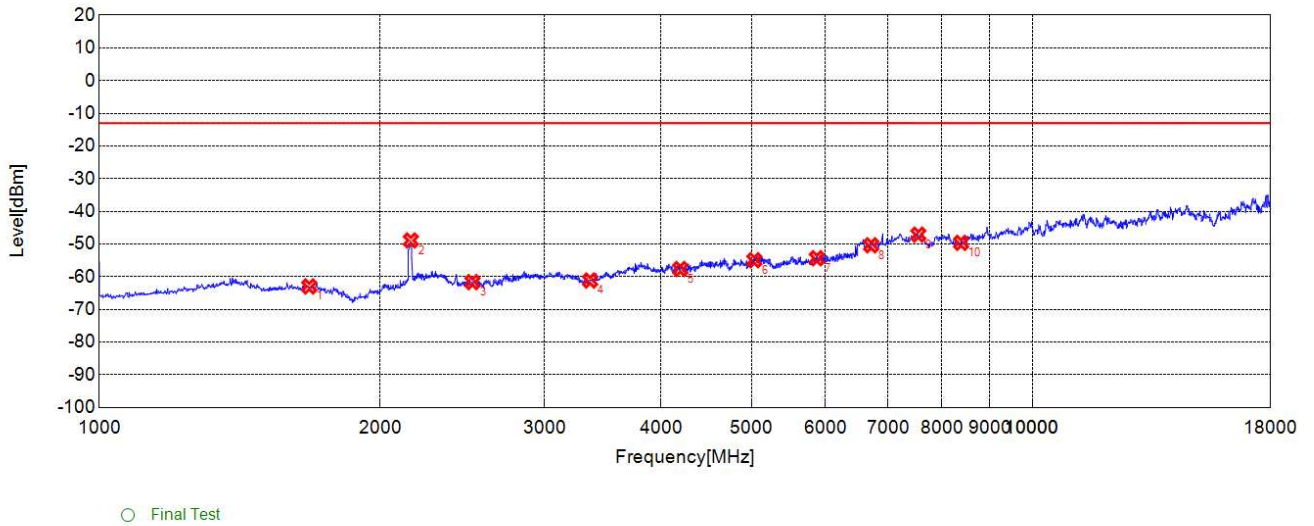
Test Graph

O Final Test

NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
1	1678.6790	-62.83	-13.00	49.83	-8.66	-46.31	37.65	40	Z	Horizontal
2	2159.1590	-34.85	-13.00	21.85	-7.78	-46.75	38.97	123	Z	NA
3	2519.5200	-61.67	-13.00	48.67	-10.56	-47.29	36.73	154	Z	Horizontal
4	3353.8540	-60.89	-13.00	47.89	-9.86	-48.02	38.16	301	Z	Horizontal
5	4198.1980	-58.22	-13.00	45.22	-6.68	-46.34	39.66	52	Z	Horizontal
6	5039.0390	-55.4	-13.00	42.40	-2.42	-43.85	41.43	264	Z	Horizontal
7	5872.8730	-54.38	-13.00	41.38	-1.10	-42.43	41.33	281	Z	Horizontal
8	6718.7190	-49.81	-13.00	36.81	4.05	-38.81	42.86	69	Z	Horizontal
9	7547.5480	-48.39	-13.00	35.39	9.62	-36.04	45.66	54	Z	Horizontal
10	8387.8880	-50.03	-13.00	37.03	8.81	-36.00	44.81	358	Z	Horizontal

The "Suspected List" header spans the top of the table.

DC_66A-46A_N5 167800 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz

1-18G H

Test Graph

○ Final Test

Suspected List										
NO.	Freq. [MHz]	Level [dBm]	Limit [dBm]	Margin [dB]	Factor [dB]	Path [dB]	Air [dB]	Angle [°]	EUT Pol.	Ant. Pol.
1	1678.6790	-62.97	-13.00	49.97	-9.60	-46.31	36.71	35	Z	Vertical
2	2157.1570	-48.91	-13.00	35.91	-8.35	-46.75	38.40	154	Z	NA
3	2511.5120	-61.65	-13.00	48.65	-10.64	-47.21	36.57	167	Z	Vertical
4	3357.3570	-61.18	-13.00	48.18	-10.44	-47.98	37.54	154	Z	Vertical
5	4194.6950	-57.64	-13.00	44.64	-6.92	-46.40	39.48	32	Z	Vertical
6	5035.5360	-54.96	-13.00	41.96	-2.75	-43.85	41.10	169	Z	Vertical
7	5876.3760	-54.35	-13.00	41.35	-1.22	-42.46	41.24	154	Z	Vertical
8	6718.7190	-50.4	-13.00	37.40	4.11	-38.81	42.92	156	Z	Vertical
9	7547.5480	-47.13	-13.00	34.13	9.46	-36.04	45.50	54	Z	Vertical
10	8387.8880	-49.65	-13.00	36.65	8.71	-36.00	44.71	89	Z	Vertical

DC_66A-46A_N5 167800 20M DFT-s-OFDM PI/2 BPSK RB Size-1 RB Offset-1 SCS 15KHz

1-18G V