



TEST REPORT

APPLICANT : Reliance Communications LLC

PRODUCT NAME : Orbic Speed 5G

MODEL NAME : R500L5S6

BRAND NAME : Orbic

FCC ID : 2ABGH-R500L5S6

STANDARD(S) : 47 CFR Part 2
47 CFR Part 22 Subpart H
47 CFR Part 24 Subpart E
47 CFR Part 27 Subpart L

RECEIPT DATE : 2021-02-25

TEST DATE : 2021-03-22 to 2021-06-16

ISSUE DATE : 2022-08-30

Edited by: Peng Mi
Peng Mi (Rapporteur)

Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3**
- 1.1. Applicant and Manufacturer Information 3**
- 1.2. Equipment Under Test (EUT) Description 3**
- 1.3. Maximum E.R.P./E.I.R.P. and Emission Designator 5**
- 1.4. Test Standards and Results 6**
- 1.5. Environmental Conditions 7**
- 2. 47 CFR Part 2, Part 22H , 24E&27L Requirements 8**
- 2.1. Conducted RF Output Power 8**
- 2.2. Peak to Average Ratio 12**
- 2.3. Occupied Bandwidth 16**
- 2.4. Frequency Stability 21**
- 2.5. Conducted Out of Band Emissions 24**
- 2.6. Band Edge 28**
- 2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements 30**
- 2.8. Radiated Out of Band Emissions 34**
- Annex A Test Uncertainty 46**
- Annex B Testing Laboratory Information 47**

| Change History | | |
|----------------|------------|-------------------|
| Version | Date | Reason for change |
| 1.0 | 2022-08-30 | First edition |
| | | |





1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

| | |
|------------------------------|--|
| Applicant: | Reliance Communications LLC |
| Applicant Address: | 1560 Fifth Ave BayShore, NY 11706 |
| Manufacturer: | Unimaxcomm |
| Manufacturer Address: | 35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110 |

1.2. Equipment Under Test (EUT) Description

| | | |
|-----------------------------------|---|--|
| Product Name: | Orbic Speed 5G | |
| Serial No.: | 2# | |
| Hardware Version: | V1.2 | |
| Software Version: | ORB500L5S6_V1.0.6_BVT-NA | |
| Modulation Type: | WCDMA Mode with QPSK Modulation HSDPA Mode with QPSK Modulation HSUPA Mode with QPSK Modulation HSPA+ Mode with 16QAM Modulation | |
| Operating Frequency Range: | WCDMA Band V | Tx: 824MHz-849MHz Rx: 869MHz-894MHz |
| | WCDMA Band IV | Tx: 1710MHz-1755MHz Rx: 2110MHz-2155MHz |
| | WCDMA Band II | Tx: 1850MHz-1910MHz Rx: 1930MHz-1990MHz |
| Antenna Type: | PIFA Antenna | |
| Antenna Gain: | WCDMA Band V: | -0.10dBi |
| | WCDMA Band IV: | 3.68dBi |
| | WCDMA Band II: | 3.80dBi |



| | | |
|-------------------------------|----------------|--------------------------------------|
| Accessory Information: | Battery | |
| | Brand Name: | Orbic |
| | Model No.: | BTE-4401 |
| | Serial No.: | N/A |
| | Capacity: | 4400mAh |
| | Rated Voltage: | 3.80V |
| | Charge Limit: | 4.35V |
| | Manufacturer: | HUIZHOU DXDRAGON INC |
| | AC Adapter | |
| | Brand Name: | Orbic |
| | Model No.: | TPA-23A050200UU01 |
| | Serial No.: | N/A |
| | Rated Output: | 5V \pm 2A |
| | Rated Input: | 100-240V \sim 50/60Hz, 0.3A |
| | Manufacturer: | Dongguan summer electronics Co., LTD |

Note 1: This test report is variant from the original report (Report No.: SZ22050178W03, FCC ID: 2ABGH-R500L5S6), based on the similarity between before, only changed the applicant address and enable LTE B17 by software. However, there is no other evaluation for LTE B17 due to the band is completely covered by LTE B12 and its power level setting also same as LTE B12. The changes do not affect the results in this report.

Note 2: The transmitter (Tx) frequency arrangement of the WCDMA Band V used by the EUT can be represented with the formula $F(n)=826.4+0.2*(n-4132)$, $4132 \leq n \leq 4233$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 4132 (826.4MHz), 4182(836.4MHz) and 4233 (846.6MHz).

Note 3: The transmitter (Tx) frequency arrangement of the WCDMA IV band used by the EUT can be represented with the formula $F(n)=1712.4+0.2*(n-1312)$, $1312 \leq n \leq 1513$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 1312 (1712.4MHz), 1413 (1732.6MHz) and 1513 (1752.6MHz).

Note 4: The transmitter (Tx) frequency arrangement of the WCDMA Band II used by the EUT can be represented with the formula $F(n)=1852.4+0.2*(n-9262)$, $9262 \leq n \leq 9538$; the lowest, middle and highest channel numbers (ARFCHs) used and tested in this report are separately 9262 (1852.4MHz), 9400 (1880MHz) and 9538 (1907.6MHz).

Note 5: All test modes and data rates were considered and evaluated respectively by performing full test. Test modes are chosen to be reported as the worst case below:

- WCDMA mode for WCDMA band V;
- WCDMA mode for WCDMA band IV;
- WCDMA mode for WCDMA band II;





Note 6: For a more detailed description, please refer to Specification or User’s Manual supplied by the applicant and/or manufacturer.

1.3. Maximum E.R.P./E.I.R.P. and Emission Designator

| Test Mode | Maximum E.R.P./E.I.R.P. (W) | Emission Designator |
|---------------|-----------------------------|---------------------|
| WCDMA Band V | 0.163 | 4M14F9W |
| WCDMA Band IV | 0.051 | 4M15F9W |
| WCDMA Band II | 0.047 | 4M15F9W |





1.4. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 2, Part 22, Part 24 and Part 27 for the EUT FCC ID Certification:

| No. | Identity | Document Title |
|-----|----------------------------------|---|
| 1 | 47 CFR Part 2 (10-1-12 Edition) | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations |
| 2 | 47 CFR Part 22 (10-1-12 Edition) | Public Mobile Services |
| 3 | 47 CFR Part 24 (10-1-12 Edition) | Personal Communications Services |
| 4 | 47 CFR Part 27 (10-1-12 Edition) | Miscellaneous Wireless Communications Services |

Test detailed items/section required by FCC rules and results are as below:

| No. | Section | Description | Test Date | Test Engineer | Result | Method determination /Remark |
|-----|--|--|---------------|--------------------|-----------------------|------------------------------|
| 1 | 2.1046 | Conducted RF Output Power | Jun. 10, 2021 | Chen Hao Ling Keye | PASS _{Note1} | No deviation |
| 2 | 24.232(d) | Peak -Average Ratio | Mar. 22, 2021 | Ling Keye | PASS _{Note1} | No deviation |
| 3 | 2.1049 | Occupied Bandwidth | Mar. 22, 2021 | Ling Keye | PASS _{Note1} | No deviation |
| 4 | 2.1055, 22.355, 24.235, 27.54 | Frequency Stability | Jun. 16, 2021 | Ling Keye | PASS _{Note1} | No deviation |
| 5 | 2.1051, 22.917(a), 24.238(a), 27.53(h) | Conducted Out of Band Emissions | Mar. 22, 2021 | Ling Keye | PASS _{Note1} | No deviation |
| 6 | 2.1051, 22.917(a), 24.238(a), 27.53(h) | Band Edge | Mar. 22, 2021 | Ling Keye | PASS _{Note1} | No deviation |
| 7 | 22.913(a), 24.232(c), 27.50(d) | Transmitter Radiated Power (EIPR/E.R.P.) | Jun. 10, 2021 | Gao Jianrou | PASS _{Note1} | No deviation |
| 8 | 2.1051, 22.917(a), | Radiated Out of Band | Apr. 09, 2021 | Gao Jianrou | PASS _{Note1} | No deviation |





| | | | | | | |
|--|------------------------|-----------|--|--|--|--|
| | 24.238(a), 27.53(h) | Emissions | | | | |
|--|------------------------|-----------|--|--|--|--|

Note 1: The test results of these test items in this report refer to the test report (Report No.: SZ22050178W03).

Note 2: The tests were performed according to the method of measurements prescribed in KDB971168 D01 v03r01 and ANSI/TIA-603-E-2016.

Note 3: The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 24.5dB contains two parts that cable loss 14.5dB and Attenuator 10dB.

Note 4: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 5: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.5. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

| | |
|-----------------------------|--------|
| Temperature (°C): | 15-35 |
| Relative Humidity (%): | 30-60 |
| Atmospheric Pressure (kPa): | 86-106 |



2.47 CFR Part 2, Part 22H , 24E&27L Requirements


2.1. Conducted RF Output Power

2.1.1. Requirement

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

2.1.2. Test Description

Test Setup:

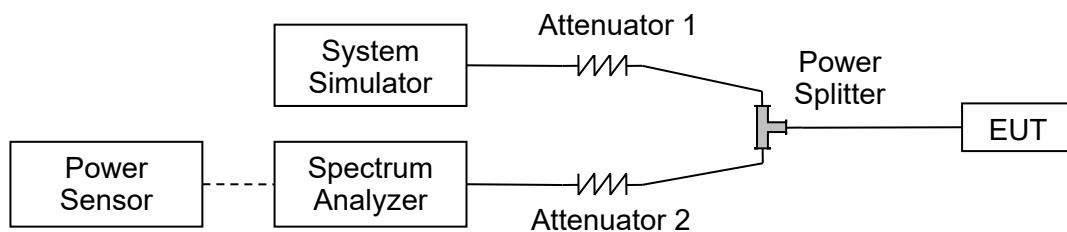

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



**2.1.3.Test Results**

| WCDMA Band V | Average Power (dBm) | | |
|-------------------------|----------------------------|--------------|--------------|
| TX Channel | 4132 | 4182 | 4233 |
| Frequency (MHz) | 826.4 | 836.4 | 846.6 |
| RMC 12.2Kbps | 24.38 | 24.04 | 23.80 |
| HSDPA Subtest-1 | 22.38 | 22.19 | 22.31 |
| HSDPA Subtest-2 | 22.30 | 22.13 | 22.36 |
| HSDPA Subtest-3 | 21.88 | 21.88 | 21.79 |
| HSDPA Subtest-4 | 21.86 | 21.68 | 21.78 |
| DC-HSDPA Subtest-1 | 22.41 | 22.35 | 22.38 |
| DC-HSDPA Subtest-2 | 22.43 | 22.36 | 22.39 |
| DC-HSDPA Subtest-3 | 21.91 | 21.85 | 21.93 |
| DC-HSDPA Subtest-4 | 21.91 | 21.83 | 21.92 |
| HSUPA Subtest-1 | 22.30 | 22.43 | 22.23 |
| HSUPA Subtest-2 | 21.86 | 21.82 | 21.75 |
| HSUPA Subtest-3 | 22.32 | 22.28 | 22.23 |
| HSUPA Subtest-4 | 22.31 | 22.18 | 22.25 |
| HSUPA Subtest-5 | 22.34 | 22.24 | 22.34 |
| HSPA+ (16QAM) Subtest-1 | 22.39 | 22.29 | 22.31 |





| WCDMA Band IV | Average Power (dBm) | | |
|-------------------------|---------------------|---------------|---------------|
| | 1312 | 1413 | 1513 |
| TX Channel | 1312 | 1413 | 1513 |
| Frequency (MHz) | 1712.4 | 1732.6 | 1752.6 |
| RMC 12.2Kbps | 15.47 | 15.53 | 15.60 |
| HSDPA Subtest-1 | 13.65 | 13.87 | 13.79 |
| HSDPA Subtest-2 | 13.68 | 13.80 | 13.73 |
| HSDPA Subtest-3 | 13.19 | 13.31 | 13.34 |
| HSDPA Subtest-4 | 13.19 | 13.42 | 13.27 |
| DC-HSDPA Subtest-1 | 13.75 | 13.88 | 13.89 |
| DC-HSDPA Subtest-2 | 13.68 | 13.90 | 13.88 |
| DC-HSDPA Subtest-3 | 13.18 | 13.43 | 13.36 |
| DC-HSDPA Subtest-4 | 13.17 | 13.37 | 13.39 |
| HSUPA Subtest-1 | 13.67 | 13.81 | 13.78 |
| HSUPA Subtest-2 | 13.15 | 13.36 | 13.33 |
| HSUPA Subtest-3 | 13.69 | 13.73 | 13.77 |
| HSUPA Subtest-4 | 13.63 | 13.77 | 13.80 |
| HSUPA Subtest-5 | 13.75 | 13.72 | 13.75 |
| HSPA+ (16QAM) Subtest-1 | 13.63 | 13.86 | 13.70 |





| WCDMA Band II | Average Power (dBm) | | |
|-------------------------|---------------------|---------------|---------------|
| | 9262 | 9400 | 9538 |
| TX Channel | 9262 | 9400 | 9538 |
| Frequency (MHz) | 1852.4 | 1880.0 | 1907.6 |
| RMC 12.2Kbps | 15.46 | 15.37 | 15.39 |
| HSDPA Subtest-1 | 13.48 | 13.66 | 13.68 |
| HSDPA Subtest-2 | 13.51 | 13.61 | 13.71 |
| HSDPA Subtest-3 | 13.12 | 13.26 | 13.24 |
| HSDPA Subtest-4 | 13.02 | 13.16 | 13.14 |
| DC-HSDPA Subtest-1 | 13.64 | 13.70 | 13.71 |
| DC-HSDPA Subtest-2 | 13.66 | 13.67 | 13.73 |
| DC-HSDPA Subtest-3 | 13.11 | 13.18 | 13.21 |
| DC-HSDPA Subtest-4 | 13.12 | 13.16 | 13.19 |
| HSUPA Subtest-1 | 13.47 | 13.59 | 13.59 |
| HSUPA Subtest-2 | 13.03 | 13.11 | 13.20 |
| HSUPA Subtest-3 | 13.58 | 13.60 | 13.59 |
| HSUPA Subtest-4 | 13.46 | 13.57 | 13.62 |
| HSUPA Subtest-5 | 13.57 | 13.69 | 13.58 |
| HSPA+ (16QAM) Subtest-1 | 13.52 | 13.63 | 13.62 |



2.2. Peak to Average Ratio

2.2.1. Requirement

According to FCC 24.232(d) and 27.50(d), the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.2.2. Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.2.3. Test procedure

1. For GSM/EDGE operating mode:
 - a. Set RBW=1MHz, VBW=3MHz, peak detector in spectrum analyzer.
 - b. Set EUT in maximum output power, and triggered the bust signal.
 - c. Measured respectively the peak level and mean level, and the deviation was recorded as Peak to Average ratio.
2. For UMTS operating mode:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1%.





2.2.4. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:


| WCDMA Band IV | | | | | |
|---------------|---------|-----------------|----------------------------|------------|---------|
| Mode | Channel | Frequency (MHz) | Peak to Average ratio (dB) | Limit (dB) | Verdict |
| WCDMA | 1312 | 1712.4 | 2.94 | 13 | PASS |
| | 1413 | 1732.6 | 2.96 | | PASS |
| | 1513 | 1752.6 | 2.85 | | PASS |

| WCDMA Band II | | | | | |
|---------------|---------|-----------------|----------------------------|------------|---------|
| Mode | Channel | Frequency (MHz) | Peak to Average ratio (dB) | Limit (dB) | Verdict |
| WCDMA | 9262 | 1852.4 | 2.76 | 13 | PASS |
| | 9400 | 1880.0 | 2.80 | | PASS |
| | 9538 | 1907.6 | 2.77 | | PASS |






WCDMA Band IV, CH1312, 1712.4MHz

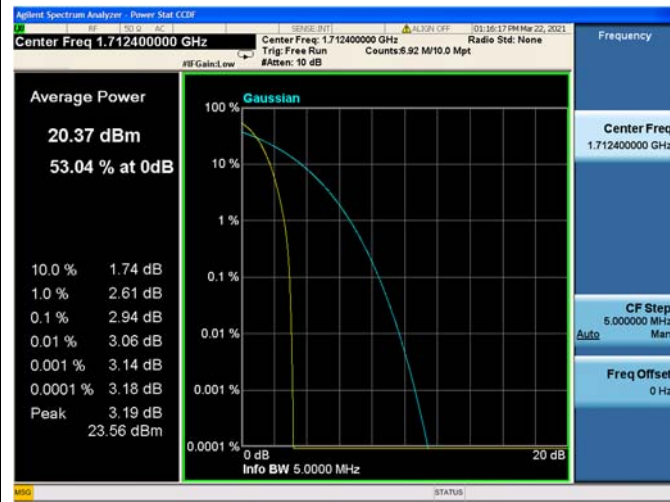

WCDMA Band IV, CH1413, 1732.6MHz




WCDMA Band IV, CH1513, 1752.6MHz

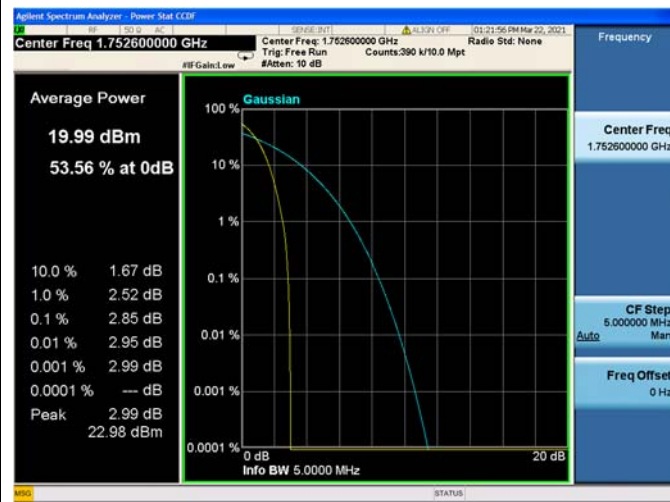



WCDMA Band II, CH9262, 1852.4MHz

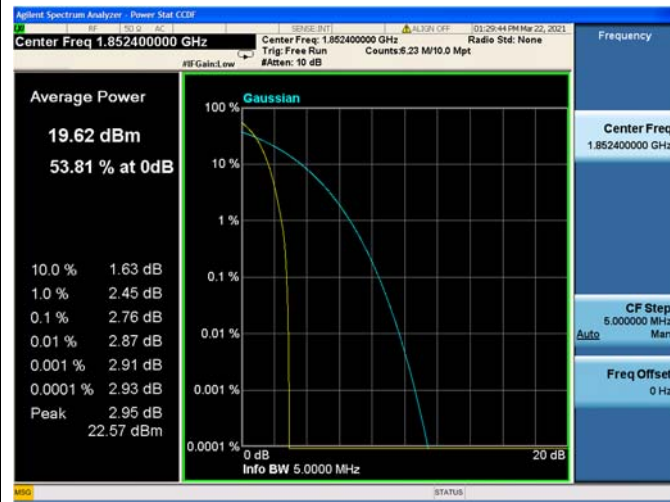

WCDMA Band II, CH9400, 1880.0MHz



WCDMA Band II, CH9538, 1907.6MHz



2.3. Occupied Bandwidth

2.3.1. Requirement

According to FCC section 2.1049, the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission. Occupied bandwidth is also known as the 99% emission bandwidth.

2.3.2. Test Description

Test Setup:



The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.



**2.3.3. Test Result**

| WCDMA Band V | | | | |
|---------------------|----------------|------------------------|-------------------------------------|-----------------------------|
| Mode | Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26dB Bandwidth (MHz) |
| WCDMA | 4132 | 826.4 | 4.13 | 4.73 |
| | 4182 | 836.4 | 4.14 | 4.70 |
| | 4233 | 846.6 | 4.14 | 4.70 |


| WCDMA Band IV | | | | |
|----------------------|----------------|------------------------|-------------------------------------|-----------------------------|
| Mode | Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26dB Bandwidth (MHz) |
| WCDMA | 1312 | 1712.4 | 4.15 | 4.72 |
| | 1413 | 1732.6 | 4.14 | 4.72 |
| | 1513 | 1752.6 | 4.15 | 4.72 |

| WCDMA Band II | | | | |
|----------------------|----------------|------------------------|-------------------------------------|-----------------------------|
| Mode | Channel | Frequency (MHz) | 99% Occupied Bandwidth (MHz) | 26dB Bandwidth (MHz) |
| WCDMA | 9262 | 1852.4 | 4.14 | 4.72 |
| | 9400 | 1880.0 | 4.14 | 4.72 |
| | 9538 | 1907.6 | 4.15 | 4.73 |





WCDMA Band V, CH4132, 826.4MHz

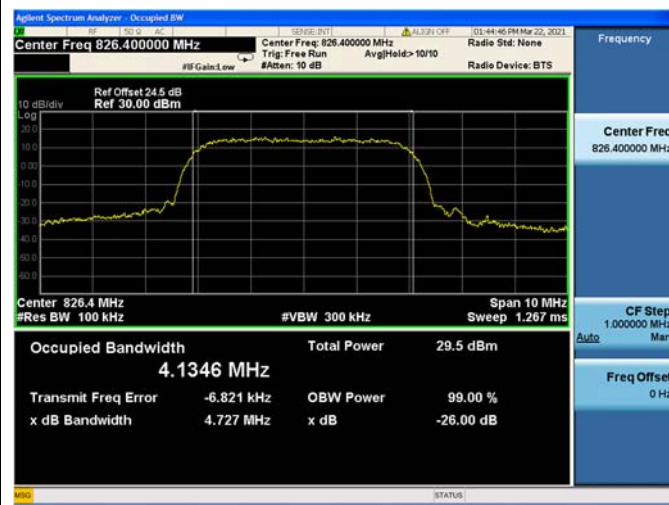

WCDMA Band V, CH4182, 836.4MHz



WCDMA Band V, CH4233, 846.6MHz





WCDMA Band IV, CH1312, 1712.4MHz



WCDMA Band IV, CH1413, 1732.6MHz



WCDMA Band IV, CH1513, 1752.6MHz






WCDMA Band II, CH9262, 1852.4MHz



WCDMA Band II, CH9400, 1880.0MHz

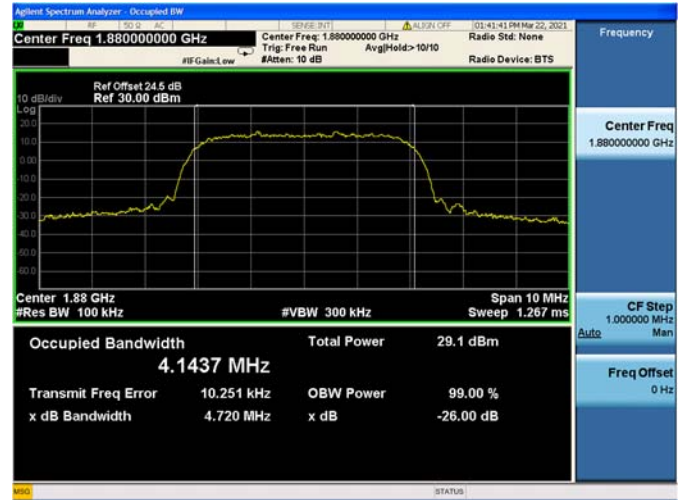

WCDMA Band II, CH9538, 1907.6MHz



2.4. Frequency Stability

2.4.1. Requirement


According to FCC section 22.355, 24.235 and 27.54 the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to $+50^{\circ}\text{C}$ at intervals of not more than 10°C .
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Note: The operating temperature of EUT is from 0°C to 55°C , which are specified by the applicant.

2.4.2. Test Description

Test Setup:

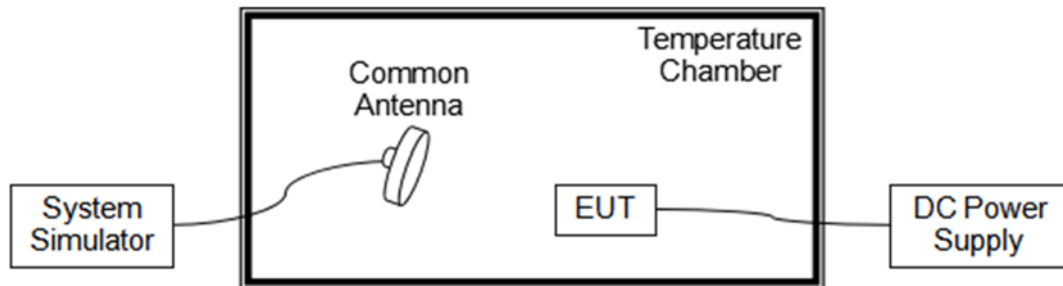

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS via a Common Antenna.





2.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.80V, 4.20V and 3.60V, which are specified by the applicant; the normal temperature here used is 20°C.

| WCDMA Band V, CH4182, 836.4MHz | | | | | |
|--------------------------------|-------------|-----------|----------------|-----------------|--------|
| Limit =±2.5ppm | | | | | |
| Voltage (%) | Power (VDC) | Temp (°C) | Fre. Dev. (Hz) | Deviation (ppm) | Result |
| Normal | 3.80 | +20(Ref) | -22 | -0.026 | PASS |
| Normal | | 0 | -20 | -0.024 | |
| Normal | | +10 | 20 | 0.024 | |
| Normal | | +20 | 23 | 0.027 | |
| Normal | | +30 | 17 | 0.020 | |
| Normal | | +40 | -13 | -0.016 | |
| Normal | | +50 | -40 | -0.048 | |
| Normal | | +55 | -12 | -0.014 | |
| High | 4.20 | +20 | 29 | 0.035 | |
| BATT.ENDPOINT | 3.60 | +20 | -21 | -0.026 | |

| WCDMA Band IV, CH1413, 1732.6MHz | | | | | |
|----------------------------------|-------------|-----------|----------------|-----------------|--------|
| Limit =Within Authorized Band | | | | | |
| Voltage (%) | Power (VDC) | Temp (°C) | Fre. Dev. (Hz) | Deviation (ppm) | Result |
| Normal | 3.80 | +20(Ref) | 21 | 0.012 | PASS |
| Normal | | 0 | 33 | 0.019 | |
| Normal | | +10 | -26 | -0.015 | |
| Normal | | +20 | 13 | 0.008 | |
| Normal | | +30 | -30 | -0.017 | |
| Normal | | +40 | 27 | 0.016 | |
| Normal | | +50 | 10 | 0.006 | |
| Normal | | +55 | -13 | -0.008 | |
| High | 4.20 | +20 | 15 | 0.009 | |
| BATT.ENDPOINT | 3.60 | +20 | -55 | -0.032 | |





| WCDMA Band II, CH9400, 1880.0MHz | | | | | |
|---|--------------------|------------------|-----------------------|------------------------|---------------|
| Limit =Within Authorized Band | | | | | |
| Voltage (%) | Power (VDC) | Temp (°C) | Fre. Dev. (Hz) | Deviation (ppm) | Result |
| Normal | 3.80 | +20(Ref) | 27 | 0.014 | PASS |
| Normal | | 0 | -56 | -0.030 | |
| Normal | | +10 | 50 | 0.027 | |
| Normal | | +20 | -17 | -0.009 | |
| Normal | | +30 | 47 | 0.025 | |
| Normal | | +40 | -16 | -0.009 | |
| Normal | | +50 | 41 | 0.022 | |
| Normal | | +55 | 21 | 0.011 | |
| High | | 4.20 | +20 | 10 | |
| BATT.ENDPOINT | 3.60 | +20 | -43 | -0.023 | |



2.5. Conducted Out of Band Emissions

2.5.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

2.5.2. Test Description

Test Setup:




The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.






2.5.3. Test Result


WCDMA Band V, CH4132, 826.4MHz

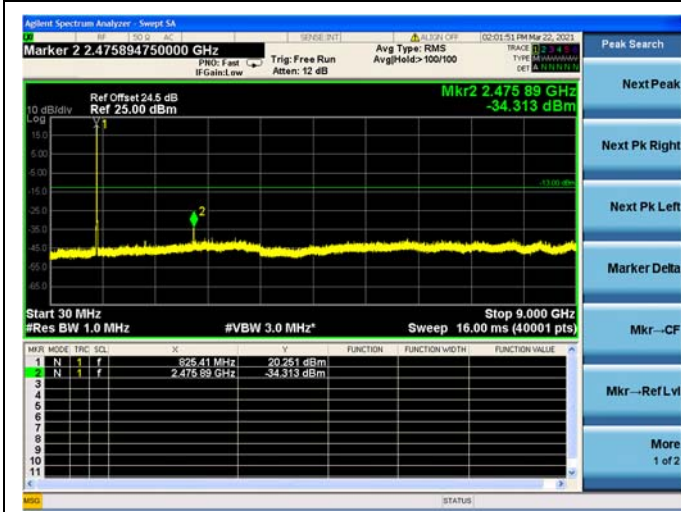

WCDMA Band V, CH4182, 836.4MHz

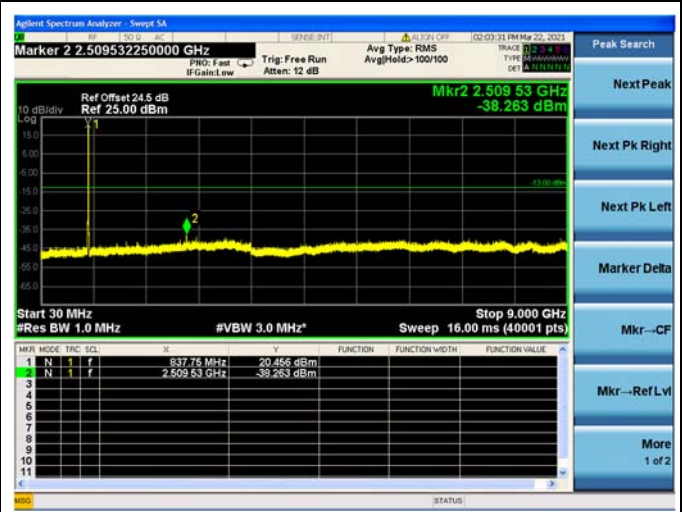


WCDMA Band V, CH4233, 846.6MHz

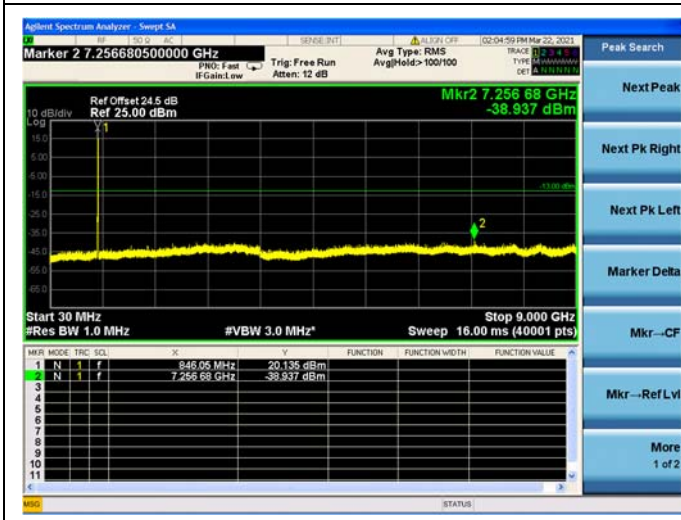





WCDMA Band IV, CH1312, 1712.4MHz

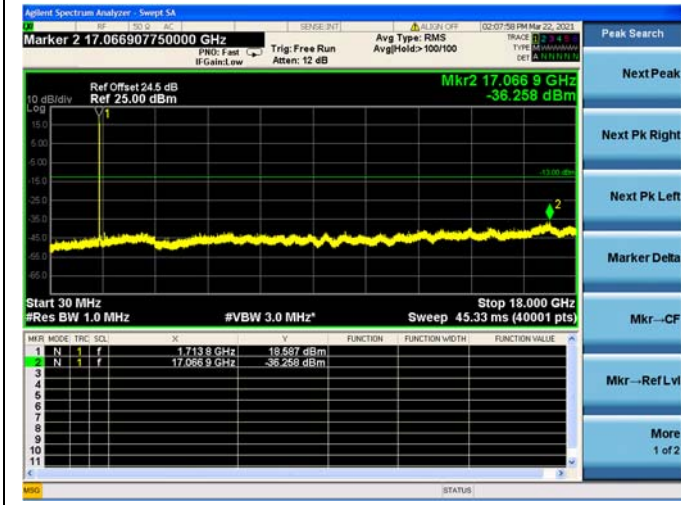

WCDMA Band IV, CH1413, 1732.6MHz

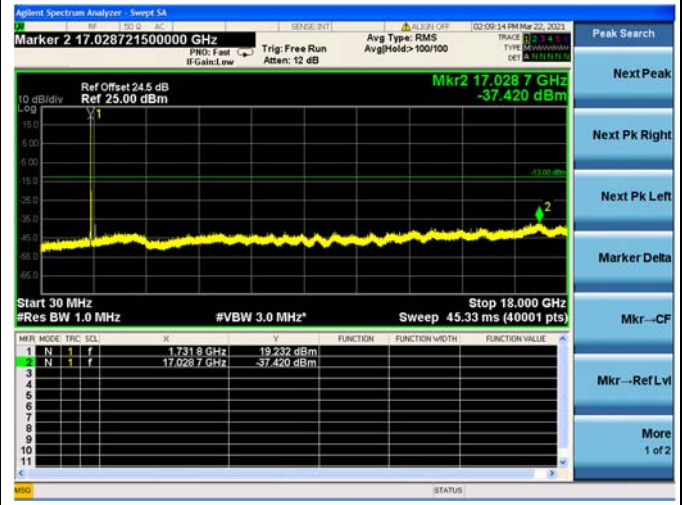


WCDMA Band IV, CH1513, 1752.6MHz

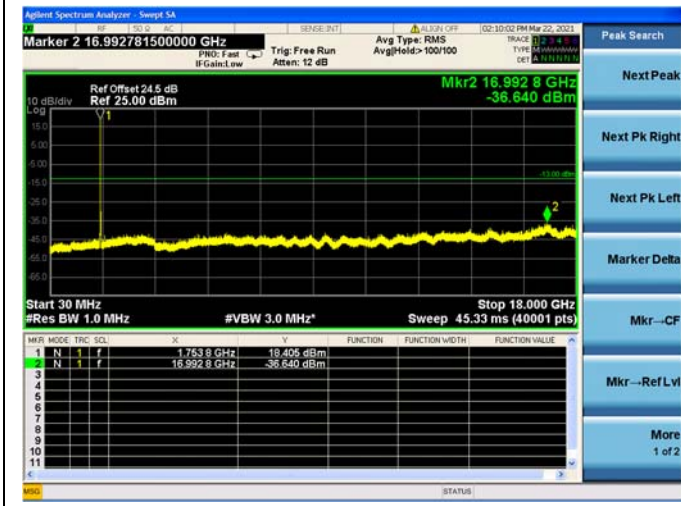





WCDMA Band II, CH9262, 1852.4MHz

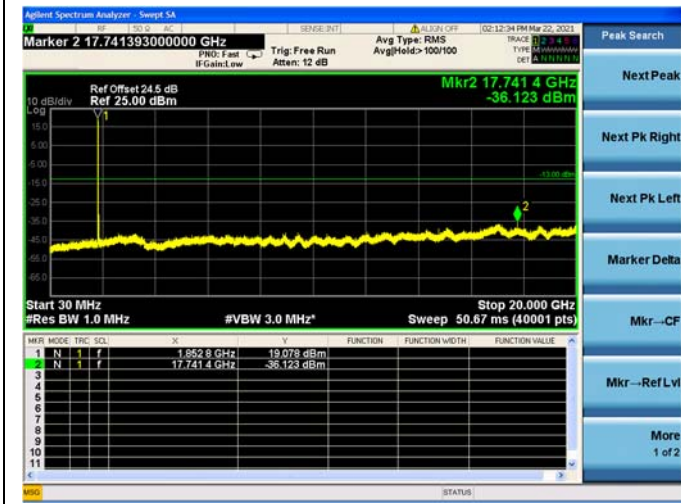

WCDMA Band II, CH9400, 1880.0MHz

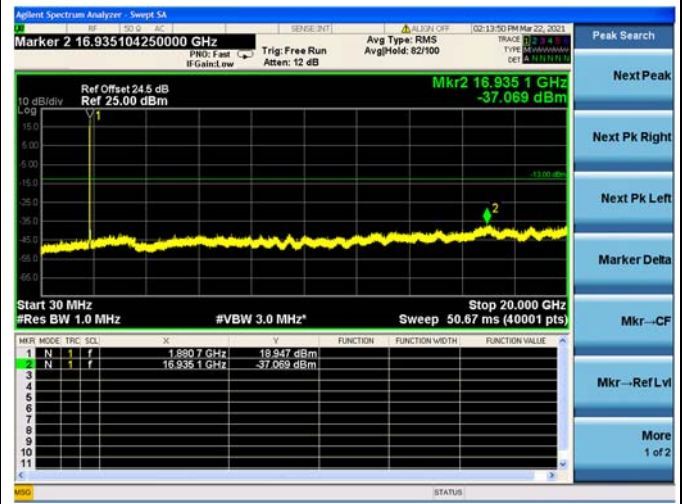

WCDMA Band II, CH9538, 1907.6MHz

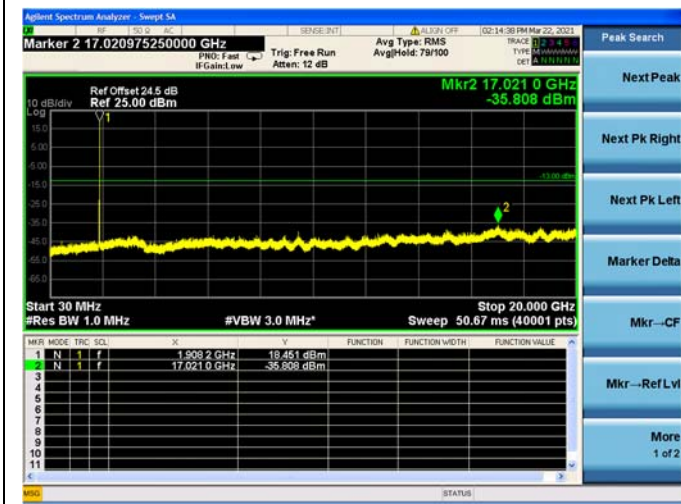


2.6. Band Edge

2.6.1. Requirement

According to FCC section 22.917(a), 24.238(a) and 27.53(h) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB.

2.6.2. Test Description

Test Setup:

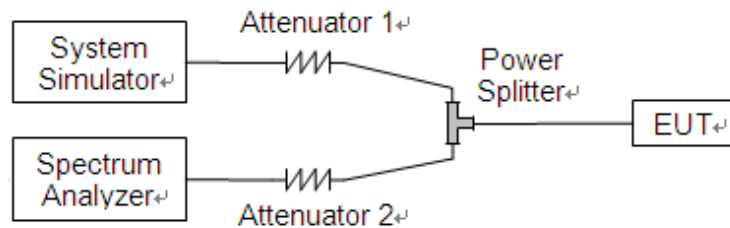

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the SS.

2.6.3. Test Result

The lowest and highest channels are tested to verify the band edge emissions.






WCDMA Band V, CH4132, 826.4MHz



WCDMA Band V, CH4233, 846.6MHz




WCDMA Band IV, CH1312, 1712.4MHz

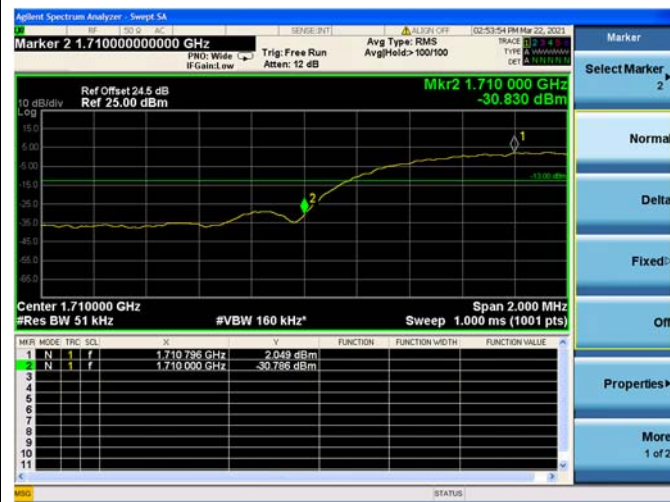


WCDMA Band IV, CH1513, 1752.6MHz



WCDMA Band II, CH9262, 1852.4MHz

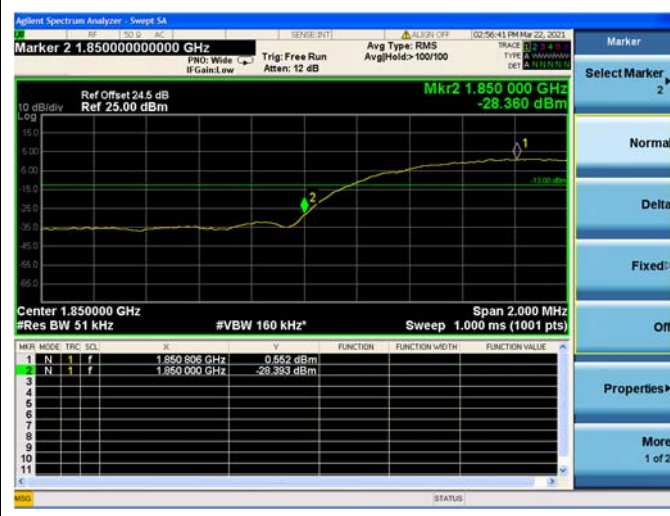

WCDMA Band II, CH9538, 1907.6MHz

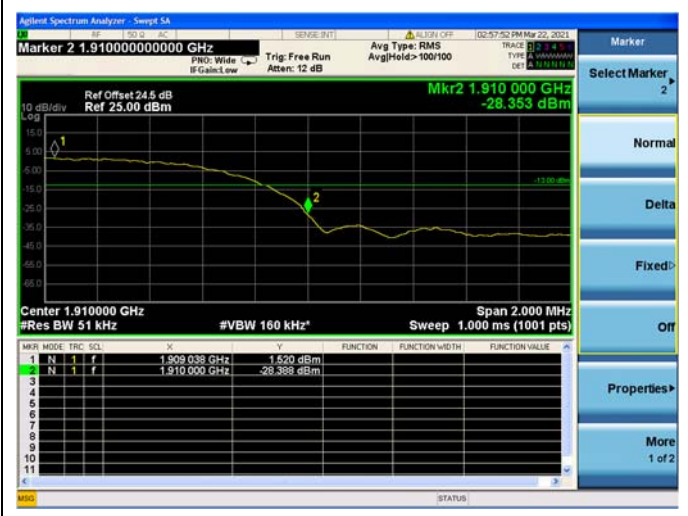

2.7. Determining E.R.P. and/or E.I.R.P. from conducted RF output power measurements

2.7.1. Requirement

According to FCC section 22.913, the Effective Radiated Power (E.R.P.) of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

According to FCC section 27.50, mobile, and portable (hand-held) stations is limited to 1 Watts e.i.r.p. peak power.

2.7.2. Test Description

The test setups refer to section 2.1.3

A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power (i.e. GSM850MHz band Power Control Level (PCL) = 5/19 and Power Class = 4, GSM1900MHz band Power Control Level (PCL) = 0/15 and Power Class = 1), and only the test result of the maximum output power was recorded. Please refer to section 2.1.3 of this report.

The relevant equation for determining the maximum E.R.P. or E.I.R.P. from the measured RF output power is given in Equation (1) as follows:

$$\text{E.R.P. or E.I.R.P.} = P_{\text{Meas}} + G_{\text{T}}$$

Where:

E.R.P. or E.I.R.P. effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (E.R.P.) or dBi (E.I.R.P.)

For devices utilizing multiple antennas, see ANSI C63.25-2015 6.4 for guidance with respect to determining the effective array transmit antenna gain term to be used in the above equation.

The following equations demonstrate the mathematical relationship between E.R.P. and E.I.R.P.:

a) E.R.P. = E.I.R.P. - 2.15, where E.R.P. and E.I.R.P. are expressed in consistent units.

b) E.I.R.P. = E.R.P. + 2.15, where E.R.P. and E.I.R.P. are expressed in consistent units.



**2.7.3.Test Result**

| WCDMA Band V | | | | | | | |
|--------------|---------|-----------------|-----------------|-------|-------|---|---------|
| Band | Channel | Frequency (MHz) | Measured E.R.P. | | Limit | | Verdict |
| | | | dBm | W | dBm | W | |
| WCDMA | 4132 | 826.4 | 22.13 | 0.163 | 38.5 | 7 | PASS |
| | 4182 | 836.4 | 21.79 | 0.151 | | | PASS |
| | 4233 | 846.6 | 21.55 | 0.143 | | | PASS |
| HSDPA | 4132 | 826.4 | 20.13 | 0.103 | 38.5 | 7 | PASS |
| | 4182 | 836.4 | 19.94 | 0.099 | | | PASS |
| | 4233 | 846.6 | 20.11 | 0.103 | | | PASS |
| DC-HSD PA | 4132 | 826.4 | 20.18 | 0.104 | 38.5 | 7 | PASS |
| | 4182 | 836.4 | 20.11 | 0.103 | | | PASS |
| | 4233 | 846.6 | 20.14 | 0.103 | | | PASS |
| HSUPA | 4132 | 826.4 | 20.09 | 0.102 | 38.5 | 7 | PASS |
| | 4182 | 836.4 | 20.18 | 0.104 | | | PASS |
| | 4233 | 846.6 | 20.09 | 0.102 | | | PASS |
| HSPA+ | 4132 | 826.4 | 20.14 | 0.103 | 38.5 | 7 | PASS |
| | 4182 | 836.4 | 20.04 | 0.101 | | | PASS |
| | 4233 | 846.6 | 20.06 | 0.101 | | | PASS |

Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.



| WCDMA Band IV | | | | | | | |
|---------------|---------|-----------------|-------------------|-------|-------|---|---------|
| Band | Channel | Frequency (MHz) | Measured E.I.R.P. | | Limit | | Verdict |
| | | | dBm | W | dBm | W | |
| WCDMA | 1312 | 1712.4 | 16.97 | 0.050 | 30 | 1 | PASS |
| | 1413 | 1732.6 | 17.03 | 0.050 | | | PASS |
| | 1513 | 1752.6 | 17.10 | 0.051 | | | PASS |
| HSDPA | 1312 | 1712.4 | 15.18 | 0.033 | 30 | 1 | PASS |
| | 1413 | 1732.6 | 15.37 | 0.034 | | | PASS |
| | 1513 | 1752.6 | 15.29 | 0.034 | | | PASS |
| DC-HSD PA | 1312 | 1712.4 | 15.25 | 0.033 | 30 | 1 | PASS |
| | 1413 | 1732.6 | 15.40 | 0.035 | | | PASS |
| | 1513 | 1752.6 | 15.39 | 0.035 | | | PASS |
| HSUPA | 1312 | 1712.4 | 15.25 | 0.033 | 30 | 1 | PASS |
| | 1413 | 1732.6 | 15.31 | 0.034 | | | PASS |
| | 1513 | 1752.6 | 15.30 | 0.034 | | | PASS |
| HSPA+ | 1312 | 1712.4 | 15.13 | 0.033 | 30 | 1 | PASS |
| | 1413 | 1732.6 | 15.36 | 0.034 | | | PASS |
| | 1513 | 1752.6 | 15.20 | 0.033 | | | PASS |

Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.





| WCDMA Band II | | | | | | | |
|---------------|---------|-----------------|-------------------|-------|-------|---|---------|
| Band | Channel | Frequency (MHz) | Measured E.I.R.P. | | Limit | | Verdict |
| | | | dBm | W | dBm | W | |
| WCDMA | 9262 | 1852.4 | 16.76 | 0.047 | 33 | 2 | PASS |
| | 9400 | 1880.0 | 16.67 | 0.046 | | | PASS |
| | 9538 | 1907.6 | 16.69 | 0.047 | | | PASS |
| HSDPA | 9262 | 1852.4 | 14.81 | 0.030 | 33 | 2 | PASS |
| | 9400 | 1880.0 | 14.96 | 0.031 | | | PASS |
| | 9538 | 1907.6 | 15.01 | 0.032 | | | PASS |
| DC-HSD PA | 9262 | 1852.4 | 14.96 | 0.031 | 33 | 2 | PASS |
| | 9400 | 1880.0 | 15.00 | 0.032 | | | PASS |
| | 9538 | 1907.6 | 15.03 | 0.032 | | | PASS |
| HSUPA | 9262 | 1852.4 | 14.88 | 0.031 | 33 | 2 | PASS |
| | 9400 | 1880.0 | 14.99 | 0.032 | | | PASS |
| | 9538 | 1907.6 | 14.92 | 0.031 | | | PASS |
| HSPA+ | 9262 | 1852.4 | 14.82 | 0.030 | 33 | 2 | PASS |
| | 9400 | 1880.0 | 14.93 | 0.031 | | | PASS |
| | 9538 | 1907.6 | 14.92 | 0.031 | | | PASS |

Note 1: For the HSDPA and HSUPA mode, all the subtests were tested and just the worst data were recorded in this report.




2.8. Radiated Out of Band Emissions

2.8.1. Requirement


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10*\log(P)$ dB. This calculated to be -13dBm. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

2.8.2. Test Description

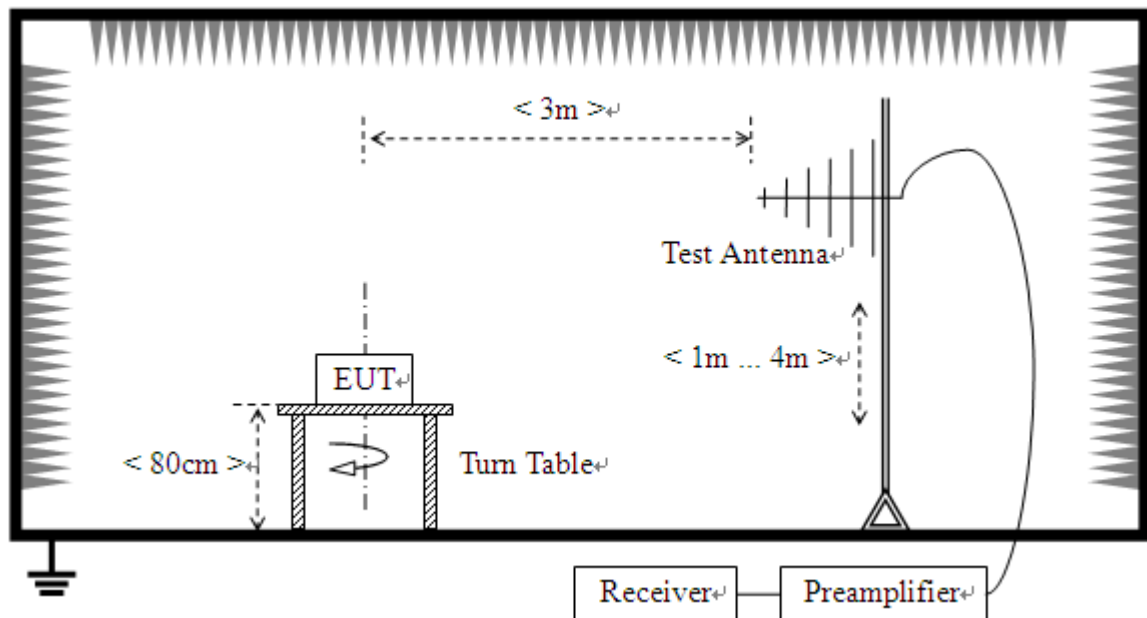

(For the test frequency from 30MHz to 1GHz)



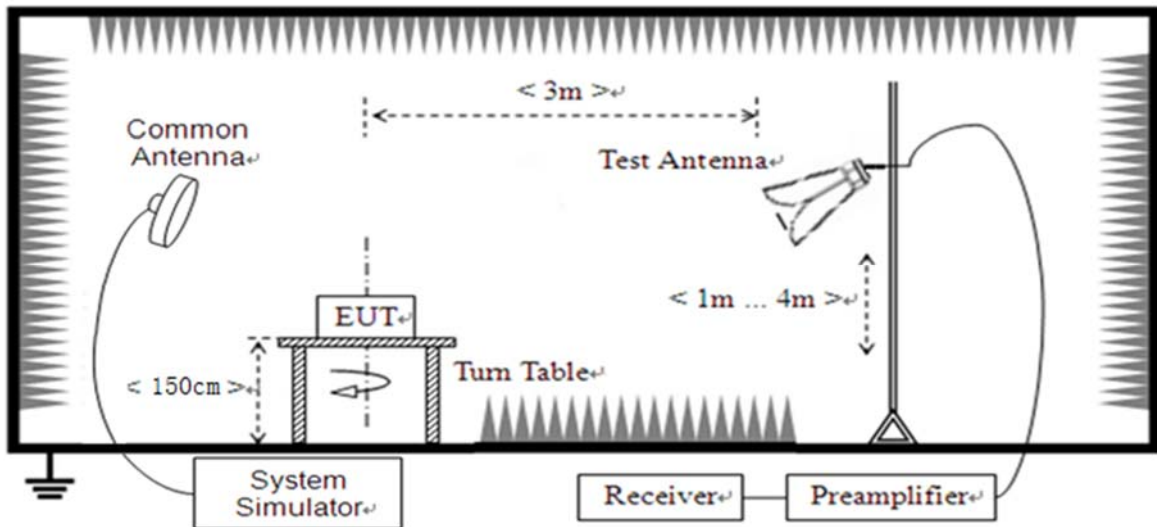

(For the test frequency above 1GHz)

The EUT is located in a 3m Full-Anechoic Chamber, the cable loss, air loss and so on of the site as factors are pre-calibrated using the "Substitution" method, and calculated to correct the reading. A call is established between the EUT and the SS via a Common Antenna. The EUT is commanded by the SS to operate at the maximum and minimum output power and only the test result of the maximum output power was recorded.

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground and the Turn Table is actuated to turn from 0° to 360° to determine the maximum value of the radiated power. The emission levels at both horizontal and vertical polarizations should be tested. The Filters consists of Notch Filters and High Pass Filter.

Note: When doing measurements above 1GHz, the EUT has been within the 3dB cone width of the horn antenna during horizontal antenna.

2.8.3. Test Procedure

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements.





2.8.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. The lowest, middle and highest channels are tested to verify the out of band emissions.

The substitution corrections are obtained as described below:

$$A_{\text{SUBST}} = P_{\text{SUBST_TX}} - P_{\text{SUBST_RX}} - L_{\text{SUBST_CABLES}} + G_{\text{SUBST_TX_ANT}}$$

$$A_{\text{TOT}} = L_{\text{CABLES}} + A_{\text{SUBST}}$$

Where A_{SUBST} is the final substitution correction including receive antenna gain.

$P_{\text{SUBST_TX}}$ is signal generator level,

$P_{\text{SUBST_RX}}$ is receiver level,

$L_{\text{SUBST_CABLES}}$ is cable losses including TX cable,

$G_{\text{SUBST_TX_ANT}}$ is substitution antenna gain.

A_{TOT} is total correction factor including cable loss and substitution correction

During the test, the data of A_{TOT} was added in the test spectrum analyze, so spectrum analyze reading is the final values which contain the data of A_{TOT} .

Note1: The power of the EUT transmitting frequency should be ignored.


Note2: All test mode and condition mentioned were considered and evaluated respectively by performing full test, only the worst data were recorded and reported.

Note3: All spurious emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note4: N/A means the frequency is the basic frequency or the base station frequency, they are no need to verdict.



WCDMA Band V(WCDMA), Low Channel

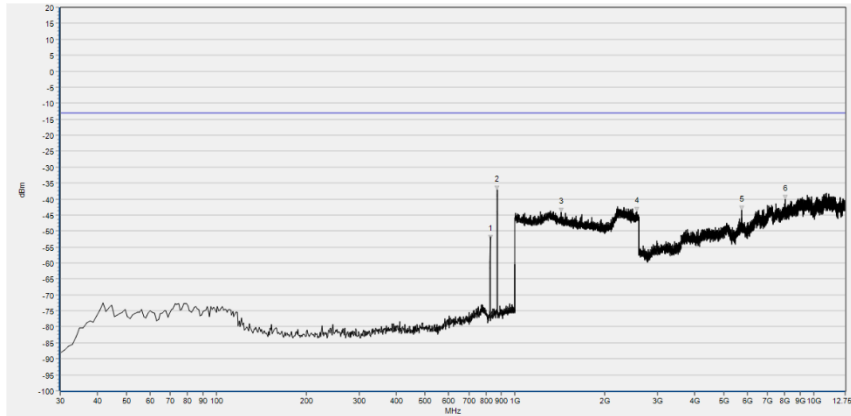


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 826.370 | -52.63 | -13.00 | Horizontal | N/A |
| 2 | 871.960 | -37.30 | -13.00 | Horizontal | N/A |
| 3 | 1426.411 | -44.10 | -13.00 | Horizontal | PASS |
| 4 | 2552.621 | -43.92 | -13.00 | Horizontal | PASS |
| 5 | 5739.689 | -43.55 | -13.00 | Horizontal | PASS |
| 6 | 8017.394 | -40.13 | -13.00 | Horizontal | PASS |

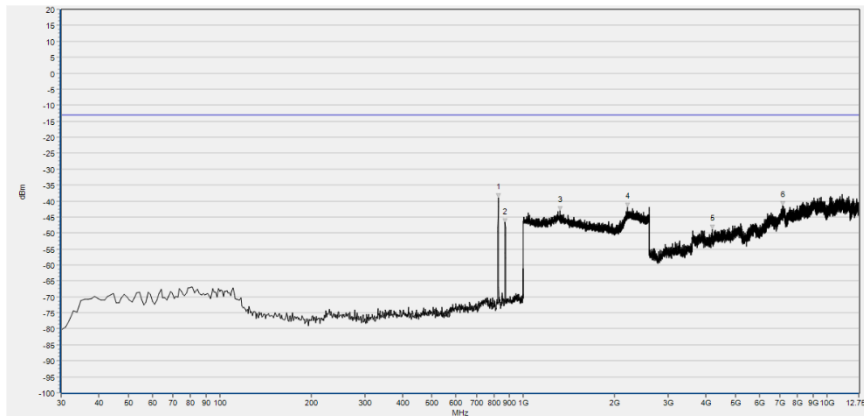


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 827.340 | -38.94 | -13.00 | Vertical | N/A |
| 2 | 871.960 | -46.84 | -13.00 | Vertical | N/A |
| 3 | 1322.689 | -43.04 | -13.00 | Vertical | PASS |
| 4 | 2198.559 | -41.94 | -13.00 | Vertical | PASS |
| 5 | 4198.454 | -48.90 | -13.00 | Vertical | PASS |
| 6 | 7170.176 | -41.52 | -13.00 | Vertical | PASS |



WCDMA Band V(WCDMA), Mid Channel

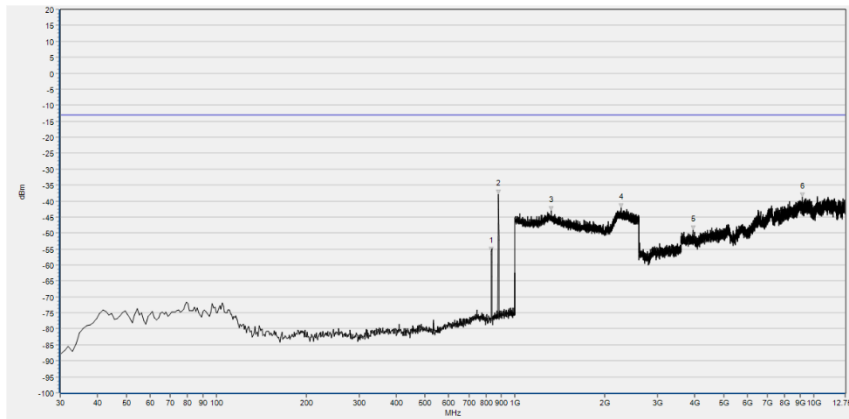


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 834.130 | -55.80 | -13.00 | Horizontal | N/A |
| 2 | 879.720 | -37.79 | -13.00 | Horizontal | N/A |
| 3 | 1323.329 | -43.05 | -13.00 | Horizontal | PASS |
| 4 | 2267.707 | -42.15 | -13.00 | Horizontal | PASS |
| 5 | 3940.044 | -49.04 | -13.00 | Horizontal | PASS |
| 6 | 9148.863 | -38.76 | -13.00 | Horizontal | PASS |

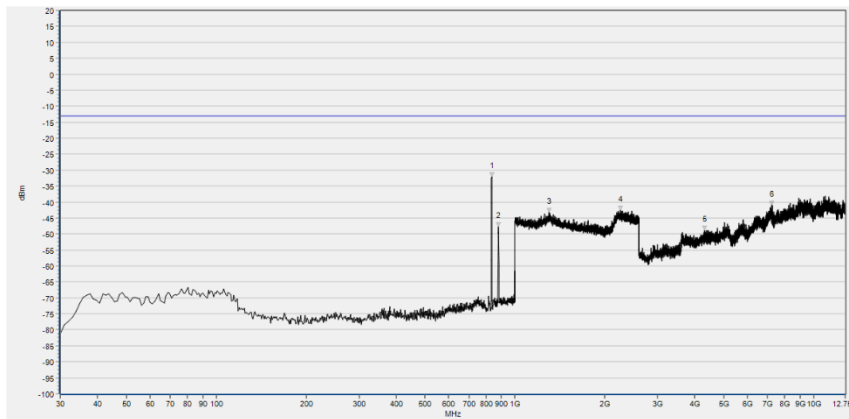


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 835.100 | -32.03 | -13.00 | Vertical | N/A |
| 2 | 881.660 | -47.70 | -13.00 | Vertical | N/A |
| 3 | 1300.280 | -43.25 | -13.00 | Vertical | PASS |
| 4 | 2254.262 | -42.51 | -13.00 | Vertical | PASS |
| 5 | 4322.122 | -48.93 | -13.00 | Vertical | PASS |
| 6 | 7216.321 | -40.91 | -13.00 | Vertical | PASS |



WCDMA Band V(WCDMA), High Channel

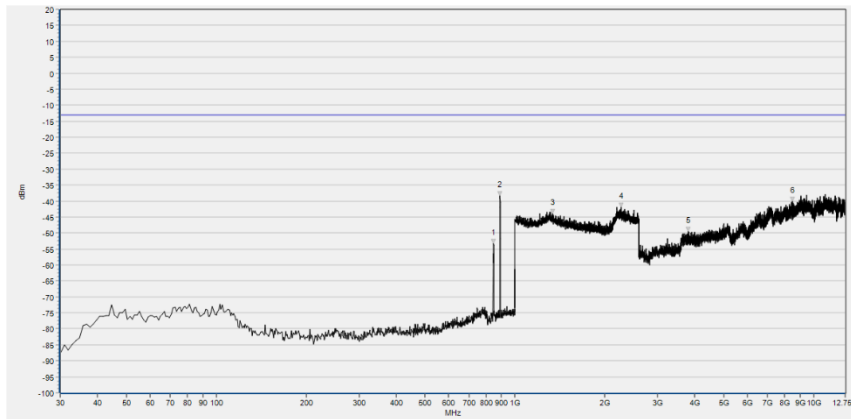


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 847.710 | -53.39 | -13.00 | Horizontal | N/A |
| 2 | 890.390 | -38.40 | -13.00 | Horizontal | N/A |
| 3 | 1338.695 | -43.86 | -13.00 | Horizontal | PASS |
| 4 | 2267.707 | -41.94 | -13.00 | Horizontal | PASS |
| 5 | 3810.838 | -49.59 | -13.00 | Horizontal | PASS |
| 6 | 8465.921 | -40.21 | -13.00 | Horizontal | PASS |

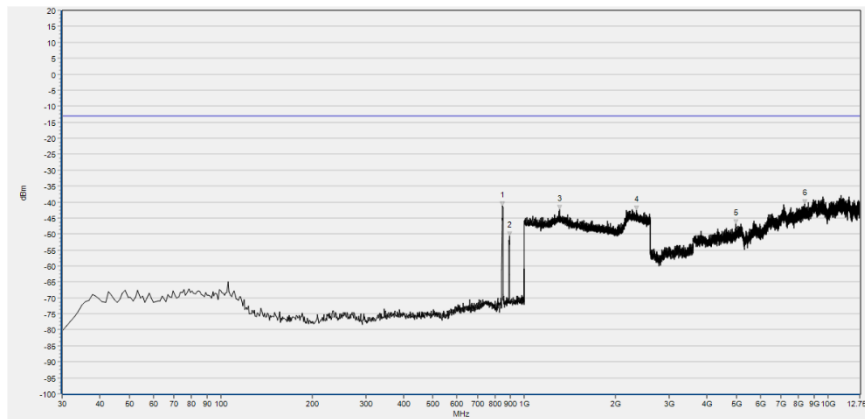


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 847.710 | -41.22 | -13.00 | Vertical | N/A |
| 2 | 893.300 | -50.61 | -13.00 | Vertical | N/A |
| 3 | 1304.762 | -42.42 | -13.00 | Vertical | PASS |
| 4 | 2336.214 | -42.54 | -13.00 | Vertical | PASS |
| 5 | 4977.378 | -46.80 | -13.00 | Vertical | PASS |
| 6 | 8403.164 | -40.65 | -13.00 | Vertical | PASS |



WCDMA Band IV(WCDMA), Low Channel

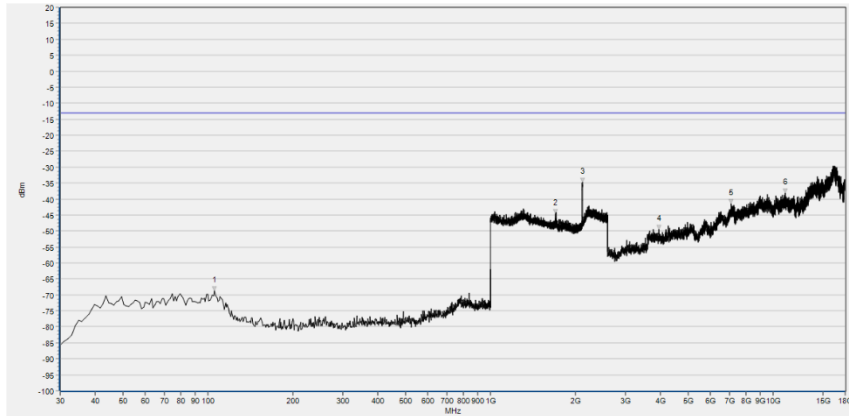


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 105.660 | -68.79 | -13.00 | Horizontal | PASS |
| 2 | 1696.599 | -44.52 | -13.00 | Horizontal | N/A |
| 3 | 2112.765 | -34.81 | -13.00 | Horizontal | N/A |
| 4 | 3947.045 | -49.41 | -13.00 | Horizontal | PASS |
| 5 | 7117.221 | -41.56 | -13.00 | Horizontal | PASS |
| 6 | 11057.538 | -38.18 | -13.00 | Horizontal | PASS |

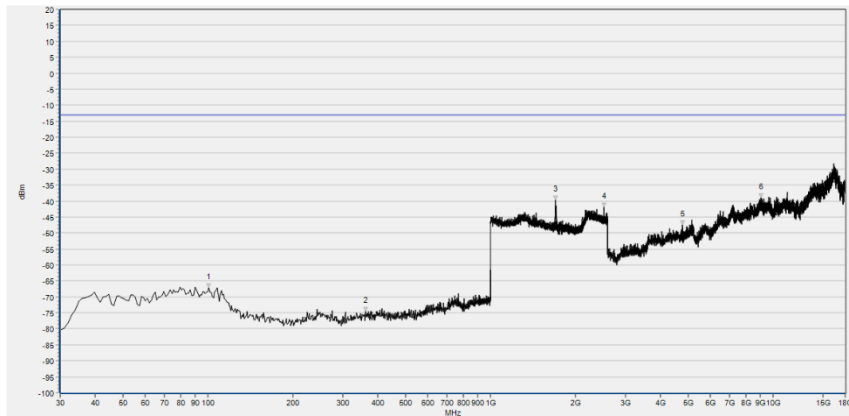


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 100.810 | -67.25 | -13.00 | Vertical | PASS |
| 2 | 360.770 | -74.58 | -13.00 | Vertical | PASS |
| 3 | 1694.678 | -39.64 | -13.00 | Vertical | N/A |
| 4 | 2517.407 | -41.90 | -13.00 | Vertical | PASS |
| 5 | 4767.594 | -47.53 | -13.00 | Vertical | PASS |
| 6 | 9052.373 | -39.02 | -13.00 | Vertical | PASS |



WCDMA Band IV(WCDMA), Mid Channel

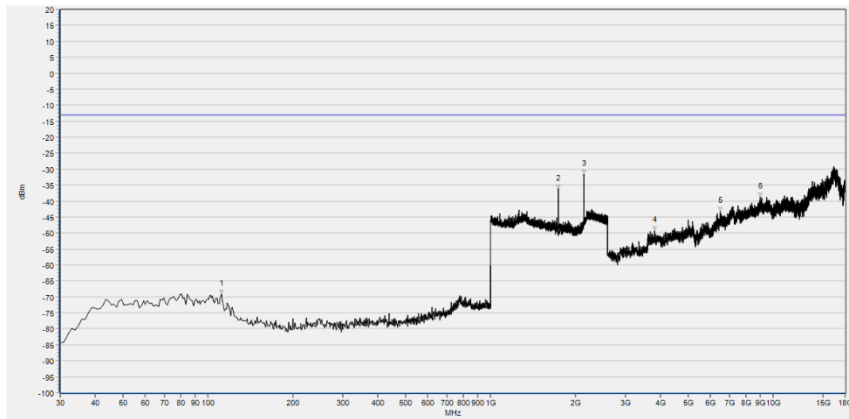


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 111.480 | -69.08 | -13.00 | Horizontal | PASS |
| 2 | 1738.856 | -36.22 | -13.00 | Horizontal | N/A |
| 3 | 2141.577 | -31.70 | -13.00 | Horizontal | N/A |
| 4 | 3801.418 | -49.34 | -13.00 | Horizontal | PASS |
| 5 | 6517.912 | -43.20 | -13.00 | Horizontal | PASS |
| 6 | 8985.161 | -38.83 | -13.00 | Horizontal | PASS |

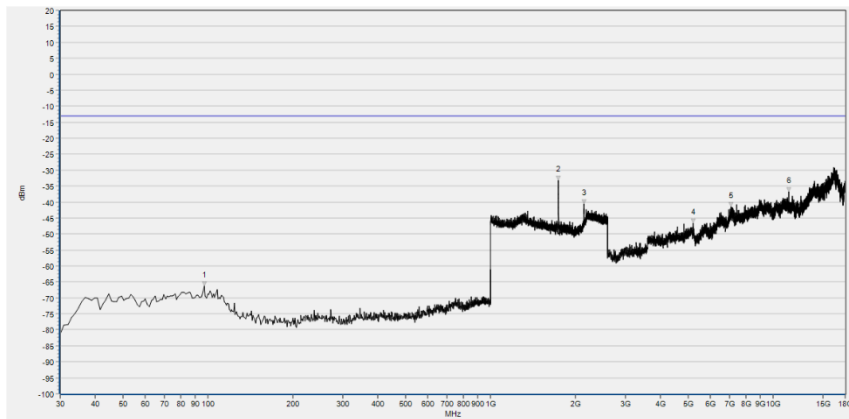


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 96.930 | -66.31 | -13.00 | Vertical | PASS |
| 2 | 1739.496 | -33.20 | -13.00 | Vertical | N/A |
| 3 | 2140.296 | -40.48 | -13.00 | Vertical | N/A |
| 4 | 5210.075 | -46.52 | -13.00 | Vertical | PASS |
| 5 | 7117.221 | -41.47 | -13.00 | Vertical | PASS |
| 6 | 11345.990 | -36.86 | -13.00 | Vertical | PASS |



WCDMA Band IV(WCDMA), High Channel

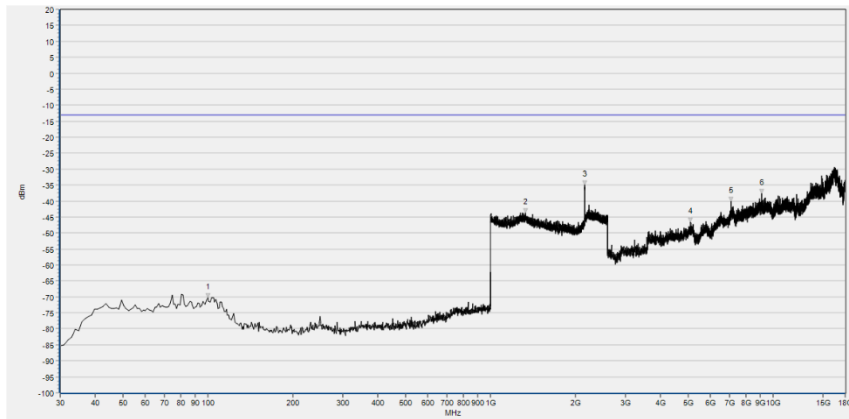


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 99.840 | -70.36 | -13.00 | Horizontal | PASS |
| 2 | 1329.092 | -43.62 | -13.00 | Horizontal | PASS |
| 3 | 2151.821 | -35.06 | -13.00 | Horizontal | N/A |
| 4 | 5109.256 | -46.67 | -13.00 | Horizontal | PASS |
| 5 | 7092.017 | -40.19 | -13.00 | Horizontal | PASS |
| 6 | 9094.381 | -37.71 | -13.00 | Horizontal | PASS |

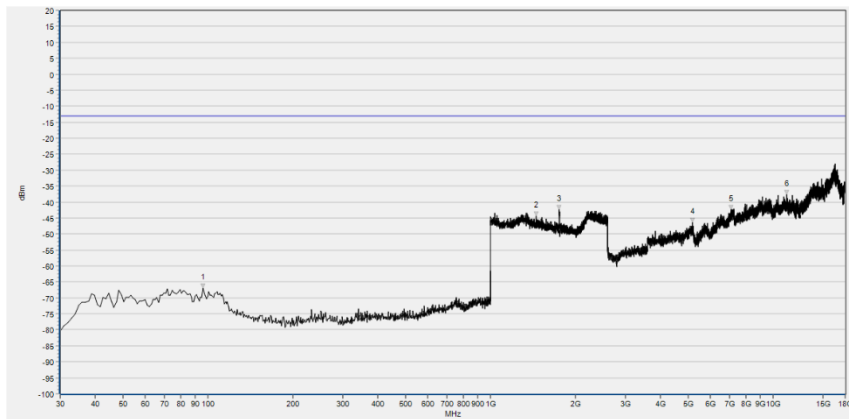


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 95.960 | -67.02 | -13.00 | Vertical | PASS |
| 2 | 1447.539 | -44.37 | -13.00 | Vertical | PASS |
| 3 | 1752.301 | -42.28 | -13.00 | Vertical | N/A |
| 4 | 5190.471 | -46.40 | -13.00 | Vertical | PASS |
| 5 | 7083.615 | -42.29 | -13.00 | Vertical | PASS |
| 6 | 11200.364 | -37.65 | -13.00 | Vertical | PASS |



WCDMA Band II(WCDMA), Low Channel

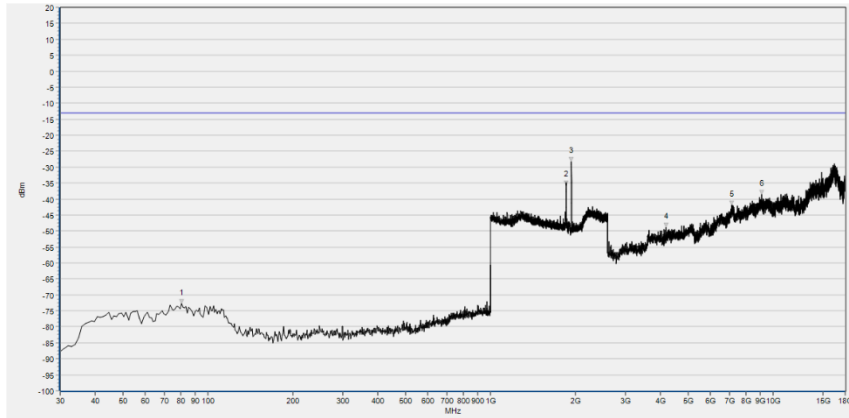


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 80.440 | -72.68 | -13.00 | Horizontal | PASS |
| 2 | 1853.461 | -35.54 | -13.00 | Horizontal | N/A |
| 3 | 1934.774 | -28.21 | -13.00 | Horizontal | N/A |
| 4 | 4176.687 | -48.75 | -13.00 | Horizontal | PASS |
| 5 | 7122.822 | -41.99 | -13.00 | Horizontal | PASS |
| 6 | 9102.782 | -38.45 | -13.00 | Horizontal | PASS |

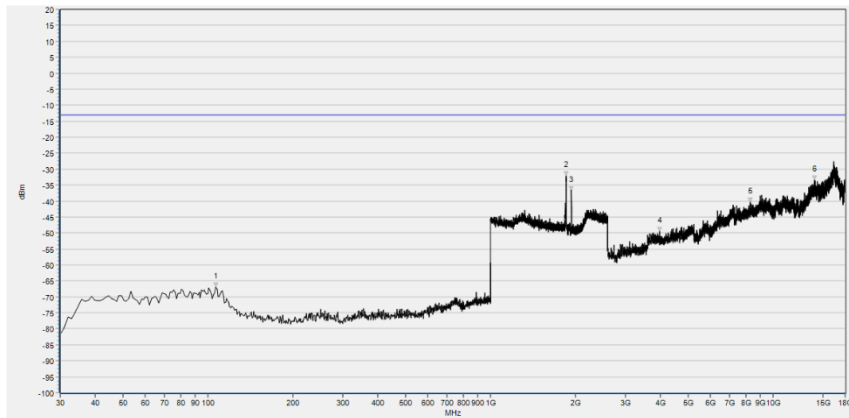


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 106.630 | -66.88 | -13.00 | Vertical | PASS |
| 2 | 1852.181 | -32.09 | -13.00 | Vertical | N/A |
| 3 | 1934.774 | -36.69 | -13.00 | Vertical | N/A |
| 4 | 3963.848 | -49.57 | -13.00 | Vertical | PASS |
| 5 | 8310.238 | -40.28 | -13.00 | Vertical | PASS |
| 6 | 14009.274 | -33.42 | -13.00 | Vertical | PASS |



WCDMA Band II(WCDMA), Mid Channel

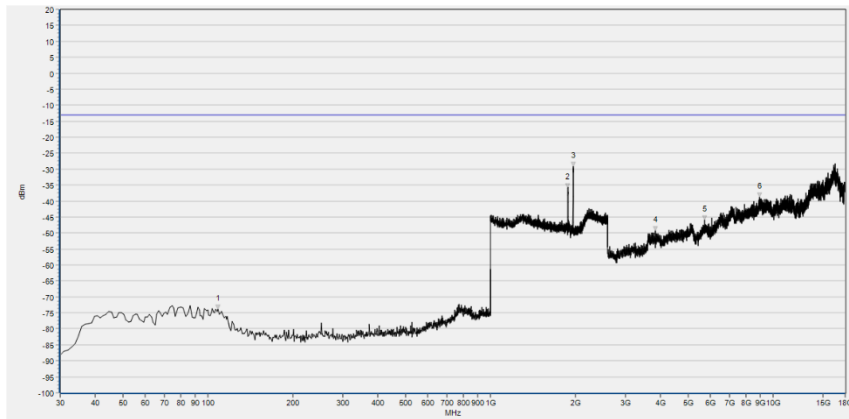


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 108.570 | -73.96 | -13.00 | Horizontal | PASS |
| 2 | 1879.072 | -35.79 | -13.00 | Horizontal | N/A |
| 3 | 1959.104 | -29.17 | -13.00 | Horizontal | N/A |
| 4 | 3829.424 | -49.34 | -13.00 | Horizontal | PASS |
| 5 | 5728.169 | -45.90 | -13.00 | Horizontal | PASS |
| 6 | 8962.757 | -38.71 | -13.00 | Horizontal | PASS |

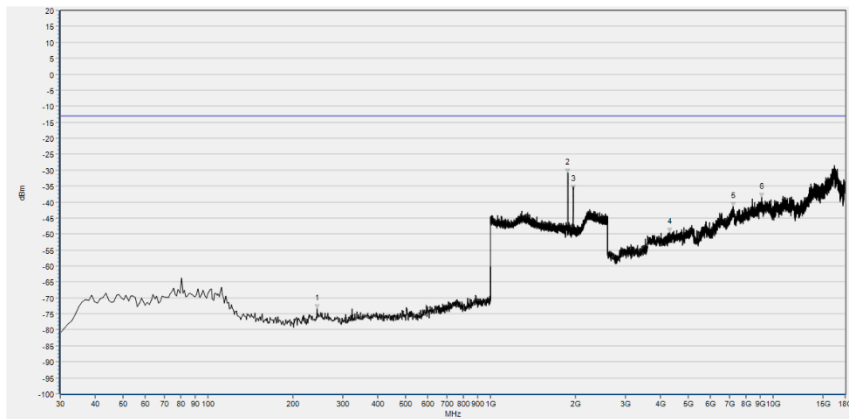


| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 243.400 | -73.40 | -13.00 | Vertical | PASS |
| 2 | 1879.072 | -31.04 | -13.00 | Vertical | N/A |
| 3 | 1959.104 | -36.03 | -13.00 | Vertical | N/A |
| 4 | 4299.909 | -49.50 | -13.00 | Vertical | PASS |
| 5 | 7206.838 | -41.44 | -13.00 | Vertical | PASS |
| 6 | 9099.982 | -38.47 | -13.00 | Vertical | PASS |



WCDMA Band II(WCDMA), High Channel

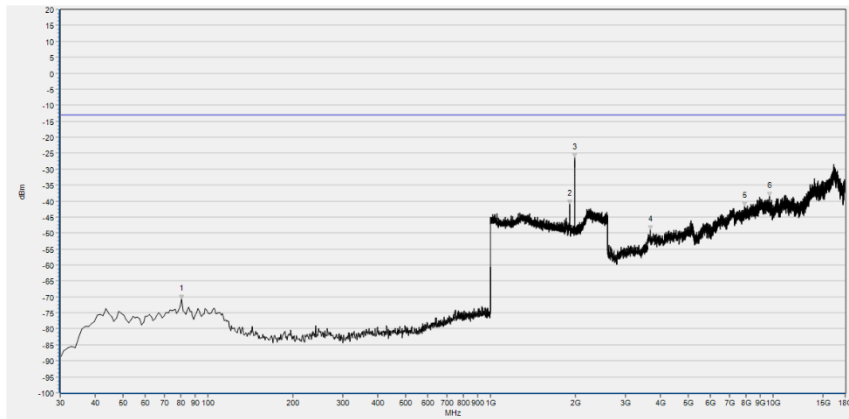

| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|------------|---------|
| 1 | 80.440 | -70.73 | -13.00 | Horizontal | PASS |
| 2 | 1908.523 | -40.91 | -13.00 | Horizontal | N/A |
| 3 | 1989.196 | -26.57 | -13.00 | Horizontal | N/A |
| 4 | 3680.997 | -48.96 | -13.00 | Horizontal | PASS |
| 5 | 7926.568 | -41.73 | -13.00 | Horizontal | PASS |
| 6 | 9730.096 | -38.51 | -13.00 | Horizontal | PASS |

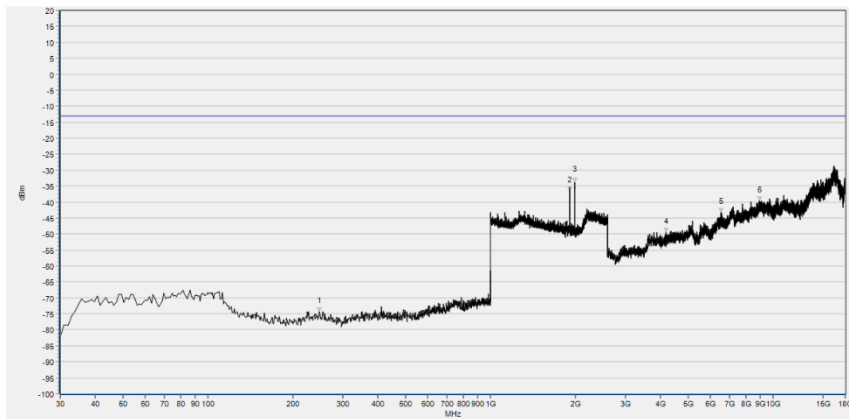

| No. | Fre.(MHz) | PK (dBm) | Limit (dBm) | Antenna | Verdict |
|-----|-----------|----------|-------------|----------|---------|
| 1 | 248.250 | -74.24 | -13.00 | Vertical | PASS |
| 2 | 1909.804 | -36.56 | -13.00 | Vertical | N/A |
| 3 | 1988.555 | -33.85 | -13.00 | Vertical | N/A |
| 4 | 4193.490 | -49.45 | -13.00 | Vertical | PASS |
| 5 | 6540.316 | -43.24 | -13.00 | Vertical | PASS |
| 6 | 8962.757 | -39.74 | -13.00 | Vertical | PASS |



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

| Test items | Uncertainty |
|-----------------------------|---------------------|
| Output Power | $\pm 2.22\text{dB}$ |
| Bandwidth | $\pm 5\%$ |
| Conducted Spurious Emission | $\pm 2.77\text{dB}$ |
| Radiated Emission | $\pm 2.95\text{dB}$ |

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$





Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

| | |
|----------------------------|--|
| Laboratory Name: | Shenzhen Morlab Communications Technology Co., Ltd. |
| Laboratory Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |
| Telephone: | +86 755 36698555 |
| Facsimile: | +86 755 36698525 |

2. Identification of the Responsible Testing Location

| | |
|-----------------|--|
| Name: | Shenzhen Morlab Communications Technology Co., Ltd. |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China |

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.





4. Test Equipments Utilized

4.1 Conducted Test Equipments

| Equipment Name | Serial No. | Type | Manufacturer | Cal. Date | Due Date |
|---------------------|-------------|---------|--|------------|------------|
| EXA Signal Analyzer | MY51511149 | N9020A | Agilent | 2020.07.27 | 2021.07.26 |
| System Simulator | 6200995016 | MT8820C | Anritsu | 2020.10.28 | 2021.10.27 |
| Temperature Chamber | 20171112102 | HZ-2019 | Dongguan Lixian Instrument Technology Co., Ltd | 2020.10.26 | 2021.10.25 |

4.2 List of Software Used

| Description | Manufacturer | Software Version |
|------------------------|--------------|------------------|
| Morlab FCC Test System | MORLAB | V2.8 |
| MORLAB EMCR V1.2 | MORLAB | V1.0 |



**4.3 Radiated Test Equipments**

| Equipment Name | Serial No. | Type | Manufacturer | Cal. Date | Due Date |
|--------------------------------------|-------------|-----------------|--------------|------------|------------|
| System Simulator | 152038 | CMW500 | R&S | 2020.11.19 | 2021.11.18 |
| Receiver | MY54130016 | N9038A | Agilent | 2020.07.21 | 2021.07.20 |
| Test Antenna - Bi-Log | 9163-519 | VULB 9163 | Schwarzbeck | 2019.05.24 | 2022.05.23 |
| Test Antenna - Horn | 9170C-531 | BBHA9170 | Schwarzbeck | 2019.07.26 | 2022.07.25 |
| Test Antenna - Horn | 01774 | BBHA 9120D | Schwarzbeck | 2019.07.26 | 2022.07.25 |
| Coaxial cable (N male) (9kHz-30MHz) | CB04 | EMC04 | Morlab | N/A | N/A |
| Coaxial cable (N male) (30MHz-26GHz) | CB02 | EMC02 | Morlab | N/A | N/A |
| Coaxial cable (N male) (30MHz-26GHz) | CB03 | EMC03 | Morlab | N/A | N/A |
| Coaxial cable (N male) (30MHz-40GHz) | CB05 | EMC05 | Morlab | N/A | N/A |
| 1-18GHz pre-Amplifier | 61171/61172 | S020180L3203 | Tonscend | 2020.07.21 | 2021.07.20 |
| 18-26.5GHz pre-Amplifier | 46732 | S10M100L3802 | Tonscend | 2020.07.21 | 2021.07.20 |
| 26-40GHz pre-Amplifier | 56774 | S40M400L4002 | Tonscend | 2020.07.21 | 2021.07.20 |
| Notch Filter | N/A | WRCG-GSM 850 | Wainwright | 2020.07.21 | 2021.07.20 |
| Notch Filter | N/A | WRCG-GSM 1900 | Wainwright | 2020.07.21 | 2021.07.20 |
| Notch Filter | N/A | WRCGV-W Band V | Wainwright | 2020.07.21 | 2021.07.20 |
| Notch Filter | N/A | WRCGV-W Band II | Wainwright | 2020.07.21 | 2021.07.20 |





| Equipment Name | Serial No. | Type | Manufacturer | Cal. Date | Due Date |
|------------------|------------|--------------------|--------------|------------|------------|
| Notch Filter | N/A | WRCGV-W Band IV | Wainwright | 2020.07.21 | 2021.07.20 |
| Anechoic Chamber | N/A | 9m*6m*6m | CRT | 2019.07.13 | 2022.07.12 |

_____ END OF REPORT _____

