



TEST REPORT

APPLICANT : Reliance Communications LLC
PRODUCT NAME : Orbic Trophy 5G UW
MODEL NAME : R667L5U
BRAND NAME : Orbic
FCC ID : 2ABGH-R667L5U
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2023-11-07
TEST DATE : 2023-11-20 to 2024-02-19
ISSUE DATE : 2024-04-22



Edited by: Zeng Xiaoying
Zeng Xiaoying (Rapporteur)
Approved by: Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Summary of Test Result 4
 - 1.1. Testing Applied Standards 5
 - 1.2. Test Equipment List 6
 - 1.3. Measurement Uncertainty 8
 - 1.4. Testing Laboratory 8
- 2. General Description 9
 - 2.1. Information of Applicant and Manufacturer 9
 - 2.2. Information of EUT 9
 - 2.3. Channel List of EUT 11
 - 2.4. Test Configuration of EUT 12
 - 2.5. Test Conditions 12
 - 2.6. Test Setup Layout Diagram 13
- 3. Test Results 16
 - 3.1. Antenna Requirement 16
 - 3.2. Duty Cycle of Test Signal 17
 - 3.3. Maximum Peak and Average Conducted Output Power 18
 - 3.4. 6 dB Bandwidth 19
 - 3.5. Conducted Spurious Emissions and Band Edge 20
 - 3.6. Power Spectral Density 21
 - 3.7. Conducted Emission 22
 - 3.8. Restricted Frequency Bands 23
 - 3.9. Radiated Emission 24
- Annex A Test Data and Result 26



Change History		
Version	Date	Reason for change
1.0	2024-04-22	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Dec. 21, 2023	He Yuyang	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Dec. 21, 2023	He Yuyang	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Dec. 21, 2023	He Yuyang	PASS	No deviation
5	15.247(a)	Bandwidth	Dec. 21, 2023	He Yuyang	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Dec. 21, 2023	He Yuyang	PASS	No deviation
7	15.247(e)	Power Spectral Density	Dec. 21, 2023	He Yuyang	PASS	No deviation
8	15.207	Conducted Emission	Jan. 03, 2024	Wang Deyong	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Dec. 29, 2023 Jan. 12, 2024	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Dec. 31, 2023	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
Power Sensor	MY54180008	U2021XA	Agilent	2023.10.17	2024.10.16
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
				2024.01.25	2024.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
				2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	±2.22dB	Confidence levels of 95%
Power Spectral Density	±2.22dB	Confidence levels of 95%
Bandwidth	±5%	Confidence levels of 95%
Conducted Spurious Emission	±2.77dB	Confidence levels of 95%
Restricted Frequency Bands	±5%	Confidence levels of 95%
Radiated Emission	±2.95dB	Confidence levels of 95%
Conducted Emission	±2.44dB	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Reliance Communications LLC
Applicant Address	555 Wireless Blvd. Hauppauge, NY 11788, USA
Manufacturer	Unimaxcomm
Manufacturer Address	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110

2.2. Information of EUT

Product Name:	Orbic Trophy 5G UW	
Sample No.:	2#	
Hardware Version:	V1.0	
Software Version:	R667L5U_v1.1.2_BVZ	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section1.3	
Wireless Technology:	802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	2412MHz–2462MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	ANT 8: 0.44dBi; ANT 9: -1.27dBi	
Directional Gain:	2.64dBi <small>Note 2</small>	
Accessory Information:	Battery	
	Brand Name:	Shenbird
	Model No.:	BTE-5003
	Serial No.:	N/A
	Capacity:	5000mAh
	Rated Voltage:	3.89V
	Charge Limit:	4.48V
	Manufacturer:	Shenbird New Energy (Huizhou) Co., Ltd.



Accessory Information:	AC Adapter	
	Brand Name:	Orbic
	Model No.:	OACH023US1
	Serial No.:	N/A
	Rated Output:	5V=3A, 9V=2A, 12V=1.5A
	Rated Input:	100-240V~50/60Hz,0.5A
	Manufacturer 1:	WATAI ELECTRONICS PRIVATE LIMITED
	Manufacturer 2:	KANGYIN ELECTRONIC TECHNOLOGY CO.,LTD
	USB Cable	
	Model No.:	HX-YLMK-06
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS CO.,LTD

Note 1: The EUT supports a MIMO function. Physically, the EUT provides two completed transmitters and two receivers for 802.11n and 802.11ax modulation mode.

Modulation Mode:	TX Function
802.11b/g	1TX
802.11n	2TX

Note 2: According to KDB 662911 D01, the directional gain = $10\log[(10^{G0/20}+10^{G1/20})^2/2] = 2.64\text{dBi}$.

Note 3: All radiation test items for 802.11n modulation mode operate at MIMO mode during the test. Other modulation mode operate at SISO mode, both of the two antennas were tested separately, we only recorded the worst test result(ANT 9) in this report.

Note 4: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
20MHz	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		
Nominal Channel Bandwidth	Channel	Frequency (MHz)	Channel	Frequency (MHz)
40MHz	3	2422	8	2447
	4	2427	9	2452
	5	2432		
	6	2437		
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.


2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


Power item

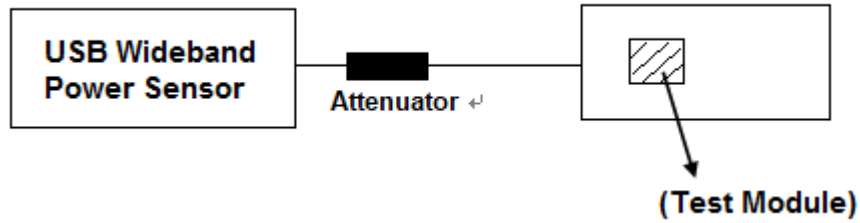

Other items

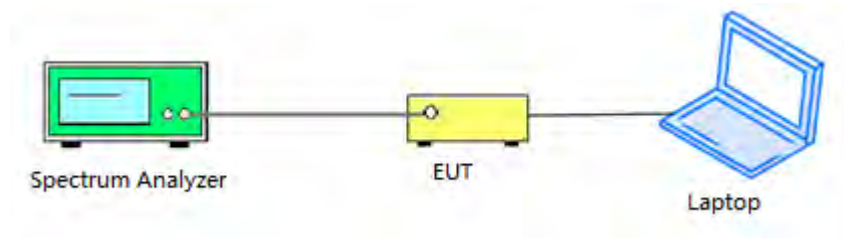


2.6.2. Conducted Emission Measurement

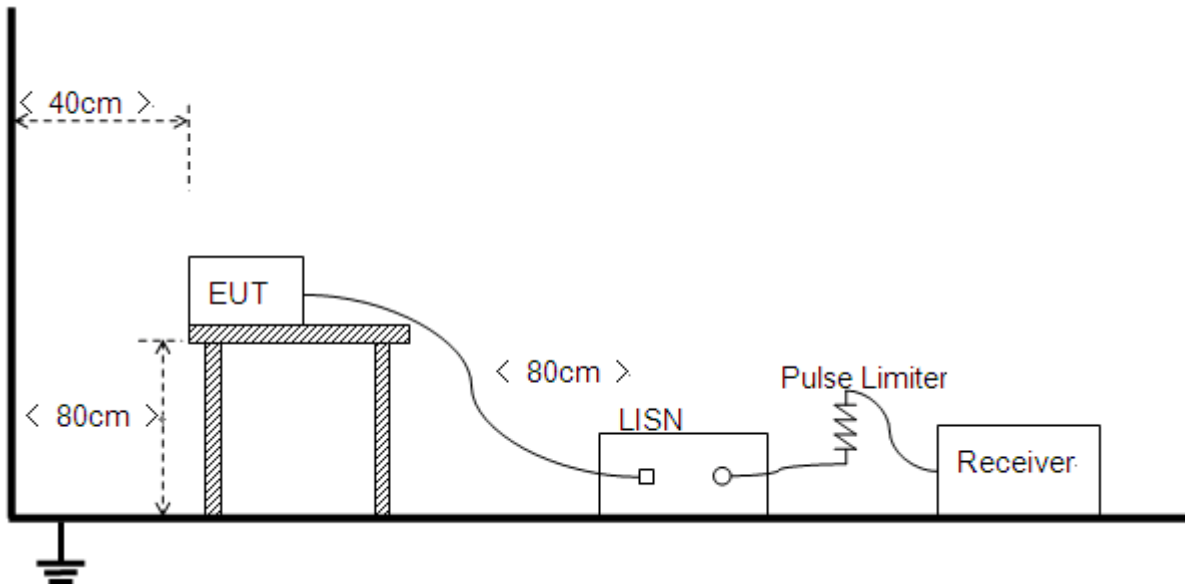


2.6.3. Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

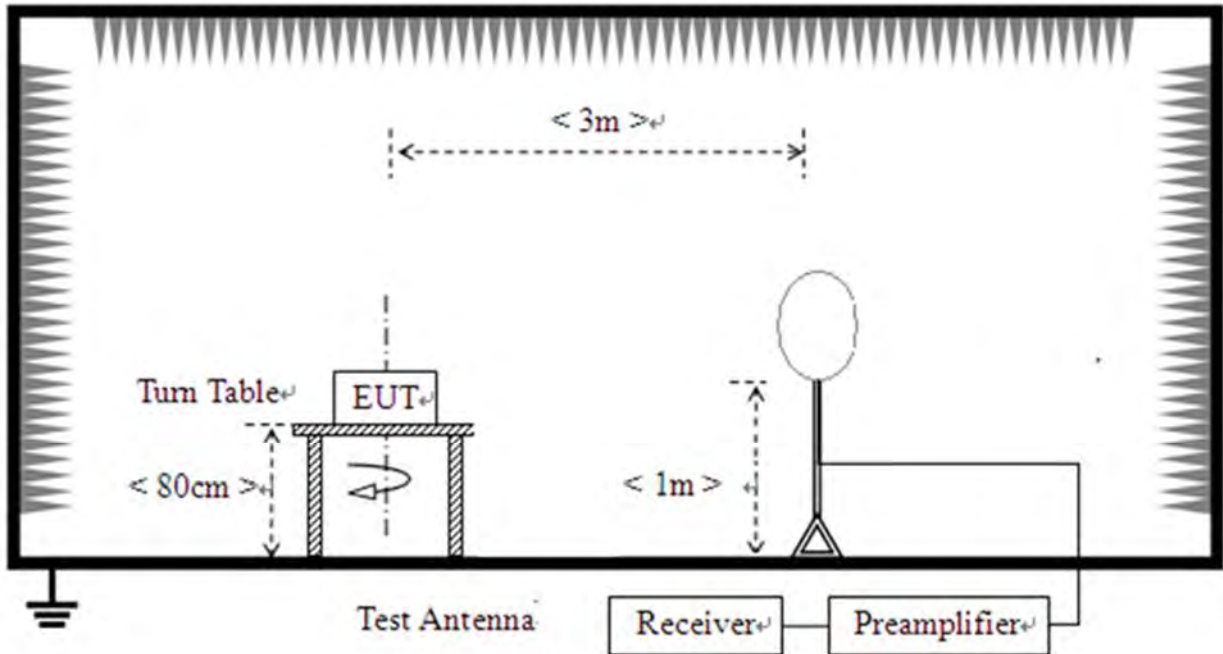

2) For radiated emissions from 30MHz to 1GHz

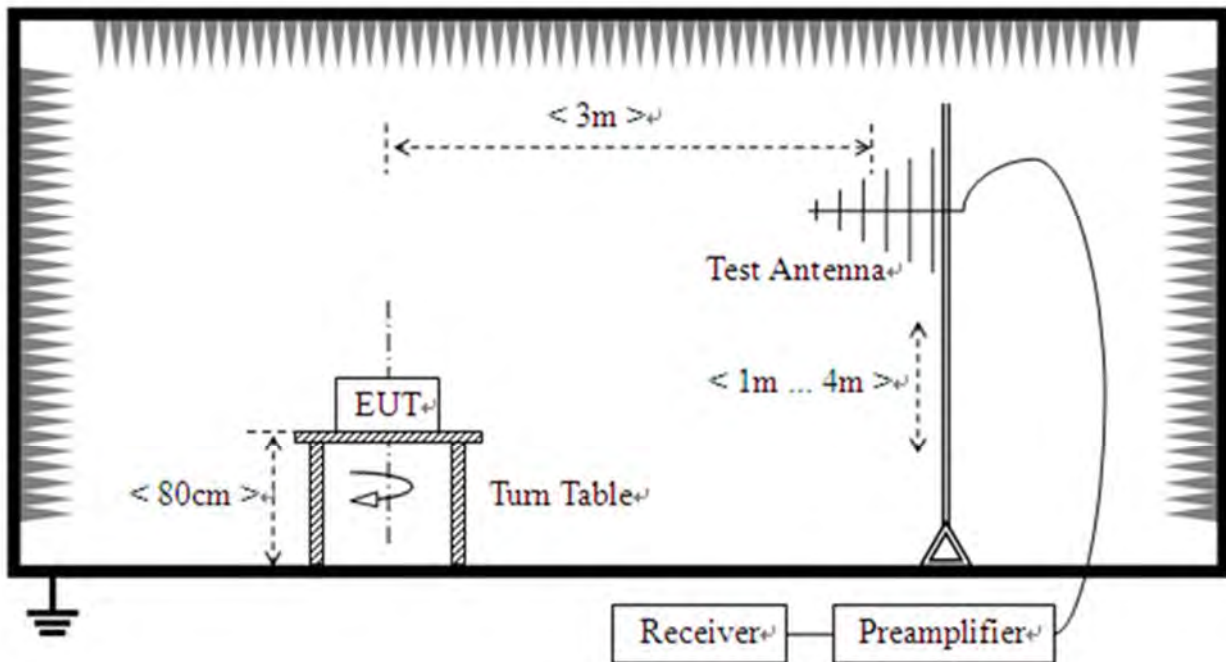

3) For radiated emissions above 1GHz

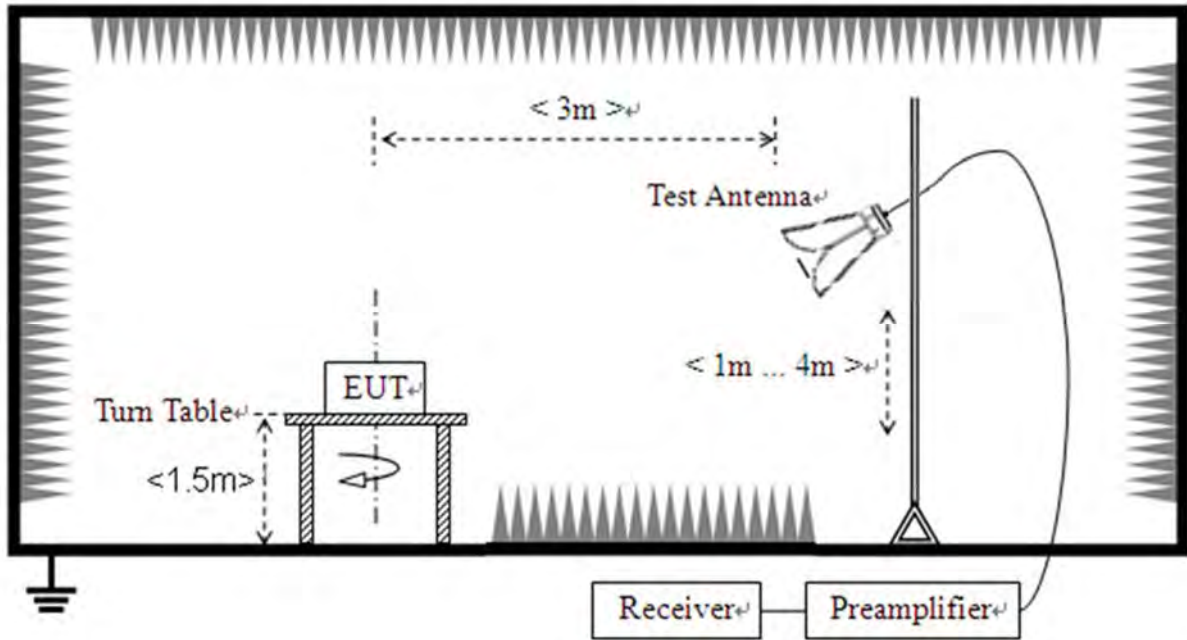



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in above of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg(30k/3k)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.



3.8. Restricted Frequency Bands

3.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4. Test Result

Refer to Annex A.9 in this report.



3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.10 in this report.

Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b SISO	2412	Ant8	99.53	0.02	0
NVNT	b SISO	2437	Ant8	99.25	0.03	0.08
NVNT	b SISO	2462	Ant8	99.55	0.02	0
NVNT	b SISO	2412	Ant9	99.27	0.03	0.08
NVNT	b SISO	2437	Ant9	98.1	0.08	0.08
NVNT	b SISO	2462	Ant9	99.55	0.02	0
NVNT	g SISO	2412	Ant8	98.26	0.08	0.49
NVNT	g SISO	2437	Ant8	98.26	0.08	0.49
NVNT	g SISO	2462	Ant8	98.35	0.07	0.49
NVNT	g SISO	2412	Ant9	98.26	0.08	0.49
NVNT	g SISO	2437	Ant9	98.26	0.08	0.49
NVNT	g SISO	2462	Ant9	98.35	0.07	0.49
NVNT	n20 SISO	2412	Ant8	98.13	0.08	0.53
NVNT	n20 SISO	2437	Ant8	98.23	0.08	0.53
NVNT	n20 SISO	2462	Ant8	98.23	0.08	0.53
NVNT	n20 SISO	2412	Ant9	98.13	0.08	0.53
NVNT	n20 SISO	2437	Ant9	98.23	0.08	0.53
NVNT	n20 SISO	2462	Ant9	98.23	0.08	0.53
NVNT	n20 MIMO	2412	Sum	98.23	0.08	0.53
NVNT	n20 MIMO	2437	Sum	98.13	0.08	0.53
NVNT	n20 MIMO	2462	Sum	98.13	0.08	0.53
NVNT	n40 SISO	2422	Ant8	94.9	0.23	1.08
NVNT	n40 SISO	2437	Ant8	94.89	0.23	1.08
NVNT	n40 SISO	2452	Ant8	94.9	0.23	1.08
NVNT	n40 SISO	2422	Ant9	94.89	0.23	1.08
NVNT	n40 SISO	2437	Ant9	94.89	0.23	1.08
NVNT	n40 SISO	2452	Ant9	94.9	0.23	1.08
NVNT	n40 MIMO	2422	Sum	94.9	0.23	1.08
NVNT	n40 MIMO	2437	Sum	94.89	0.23	1.08
NVNT	n40 MIMO	2452	Sum	95.09	0.22	1.08




Test Graphs

Duty Cycle NVNT b 2412MHz Ant8 SISO

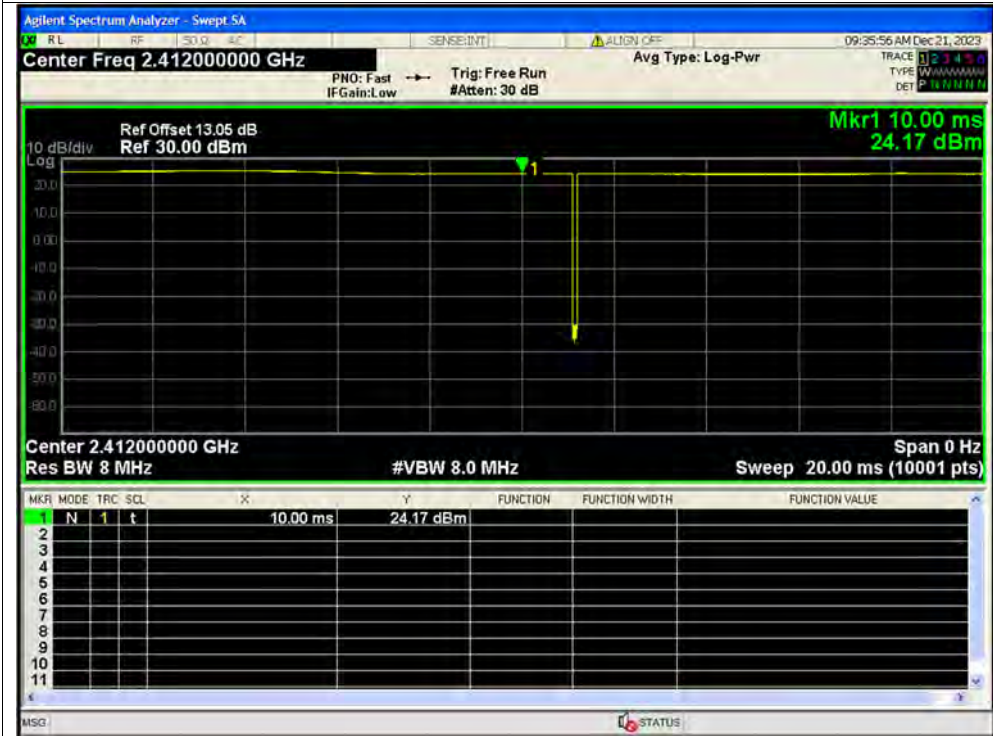


Duty Cycle NVNT b 2437MHz Ant8 SISO

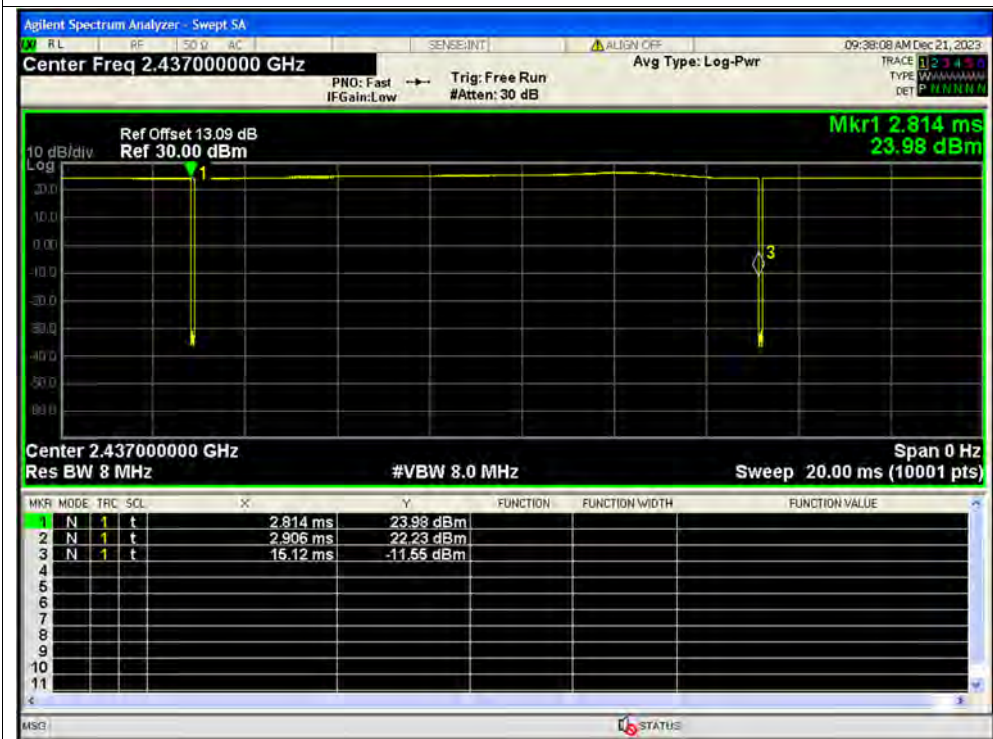




Duty Cycle NVNT b 2462MHz Ant8 SISO

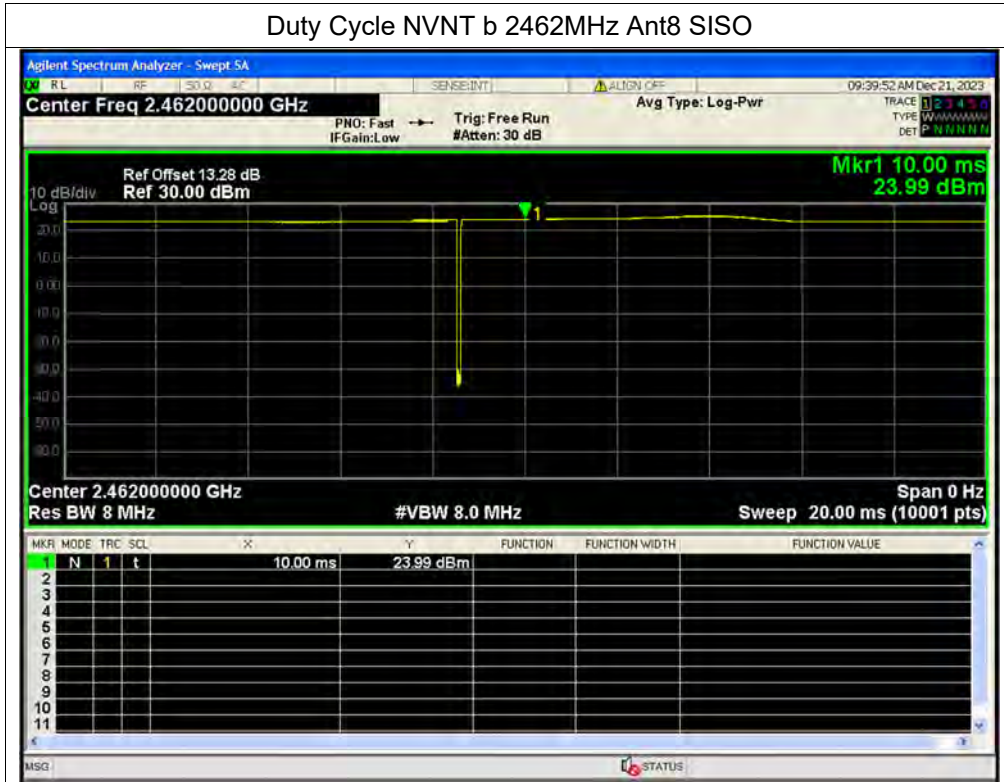


Duty Cycle NVNT b 2412MHz Ant9 SISO

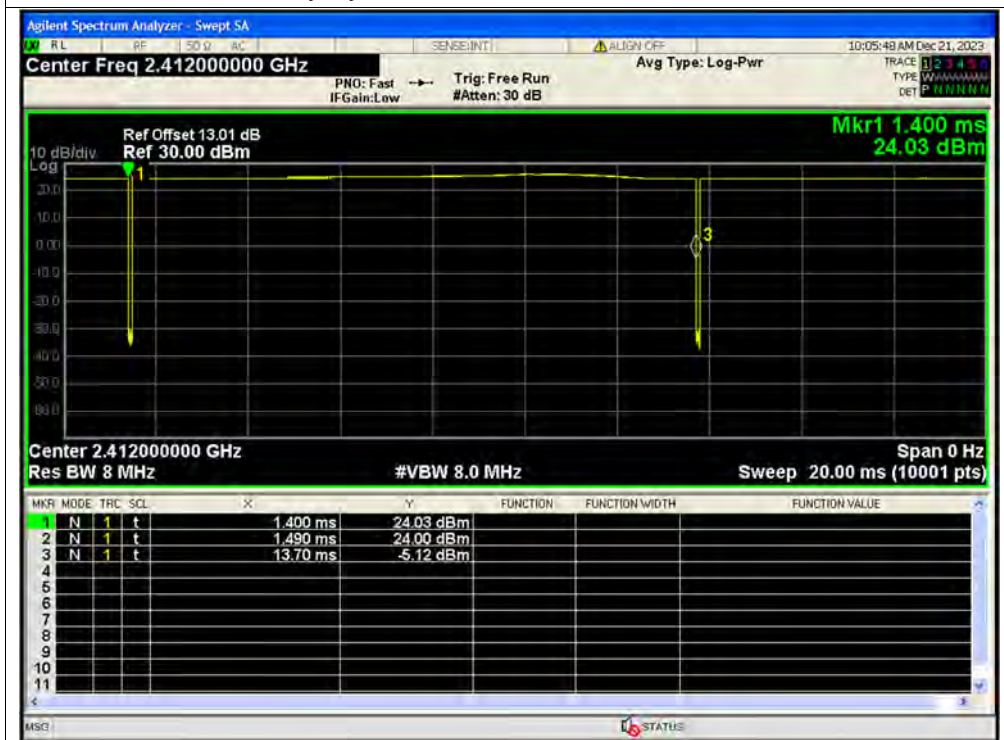




Duty Cycle NVNT b 2437MHz Ant9 SISO

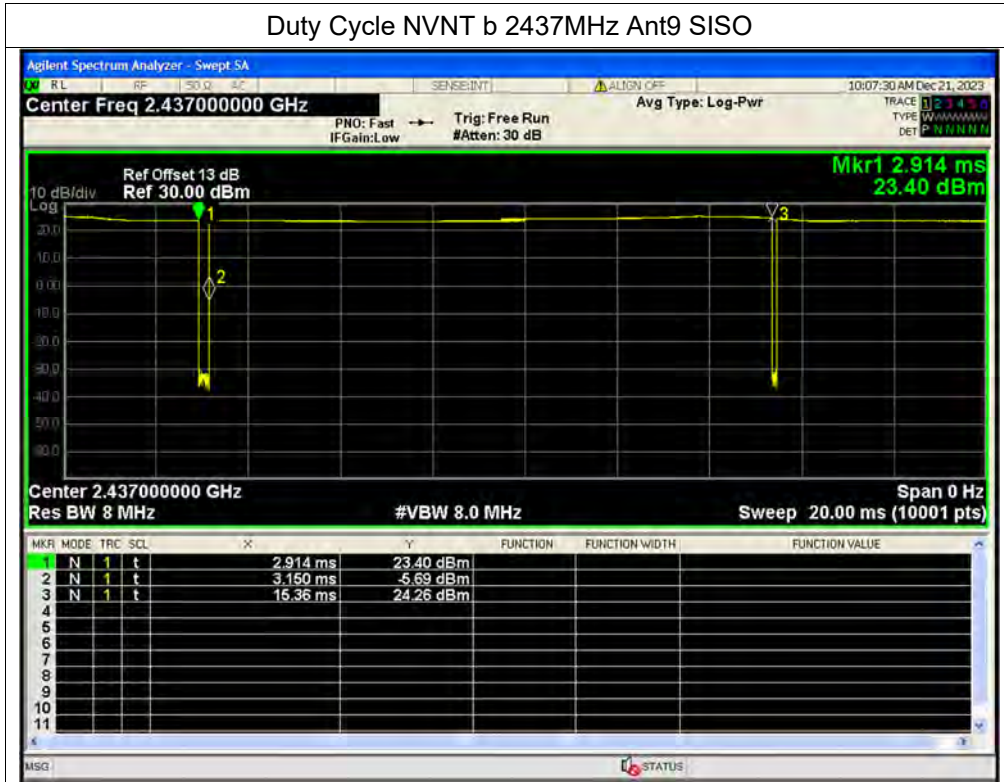


Duty Cycle NVNT b 2462MHz Ant9 SISO

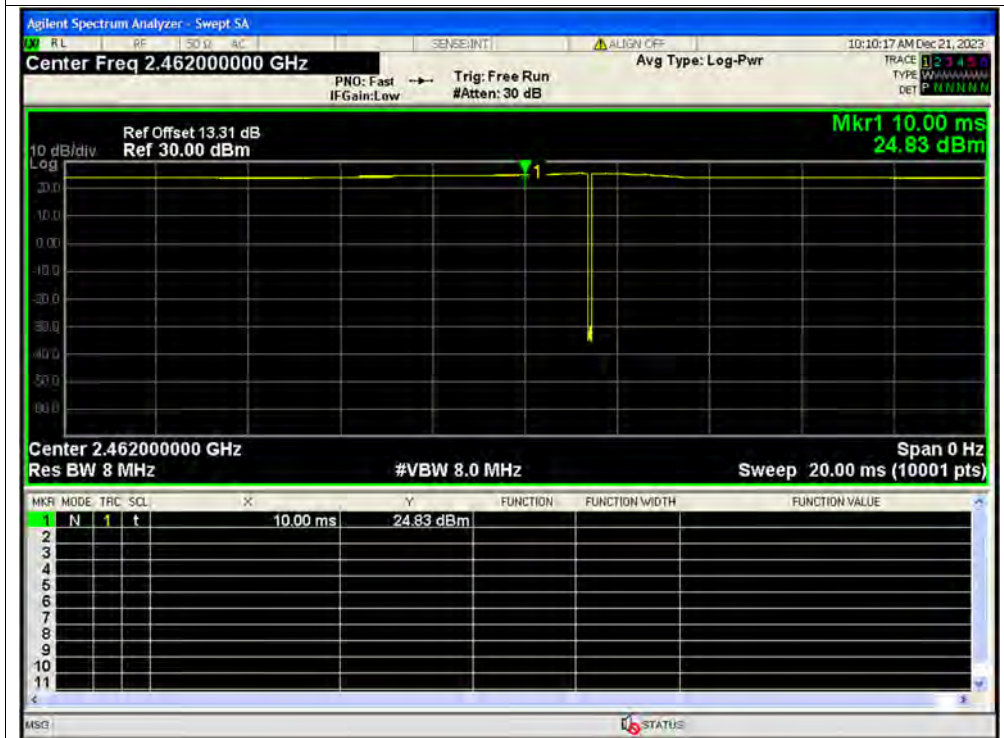




Duty Cycle NVNT g 2412MHz Ant8 SISO

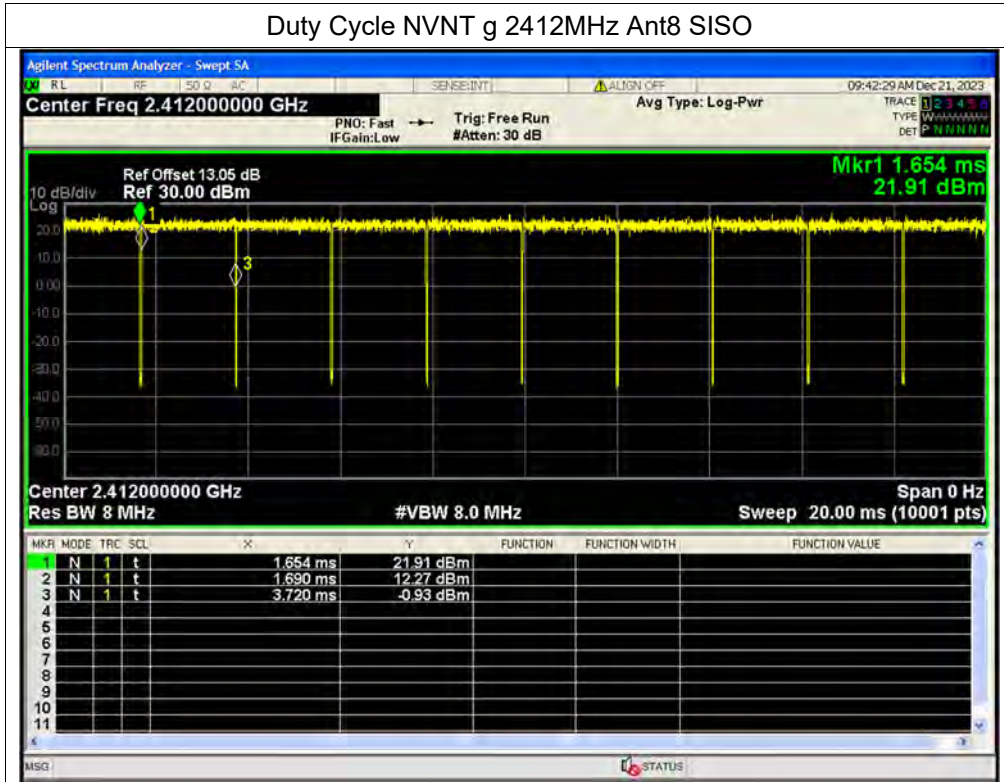


Duty Cycle NVNT g 2437MHz Ant8 SISO

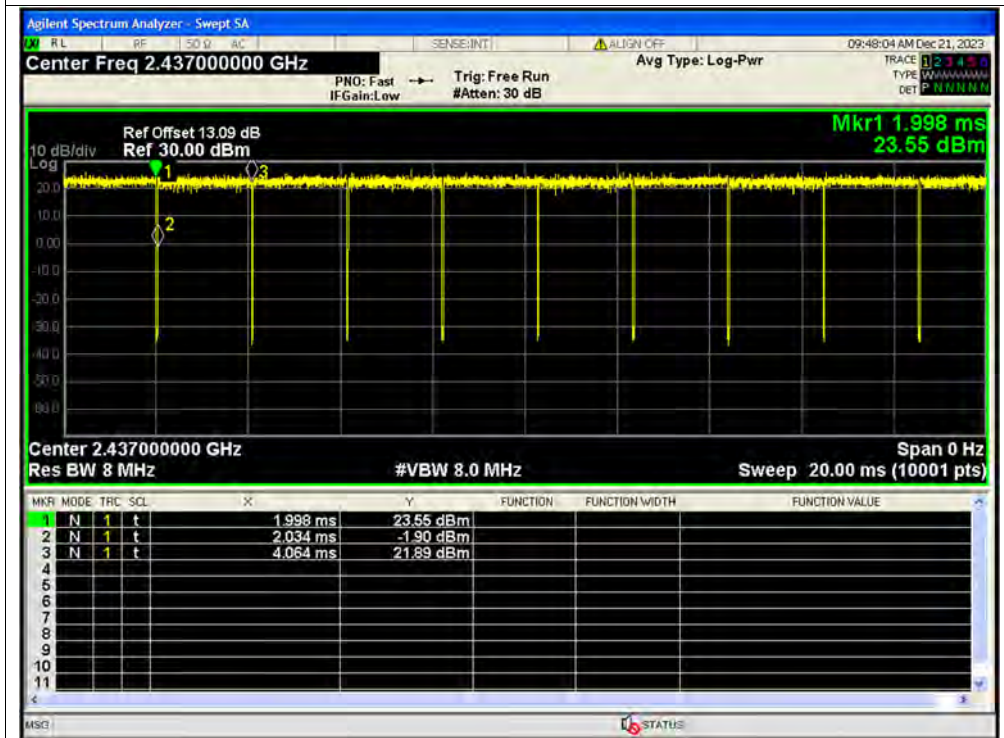




Duty Cycle NVNT g 2462MHz Ant8 SISO

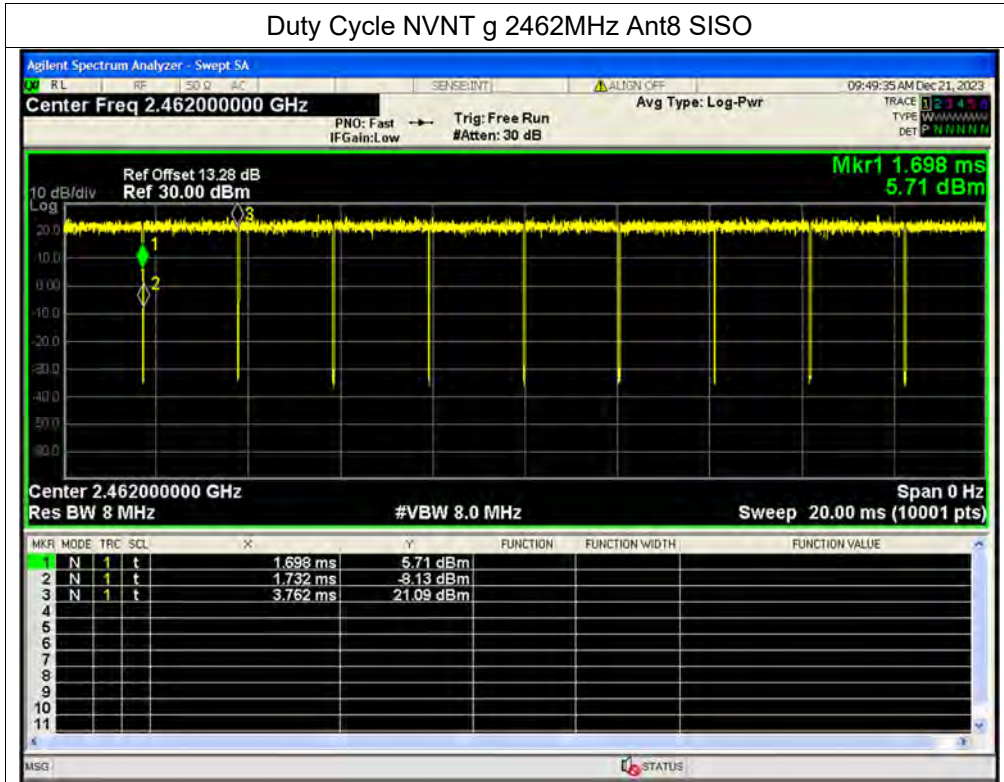


Duty Cycle NVNT g 2412MHz Ant9 SISO

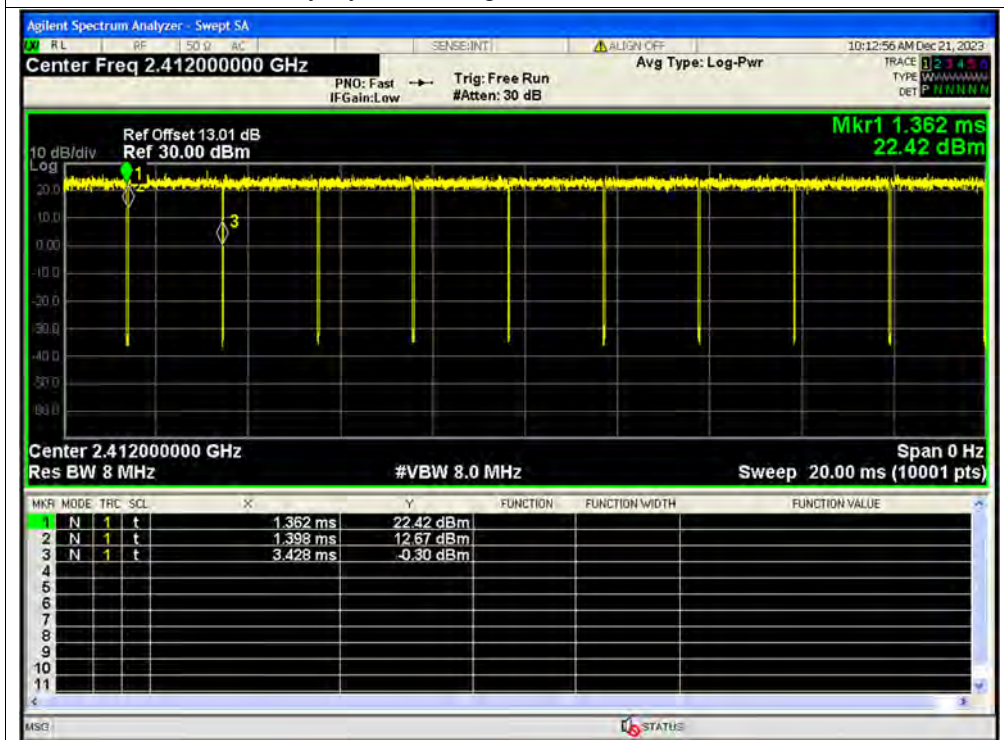




Duty Cycle NVNT g 2437MHz Ant9 SISO

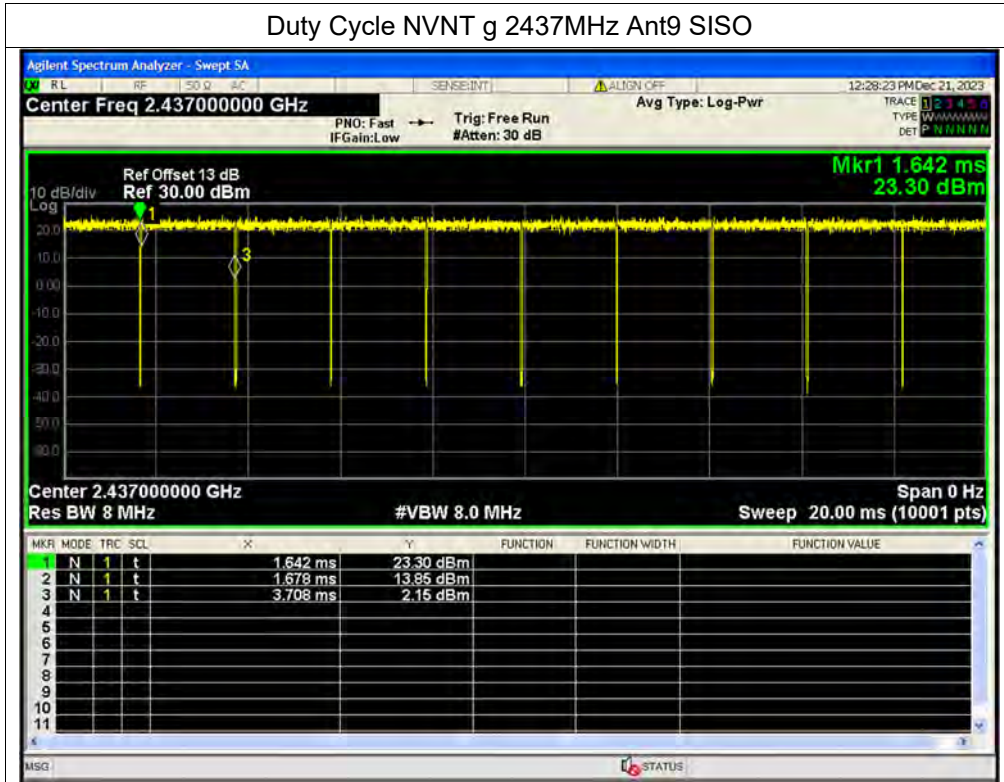


Duty Cycle NVNT g 2462MHz Ant9 SISO

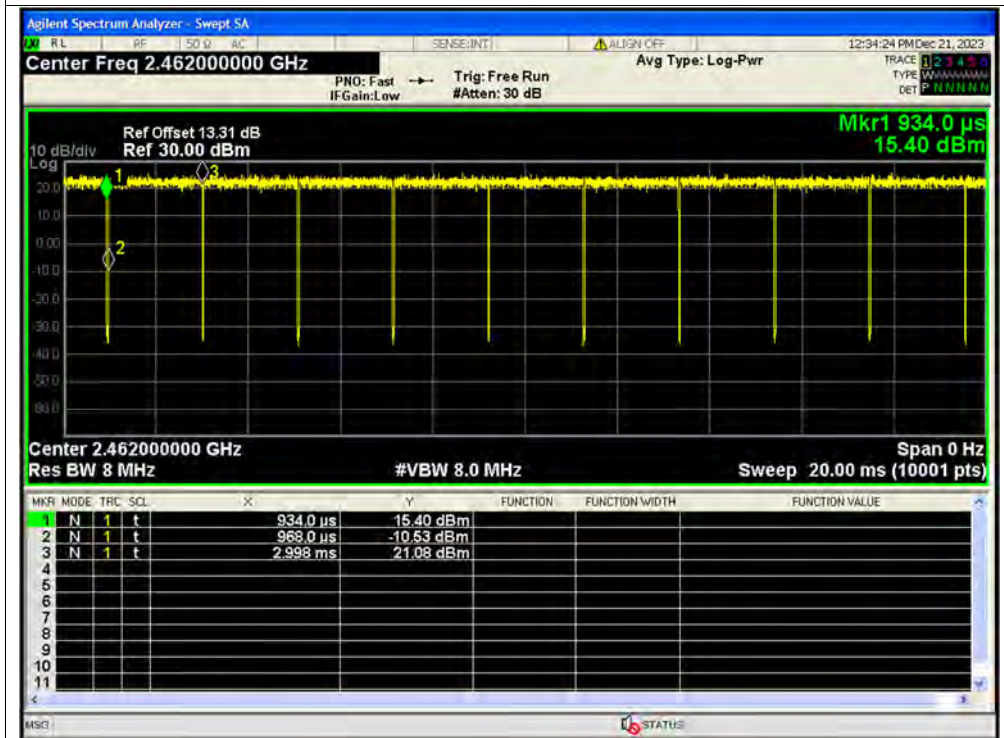




Duty Cycle NVNT n20 2412MHz Ant8 SISO

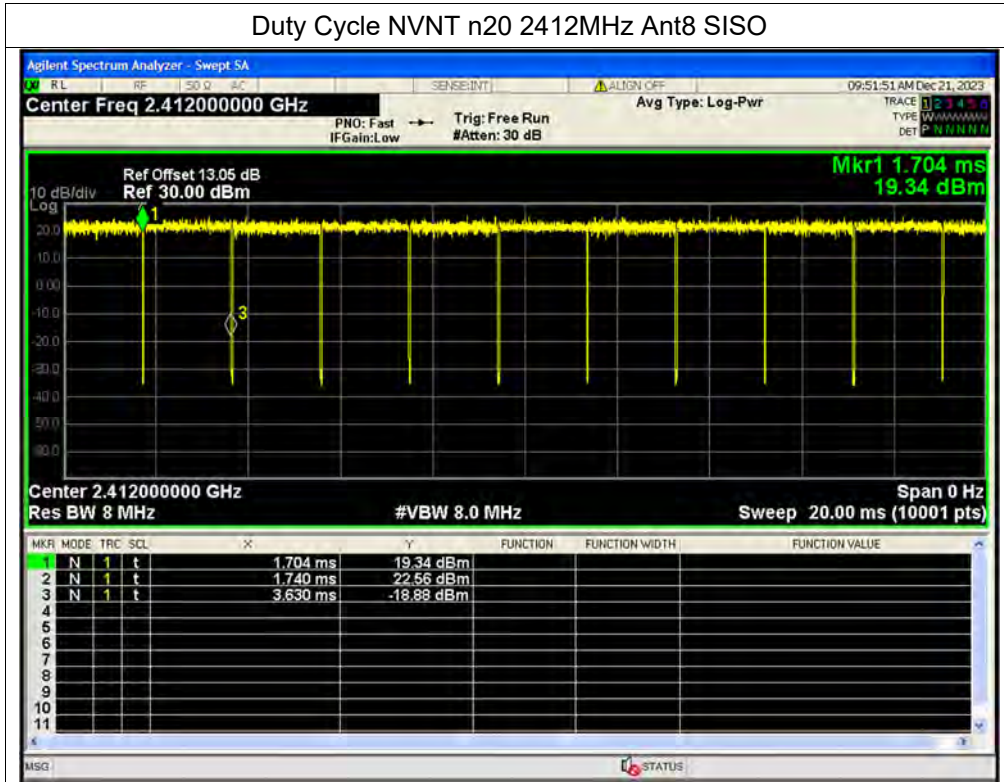


Duty Cycle NVNT n20 2437MHz Ant8 SISO

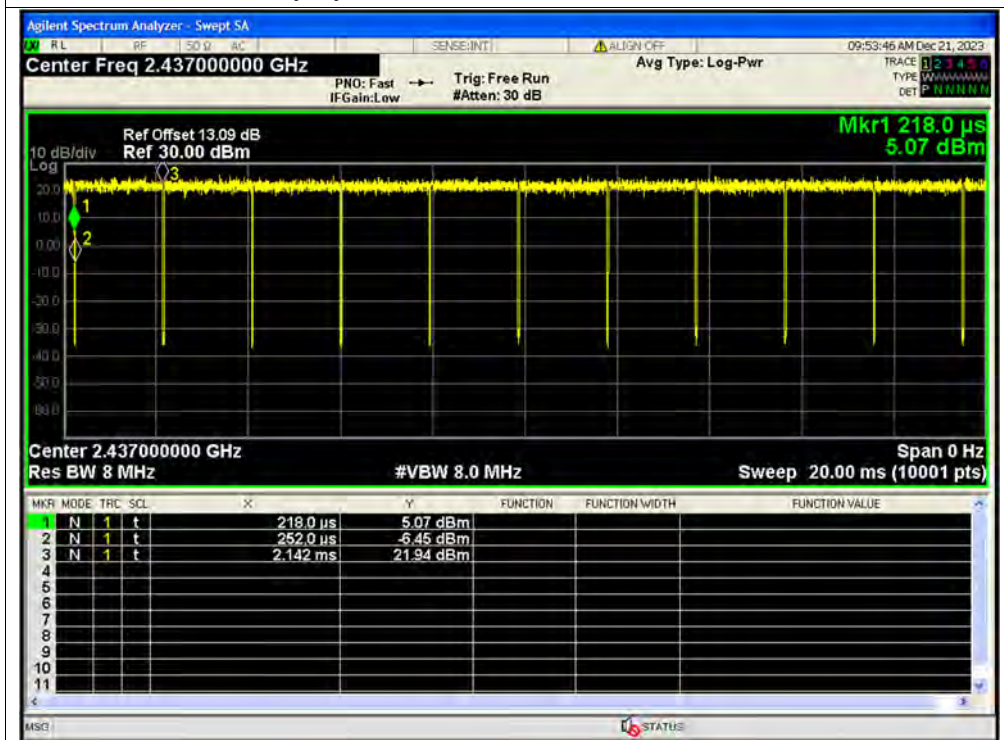




Duty Cycle NVNT n20 2462MHz Ant8 SISO

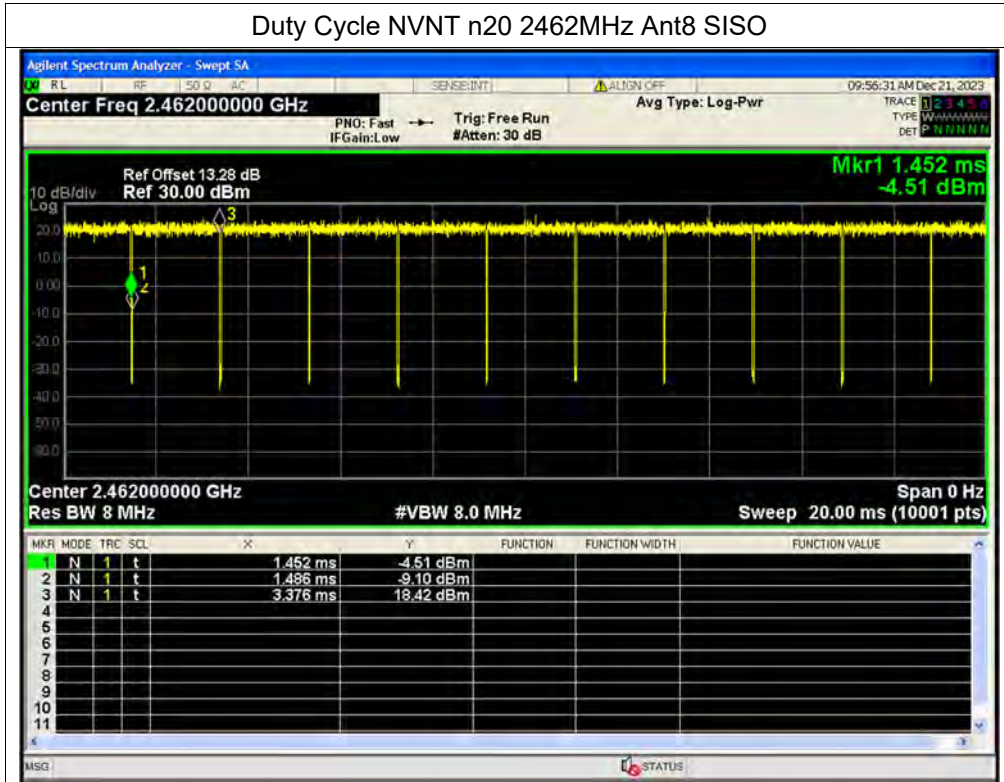


Duty Cycle NVNT n20 2412MHz Ant9 SISO

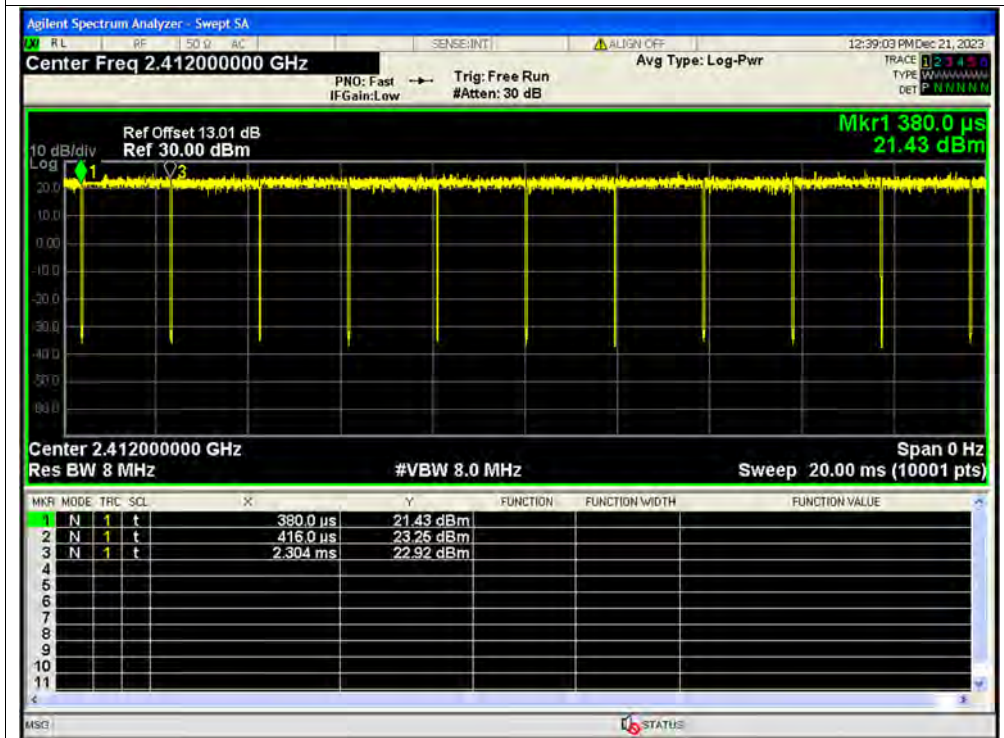




Duty Cycle NVNT n20 2437MHz Ant9 SISO

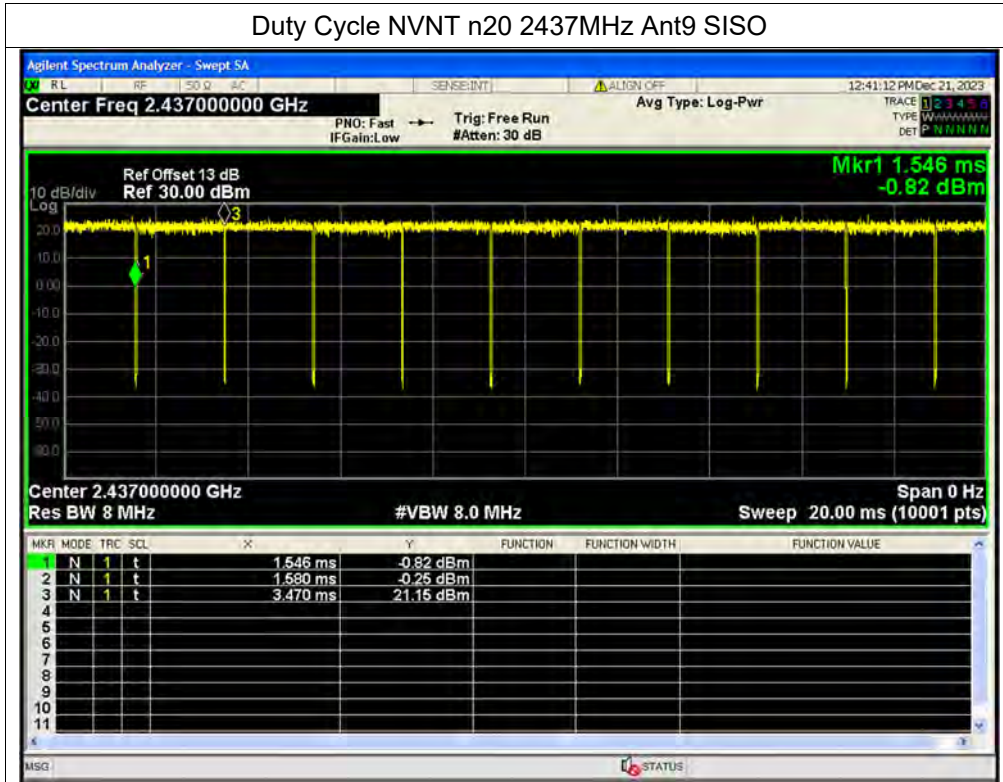


Duty Cycle NVNT n20 2462MHz Ant9 SISO

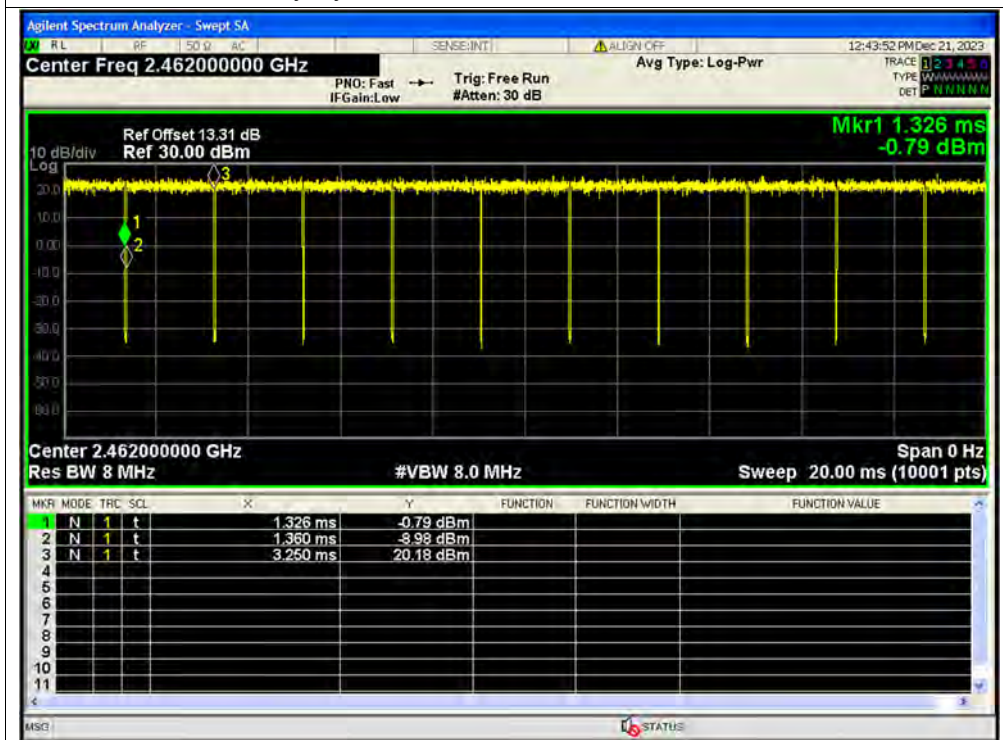




Duty Cycle NVNT n20 2412MHz Sum MIMO

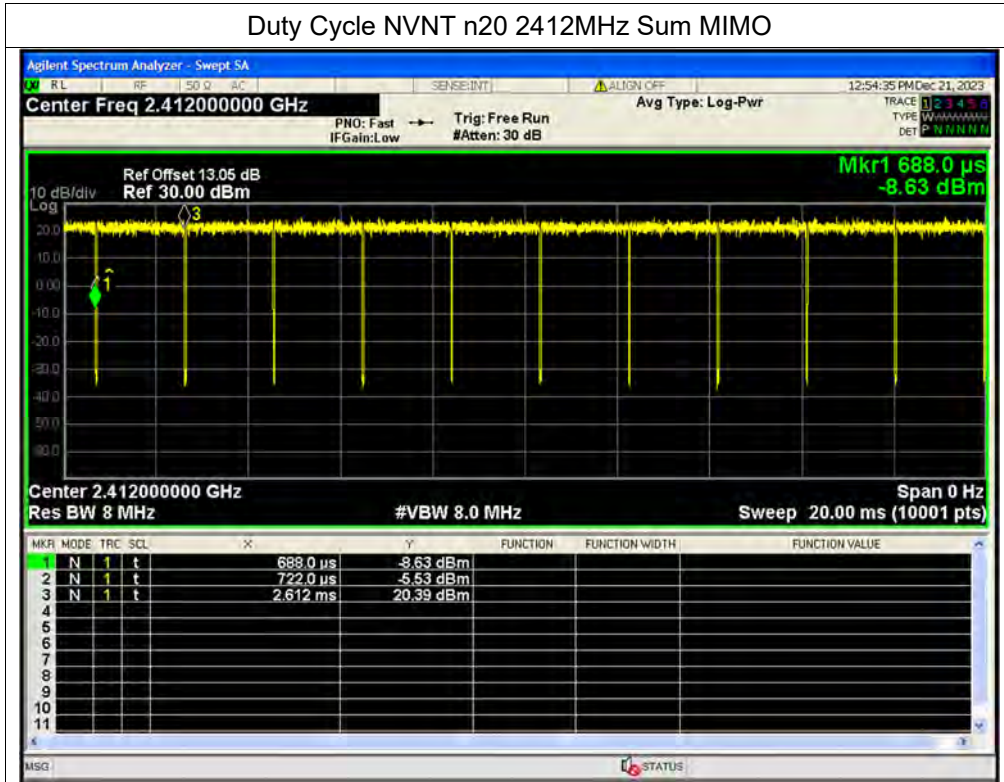


Duty Cycle NVNT n20 2437MHz Sum MIMO

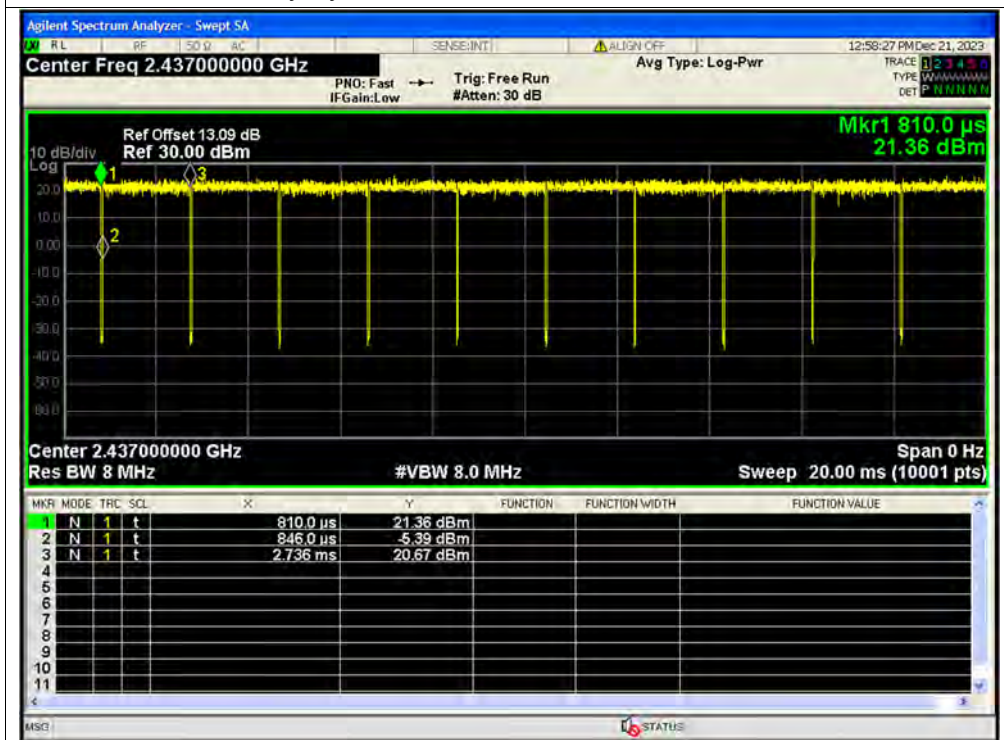




Duty Cycle NVNT n20 2462MHz Sum MIMO

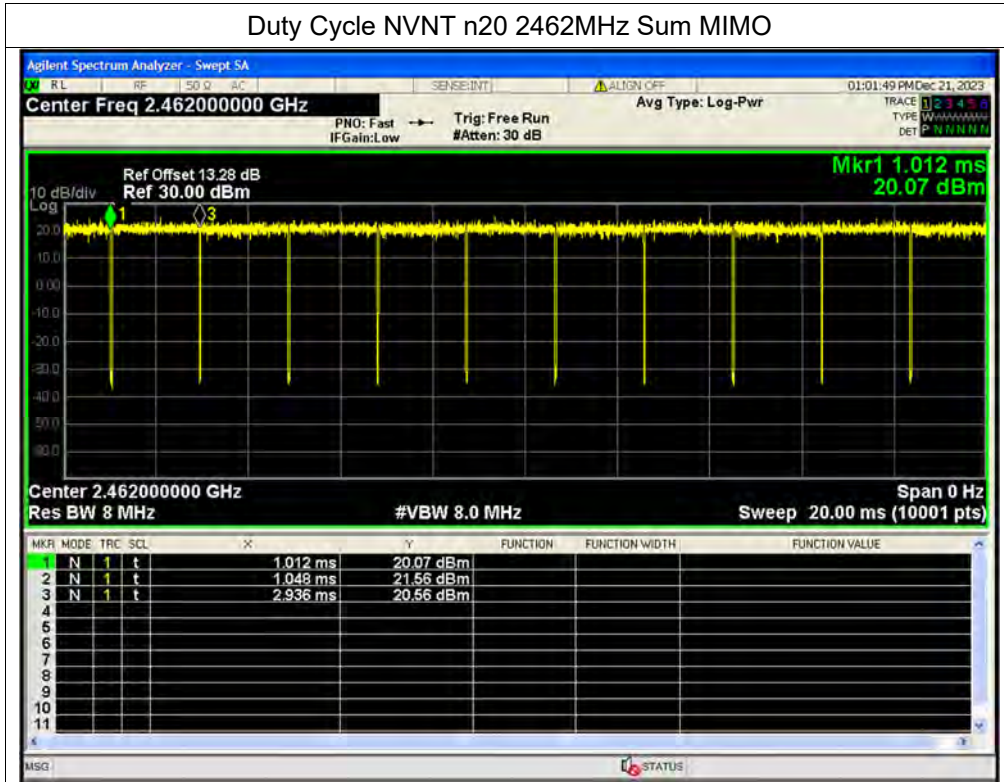


Duty Cycle NVNT n40 2422MHz Ant8 SISO

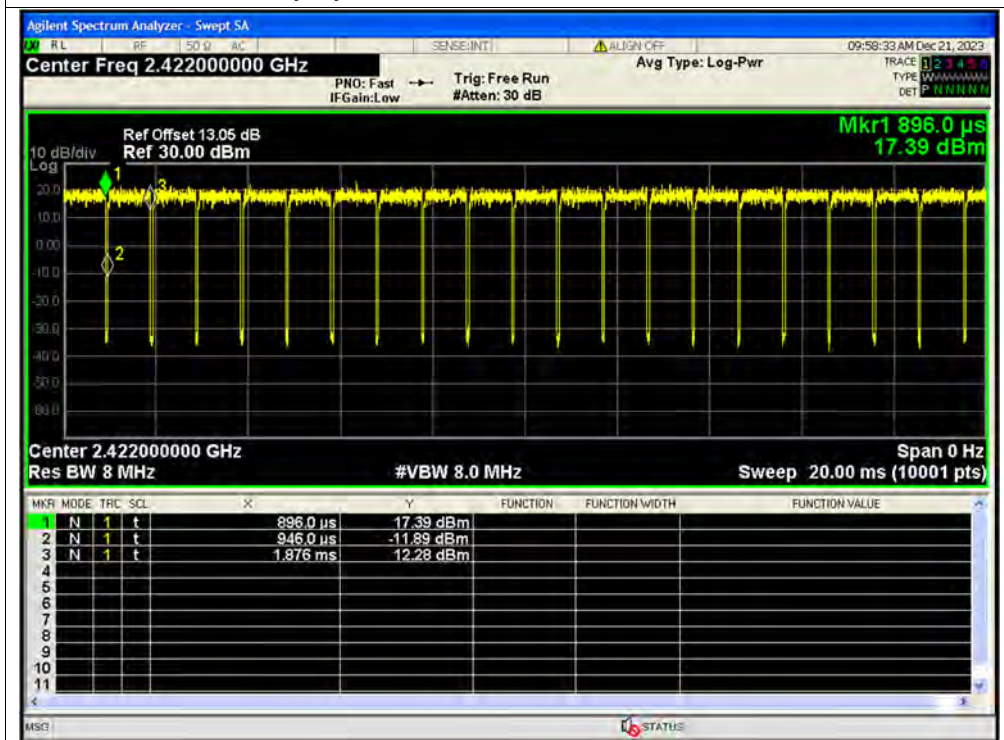




Duty Cycle NVNT n40 2437MHz Ant8 SISO

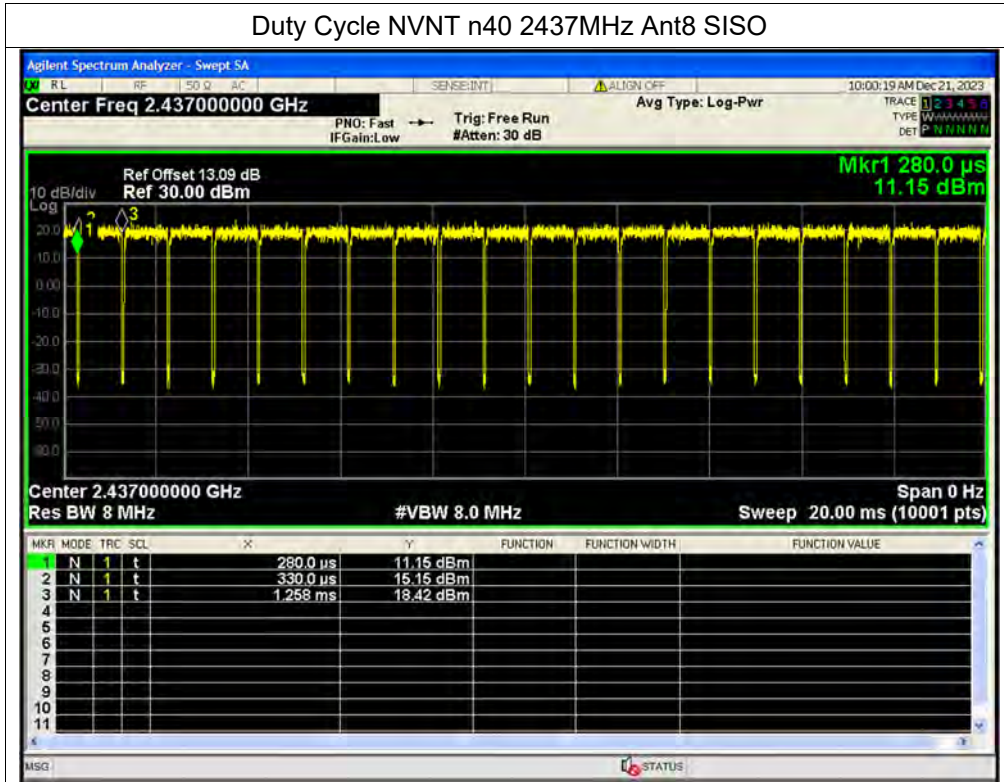


Duty Cycle NVNT n40 2452MHz Ant8 SISO

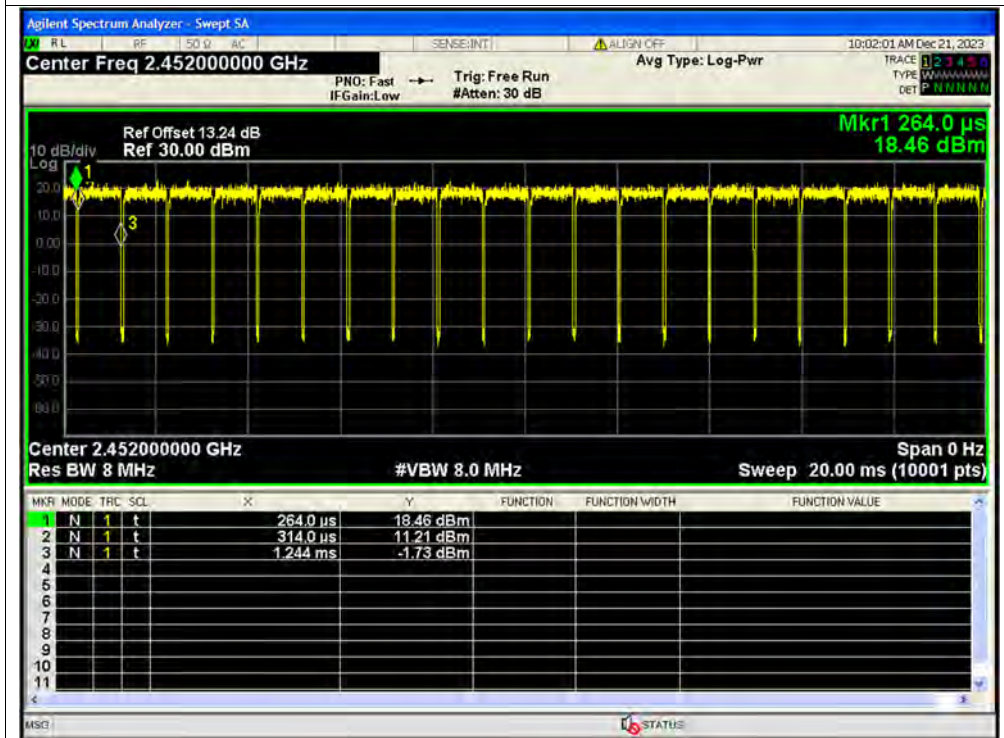




Duty Cycle NVNT n40 2422MHz Ant9 SISO

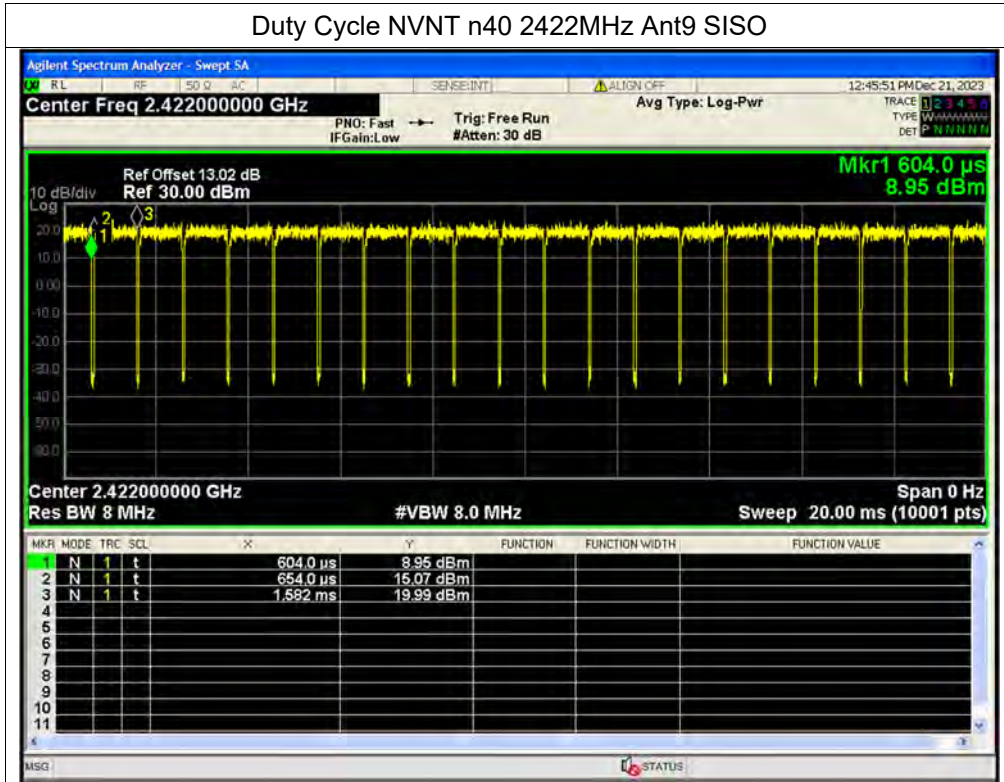


Duty Cycle NVNT n40 2437MHz Ant9 SISO

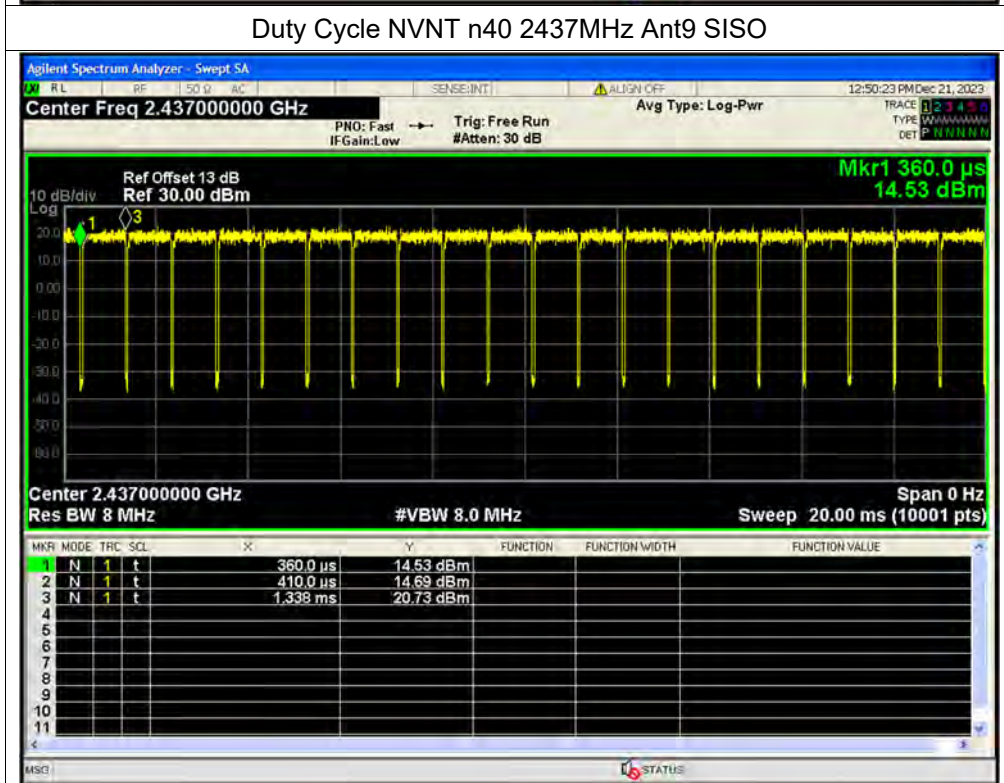




Duty Cycle NVNT n40 2452MHz Ant9 SISO

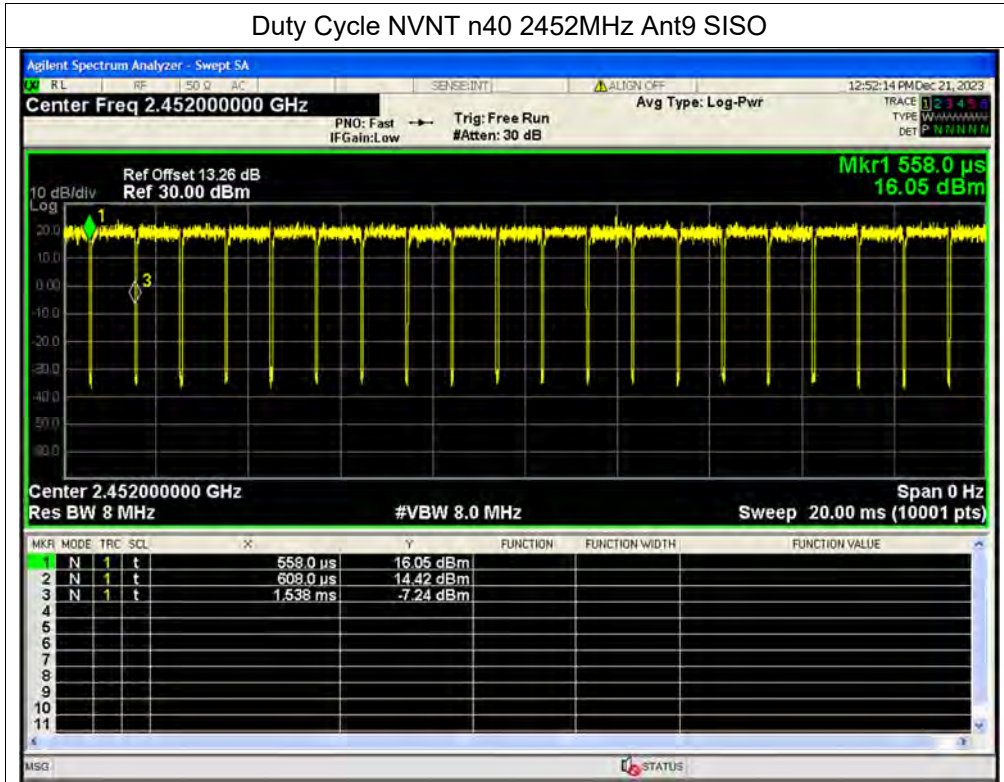


Duty Cycle NVNT n40 2422MHz Sum MIMO

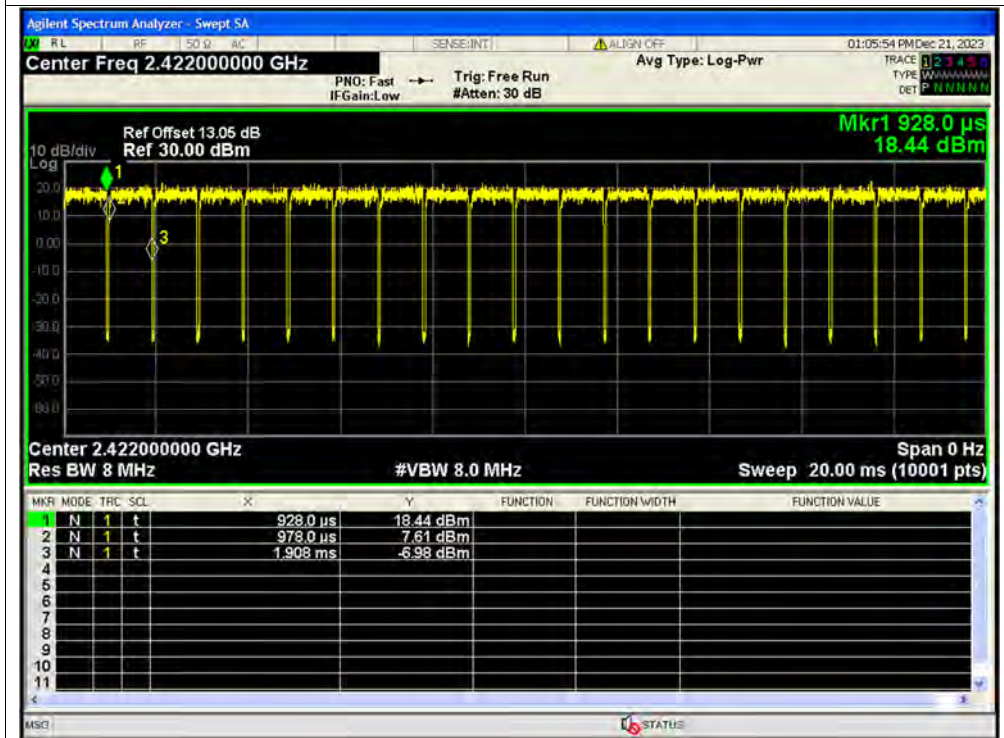




Duty Cycle NVNT n40 2437MHz Sum MIMO

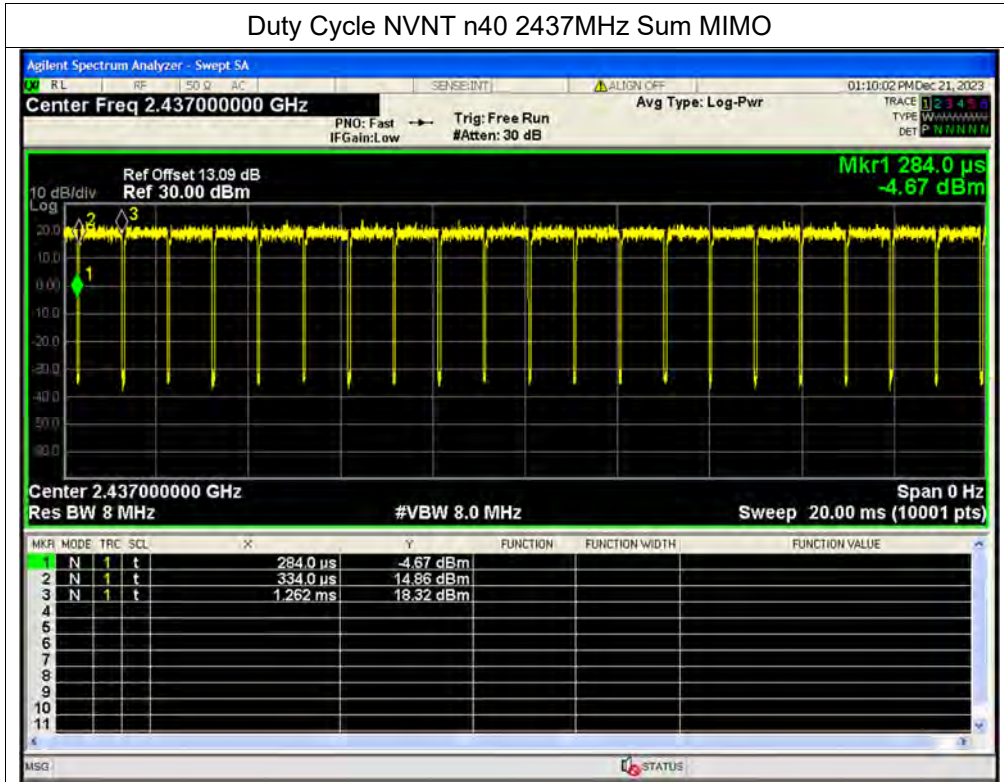

Duty Cycle NVNT n40 2452MHz Sum MIMO

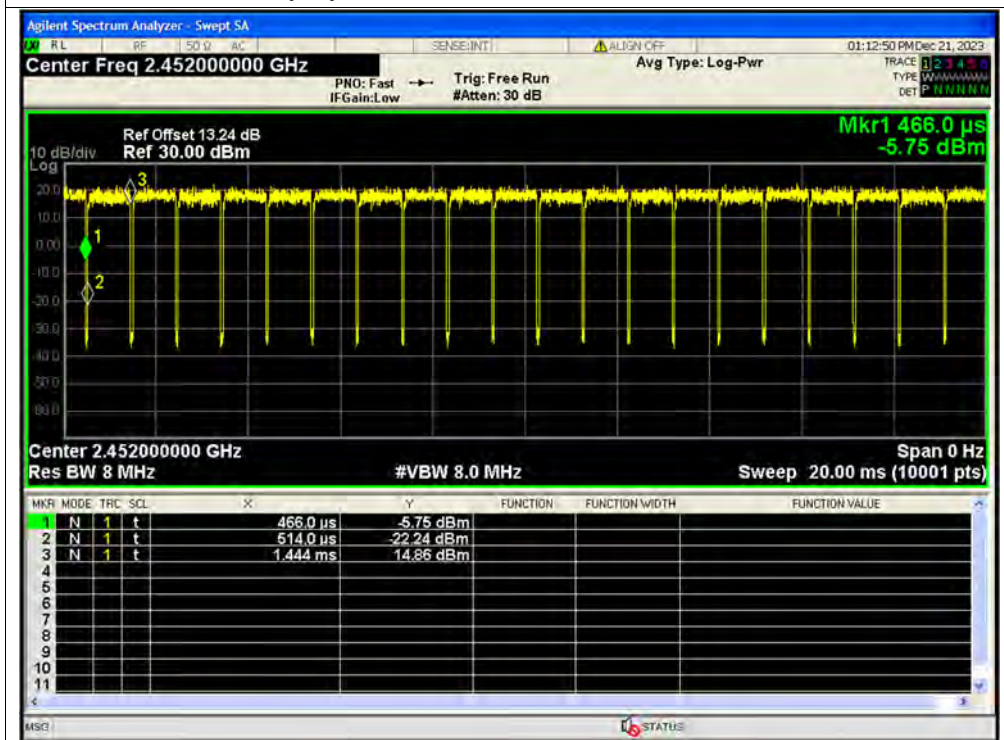



A.2. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b SISO	2412	Ant8	23.58	0	23.58	0.22803	30	Pass
NVNT	b SISO	2437	Ant8	23.66	0	23.66	0.23227	30	Pass
NVNT	b SISO	2462	Ant8	22.47	0	22.47	0.1766	30	Pass
NVNT	b SISO	2412	Ant9	23.69	0	23.69	0.23388	30	Pass
NVNT	b SISO	2437	Ant9	22.91	0	22.91	0.19543	30	Pass
NVNT	b SISO	2462	Ant9	23.23	0	23.23	0.21038	30	Pass
NVNT	g SISO	2412	Ant8	25.81	0	25.81	0.38107	30	Pass
NVNT	g SISO	2437	Ant8	26.89	0	26.89	0.48865	30	Pass
NVNT	g SISO	2462	Ant8	26.56	0	26.56	0.4529	30	Pass
NVNT	g SISO	2412	Ant9	27.29	0	27.29	0.5358	30	Pass
NVNT	g SISO	2437	Ant9	27.26	0	27.26	0.53211	30	Pass
NVNT	g SISO	2462	Ant9	27.3	0	27.3	0.53703	30	Pass
NVNT	n20 SISO	2412	Ant8	25.96	0	25.96	0.39446	30	Pass
NVNT	n20 SISO	2437	Ant8	25.94	0	25.94	0.39264	30	Pass
NVNT	n20 SISO	2462	Ant8	25.91	0	25.91	0.38994	30	Pass
NVNT	n20 SISO	2412	Ant9	26.98	0	26.98	0.49888	30	Pass
NVNT	n20 SISO	2437	Ant9	26.89	0	26.89	0.48865	30	Pass
NVNT	n20 SISO	2462	Ant9	26.54	0	26.54	0.45082	30	Pass
NVNT	n20 MIMO	2412	Ant8	26.16	0	26.16	0.41305	30	Pass
NVNT	n20 MIMO	2412	Ant9	26.94	0	26.94	0.49431	30	Pass
NVNT	n20 MIMO	2412	Sum	NaN	NaN	29.58	0.90736	30	Pass
NVNT	n20 MIMO	2437	Ant8	26.52	0	26.52	0.44875	30	Pass
NVNT	n20	2437	Ant9	26.6	0	26.6	0.45709	30	Pass




	MIMO								
NVNT	n20 MIMO	2437	Sum	NaN	NaN	29.57	0.90583	30	Pass
NVNT	n20 MIMO	2462	Ant8	26.1	0	26.1	0.40738	30	Pass
NVNT	n20 MIMO	2462	Ant9	26.64	0	26.64	0.46132	30	Pass
NVNT	n20 MIMO	2462	Sum	NaN	NaN	29.39	0.8687	30	Pass
NVNT	n40 SISO	2422	Ant8	26.95	0	26.95	0.49545	30	Pass
NVNT	n40 SISO	2437	Ant8	26.65	0	26.65	0.46238	30	Pass
NVNT	n40 SISO	2452	Ant8	26.52	0	26.52	0.44875	30	Pass
NVNT	n40 SISO	2422	Ant9	27.3	0	27.3	0.53703	30	Pass
NVNT	n40 SISO	2437	Ant9	26.97	0	26.97	0.49774	30	Pass
NVNT	n40 SISO	2452	Ant9	26.97	0	26.97	0.49774	30	Pass
NVNT	n40 MIMO	2422	Ant8	26.83	0	26.83	0.48195	30	Pass
NVNT	n40 MIMO	2422	Ant9	27.09	0	27.09	0.51168	30	Pass
NVNT	n40 MIMO	2422	Sum	NaN	NaN	29.97	0.99363	30	Pass
NVNT	n40 MIMO	2437	Ant8	26.51	0	26.51	0.44771	30	Pass
NVNT	n40 MIMO	2437	Ant9	26.75	0	26.75	0.47315	30	Pass
NVNT	n40 MIMO	2437	Sum	NaN	NaN	29.64	0.92086	30	Pass
NVNT	n40 MIMO	2452	Ant8	26.33	0	26.33	0.42954	30	Pass
NVNT	n40 MIMO	2452	Ant9	26.73	0	26.73	0.47098	30	Pass
NVNT	n40 MIMO	2452	Sum	NaN	NaN	29.54	0.90051	30	Pass




Test Graphs

Peak Power NVNT b 2412MHz Ant8 SISO

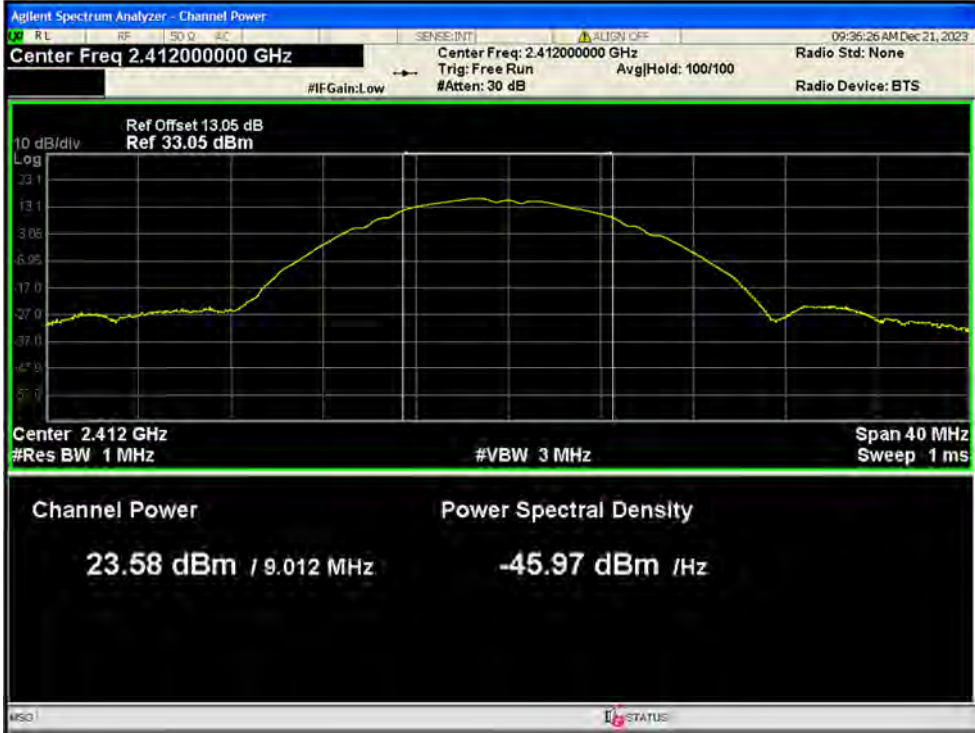

Peak Power NVNT b 2437MHz Ant8 SISO

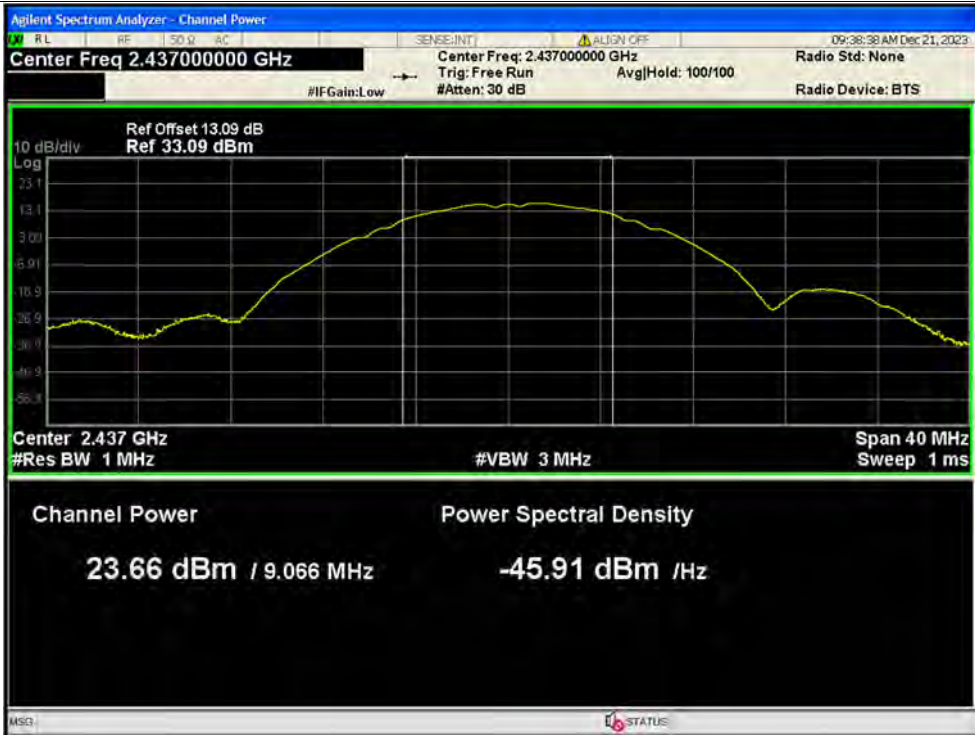




Peak Power NVNT b 2462MHz Ant8 SISO



Peak Power NVNT b 2412MHz Ant9 SISO

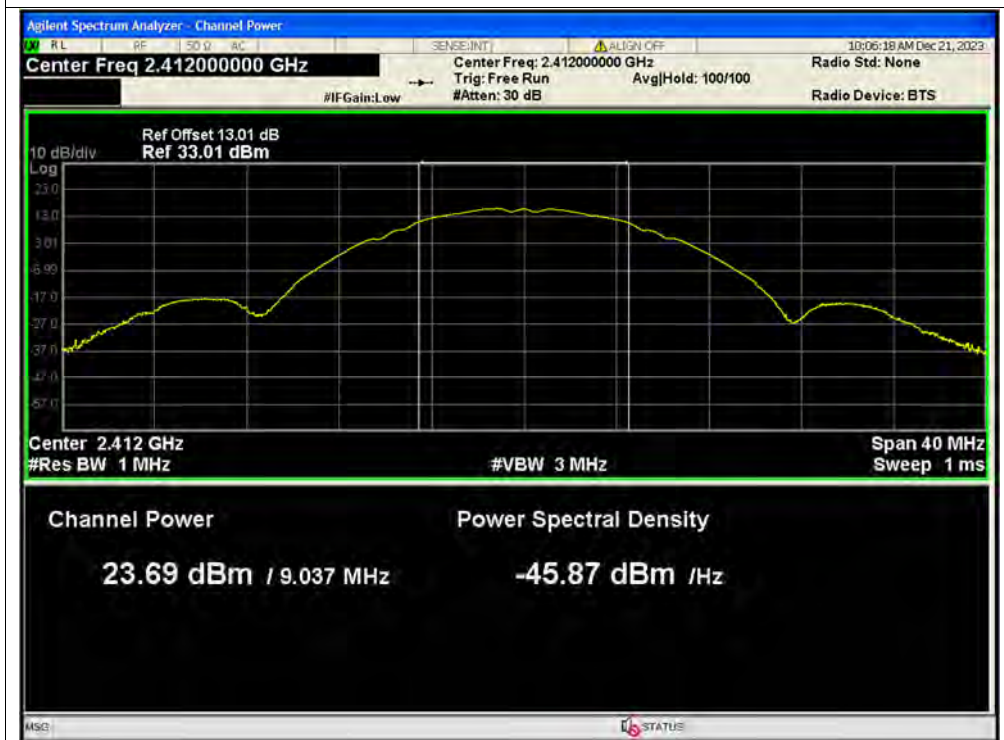




Peak Power NVNT b 2437MHz Ant9 SISO



Peak Power NVNT b 2462MHz Ant9 SISO

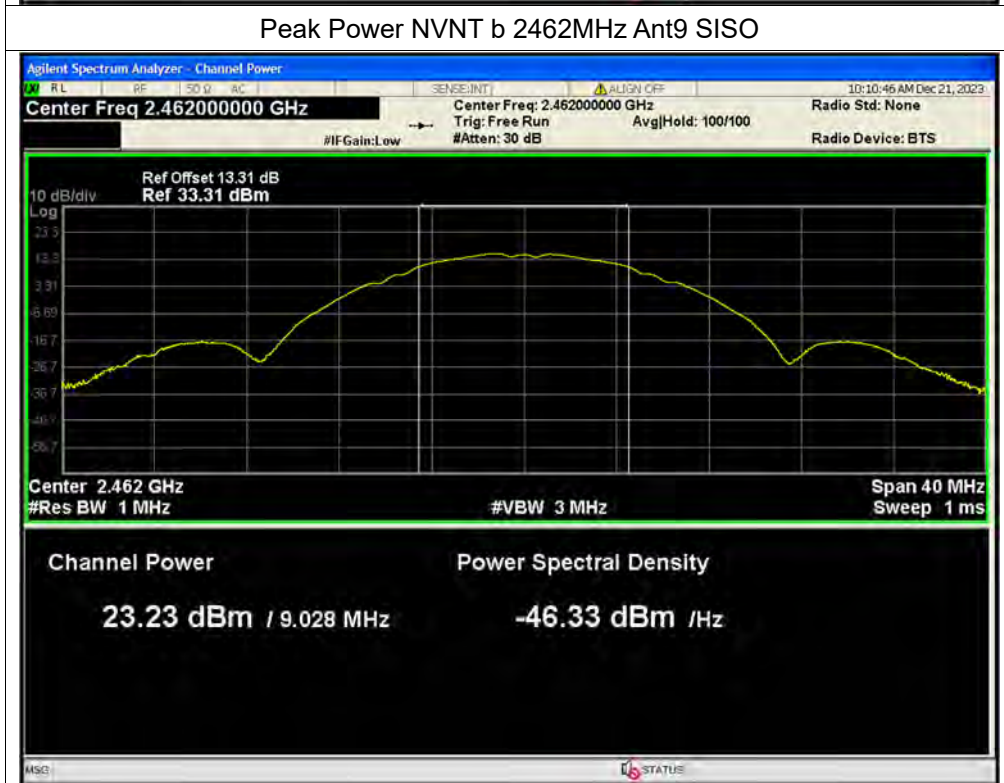



Peak Power NVNT g 2412MHz Ant8 SISO



Peak Power NVNT g 2437MHz Ant8 SISO






Peak Power NVNT g 2462MHz Ant8 SISO



Peak Power NVNT g 2412MHz Ant9 SISO

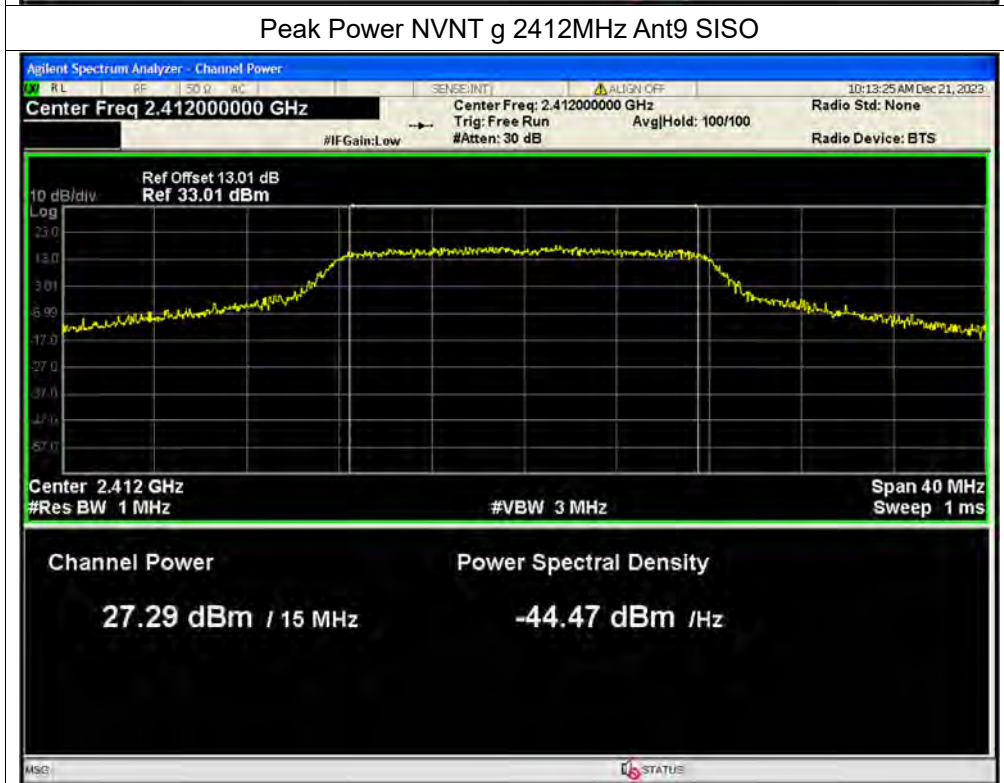




Peak Power NVNT g 2437MHz Ant9 SISO




Peak Power NVNT g 2462MHz Ant9 SISO

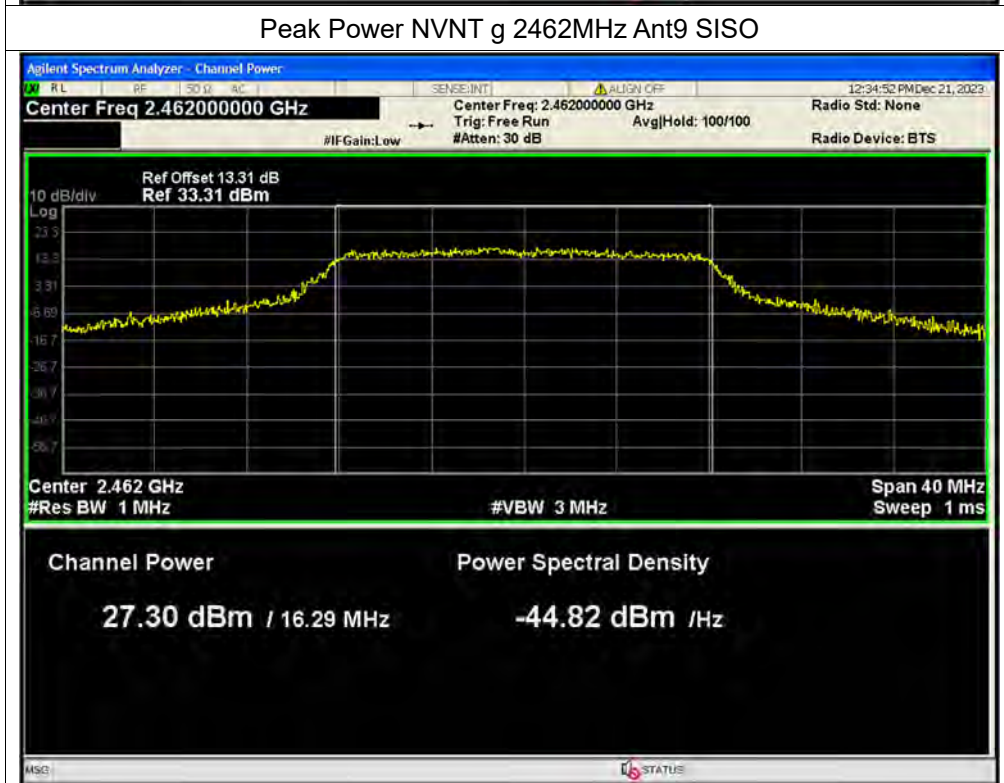




Peak Power NVNT n20 2412MHz Ant8 SISO

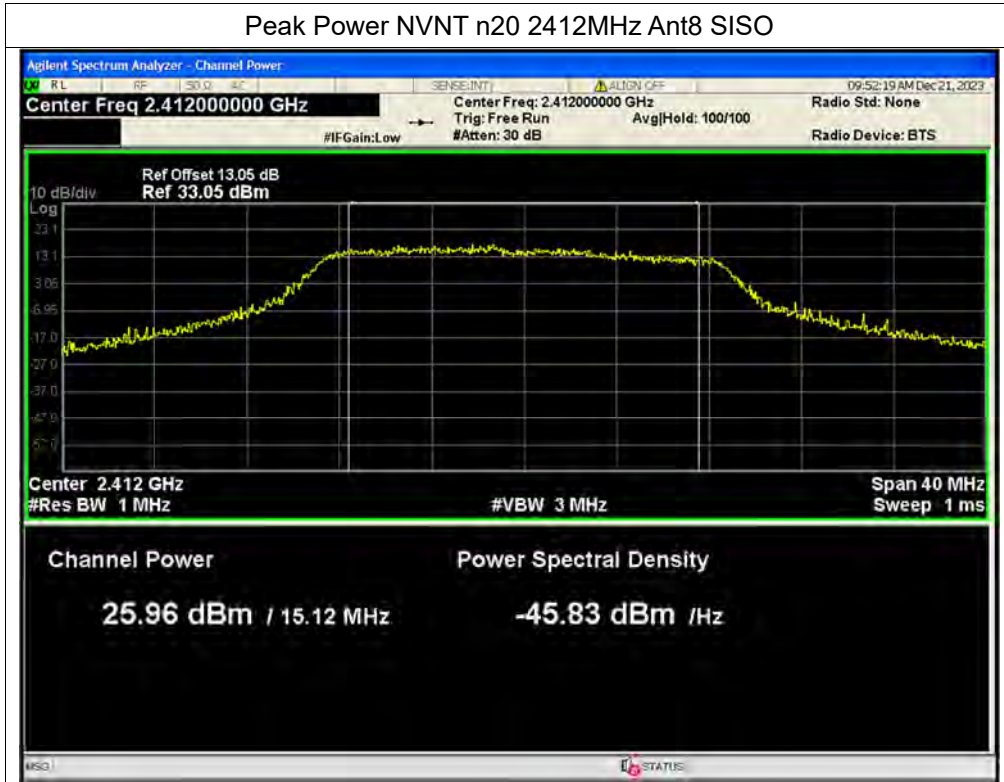


Peak Power NVNT n20 2437MHz Ant8 SISO

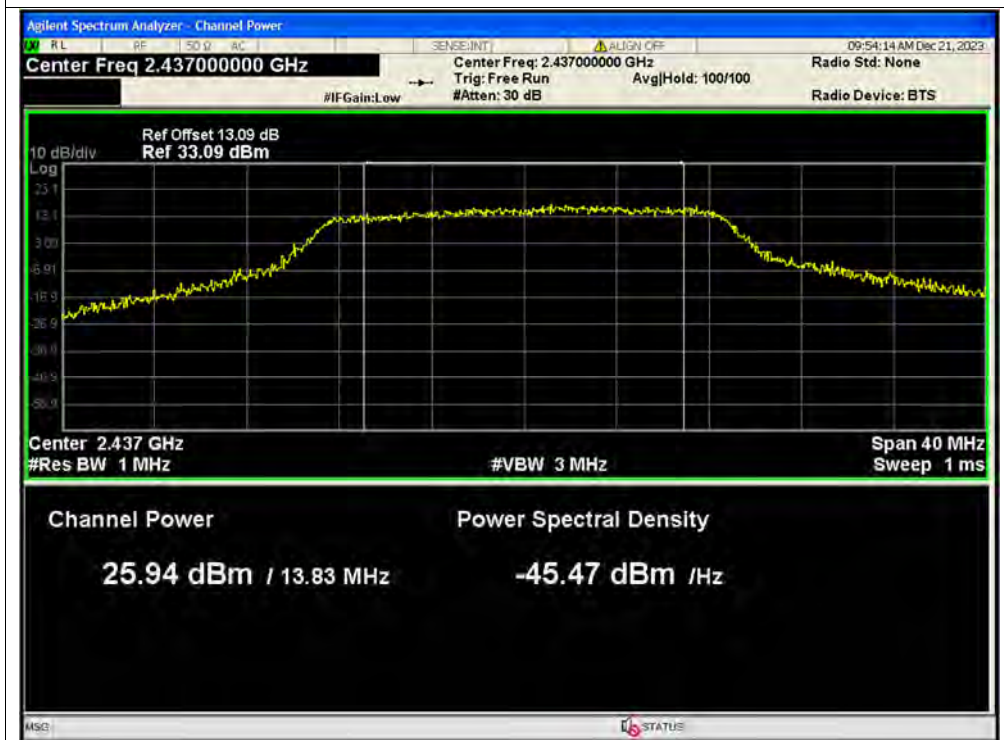




Peak Power NVNT n20 2462MHz Ant8 SISO

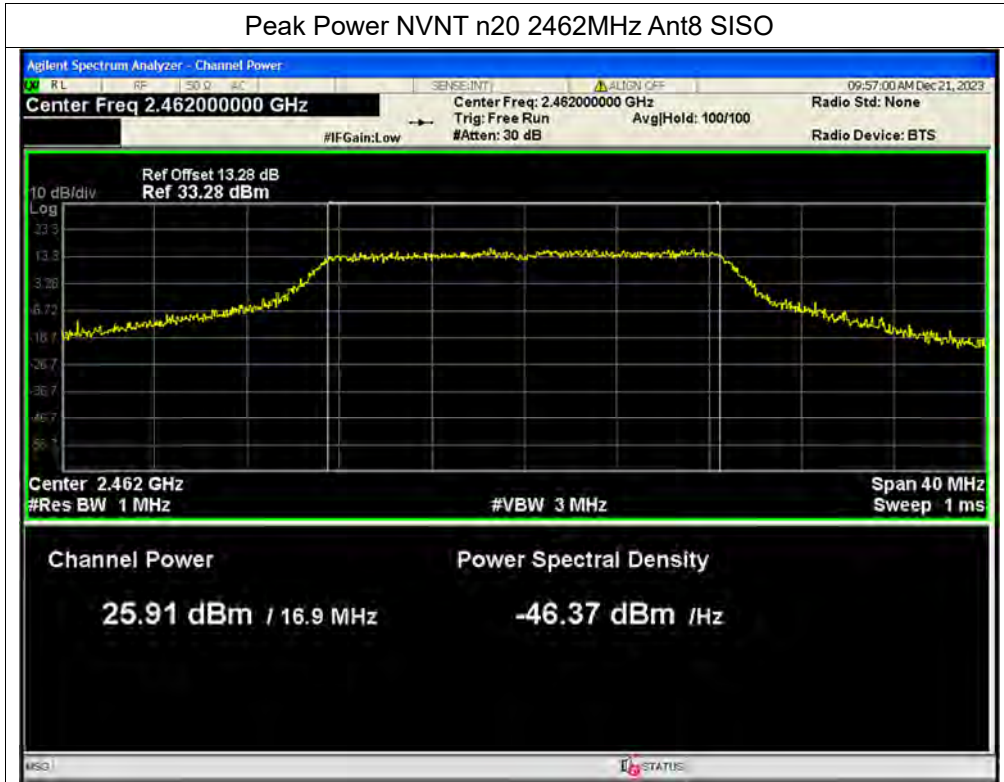


Peak Power NVNT n20 2412MHz Ant9 SISO

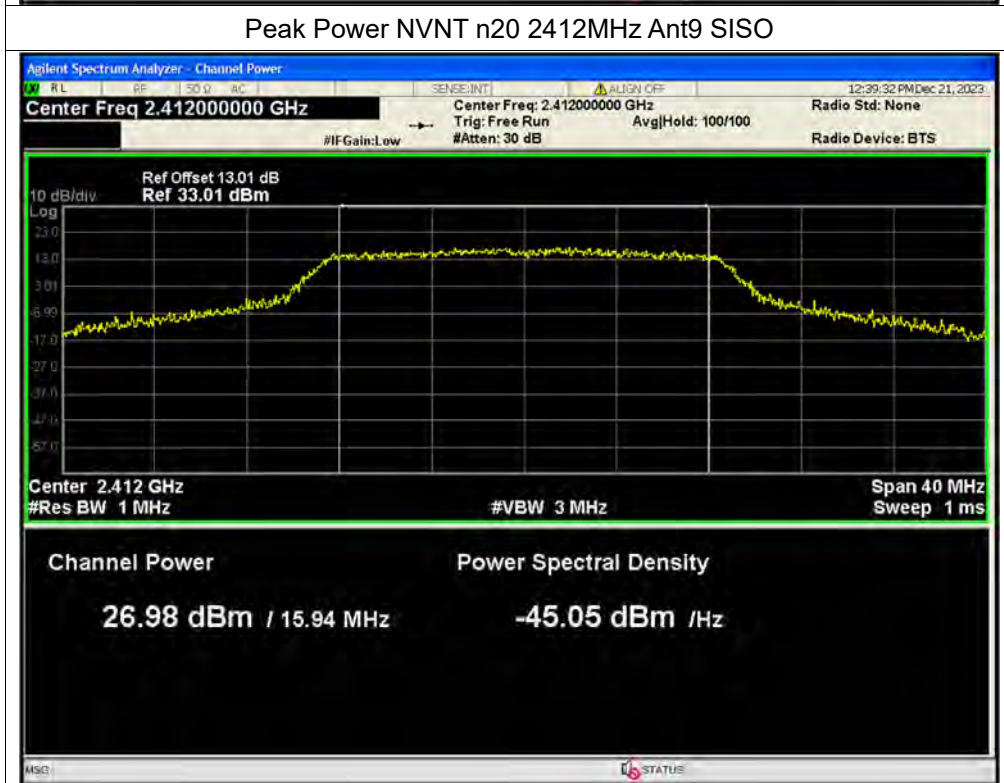




Peak Power NVNT n20 2437MHz Ant9 SISO

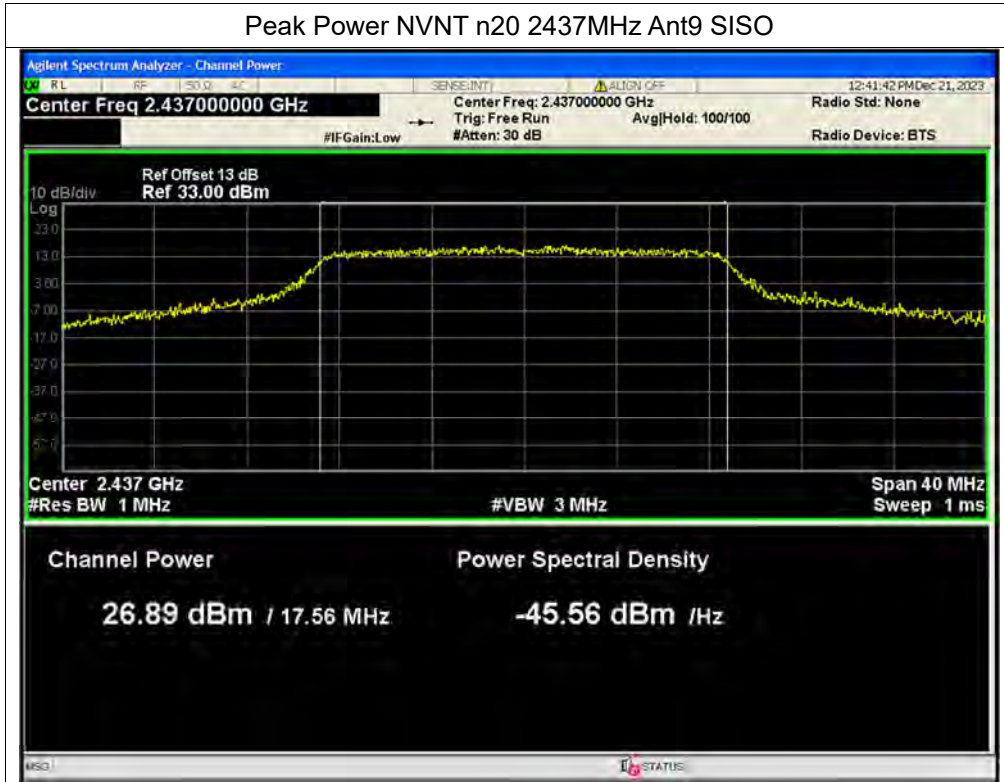


Peak Power NVNT n20 2462MHz Ant9 SISO

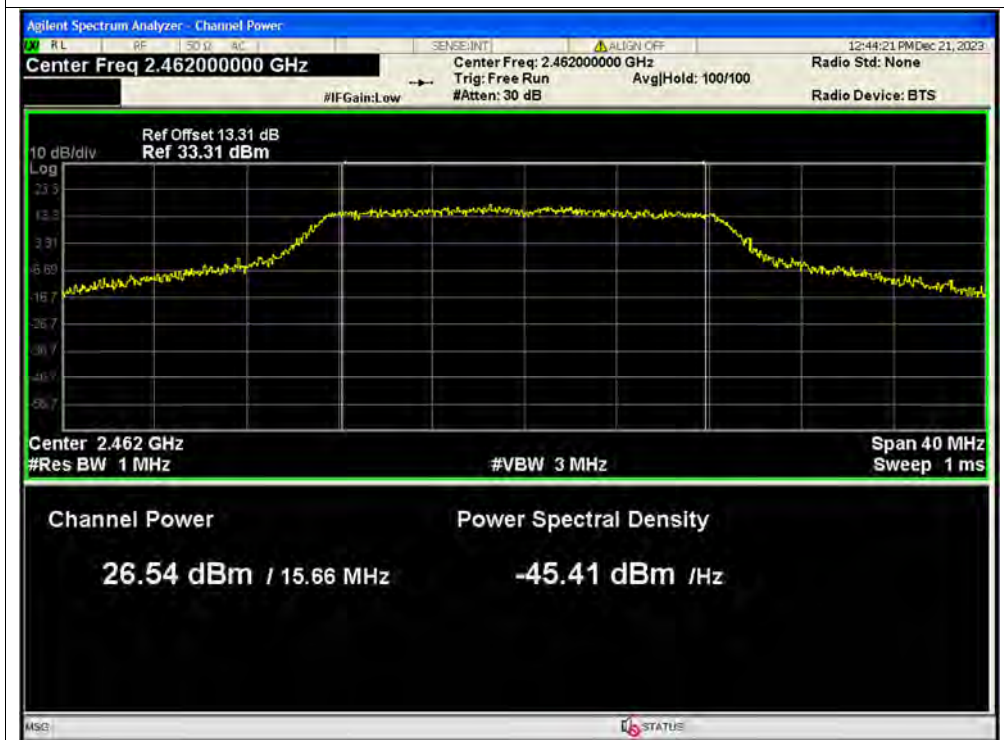




Peak Power NVNT n20 2412MHz Ant8 MIMO

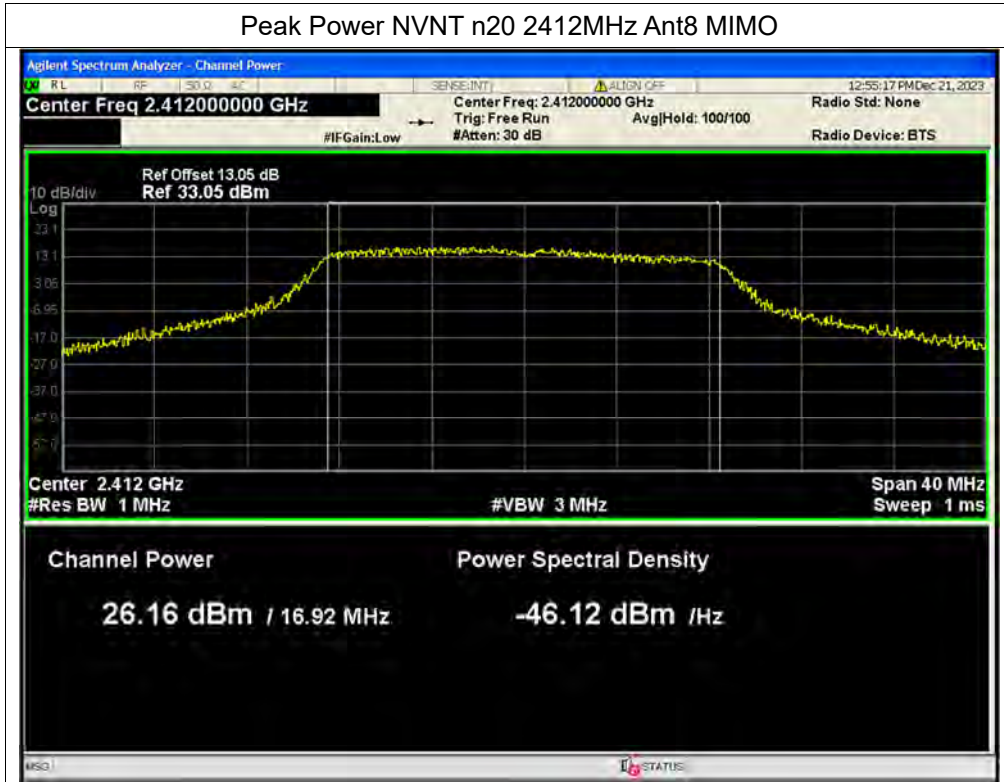


Peak Power NVNT n20 2412MHz Ant9 MIMO

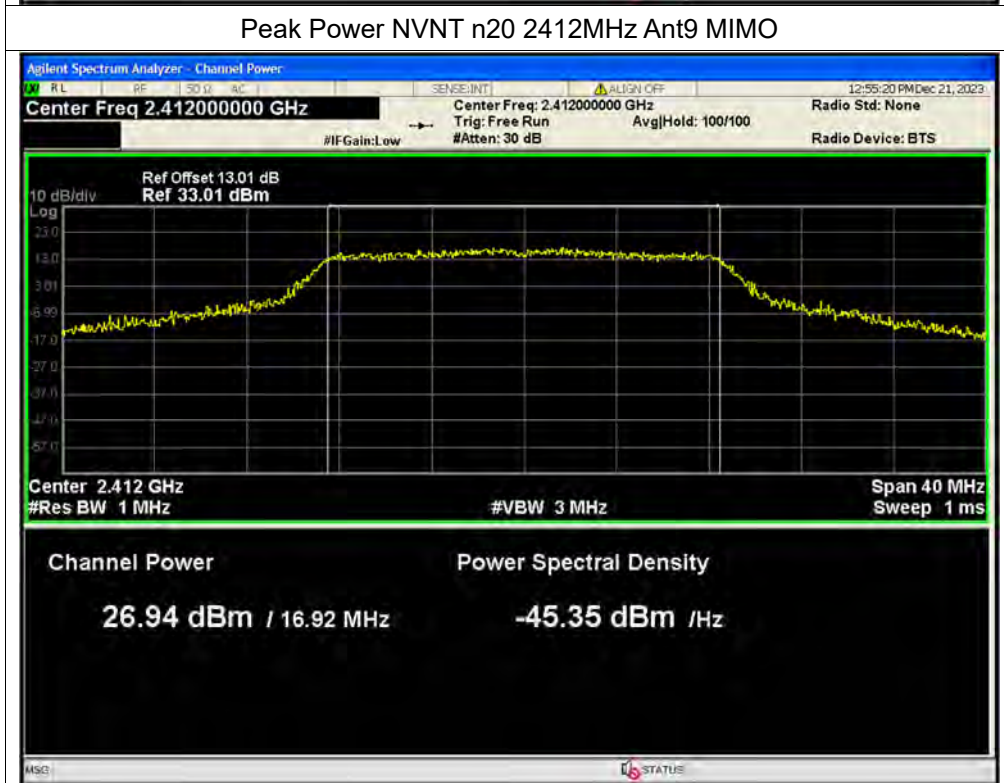




Peak Power NVNT n20 2437MHz Ant8 MIMO

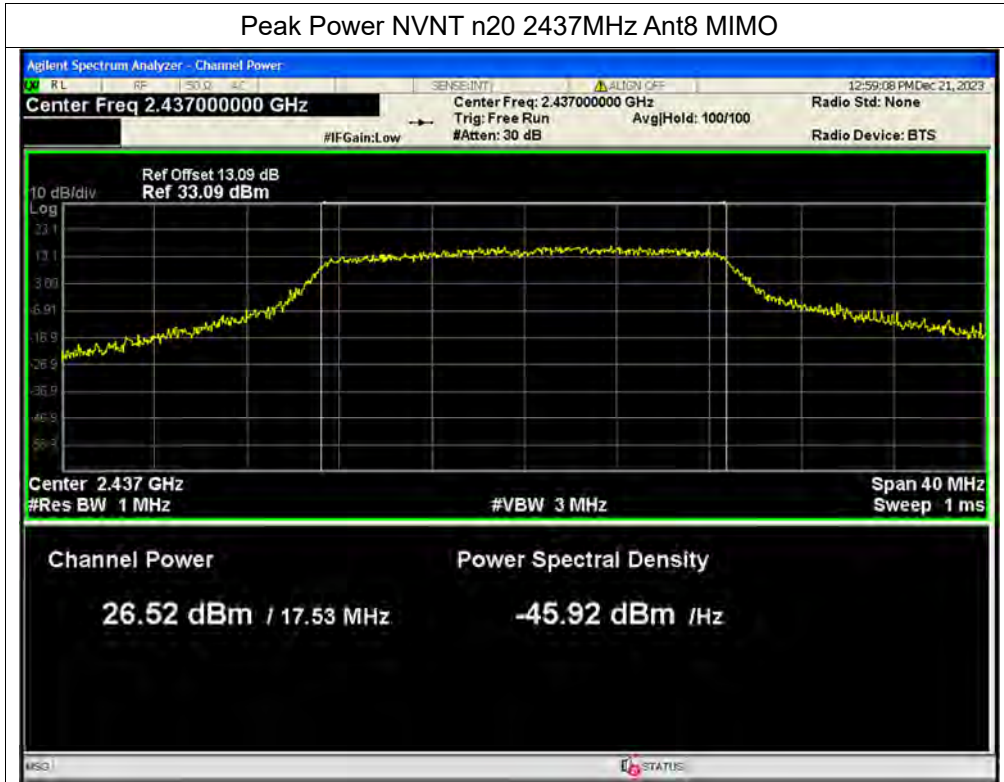


Peak Power NVNT n20 2437MHz Ant9 MIMO

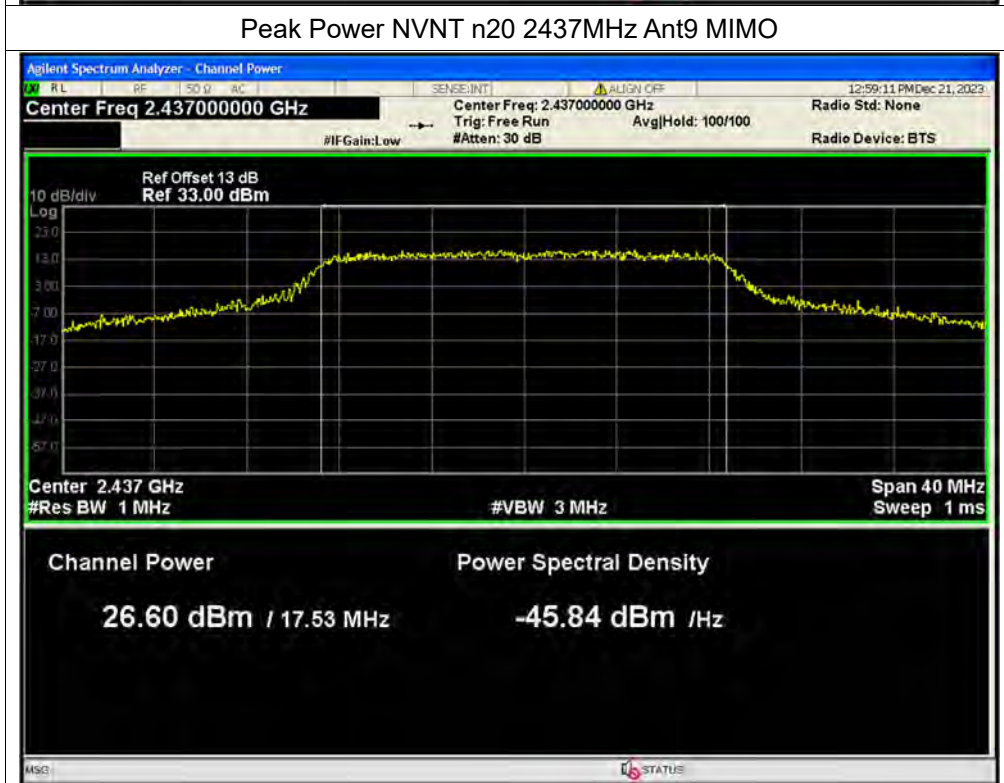




Peak Power NVNT n20 2462MHz Ant8 MIMO

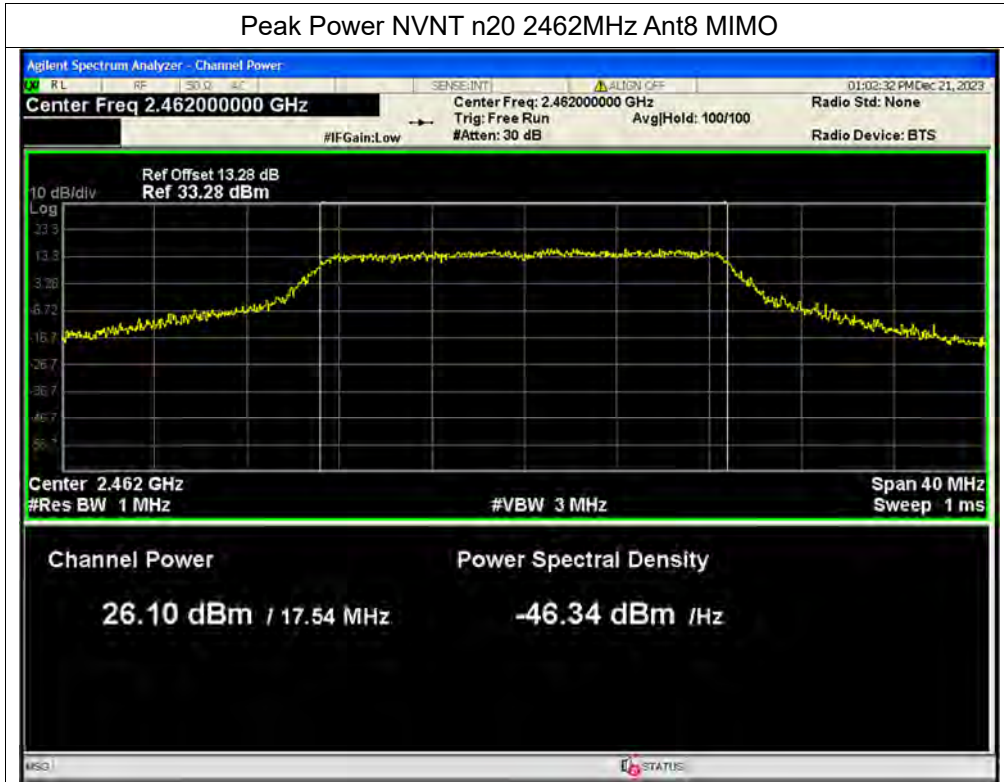


Peak Power NVNT n20 2462MHz Ant9 MIMO

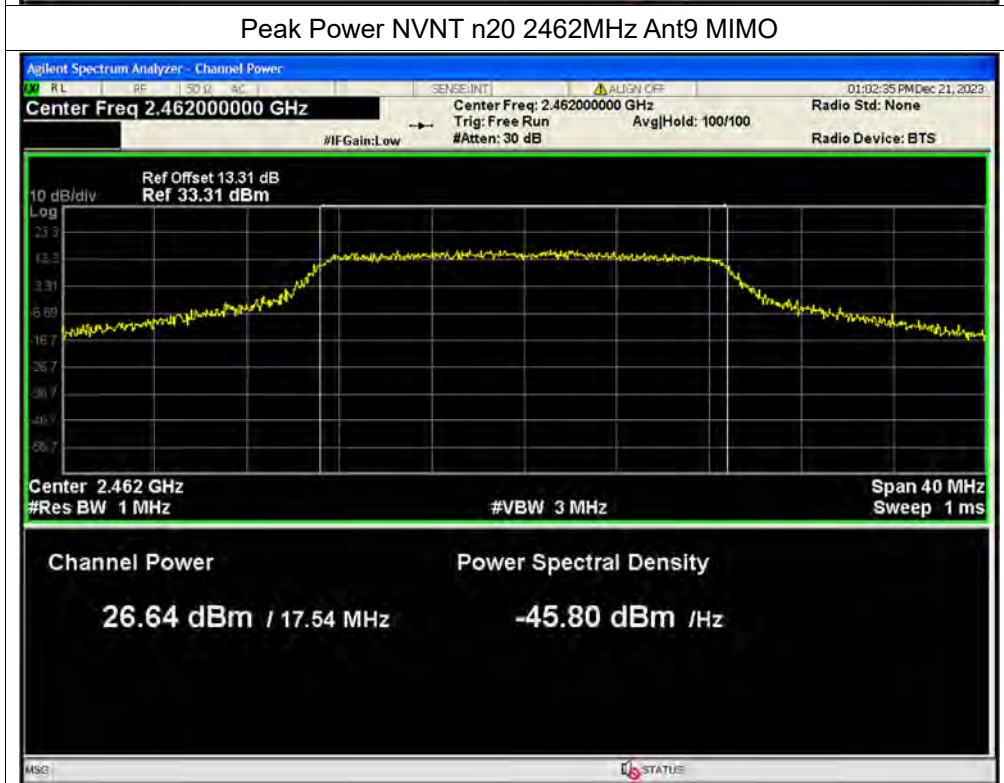




Peak Power NVNT n40 2422MHz Ant8 SISO

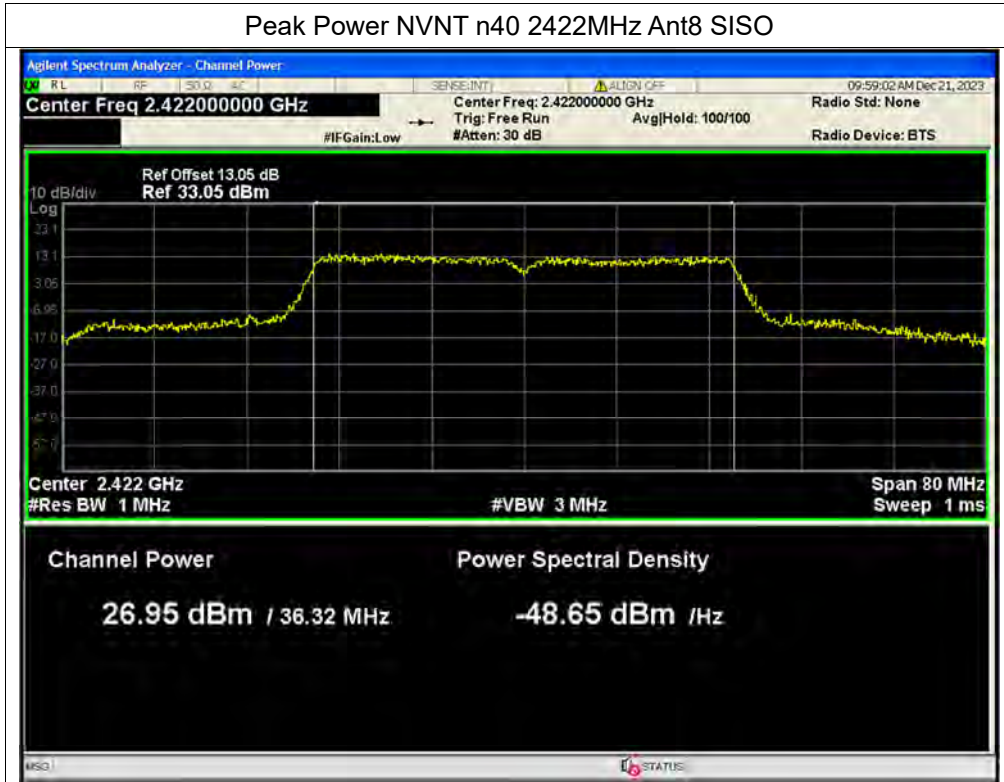


Peak Power NVNT n40 2437MHz Ant8 SISO

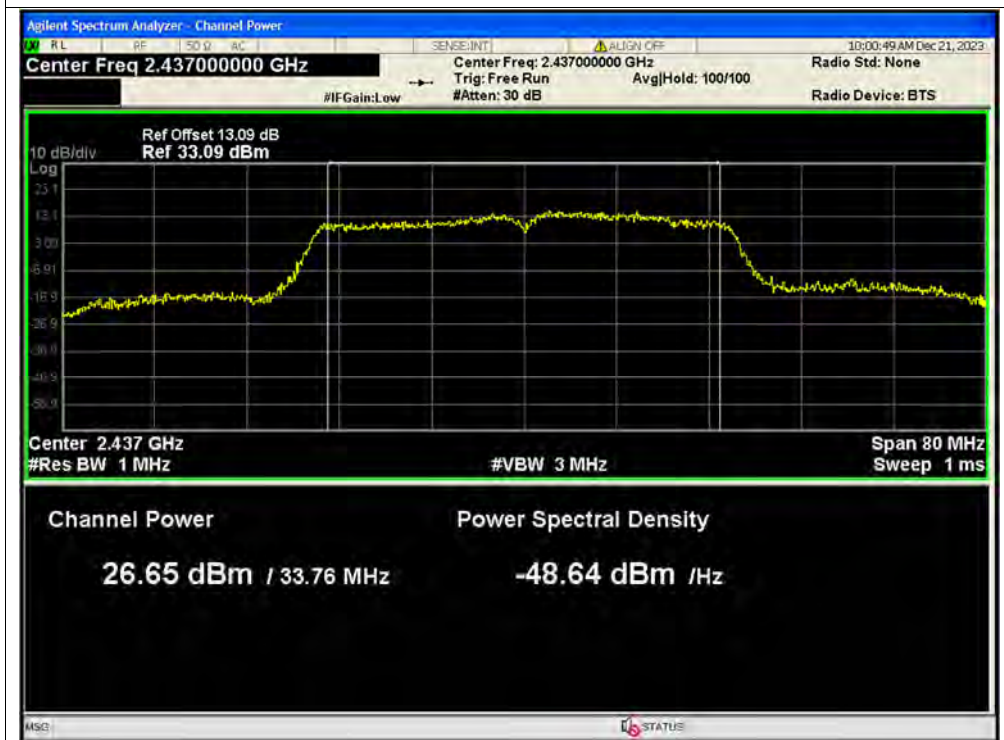




Peak Power NVNT n40 2452MHz Ant8 SISO

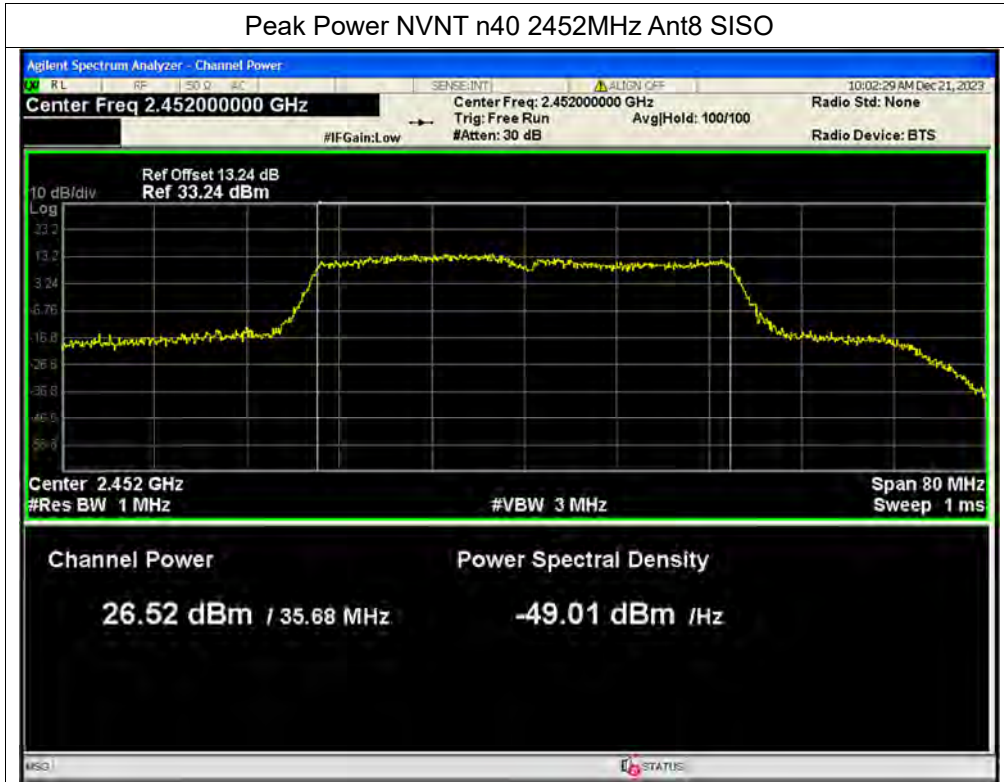


Peak Power NVNT n40 2422MHz Ant9 SISO

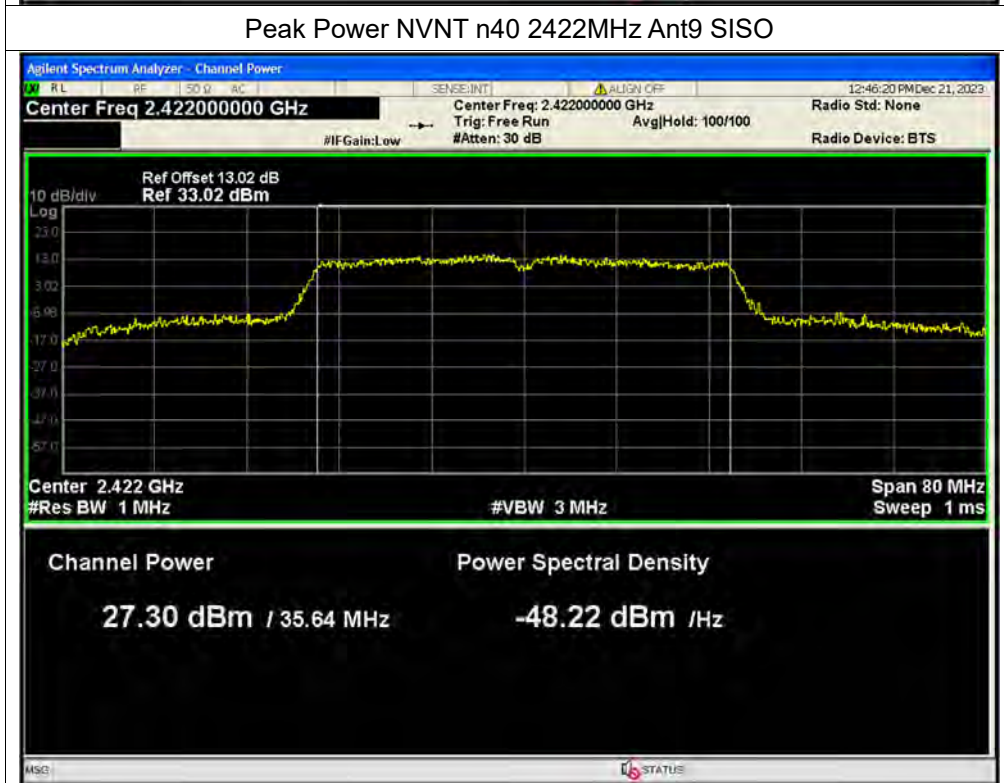




Peak Power NVNT n40 2437MHz Ant9 SISO

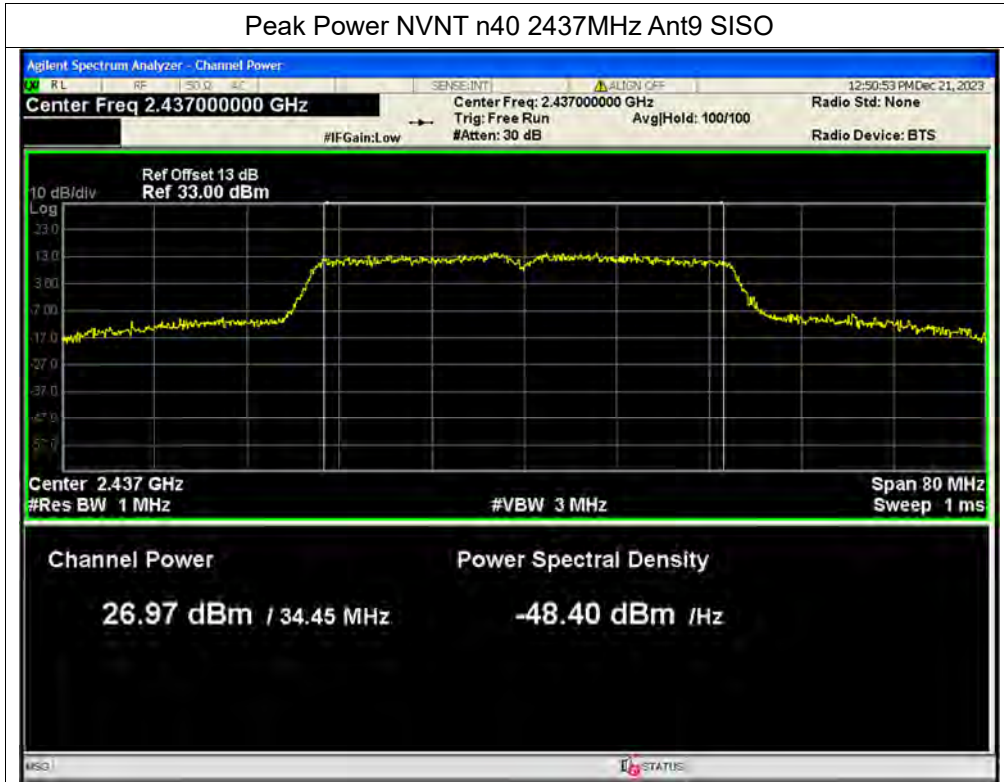


Peak Power NVNT n40 2452MHz Ant9 SISO

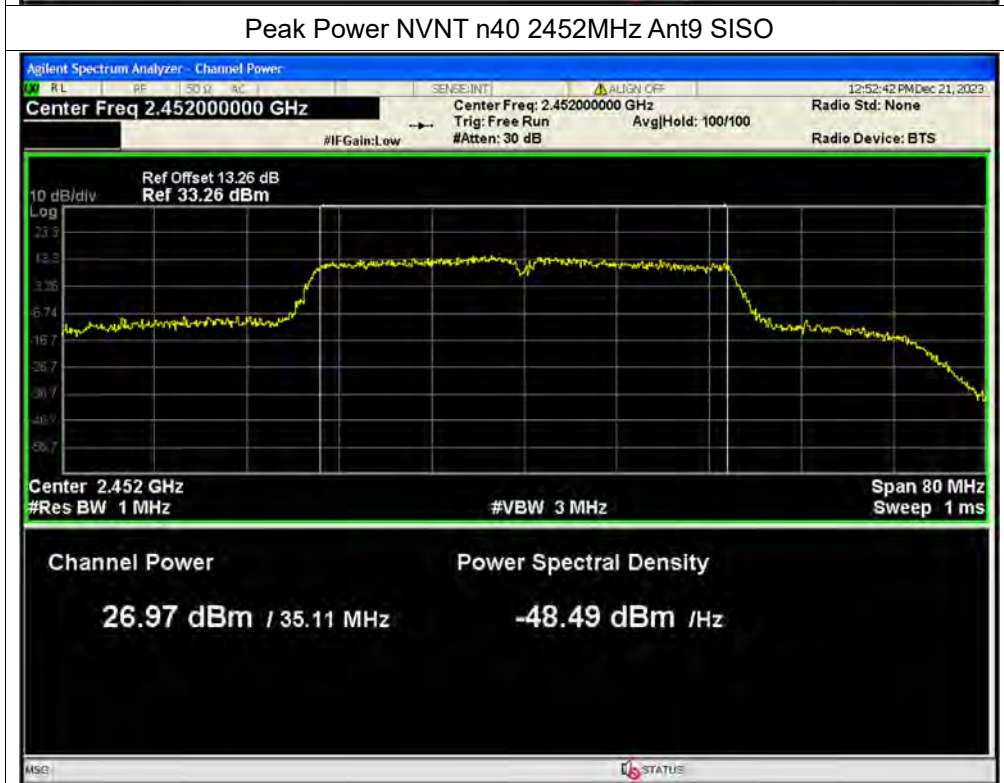




Peak Power NVNT n40 2422MHz Ant8 MIMO

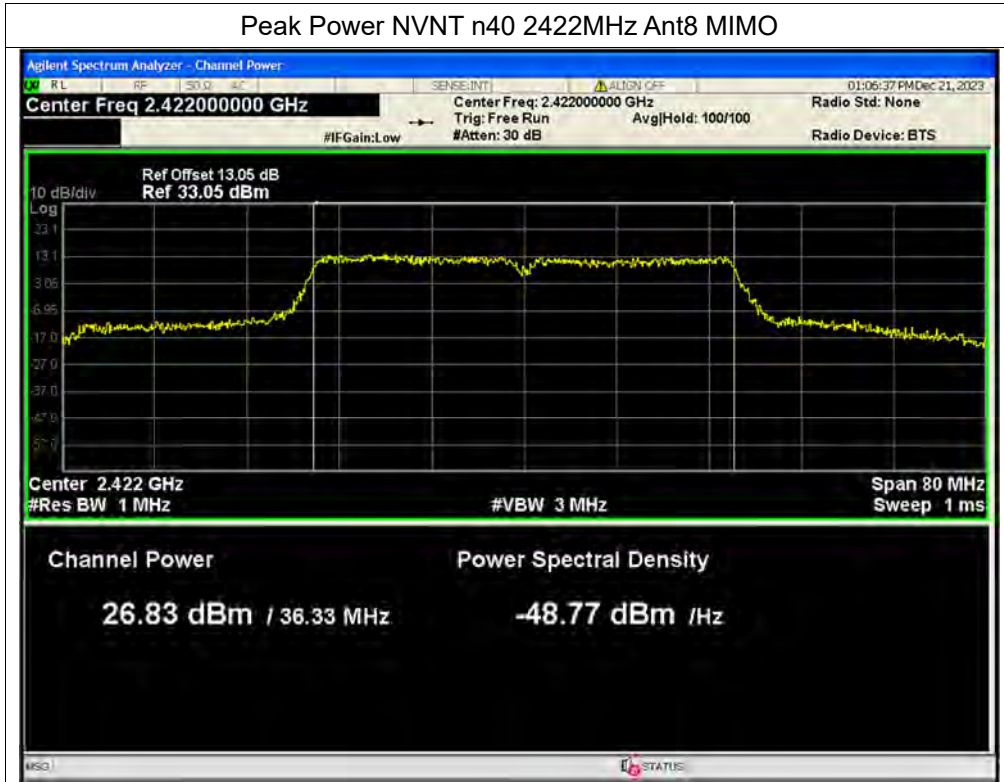


Peak Power NVNT n40 2422MHz Ant9 MIMO

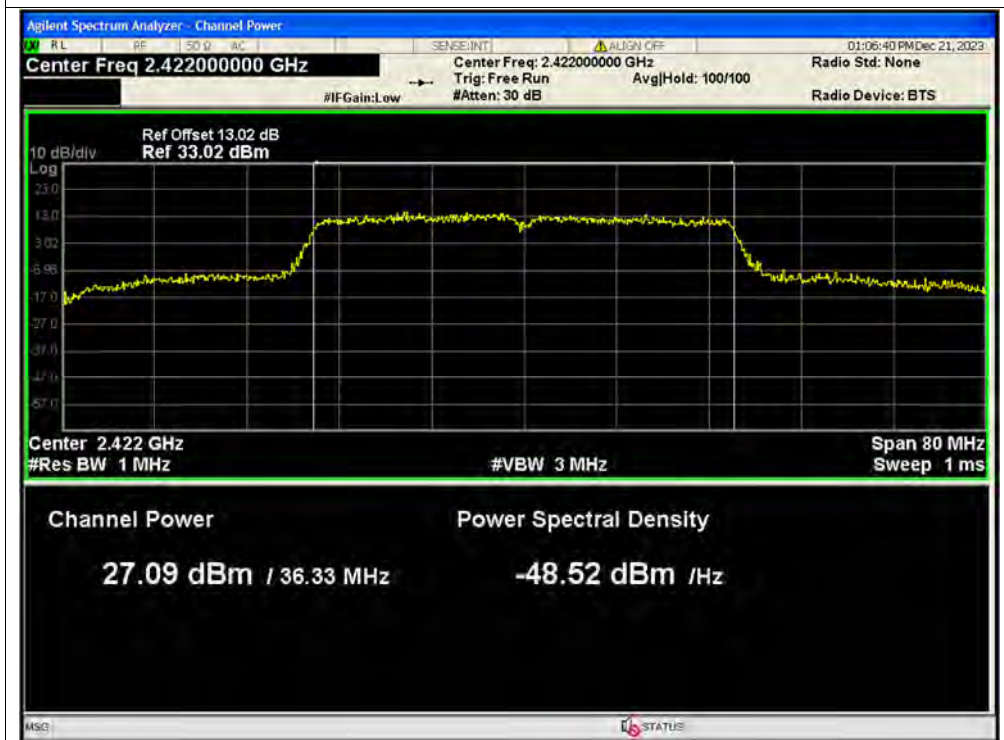




Peak Power NVNT n40 2437MHz Ant8 MIMO

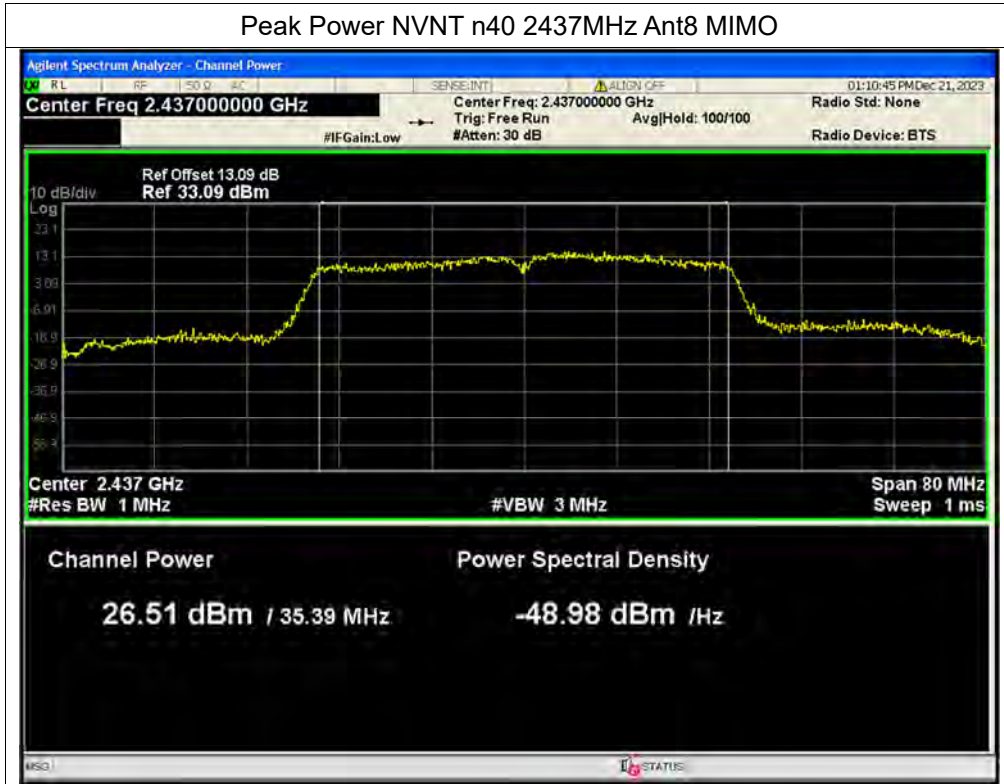


Peak Power NVNT n40 2437MHz Ant9 MIMO

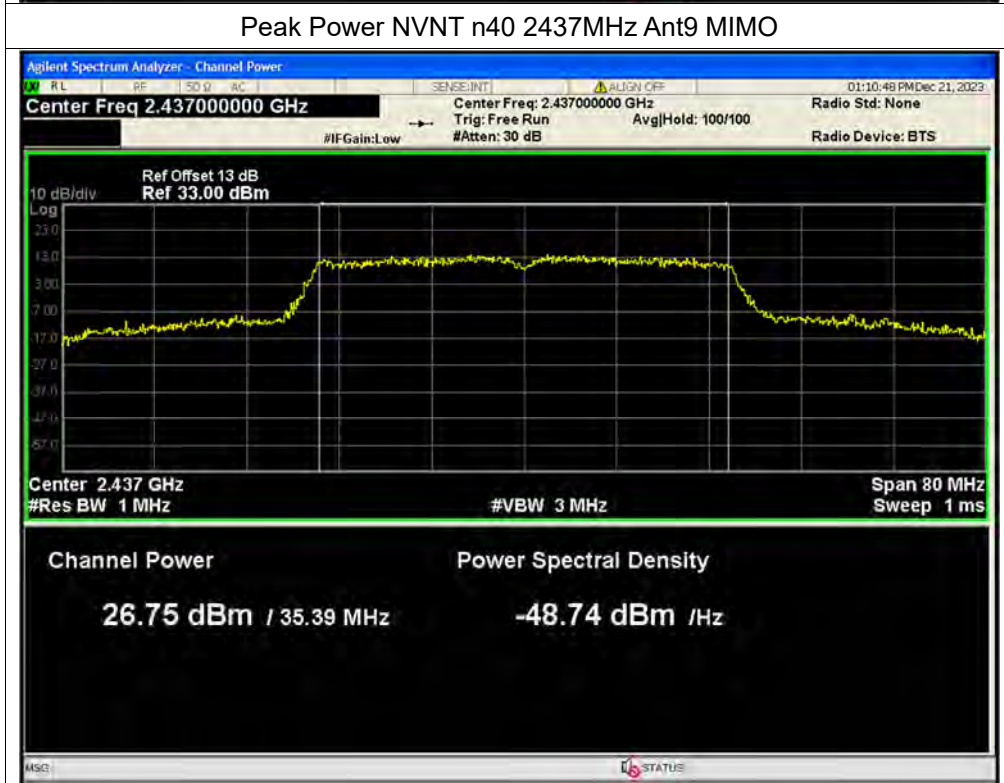




Peak Power NVNT n40 2452MHz Ant8 MIMO

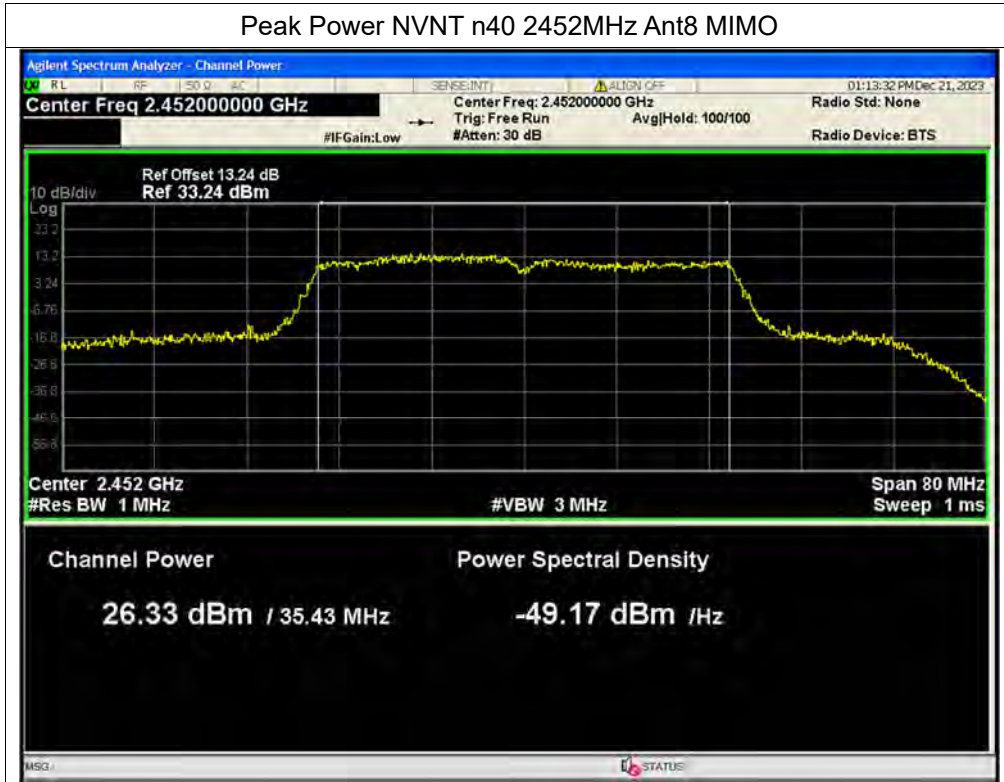

Peak Power NVNT n40 2452MHz Ant9 MIMO

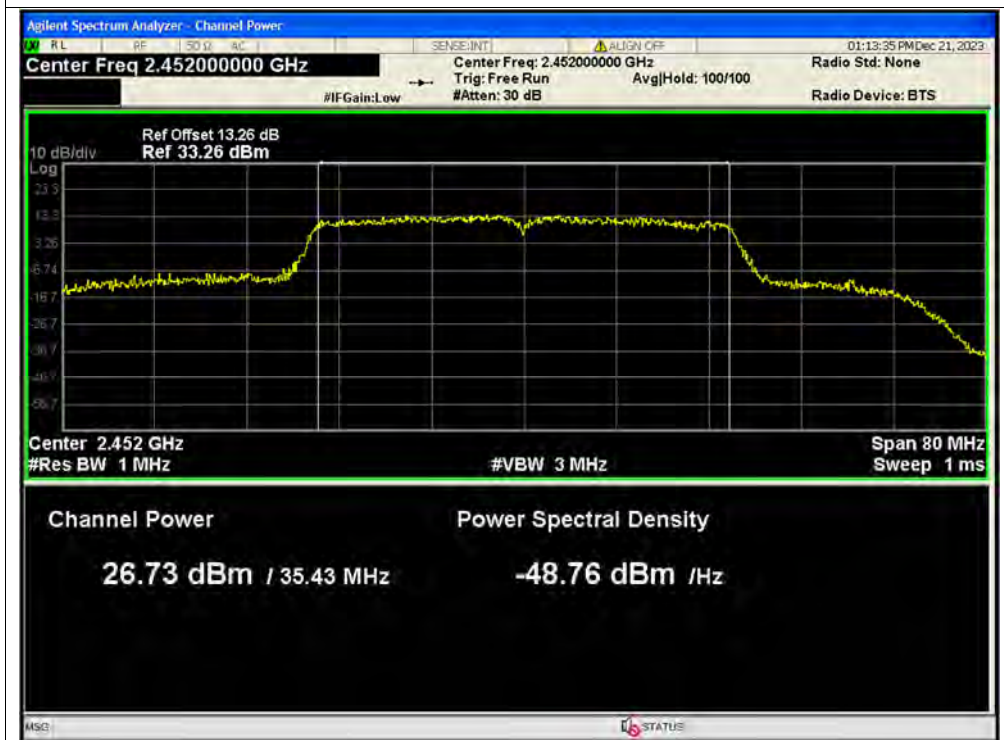



A.3. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b SISO	2412	Ant8	20.99	0.02	21.01	0.12618	30	Pass
NVNT	b SISO	2437	Ant8	21.09	0.03	21.12	0.12942	30	Pass
NVNT	b SISO	2462	Ant8	20.18	0.02	20.2	0.10471	30	Pass
NVNT	b SISO	2412	Ant9	21.17	0.03	21.2	0.13183	30	Pass
NVNT	b SISO	2437	Ant9	20.48	0.08	20.56	0.11376	30	Pass
NVNT	b SISO	2462	Ant9	20.84	0.02	20.86	0.1219	30	Pass
NVNT	g SISO	2412	Ant8	19.66	0.08	19.74	0.09419	30	Pass
NVNT	g SISO	2437	Ant8	20.13	0.08	20.21	0.10495	30	Pass
NVNT	g SISO	2462	Ant8	19.38	0.07	19.45	0.0881	30	Pass
NVNT	g SISO	2412	Ant9	20.32	0.08	20.4	0.10965	30	Pass
NVNT	g SISO	2437	Ant9	20.08	0.08	20.16	0.10375	30	Pass
NVNT	g SISO	2462	Ant9	20.04	0.07	20.11	0.10257	30	Pass
NVNT	n20 SISO	2412	Ant8	19.14	0.08	19.22	0.08356	30	Pass
NVNT	n20 SISO	2437	Ant8	19.39	0.08	19.47	0.08851	30	Pass
NVNT	n20 SISO	2462	Ant8	18.83	0.08	18.91	0.0778	30	Pass
NVNT	n20 SISO	2412	Ant9	19.9	0.08	19.98	0.09954	30	Pass
NVNT	n20 SISO	2437	Ant9	19.62	0.08	19.7	0.09333	30	Pass
NVNT	n20 SISO	2462	Ant9	19.68	0.08	19.76	0.09462	30	Pass
NVNT	n20 MIMO	2412	Ant8	18.91	0.08	18.99	0.07925	30	Pass
NVNT	n20 MIMO	2412	Ant9	19.71	0.08	19.79	0.09528	30	Pass
NVNT	n20 MIMO	2412	Sum	NaN	NaN	22.42	0.17453	30	Pass
NVNT	n20 MIMO	2437	Ant8	19.26	0.08	19.34	0.0859	30	Pass
NVNT	n20	2437	Ant9	19.33	0.08	19.41	0.0873	30	Pass




	MIMO								
NVNT	n20 MIMO	2437	Sum	NaN	NaN	22.39	0.1732	30	Pass
NVNT	n20 MIMO	2462	Ant8	18.81	0.08	18.89	0.07745	30	Pass
NVNT	n20 MIMO	2462	Ant9	19.43	0.08	19.51	0.08933	30	Pass
NVNT	n20 MIMO	2462	Sum	NaN	NaN	22.22	0.16678	30	Pass
NVNT	n40 SISO	2422	Ant8	19.44	0.23	19.67	0.09268	30	Pass
NVNT	n40 SISO	2437	Ant8	19.17	0.23	19.4	0.0871	30	Pass
NVNT	n40 SISO	2452	Ant8	19	0.23	19.23	0.08375	30	Pass
NVNT	n40 SISO	2422	Ant9	19.8	0.23	20.03	0.10069	30	Pass
NVNT	n40 SISO	2437	Ant9	19.52	0.23	19.75	0.09441	30	Pass
NVNT	n40 SISO	2452	Ant9	19.54	0.23	19.77	0.09484	30	Pass
NVNT	n40 MIMO	2422	Ant8	19.33	0.23	19.56	0.09036	30	Pass
NVNT	n40 MIMO	2422	Ant9	19.6	0.23	19.83	0.09616	30	Pass
NVNT	n40 MIMO	2422	Sum	NaN	NaN	22.71	0.18653	30	Pass
NVNT	n40 MIMO	2437	Ant8	19.04	0.23	19.27	0.08453	30	Pass
NVNT	n40 MIMO	2437	Ant9	19.26	0.23	19.49	0.08892	30	Pass
NVNT	n40 MIMO	2437	Sum	NaN	NaN	22.39	0.17345	30	Pass
NVNT	n40 MIMO	2452	Ant8	18.88	0.22	19.1	0.08128	30	Pass
NVNT	n40 MIMO	2452	Ant9	19.29	0.22	19.51	0.08933	30	Pass
NVNT	n40 MIMO	2452	Sum	NaN	NaN	22.32	0.17061	30	Pass






Average Power NVNT b 2462MHz Ant8 SISO

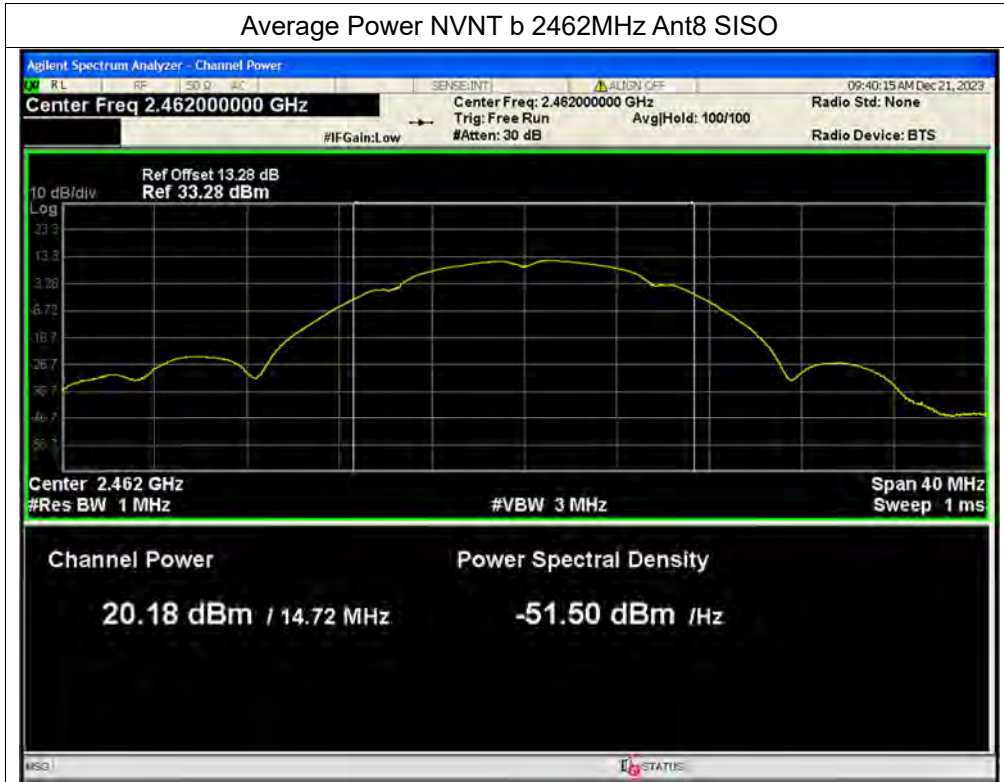


Average Power NVNT b 2412MHz Ant9 SISO

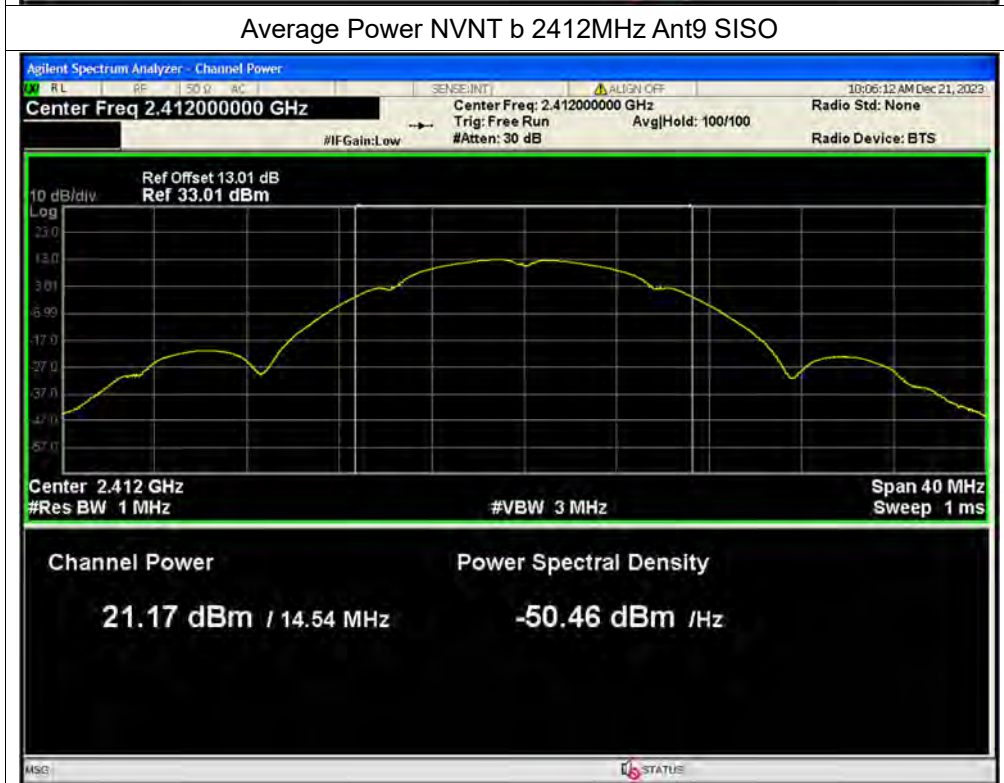




Average Power NVNT b 2437MHz Ant9 SISO

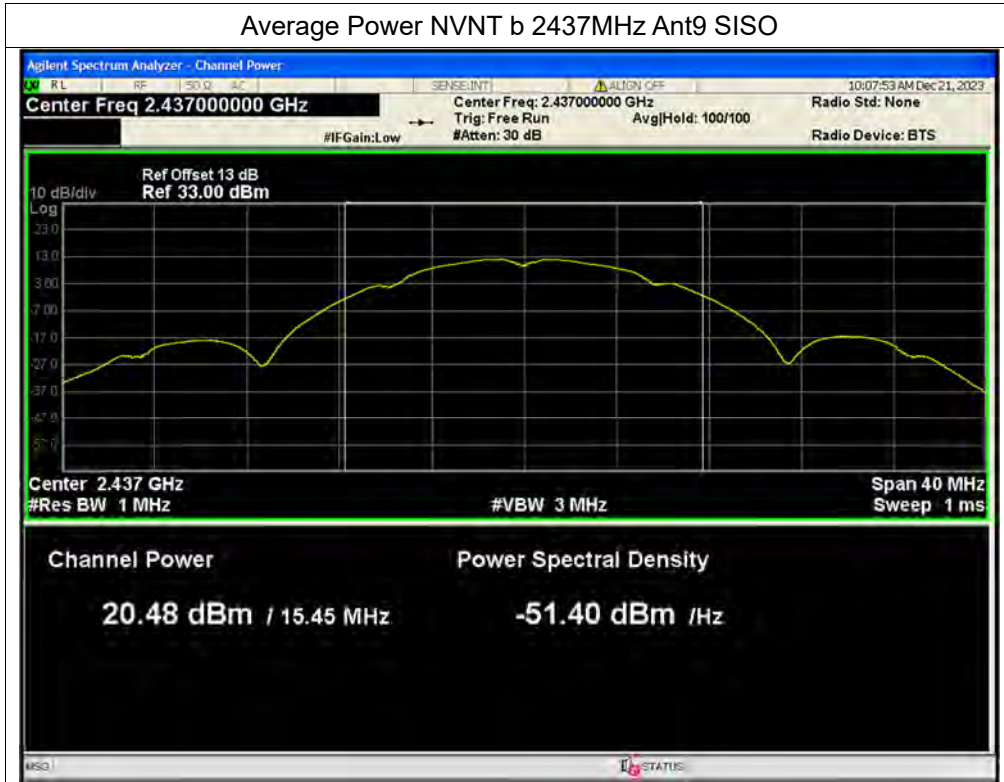


Average Power NVNT b 2462MHz Ant9 SISO

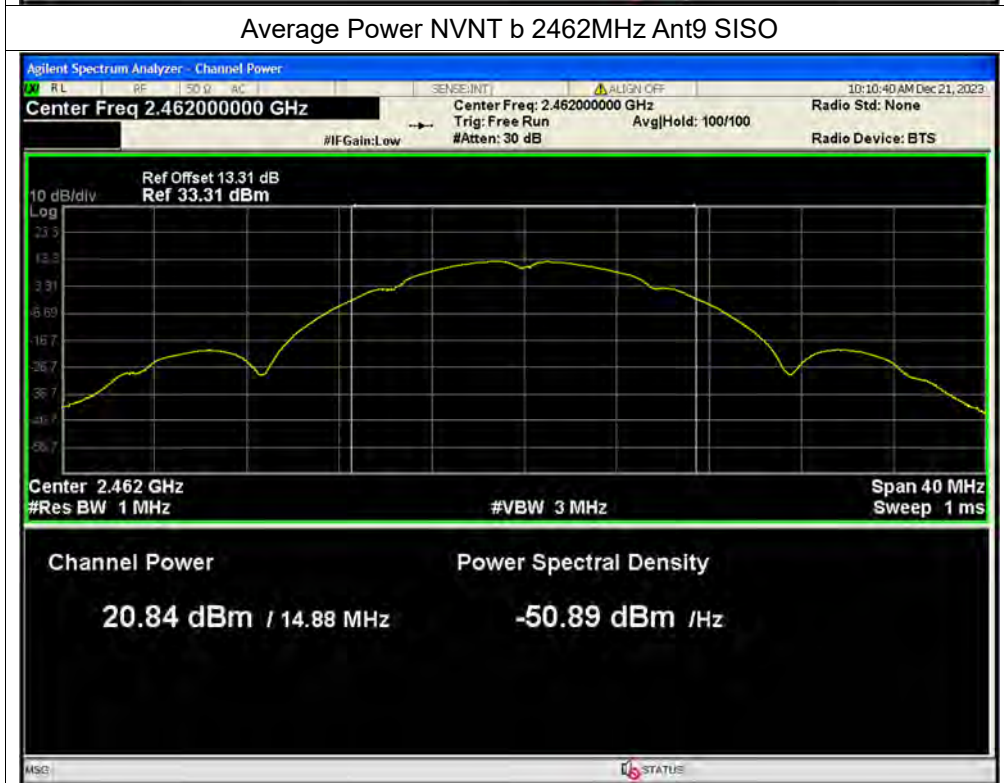




Average Power NVNT g 2412MHz Ant8 SISO

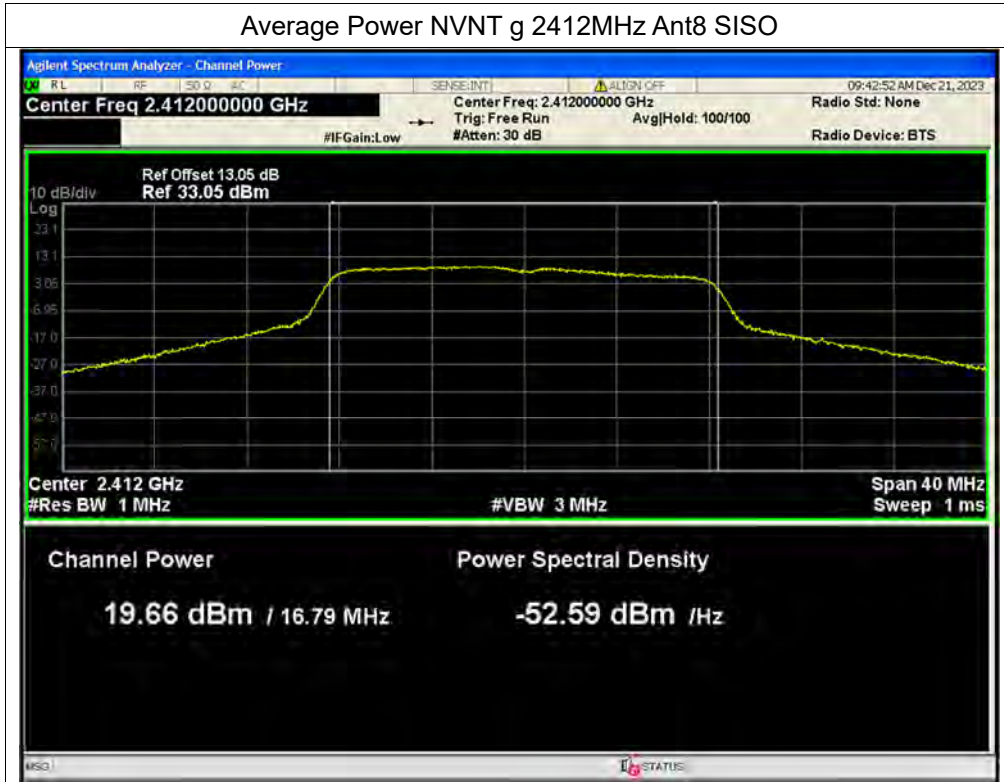


Average Power NVNT g 2437MHz Ant8 SISO

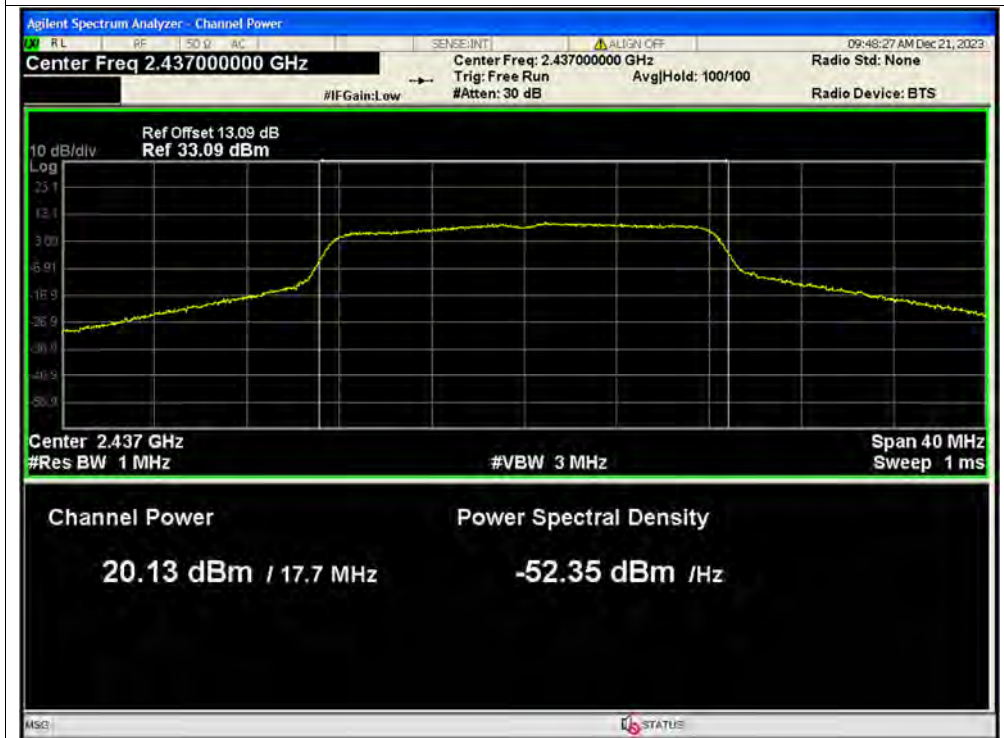




Average Power NVNT g 2462MHz Ant8 SISO

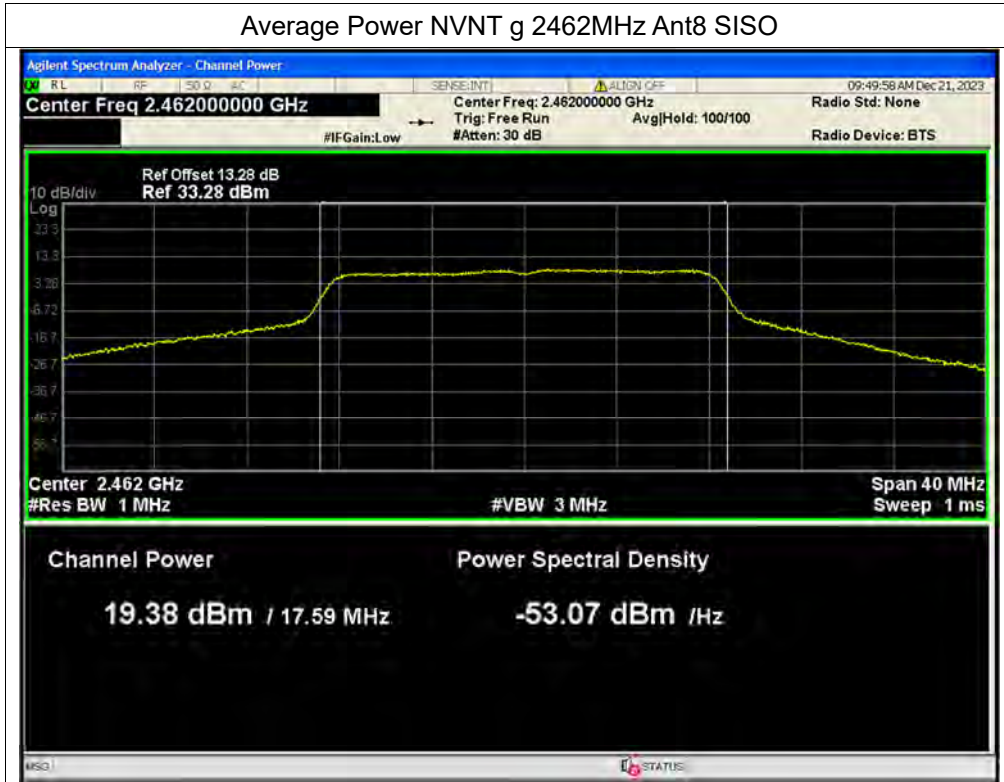


Average Power NVNT g 2412MHz Ant9 SISO

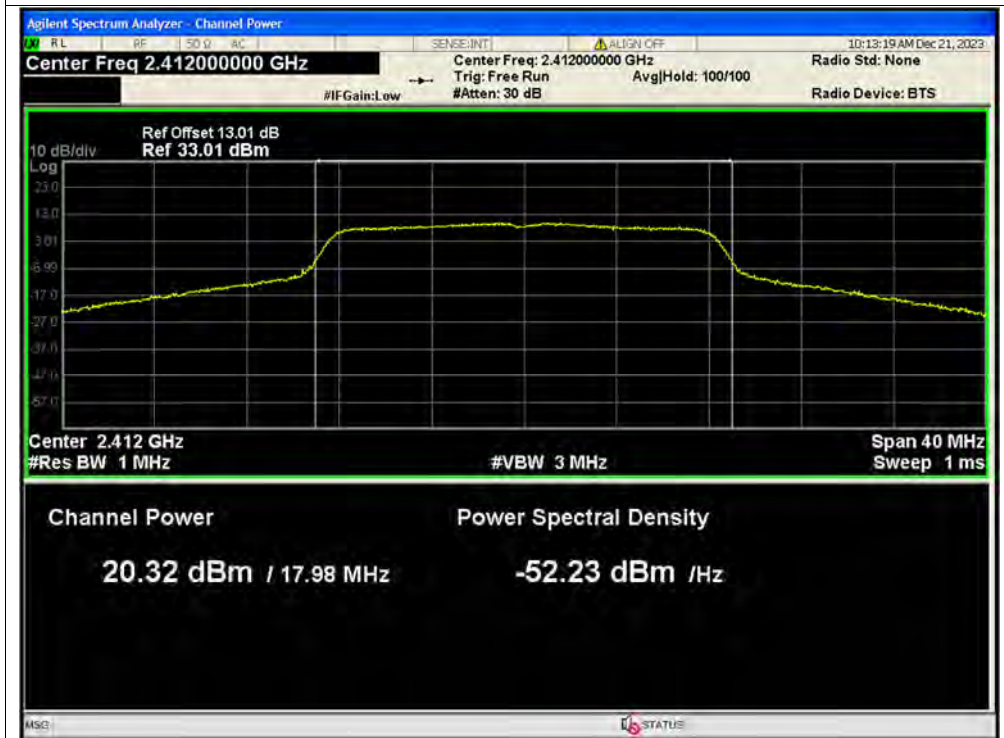




Average Power NVNT g 2437MHz Ant9 SISO

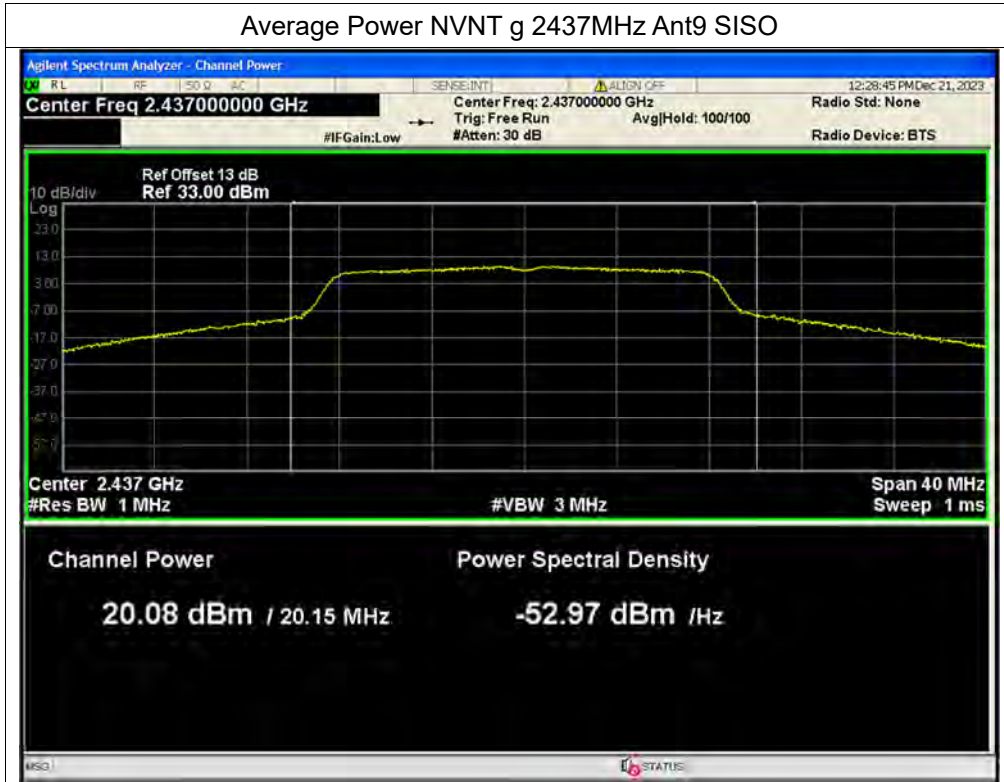


Average Power NVNT g 2462MHz Ant9 SISO

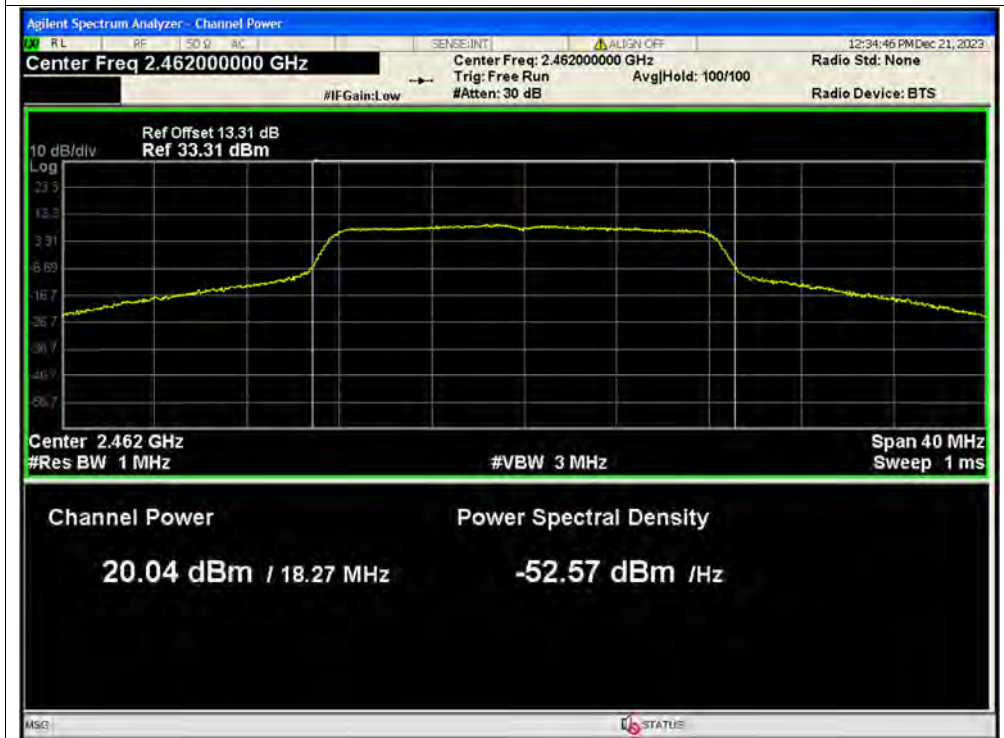




Average Power NVNT n20 2412MHz Ant8 SISO

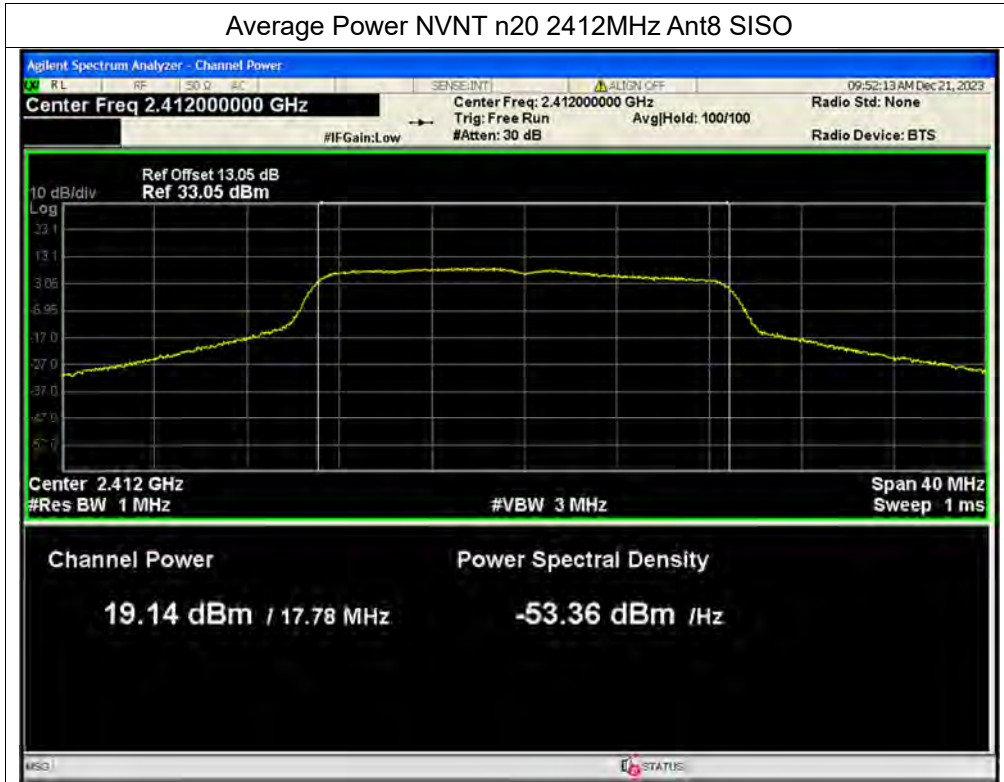


Average Power NVNT n20 2437MHz Ant8 SISO

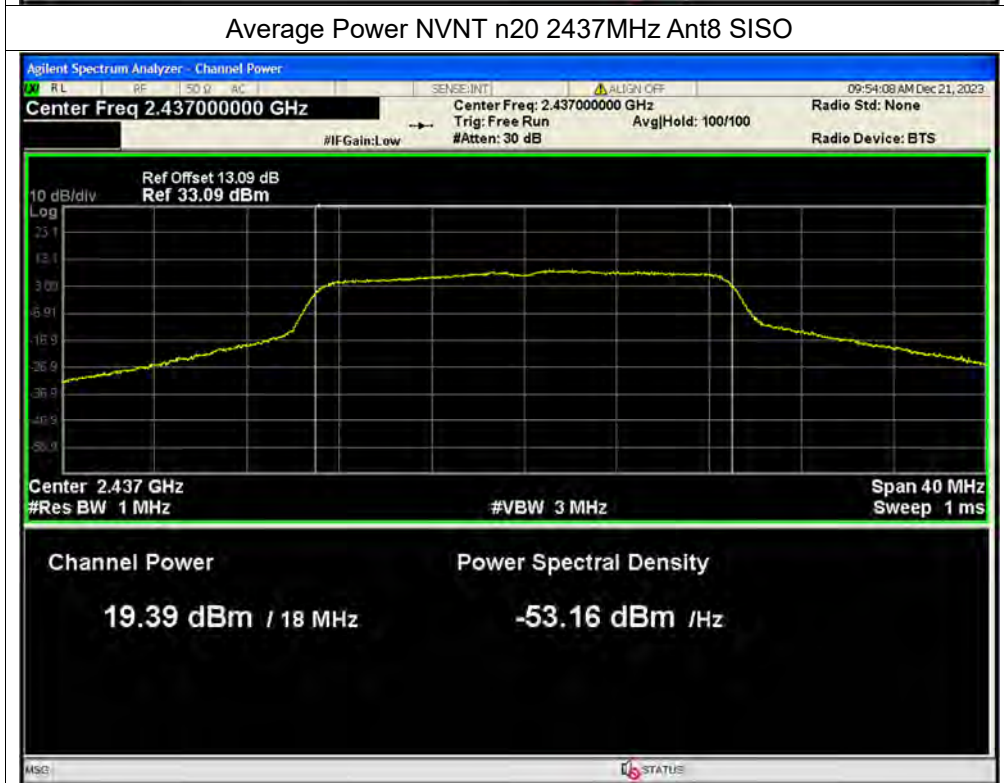




Average Power NVNT n20 2462MHz Ant8 SISO

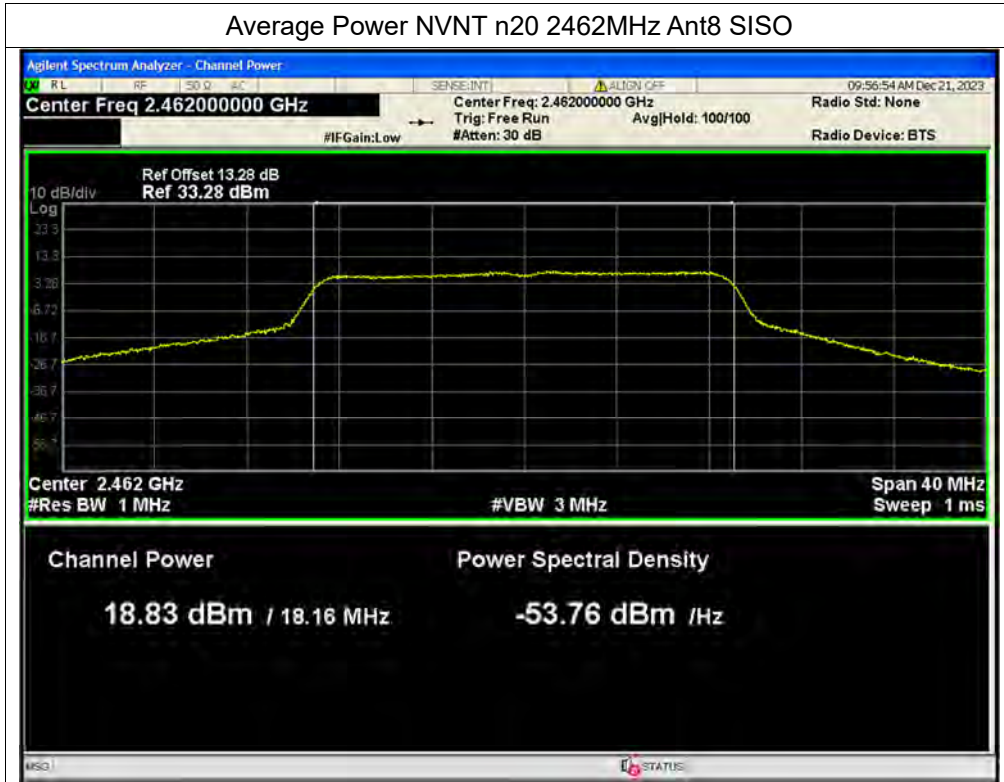


Average Power NVNT n20 2412MHz Ant9 SISO

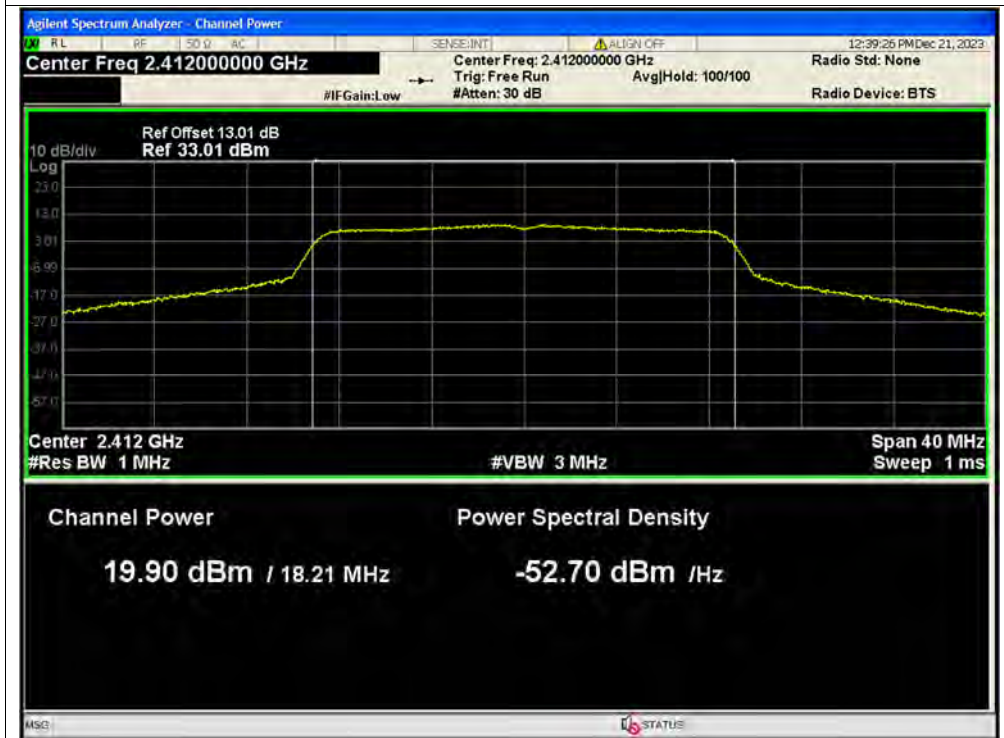




Average Power NVNT n20 2437MHz Ant9 SISO

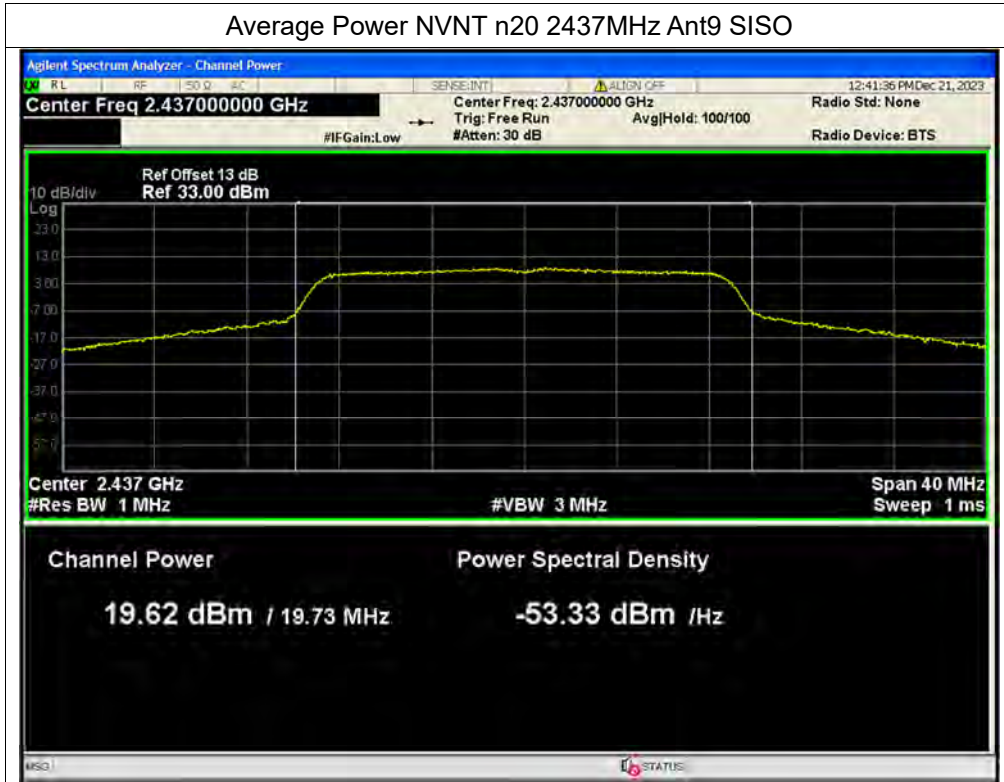


Average Power NVNT n20 2462MHz Ant9 SISO

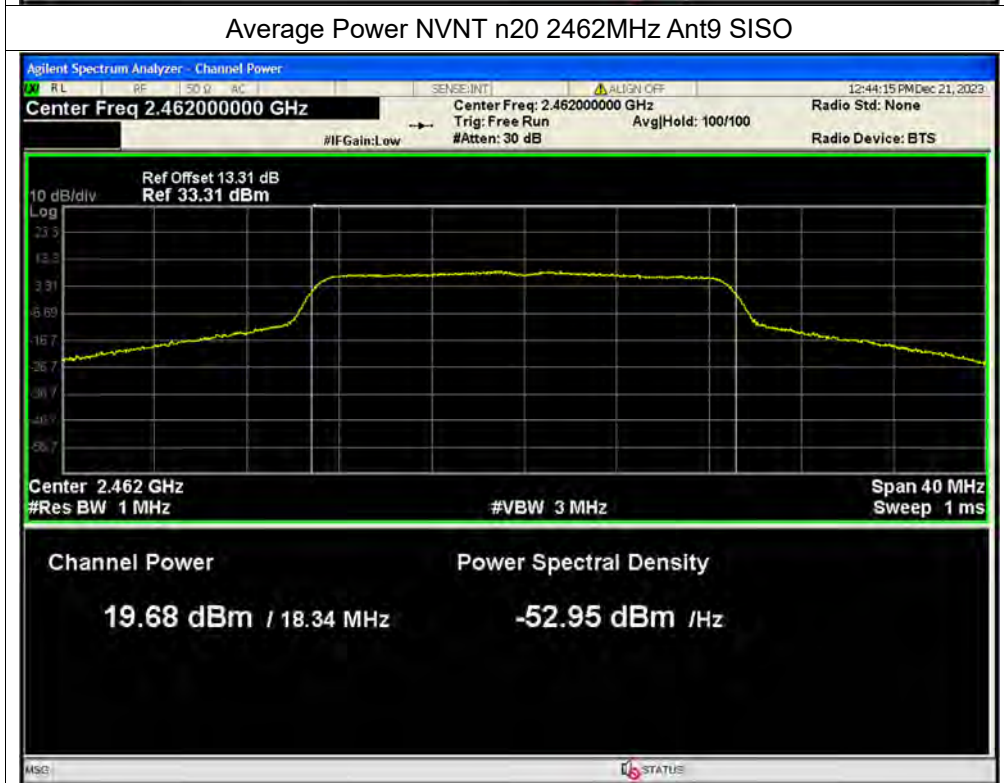




Average Power NVNT n20 2412MHz Ant8 MIMO

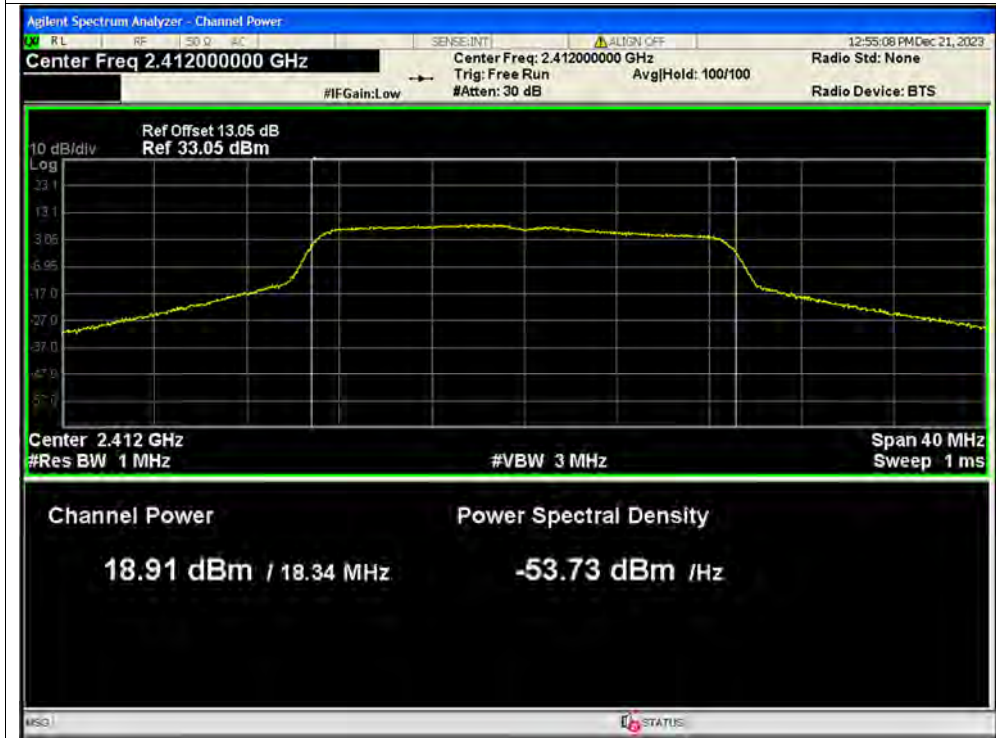


Average Power NVNT n20 2412MHz Ant9 MIMO

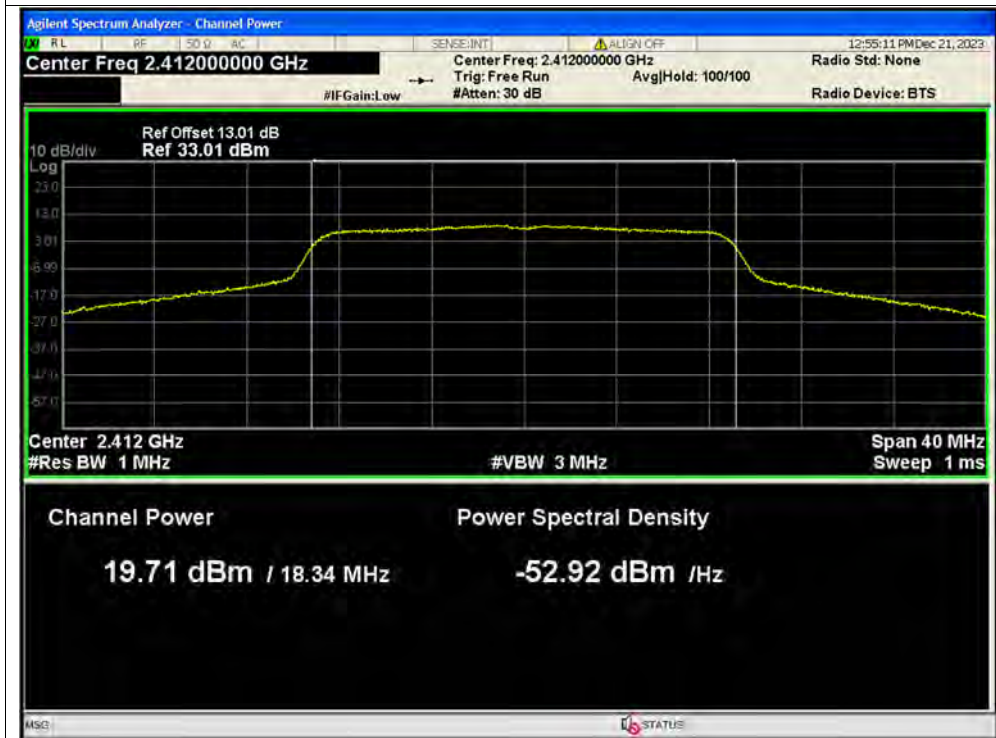




Average Power NVNT n20 2437MHz Ant8 MIMO

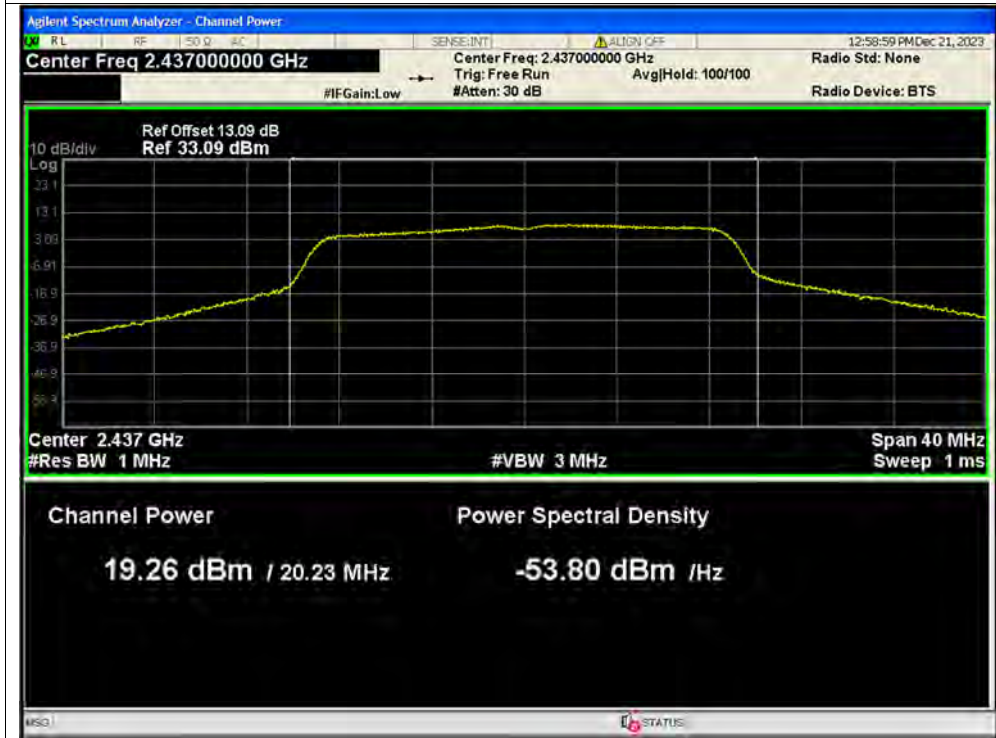


Average Power NVNT n20 2437MHz Ant9 MIMO

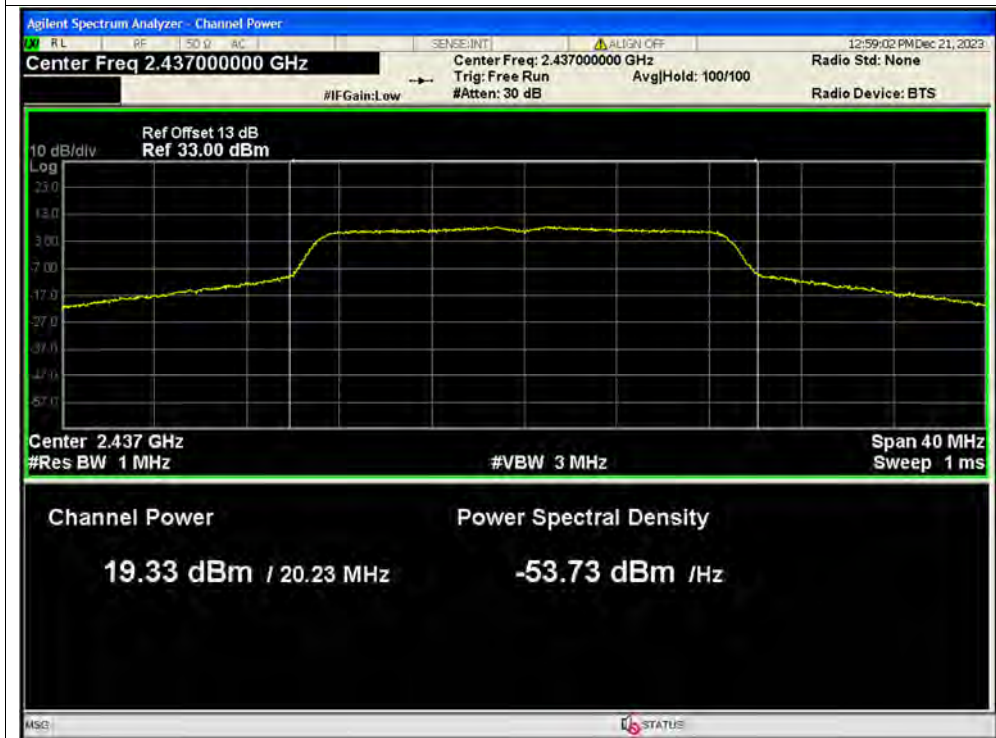




Average Power NVNT n20 2462MHz Ant8 MIMO

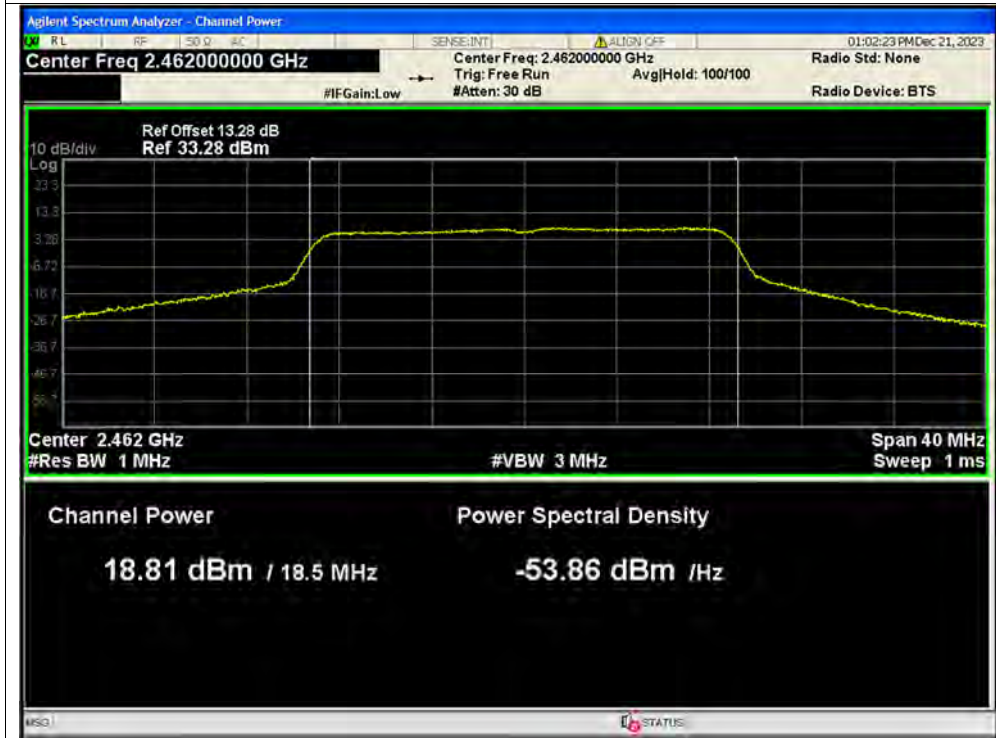


Average Power NVNT n20 2462MHz Ant9 MIMO

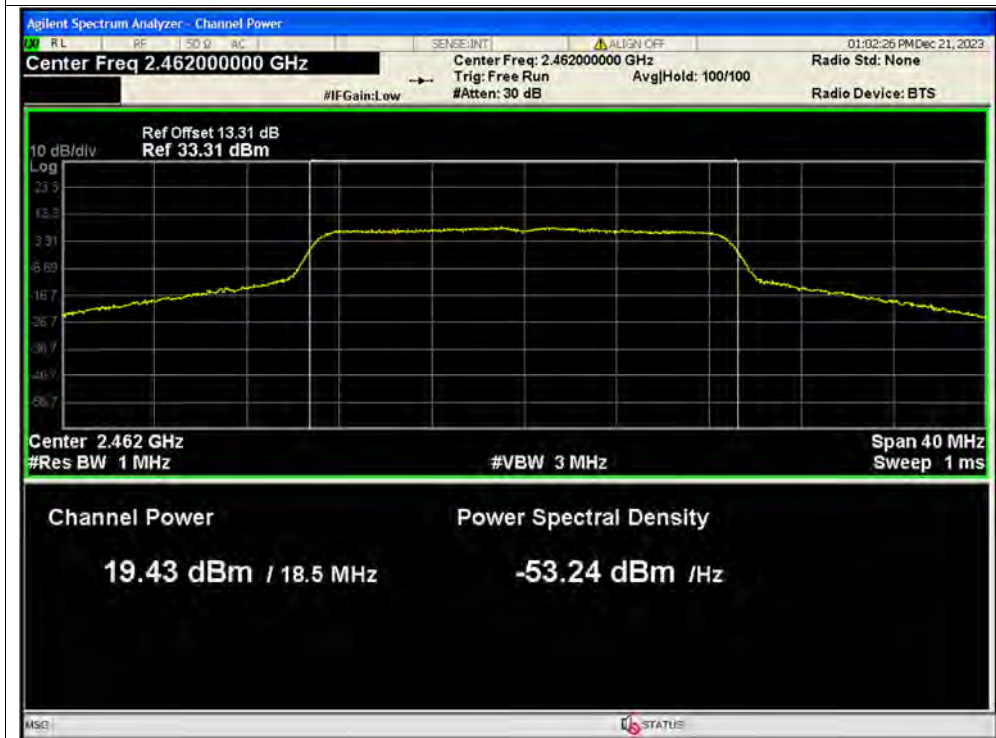




Average Power NVNT n40 2422MHz Ant8 SISO

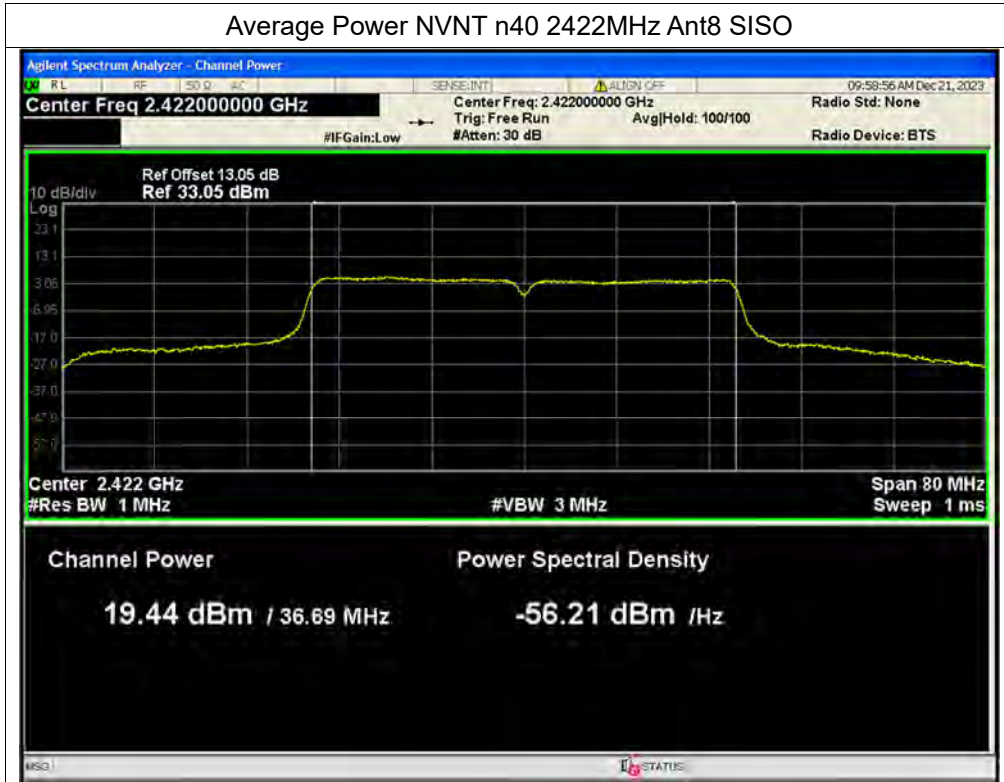


Average Power NVNT n40 2437MHz Ant8 SISO

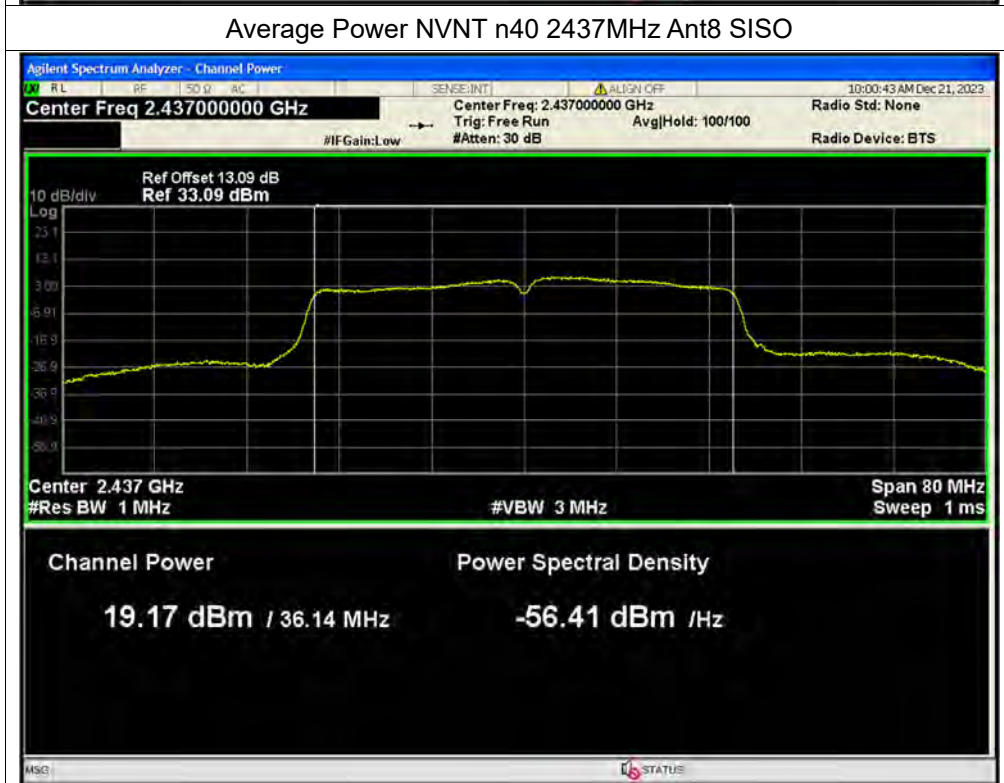




Average Power NVNT n40 2452MHz Ant8 SISO

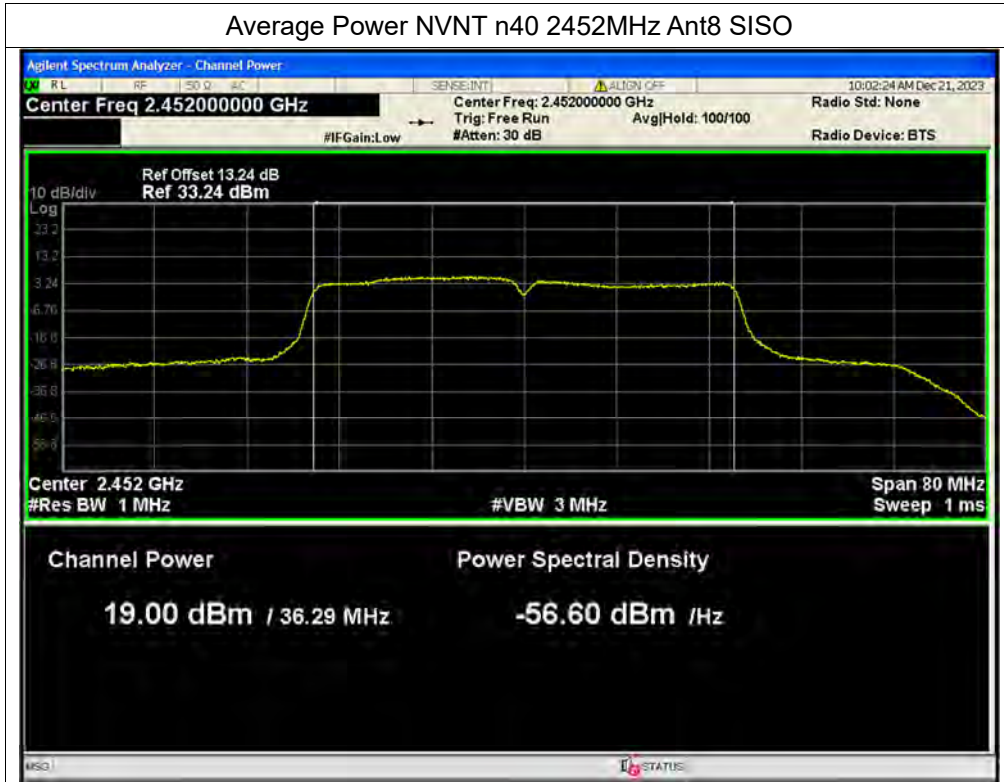


Average Power NVNT n40 2422MHz Ant9 SISO

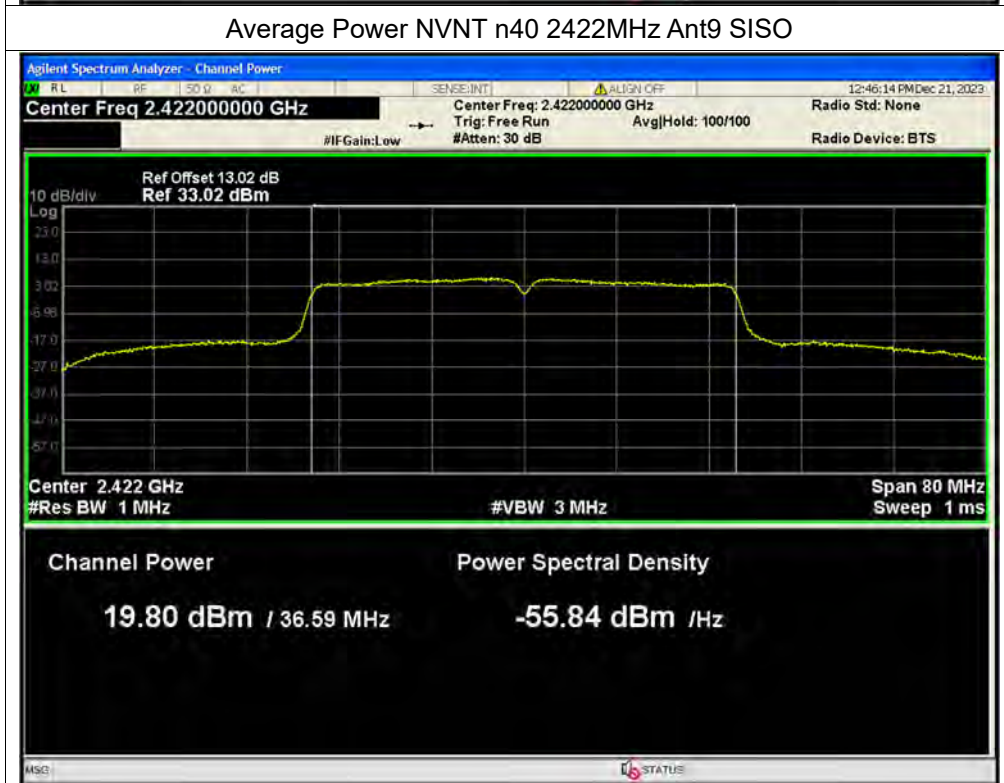




Average Power NVNT n40 2437MHz Ant9 SISO

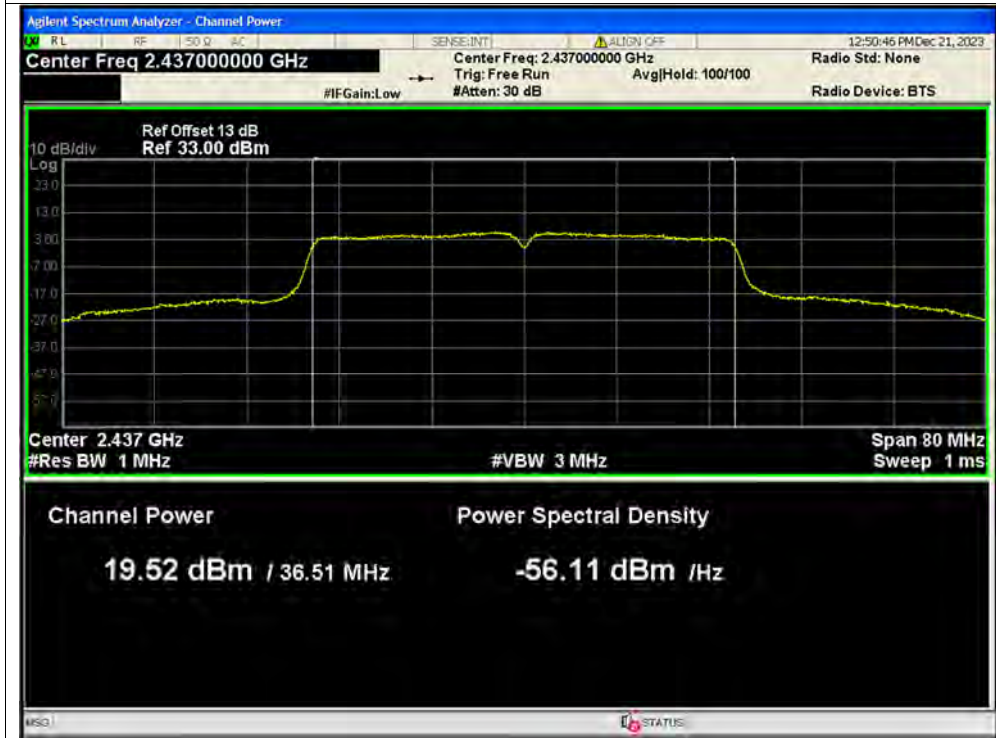


Average Power NVNT n40 2452MHz Ant9 SISO

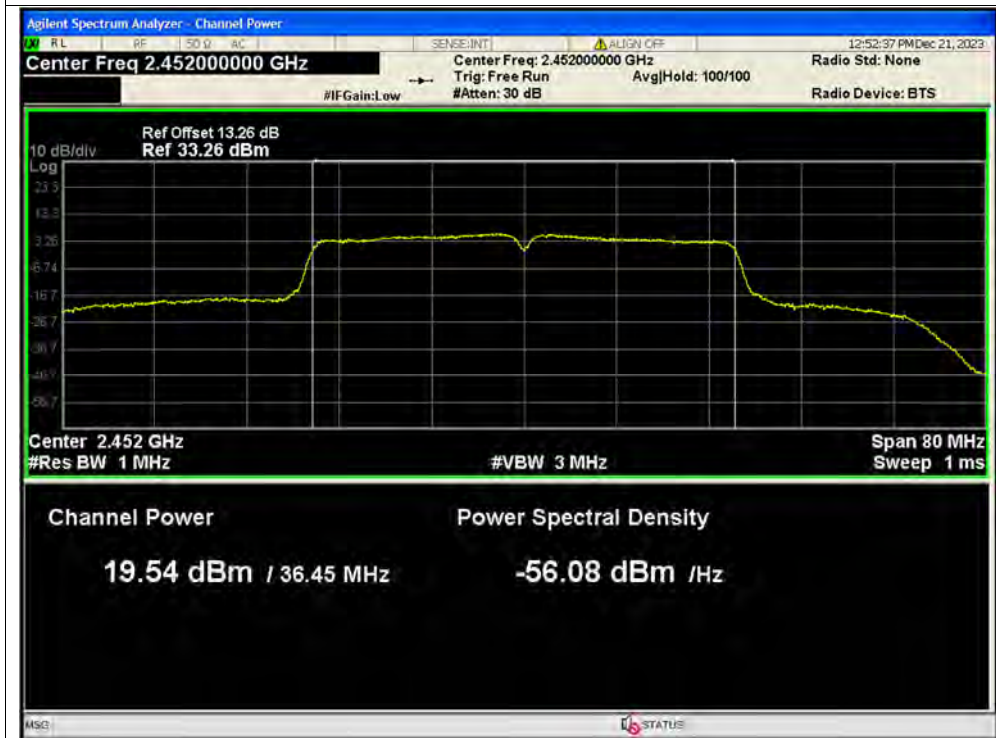




Average Power NVNT n40 2422MHz Ant8 MIMO

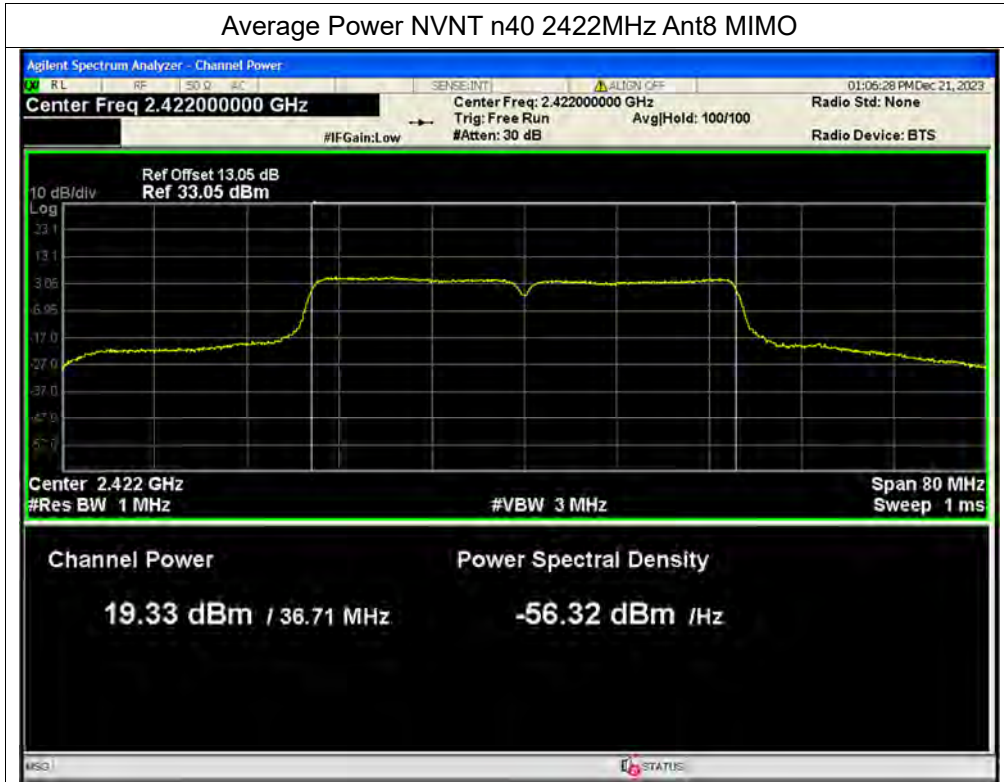


Average Power NVNT n40 2422MHz Ant9 MIMO

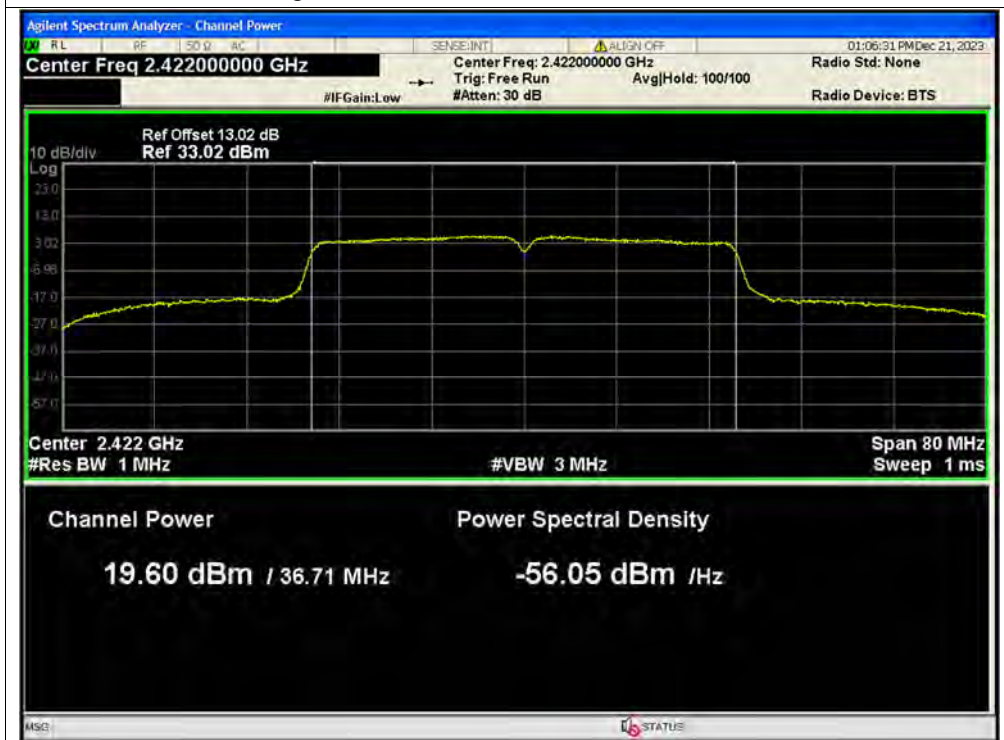




Average Power NVNT n40 2437MHz Ant8 MIMO

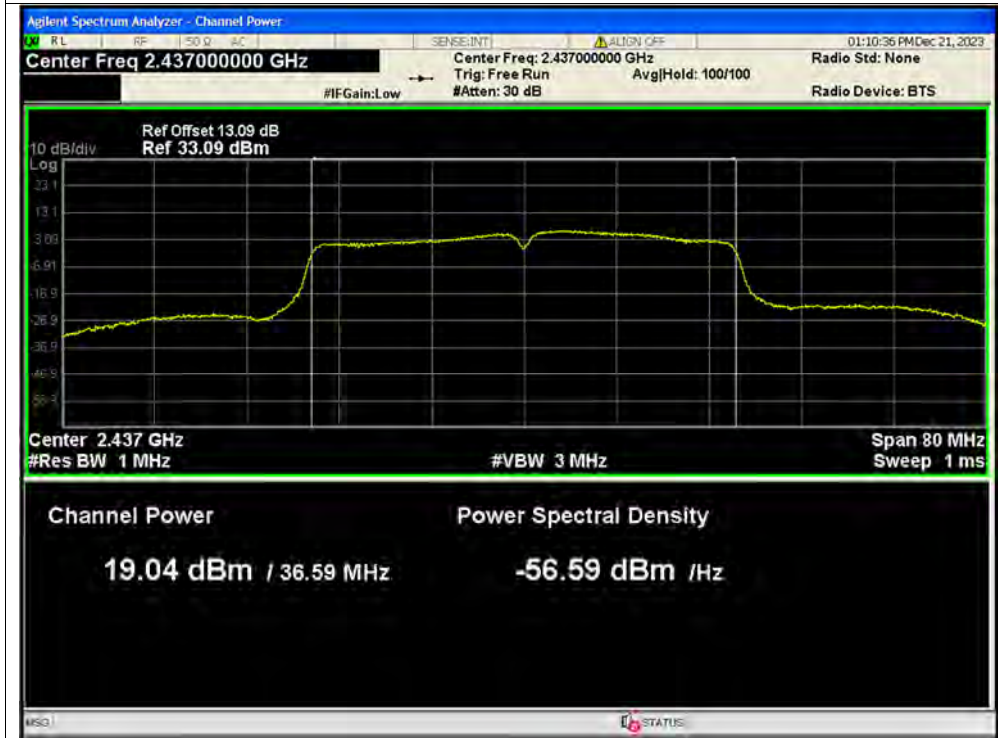


Average Power NVNT n40 2437MHz Ant9 MIMO

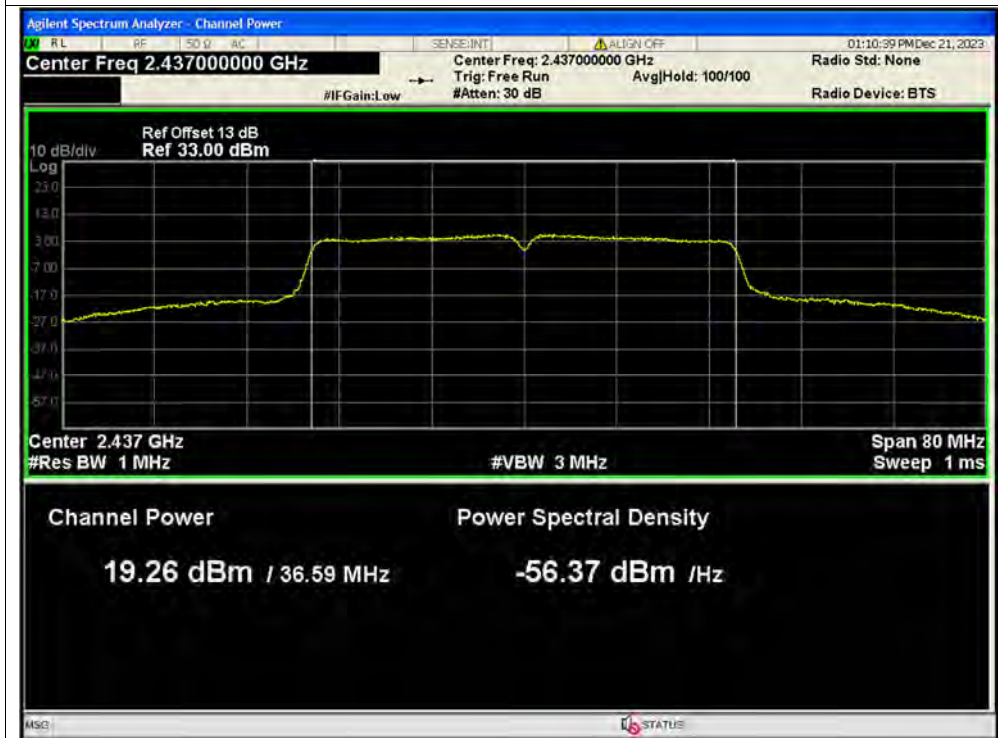




Average Power NVNT n40 2452MHz Ant8 MIMO

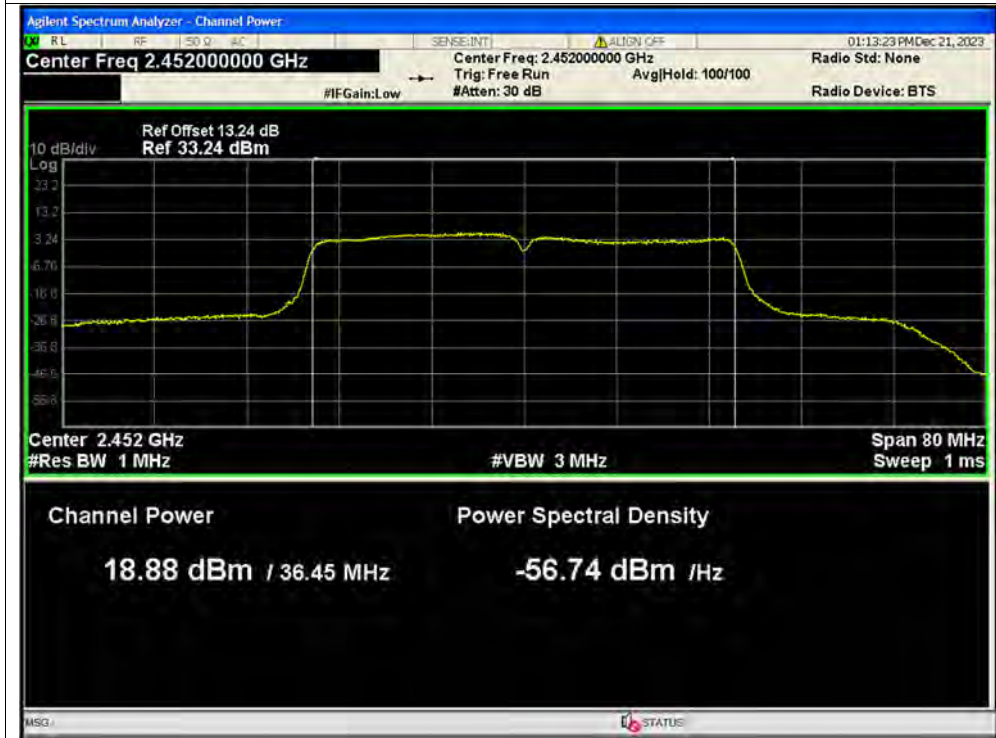

Average Power NVNT n40 2452MHz Ant9 MIMO

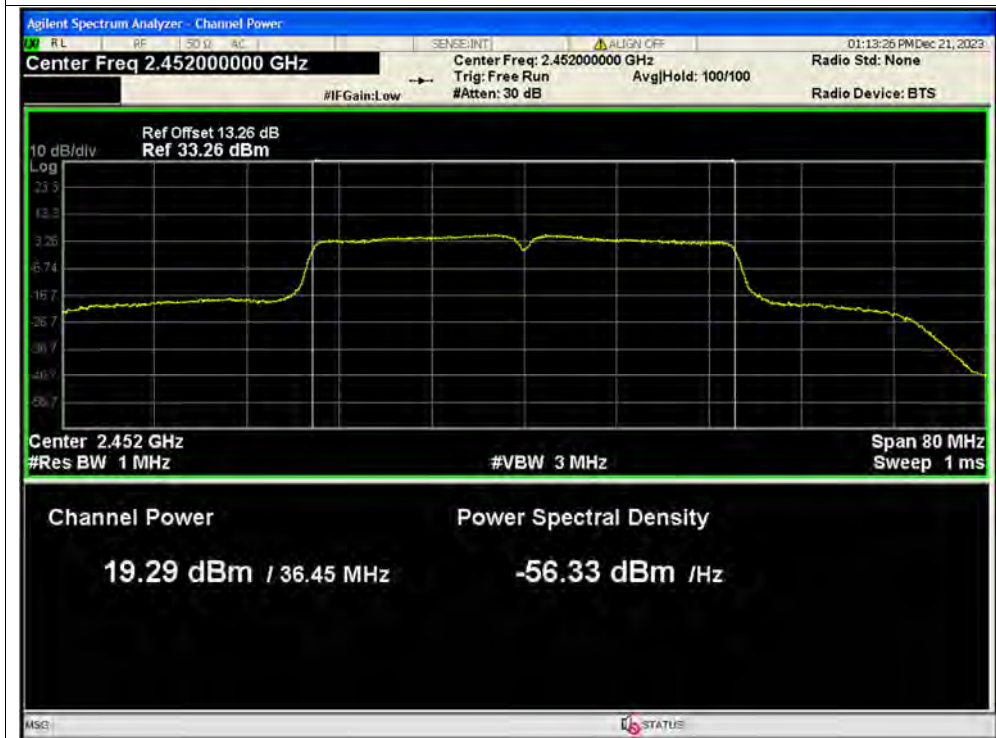


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit (MHz)	Verdict
NVNT	b SISO	2412	Ant8	9.012	0.5	Pass
NVNT	b SISO	2412	Ant8	9.066	0.5	Pass
NVNT	b SISO	2437	Ant8	8.536	0.5	Pass
NVNT	b SISO	2437	Ant9	9.037	0.5	Pass
NVNT	b SISO	2462	Ant9	9.049	0.5	Pass
NVNT	b SISO	2462	Ant9	9.028	0.5	Pass
NVNT	g SISO	2412	Ant8	11.271	0.5	Pass
NVNT	g SISO	2412	Ant8	14.451	0.5	Pass
NVNT	g SISO	2437	Ant8	15.985	0.5	Pass
NVNT	g SISO	2437	Ant9	15.003	0.5	Pass
NVNT	g SISO	2462	Ant9	16.288	0.5	Pass
NVNT	g SISO	2462	Ant9	16.291	0.5	Pass
NVNT	n20 SISO	2412	Ant8	15.115	0.5	Pass
NVNT	n20 SISO	2412	Ant8	13.83	0.5	Pass
NVNT	n20 MIMO	2412	Ant8	16.902	0.5	Pass
NVNT	n20 MIMO	2412	Ant9	15.936	0.5	Pass
NVNT	n20 SISO	2437	Ant9	17.557	0.5	Pass
NVNT	n20 SISO	2437	Ant9	15.659	0.5	Pass
NVNT	n20 MIMO	2437	Ant8	15.879	0.5	Pass
NVNT	n20 MIMO	2437	Ant9	16.917	0.5	Pass
NVNT	n20 SISO	2462	Ant8	16.268	0.5	Pass
NVNT	n20 SISO	2462	Ant9	17.525	0.5	Pass
NVNT	n20 MIMO	2462	Ant8	16.295	0.5	Pass
NVNT	n20 MIMO	2462	Ant9	17.54	0.5	Pass
NVNT	n40 SISO	2422	Ant8	36.323	0.5	Pass
NVNT	n40 SISO	2422	Ant8	33.764	0.5	Pass
NVNT	n40 MIMO	2422	Ant8	35.676	0.5	Pass
NVNT	n40 MIMO	2422	Ant9	35.643	0.5	Pass
NVNT	n40 SISO	2437	Ant9	34.454	0.5	Pass
NVNT	n40 SISO	2437	Ant9	35.112	0.5	Pass
NVNT	n40 MIMO	2437	Ant8	36.325	0.5	Pass
NVNT	n40 MIMO	2437	Ant9	35.079	0.5	Pass
NVNT	n40 SISO	2452	Ant8	32.576	0.5	Pass
NVNT	n40 SISO	2452	Ant9	35.388	0.5	Pass
NVNT	n40 MIMO	2452	Ant8	35.024	0.5	Pass
NVNT	n40 MIMO	2452	Ant9	35.433	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant8 SISO

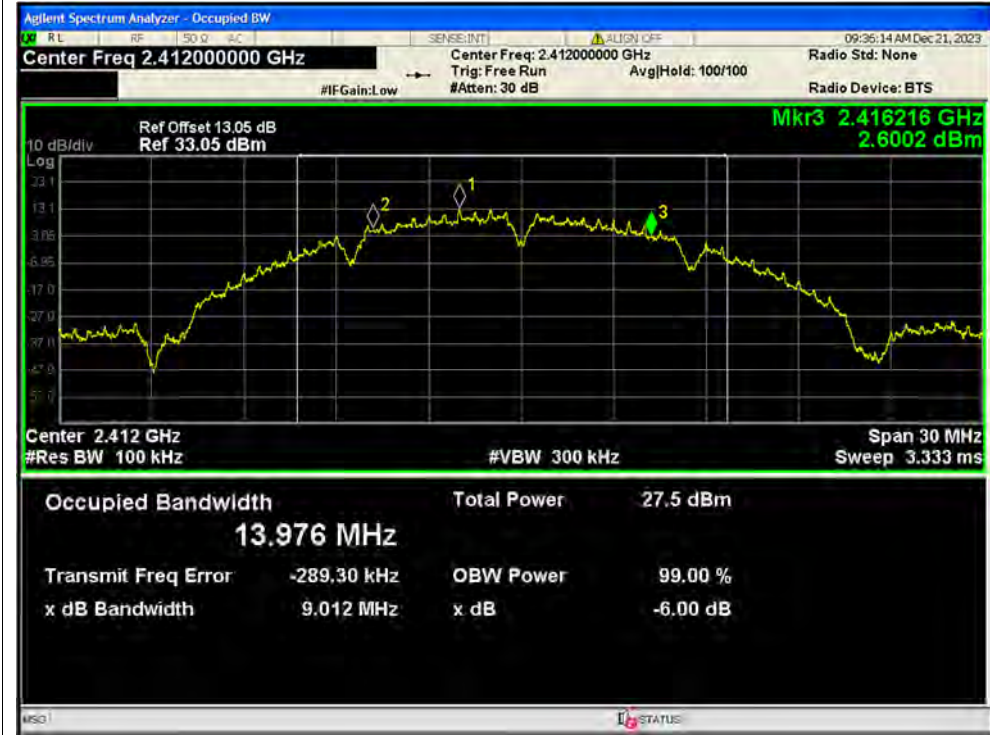

-6dB Bandwidth NVNT b 2437MHz Ant8 SISO





-6dB Bandwidth NVNT b 2462MHz Ant8 SISO



-6dB Bandwidth NVNT b 2412MHz Ant9 SISO






-6dB Bandwidth NVNT b 2437MHz Ant9 SISO



-6dB Bandwidth NVNT b 2462MHz Ant9 SISO

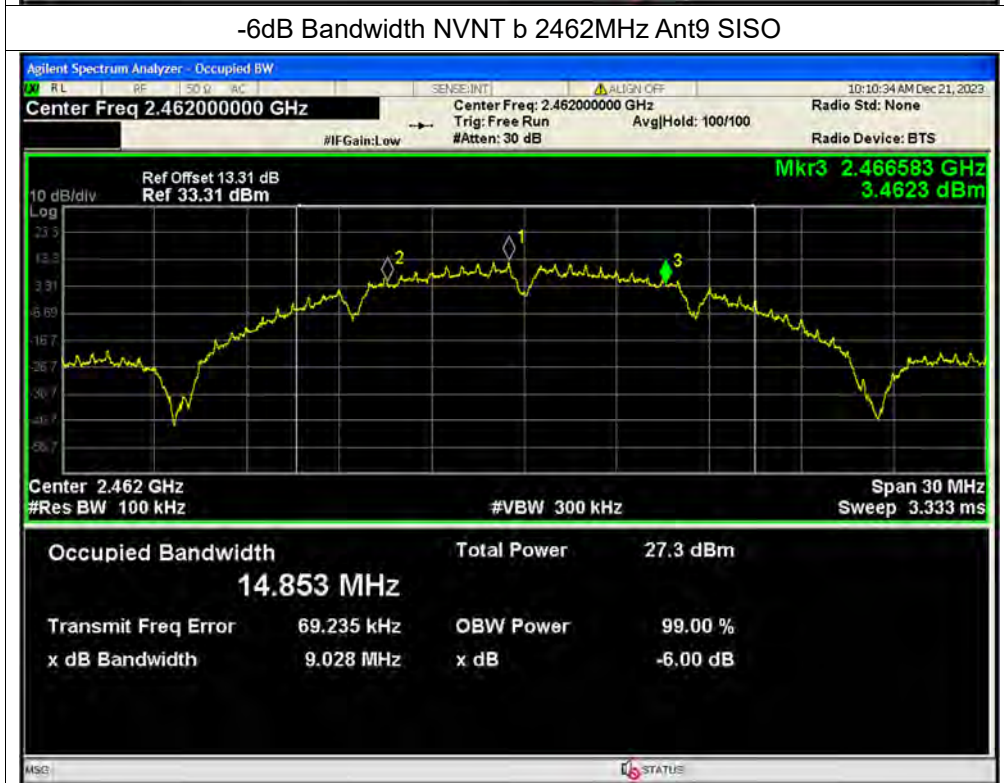




-6dB Bandwidth NVNT g 2412MHz Ant8 SISO




-6dB Bandwidth NVNT g 2437MHz Ant8 SISO

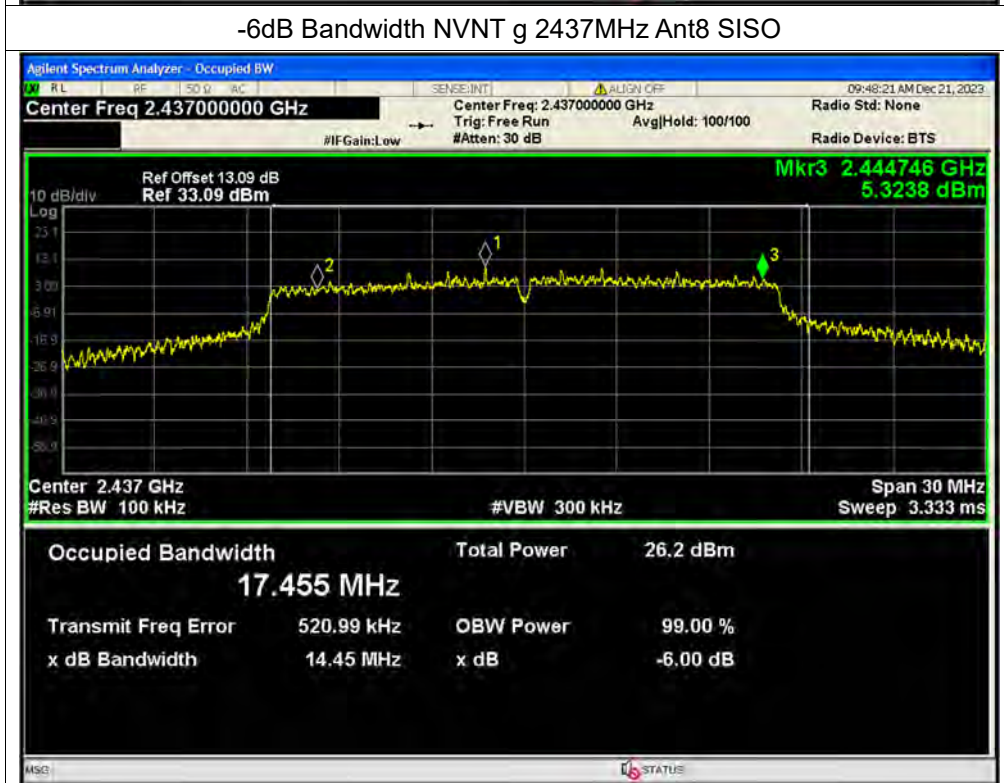

-6dB Bandwidth NVNT g 2462MHz Ant8 SISO



-6dB Bandwidth NVNT g 2412MHz Ant9 SISO

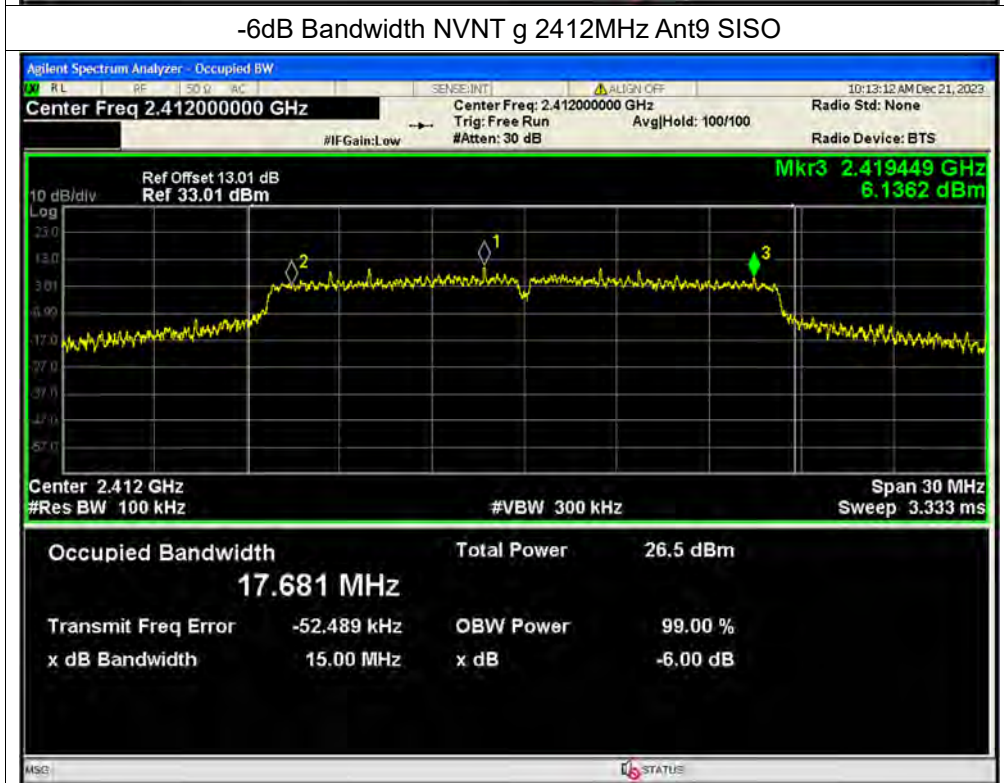



-6dB Bandwidth NVNT g 2437MHz Ant9 SISO



-6dB Bandwidth NVNT g 2462MHz Ant9 SISO






-6dB Bandwidth NVNT n20 2412MHz Ant8 SISO




-6dB Bandwidth NVNT n20 2437MHz Ant8 SISO

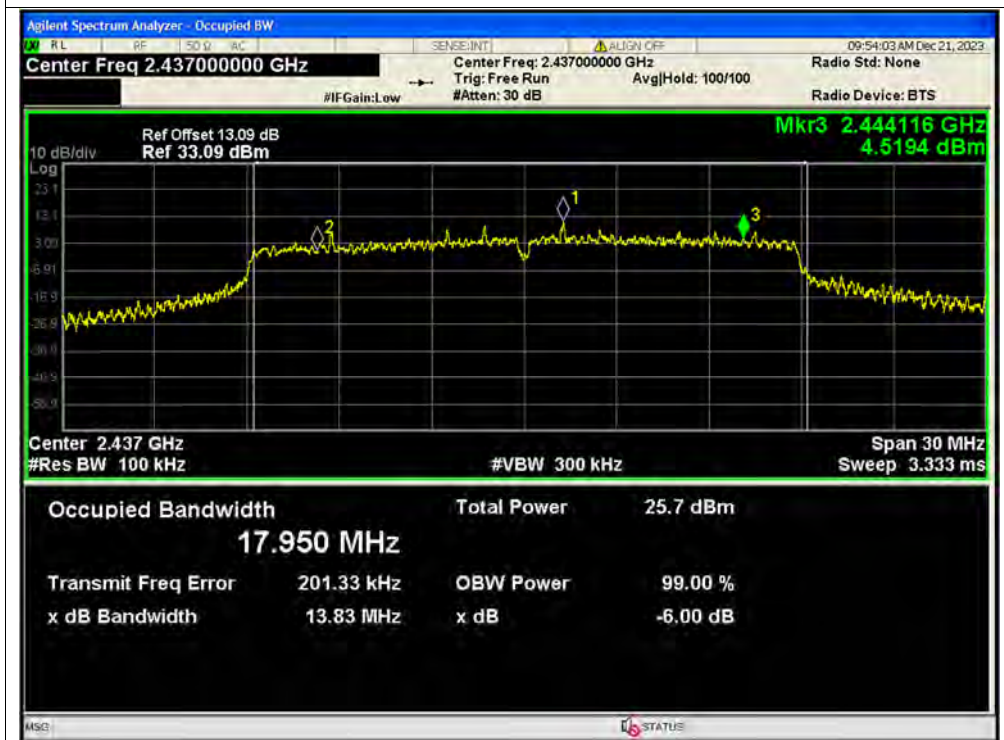




-6dB Bandwidth NVNT n20 2462MHz Ant8 SISO

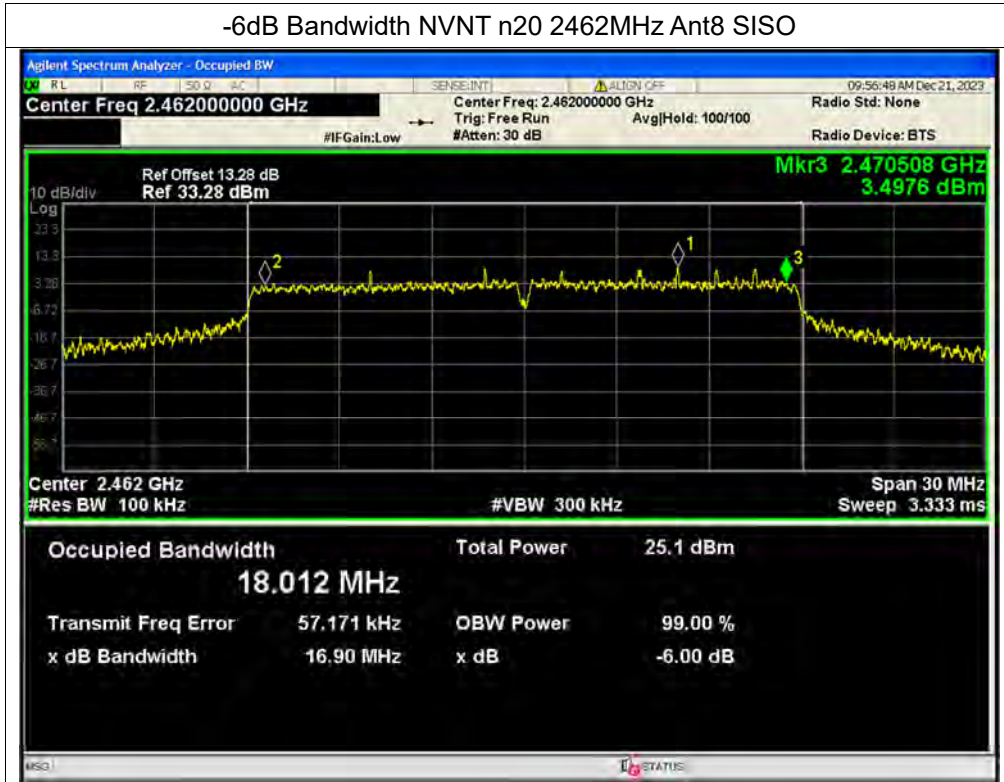


-6dB Bandwidth NVNT n20 2412MHz Ant9 SISO

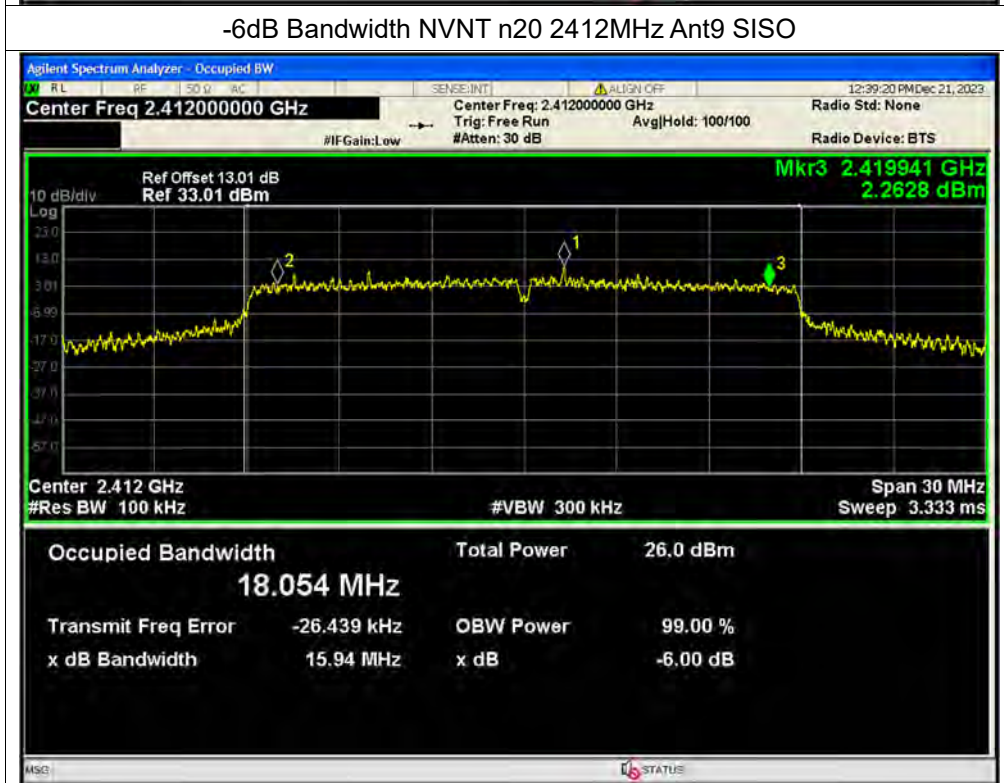




-6dB Bandwidth NVNT n20 2437MHz Ant9 SISO

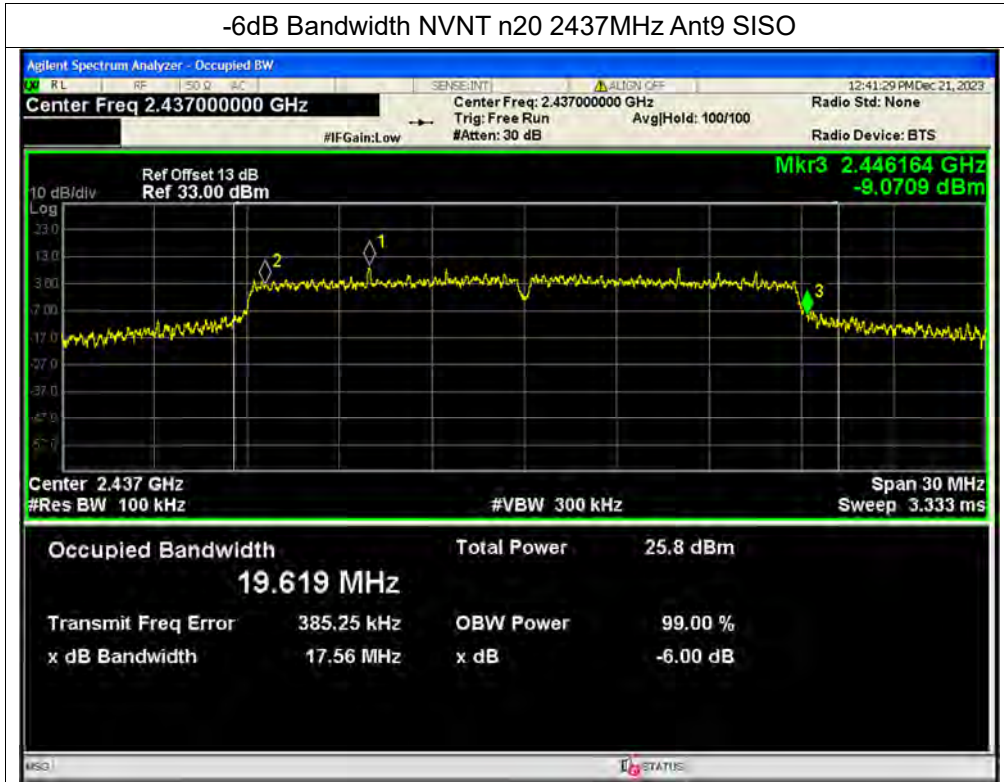


-6dB Bandwidth NVNT n20 2462MHz Ant9 SISO

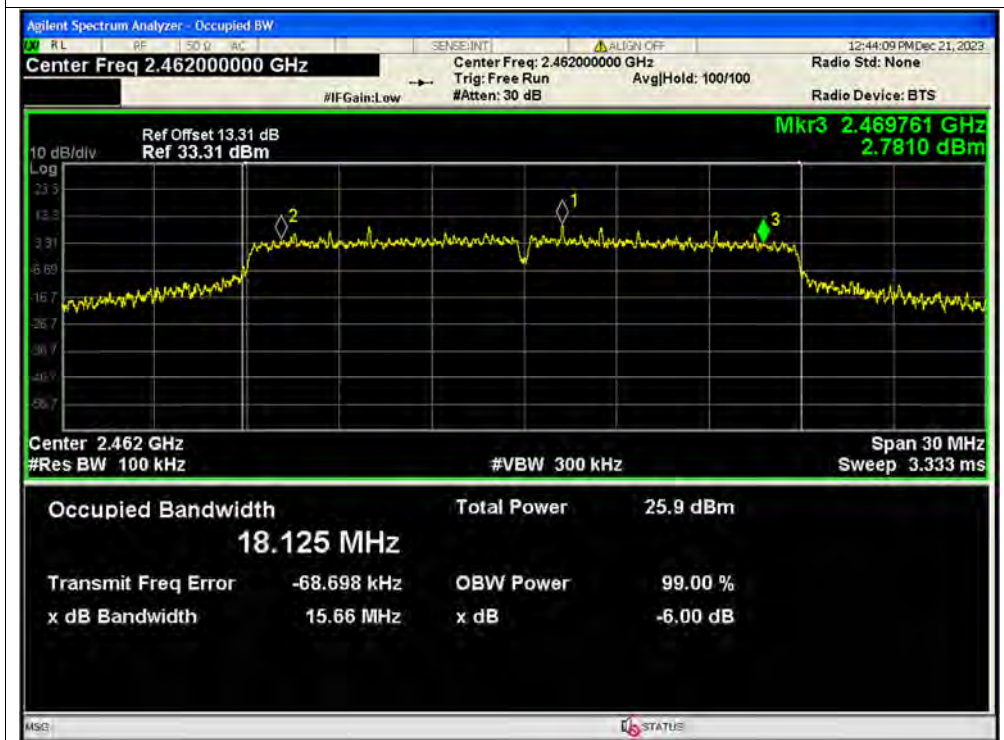



-6dB Bandwidth NVNT n20 2412MHz Ant8 MIMO

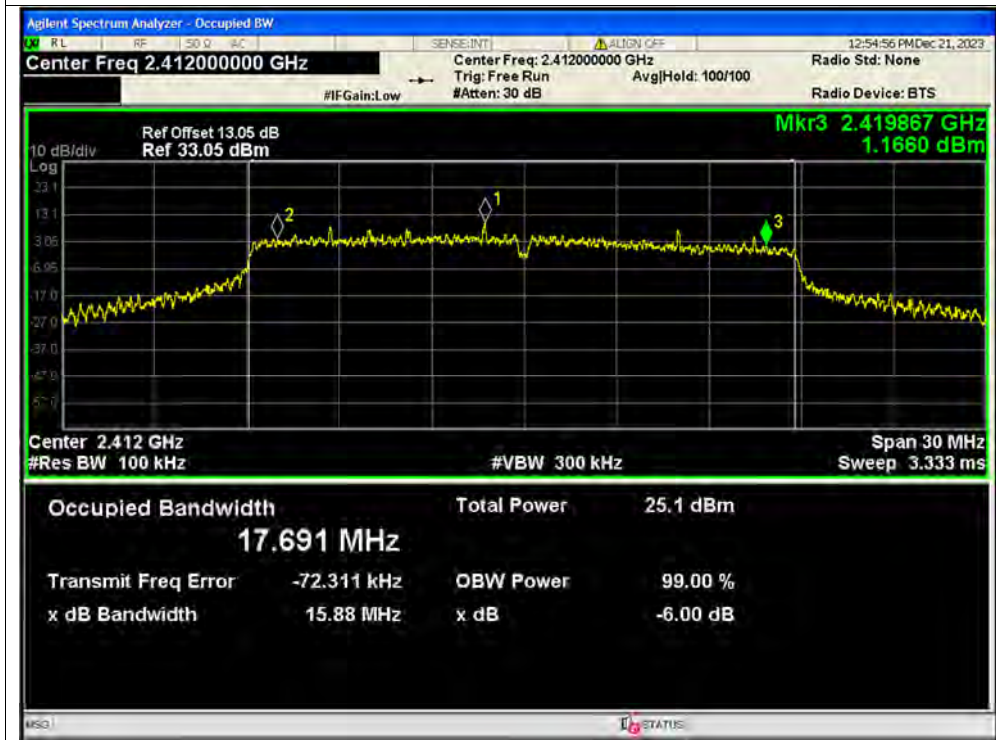


-6dB Bandwidth NVNT n20 2412MHz Ant9 MIMO






-6dB Bandwidth NVNT n20 2437MHz Ant8 MIMO

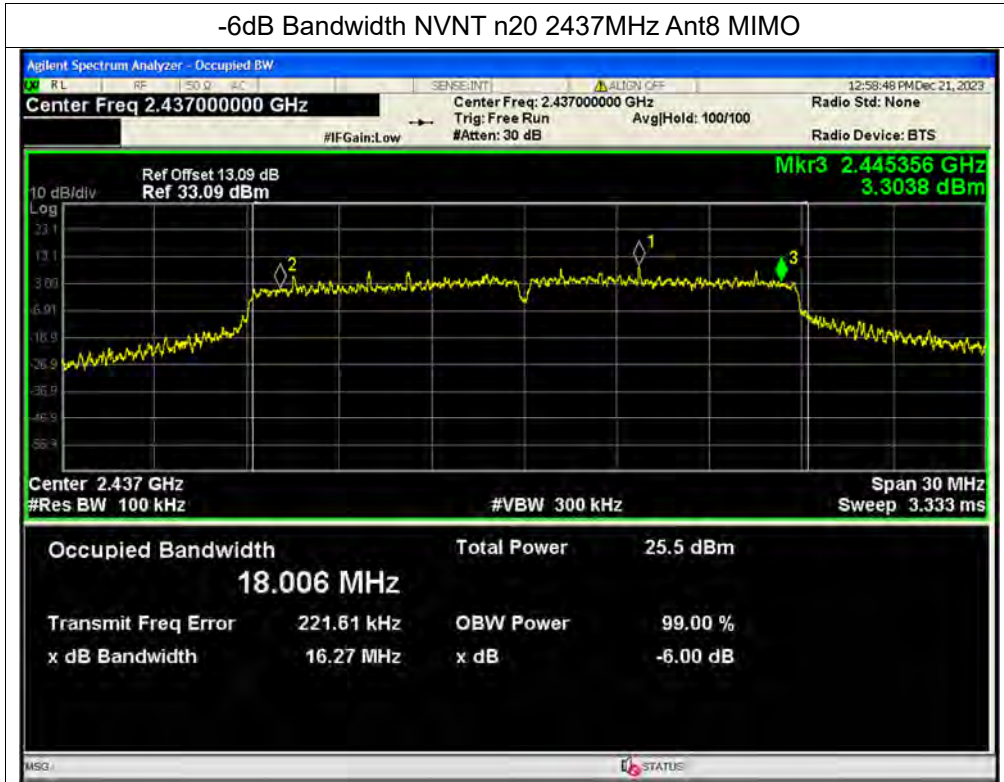


-6dB Bandwidth NVNT n20 2437MHz Ant9 MIMO

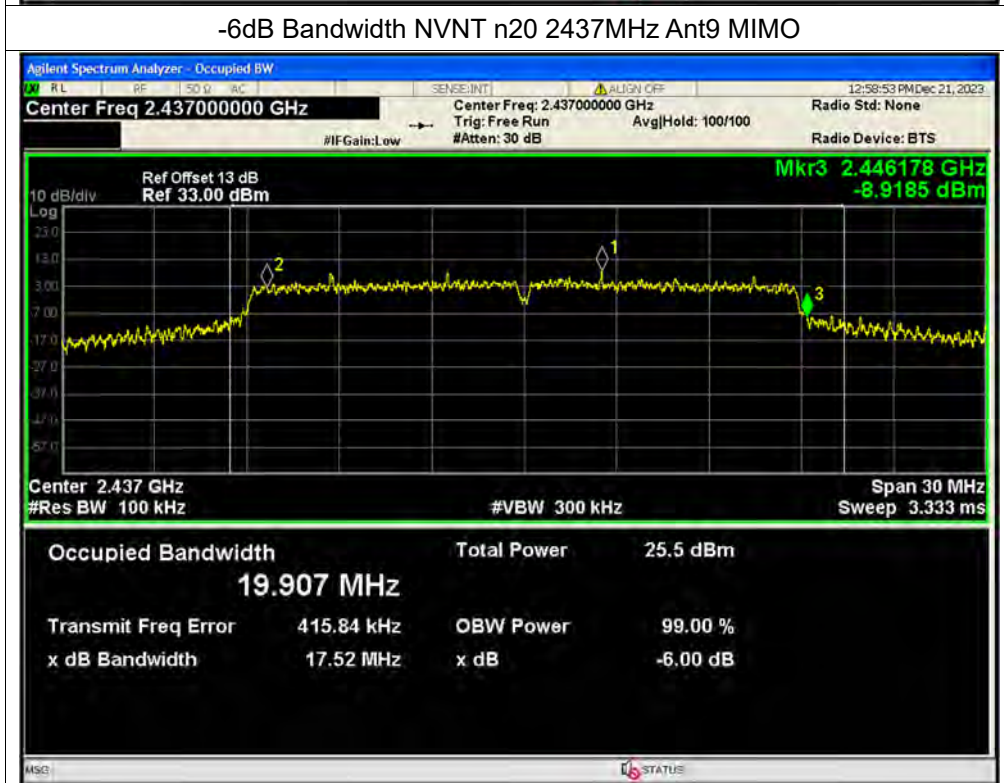




-6dB Bandwidth NVNT n20 2462MHz Ant8 MIMO

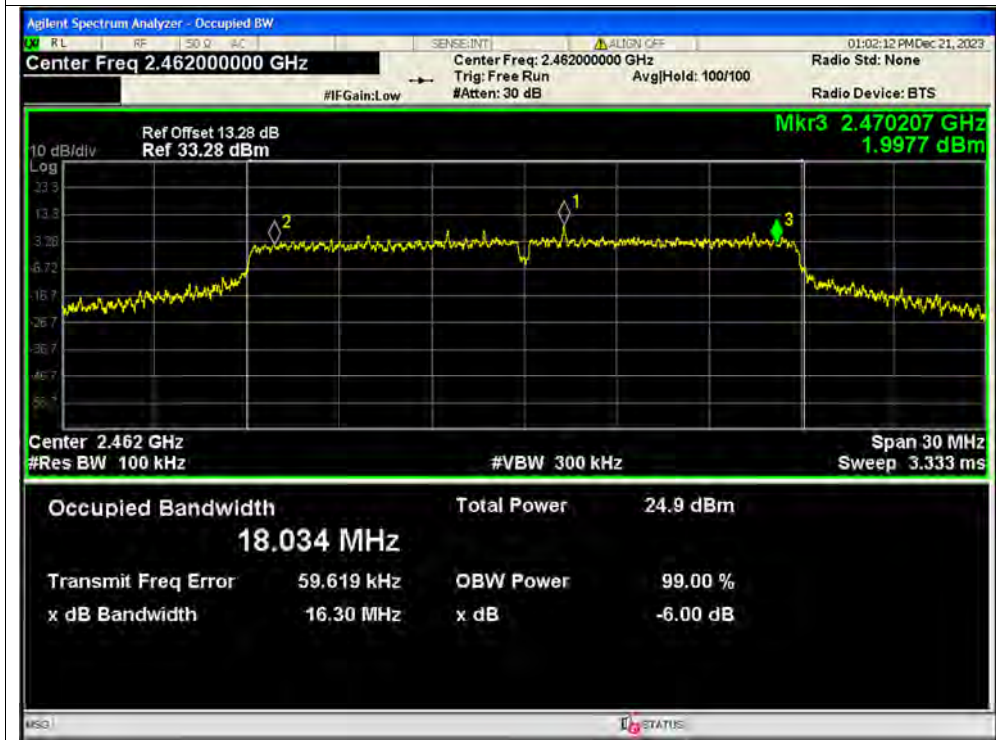


-6dB Bandwidth NVNT n20 2462MHz Ant9 MIMO

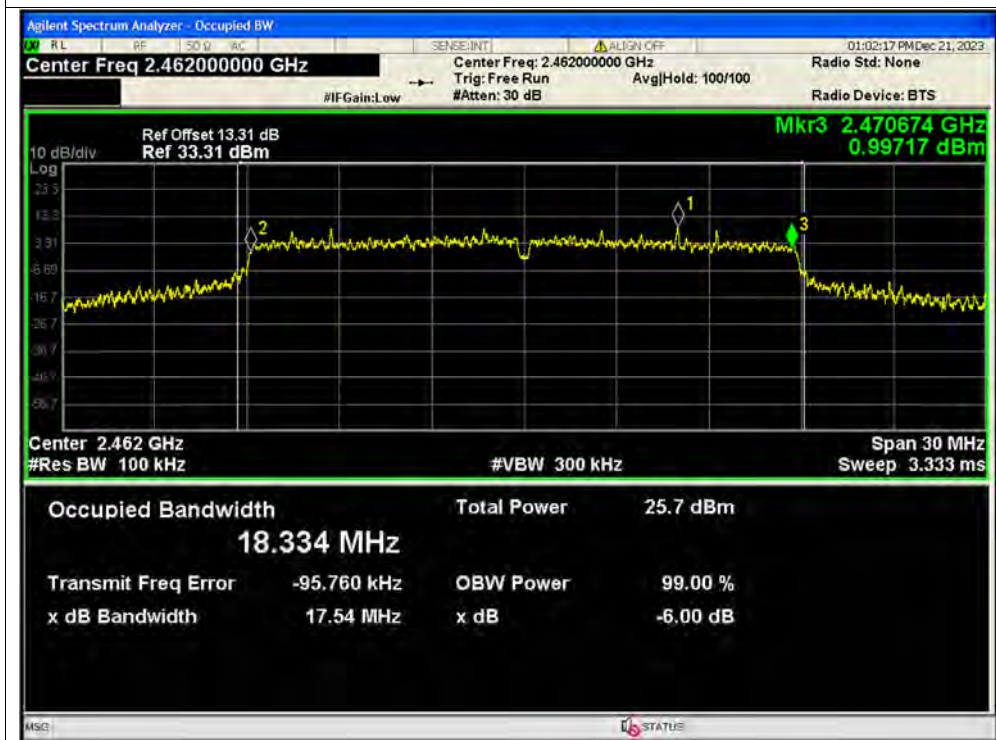




-6dB Bandwidth NVNT n40 2422MHz Ant8 SISO

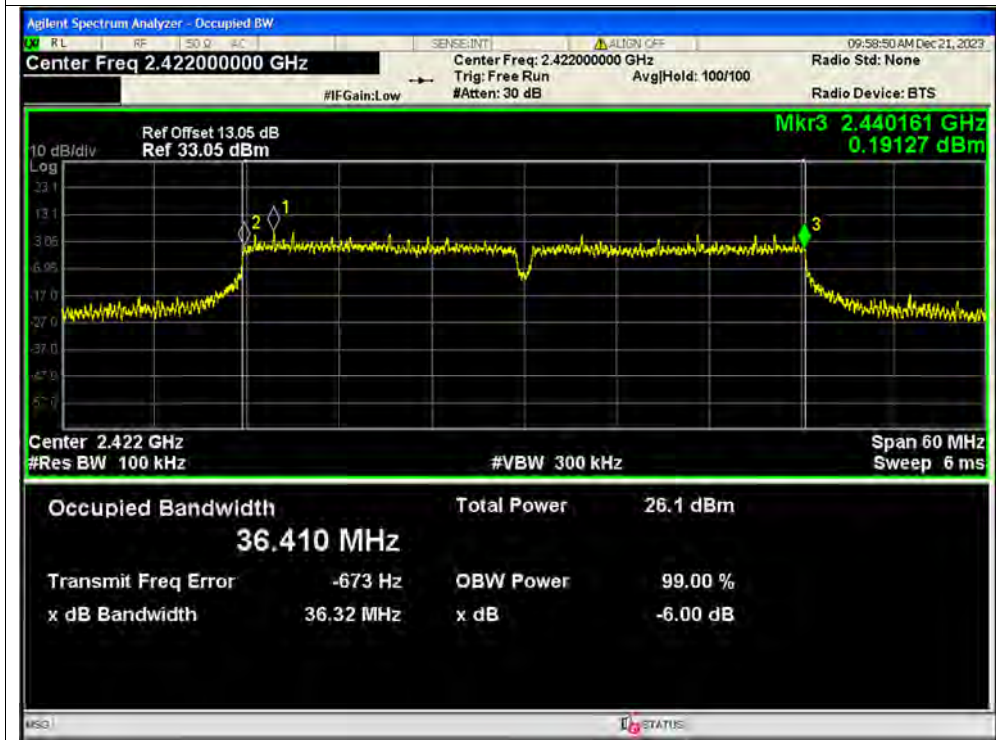


-6dB Bandwidth NVNT n40 2437MHz Ant8 SISO

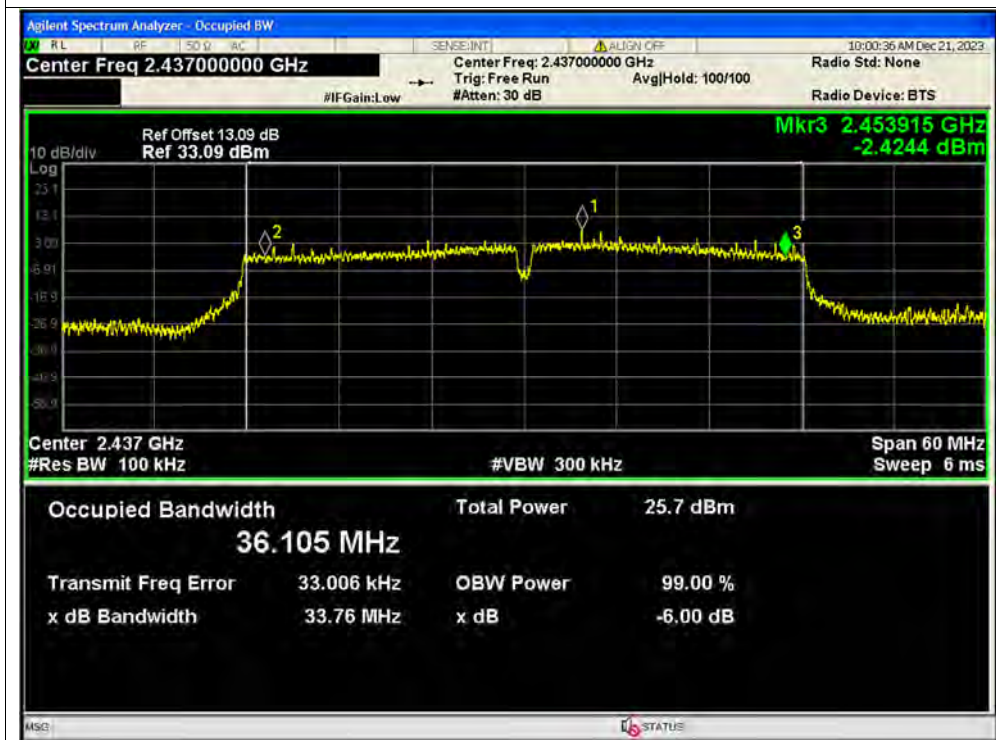




-6dB Bandwidth NVNT n40 2452MHz Ant8 SISO

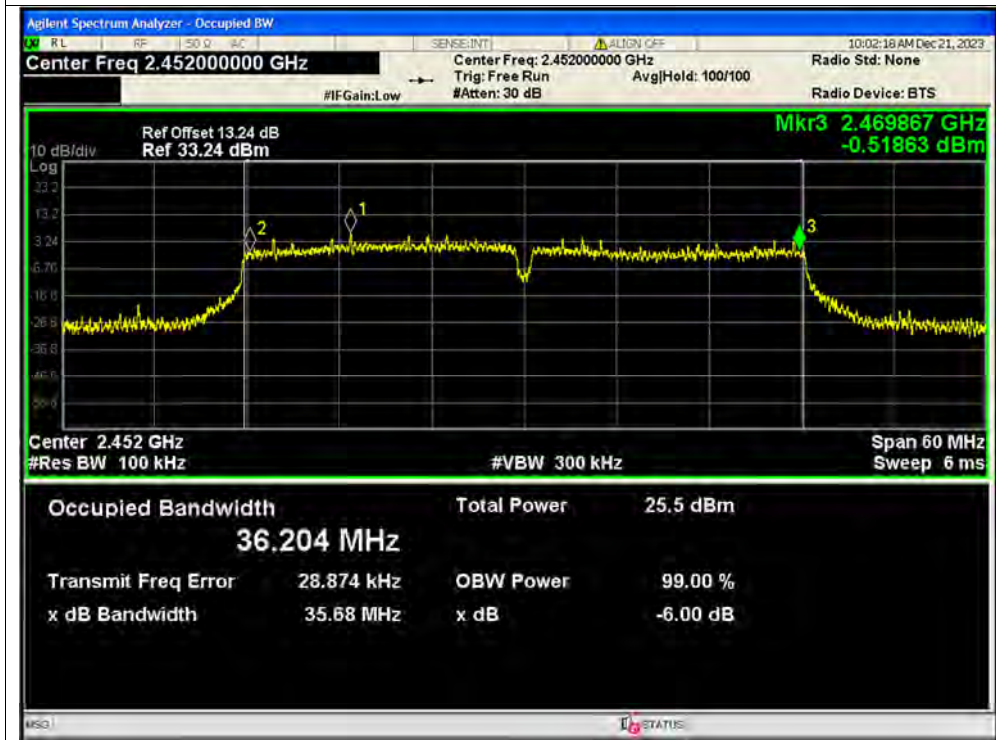


-6dB Bandwidth NVNT n40 2422MHz Ant9 SISO

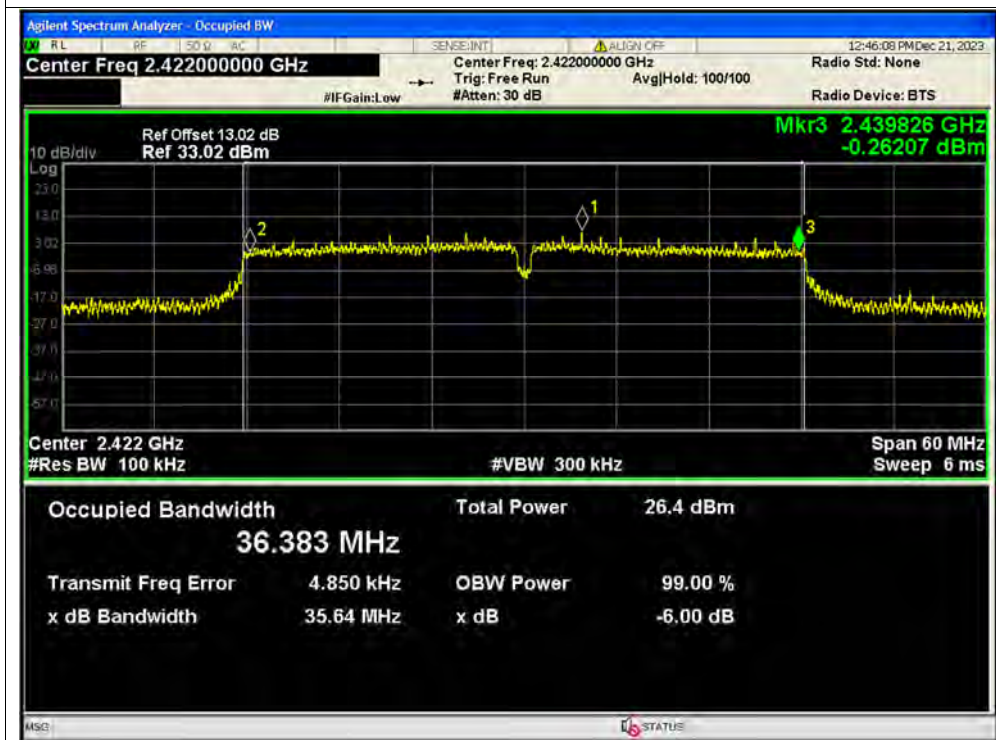



-6dB Bandwidth NVNT n40 2437MHz Ant9 SISO

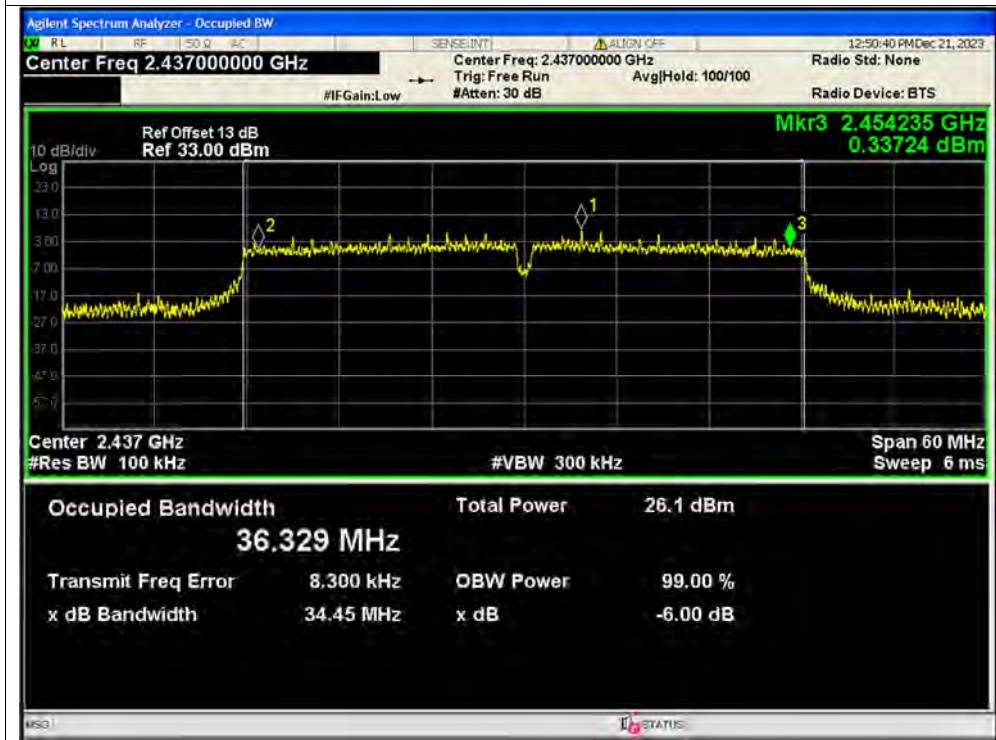


-6dB Bandwidth NVNT n40 2452MHz Ant9 SISO





-6dB Bandwidth NVNT n40 2422MHz Ant8 MIMO

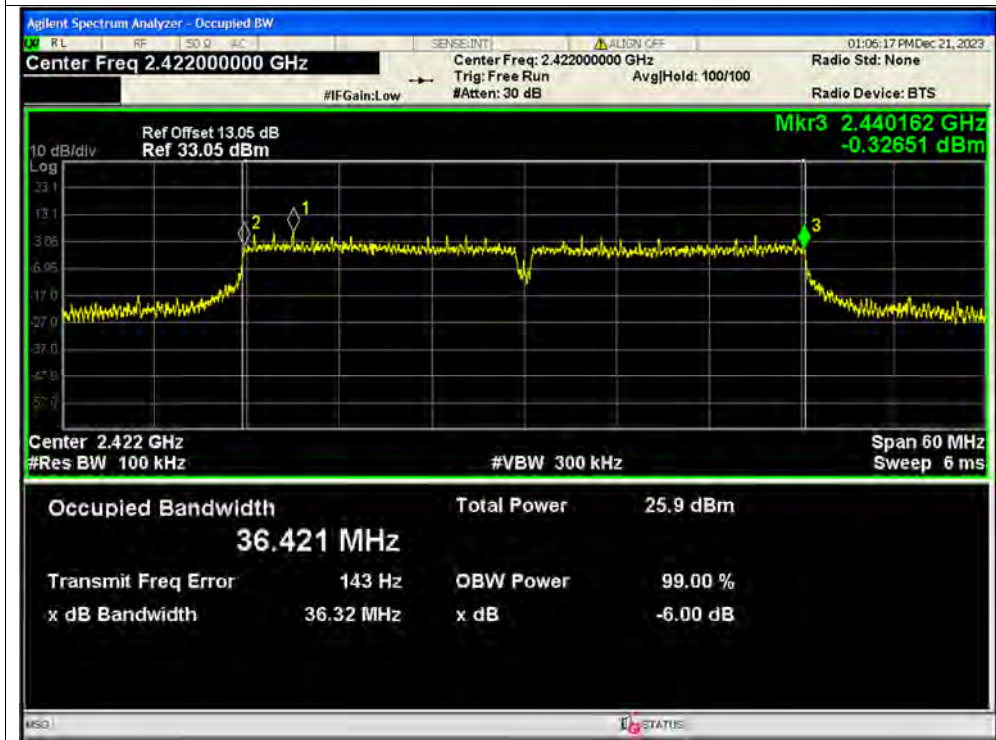


-6dB Bandwidth NVNT n40 2422MHz Ant9 MIMO





-6dB Bandwidth NVNT n40 2437MHz Ant8 MIMO

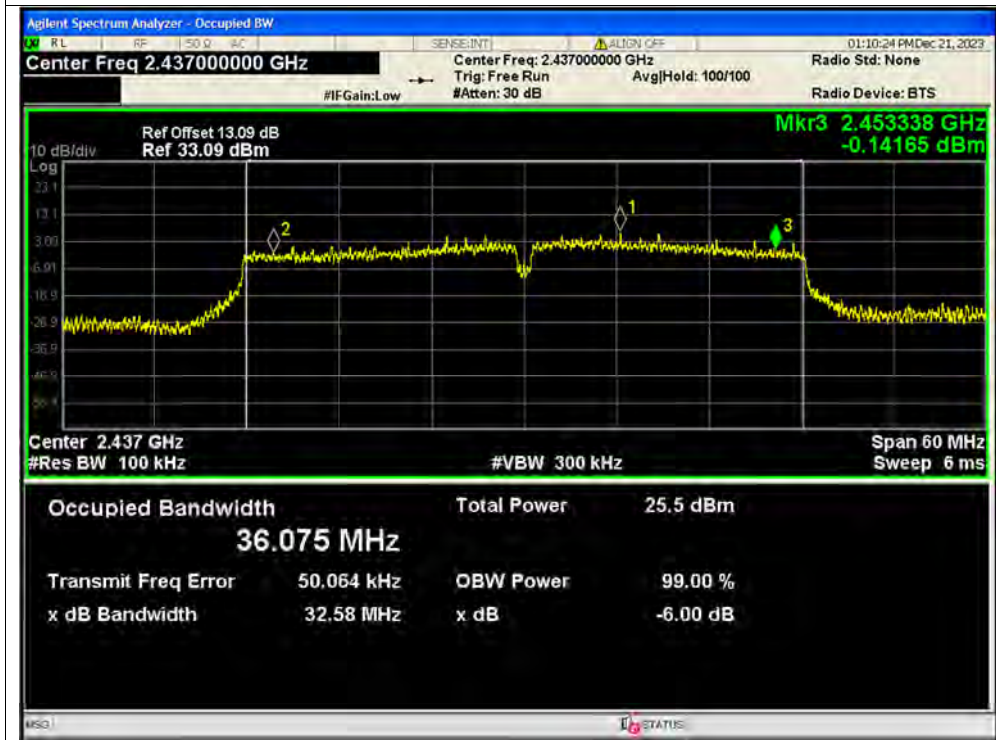

-6dB Bandwidth NVNT n40 2437MHz Ant9 MIMO





-6dB Bandwidth NVNT n40 2452MHz Ant8 MIMO




-6dB Bandwidth NVNT n40 2452MHz Ant9 MIMO



**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b SISO	2412	Ant8	-42.14	-20	Pass
NVNT	b SISO	2437	Ant8	-41.86	-20	Pass
NVNT	b SISO	2462	Ant8	-39.23	-20	Pass
NVNT	b SISO	2412	Ant9	-41.89	-20	Pass
NVNT	b SISO	2437	Ant9	-41.08	-20	Pass
NVNT	b SISO	2462	Ant9	-41.41	-20	Pass
NVNT	g SISO	2412	Ant8	-39.31	-20	Pass
NVNT	g SISO	2437	Ant8	-40.69	-20	Pass
NVNT	g SISO	2462	Ant8	-38.73	-20	Pass
NVNT	g SISO	2412	Ant9	-40.81	-20	Pass
NVNT	g SISO	2437	Ant9	-38.99	-20	Pass
NVNT	g SISO	2462	Ant9	-39.88	-20	Pass
NVNT	n20 SISO	2412	Ant8	-38.33	-20	Pass
NVNT	n20 SISO	2437	Ant8	-39.62	-20	Pass
NVNT	n20 SISO	2462	Ant8	-37.61	-20	Pass
NVNT	n20 SISO	2412	Ant9	-39.6	-20	Pass
NVNT	n20 SISO	2437	Ant9	-39.07	-20	Pass
NVNT	n20 SISO	2462	Ant9	-38.96	-20	Pass
NVNT	n20 MIMO	2412	Ant8	-38.62	-20	Pass
NVNT	n20 MIMO	2412	Ant9	-39.95	-20	Pass
NVNT	n20 MIMO	2437	Ant8	-38.44	-20	Pass
NVNT	n20 MIMO	2437	Ant9	-37.89	-20	Pass
NVNT	n20 MIMO	2462	Ant8	-38.68	-20	Pass
NVNT	n20 MIMO	2462	Ant9	-38.72	-20	Pass
NVNT	n40 SISO	2422	Ant8	-35.51	-20	Pass
NVNT	n40 SISO	2437	Ant8	-36.59	-20	Pass
NVNT	n40 SISO	2452	Ant8	-36.03	-20	Pass
NVNT	n40 SISO	2422	Ant9	-36.04	-20	Pass
NVNT	n40 SISO	2437	Ant9	-36.3	-20	Pass
NVNT	n40 SISO	2452	Ant9	-35.17	-20	Pass
NVNT	n40 MIMO	2422	Ant8	-35.67	-20	Pass
NVNT	n40 MIMO	2422	Ant9	-36.33	-20	Pass
NVNT	n40 MIMO	2437	Ant8	-36.93	-20	Pass
NVNT	n40 MIMO	2437	Ant9	-35.5	-20	Pass
NVNT	n40 MIMO	2452	Ant8	-35.67	-20	Pass
NVNT	n40 MIMO	2452	Ant9	-35.77	-20	Pass

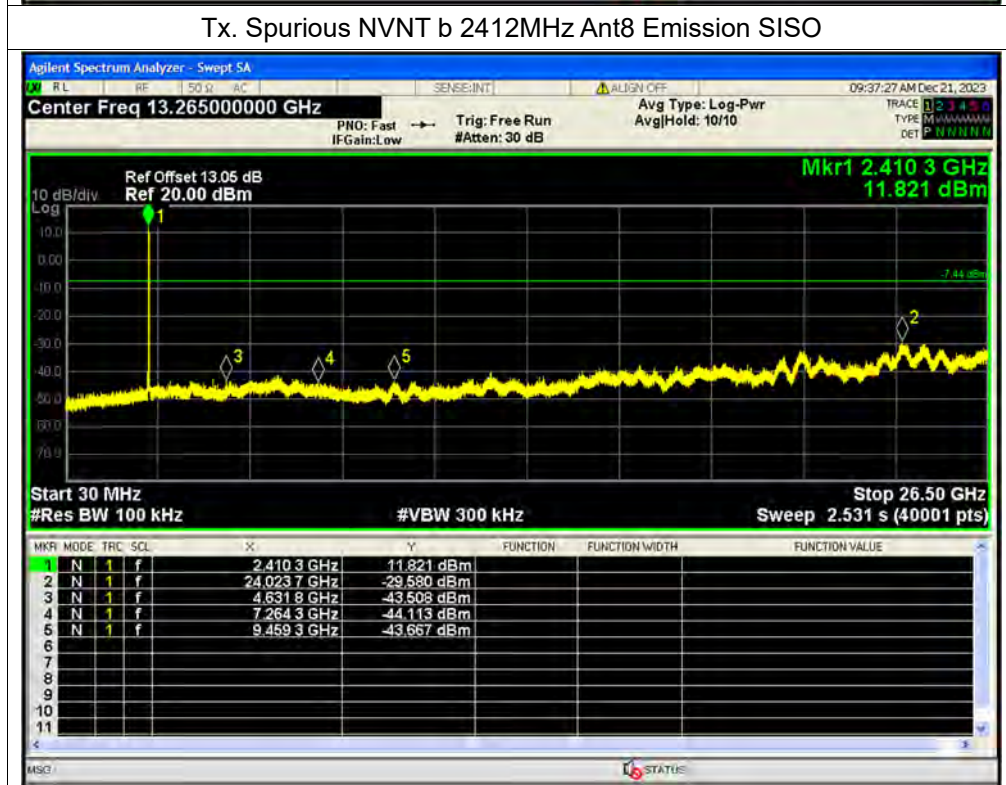

Tx. Spurious NVNT b 2437MHz Ant8 Ref SISO



Tx. Spurious NVNT b 2437MHz Ant8 Emission SISO

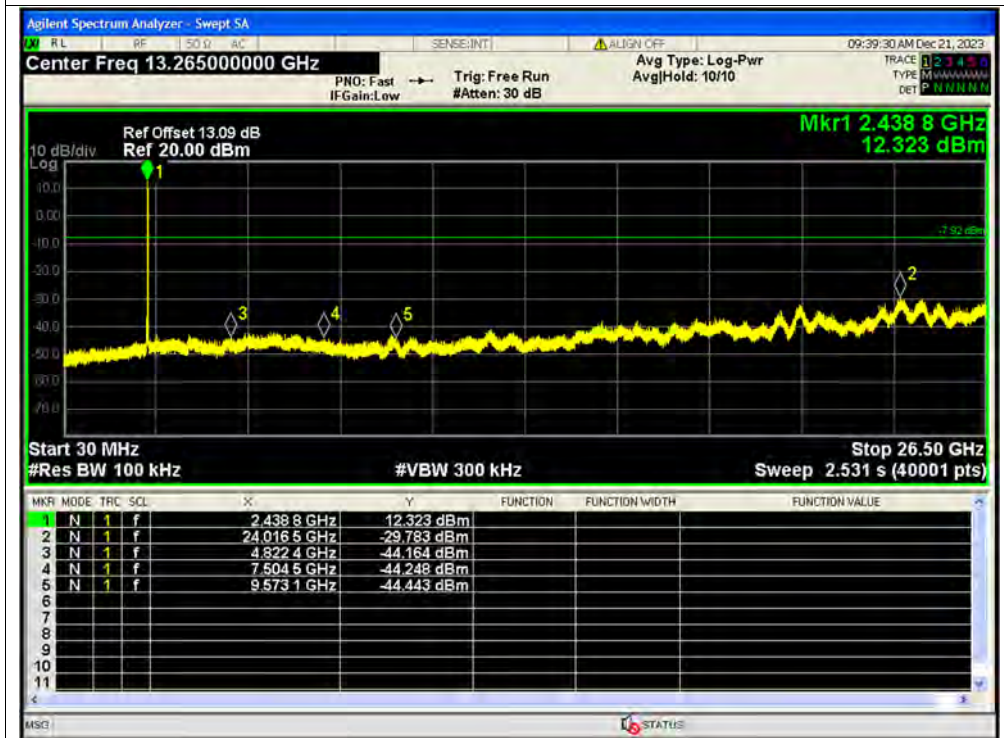




Tx. Spurious NVNT b 2462MHz Ant8 Ref SISO



Tx. Spurious NVNT b 2462MHz Ant8 Emission SISO

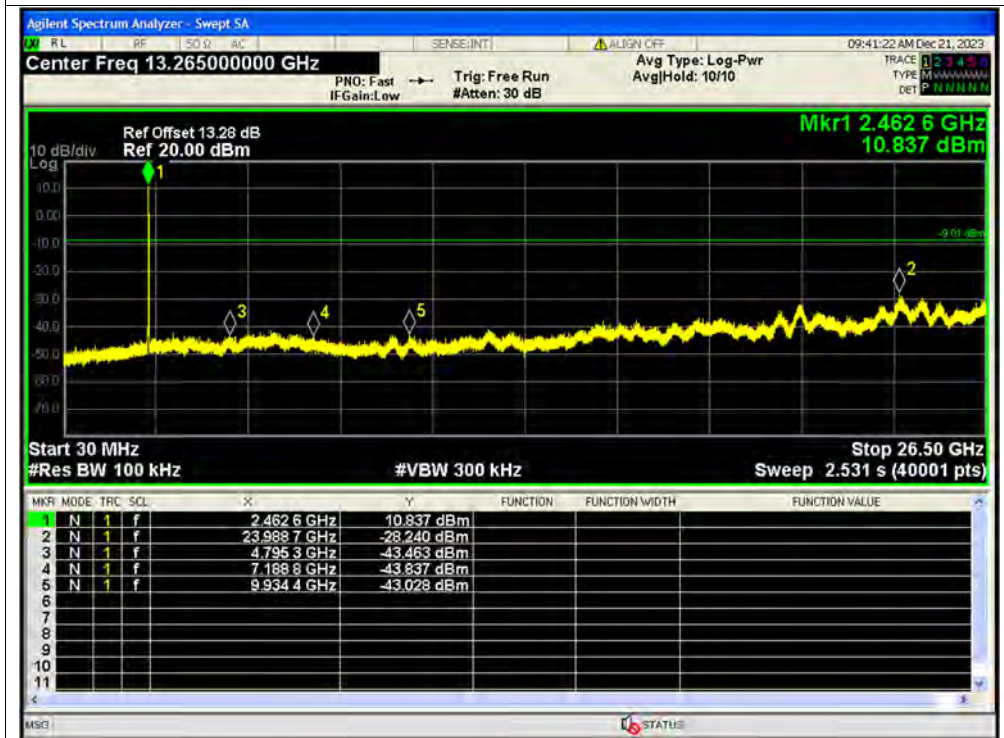




Tx. Spurious NVNT b 2412MHz Ant9 Ref SISO



Tx. Spurious NVNT b 2412MHz Ant9 Emission SISO

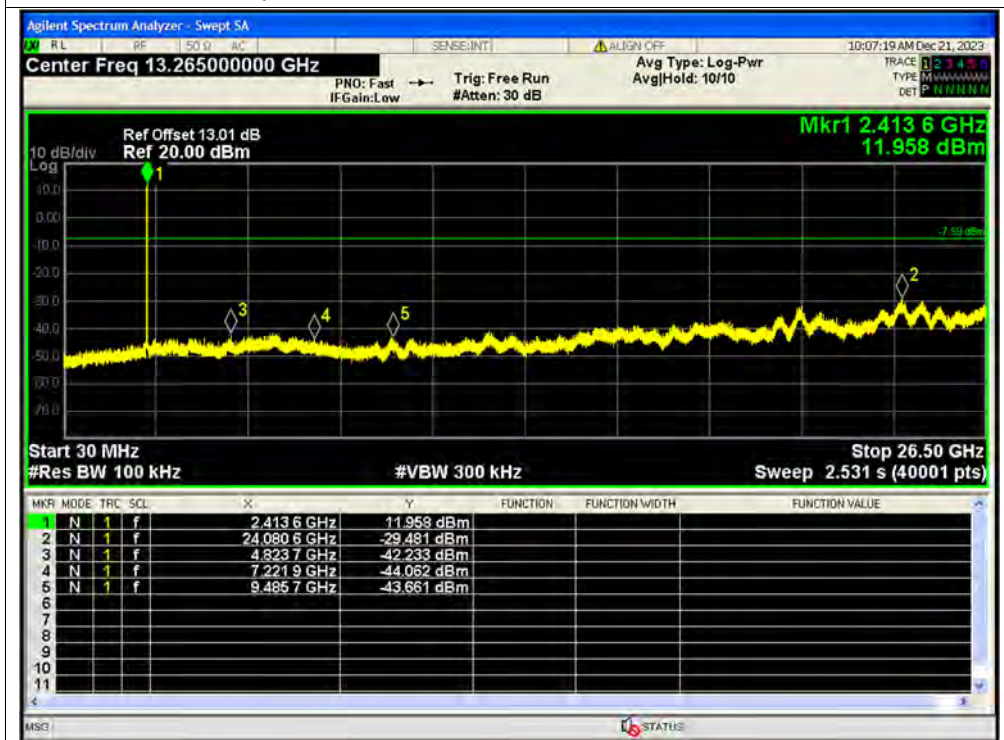




Tx. Spurious NVNT b 2437MHz Ant9 Ref SISO



Tx. Spurious NVNT b 2437MHz Ant9 Emission SISO

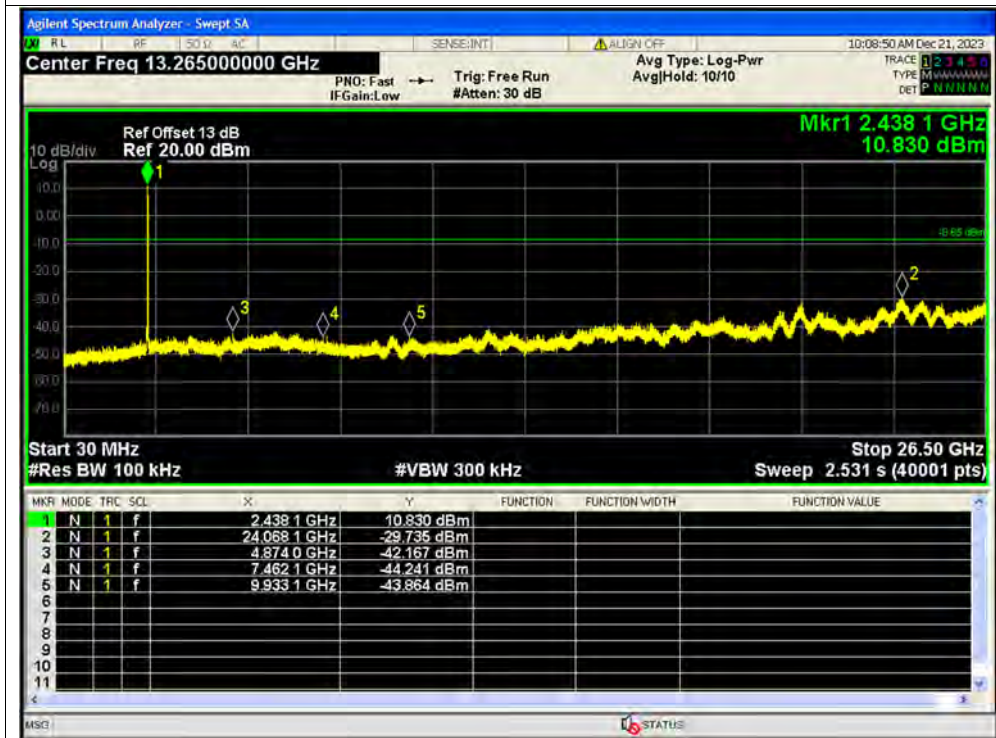




Tx. Spurious NVNT b 2462MHz Ant9 Ref SISO



Tx. Spurious NVNT b 2462MHz Ant9 Emission SISO

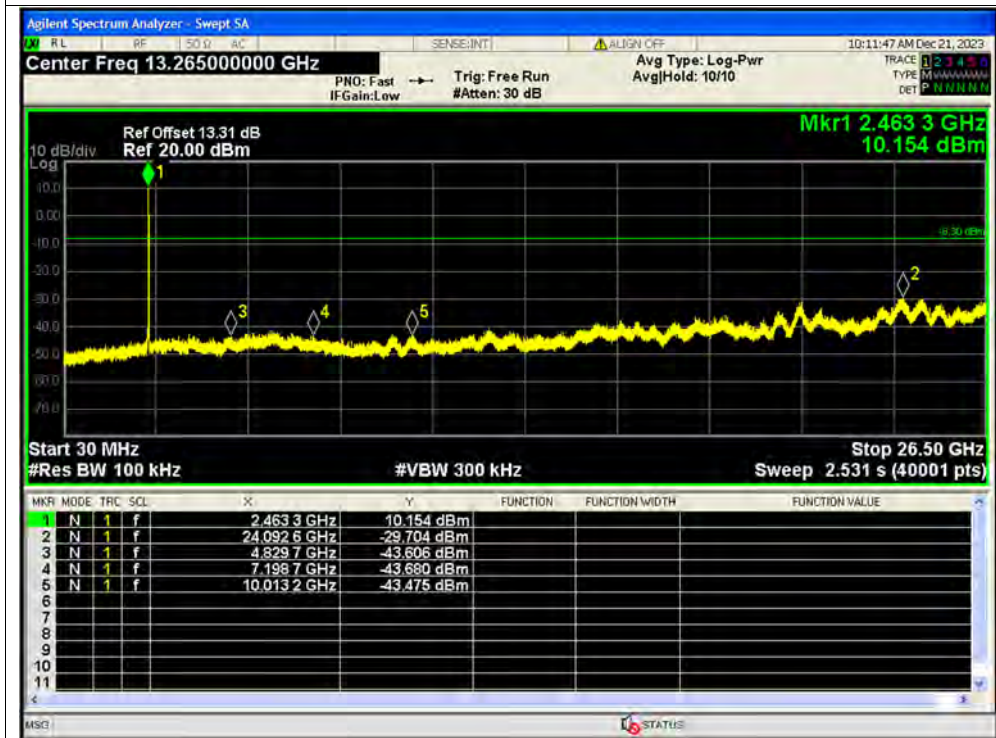




Tx. Spurious NVNT g 2412MHz Ant8 Ref SISO




Tx. Spurious NVNT g 2412MHz Ant8 Emission SISO

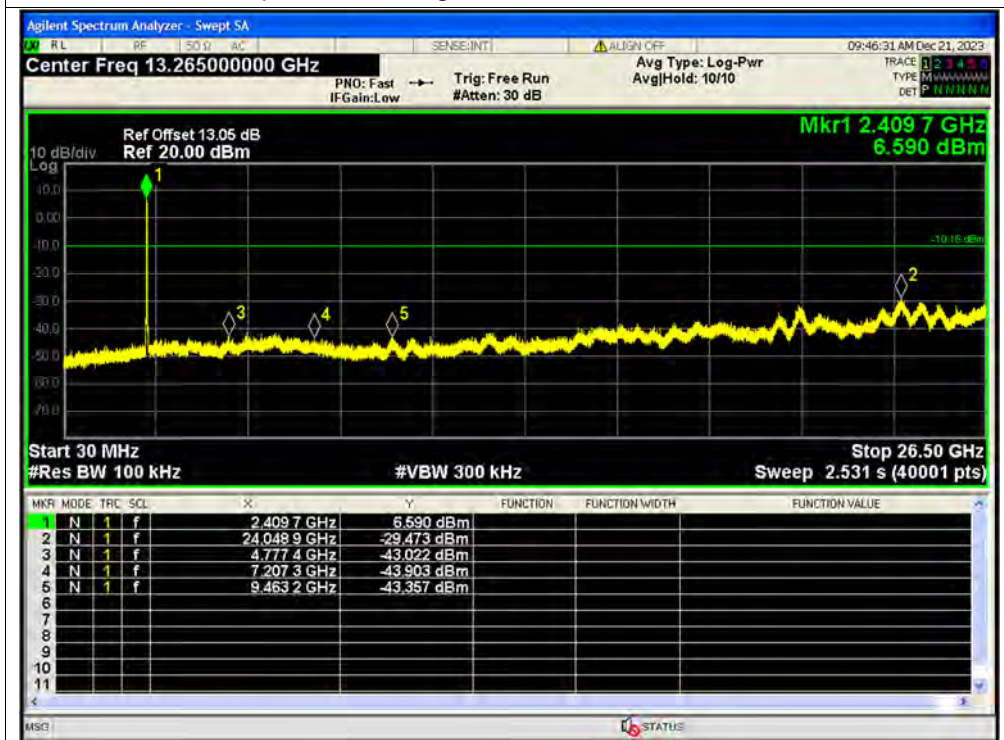




Tx. Spurious NVNT g 2437MHz Ant8 Ref SISO

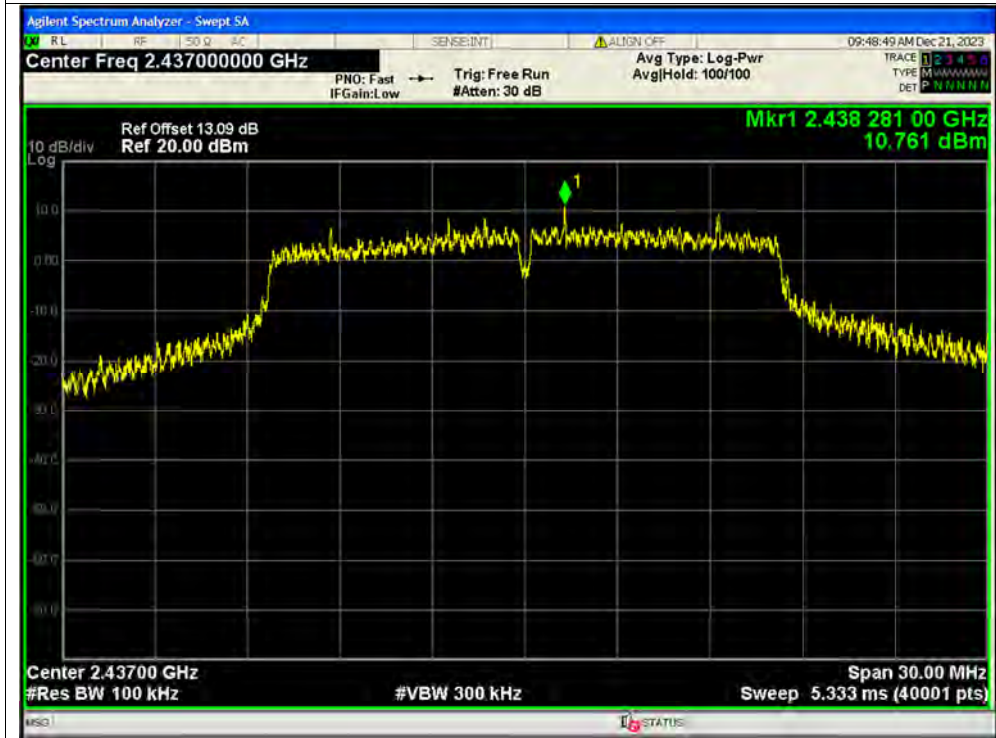

Tx. Spurious NVNT g 2437MHz Ant8 Emission SISO

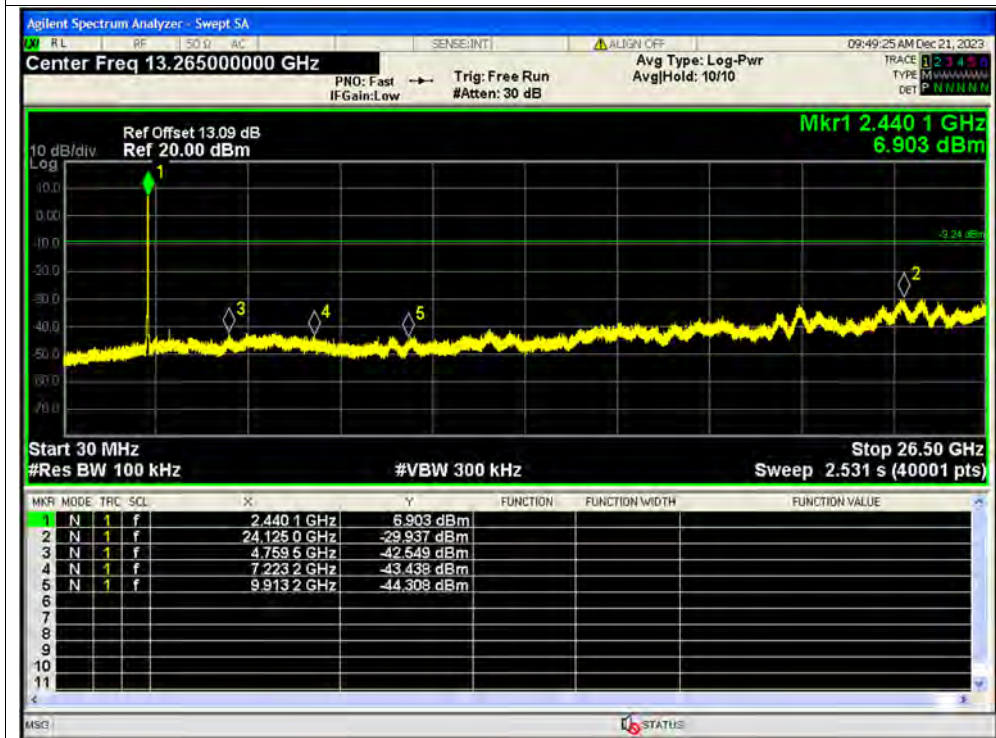





Tx. Spurious NVNT g 2462MHz Ant8 Ref SISO




Tx. Spurious NVNT g 2462MHz Ant8 Emission SISO

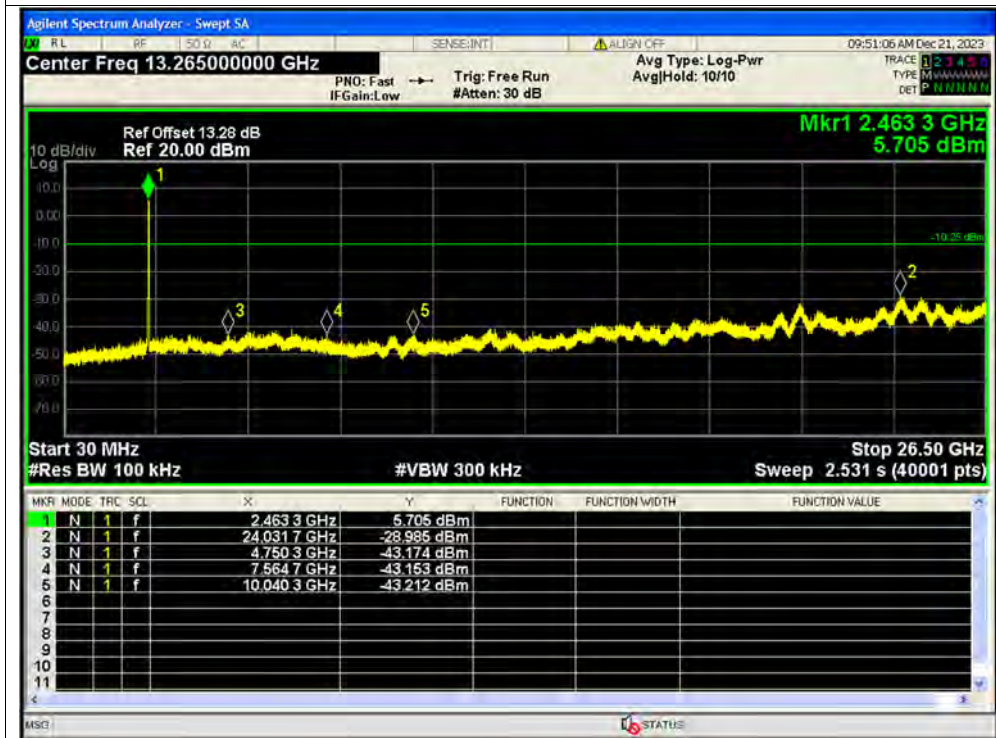

Tx. Spurious NVNT g 2412MHz Ant9 Ref SISO

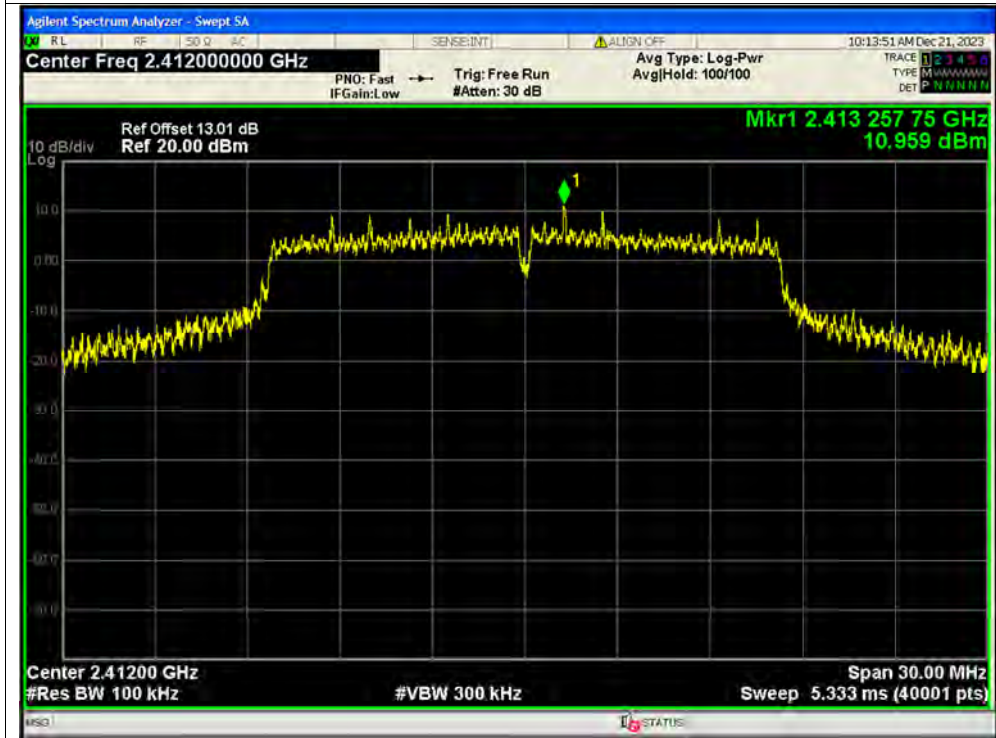


Tx. Spurious NVNT g 2412MHz Ant9 Emission SISO

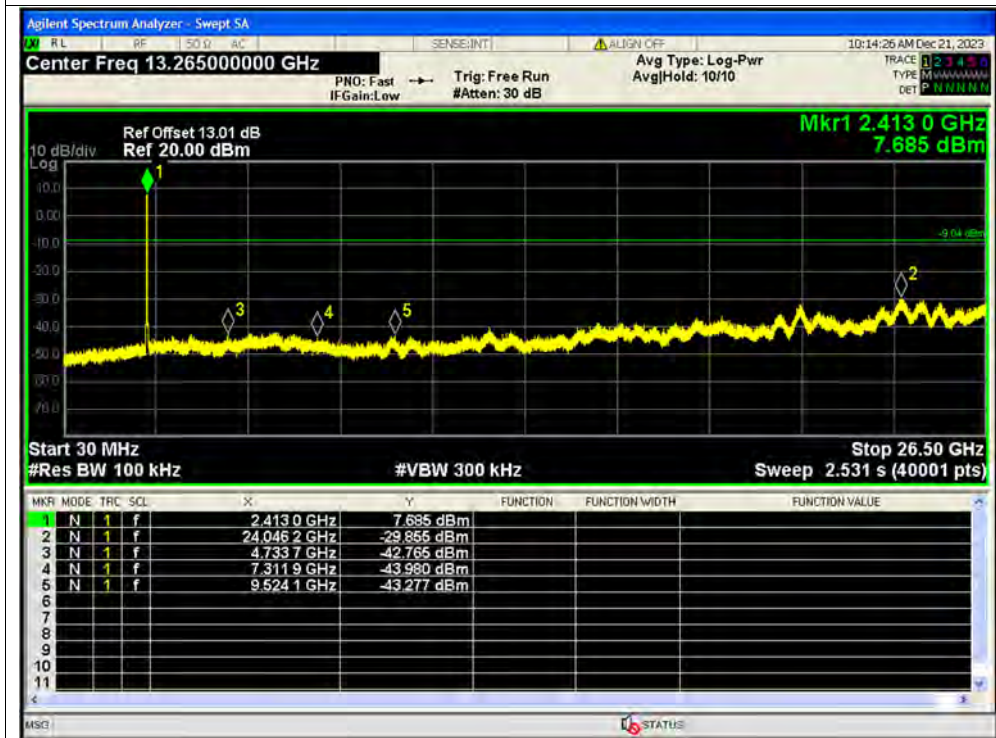




Tx. Spurious NVNT g 2437MHz Ant9 Ref SISO

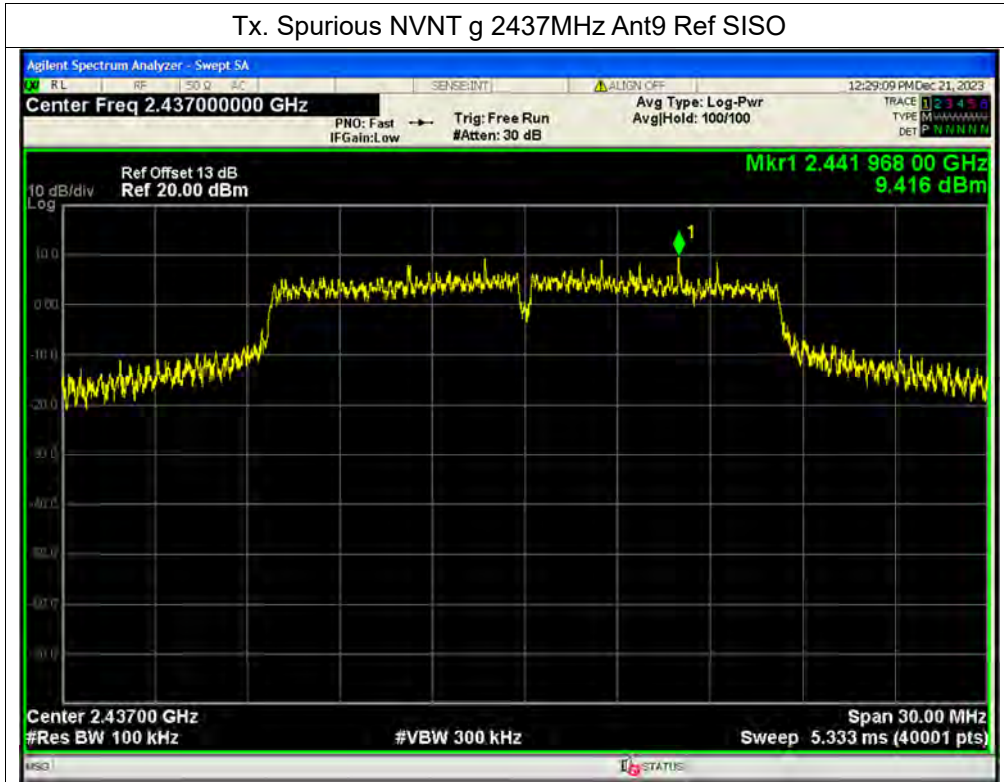


Tx. Spurious NVNT g 2437MHz Ant9 Emission SISO

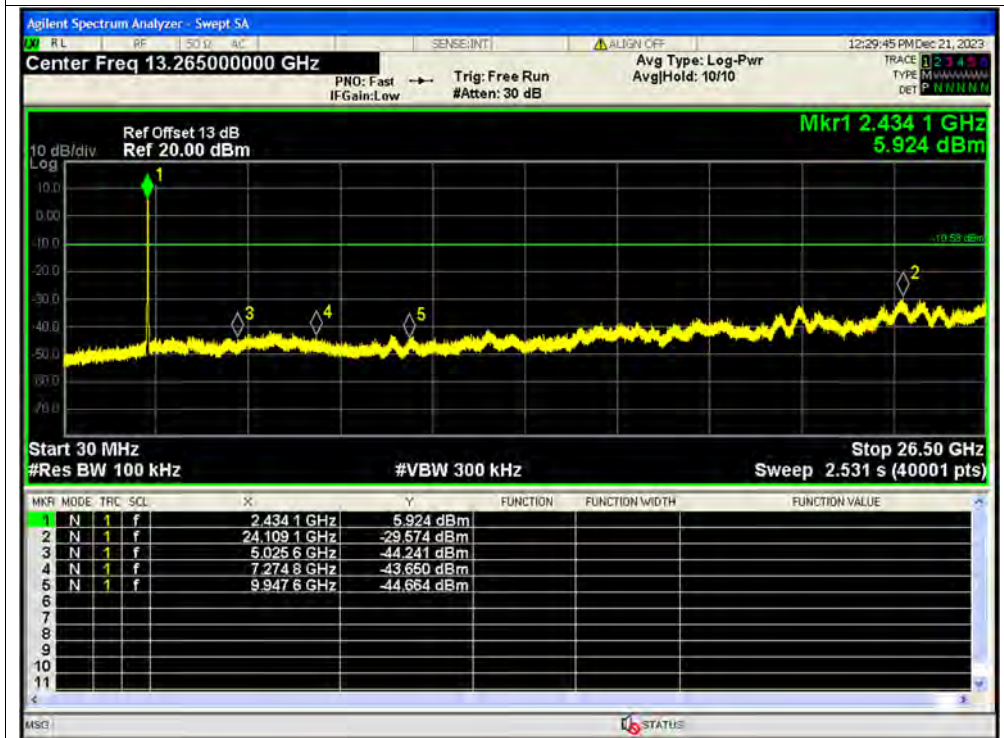

Tx. Spurious NVNT g 2462MHz Ant9 Ref SISO




Tx. Spurious NVNT g 2462MHz Ant9 Emission SISO

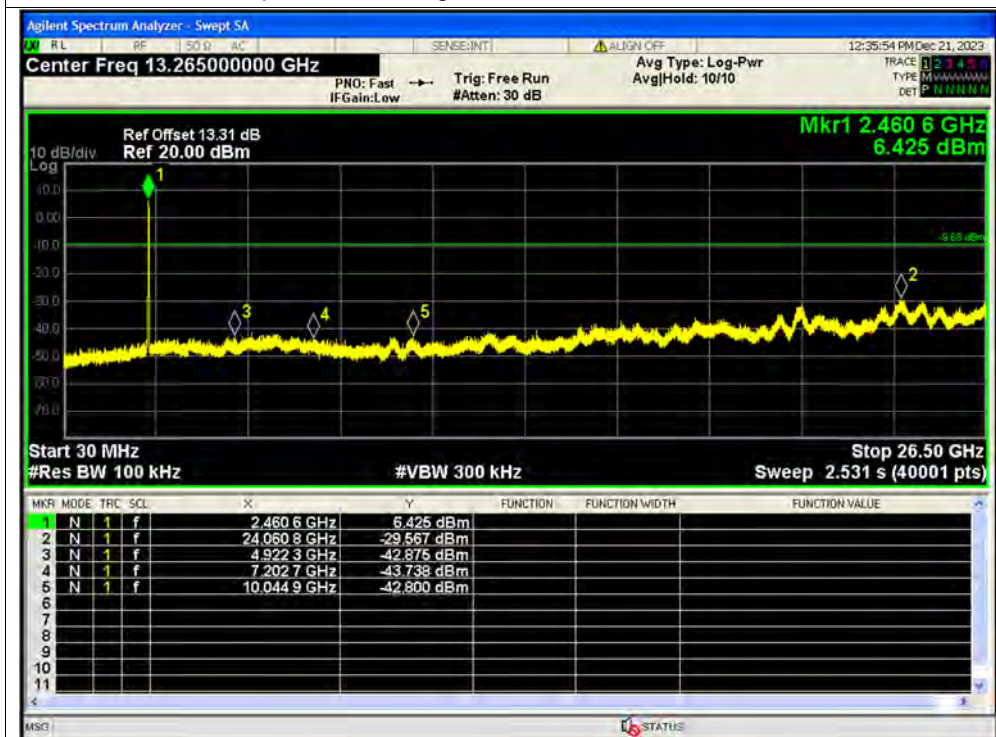




Tx. Spurious NVNT n20 2412MHz Ant8 Ref SISO

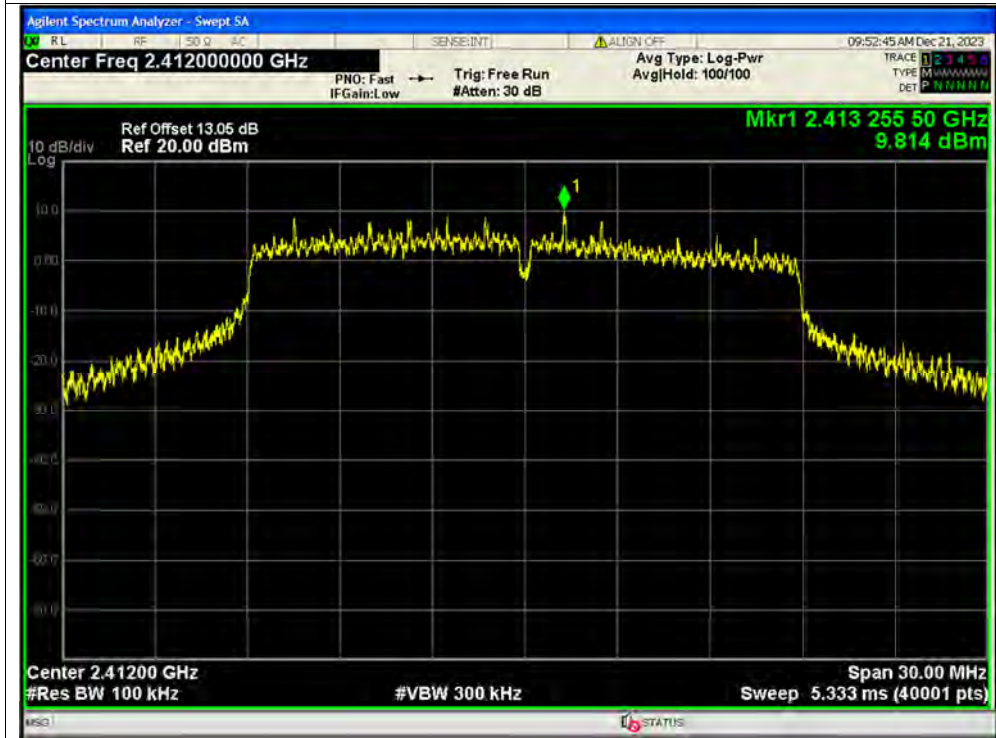


Tx. Spurious NVNT n20 2412MHz Ant8 Emission SISO

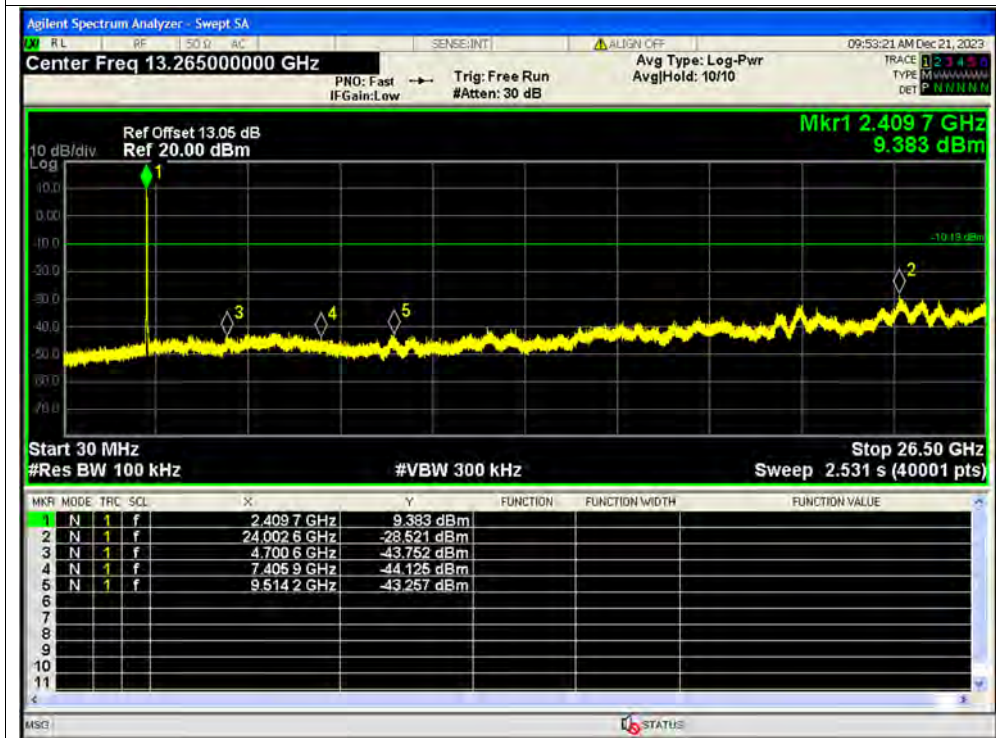



Tx. Spurious NVNT n20 2437MHz Ant8 Ref SISO

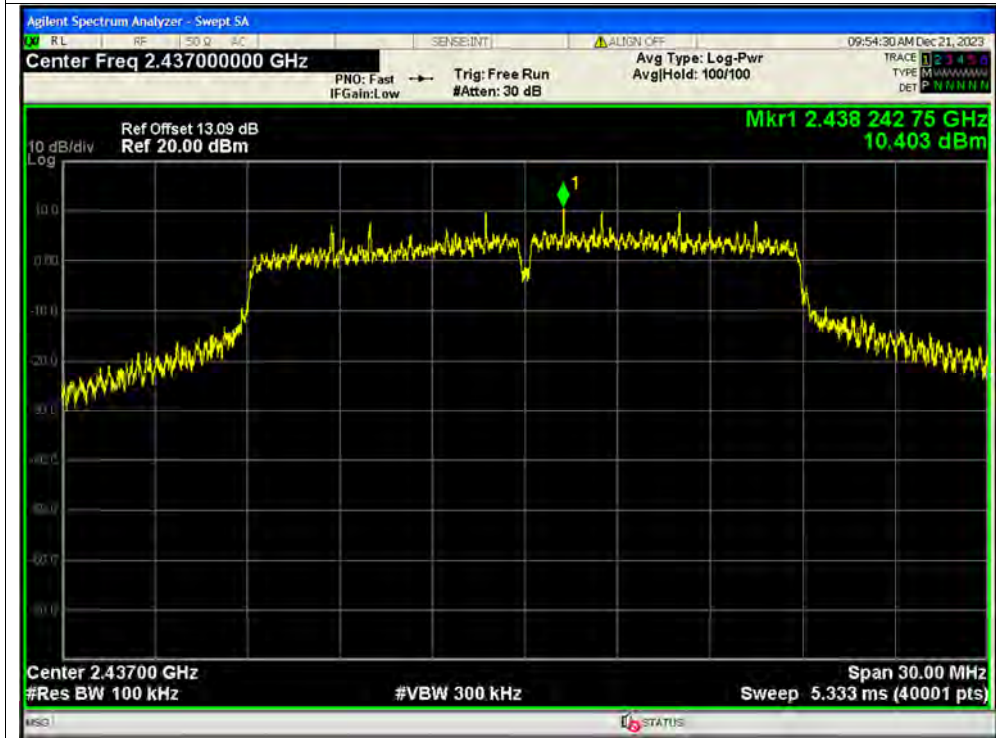

Tx. Spurious NVNT n20 2437MHz Ant8 Emission SISO

