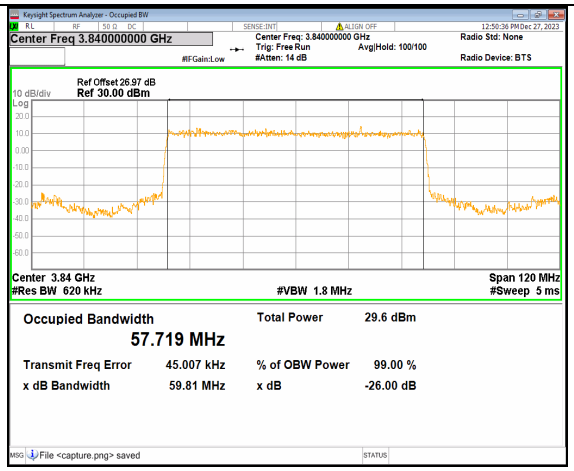

2A_n77(3700-3980MHz) 60M DFT-s-OFDM BPSK Outer_Full Mid

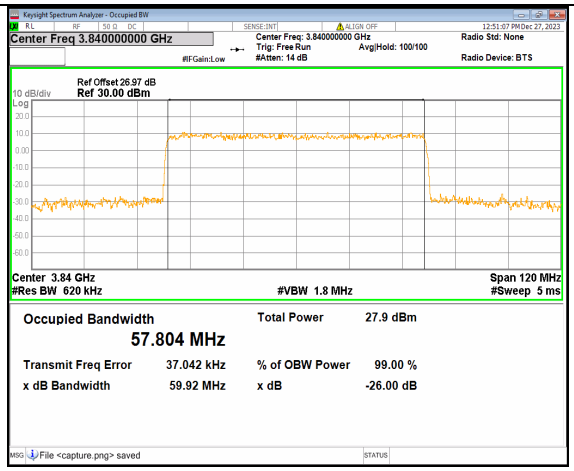

2A_n77(3700-3980MHz) 60M DFT-s-OFDM QPSK Outer_Full Mid

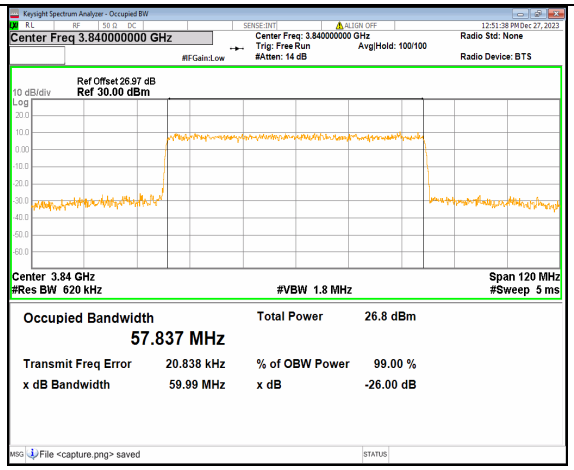

2A_n77(3700-3980MHz) 60M DFT-s-OFDM 16QAM Outer_Full Mid

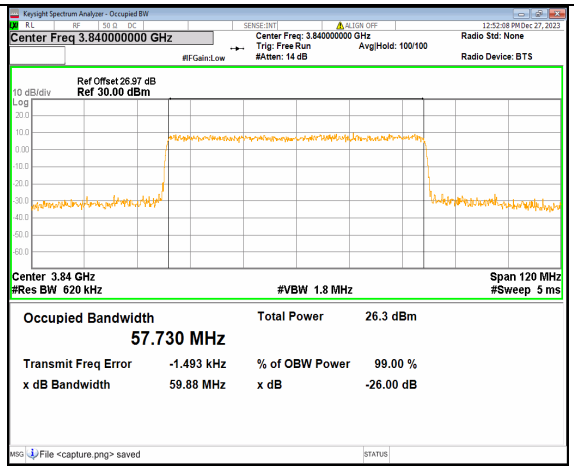

2A_n77(3700-3980MHz) 60M DFT-s-OFDM 64QAM Outer_Full Mid

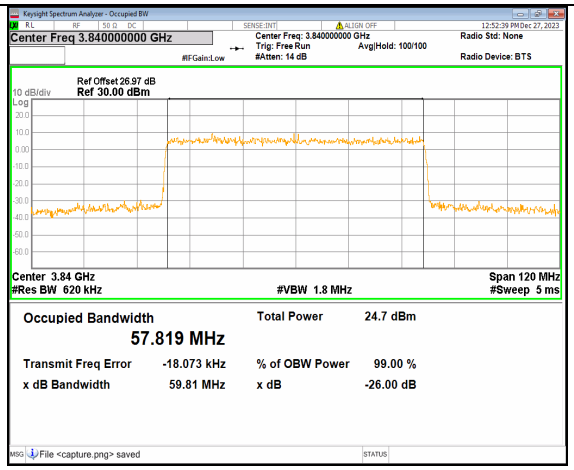

2A_n77(3700-3980MHz) 60M DFT-s-OFDM 256QAM Outer_Full Mid

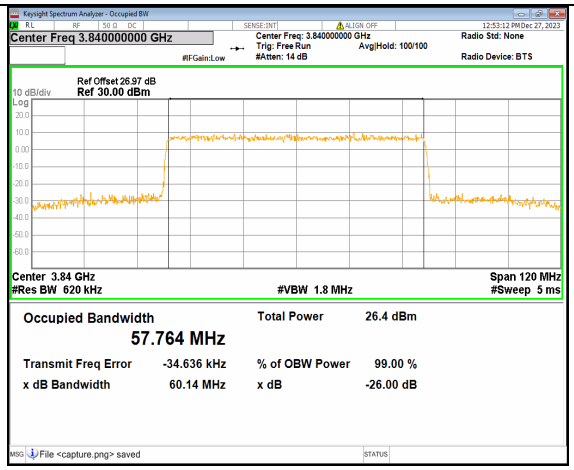

2A_n77(3700-3980MHz) 60M CP-OFDM QPSK Outer_Full Mid

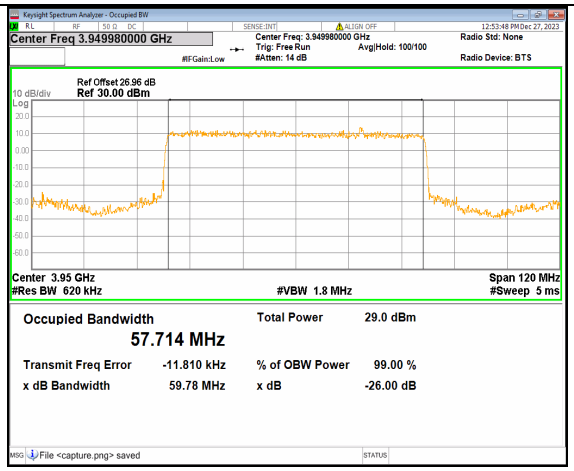

2A_n77(3700-3980MHz) 60M DFT-s-OFDM BPSK Outer_Full High

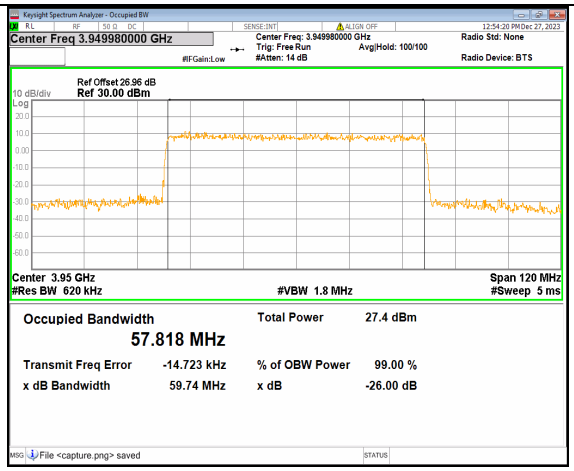

2A_n77(3700-3980MHz) 60M DFT-s-OFDM QPSK Outer_Full High

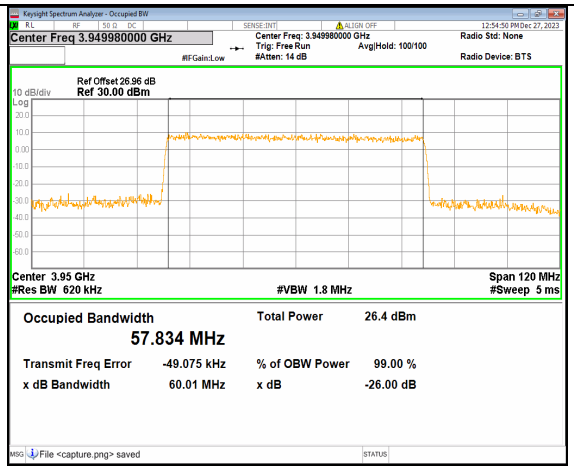

2A_n77(3700-3980MHz) 60M DFT-s-OFDM 16QAM Outer_Full High

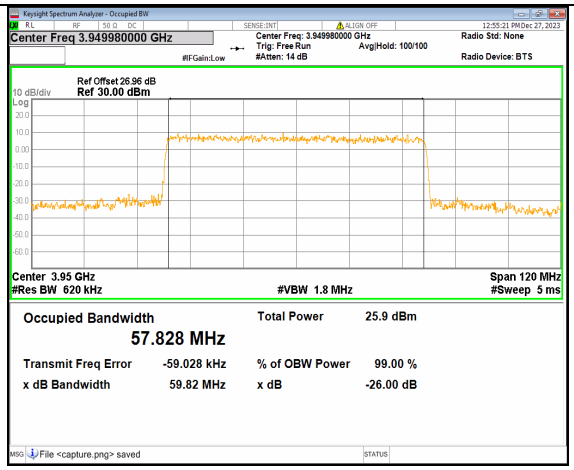

2A_n77(3700-3980MHz) 60M DFT-s-OFDM 64QAM Outer_Full High

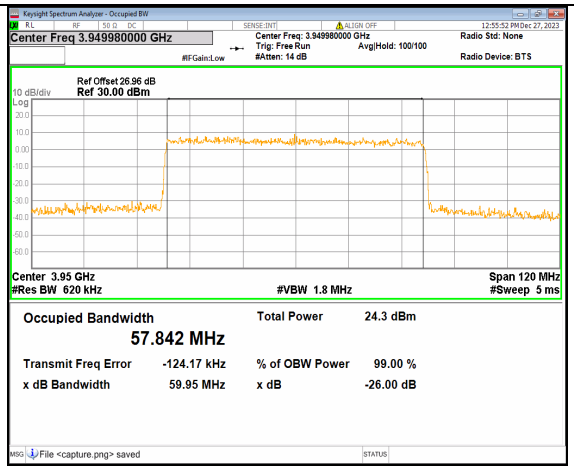

2A_n77(3700-3980MHz) 60M DFT-s-OFDM 256QAM Outer_Full High

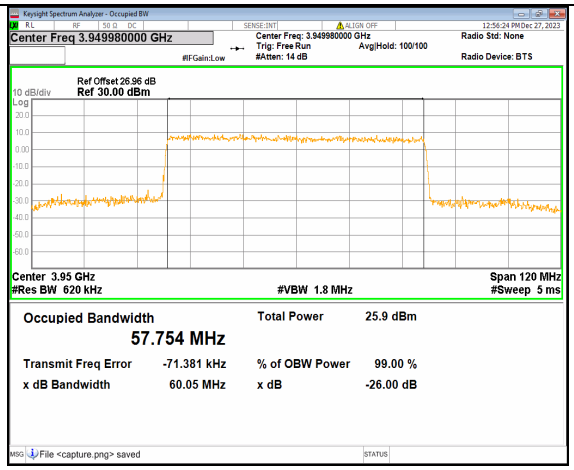

2A_n77(3700-3980MHz) 60M CP-OFDM QPSK Outer_Full High

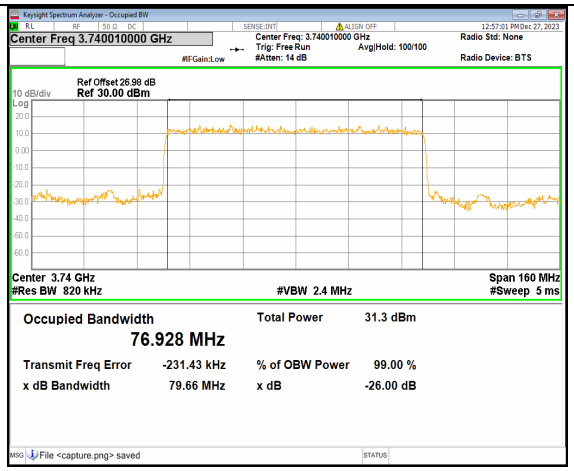

2A_n77(3700-3980MHz) 80M DFT-s-OFDM BPSK Outer_Full Low

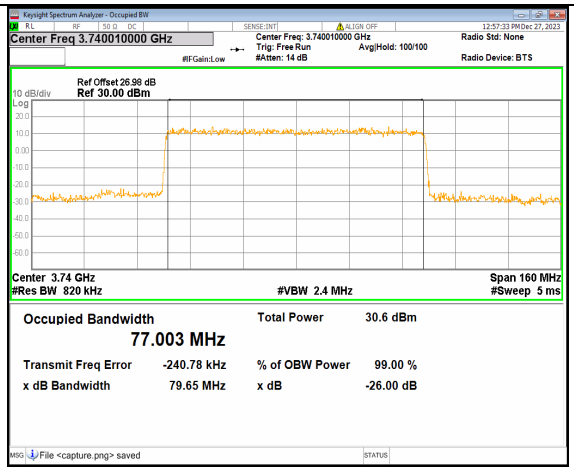

2A_n77(3700-3980MHz) 80M DFT-s-OFDM QPSK Outer_Full Low

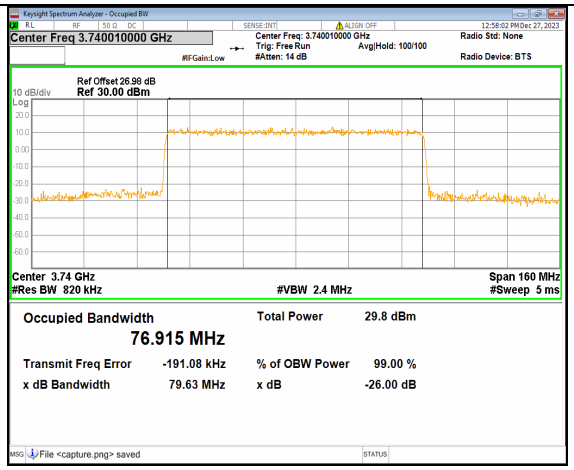

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 16QAM Outer_Full Low

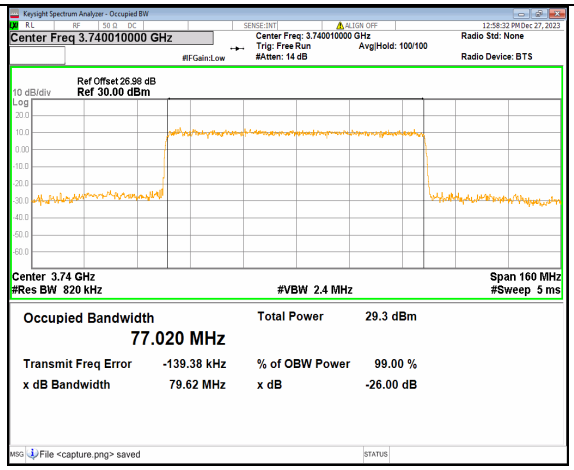

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 64QAM Outer_Full Low

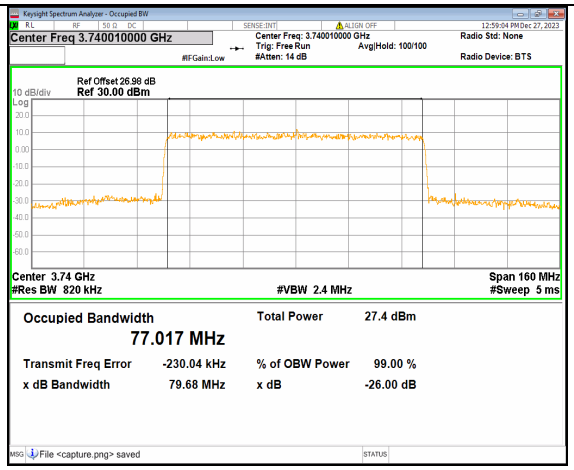

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 256QAM Outer_Full Low

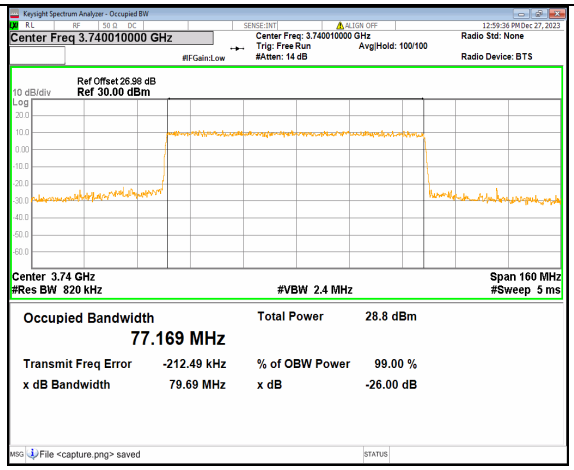

2A_n77(3700-3980MHz) 80M CP-OFDM QPSK Outer_Full Low

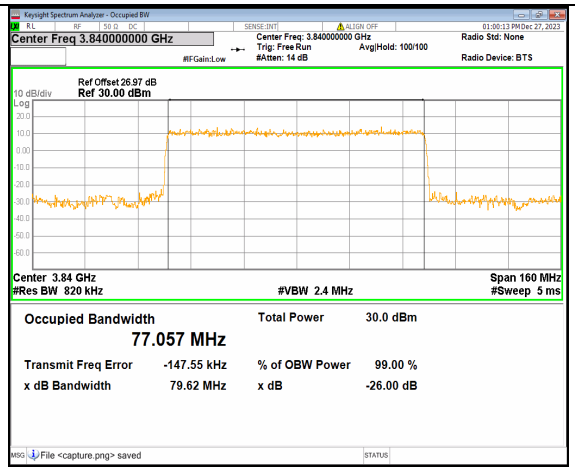

2A_n77(3700-3980MHz) 80M DFT-s-OFDM BPSK Outer_Full Mid

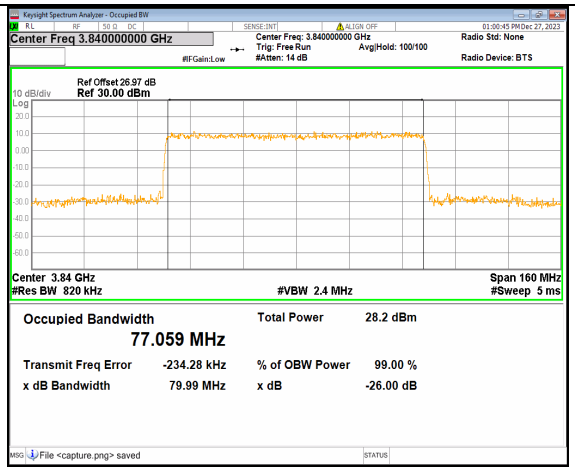

2A_n77(3700-3980MHz) 80M DFT-s-OFDM QPSK Outer_Full Mid

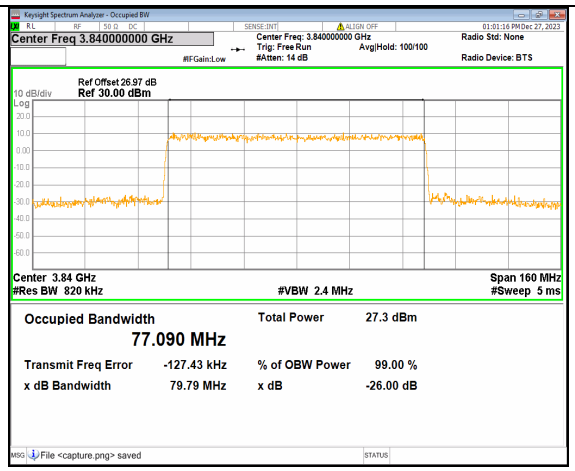

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 16QAM Outer_Full Mid

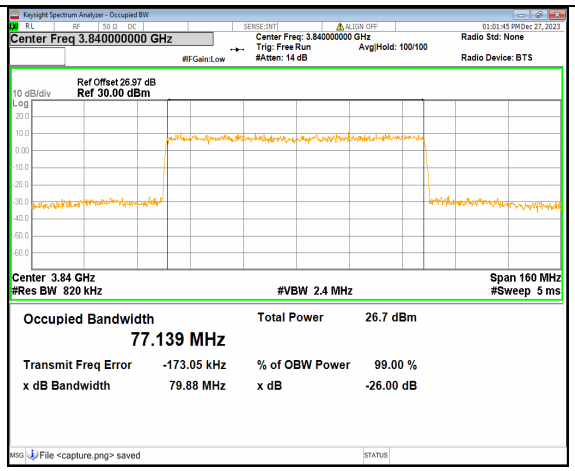

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 64QAM Outer_Full Mid

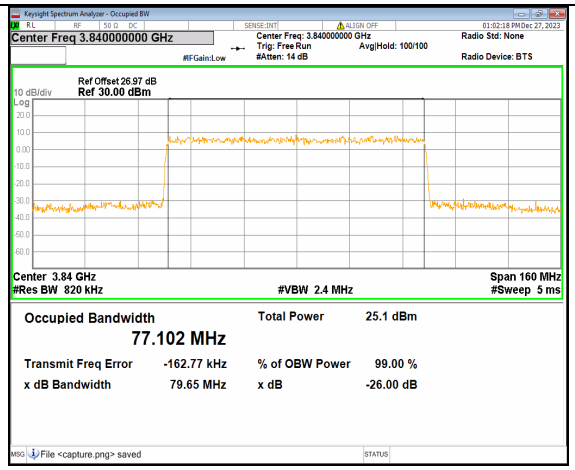

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 256QAM Outer_Full Mid

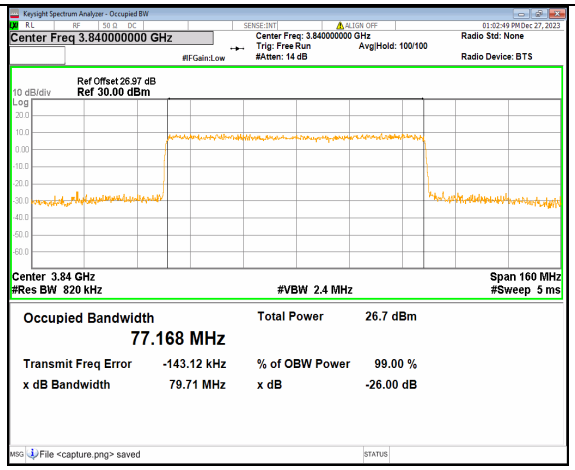

2A_n77(3700-3980MHz) 80M CP-OFDM QPSK Outer_Full Mid

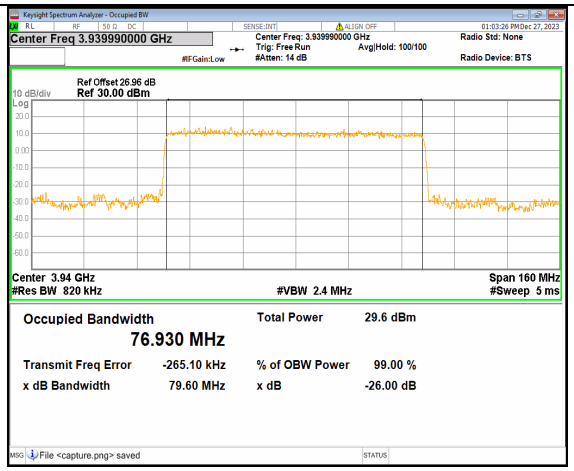

2A_n77(3700-3980MHz) 80M DFT-s-OFDM BPSK Outer_Full High

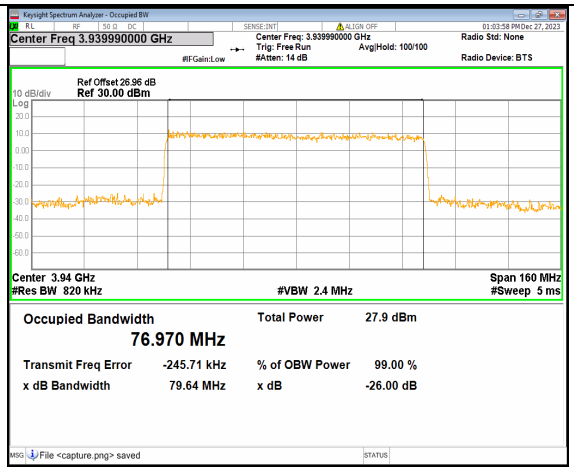

2A_n77(3700-3980MHz) 80M DFT-s-OFDM QPSK Outer_Full High

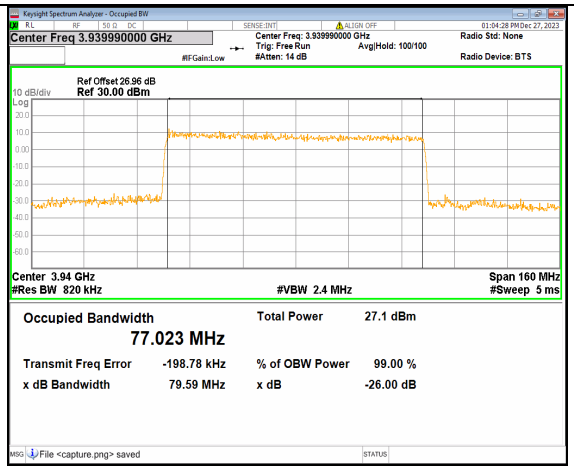

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 16QAM Outer_Full High

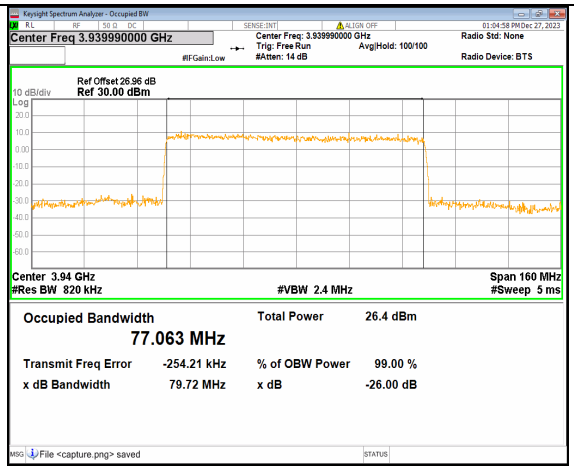

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 64QAM Outer_Full High

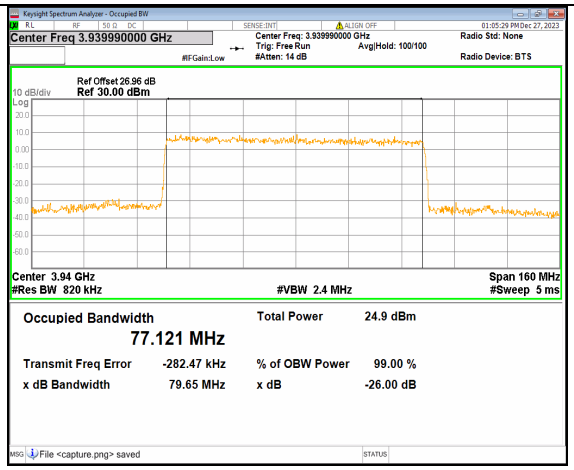

2A_n77(3700-3980MHz) 80M DFT-s-OFDM 256QAM Outer_Full High

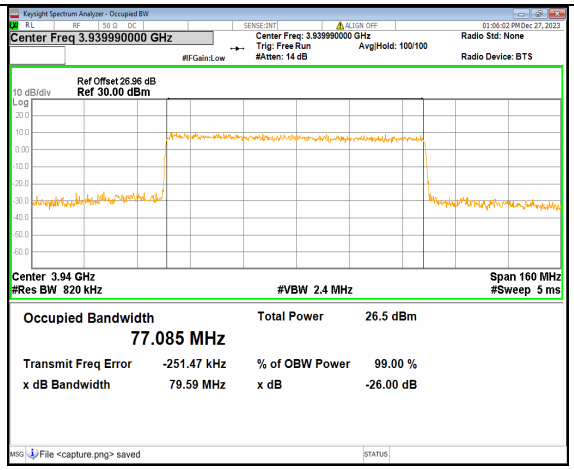

2A_n77(3700-3980MHz) 80M CP-OFDM QPSK Outer_Full High

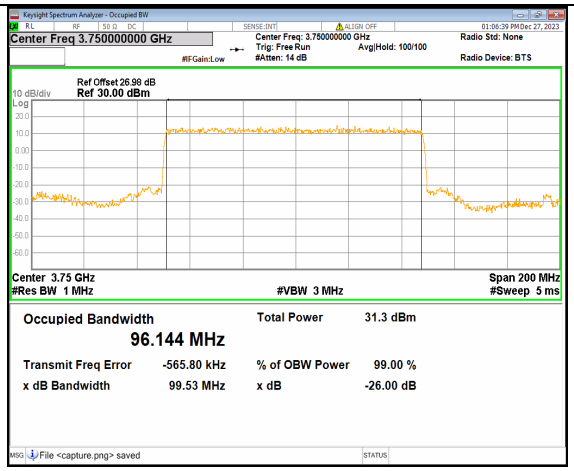

2A_n77(3700-3980MHz) 100M DFT-s-OFDM BPSK Outer_Full Low

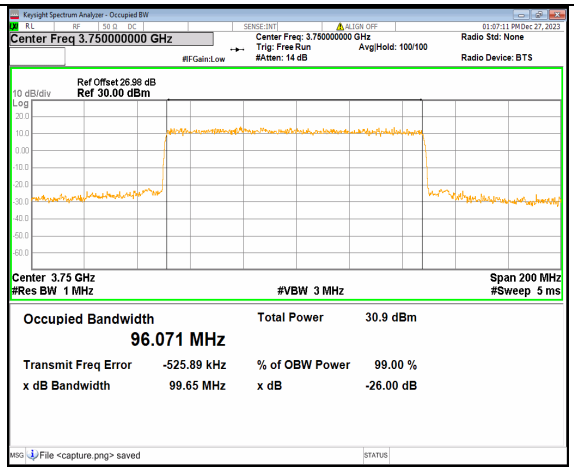

2A_n77(3700-3980MHz) 100M DFT-s-OFDM QPSK Outer_Full Low

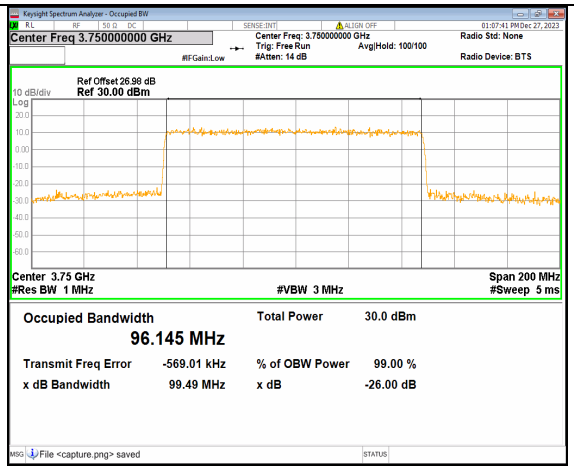

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 16QAM Outer_Full Low

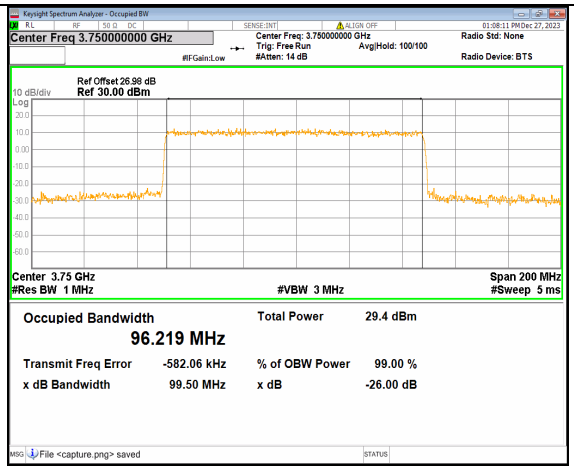

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 64QAM Outer_Full Low

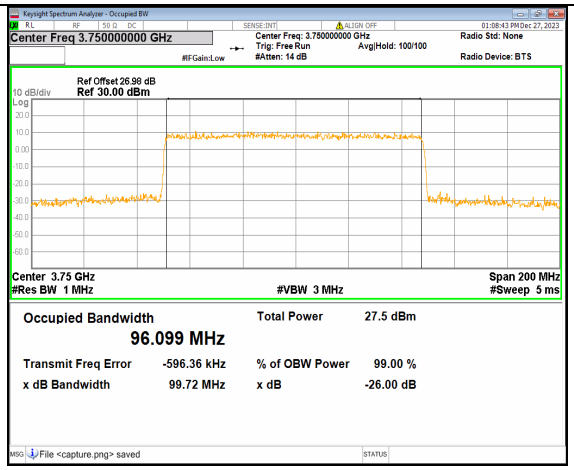

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 256QAM Outer_Full Low

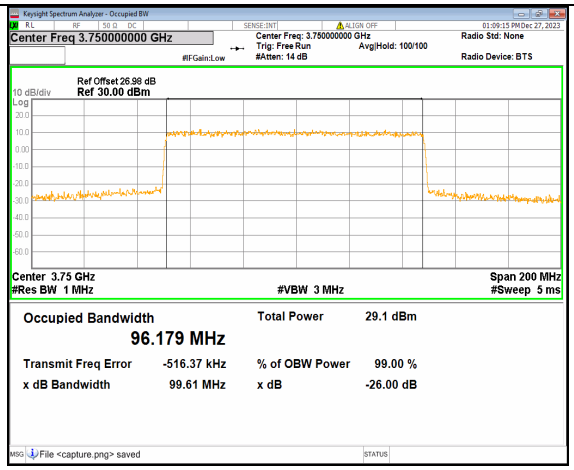

2A_n77(3700-3980MHz) 100M CP-OFDM QPSK Outer_Full Low

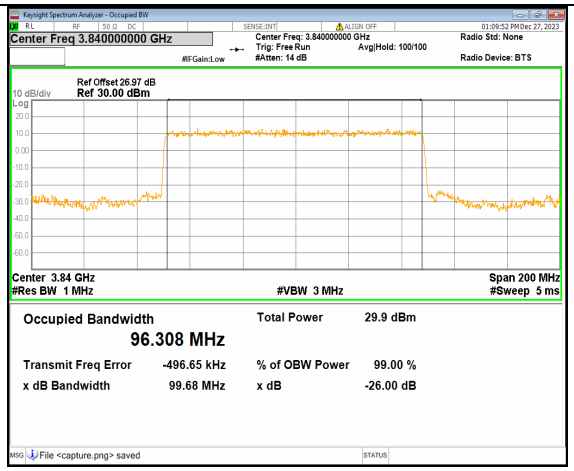

2A_n77(3700-3980MHz) 100M DFT-s-OFDM BPSK Outer_Full Mid

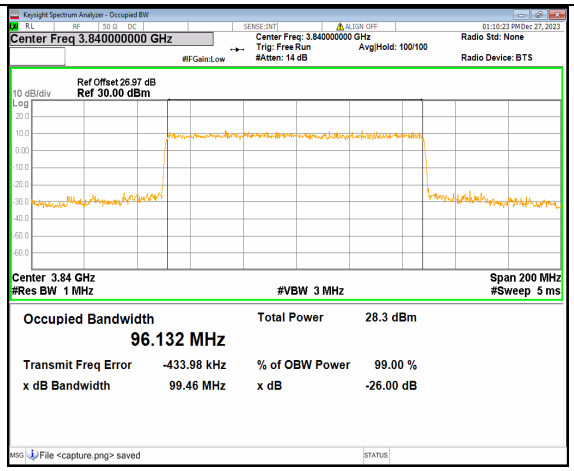

2A_n77(3700-3980MHz) 100M DFT-s-OFDM QPSK Outer_Full Mid

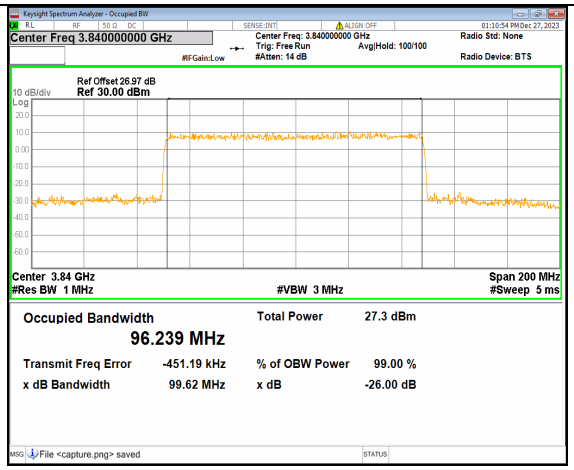

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 16QAM Outer_Full Mid

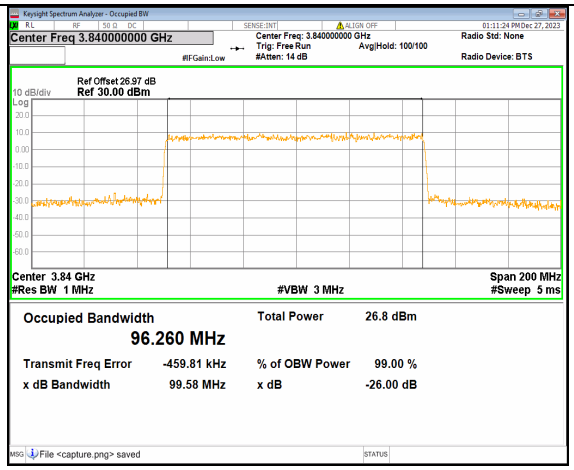

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 64QAM Outer_Full Mid

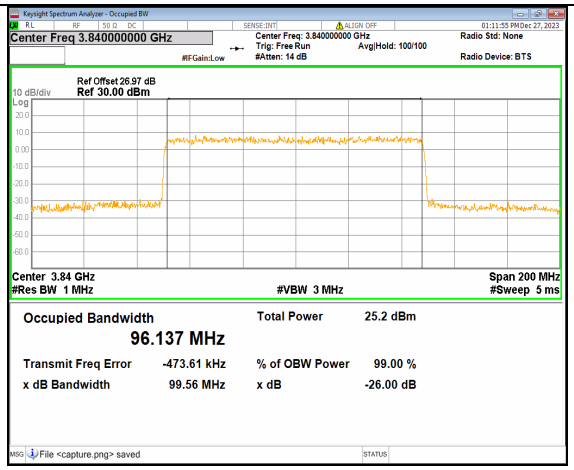

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 256QAM Outer_Full Mid

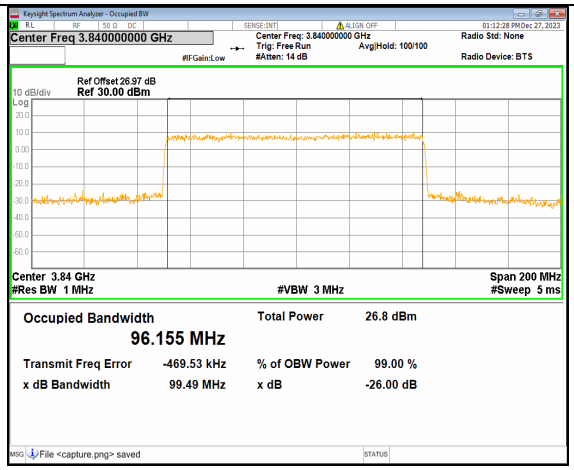

2A_n77(3700-3980MHz) 100M CP-OFDM QPSK Outer_Full Mid

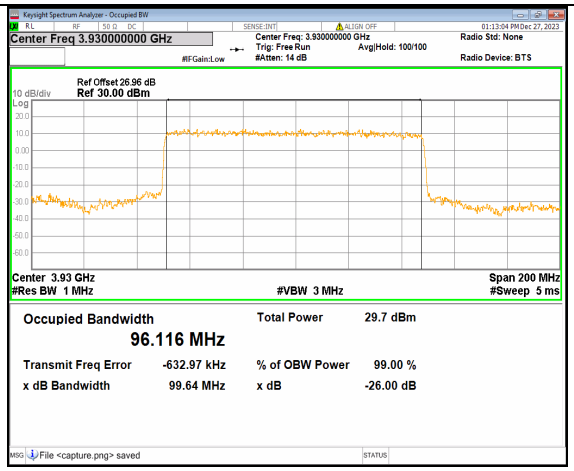

2A_n77(3700-3980MHz) 100M DFT-s-OFDM BPSK Outer_Full High

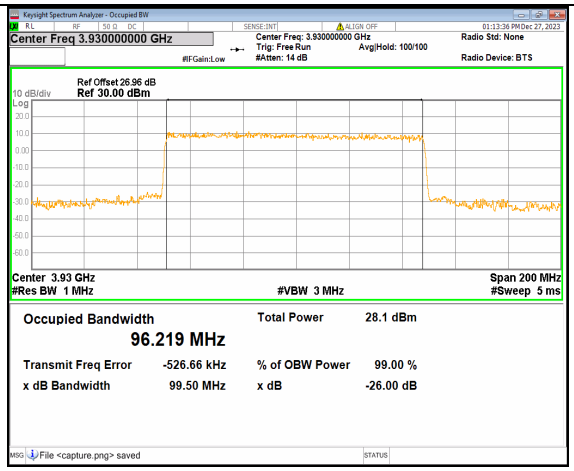

2A_n77(3700-3980MHz) 100M DFT-s-OFDM QPSK Outer_Full High

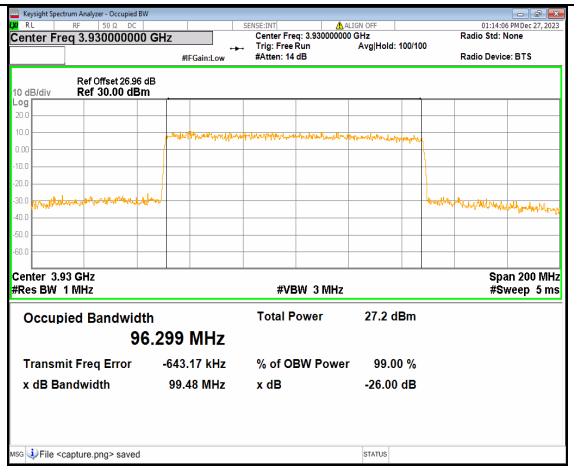

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 16QAM Outer_Full High

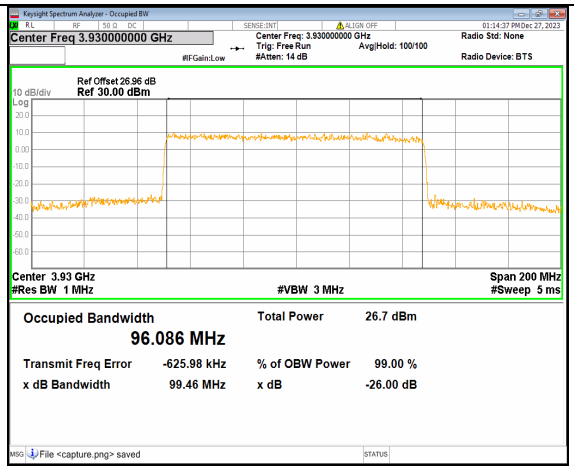

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 64QAM Outer_Full High

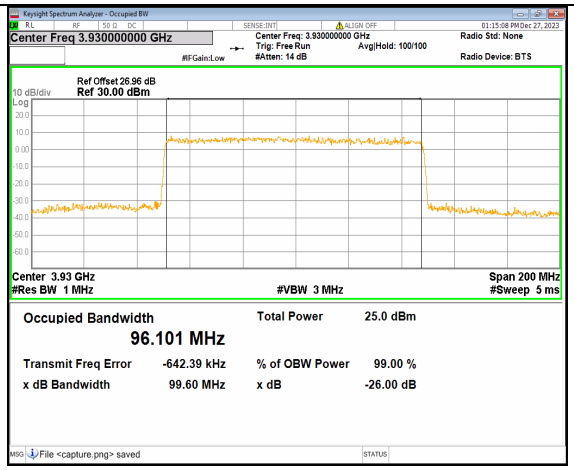

2A_n77(3700-3980MHz) 100M DFT-s-OFDM 256QAM Outer_Full High

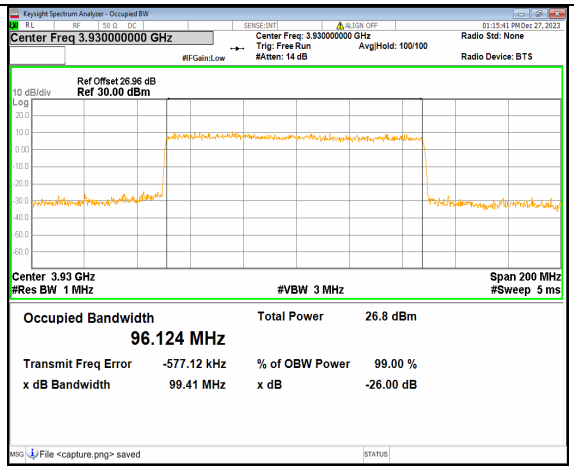

2A_n77(3700-3980MHz) 100M CP-OFDM QPSK Outer_Full High

2.3. Frequency Stability

2.3.1.Requirement

According to FCC section 2.1055, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

(a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.

(b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacture. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

Note: The operating temperature of EUT is from 0°C to 45°C, which are specified by the applicant.

2.3.2.Test Description

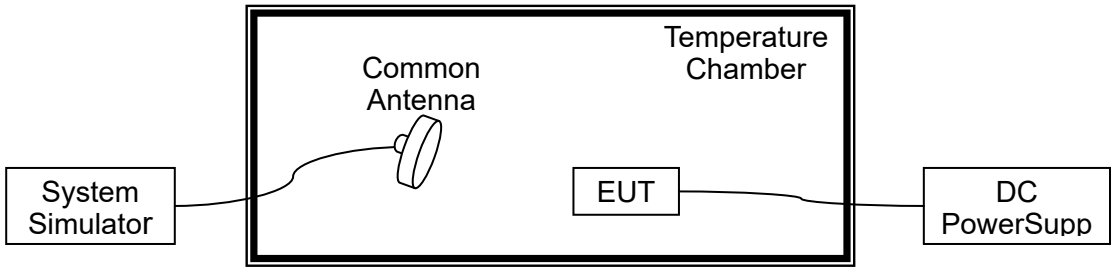

The EUT which is powered by the DC Power Supply directly is located in the Temperature Chamber. The EUT is commanded by the System Simulator (SS) to operate at the maximum output power. A call is established between the EUT and the SS via a Common Antenna.

2.3.3.Test procedure

KDB 971168 D01v03 Section 9.0 and ANSI/TIA-603-E-2016.

2.3.4.Test Result

The nominal, highest and lowest extreme voltages are separately 3.89VDC, 4.48VDC and 3.60VDC, which are specified by the applicant; the normal temperature here used is 20°C.

B5_n2, QPSK, Channel 376000, SCS 15kHz, Frequency 1880.0MHz Limit =Within Authorized Band					
Voltage (%)	**Power (VDC)**	**Temp (°C)**	**Fre. Dev. (Hz)**	**Deviation (ppm)**	**Result**
Normal	3.89	+20(Ref)	13	0.007	PASS
Normal		0	13	0.007	
Normal		+10	-13	-0.007	
Normal		+20	-13	-0.007	
Normal		+30	20	0.011	
Normal		+40	-18	-0.010	
Normal		+45	23	**0.012**	
High	4.48	+20	-10	-0.005	
BATT.ENDPOINT	3.60	+20	15	0.008	

B66_n5, QPSK, Channel 167300, SCS 15kHz, Frequency 836.5 MHz Limit=±2.5ppm					
Voltage (%)	**Power (VDC)**	**Temp (°C)**	**Fre. Dev. (Hz)**	**Deviation (ppm)**	**Result**
Normal	3.89	+20(Ref)	22	0.026	PASS
Normal		0	-5	-0.006	
Normal		+10	19	0.023	
Normal		+20	-15	-0.018	
Normal		+30	23	**0.027**	
Normal		+40	-10	-0.012	
Normal		+45	13	0.016	
High	4.48	+20	14	0.017	
BATT.ENDPOINT	3.60	+20	-9	-0.011	

B2_n66, QPSK, Channel 349000, SCS 15kHz, Frequency 1745MHz Limit=±2.5ppm					
Voltage (%)	**Power (VDC)**	**Temp (°C)**	**Fre. Dev. (Hz)**	**Deviation (ppm)**	**Result**
Normal	3.89	+20(Ref)	14	0.008	PASS
Normal		0	7	0.004	
Normal		+10	17	0.010	
Normal		+20	17	0.010	
Normal		+30	23	**0.013**	
Normal		+40	-21	-0.012	
Normal		+45	-20	-0.011	
High	4.48	+20	-3	-0.002	
BATT.ENDPOINT	3.60	+20	18	0.010	

B2_n77(3450-3550MHz), QPSK, Channel 633334, SCS 30kHz, Frequency 3550MHz Limit =Within Authorized Band					
Voltage (%)	**Power (VDC)**	**Temp (°C)**	**Fre. Dev. (Hz)**	**Deviation (ppm)**	**Result**
Normal	3.89	+20(Ref)	14	0.004	PASS
Normal		0	16	0.005	
Normal		+10	16	0.005	
Normal		+20	2	0.001	
Normal		+30	17	0.005	
Normal		+40	20	**0.006**	
Normal		+45	14	0.004	
High	4.48	+20	13	0.004	
BATT.ENDPOINT	3.60	+20	10	0.003	

B2_N77(3700-3980MHz), QPSK, Channel 656000, SCS 30kHz, Frequency 3840MHz Limit =Within Authorized Band					
Voltage (%)	**Power (VDC)**	**Temp (°C)**	**Fre. Dev. (Hz)**	**Deviation (ppm)**	**Result**
Normal	3.89	+20(Ref)	-11	-0.003	PASS
Normal		0	16	0.004	
Normal		+10	-3	-0.001	
Normal		+20	18	**0.005**	
Normal		+30	17	0.004	
Normal		+40	16	0.004	
Normal		+45	15	0.004	
High	4.48	+20	17	0.004	
BATT.ENDPOINT	3.60	+20	14	0.004	

2.4. Peak to Average Ratio

2.4.1.Requirement

According to FCC section 24.232(d) for n2, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to FCC section 27.50(d)(5) for n66, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to FCC section 27.50(j)(4) and 25.50(k)(4) for n77, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

2.4.2.Test Description

Test Set:

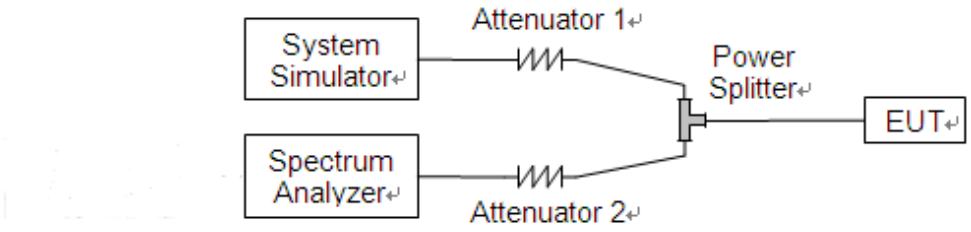

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

2.4.3.Test procedure

KDB 971168 D01v03 Section 5.7 and ANSI/TIA-603-E-2016.

2.4.4.Test Result

Record the maximum PAPR level associated with a probability of 0.1%.

Band	SCS (KHz)	BW (MHz)	ARFCN	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5A_n2	15	5	370500	DFT-s-OFDM PI/2 BPSK	25/0	4.48	13	PASS
5A_n2	15	5	370500	DFT-s-OFDM 256QAM	25/0	6.83	13	PASS
5A_n2	15	5	370500	CP-OFDM QPSK	25/0	6.73	13	PASS
5A_n2	15	5	370500	CP-OFDM 256QAM	25/0	8.95	13	PASS
5A_n2	15	5	376000	DFT-s-OFDM PI/2 BPSK	25/0	4.39	13	PASS
5A_n2	15	5	376000	DFT-s-OFDM 256QAM	25/0	6.52	13	PASS
5A_n2	15	5	376000	CP-OFDM QPSK	25/0	6.73	13	PASS
5A_n2	15	5	376000	CP-OFDM 256QAM	25/0	8.98	13	PASS
5A_n2	15	5	381500	DFT-s-OFDM PI/2 BPSK	25/0	4.51	13	PASS
5A_n2	15	5	381500	DFT-s-OFDM 256QAM	25/0	6.64	13	PASS
5A_n2	15	5	381500	CP-OFDM QPSK	25/0	6.84	13	PASS
5A_n2	15	5	381500	CP-OFDM 256QAM	25/0	9.01	13	PASS
5A_n2	15	10	371000	DFT-s-OFDM PI/2 BPSK	50/0	4.43	13	PASS
5A_n2	15	10	371000	DFT-s-OFDM 256QAM	50/0	6.63	13	PASS
5A_n2	15	10	371000	CP-OFDM QPSK	52/0	7.04	13	PASS
5A_n2	15	10	371000	CP-OFDM 256QAM	52/0	8.9	13	PASS
5A_n2	15	10	376000	DFT-s-OFDM PI/2 BPSK	50/0	4.48	13	PASS
5A_n2	15	10	376000	DFT-s-OFDM 256QAM	50/0	6.57	13	PASS
5A_n2	15	10	376000	CP-OFDM QPSK	52/0	6.94	13	PASS
5A_n2	15	10	376000	CP-OFDM 256QAM	52/0	8.97	13	PASS
5A_n2	15	10	381000	DFT-s-OFDM PI/2 BPSK	50/0	4.54	13	PASS
5A_n2	15	10	381000	DFT-s-OFDM 256QAM	50/0	6.68	13	PASS

5A_n2	15	10	381000	CP-OFDM QPSK	52/0	7.05	13	PASS
5A_n2	15	10	381000	CP-OFDM 256QAM	52/0	8.92	13	PASS
5A_n2	15	15	371500	DFT-s-OFDM PI/2 BPSK	75/0	4.41	13	PASS
5A_n2	15	15	371500	DFT-s-OFDM 256QAM	75/0	6.97	13	PASS
5A_n2	15	15	371500	CP-OFDM QPSK	79/0	6.83	13	PASS
5A_n2	15	15	371500	CP-OFDM 256QAM	79/0	8.76	13	PASS
5A_n2	15	15	376000	DFT-s-OFDM PI/2 BPSK	75/0	4.47	13	PASS
5A_n2	15	15	376000	DFT-s-OFDM 256QAM	75/0	6.94	13	PASS
5A_n2	15	15	376000	CP-OFDM QPSK	79/0	6.68	13	PASS
5A_n2	15	15	376000	CP-OFDM 256QAM	79/0	8.78	13	PASS
5A_n2	15	15	380500	DFT-s-OFDM PI/2 BPSK	75/0	4.38	13	PASS
5A_n2	15	15	380500	DFT-s-OFDM 256QAM	75/0	6.74	13	PASS
5A_n2	15	15	380500	CP-OFDM QPSK	79/0	6.95	13	PASS
5A_n2	15	15	380500	CP-OFDM 256QAM	79/0	8.6	13	PASS
5A_n2	15	20	372000	DFT-s-OFDM PI/2 BPSK	100/0	4.32	13	PASS
5A_n2	15	20	372000	DFT-s-OFDM 256QAM	100/0	6.7	13	PASS
5A_n2	15	20	372000	CP-OFDM QPSK	106/0	6.73	13	PASS
5A_n2	15	20	372000	CP-OFDM 256QAM	106/0	8.83	13	PASS
5A_n2	15	20	376000	DFT-s-OFDM PI/2 BPSK	100/0	4.4	13	PASS
5A_n2	15	20	376000	DFT-s-OFDM 256QAM	100/0	6.76	13	PASS
5A_n2	15	20	376000	CP-OFDM QPSK	106/0	7.53	13	PASS
5A_n2	15	20	376000	CP-OFDM 256QAM	106/0	8.78	13	PASS
5A_n2	15	20	380000	DFT-s-OFDM PI/2 BPSK	100/0	4.51	13	PASS
5A_n2	15	20	380000	DFT-s-OFDM 256QAM	100/0	6.74	13	PASS
5A_n2	15	20	380000	CP-OFDM	106/0	7.3	13	PASS

				QPSK				
5A_n2	15	20	380000	CP-OFDM 256QAM	106/0	8.78	13	PASS

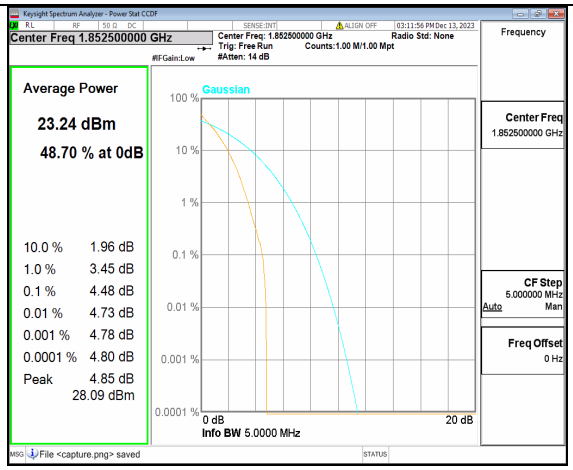

5A_n2 5M DFT-s-OFDM BPSK Outer_Full Low

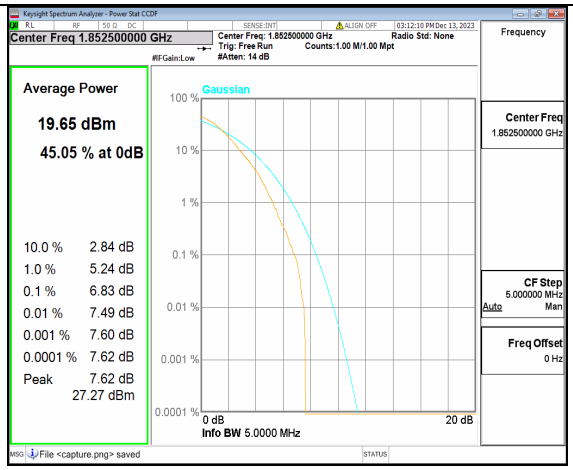

5A_n2 5M DFT-s-OFDM 256QAM Outer_Full Low

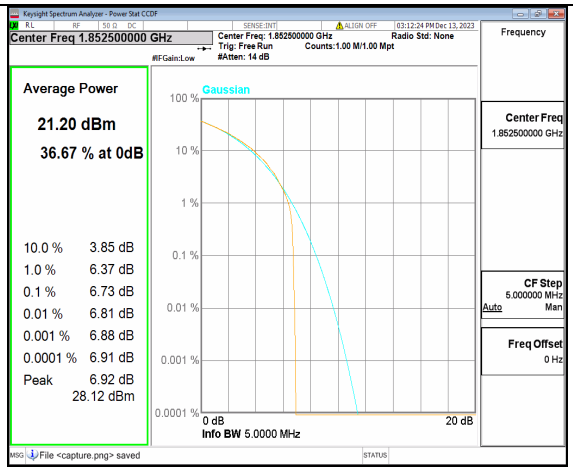

5A_n2 5M CP-OFDM QPSK Outer_Full Low

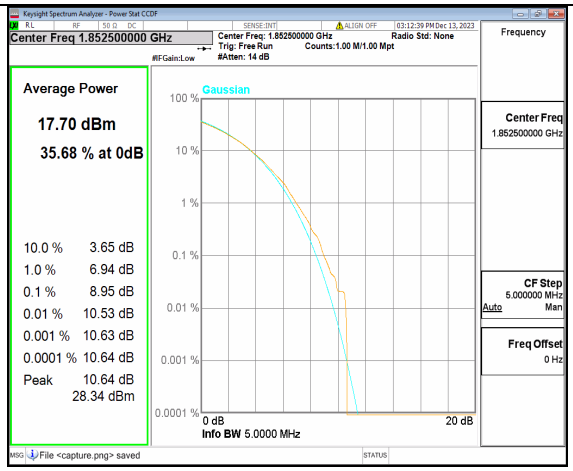

5A_n2 5M CP-OFDM 256QAM Outer_Full Low

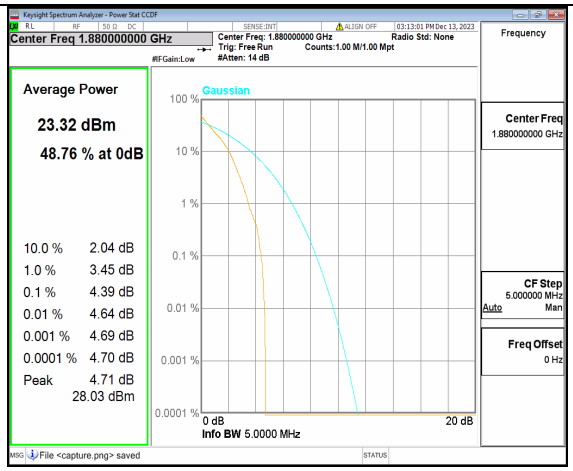

5A_n2 5M DFT-s-OFDM BPSK Outer_Full Mid

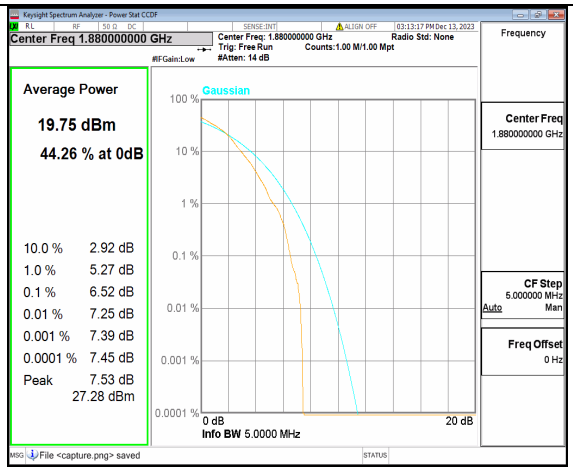

5A_n2 5M DFT-s-OFDM 256QAM Outer_Full Mid

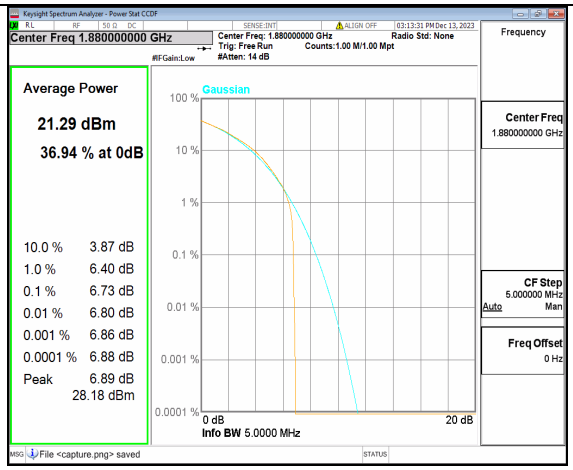

5A_n2 5M CP-OFDM QPSK Outer_Full Mid

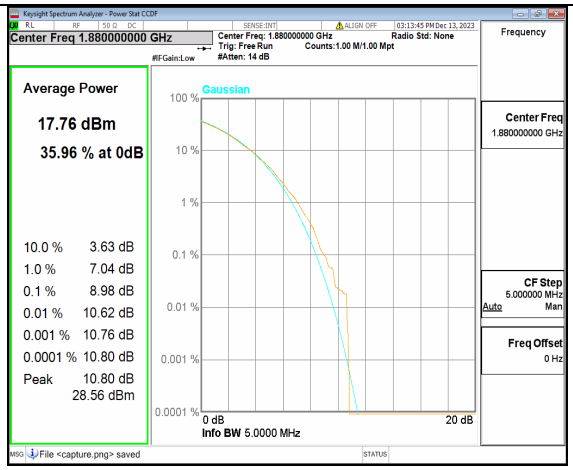

5A_n2 5M CP-OFDM 256QAM Outer_Full Mid

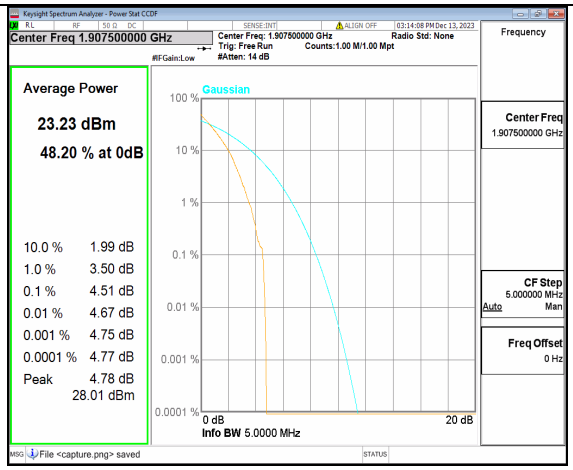

5A_n2 5M DFT-s-OFDM BPSK Outer_Full High

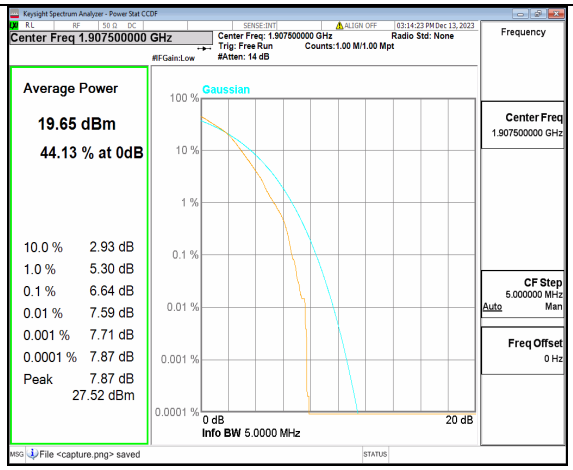

5A_n2 5M DFT-s-OFDM 256QAM Outer_Full High

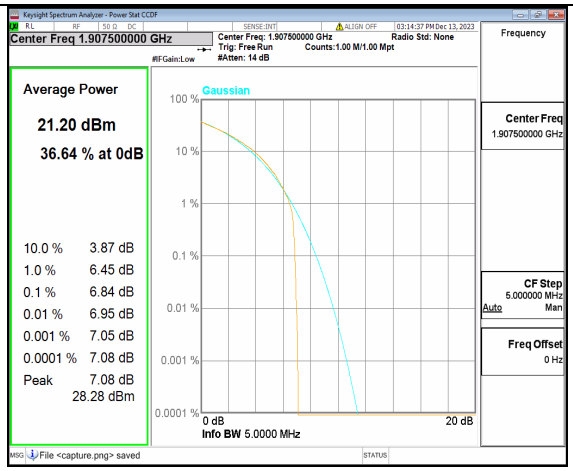

5A_n2 5M CP-OFDM QPSK Outer_Full High

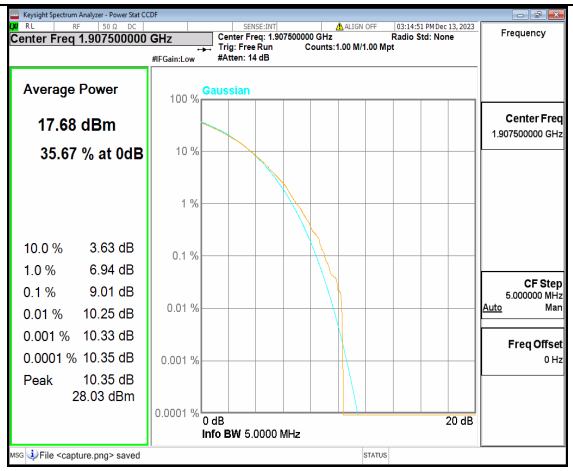

5A_n2 5M CP-OFDM 256QAM Outer_Full High

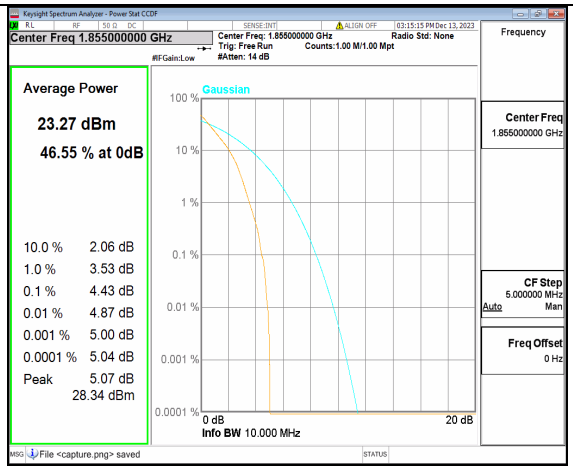

5A_n2 10M DFT-s-OFDM BPSK Outer_Full Low

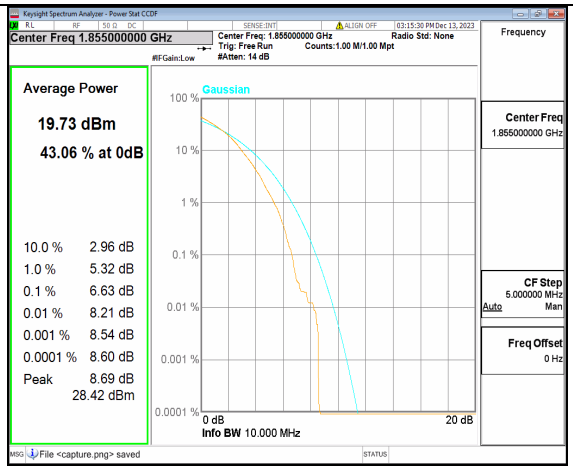

5A_n2 10M DFT-s-OFDM 256QAM Outer_Full Low

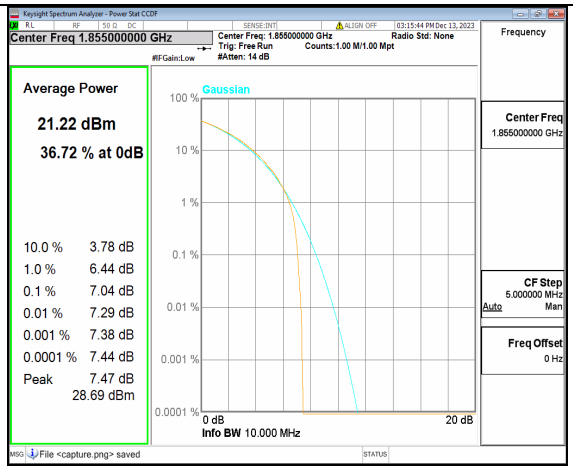

5A_n2 10M CP-OFDM QPSK Outer_Full Low

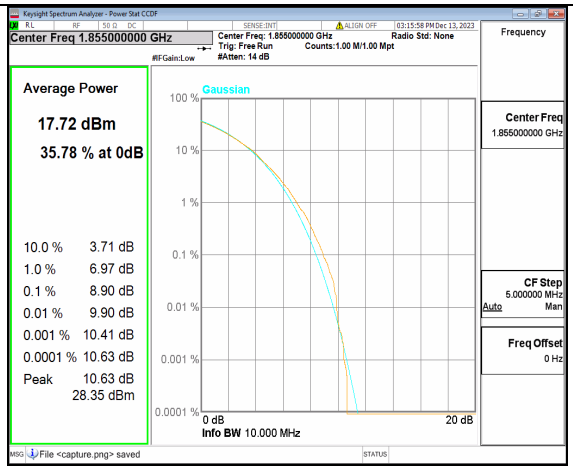

5A_n2 10M CP-OFDM 256QAM Outer_Full Low

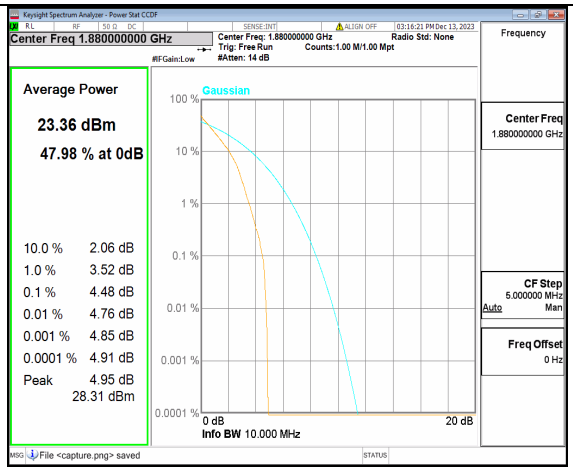

5A_n2 10M DFT-s-OFDM BPSK Outer_Full Mid

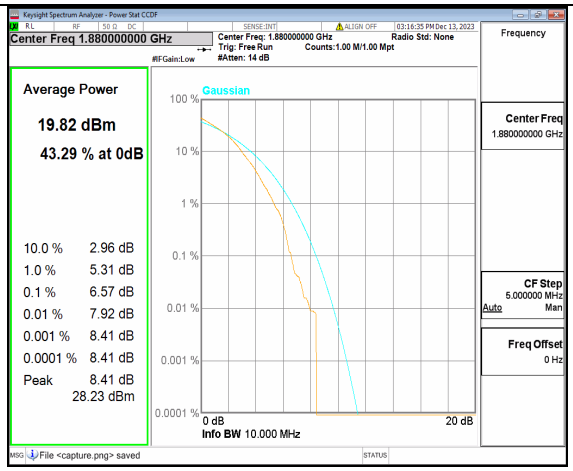

5A_n2 10M DFT-s-OFDM 256QAM Outer_Full Mid

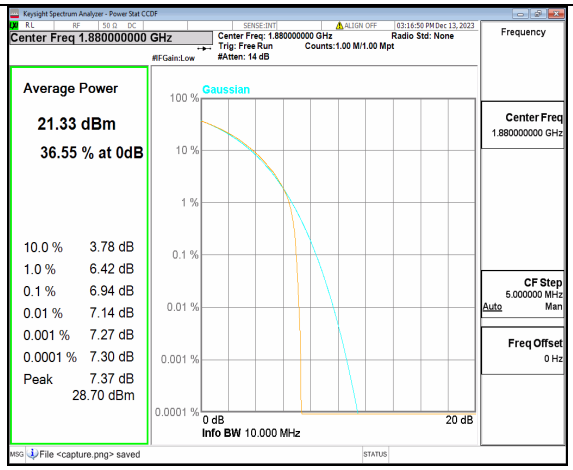

5A_n2 10M CP-OFDM QPSK Outer_Full Mid

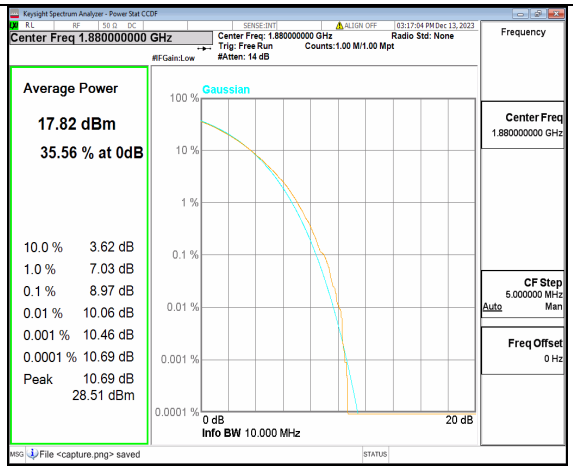

5A_n2 10M CP-OFDM 256QAM Outer_Full Mid

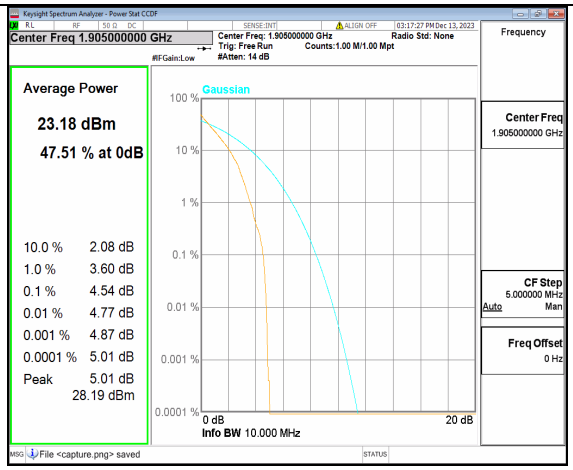

5A_n2 10M DFT-s-OFDM BPSK Outer_Full High

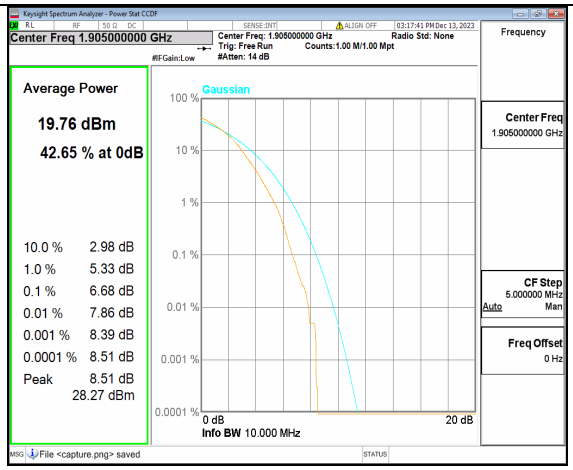

5A_n2 10M DFT-s-OFDM 256QAM Outer_Full High

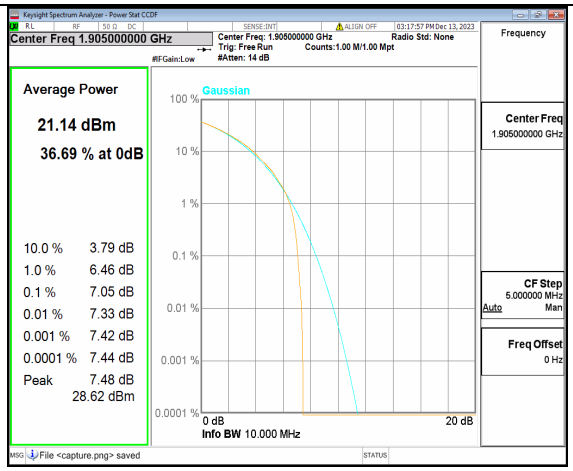

5A_n2 10M CP-OFDM QPSK Outer_Full High

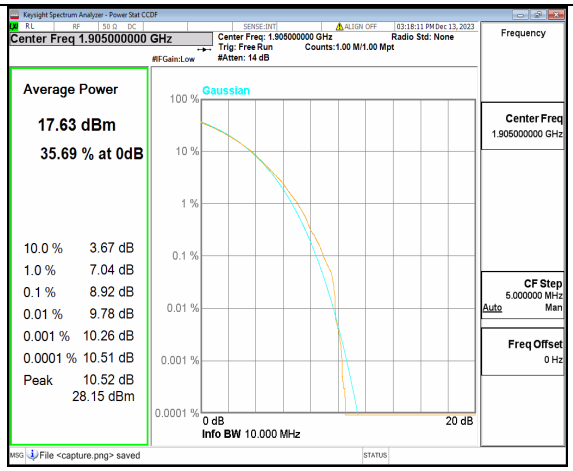

5A_n2 10M CP-OFDM 256QAM Outer_Full High

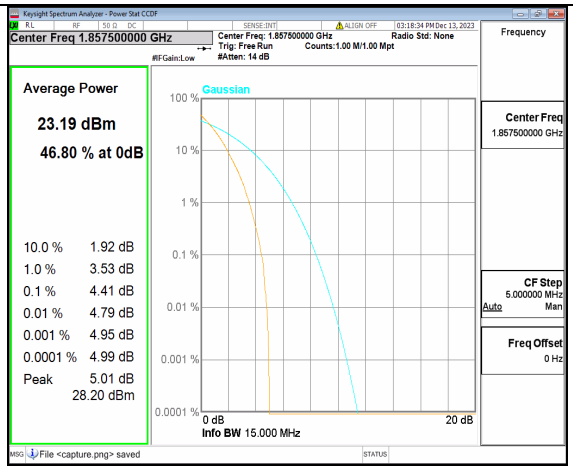

5A_n2 15M DFT-s-OFDM BPSK Outer_Full Low

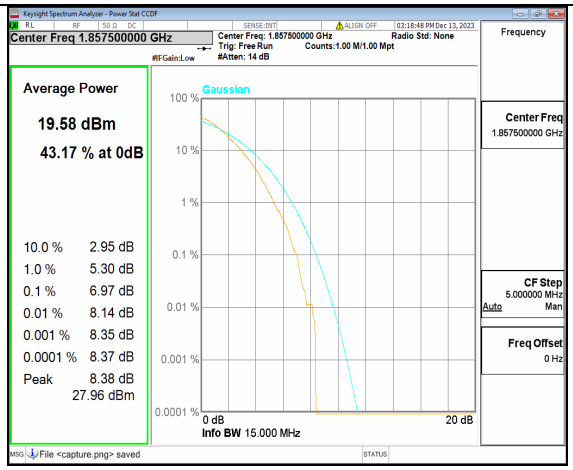

5A_n2 15M DFT-s-OFDM 256QAM Outer_Full Low

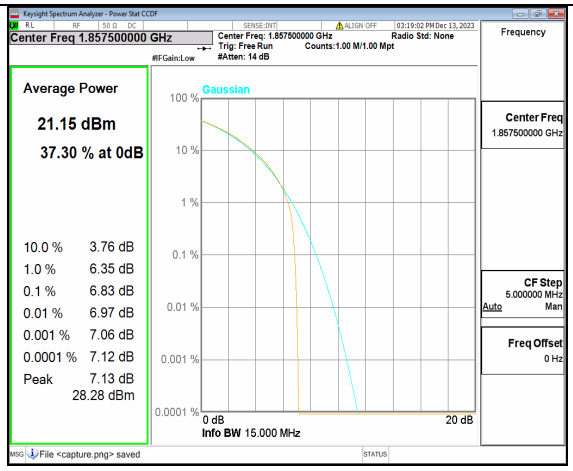

5A_n2 15M CP-OFDM QPSK Outer_Full Low

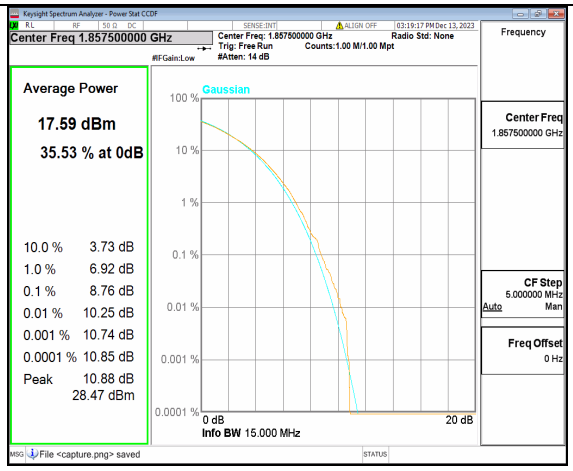

5A_n2 15M CP-OFDM 256QAM Outer_Full Low

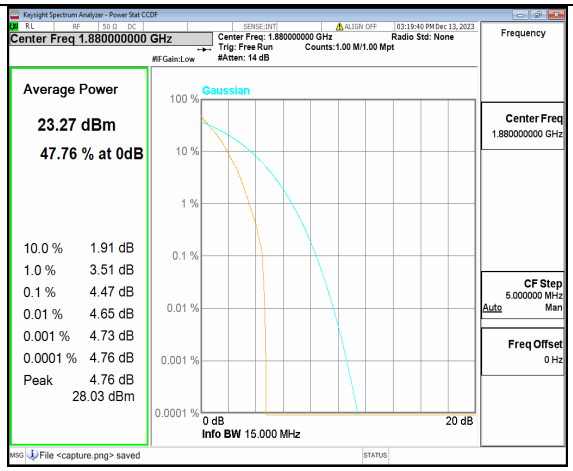

5A_n2 15M DFT-s-OFDM BPSK Outer_Full Mid

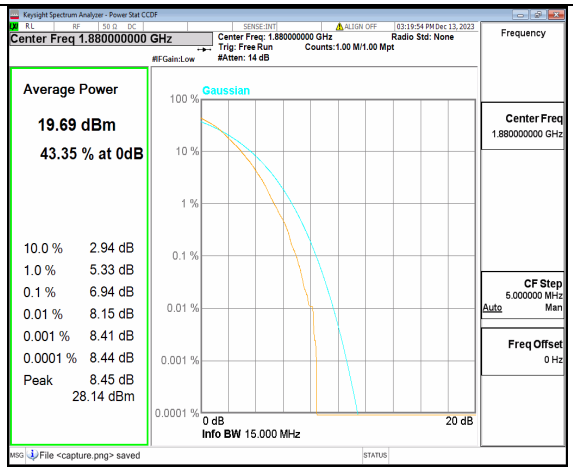

5A_n2 15M DFT-s-OFDM 256QAM Outer_Full Mid

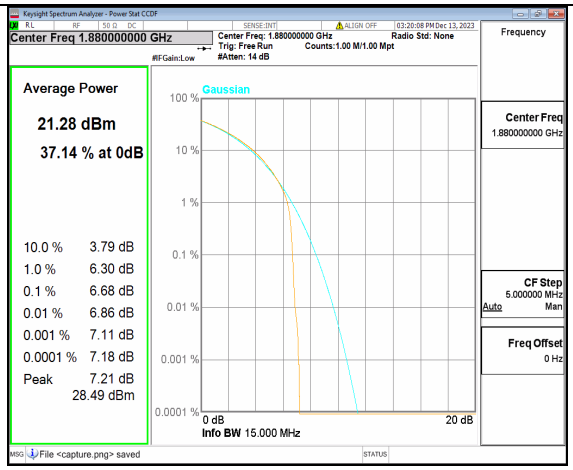

5A_n2 15M CP-OFDM QPSK Outer_Full Mid

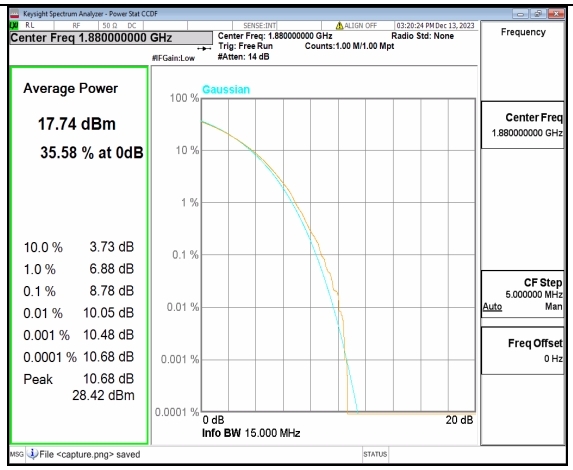

5A_n2 15M CP-OFDM 256QAM Outer_Full Mid

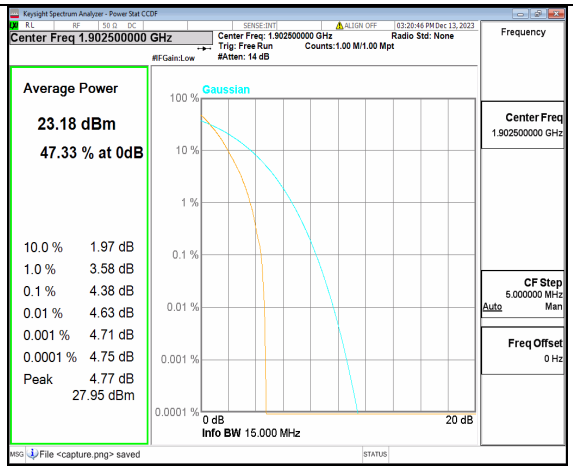

5A_n2 15M DFT-s-OFDM BPSK Outer_Full High

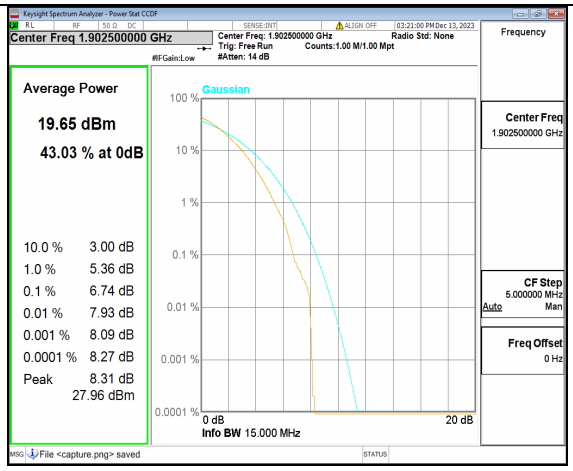

5A_n2 15M DFT-s-OFDM 256QAM Outer_Full High

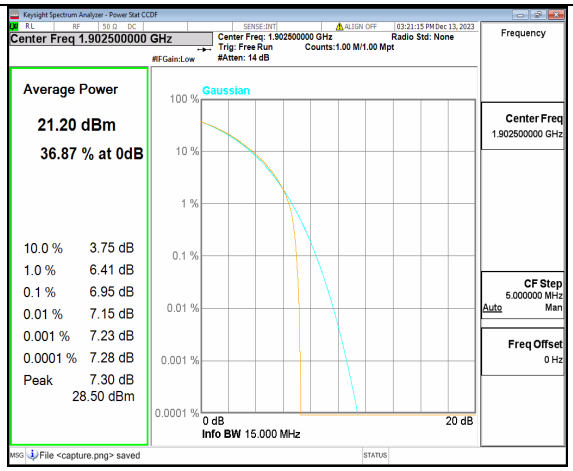

5A_n2 15M CP-OFDM QPSK Outer_Full High

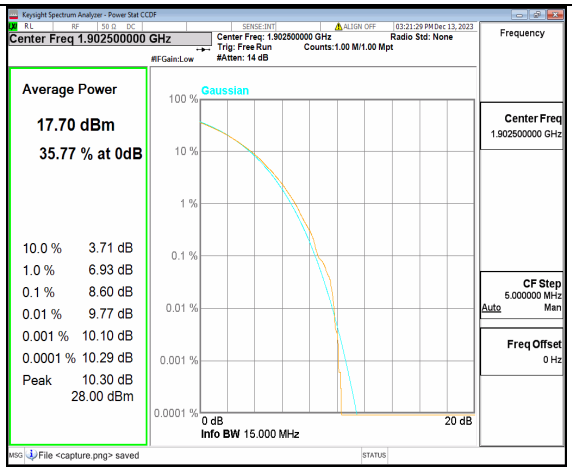

5A_n2 15M CP-OFDM 256QAM Outer_Full High

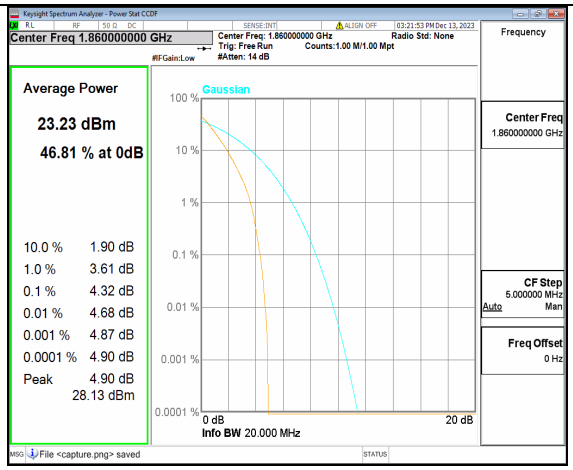

5A_n2 20M DFT-s-OFDM BPSK Outer_Full Low

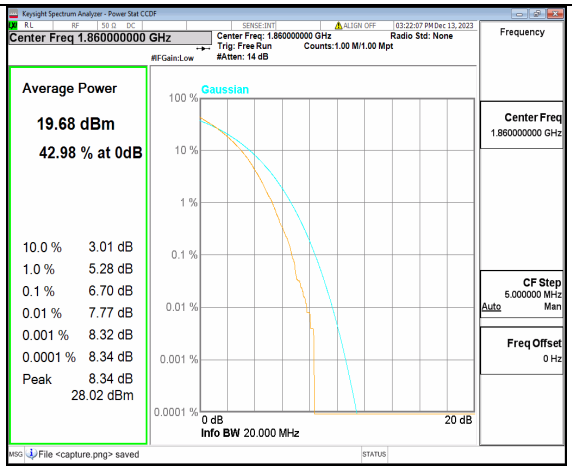

5A_n2 20M DFT-s-OFDM 256QAM Outer_Full Low

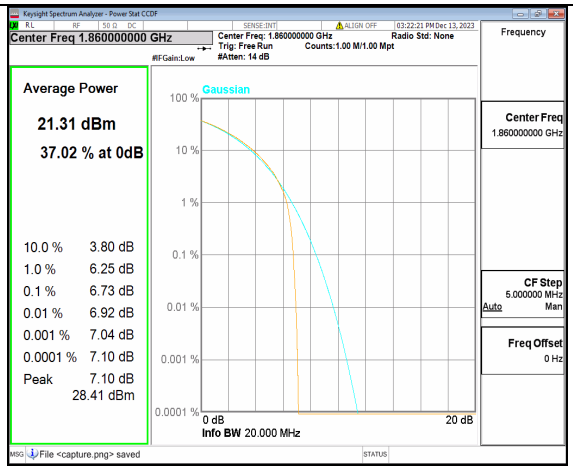

5A_n2 20M CP-OFDM QPSK Outer_Full Low

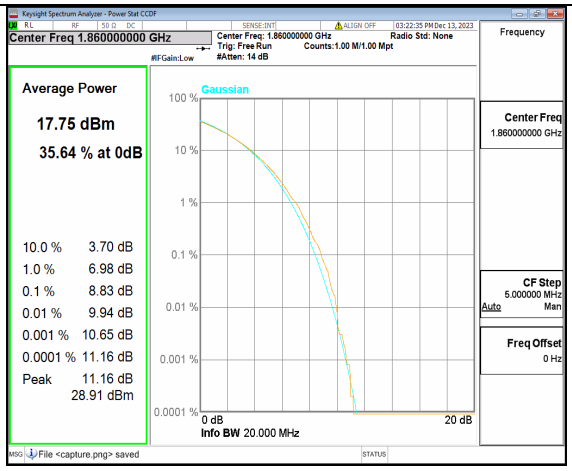

5A_n2 20M CP-OFDM 256QAM Outer_Full Low

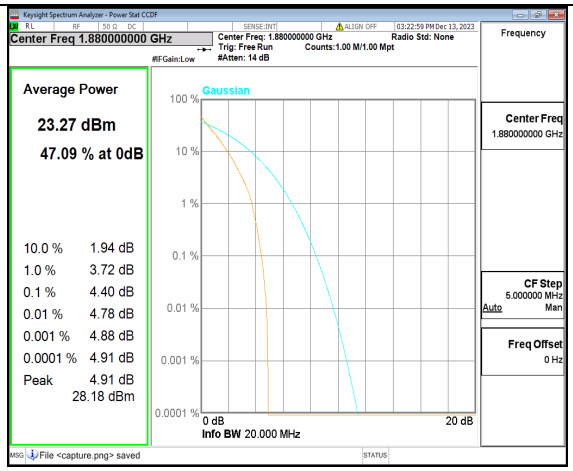

5A_n2 20M DFT-s-OFDM BPSK Outer_Full Mid

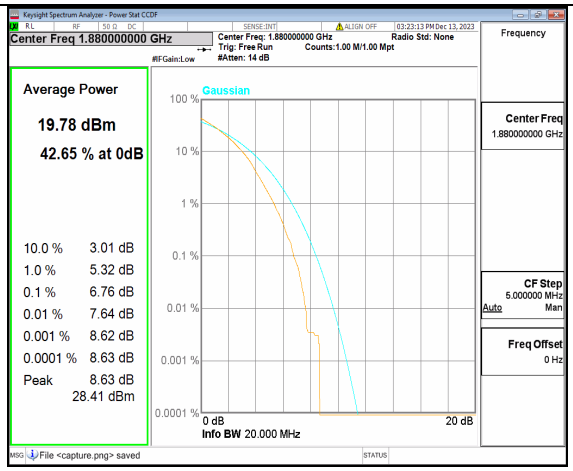

5A_n2 20M DFT-s-OFDM 256QAM Outer_Full Mid

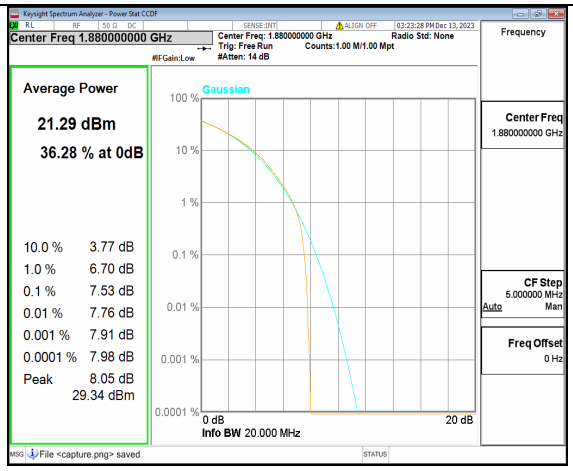

5A_n2 20M CP-OFDM QPSK Outer_Full Mid

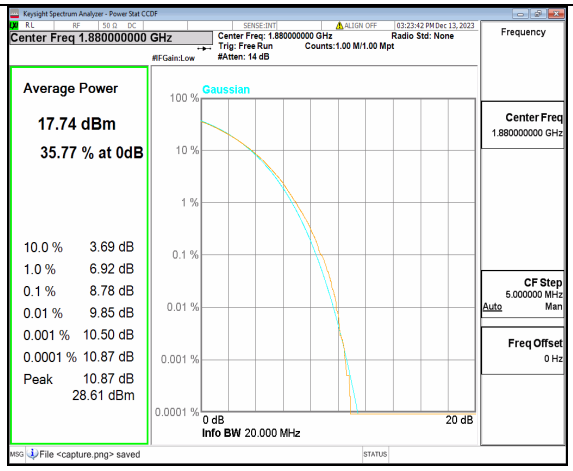

5A_n2 20M CP-OFDM 256QAM Outer_Full Mid

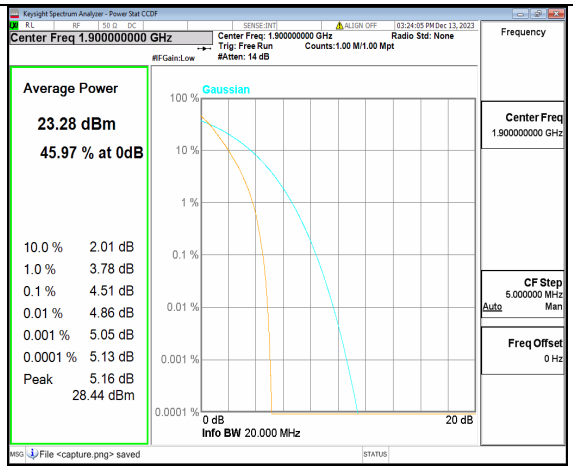

5A_n2 20M DFT-s-OFDM BPSK Outer_Full High

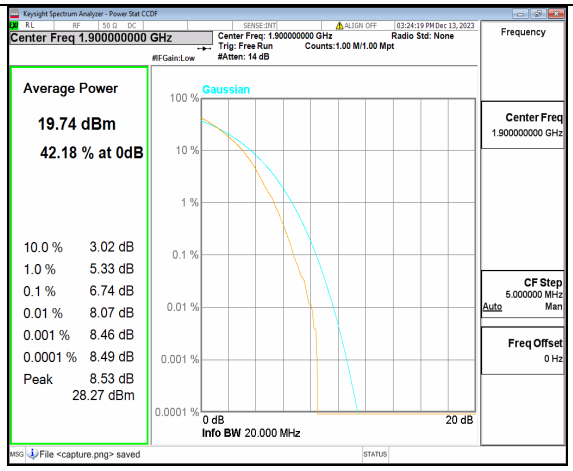

5A_n2 20M DFT-s-OFDM 256QAM Outer_Full High

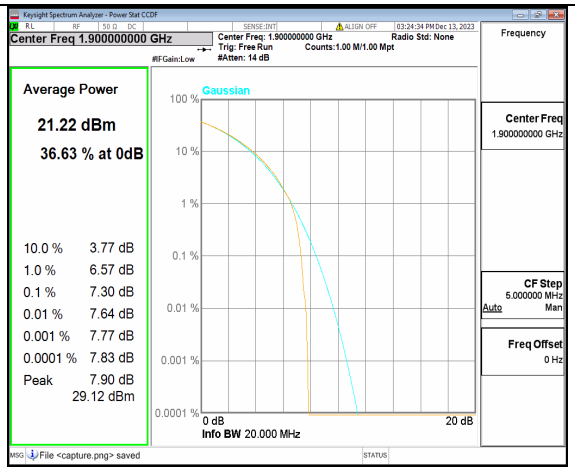

5A_n2 20M CP-OFDM QPSK Outer_Full High

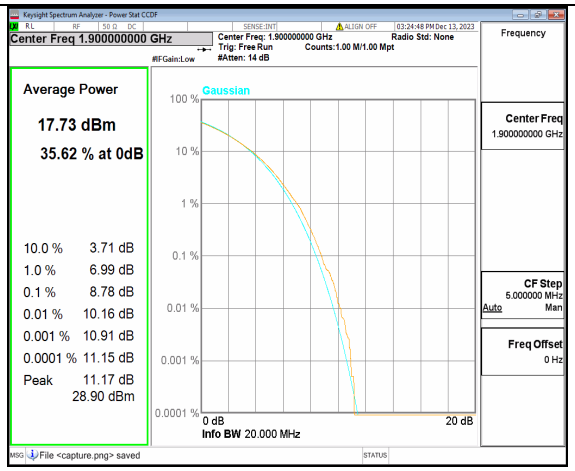

5A_n2 20M CP-OFDM 256QAM Outer_Full High

Band	SCS (KHz)	BW (MHz)	ARFCN	Modulation	RB	Result (dB)	Limit (dB)	Verdict
2A_n66	15	5	342500	DFT-s-OFDM PI/2 BPSK	25/0	4.76	13	PASS
2A_n66	15	5	342500	DFT-s-OFDM 256QAM	25/0	7.27	13	PASS
2A_n66	15	5	342500	CP-OFDM QPSK	25/0	7.52	13	PASS
2A_n66	15	5	342500	CP-OFDM 256QAM	25/0	9.62	13	PASS
2A_n66	15	5	349000	DFT-s-OFDM PI/2 BPSK	25/0	4.27	13	PASS
2A_n66	15	5	349000	DFT-s-OFDM 256QAM	25/0	6.94	13	PASS
2A_n66	15	5	349000	CP-OFDM QPSK	25/0	8.11	13	PASS
2A_n66	15	5	349000	CP-OFDM 256QAM	25/0	9.64	13	PASS
2A_n66	15	5	355500	DFT-s-OFDM PI/2 BPSK	25/0	4.59	13	PASS
2A_n66	15	5	355500	DFT-s-OFDM 256QAM	25/0	6.99	13	PASS
2A_n66	15	5	355500	CP-OFDM QPSK	25/0	7.97	13	PASS
2A_n66	15	5	355500	CP-OFDM 256QAM	25/0	9.67	13	PASS
2A_n66	15	10	343000	DFT-s-OFDM PI/2 BPSK	50/0	4.68	13	PASS
2A_n66	15	10	343000	DFT-s-OFDM 256QAM	50/0	7.02	13	PASS
2A_n66	15	10	343000	CP-OFDM QPSK	52/0	8.12	13	PASS

2A_n66	15	10	343000	CP-OFDM 256QAM	52/0	9.59	13	PASS
2A_n66	15	10	349000	DFT-s-OFDM PI/2 BPSK	50/0	4.51	13	PASS
2A_n66	15	10	349000	DFT-s-OFDM 256QAM	50/0	7.01	13	PASS
2A_n66	15	10	349000	CP-OFDM QPSK	52/0	8.01	13	PASS
2A_n66	15	10	349000	CP-OFDM 256QAM	52/0	9.66	13	PASS
2A_n66	15	10	355000	DFT-s-OFDM PI/2 BPSK	50/0	4.78	13	PASS
2A_n66	15	10	355000	DFT-s-OFDM 256QAM	50/0	7.26	13	PASS
2A_n66	15	10	355000	CP-OFDM QPSK	52/0	7.68	13	PASS
2A_n66	15	10	355000	CP-OFDM 256QAM	52/0	9.64	13	PASS
2A_n66	15	15	343500	DFT-s-OFDM PI/2 BPSK	75/0	4.68	13	PASS
2A_n66	15	15	343500	DFT-s-OFDM 256QAM	75/0	7.52	13	PASS
2A_n66	15	15	343500	CP-OFDM QPSK	79/0	7.94	13	PASS
2A_n66	15	15	343500	CP-OFDM 256QAM	79/0	9.34	13	PASS
2A_n66	15	15	349000	DFT-s-OFDM PI/2 BPSK	75/0	4.5	13	PASS
2A_n66	15	15	349000	DFT-s-OFDM 256QAM	75/0	7.26	13	PASS
2A_n66	15	15	349000	CP-OFDM QPSK	79/0	8.21	13	PASS
2A_n66	15	15	349000	CP-OFDM 256QAM	79/0	9.49	13	PASS
2A_n66	15	15	354500	DFT-s-OFDM PI/2 BPSK	75/0	5	13	PASS
2A_n66	15	15	354500	DFT-s-OFDM 256QAM	75/0	7.13	13	PASS
2A_n66	15	15	354500	CP-OFDM QPSK	79/0	7.99	13	PASS
2A_n66	15	15	354500	CP-OFDM 256QAM	79/0	9.39	13	PASS
2A_n66	15	20	344000	DFT-s-OFDM PI/2 BPSK	100/0	4.9	13	PASS
2A_n66	15	20	344000	DFT-s-OFDM 256QAM	100/0	7.26	13	PASS
2A_n66	15	20	344000	CP-OFDM QPSK	106/0	7.77	13	PASS

2A_n66	15	20	344000	CP-OFDM 256QAM	106/0	9.34	13	PASS
2A_n66	15	20	349000	DFT-s-OFDM PI/2 BPSK	100/0	4.68	13	PASS
2A_n66	15	20	349000	DFT-s-OFDM 256QAM	100/0	7.32	13	PASS
2A_n66	15	20	349000	CP-OFDM QPSK	106/0	8.31	13	PASS
2A_n66	15	20	349000	CP-OFDM 256QAM	106/0	9.49	13	PASS
2A_n66	15	20	354000	DFT-s-OFDM PI/2 BPSK	100/0	4.86	13	PASS
2A_n66	15	20	354000	DFT-s-OFDM 256QAM	100/0	7.15	13	PASS
2A_n66	15	20	354000	CP-OFDM QPSK	106/0	8.38	13	PASS
2A_n66	15	20	354000	CP-OFDM 256QAM	106/0	9.32	13	PASS
2A_n66	15	30	345000	DFT-s-OFDM PI/2 BPSK	160/0	3.96	13	PASS
2A_n66	15	30	345000	DFT-s-OFDM 256QAM	160/0	7.17	13	PASS
2A_n66	15	30	345000	CP-OFDM QPSK	160/0	7.8	13	PASS
2A_n66	15	30	345000	CP-OFDM 256QAM	160/0	9.17	13	PASS
2A_n66	15	30	349000	DFT-s-OFDM PI/2 BPSK	160/0	4.91	13	PASS
2A_n66	15	30	349000	DFT-s-OFDM 256QAM	160/0	7.47	13	PASS
2A_n66	15	30	349000	CP-OFDM QPSK	160/0	7.78	13	PASS
2A_n66	15	30	349000	CP-OFDM 256QAM	160/0	9.32	13	PASS
2A_n66	15	30	353000	DFT-s-OFDM PI/2 BPSK	160/0	4.07	13	PASS
2A_n66	15	30	353000	DFT-s-OFDM 256QAM	160/0	7.16	13	PASS
2A_n66	15	30	353000	CP-OFDM QPSK	160/0	8.36	13	PASS
2A_n66	15	30	353000	CP-OFDM 256QAM	160/0	9.44	13	PASS

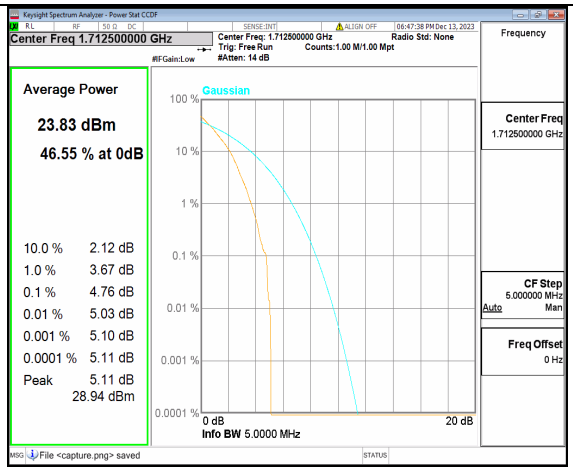

2A_n66 5M DFT-s-OFDM BPSK Outer_Full Low

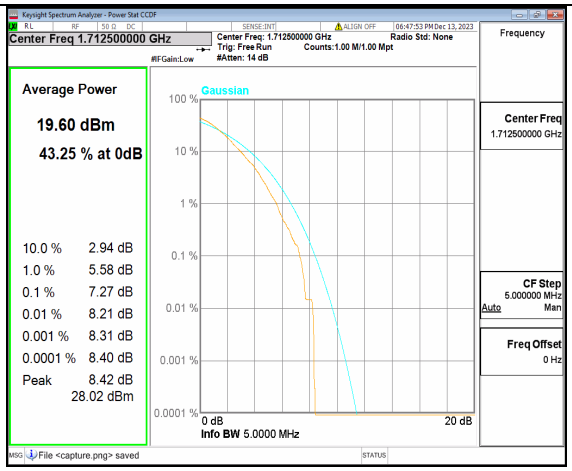

2A_n66 5M DFT-s-OFDM 256QAM Outer_Full Low

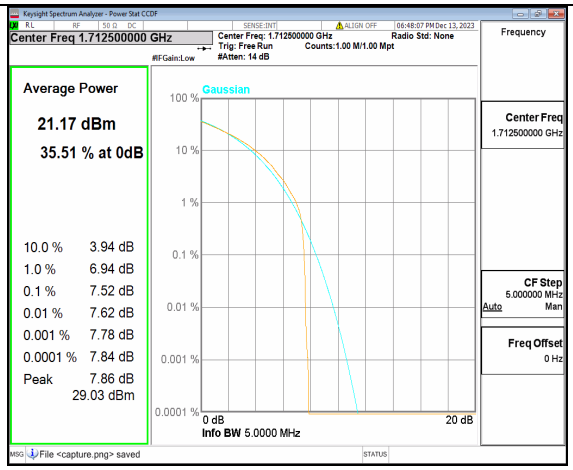

2A_n66 5M CP-OFDM QPSK Outer_Full Low

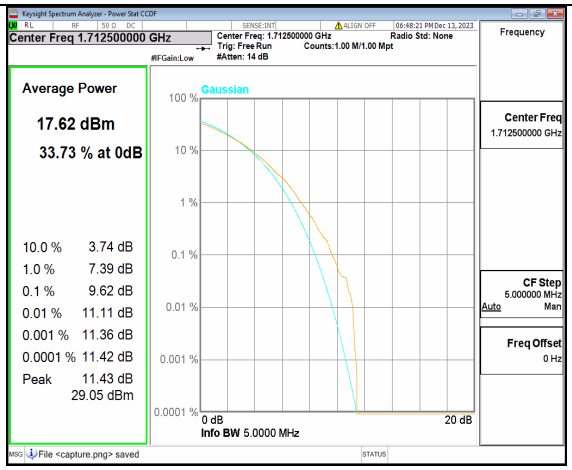

2A_n66 5M CP-OFDM 256QAM Outer_Full Low

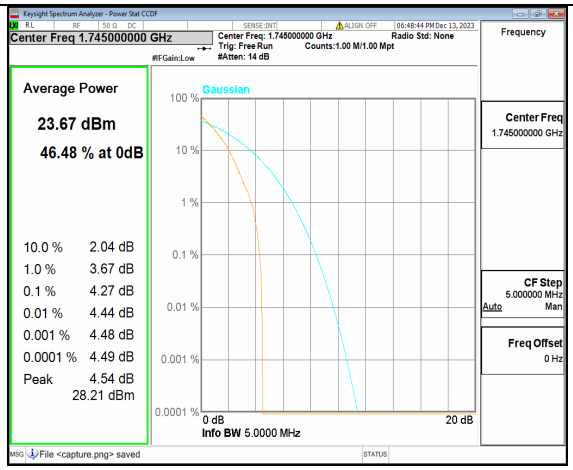

2A_n66 5M DFT-s-OFDM BPSK Outer_Full Mid

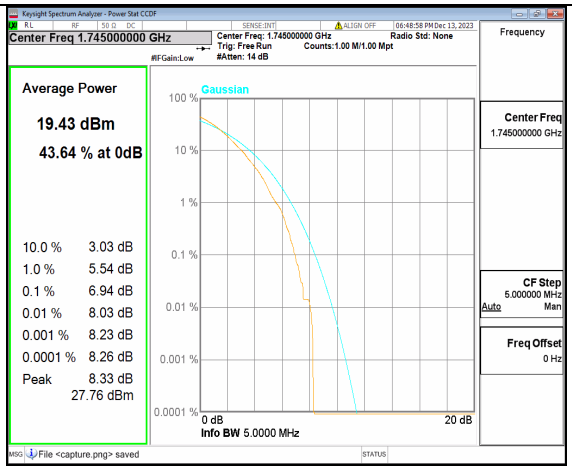

2A_n66 5M DFT-s-OFDM 256QAM Outer_Full Mid

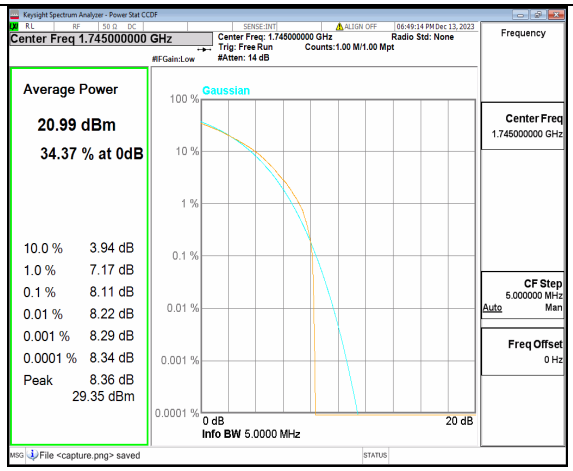

2A_n66 5M CP-OFDM QPSK Outer_Full Mid

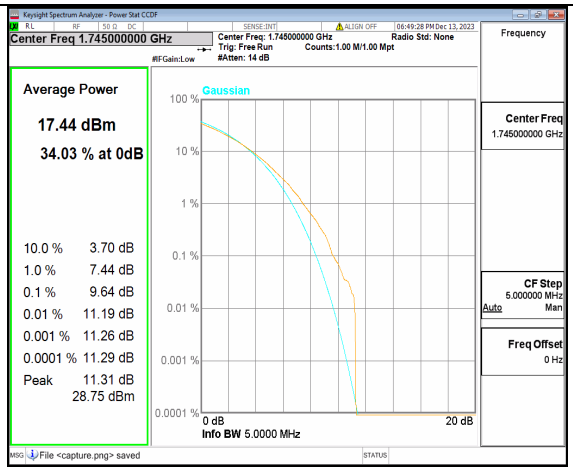

2A_n66 5M CP-OFDM 256QAM Outer_Full Mid

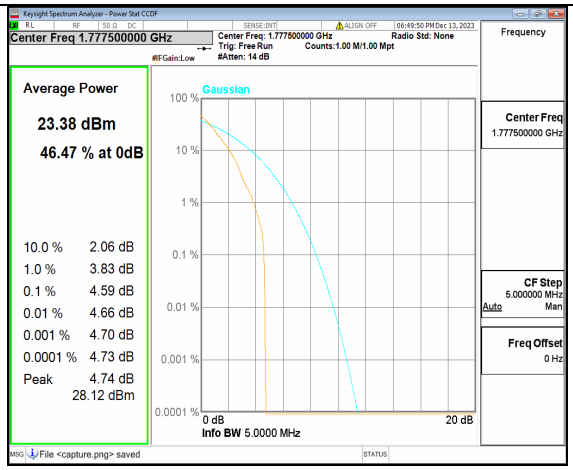

2A_n66 5M DFT-s-OFDM BPSK Outer_Full High

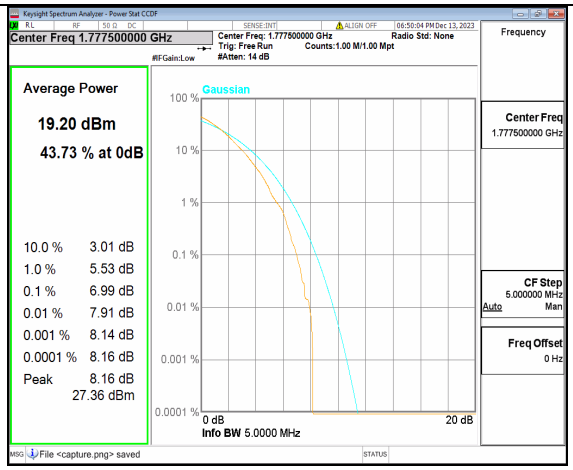

2A_n66 5M DFT-s-OFDM 256QAM Outer_Full High

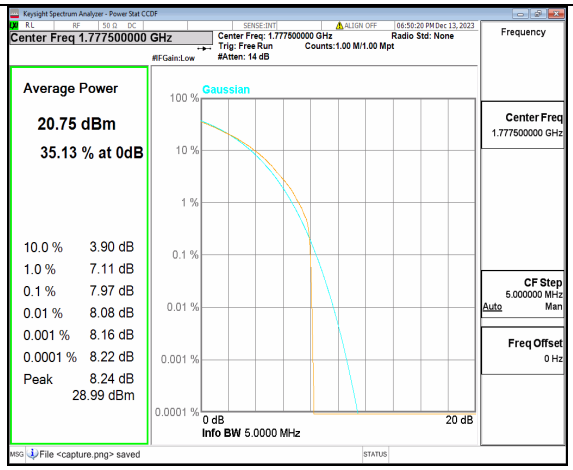

2A_n66 5M CP-OFDM QPSK Outer_Full High

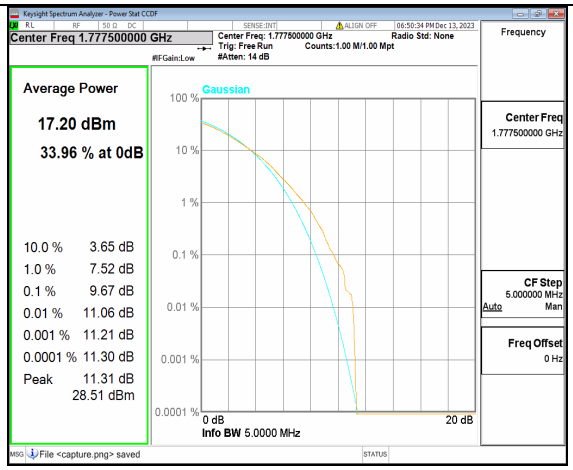

2A_n66 5M CP-OFDM 256QAM Outer_Full High

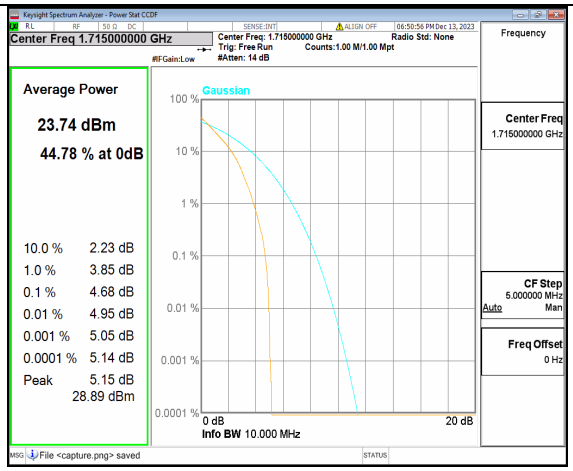

2A_n66 10M DFT-s-OFDM BPSK Outer_Full Low

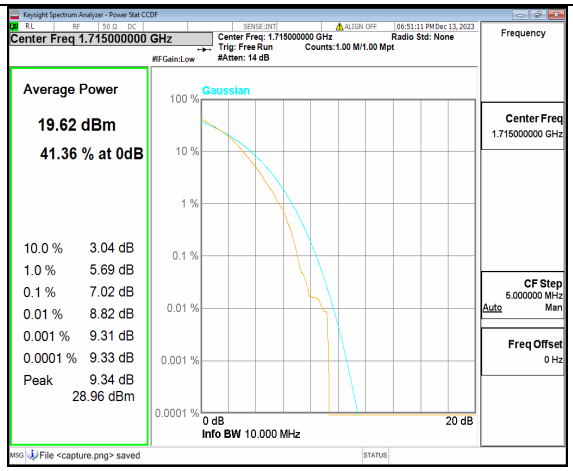

2A_n66 10M DFT-s-OFDM 256QAM Outer_Full Low

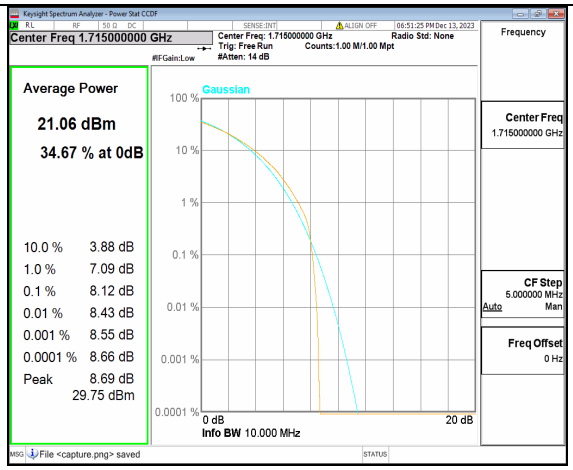

2A_n66 10M CP-OFDM QPSK Outer_Full Low

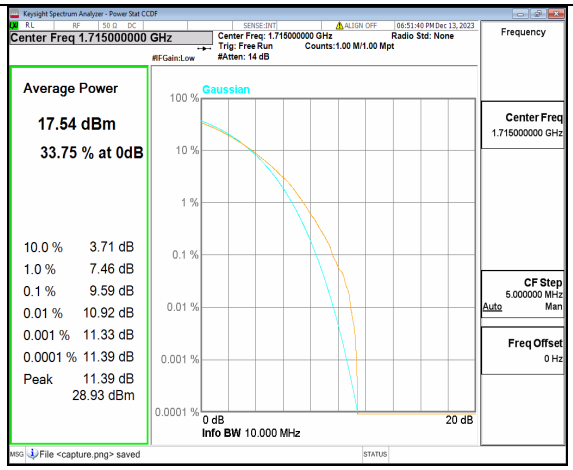

2A_n66 10M CP-OFDM 256QAM Outer_Full Low

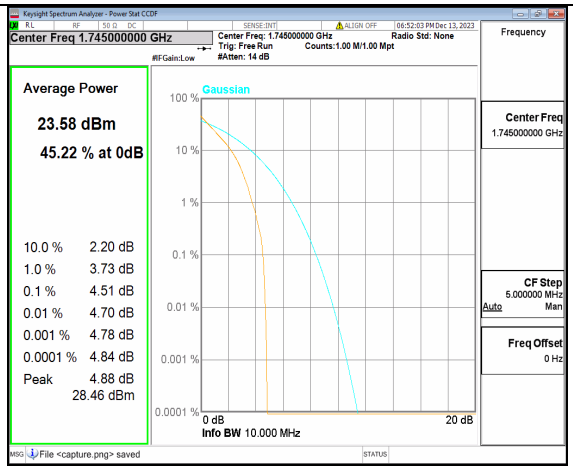

2A_n66 10M DFT-s-OFDM BPSK Outer_Full Mid

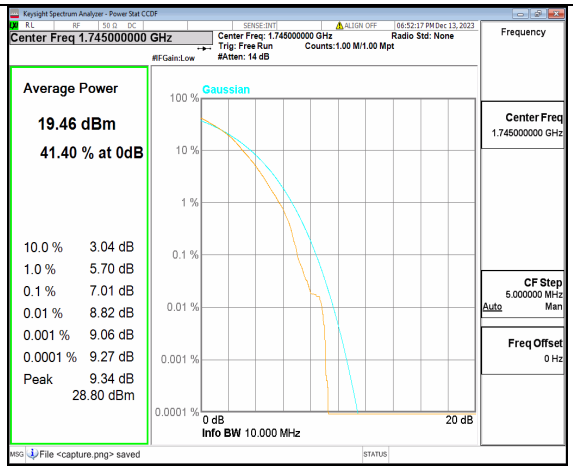

2A_n66 10M DFT-s-OFDM 256QAM Outer_Full Mid

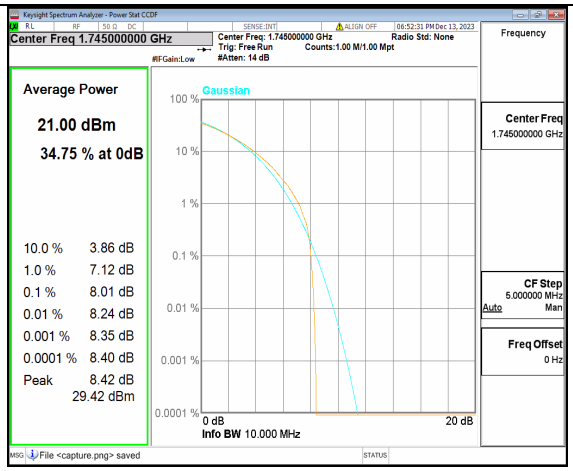

2A_n66 10M CP-OFDM QPSK Outer_Full Mid

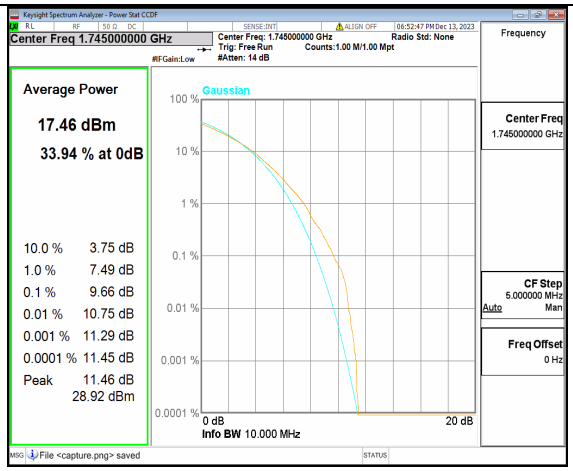

2A_n66 10M CP-OFDM 256QAM Outer_Full Mid

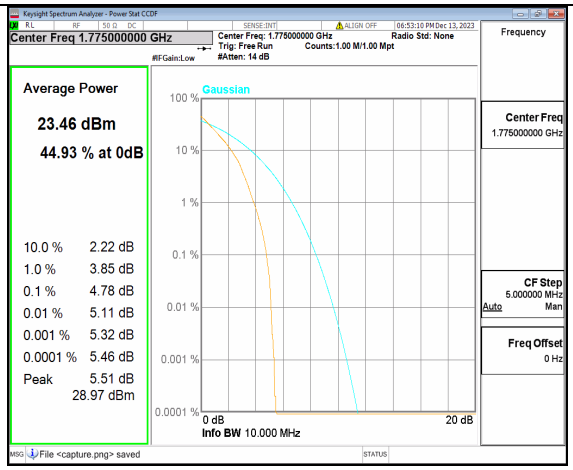

2A_n66 10M DFT-s-OFDM BPSK Outer_Full High

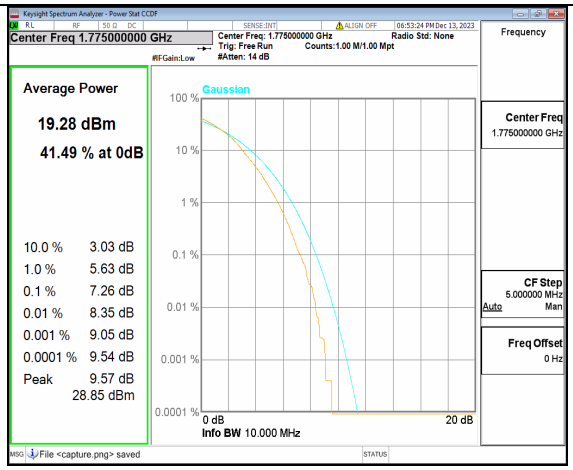

2A_n66 10M DFT-s-OFDM 256QAM Outer_Full High

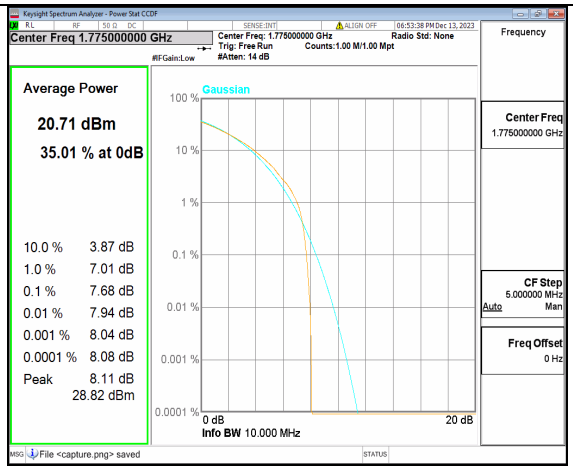

2A_n66 10M CP-OFDM QPSK Outer_Full High

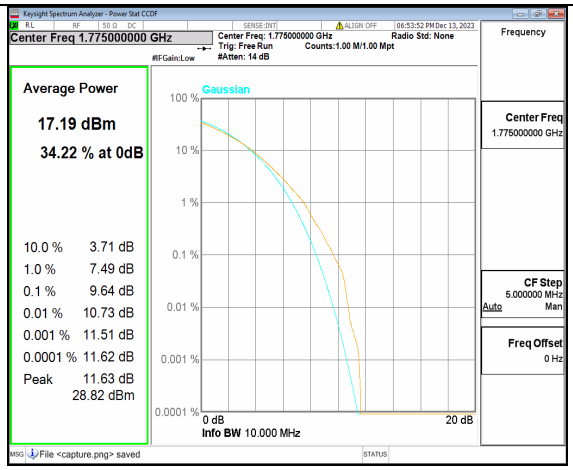

2A_n66 10M CP-OFDM 256QAM Outer_Full High