



# TEST REPORT

**APPLICANT** : Reliance Communications LLC

**PRODUCT NAME** : Orbic Myra

**MODEL NAME** : R678L5S6

**BRAND NAME** : Orbic

**FCC ID** : 2ABGH-R678L5S6

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**RECEIPT DATE** : 2020-10-21

**TEST DATE** : 2020-11-07 to 2020-12-14

**ISSUE DATE** : 2022-08-02

Edited by: Zeng Xiaoying  
Zeng Xiaoying (Rapporteur)

Approved by: Shen Junsheng  
Shen Junsheng (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





# DIRECTORY

- 1. Technical Information ..... 3**
- 1.1. Applicant and Manufacturer Information ..... 3**
- 1.2. Equipment Under Test (EUT) Description ..... 3**
- 1.3. Modulation Type and Data Rate of EUT ..... 5**
- 1.4. The Channel Number and Frequency ..... 6**
- 1.5. Test Standards and Results ..... 7**
- 1.6. Environmental Conditions ..... 8**
- 2. 47 CFR Part 15C Requirements ..... 9**
- 2.1. Antenna Requirement ..... 9**
- 2.2. Duty Cycle of Test Signal ..... 10**
- 2.3. Maximum Peak and Average Conducted Output Power ..... 14**
- 2.4. Bandwidth ..... 17**
- 2.5. Conducted Spurious Emissions and Band Edge ..... 26**
- 2.6. Power Spectral Density (PSD) ..... 39**
- 2.7. Conducted Emission ..... 56**
- 2.8. Restricted Frequency Bands ..... 60**
- 2.9. Radiated Emission ..... 73**
- Annex A Test Uncertainty ..... 89**
- Annex B Testing Laboratory Information ..... 90**

Change History		
Version	Date	Reason for change
1.0	2022-08-02	First edition



# 1. Technical Information

Note: Provide by applicant.

## 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	Reliance Communications LLC
<b>Applicant Address:</b>	1560 Fifth Ave BayShore, NY 11706
<b>Manufacturer:</b>	ZJY RIGHT SOURCE INDIA PRIVATE LIMITED
<b>Manufacturer Address:</b>	MIDC industrial Area, Shiravane, Nerul, India

## 1.2. Equipment Under Test (EUT) Description

<b>Product Name:</b>	Orbic Myra	
<b>Sample No.:</b>	27#	
<b>Hardware Version:</b>	V2.2	
<b>Software Version:</b>	ORB678L5S6_v1.0.68_BVT-NA	
<b>Modulation Technology:</b>	DSSS, OFDM	
<b>Modulation Type:</b>	Refer to section1.3	
<b>Operating Frequency Range:</b>	802.11b/g/ n (HT20): 2412MHz–2472MHz 802.11n (HT40): 2422MHz–2462MHz	
<b>Antenna Type:</b>	PIFA Antenna	
<b>Antenna Gain:</b>	ANT 0: 0.29dBi; ANT 1: 0.29dBi	
<b>Directional Gain:</b>	3.30dBi <sub>Note 3</sub>	
<b>Accessory Information:</b>	Battery	
	<b>Brand Name:</b>	Orbic
	<b>Model No.:</b>	BLE-5001
	<b>Serial No.:</b>	(N/A, marked #1 by test site)
	<b>Capacity:</b>	5000mAh
	<b>Rated Voltage:</b>	3.85V
	<b>Charge Limit:</b>	4.40V
	<b>Manufacturer:</b>	HUIZHOU DXDRAGON INC



<b>Accessory Information:</b>	AC Adapter	
	Brand Name:	Orbic
	Model No.:	BLJ-QC06HU
	Serial No.:	(N/A, marked #1 by test site)
	Rated Output:	5V=3A, 9V=2A, 12V=1.5A,
	Rated Input:	100-240V~50/60Hz, 0.5A
	Manufacturer:	Baolijin

**Note 1:** We use the dedicated software to control the EUT continuous transmission.

**Note 2:** The EUT has two antennas, only 802.11n modulation mode supports a MIMO function.

**Note 3:** According to KDB 662911 D01, the directional gain =  $G_{ANT} + 10\log(N_{ANT})$  dBi, where  $G_{ANT}$  is the maximum antenna gain in dBi,  $N_{ANT}$  is the number of outputs.

**Note 4:** For conducted test item Conducted Output Power and Power Spectral Density of each modulation mode, we recorded the test result of two antennas separately, for other conducted test items both of the two antennas were tested separately, we only recorded the worst test result (ANT 1) in this report.

**Note 5:** Radiation test items for all modulation operate at 2Tx mode during the test, only the worst test result(ANT1) was recorded in this report.

**Note 6:** For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



### 1.3. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) <small>Note1</small>
DSSS (802.11b)	DBPSK	<b>1</b>
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	<b>6 / 9</b>
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	<b>6.5</b>
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65
OFDM (802.11n (HT40))	BPSK	<b>13.5</b>
	QPSK	27/40.5
	16QAM	54/81/108
	64QAM	121.5/135

**Note1:** The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.



## 1.4. The Channel Number and Frequency

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/ n (HT20)	<b>1</b>	<b>2412</b>	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432	12	2467
	6	2437	<b>13</b>	<b>2472</b>
	<b>7</b>	<b>2442</b>		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	<b>3</b>	<b>2422</b>	8	2447
	4	2427	9	2452
	5	2432	10	2457
	6	2437	<b>11</b>	<b>2462</b>
	<b>7</b>	<b>2442</b>		

**Note 1:** The black bold channels were selected for test.



## 1.5. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle Of Test Signal	Nov 18&Dec 02, 2020	Liu Bo	PASS	No deviation
3	15.247(b)	Maximum Peak and Average Conducted Output Power	Dec 02, 2020	Liu Bo	PASS	No deviation
4	15.247(a)	Bandwidth	Nov 18&Dec 02, 2020	Liu Bo	PASS	No deviation
5	15.247(d)	Conducted Spurious Emission and Band Edge	Nov 18&Dec 02, 2020	Liu Bo	PASS	No deviation
6	15.247(e)	Power Spectral Density (PSD)	Nov 18&Dec 02, 2020	Liu Bo	PASS	No deviation
7	15.207	Conducted Emission	Dec 14, 2020	Huang Zhiye	PASS	No deviation
8	15.247(d)	Restricted Frequency Bands	Nov 11&13, 2020	Peng Xuwei	PASS	No deviation
9	15.209, 15.247(d)	Radiated Emission	Nov 07&14, 2020	Peng Xuwei	PASS	No deviation

**Note 1:** The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013, KDB558074 D01 v05r02.



**Note 2:** The path loss during the RF test is calibrated to correct the results by the offset setting in the test equipments. The ref offset 11.5dB contains two parts that cable loss 1.5dB and Attenuator 10dB.

**Note 3:** Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

**Note 4:** When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

## 1.6. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106





## 2. 47 CFR Part 15C Requirements

### 2.1. Antenna Requirement

#### 2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2. Test Result: Compliant

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT internal photos.

## 2.2. Duty Cycle of Test Signal

### 2.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this subclause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than  $\pm 2\%$ ; otherwise, the duty cycle is considered to be nonconstant.

### 2.2.2. Test Description

#### Test Setup:



ANSI C63.10 2013 Clause 11.6 was used in order to prove compliance.



2.2.3. Test Result


A. Test Verdict:

Test Mode	Duty Cycle (%) (D)	Duty Factor (10*Ig[1/D])
802.11b	100.00	0.00
802.11g	98.07	0.08
802.11n (HT20)	97.93	0.09
802.11n (HT40)	94.39	0.25


B. Test Plot:




(Channel 1, 802.11b)

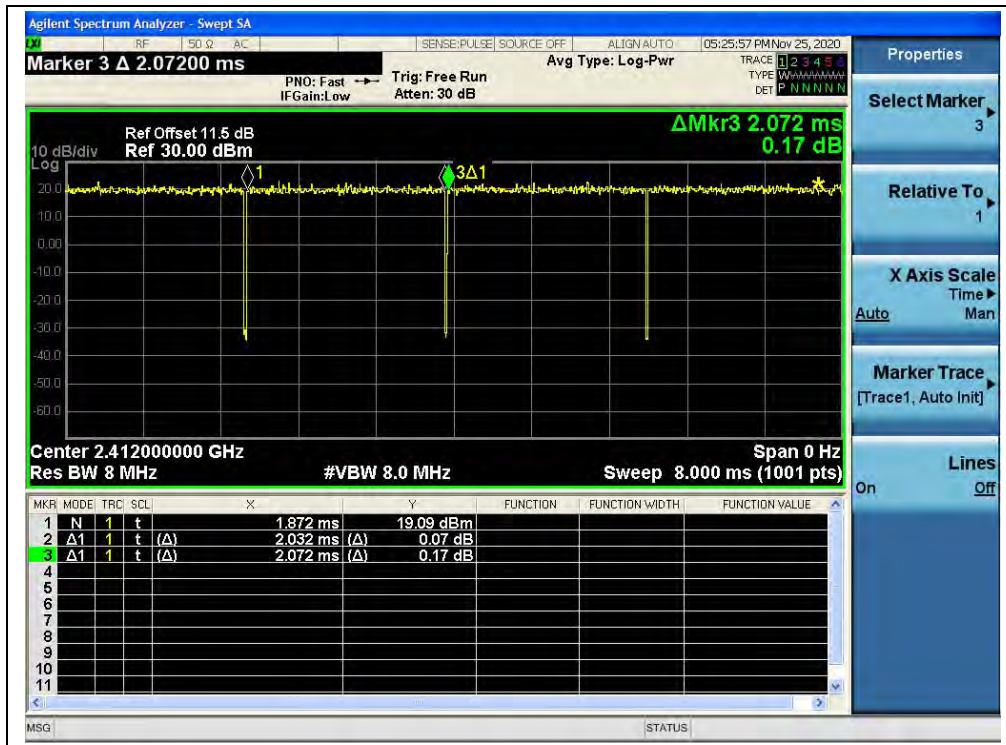

(Channel 1, 802.11g)

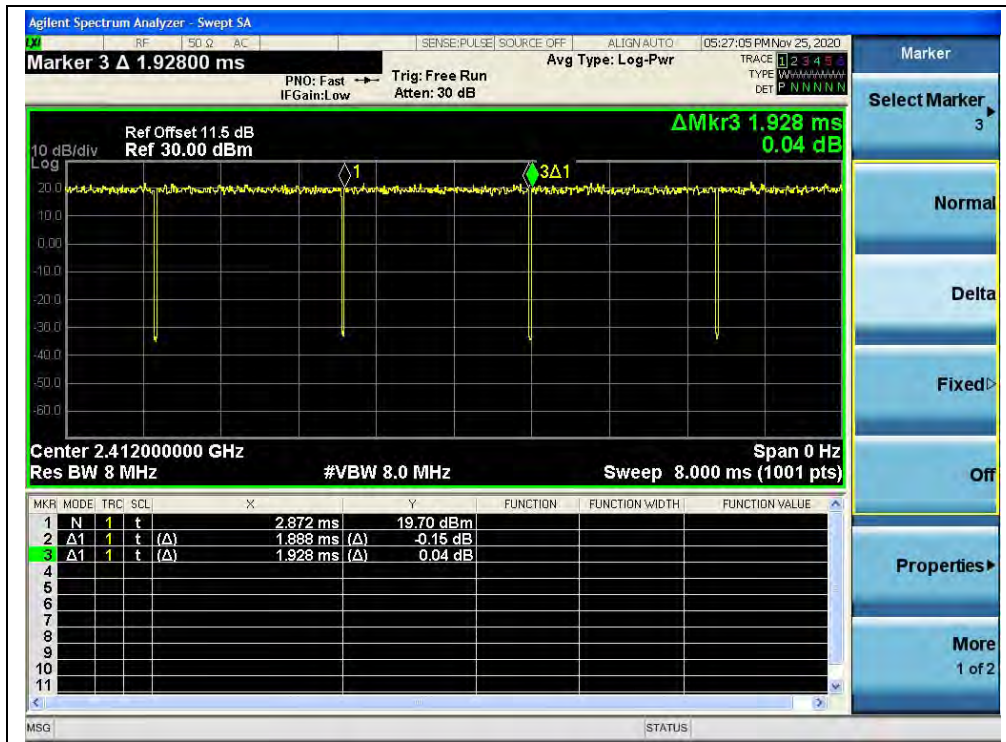

(Channel 1, 802.11n (HT20))

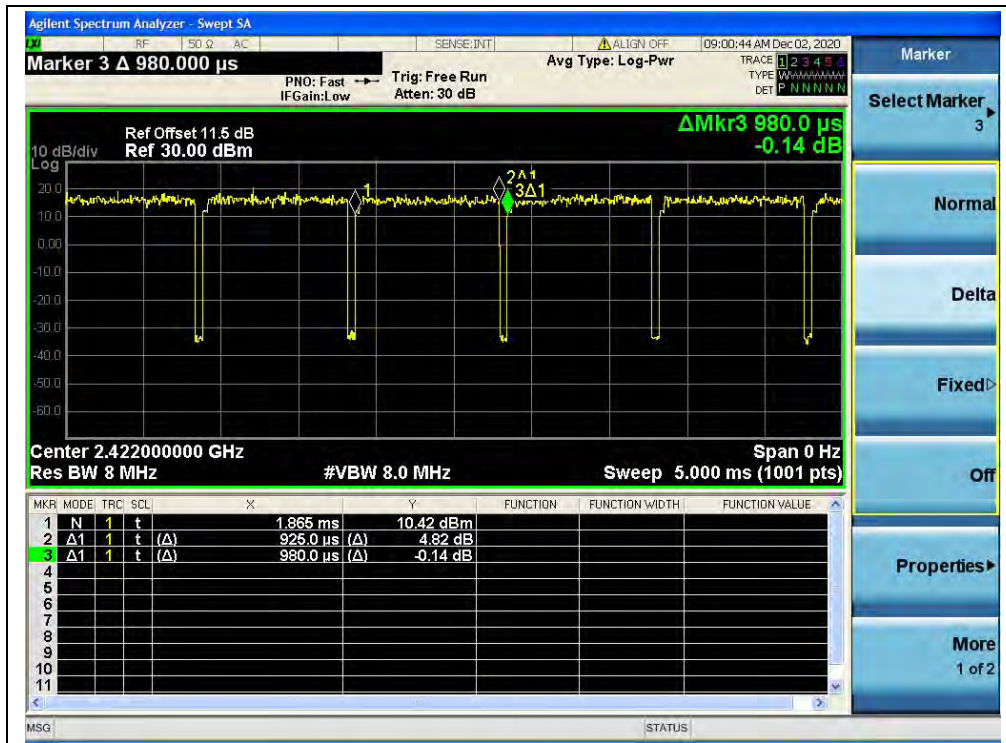

(Channel 3, 802.11n (HT40))

## 2.3. Maximum Peak and Average Conducted Output Power


### 2.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.3.2. Test Description

The measured output power was calculated by the reading of the USB Wideband Power Sensor and calibration.

#### Test Setup:

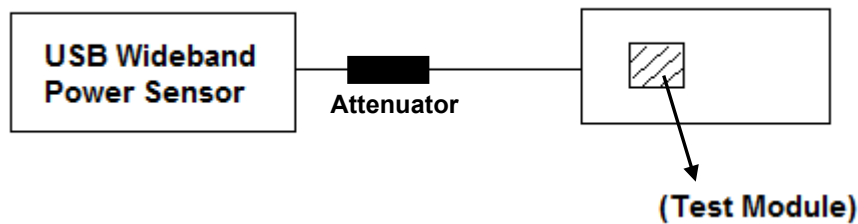

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.



2.3.3.Test Result

Maximum Peak Conducted Output Power

802.11b Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit (dBm)		Verdict
		ANT 0		ANT 1		dBm	W	
		dBm	W	dBm	W			
1	2412	18.05	0.064	17.16	0.052	30	1	PASS
7	2442	17.88	0.061	19.13	0.082			PASS
13	2472	18.66	0.073	19.25	0.084			PASS

802.11g Mode

Channel	Frequency (MHz)	Measured Peak Power				Limit (dBm)		Verdict
		ANT 0		ANT 1		dBm	W	
		dBm	W	dBm	W			
1	2412	19.48	0.089	20.78	0.120	30	1	PASS
7	2442	19.09	0.081	<b>20.74</b>	<b>0.119</b>			PASS
13	2472	19.97	0.099	20.68	0.117			PASS

802.11n(HT20) Mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
1	2412	19.55	20.81	23.24	0.211	30	1	PASS
7	2442	18.96	20.73	22.94	0.197			PASS
13	2472	19.85	20.74	23.32	0.215			PASS

**Note:** Directional gain = 0.29dBi + 10log(2) = 3.3dBi < 6dBi, so the power limit is 1W(30dBm).

802.11n(HT40) Mode

Channel	Frequency (MHz)	Measured Peak Power (dBm)		Total Power (dBm)	Total Power (W)	Limit		Verdict
		ANT 0	ANT 1			dBm	W	
3	2422	19.74	20.67	23.24	0.211	30	1	PASS
7	2442	20.10	20.62	23.38	0.218			PASS
11	2462	20.21	20.57	<b>23.40</b>	<b>0.219</b>			PASS

**Note:** Directional gain = 0.29dBi + 10log(2) = 3.3dBi < 6dBi, so the power limit is 1W(30dBm).



**Maximum Average Conducted Output Power**

**802.11b Mode**

Frequency (MHz)	Average Power						Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm		W
2412	15.80	17.47	0.00	15.80	0.038	<b>17.47</b>	0.056	30	1	PASS
2442	15.63	16.82		15.63	0.037	16.82	0.048			PASS
2472	16.21	17.03		<b>16.21</b>	0.042	17.03	0.050			PASS

**802.11g Mode**

Frequency (MHz)	Average Power						Limit		Verdict	
	Measured		Duty Factor	Duty factor Calculated						
	ANT0	ANT1		ANT0		ANT1				
	dBm	dBm		dBm	W	dBm	W	dBm		W
2412	14.60	15.97	0.00	14.60	0.029	15.97	0.040	30	1	PASS
2442	14.34	15.87		14.34	0.027	15.87	0.039			PASS
2472	14.71	15.71		14.71	0.030	15.71	0.037			PASS

**802.11n (HT20) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W			
	dBm	dBm		dBm	W			
2412	14.46	15.78	0.09	<b>18.26</b>	<b>0.067</b>	30	1	PASS
2442	14.24	15.69		18.13	0.065			PASS
2472	14.51	15.51		18.13	0.065			PASS

**Note:** Directional gain = 0.29dBi +10log(2) = 3.3dBi < 6dBi, so the power limit is 1W(30dBm).

**802.11n (HT40) Mode**

Frequency (MHz)	Average Power					Limit		Verdict
	Measured		Duty Factor	Total Power with Duty Factor				
	ANT0	ANT1		dBm	W			
	dBm	dBm		dBm	W			
2422	14.40	15.34	0.25	18.13	0.065	30	1	PASS
2442	14.46	15.37		18.20	0.066			PASS
2462	14.25	15.18		17.99	0.063			PASS

**Note:** Directional gain = 0.29dBi +10log(2) = 3.3dBi < 6dBi, so the power limit is 1W(30dBm).




## 2.4. Bandwidth

### 2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.4.2. Test Description

#### Test Setup:

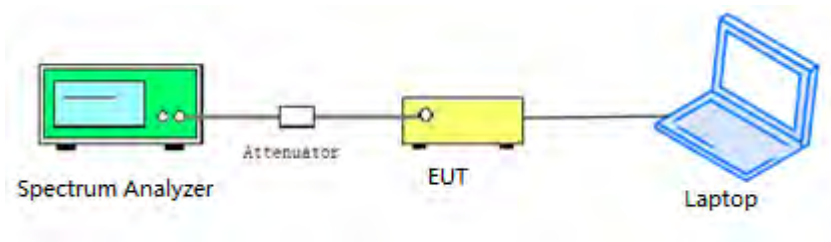

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.4.3. Test Procedure

KDB 558074 Section 8.2 was used in order to prove compliance.



2.4.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	8.57	≥500	PASS
7	2442	8.07	≥500	PASS
13	2472	7.58	≥500	PASS

B. Test Plot:



(Channel 1, 802.11b)



(Channel 7, 802.11b)



(Channel 13, 802.11b)



802.11g Mode

A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	15.61	≥500	PASS
7	2442	16.26	≥500	PASS
13	2472	15.71	≥500	PASS


B. Test Plot:



(Channel 1, 802.11g)



(Channel 7, 802.11g)

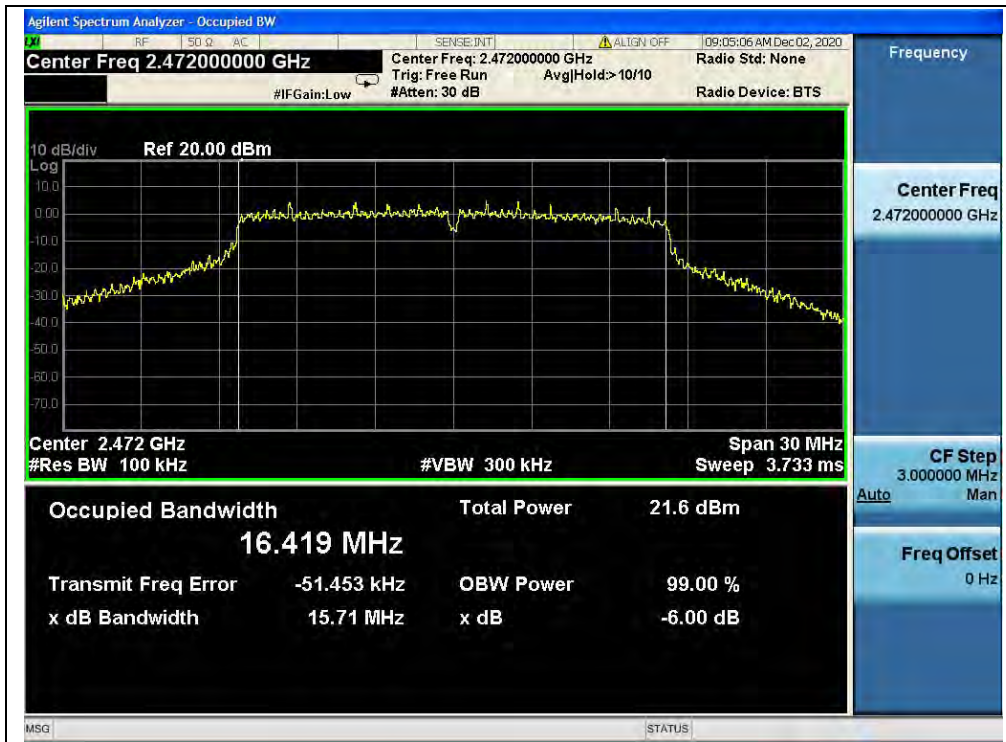

(Channel 13, 802.11g)




**802.11n (HT20) Mode**


**A.Test Verdict:**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
1	2412	16.08	≥500	PASS
7	2442	15.73	≥500	PASS
13	2472	15.86	≥500	PASS


**B.Test Plot:**

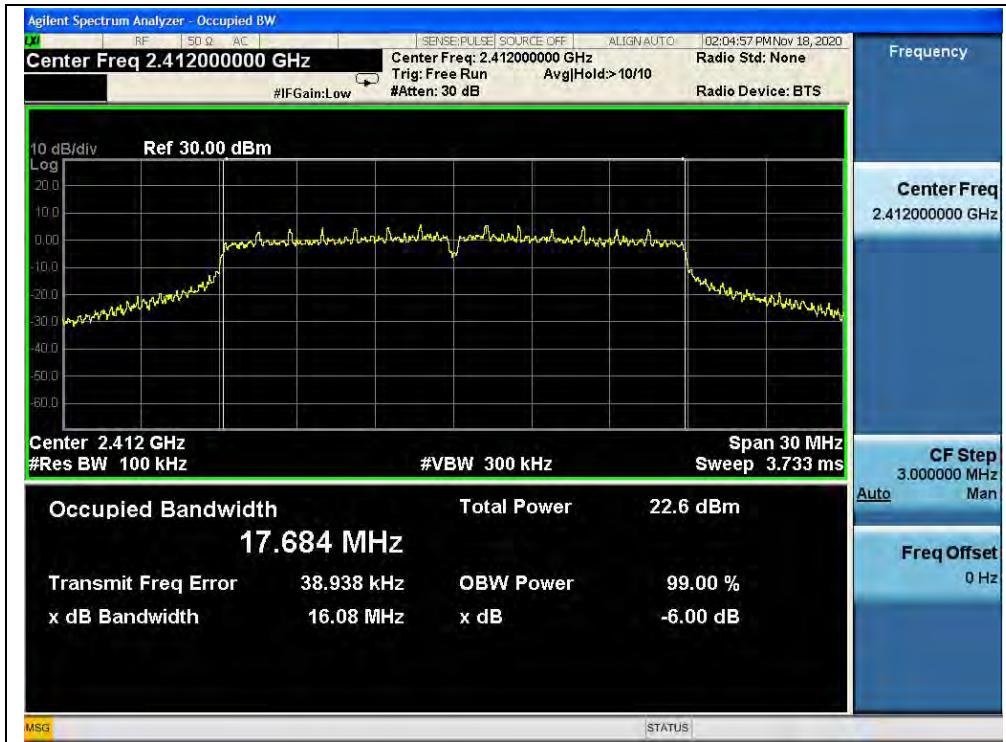

(Channel 1, 802.11n (HT20))

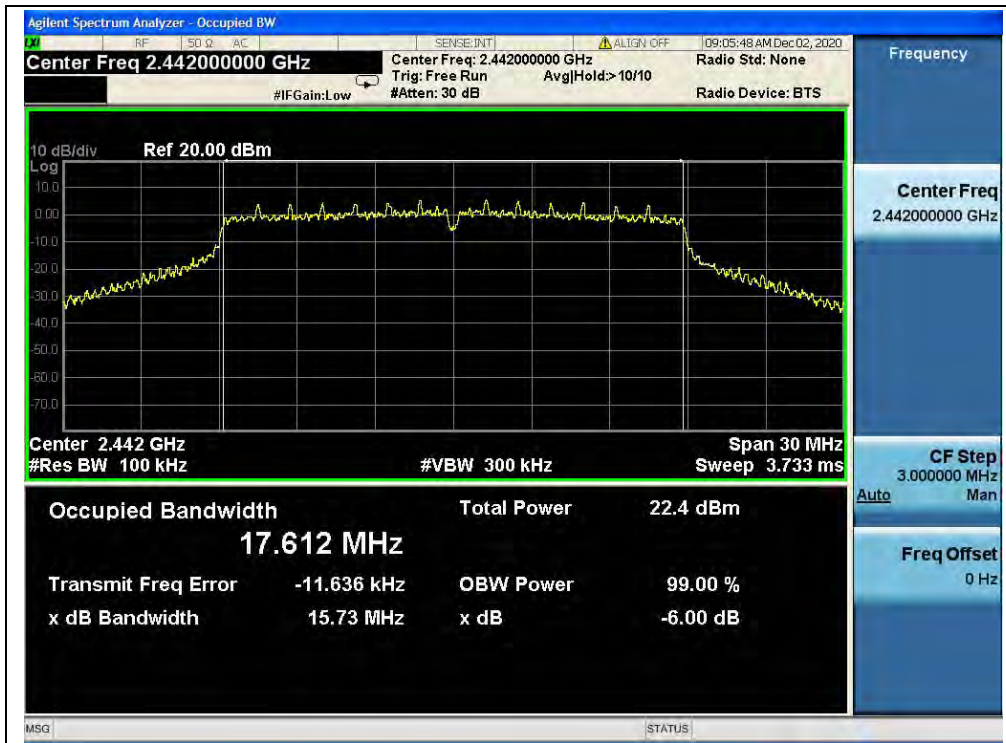

(Channel 7, 802.11n (HT20))

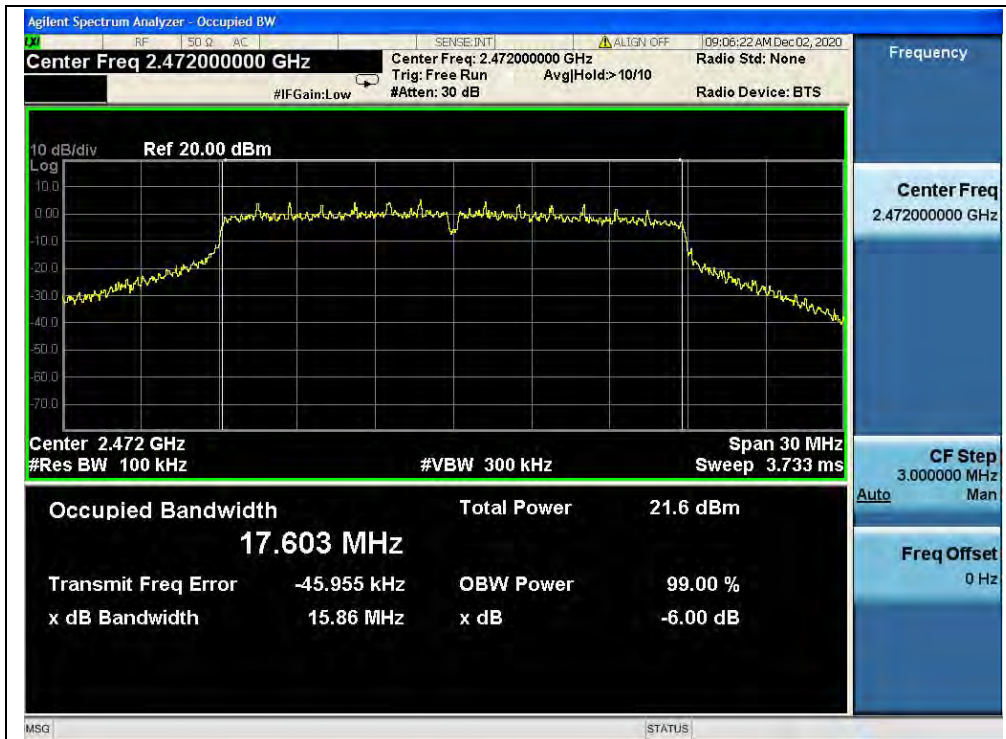

(Channel 13, 802.11n (HT20))




**802.11n (HT40) Mode**

**A.Test Verdict:**


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limits(kHz)	Result
3	2422	35.35	≥500	PASS
7	2442	35.72	≥500	PASS
11	2462	35.65	≥500	PASS

**B.Test Plot:**

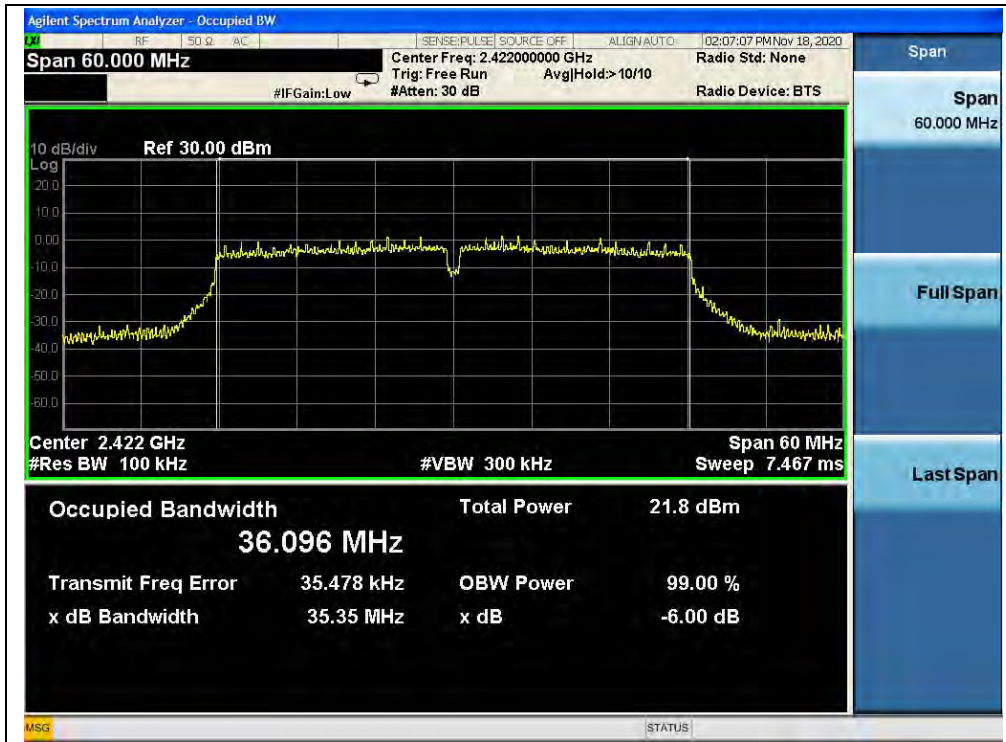


(Channel 3, 802.11n (HT40))



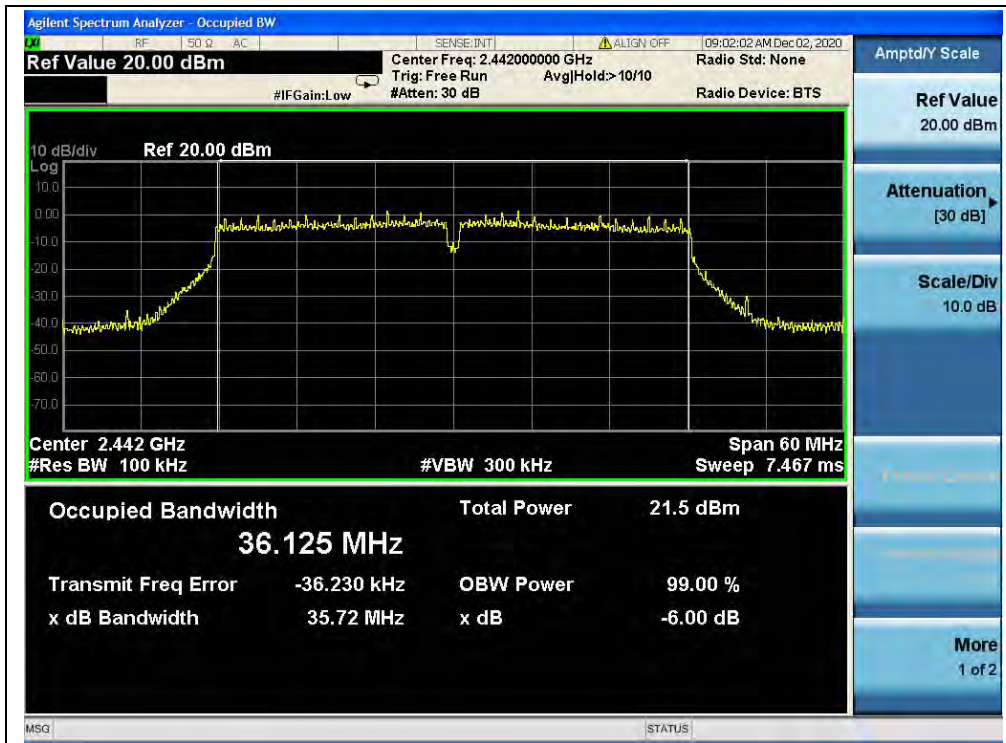

(Channel 7, 802.11n (HT40))

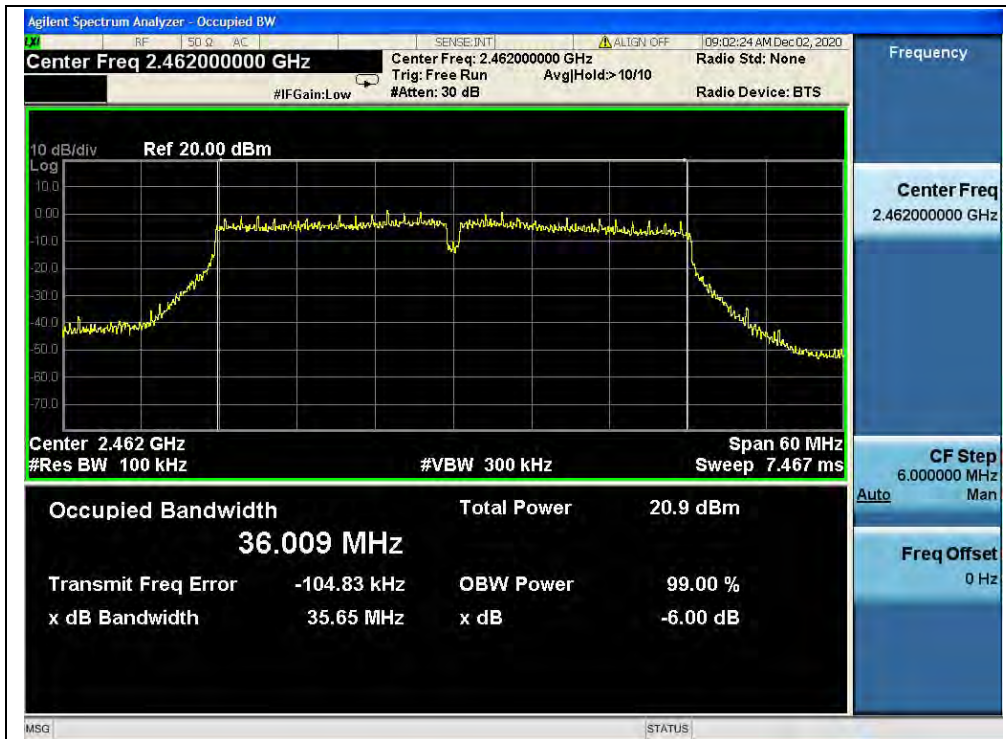

(Channel 11, 802.11n (HT40))


## 2.5. Conducted Spurious Emissions and Band Edge

### 2.5.1. Requirement

According to FCC section 15.247(c), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.5.2. Test Description

#### Test Setup:

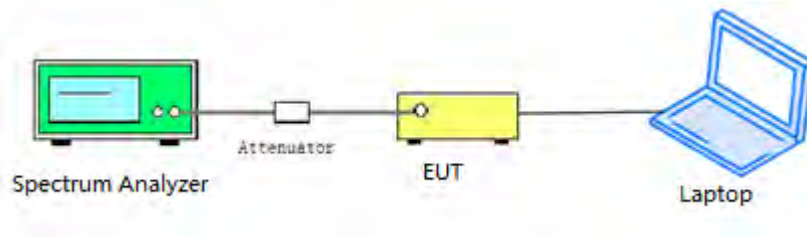

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 2.5.3. Test Procedure

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.



2.5.4. Test Result

802.11b Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.57	8.10	-11.90	PASS
7	2442	-43.98	6.10	-13.90	PASS
13	2472	-43.41	6.10	-13.90	PASS

B. Test Plot:




(30MHz to 25GHz, Channel 1, 802.11b)

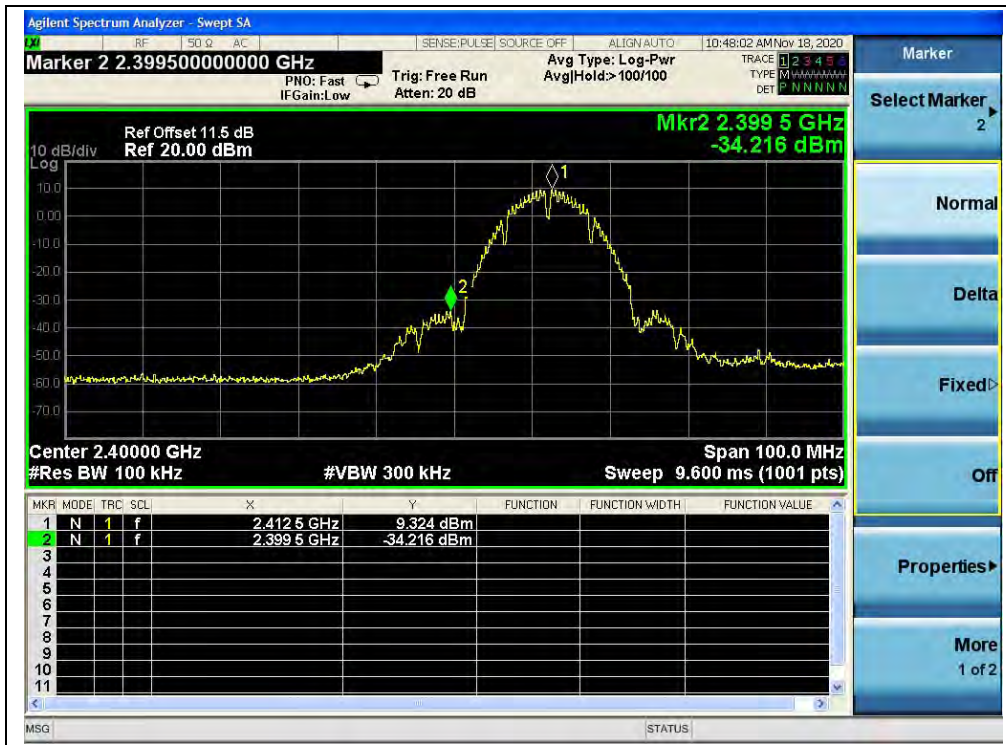


(Band Edge, Channel 1, 802.11b)



(30MHz to 25GHz, Channel 7, 802.11b)

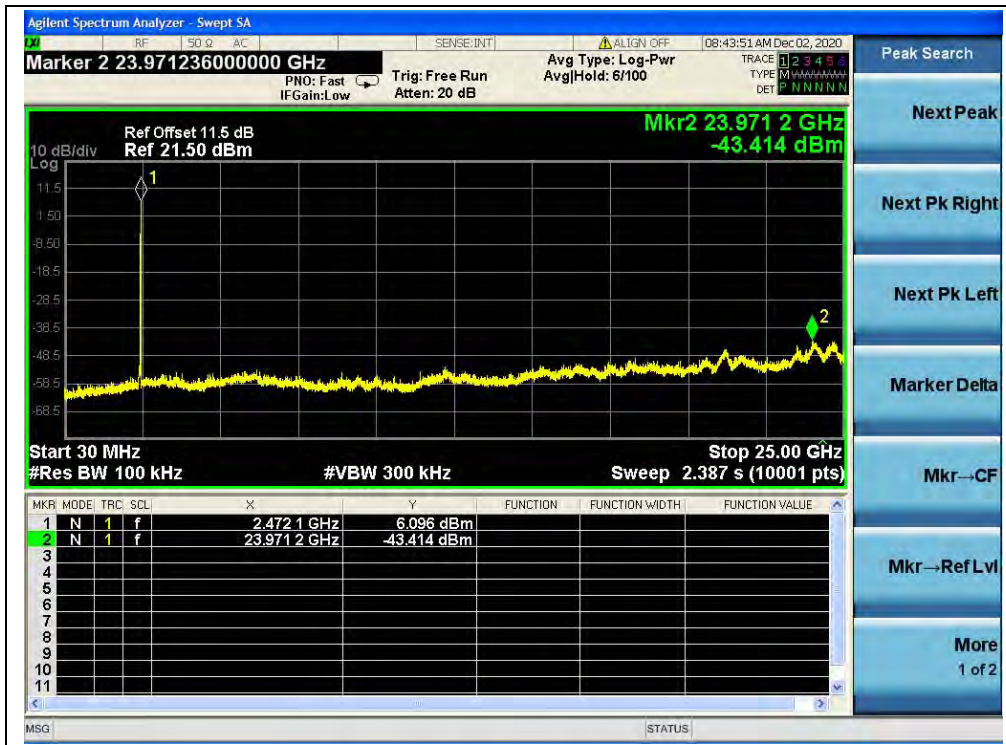

(30MHz to 25GHz, Channel 13, 802.11b)

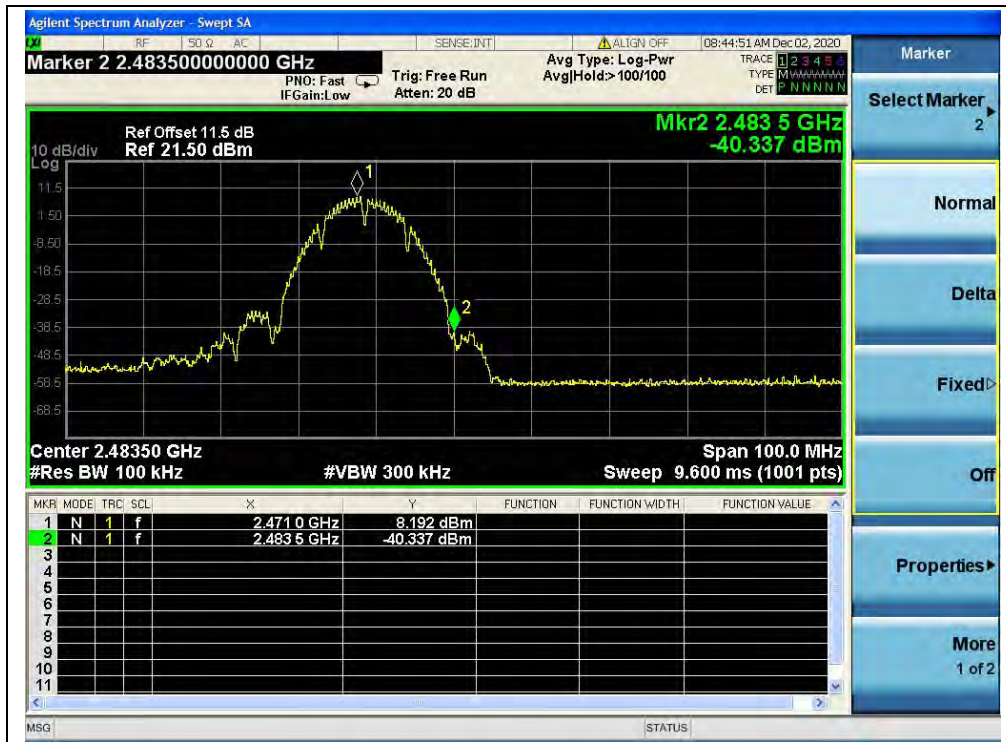

(Band Edge, Channel 13, 802.11b)




802.11g Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-41.90	3.01	-16.99	PASS
7	2442	-43.47	2.94	-17.06	PASS
13	2472	-43.46	1.56	-18.44	PASS


B. Test Plot:

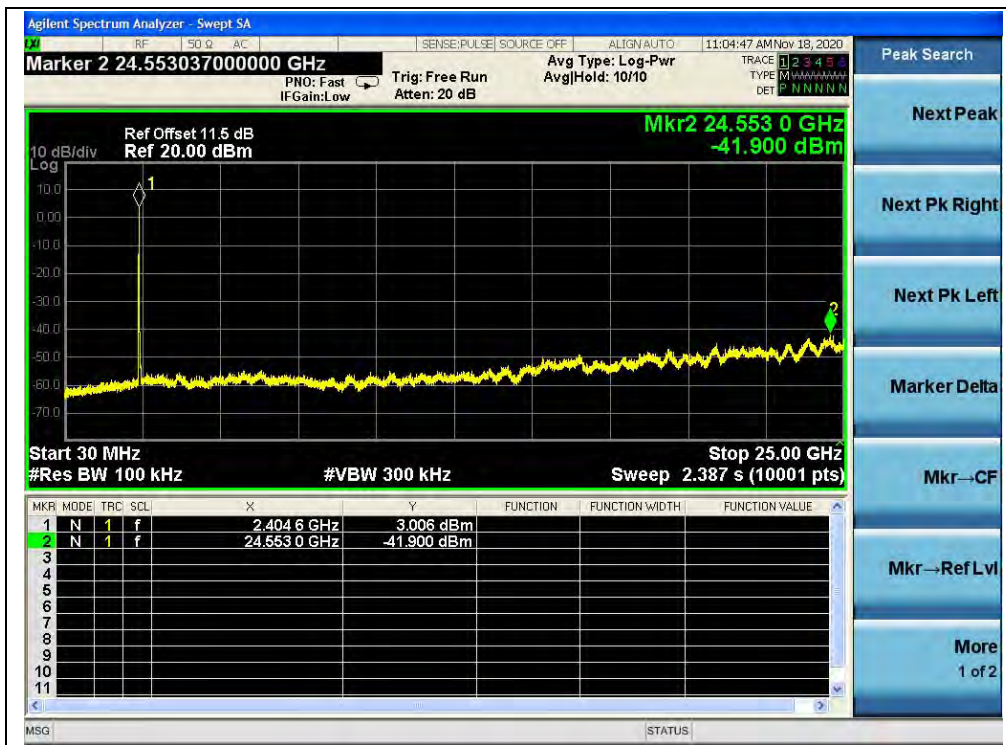


(30MHz to 25GHz, Channel 1, 802.11g)




(Band Edge, Channel 1, 802.11g)

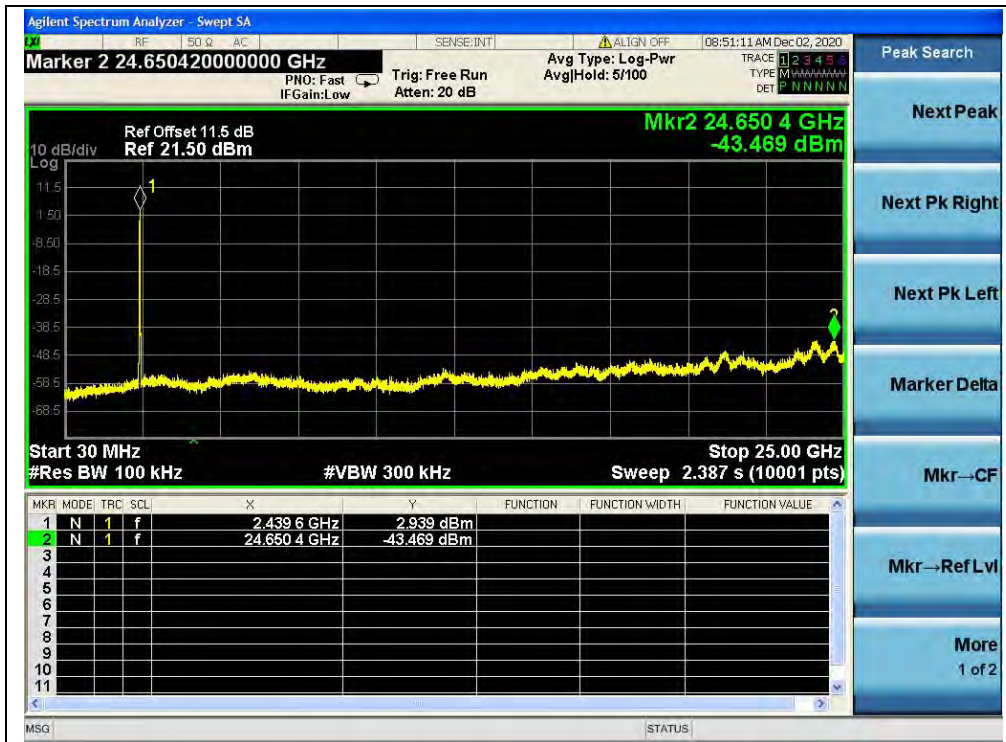

(30MHz to 25GHz, Channel 7, 802.11g)

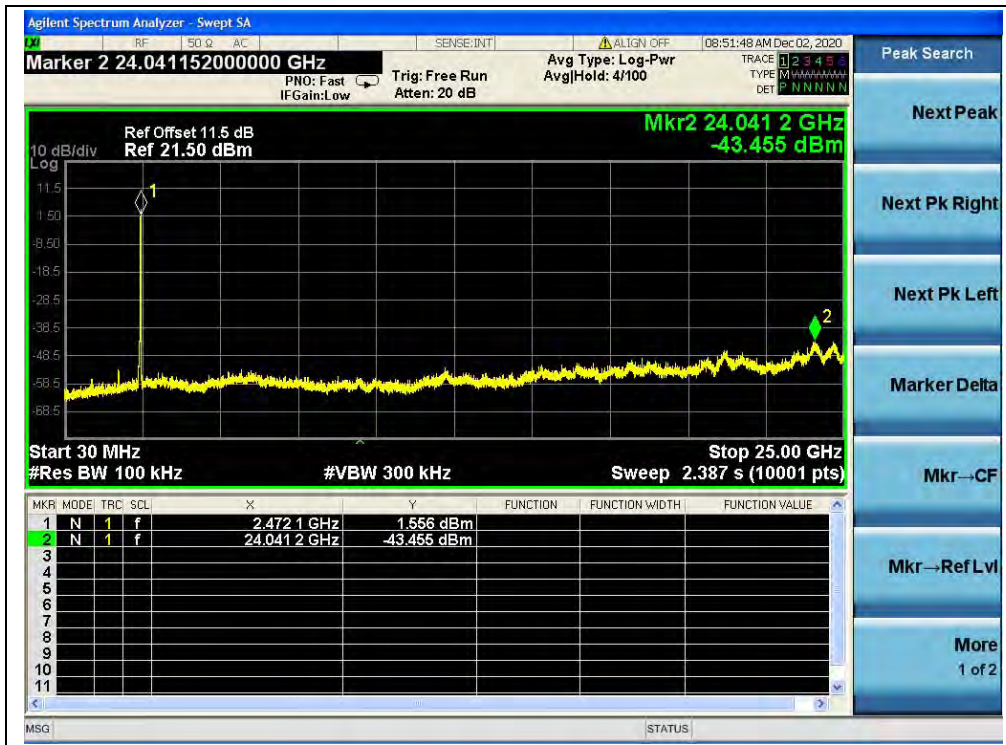

(30MHz to 25GHz, Channel 13, 802.11g)

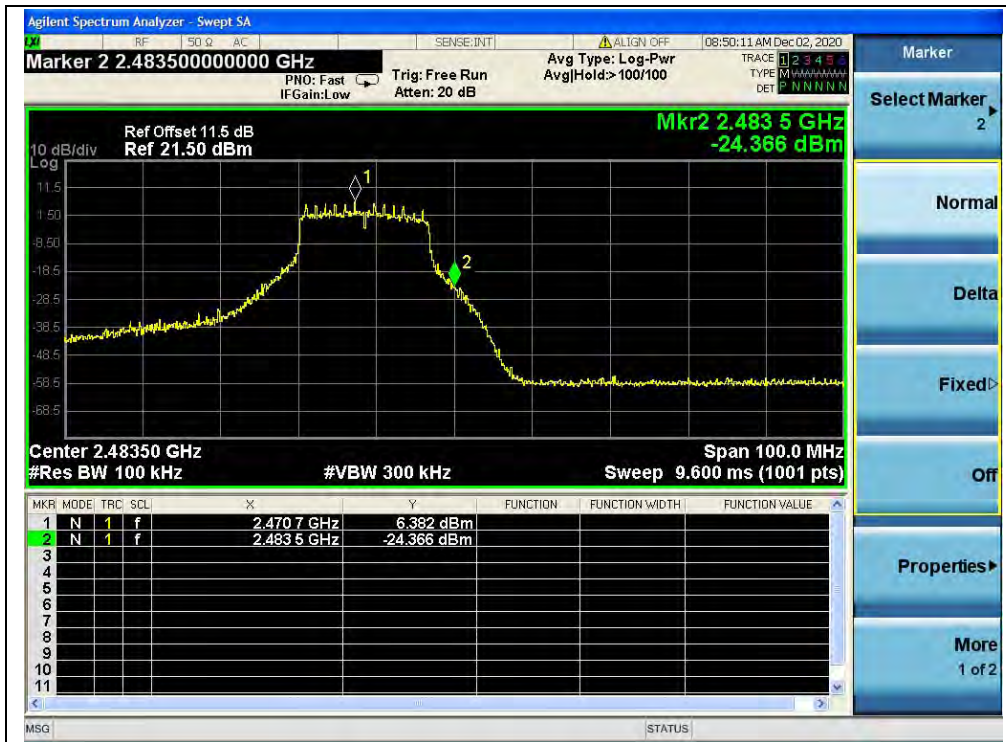

(Band Edge, Channel 13, 802.11g)






802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
1	2412	-42.53	2.02	-17.98	PASS
7	2442	-42.90	3.62	-16.38	PASS
13	2472	-42.34	5.07	-14.93	PASS

B. Test Plot:

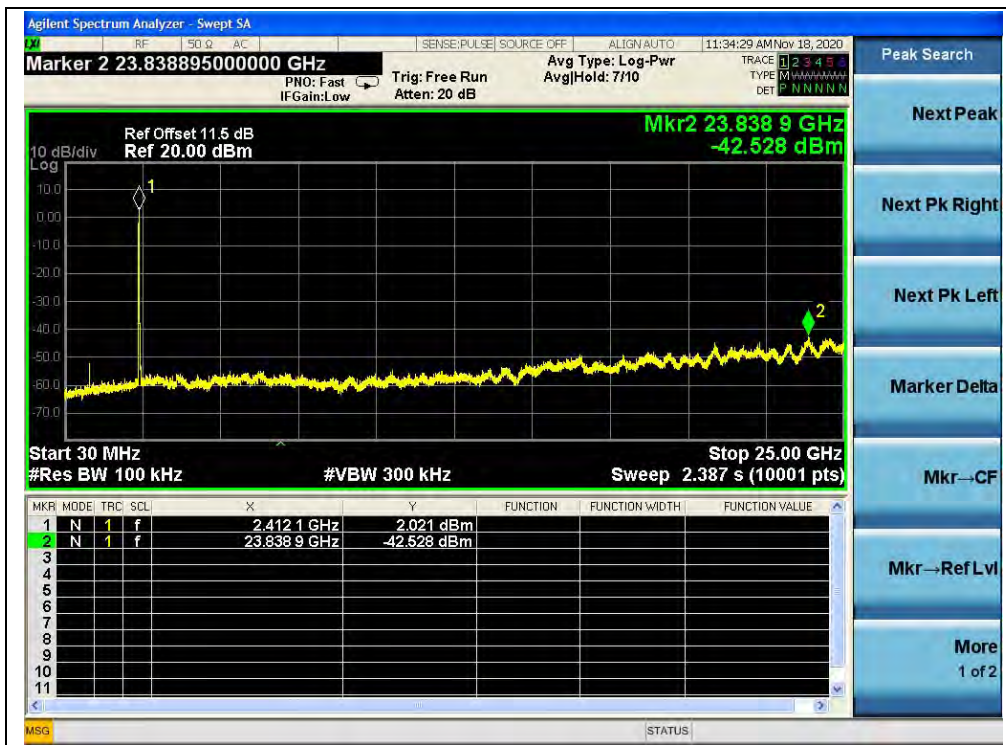

(30MHz to 25GHz, Channel 1, 802.11n (HT20))




(Band Edge, Channel 1, 802.11n (HT20))



(30MHz to 25GHz, Channel 7, 802.11n (HT20))



(30MHz to 25GHz, Channel 13, 802.11n (HT20))

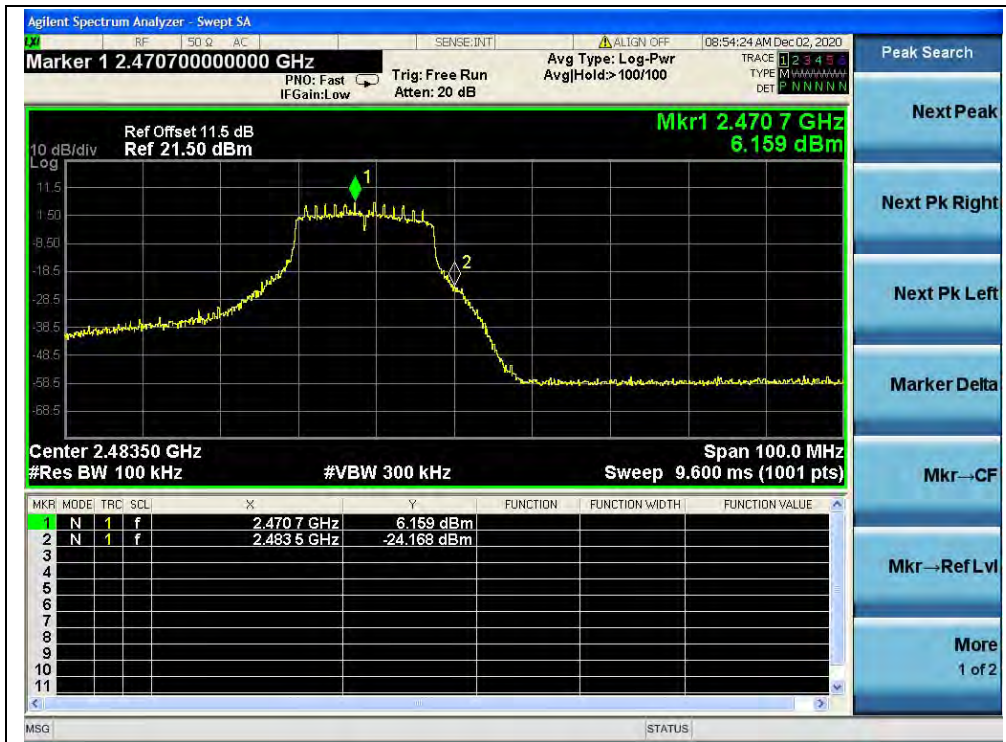

(Band Edge, Channel 13, 802.11n (HT20))




802.11n (HT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
			Carrier Level	Calculated -20dBc Limit	
3	2422	-41.93	2.59	-17.41	PASS
7	2442	-43.41	-0.57	-20.57	PASS
11	2462	-42.83	0.43	-19.57	PASS


B. Test Plot:

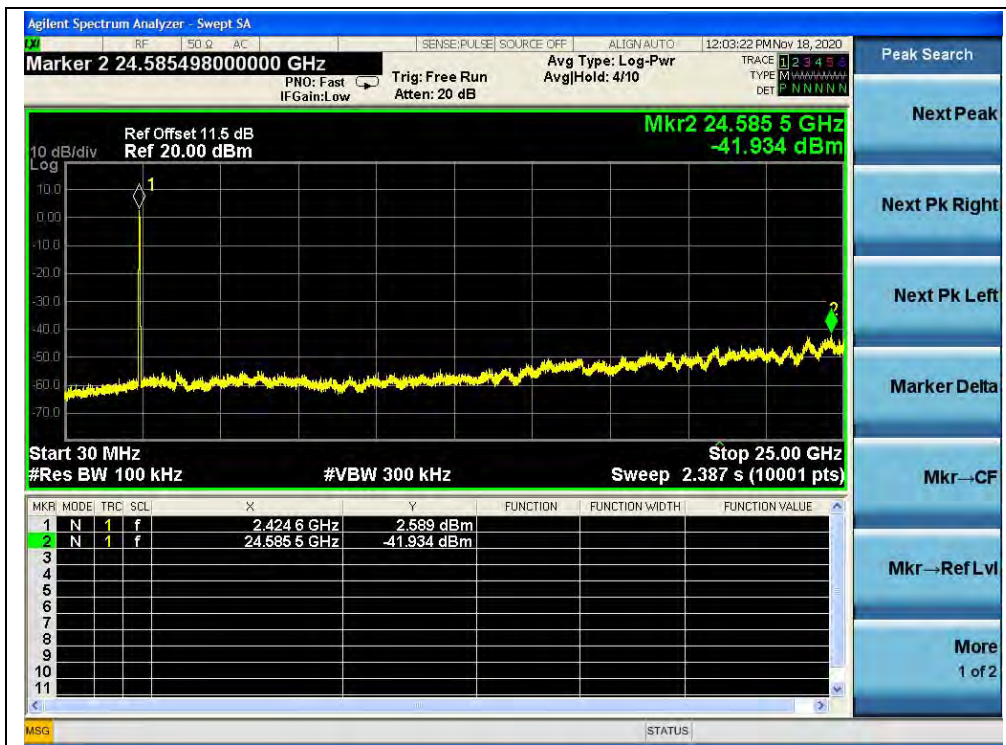


(30MHz to 25GHz, Channel 3, 802.11n (HT40))



(Band Edge, Channel 3, 802.11n (HT40))

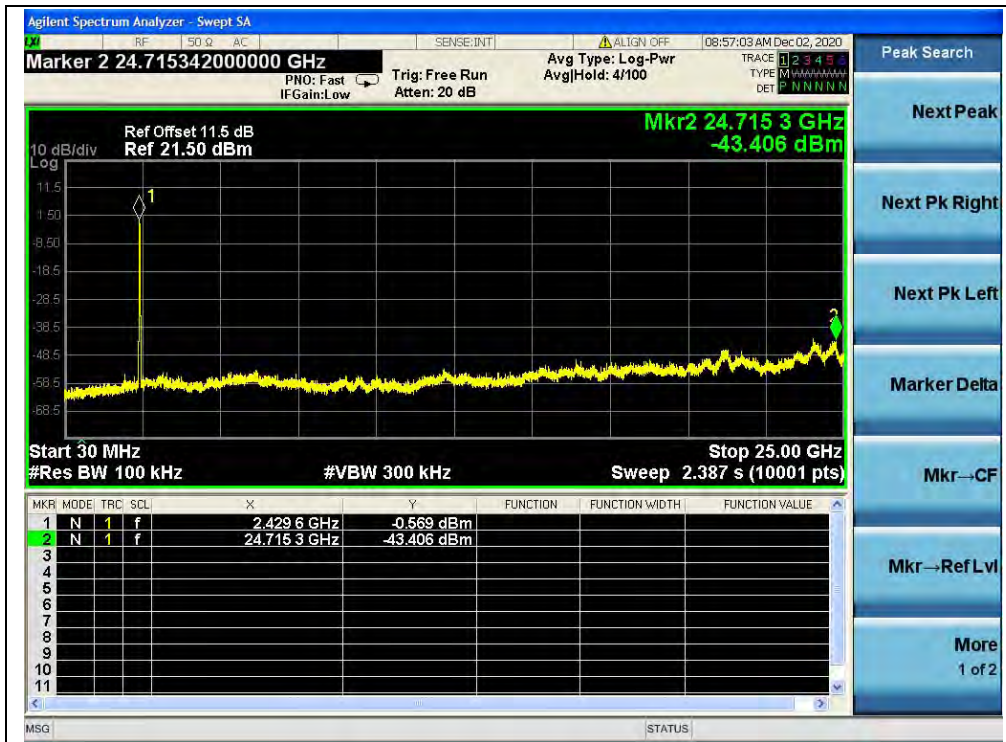

(30MHz to 25GHz, Channel 7, 802.11n (HT40))

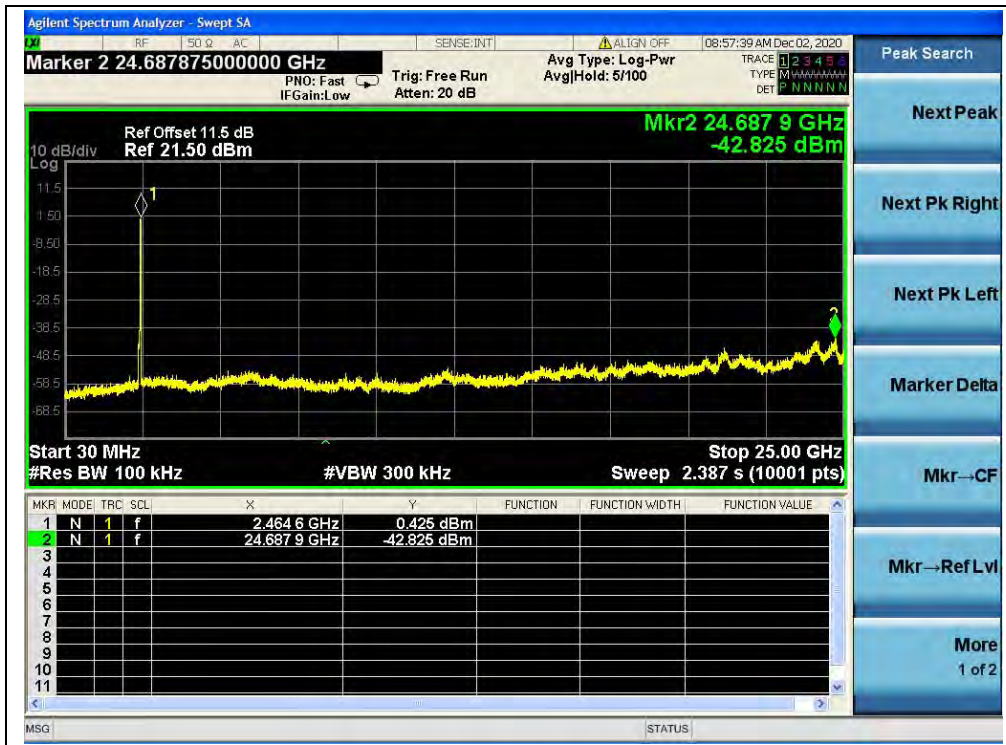

(30MHz to 25GHz, Channel 11, 802.11n (HT40))



(Band Edge, Channel 11, 802.11n (HT40))


## 2.6. Power Spectral Density (PSD)

### 2.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.6.2. Test Description

#### Test Setup:

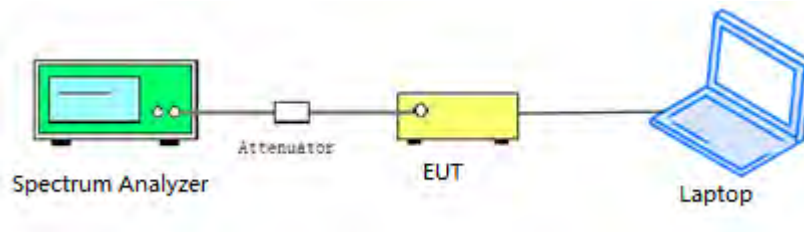

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

### 2.6.3. Test Procedure

KDB 558074 Section 8.4 was used in order to prove compliance.



2.6.4. Test Result

802.11b Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1		
1	2412	-5.09	-3.09	8	PASS
7	2442	-7.33	-4.46	8	PASS
13	2472	-7.08	-5.23	8	PASS

B. Test Plot:



(Channel 1, 802.11b, ANT0)





(Channel 7, 802.11b, ANT0)



(Channel 13, 802.11b, ANT0)



(Channel 1, 802.11b, ANT1)



(Channel 7, 802.11b, ANT1)



(Channel 13, 802.11b, ANT1)




802.11g Mode


A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1		
1	2412	-8.16	-8.37	8	PASS
7	2442	-9.96	-8.38	8	PASS
13	2472	-10.79	-9.50	8	PASS


B. Test Plot:

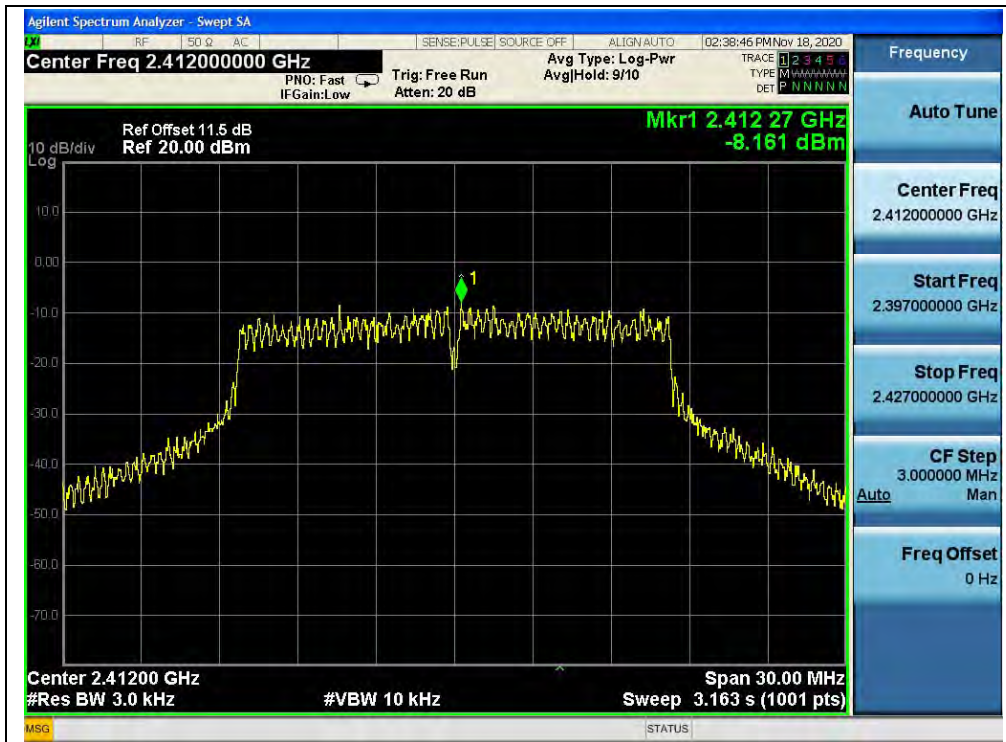


(Channel 1, 802.11g, ANT0)

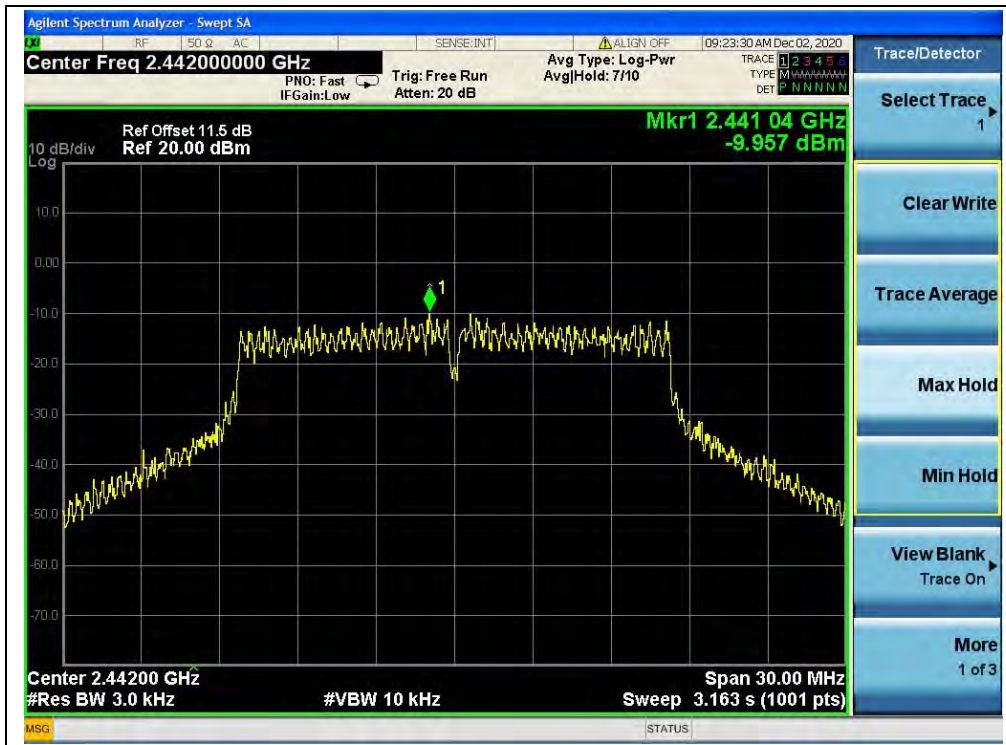


(Channel 7, 802.11g, ANT0)

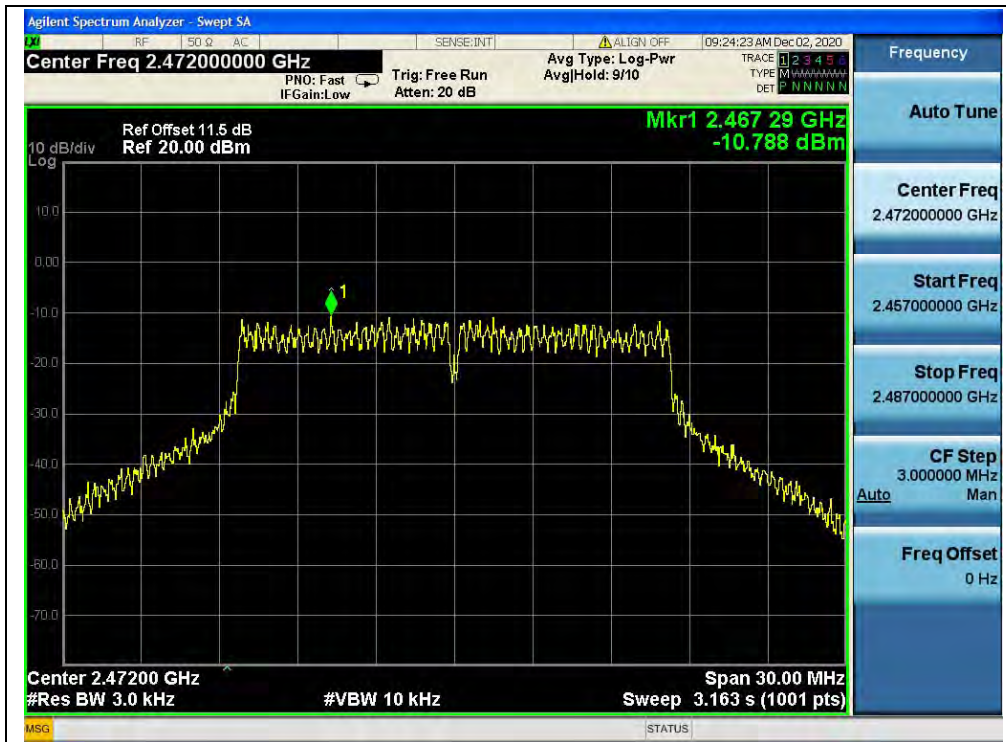

(Channel 13, 802.11g, ANT0)

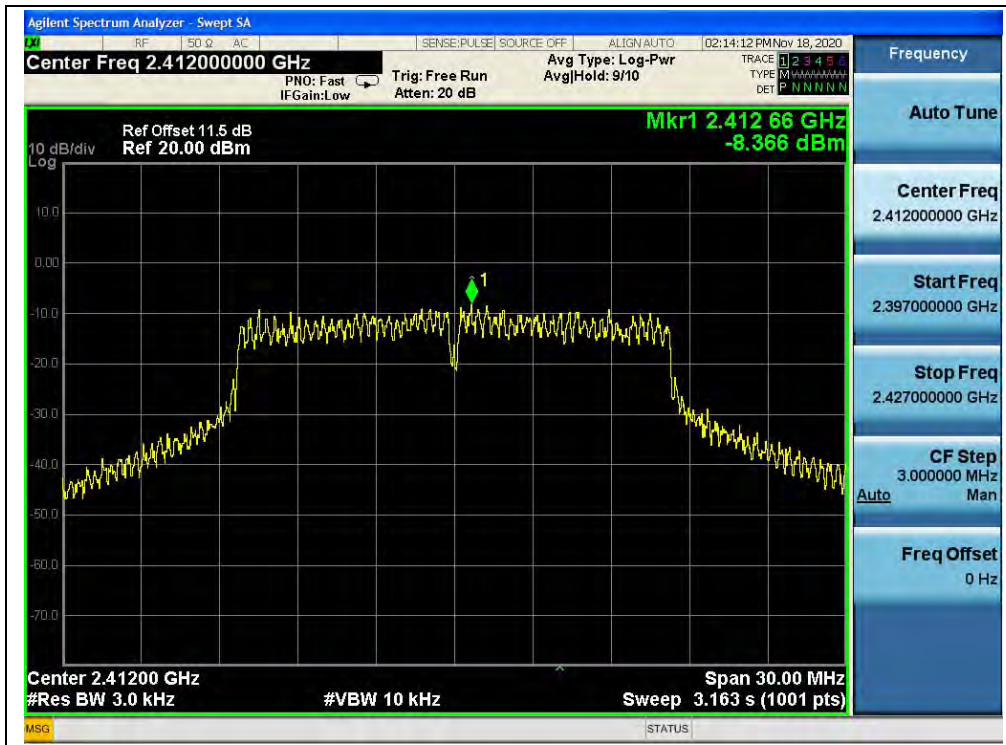

(Channel 1, 802.11g, ANT1)

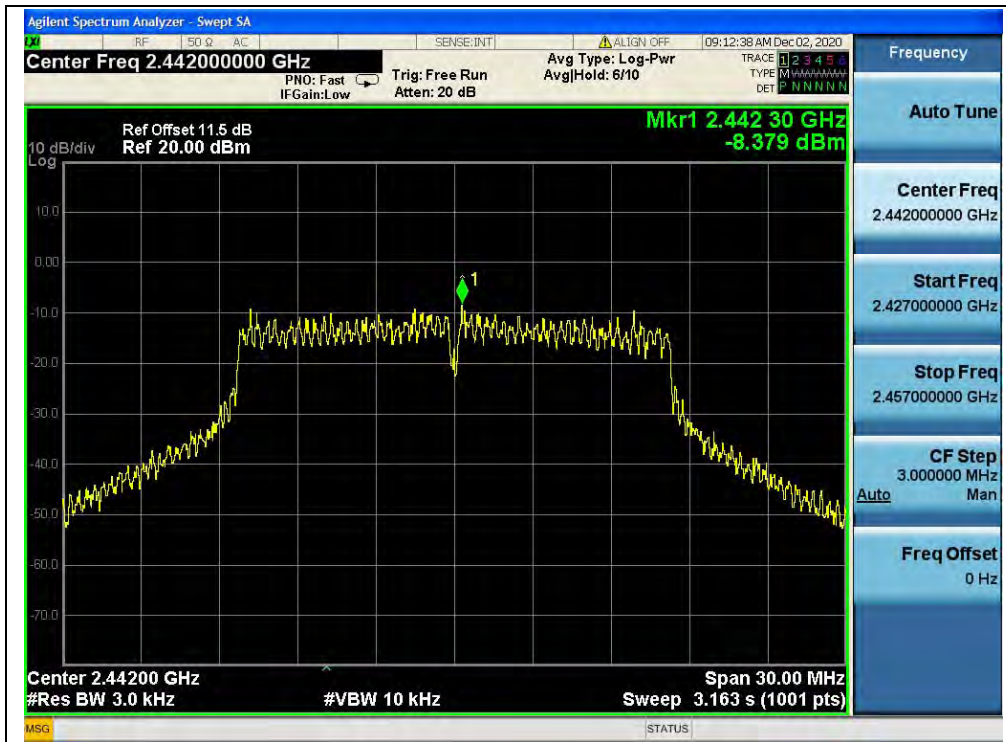

(Channel 7, 802.11g, ANT1)



(Channel 13, 802.11g, ANT1)




802.11n (HT20) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1			
1	2412	-9.72	-8.64	-6.14	8	PASS
7	2442	-10.09	-9.41	-6.73	8	PASS
13	2472	-11.32	-9.52	-7.32	8	PASS


**Note:** Directional gain =  $0.29\text{dBi} + 10\log(2) = 3.30\text{dBi} < 6\text{dBi}$ , so the power limit is 8 dBm/3kHz.

B. Test Plot:

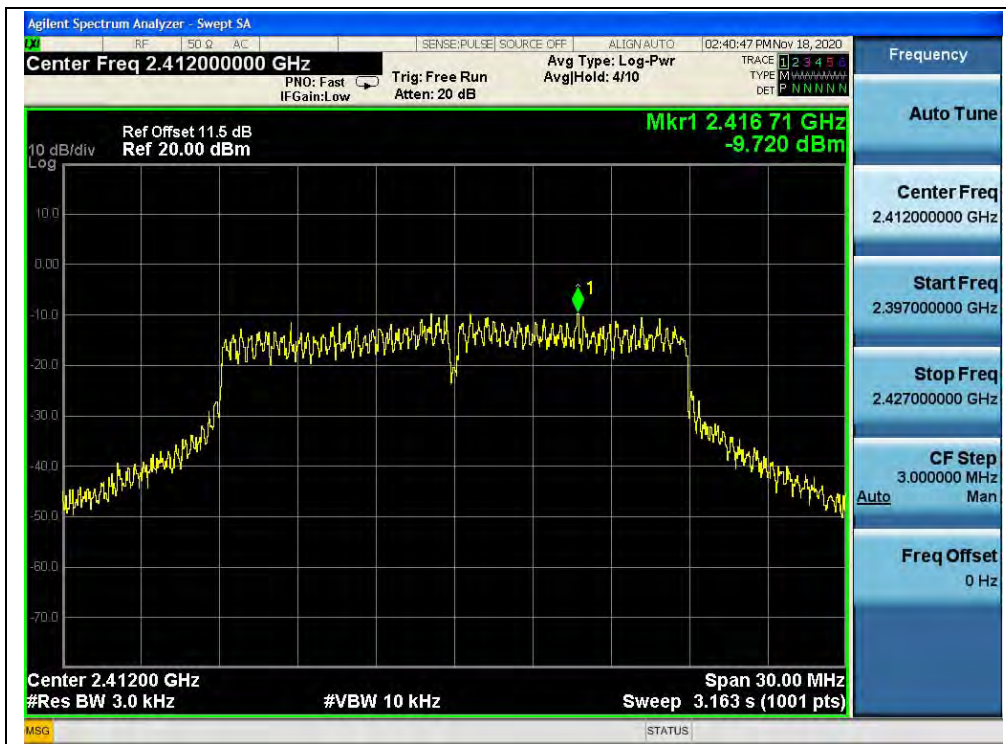


(Channel 1, 802.11n (HT20), ANT0)



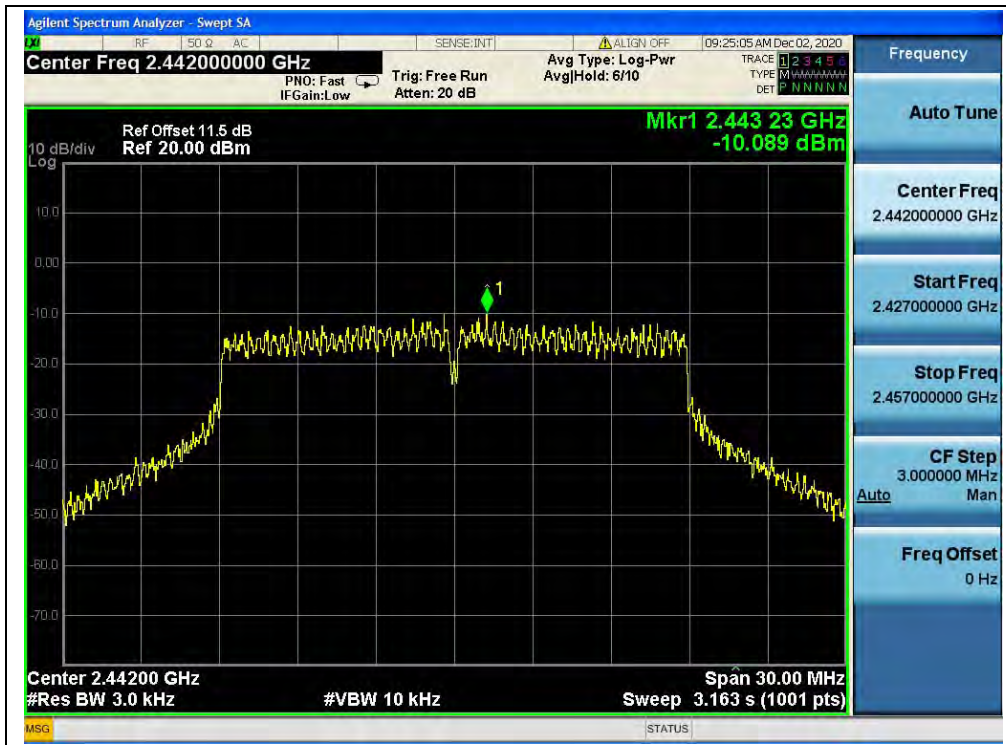


(Channel 7, 802.11n (HT20), ANT0)

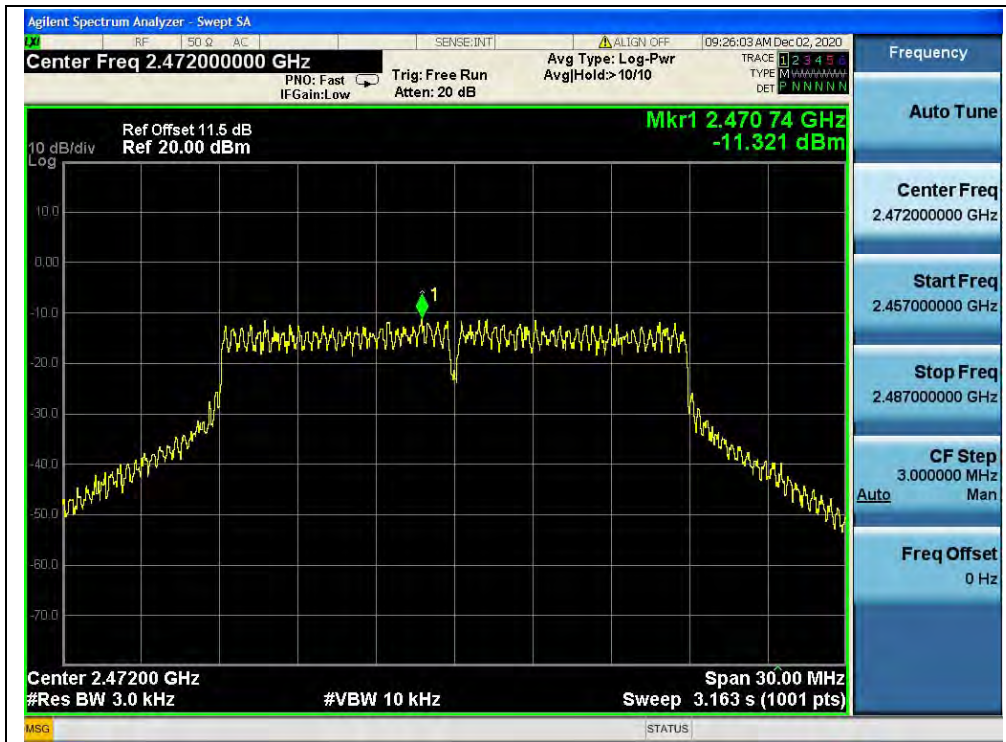


(Channel 13, 802.11n (HT20), ANT0)



(Channel 1, 802.11n (HT20), ANT1)

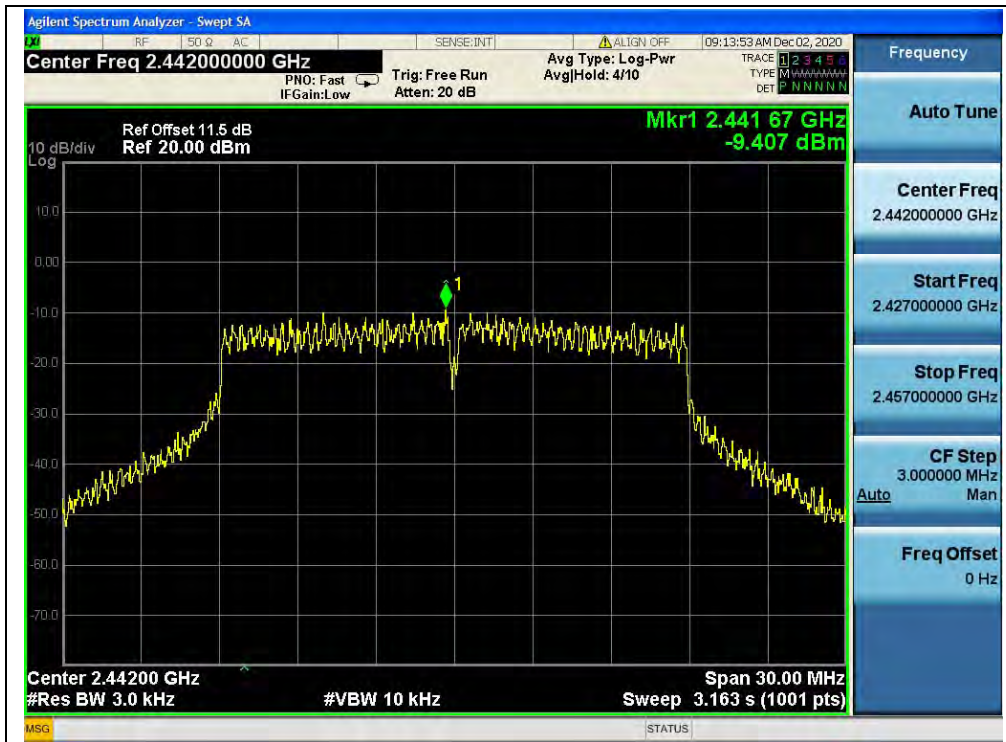

(Channel 7, 802.11n (HT20), ANT1)

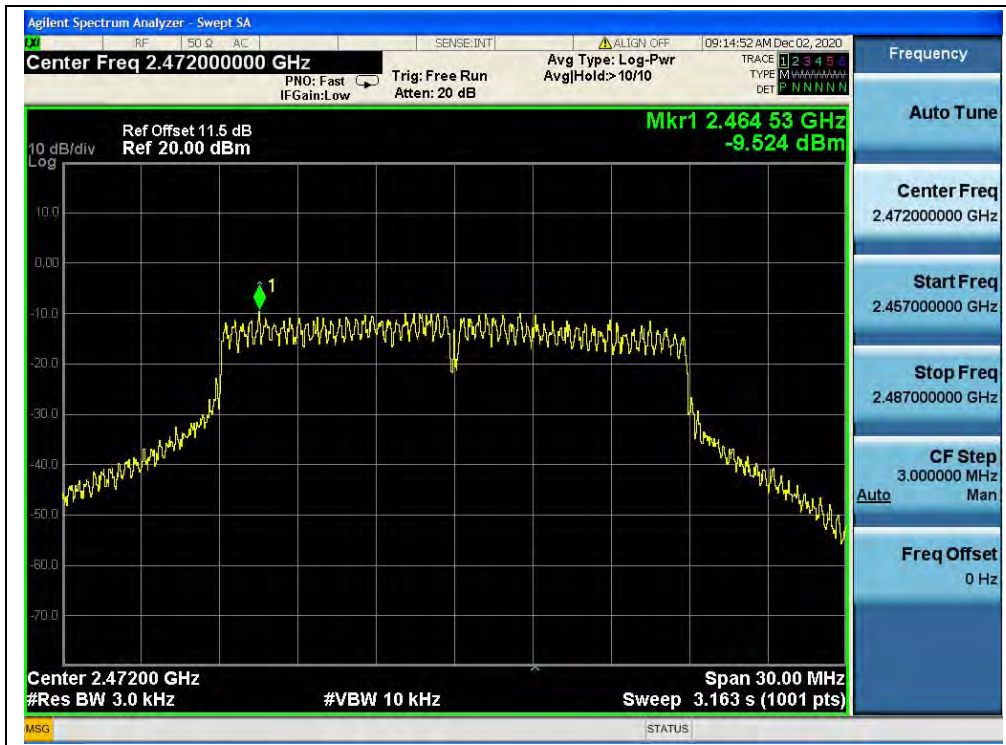

(Channel 13, 802.11n (HT20), ANT1)




802.11n (HT40) Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)		Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
		ANT 0	ANT 1			
3	2422	-11.85	-11.55	-8.69	8	PASS
7	2442	-13.25	-12.32	-9.75	8	PASS
11	2462	-12.56	-12.09	-9.31	8	PASS

**Note:** Directional gain =  $0.29\text{dBi} + 10\log(2) = 3.30\text{dBi} < 6\text{dBi}$ , so the power limit is 8 dBm/3kHz.


B. Test Plot:

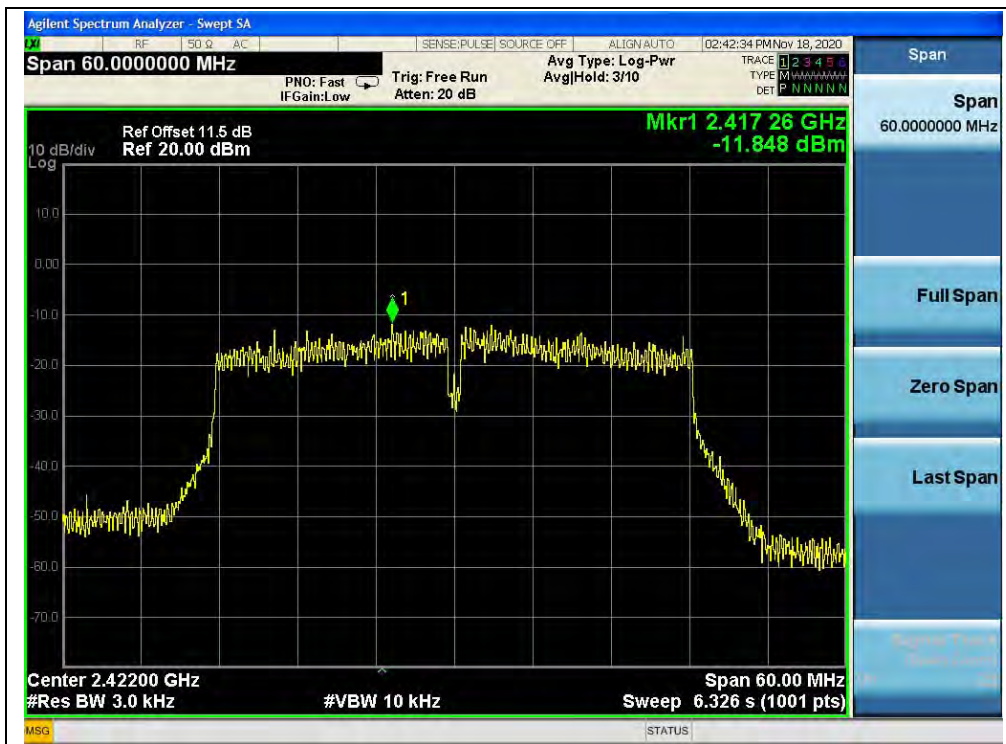

(Channel 3, 802.11n (HT40), ANT0)



(Channel 7, 802.11n (HT40), ANT0)

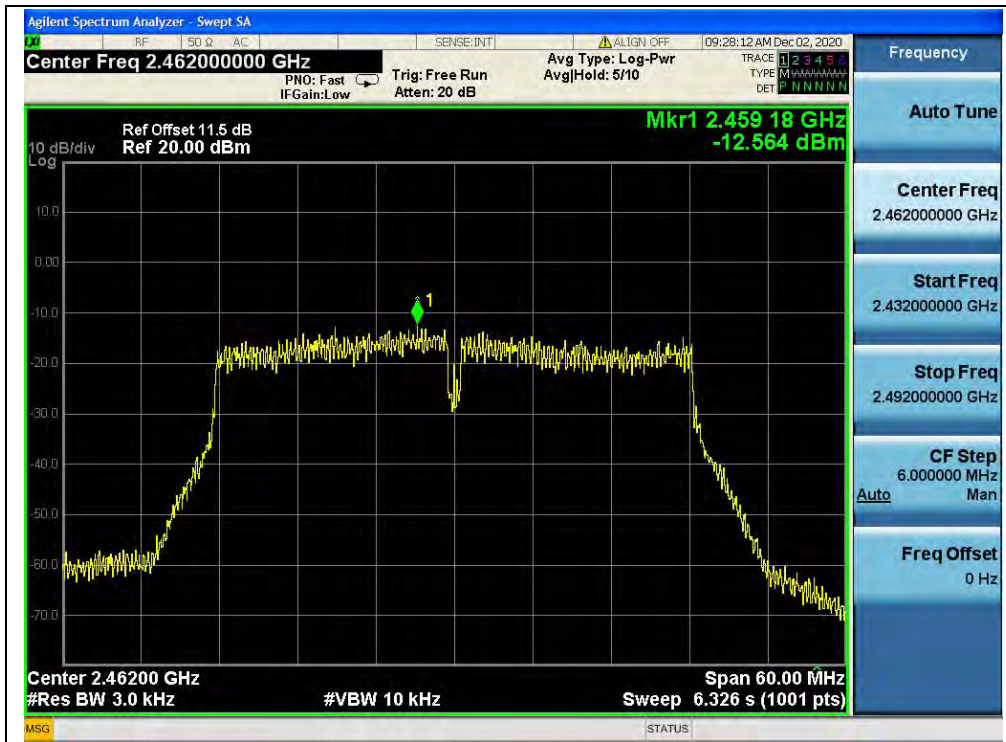


(Channel 11, 802.11n (HT40), ANT0)



(Channel 3, 802.11n (HT40), ANT1)



(Channel 7, 802.11n (HT40), ANT1)

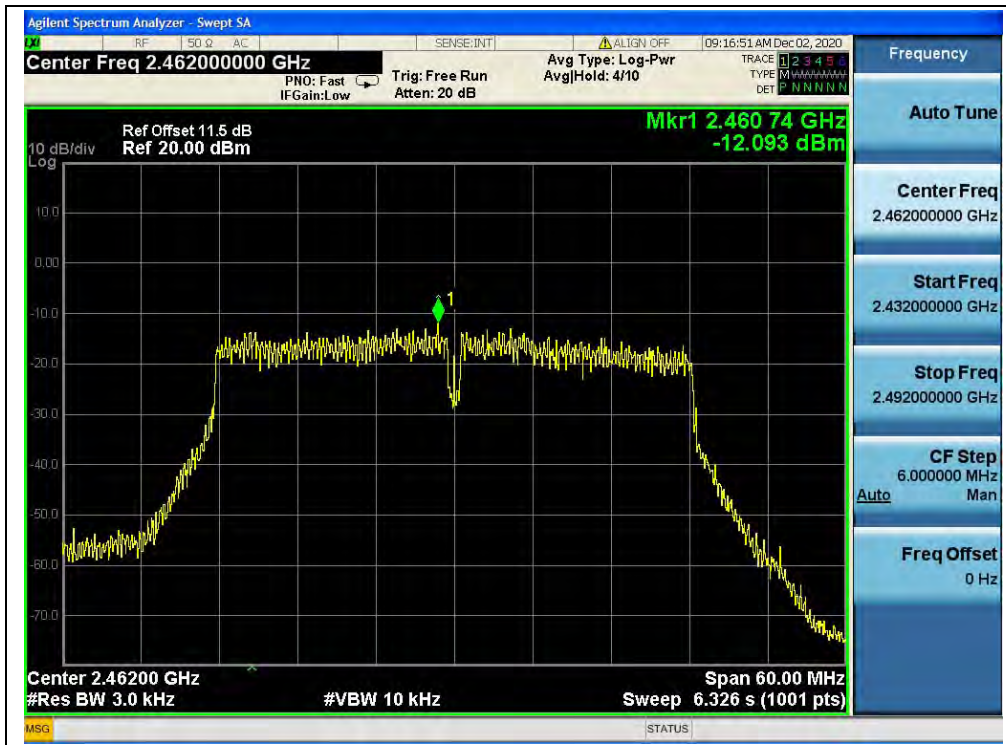

(Channel 11, 802.11n (HT40), ANT1)

## 2.7. Conducted Emission

### 2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**NOTE:**

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2. Test Description

**Test Setup:**

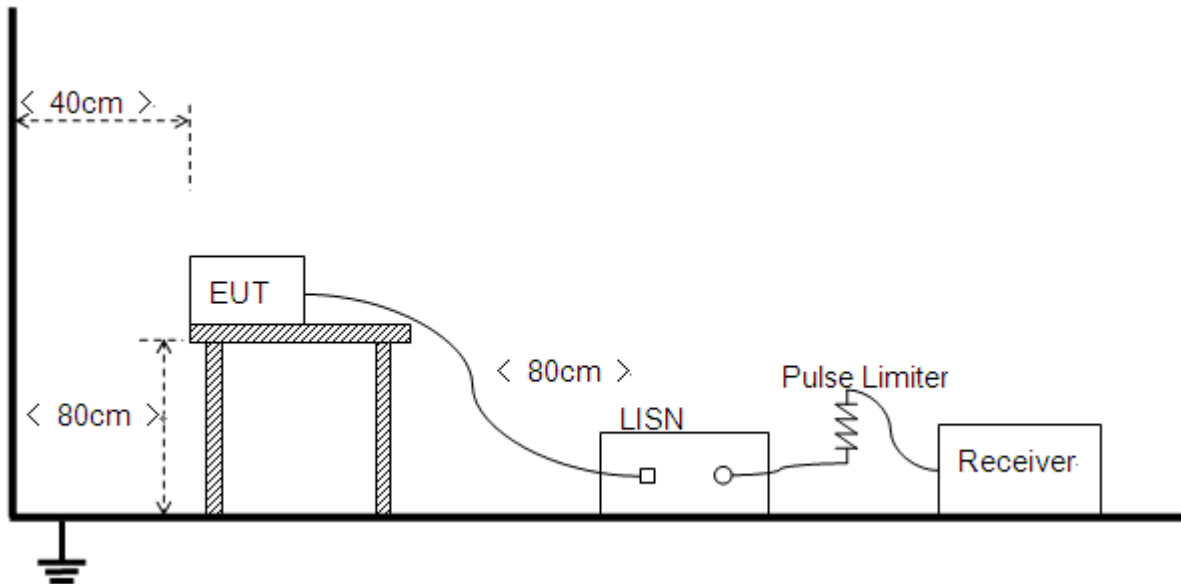

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.





### 2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

**Note:** Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

#### A. Test Setup:

Test Mode: EUT+ ADAPTER+ Earphone + WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

$U_R$ : Receiver Reading


$A_{\text{Factor}}$ : Voltage division factor of LISN

**B.Test Plot:**

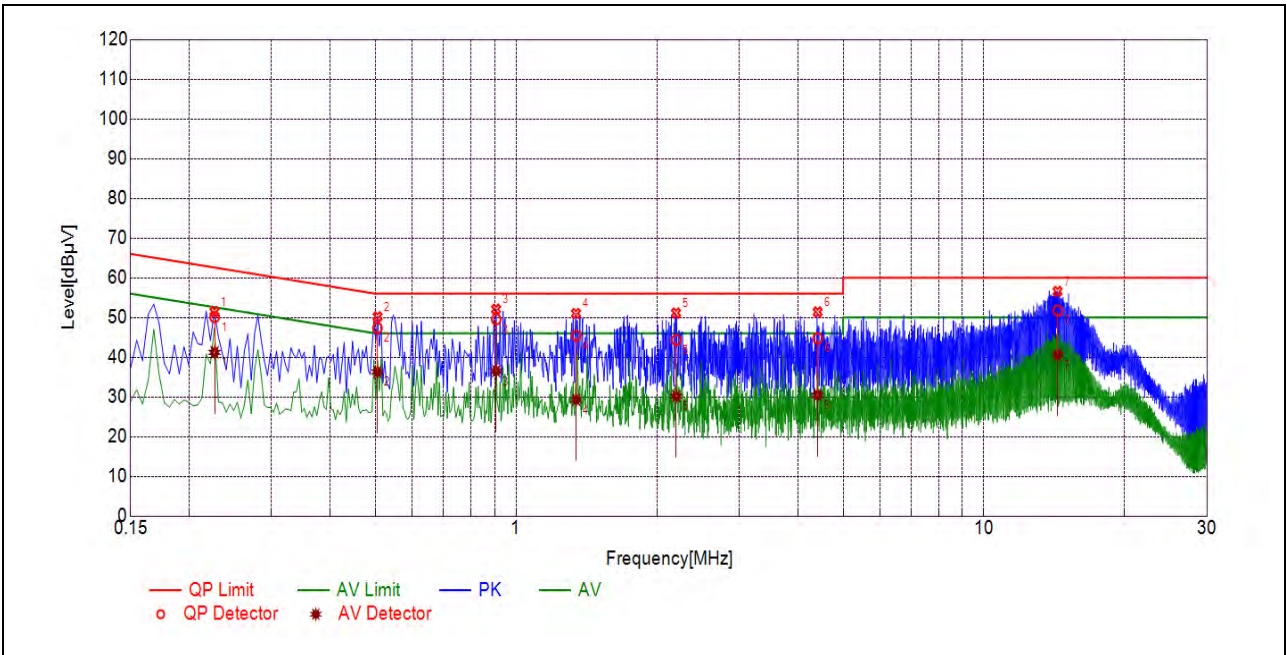

(L Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2267	50.08	41.22	62.57	52.57	Line	PASS
2	0.5052	47.33	36.28	56.00	46.00		PASS
3	0.9067	49.54	36.49	56.00	46.00		PASS
4	1.3438	45.40	29.29	56.00	46.00		PASS
5	2.1990	44.32	30.19	56.00	46.00		PASS
6	4.4113	44.76	30.43	56.00	46.00		PASS
7	14.3793	51.73	40.59	60.00	50.00		PASS

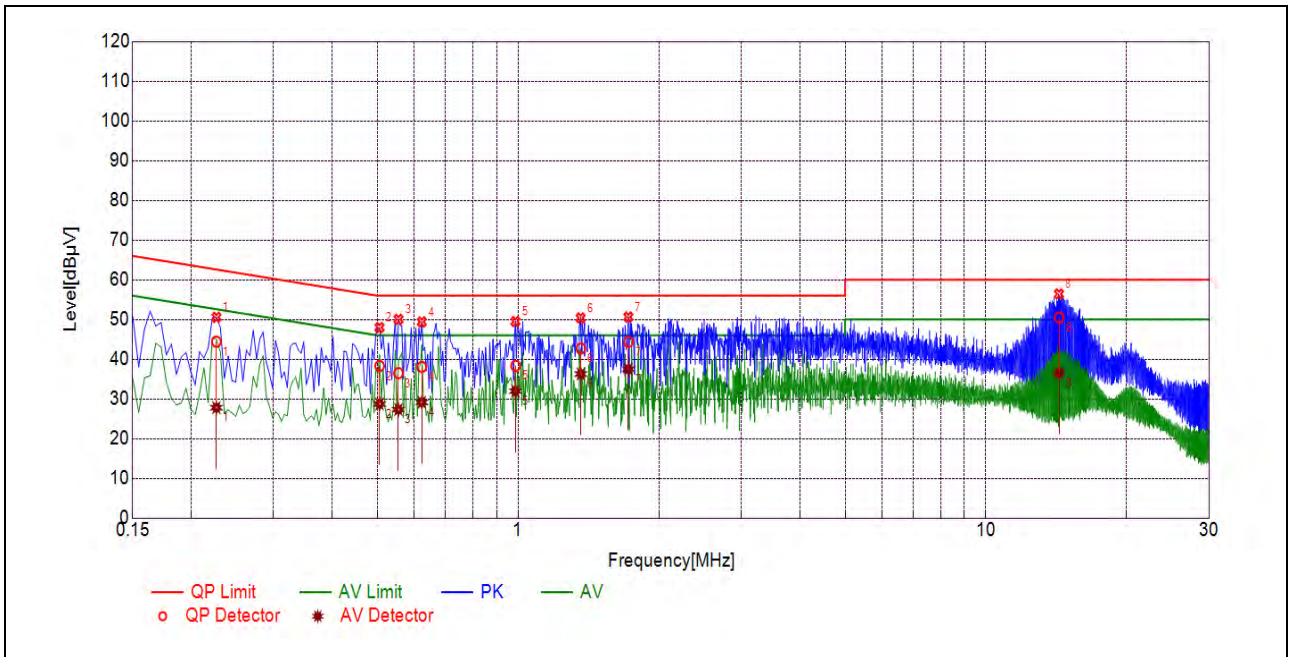

(N Phase)

No.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.2264	44.42	27.80	62.58	52.58	Neutral	PASS
2	0.5057	38.30	28.73	56.00	46.00		PASS
3	0.5548	36.49	27.32	56.00	46.00		PASS
4	0.6225	38.06	29.15	56.00	46.00		PASS
5	0.9875	38.34	31.97	56.00	46.00		PASS
6	1.3616	42.69	36.26	56.00	46.00		PASS
7	1.7212	44.37	37.46	56.00	46.00		PASS
8	14.3328	50.52	36.45	60.00	50.00		PASS


## 2.8. Restricted Frequency Bands

### 2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.8.2. Test Description

#### Test Setup

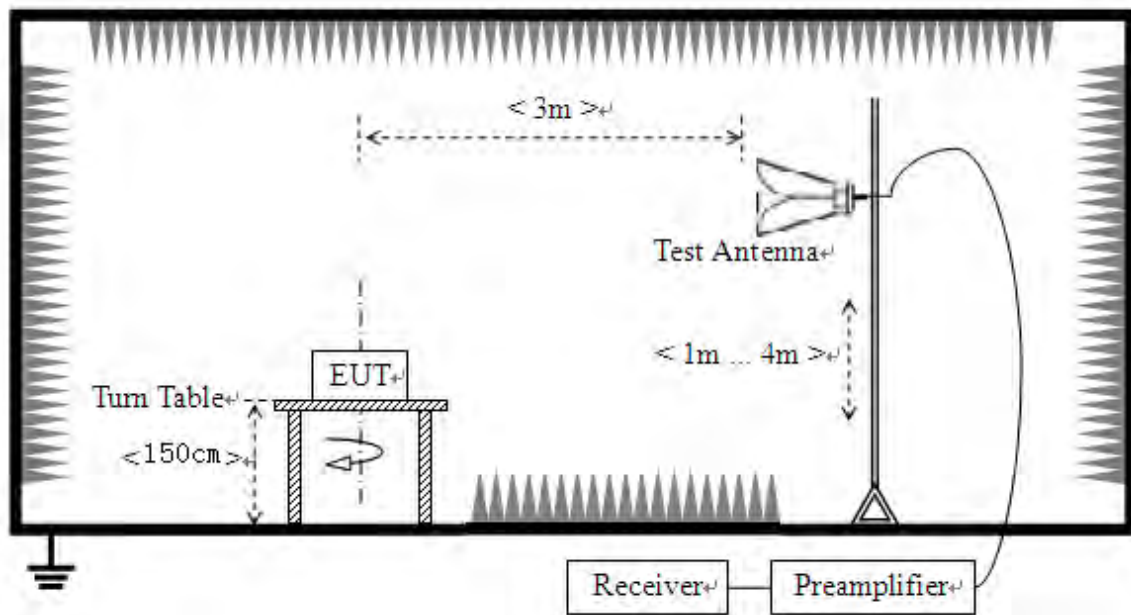

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



### 2.8.3. Test Procedure

KDB 558074 Section 8.6 and 8.7 was used in order to prove compliance.

### 2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

**Note:** Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


### 802.11b Mode

#### A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission E (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
		PK/ AV	$U_R$ (dB $\mu$ V)					
1	2378.48	PK	25.93	6.74	27.20	59.87	74	PASS
1	2390.00	AV	13.32	6.74	27.20	47.26	54	PASS
13	2485.59	PK	26.55	6.74	27.20	60.49	74	PASS
13	2485.74	AV	14.35	6.74	27.20	48.29	54	PASS




B.Test Plot:

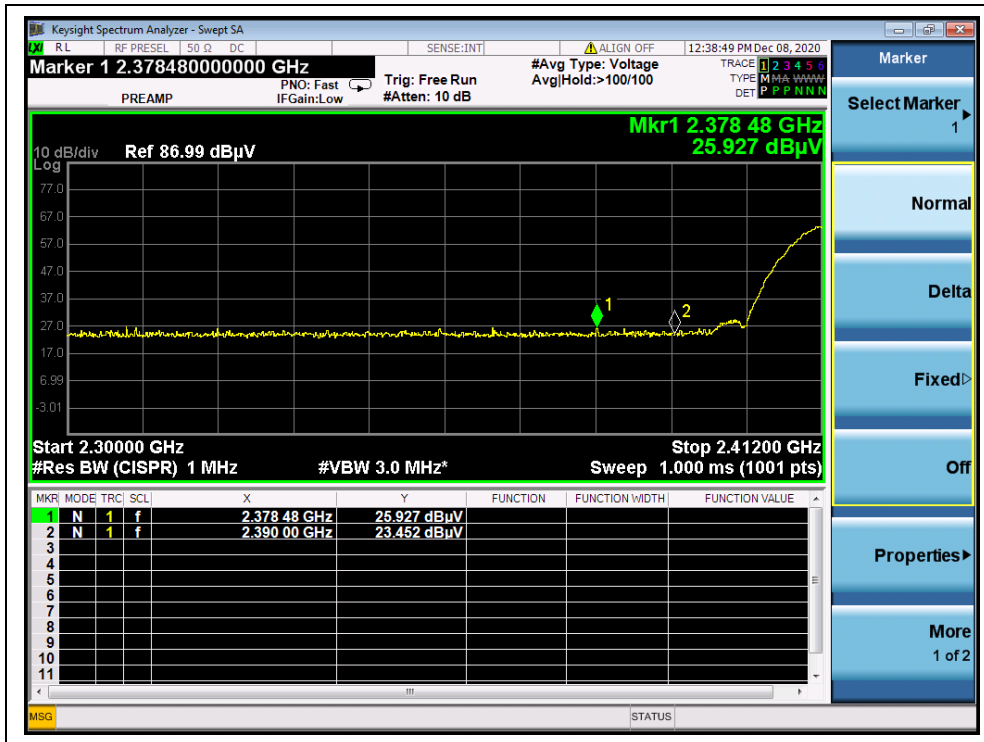

(PEAK, Channel 1, 802.11b)

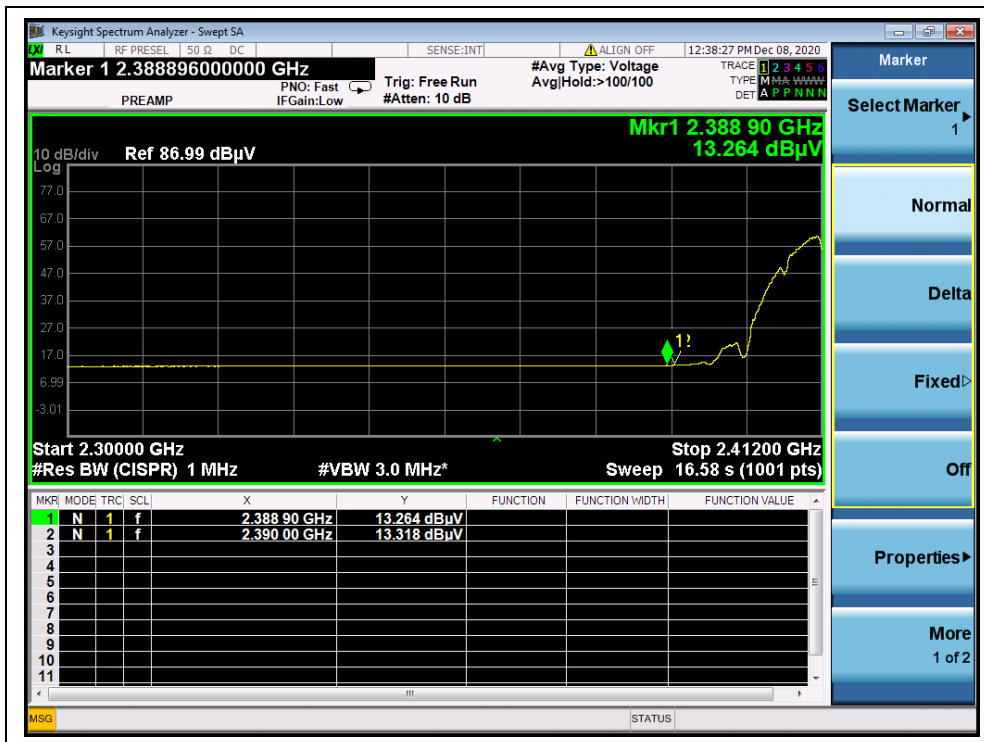

(AVERAGE, Channel 1, 802.11b)

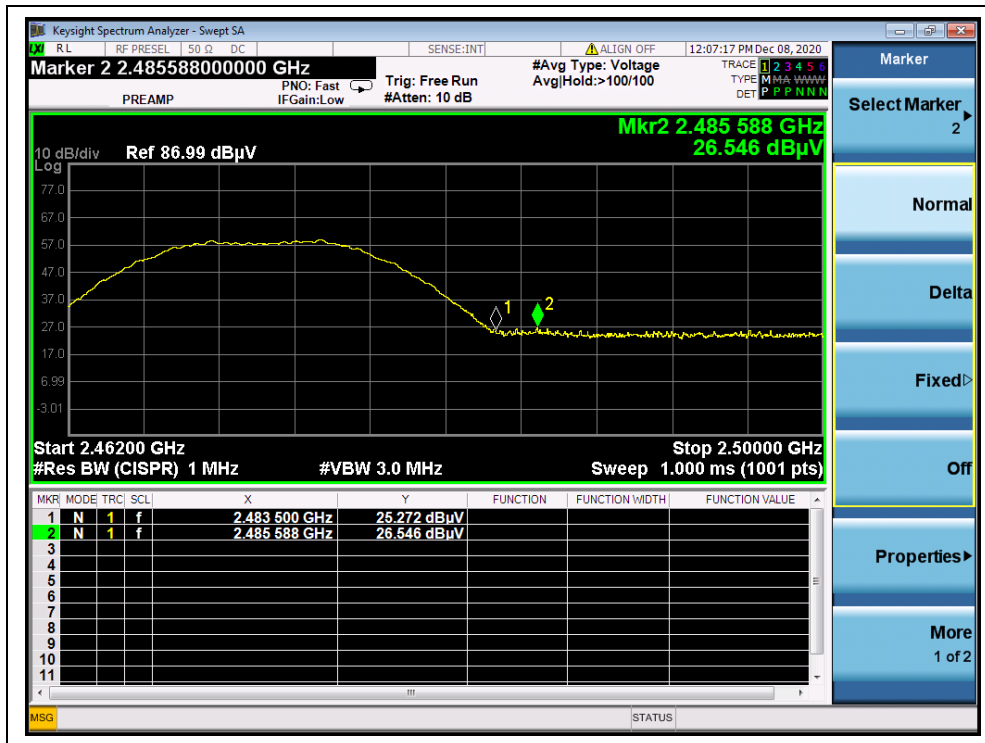

(PEAK, Channel 13, 802.11b)



(AVERAGE, Channel 13, 802.11b)




802.11g Mode

A. Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBμV)					
1	2387.22	PK	25.67	6.74	27.20	59.61	74	PASS
1	2390.00	AV	14.30	6.74	27.20	48.24	54	PASS
13	2483.84	PK	29.50	6.74	27.20	63.44	74	PASS
13	2483.73	AV	16.92	6.74	27.20	50.86	54	PASS

B. Test Plot:

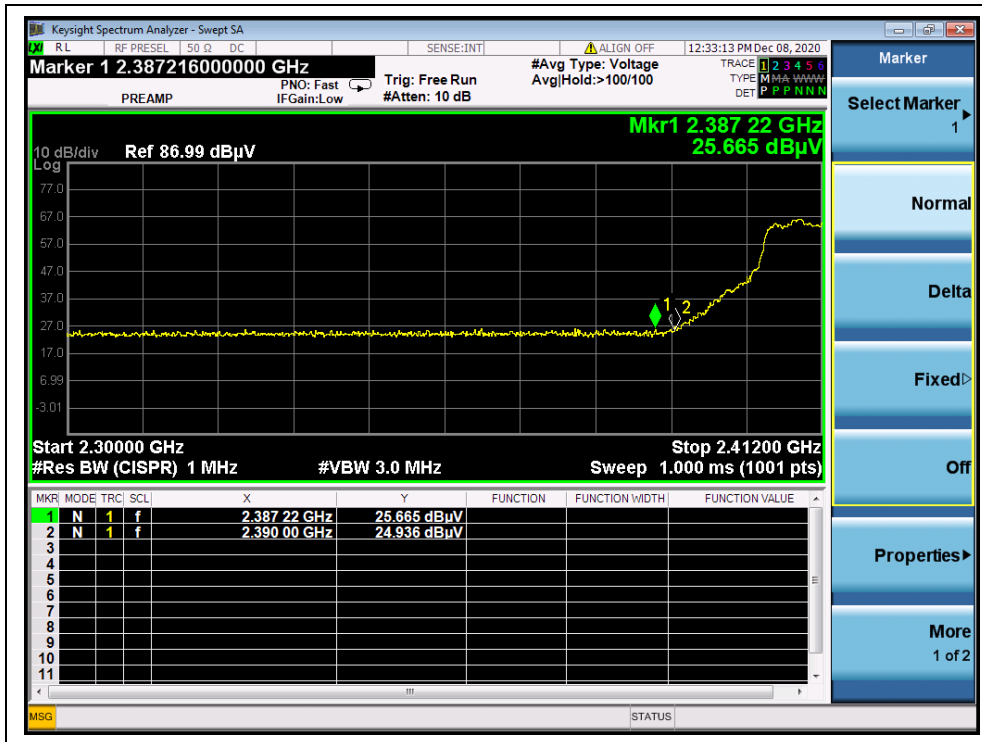


(PEAK, Channel 1, 802.11g)




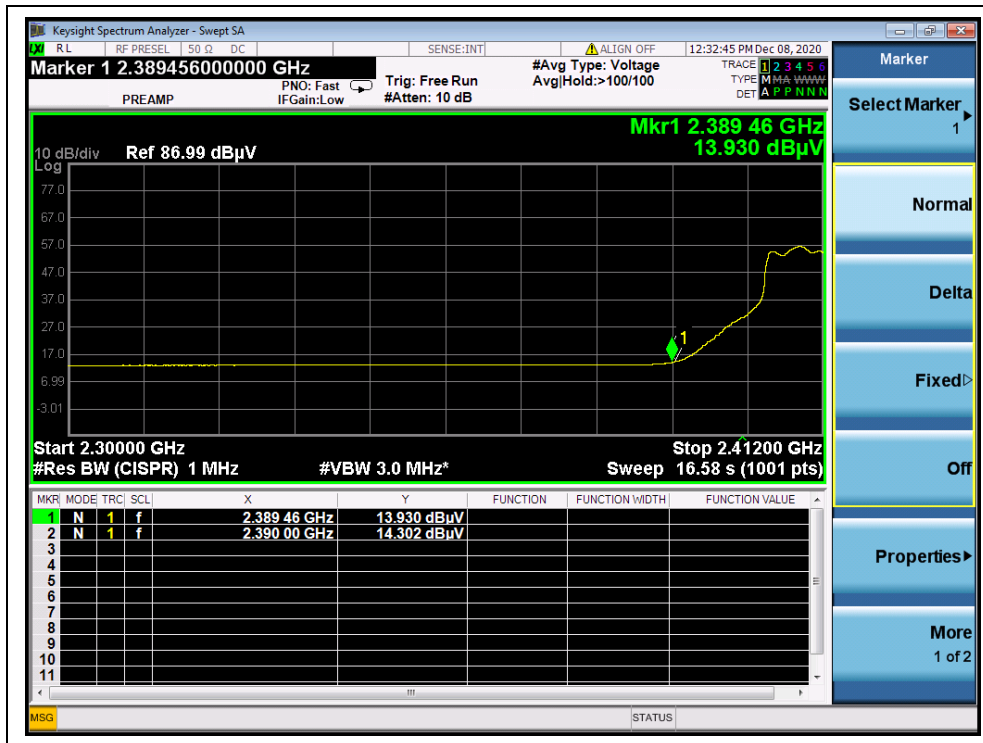

(AVERAGE, Channel 1, 802.11g)

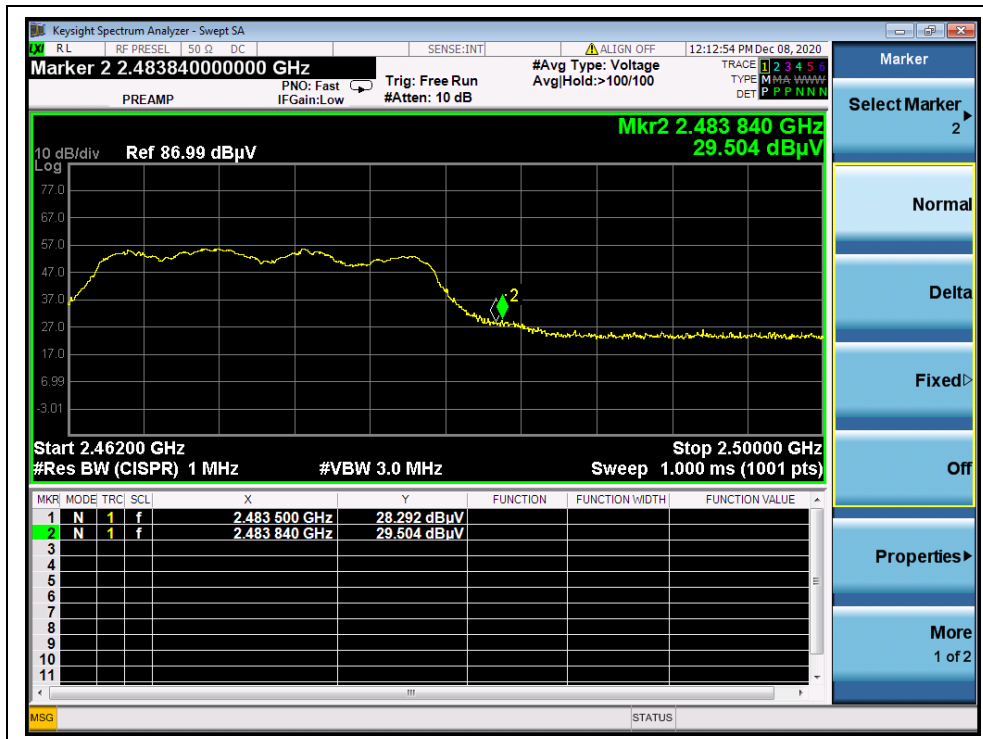

(PEAK, Channel 13, 802.11g)

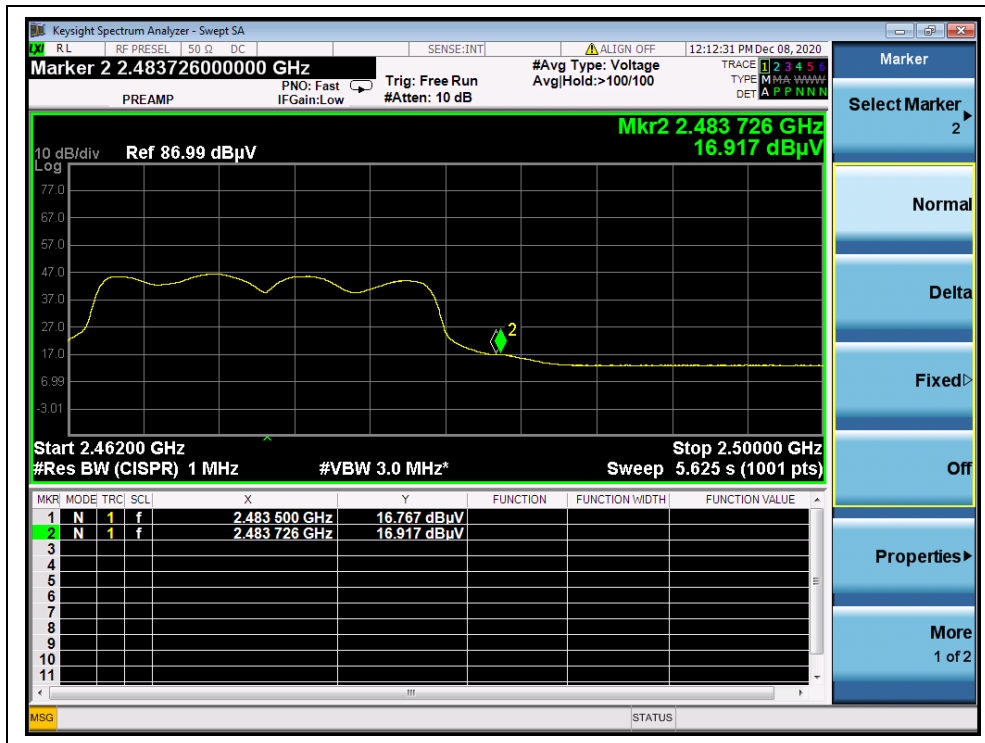

(AVERAGE, Channel 13, 802.11g)




802.11n (HT20) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBμV)					
1	2390.00	PK	28.17	6.74	27.20	62.11	74	PASS
1	2390.00	AV	14.76	6.74	27.20	48.70	54	PASS
13	2483.95	PK	29.28	6.74	27.20	63.22	74	PASS
13	2483.50	AV	16.88	6.74	27.20	50.82	54	PASS


B. Test Plot:

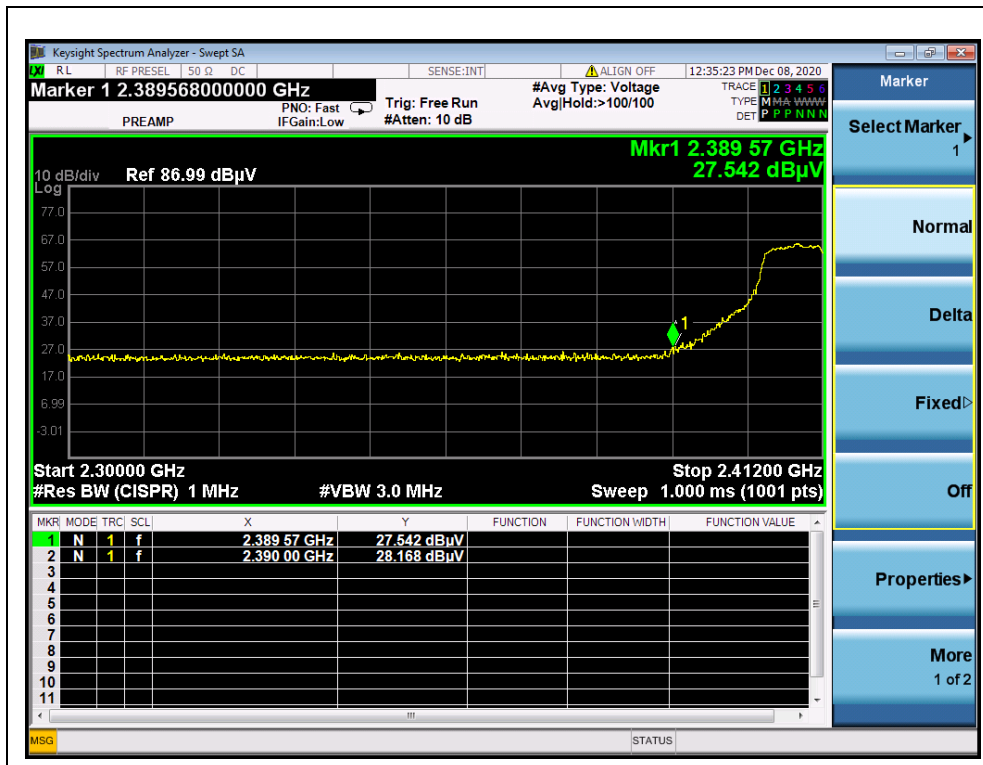


(PEAK, Channel 1, 802.11n (HT20))

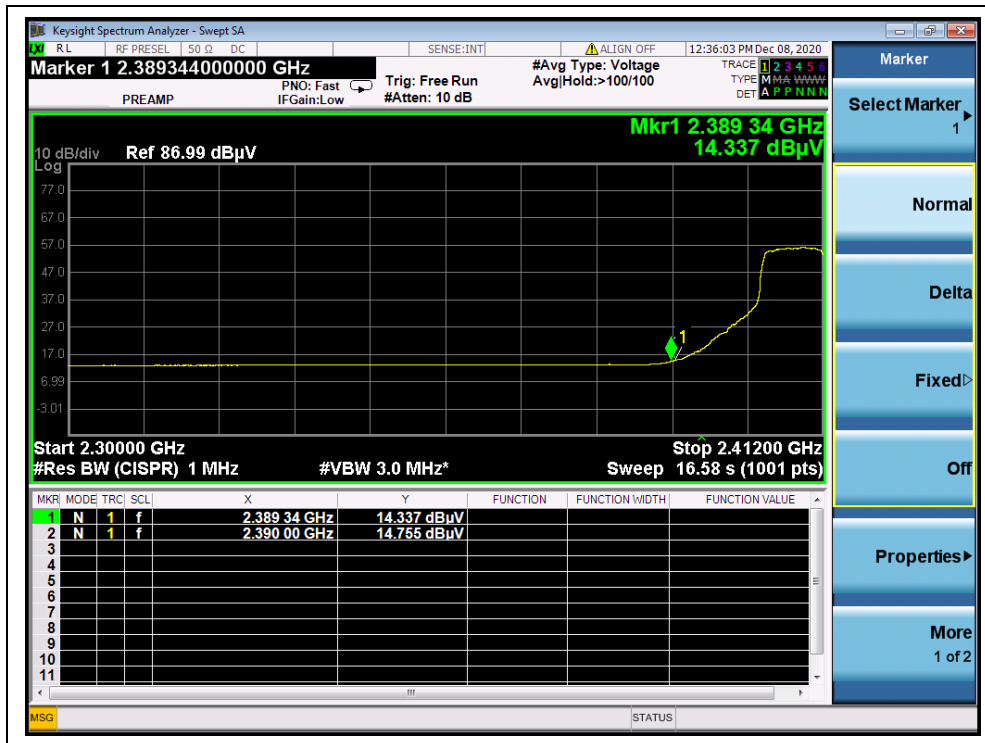

(AVERAGE, Channel 1, 802.11n (HT20))

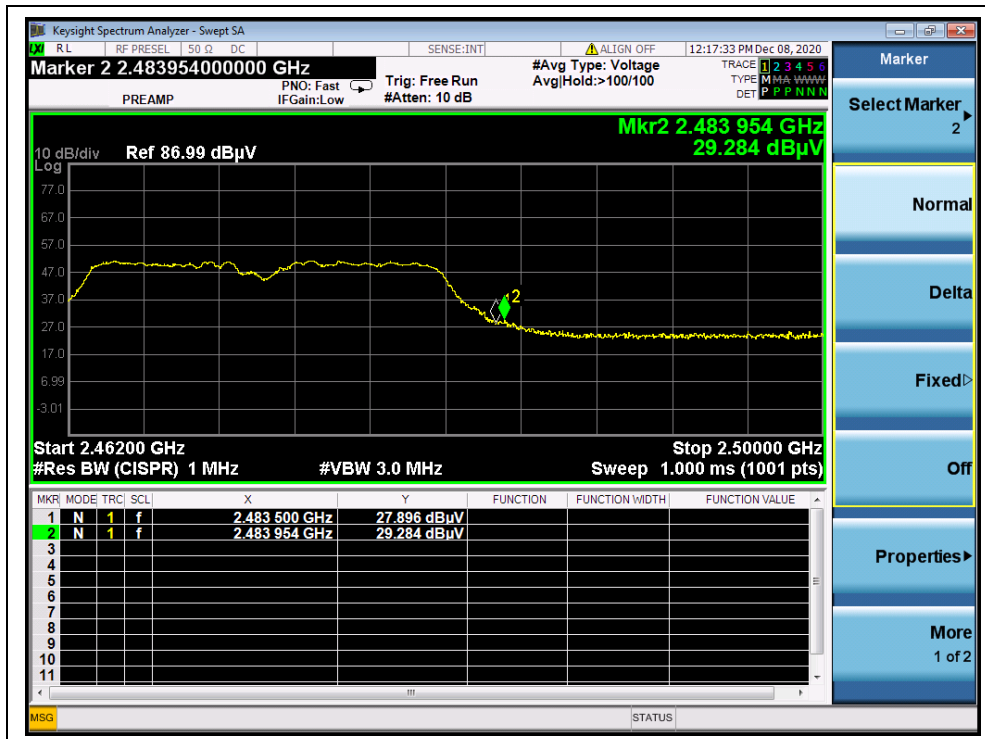

(PEAK, Channel 13, 802.11n (HT20))

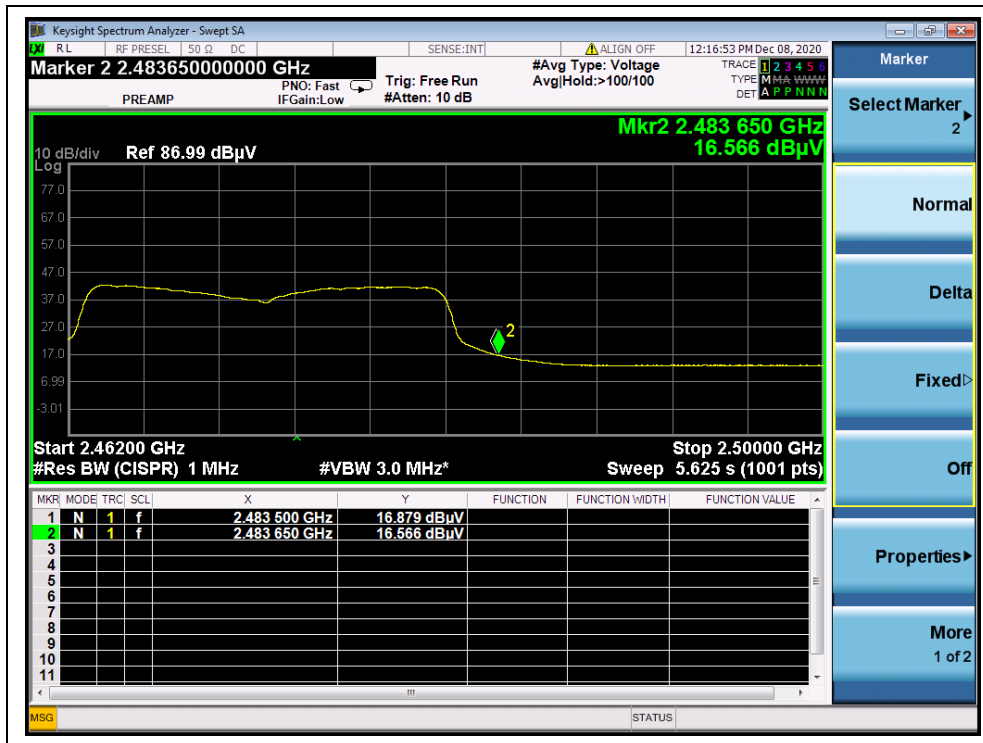

(AVERAGE, Channel 13, 802.11n (HT20))




802.11n (HT40) Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A <sub>T</sub> (dB)	A <sub>Factor</sub> (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV	U <sub>R</sub> (dBμV)					
3	2388.78	PK	26.62	6.74	27.20	60.56	74	PASS
3	2390.00	AV	15.46	6.74	27.20	49.40	54	PASS
11	2483.73	PK	28.30	6.74	27.20	62.24	74	PASS
11	2483.50	AV	16.21	6.74	27.20	50.15	54	PASS


B. Test Plot:

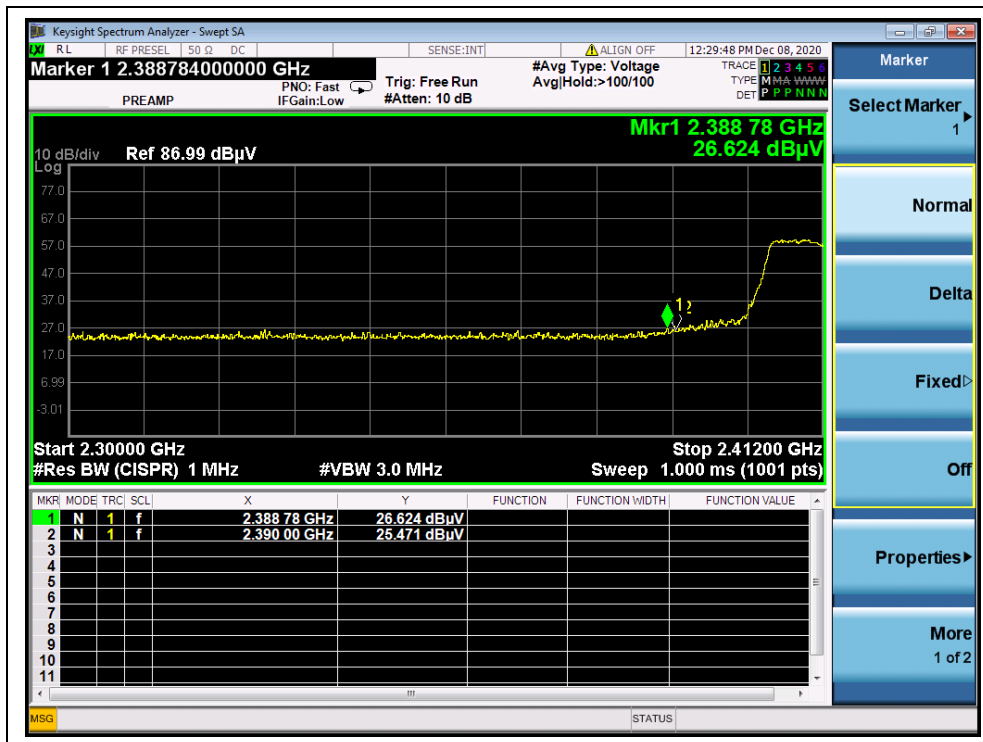


(PEAK, Channel 3, 802.11n (HT40))

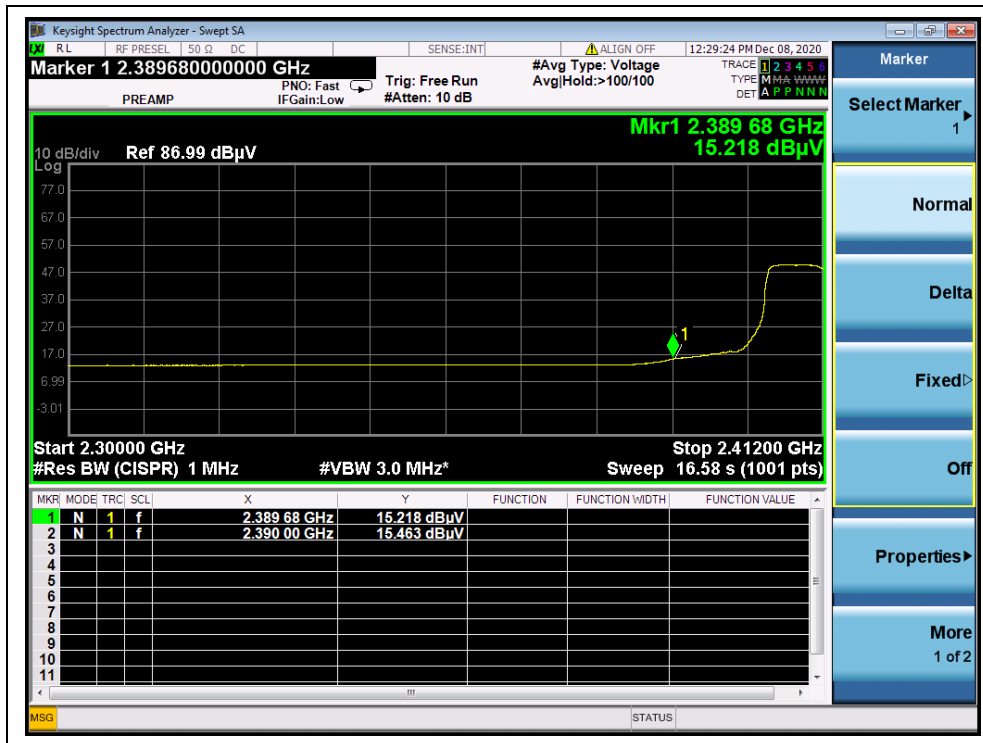

(AVERAGE, Channel 3, 802.11n (HT40))

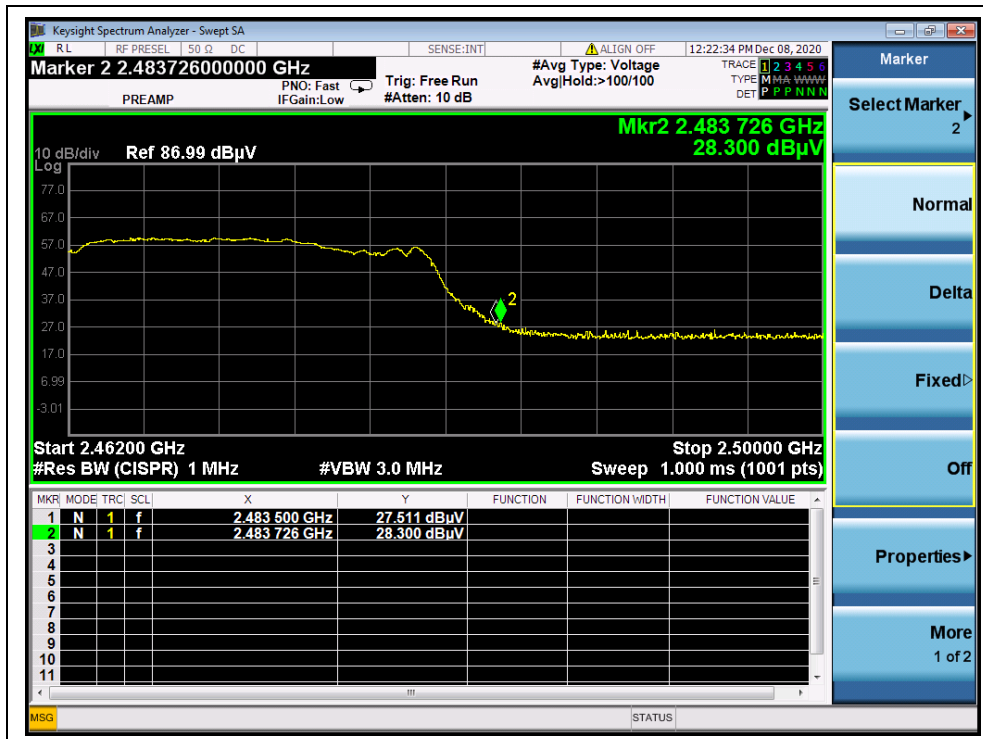

(PEAK, Channel 11, 802.11n (HT40))

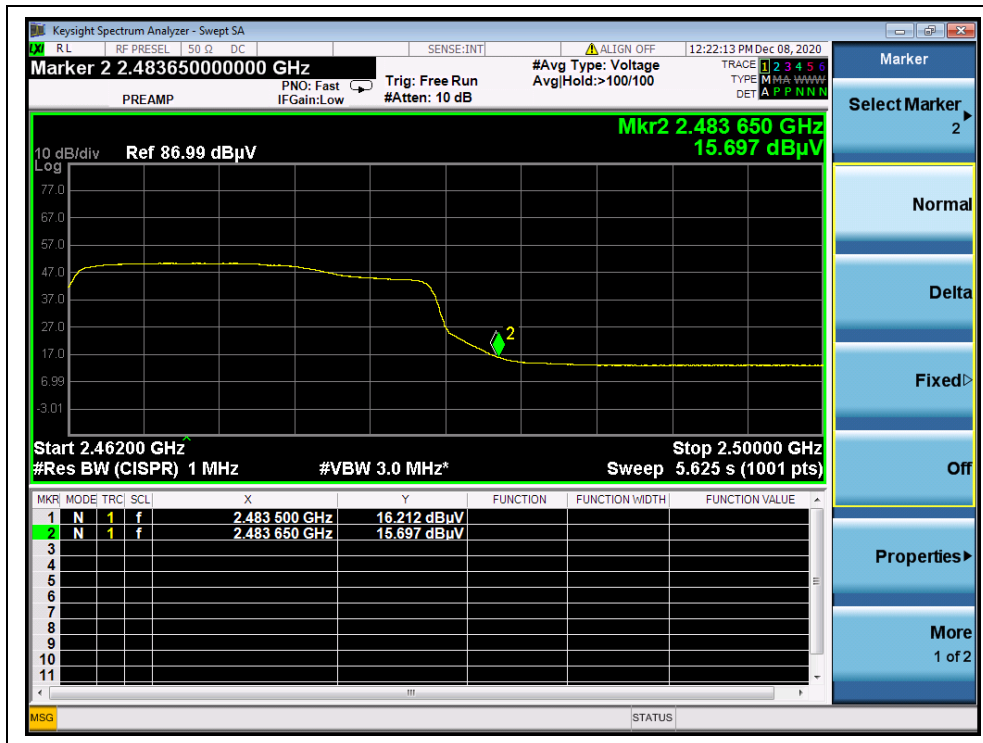

(AVERAGE, Channel 11, 802.11n (HT40))





## 2.9. Radiated Emission

### 2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3


**Note1:** For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

**Note2:** For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).


**2.9.2. Test Description**

**Test Setup:**


1) For radiated emissions from 9kHz to 30MHz

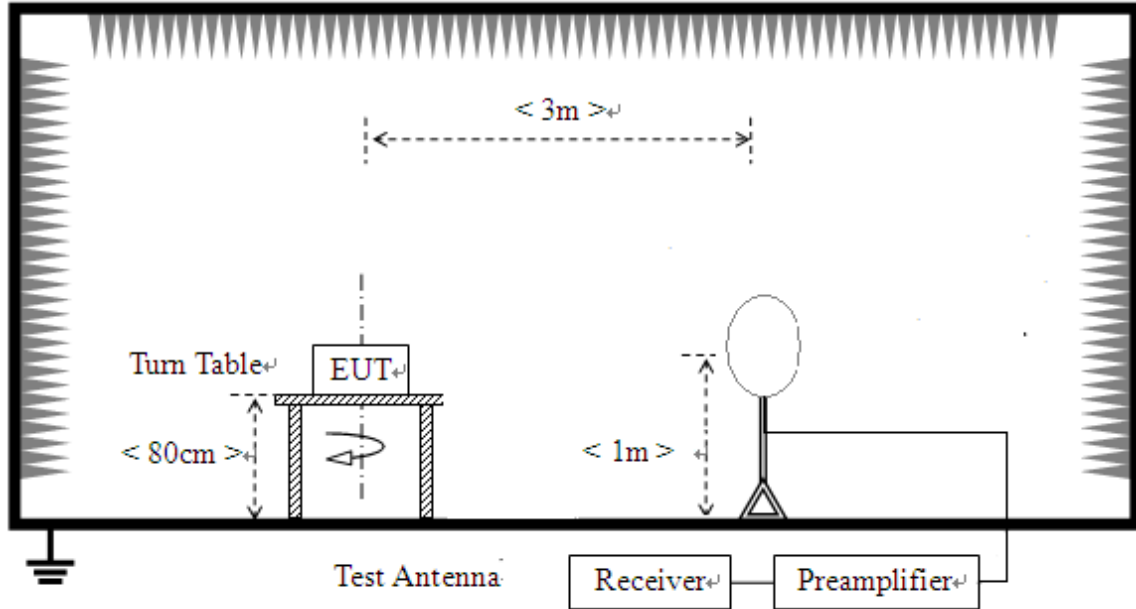

2) For radiated emissions from 30MHz to 1GHz

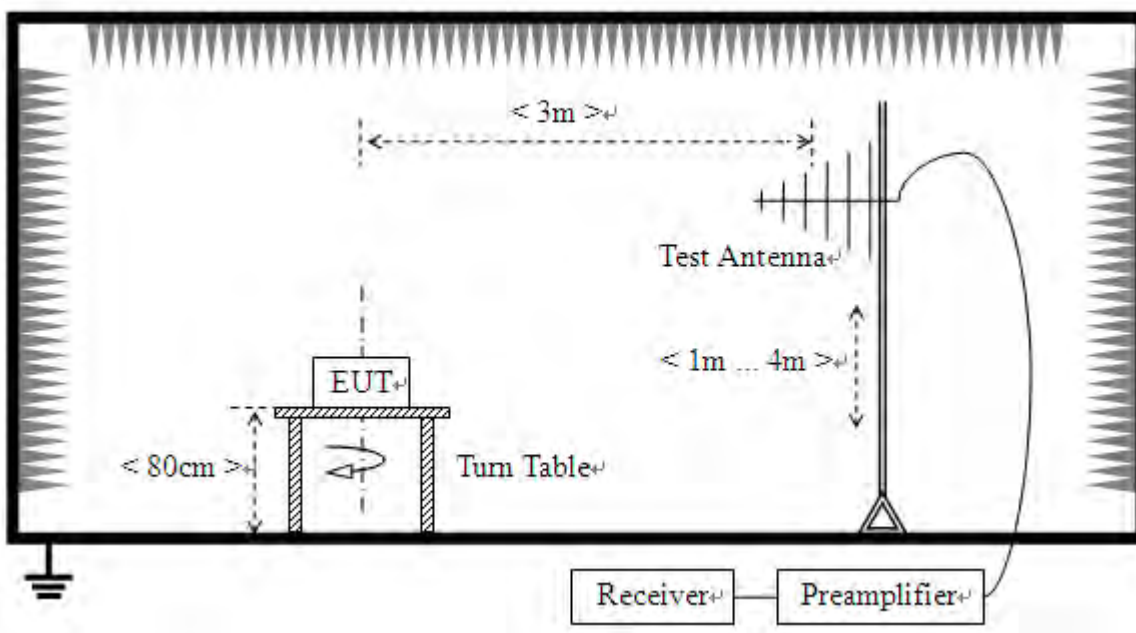

3) For radiated emissions above 1GHz

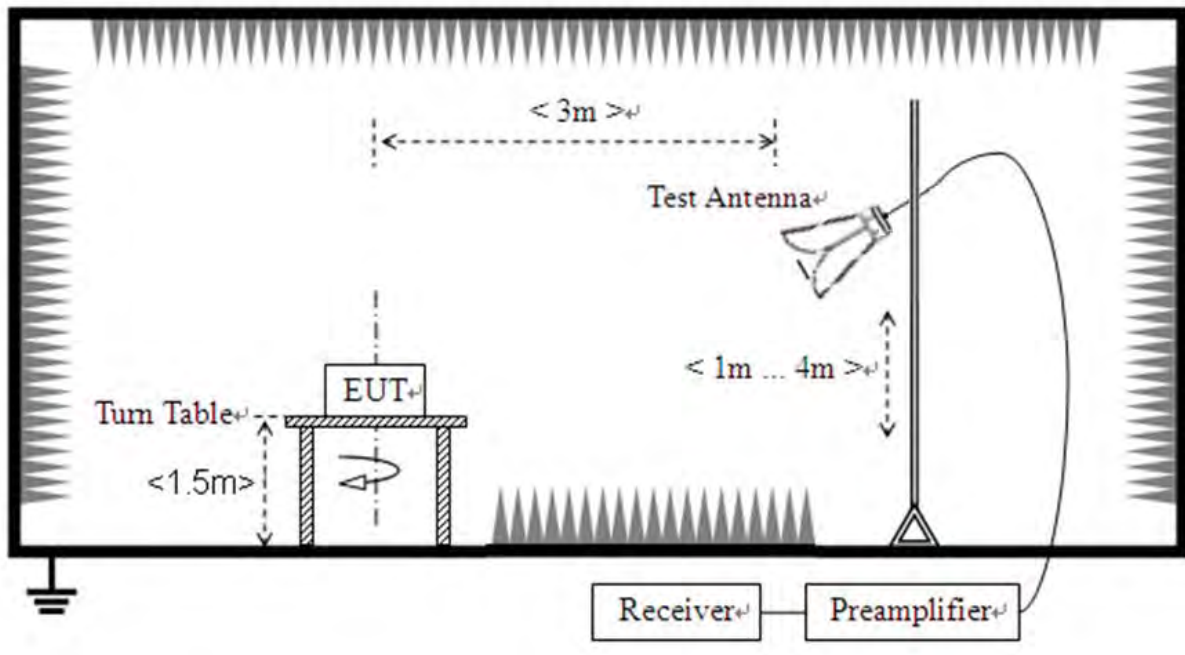

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



### 2.9.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.


**Note1:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

**Note2:** For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

**Note3:** For the frequency, which started from 18GHz to 40GHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Mode**

Plot for Channel 1

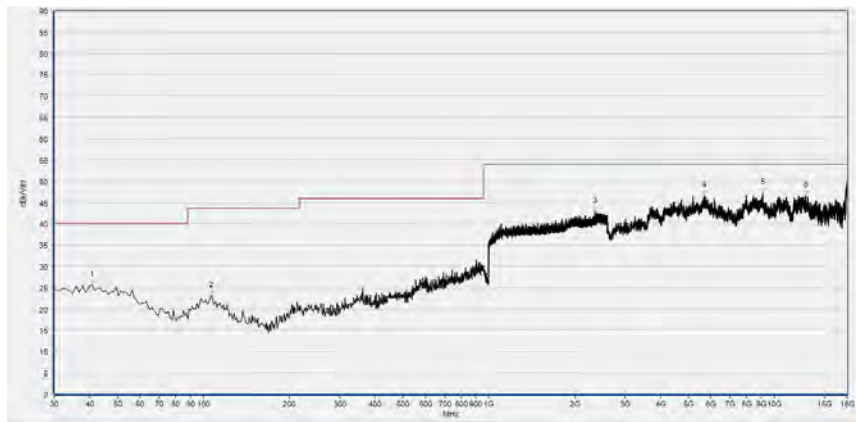

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
40.670	25.66	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
106.630	23.18	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2357.867	42.84	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5695.400	46.62	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9123.440	47.25	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12921.080	46.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

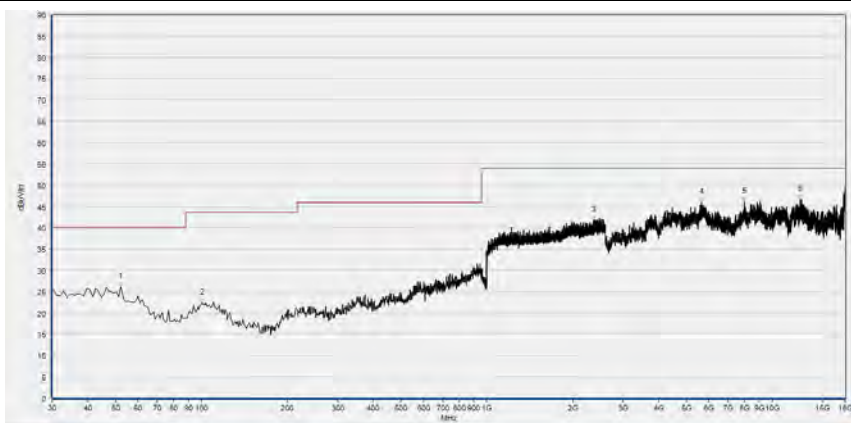

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
52.310	26.18	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.810	22.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2368.000	41.81	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5667.680	45.97	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7993.080	46.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12554.560	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

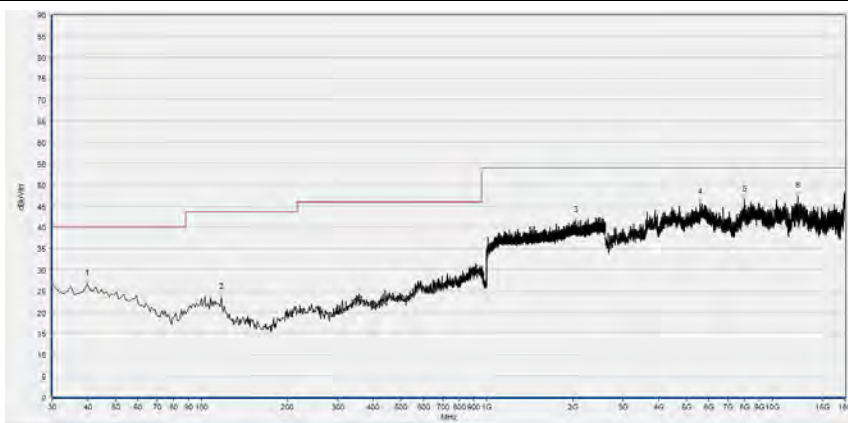

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
39.700	26.71	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
117.300	23.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2051.200	41.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5599.920	45.77	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7996.160	46.39	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12298.920	47.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

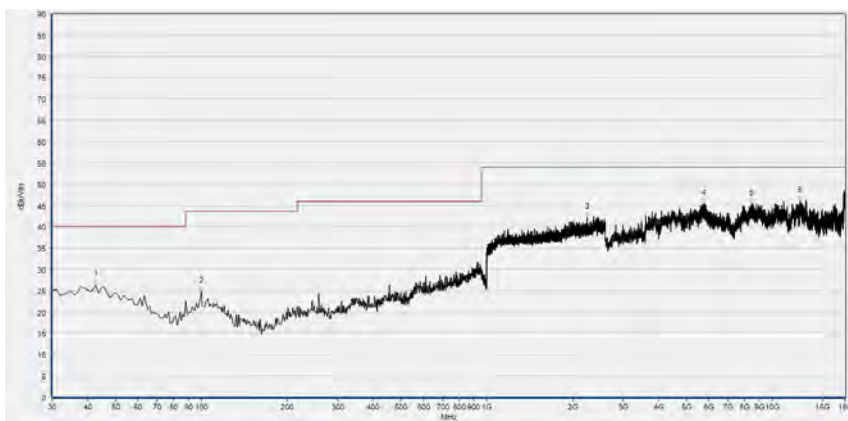

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	26.38	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
99.840	24.84	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2251.733	42.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5753.920	45.34	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8461.240	45.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12483.720	46.11	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 13

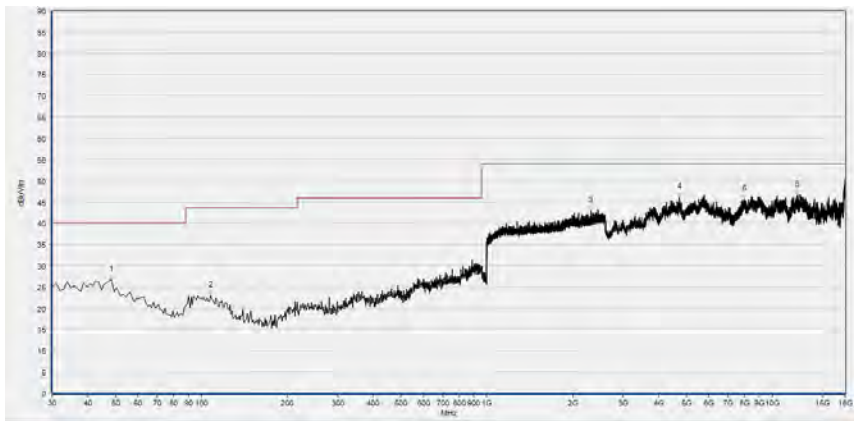

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.430	26.58	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
107.600	22.99	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2320.000	42.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4728.280	46.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7980.760	45.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12218.840	46.63	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

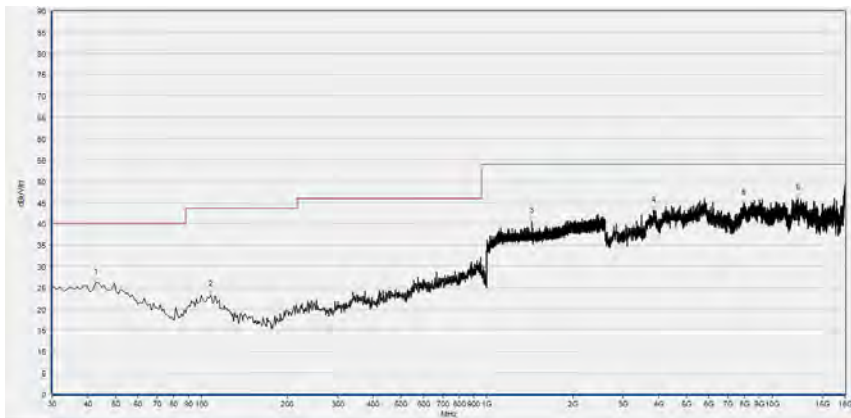


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	26.11	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
107.600	23.22	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1437.867	40.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3835.080	43.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7943.800	44.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12283.520	45.84	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11g Mode**

**Plot for Channel 1**

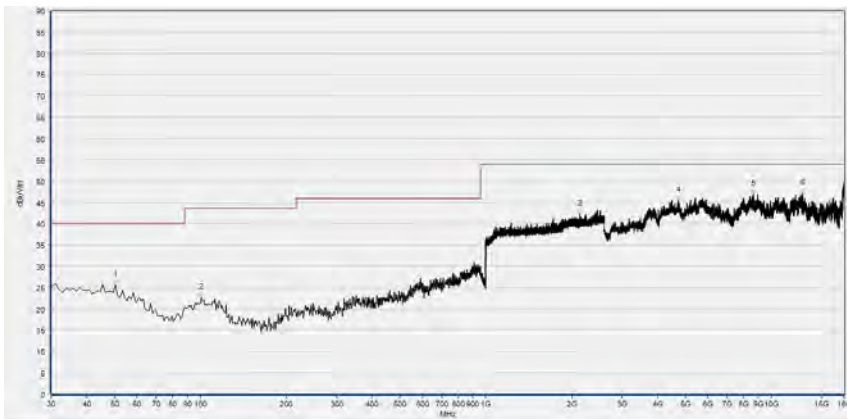

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
50.370	25.69	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
100.810	22.61	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2131.733	42.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4719.040	45.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8652.200	46.97	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12896.440	47.13	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

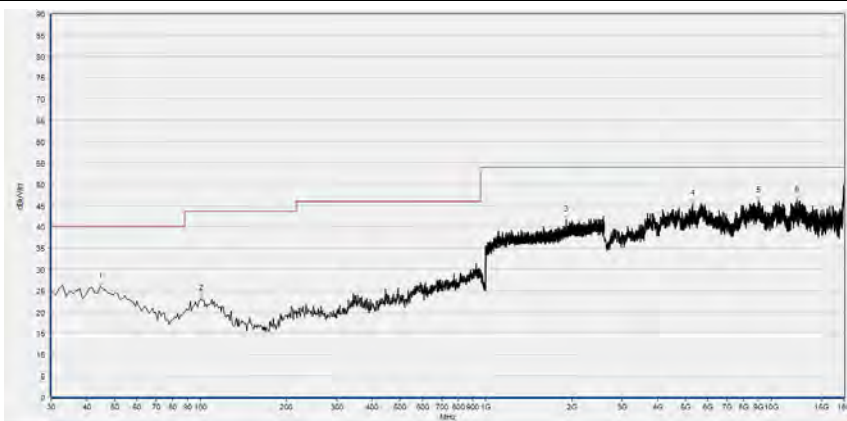


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	26.05	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
100.810	23.10	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1910.400	41.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5307.320	45.41	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
9037.200	46.13	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12292.760	46.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 7

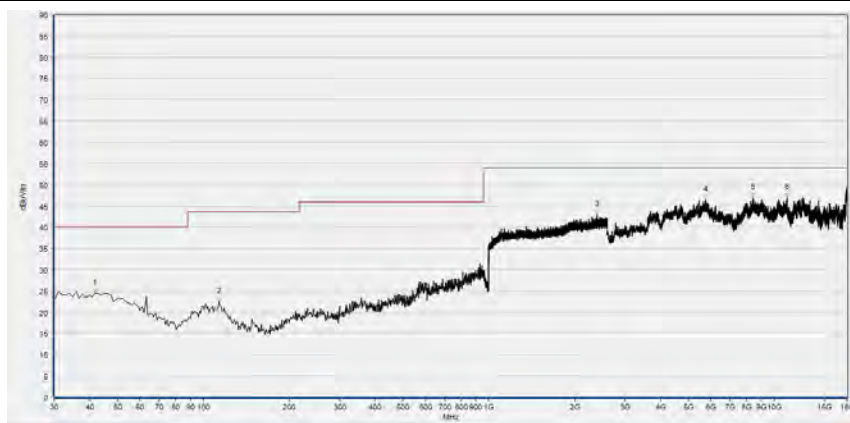

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
41.640	24.44	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
113.420	22.52	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2391.467	42.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5760.080	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8430.440	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11119.280	46.99	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

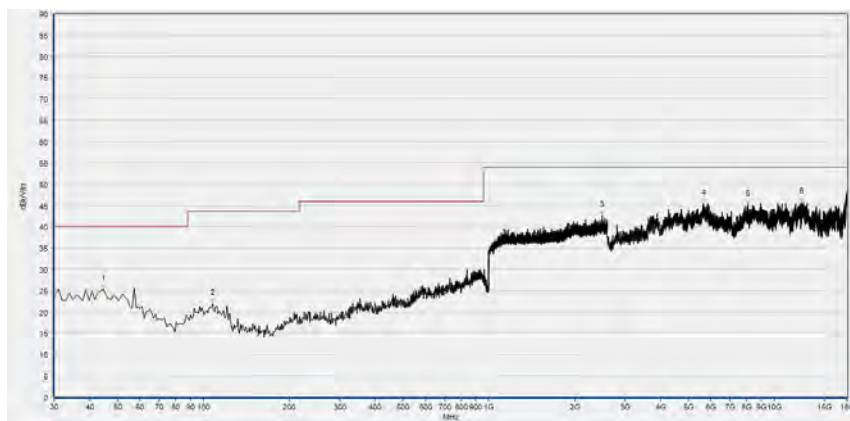

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
44.550	25.26	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
107.600	21.94	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2499.200	42.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5655.360	45.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8100.880	45.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12474.480	45.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 13

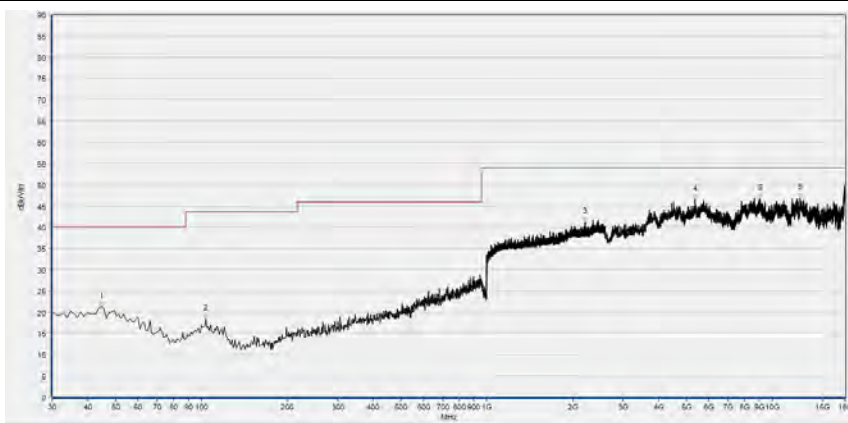

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
44.550	21.26	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
103.720	18.36	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2209.600	41.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5365.840	46.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9064.920	46.71	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12492.960	46.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

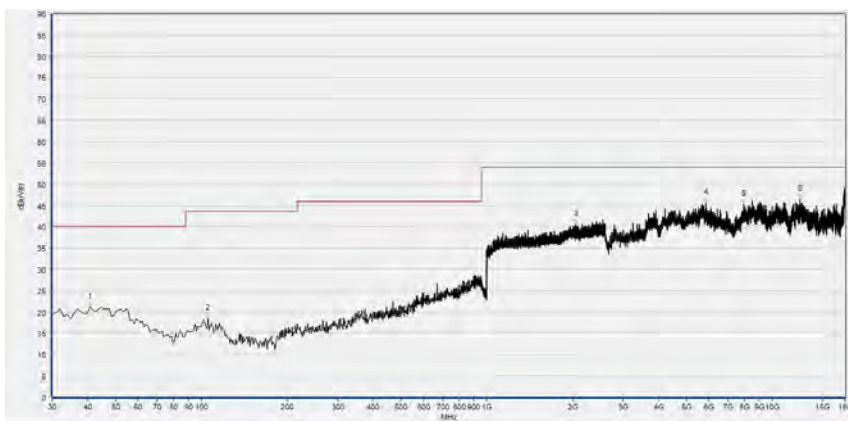


Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
40.670	21.09	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
105.660	18.37	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2054.400	40.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5843.240	45.54	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7953.040	45.28	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12517.600	46.45	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11n (HT20) Mode**

Plot for Channel 1

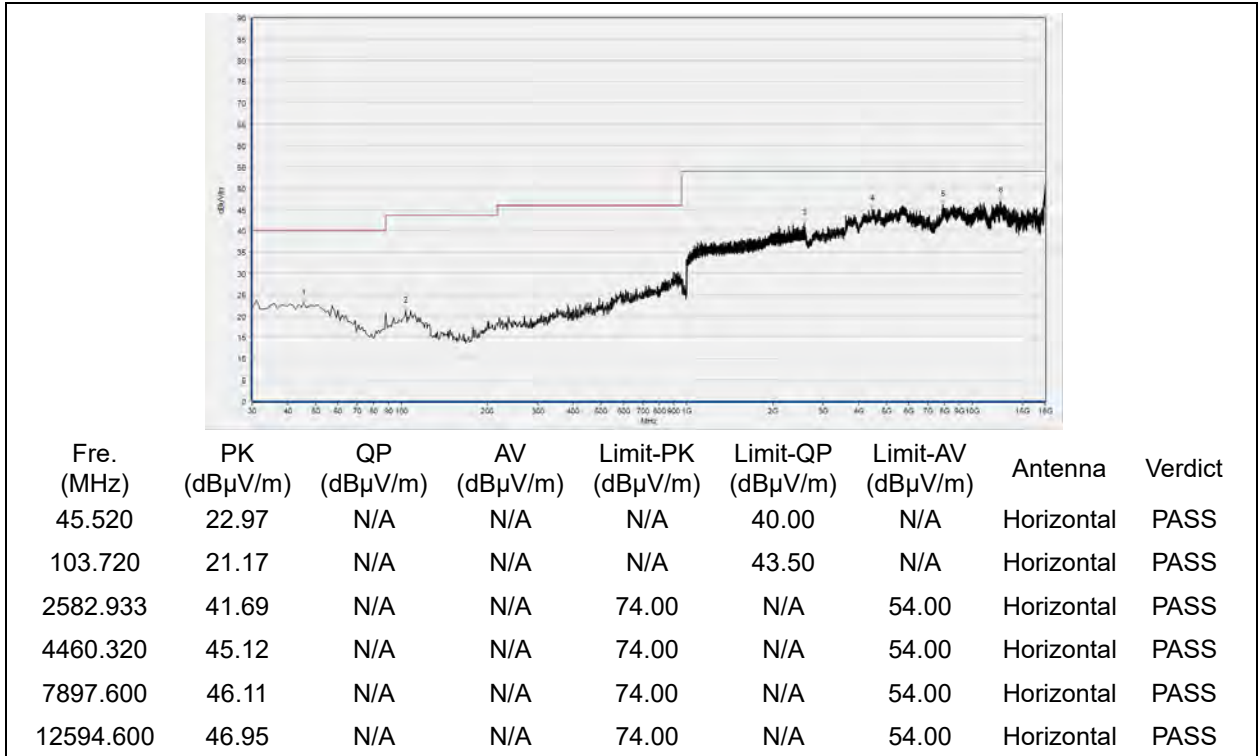


(Antenna Horizontal, 30MHz to 18GHz)

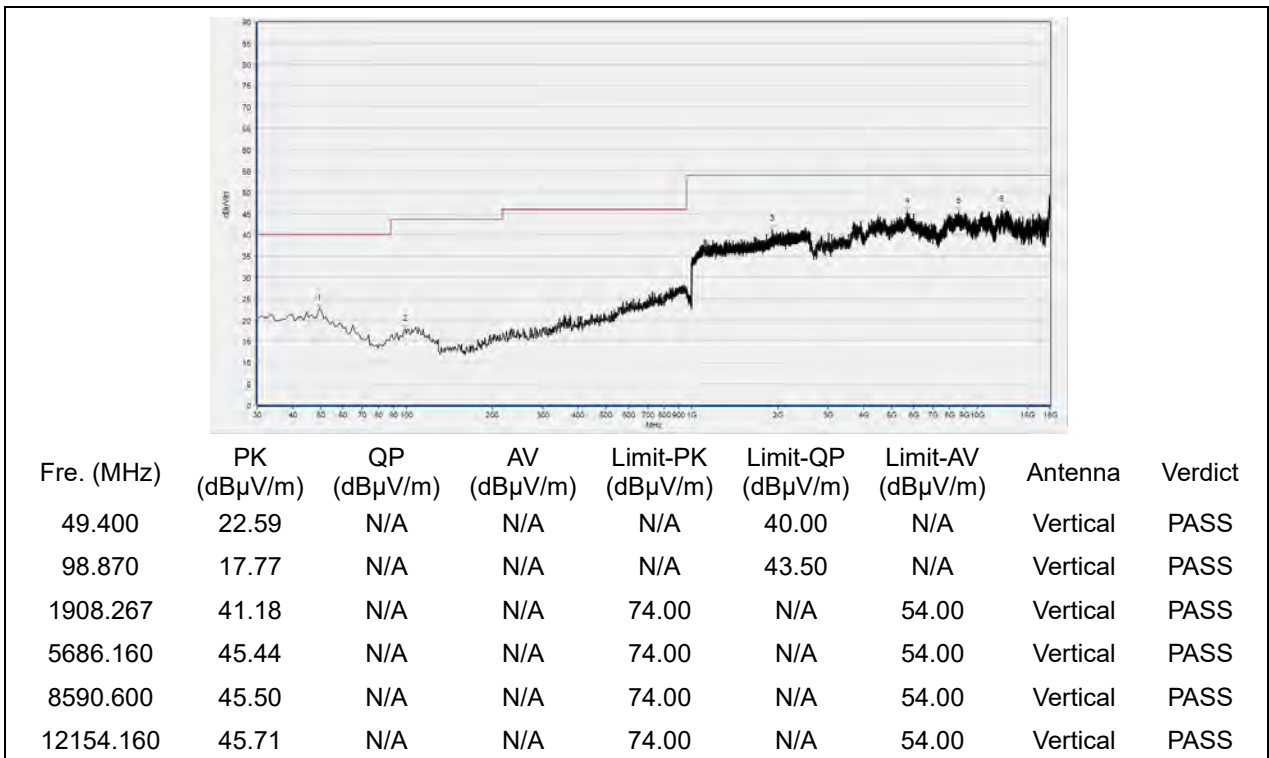


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

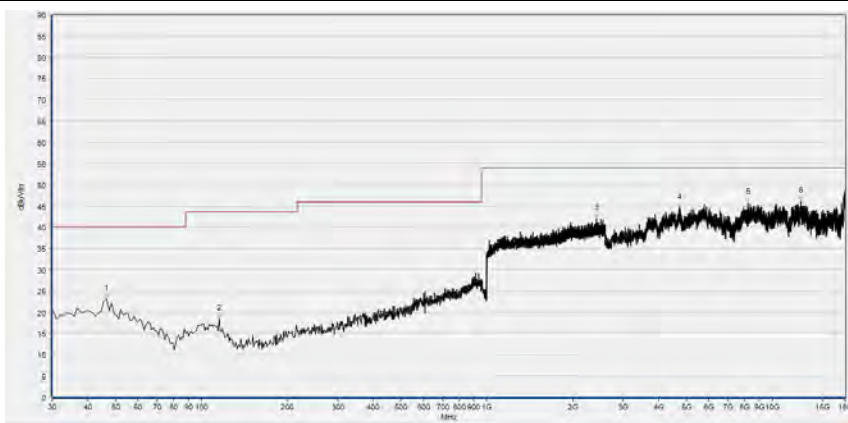

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
46.490	23.08	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
115.360	18.38	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2427.200	42.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4715.960	44.59	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8233.320	45.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12613.080	46.15	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

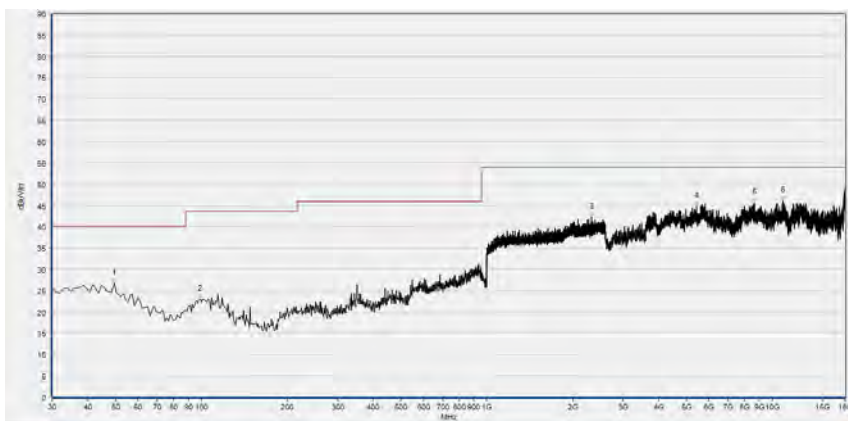

Fre. (MHz)	PK (dBµV/m)	QP (dBµV/m)	AV (dBµV/m)	Limit-PK (dBµV/m)	Limit-QP (dBµV/m)	Limit-AV (dBµV/m)	Antenna	Verdict
49.400	26.68	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
98.870	23.00	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2330.133	42.25	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5427.440	44.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8646.040	45.60	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10885.200	46.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 13

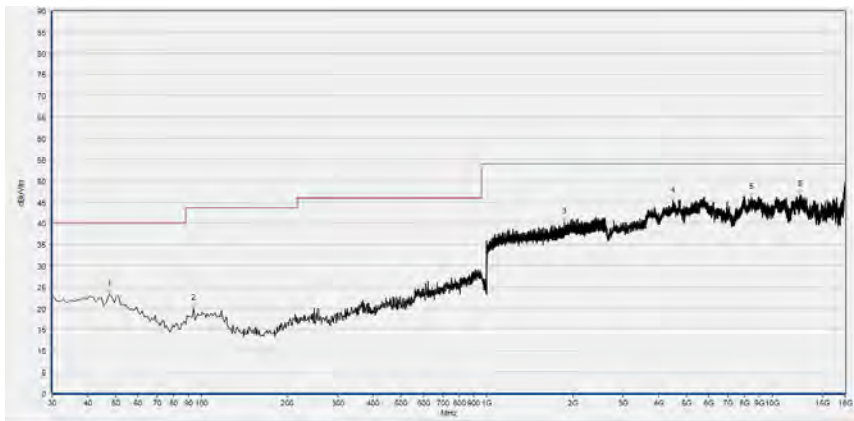

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
47.460	23.33	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
94.020	19.95	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1868.267	40.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4481.880	45.22	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8436.600	46.05	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12554.560	46.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

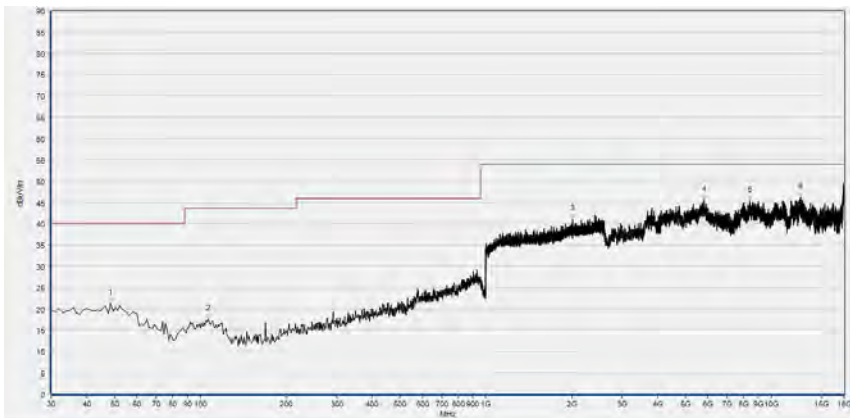


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.430	21.34	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
106.630	17.53	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2010.667	41.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5809.360	45.62	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8396.560	45.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12690.080	46.21	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




**802.11n (HT40) Mode**

**Plot for Channel 3**

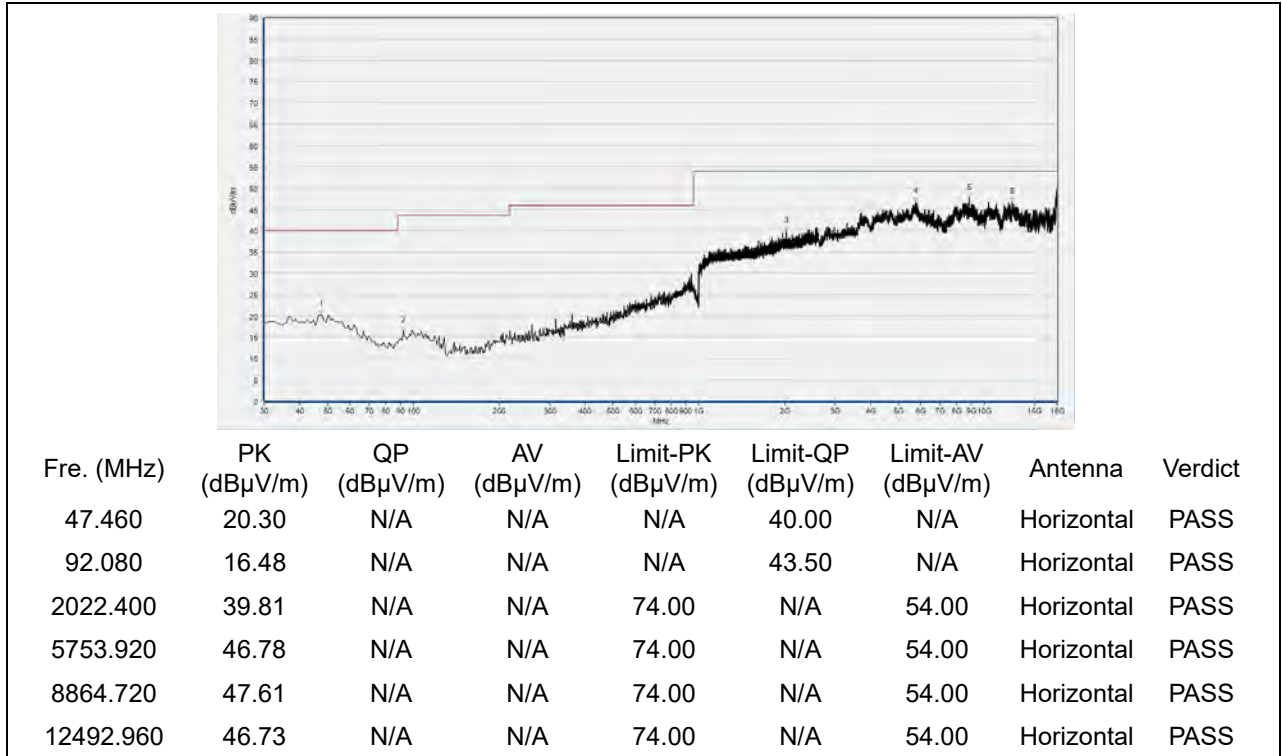


(Antenna Horizontal, 30MHz to 18GHz)

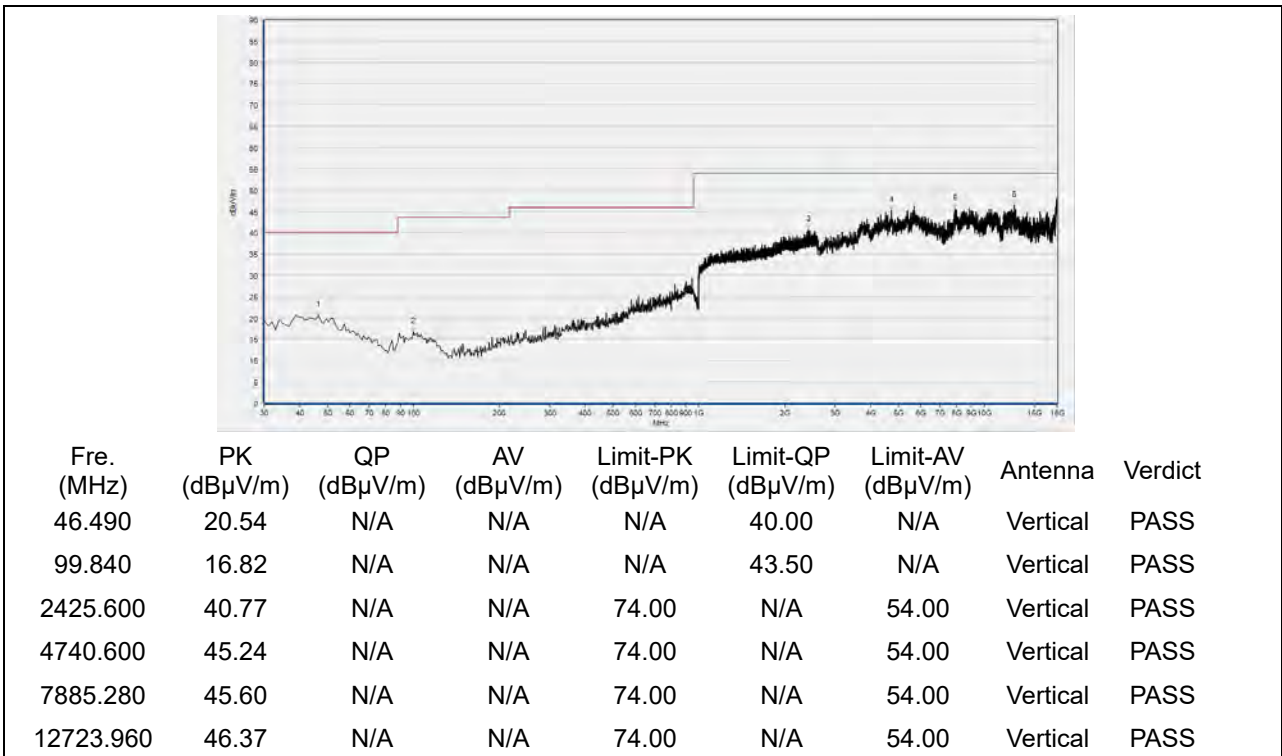


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 7

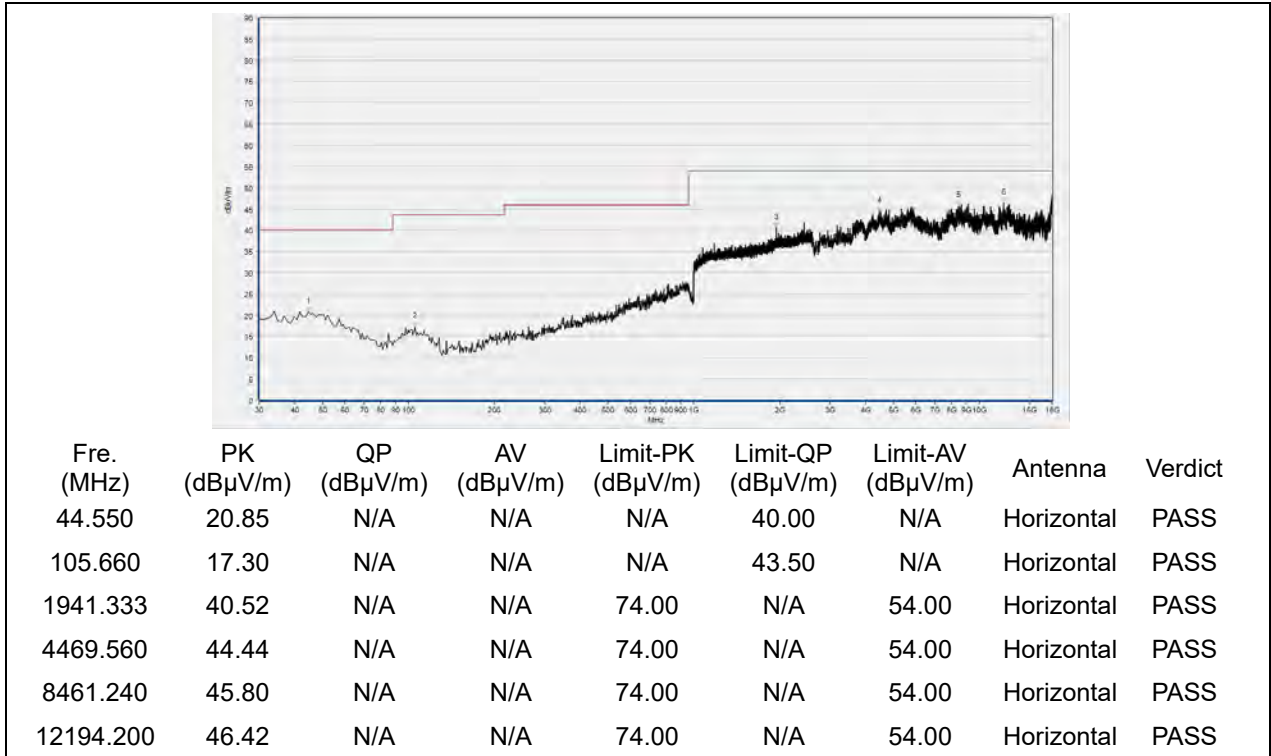


(Antenna Horizontal, 30MHz to 18GHz)

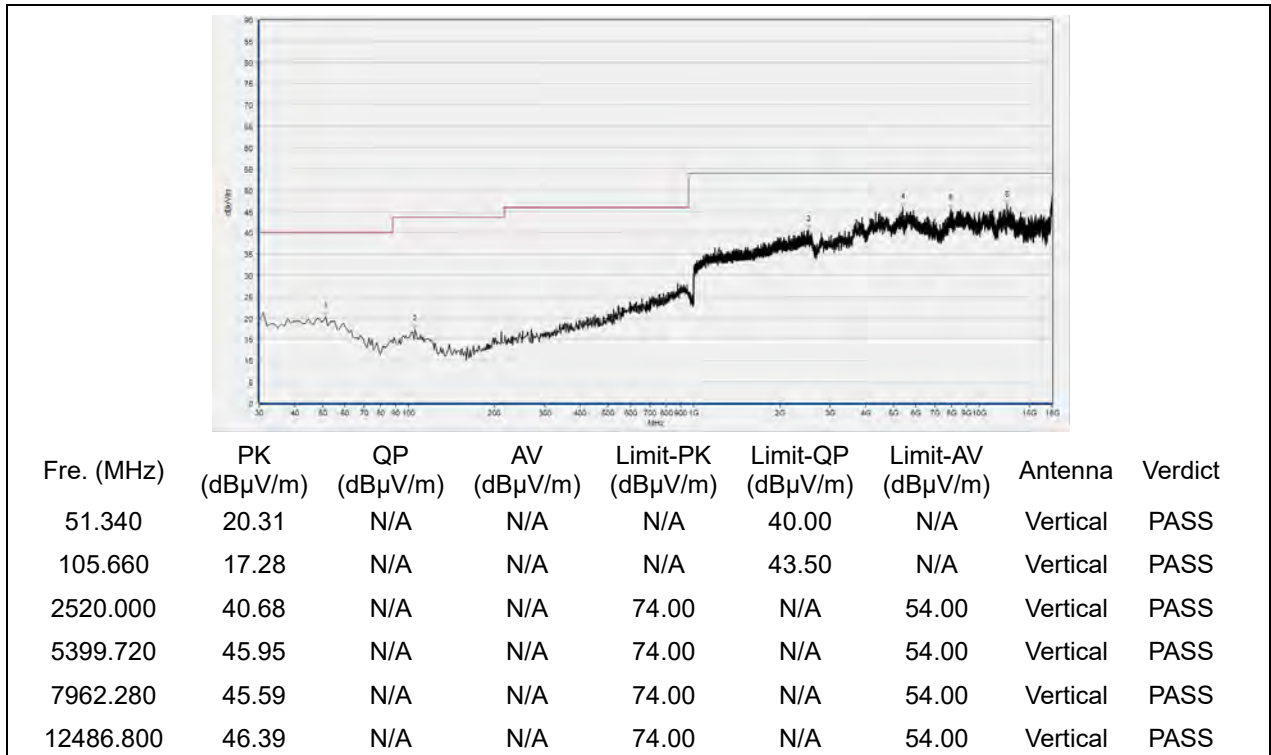


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 11

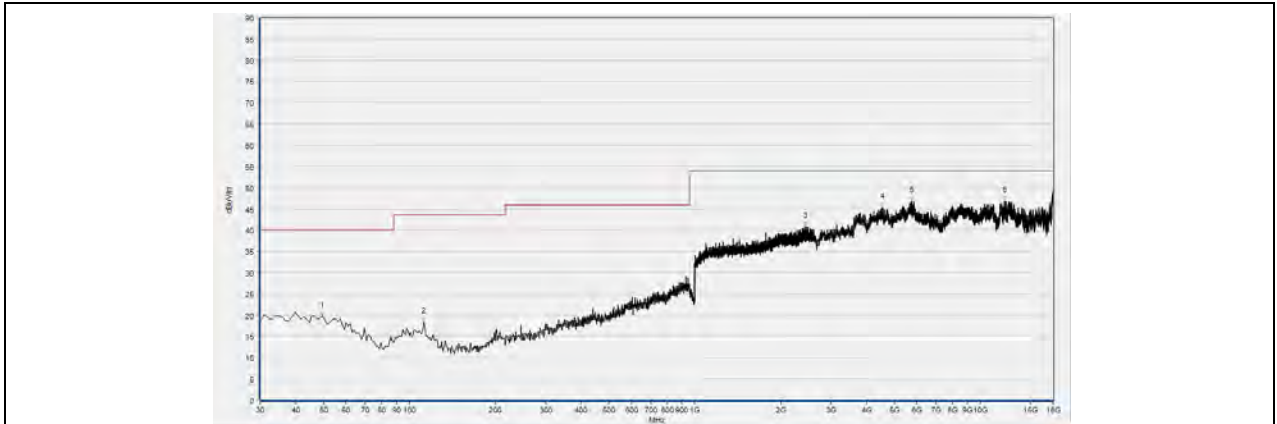

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.400	19.75	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
112.450	18.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2441.600	40.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4534.240	45.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5741.600	46.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12135.680	46.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

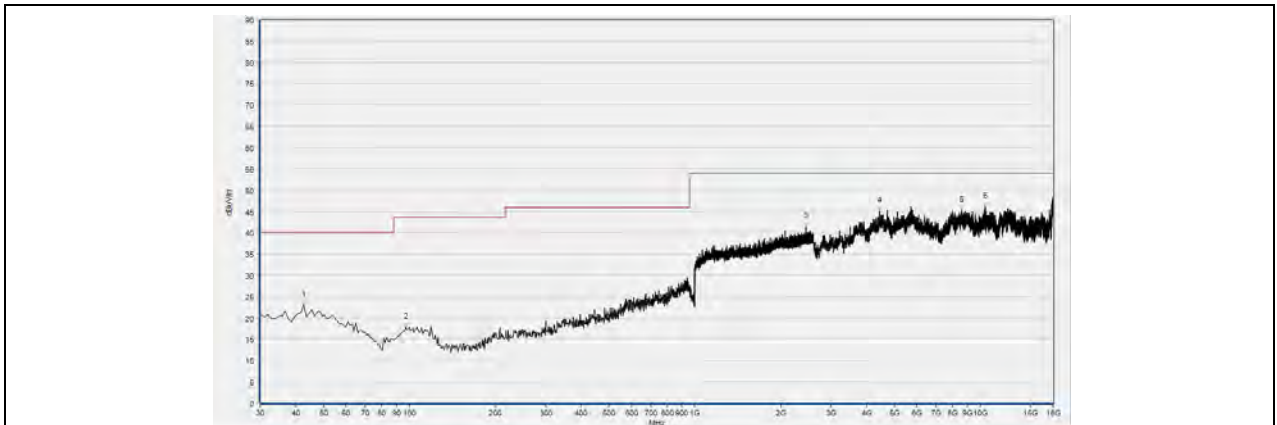

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
42.610	22.97	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
96.930	17.77	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2457.067	41.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4429.520	45.09	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8627.560	45.27	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10426.280	46.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)





## Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	$\pm 2.22\text{dB}$
Power spectral density (PSD)	$\pm 2.22\text{dB}$
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	$\pm 2.77\text{dB}$
Restricted Frequency Bands	$\pm 5\%$
Radiated Emission	$\pm 2.95\text{dB}$
Conducted Emission	$\pm 2.44\text{dB}$

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
<b>Telephone:</b>	+86 755 36698555
<b>Facsimile:</b>	+86 755 36698525

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Shenzhen Morlab Communications Technology Co., Ltd.
<b>Address:</b>	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192, the test firm registration number is 226174.



#### 4. Test Equipments Utilized

##### 4.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Attenuator 1	(N/A.)	10dB	Resent	N/A	N/A
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2020.04.01	2021.03.31
USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2020.04.01	2021.03.31
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Computer	T430i	Think Pad	Lenovo	N/A	N/A

##### 4.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2020.03.26	2021.03.25
LISN	812744	NSLK 8127	Schwarzbeck	2020.03.26	2021.03.25
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2020.07.24	2021.07.23
Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A
Adapter	J5164200005	AK933JH	OPPO	N/A	N/A

##### 4.3 List of Software Used

Description	Manufacturer	Software Version
Test system	Townsend	V2.6
Power Panel	Agilent	V3.8
MORLAB EMCR V1.2	MORLAB	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**4.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2020.07.21	2021.07.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2019.05.24	2022.05.23
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2019.02.14	2022.02.13
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2019.07.26	2022.07.25
Test Antenna – Horn	BBHA9170 #774	BBHA9170	Schwarzbeck	2019.07.26	2022.07.25
Coaxial cable (N male) (9kHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
Coaxial cable (N male) (30MHz-40GHz)	CB05	EMC05	Morlab	N/A	N/A
1-18GHz pre-Amplifier	61171/61172	S020180L32 03	Tonscend	2020.07.21	2021.07.20
18-26.5GHz pre-Amplifier	46732	S10M100L38 02	Tonscend	2020.07.21	2021.07.20
26-40GHz pre-Amplifier	56774	S40M400L40 02	Tonscend	2020.07.21	2021.07.20
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2020.07.21	2021.07.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2020.01.06	2023.01.05

————— END OF REPORT —————