



REPORT No.: SZ24030059W08

TEST REPORT

APPLICANT : Reliance Communications LLC

PRODUCT NAME : Orbic Fun Pro 5G

MODEL NAME : R678L5SLFP

BRAND NAME : Orbic

FCC ID : 2ABGH-R678L5SLFP

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2023-11-28

TEST DATE : 2023-12-06 to 2024-02-23

ISSUE DATE : 2024-05-24



Edited by:

Peng Mi

Peng Mi (Rapporteur)

Approved by:

Shen Junsheng

Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	13
3. Test Results	16
3.1. Antenna Requirement	16
3.2. Duty Cycle of Test Signal	17
3.3. Maximum Peak and Average Conducted Output Power	18
3.4. 6 dB Bandwidth	19
3.5. Conducted Spurious Emissions and Band Edge	20
3.6. Power Spectral Density	21
3.7. Conducted Emission	22
3.8. Restricted Frequency Bands	23
3.9. Radiated Emission	24
Annex A Test Data and Result	26



REPORT No.: SZ24030059W08

Change History		
Version	Date	Reason for change
1.0	2024-05-24	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS _{Note1}	No deviation
2	N/A	Duty Cycle of Test Signal	Dec. 06, 2023	He Yuyang	PASS _{Note1}	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Dec. 06, 2023	He Yuyang	PASS _{Note1}	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Dec. 06, 2023	He Yuyang	PASS _{Note1}	No deviation
5	15.247(a)	Bandwidth	Dec. 06, 2023	He Yuyang	PASS _{Note1}	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Dec. 06, 2023	He Yuyang	PASS _{Note1}	No deviation
7	15.247(e)	Power Spectral Density	Dec. 06, 2023	He Yuyang	PASS _{Note1}	No deviation
8	15.207	Conducted Emission	Jan. 01, 2024 to Feb. 04, 2024	Wang Deyong	PASS _{Note1}	No deviation
9	15.247(d)	Restricted Frequency Bands	Jan. 19, 2024 to Feb. 23, 2024	Gao Jianrou	PASS _{Note1}	No deviation
10	15.209, 15.247(d)	Radiated Emission	Jan. 19 to 22, 2024	Gao Jianrou	PASS _{Note1}	No deviation

Note 1: The test results of these test items in this report refer to the test report (Report No.: SZ23120302W08).

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and KDB 558074 D01 v05r02.

Note 3: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.



Note 4: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.

1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
Power Sensor	MY54180008	U2021XA	Agilent	2023.10.17	2024.10.16
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
				2024.01.25	2025.01.24
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
				2024.02.02	2025.02.01
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2023.06.27	2024.06.26
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	N/A	N/A

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR	Morlab	V1.2
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2023.06.21	2024.06.20
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2023.06.26	2024.06.25
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2023.07.01	2024.06.30
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2023.07.01	2024.06.30
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2023.06.27	2024.06.26
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2023.06.27	2024.06.26
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2023.07.04	2024.07.03
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2023.07.04	2024.07.03
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	Reliance Communications LLC
Applicant Address	555 Wireless Blvd. Hauppauge, NY 11788, USA
Manufacturer	Unimaxcomm
Manufacturer Address	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110

2.2. Information of EUT

Product Name:	Orbic Fun Pro 5G	
Sample No.:	4#	
Hardware Version:	V1.0	
Software Version:	R678L5SLFP_V1.0.10_BLL	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section1.3	
Wireless Technology:	802.11b, 802.11g, 802.11n (HT20), 802.11n (HT40)	
Operating Frequency Range:	2412MHz–2462MHz	
Antenna Type:	PIFA Antenna	
Antenna Gain:	-0.20dBi	
Accessory Information:	Battery	
	Brand Name:	Orbic
	Model No.:	BTE-5004
	Serial No.:	N/A
	Capacity:	4870mAh
	Rated Voltage:	3.87V
	Charge Limit:	4.45V
	Manufacturer:	Shenzhen Aerospace Electronic Co.,Ltd.



Accessory Information:	AC Adapter	
	Brand Name:	Orbic
	Model No.:	OACH023US1
	Serial No.:	N/A
	Rated Input:	5V $\Rightarrow$ 3A; 9V $\Rightarrow$ 2A; 12V $\Rightarrow$ 1.5A
	Rated Output:	100-240V $\sim$ 50/60Hz, 0.5A
	Manufacturer 1:	WATAI ELECTRONICS PRIVATE LIMITED
	Manufacturer 2:	KANGYIN ELECTRONIC TECHNOLOGY CO.,LTD
	USB Cable	
	Model No.:	HX-YLMK-06
	Manufacturer:	HUIZHOU WASHIN ELECTRONICS CO.,LTD

Note 1: This is a variant report of original report (Report No.: SZ23120302W08, FCC ID: 2ABGH-R678L5SFP). Based on the similarity between before, only change model name, software version, FCC ID, enable LTE B14/17/25/26/30/41/71 and NR n25/26/41/71, the others are the same as before. No other changes, all RF parameters remain the same. The changes do not affect the test results.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n (HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		
Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11n (HT40)	3	2422	8	2447
	4	2427	9	2452
	5	2432		
	6	2437		
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Mode	Bandwidth (MHz)	Modulation Technology	Modulation Type	Data Rate	RU Size
802.11b	20	DSSS	DBPSK	1/2/5.5/11Mbps	N/A
			DQPSK		
			CCK		
802.11g	20	OFDM	BPSK	6/9/12/18/24/36/48/54 Mbps	N/A
			QPSK		
			16QAM		
			64QAM		
802.11n	20/40 (HT20/40)	OFDM	BPSK	MCS0~MCS7	N/A
			QPSK		
			16QAM		
			64QAM		

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.


2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


Power item

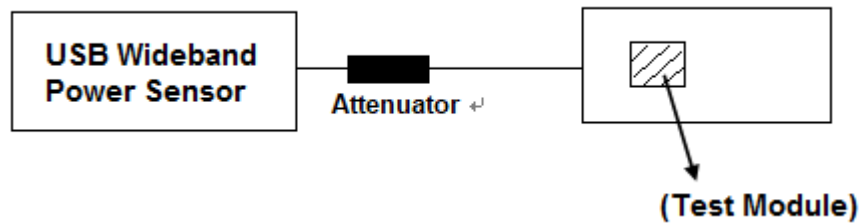

Other items

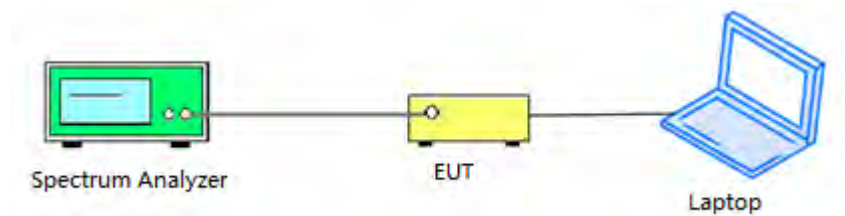


2.6.2. Conducted Emission Measurement

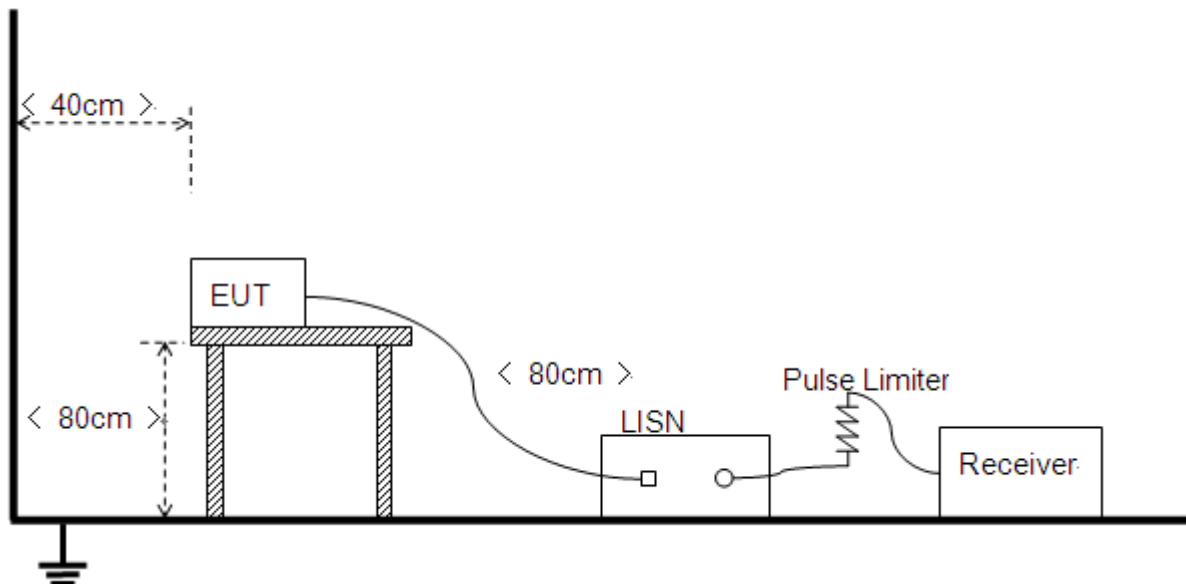


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

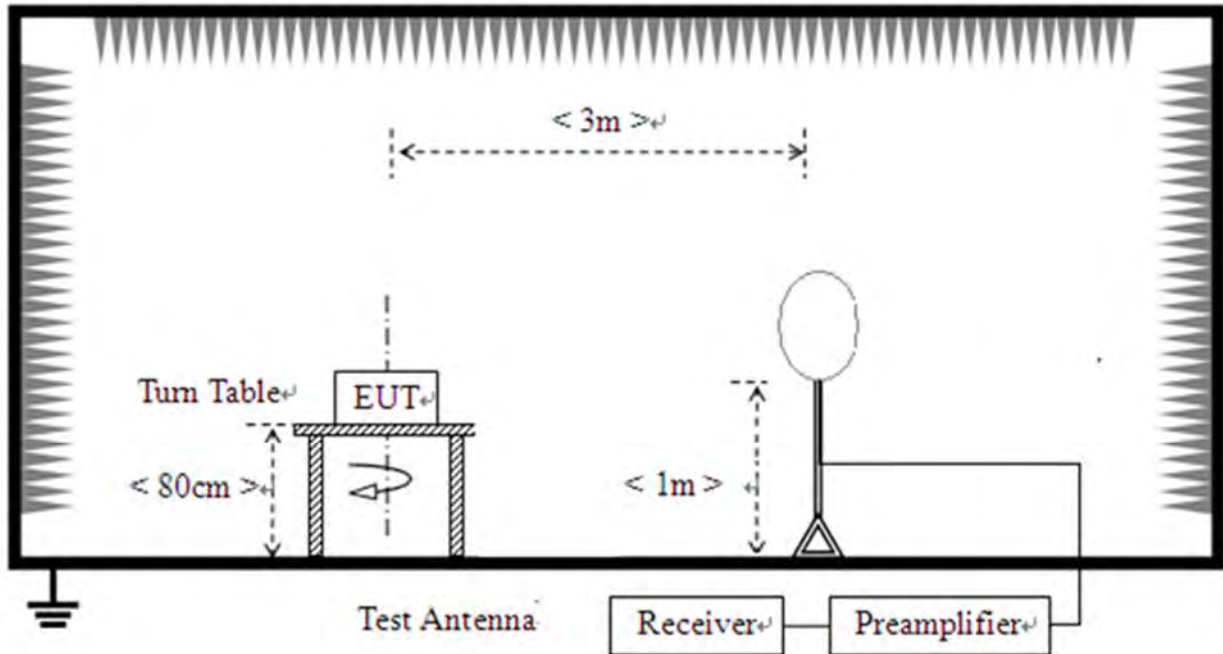

2) For radiated emissions from 30MHz to 1GHz

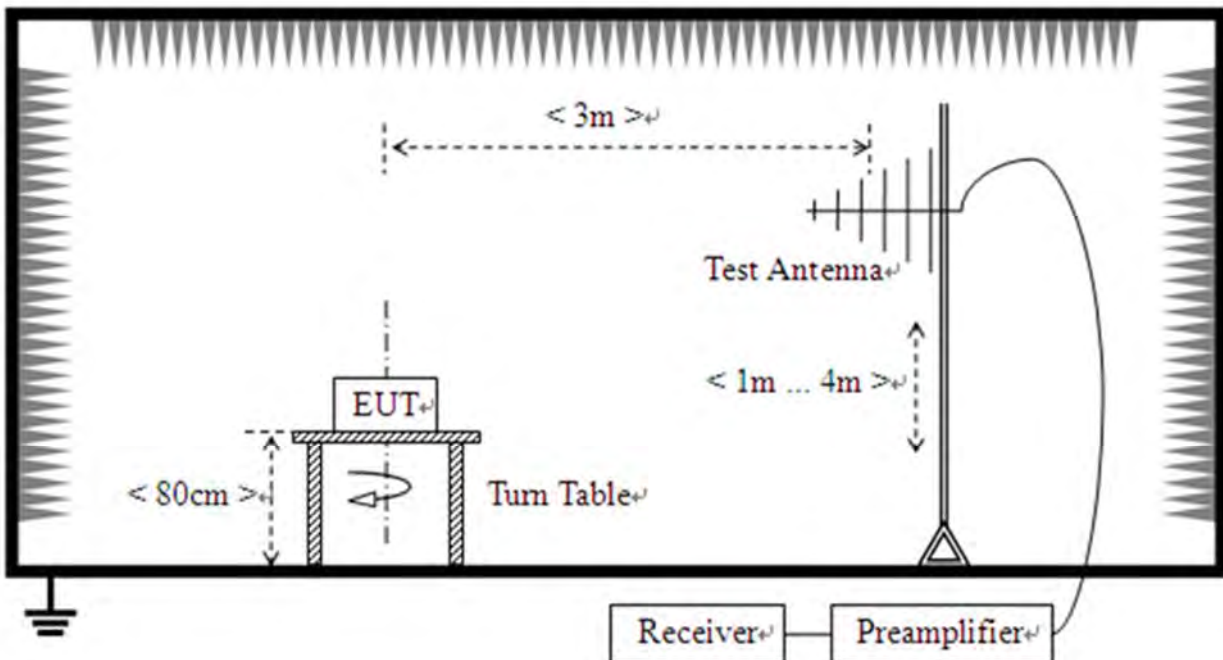

3) For radiated emissions above 1GHz

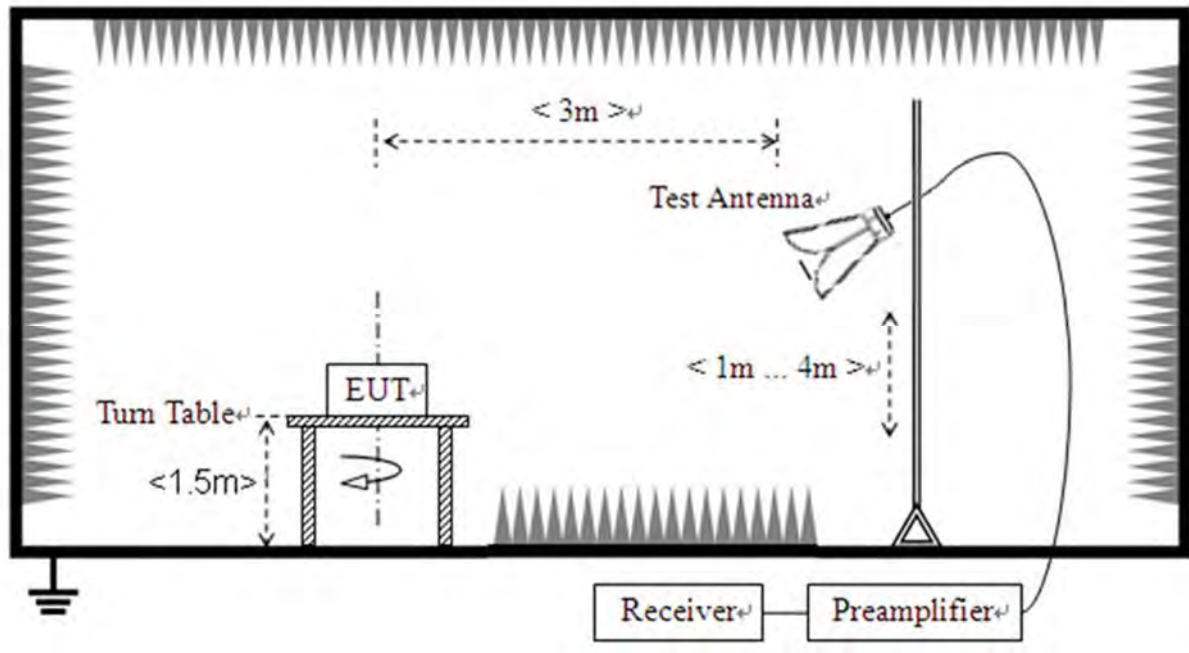



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Inside of the EUT has a PIFA antenna coupled with the metal shrapnel. Please refer to the EUT photos.



3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg(30k/3k)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.



3.8.Restricted Frequency Bands

3.8.1.Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2.Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4.Test Result

Refer to Annex A.9 in this report.

3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2. Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.10 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	98.77	0.05	0.08
NVNT	b	2437	Ant1	98.77	0.05	0.08
NVNT	b	2462	Ant1	99.29	0.03	0
NVNT	g	2412	Ant1	98.26	0.08	0.49
NVNT	g	2437	Ant1	98.26	0.08	0.49
NVNT	g	2462	Ant1	98.26	0.08	0.49
NVNT	n20	2412	Ant1	98.13	0.08	0.53
NVNT	n20	2437	Ant1	98.13	0.08	0.53
NVNT	n20	2462	Ant1	98.13	0.08	0.53
NVNT	n40	2422	Ant1	94.9	0.23	1.08
NVNT	n40	2437	Ant1	94.89	0.23	1.08
NVNT	n40	2452	Ant1	94.89	0.23	1.08

Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

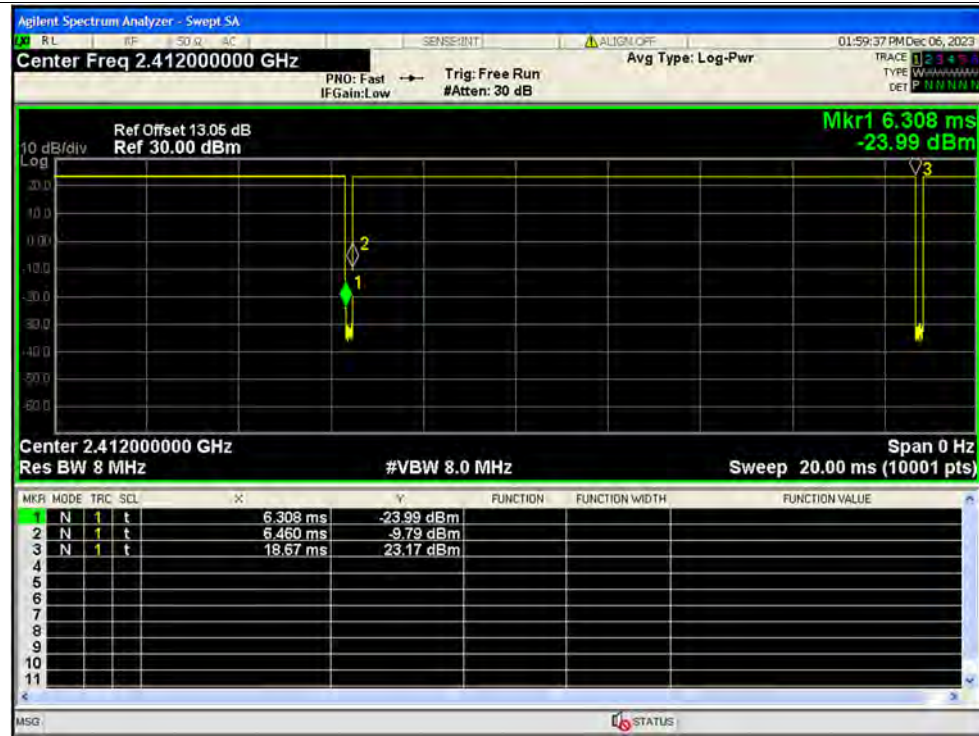


Duty Cycle NVNT b 2437MHz Ant1

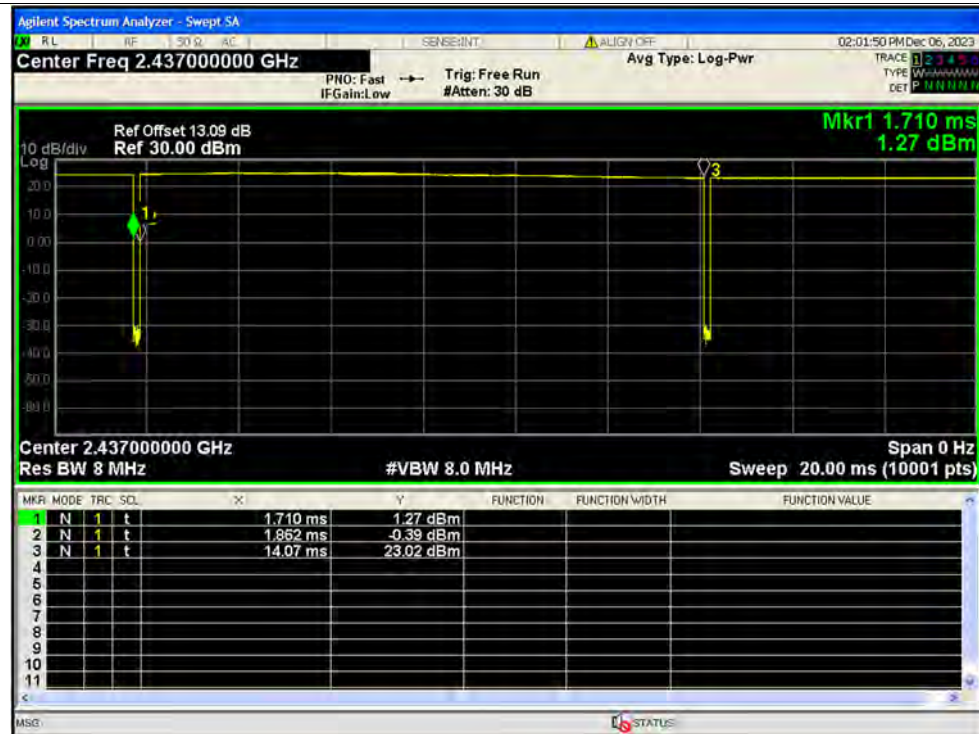




Duty Cycle NVNT b 2462MHz Ant1

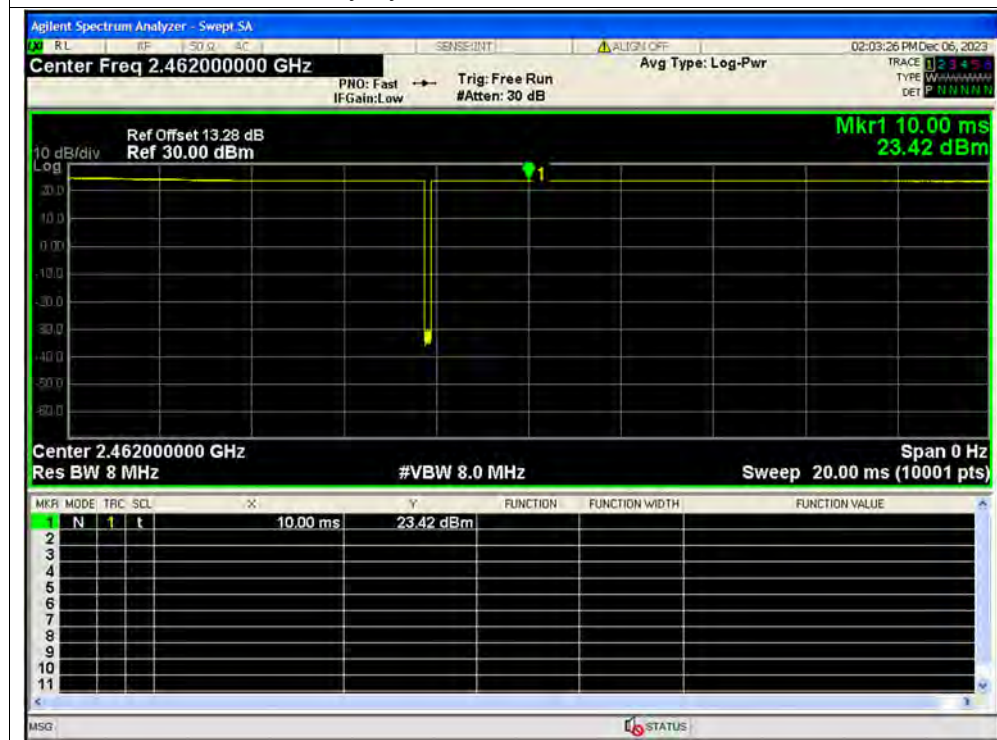


Duty Cycle NVNT g 2412MHz Ant1

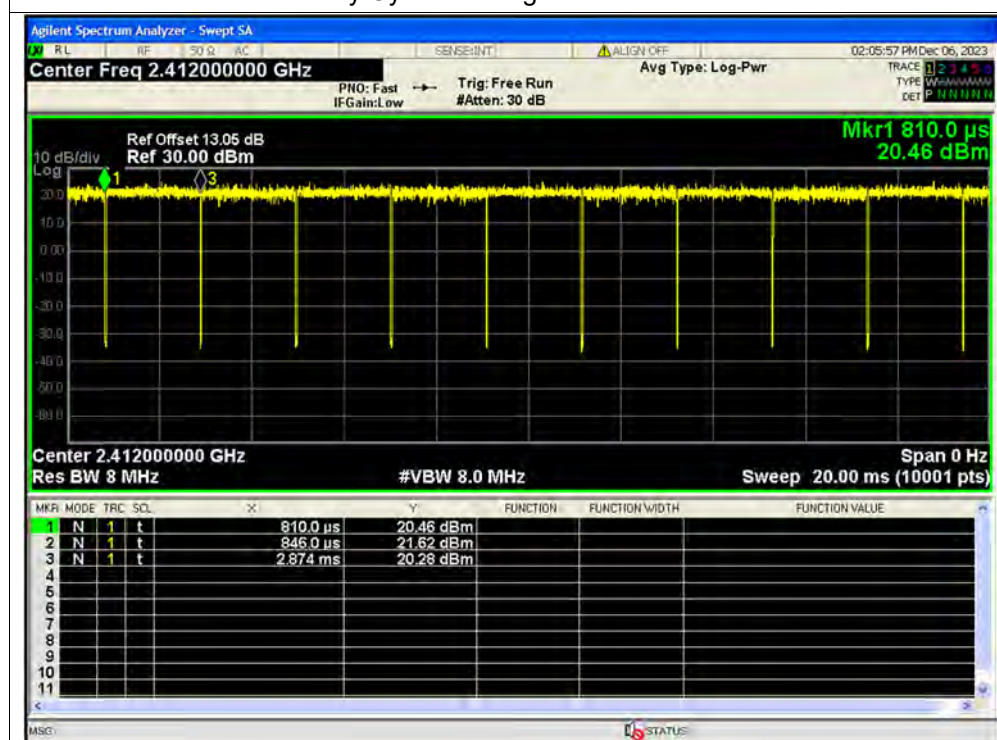





Duty Cycle NVNT g 2437MHz Ant1

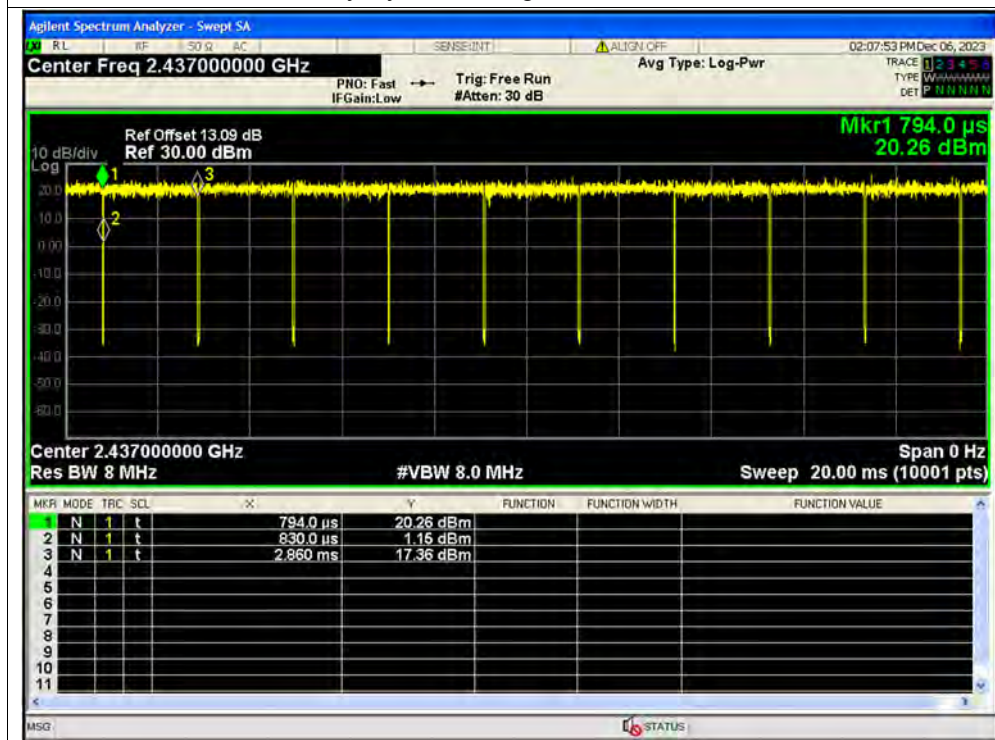


Duty Cycle NVNT g 2462MHz Ant1

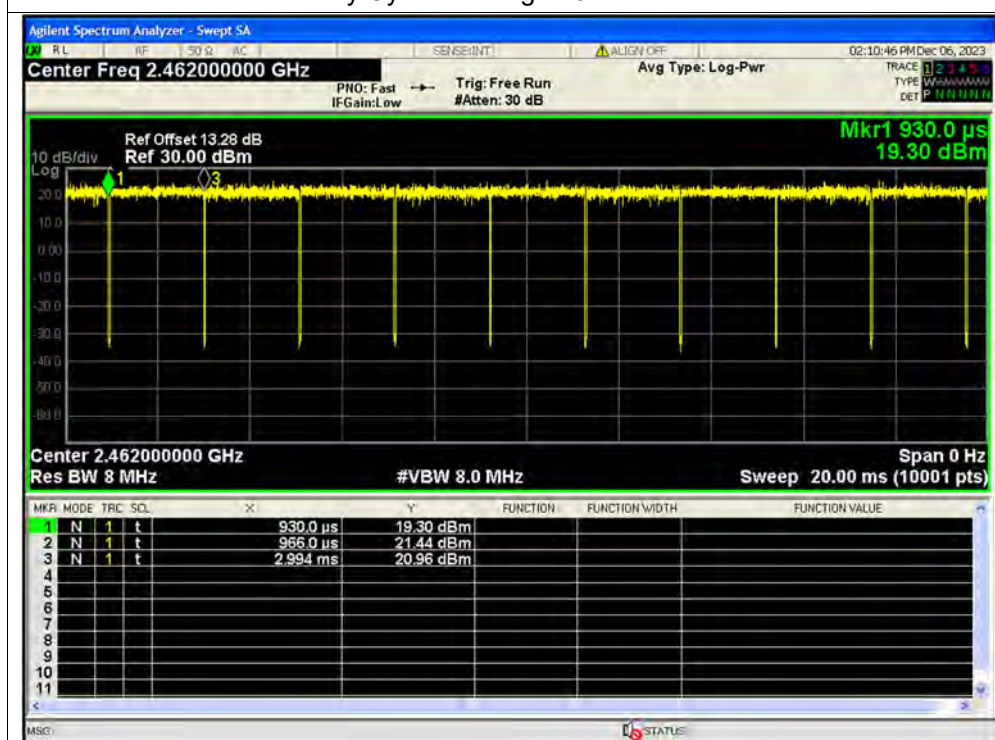


Duty Cycle NVNT n20 2412MHz Ant1

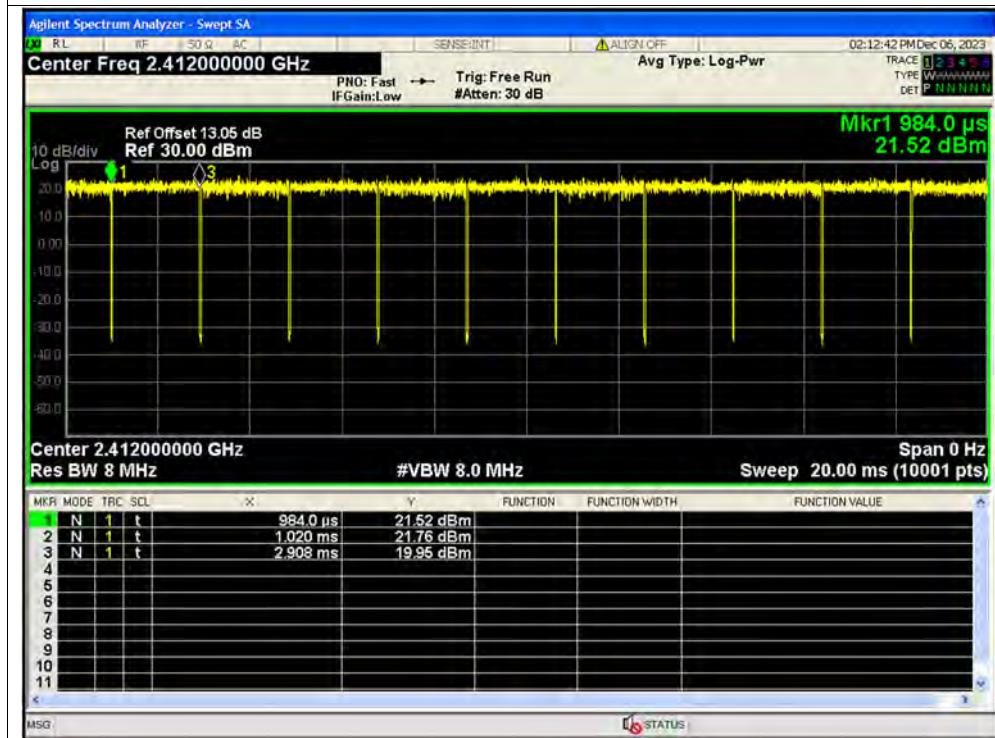


Duty Cycle NVNT n20 2437MHz Ant1

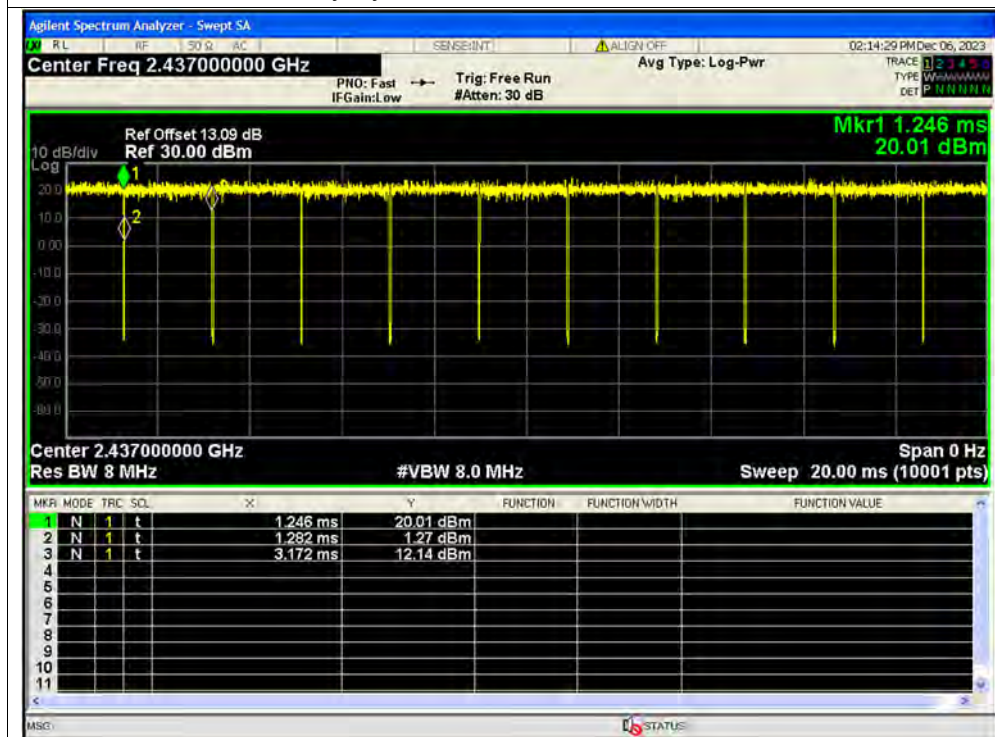

Duty Cycle NVNT n20 2462MHz Ant1

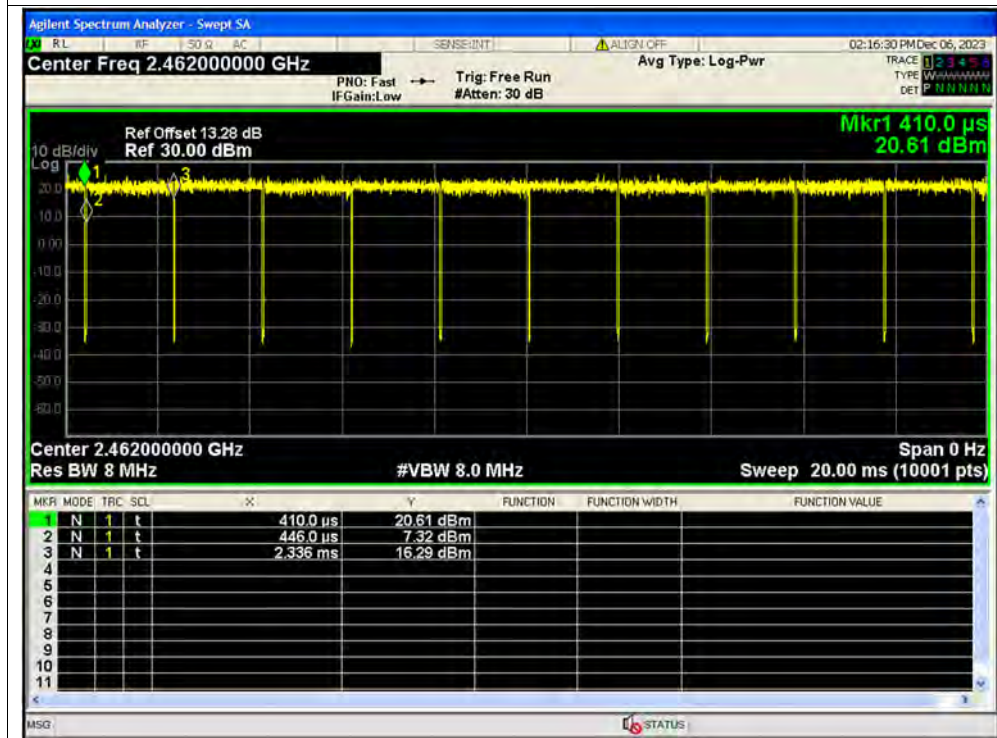


Duty Cycle NVNT n40 2422MHz Ant1

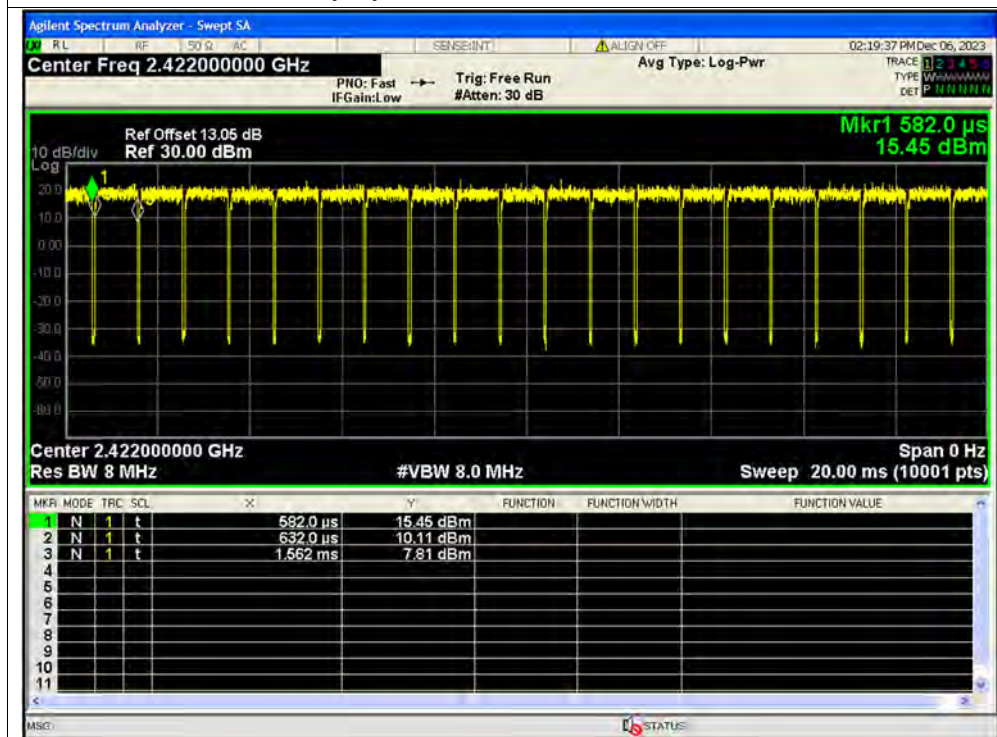




Duty Cycle NVNT n40 2437MHz Ant1

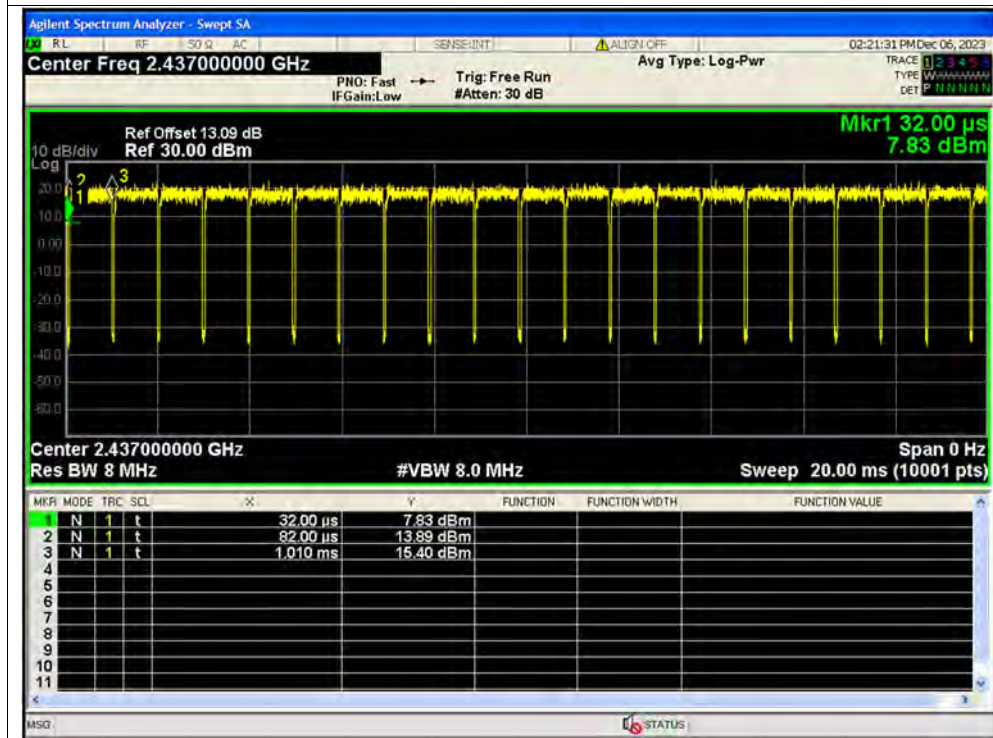

Duty Cycle NVNT n40 2452MHz Ant1

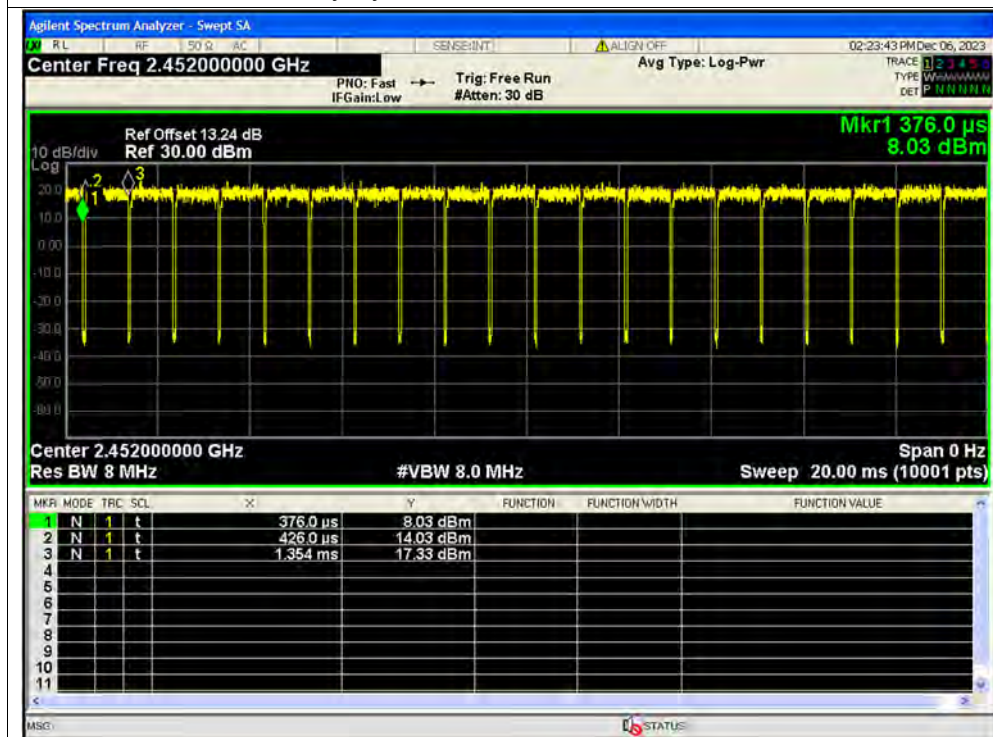


**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	22.9	0	22.9	0.19498	30	Pass
NVNT	b	2437	Ant1	22.37	0	22.37	0.17258	30	Pass
NVNT	b	2462	Ant1	23.02	0	23.02	0.20045	30	Pass
NVNT	g	2412	Ant1	25.69	0	25.69	0.37068	30	Pass
NVNT	g	2437	Ant1	25.02	0	25.02	0.31769	30	Pass
NVNT	g	2462	Ant1	25.86	0	25.86	0.38548	30	Pass
NVNT	n20	2412	Ant1	25.25	0	25.25	0.33497	30	Pass
NVNT	n20	2437	Ant1	25.07	0	25.07	0.32137	30	Pass
NVNT	n20	2462	Ant1	25.38	0	25.38	0.34514	30	Pass
NVNT	n40	2422	Ant1	26.3	0	26.3	0.42658	30	Pass
NVNT	n40	2437	Ant1	26.32	0	26.32	0.42855	30	Pass
NVNT	n40	2452	Ant1	26.66	0	26.66	0.46345	30	Pass



Test Graphs


Peak Power NVNT b 2412MHz Ant1

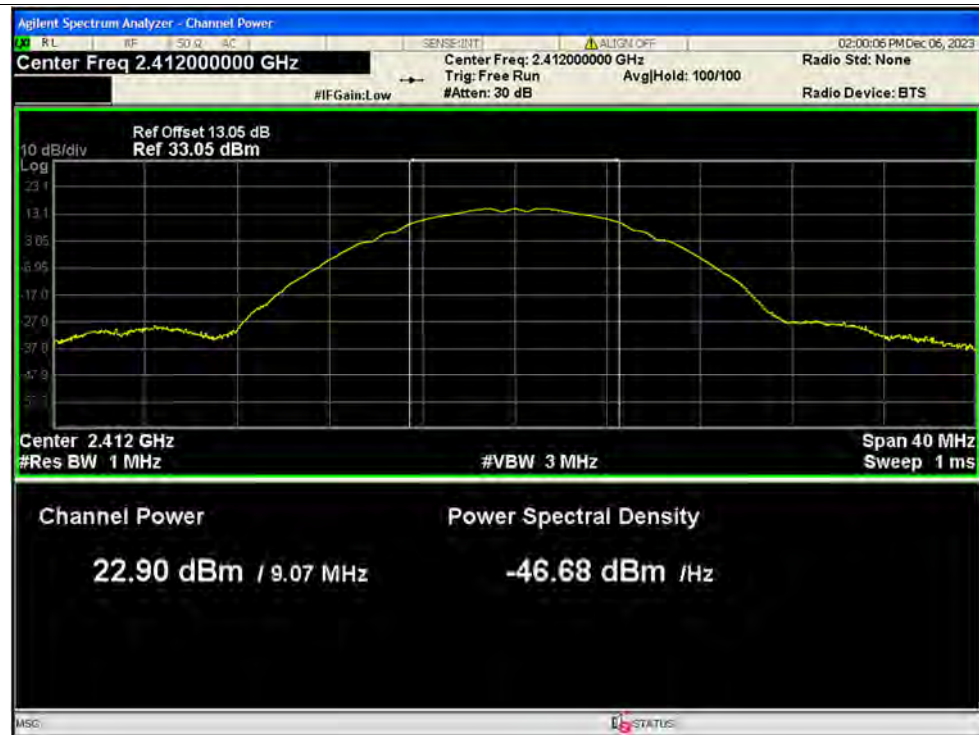


Peak Power NVNT b 2437MHz Ant1




Peak Power NVNT b 2462MHz Ant1

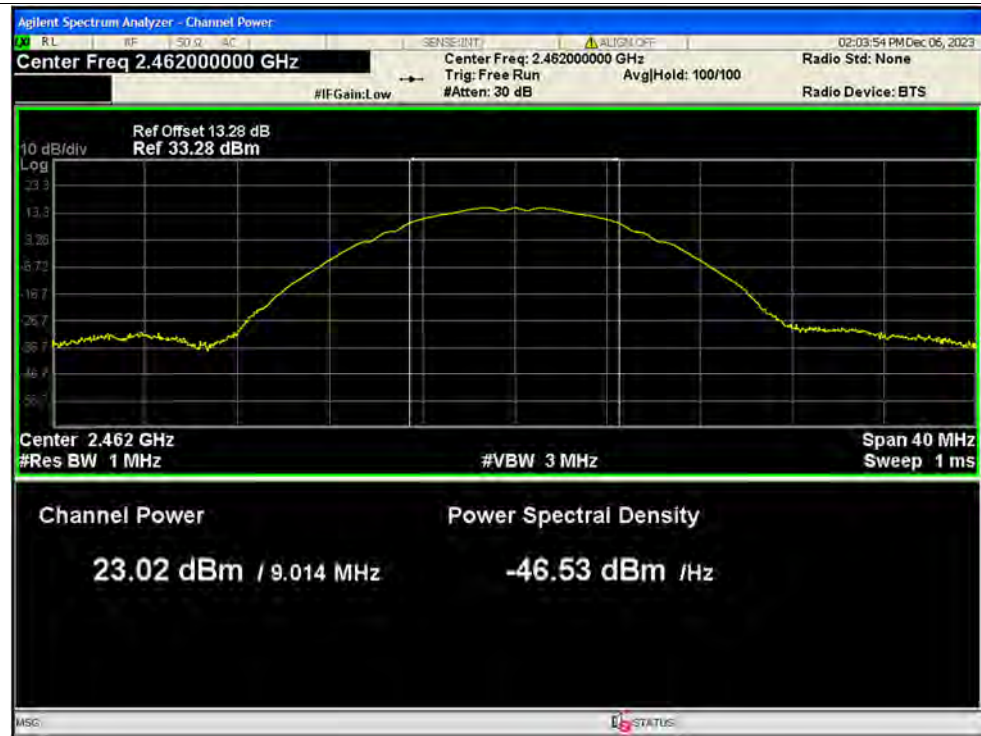


Peak Power NVNT g 2412MHz Ant1

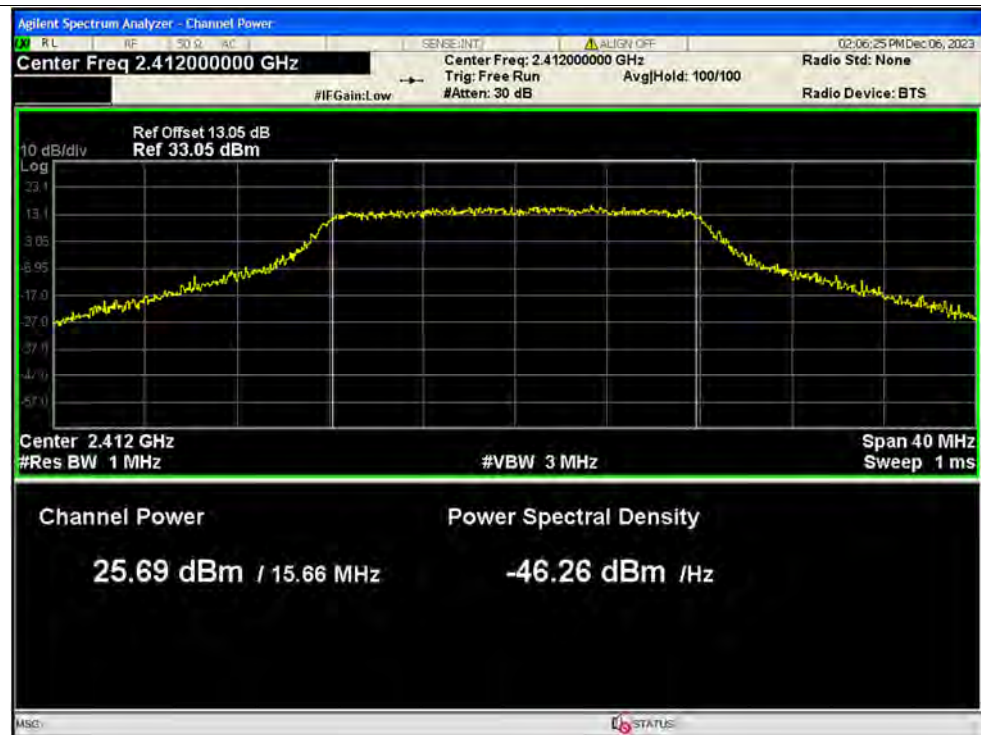

Peak Power NVNT g 2437MHz Ant1

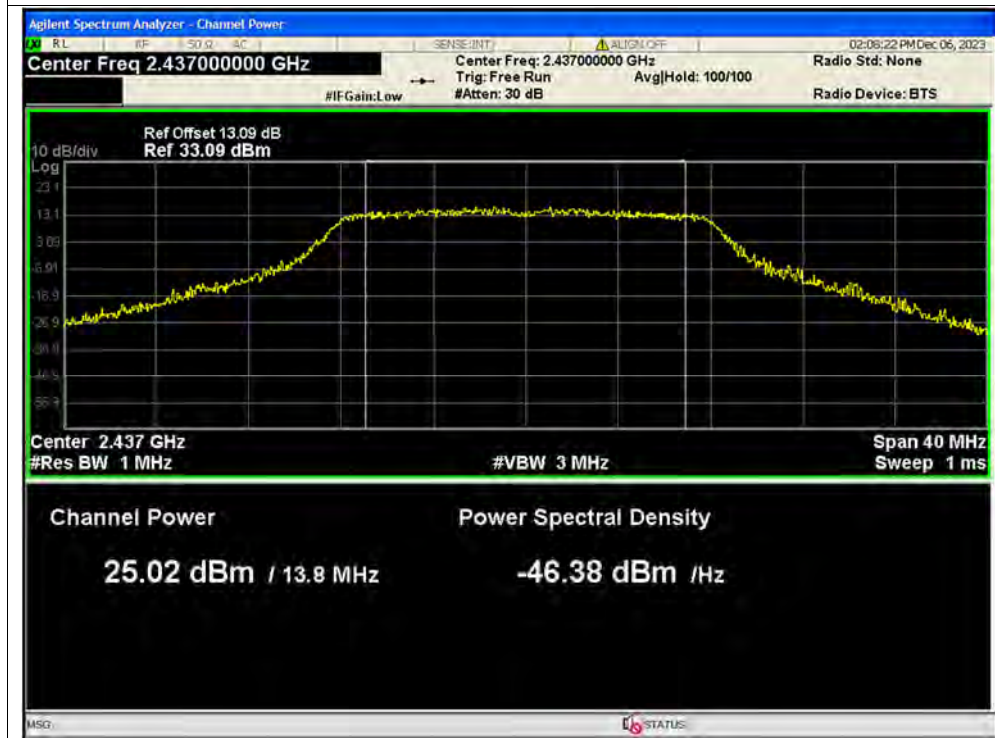


Peak Power NVNT g 2462MHz Ant1

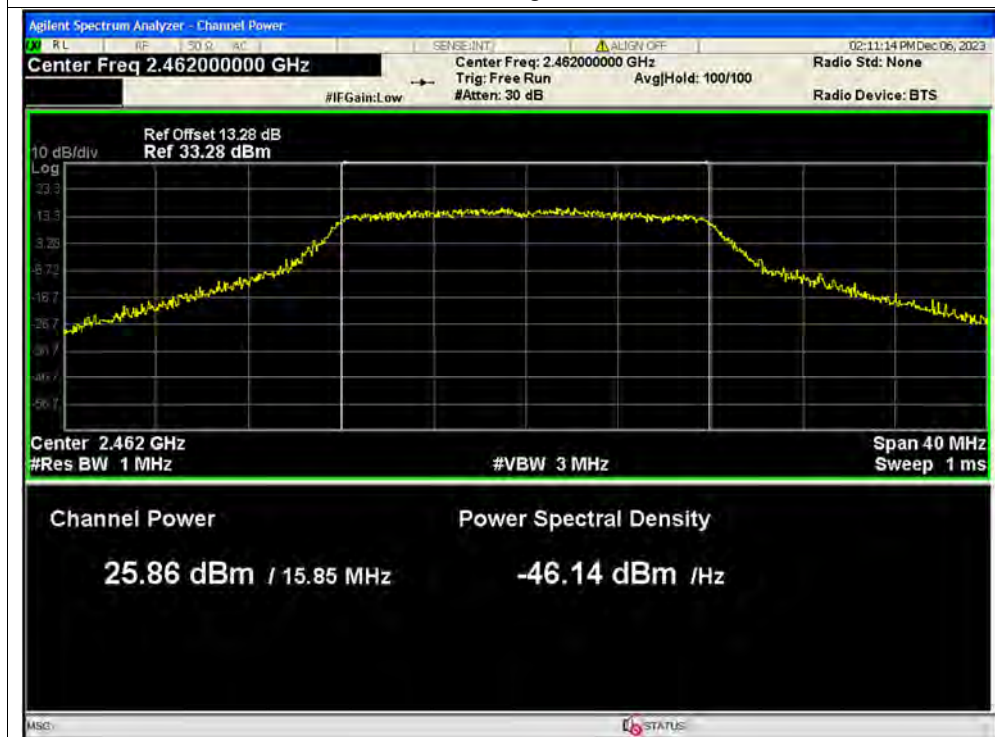





Peak Power NVNT n20 2412MHz Ant1

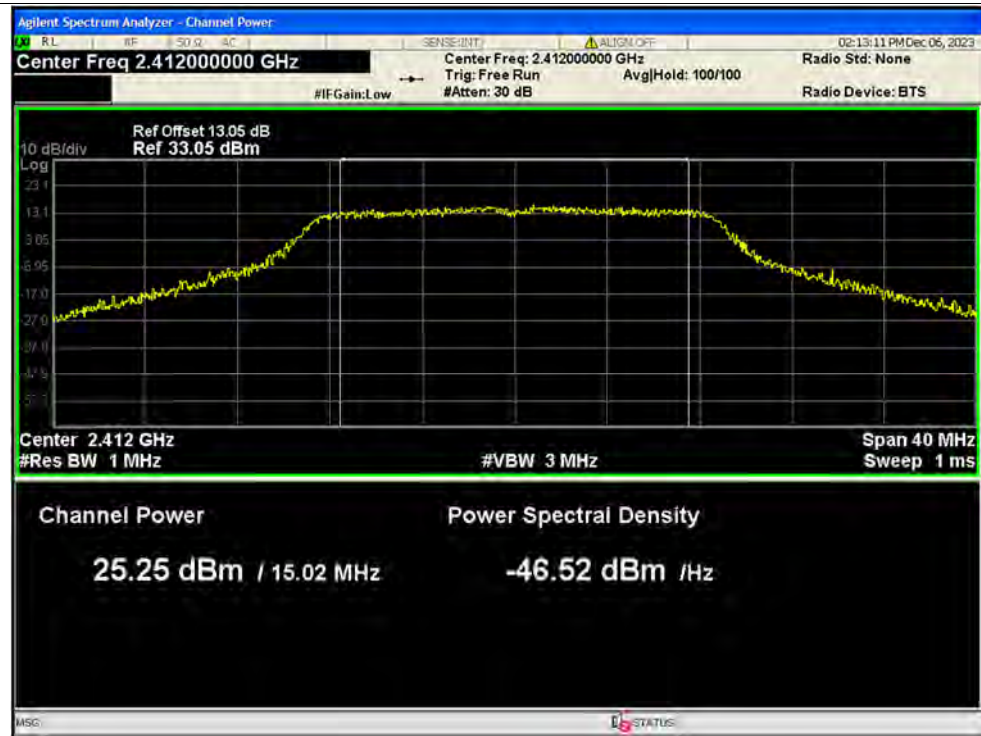


Peak Power NVNT n20 2437MHz Ant1

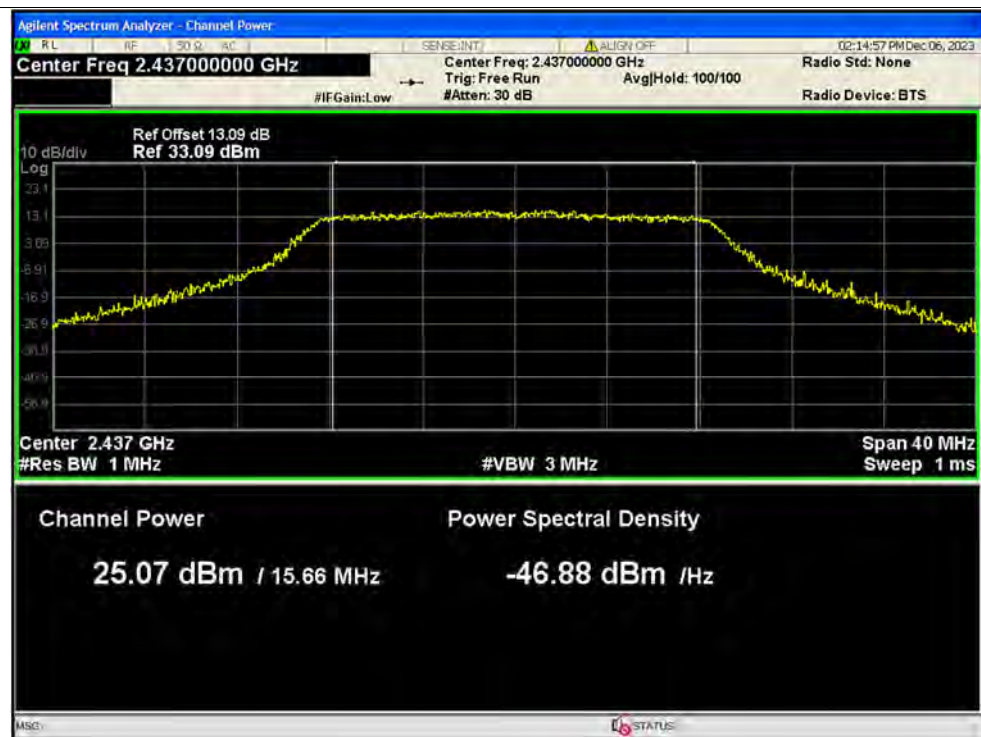


Peak Power NVNT n20 2462MHz Ant1

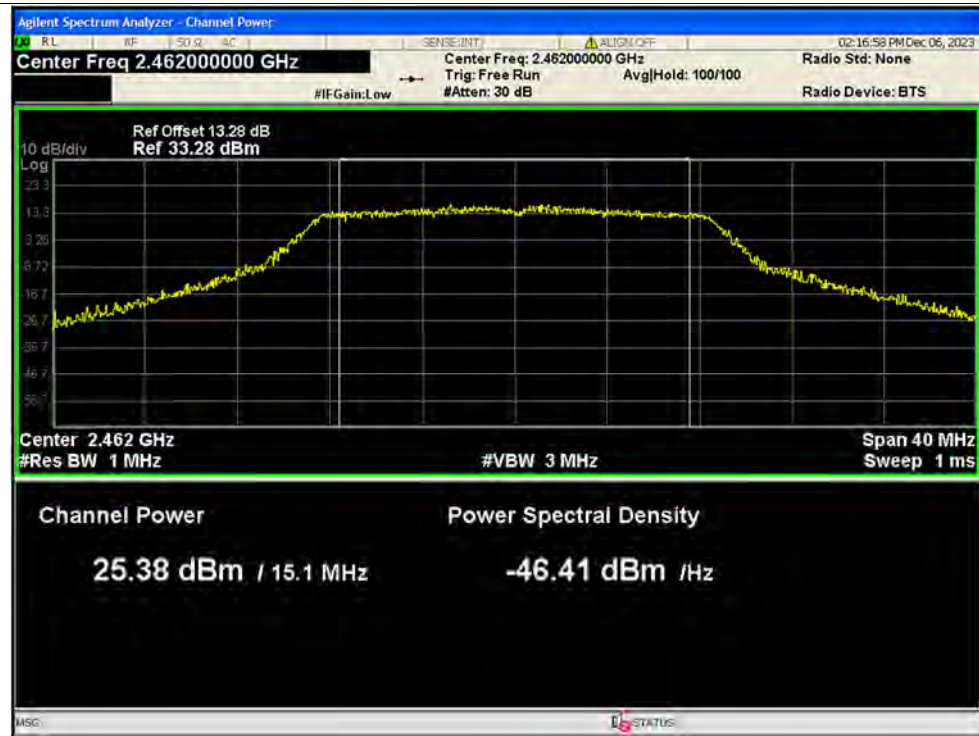


Peak Power NVNT n40 2422MHz Ant1

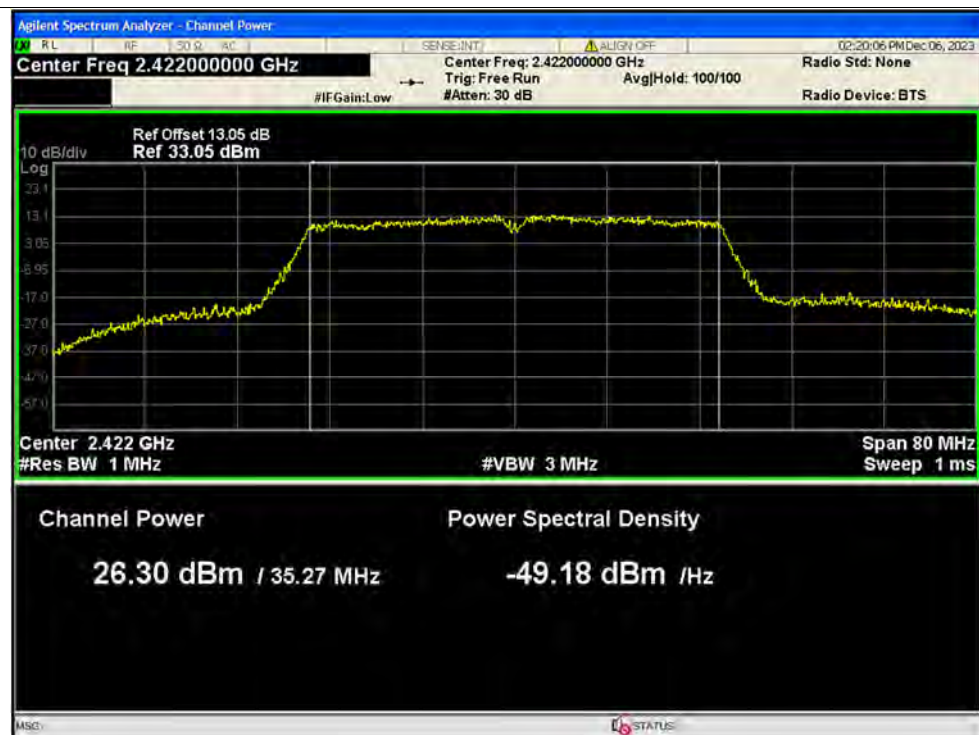

Peak Power NVNT n40 2437MHz Ant1

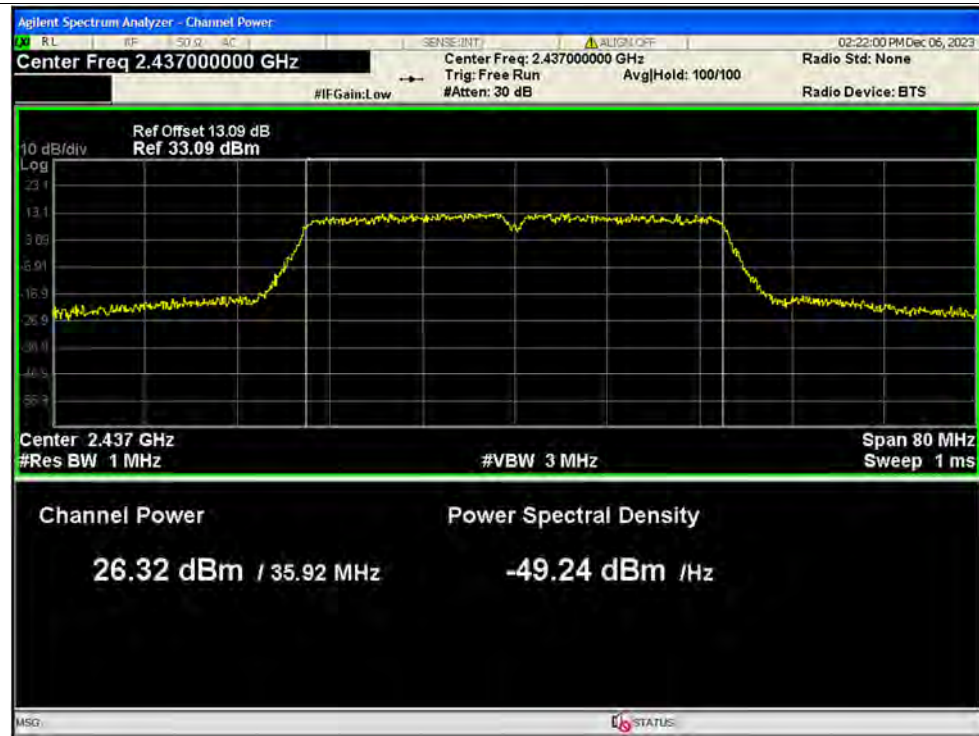

Peak Power NVNT n40 2452MHz Ant1

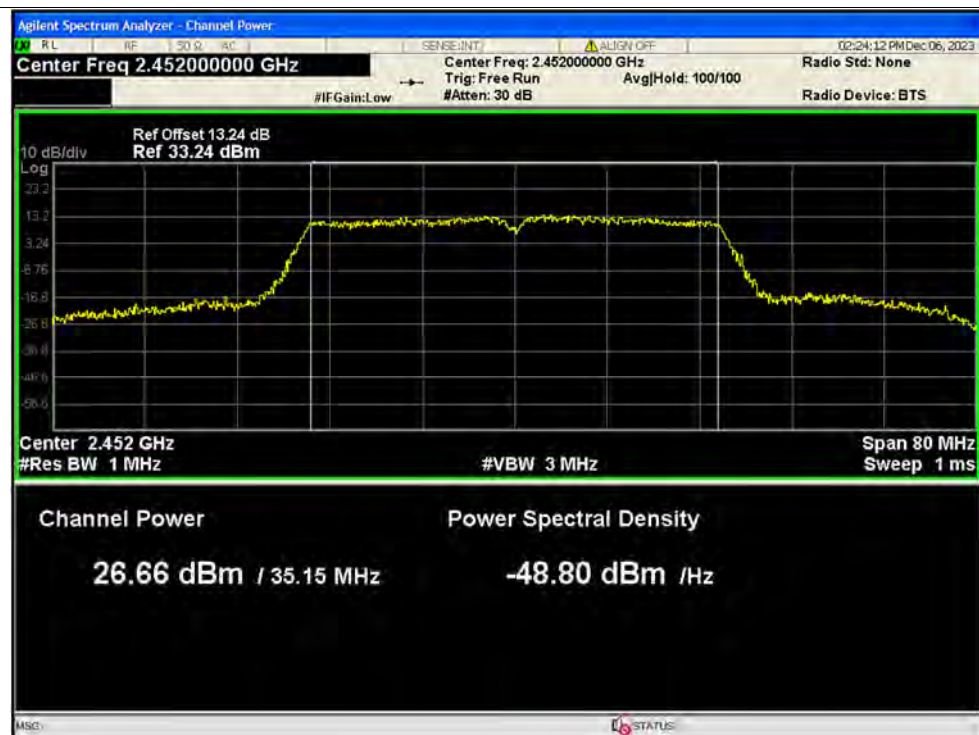


**A.3. Maximum Average Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	b	2412	Ant1	20.25	0.05	20.3	0.10715	30	Pass
NVNT	b	2437	Ant1	19.65	0.05	19.7	0.09333	30	Pass
NVNT	b	2462	Ant1	20.31	0.03	20.34	0.10814	30	Pass
NVNT	g	2412	Ant1	18.51	0.08	18.59	0.07228	30	Pass
NVNT	g	2437	Ant1	18.3	0.08	18.38	0.06887	30	Pass
NVNT	g	2462	Ant1	18.55	0.08	18.63	0.07295	30	Pass
NVNT	n20	2412	Ant1	18.42	0.08	18.5	0.07079	30	Pass
NVNT	n20	2437	Ant1	18.08	0.08	18.16	0.06546	30	Pass
NVNT	n20	2462	Ant1	18.48	0.08	18.56	0.07178	30	Pass
NVNT	n40	2422	Ant1	18.83	0.23	19.06	0.08054	30	Pass
NVNT	n40	2437	Ant1	18.79	0.23	19.02	0.0798	30	Pass
NVNT	n40	2452	Ant1	19.25	0.23	19.48	0.08872	30	Pass

Test Graphs


Average Power NVNT b 2412MHz Ant1

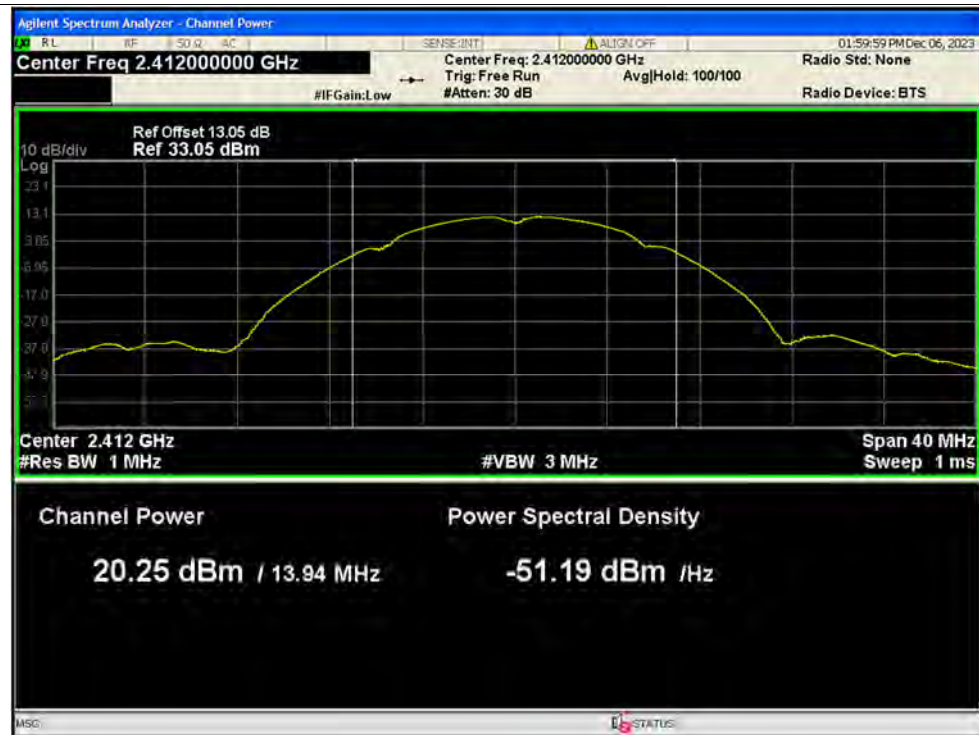

Average Power NVNT b 2437MHz Ant1

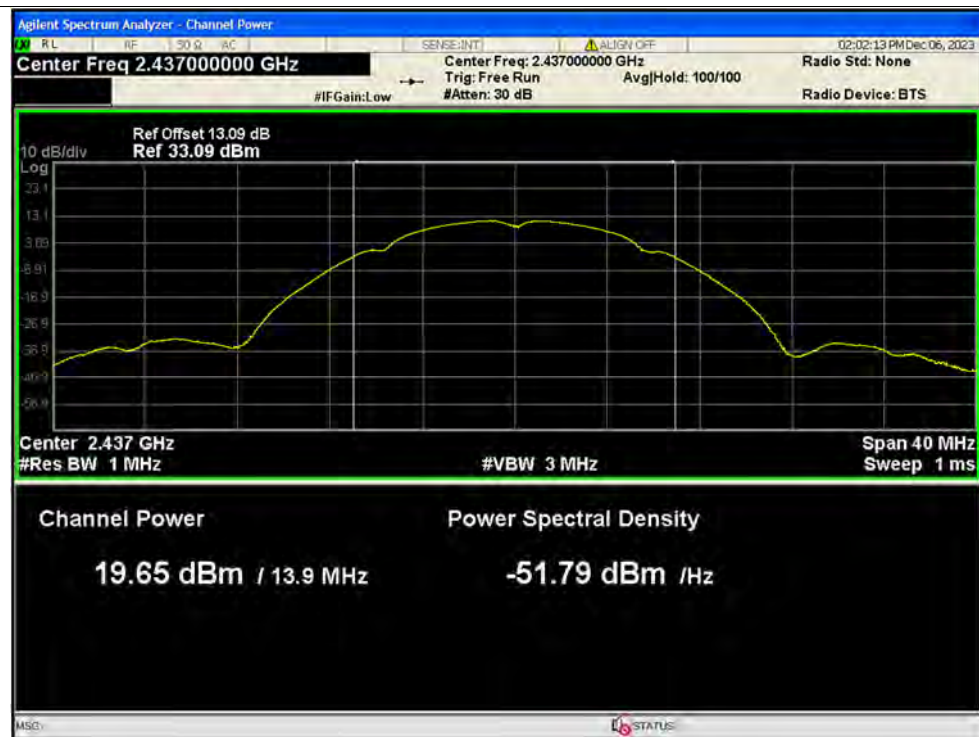


Average Power NVNT b 2462MHz Ant1

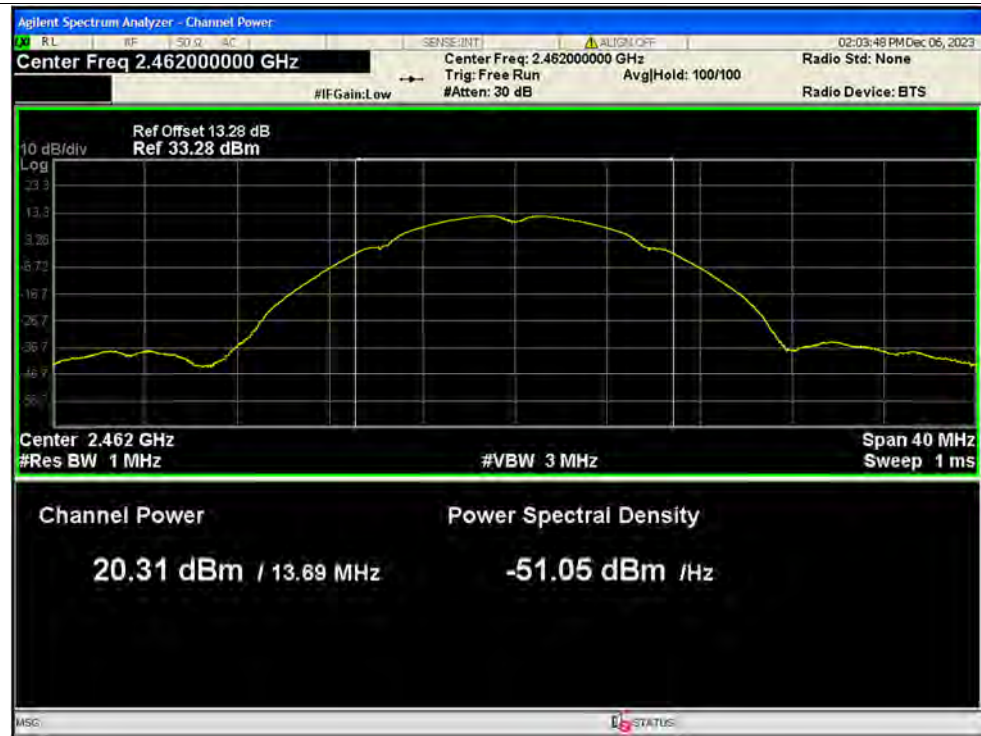


Average Power NVNT g 2412MHz Ant1




Average Power NVNT g 2437MHz Ant1

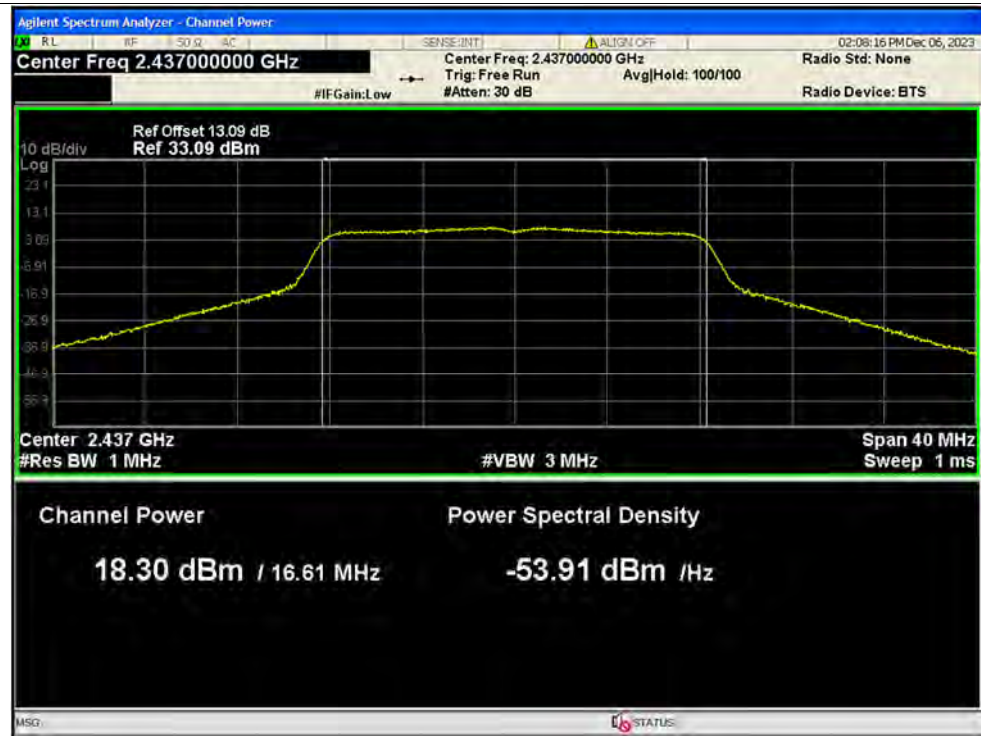


Average Power NVNT g 2462MHz Ant1

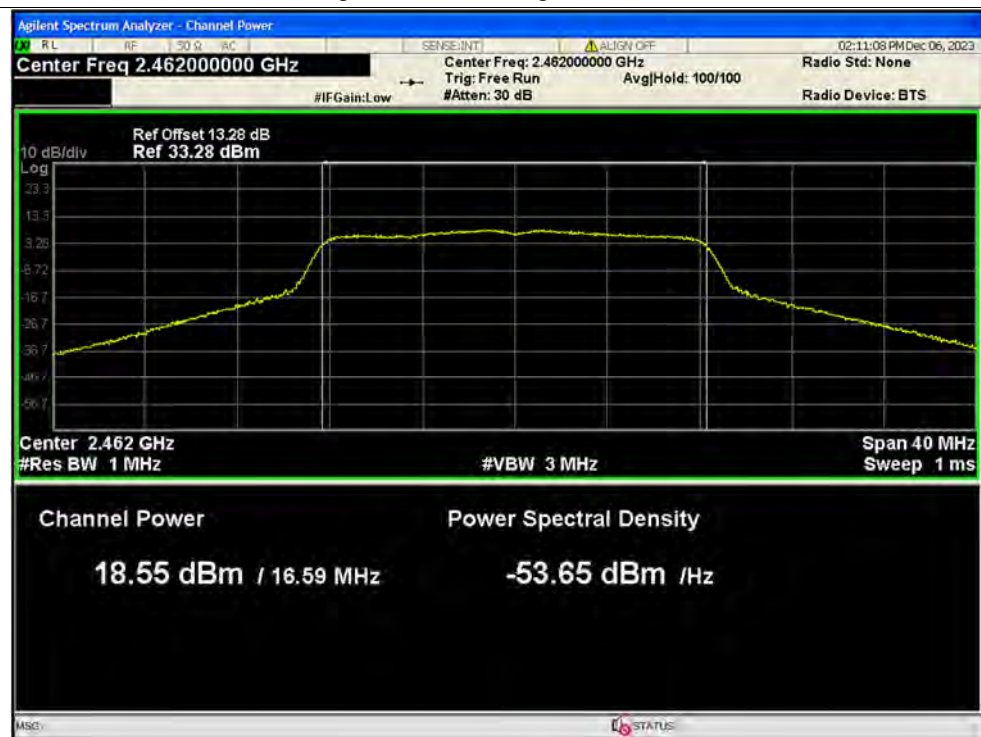


Average Power NVNT n20 2412MHz Ant1

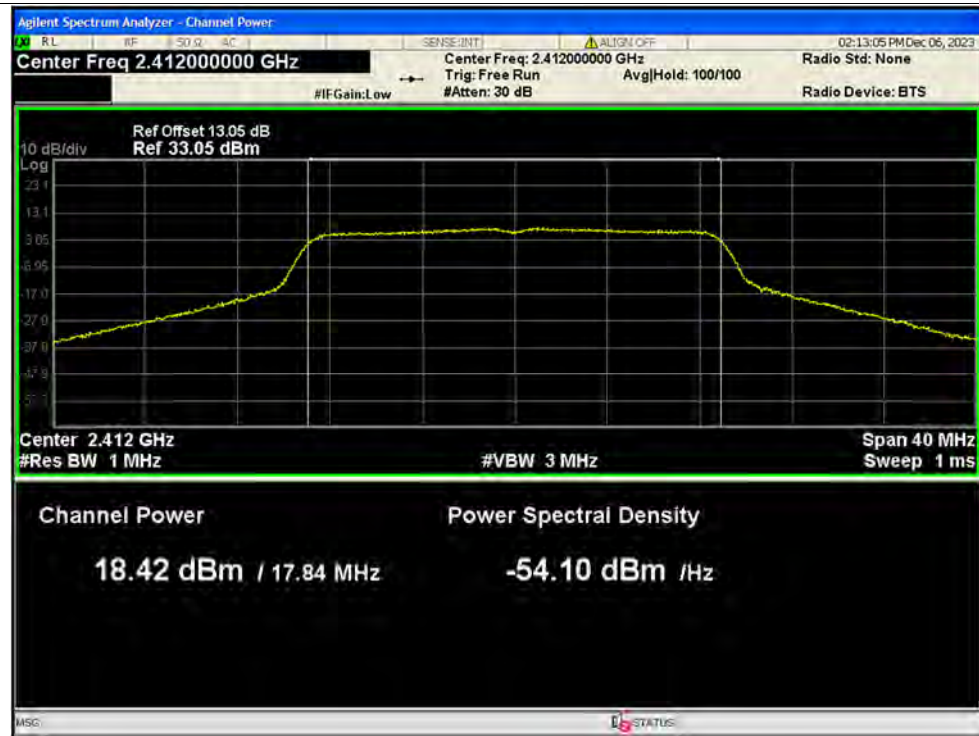

Average Power NVNT n20 2437MHz Ant1

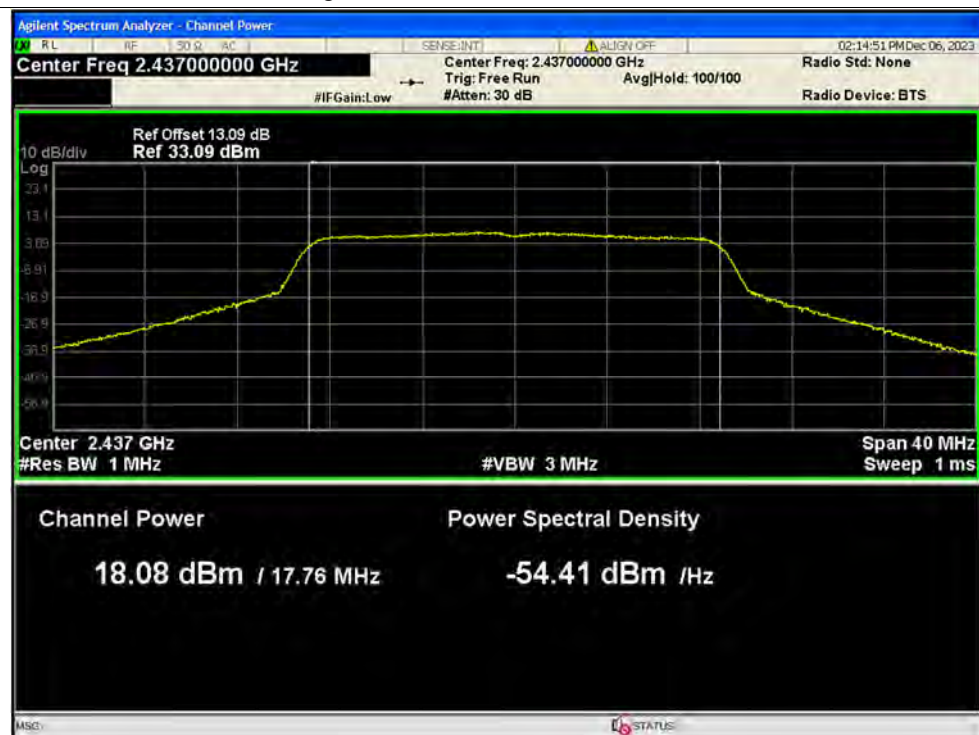


Average Power NVNT n20 2462MHz Ant1

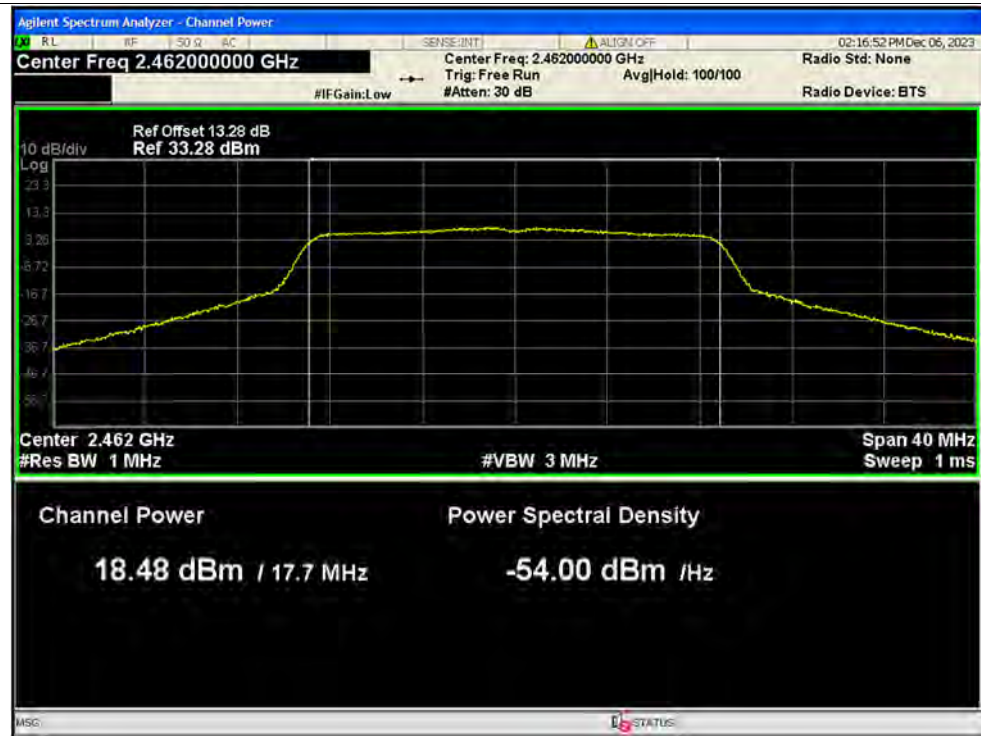


Average Power NVNT n40 2422MHz Ant1



Average Power NVNT n40 2437MHz Ant1

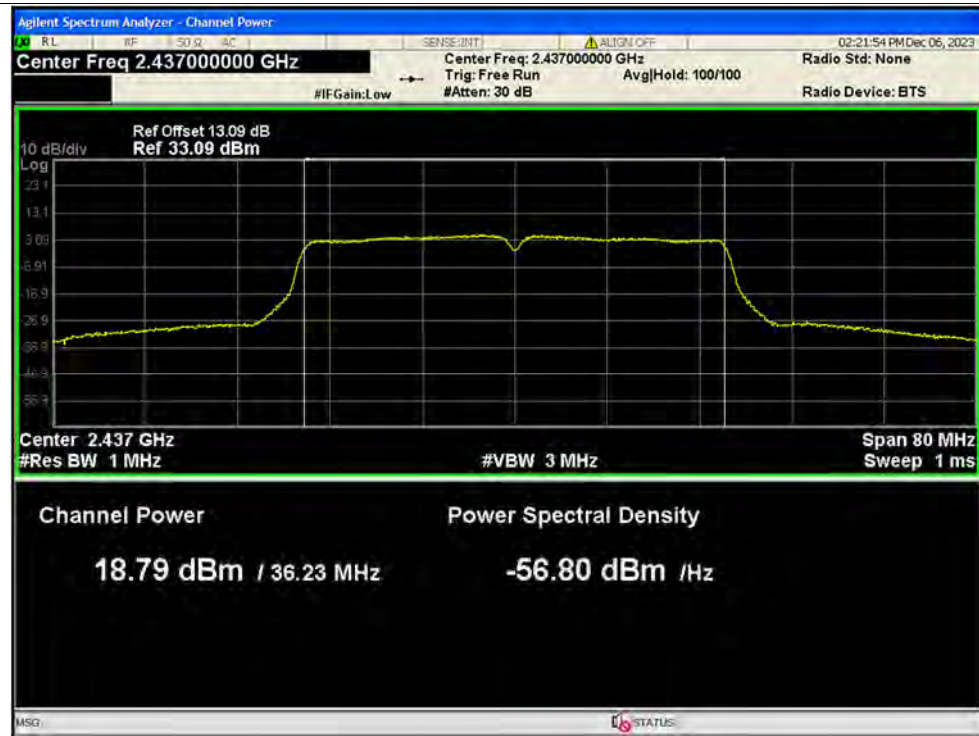

Average Power NVNT n40 2452MHz Ant1

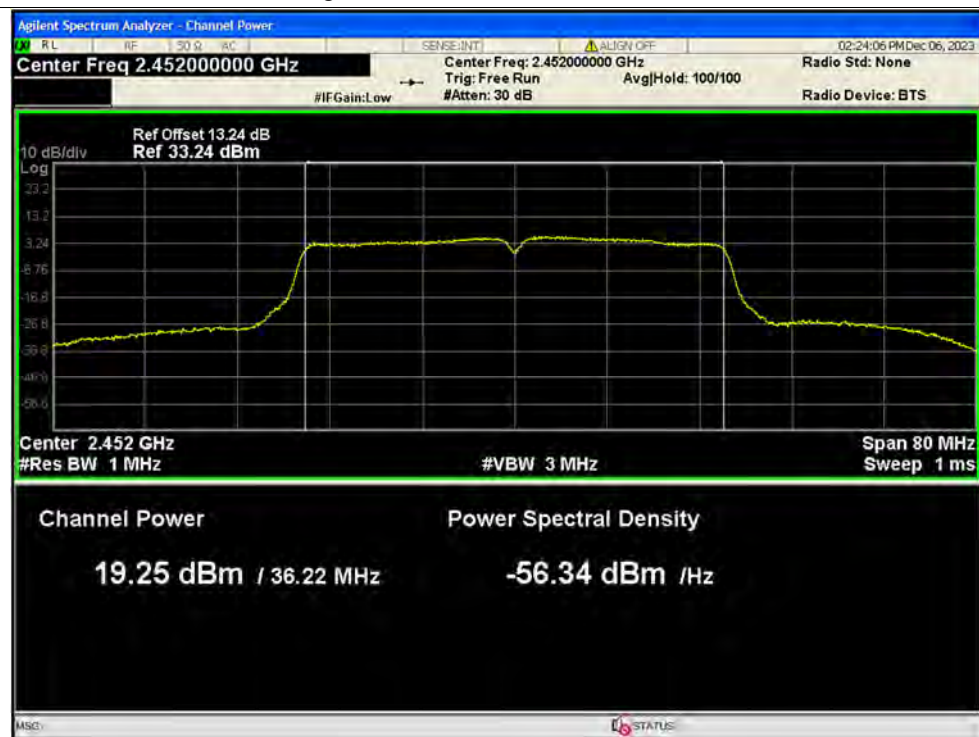

**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.07	0.5	Pass
NVNT	b	2437	Ant1	8.585	0.5	Pass
NVNT	b	2462	Ant1	9.014	0.5	Pass
NVNT	g	2412	Ant1	15.657	0.5	Pass
NVNT	g	2437	Ant1	13.803	0.5	Pass
NVNT	g	2462	Ant1	15.849	0.5	Pass
NVNT	n20	2412	Ant1	15.021	0.5	Pass
NVNT	n20	2437	Ant1	15.657	0.5	Pass
NVNT	n20	2462	Ant1	15.097	0.5	Pass
NVNT	n40	2422	Ant1	35.268	0.5	Pass
NVNT	n40	2437	Ant1	35.916	0.5	Pass
NVNT	n40	2452	Ant1	35.146	0.5	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1




-6dB Bandwidth NVNT b 2437MHz Ant1




-6dB Bandwidth NVNT b 2462MHz Ant1



-6dB Bandwidth NVNT g 2412MHz Ant1

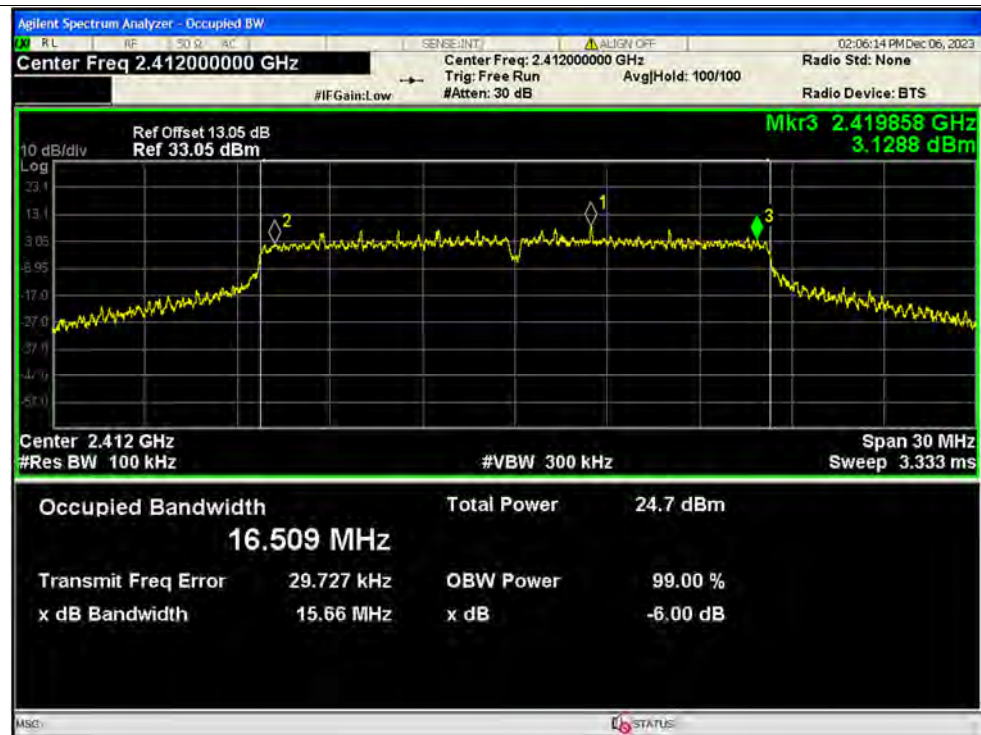


-6dB Bandwidth NVNT g 2437MHz Ant1

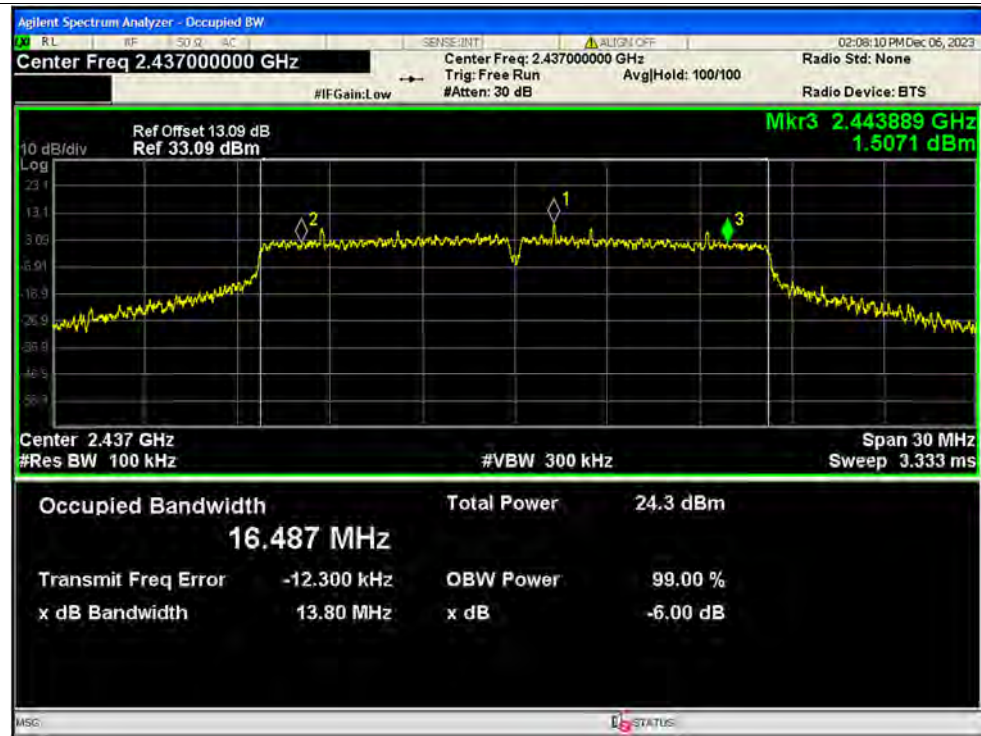


-6dB Bandwidth NVNT g 2462MHz Ant1




-6dB Bandwidth NVNT n20 2412MHz Ant1

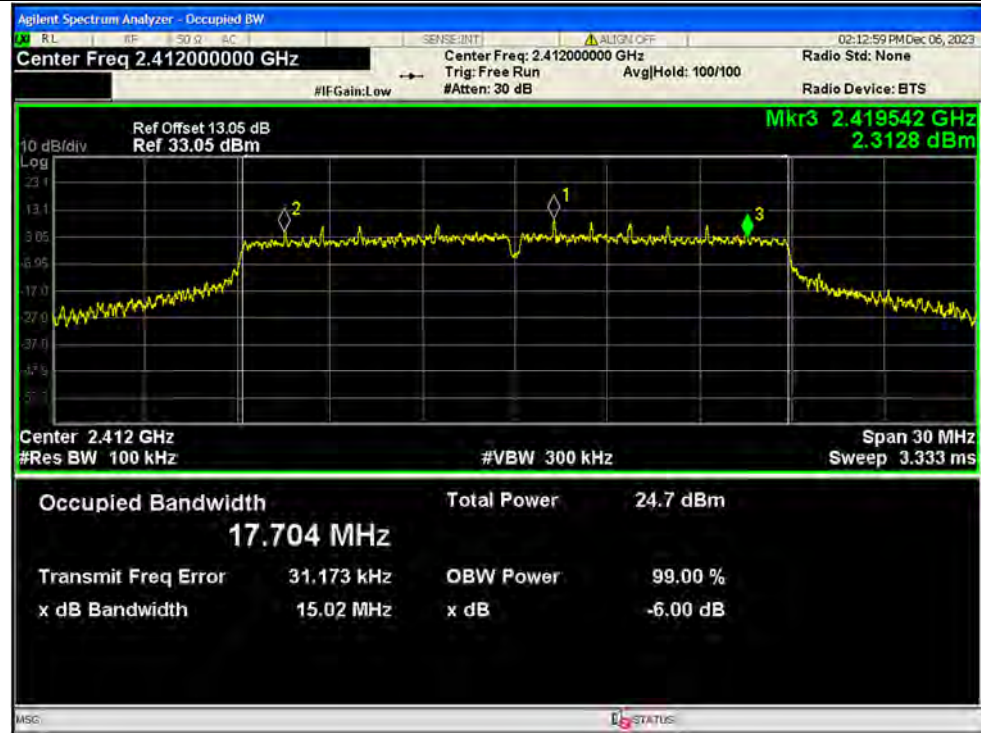


-6dB Bandwidth NVNT n20 2437MHz Ant1

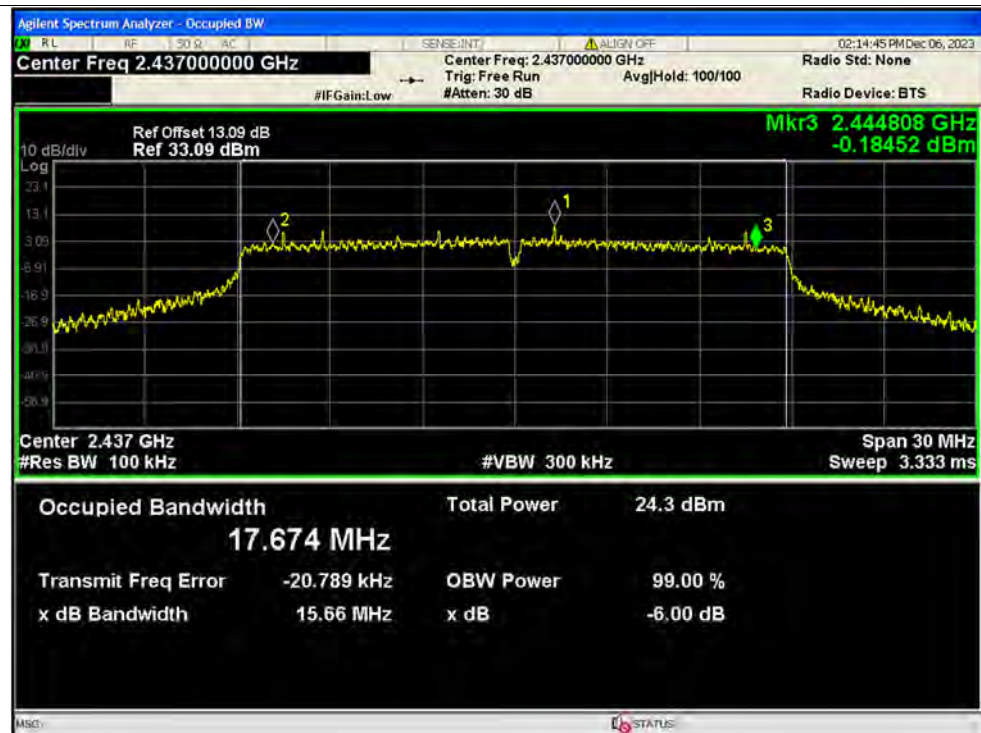


-6dB Bandwidth NVNT n20 2462MHz Ant1

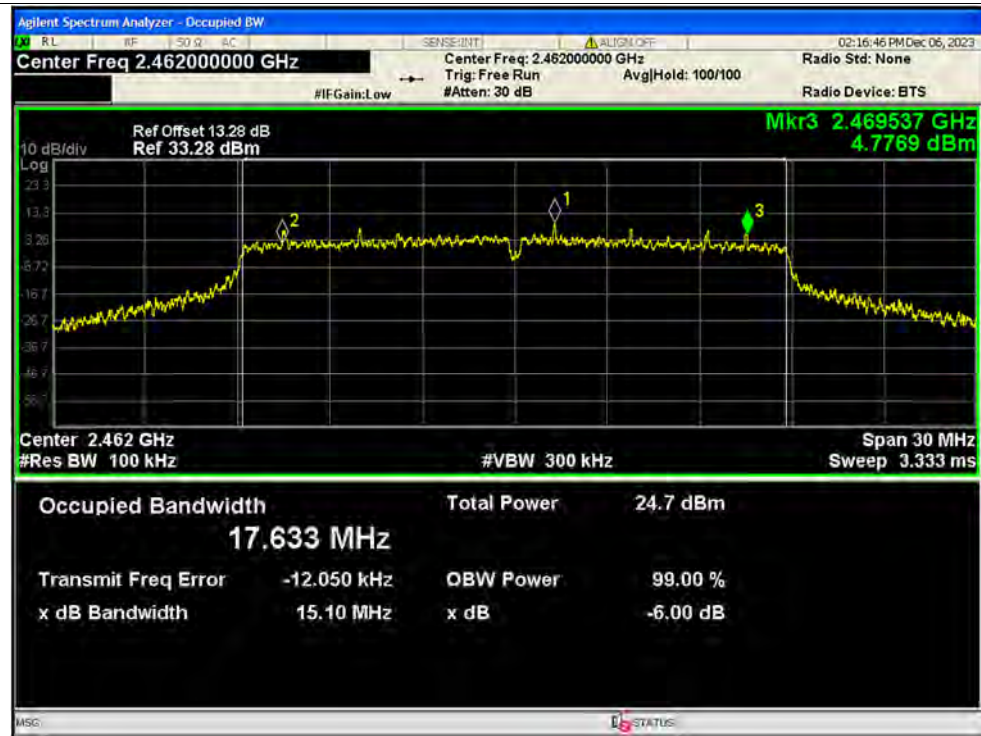


-6dB Bandwidth NVNT n40 2422MHz Ant1

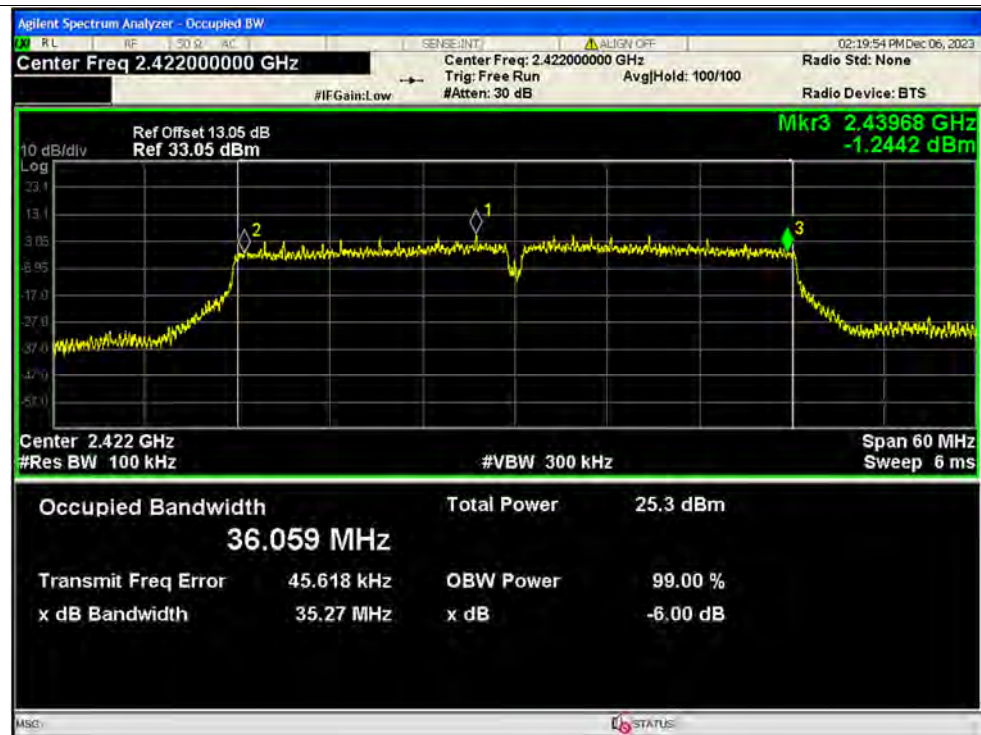

-6dB Bandwidth NVNT n40 2437MHz Ant1

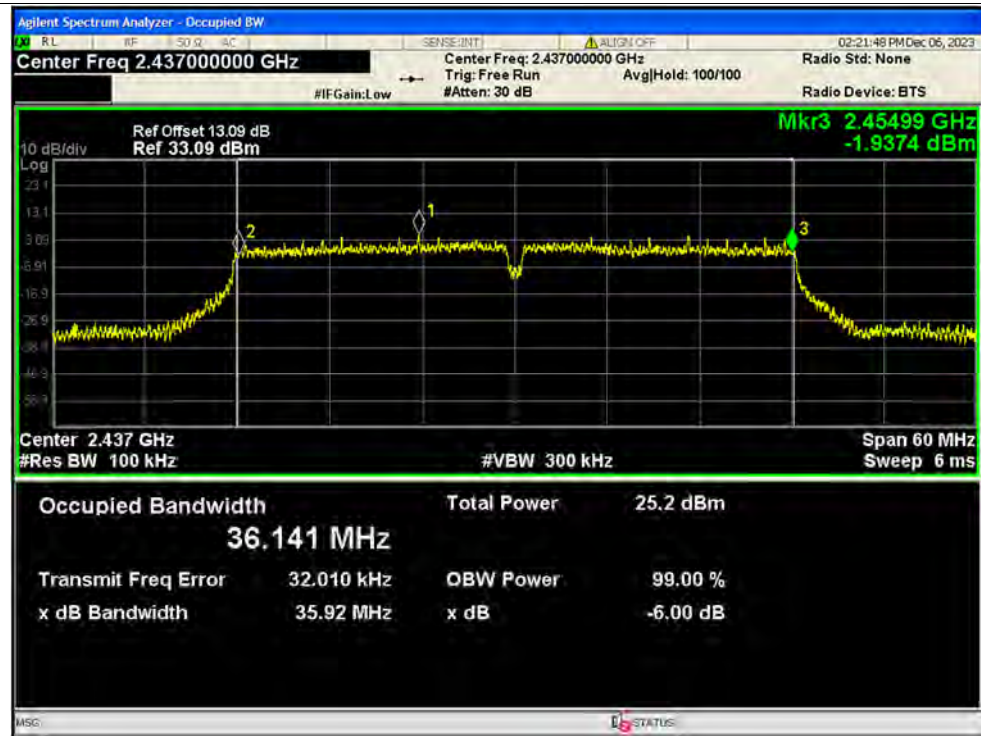

-6dB Bandwidth NVNT n40 2452MHz Ant1

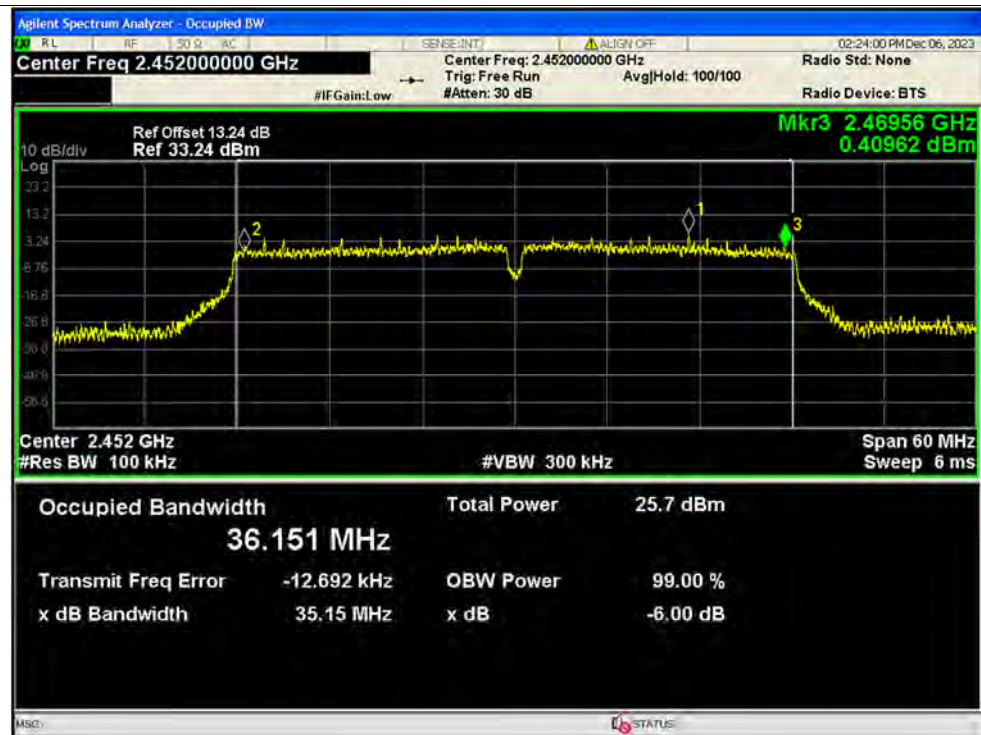

**A.5. Conducted Spurious Emissions**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-40.83	-20	Pass
NVNT	b	2437	Ant1	-39.99	-20	Pass
NVNT	b	2462	Ant1	-41.56	-20	Pass
NVNT	g	2412	Ant1	-38.4	-20	Pass
NVNT	g	2437	Ant1	-37.75	-20	Pass
NVNT	g	2462	Ant1	-36.93	-20	Pass
NVNT	n20	2412	Ant1	-37.73	-20	Pass
NVNT	n20	2437	Ant1	-35.8	-20	Pass
NVNT	n20	2462	Ant1	-37.1	-20	Pass
NVNT	n40	2422	Ant1	-36.11	-20	Pass
NVNT	n40	2437	Ant1	-35.28	-20	Pass
NVNT	n40	2452	Ant1	-35.04	-20	Pass

Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref




Tx. Spurious NVNT b 2412MHz Ant1 Emission

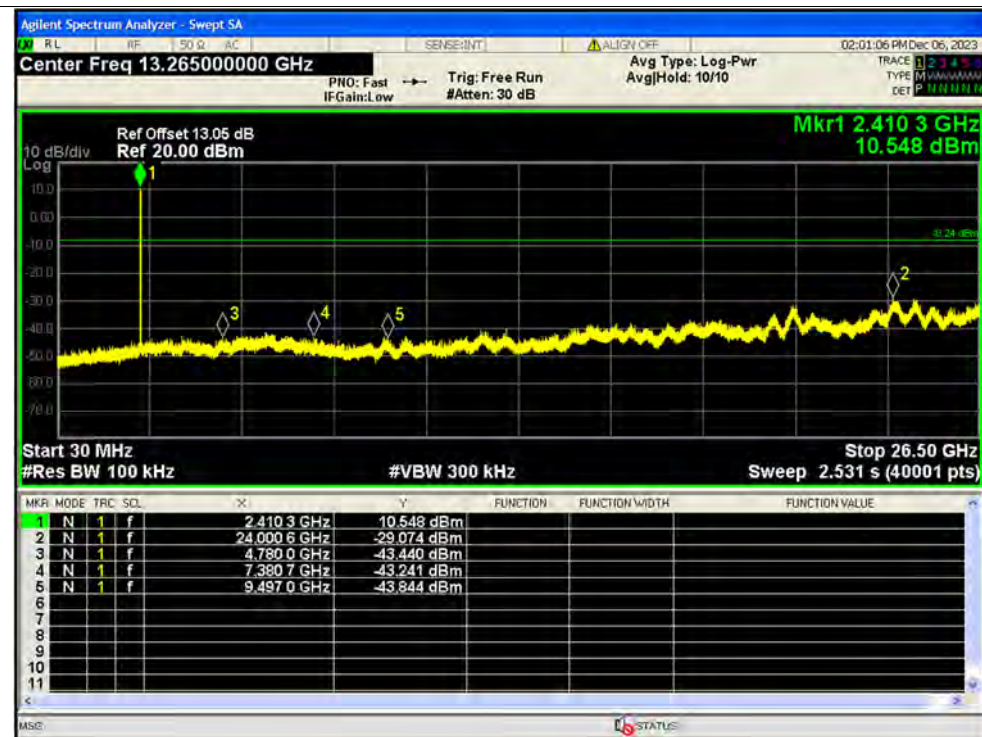

Tx. Spurious NVNT b 2437MHz Ant1 Ref




Tx. Spurious NVNT b 2437MHz Ant1 Emission

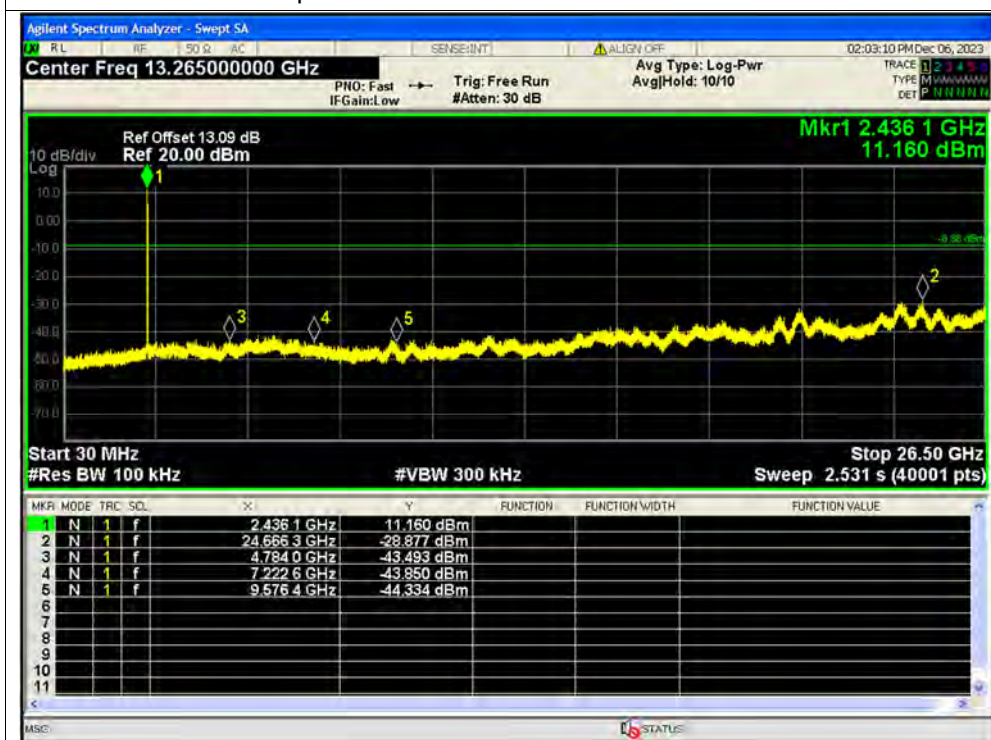


Tx. Spurious NVNT b 2462MHz Ant1 Ref




Tx. Spurious NVNT b 2462MHz Ant1 Emission

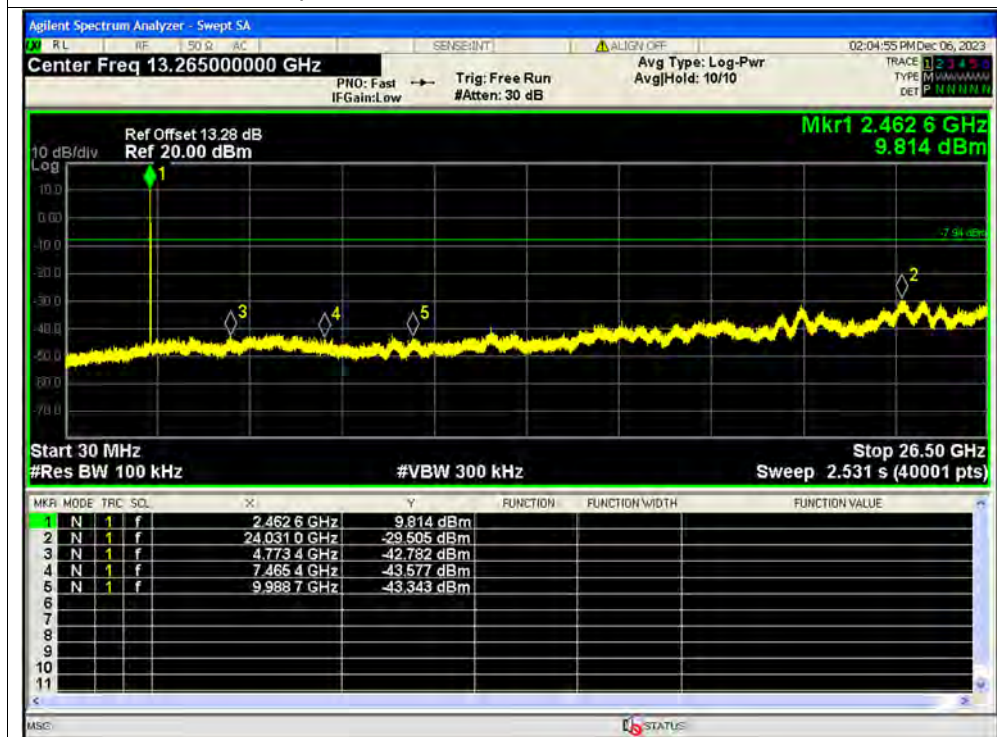

Tx. Spurious NVNT g 2412MHz Ant1 Ref

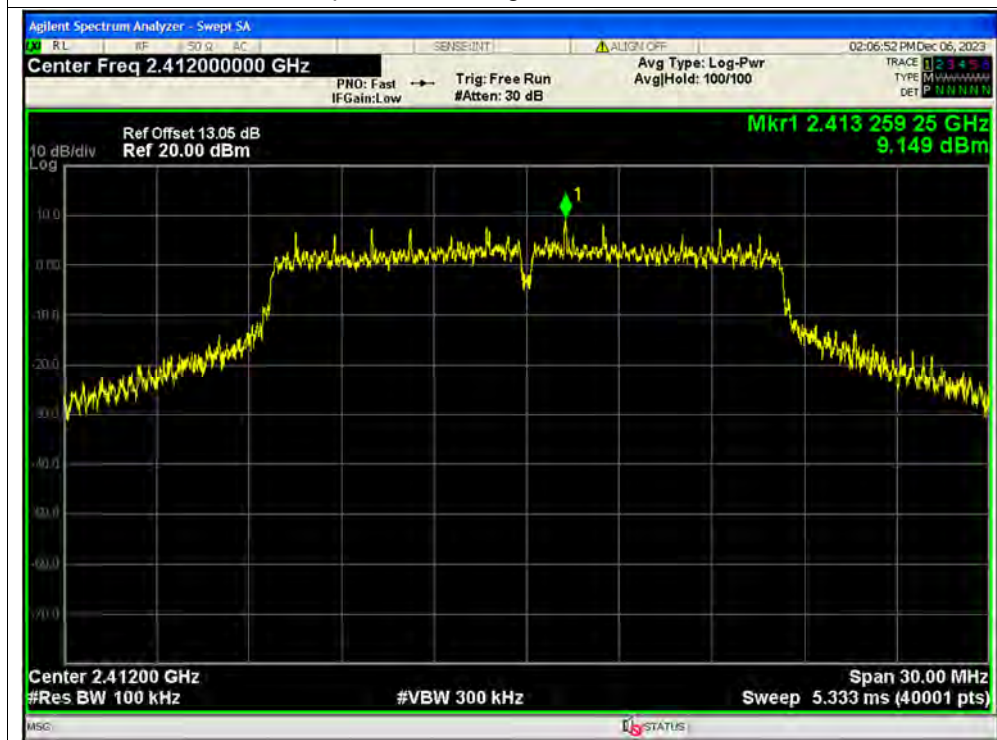


Tx. Spurious NVNT g 2412MHz Ant1 Emission

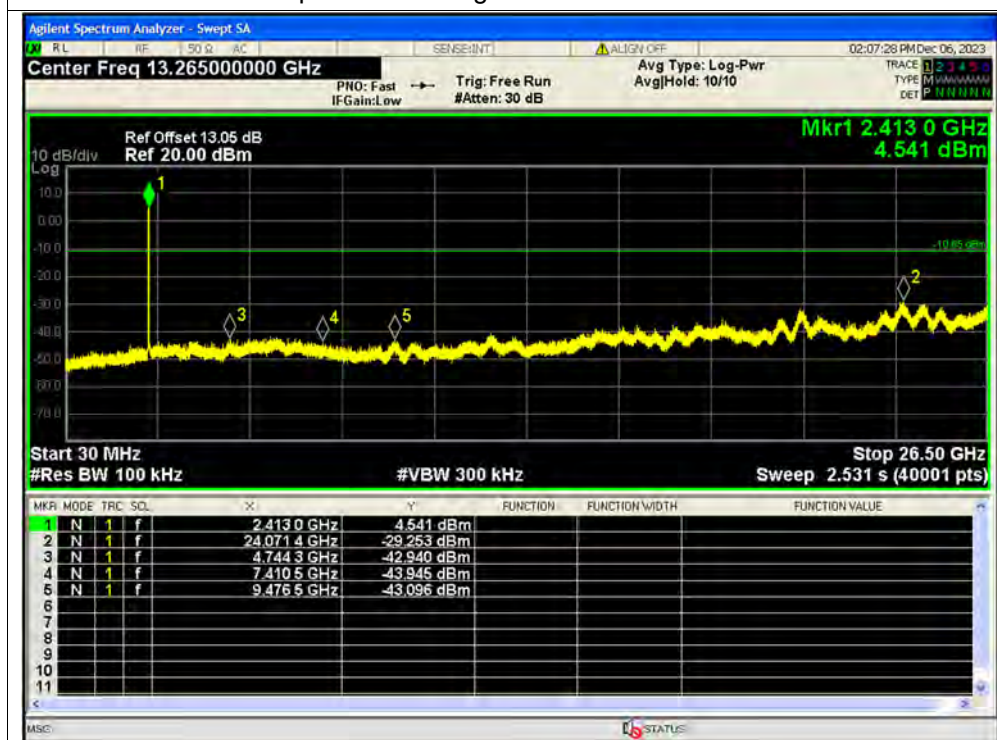

Tx. Spurious NVNT g 2437MHz Ant1 Ref




Tx. Spurious NVNT g 2437MHz Ant1 Emission

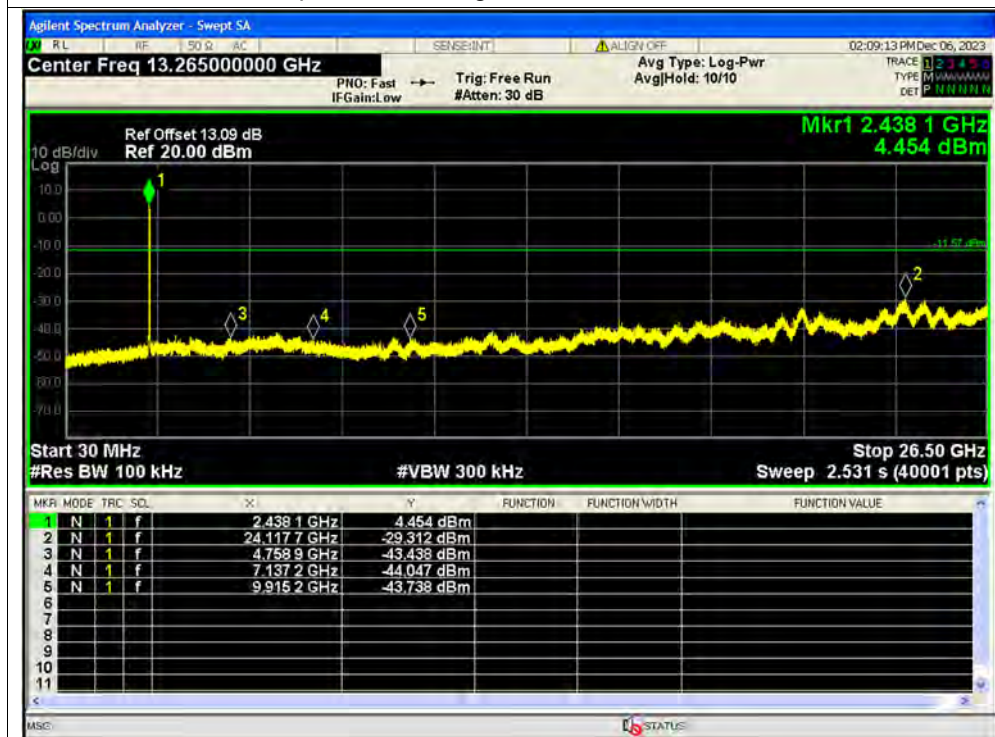


Tx. Spurious NVNT g 2462MHz Ant1 Ref




Tx. Spurious NVNT g 2462MHz Ant1 Emission

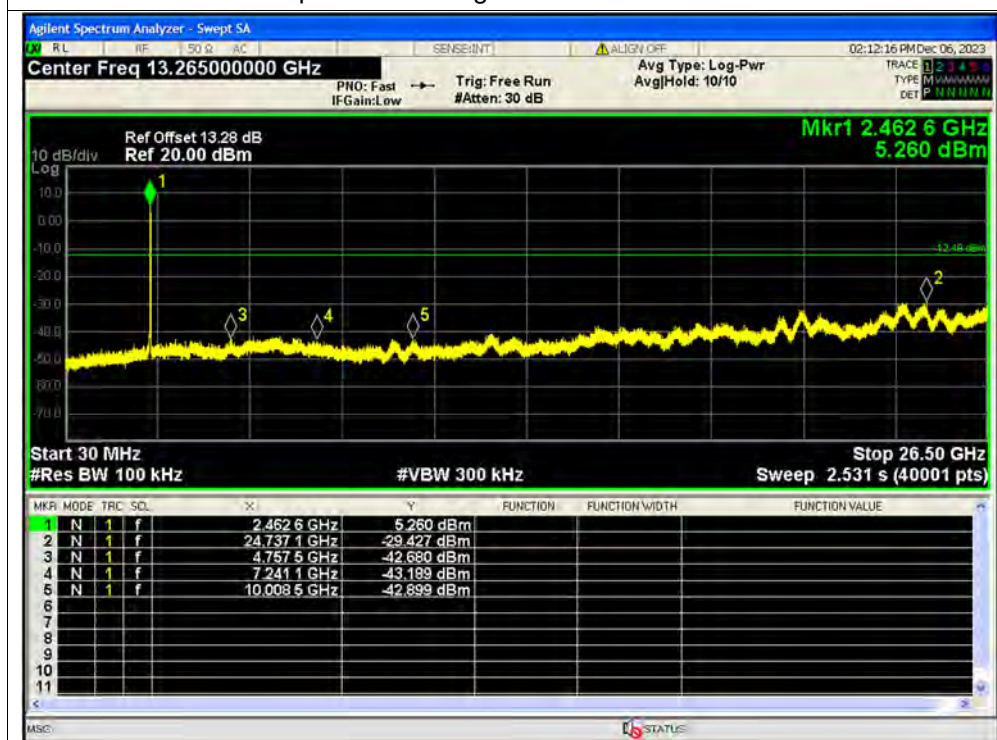


Tx. Spurious NVNT n20 2412MHz Ant1 Ref

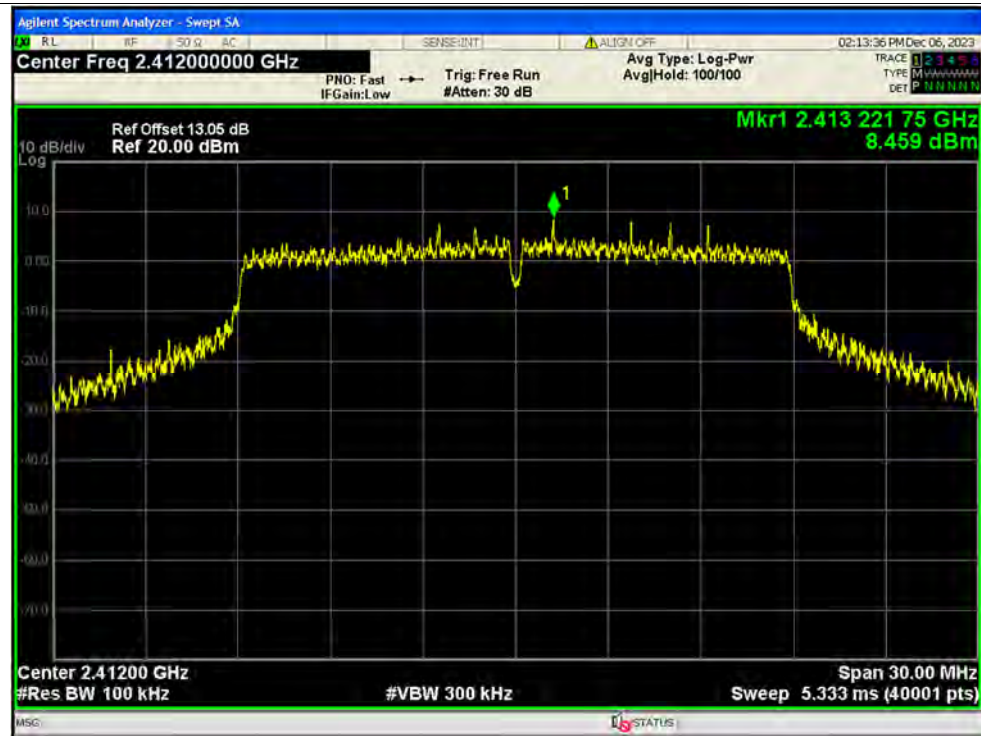


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

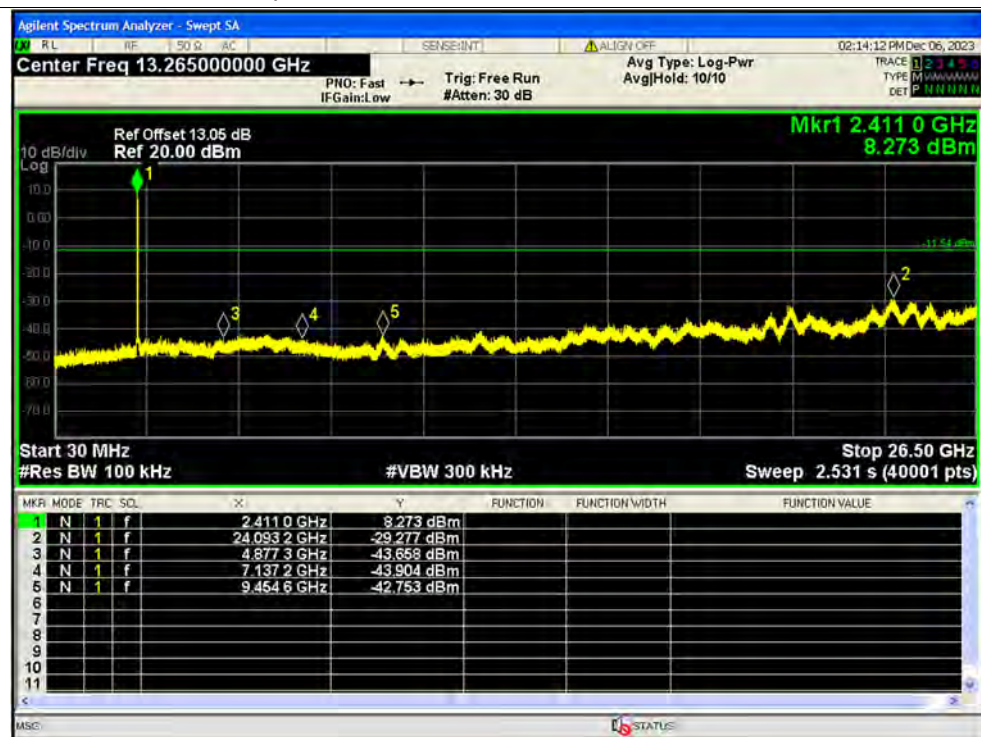


Tx. Spurious NVNT n20 2437MHz Ant1 Ref

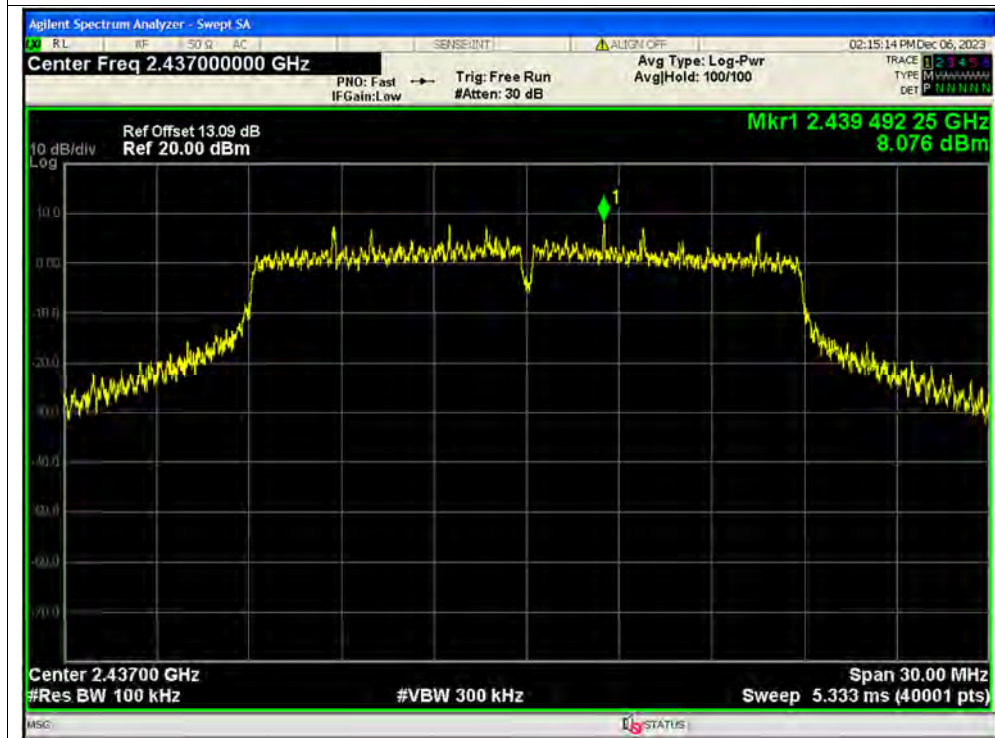


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

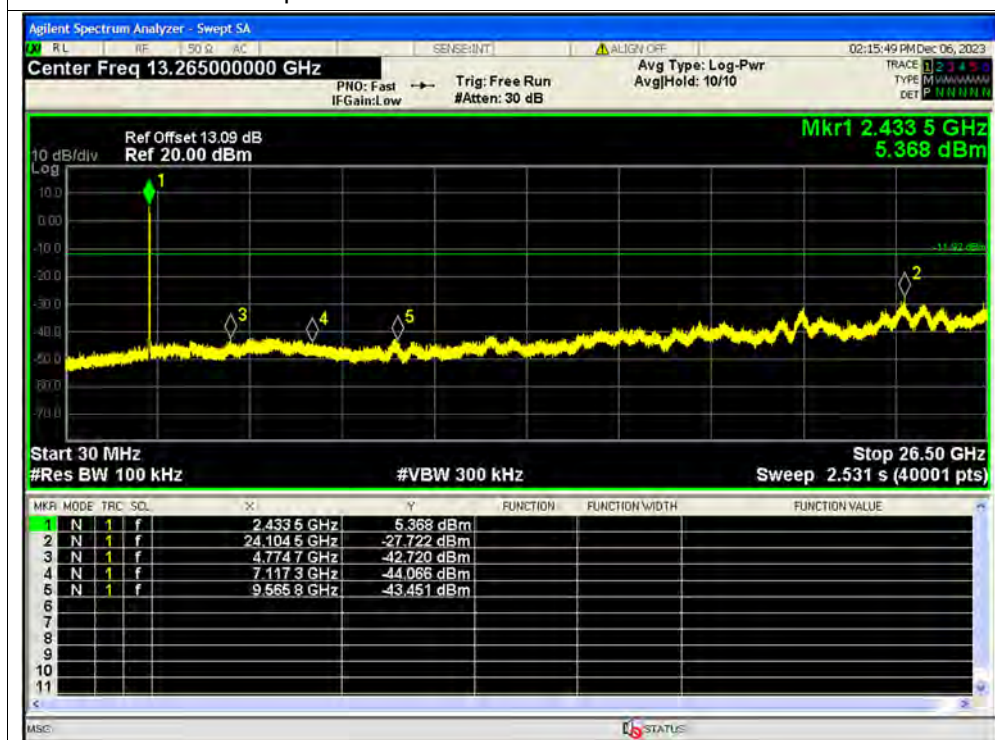


Tx. Spurious NVNT n20 2462MHz Ant1 Ref

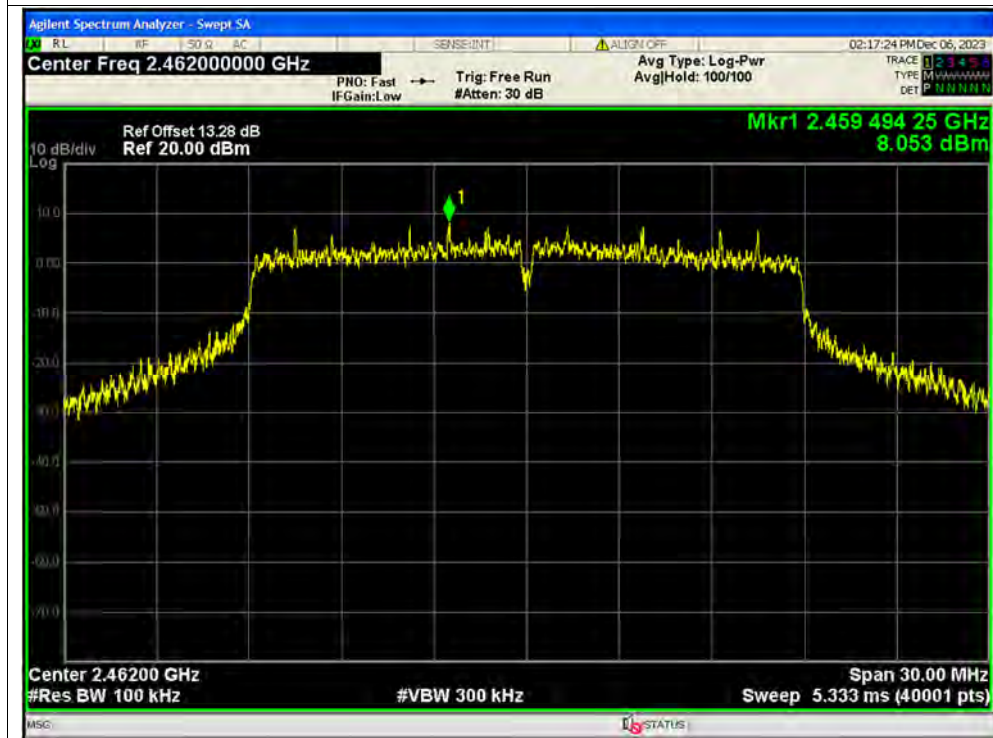


Tx. Spurious NVNT n20 2462MHz Ant1 Emission

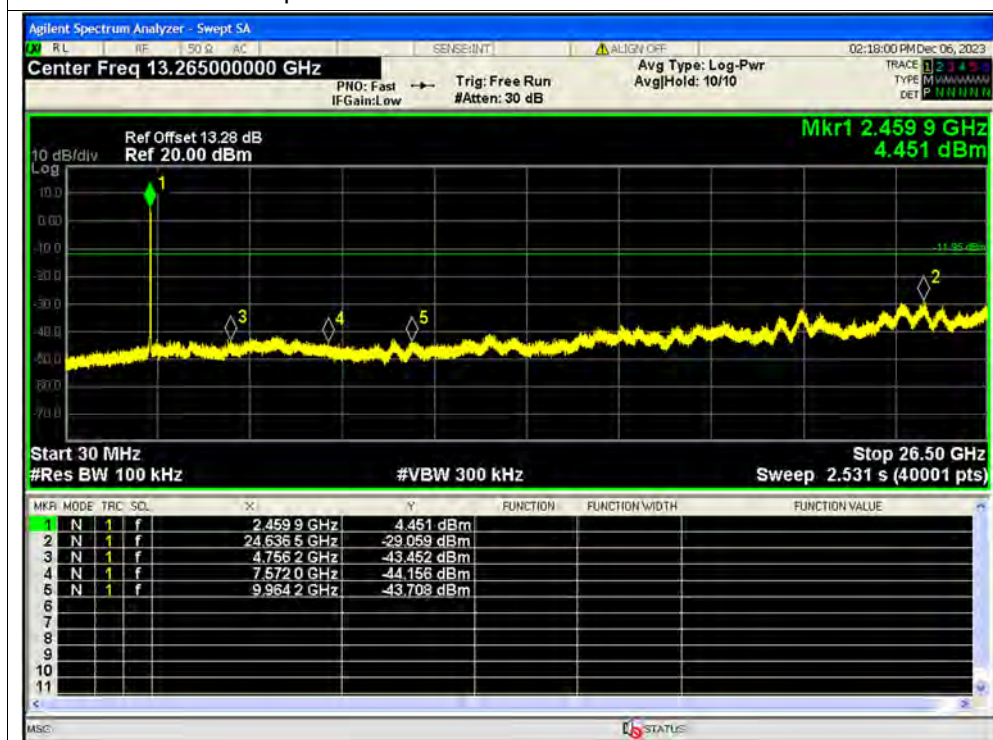

Tx. Spurious NVNT n40 2422MHz Ant1 Ref

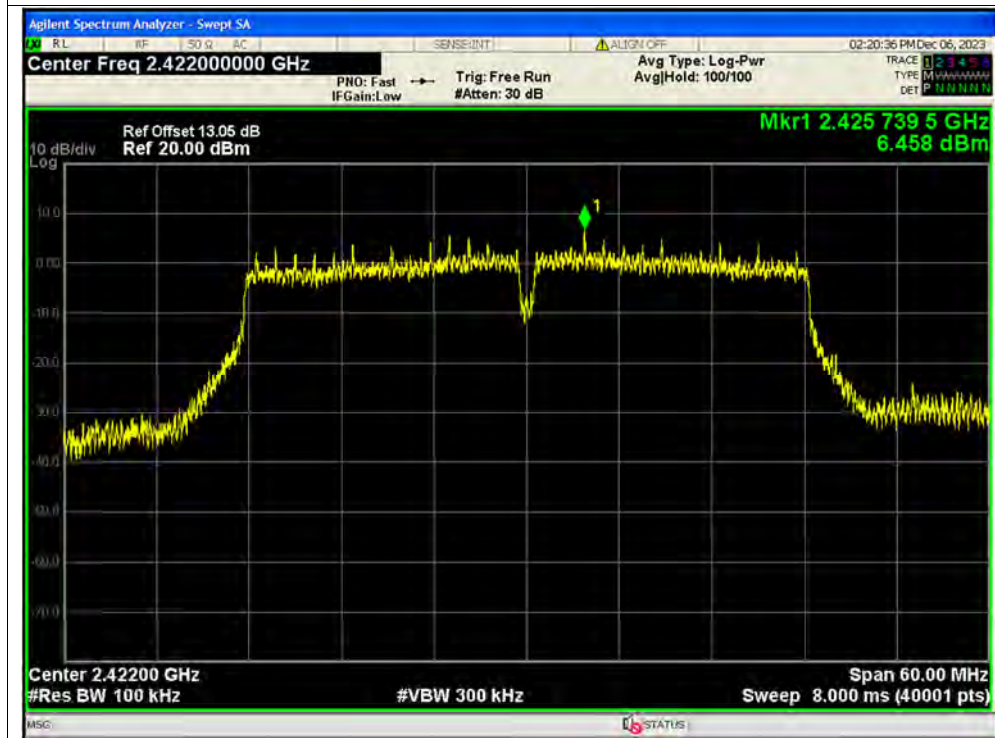


Tx. Spurious NVNT n40 2422MHz Ant1 Emission

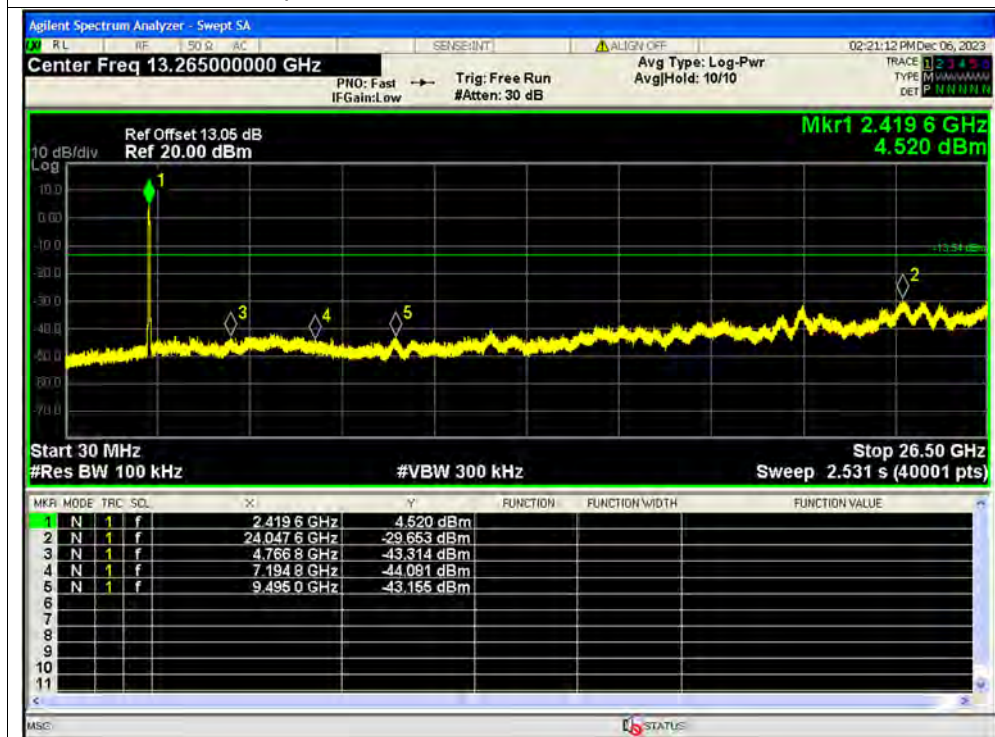


Tx. Spurious NVNT n40 2437MHz Ant1 Ref




Tx. Spurious NVNT n40 2437MHz Ant1 Emission

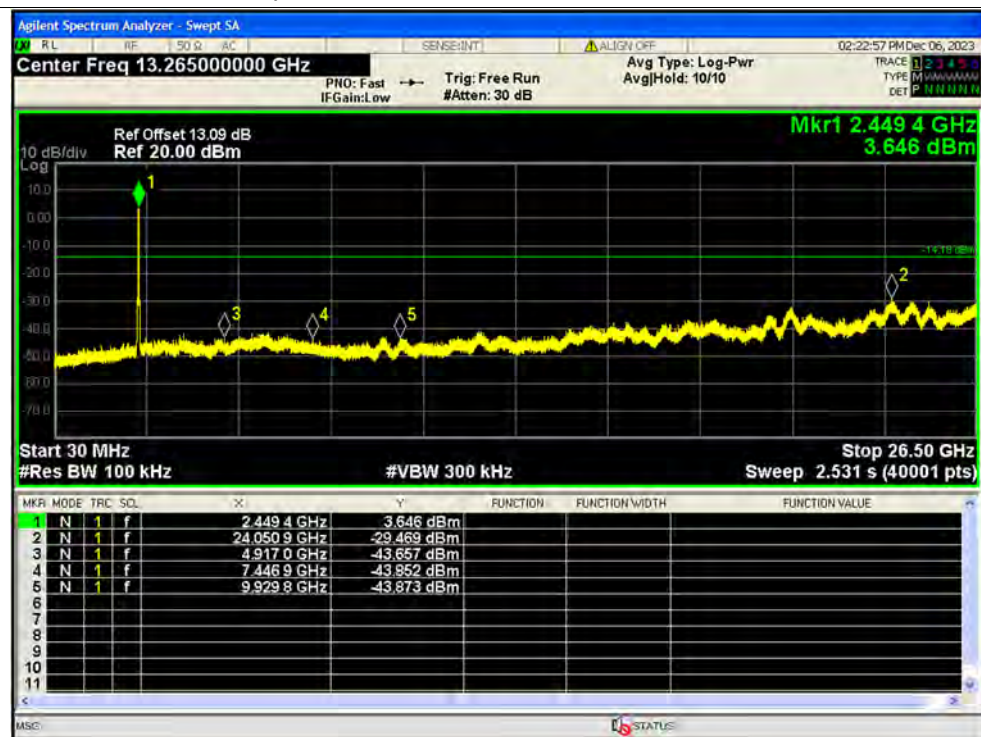

Tx. Spurious NVNT n40 2452MHz Ant1 Ref

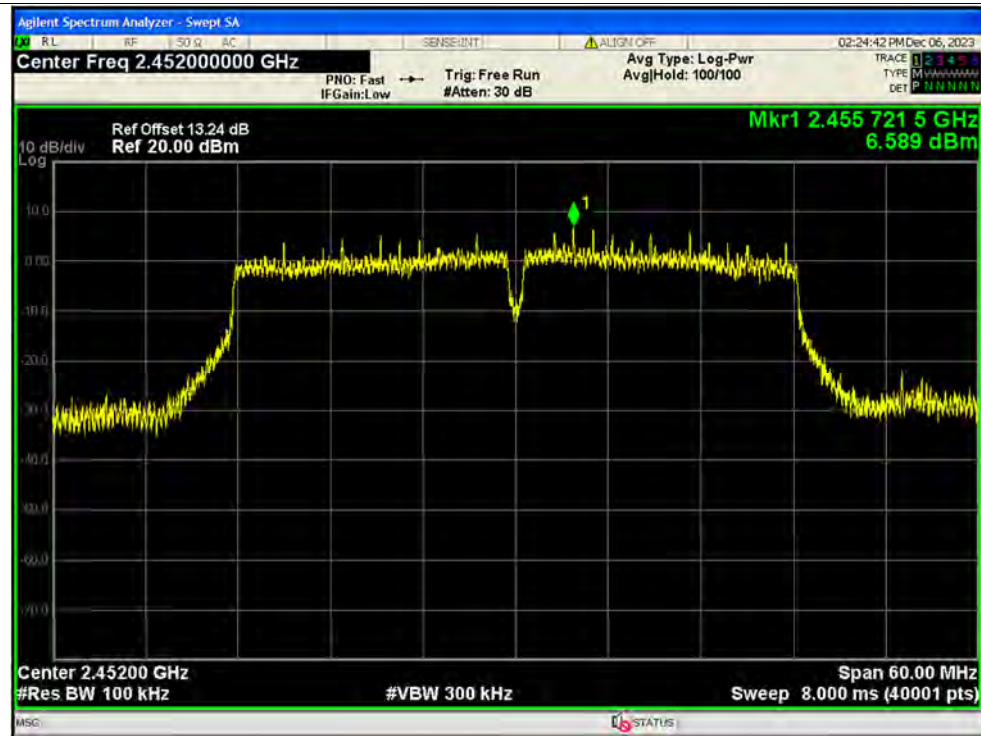

Tx. Spurious NVNT n40 2452MHz Ant1 Emission

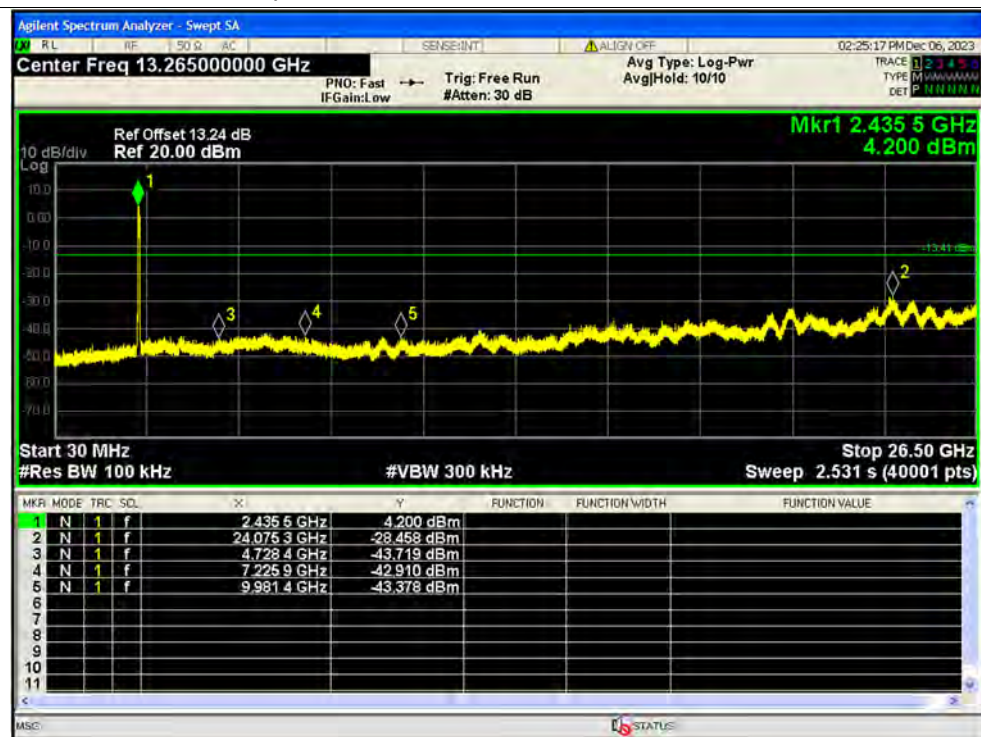

**A.6. Band Edge**


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-45.34	-20	Pass
NVNT	b	2462	Ant1	-56.89	-20	Pass
NVNT	g	2412	Ant1	-28.54	-20	Pass
NVNT	g	2462	Ant1	-46.52	-20	Pass
NVNT	n20	2412	Ant1	-28.13	-20	Pass
NVNT	n20	2462	Ant1	-46.03	-20	Pass
NVNT	n40	2422	Ant1	-34.81	-20	Pass
NVNT	n40	2452	Ant1	-32.83	-20	Pass

Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref




Band Edge NVNT b 2412MHz Ant1 Emission

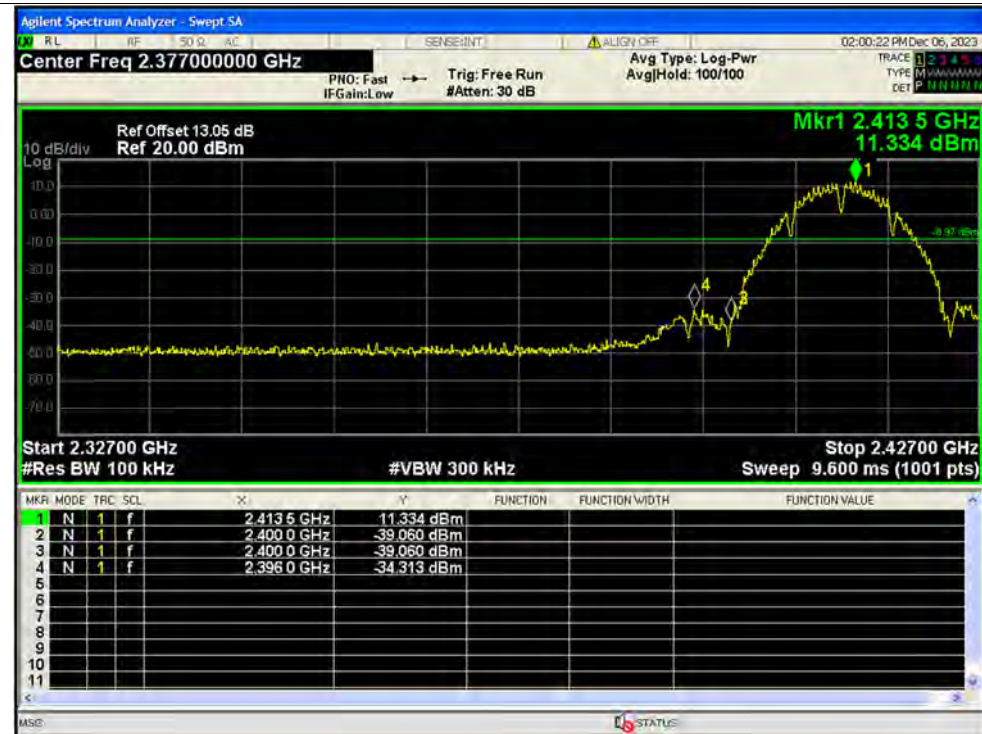

Band Edge NVNT b 2462MHz Ant1 Ref




Band Edge NVNT b 2462MHz Ant1 Emission

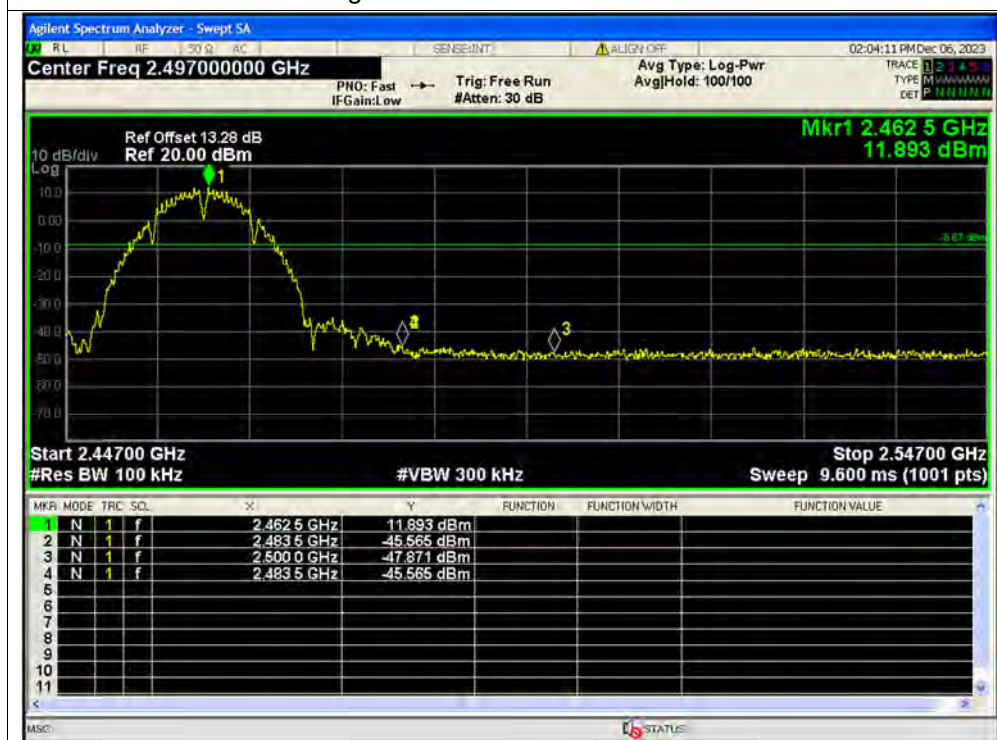

Band Edge NVNT g 2412MHz Ant1 Ref



Band Edge NVNT g 2412MHz Ant1 Emission

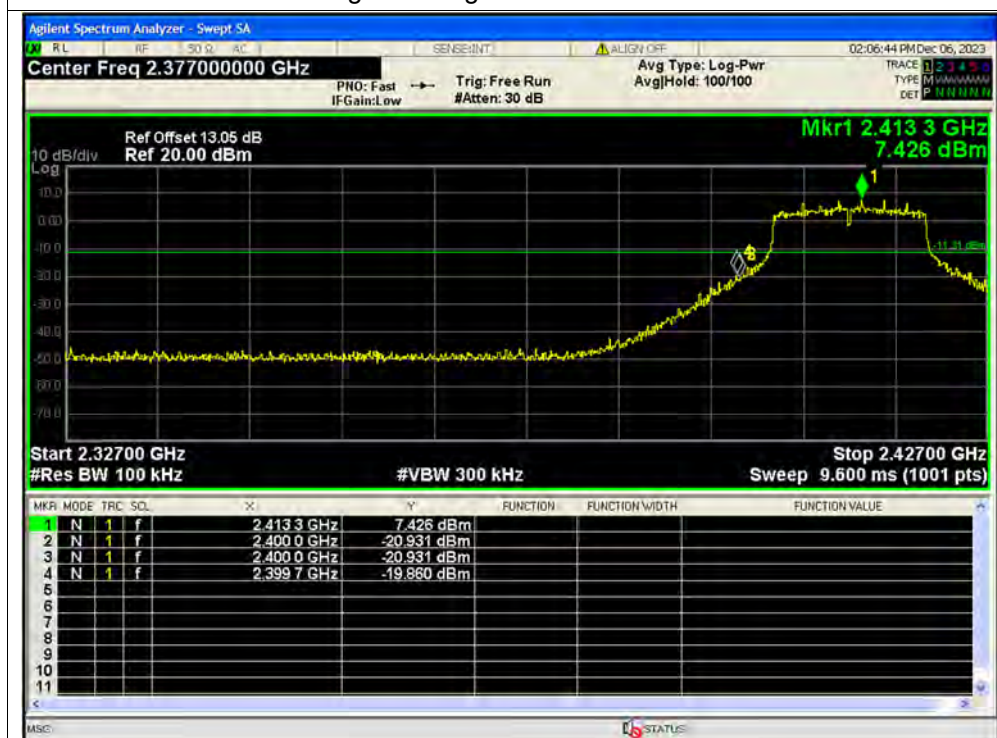

Band Edge NVNT g 2462MHz Ant1 Ref




Band Edge NVNT g 2462MHz Ant1 Emission



Band Edge NVNT n20 2412MHz Ant1 Ref




Band Edge NVNT n20 2412MHz Ant1 Emission

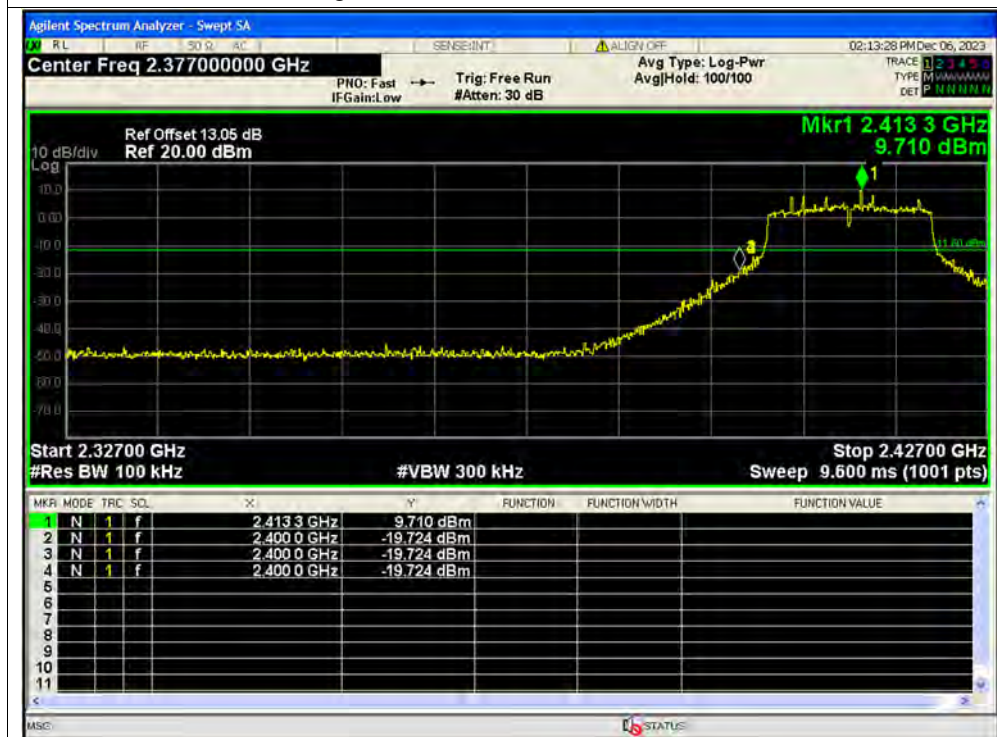

Band Edge NVNT n20 2462MHz Ant1 Ref



Band Edge NVNT n20 2462MHz Ant1 Emission

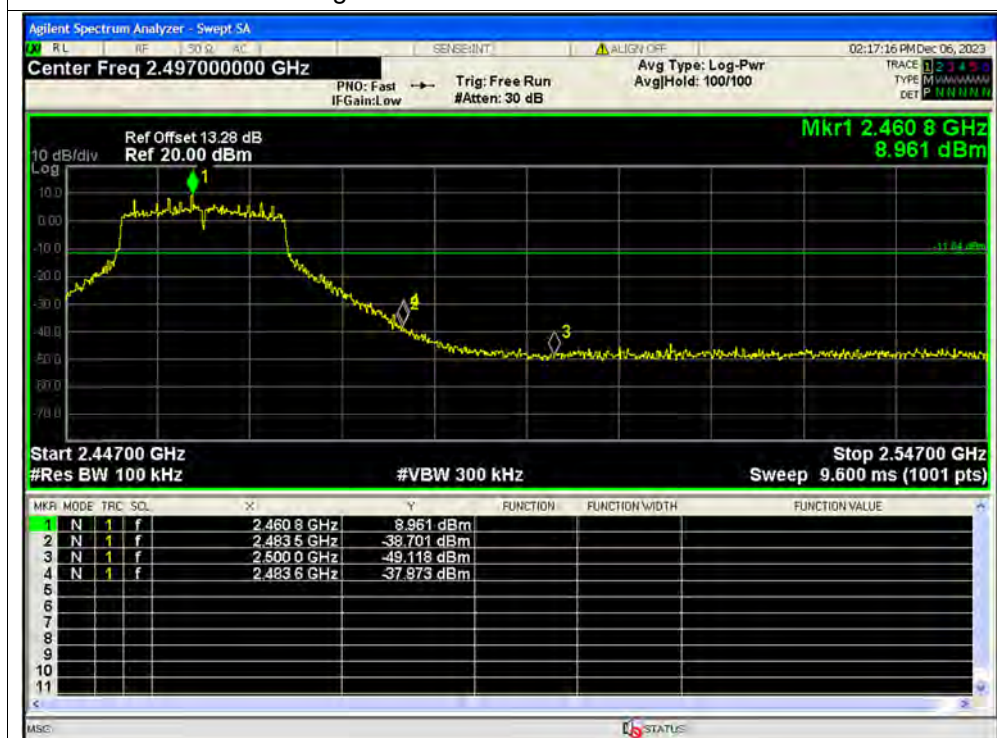

Band Edge NVNT n40 2422MHz Ant1 Ref



Band Edge NVNT n40 2422MHz Ant1 Emission



Band Edge NVNT n40 2452MHz Ant1 Ref



Band Edge NVNT n40 2452MHz Ant1 Emission




**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-2.58	0	-2.58	8	Pass
NVNT	b	2437	Ant1	-1.85	0	-1.85	8	Pass
NVNT	b	2462	Ant1	-1.98	0	-1.98	8	Pass
NVNT	g	2412	Ant1	-6.15	0	-6.15	8	Pass
NVNT	g	2437	Ant1	-6.83	0	-6.83	8	Pass
NVNT	g	2462	Ant1	-5.8	0	-5.8	8	Pass
NVNT	n20	2412	Ant1	-5.72	0	-5.72	8	Pass
NVNT	n20	2437	Ant1	-5.93	0	-5.93	8	Pass
NVNT	n20	2462	Ant1	-5.47	0	-5.47	8	Pass
NVNT	n40	2422	Ant1	-9.14	0	-9.14	8	Pass
NVNT	n40	2437	Ant1	-9.04	0	-9.04	8	Pass
NVNT	n40	2452	Ant1	-8.3	0	-8.3	8	Pass

Test Graphs

PSD NVNT b 2412MHz Ant1

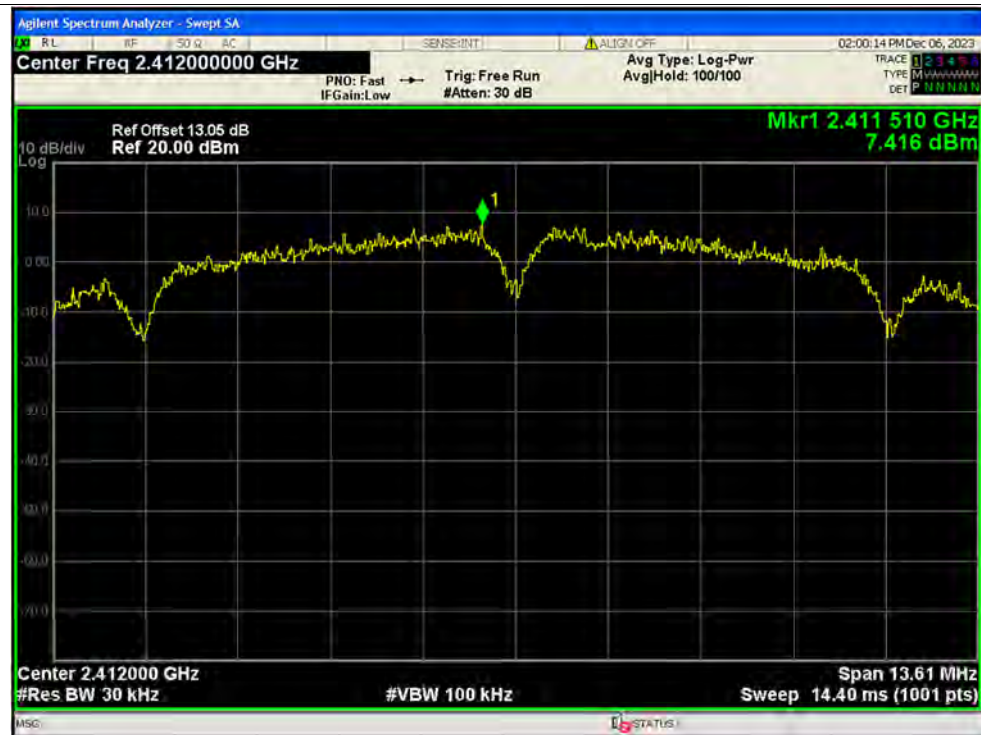

PSD NVNT b 2437MHz Ant1



PSD NVNT b 2462MHz Ant1




PSD NVNT g 2412MHz Ant1






PSD NVNT g 2437MHz Ant1

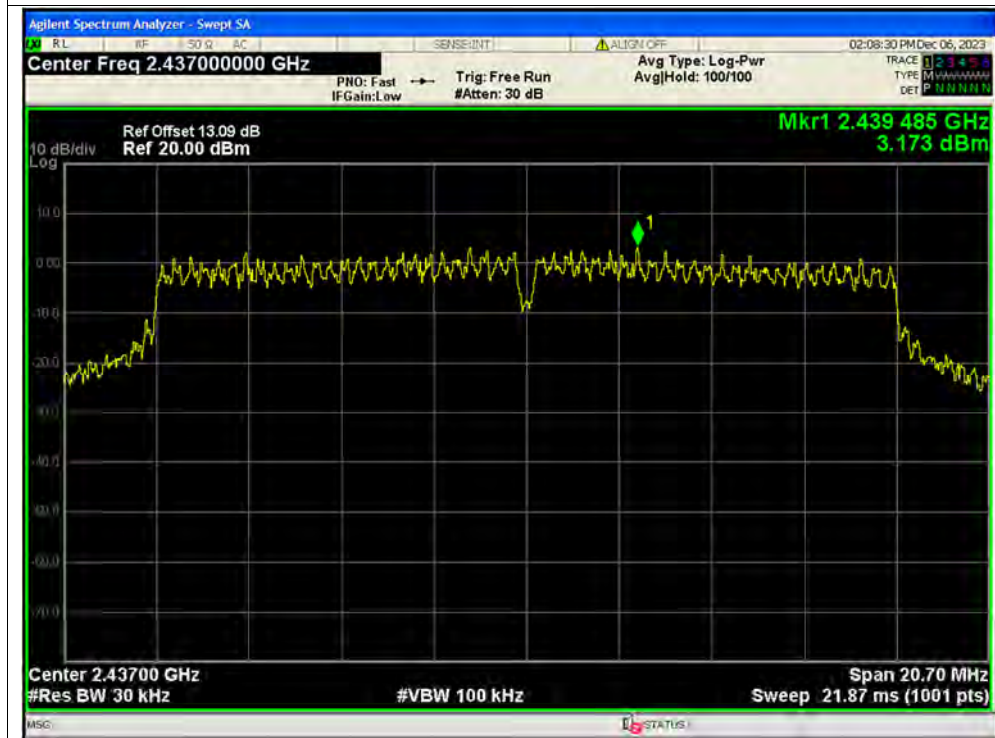


PSD NVNT g 2462MHz Ant1



PSD NVNT n20 2412MHz Ant1

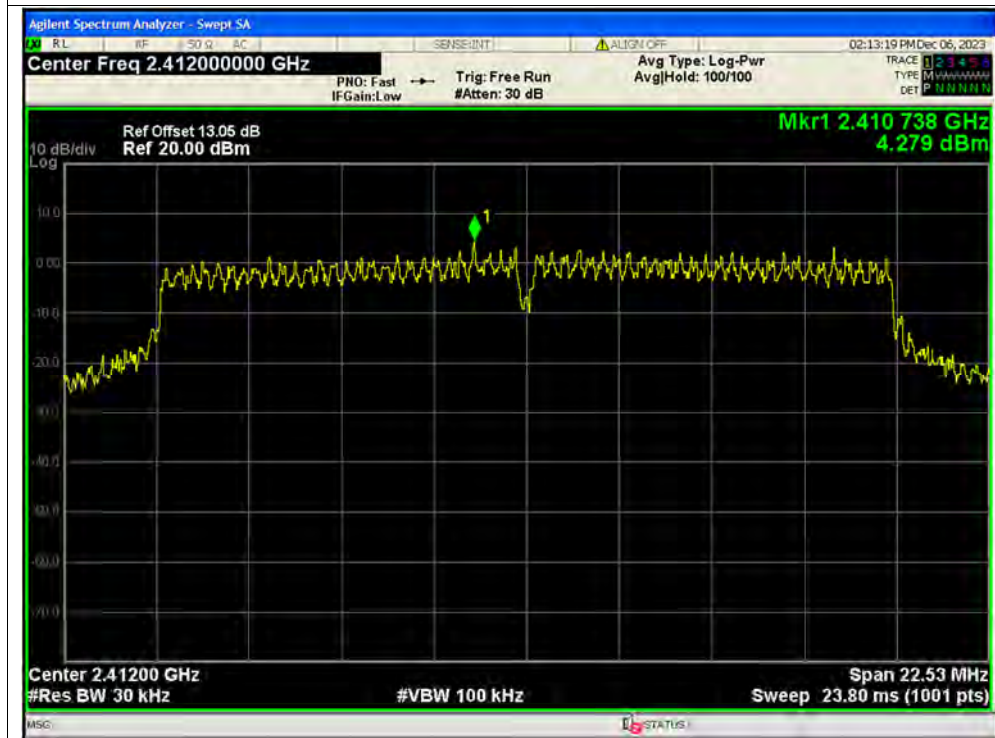


PSD NVNT n20 2437MHz Ant1

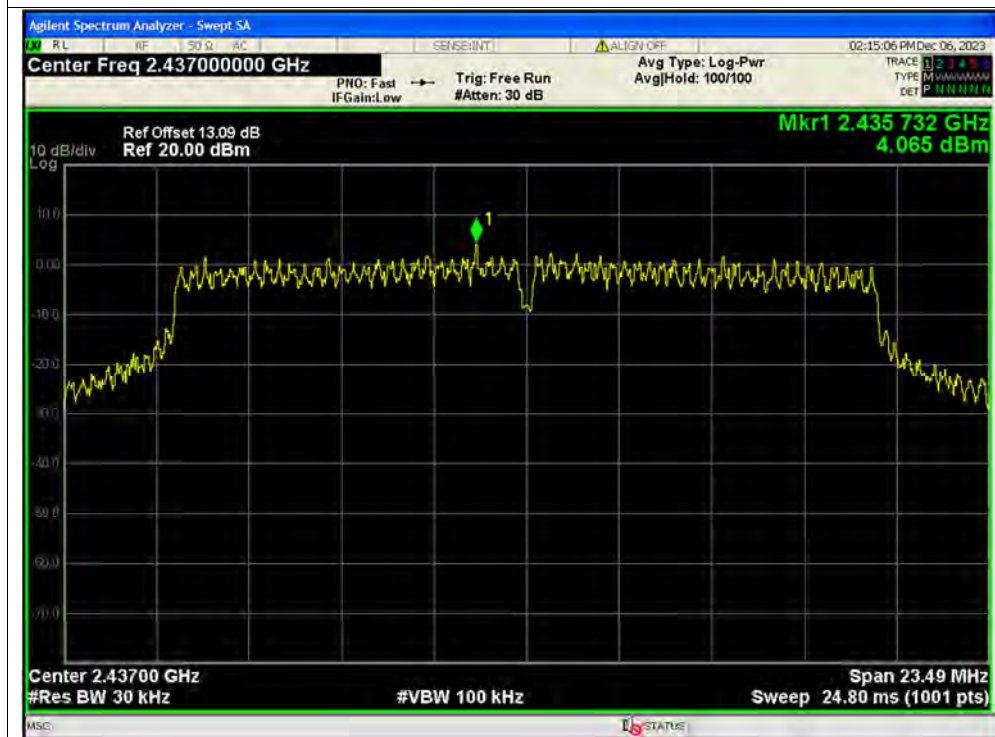





PSD NVNT n20 2462MHz Ant1

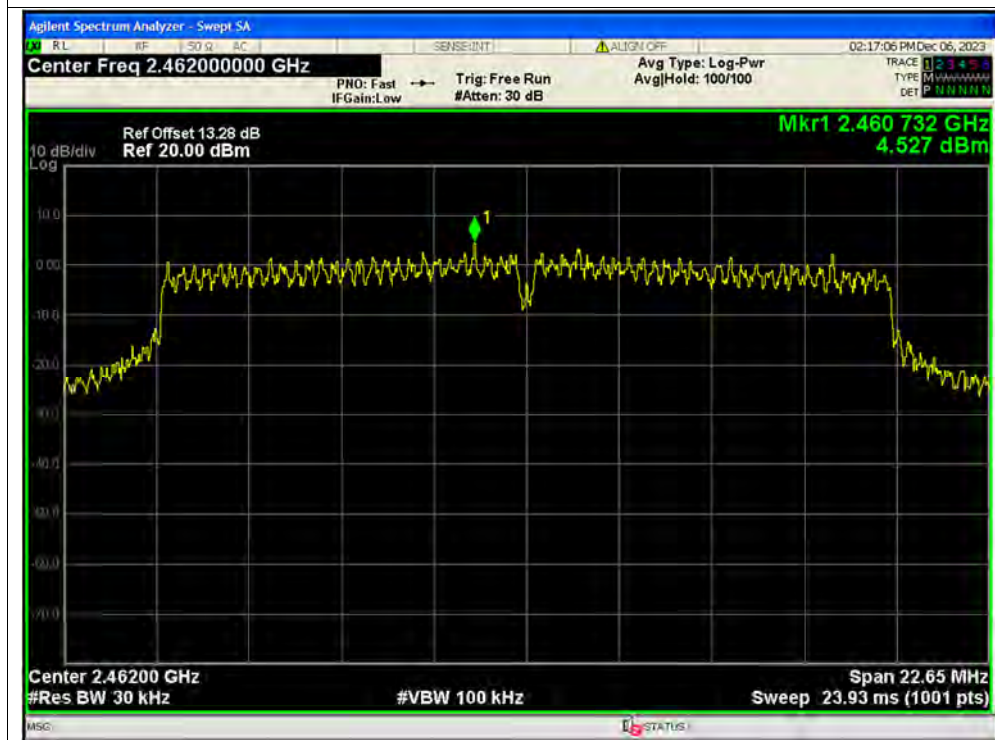


PSD NVNT n40 2422MHz Ant1

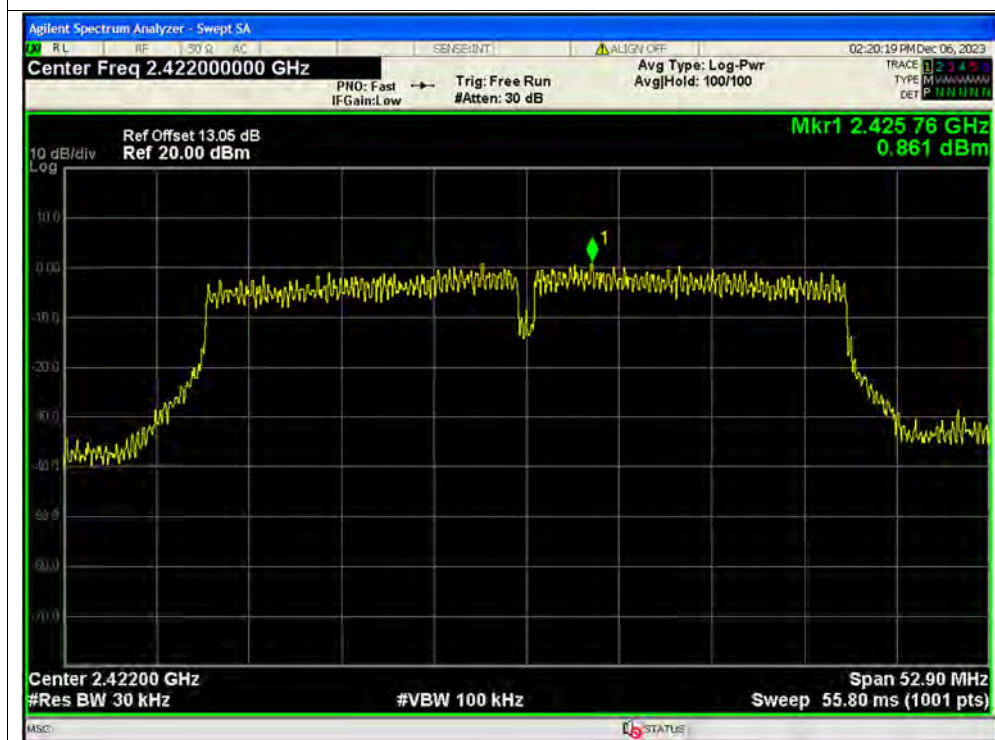

PSD NVNT n40 2437MHz Ant1

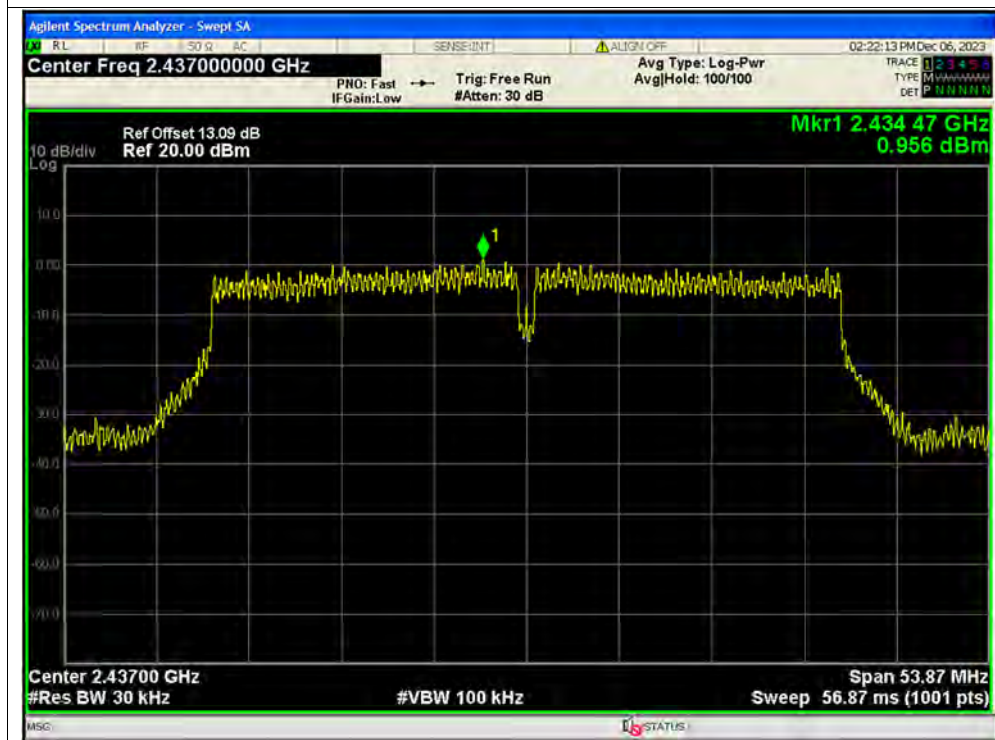

PSD NVNT n40 2452MHz Ant1

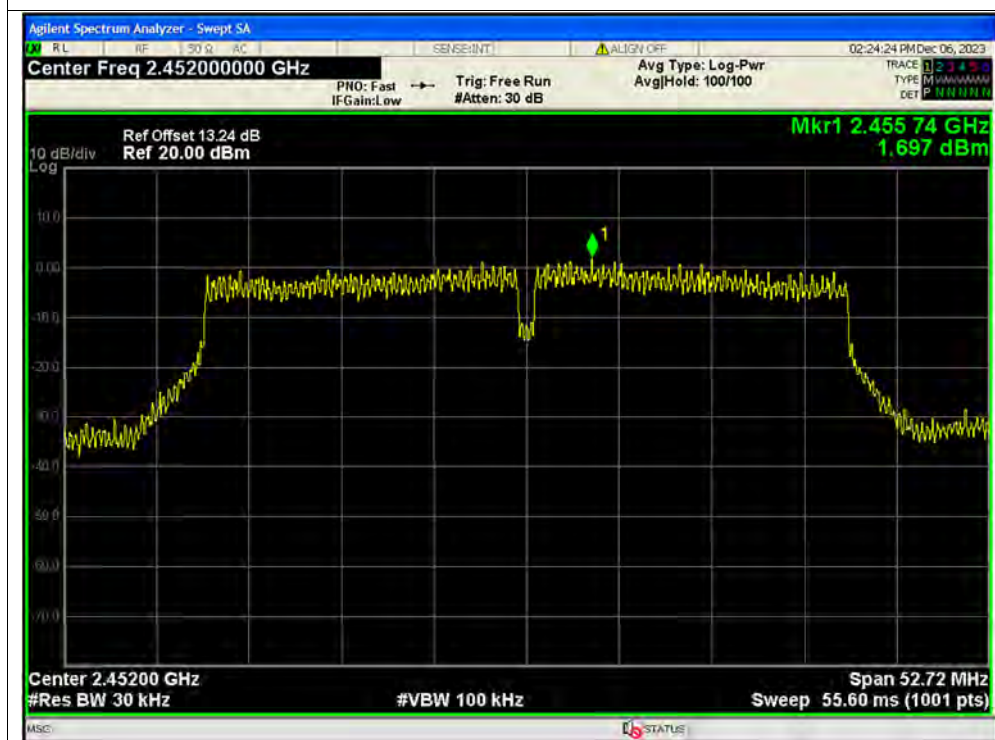



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT+ USB Cable + PC +PC Adapter +WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

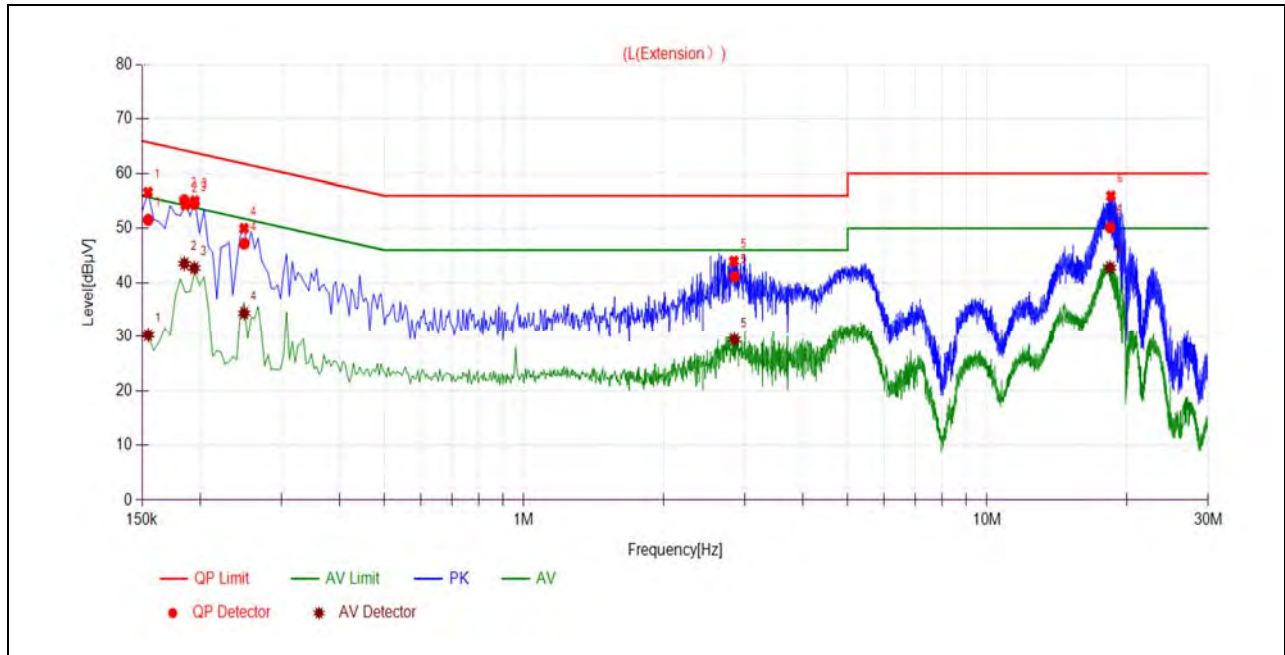

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1546	51.58	30.26	65.75	55.75	Line	PASS
2	0.1851	55.18	43.52	64.25	54.25		PASS
3	0.1944	54.54	42.70	63.85	53.85		PASS
4	0.2492	47.20	34.39	61.78	51.78		PASS
5	2.8487	41.11	29.41	56.00	46.00		PASS
6	18.4355	50.18	42.79	60.00	50.00		PASS

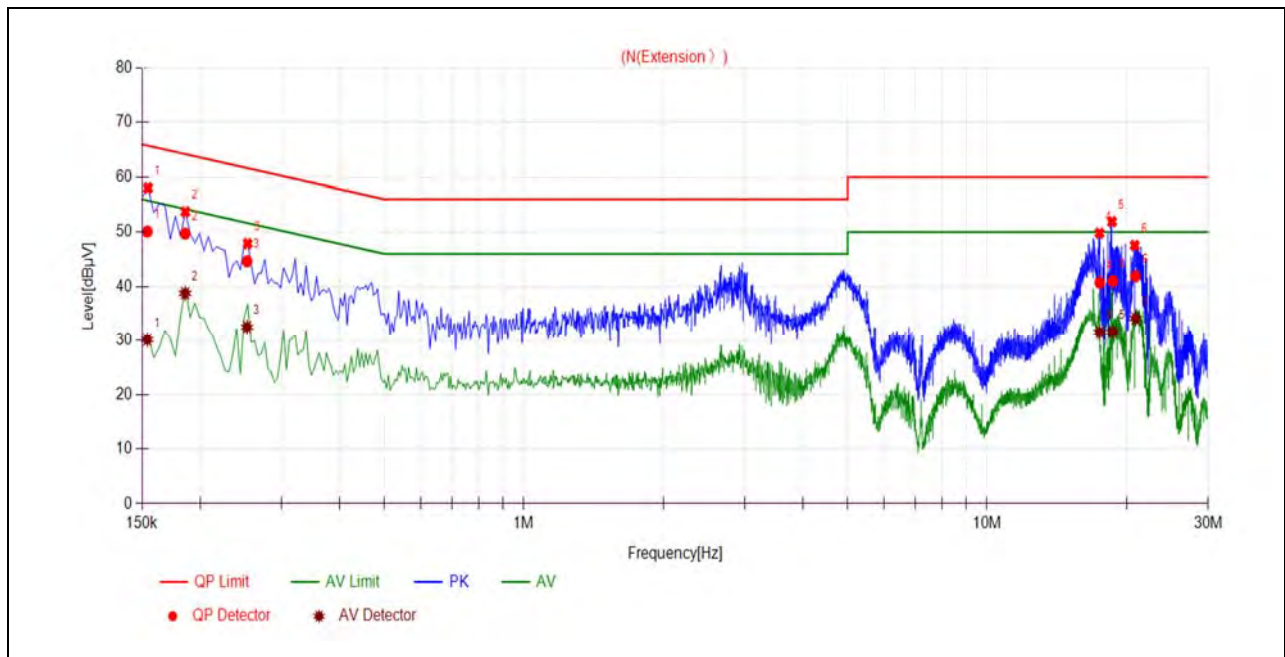

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1540	50.11	30.14	65.78	55.78	Neutral	PASS
2	0.1858	49.72	38.78	64.22	54.22		PASS
3	0.2528	44.66	32.53	61.67	51.67		PASS
4	17.5018	40.72	31.55	60.00	50.00		PASS
5	18.6797	41.02	31.64	60.00	50.00		PASS
6	20.9066	41.91	34.12	60.00	50.00		PASS



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2388.82	PK	24.21	6.74	27.20	58.15	74	PASS
1	2387.36	AV	12.73	6.74	27.20	46.67	54	PASS
11	2488.30	PK	24.06	6.74	27.20	58.00	74	PASS
11	2487.38	AV	11.72	6.74	27.20	45.66	54	PASS

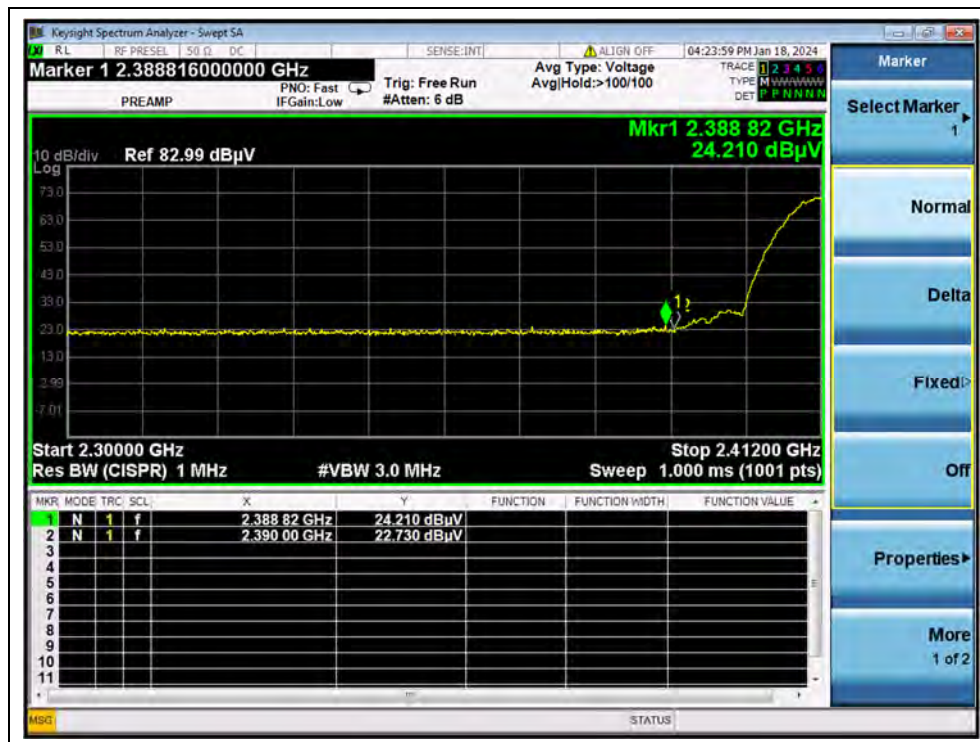

(PEAK, Channel 1, 802.11b)

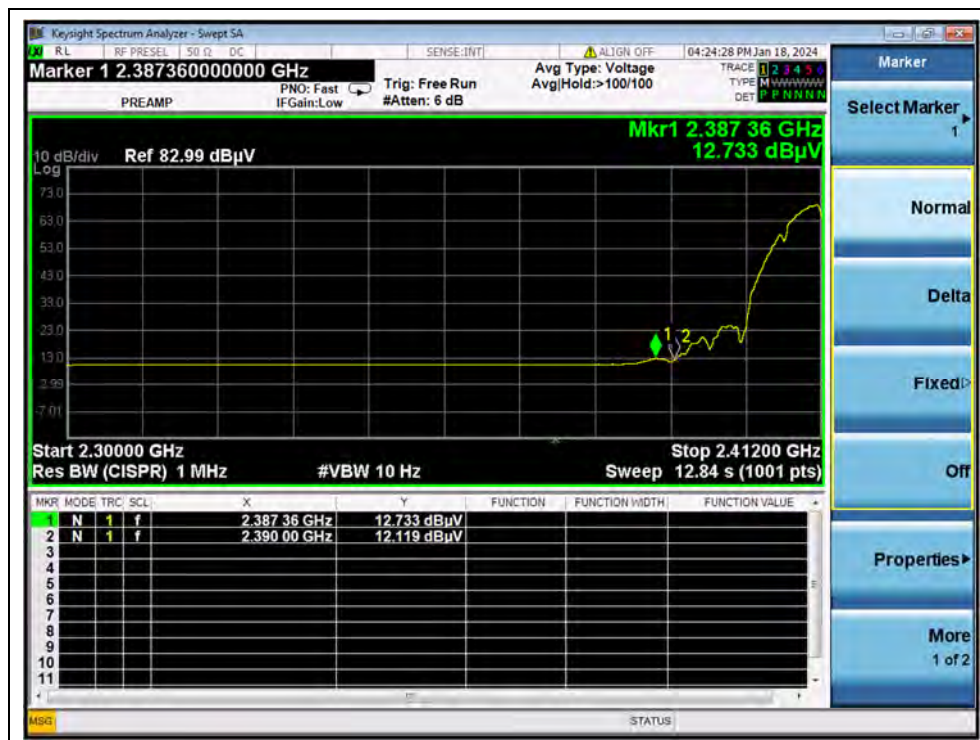

(AVERAGE, Channel 1, 802.11b)

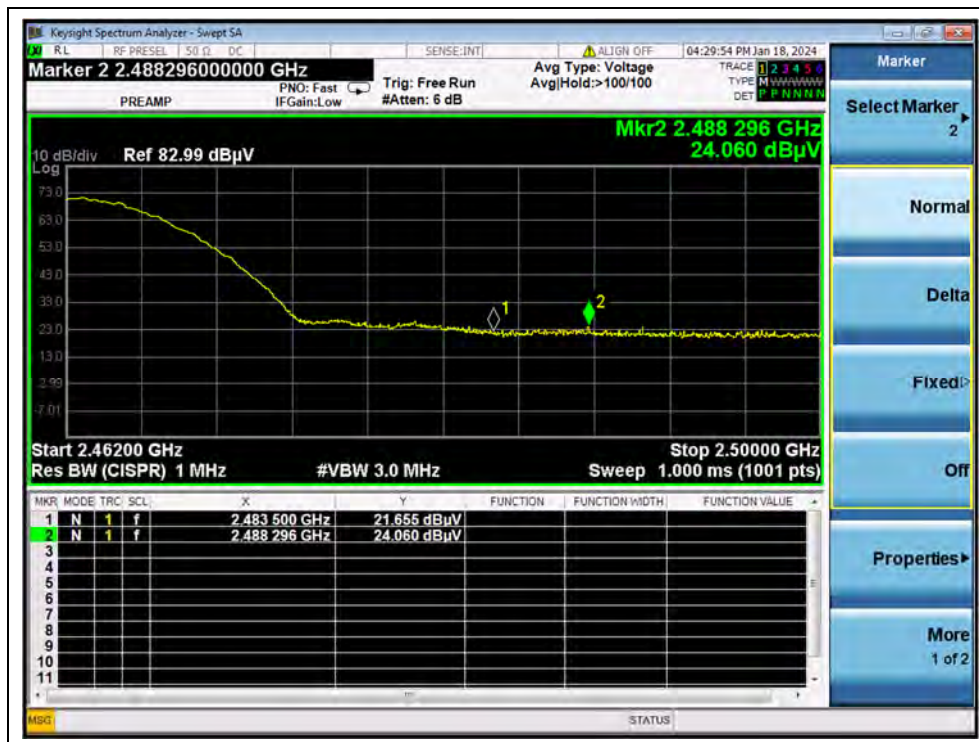

(PEAK, Channel 11, 802.11b)




(AVERAGE, Channel 11, 802.11b)



802.11g Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2390.00	PK	30.35	6.74	27.20	64.29	74	PASS
1	2390.00	AV	18.19	6.74	27.20	52.13	54	PASS
11	2483.70	PK	26.50	6.74	27.20	60.44	74	PASS
11	2483.50	AV	14.47	6.74	27.20	48.41	54	PASS

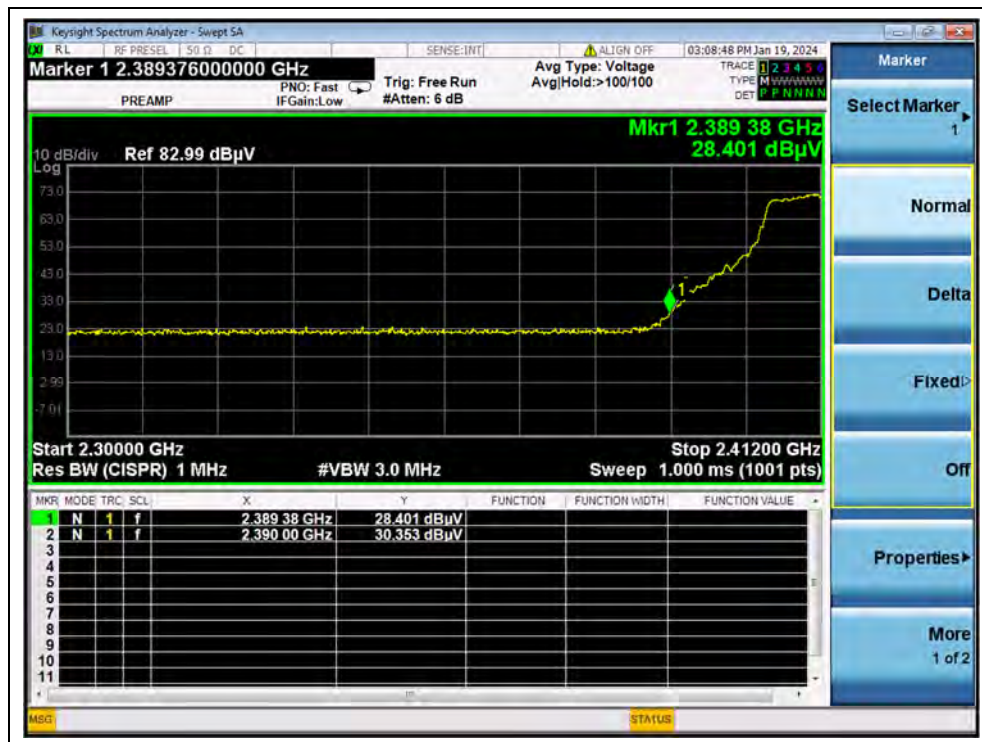

(PEAK, Channel 1, 802.11g)



(AVERAGE, Channel 1, 802.11g)



(PEAK, Channel 11, 802.11g)




(AVERAGE, Channel 11, 802.11g)




802.11n (HT20) Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2389.60	PK	30.54	6.74	27.20	64.48	74	PASS
1	2390.00	AV	17.94	6.74	27.20	51.88	54	PASS
11	2483.93	PK	27.80	6.74	27.20	61.74	74	PASS
11	2483.50	AV	16.39	6.74	27.20	50.33	54	PASS

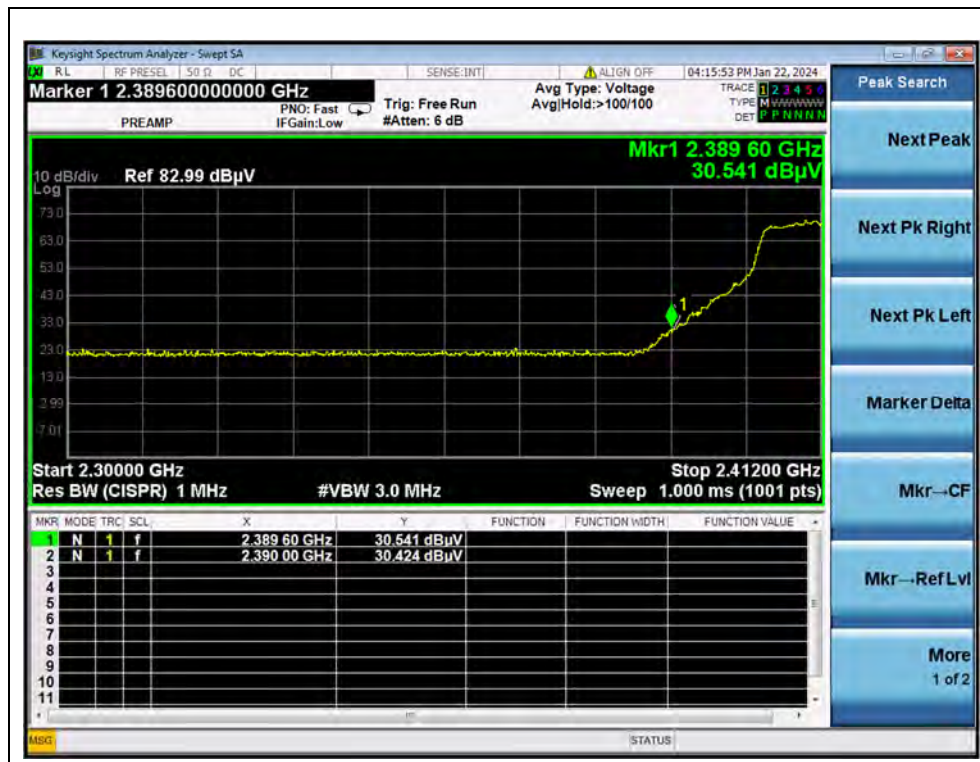


(PEAK, Channel 1, 802.11n (HT20))

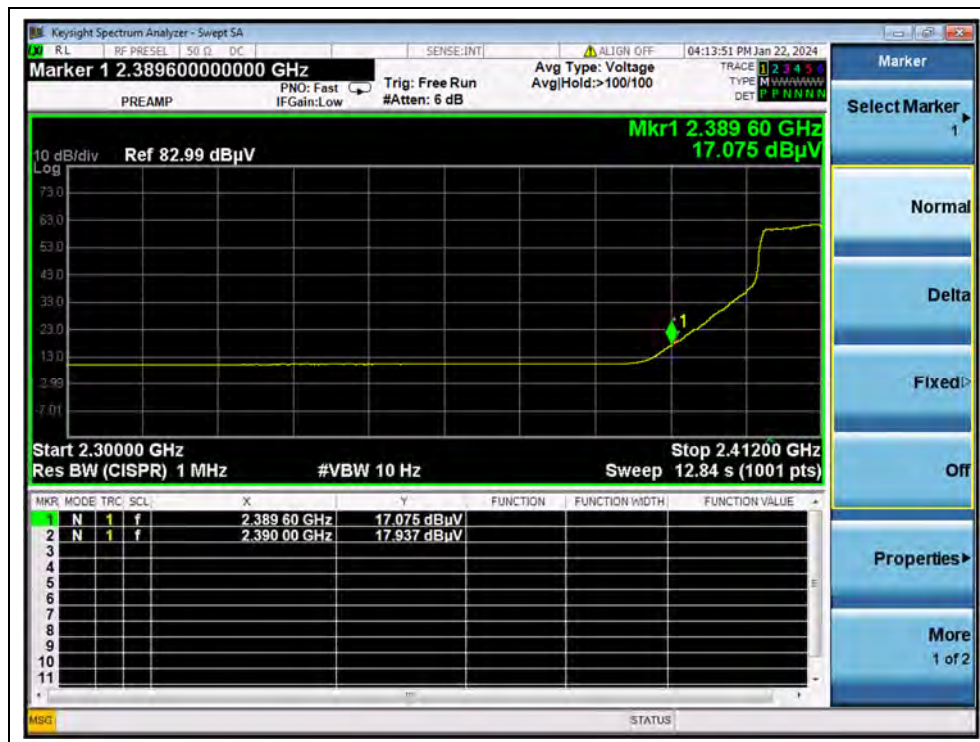

(AVERAGE, Channel 1, 802.11n (HT20))



(PEAK, Channel 11, 802.11n (HT20))

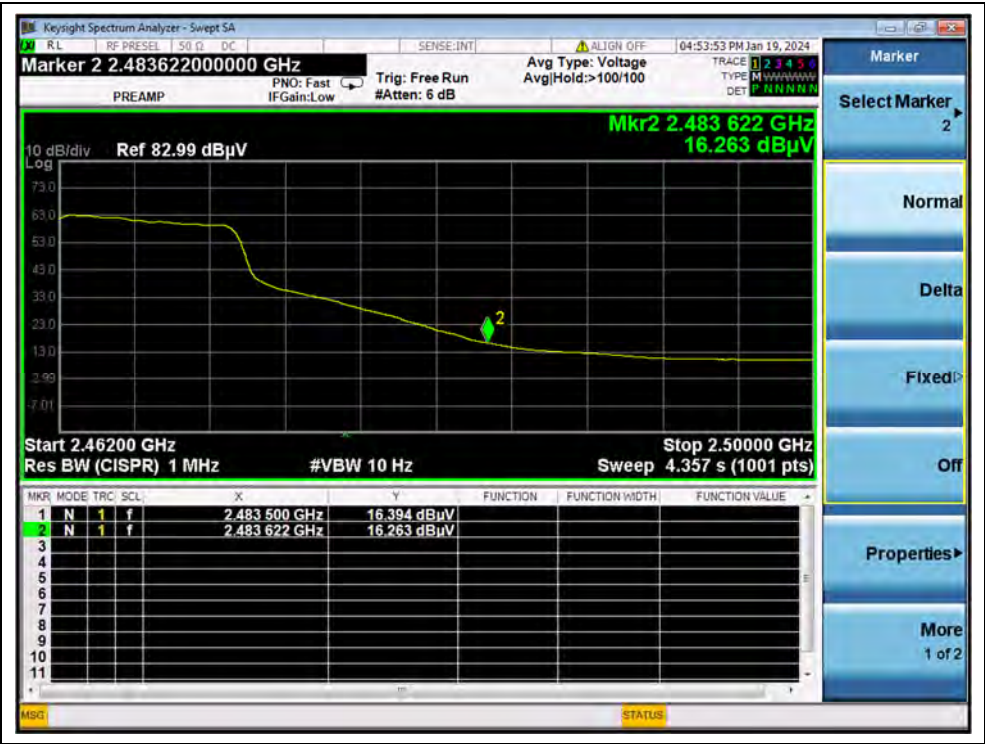


(AVERAGE, Channel 11, 802.11n (HT20))




802.11n (HT40) Mode

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
3	2389.79	PK	26.63	6.74	27.20	60.57	74	PASS
3	2390.00	AV	17.58	6.74	27.20	51.52	54	PASS
9	2483.78	PK	28.72	6.74	27.20	62.66	74	PASS
9	2483.58	AV	19.05	6.74	27.20	52.99	54	PASS

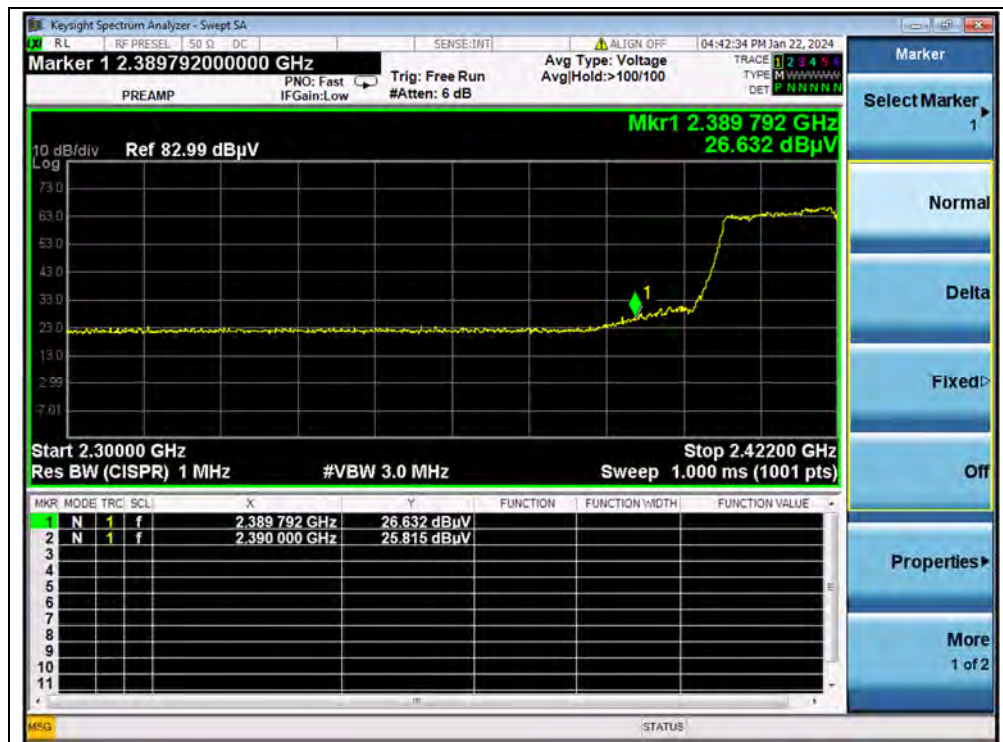


(PEAK, Channel 3, 802.11n (HT40))

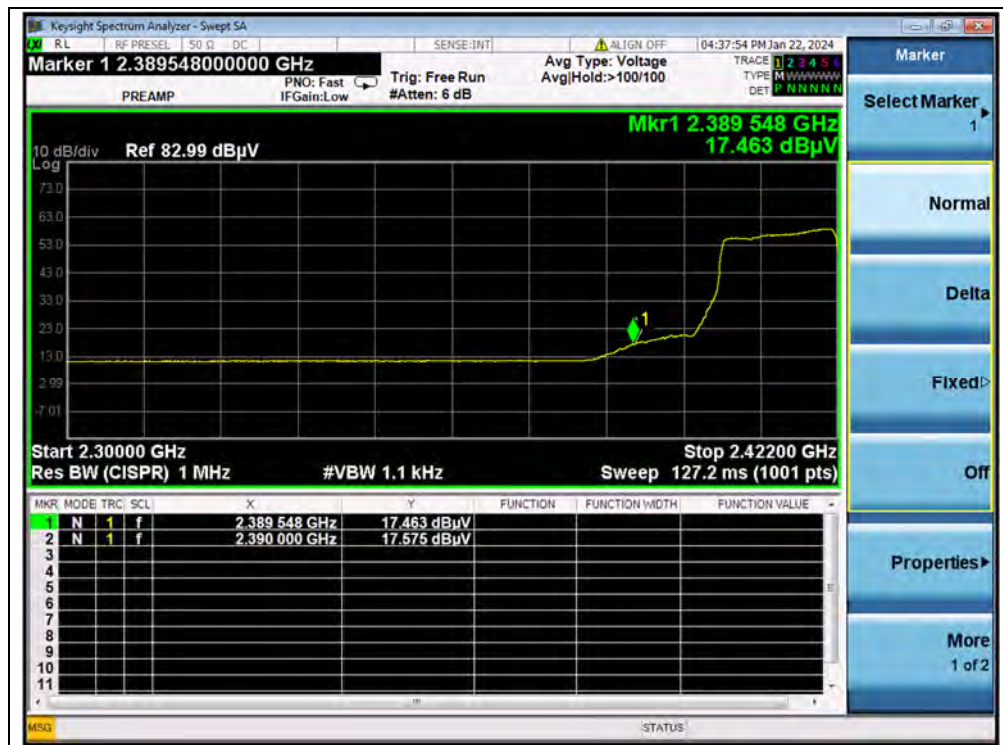

(AVERAGE, Channel 3, 802.11n (HT40))



(PEAK, Channel 9, 802.11n (HT40))

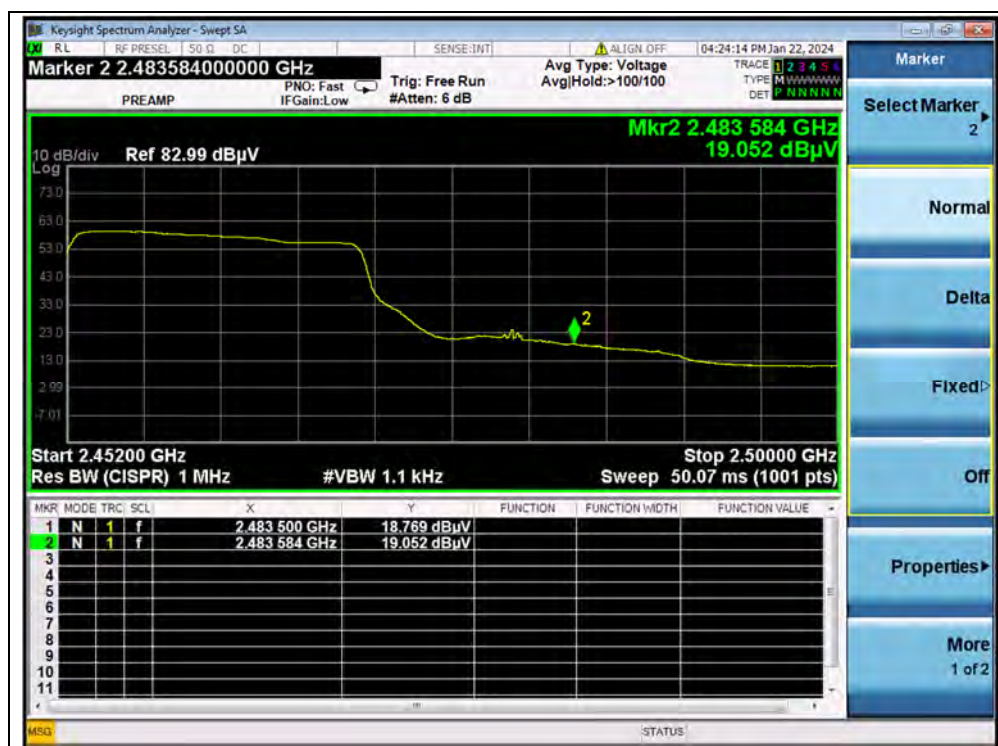

(AVERAGE, Channel 9, 802.11n (HT40))



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Field strength of fundamental:

Frequency (MHz)	Reading_Peak (dB μ V/m)	Antenna Factor (dB)	Path Loss (dB)	Final_Peak (dB μ V/m)	Antenna Polarity
2412.90	71.92	27.20	6.74	105.86	Horizontal

The field strength (the lowest) of fundamenta is more than 20dB higher than the unwanted emissions, in accordance with FCC part 15.215(b).

**802.11b Mode**

Plot for Channel 1



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	33.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2390.933	47.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4885.360	46.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5630.720	48.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9055.680	46.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12141.840	47.23	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	32.45	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1977.067	48.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2821.760	45.61	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3323.800	44.19	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3998.320	45.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5781.640	47.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12209.600	46.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

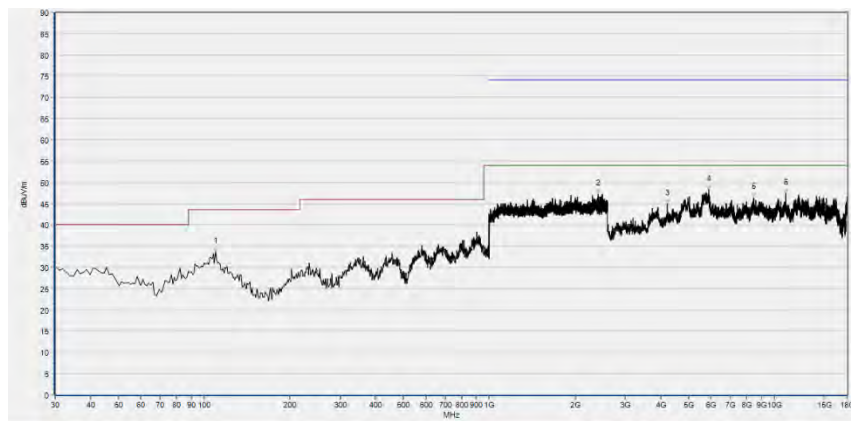

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.64	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2404.267	47.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4210.840	44.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5874.040	48.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8455.080	46.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10943.720	47.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

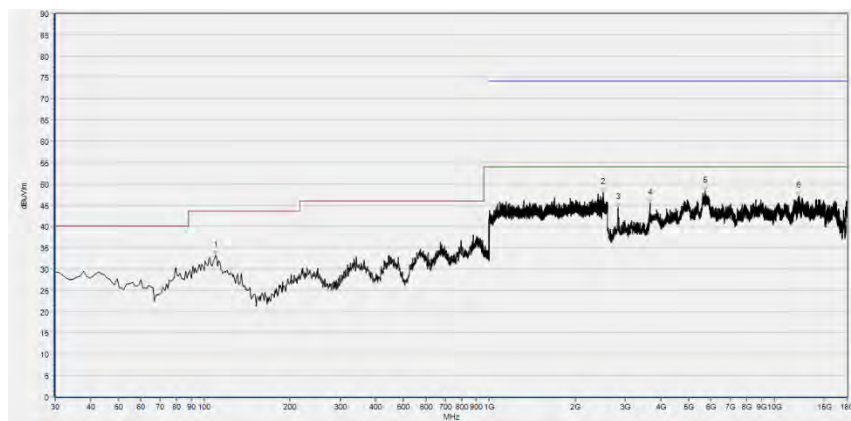


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.12	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2514.133	47.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2827.920	44.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3659.520	45.38	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5701.560	48.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12148.000	47.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 11

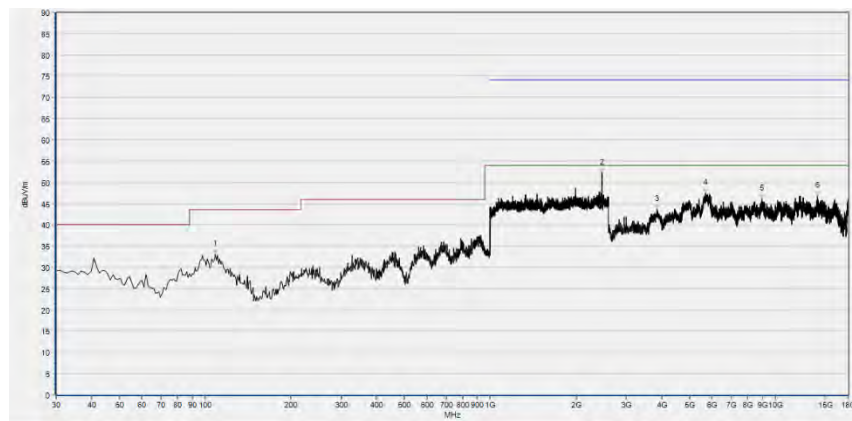


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	33.08	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2461.333	52.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3844.320	43.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5676.920	47.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8947.880	46.09	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14085.320	46.79	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	32.71	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2461.867	49.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2831.000	44.31	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2997.320	44.36	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3656.440	46.99	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3992.160	48.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
6945.880	46.08	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12200.360	47.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

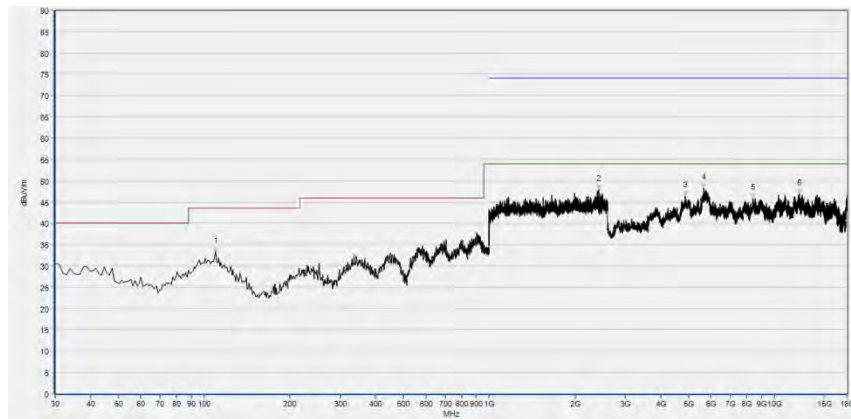**802.11g Mode****Plot for Channel 1**

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	33.32	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2419.200	47.87	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4873.040	46.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5664.600	48.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8430.440	45.93	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12200.360	46.86	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.26	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2324.800	47.49	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2997.320	44.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3982.920	45.47	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5310.400	47.75	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12148.000	47.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

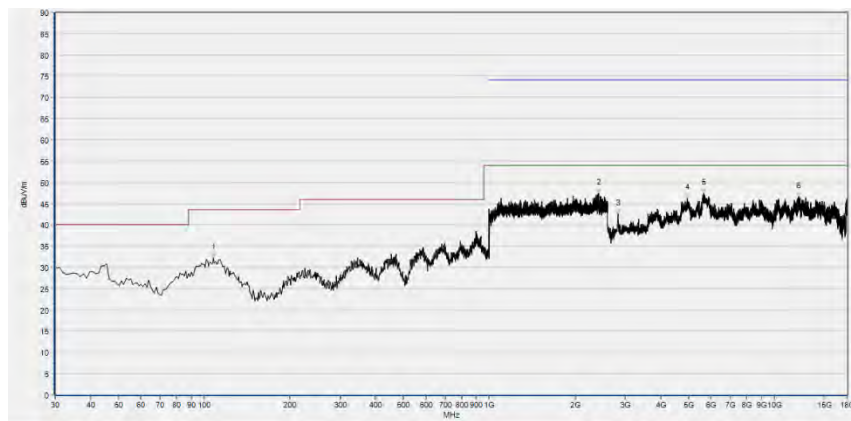

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.23	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2416.000	47.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2824.840	42.61	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4962.360	46.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5655.360	47.41	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12184.960	46.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

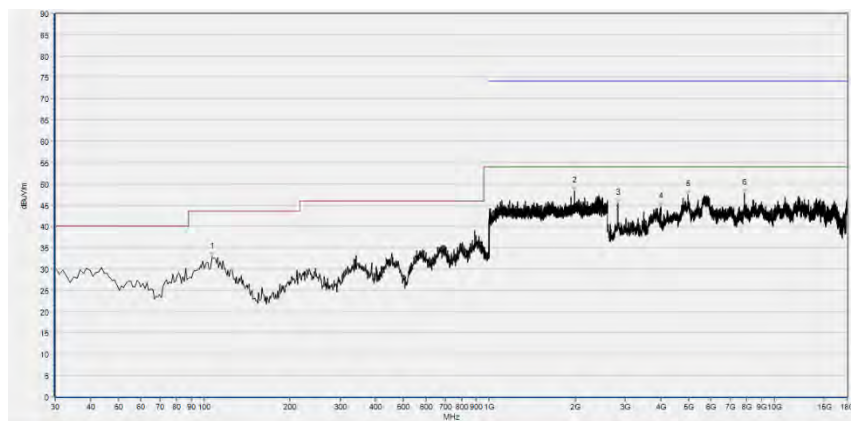


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	32.85	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1993.600	48.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2824.840	45.37	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3989.080	44.58	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4990.080	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7857.560	47.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

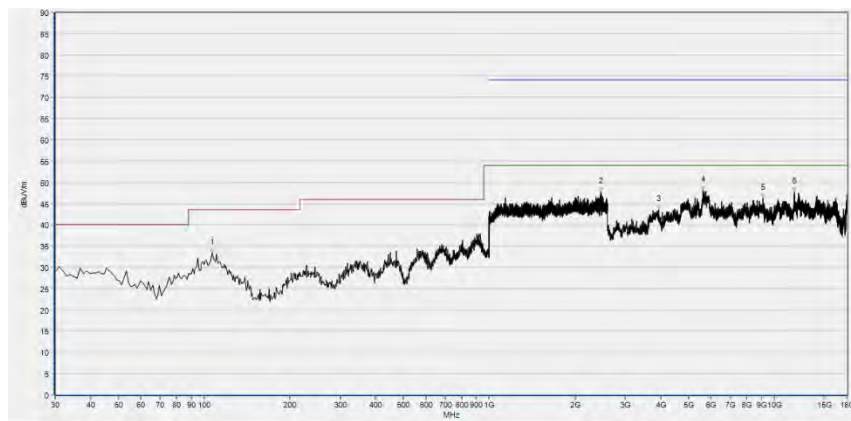

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	33.40	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2460.267	47.69	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3933.640	43.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5633.800	48.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9111.120	46.19	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
11738.360	47.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

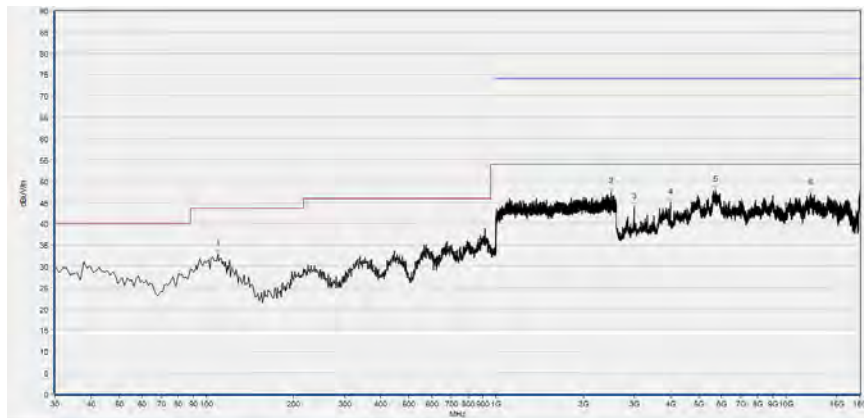


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.78	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2491.733	47.40	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2991.160	43.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3989.080	44.94	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5710.800	47.89	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12141.840	47.14	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

**802.11n (HT20) Mode**

Plot for Channel 1

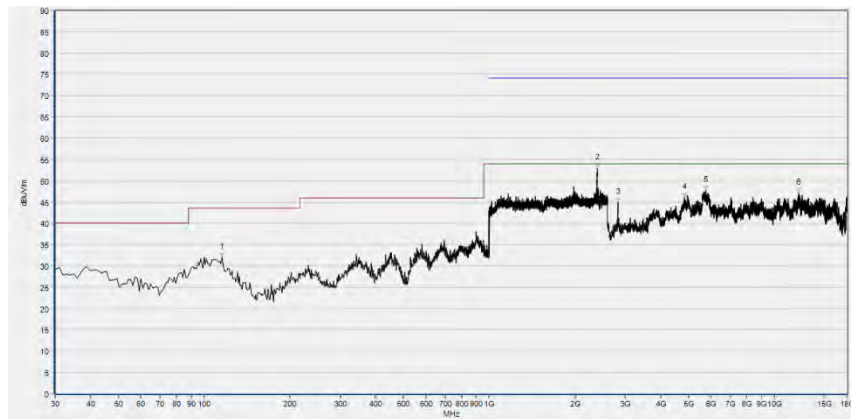

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
115.360	31.96	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2388.800	53.02	N/A	40.70	74.00	N/A	54.00	Horizontal	PASS
2824.840	44.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4829.920	46.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5741.600	47.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12184.960	47.16	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)




Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.73	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2827.920	45.01	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2988.080	45.39	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3995.240	47.48	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5643.040	47.52	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12206.520	46.77	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

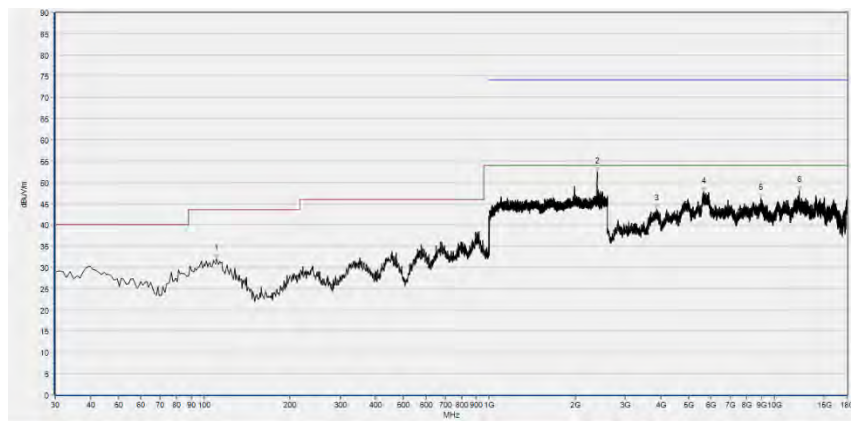

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	31.97	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2388.800	52.37	N/A	41.01	74.00	N/A	54.00	Horizontal	PASS
3868.960	43.78	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5658.440	47.83	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8975.600	46.32	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12200.360	48.11	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

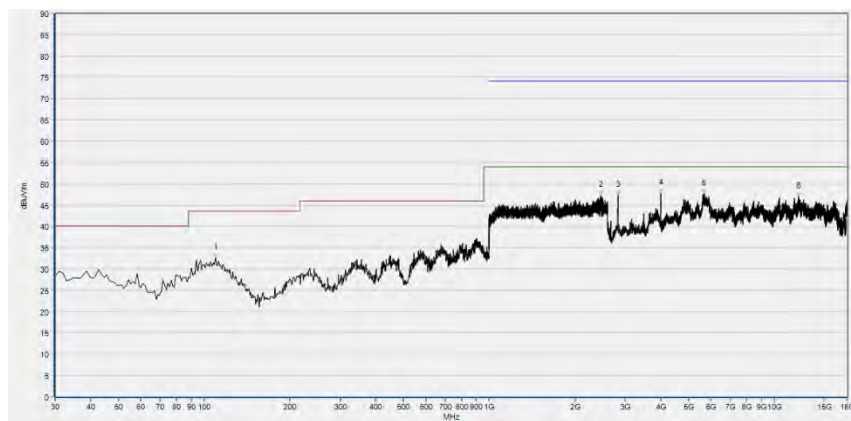

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.48	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2463.467	47.26	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2831.000	47.18	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3998.320	47.76	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5658.440	47.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12144.920	46.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
110.510	33.45	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2389.333	52.52	N/A	41.12	74.00	N/A	54.00	Horizontal	PASS
3887.440	43.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
4802.200	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5596.840	47.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12166.480	47.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

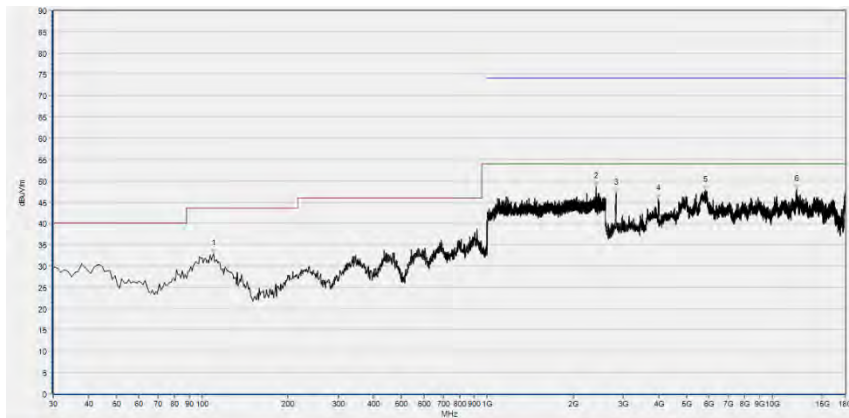

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	32.89	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2413.333	48.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2834.080	47.10	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3982.920	45.67	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5803.200	47.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12135.680	47.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT40) Mode**

Plot for Channel 3



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.810	31.63	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1995.200	50.43	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
2388.267	52.94	N/A	41.50	74.00	N/A	54.00	Horizontal	PASS
3644.120	44.51	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5846.320	47.80	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12197.280	47.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

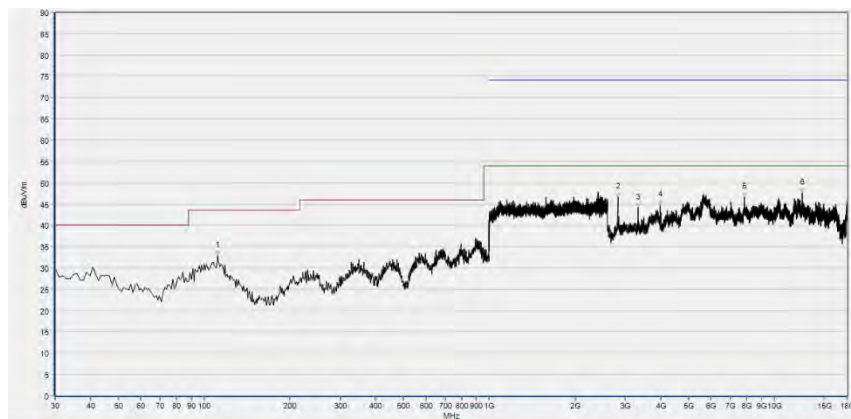


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	32.79	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2824.840	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3320.720	44.05	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3982.920	44.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7836.000	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12499.120	47.57	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

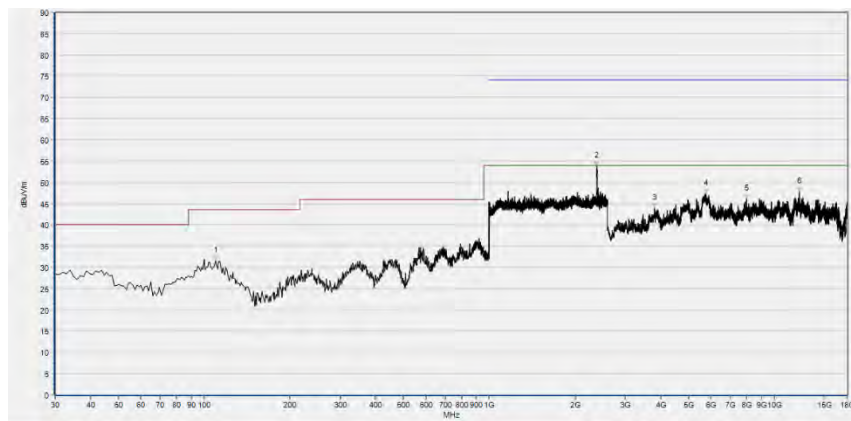

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	31.46	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2386.667	53.87	N/A	41.60	74.00	N/A	54.00	Horizontal	PASS
3801.200	43.94	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5763.160	47.29	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
7974.600	46.07	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12203.440	47.74	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

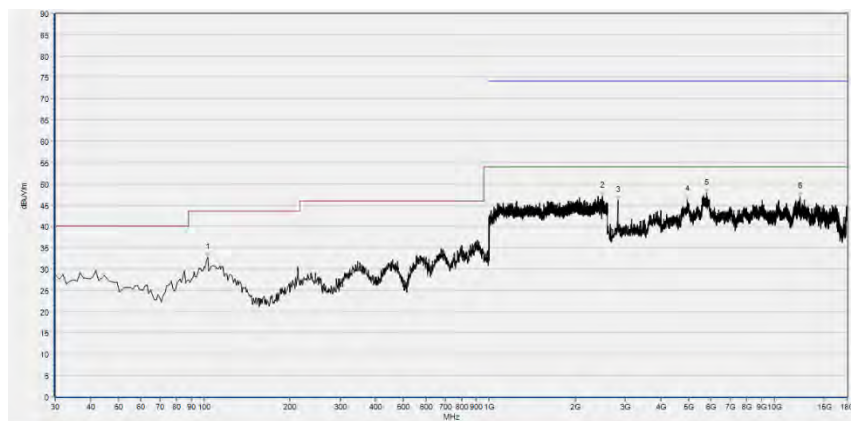


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	32.66	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2489.067	47.17	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2827.920	46.15	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
4959.280	46.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5772.400	47.82	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12277.360	46.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 9

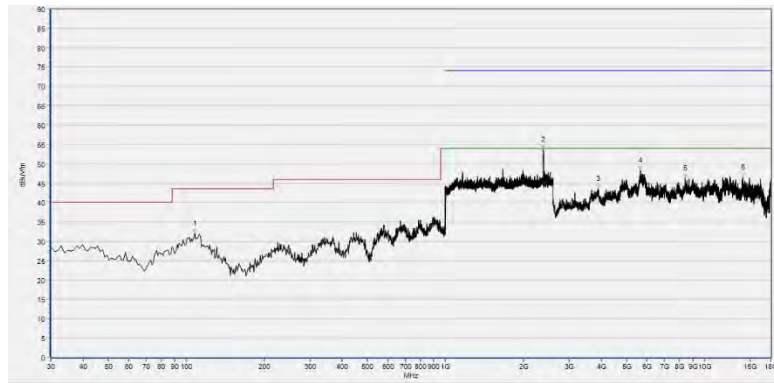

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.600	32.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2387.733	53.56	N/A	41.26	74.00	N/A	54.00	Horizontal	PASS
3878.200	43.53	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5649.200	48.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8421.200	46.18	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
14042.200	46.36	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
109.540	31.98	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1662.400	49.55	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
2827.920	46.30	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3998.320	43.96	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5867.880	47.03	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12160.320	46.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT