



REPORT No.: SZ23020294S01

Annex D Plots of Maximum SAR Test Results

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

GSM850_GPRS(4 TX slots)_Right Cheek_Ch189

Communication System: UID 0, GSM850(class 12) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.843$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 836.4 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch189/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.353 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.273 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.345 W/kg

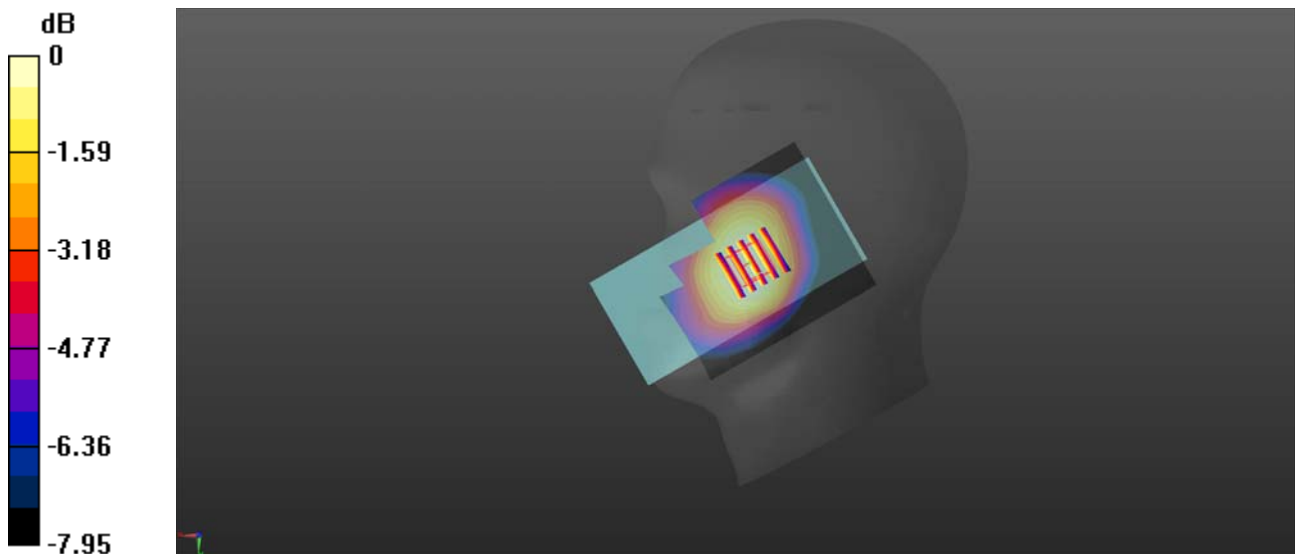

0 dB = 0.345 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

GSM1900_GPRS(4 TX slots)_Left Cheek_Ch661

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.152 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.946 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

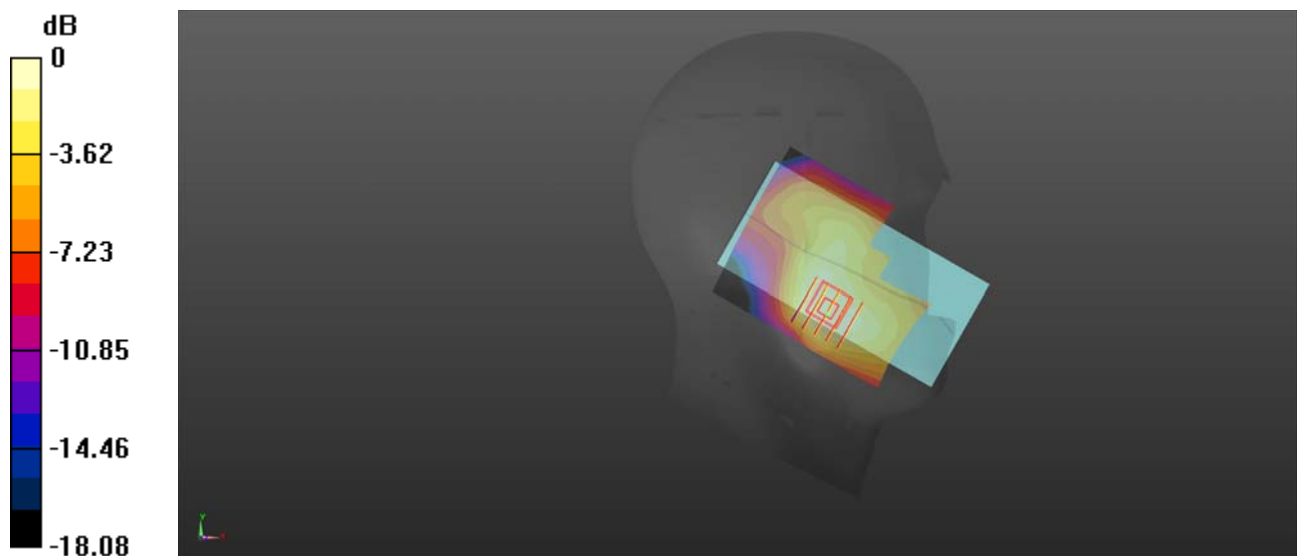

0 dB = 0.156 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

WCDMA Band II_RMC 12.2Kbps_Left Cheek_Ch9400


Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.151 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.943 V/m; Power Drift = 0.11 dB
Peak SAR (extrapolated) = 0.189 W/kg
SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.079 W/kg
Maximum value of SAR (measured) = 0.155 W/kg

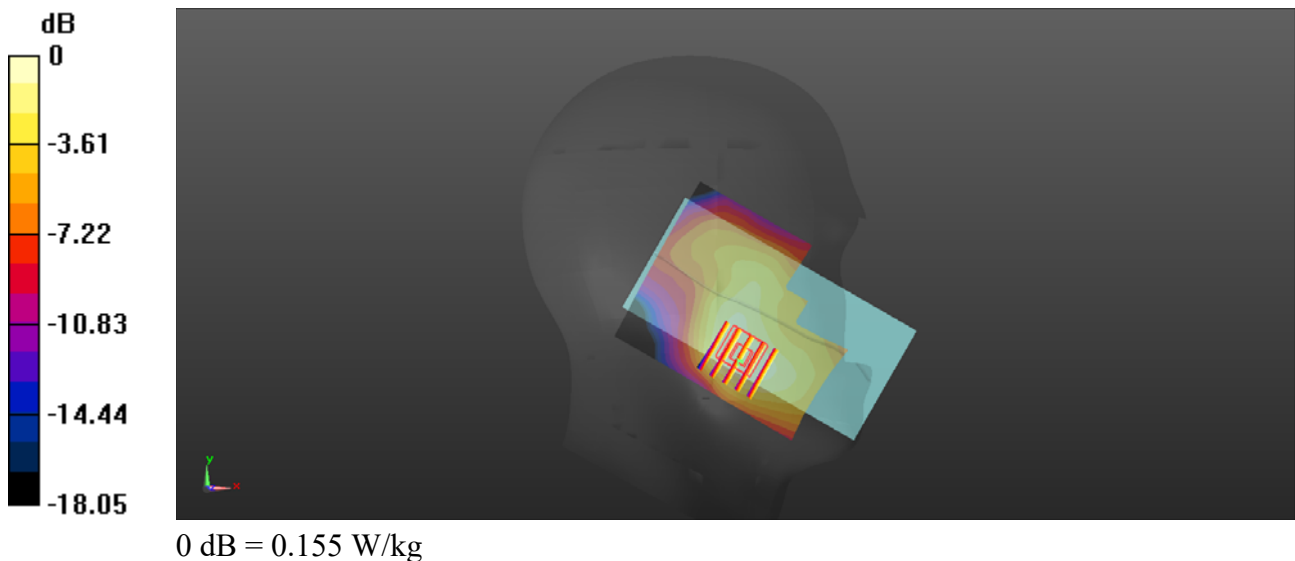

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

WCDMA Band IV_RMC 12.2Kbps_Left Cheek_Ch1413


Communication System: UID 0, UMTS-FDD (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 41.367$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1732.6 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1413/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.185 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.908 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.218 W/kg
SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.096 W/kg
Maximum value of SAR (measured) = 0.174 W/kg

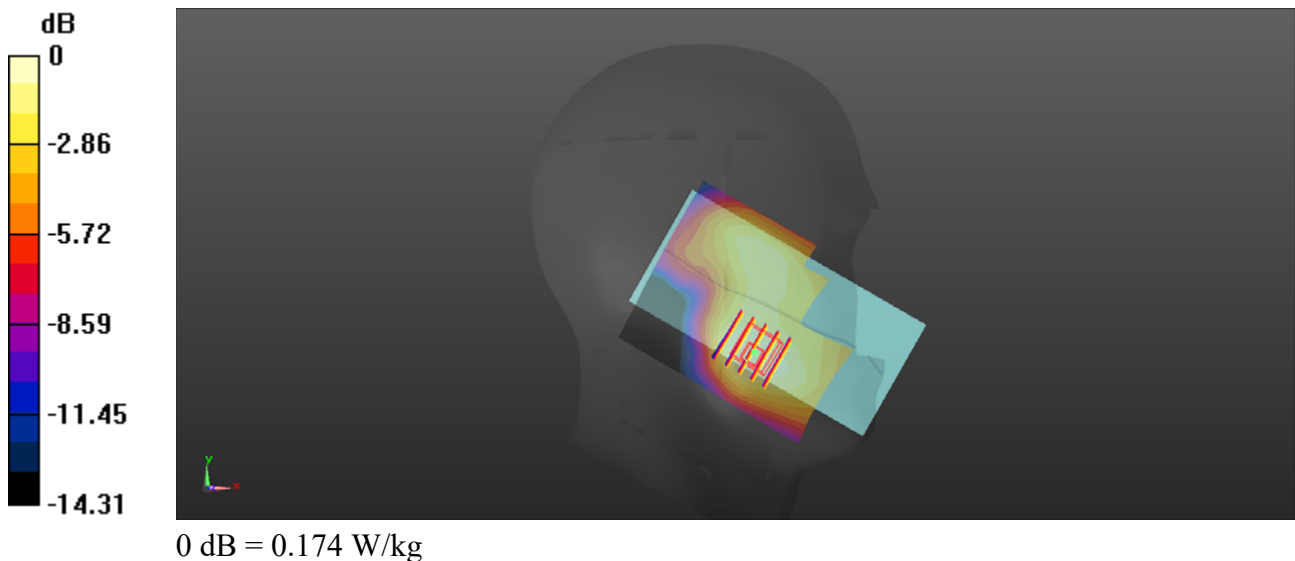

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

WCDMA Band V_RMC 12.2Kbps_Right Cheek_Ch4182

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.843$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 836.4 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.360 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.499 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.357 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.235 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

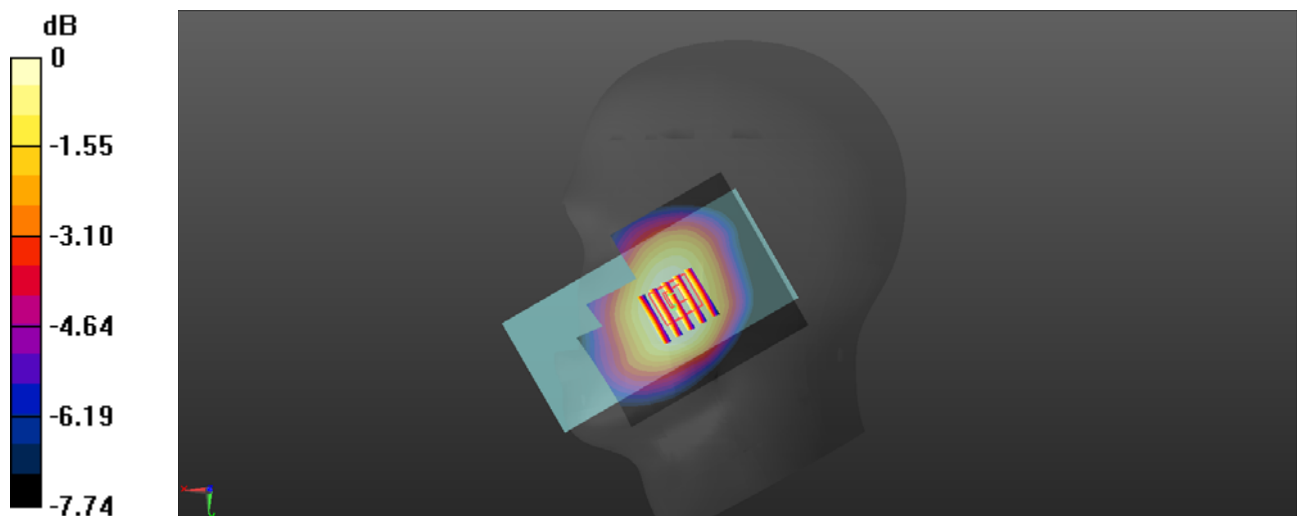

0 dB = 0.326 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

LTE Band 2_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.180 W/kg


Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.968 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

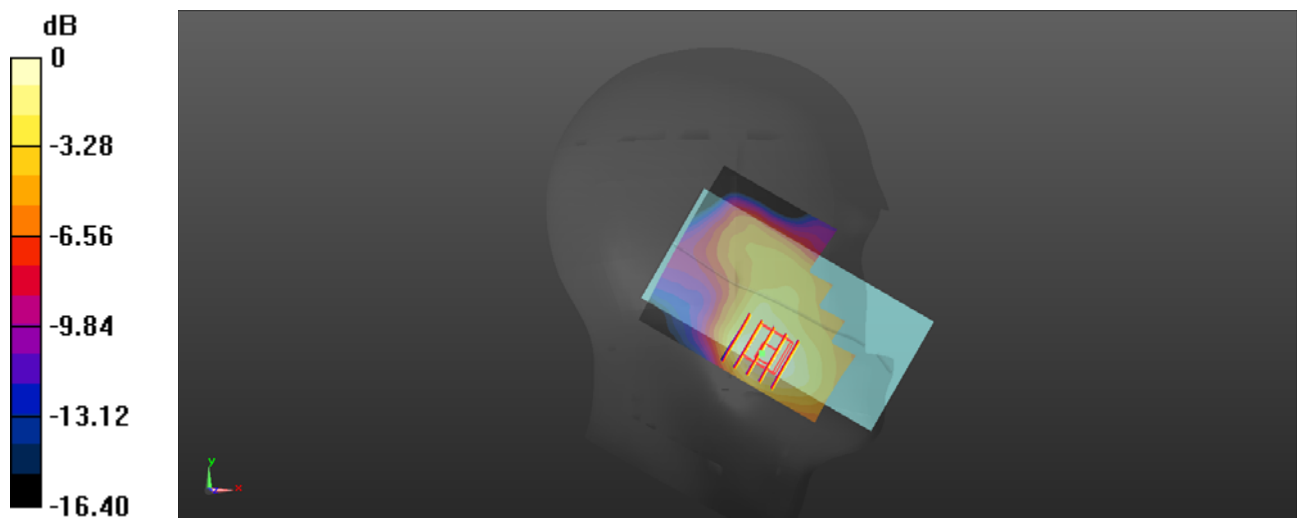

0 dB = 0.163 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

LTE Band 4_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch20175

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 41.367$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1732.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20175/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.138 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.973 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

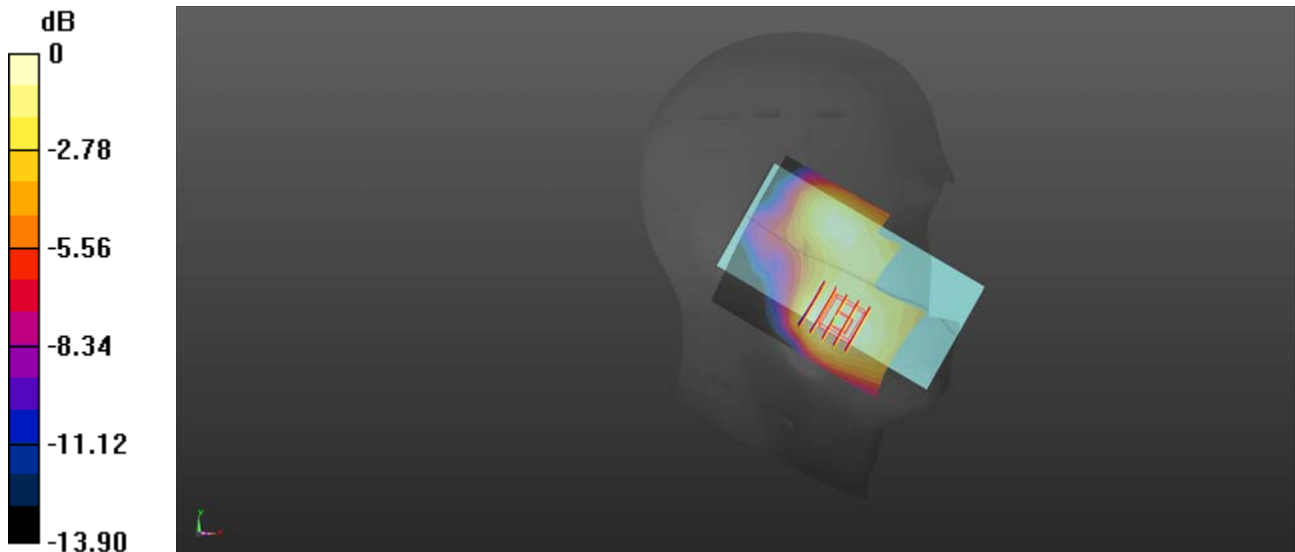

0 dB = 0.128 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

LTE Band 5_10MHz_QPSK_1RB_0Offset_Right Cheek_Ch20525

Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.843$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 836.4 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.349 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.273 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.377 W/kg
SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.233 W/kg
Maximum value of SAR (measured) = 0.340 W/kg

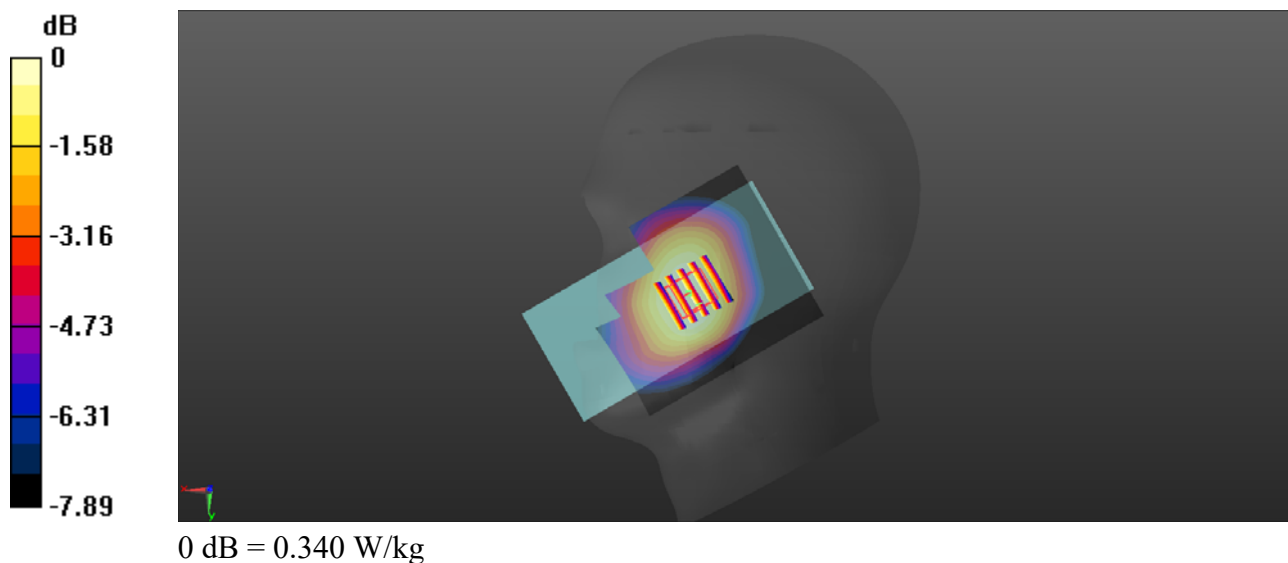

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.01

LTE Band 12_10MHz_QPSK_1RB_0Offset_Right Cheek_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.233$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.43, 10.43, 10.43) @ 707.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.252 W/kg


Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.268 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.271 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.174 W/kg

Maximum value of SAR (measured) = 0.247 W/kg

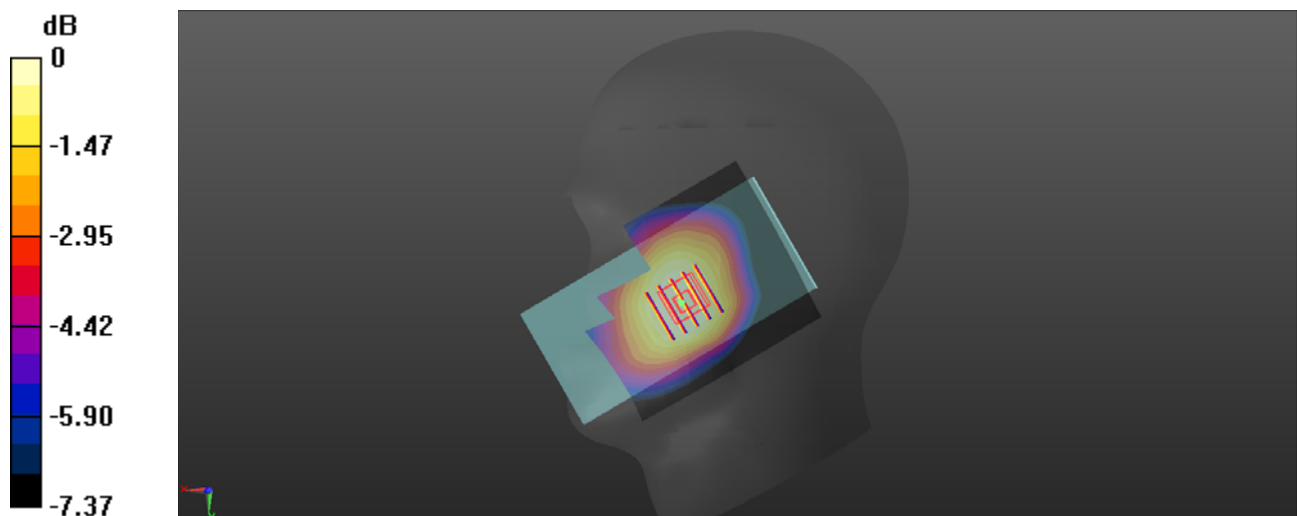

0 dB = 0.247 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

LTE Band 25_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch26365

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL_2000 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.91$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1882.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.187 W/kg


Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.603 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.221 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

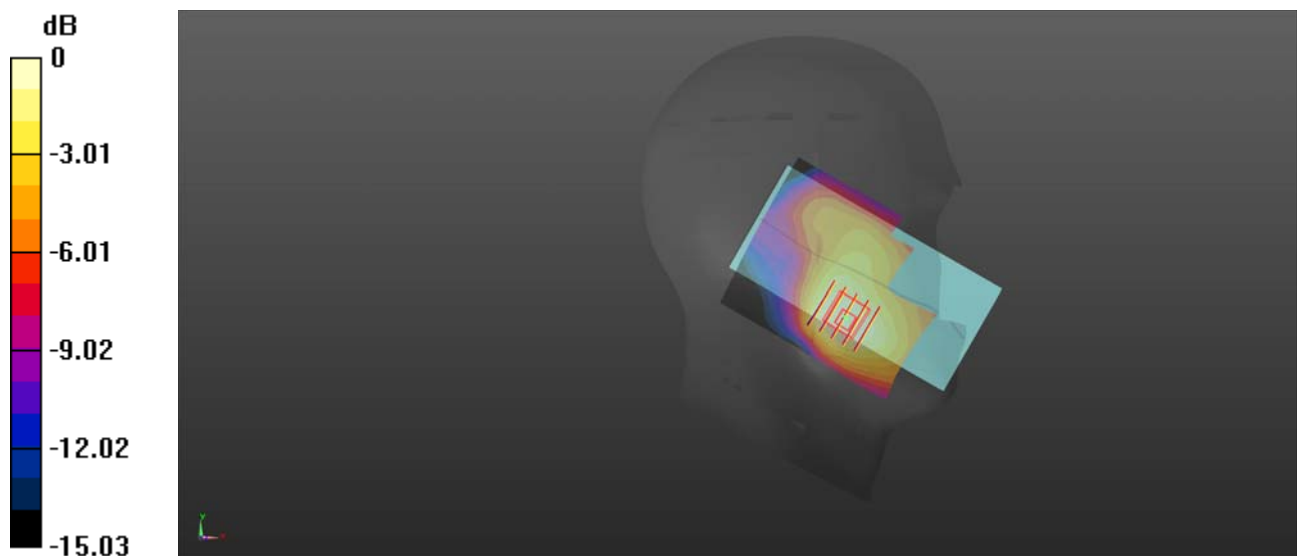

0 dB = 0.175 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

LTE Band 26_15MHz_QPSK_1RB_0Offset_Right Cheek_Ch26865

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_900 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 40.861$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 831.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26865/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.401 W/kg


Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.913 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.380 W/kg

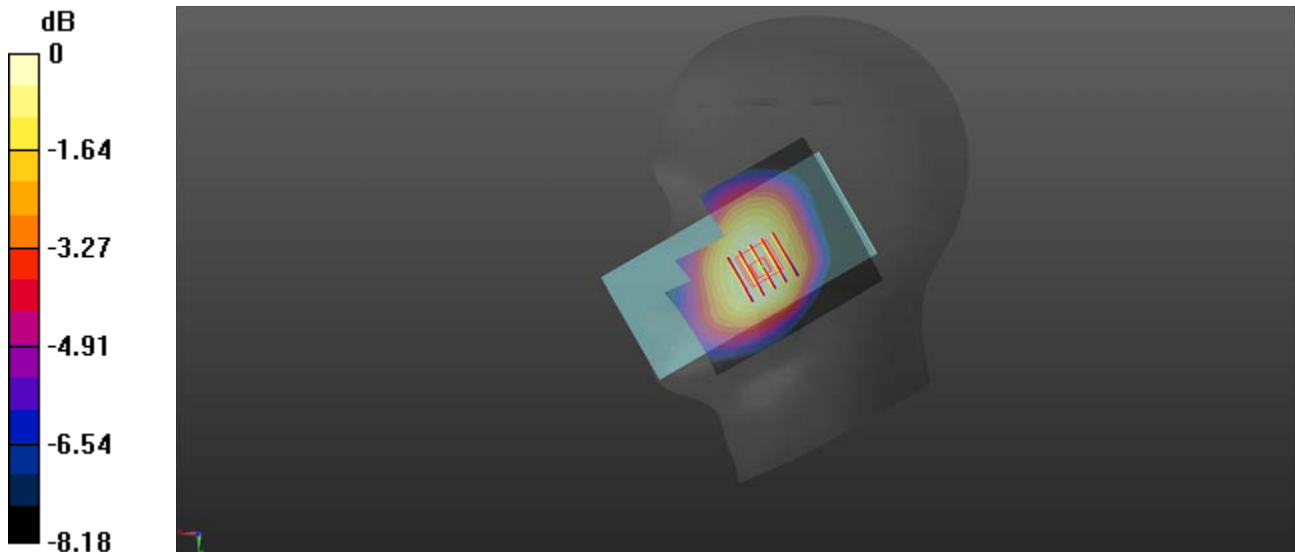

0 dB = 0.380 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.07

LTE Band 41_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch40620_P2

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.214$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.5, 7.5, 7.5) @ 2593 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40620/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.526 W/kg


Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.881 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.627 W/kg

SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.212 W/kg

Maximum value of SAR (measured) = 0.498 W/kg

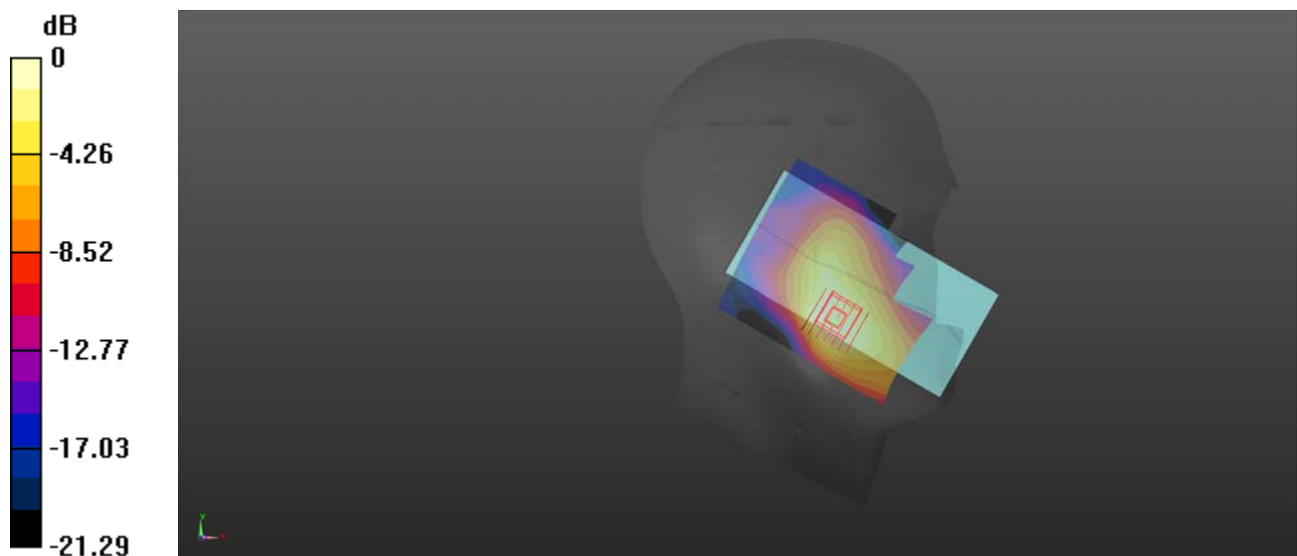

0 dB = 0.498 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

LTE Band 66_20MHz_QPSK_1RB_0Offset_Left Cheek_Ch132322

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 41.164$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1745 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.145 W/kg


Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.753 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.165 W/kg

SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.072 W/kg

Maximum value of SAR (measured) = 0.131 W/kg

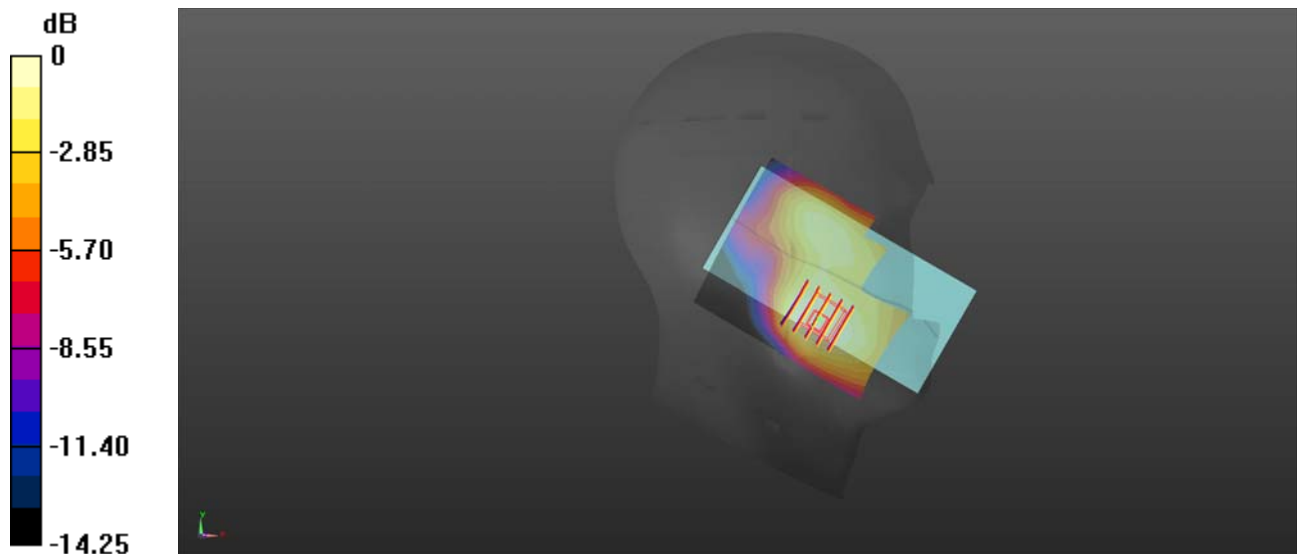

0 dB = 0.131 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.01

LTE Band 71_20MHz_QPSK_1RB_0Offset_Right Cheek_Ch133322


Communication System: UID 0, UMTS-FDD (0); Frequency: 683 MHz; Duty Cycle: 1:1
Medium: HSL_750 Medium parameters used: $f = 683$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.843$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 683 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch133322/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.172 W/kg

Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.726 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.177 W/kg
SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.118 W/kg
Maximum value of SAR (measured) = 0.163 W/kg

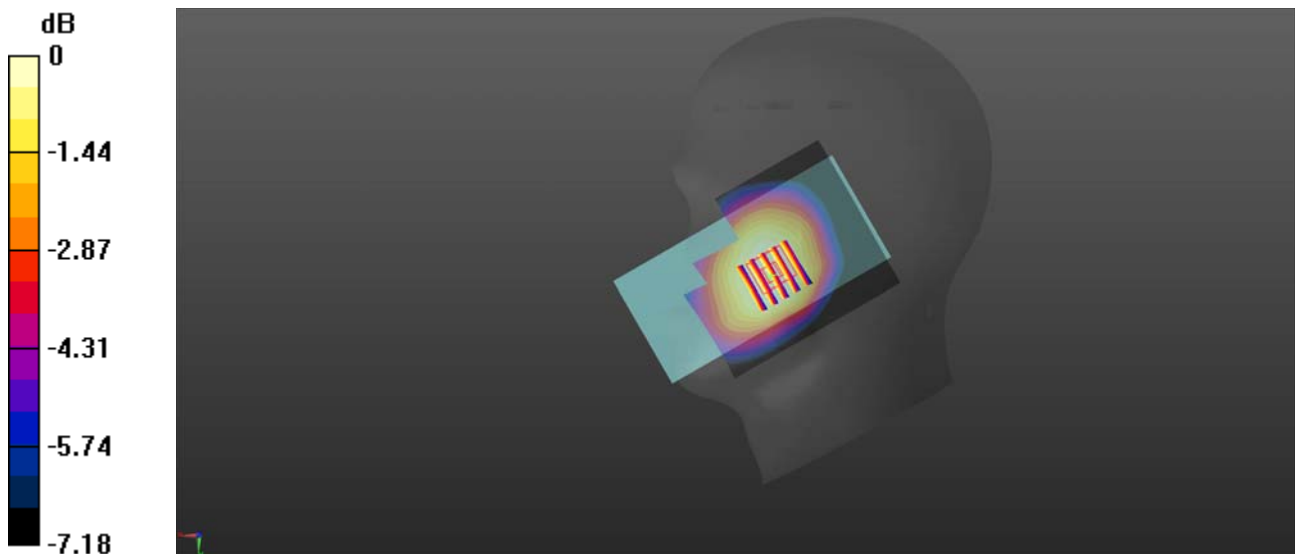

0 dB = 0.163 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.06

WLAN 2.4GHz_802.11b 1Mbps_Left Cheek_Ch7

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1.012
Medium: HSL_2450 Medium parameters used: $f = 2442$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.829$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.71, 7.71, 7.71) @ 2442 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch7/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.636 W/kg


Ch7/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.937 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.744 W/kg

SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.216 W/kg

Maximum value of SAR (measured) = 0.564 W/kg

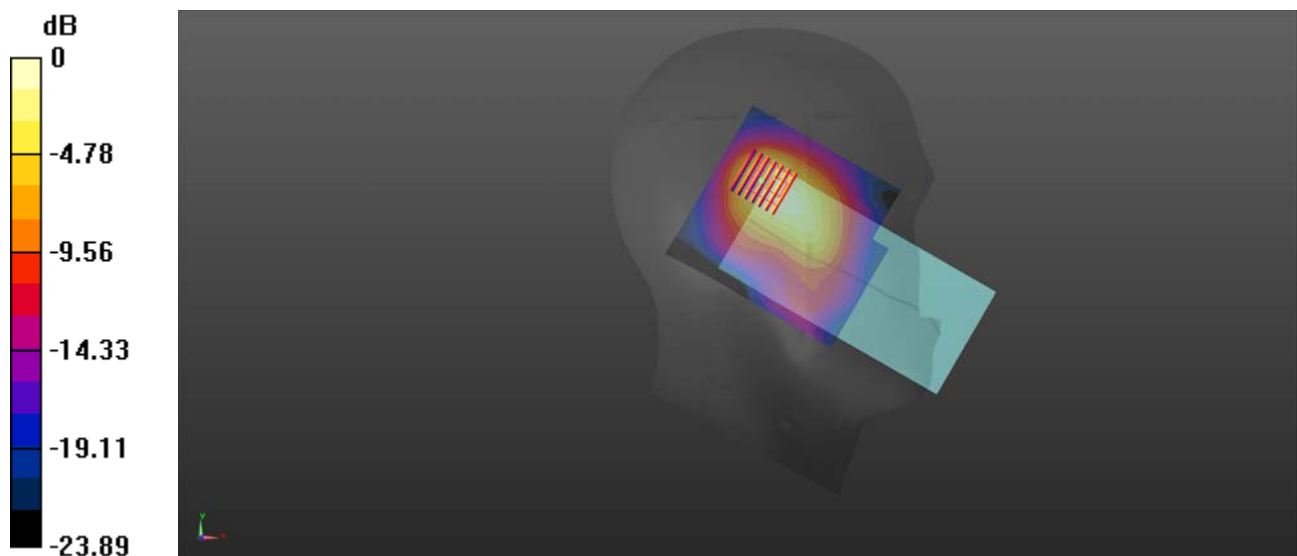

0 dB = 0.636 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.09

WLAN 5.2GHz_802.11n-HT40 MCS0_Left Cheek_Ch46


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5230 MHz; Duty Cycle: 1:1.038
Medium: HSL_5750 Medium parameters used: $f = 5230$ MHz; $\sigma = 4.676$ S/m; $\epsilon_r = 36.093$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.57, 5.57, 5.57) @ 5230 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch46/Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.426 W/kg

Ch46/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 1.001 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.048 W/kg
Maximum value of SAR (measured) = 0.426 W/kg

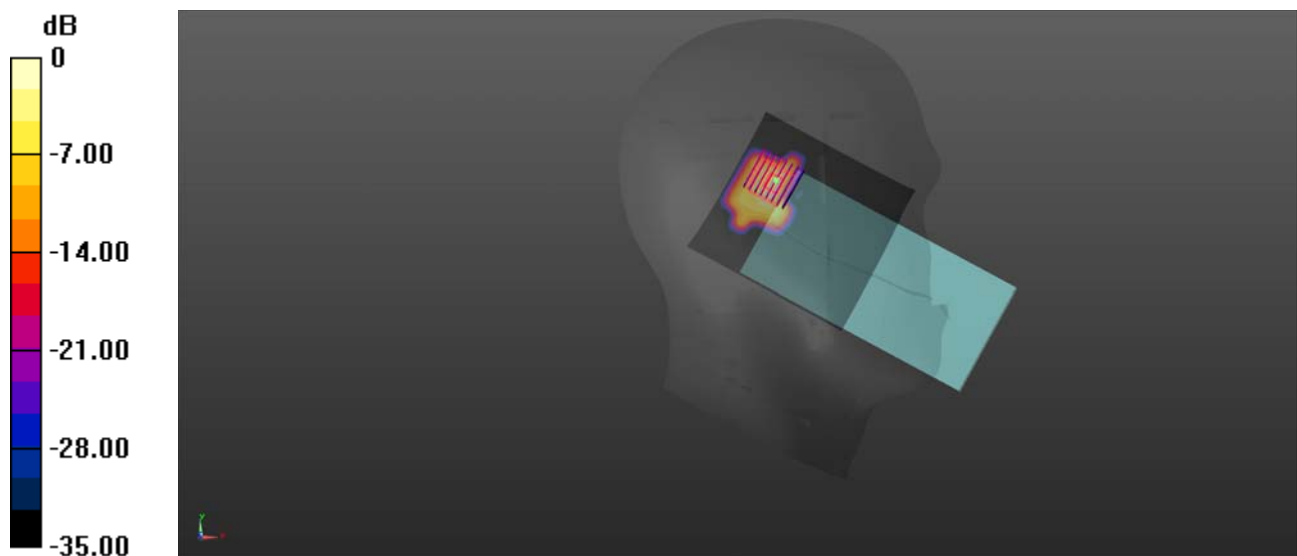

0 dB = 0.426 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.10

WLAN 5.8GHz_802.11n-HT40 MCS0_Left Cheek_Ch151


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5755 MHz; Duty Cycle: 1:1.038
Medium: HSL_5750 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.306$ S/m; $\epsilon_r = 35.15$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.08, 5.08, 5.08) @ 5755 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch151/Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.04 W/kg

Ch151/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 2.629 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.26 W/kg
SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.085 W/kg
Maximum value of SAR (measured) = 0.713 W/kg

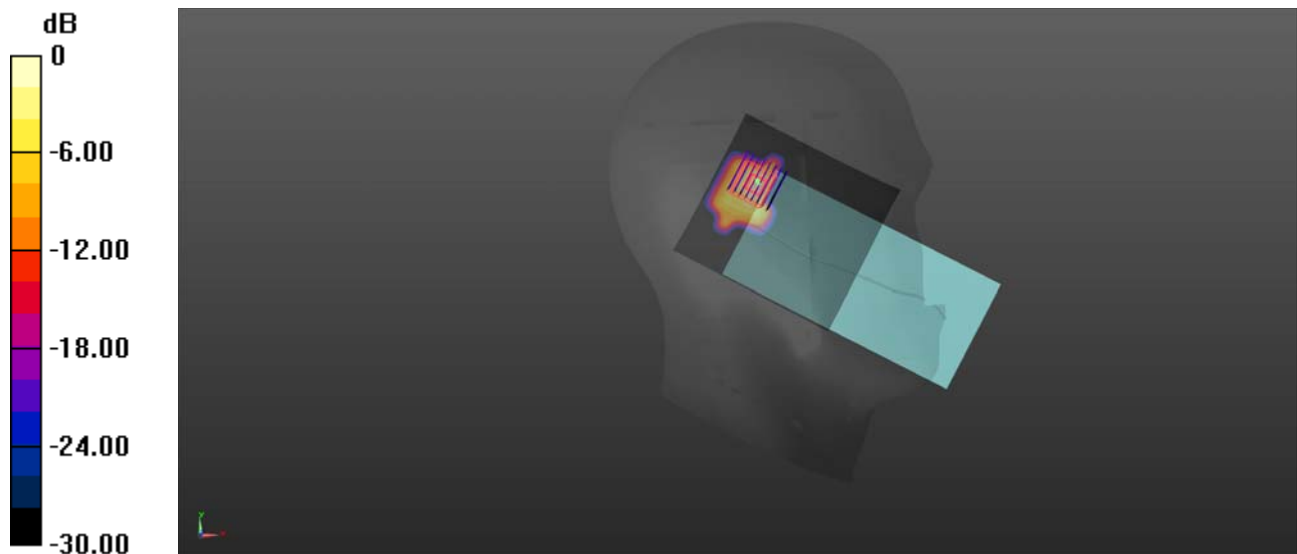

0 dB = 0.713 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

GSM850_GPRS(4 TX slots)_Back Side_10mm_Ch189


Communication System: UID 0, GSM850(class 12) (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.08
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.843$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 836.4 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch189/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm.
Maximum value of SAR (interpolated) = 0.186 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.72 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.205 W/kg
SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.124 W/kg
Maximum value of SAR (measured) = 0.186 W/kg

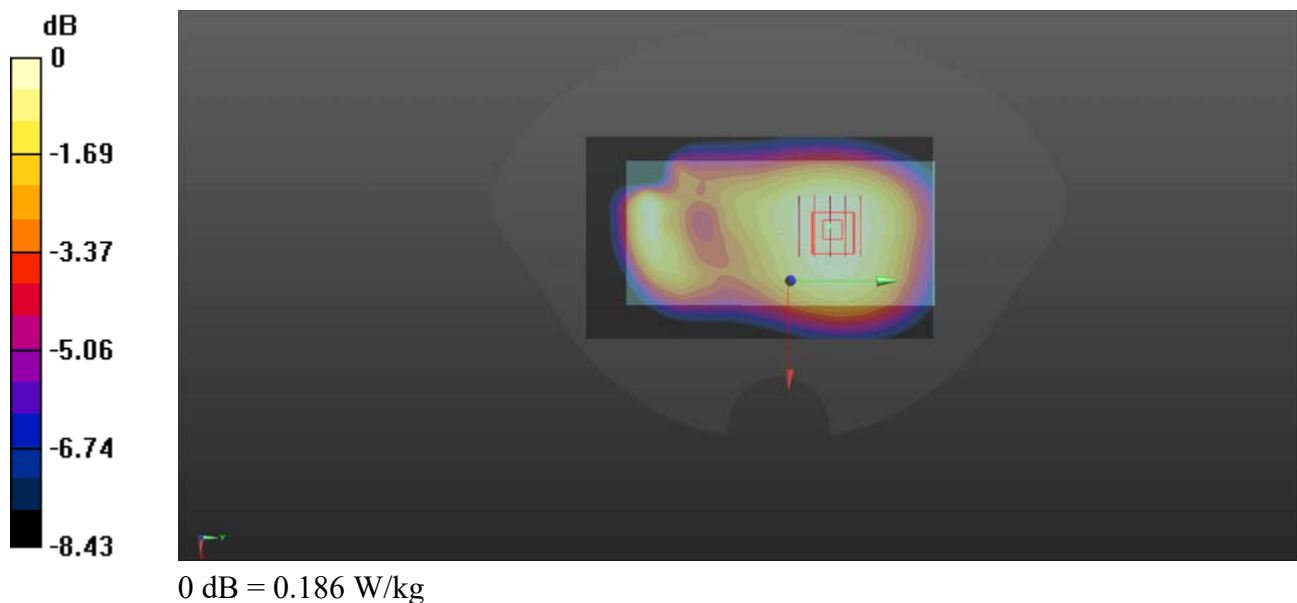

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

GSM1900_GPRS(4 TX slots)_Back Side_10mm_Ch661

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.337 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.150 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.439 W/kg

SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.154 W/kg

Maximum value of SAR (measured) = 0.337 W/kg

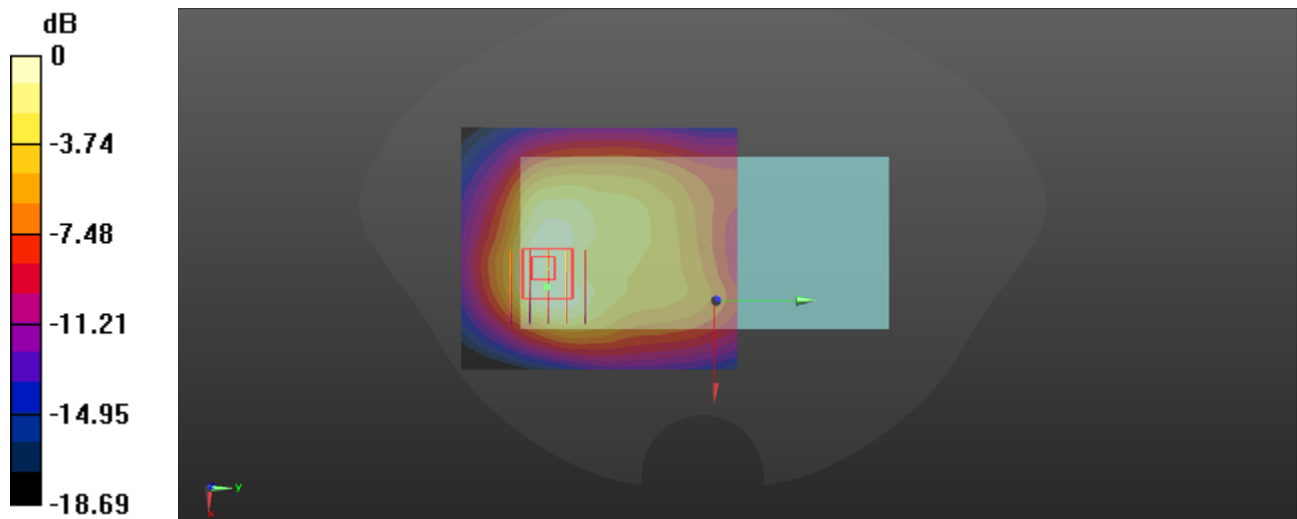

0 dB = 0.337 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

GSM1900_GPRS(4 TX slots)_Bottom Side_10mm_Ch661

Communication System: UID 0, GSM1900(class 12) (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch661/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Configuration/Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.89 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.210 W/kg

Maximum value of SAR (measured) = 0.994 W/kg

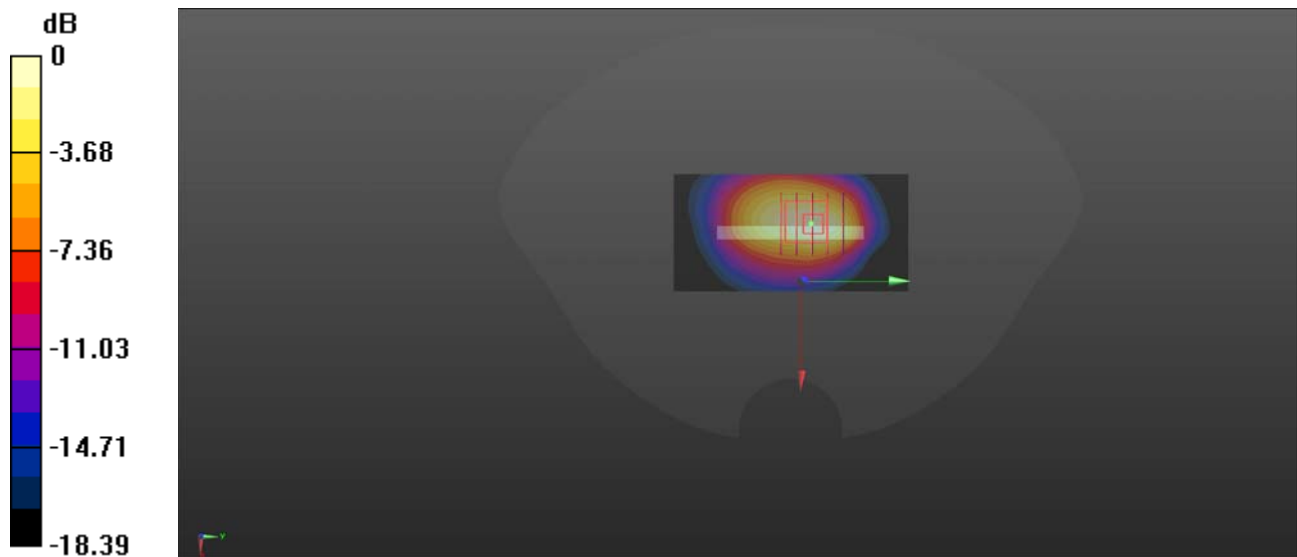

0 dB = 0.994 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

WCDMA Band II_RMC 12.2Kbps_Back Side_10mm_Ch9400


Communication System: UID 0, UMTS-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9400/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.917 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.948 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.640 W/kg; SAR(10 g) = 0.367 W/kg
Maximum value of SAR (measured) = 0.859 W/kg

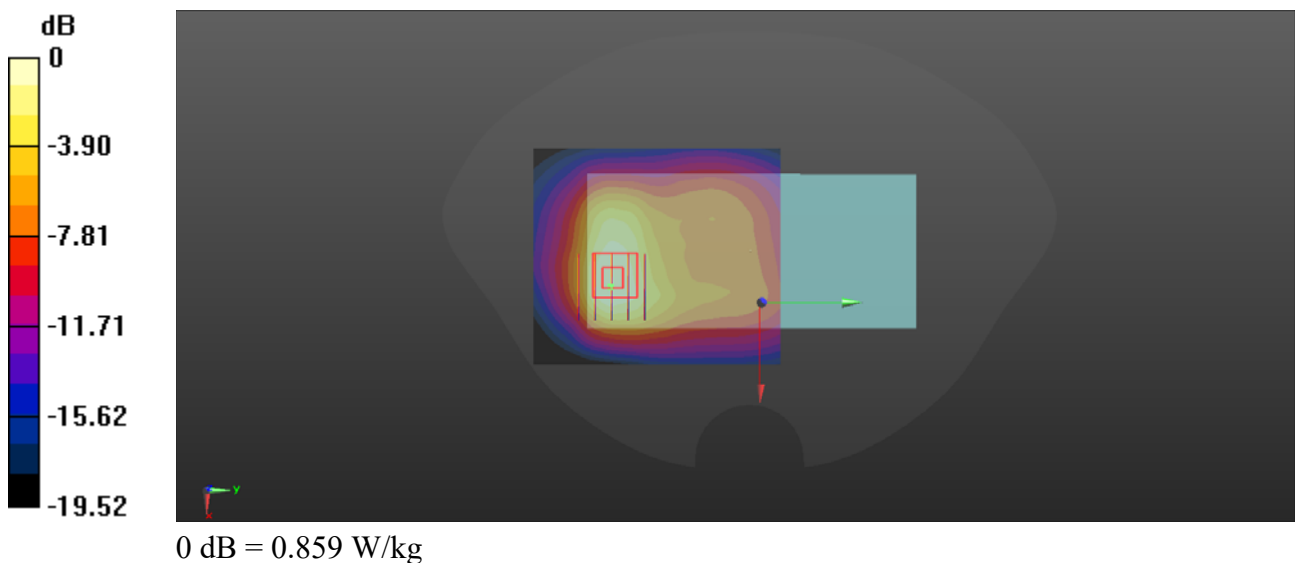

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

WCDMA Band II_RMC 12.2Kbps_Bottom Side_10mm_Ch9262


Communication System: UID 0, UMTS-FDD (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: HSL_2000 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.296$ S/m; $\epsilon_r = 39.768$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1852.4 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch9262/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.17 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.16 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 1.35 W/kg
SAR(1 g) = 0.780 W/kg; SAR(10 g) = 0.431 W/kg
Maximum value of SAR (measured) = 1.08 W/kg

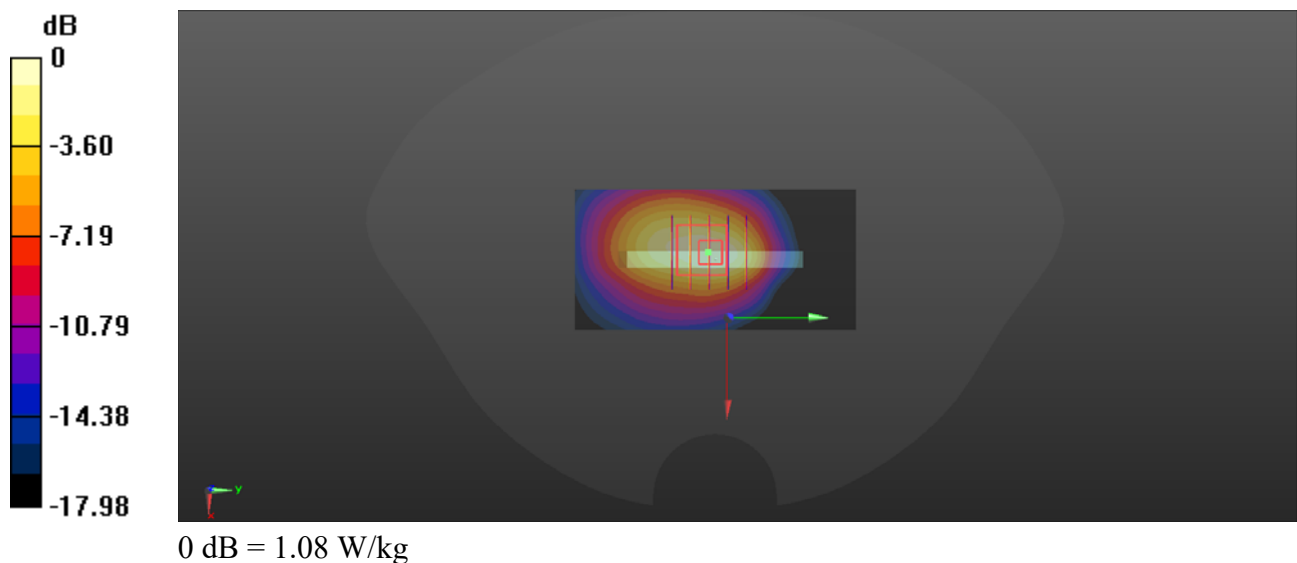

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

WCDMA Band IV_RMC 12.2Kbps_Back Side_10mm_Ch1413


Communication System: UID 0, UMTS-FDD (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 41.367$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1732.6 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1413/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.903 W/kg

Ch1413/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.518 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.353 W/kg
Maximum value of SAR (measured) = 0.764 W/kg

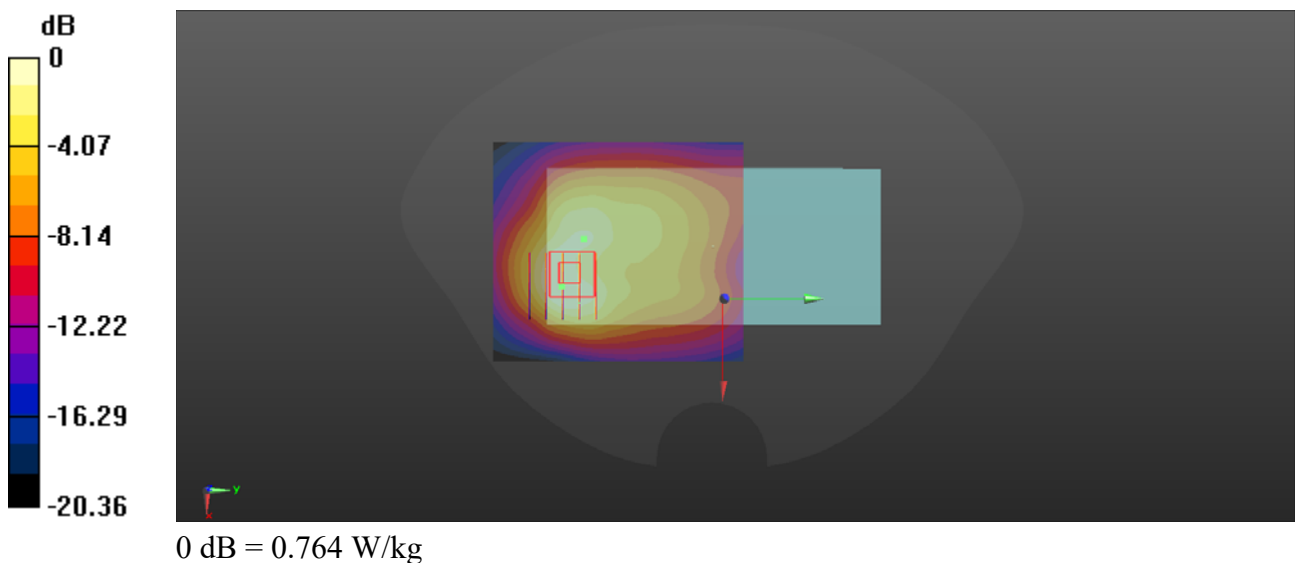

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

WCDMA Band IV_RMC 12.2Kbps_Bottom Side_10mm_Ch1513


Communication System: UID 0, UMTS-FDD (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 41.122$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1752.6 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch1513/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.27 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.38 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.851 W/kg; SAR(10 g) = 0.467 W/kg
Maximum value of SAR (measured) = 1.17 W/kg

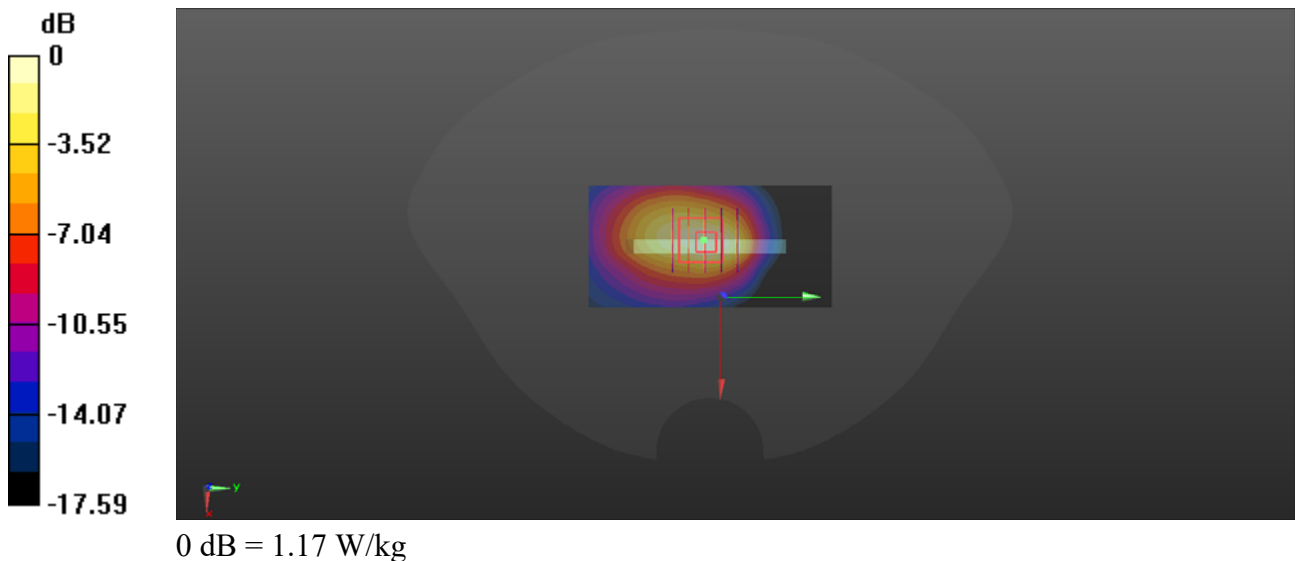

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

WCDMA Band V_RMC 12.2Kbps_Back Side_10mm_Ch4182


Communication System: UID 0, UMTS-FDD (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.843$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 836.4 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.522 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.67 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 0.676 W/kg
SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.207 W/kg
Maximum value of SAR (measured) = 0.531 W/kg

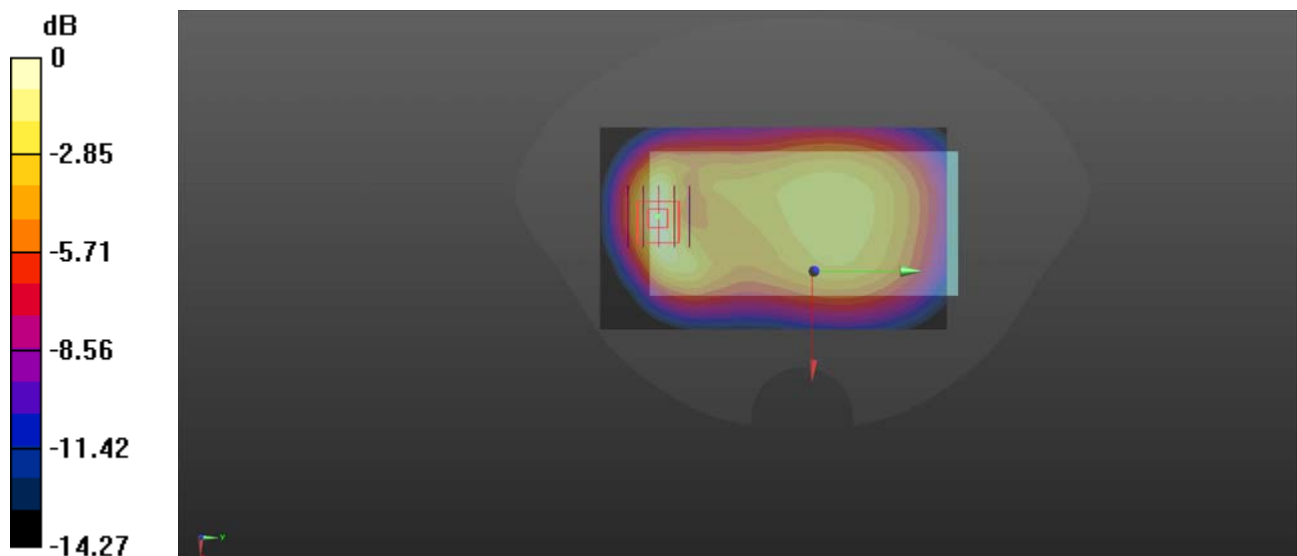

0 dB = 0.531 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

LTE Band 2_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.691 W/kg


Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.56 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.833 W/kg

SAR(1 g) = 0.495 W/kg; SAR(10 g) = 0.283 W/kg

Maximum value of SAR (measured) = 0.653 W/kg

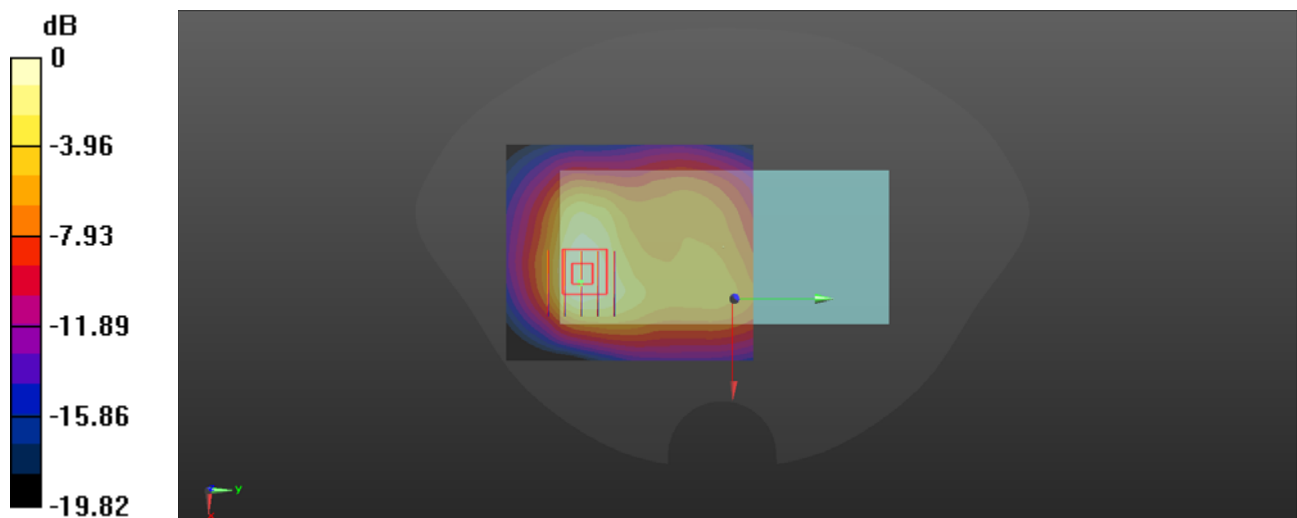

0 dB = 0.653 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

LTE Band 2_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch18900

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL_2000 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.882$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1880 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch18900/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


Ch18900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.59 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.687 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 0.952 W/kg

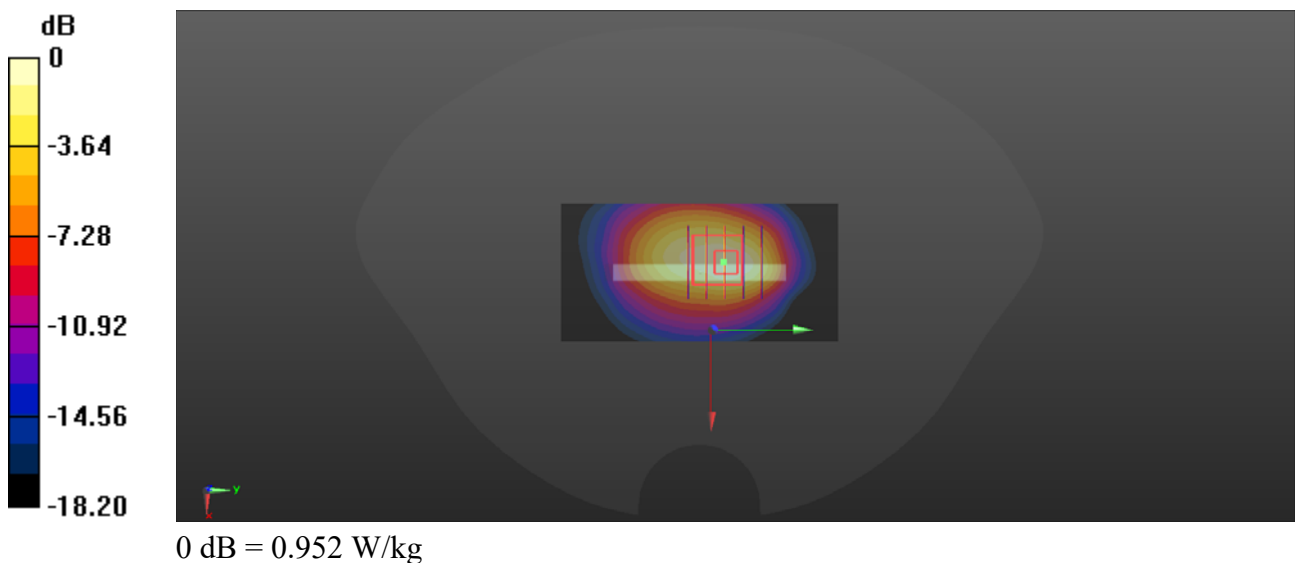

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

LTE Band 4_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch20175


Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 41.367$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1732.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20175/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.737 W/kg

Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 9.150 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 0.839 W/kg
SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.298 W/kg
Maximum value of SAR (measured) = 0.662 W/kg

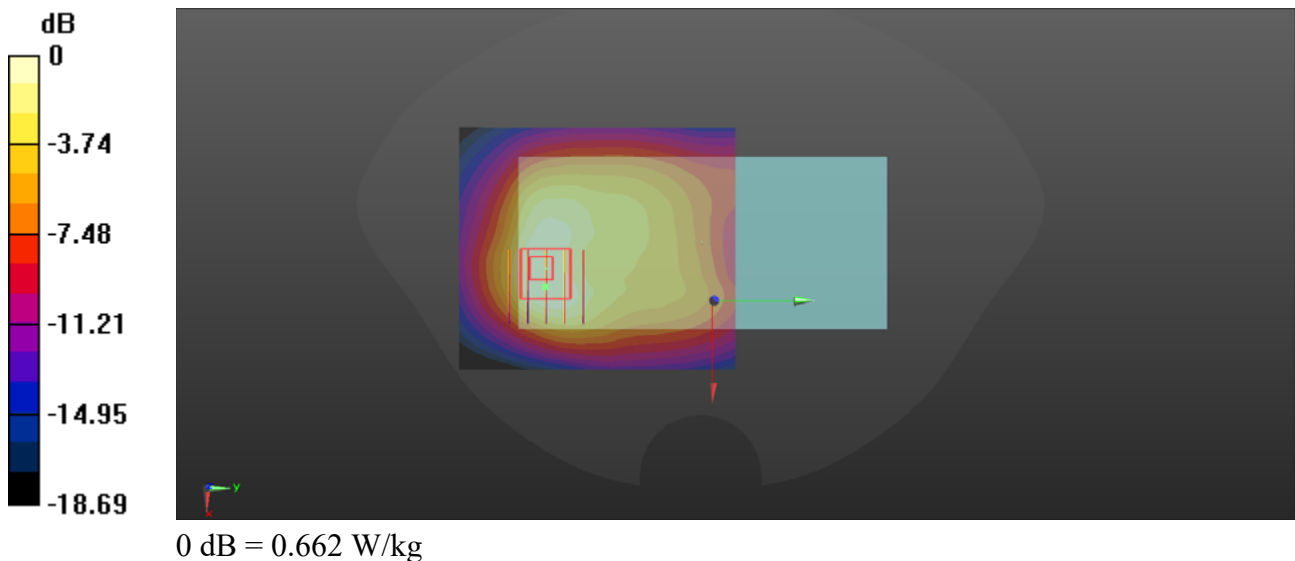

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

LTE Band 4_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch20175

Communication System: UID 0, LTE (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 41.367$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1732.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20175/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.881 W/kg


Ch20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.34 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.595 W/kg; SAR(10 g) = 0.326 W/kg

Maximum value of SAR (measured) = 0.829 W/kg

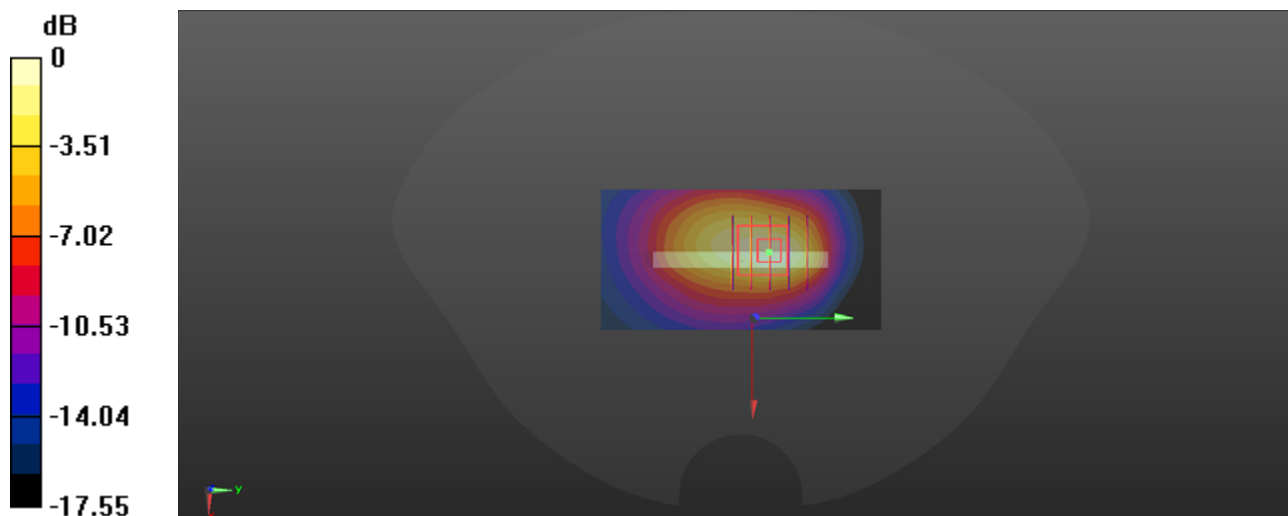

0 dB = 0.829 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

LTE Band 5_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch20525


Communication System: UID 0, LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.958$ S/m; $\epsilon_r = 40.846$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 836.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch20525/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.421 W/kg

Ch20525/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.06 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.591 W/kg
SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.190 W/kg
Maximum value of SAR (measured) = 0.460 W/kg

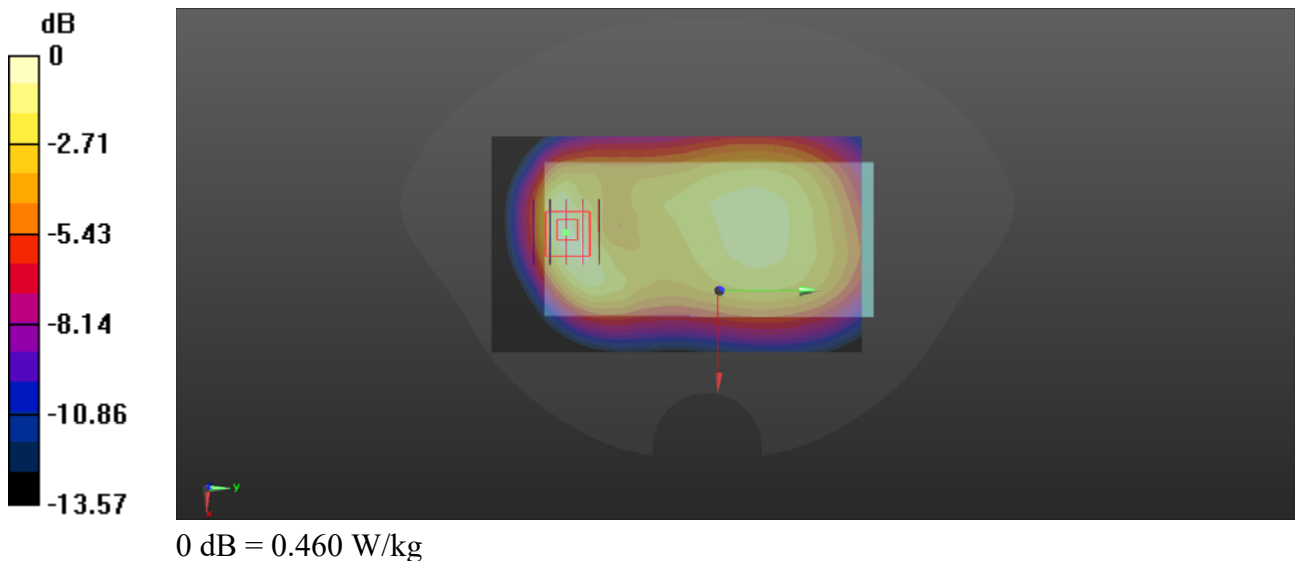

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.01

LTE Band 12_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch23095

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 42.233$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.43, 10.43, 10.43) @ 707.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch23095/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.508 W/kg


Ch23095/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.38 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.466 W/kg

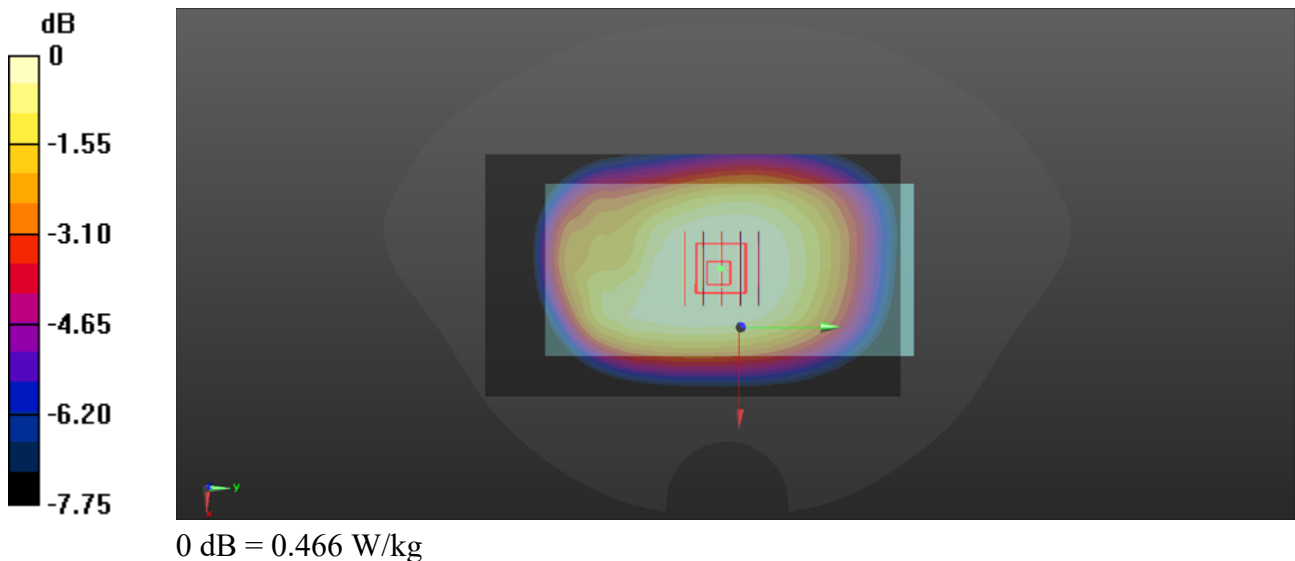

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

LTE Band 25_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch26365

Communication System: UID 0, LTE (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL_2000 Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 39.91$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1882.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26365/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.723 W/kg


Ch26365/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.949 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.831 W/kg

SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.289 W/kg

Maximum value of SAR (measured) = 0.667 W/kg

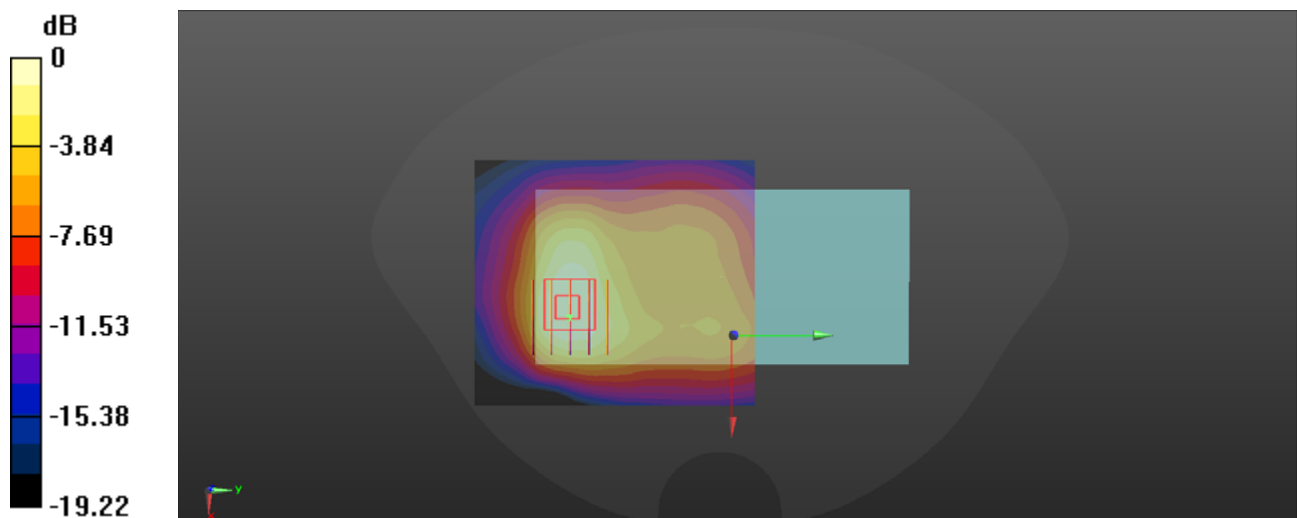

0 dB = 0.667 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.08

LTE Band 25_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch26590

Communication System: UID 0, LTE (0); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: HSL_2000 Medium parameters used: $f = 1905$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 39.739$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.27, 8.27, 8.27) @ 1905 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26590/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg


Ch26590/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.53 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.450 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

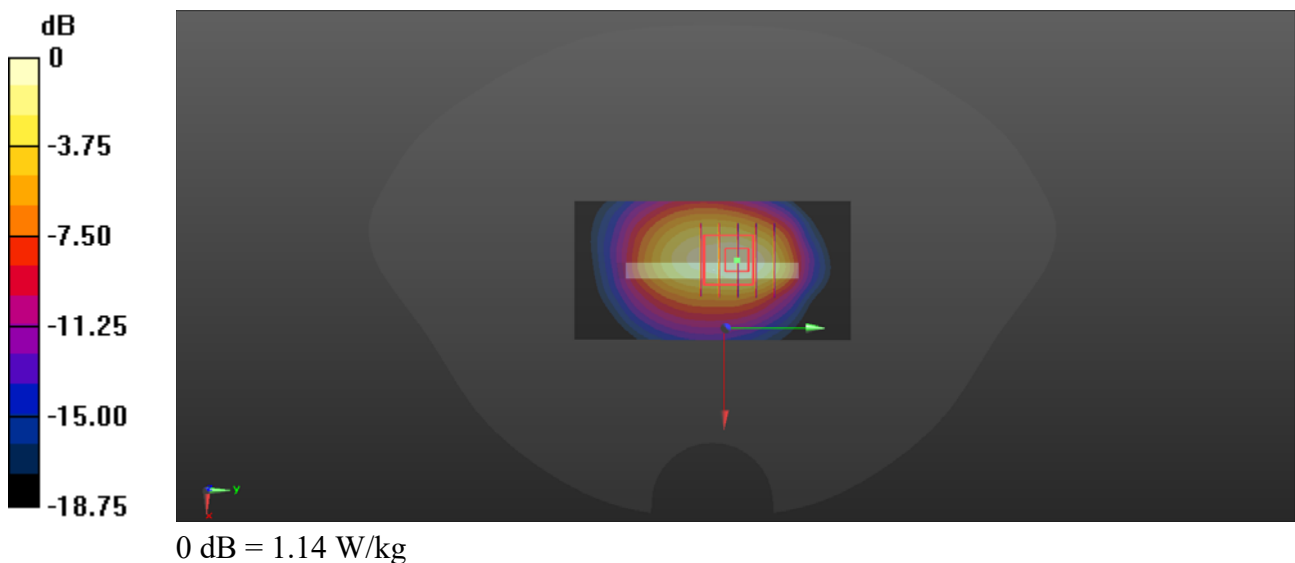

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.04

LTE Band 26_15MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch26865


Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL_900 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.956$ S/m; $\epsilon_r = 40.861$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.1, 10.1, 10.1) @ 831.5 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch26865/Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.469 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.73 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.574 W/kg
SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.181 W/kg
Maximum value of SAR (measured) = 0.450 W/kg

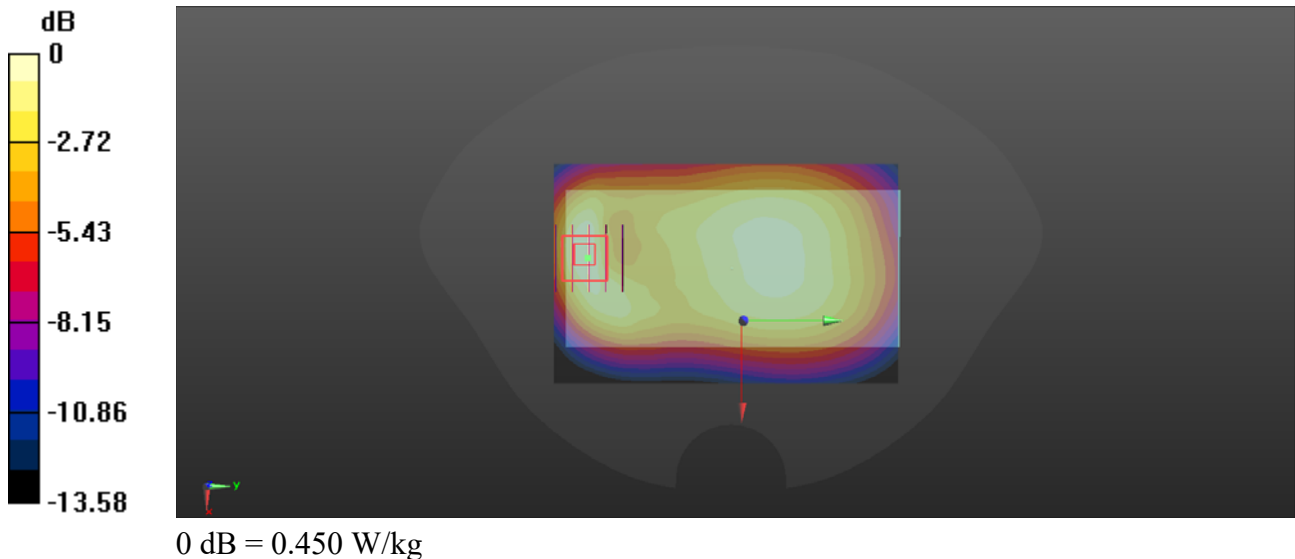

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.07

LTE Band 41_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch40620_P2

Communication System: UID 0, LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.214$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.5, 7.5, 7.5) @ 2593 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch40620/Area Scan (91x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.713 W/kg


Ch40620/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.145 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.897 W/kg

SAR(1 g) = 0.484 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.685 W/kg

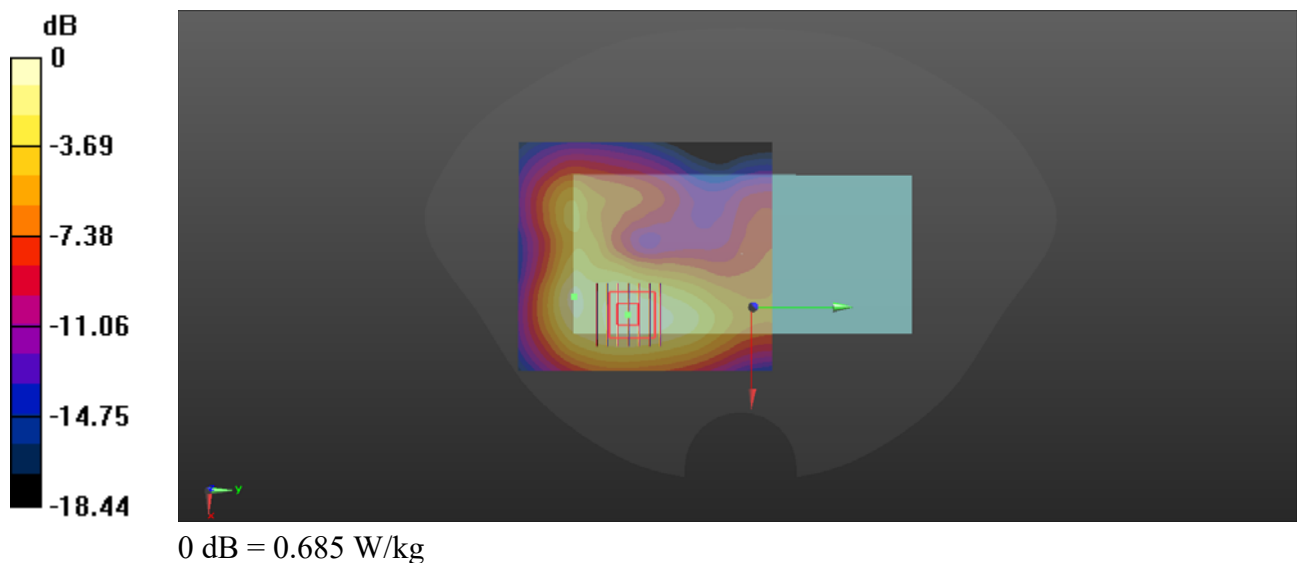

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

LTE Band 66_20MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch132322

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 41.164$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1745 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.619 W/kg


Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.206 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.243 W/kg

Maximum value of SAR (measured) = 0.542 W/kg

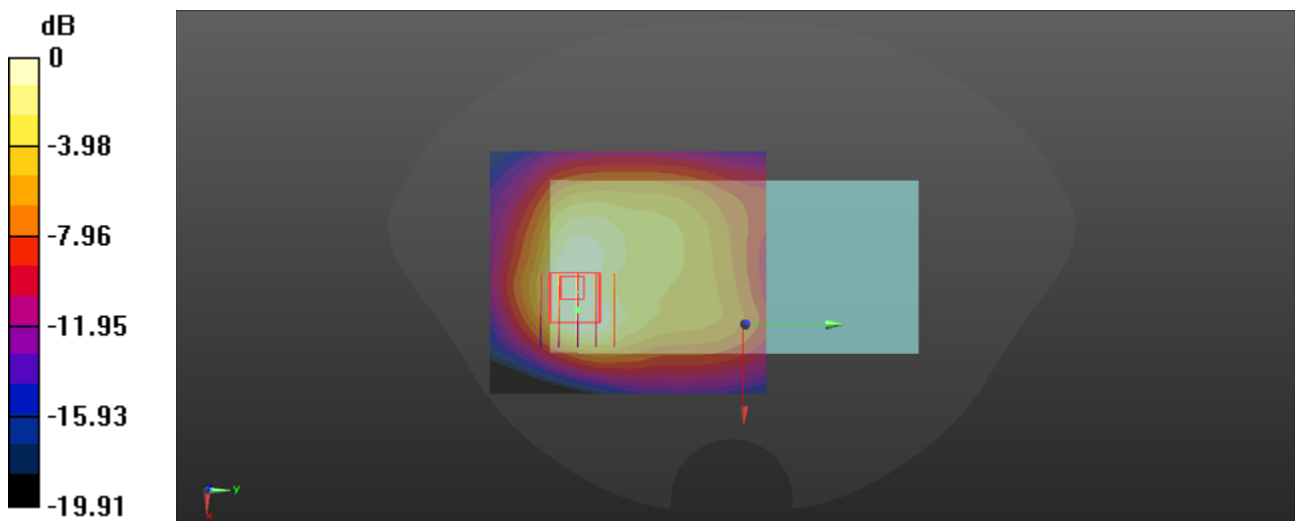

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.02

LTE Band 66_20MHz_QPSK_1RB_0Offset_Bottom Side_10mm_Ch132322

Communication System: UID 0, LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1800 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 41.164$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(8.6, 8.6, 8.6) @ 1745 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch132322/Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.859 W/kg


Ch132322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.00 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.995 W/kg

SAR(1 g) = 0.584 W/kg; SAR(10 g) = 0.321 W/kg

Maximum value of SAR (measured) = 0.813 W/kg

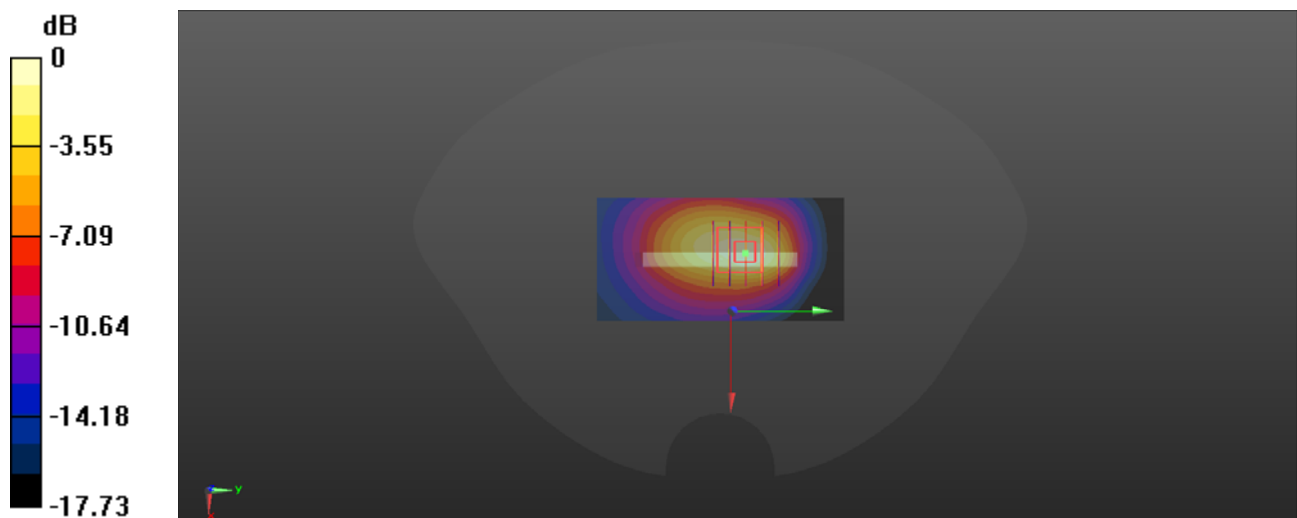

0 dB = 0.813 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.01

LTE Band 71_10MHz_QPSK_1RB_0Offset_Back Side_10mm_Ch133322

Communication System: UID 0, LTE (0); Frequency: 683 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 683$ MHz; $\sigma = 0.91$ S/m; $\epsilon_r = 42.287$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(10.43, 10.43, 10.43) @ 683 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch133322/Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


Ch133322/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.31 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.281 W/kg

SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

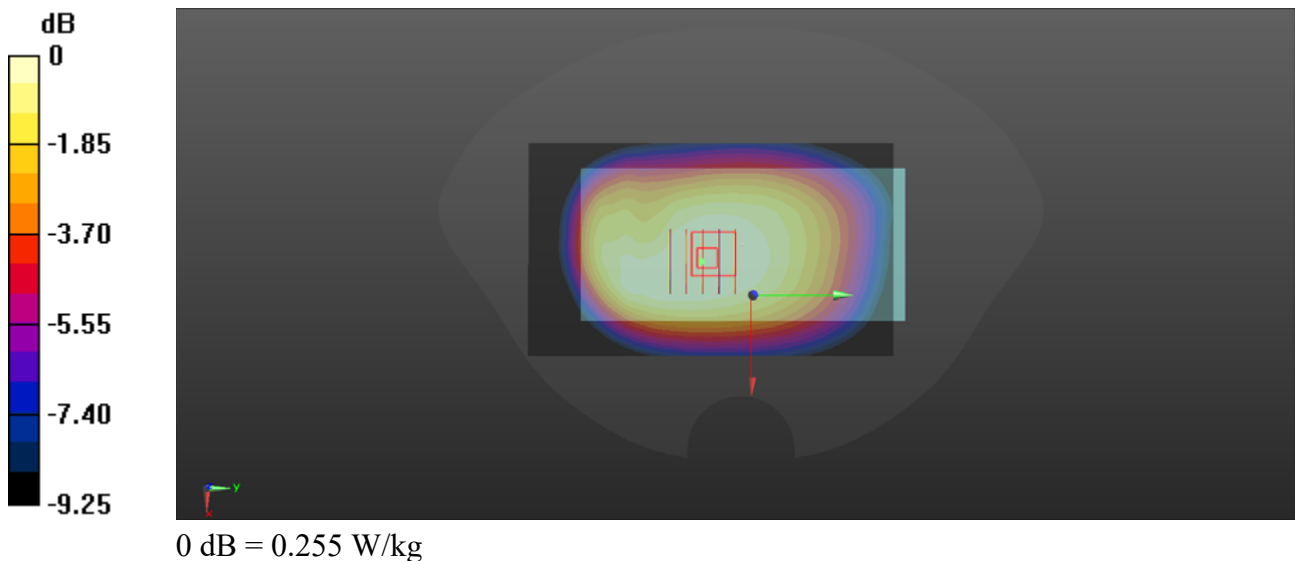

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.06

WLAN 2.4GHz_802.11b 1Mbps_Back Side_10mm_Ch7

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2442 MHz; Duty Cycle: 1:1.012
Medium: HSL_2450 Medium parameters used: $f = 2442$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 38.829$; $\rho = 1000$ kg/m³


Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.71, 7.71, 7.71) @ 2442 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch7/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.216 W/kg

Ch7/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.747 V/m; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 0.292 W/kg
SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.081 W/kg
Maximum value of SAR (measured) = 0.217 W/kg

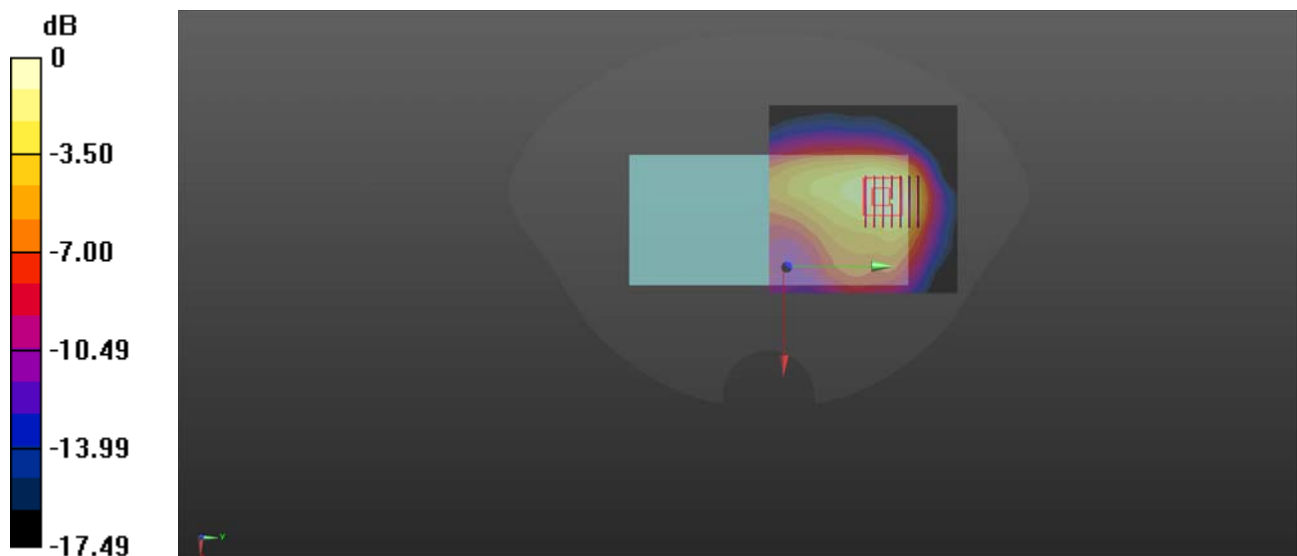

0 dB = 0.216 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.09

WLAN 5.2GHz_802.11n-HT40 MCS0_Back Side_10mm_Ch46


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5230 MHz; Duty Cycle: 1:1.038
Medium: HSL_5250 Medium parameters used: $f = 5230$ MHz; $\sigma = 4.676$ S/m; $\epsilon_r = 36.093$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.57, 5.57, 5.57) @ 5230 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch46/Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.225 W/kg

Ch46/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.283 W/kg
SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.032 W/kg
Maximum value of SAR (measured) = 0.154 W/kg

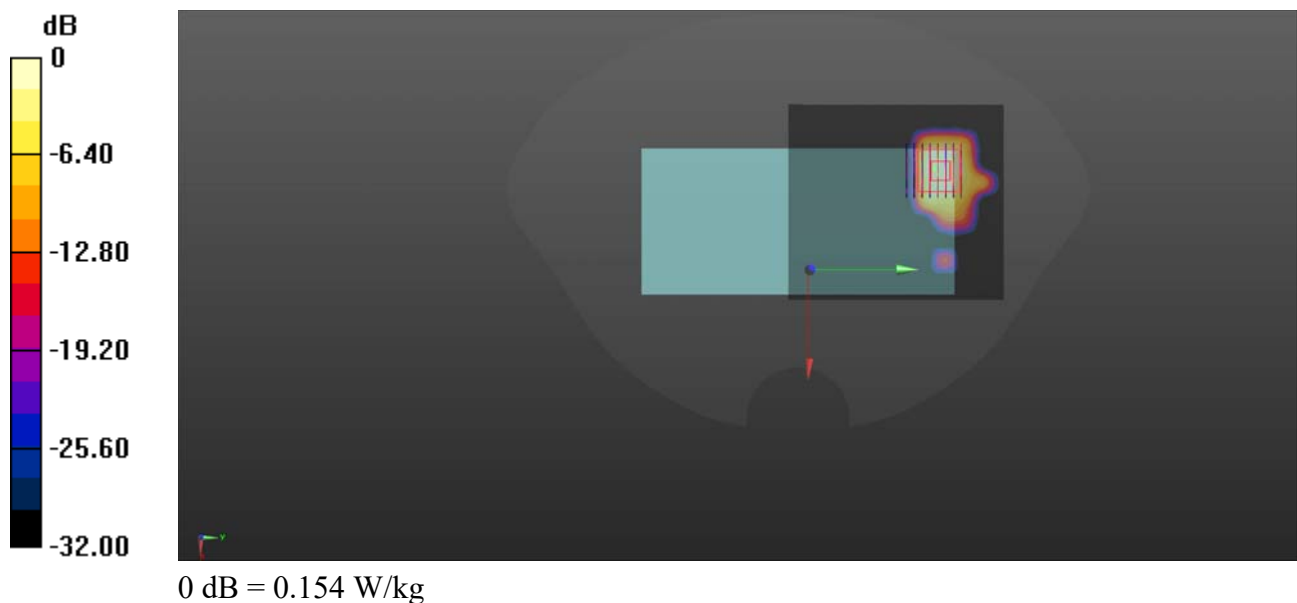

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.10

WLAN 5.8GHz_802.11n-HT40 MCS0_Back Side_10mm_Ch151


Communication System: UID 0, WLAN 5GHz (0); Frequency: 5755 MHz; Duty Cycle: 1:1.038
Medium: HSL_5750 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.306$ S/m; $\epsilon_r = 35.15$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(5.08, 5.08, 5.08) @ 5755 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch151/Area Scan (101x111x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.359 W/kg

Ch151/Zoom Scan (8x8x15)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 0 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.694 W/kg
SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.056 W/kg
Maximum value of SAR (measured) = 0.343 W/kg

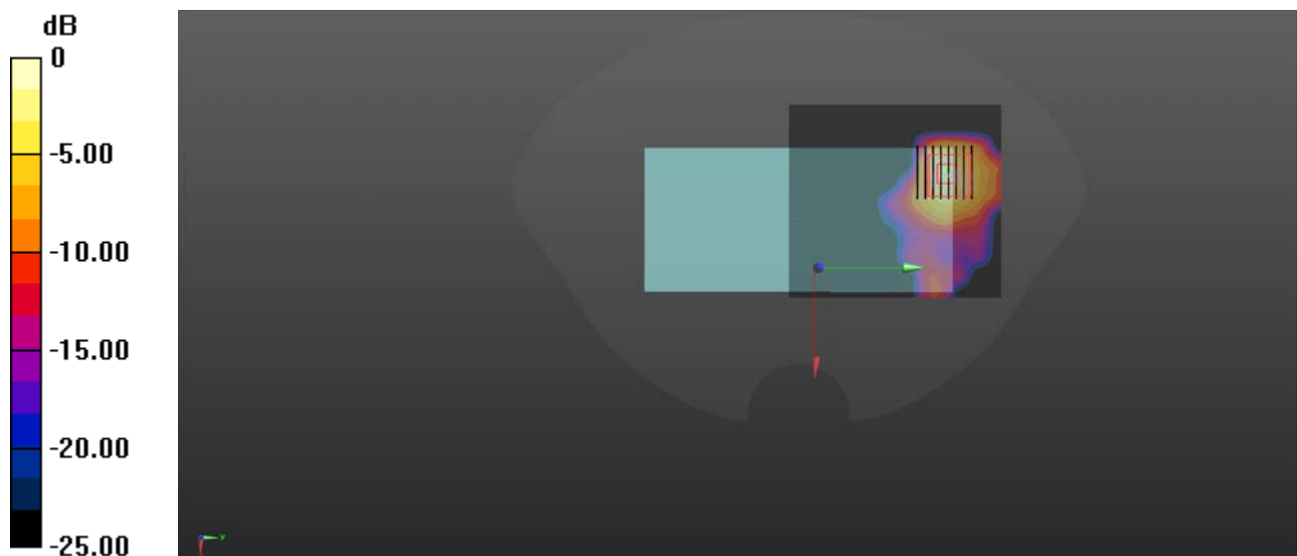

0 dB = 0.359 W/kg

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.03.06

Bluetooth_DH5_Back Side_10mm_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.295
Medium: HSL_2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.749$ S/m; $\epsilon_r = 38.922$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7624; ConvF(7.71, 7.71, 7.71) @ 2402 MHz; Calibrated: 2022.03.31
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2022.12.28
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Ch0/Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0453 W/kg

Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.027 V/m; Power Drift = 0.10 dB
Peak SAR (extrapolated) = 0.0680 W/kg
SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.016 W/kg
Maximum value of SAR (measured) = 0.0518 W/kg

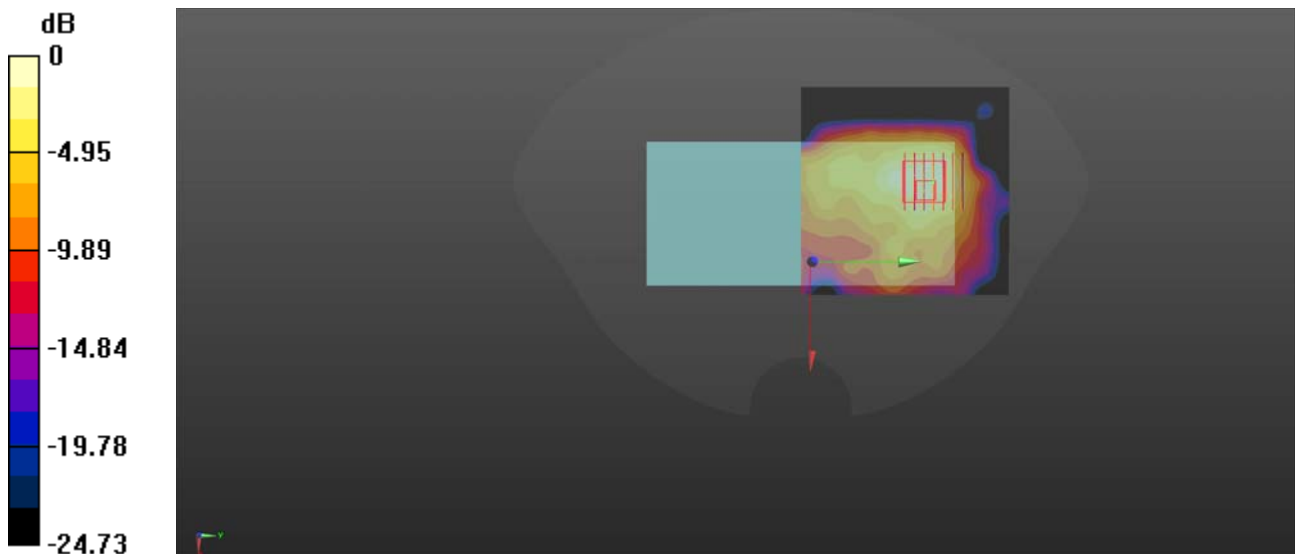

0 dB = 0.0518 W/kg