


ISED CABid: ES1909

Test Report No:
 NIE: 71449RRF.001A1

Test Report

USA FCC Part 15.247, 15.209

CANADA RSS-247, RSS-Gen

(*) Identification of item tested	Radio AM/FM, USB, AUX-IN, iPod, Bluetooth
(*) Trademark	Clarion
(*) Model and /or type reference	i1121e-s
Other identification of the product	FCC ID: 2ABGYI1121E-SFCE IC: 12359A-I1121ESFCE
(*) Features	Radio AM/FM, USB, AUX-IN, iPod, Bluetooth HW version: 3.0 SW version: 3.0
Manufacturer	Electronica Clarion S.A de C.V Avenida nueve oriente, No, 3, zona industrial valle de oro, CP 76803, San Juan del Rio , Queretaro, México
Test method requested, standard	USA FCC Part 15.247 (10-1-20 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-20 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Rafael López Martín EMC Consumer & RF Lab. Manager  2022.08.08 08:38:34 +02'00'
Date of issue	2022-08-05
Report template No.	FDT08_24 (*) "Data provided by the client"

Index

INDEX	2
ACRONYMS	3
COMPETENCES AND GUARANTEES	3
GENERAL CONDITIONS	4
UNCERTAINTY	4
DATA PROVIDED BY THE CLIENT	4
USAGE OF SAMPLES	5
TEST SAMPLE DESCRIPTION	6
IDENTIFICATION OF THE CLIENT	8
TESTING PERIOD AND PLACE	8
DOCUMENT HISTORY	8
ENVIRONMENTAL CONDITIONS	8
REMARKS AND COMMENTS	9
TESTING VERDICTS	10
SUMMARY.....	10
APPENDIX A: TEST RESULTS. BLUETOOTH EDR.....	11

Acronyms

Acronym ID	Acronym Description
EBW	Emission Bandwidth
# of Tx Chains	Number of Transmission Chains
Avg COT	Average Channel Occupancy Time
BW	Bandwidth
Detector	Detector used
Equipment	Equipment Type
Freq	Frequency
Freq Rng	Frequency Range
Freq Sep	Frequency Separation
Inband Peak Lvl	Inband Peak Level
Lvl	Level
MP	Measurement Point
Mod	Modulation
NHC	Number of Hopping Channels
NHp	Number of hops over the period
Occ Ch BW	Occupied Channel Bandwidth
Peak Power	Maximum Peak Conducted Output Power
Pol	Polarization
Port	Active Port
Unwanted Freq	Unwanted Emissions Frequency
Unwanted Lvl	Unwanted Emissions Level

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

The total uncertainty of the measurement system for the radiated emissions of EUT from 30 MHz to 1 GHz is:
Measurement uncertainty $\leq \pm 5,35$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 1 GHz to 17 GHz is:
Measurement uncertainty $\leq \pm 4,32$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the radiated emissions of EUT from 17 GHz to 26 GHz is:
Measurement uncertainty $\leq \pm 5,51$ dB with factor ($k = 2$).

The total uncertainty of the measurement system for the conducted testing of EUT is:

- RF Peak Output Power: Measurement uncertainty $\leq \pm 0,80$ dB
- Accumulated Dwell Time: Measurement uncertainty $\leq \pm 0,16$ %
- Minimum Frequency Occupation Time: Measurement uncertainty $\leq \pm 0,53$ %
- Hopping Frequency Separation: Measurement uncertainty $\leq \pm 1,74$ %
- Occupied Channel Bandwidth: Measurement uncertainty $\leq \pm 1,24$ %
- Conducted Band-edge spurious emissions: Measurement uncertainty $\leq \pm 1,76$ dB

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample consists of a Radio AM/FM, USB, AUX-IN, iPod, Bluetooth. Model refer to i1121e-s.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of results.

Usage of samples

Samples undergoing test have been selected by: The client.

Id	Control Number	Description	Model	Serial N°	Date of Reception	Application
S/01	71449_3.1	Harness	--	--	2022-03-24	Auxiliary Element
S/01	71449_5.1	USB cable	--	--	2022-03-24	Auxiliary Element
S/01	71449_7.1	Car Radio	BTS33	0001223	2022-06-15	Element Under Test
S/02	71449_10.1	Harness	--	--	2022-06-15	Auxiliary Element
S/02	71449_1.1	Car radio (conducted)	BTS33	0001225	2022-03-24	Element Under Test
S/02	71449_5.1	USB cable	--	--	2022-03-24	Auxiliary Element

Notes referenced to samples during the project:

Id	Type
S/01	Test samples used for Radiated testing
S/02	Test samples used for Conducted testing

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
	[]	[]	[]		
.....	[]	[]	[]			
Supplementary information to the ports..... :						
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	[]	AC:	[]	[]	[]	[]	[]
	[]	AC:	[]	[]	[]	[]	[]
	[X]	DC: 9V ~ 16V					
[]	DC:						
Rated Power	30 W						
Clock frequencies..... :	MCU : 32MHz / SOC : 412MHz, X-TAL 27 MHZ, X-TAL 16 MHZ, X-TAL 36.86 MHZ						
Other parameters						
Software version	3.0						
Hardware version	3.0						
Dimensions in cm (W x H x D)						
Mounting position	[]	Table top equipment					
	[]	Wall/Ceiling mounted equipment					
	[]	Floor standing equipment					
	[]	Hand-held equipment					
	[X]	Other:					
Modules/parts..... :	Module/parts of test item			Type	Manufacturer		
	i1121e-s (BT MODULE)			module	Barrot		
		
		

Accessories (not part of the test item)	Description	Type	Manufacturer
	power supply arness	N/A	Tyco

Documents as provided by the applicant.....	Description	File name	Issue date

⁽³⁾ Only for Medical Equipment

Identification of the client

Electronica Clarion S.A de C.V

Avenida nueve oriente, No, 3, zona industrial valle de oro, CP 76803, San Juan del Rio , Queretaro, México

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2022-06-27
Date (finish)	2022-07-06

Document history

Report number	Date	Description
71449RRF.001	2022-07-25	First release.
71449RRF.001A1	2022-08-05	Second release. Minor typos corrected. This test report cancels and replaces the test report 71449RRF.001.

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Javier Miguel Nadales Lisbona, José Manuel Jiménez González and Pablo Redondo Reyes.

Used instrumentation:

Conducted measurements:

Control No.	Equipment	Model	Manufacturer	Next Calibration
6793	SHIELDED ROOM	S101	ETS LINDGREN	NA
0922	POWER SUPPLY DC 40V/40A	NGPE 40/40	ROHDE AND SCHWARZ	NA
4761	SIGNAL GENERATOR 9kHz-6GHz	SMB100A	ROHDE AND SCHWARZ	2023-11-05
7794	SIGNAL AND SPECTRUM ANALYZER 10Hz-40GHz	FSV40	ROHDE AND SCHWARZ	2023-02-26
7796	EXTENSION FOR OPEN SWITCH UNIT UP TO 40GHz	OSP-B157Wx	ROHDE AND SCHWARZ	2024-03-16
7798	SOFTWARE FOR EMC/RF TESTING	WMS32	ROHDE AND SCHWARZ	NA
7758	DIGITAL MULTIMETER	175	FLUKE	2022-11-04

Radiated measurements:

Control No.	Equipment	Model	Manufacturer	Next Calibration
4825	SEMIANECHOIC ABSORBER LINED CHAMBER	FACT 3 200 STP	ETS LINDGREN	NA
4826	SHIELDED ROOM	S101	ETS LINDGREN	NA
4578	HYBRID BILOG ANTENNA 30MHz-6GHz	3142E	ETS LINDGREN	2023-04-30
6144	PRE-AMPLIFIER G>40dB 10MHz-6GHz	BLNA 0160-01N	BONN ELEKTRONIK	2023-03-17
6165	EMI TEST RECEIVER 9kHz-7GHz	ESR7	ROHDE AND SCHWARZ	2022-11-08
4611	HORN ANTENNA 1-18GHz	BBHA 9120 D	SCHWARZBECK MESS-ELEKTRONIK	2022-11-18
4716	SIGNAL AND SPECTRUM ANALYZER 2Hz-50GHz	FSW50	ROHDE AND SCHWARZ	2022-07-06
5705	PRE-AMPLIFIER G>40dB 1-18 GHz	BLMA 0118-1M	BONN ELEKTRONIK	2023-07-21
4657	HORN ANTENNA 18-40GHz	BBHA 9170	SCHWARZBECK	2023-05-05
8856	PRE-AMPLIFIER G>30dB 18-40GHz	BLMA 1840-4A	BONN ELEKTRONIK	2022-09-08

Control No.	Equipment	Model	Manufacturer	Next Calibration
4848	SOFTWARE FOR EMC/RF TESTING	EMC32	ROHDE AND SCHWARZ	NA
5880	DC POWER SUPPLY 30V/5A	U8002A	KEYSIGHT TECHNOLOGIES	NA
7758	DIGITAL MULTIMETER	175	FLUKE	2022-11-04

Testing verdicts

Fail	F
Not applicable	N/A
Not measured	N/M
Pass	P

Summary

Bluetooth EDR

Requirement – Test case	FCC PART 15 PARAGRAPH / RSS-247	Verdict	Remark
RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth		P	--
RSS-247 5.1 (b) / FCC 15.247 (a) (1) [CFS] Carrier Frequency Separation		P	--
RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy (Dwell Time)		P	--
RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels		P	--
RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power		P	--
RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)		P	--
RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)		P	--
<u>Supplementary information and remarks:</u>			
None			

Appendix A: Test results. Bluetooth EDR

INDEX

TEST CONDITIONS	13
TEST CASES DETAILS	16
FCC 47 CFR PART 15.247 / RSS-247	16
RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth	16
RSS-247 5.1 (b) / FCC 15.247 (a) (1) [CFS] Carrier Frequency Separation.....	28
RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy (Dwell Time).....	32
RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels	38
RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power	44
RSS-247 5.5 / FCC 15.247 (d) [Bndedge] Band-edge emissions compliance (Transmitter)	56
RSS-247 5.5 / FCC 15.247 (d) [RSE] Emission limitations radiated (Transmitter)	71
99dBw Occupied Channel Bandwidth 99%	97

TEST CONDITIONS

(*): Data provided by the client.

POWER SUPPLY (*):

Vnominal:	12 Vdc
Type of Power Supply:	External power supply.

ANTENNA (*):

Type of Antenna:	Multilayer Chip Antenna
Maximum Declared Antenna Gain:	2.3dBi (peak)

TEST FREQUENCIES (*):

Low Channel:	2402 MHz
Middle Channel:	2441 MHz
High Channel:	2480 MHz

CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1.5 m for the frequency range 17 GHz-26 GHz (17 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100 kHz / 300 kHz was used for frequencies below 1 GHz and 1 MHz / 3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

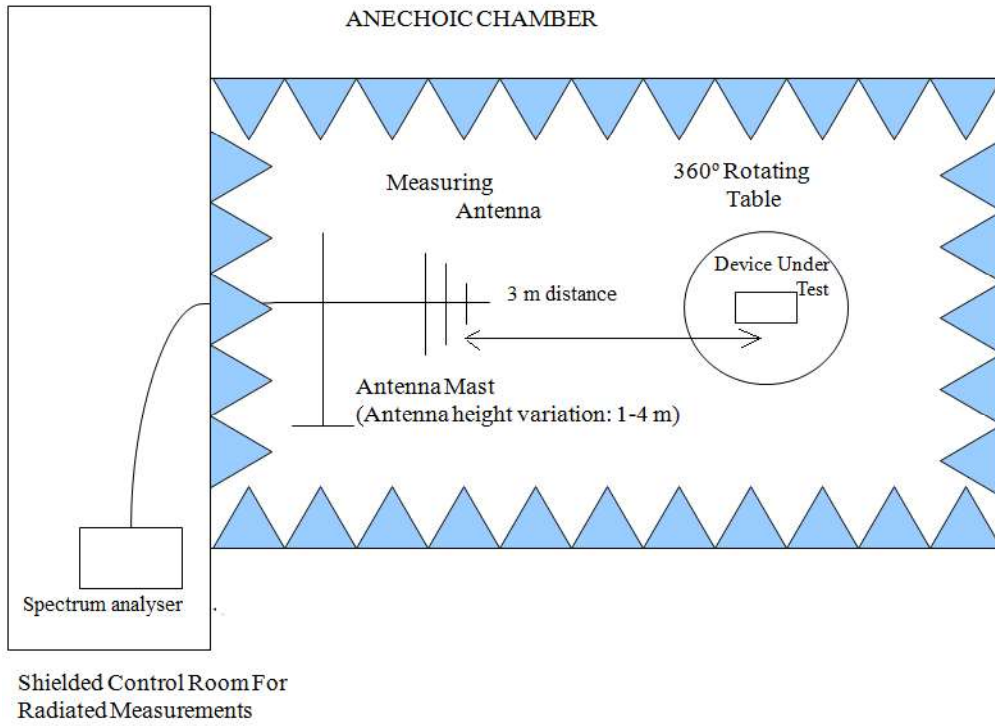

Radiated measurements setup from 1 GHz to 17 GHz:

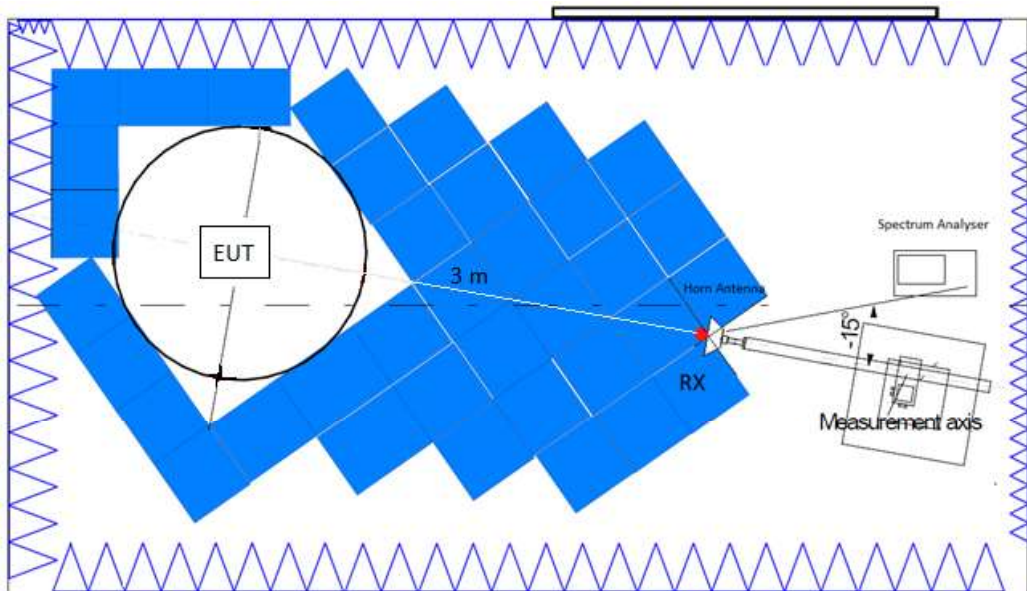

Radiated measurements setup $f > 17$ GHz:

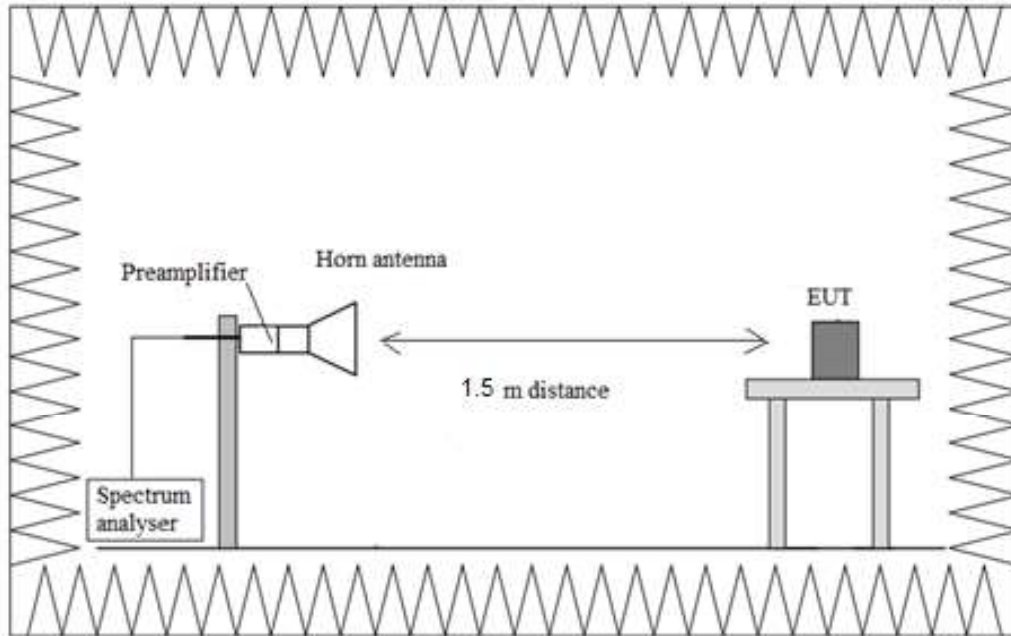

TEST CASES DETAILS

FCC 47 CFR Part 15.247 / RSS-247

RSS-247 5.1 (b) / FCC 15.247 (a) (1) [20dBW] 20 dB Bandwidth

Limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Modulation: BT (GFSK 1-DH5)

Results

Freq (MHz)	Equipment	Emission Bandwidth (MHz)
2402.00000	Frequency Hopping Spread Spectrum systems (DSS)	0.930
2441.00000		0.930
2480.00000		0.930



Verdict

Pass

Attachments



**Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)**

Images:

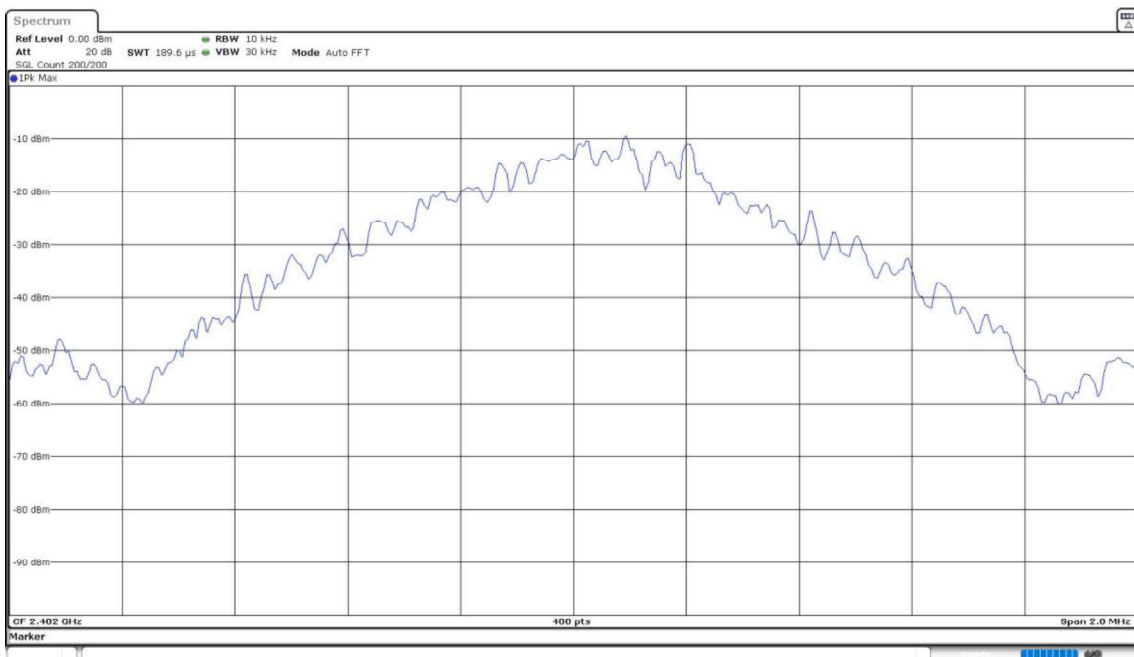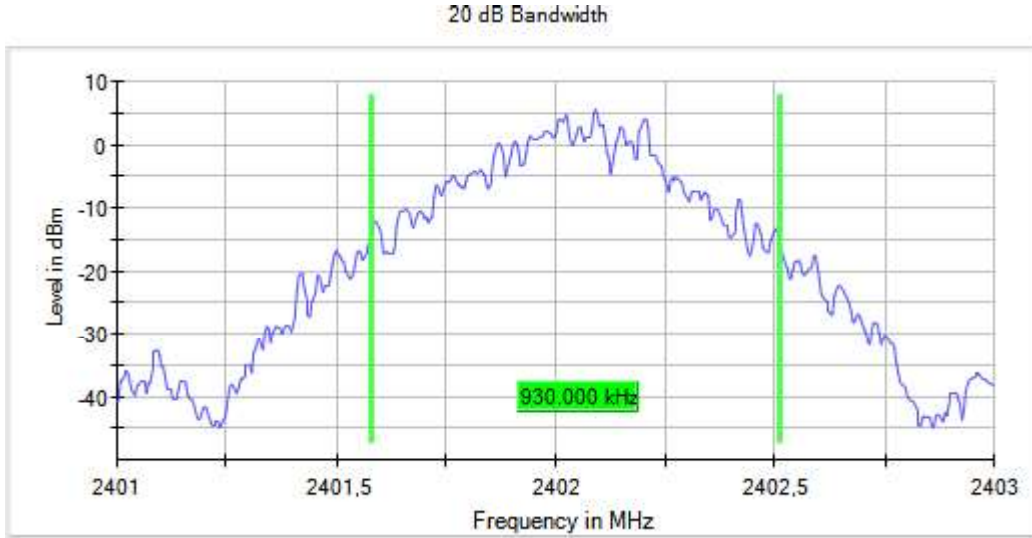



Frequency MHz = 2441.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

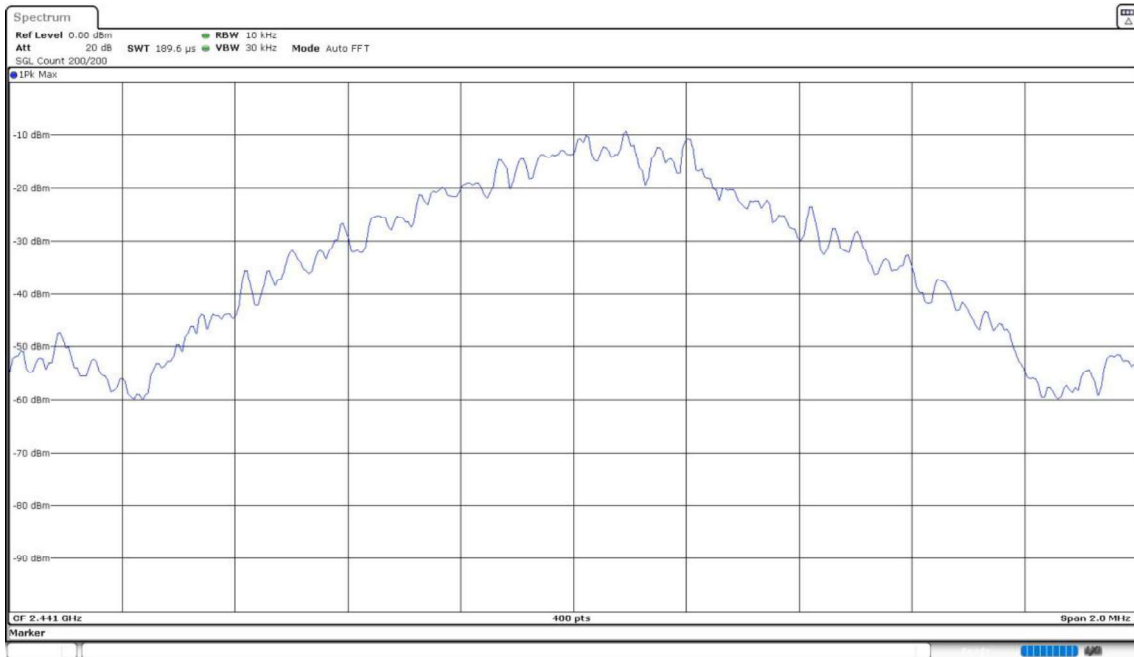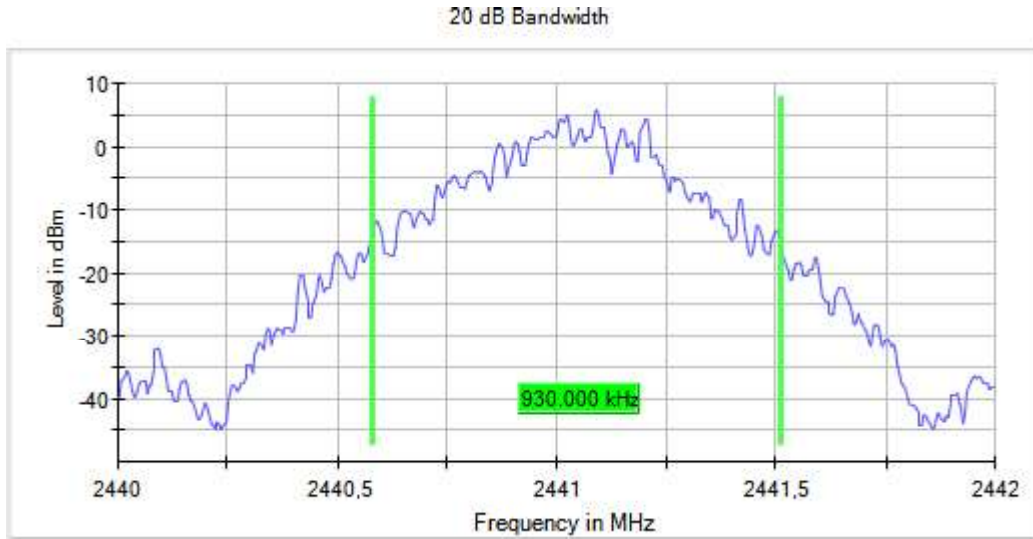

Frequency MHz = 2480.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

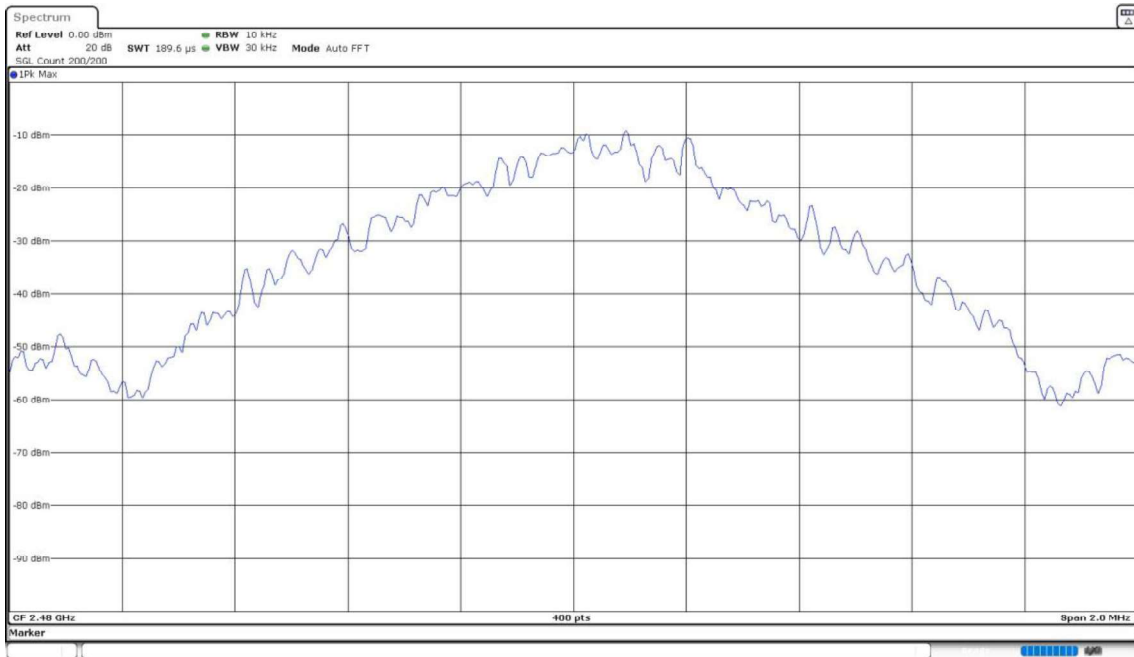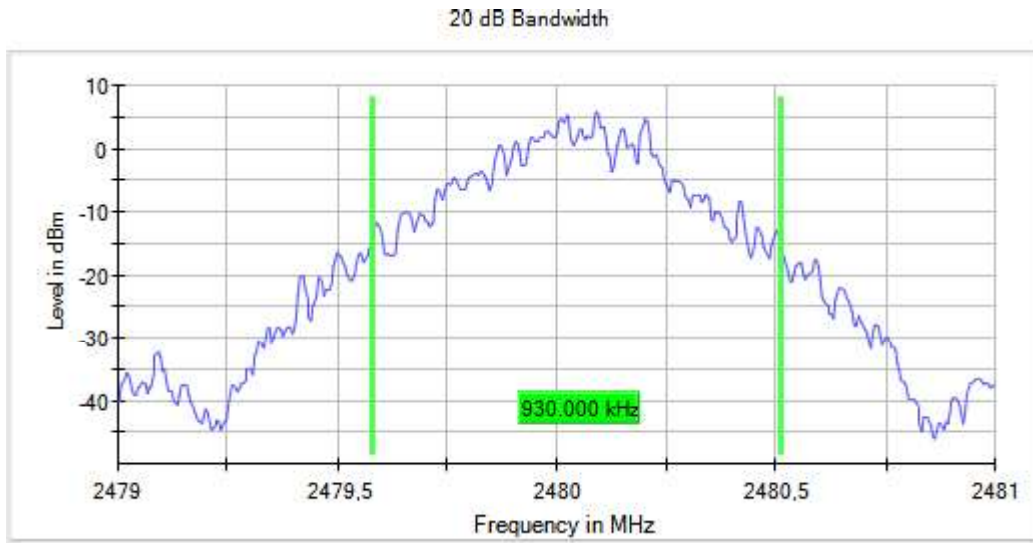

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Freq (MHz)	Equipment	Emission Bandwidth (MHz)
2402.00000	Frequency Hopping Spread Spectrum systems (DSS)	0.545
2441.00000		0.545
2480.00000		0.545



Verdict

Pass

Attachments



**Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)**

Images:

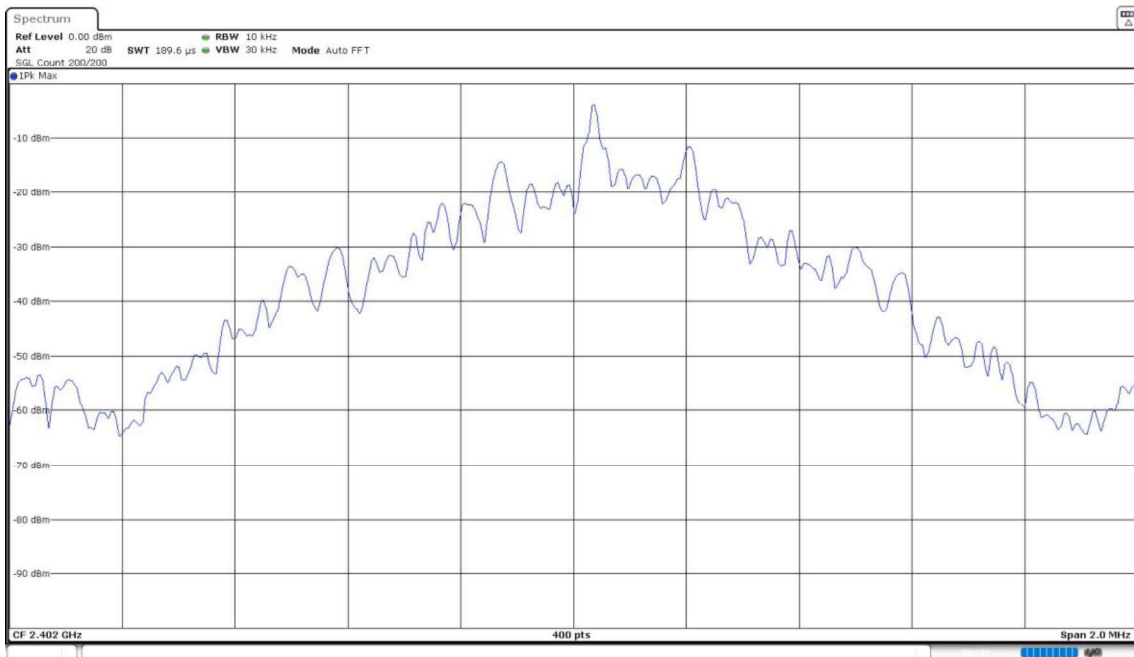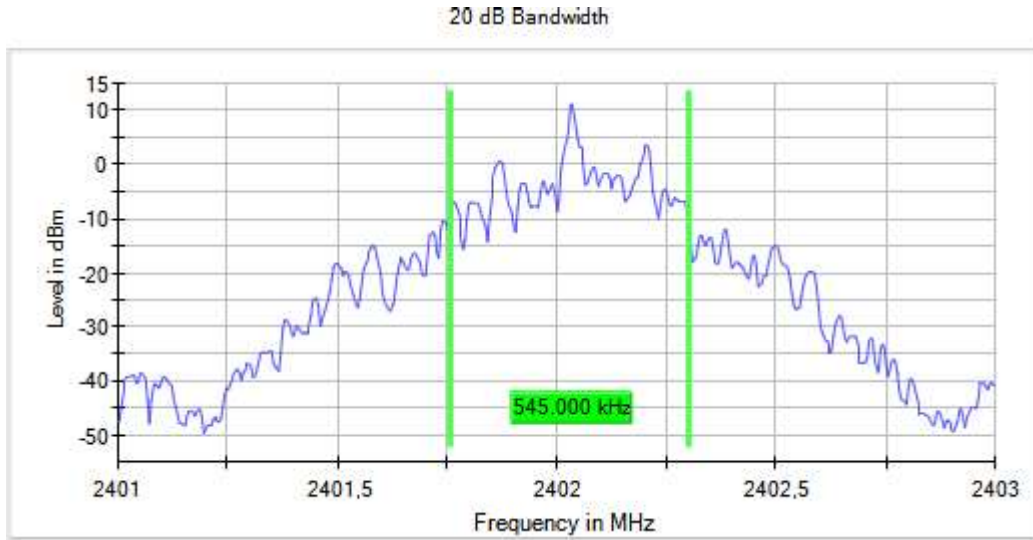



Frequency MHz = 2441.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

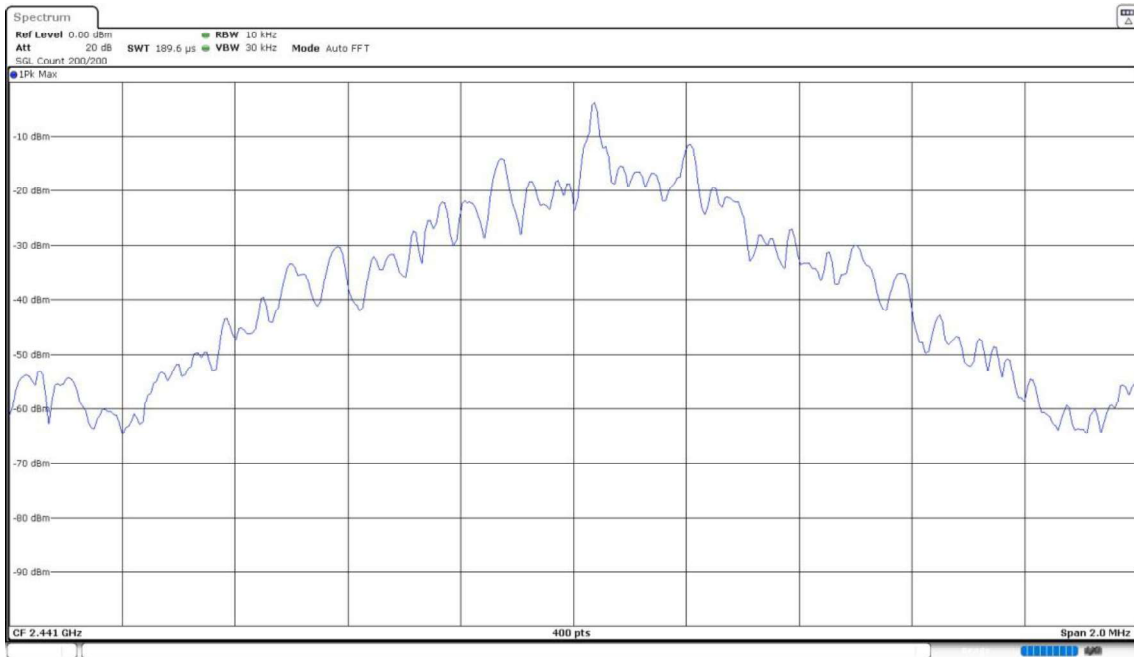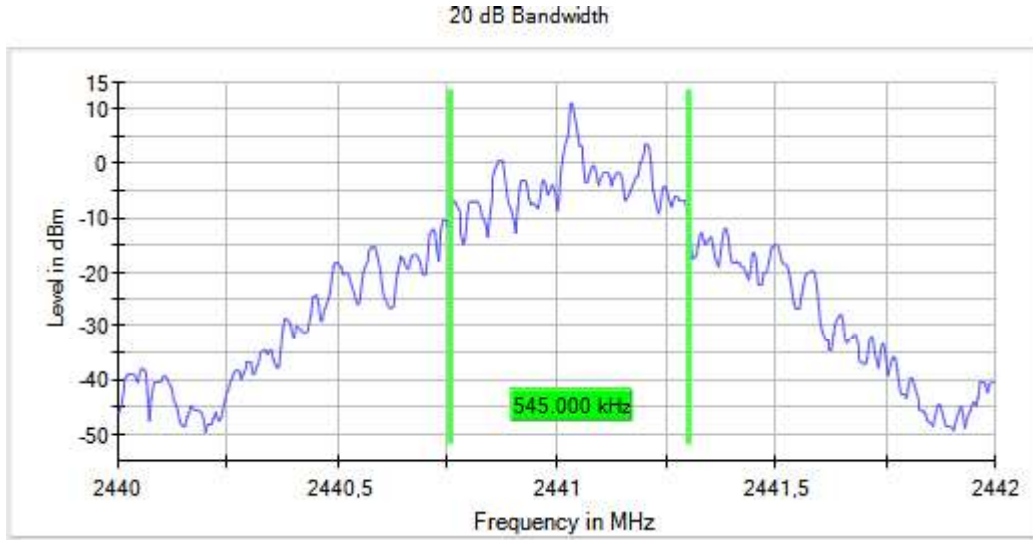

Frequency MHz = 2480.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

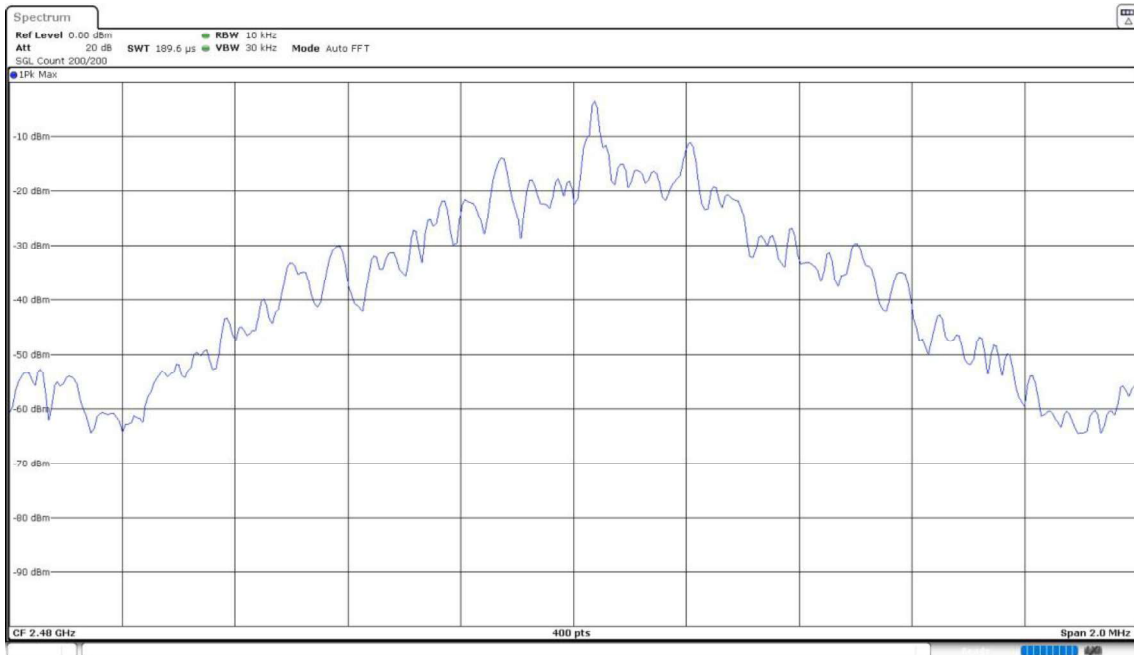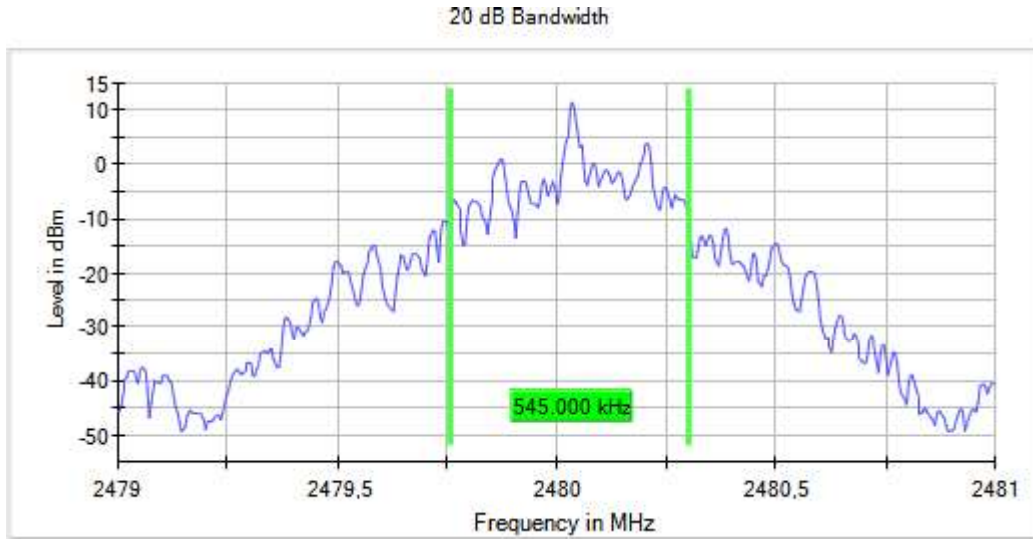

Modulation: BT (8DPSK 3-DH5)

Results

Freq (MHz)	Equipment	Emission Bandwidth (MHz)
2402.00000	Frequency Hopping Spread Spectrum systems (DSS)	0.540
2441.00000		0.540
2480.00000		0.540



Verdict

Pass

Attachments



**Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)**

Images:

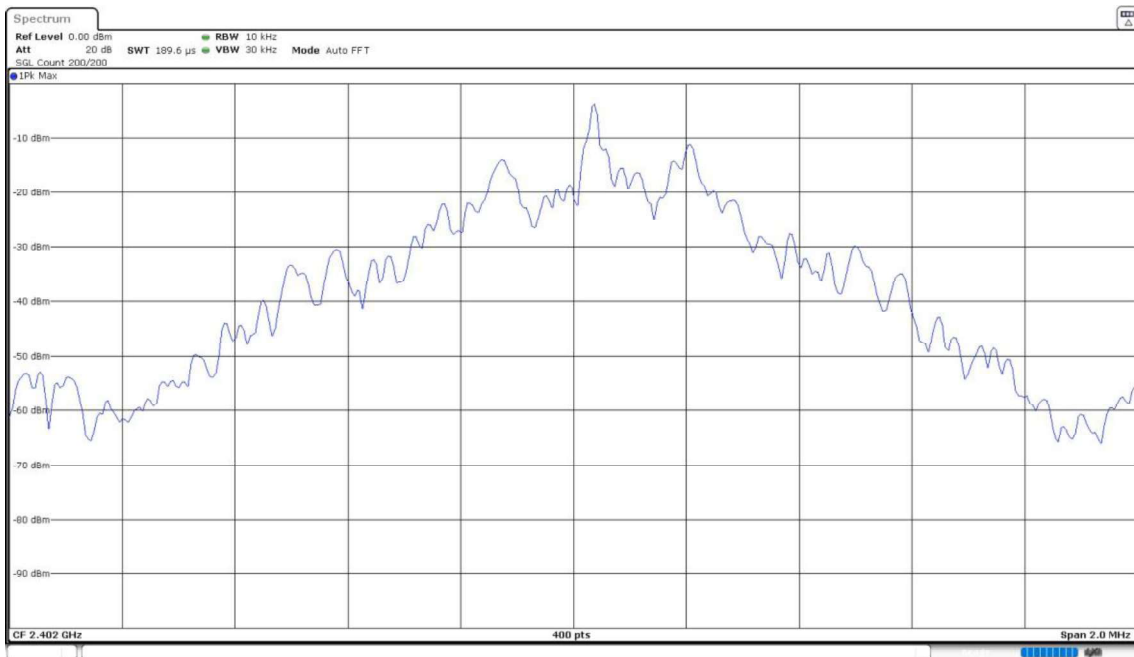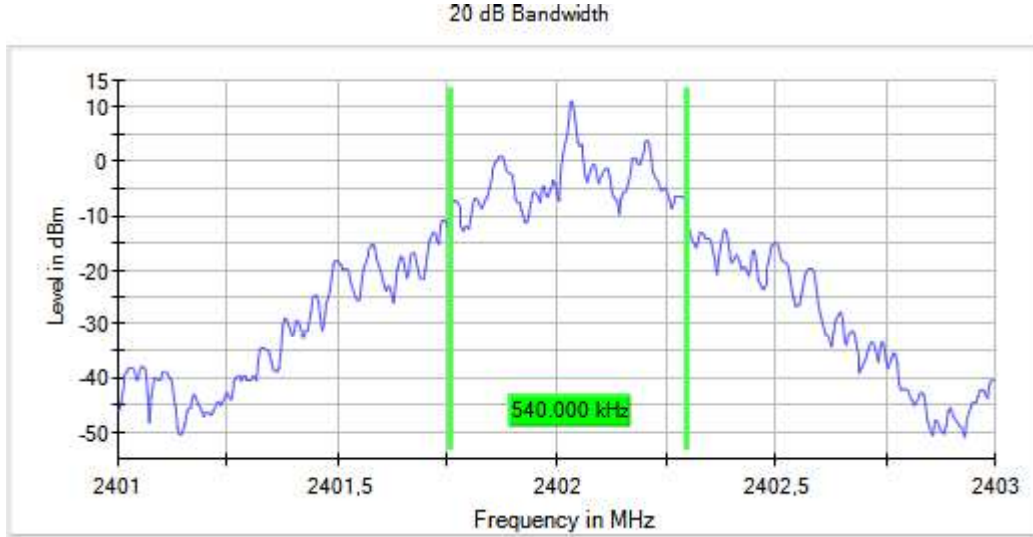



Frequency MHz = 2441.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)

Images:

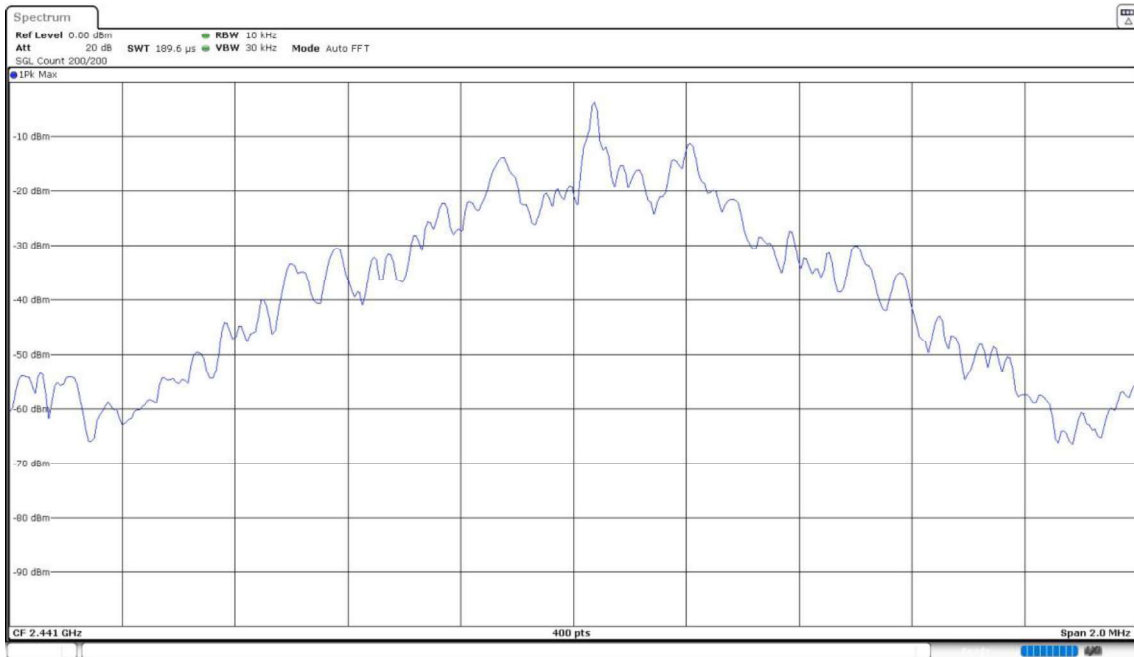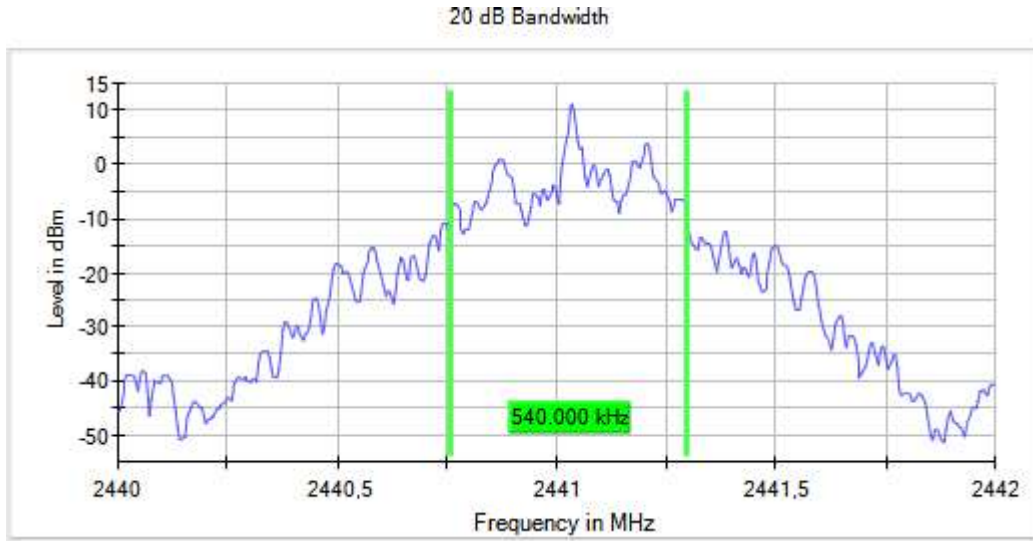

Frequency MHz = 2480.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)

Images:

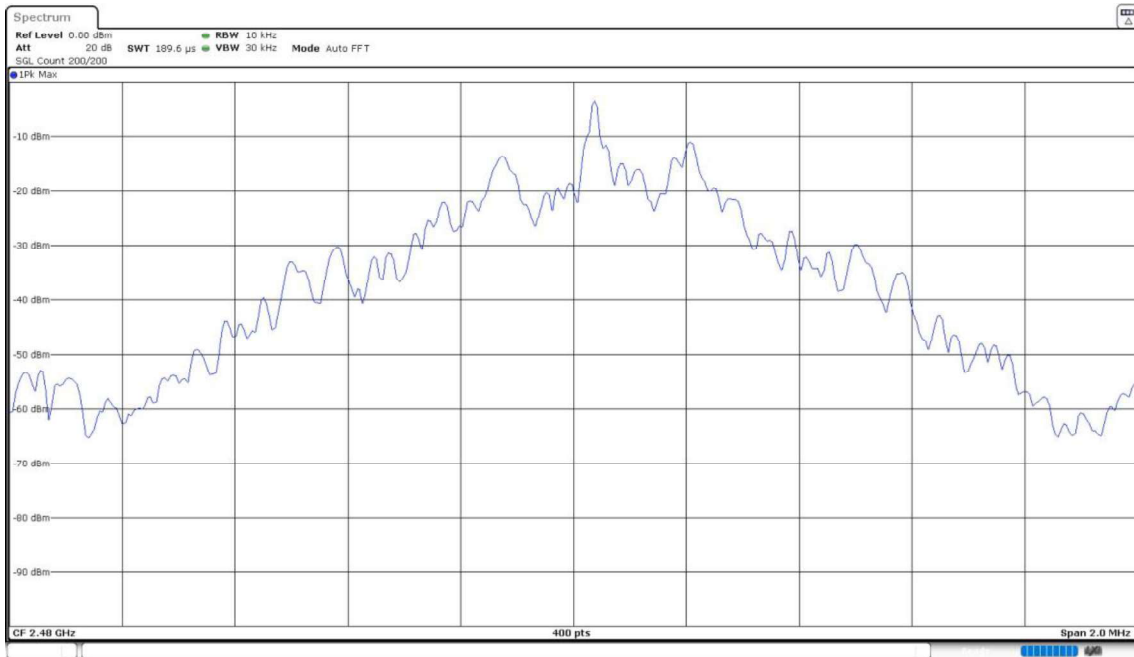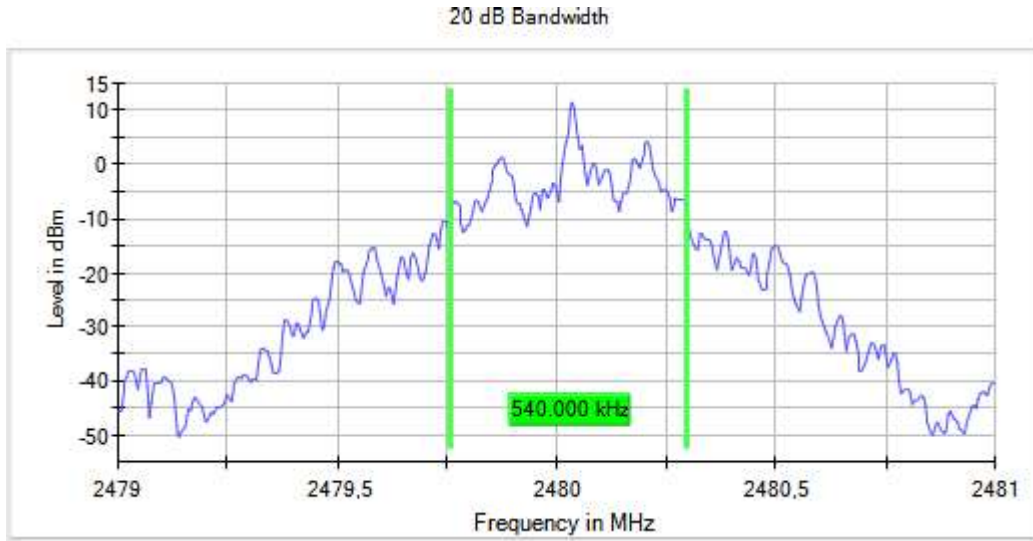

RSS-247 5.1 (b) / FCC 15.247 (a) (1) [CFS] Carrier Frequency Separation

Limits

The hopping channel carrier frequencies are separated by a minimum two-thirds of the 20 dB bandwidth of the hopping channel.

Modulation: BT (GFSK 1-DH5)

Results

Equipment	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	1.01


Verdict


Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

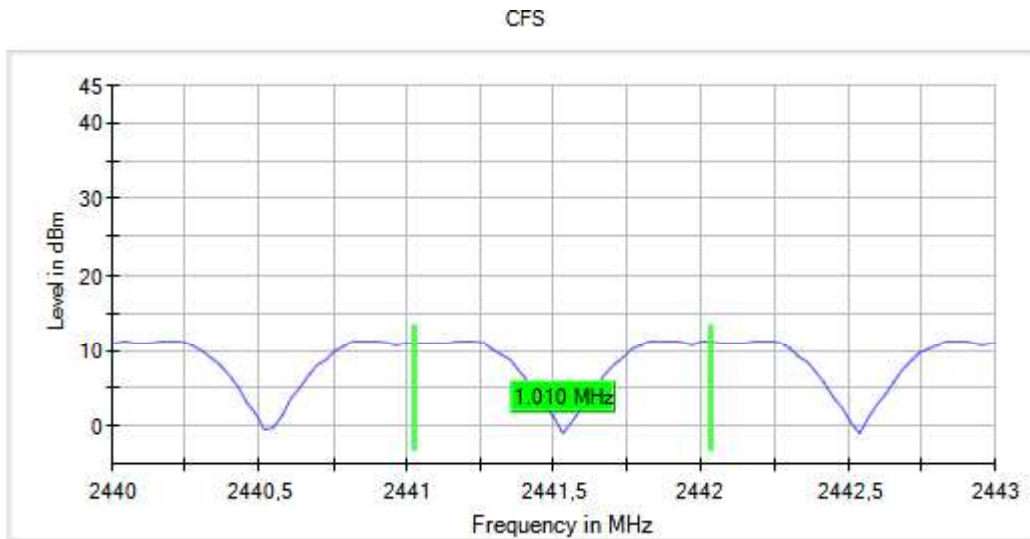

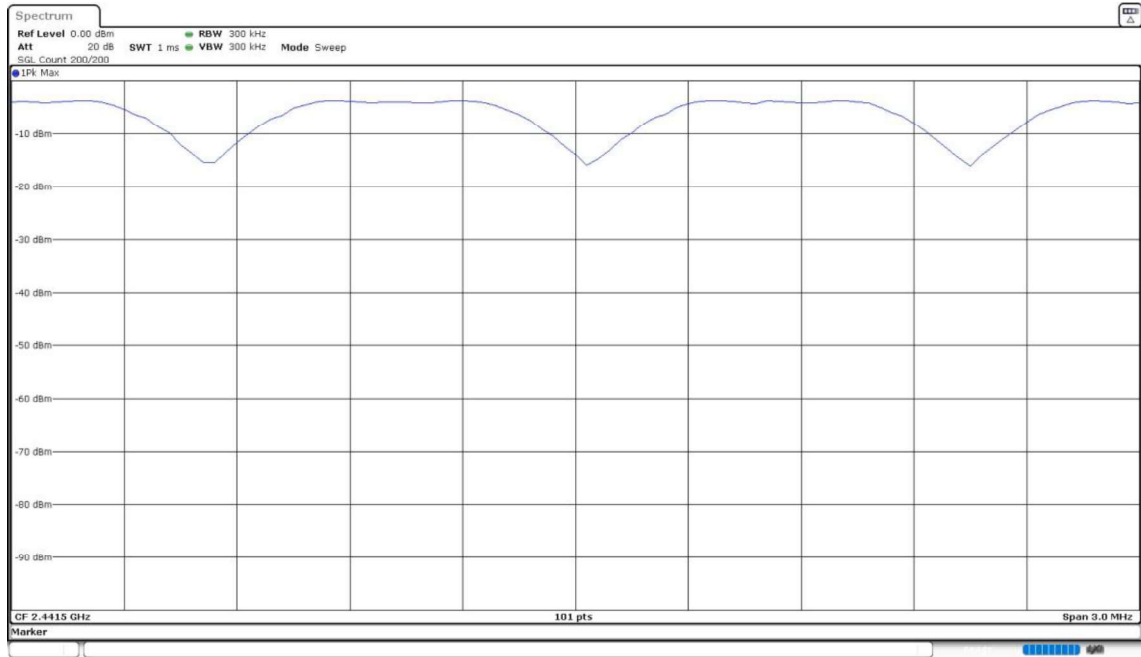

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	Freq Sep (MHz)
Frequency Hopping Spread Spectrum systems (DSS)	0.95



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

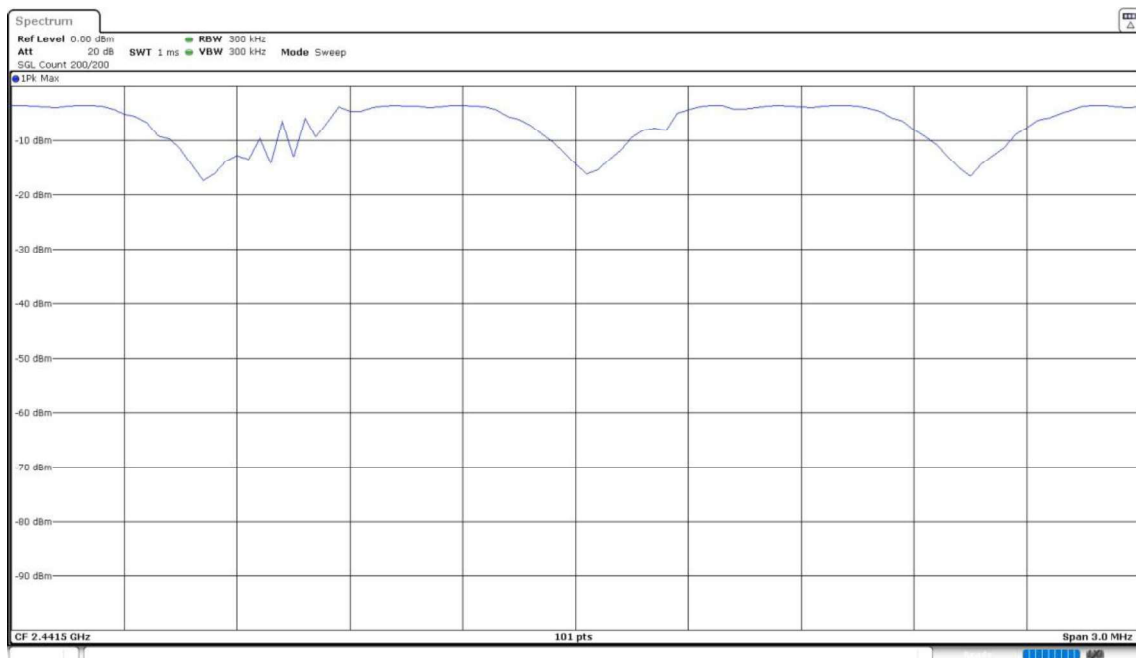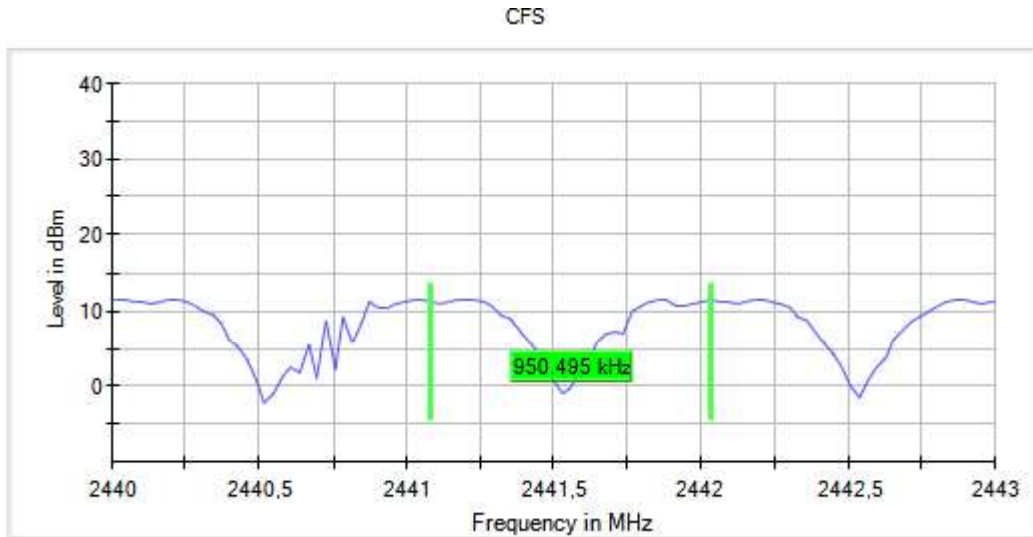

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [DwT] Time of Occupancy (Dwell Time)

Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds (400 ms) within a period of 0.4 seconds multiplied by the number of hopping channels employed = $0.4 \times 79 = 31.6$ seconds.

Modulation: BT (GFSK 1-DH5)

Results



Operation Band (MHz)	Equipment	NHp	Avg COT (ms)
[2400, 2483.5]	Frequency Hopping Spread Spectrum systems (DSS)	106	310.30

Verdict

Pass

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

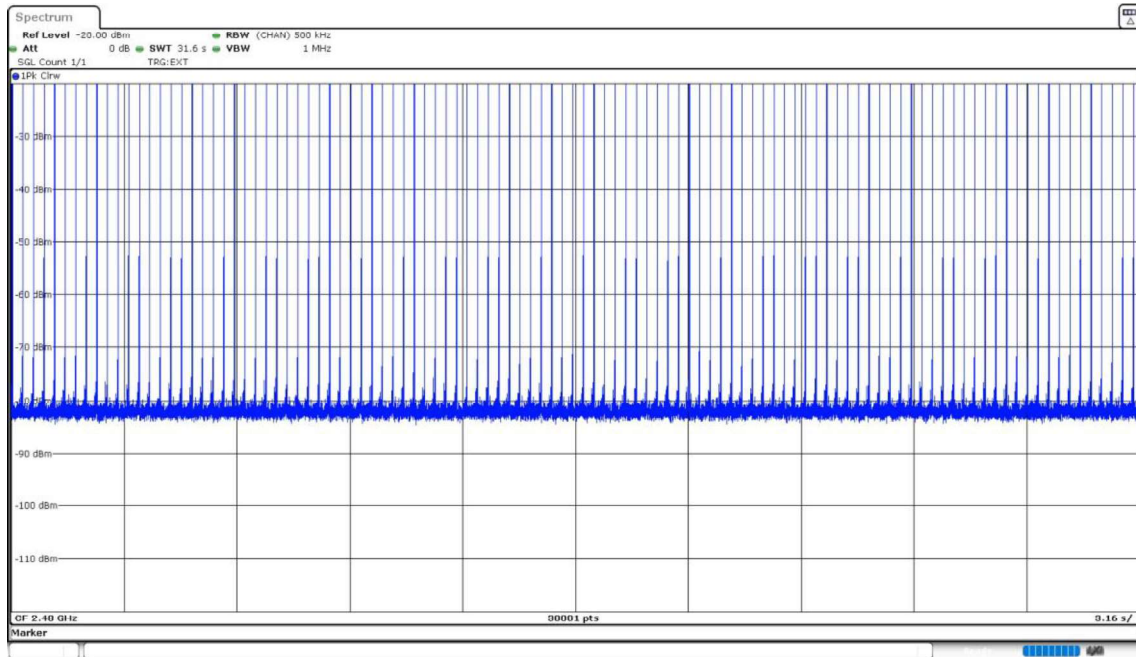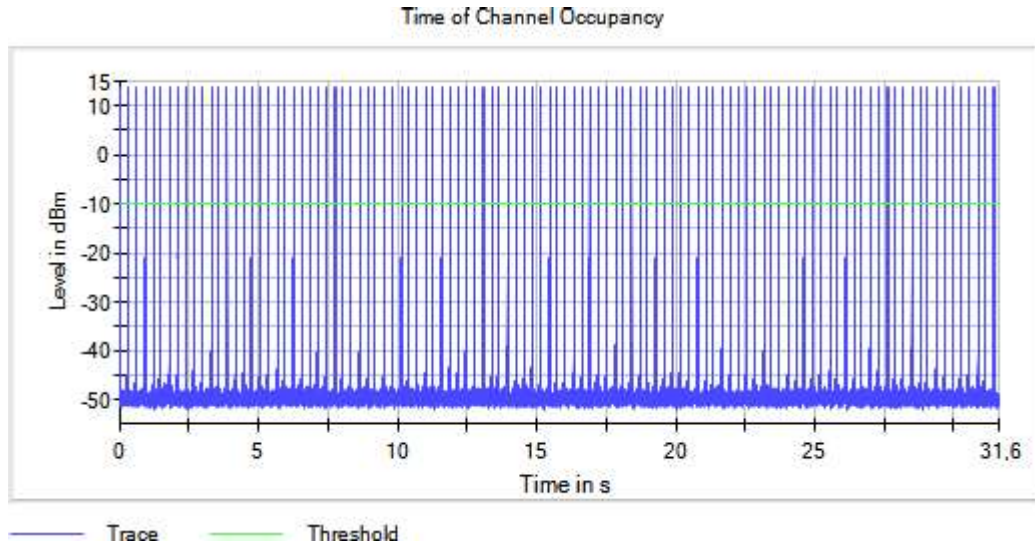

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	106	309.65



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

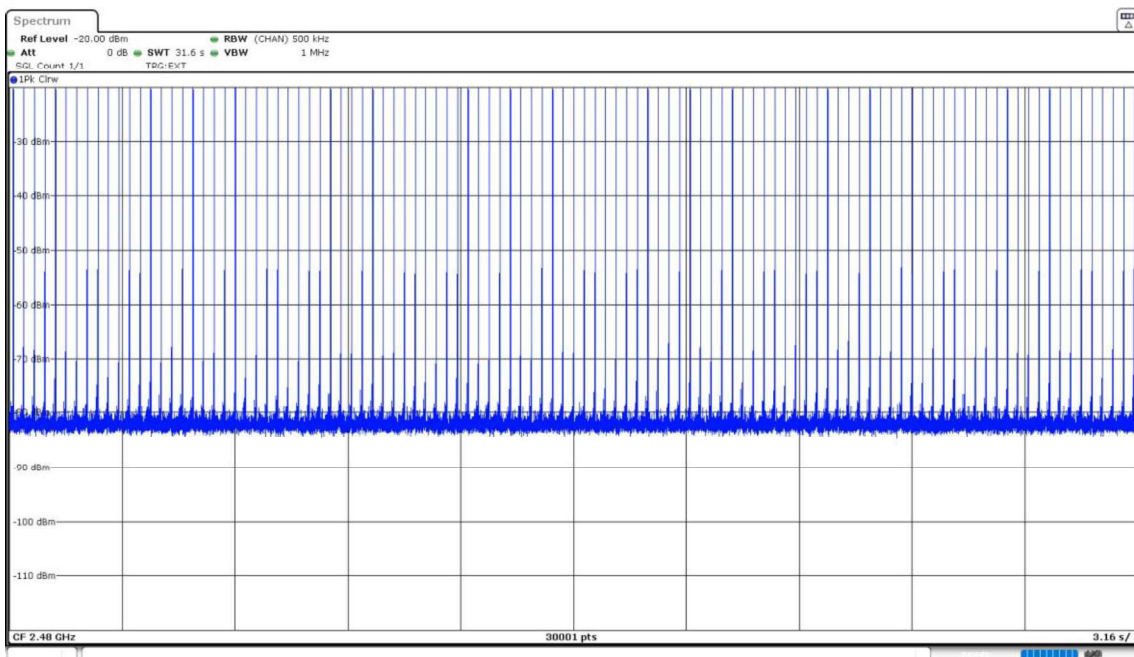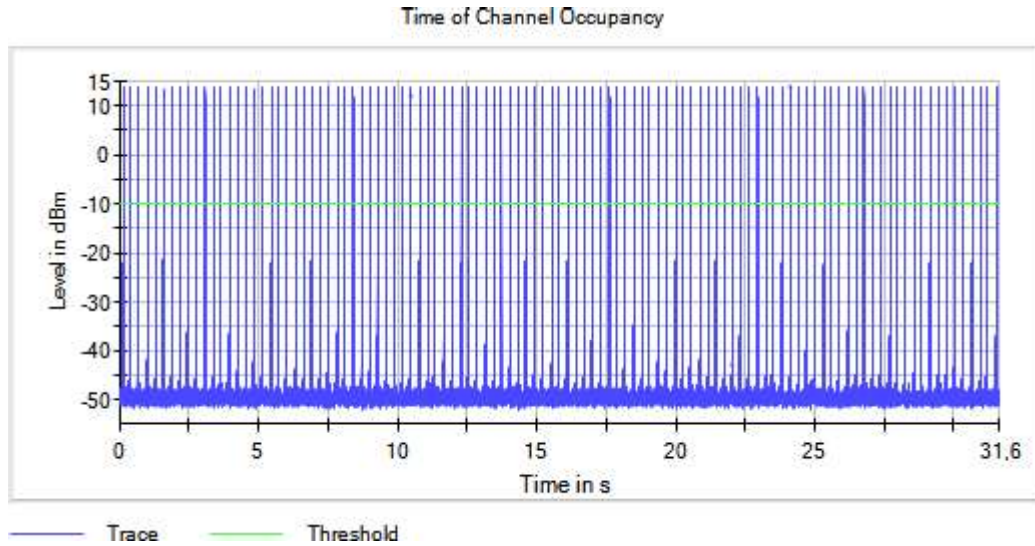

Modulation: BT (8DPSK 3-DH5)

Results



Equipment	NHp	Avg COT (ms)
Frequency Hopping Spread Spectrum systems (DSS)	106	310.25

Verdict

Pass

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)

Images:

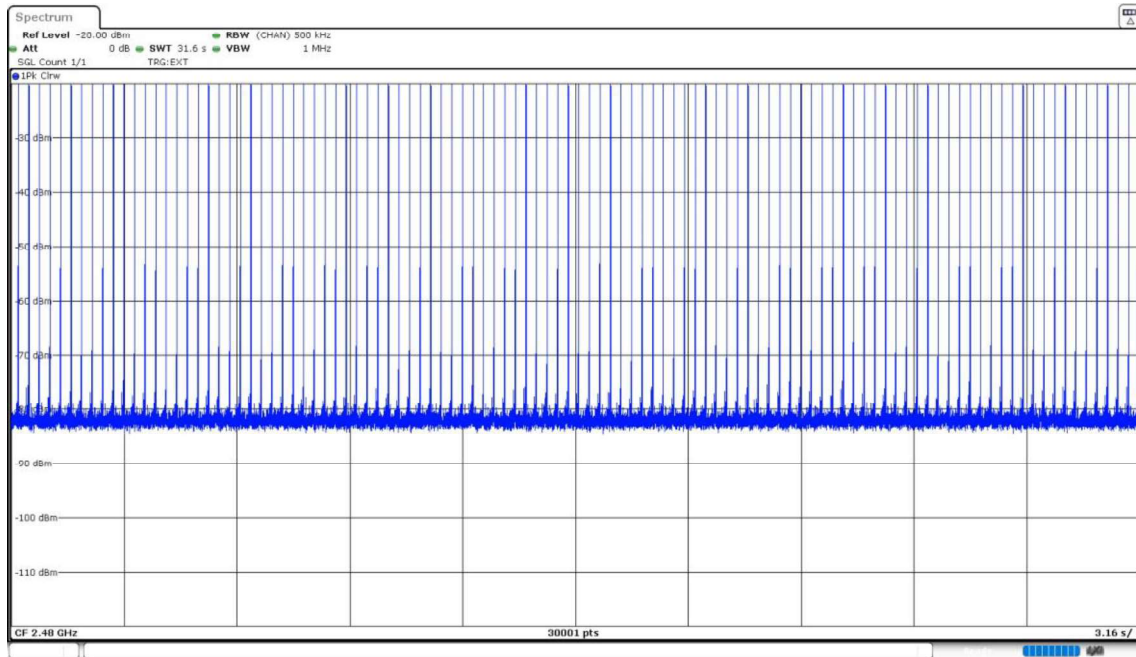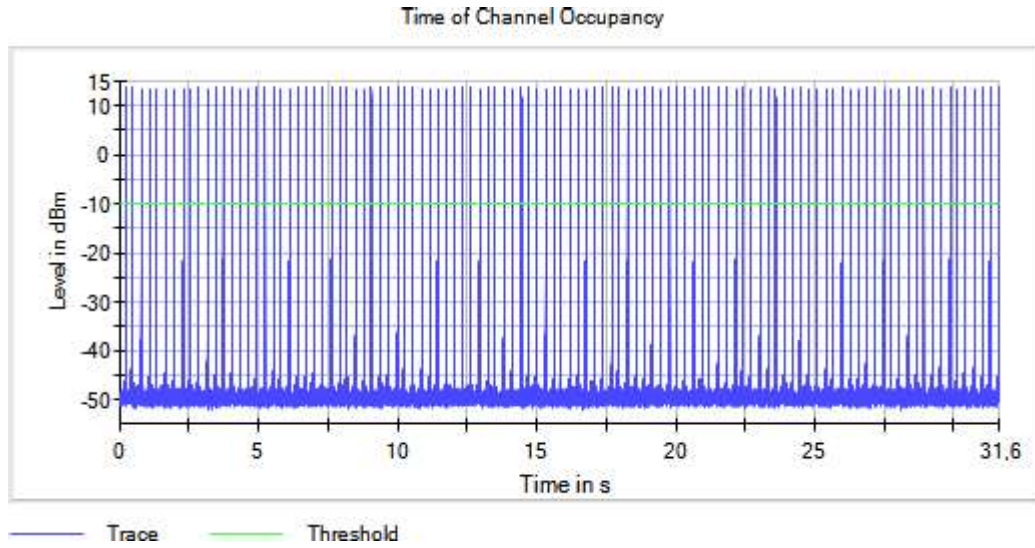

RSS-247 5.1 (d) / FCC 15.247 (a) (1) (iii) [NHC] Number of hopping channels

Limits

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 channels.

Modulation: BT (GFSK 1-DH5)

Results

Equipment	NHC
Frequency Hopping Spread Spectrum systems (DSS)	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

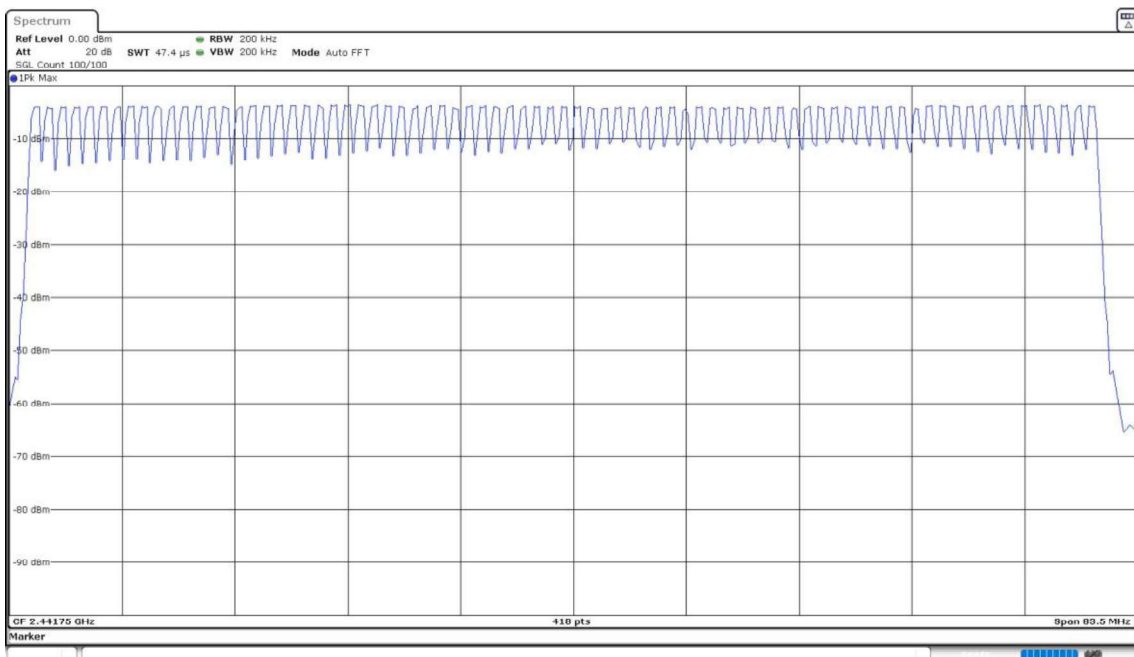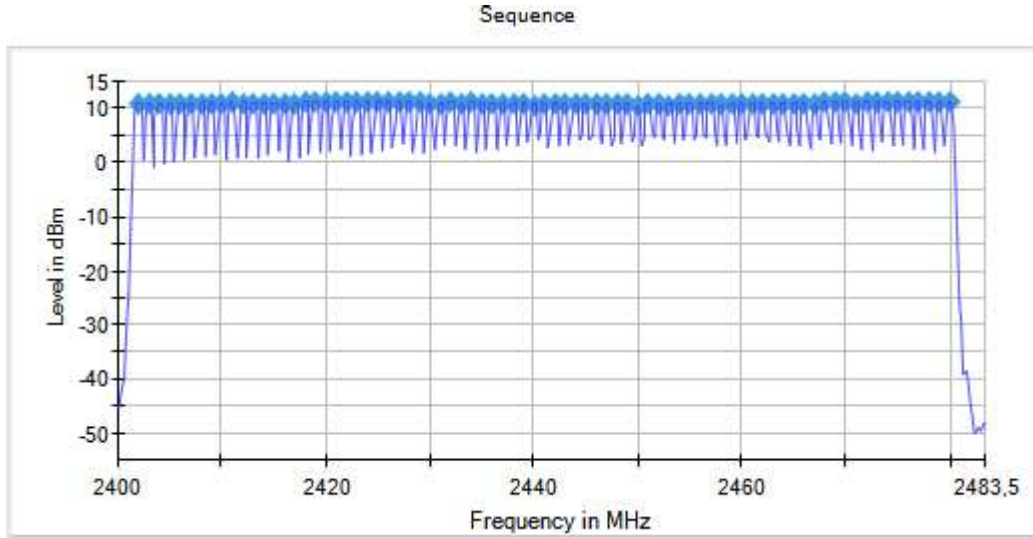

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Equipment	NHC
Frequency Hopping Spread Spectrum systems (DSS)	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5),

Images:

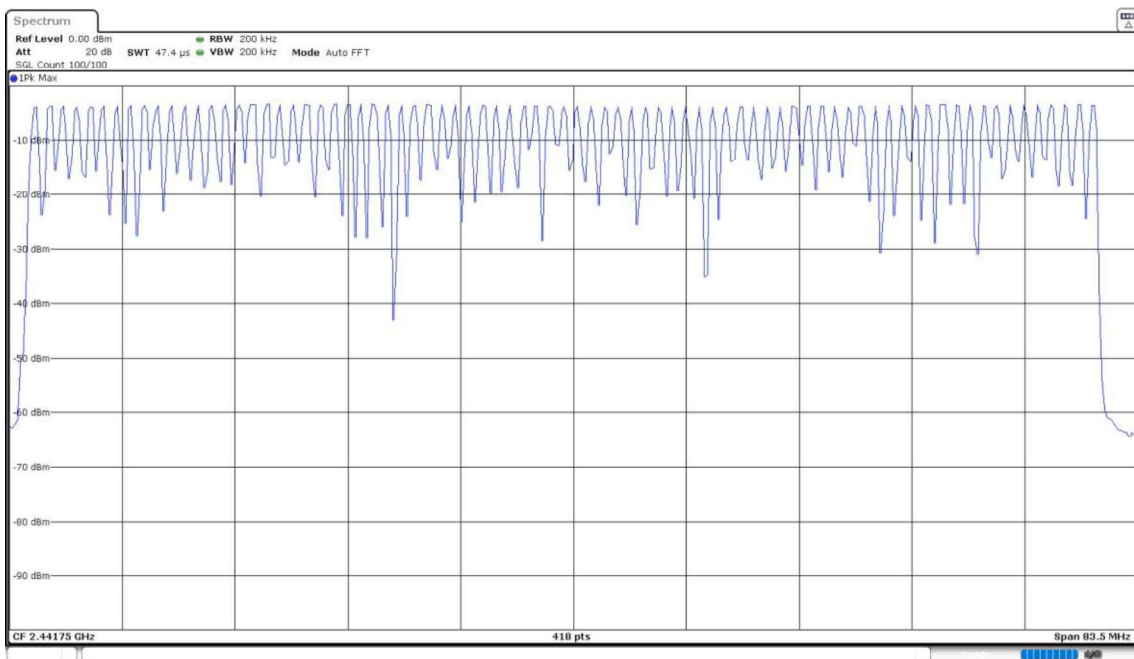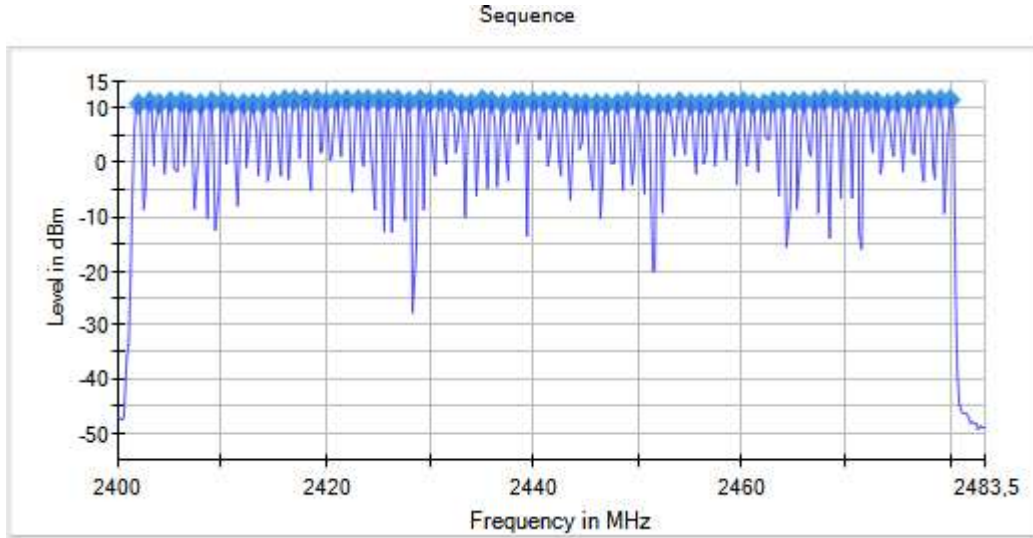

Modulation: BT (8DPSK 3-DH5)

Results

Equipment	NHC
Frequency Hopping Spread Spectrum systems (DSS)	79



Verdict

Pass

Attachments

Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)

Images:

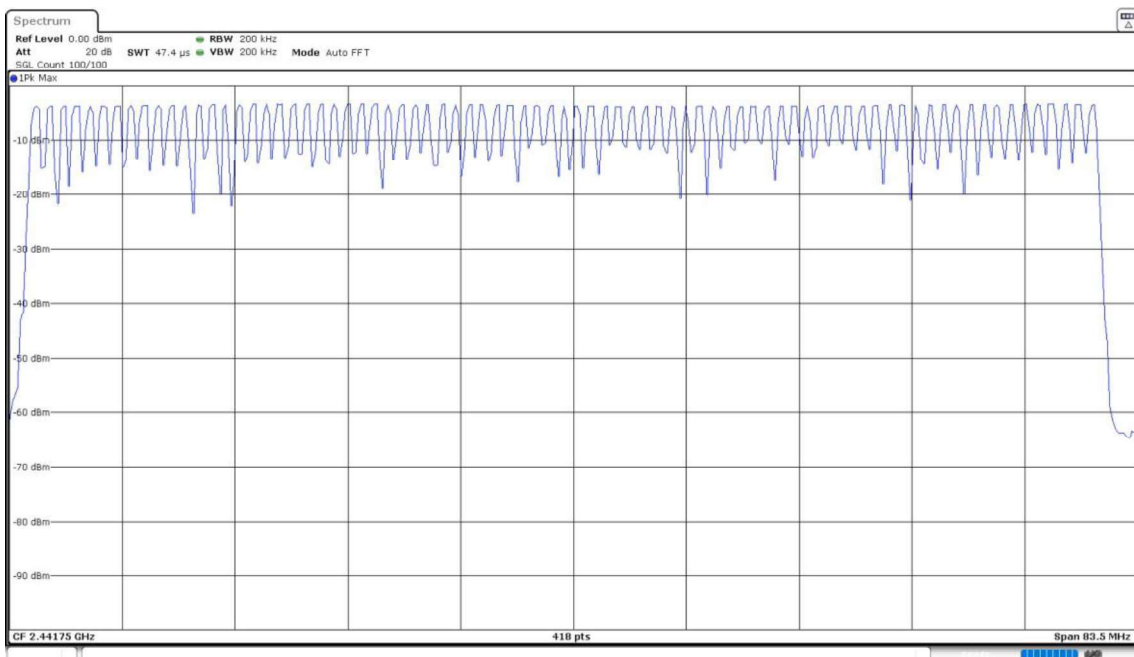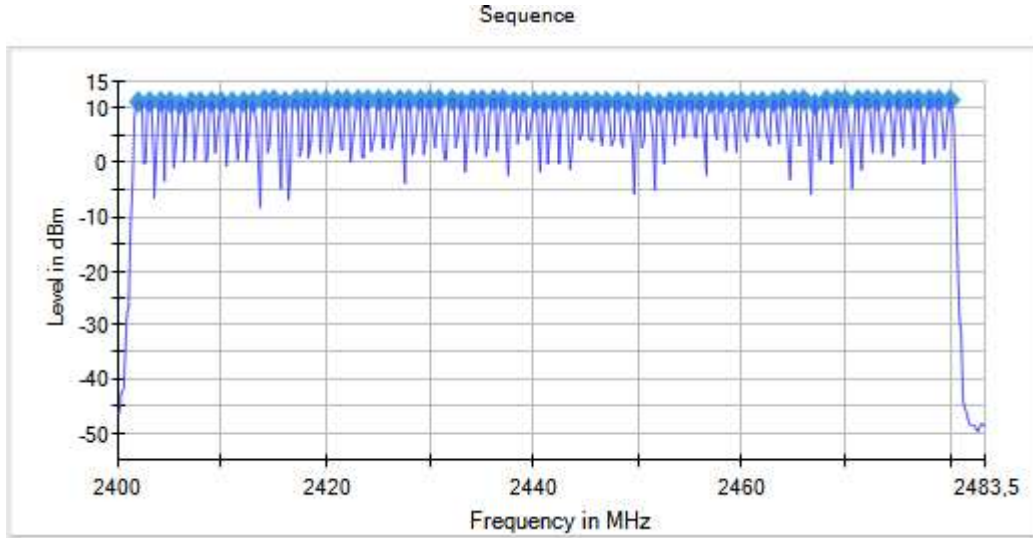

RSS-247 5.4 (b) / FCC 15.247 (b) (1) [Pkcp] Maximum Peak Conducted output power

Limits

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt (30 dBm). The e.i.r.p. shall not exceed 4 W (RSS-247).

Modulation: BT (GFSK 1-DH5)

Results

Freq (MHz)	Equipment	Maximum Conducted Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	Frequency Hopping Spread Spectrum systems (DSS)	11.10	13.41
2441.00000		11.30	13.61
2480.00000		11.50	13.81



Verdict

Pass

Attachments



Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

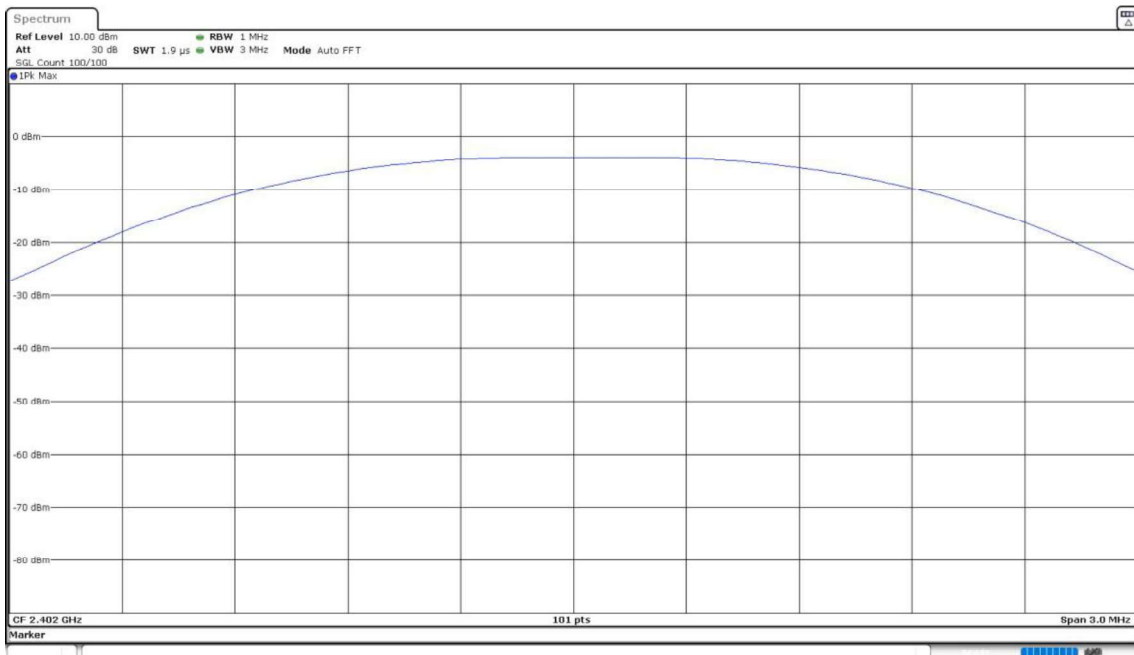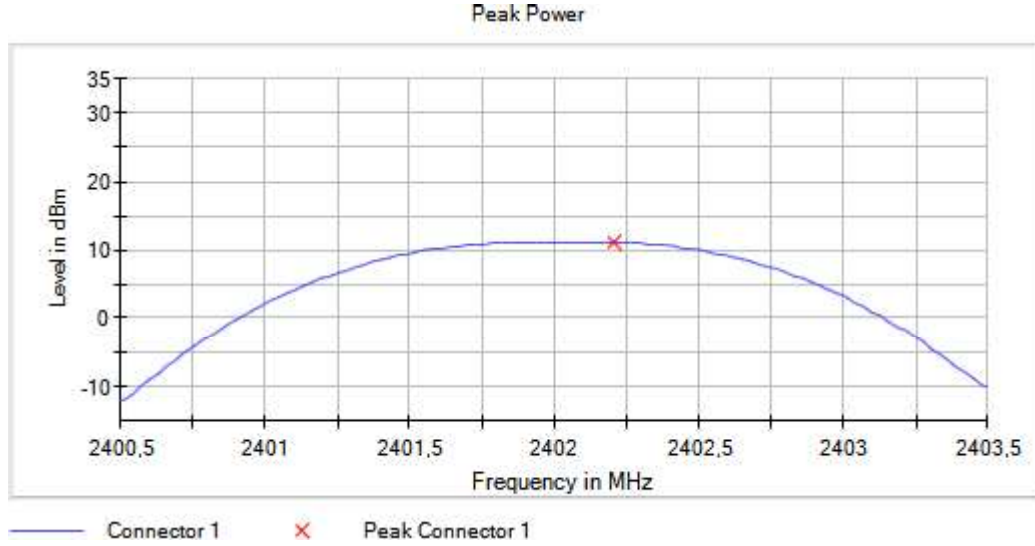



Frequency MHz = 2441.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

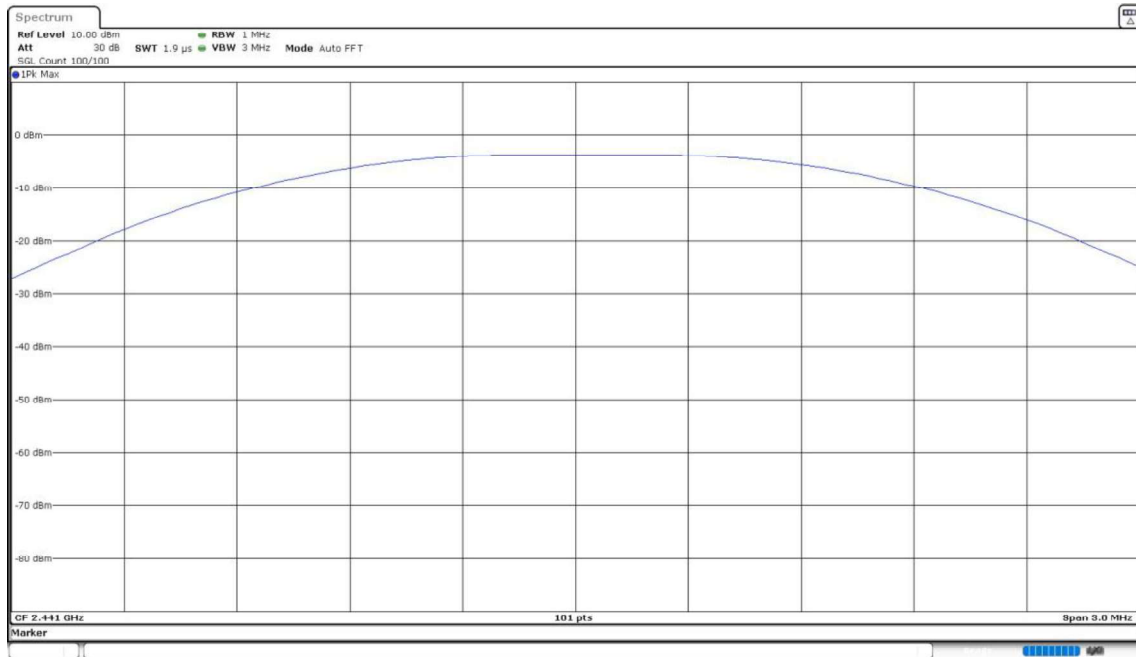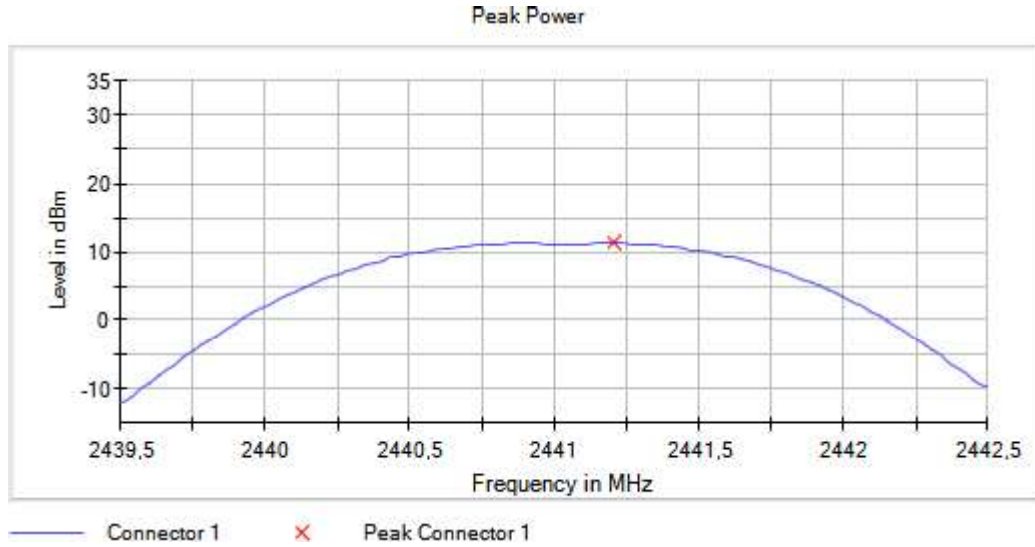

Frequency MHz = 2480.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (GFSK 1-DH5)

Images:

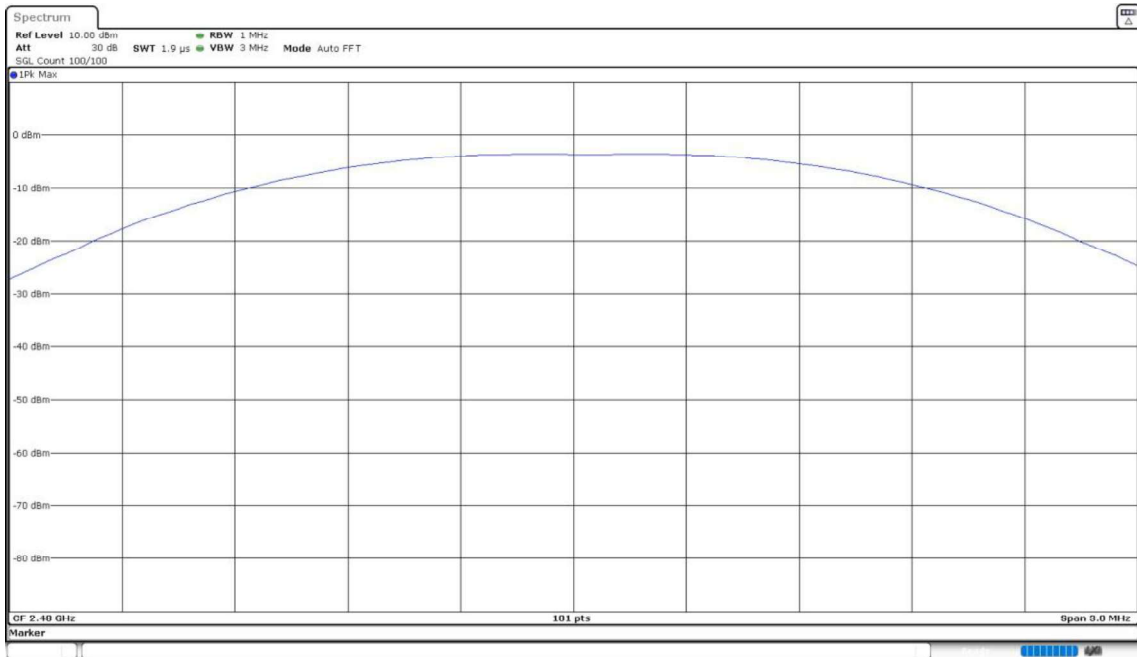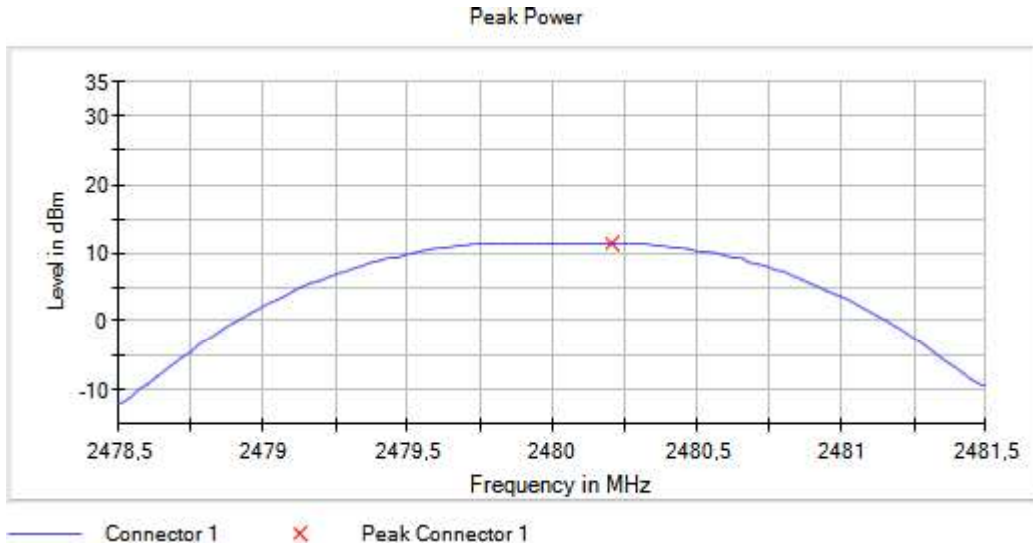

Modulation: BT (Pi/4 DQPSK 2-DH5)

Results

Freq (MHz)	Equipment	Maximum Conducted Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	Frequency Hopping Spread Spectrum systems (DSS)	11.30	13.61
2441.00000		11.30	13.61
2480.00000		11.60	13.91



Verdict

Pass

Attachments



Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

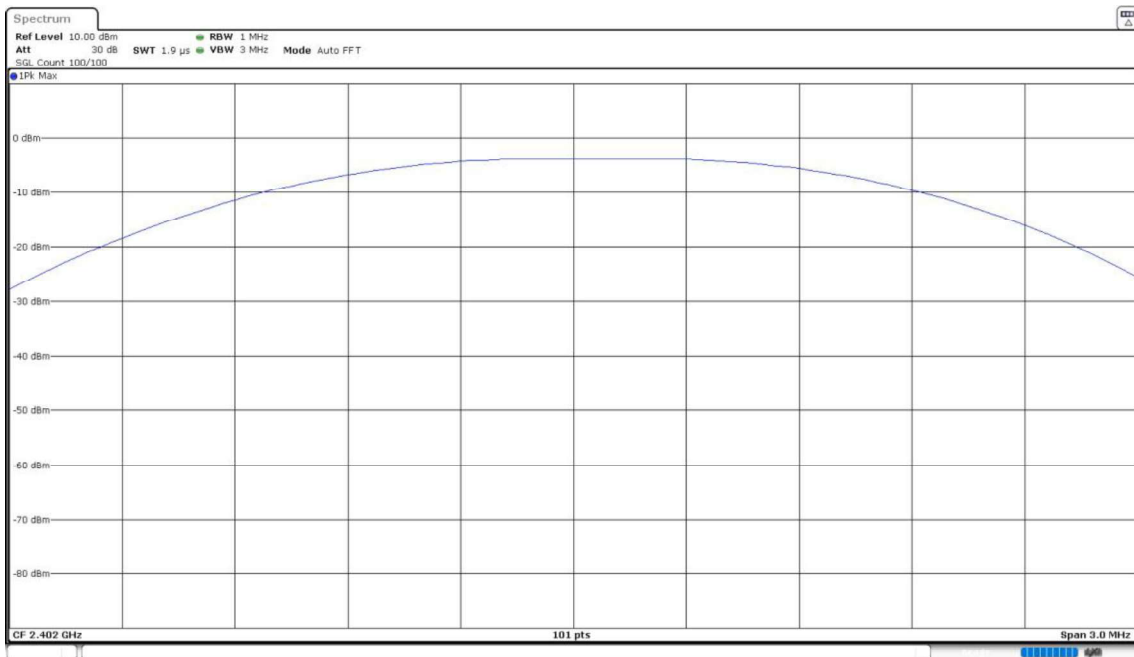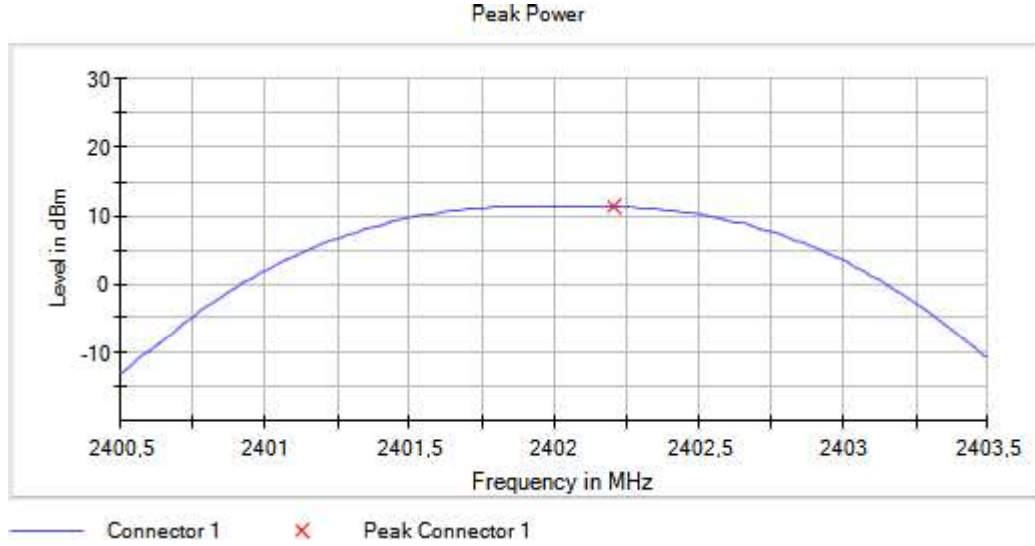



Frequency MHz = 2441.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

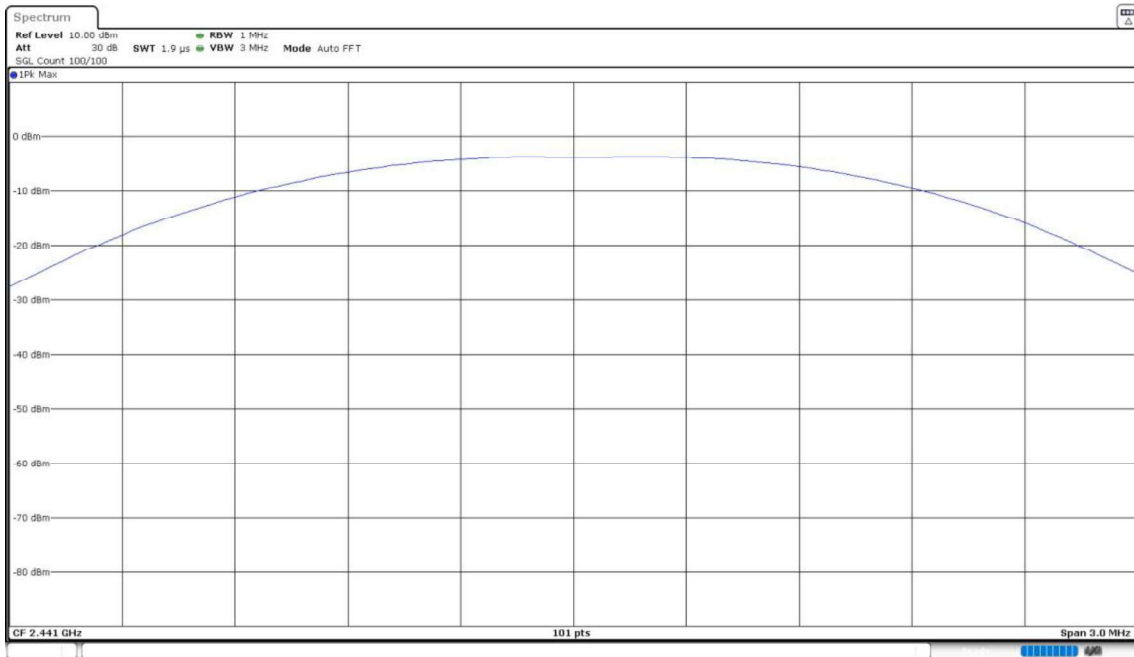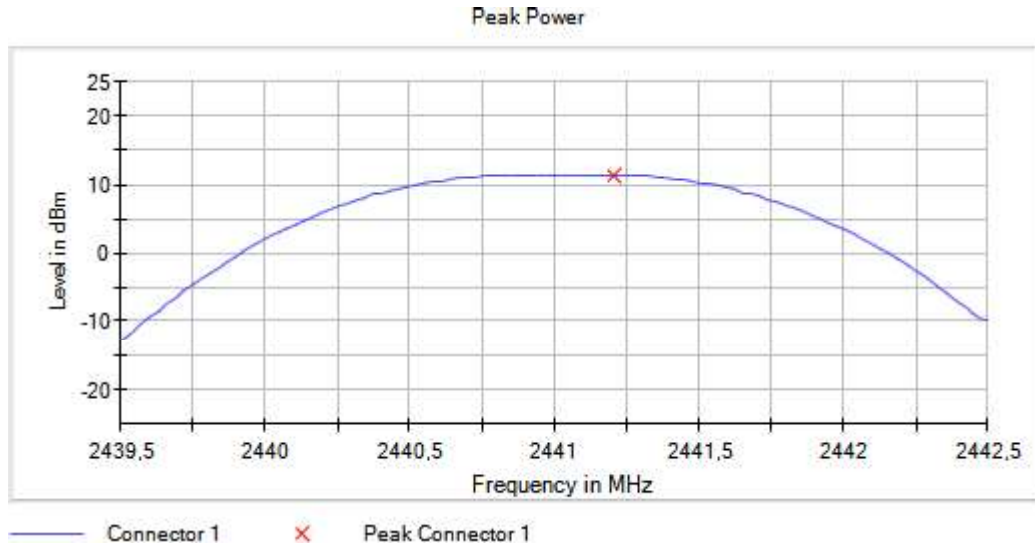

Frequency MHz = 2480.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (Pi/4 DQPSK 2-DH5)

Images:

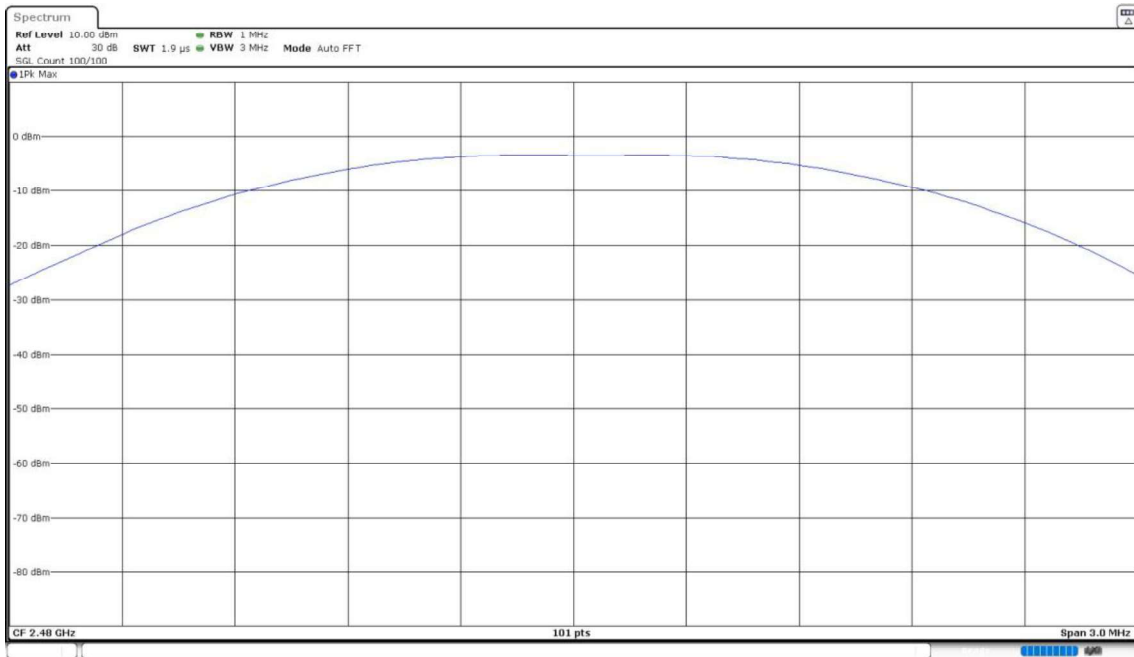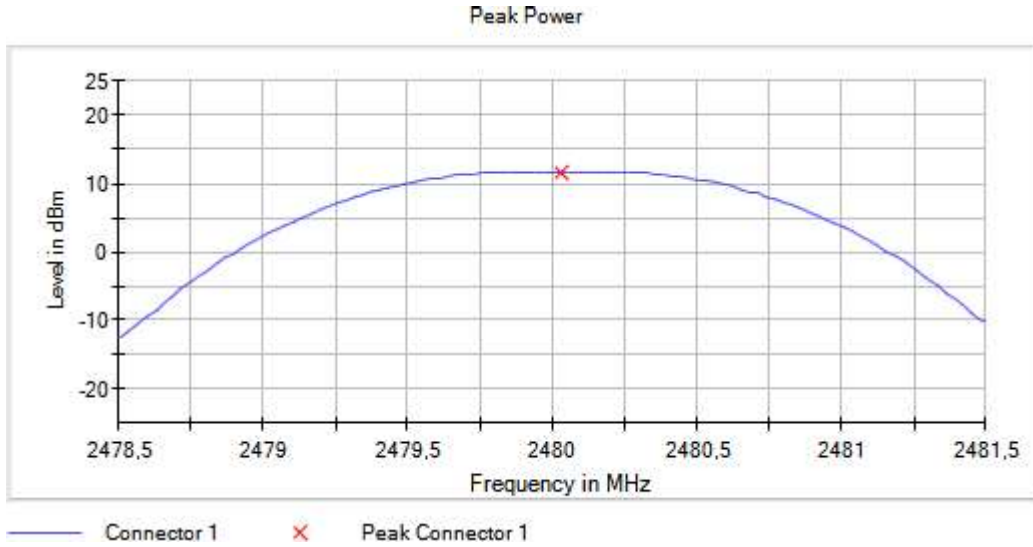

Modulation: BT (8DPSK 3-DH5)

Results

Freq (MHz)	Equipment	Maximum Conducted Power (dBm)	Maximum EIRP Power (dBm)
2402.00000	Frequency Hopping Spread Spectrum systems (DSS)	11.30	13.61
2441.00000		11.40	13.71
2480.00000		11.70	14.01



Verdict

Pass

Attachments

Frequency MHz = 2402.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS), Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)

Images:

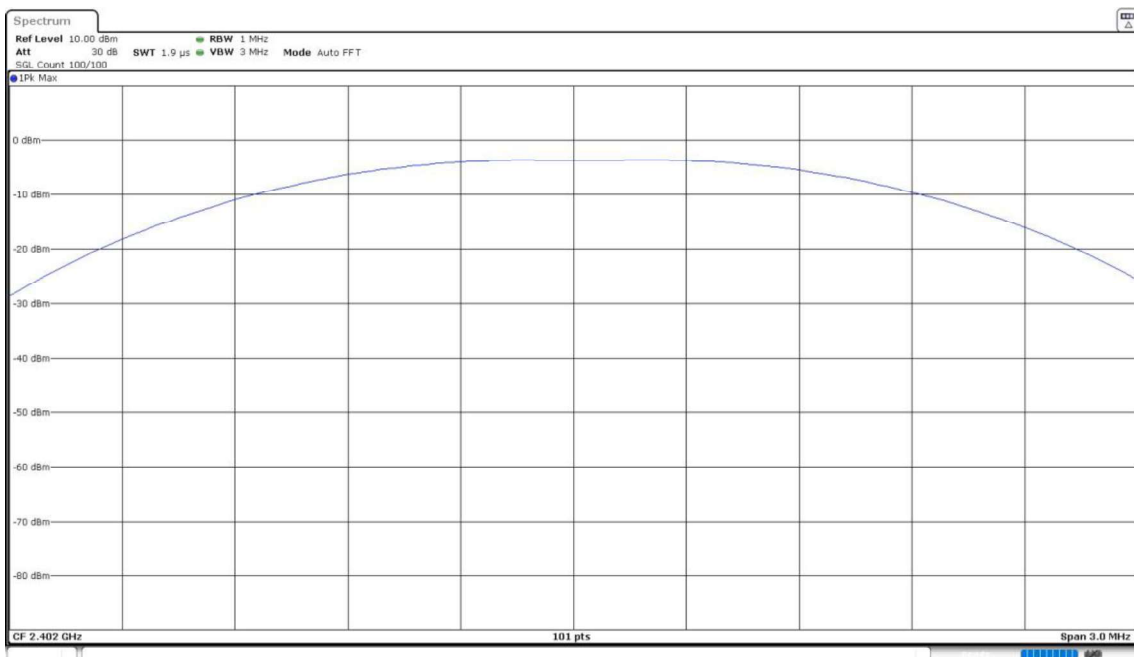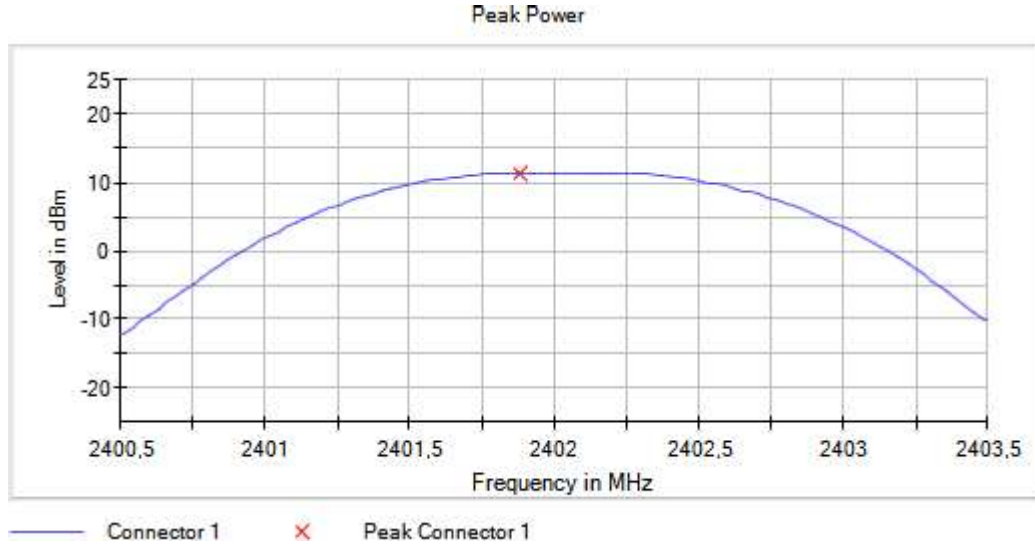

Frequency MHz = 2441.00000, Equipment Type = Frequency Hopping Spread Spectrum systems (DSS),
Bandwidth MHz = 1, Modulation = BT (8DPSK 3-DH5)

Images:

