

TEST REPORT

Reference No...... : WTD21D06058407W001
FCC ID : 2ABH3-FOS7HTA
Applicant..... : Furrion Ltd.
Address..... : 4/F, Flat C & D, The Grid, 133 Wai Yip Street, Kwun Tong
Kowloon 999077 Hongkong
Manufacturer : Furrion Ltd.
Address..... : 4/F, Flat C & D, The Grid, 133 Wai Yip Street, Kwun Tong
Kowloon 999077 Hongkong
Product..... : Vision S+ 7-inch Monitor
Model(s)..... : FOS7HTADS
Brand Name..... : N/A
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2021-06-28
Date of Test : 2021-06-28 to 2022-01-10
Date of Issue..... : 2022-02-22
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Estel Qian

Estel Qian / Project Engineer

Approved by:



Daniel Liu

Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 CHANNEL LIST	5
4.4 TEST MODE	5
4.5 TEST FACILITY.....	5
5 TEST SUMMARY	6
6 EQUIPMENT USED DURING TEST	7
6.1 EQUIPMENTS LIST	7
6.2 DESCRIPTION OF SUPPORT UNITS	8
6.3 MEASUREMENT UNCERTAINTY	8
6.4 TEST EQUIPMENT CALIBRATION	8
7 RADIATED EMISSIONS.....	9
7.1 EUT OPERATION.....	9
7.2 TEST SETUP	10
7.3 SPECTRUM ANALYZER SETUP	11
7.4 TEST PROCEDURE	12
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	12
7.6 SUMMARY OF TEST RESULTS	13
8 DUTY CYCLE.....	25
9 CONDUCTED SPURIOUS EMISSIONS.....	26
9.1 TEST PROCEDURE	26
9.2 TEST RESULT	27
10 BAND EDGE MEASUREMENT	39
10.1 TEST PROCEDURE	39
10.2 TEST RESULT	40
11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	44
11.1 TEST PROCEDURE:.....	44
11.2 TEST RESULT:	44
12 MAXIMUM PEAK OUTPUT POWER	57
12.1 TEST PROCEDURE:.....	57
12.2 TEST RESULT:	58
13 POWER SPECTRAL DENSITY	65
13.1 TEST PROCEDURE:.....	65
13.2 TEST RESULT:	65
14 ANTENNA REQUIREMENT	72
15 RF EXPOSURE.....	72
16 PHOTOGRAPHS OF TEST SETUP AND EUT.....	72

3 Revision History


Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D06058407 W001	2021-06-28	2021-06-28 to 2022-01-10	2022-02-22	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Vision S+ 7-inch Monitor
Model(s):	FOS7HTADS
Model Description:	N/A
Hardware Version:	FOS7HTADS-MAIN-V10
Software Version:	VISION_S+_7_MONITOR_20211206_V1.8
Note:	N/A

4.2 Details of E.U.T.

Operation Frequency:	2412~2462MHz
Max. RF output power:	ANT 0: 25.38dBm ANT 1: 25.83dBm
Type of Modulation:	CCK, OFDM
Antenna installation:	External antenna with RP-SMA connector
Antenna Gain:	ANT 0: 3.0dBi ANT 1: 3.0dBi
Ratings:	DC 5V from car charger
Car charger:	Input: DC 12 -24V Output: DC 5.0V  2.4A Max

Note: EUT not support MIMO Transmission techniques.

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	CCK	Normal	1/6/11	TX
	OFDM	Normal	1/6/11	TX
Power Spectral Density	CCK	Normal	1/6/11	TX
	OFDM	Normal	1/6/11	TX
6dB Bandwidth	CCK	Normal	1/6/11	TX
	OFDM	Normal	1/6/11	TX
Band Edge	CCK	Normal	1/6/11	TX
	OFDM	Normal	1/6/11	TX
Transmitter Spurious Emissions	CCK	Normal	1/6/11	TX
	OFDM	Normal	1/6/11	TX

Note: parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

4.5 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	N/A
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	2.1901	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2021-07-26	2022-07-25
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2021-07-26	2022-07-25
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2021-07-26	2022-07-25
4.	Cable	LARGE	RF300	-	2021-07-26	2022-07-25
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2021-04-26	2022-04-25
2	Amplifier	Agilent	8447D	2944A10178	2021-07-26	2022-07-25
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2021-04-26	2022-04-25
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2021-08-23	2022-08-22
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-26	2022-04-25
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2021-07-30	2022-07-29
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2021-07-26	2022-07-25
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	N/A	2021-04-26	2022-04-25
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2021-04-26	2022-04-25
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2021-10-31	2022-10-30
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2021-04-29	2022-04-28
	Amplifier	ANRITSU	MH648A	M43381	2021-04-26	2022-04-25
4	Cable	HUBER+SUHNER	CBL2	525178	2021-04-26	2022-04-25
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Signal Generater	Agilent	N5182A	MY46240814	2021-07-26	2022-07-25
2.	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	2022-04-25
3.	EXA Signal Analyzer	Malaysia Keysight	N9010A	MY50520207	2021-04-26	2022-04-25

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

7.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 52.1 % RH


Atmospheric Pressure: 101.2kPa

EUT Operation: The test was performed in TX transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

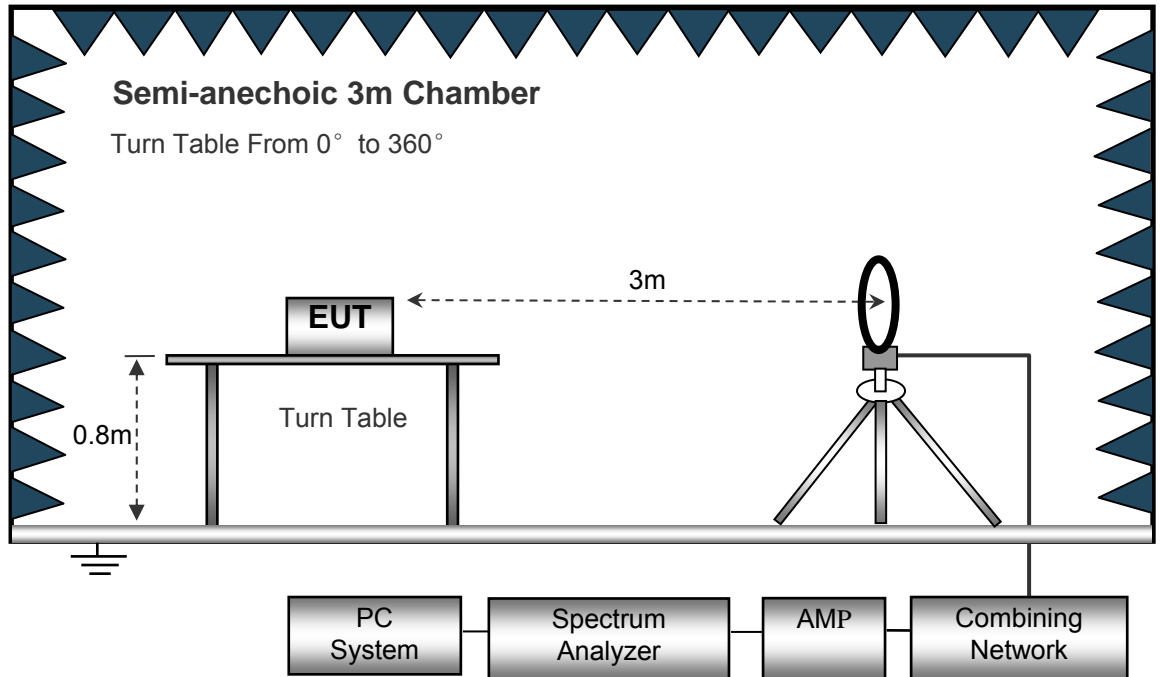

The test setup for emission measurement from 30 MHz to 1 GHz.

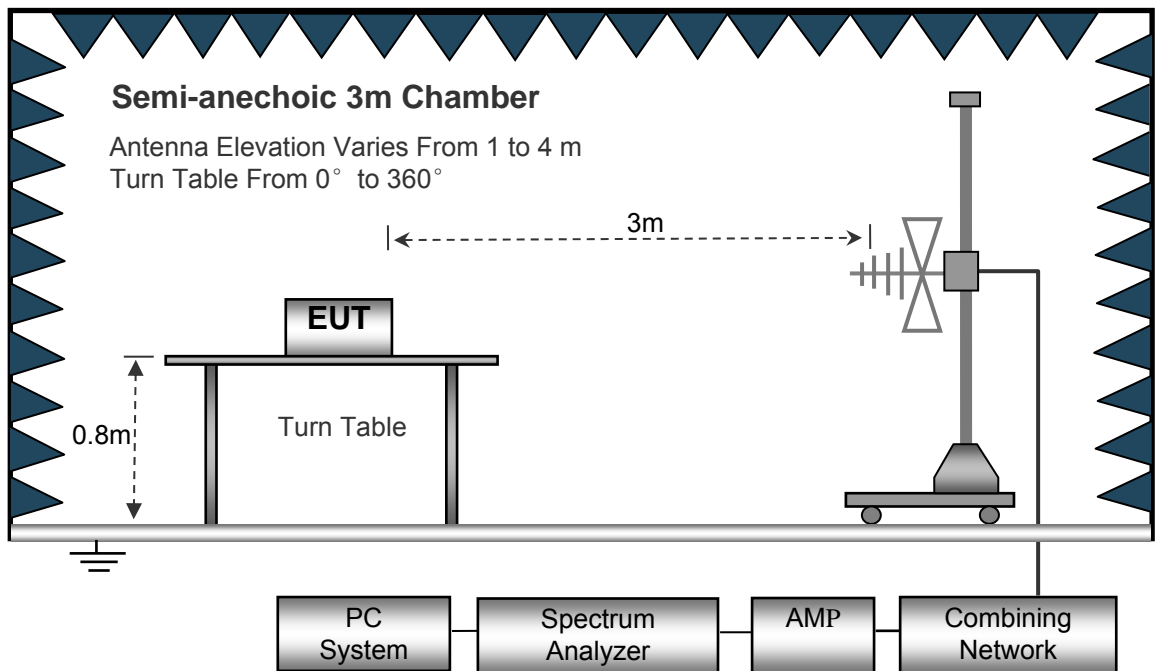

The test setup for emission measurement above 1 GHz.

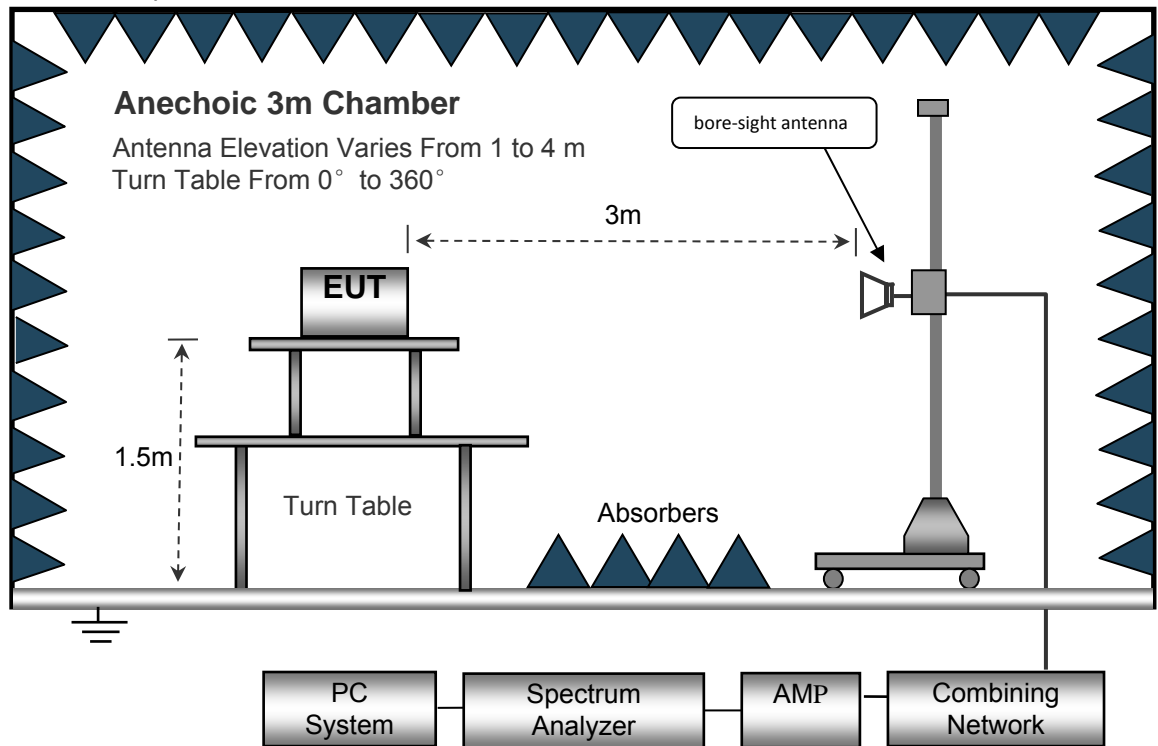

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test frequency: below 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test frequency: 30MHz ~ 8GHz

ANT0

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
CCK: Low Channel 2412MHz									
932.27	36.18	QP	34	1.6	H	-11.62	24.56	46.00	-21.44
932.27	54.59	QP	250	1.5	V	-11.62	42.97	46.00	-3.03
4824.00	54.83	PK	228	1.5	V	-1.06	53.77	74.00	-20.23
4824.00	52.25	Ave	228	1.5	V	-1.06	51.19	54.00	-2.81
7236.00	41.08	PK	68	1.2	H	1.33	42.41	74.00	-31.59
7236.00	41.96	Ave	68	1.2	H	1.33	43.29	54.00	-10.71
2321.82	46.06	PK	303	1.4	V	-13.19	32.87	74.00	-41.13
2321.82	37.71	Ave	303	1.4	V	-13.19	24.52	54.00	-29.48
2351.43	44.57	PK	71	1.1	H	-13.14	31.43	74.00	-42.57
2351.43	36.37	Ave	71	1.1	H	-13.14	23.23	54.00	-30.77
2490.20	42.03	PK	68	1.5	V	-13.08	28.95	74.00	-45.05
2490.20	38.11	Ave	68	1.5	V	-13.08	25.03	54.00	-28.97

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
CCK: Middle Channel 2437MHz									
932.27	37.37	QP	271	1.6	H	-11.62	25.75	46.00	-20.25
932.27	54.19	QP	338	1.9	V	-11.62	42.57	46.00	-3.43
4874.00	56.27	PK	150	1.8	V	-0.62	55.65	74.00	-18.35
4874.00	48.98	Ave	150	1.8	V	-0.62	48.36	54.00	-5.64
7311.00	40.59	PK	287	1.2	H	2.21	42.80	74.00	-31.20
7311.00	42.61	Ave	287	1.2	H	2.21	44.82	54.00	-9.18
2334.84	45.93	PK	208	1.4	V	-13.19	32.74	74.00	-41.26
2334.84	37.87	Ave	208	1.4	V	-13.19	24.68	54.00	-29.32
2381.20	43.43	PK	292	1.2	H	-13.14	30.29	74.00	-43.71
2381.20	37.71	Ave	292	1.2	H	-13.14	24.57	54.00	-29.43
2496.38	44.35	PK	91	1.7	V	-13.08	31.27	74.00	-42.73
2496.38	37.25	Ave	91	1.7	V	-13.08	24.17	54.00	-29.83

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
CCK: High Channel 2462MHz									
932.27	35.96	QP	85	1.0	H	-11.62	24.34	46.00	-21.66
932.27	53.69	QP	136	1.0	V	-11.62	42.07	46.00	-3.93
4924.00	56.38	PK	286	1.8	V	-0.24	56.14	74.00	-17.86
4924.00	47.57	Ave	286	1.8	V	-0.24	47.33	54.00	-6.67
7386.00	39.74	PK	121	1.1	H	2.84	42.58	74.00	-31.42
7386.00	43.38	Ave	121	1.1	H	2.84	46.22	54.00	-7.78
2313.43	46.25	PK	112	1.5	V	-13.19	33.06	74.00	-40.94
2313.43	39.44	Ave	112	1.5	V	-13.19	26.25	54.00	-27.75
2385.97	42.67	PK	182	2.0	H	-13.14	29.53	74.00	-44.47
2385.97	36.11	Ave	182	2.0	H	-13.14	22.97	54.00	-31.03
2493.72	43.29	PK	131	1.9	V	-13.08	30.21	74.00	-43.79
2493.72	36.52	Ave	131	1.9	V	-13.08	23.44	54.00	-30.56

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
OFDM: Low Channel 2412MHz									
932.27	35.53	QP	356	1.8	H	-11.62	23.91	46.00	-22.09
932.27	54.33	QP	208	1.1	V	-11.62	42.71	46.00	-3.29
4824.00	57.41	PK	355	1.0	V	-1.06	56.35	74.00	-17.65
4824.00	48.75	Ave	355	1.0	V	-1.06	47.69	54.00	-6.31
7236.00	39.87	PK	86	1.1	H	1.33	41.20	74.00	-32.80
7236.00	43.01	Ave	86	1.1	H	1.33	44.34	54.00	-9.66
2310.13	45.55	PK	134	1.8	V	-13.19	32.36	74.00	-41.64
2310.13	37.99	Ave	134	1.8	V	-13.19	24.80	54.00	-29.20
2385.18	42.08	PK	43	1.1	H	-13.14	28.94	74.00	-45.06
2385.18	36.71	Ave	43	1.1	H	-13.14	23.57	54.00	-30.43
2499.51	44.30	PK	99	1.3	V	-13.08	31.22	74.00	-42.78
2499.51	38.71	Ave	99	1.3	V	-13.08	25.63	54.00	-28.37

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
OFDM: Middle Channel 2437MHz									
932.27	34.62	QP	86	1.2	H	-11.62	23.00	46.00	-23.00
932.27	54.10	QP	354	1.1	V	-11.62	42.48	46.00	-3.52
4874.00	58.77	PK	181	1.6	V	-0.62	58.15	74.00	-15.85
4874.00	49.54	Ave	181	1.6	V	-0.62	48.92	54.00	-5.08
7311.00	40.02	PK	189	1.9	H	2.21	42.23	74.00	-31.77
7311.00	42.78	Ave	189	1.9	H	2.21	44.99	54.00	-9.01
2347.52	46.20	PK	34	1.0	V	-13.19	33.01	74.00	-40.99
2347.52	37.91	Ave	34	1.0	V	-13.19	24.72	54.00	-29.28
2388.50	44.91	PK	61	1.2	H	-13.14	31.77	74.00	-42.23
2388.50	38.06	Ave	61	1.2	H	-13.14	24.92	54.00	-29.08
2494.08	43.88	PK	164	1.8	V	-13.08	30.80	74.00	-43.20
2494.08	36.05	Ave	164	1.8	V	-13.08	22.97	54.00	-31.03

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
OFDM: High Channel 2462MHz									
932.27	35.64	QP	246	1.4	H	-11.62	24.02	46.00	-21.98
932.27	53.10	QP	206	2.0	V	-11.62	41.48	46.00	-4.52
4924.00	60.03	PK	169	1.9	V	-0.24	59.79	74.00	-14.21
4924.00	49.87	Ave	169	1.9	V	-0.24	49.63	54.00	-4.37
7386.00	39.47	PK	217	1.4	H	2.84	42.31	74.00	-31.69
7386.00	42.60	Ave	217	1.4	H	2.84	45.44	54.00	-8.56
2340.85	46.97	PK	21	1.3	V	-13.19	33.78	74.00	-40.22
2340.85	39.72	Ave	21	1.3	V	-13.19	26.53	54.00	-27.47
2386.36	44.78	PK	290	1.0	H	-13.14	31.64	74.00	-42.36
2386.36	36.04	Ave	290	1.0	H	-13.14	22.90	54.00	-31.10
2496.78	44.89	PK	182	1.3	V	-13.08	31.81	74.00	-42.19
2496.78	36.21	Ave	182	1.3	V	-13.08	23.13	54.00	-30.87

ANT1

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
CCK: Low Channel 2412MHz									
932.27	35.18	QP	42	1.6	H	-11.62	23.56	46.00	-22.44
932.27	53.59	QP	280	1.1	V	-11.62	41.97	46.00	-4.03
4824.00	52.83	PK	200	1.1	V	-1.06	51.77	74.00	-22.23
4824.00	51.25	Ave	200	1.1	V	-1.06	50.19	54.00	-3.81
7236.00	41.08	PK	34	1.5	H	1.33	42.41	74.00	-31.59
7236.00	41.96	Ave	34	1.5	H	1.33	43.29	54.00	-10.71
2329.02	45.29	PK	69	1.5	V	-13.19	32.10	74.00	-41.90
2329.02	38.90	Ave	69	1.5	V	-13.19	25.71	54.00	-28.29
2367.82	44.12	PK	75	1.7	H	-13.14	30.98	74.00	-43.02
2367.82	37.46	Ave	75	1.7	H	-13.14	24.32	54.00	-29.68
2493.78	42.54	PK	94	1.4	V	-13.08	29.46	74.00	-44.54
2493.78	38.55	Ave	94	1.4	V	-13.08	25.47	54.00	-28.53

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
CCK: Middle Channel 2437MHz									
932.27	36.14	QP	79	1.4	H	-11.62	24.52	46.00	-21.48
932.27	52.10	QP	60	1.5	V	-11.62	40.48	46.00	-5.52
4874.00	51.71	PK	16	1.6	V	-0.62	51.09	74.00	-22.91
4874.00	50.57	Ave	16	1.6	V	-0.62	49.95	54.00	-4.05
7311.00	42.11	PK	159	1.5	H	2.21	44.32	74.00	-29.68
7311.00	41.97	Ave	159	1.5	H	2.21	44.18	54.00	-9.82
2347.84	46.41	PK	117	1.8	V	-13.19	33.22	74.00	-40.78
2347.84	38.00	Ave	117	1.8	V	-13.19	24.81	54.00	-29.19
2377.71	43.38	PK	195	1.5	H	-13.14	30.24	74.00	-43.76
2377.71	37.43	Ave	195	1.5	H	-13.14	24.29	54.00	-29.71
2486.40	42.08	PK	97	2.0	V	-13.08	29.00	74.00	-45.00
2486.40	37.80	Ave	97	2.0	V	-13.08	24.72	54.00	-29.28

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
932.27	34.94	QP	192	1.9	H	-11.62	23.32	46.00	-22.68
932.27	52.65	QP	326	1.1	V	-11.62	41.03	46.00	-4.97
4924.00	52.05	PK	91	1.5	V	-0.24	51.81	74.00	-22.19
4924.00	50.78	Ave	91	1.5	V	-0.24	50.54	54.00	-3.46
7386.00	42.45	PK	79	1.1	H	2.84	45.29	74.00	-28.71
7386.00	42.67	Ave	79	1.1	H	2.84	45.51	54.00	-8.49
2328.34	46.91	PK	50	1.7	V	-13.19	33.72	74.00	-40.28
2328.34	39.49	Ave	50	1.7	V	-13.19	26.30	54.00	-27.70
2370.71	44.22	PK	135	1.0	H	-13.14	31.08	74.00	-42.92
2370.71	37.37	Ave	135	1.0	H	-13.14	24.23	54.00	-29.77
2487.45	42.99	PK	214	1.3	V	-13.08	29.91	74.00	-44.09
2487.45	36.29	Ave	214	1.3	V	-13.08	23.21	54.00	-30.79

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
OFDM: Low Channel 2412MHz									
932.27	34.49	QP	143	1.9	H	-11.62	22.87	46.00	-23.13
932.27	52.92	QP	280	1.6	V	-11.62	41.30	46.00	-4.70
4824.00	52.06	PK	336	1.5	V	-1.06	51.00	74.00	-23.00
4824.00	50.61	Ave	336	1.5	V	-1.06	49.55	54.00	-4.45
7236.00	41.47	PK	104	1.9	H	1.33	42.80	74.00	-31.20
7236.00	42.92	Ave	104	1.9	H	1.33	44.25	54.00	-9.75
2321.15	45.58	PK	175	1.1	V	-13.19	32.39	74.00	-41.61
2321.15	37.21	Ave	175	1.1	V	-13.19	24.02	54.00	-29.98
2375.61	42.63	PK	134	1.1	H	-13.14	29.49	74.00	-44.51
2375.61	37.05	Ave	134	1.1	H	-13.14	23.91	54.00	-30.09
2486.10	44.81	PK	212	1.4	V	-13.08	31.73	74.00	-42.27
2486.10	38.68	Ave	212	1.4	V	-13.08	25.60	54.00	-28.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
OFDM: Middle Channel 2437MHz									
932.27	34.03	QP	113	1.7	H	-11.62	22.41	46.00	-23.59
932.27	51.41	QP	89	1.0	V	-11.62	39.79	46.00	-6.21
4874.00	51.29	PK	355	1.8	V	-0.62	50.67	74.00	-23.33
4874.00	49.93	Ave	355	1.8	V	-0.62	49.31	54.00	-4.69
7311.00	41.53	PK	228	1.9	H	2.21	43.74	74.00	-30.26
7311.00	44.39	Ave	228	1.9	H	2.21	46.60	54.00	-7.40
2334.09	46.09	PK	334	1.4	V	-13.19	32.90	74.00	-41.10
2334.09	38.65	Ave	334	1.4	V	-13.19	25.46	54.00	-28.54
2357.12	42.11	PK	47	1.0	H	-13.14	28.97	74.00	-45.03
2357.12	36.64	Ave	47	1.0	H	-13.14	23.50	54.00	-30.50
2498.90	44.27	PK	200	1.9	V	-13.08	31.19	74.00	-42.81
2498.90	37.77	Ave	200	1.9	V	-13.08	24.69	54.00	-29.31

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
OFDM: High Channel 2462MHz									
932.27	35.42	QP	301	1.5	H	-11.62	23.80	46.00	-22.20
932.27	53.20	QP	262	1.7	V	-11.62	41.58	46.00	-4.42
4924.00	50.95	PK	172	1.8	V	-0.24	50.71	74.00	-23.29
4924.00	49.52	Ave	172	1.8	V	-0.24	49.28	54.00	-4.72
7386.00	40.19	PK	293	1.1	H	2.84	43.03	74.00	-30.97
7386.00	44.28	Ave	293	1.1	H	2.84	47.12	54.00	-6.88
2319.36	46.10	PK	163	1.1	V	-13.19	32.91	74.00	-41.09
2319.36	39.90	Ave	163	1.1	V	-13.19	26.71	54.00	-27.29
2369.25	43.89	PK	124	1.9	H	-13.14	30.75	74.00	-43.25
2369.25	37.37	Ave	124	1.9	H	-13.14	24.23	54.00	-29.77
2484.42	42.00	PK	263	1.4	V	-13.08	28.92	74.00	-45.08
2484.42	36.30	Ave	263	1.4	V	-13.08	23.22	54.00	-30.78

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Duty cycle

Ant.	Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
Ant. 0	CCK	0.312	0.640	0.49	48.75	3.12	-6.24
Ant. 1	CCK	0.312	0.630	0.50	49.52	3.05	-6.10
Ant. 0	OFDM	0.216	0.484	0.45	44.63	3.50	-7.01
Ant. 1	OFDM	0.220	0.484	0.45	45.45	3.42	-6.85



Remark:

Duty cycle=On Time/period;



Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;

Average factor= $20 \log_{10} \text{Duty cycle}$

CCK

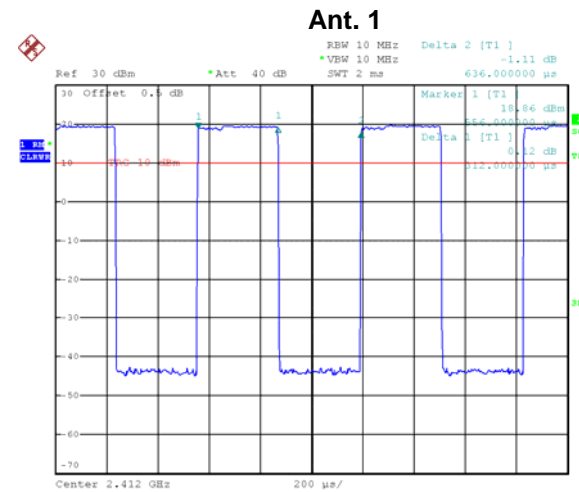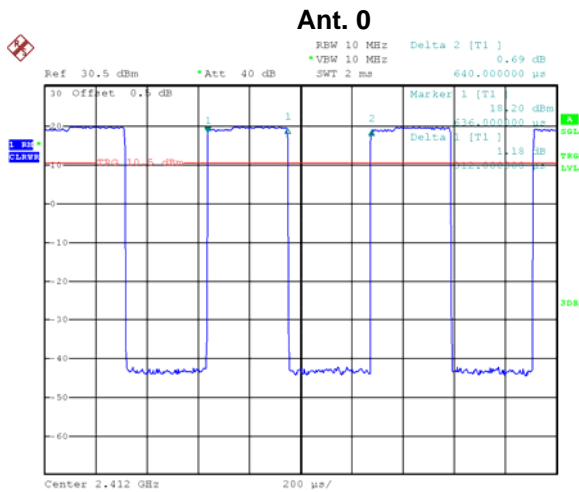

OFDM

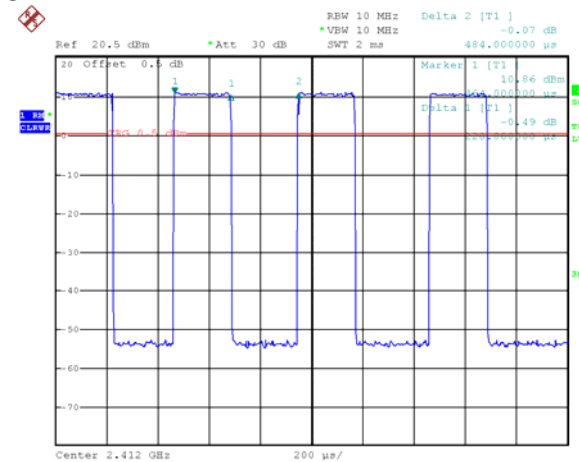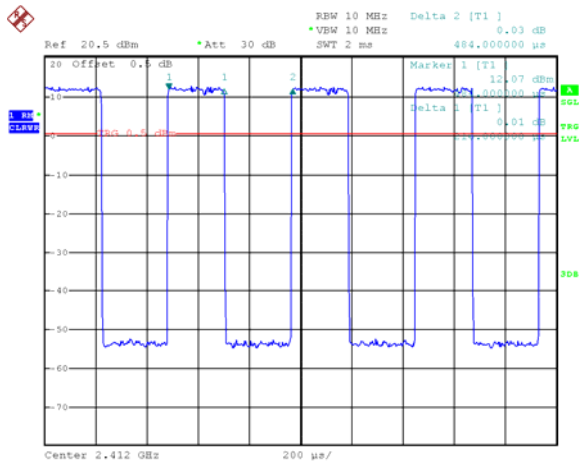

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
ANSI C63.10:2013

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the span to ~ 1.5 times the DTS bandwidth.
 - c) Set the RBW = 100 kHz.
 - d) Set the VBW _ [3 × RBW].
 - e) Detector = peak.
 - f) Sweep time = auto couple.
 - g) Trace mode = max hold.
 - h) Allow trace to fully stabilize.
 - i) Use the peak marker function to determine the maximum PSD level.


Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

9.2 Test Result


Antenna 0
9KHz – 30MHz
CCK
Low Channel

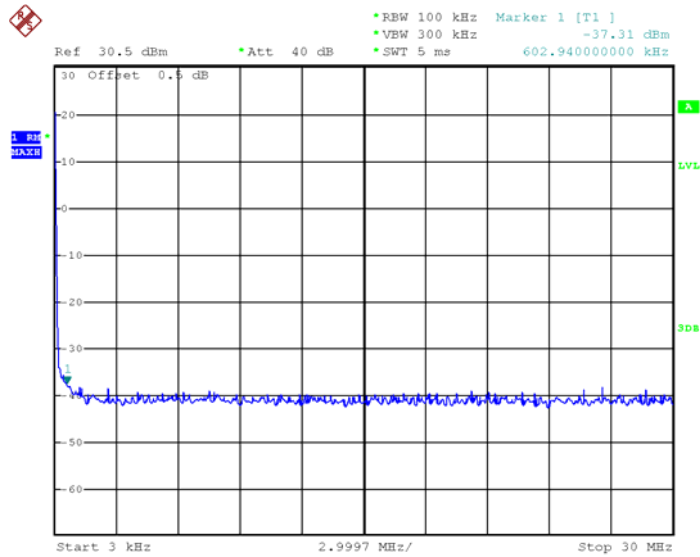

Middle Channel

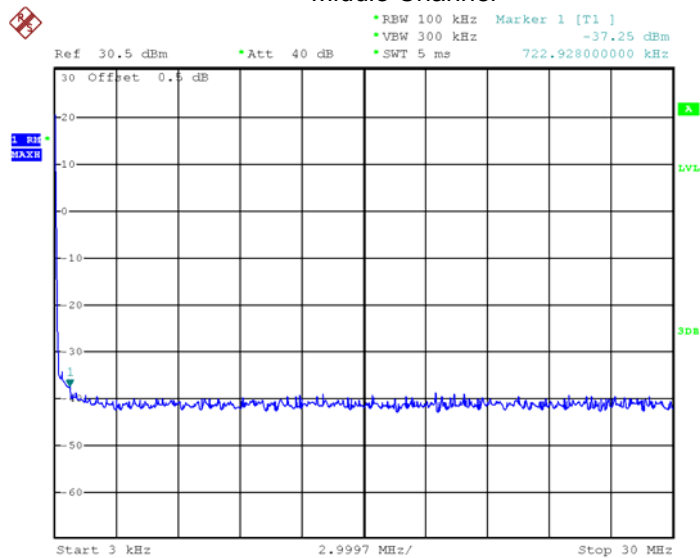




High Channel

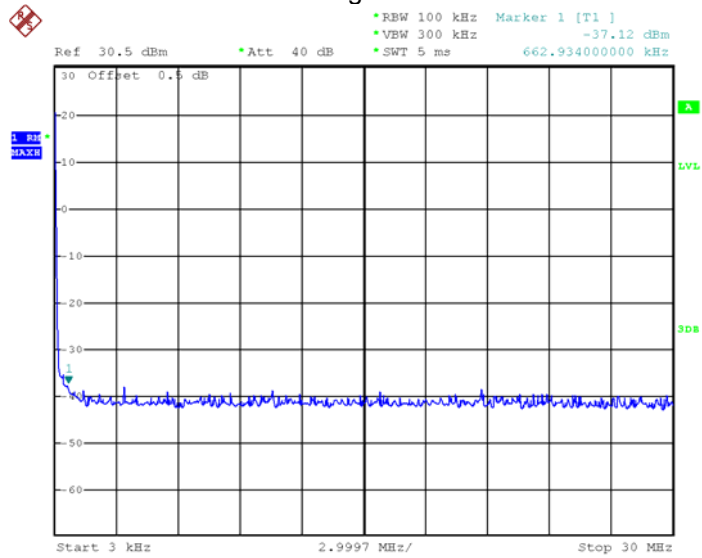

OFDM

Low Channel

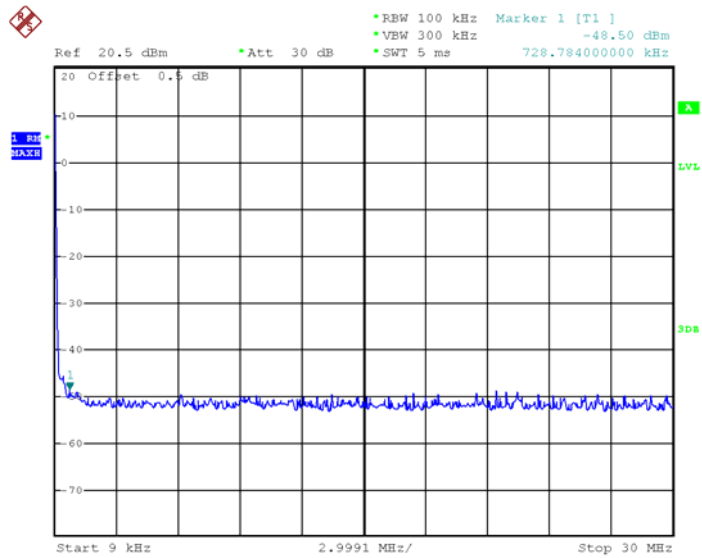

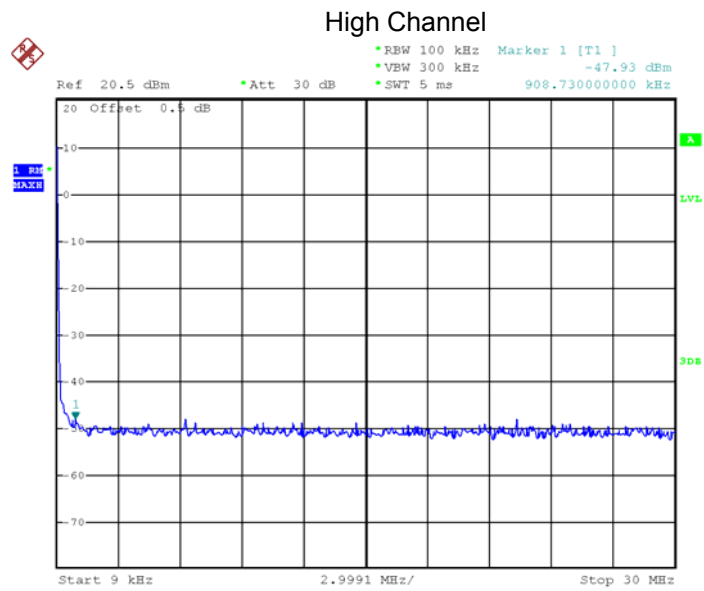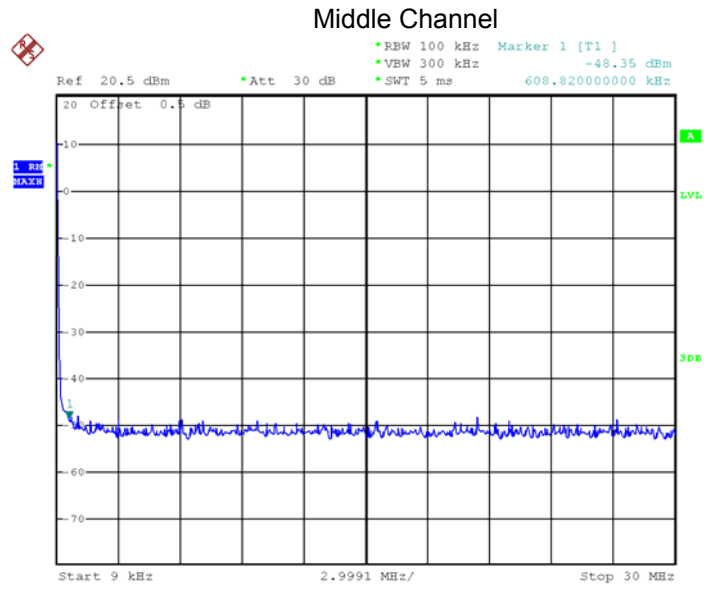


Above 30MHz

CCK


Low Channel

Fundamental

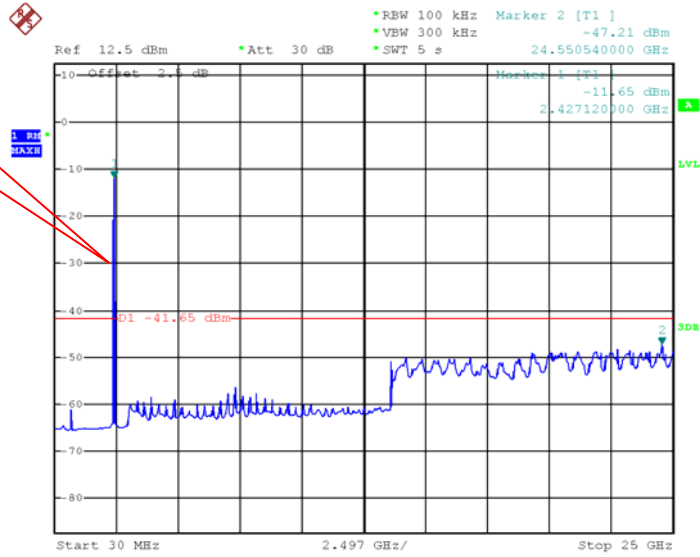


Middle Channel

Fundamental

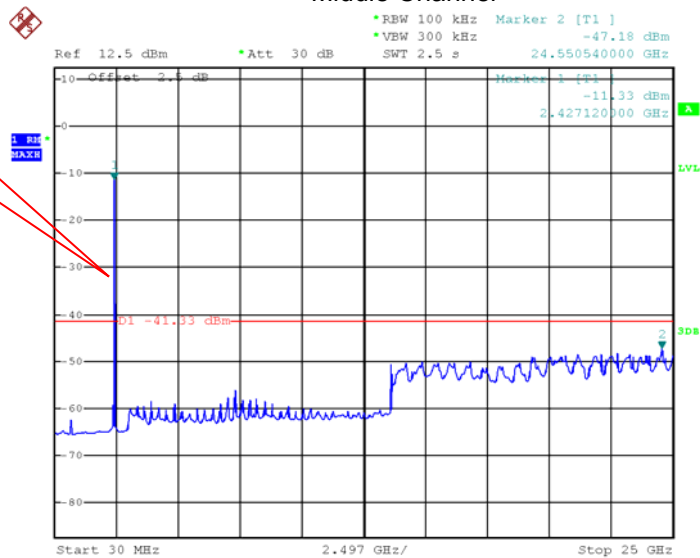

High Channel


Fundamental

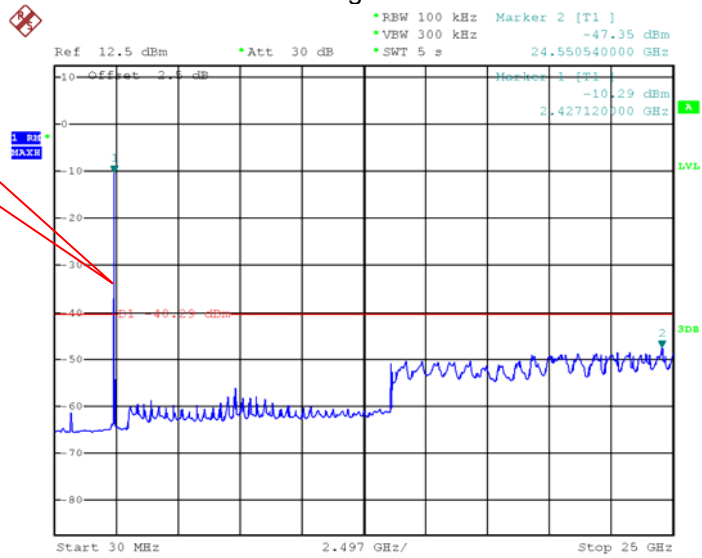

OFDM


Low Channel

Fundamental

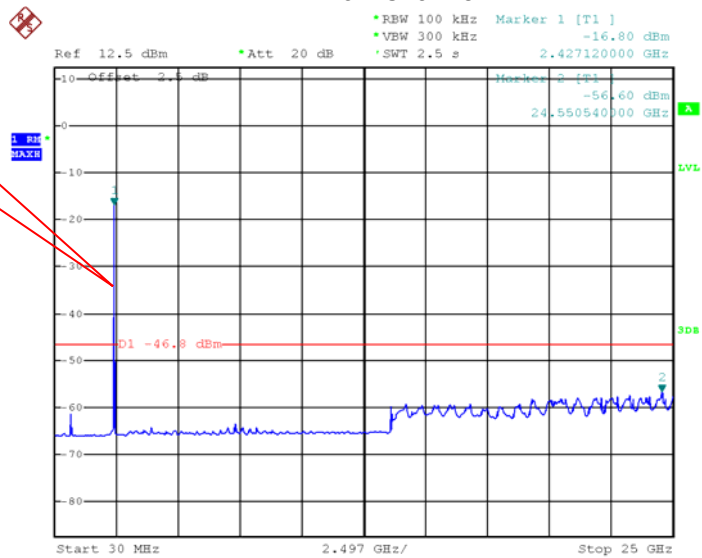


Middle Channel

Fundamental

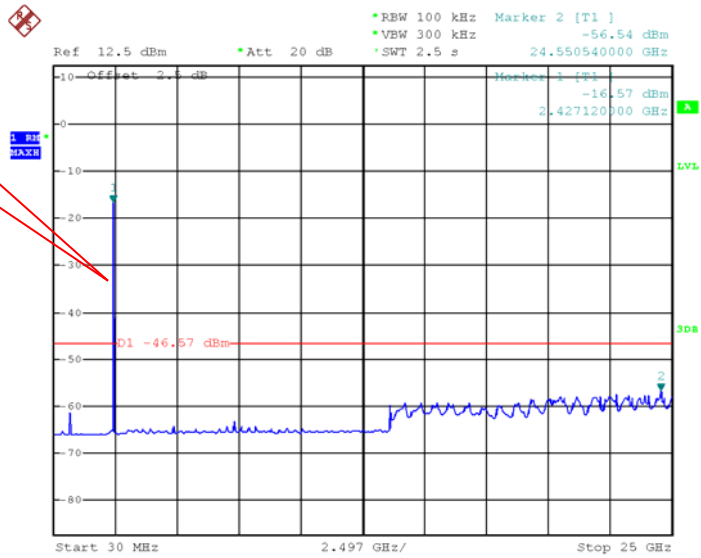


High Channel


Fundamental

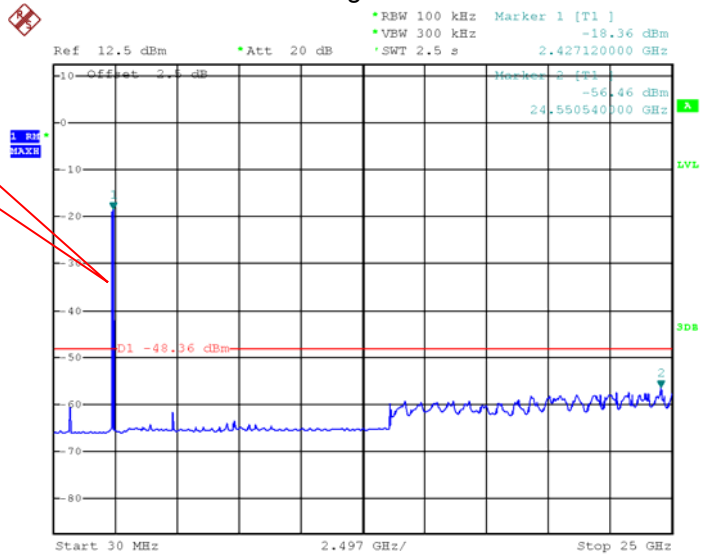


Antenna 1
9KHz – 30MHz
CCK
Low Channel

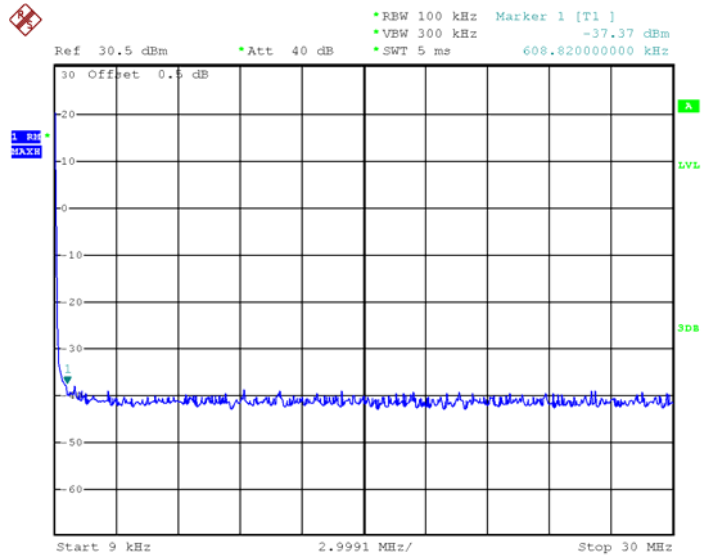

Middle Channel

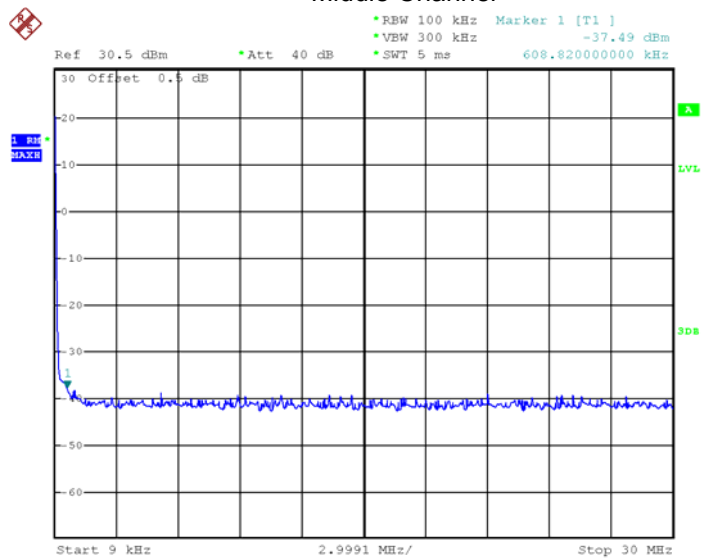




High Channel

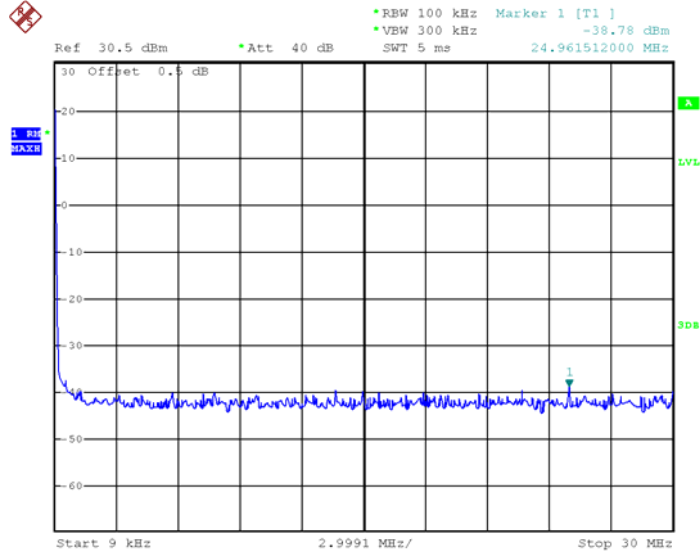

OFDM

Low Channel

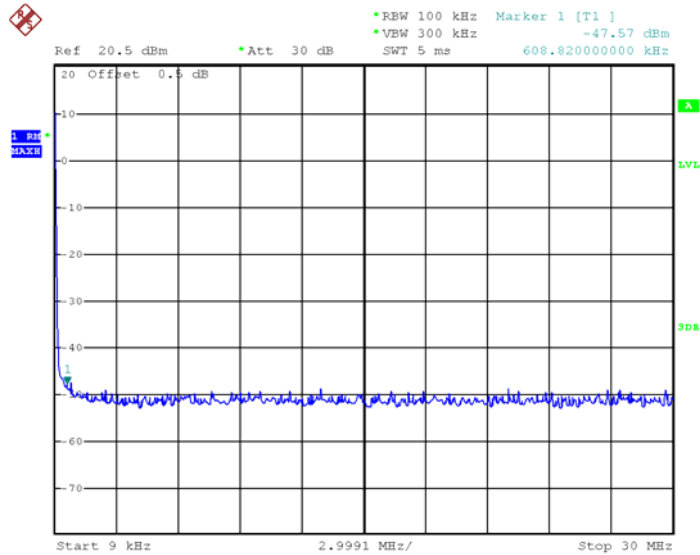

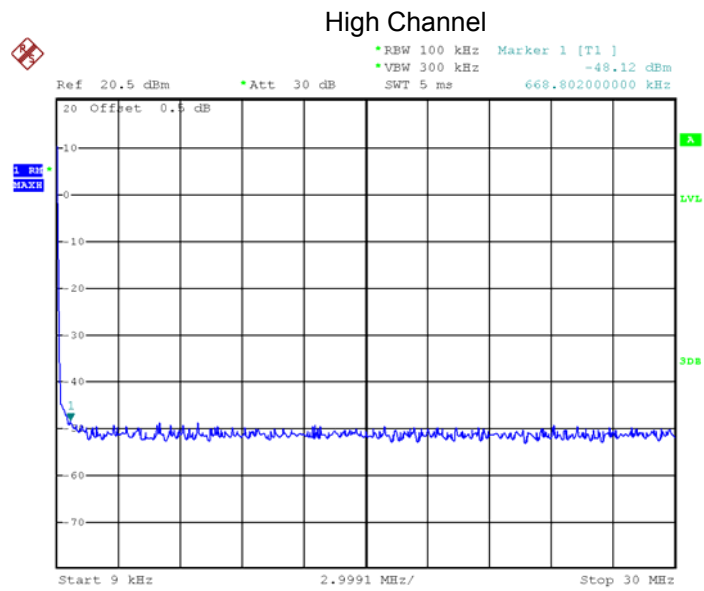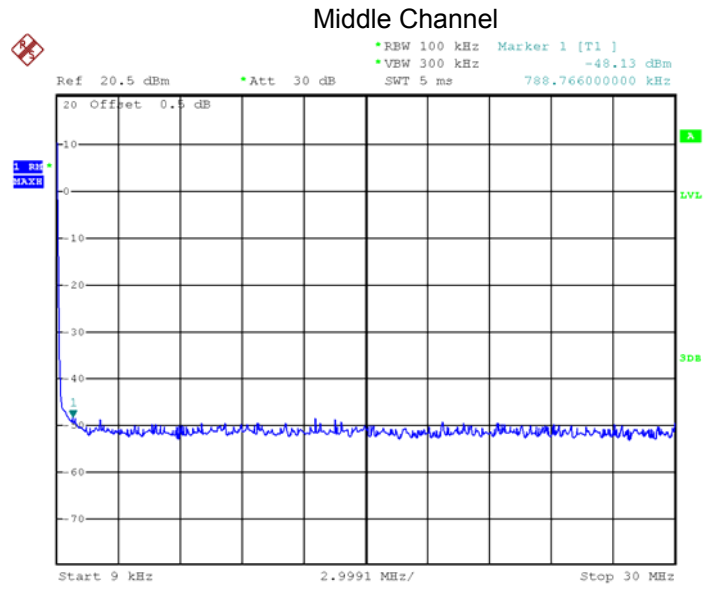


Above 30MHz

CCK


Low Channel

Fundamental

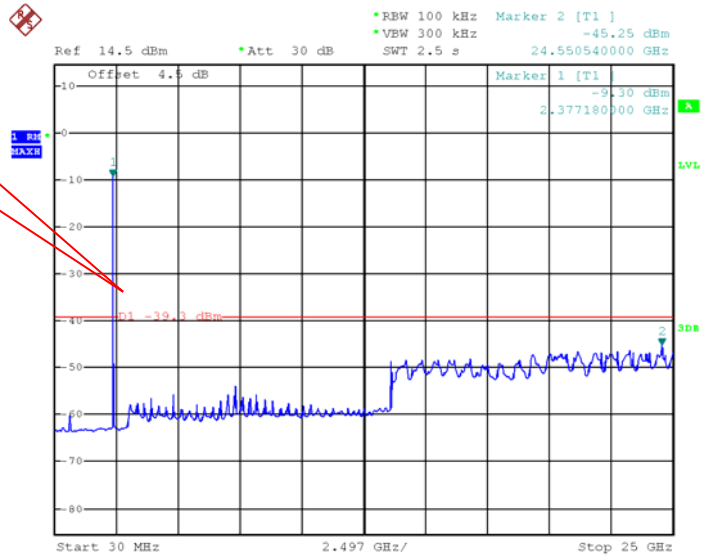


Middle Channel

Fundamental

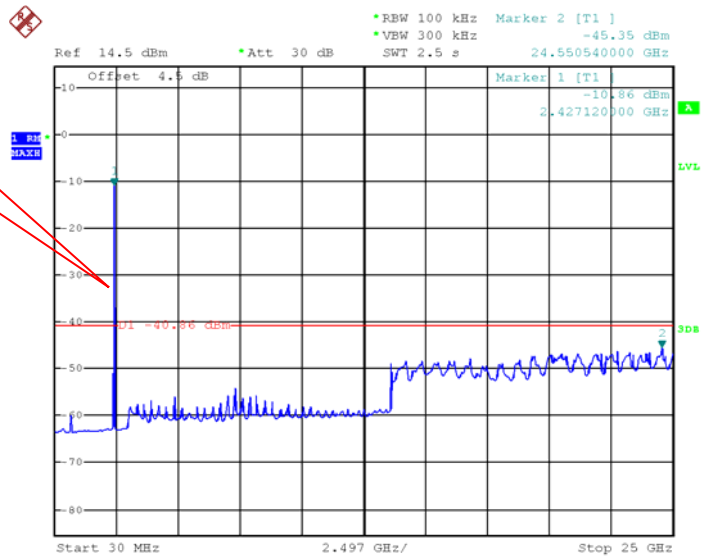

High Channel


Fundamental

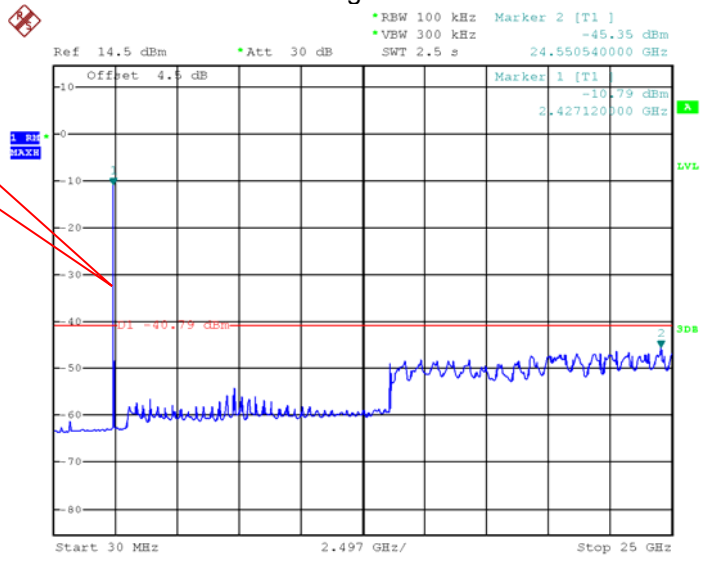

OFDM


Low Channel

Fundamental

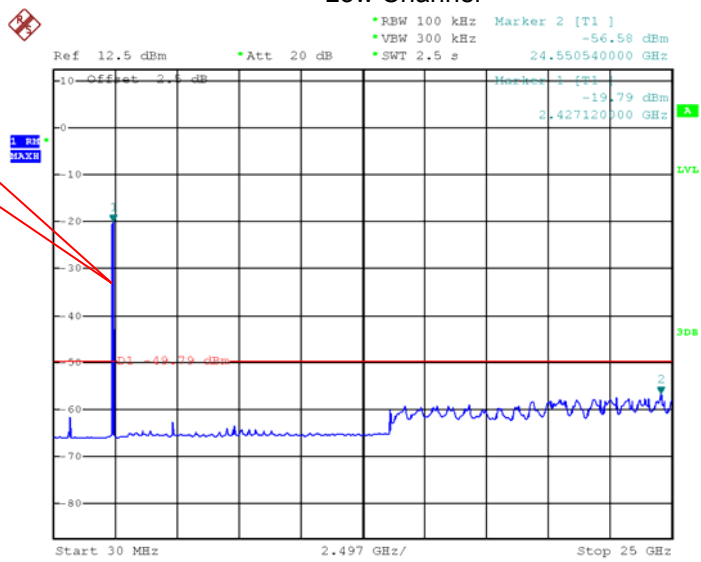


Middle Channel

Fundamental

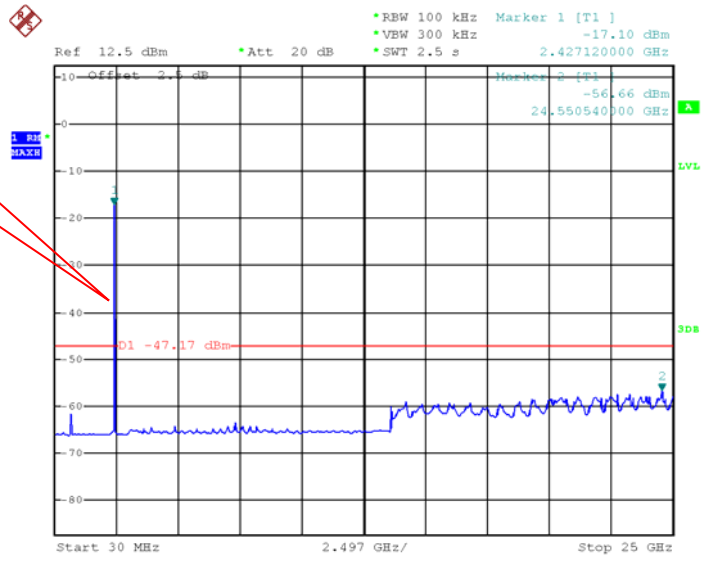

High Channel

Fundamental

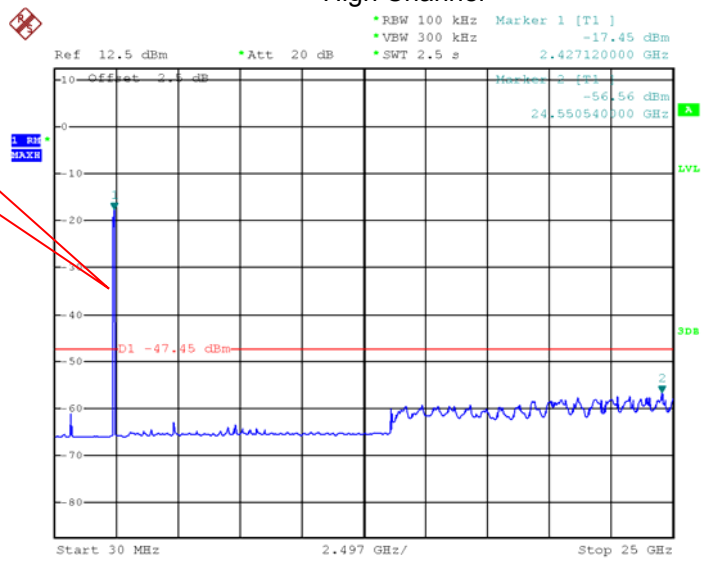

10 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
ANSI C63.10:2013

Test Limit: Regulation 15.247(d), in any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result


Test result plots shown as follows:

Antenna 0


TX CCK: Band edge-left side

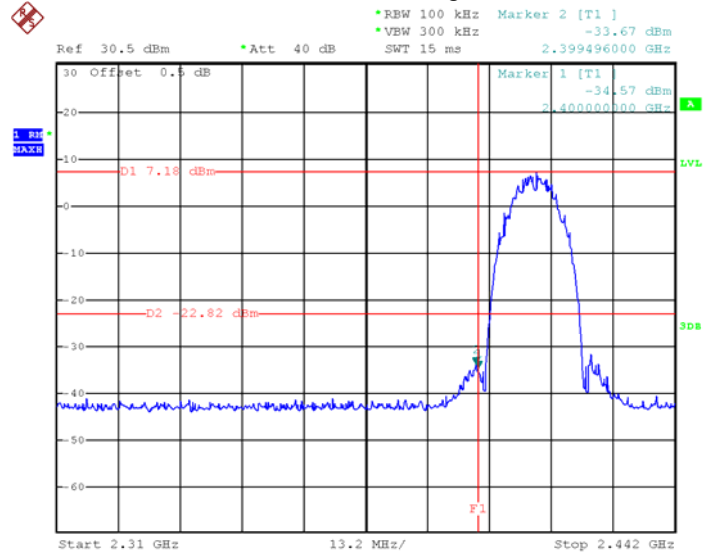


TX CCK: Band edge-right side

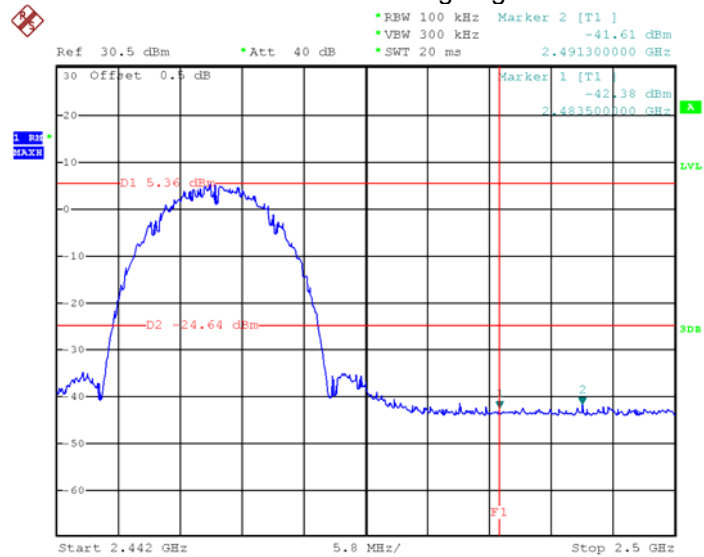

TX OFDM: Band edge-left side

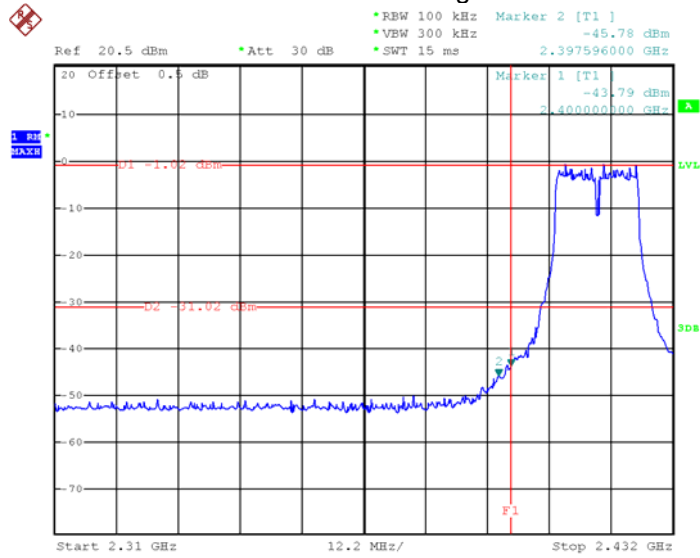


TX OFDM: Band edge-right side

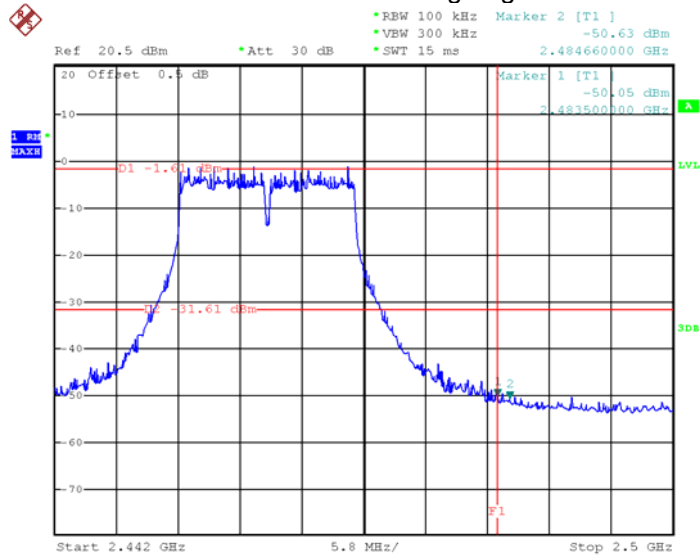


Antenna 1


TX CCK: Band edge-left side

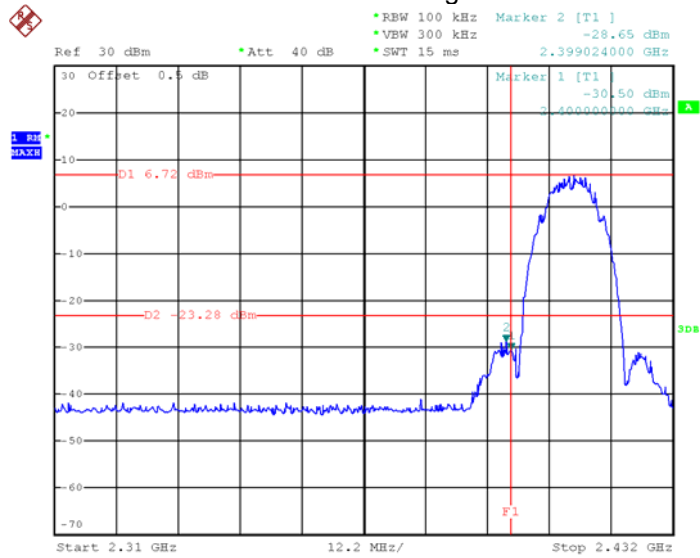


TX CCK: Band edge-right side

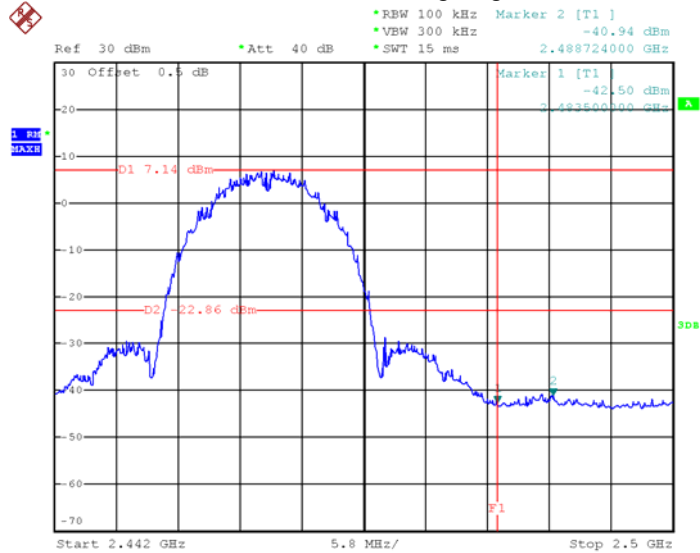

TX OFDM: Band edge-left side

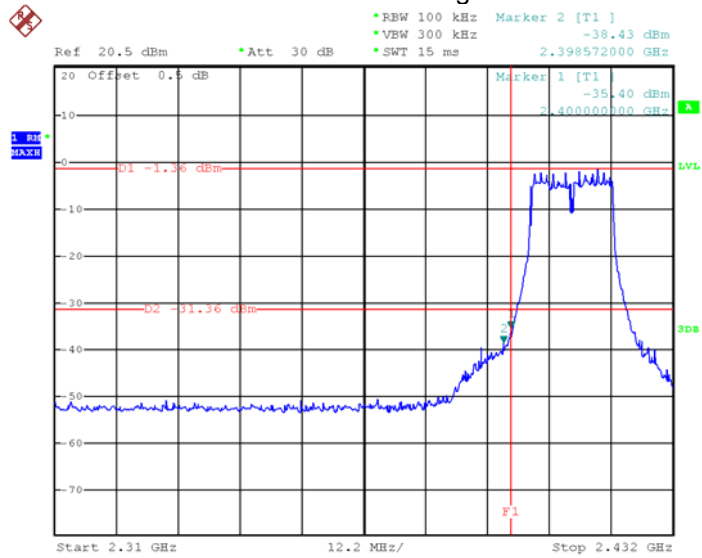

TX OFDM: Band edge-right side

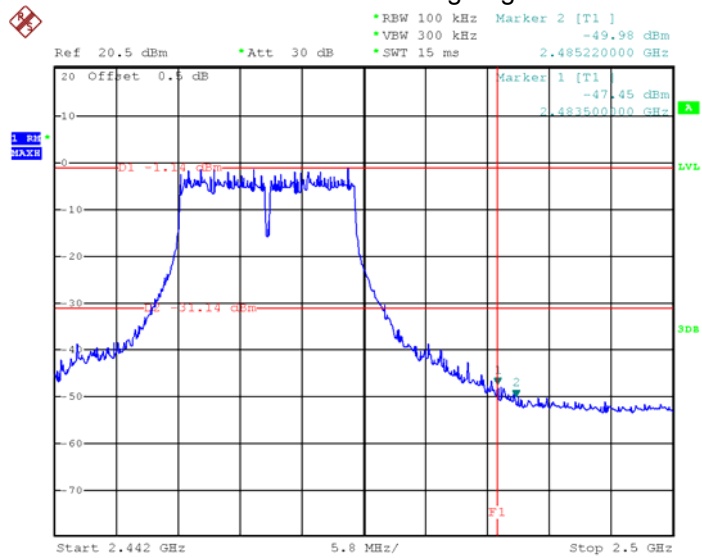

11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
ANSI C63.10:2013

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:

Antenna 0

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX CCK	Channel 1	9.476	14.240
	Channel 6	9.888	14.208
	Channel 11	9.792	14.176
TX OFDM	Channel 1	16.060	17.248
	Channel 6	16.412	17.204
	Channel 11	16.280	17.248

Antenna 1


Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX CCK	Channel 1	9.984	14.272
	Channel 6	9.856	14.208
	Channel 11	9.824	14.176
TX OFDM	Channel 1	16.192	17.500
	Channel 6	16.300	17.500
	Channel 11	16.000	17.500

Test result plot:


6dB Bandwidth

Antenna 0


Mode: TX CCK channel 1

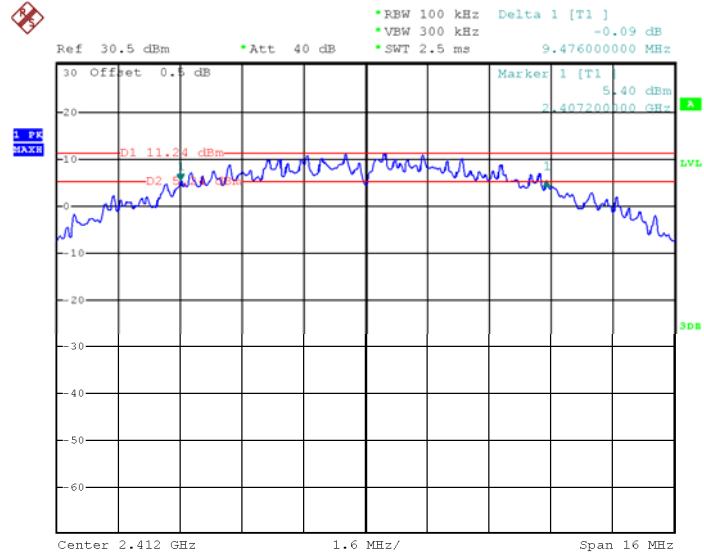


Mode: TX CCK channel 6

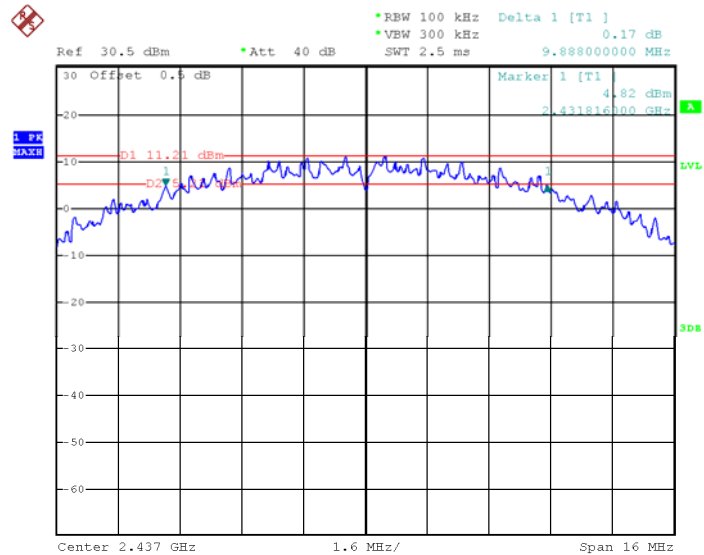


Mode: TX CCK channel 11

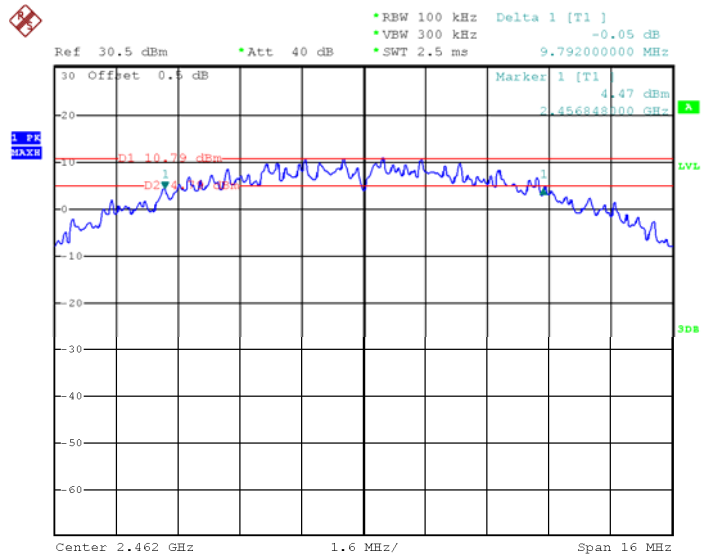


Mode: TX OFDM channel 1

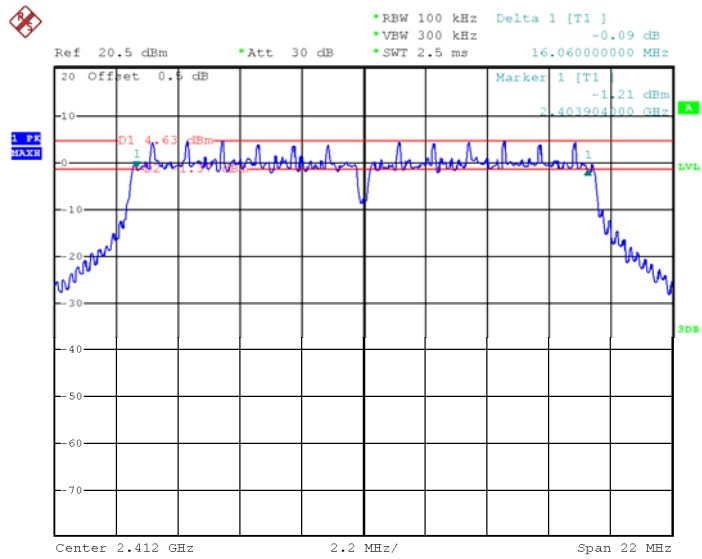

Mode: TX OFDM channel 6

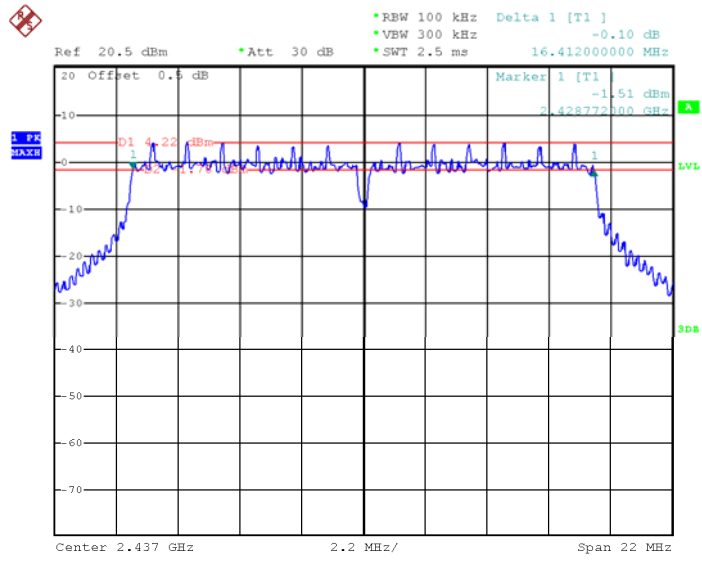


Mode: TX OFDM channel 11

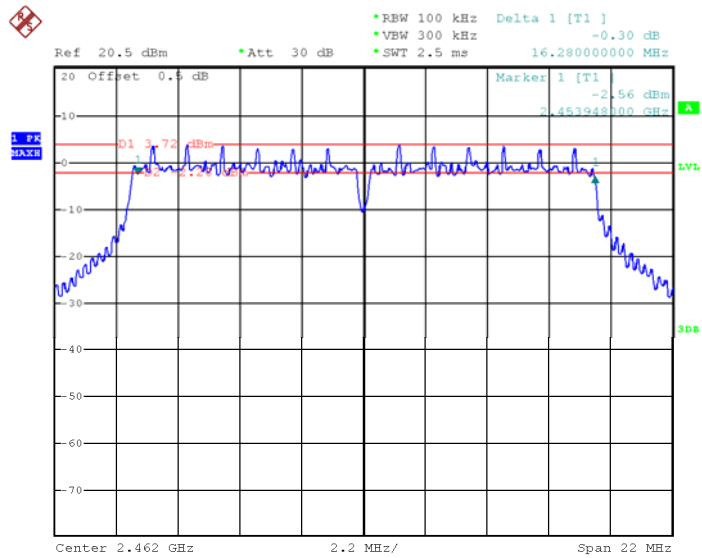


99% Bandwidth


Mode: TX CCK channel 1

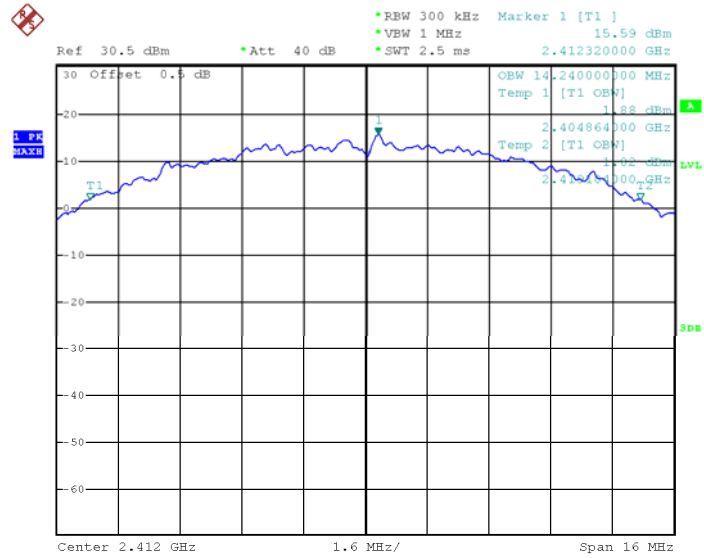


Mode: TX CCK channel 6

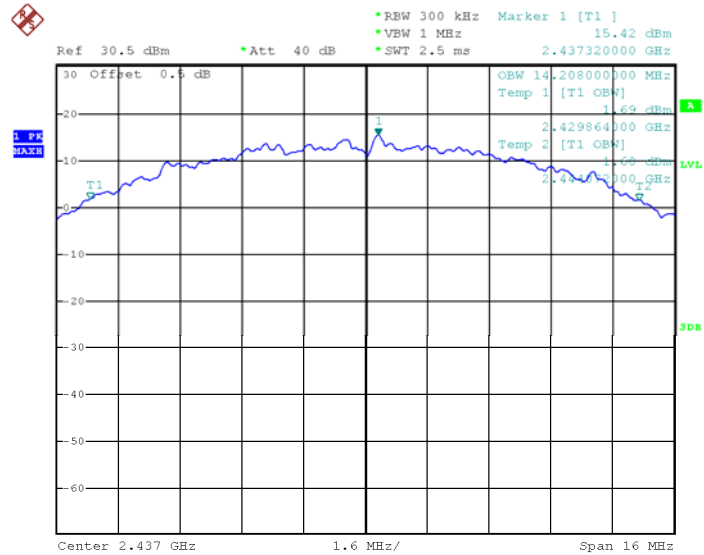


Mode: TX CCK channel 11

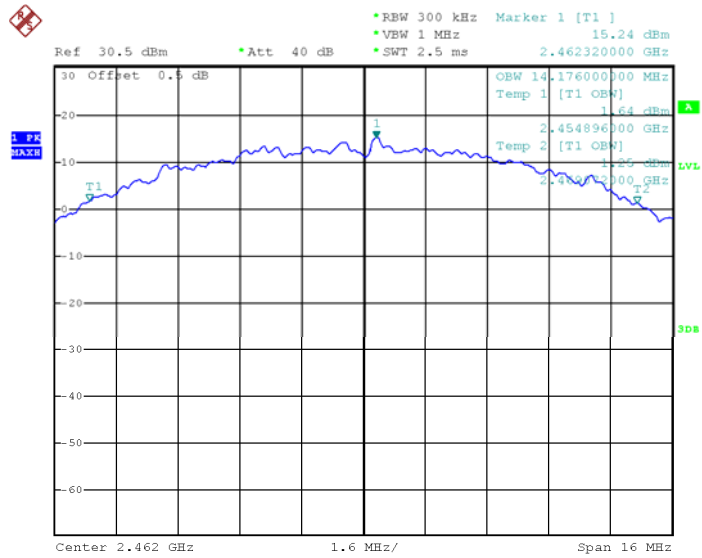


Mode: TX OFDM channel 1

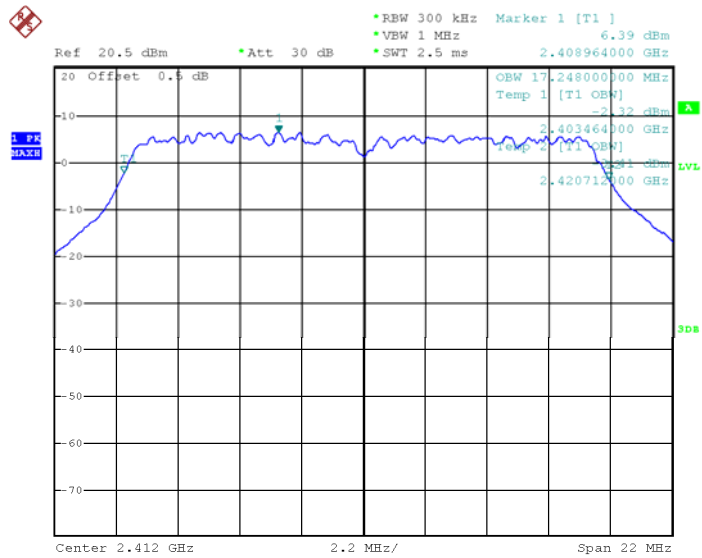

Mode: TX OFDM channel 6

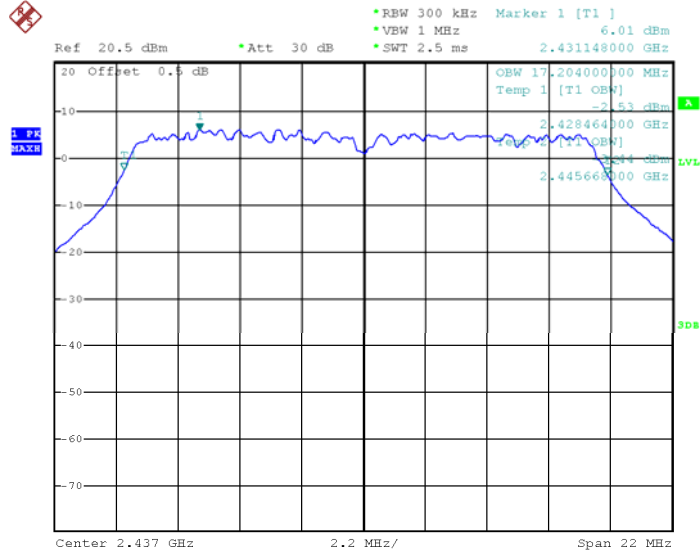


Mode: TX OFDM channel 11

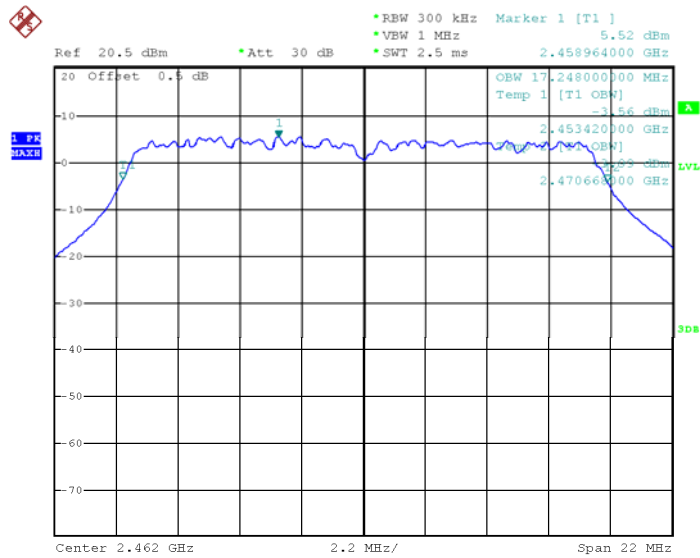


6dB Bandwidth

Antenna 1


Mode: TX CCK channel 1

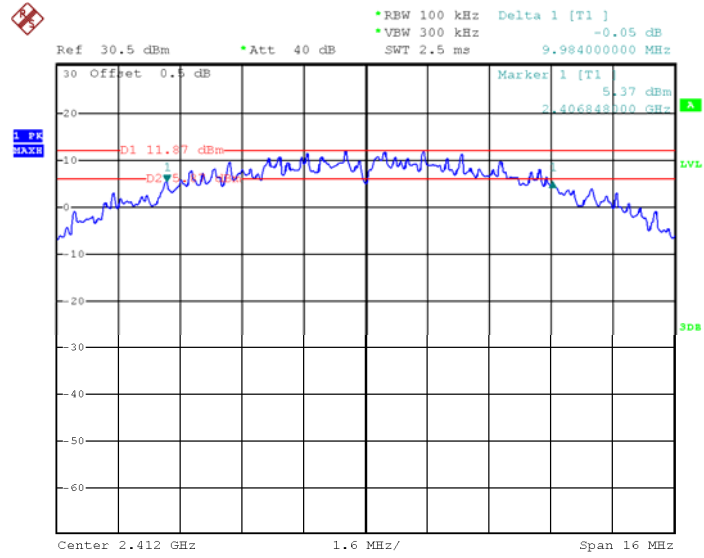


Mode: TX CCK channel 6

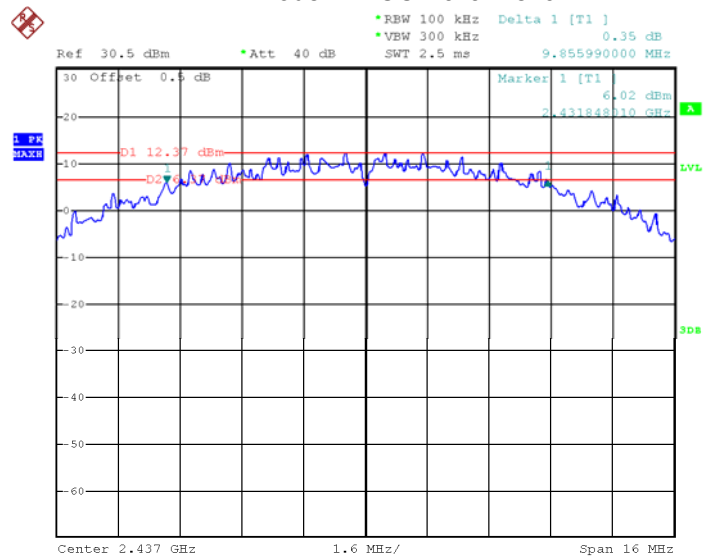


Mode: TX CCK channel 11

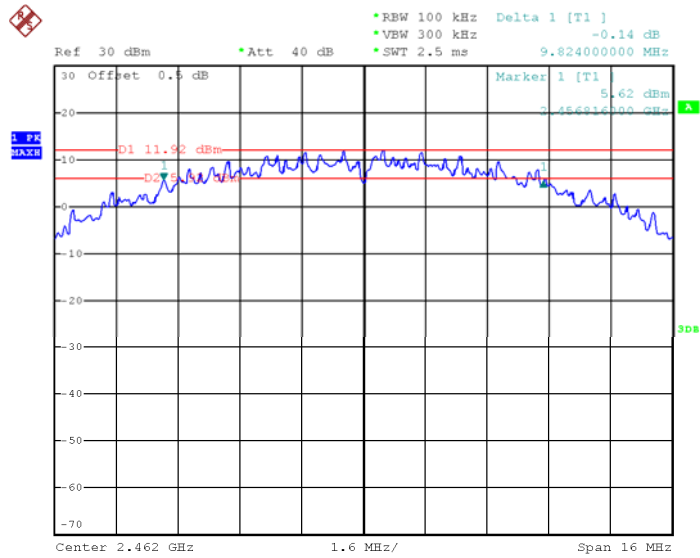


Mode: TX OFDM channel 1

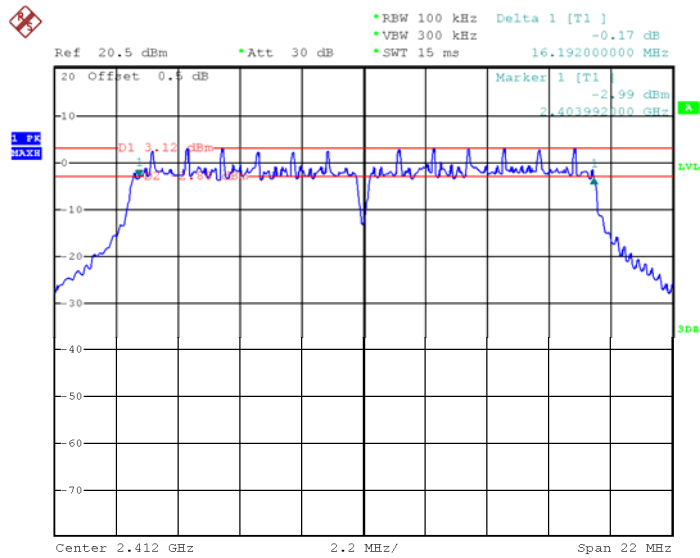

Mode: TX OFDM channel 6

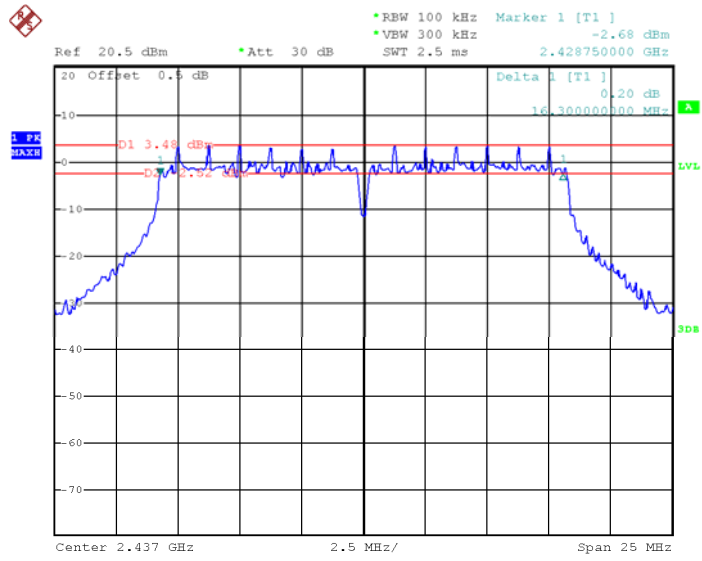


Mode: TX OFDM channel 11

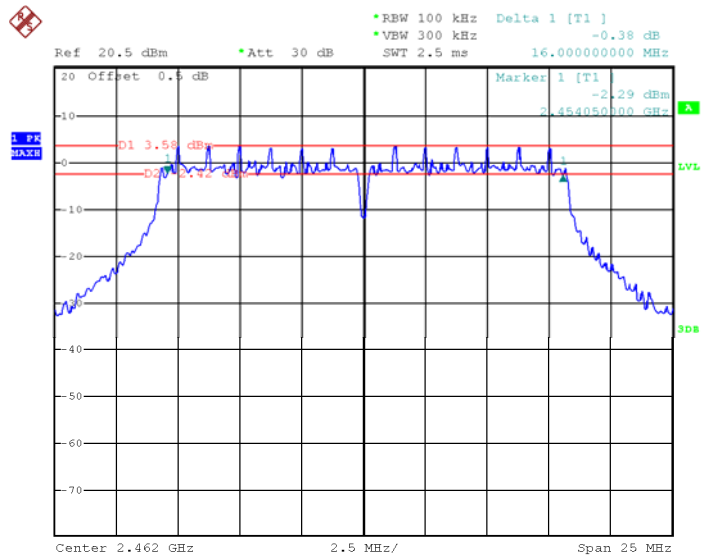


99% Bandwidth


Mode: TX CCK channel 1

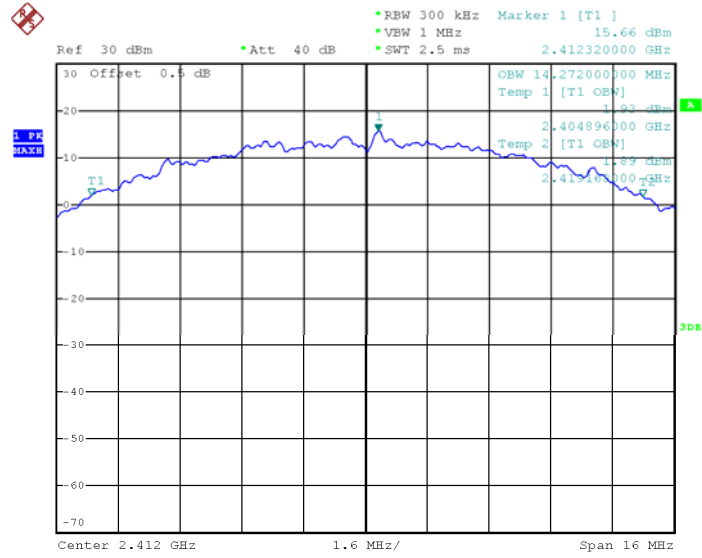


Mode: TX CCK channel 6

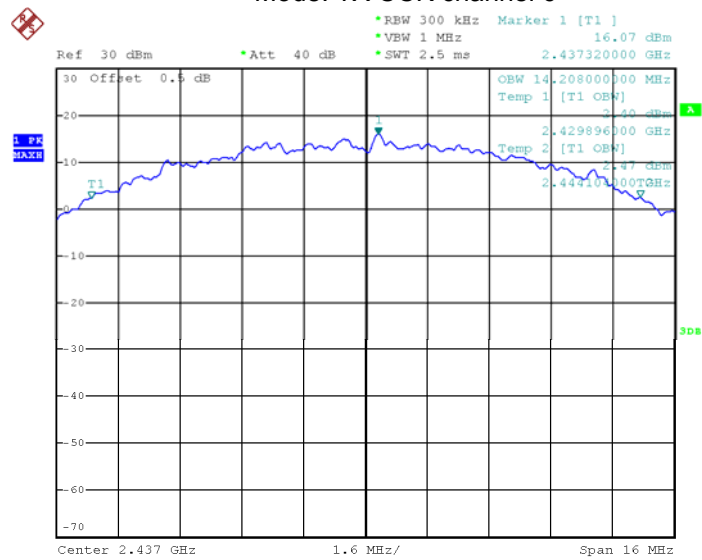


Mode: TX CCK channel 11

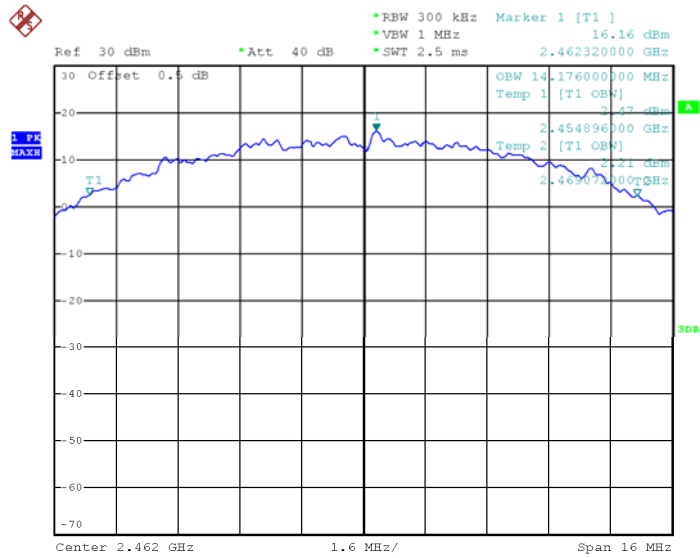


Mode: TX OFDM channel 1

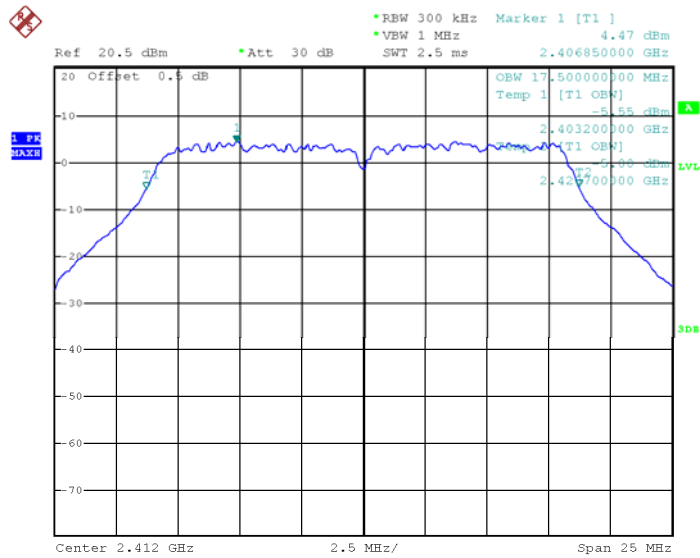

Mode: TX OFDM channel 6

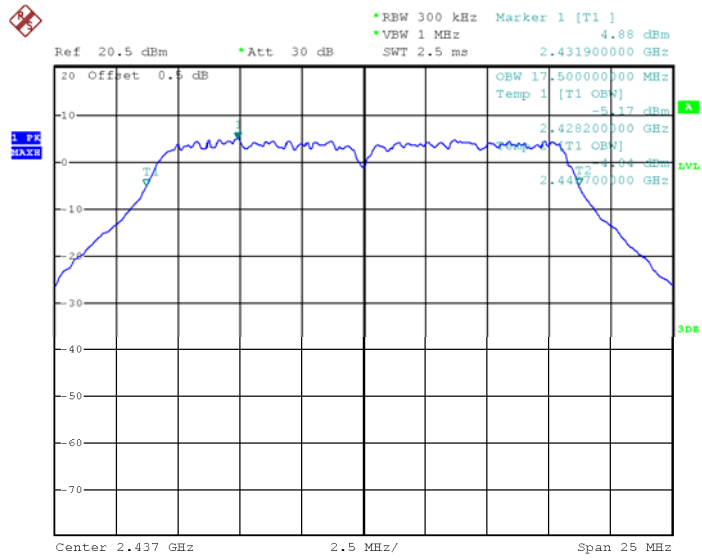

Mode: TX OFDM channel 11

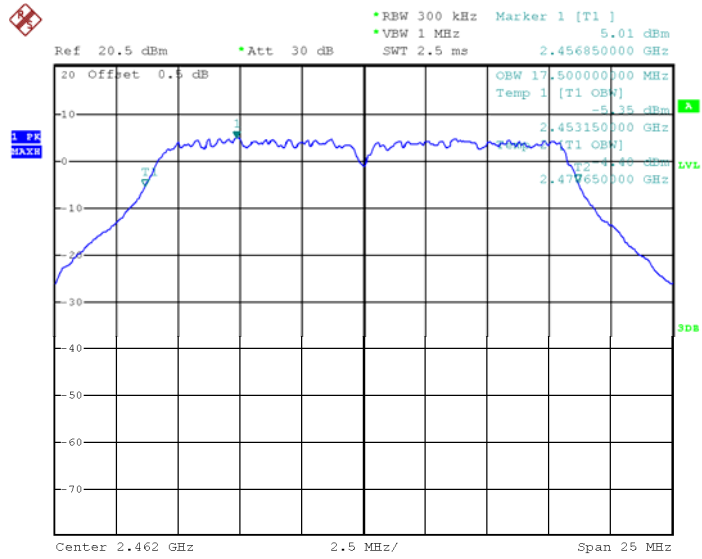

12 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
ANSI C63.10:2013

12.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019

section 8.3.1.2

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

a) Set the RBW = 1% to 5% of the OBW, not to exceed 1MHz.

b) Set the VBW $\geq 3 \times$ RBW

c) Set the span $\geq 1.5 \times$ OBW.

d) Detector = RMS.

e) Sweep time = auto couple.

f) trigger = free run.

g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)

h) Trace average at least 100 traces in power averaging (rms) mode.

i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


12.2 Test Result:

Operation mode	Frequency (MHz)	Maximum Peak Output Power						
		ANT0			ANT1			SUM (dBm)
		Measurements (dBm)	DC Factor (dB)	Power (dBm)	Measurements (dBm)	DC Factor (dB)	Power (dBm)	
TX CCK	2412	22.26	3.12	25.38	22.18	3.05	25.23	/
	2437	22.10		25.22	22.65		25.70	/
	2462	21.88		25.00	22.78		25.83	/
TX OFDM	2412	16.69	3.50	20.19	15.22	3.42	18.64	/
	2437	16.46		19.96	15.51		18.93	/
	2462	15.89		19.39	15.62		19.04	/


Test Plot

Antenna 0


Mode: TX CCK channel 1

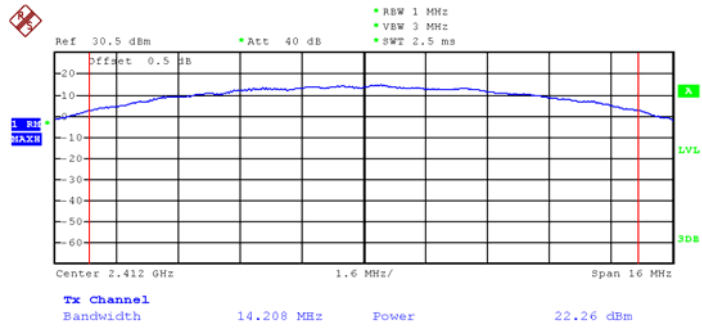


Mode: TX CCK channel 6

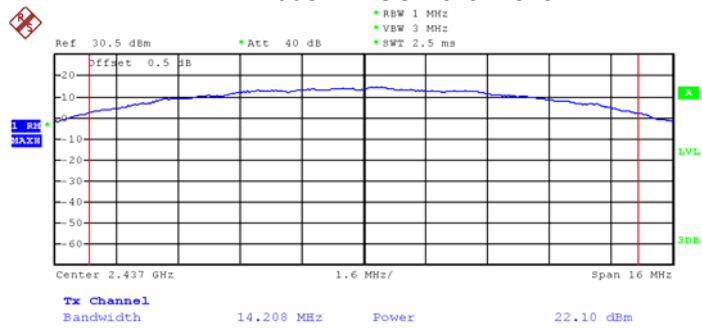


Mode: TX CCK channel 11

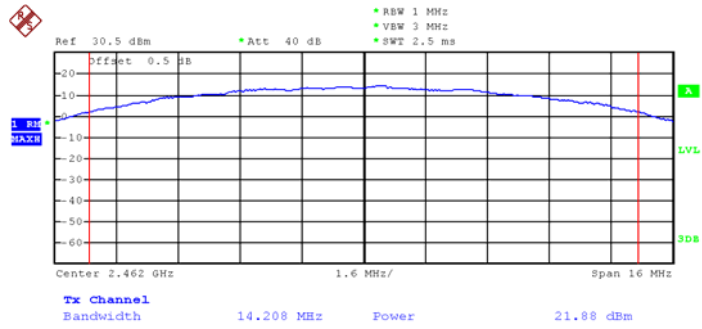


Mode: TX OFDM channel 1

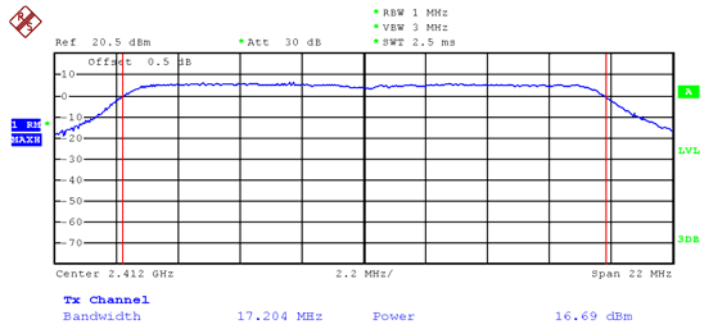

Mode : TX OFDM channel 6

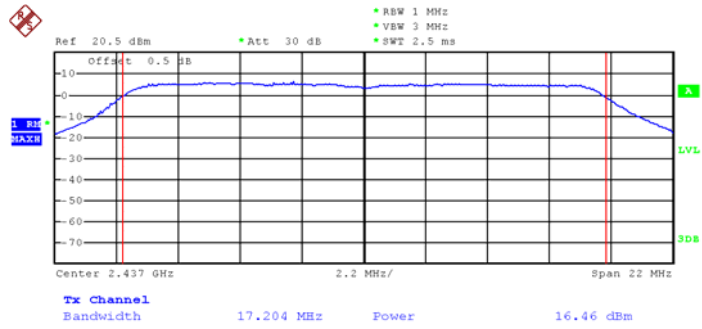


Mode : TX OFDM channel 11

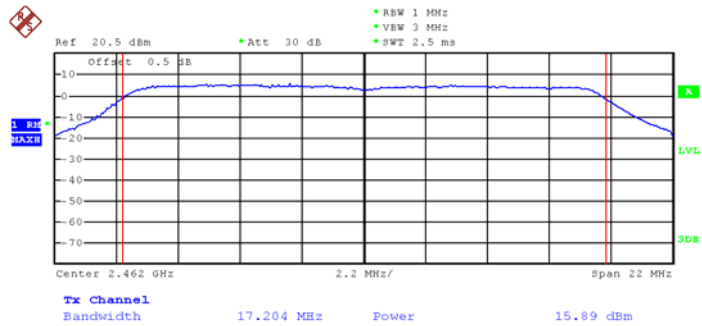


Antenna 1


Mode: TX CCK channel 1

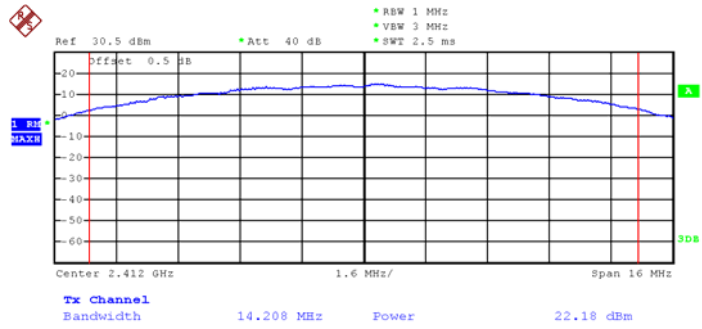


Mode: TX CCK channel 6

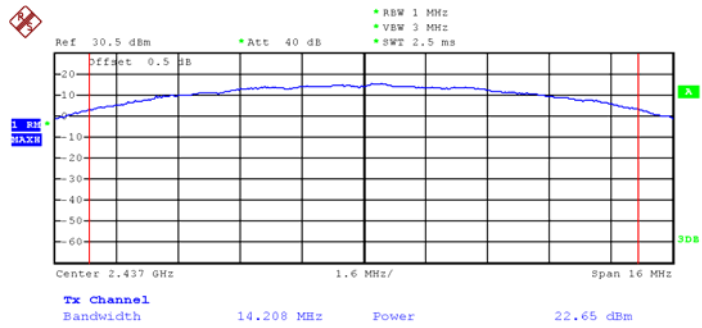


Mode: TX CCK channel 11

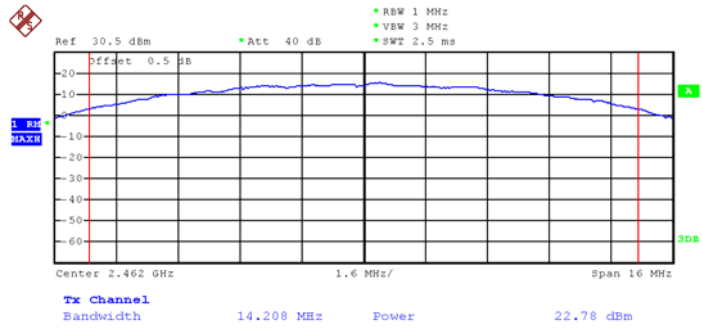


Mode : TX OFDM channel 1

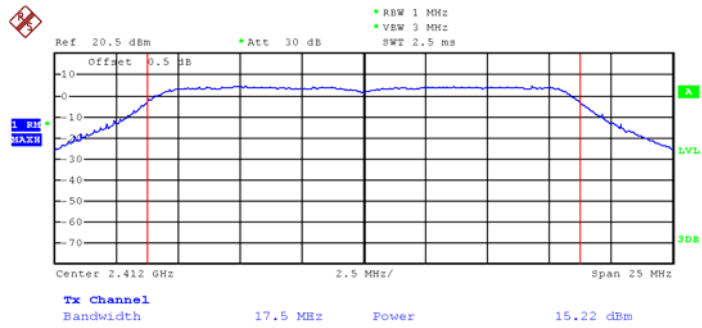

Mode : TX OFDM channel 6

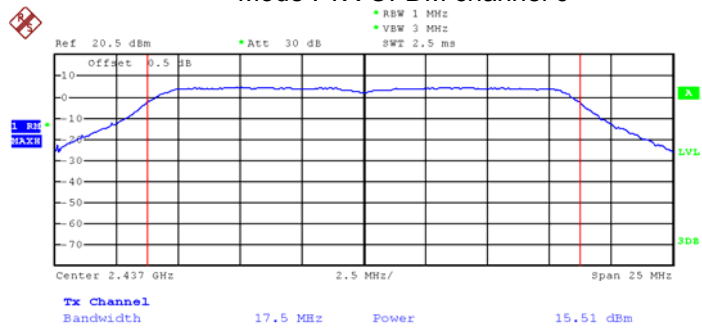

Mode : TX OFDM channel 11

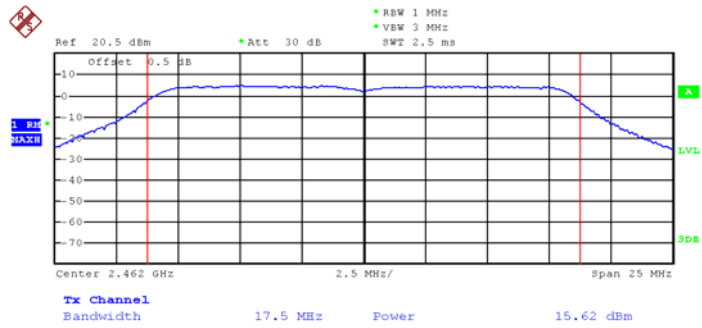

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019
ANSI C63.10:2013

13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02 April 2, 2019 section 10.2


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz, Span = 1.5 times the DTS channel bandwidth (6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

13.2 Test Result:


Operation mode	Frequency (MHz)	Power Spectral density						
		ANT0			ANT1			SUM (dBm)
		Measurements (dBm)	DC Factor (dB)	PSD (dBm)	Measurements (dBm)	DC Factor (dB)	PSD (dBm)	
TX CCK	2412	-13.35	3.12	-10.23	-13.41	3.05	-10.36	/
	2437	-14.04		-10.92	-13.49		-10.44	/
	2462	-13.94		-10.82	-12.80		-9.75	/
TX OFDM	2412	-21.30	3.50	-17.80	-22.96	3.42	-19.54	/
	2437	-23.20		-19.30	-22.93		-19.51	/
	2462	-22.62		-19.12	-21.24		-17.82	/

Test Plot


Antenna 0
Mode: TX CCK channel 1

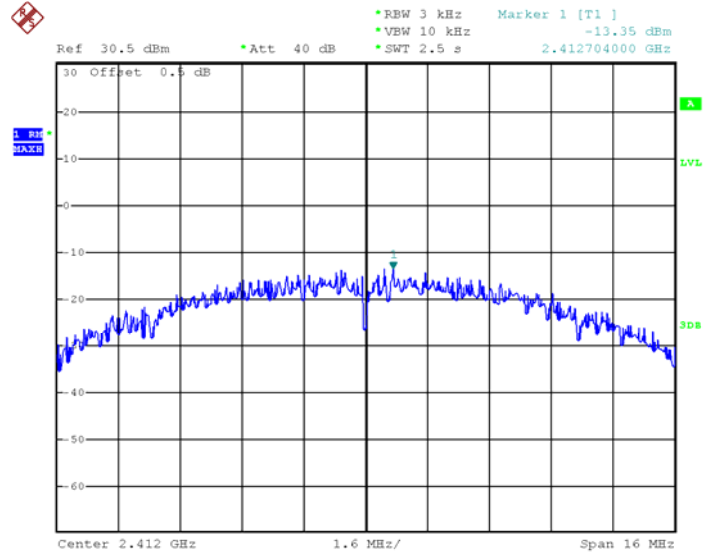


Mode: TX CCK channel 6


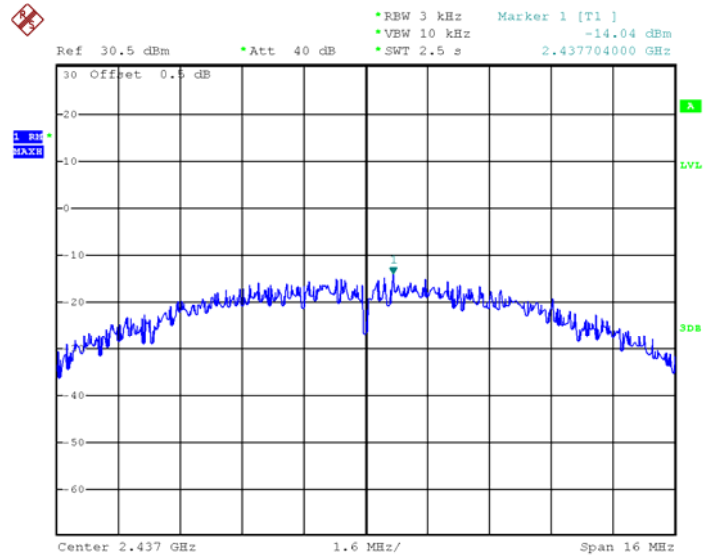


Mode: TX CCK channel 11

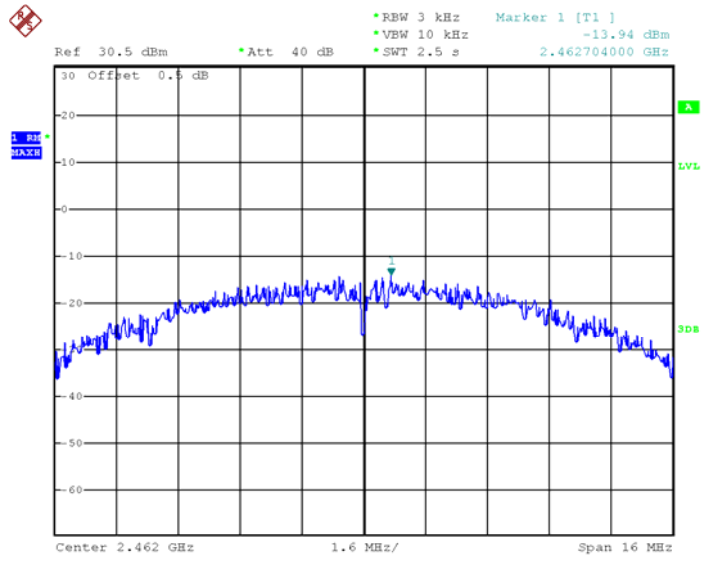


Mode: TX OFDM channel 1

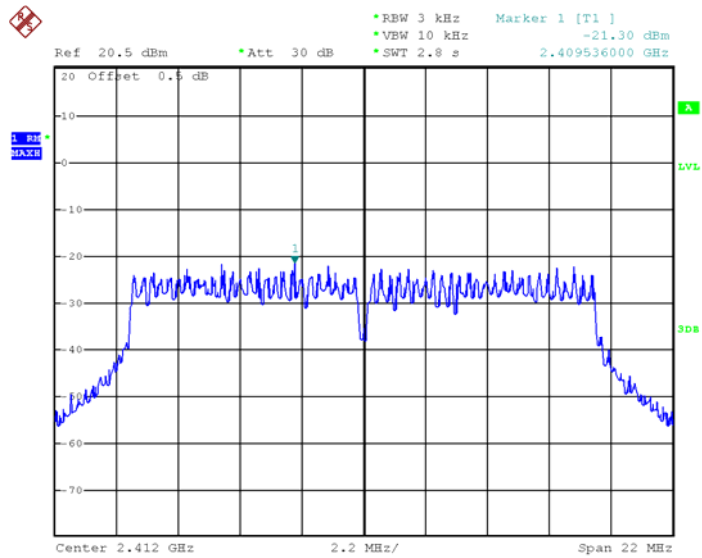


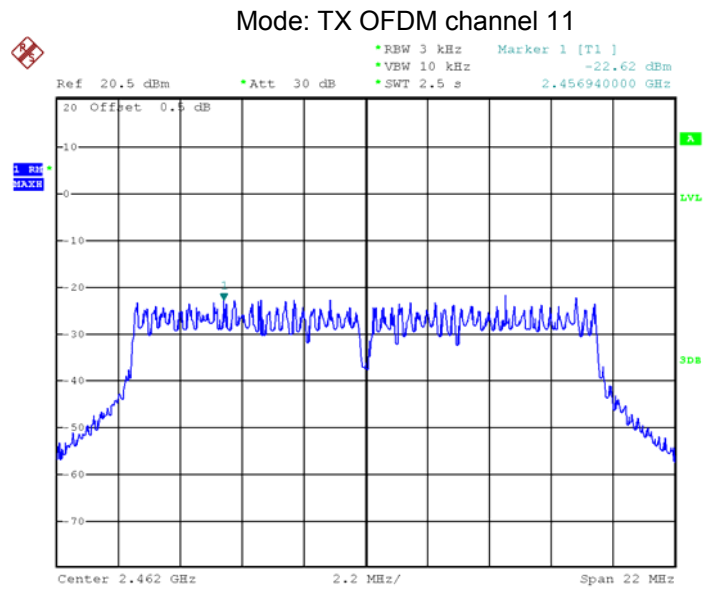
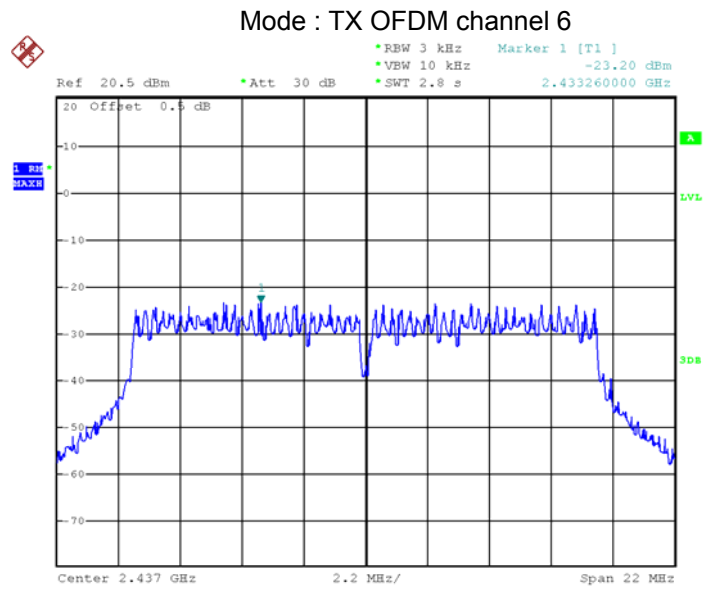


Antenna 1 Mode: TX CCK channel 1

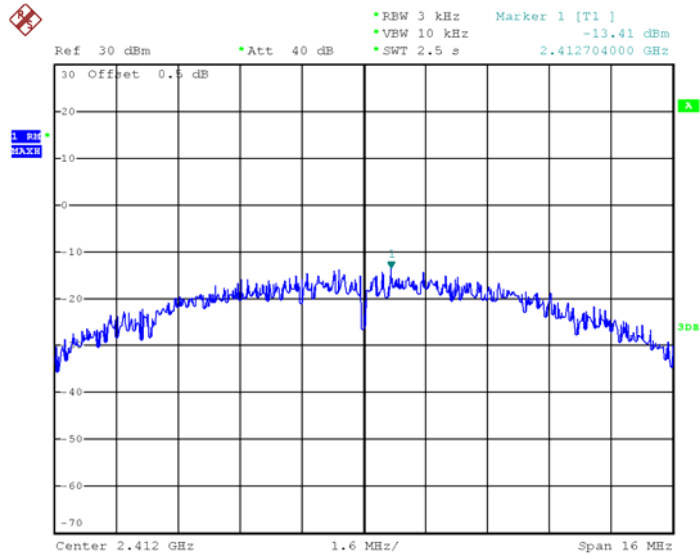


Mode: TX CCK channel 6

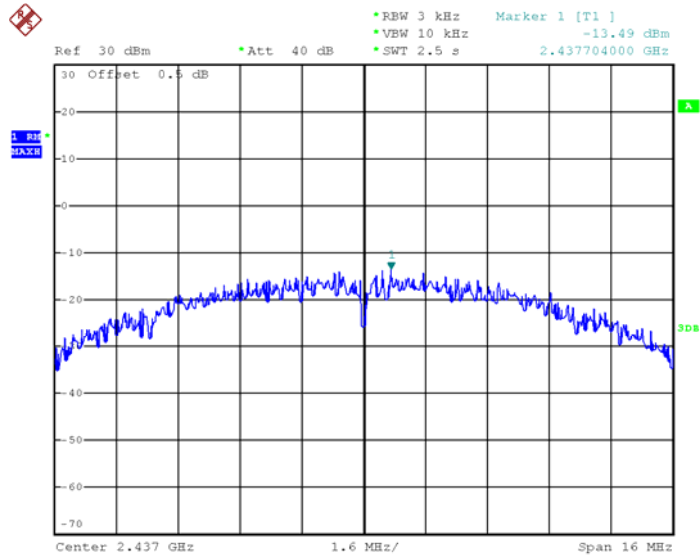


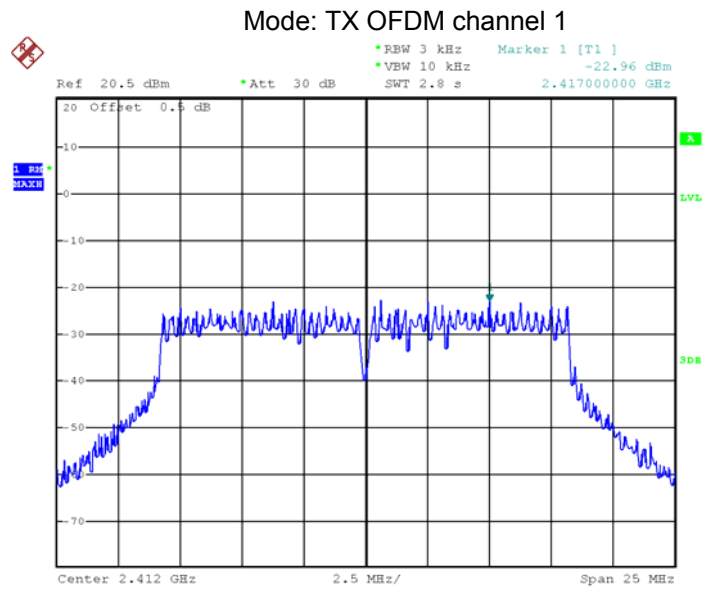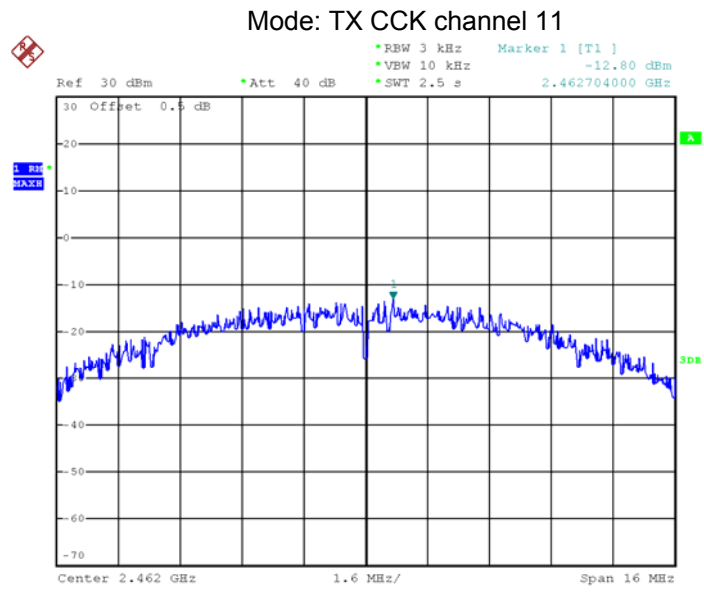

Mode: TX OFDM channel 6

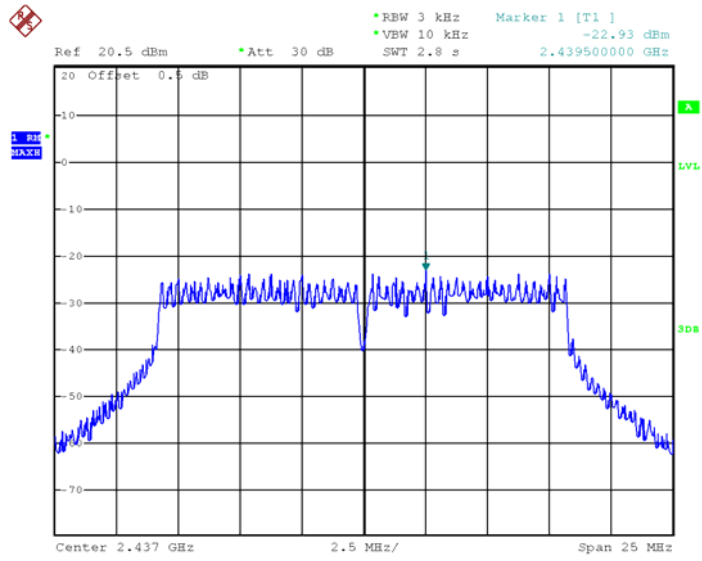

Mode: TX OFDM channel 11

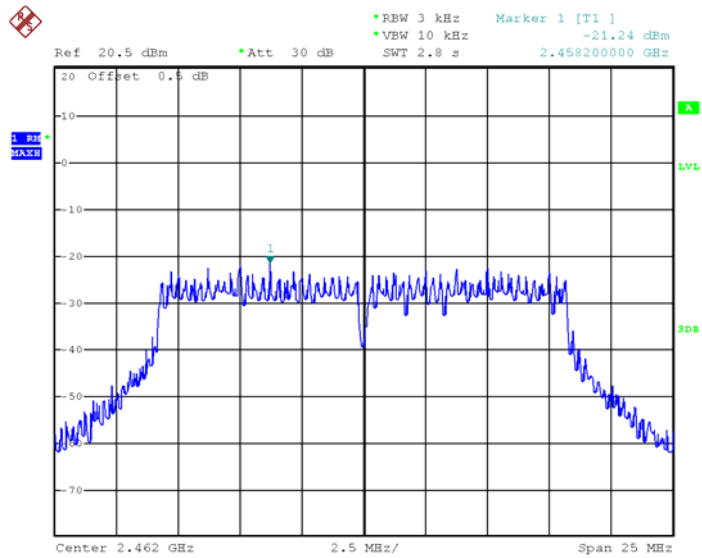

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has two external antennas fulfil the requirement of this section.

Note: Please refer to EUT photos for mor details.

15 RF Exposure

Note: Please refer to MPE report: WTD21D06058407W002.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-FOS7HTADS-Photos.

=====**End of Report**=====