

RADIO TEST REPORT

No. 1312855-2 Ed. 3

RF performance

EQUIPMENT UNDER TEST

Equipment : Soap dispenser sensor
Tested Type / model : S4
Additional type / model*: NA Version: Image design S4s with EasyCube
466200
Manufacturer : SCA hygiene products AB
Tested by request of : SCA hygiene products AB

*See 2.7 for information

SUMMARY

Referring to the emission limits and the operating mode during the tests specified in this report the equipment complies with the requirements according to

47 CFR Part 15, Subpart C, Intentional radiators, section 15.247
47 CFR Part 15, Subpart B, Unintentional radiators
RSS-GEN Issue 4 (2014)
RSS-247 Issue 1 (2015)

Test methods according to ANSI C63.10 (2013)

Date of issue: 2016-04-08

Tested by:  Matti Virkki

Approved by:  Stefan Andersson

Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2005). This report may not be reproduced other than in full, except with the prior written approval by Intertek Semko.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30

www.intertek.se

Registered in Sweden: No: SE556024059901, Registered office: As address

Revision History

Edition	Date	Description
1	2013-11-19	First release
2	2015-08-28	Report update to RSS-Gen issue 4, Rss-247 Issue 1 and ANSI C63.10 (2013). Re-measurement of transmitter radiated emissions > 1 GHz and duty cycle
3	2016-04-07	Added a new model: Image design S4s with EasyCube 466200. See section 2.7

CONTENTS

	Page
1 CLIENT INFORMATION.....	5
2 EQUIPMENT UNDER TEST (EUT).....	5
2.1 IDENTIFICATION OF THE EUT ACCORDING TO THE MANUFACTURER/CLIENT DECLARATION	5
2.2 ADDITIONAL HARDWARE INFORMATION ABOUT THE EUT	6
2.3 ADDITIONAL SOFTWARE INFORMATION ABOUT THE EUT.....	6
2.4 PERIPHERAL EQUIPMENT	6
2.5 TEST SIGNALS.....	6
2.6 MODIFICATION DURING THE TESTS	6
2.7 ADDITIONAL INFORMATION OF ADDITIONAL MODEL	6
3 TEST SPECIFICATIONS.....	7
3.1 STANDARDS.....	7
3.2 TEST SITE	7
3.3 TEST SET-UP	7
3.4 TEST CONDITIONS.....	7
4 TEST SUMMARY	8
5 TRANSMITTER RADIATED EMISSIONS MEASUREMENTS FROM 30 TO 1000MHZ.....	10
5.1 REQUIREMENT	10
5.2 TEST SETUP DETAILS	10
5.3 TEST DATA.....	11
5.4 TEST EQUIPMENT.....	11
6 TRANSMITTER RADIATED EMISSIONS MEASUREMENTS ABOVE 1 GHZ.....	12
6.1 REQUIREMENT	12
6.2 TEST SETUP DETAILS	12
6.3 TEST DATA.....	13
6.4 TEST EQUIPMENT.....	16
7 RECEIVER RADIATED EMISSIONS	17
7.1 REQUIREMENT	17
7.2 TEST SETUP DETAILS	17
7.3 TEST DATA.....	18
7.4 TEST EQUIPMENT.....	19
8 OCCUPIED 6 DB BANDWIDTH TEST.....	20
8.1 REQUIREMENT	20
8.2 TEST DATA.....	20
8.3 TEST EQUIPMENT.....	20
9 OCCUPIED 99% BANDWIDTH TEST	21
9.1 REQUIREMENT	21
9.2 TEST DATA.....	21
9.3 TEST EQUIPMENT.....	21
10 CONDUCTED OUTPUT POWER.....	22
10.1 REQUIREMENT	22
10.2 TEST DATA.....	22
10.3 TEST EQUIPMENT.....	22

11	BANDEDGE MEASUREMENT	23
11.1	REQUIREMENT	23
11.2	TEST DATA.....	23
11.3	TEST EQUIPMENT	23
12	POWER SPECTRAL DENSITY	24
12.1	REQUIREMENT	24
12.2	TEST DATA.....	24
12.3	TEST EQUIPMENT	24
13	DUTY CYCLE MEASUREMENT	25
13.1	REQUIREMENT	25
13.2	TEST DATA.....	25
13.3	TEST EQUIPMENT	26
14	UNCERTAINTIES SUMMARY	27
15	PHOTO OF THE EUT.....	29

1 CLIENT INFORMATION

The EUT has been tested by request of

Company: SCA Hygiene products AB
Bäckstensgatan 5
405 03 Gothenburg
Sweden

Name of contact: Allan Elfström

2 EQUIPMENT UNDER TEST (EUT)

2.1 Identification of the EUT according to the manufacturer/client declaration

Equipment: Soap dispenser sensor
Type/Model: NA Version: Image design S4s with EasyCube 466200
Brand name: SCA Hygiene products AB
Serial number: 130 / 044
Manufacturer: SCA Hygiene products AB
Bäckstensgatan 5
405 03 Gothenburg
Sweden

Transmitter frequency range: 2405 MHz

Receiver frequency range: 2405 MHz

Frequency agile or hopping: ☐ Yes ☒ No
Antenna: ☒ Internal antenna ☐ External antenna
Antenna connector: ☒ None, internal antenna ☐ Yes, type
Antenna gain: 1 dBi
Rating RF output power: 2 dBm
Type of modulation: O-QPSK
Temperature range: ☐ Category I (General): -20°C to +55°C
☐ Category II (Portable equipment): -10°C to +55°C
☒ Category III (Equipment for normal indoor use): +5°C to +35°C
☐ Other:
Transmitter standby mode supported: ☒ Yes ☐ No

2.2 Additional hardware information about the EUT

The EUT consists of the following units:

Unit	Part number	Serial number	Note
Soap dispenser sensor S4	561600	130	Internal antenna
Soap dispenser sensor S4	561600	044	SMA connector

2.3 Additional software information about the EUT

During the tests the EUT supported the following software:

- TX continuous modulated signal
- RX mode
- Normal operation

2.4 Peripheral equipment

Peripheral equipment is defined as equipment needed for correct operation of the EUT during the tests, but not included as a part of the testing and evaluation of the EUT.

Equipment	Manufacturer / Type	Serial number
-		

2.5 Test signals

All transmitter tests were made with continuous modulated signal.

2.6 Modification during the tests

No modifications were made during the tests.

2.7 Additional information of additional model

Model Image design S4s with EasyCube 466200 is electrically identical to tested model. All conducted test results for tested model represent the additional model as well.

The difference between tested and additional model is that the Additional model has a metal enclosure. Its radiated emissions have been reported in Intertek test report 152104STO-002.

3 TEST SPECIFICATIONS

3.1 Standards

47 CFR Part 15, Subpart C, Intentional radiators, section 15.247
47 CFR Part 15, Subpart B, Unintentional radiators
RSS-GEN Issue 4
RSS-247 Issue 1

Test methods in:
ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices

3.2 Test site

Measurements were performed at:

Intertek Semko AB.
Torshamnsgatan 43,
P.O. Box 1103
SE-164 22 Kista

Intertek Semko AB is a FCC listed test site with site registration number 90913
Intertek Semko AB is a Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
STORA HALLEN a.k.a. BIG CHAMBER	Semi-anechoic 10m and 3m	2042G-2
RADIOHALLEN	Fully-anechoic 3m	--

Test site radiohallen is CISPR 16-1-4 (2010) compliant on > 1 GHz frequencies.

3.3 Test set-up

If not stated otherwise EUT was connected to spectrum analyser with coaxial cable.

3.4 Test conditions

If not additionally specified, the tests were performed under the following environmental conditions:

Parameter	Normal
Supplying voltage, V	6 (battery)
Air temperature, °C	20-24

4 TEST SUMMARY

The results in this report apply only to the tested sample:

Test	Result	Section in report	Note
Standard test methods			
AC power-line conducted tests	N/A		
Radiated test below 30 MHz	N/A		
Radiated emissions measurements from 30 to 1000 MHz	NT	5, 7	
Determination of radiated and antenna conducted emissions above 1 GHz	NT	6, 7	1
Frequency Stability Test	N/A		
Occupied bandwidth and band-edge tests	Pass	8, 9, 11	
Output Power average symbol envelope power	NA		
Power Spectral Density < 40 GHz	Pass	12	
Power Spectral Density > 40 GHz	NA		
In-situ measurements	NA		
Polar plot, main lobe and variation on radiated emissions test	NA		
Device-specific tests			
Measurement of cable locating equipment	NA		
Determining of cordless telephone handset security code	NA		
Determination of total input power	NA		
Procedure determining compliance for periodic operation [15.231, 15.240(b)]	NA		
Determining the average value of pulsed emissions per 15.35(c)	NA		
Comparison of limits per 15.231(b)(3)	NA		
Procedure to determine compliance of frequency pairing for 47 CFR 15.233(b)(2)	NA		
Determination of frequency hopping compliance per 47 CFR 15.247	NA		
Determination of digital modulation compliance per 47 CFR 15.247	PASS	8	
Determination of peak conducted output unlicensed wireless device power [15.247(b), 15.255]	PASS	10	
Determination of maximum conducted output power (15.247, 15-E)	PASS	10	
Determination of MIMO compliance (2nd edition)	NA		
Determination of Smart antenna compliance (2nd edition)	NA		
Determination of antenna gains, including those emitting in multiple directions (15.247)	PASS	2	
Determination of compliance with RF exposure limits	PASS	10	
Millimeter wave test procedures for systems operating at 54GHz and greater	NA		
Determination of EIRP (15-F)	NA		
Determination Transmitter Etiquette FCC Part 15.255	NA		
Determination of Dynamic Frequency Selection (DFS) including Channel Move Time and In Service Monitoring	NA		
Determination of channel availability	NA		
Determination of Dynamic Frequency Selection including Channel Move Time	NA		
Determination of transmitter power control (TPC) (15-E)	NA		
Peak excursion measurement for UNII devices	NA		
Determination of UWB bandwidth	NA		
Determination of the center frequency, f_C , and highest radiated emissions, f_M (15-F)	NA		

NT = Not Tested, by request of the Client

NA = Not Applicable

Intertek Semko AB

Torshamnsgatan 43, Box 1103, SE-164 22 Kista, Sweden

Telephone +46 8 750 00 00, Fax +46 8 750 60 30

www.intertek.se

Registered in Sweden: No: SE556024059901, Registered office: As address

Notes:

1. The measured result is below the upper limit, but by a margin less than half of the uncertainty interval. It is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance

5 TRANSMITTER RADIATED EMISSIONS MEASUREMENTS FROM 30 TO 1000MHZ

Date of test:	2013-11-11	Test location:	Big Chamber
EUT Serial:	130	Ambient temp.	20 °C
Tested by:	Kajsa From	Relative humidity	25 %
Test result:	Pass	Margin:	26.6

5.1 Requirement

Reference: FCC §15.209, FCC §15.247(d), IC RSS-GEN Table 5, RSS 247 5.5


Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 – 88	40.0	3
88 – 216	43.5	3
216 – 960	46.0	3
960 –	54.0	3

5.2 Test setup details

Operation mode: continuous transmission, modulating.


The test set up is according to ANSI C63.10 (2013) 6.3 and 6.5

Test set-up photo:

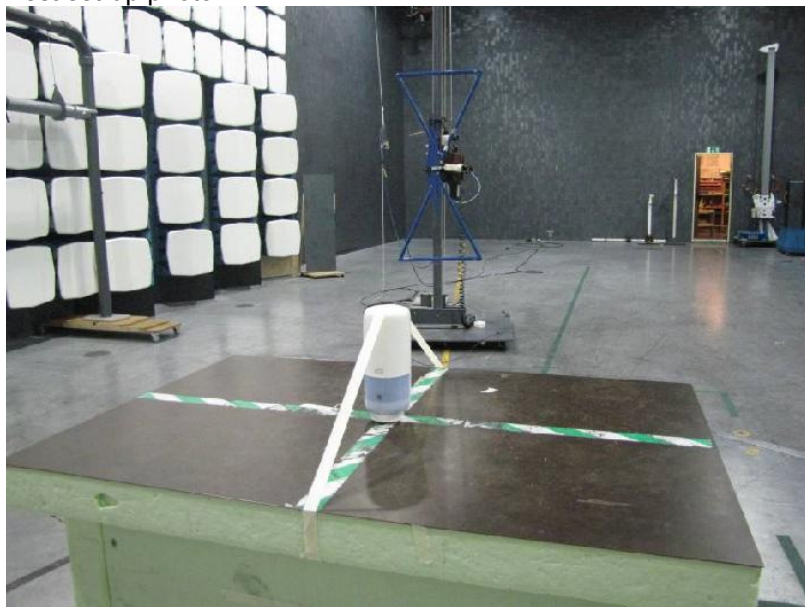

5.3 Test data

Overview sweeps performed with peak detectors,

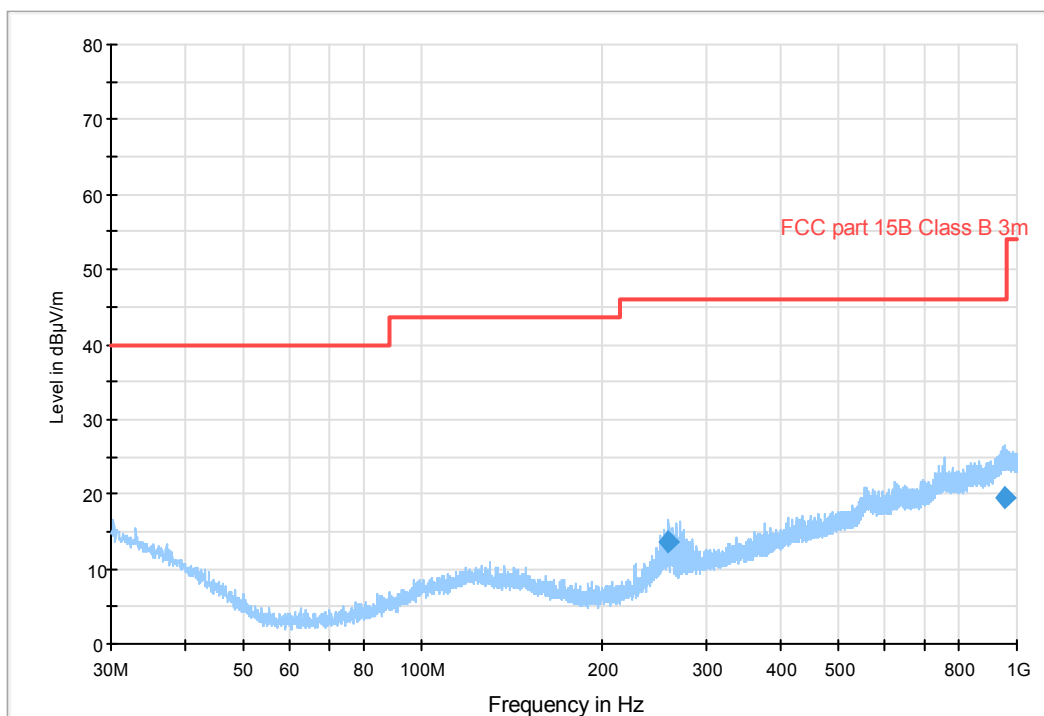

Frequency MHz	Disturbance Level dBµV/m	RBW kHz	Detector QP	Limit dBµV/m	Pol.	Azimuth deg	Antenna height cm	Margin dB
260.15	13.7	120	QP	46.0	V	44	162	32.3
951.42	19.4	120	QP	46.0	H	-24	400	26.6

Measured level [dBµV/m] = Analyser reading [dBµV] + cable loss [dB] – preamplifier gain [dB] + antenna factor [dB/m]

5.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver	Rohde & Schwarz	ESU 8	12866	7-2014
Logperiodic antenna	Chase	CBL6111A	971	9-2015
Pre amplifier		AM-1331	7992	--
Rf-cables			40036, 9511, 9506, 9957, 5181	--

6 TRANSMITTER RADIATED EMISSIONS MEASUREMENTS ABOVE 1 GHZ

Date of test:	2015-08-21	Test location:	Big chamber and Radio chamber
EUT Serial:	-	Ambient temp.	22 °C
Tested by:	Matti Virkki	Relative humidity	46 %
Test result:	Pass	Margin:	15.7 dB

6.1 Requirement

Reference: FCC §15.209, FCC §15.247(d), IC RSS-GEN Table 4, RSS 247 5.5


Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 – 88	40.0	3
88 – 216	43.5	3
216 – 960	46.0	3
960 –	54.0	3

6.2 Test setup details

Operation mode: continuous transmission, modulating.

The test set up is according to ANSI C63.10 (2013) 6.3 and 6.6

Test set-up photos:

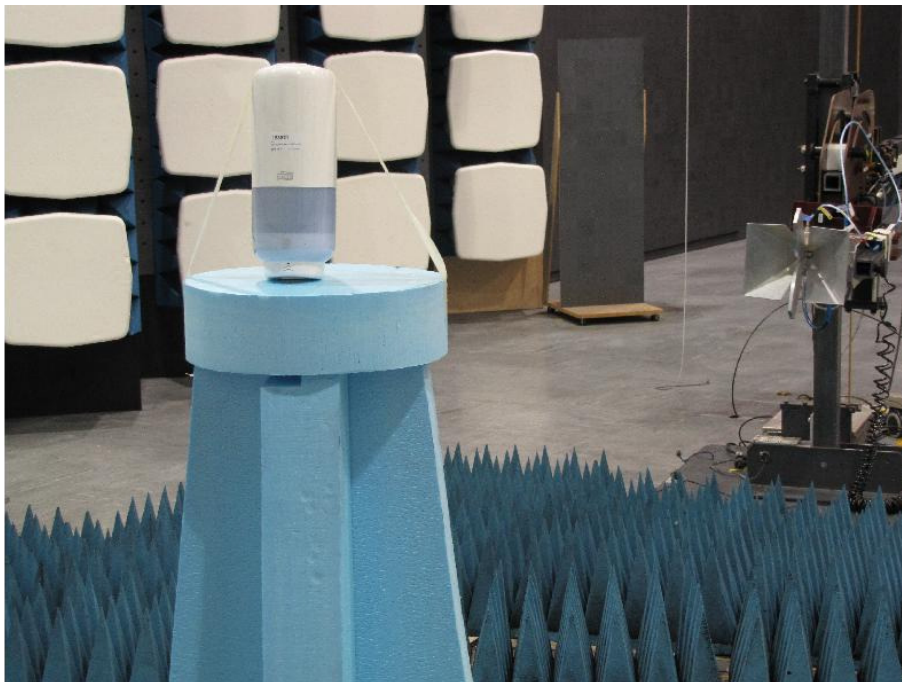


Big chamber, 1 – 18 GHz



Radio chamber, 18 – 26,5 GHz


6.3 Test data

FCC 1 G - 4 G class B 3m ESU40 Continuous TT rotation

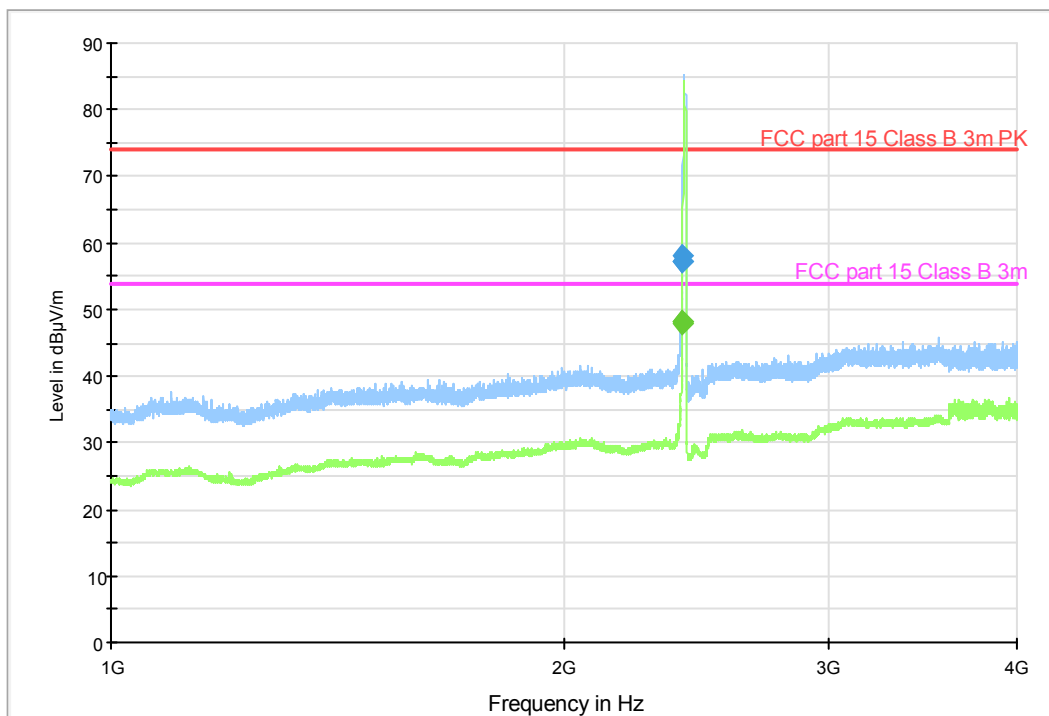


Overview sweeps performed with peak and average detectors, frequency range 1 – 4GHz
Emissions between 2400 and 2500 MHz are attenuated by band reject filter K&L M/W S/N 1

FCC 4 G - 18 G class B 3m ESU40 Continuous TT rotation

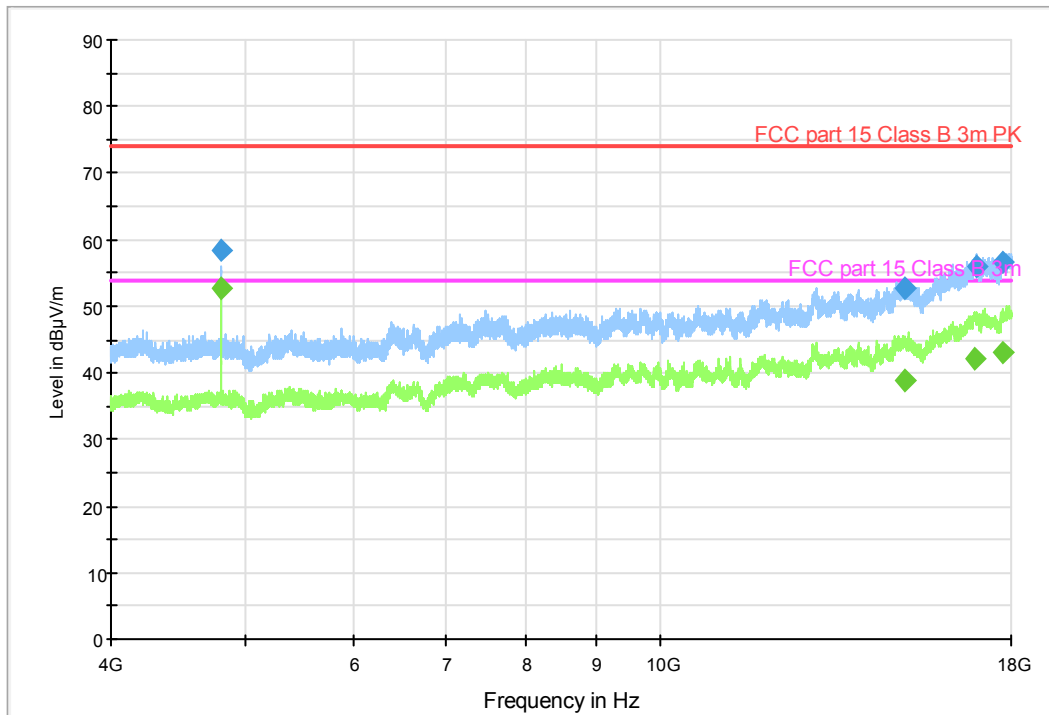

Overview sweeps performed with peak and average detectors, frequency range 4 – 18GHz
Emissions below 4000 MHz are attenuated by high-pass filter K&L 4410-X4500/18000-0

Full Spectrum

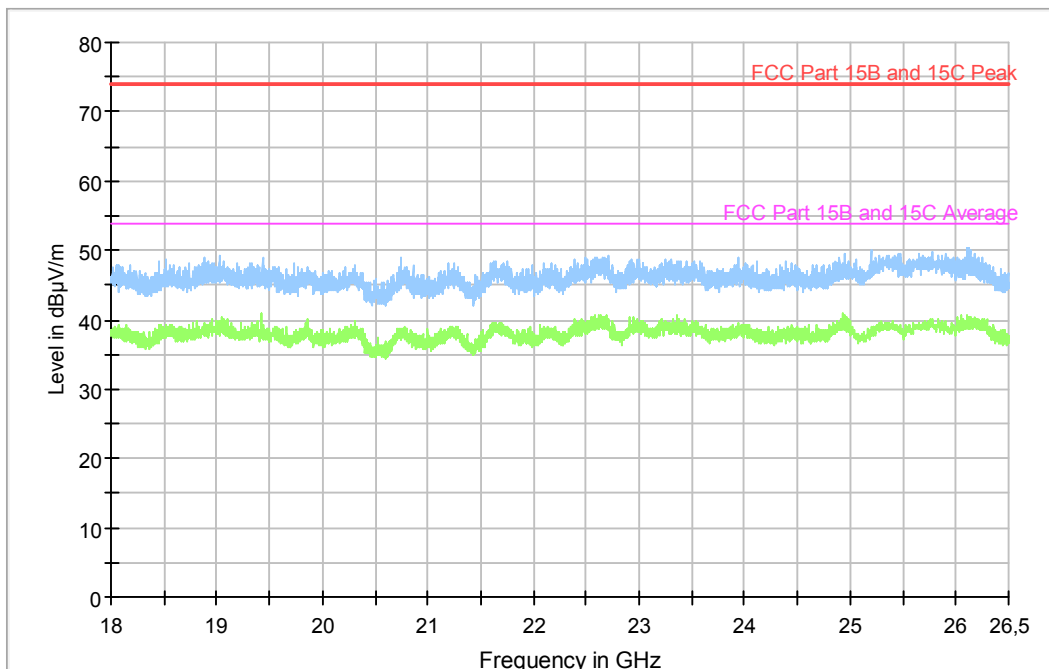

Overview sweeps performed with peak detectors, frequency range 18 – 26.5 GHz

Frequency MHz	Disturbance Level dB μ V/m	RBW kHz	Detector QP / AVG / Peak	Limit dB μ V	Margin dB	Azimuth deg	Antenna height cm	Pol. V / H
2400.0	57.1	1000	Peak	74	16.9	31	169	V
2400.1	58.1	1000	Peak	-		31	145	V
4811.0	58.3	1000	Peak	74	15.7	151	194	V
15095.2	52.7	1000	Peak	74	21.3	311	294	H
16976.5	55.8	1000	Peak	74	18.2	136	100	H
17742.7	56.7	1000	Peak	74	17.3	63	300	V

Measured level [dB μ V/m] = Analyser reading [dB μ V] + cable loss [dB] – preamplifier gain [dB] + antenna factor [dB/m]

Frequency MHz	Disturbance Level dB μ V/m	RBW kHz	Detector QP / AVG / Peak	Limit dB μ V	Margin dB	Azimuth deg	Antenna height cm	Pol. V / H
2400.0	28.2	1000	AVG	54	25.8	31	169	V
2400.1	29.2	1000	AVG	-		31	145	V
4811.0	29.4	1000	AVG	54	24.6	151	194	V
15095.2	23.8	1000	AVG	54	30.2	311	294	H
16976.5	26.9	1000	AVG	54	27.1	136	100	H
17742.7	27.8	1000	AVG	54	26.2	63	300	V

Level is calculated from peak level using 20 LOG (Ton/100ms) = -28.87 dB correction factor.

6.4 Test equipment

Radio chamber

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Software:	Rohde & Schwarz	EMC32	-	-
Signal analyzer:	Rohde & Schwarz	FSIQ 40	12793	07-2016
Preamplifier:	MITEQ	AFS6/AFS44	12335	-
Horn antenna:	EMCO	3115	4936	02-2017
High pass filter:	K&L MICROWAVE INC	4410-X4500/18000 - 0/0	5133	07-2016
RF cables			5179, 5191, 5192	

Big chamber

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Measurement receiver	Rohde & Schwarz	ESU 40	13178	07-2016
Pre-amplifier	BONN Elektronik	BLMA 0118-M	31246	07-2016
Horn antenna	Rohde & Schwarz	HF907	31245	11-2016
Horn antenna + Pre-amplifier	BONN Elektronik	BLMA 1826-5A	31247	12-2016
Band reject filter:	K&L MICROWAVE INC	6N45-2450/T 100-0/0	12389	07-2016
RF cables			39049, 39004	--

7 RECEIVER RADIATED EMISSIONS

Date of test:	2013-11-11	Test location:	Big chamber
EUT Serial:	130	Ambient temp.	20 – 21 °C
Tested by:	Kajsa From	Relative humidity	25 – 32 %
Test result:	Pass	Margin:	2.5 dB

7.1 Requirement


Reference: FCC §15.109, IC RSS-GEN Table 2

Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 – 88	40.0	3
88 – 216	43.5	3
216 – 960	46.0	3
960 –	54.0	3


7.2 Test setup details

Operation mode: Receiver active

Test setup photo:
30 – 1000 MHz

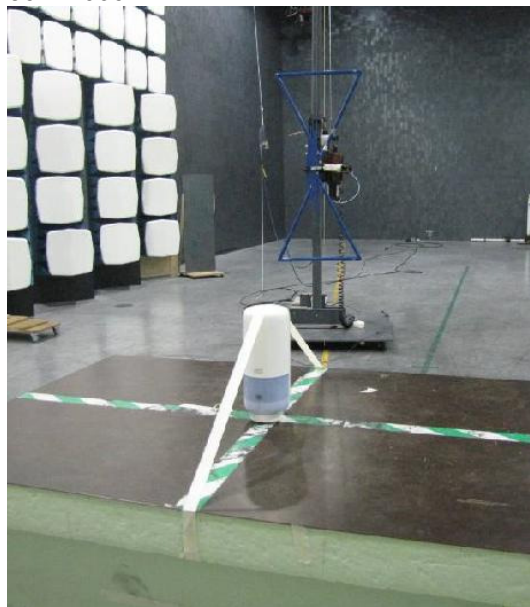


1 – 13 GHz

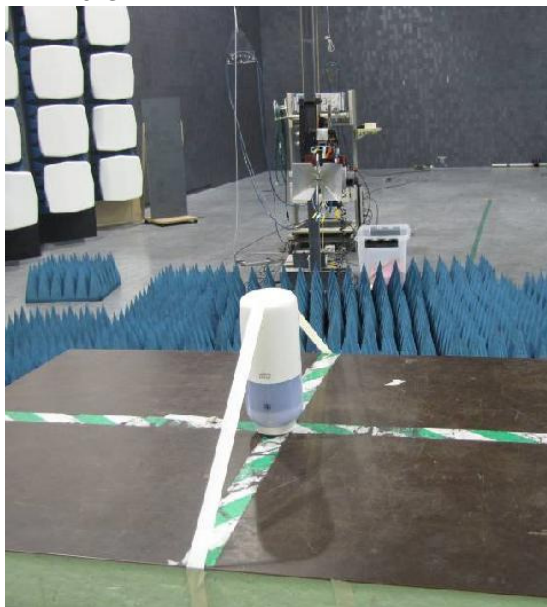


7.3 Test data

Overview sweeps performed with peak and average detectors, frequency range 30 – 1000 MHz

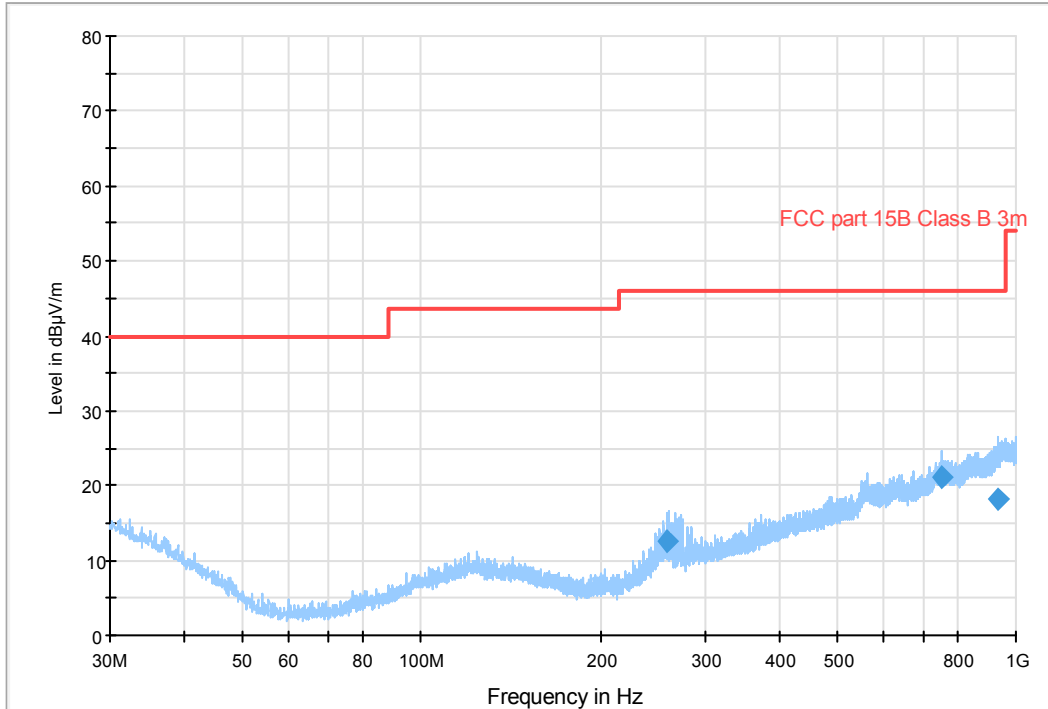

Overview sweeps performed with peak and average detectors, frequency range 1 – 13 GHz

FCC 1 G - 18 G class B 3m ESU40

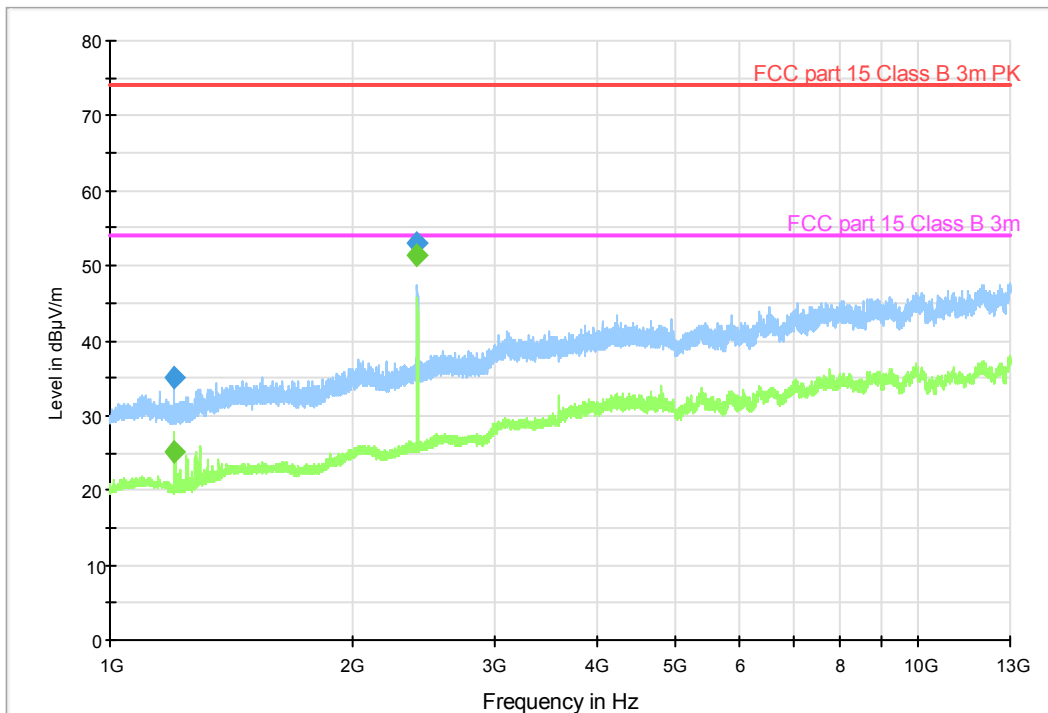

Frequency MHz	Disturbance Level dB μ V/m	RBW kHz	Detector QP / AVG / Peak	Limit dB μ V	Margin dB	Azimuth deg	Antenna height cm	Pol. V / H
260.21	12.6	120	QP	46.0	33.4	0	188	V
750.00	21.1	120	QP	46.0	24.9	302	100	V
932.86	18.3	120	QP	46.0	27.7	164	268	V
1199.69	25.1	1000	AVG	54.0	28.9	90	143	V
2402.93	51.5*	1000	AVG	54.0	2.5*	121	194	H
1199.69	35.1	1000	Peak	74.0	38.9	90	143	V
2402.93	57.1	1000	Peak	74.0	21.1	121	194	H

* The measured result is below the upper limit, but by a margin less than half of the uncertainty interval. It is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance.

7.4 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Measurement software	Rohde & Schwarz	EMC 32	--	--
Receiver	Rohde & Schwarz	ESU 8	12866	7-2014
Logperiodic antenna	Chase	CBL6111A	971	9-2015
Pre amplifier		AM-1331	7992	--
Measurement receiver	Rohde & Schwarz	ESU 40	13178	07-2014
Pre-amplifier	BONN Elektronik	BLMA 0118-M	31246	07-2014
Horn antenna	Rohde & Schwarz	HF907	31245	11-2013
RF cables			40036, 9511, 9506, 9957, 5181, 39049	--

8 OCCUPIED 6 DB BANDWIDTH TEST

Date of test:	2013-11-07	Test location:	Radio lab
EUT Serial:	044	Ambient temp.	23 °C
Tested by:	Kajsa From	Relative humidity	27 %
Test result:	Pass	Margin:	994.5 kHz


8.1 Requirement

The minimum 6 dB bandwidth shall be at least 500 kHz.

Reference: FCC §15.247(a)(2) RSS-247 A5.2(a)

Method: ANSI C63.10-2009: section 6.9.1

8.2 Test data

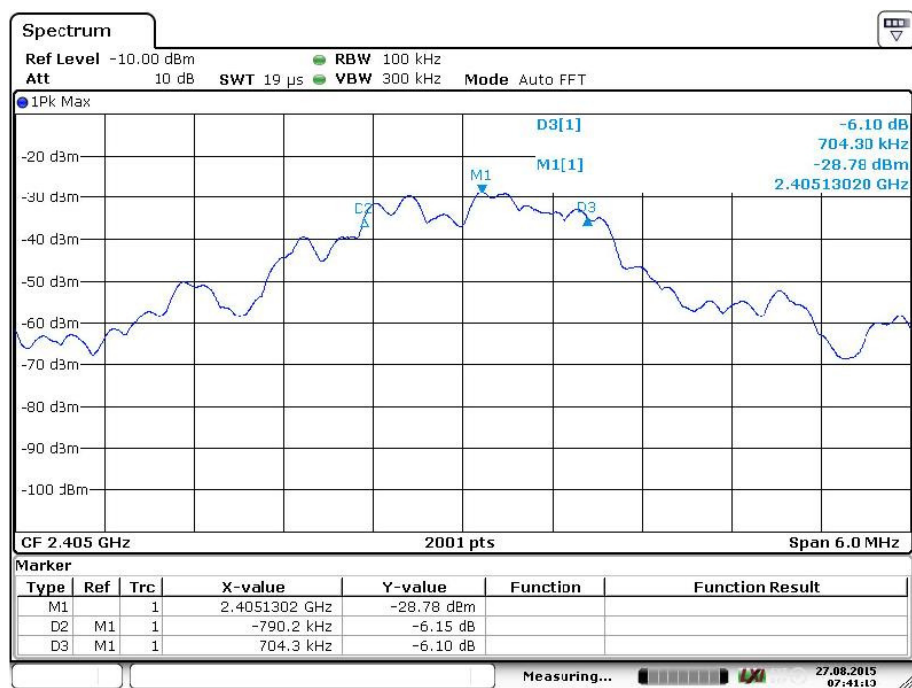

Date: 27.AUG.2015 07:41:13

Result	Limit	Margin
1494.5 kHz	>500 kHz	994.5 kHz

8.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer	Rohde & Schwarz	FSV	32594	07-2016

9 OCCUPIED 99% BANDWIDTH TEST


Date of test:	2013-11-07	Test location:	Radio lab
EUT Serial:	044	Ambient temp.	23 °C
Tested by:	Kajsa From	Relative humidity	27 %
Test result:	Pass	Margin:	-

9.1 Requirement

Reference: RSS GEN 6.6

Method: Signal analyser's power bandwidth function was used to calculate 99% bandwidth

9.2 Test data

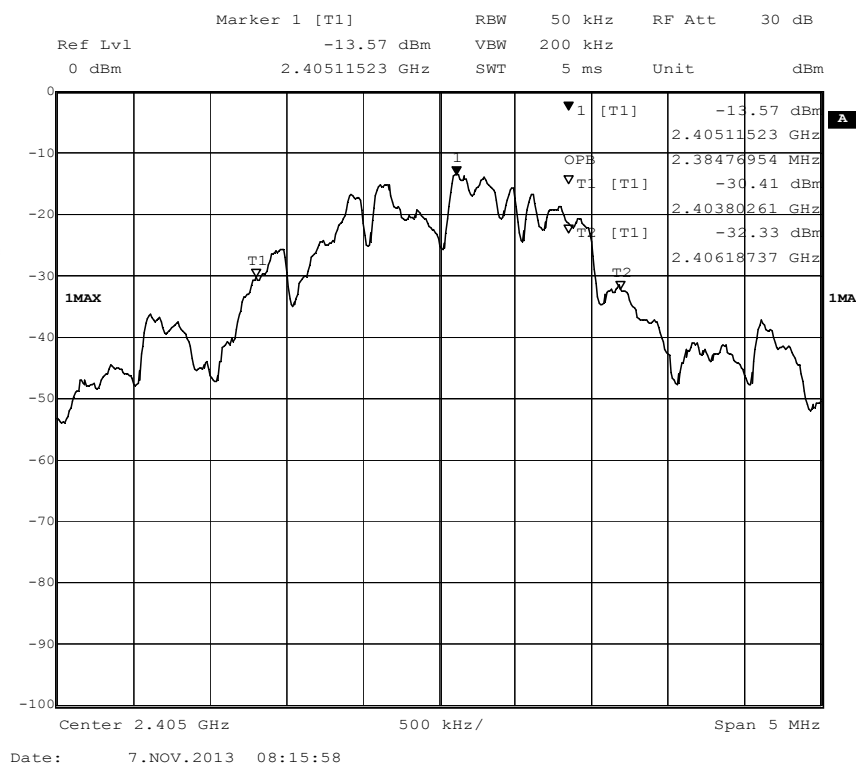

Result	Limit	Margin
2384.77 kHz	-	-

9.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer	Rohde & Schwarz	FSIQ40	12793	07-2014

10 CONDUCTED OUTPUT POWER

Date of test:	2013-11-11	Test location:	Radio lab
EUT Serial:	044	Ambient temp.	23 °C
Tested by:	Kajsa From	Relative humidity	22 %
Test result:	Pass	Margin:	998.47 mW


10.1 Requirement

The maximum peak conducted output power of the intentional radiator shall not exceed 1 watt.

Reference: FCC §15.247(b)(3) RSS-210 A8.4

Method: ANSI C63.10-2009: sections 6.10.2.1

10.2 Test data

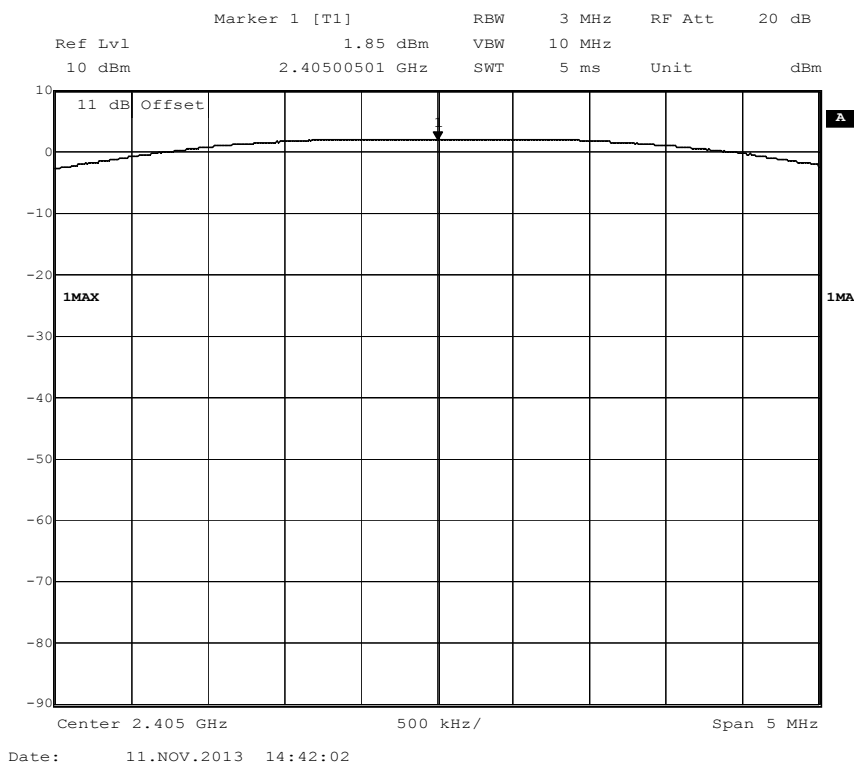

Result	Limit	Margin
1.85 dBm = 1.53 mW	30 dBm = 1 W	998.47 mW

10.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer	Rohde & Schwarz	FSIQ40	12793	07-2014

11 BANEDGE MEASUREMENT

Date of test:	2013-11-11	Test location:	Radio lab
EUT Serial:	044	Ambient temp.	23 °C
Tested by:	Kajsa From	Relative humidity	22 %
Test result:	Pass	Margin:	15.81 dB


11.1 Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth

Reference: FCC §15.247(d) RSS-210 A8.5

Method: ANSI C63.10-2009: section 6.9.2

11.2 Test data

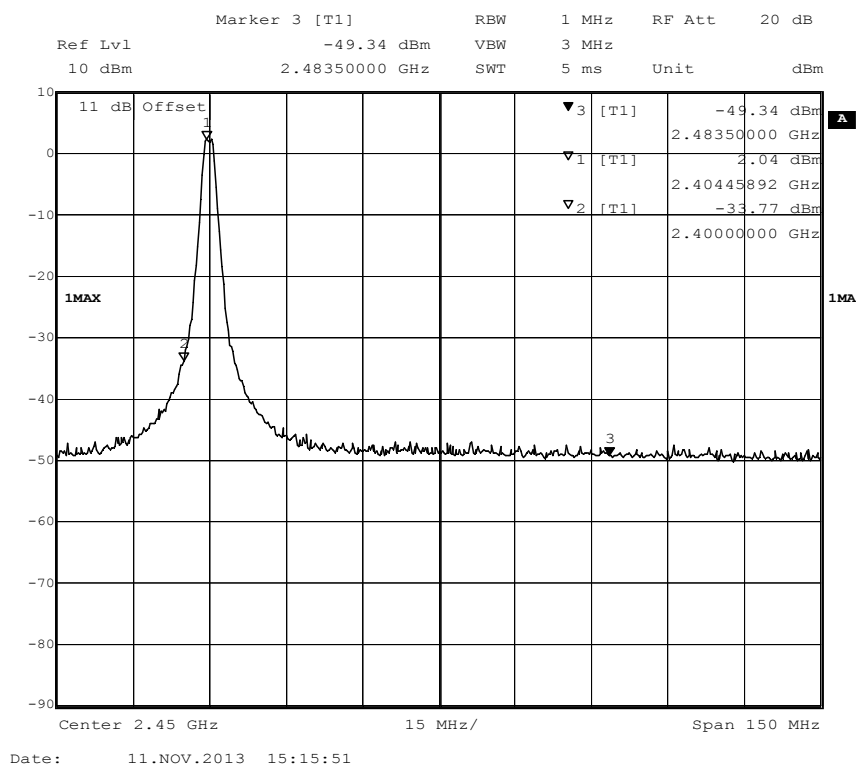

Result		Limit	Margin
Lower edge 35.81 dB	Upper edge 51.38 dB	20 dB	15.81 dB

11.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer	Rohde & Schwarz	FSIQ40	12793	7/2013

12 POWER SPECTRAL DENSITY

Date of test:	2013-11-11	Test location:	Radio lab
EUT Serial:	044	Ambient temp.	23 °C
Tested by:	Kajsa From	Relative humidity	22 %
Test result:	Pass	Margin:	15.43 dB


12.1 Requirement

Power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Reference: FCC §15.247(e) RSS-210 A8.2

Method: ANSI C63.10-2009: section 6.11.2.3

12.2 Test data

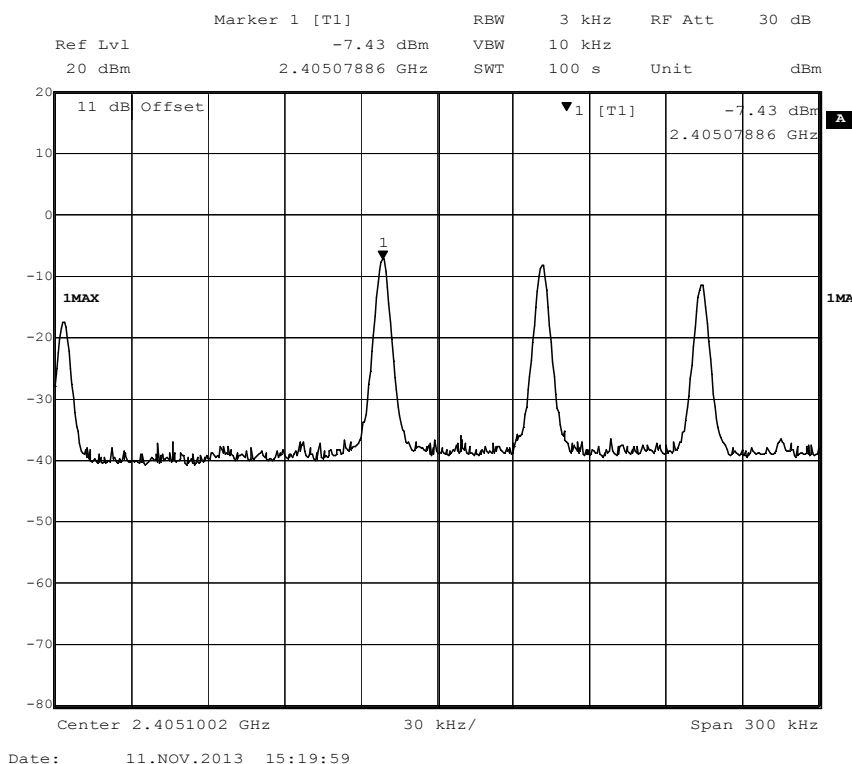

Result	Limit	Margin
-7.43 dBm / 3kHz	8dBm / 3kHz	15.43 dB

12.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyzer	Rohde & Schwarz	FSIQ40	12793	07-2014

13 DUTY CYCLE MEASUREMENT

Date of test:	2015-08-27	Test location:	Radio lab
EUT Serial:	-	Ambient temp.	23 °C
Tested by:	Matti Virkki	Relative humidity	22 %
Test result:	Pass	Margin:	-


13.1 Requirement

When the field strength (or envelope power) is not constant or it is in pulses, and an average detector is specified to be used, the value of field strength or power shall be determined by averaging over one complete pulse train, including blanking intervals within the pulse train, as long as the pulse train does not exceed 0.1 second. In cases where the pulse train exceeds 0.1 second, the average value of field strength or output power shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.


Referenece: FCC §15.35© RSS-GEN 6.10

Test method: ANSI C63.10 (2013) 7.5

13.2 Test data

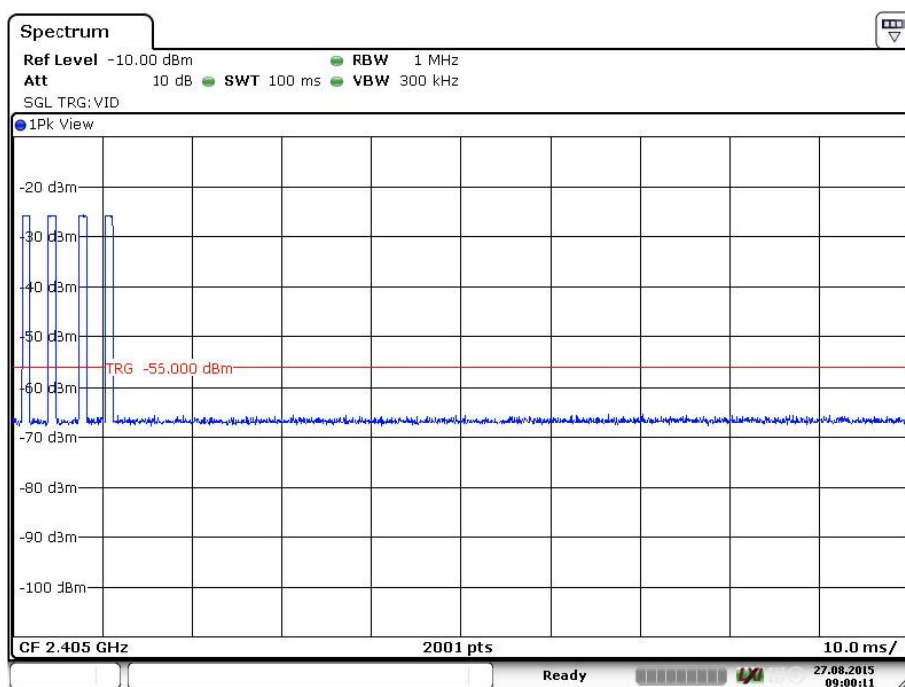

Date: 27.AUG.2015 09:00:11

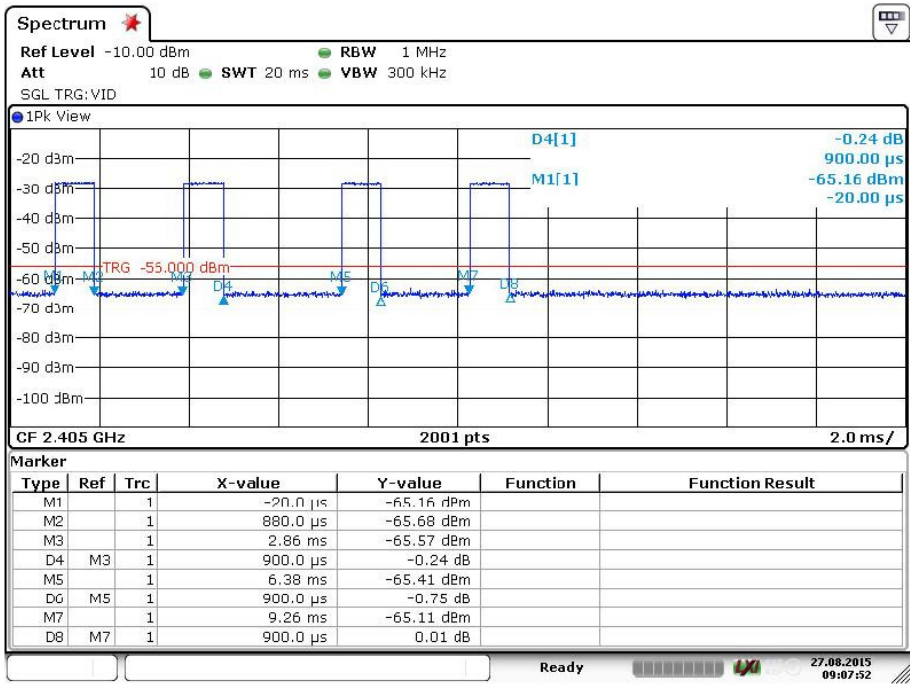

Date: 27.AUG.2015 09:07:52

Result Ton / 100 ms	Correction factor
4*900 μs = 3.6 ms	-28.87 dB

13.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Cal. due date
Spectrum analyser	Rohde & Schwarz	FSV	32594	07-2016

14 UNCERTAINTIES SUMMARY

The measurement uncertainty describes the overall uncertainty of the given measured value during operation of the EUT.

Measurement uncertainty is calculated in accordance with EA-4/02-1997.

The measurement uncertainty is given with a confidence of 95% (k=2).

Radiated disturbance, field strength, 30 MHz - 1000 MHz

30 to 300 MHz at 1 m and at a fixed height $\leq 1,5$ m	$\pm 5,3$ dB
200 to 1000 MHz at 1 m	$\pm 6,2$ dB
30 to 300 MHz at 3 m	$\pm 4,7$ dB
200 to 1000 MHz at 3 m	$\pm 4,8$ dB
30 to 300 MHz at 10 m	$\pm 4,6$ dB
200 to 1000 MHz at 10 m	$\pm 4,6$ dB

Radiated disturbance, field strength, 1 to 40 GHz in Semi Anechoic Chambers "Stora Hallen" and "Björkhallen"

1 to 18 GHz with filter or attenuator	$\pm 5,4$ dB
1 to 18 GHz without filter or attenuator	$\pm 5,2$ dB
18 to 26 GHz without filter or attenuator	$\pm 5,5$ dB
26 to 40 GHz without filter or attenuator	$\pm 5,6$ dB

Radiated disturbance, field strength, 1 to 40 GHz in Fully Anechoic Chamber "Radiohallen"

1 to 13 GHz with filter or attenuator	$\pm 5,5$ dB
1 to 13 GHz without filter or attenuator	$\pm 5,3$ dB
13 to 18 GHz with filter or attenuator	$\pm 5,3$ dB
13 to 18 GHz without filter or attenuator	$\pm 5,1$ dB
18 to 26,5 GHz without filter or attenuator	$\pm 5,4$ dB
26,5 to 40 GHz without filter or attenuator	$\pm 5,8$ dB

Frequency range

R&S FSIQ	$\pm 0,2$ %
----------	-------------

Output power

Analog signals, conducted:

RF-power meter	$\pm 0,6$ dB
Spectrum analyser	$\pm 3,5$ dB

Analog signals, radiated:

25 MHz - 1000 MHz	$\pm 3,7$ dB
1 GHz - 18 GHz	$\pm 3,4$ dB

Digital signals, conducted

$\pm 0,6$ dB

Digital signals, radiated:

25 MHz - 1000 MHz	$\pm 3,7$ dB
1 GHz - 18 GHz	$\pm 3,4$ dB

Peak power density

Conducted:

8593E	$\pm 2,5$ dB
8566B	$\pm 2,7$ dB

Radiated:

8593E & 8566B, 25 - 1000 MHz	$\pm 4,5$ dB
8593E & 8566B, 1 - 18 GHz	$\pm 4,7$ dB

Blank page

15 PHOTO OF THE EUT

