



Report No.: EA21090343F00101

1 of 85

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

M18/M12 Wireless Jobsite Speaker

Model No.: WSR1602, Cat.No.2891-20

Trademark: The Milwaukee logo is a red square with the word 'Milwaukee' in white, cursive script, and a white lightning bolt graphic.

FCC ID: 2ABL52891-M18VE

Report No.: EA21090343F00101

Issue Date: Nov. 03, 2021

Prepared for

Glory Horse Industries Limited

**WORKSHOP 8 4/F, WORLD-WIDE INDUSTRIAL CENTRE,
43-47 SHAN MEI STREET, FOTAN, SHATIN, N T HONG KONG**

Prepared by

Dong Guan Anci Electronic Technology Co., Ltd.

**1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech
Industrial Development Zone, Dongguan City, Guangdong Pr., China.**

**This report shall not be reproduced, except in full, without the written approval of
Dong Guan Anci Electronic Technology Co., Ltd.**




VERIFICATION OF COMPLIANCE

Applicant:	Glory Horse Industries Limited WORKSHOP 8 4/F, WORLD-WIDE INDUSTRIAL CENTRE, SHAN MEI STREET, FOTAN, SHATIN, N T HONG KONG	43-47
Manufacturer:	Glory Horse Industries Limited WORKSHOP 8 4/F, WORLD-WIDE INDUSTRIAL CENTRE, SHAN MEI STREET, FOTAN, SHATIN, N T HONG KONG	43-47
Factory:	GLORY HORSE DIGITECH LTD DG 11 JINYULING RD SANGYUAN INDUSTRIAL AREA DONGCHENG DISTRICT DONGGUAN GUANGDONG 523119 CHINA	
Product Description:	M18/M12 Wireless Jobsite Speaker	
Trade Mark:		
Model Number:	WSR1602, Cat.No.2891-20 (All models are identical to each other except the model name. So we choose Cat.No.2891-20 to do all the tests.)	

We hereby certify that:

The above equipment was tested by Dong Guan Anci Electronic Technology Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2020).

Date of Test : Oct. 28, 2021 to Nov. 03, 2021

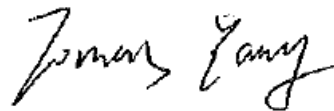

Prepared by : Tomas Yang/Supervisor



Reviewer &
Authorized Signer : Alan He/Manager



Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	EA21090343F00101



Table of Contents

- 1. GENERAL INFORMATION 6**
 - 1.1 PRODUCT DESCRIPTION 6
 - 1.2 TEST METHODOLOGY 6
 - 1.3 TEST FACILITY 7
- 2. SYSTEM TEST CONFIGURATION..... 8**
 - 2.1EUT CONFIGURATION 8
 - 2.2 EUT EXERCISE..... 8
 - 2.3 TEST PROCEDURE..... 8
 - 2.4CONFIGURATION OF TESTED SYSTEM..... 9
- 3. SUMMARY OF TEST RESULTS..... 10**
- 4. DESCRIPTION OF TEST MODES 11**
- 5. TEST SYSTEM UNCERTAINTY..... 12**
- 6. CONDUCTED EMISSIONS TEST 13**
 - 6.1MEASUREMENT PROCEDURE: 13
 - 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 13
 - 6.3MEASUREMENT EQUIPMENT USED: 13
 - 6.4 MEASUREMENT RESULT: 14
 - 6.5 CONDUCTED MEASUREMENT PHOTOS: 17
- 7. RADIATED EMISSION TEST 18**
 - 7.1MEASUREMENT PROCEDURE 18
 - 7.2TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 20
 - 7.3 MEASUREMENT EQUIPMENT USED: 21
 - 7.4 RADIATED EMISSION LIMIT 21
 - 7.5 MEASUREMENT RESULT 22
 - 7.5 RADIATED MEASUREMENT PHOTOS: 34
- 8. CHANNEL SEPARATION TEST 35**
 - 8.1MEASUREMENT PROCEDURE 35
 - 8.2TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 35
 - 8.3 MEASUREMENT EQUIPMENT USED: 35
 - 8.4MEASUREMENT RESULTS: 35
- 9. 20DB BANDWIDTH TEST 42**
 - 9.1MEASUREMENT PROCEDURE 42
 - 9.2TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) 42
 - 9.3 MEASUREMENT EQUIPMENT USED: 42
 - 9.4 MEASUREMENT RESULTS: 42
- 10. QUANTITY OF HOPPING CHANNEL TEST 49**



- 10.1 MEASUREMENT PROCEDURE 49
- 10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 49
- 10.3 MEASUREMENT EQUIPMENT USED:..... 49
- 10.4 MEASUREMENT RESULTS: 49
- 11. TIME OF OCCUPANCY (DWELL TIME) TEST 50**
 - 11.1 TEST DESCRIPTION..... 50
 - 11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 50
 - 11.3 MEASUREMENT EQUIPMENT USED:..... 50
 - 11.4 TEST REQUIREMENTS / LIMITS..... 50
 - 11.5 TEST RESULT 51
- 12. MAXIMUM PEAK OUTPUT POWER TEST 53**
 - 12.1 MEASUREMENT PROCEDURE 53
 - 12.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 53
 - 12.3 MEASUREMENT EQUIPMENT USED:..... 53
 - 12.4 MEASUREMENT RESULTS: 54
- 13. BAND EDGE TEST 60**
 - 13.1 MEASUREMENT PROCEDURE 60
 - 13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... 61
 - 13.3 MEASUREMENT EQUIPMENT USED:..... 61
 - 13.4 MEASUREMENT RESULTS: 62
- 14. ANTENNA APPLICATION 77**
 - 14.1 ANTENNA REQUIREMENT 77
 - 14.2 RESULT..... 77
- 15. PHOTOS OF EUT 78**

1. GENERAL INFORMATION

1.1 Product Description

Characteristics	Description
Product Name	M18/M12 Wireless Jobsite Speaker
Model number	Cat.No.2891-20
Input rating	DC 18V, 3A
Power Supply	DC 18V from adapter, Battery 18V and Battery 12V
Kind of Device	Bluetooth Ver.5.0+EDR
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Operating Frequency Range	2402-2480MHz
Number of Channels	79
Transmit Power Max(PK)	-1.45dBm(0.0007W)
Antenna Type	Internal PIFA antenna
Antenna Gain	0dBi

1.2 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10-2013. Radiated testing was performed at an antenna to EUT distance 3 meters.



1.3 Test Facility

Site Description

EMC Lab. : Accredited by CNAS, 2017.06.26
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L0468.

Accredited by A2LA, 2018.03.15
The Certificate Number is 4422.01.

Name of Firm : Dong Guan Anci Electronic Technology Co., Ltd.
Site Location : 1-2 Floor, Building A, No.11, Headquarters 2 Road, Songshan, Lake Hi-tech Industrial Development Zone, Dongguan City, Guangdong Pr., China.

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was fixed in a particular direction according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System






Table 2-1 Equipment Used in Tested System

Item	Equipment	Trademark	Model No.	FCC ID	Note
1.	M18/M12 Wireless Jobsite Speaker		Cat.No.2891-20	2ABL52891-M18 VE	EUT
2.	AC/DC Adapter		Model:YLS06512A-T180300 Input: AC 100-240V~50/60Hz, 1.8A Output: DC 18V, 3.0A	N/A	Support EUT

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.



3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	Compliant
§15.247(d),§15.209	Radiated Emission	Compliant
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.203	Antenna Requirement	Compliant

4. Description of test modes

The EUT has been tested under its typical operating condition for EUT tested alone. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480



5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%

6. Conducted Emissions Test

6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.2 Test SET-UP (Block Diagram of Configuration)

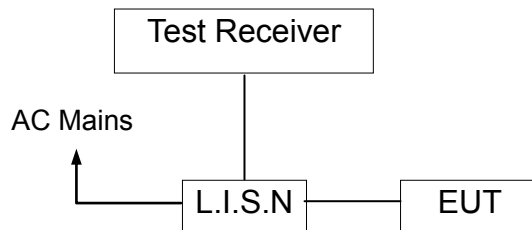

6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Calibrated until
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-669	2022-05-23
10 db attenuator	JFW	50FP-010-H4	4360846-427-1	2022-05-23
RF Cable	N/A	N/A	2#	2022-05-23
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101358	2022-05-23




6.4 Measurement Result:

Operation Mode:	TX	Test Date :	2021-11-03
Frequency Range:	0.15MHz~30MHz	Temperature :	24°C
Test Result:	PASS	Humidity :	58 %
Test By:	Best		

Pass.

All the modulation modes were tested the data of the worst mode are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following data.

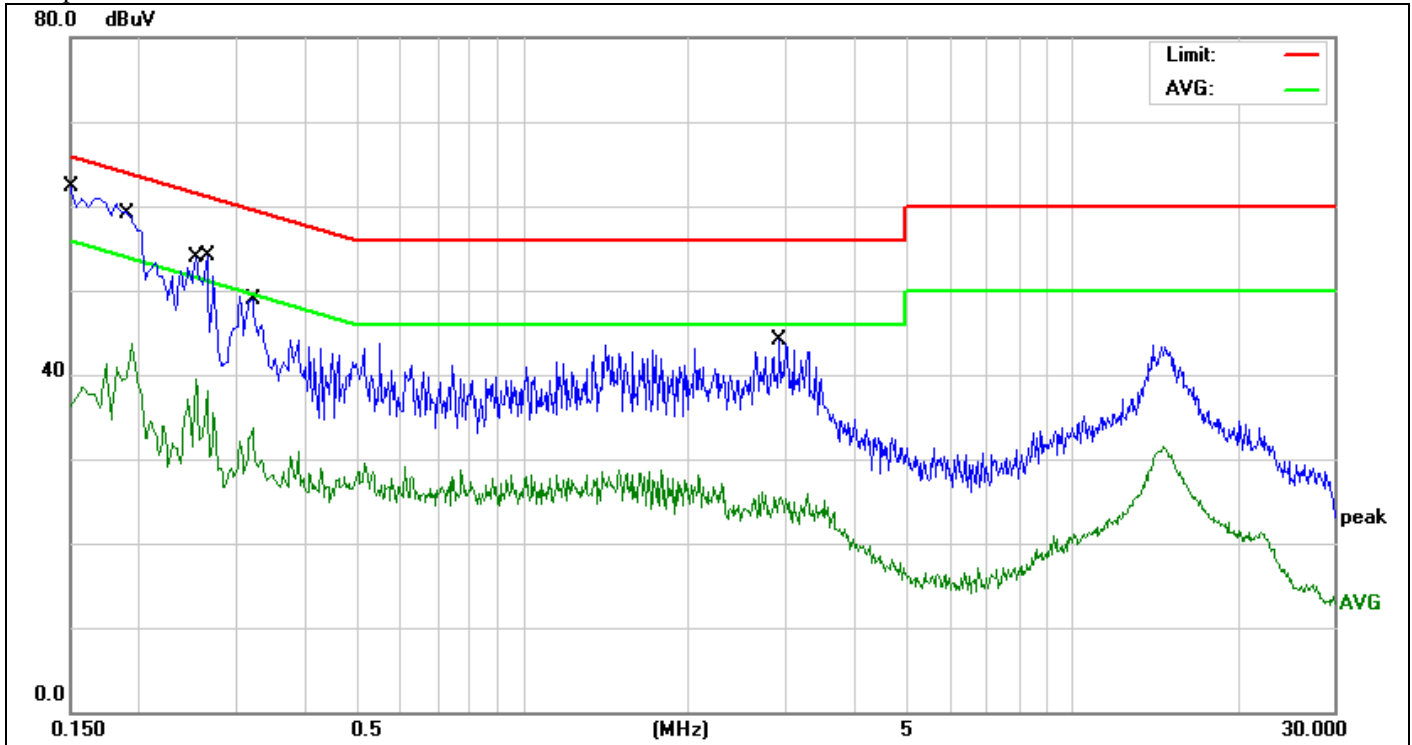

Site:	843.3	Phase:	N	Temperature(C):	26(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:	2021-11-03	Humidity(%):	60%
EUT:	M18/M12 Wireless Jobsite Speaker	Power Rating:	AC 120V/60Hz	Test Engineer:	Bast
M/N.:	Cat.No.2891-20				
Mode:	BT Mode				
Note:					

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1500	46.73	10.07	56.80	65.99	-9.19	QP	
2	0.1500	25.95	10.07	36.02	55.99	-19.97	AVG	
3 *	0.1924	45.87	10.08	55.95	63.93	-7.98	QP	
4	0.1924	28.30	10.08	38.38	53.93	-15.55	AVG	
5	0.2540	38.62	10.07	48.69	61.62	-12.93	QP	
6	0.2540	22.30	10.07	32.37	51.62	-19.25	AVG	
7	0.2660	37.49	10.07	47.56	61.24	-13.68	QP	
8	0.2660	21.46	10.07	31.53	51.24	-19.71	AVG	
9	0.3220	33.07	10.08	43.15	59.65	-16.50	QP	
10	0.3220	19.25	10.08	29.33	49.65	-20.32	AVG	
11	2.9380	26.43	10.20	36.63	56.00	-19.37	QP	
12	2.9380	12.97	10.20	23.17	46.00	-22.83	AVG	

*:Maximum data x:Over limit !:over margin

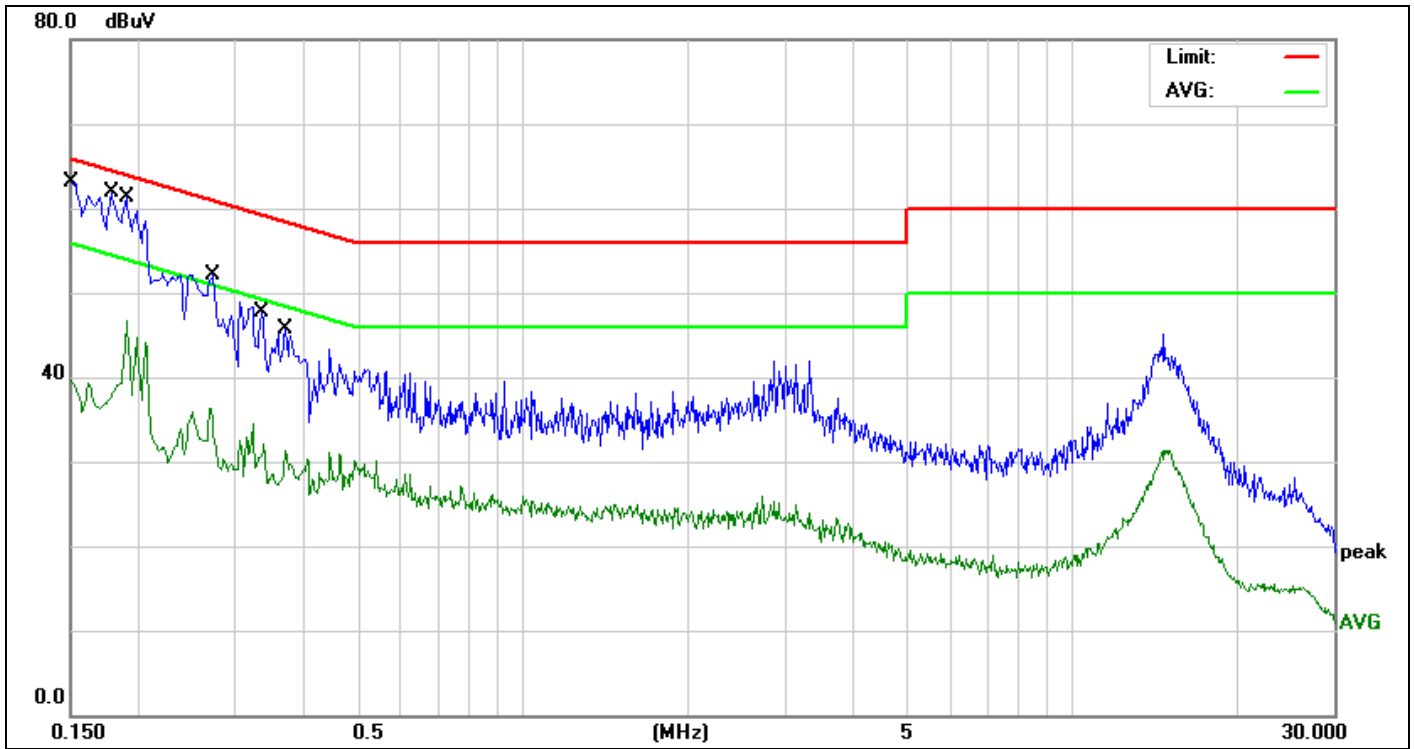

Site:	843.3	Phase:L1	Temperature(C):26(C)
Limit:	FCC Part 15 C Conduction(QP)	Test Time:	Humidity(%):60%
EUT:	M18/M12 Wireless Jobsite Speaker	Power Rating:	2021-11-03
M/N.:	Cat.No.2891-20	Test Engineer:	AC 120V/60Hz
Mode:	BT Mode		Bast
Note:			

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Over (dB)	Detector	Comment
1	0.1500	47.77	10.07	57.84	65.99	-8.15	QP	
2	0.1500	26.65	10.07	36.72	55.99	-19.27	AVG	
3	0.1780	45.20	10.08	55.28	64.57	-9.29	QP	
4	0.1780	26.05	10.08	36.13	54.57	-18.44	AVG	
5 *	0.1900	46.87	10.08	56.95	64.03	-7.08	QP	
6	0.1900	29.75	10.08	39.83	54.03	-14.20	AVG	
7	0.2740	36.79	10.07	46.86	60.99	-14.13	QP	
8	0.2740	20.98	10.07	31.05	50.99	-19.94	AVG	
9	0.3339	32.28	10.08	42.36	59.35	-16.99	QP	
10	0.3339	19.56	10.08	29.64	49.35	-19.71	AVG	
11	0.3700	29.25	10.08	39.33	58.50	-19.17	QP	
12	0.3700	18.34	10.08	28.42	48.50	-20.08	AVG	

*:Maximum data x:Over limit !:over margin

6.5 Conducted Measurement Photos:



7. Radiated Emission Test

7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Average
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

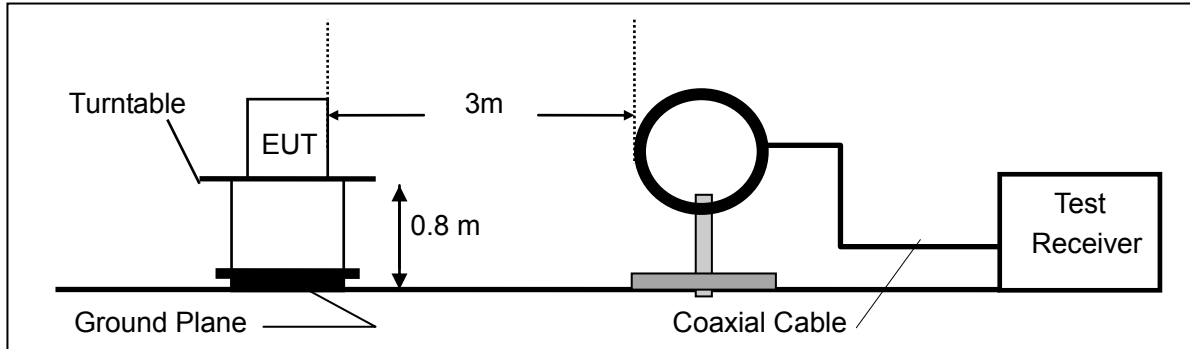

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

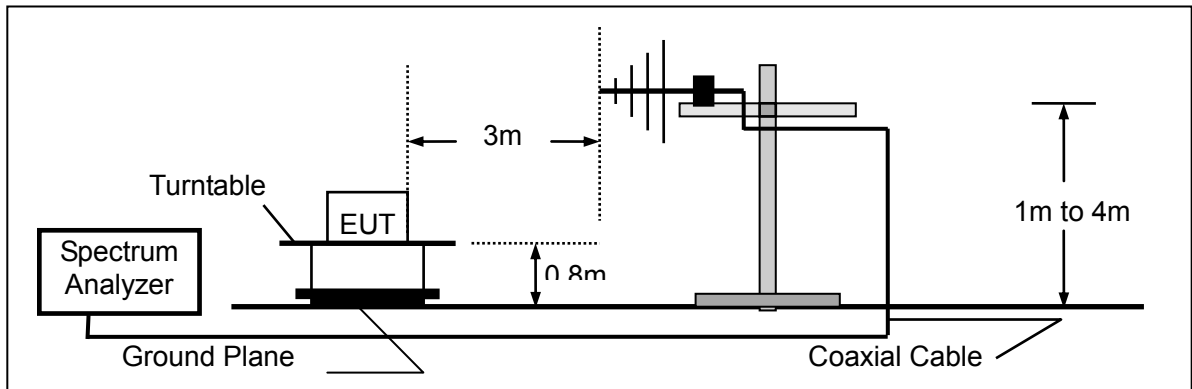

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

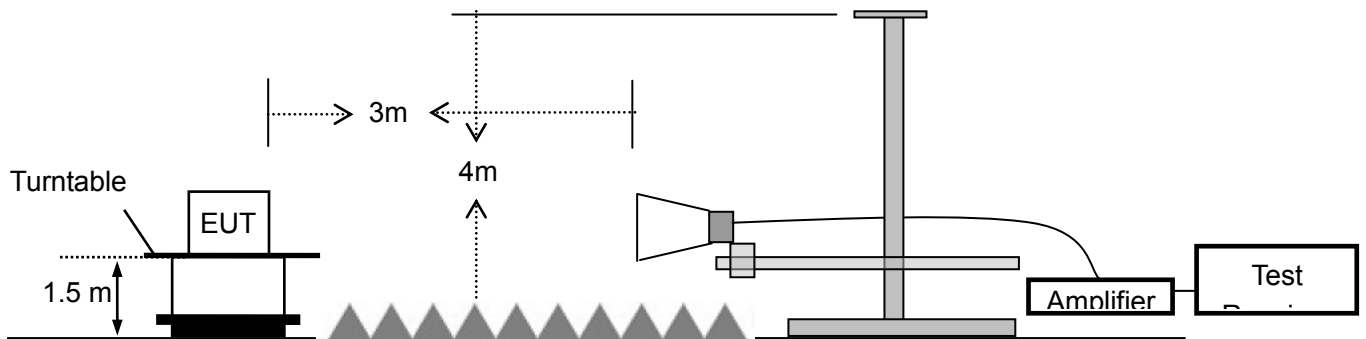

7.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1.	EMI Test Receiver	Rohde & Schwarz	ESPI	100502	2021-11-19
2.	Pre-Amplifier	HP	8447D	2727A06172	2022-05-23
3.	Bilog Antenna	Schwarzbeck	VULB9163	VULB9163-588	2022-05-23
4.	Loop Antenna	Schwarzbeck	FMZB 1516	1516-141	2021-11-19
5.	Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
6.	Low noise Amplifiers	A-INFO	LA1018N4009	J101313052400 1	2022-05-23
7.	Horn antenna	A-INFO	LB-10180-SF	J203109061212 3	2022-05-23
8.	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX10 0KHz-40GHz	J101313052400 1	2021-11-19
9.	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J203109061212 3	2021-11-19
10.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-2m	N/A	2021-11-19
11.	RF Cable	Gigalink Microwave	ZT40-2.92J-2. 92J-0.3m	N/A	2021-11-19
12.	RF Cable	N/A	N/A	6#	2022-05-23
13.	RF Cable	N/A	N/A	1-1#	2022-05-23
14.	RF Cable	N/A	N/A	1-2#	2022-05-23
15.	RF Cable	N/A	N/A	7#	2022-05-23
16.	3m Semi-anechoic Chamber	chengyu	9m*6m*6m	N/A	2022-05-23
17.	Test Software	Farad	EZ-EMC Ver:ANCI-3A1	N/A	N/A

7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

- Remark 1. Emission level in dBuV/m=20 log (uV/m)
 : 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

7.5 Measurement Result

Operation Mode: TX Test Date : 2021-11-03

Test By: Best Temperature : 25°C
 Test Result: PASS Humidity : 58 %
 Measured Distance: 3m

Below 30MHz:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--


Note: The low frequency, which started from 9KHz-30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the worst mode (8DPSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.


Please refer to the following data.

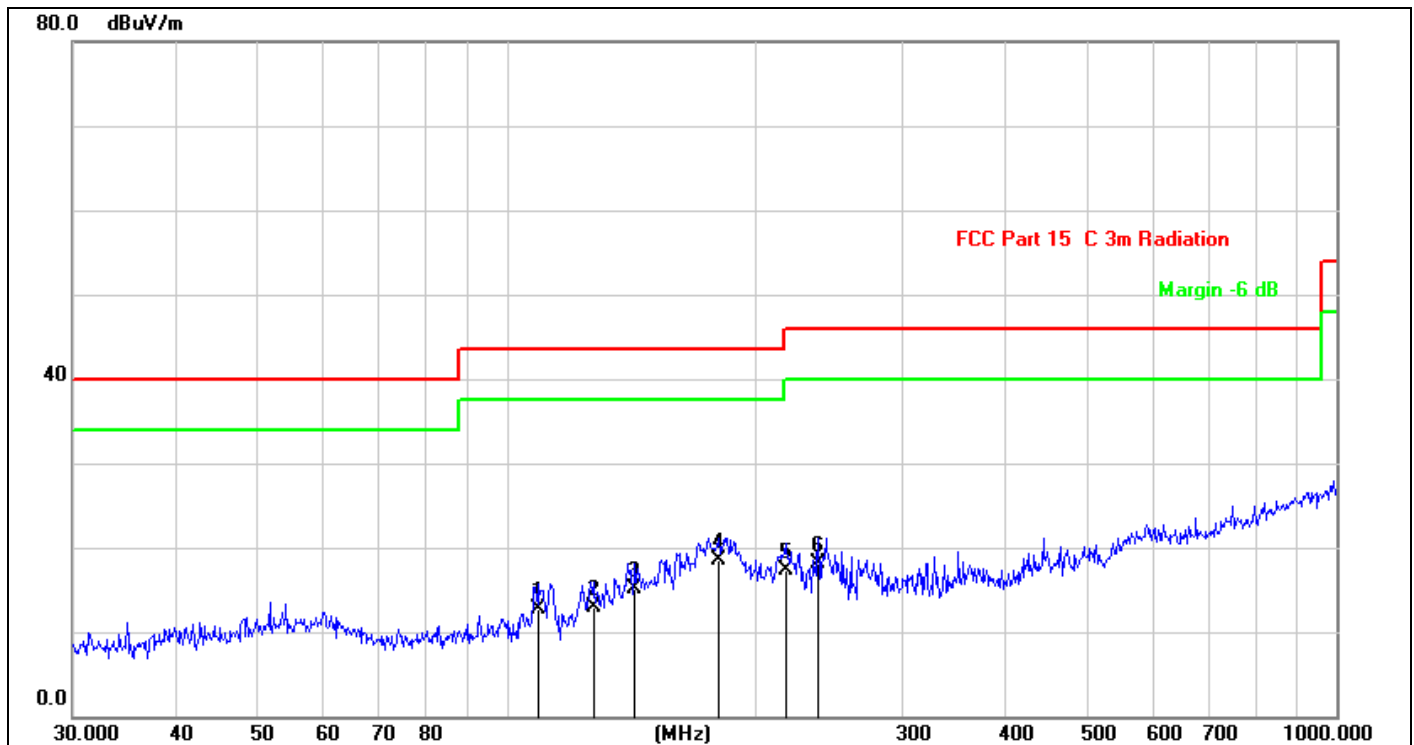



Site:	LAB	Antenna::Horizontal	Temperature(C):26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:	Humidity(%):60%
EUT:	M18/M12 Wireless Jobsite Speaker	Power Rating:	2021-11-02
M/N.:	Cat.No.2891-20	Test Engineer:	AC 120V/60Hz
Mode:	TX2402		Bast
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	109.4116	29.16	-16.49	12.67	43.50	-30.83	QP			
2	127.2176	30.95	-17.98	12.97	43.50	-30.53	QP			
3	142.8243	34.07	-19.02	15.05	43.50	-28.45	QP			
4 *	180.0165	35.90	-17.48	18.42	43.50	-25.08	QP			
5	216.7828	32.76	-15.51	17.25	46.00	-28.75	QP			
6	237.4760	32.98	-14.80	18.18	46.00	-27.82	QP			

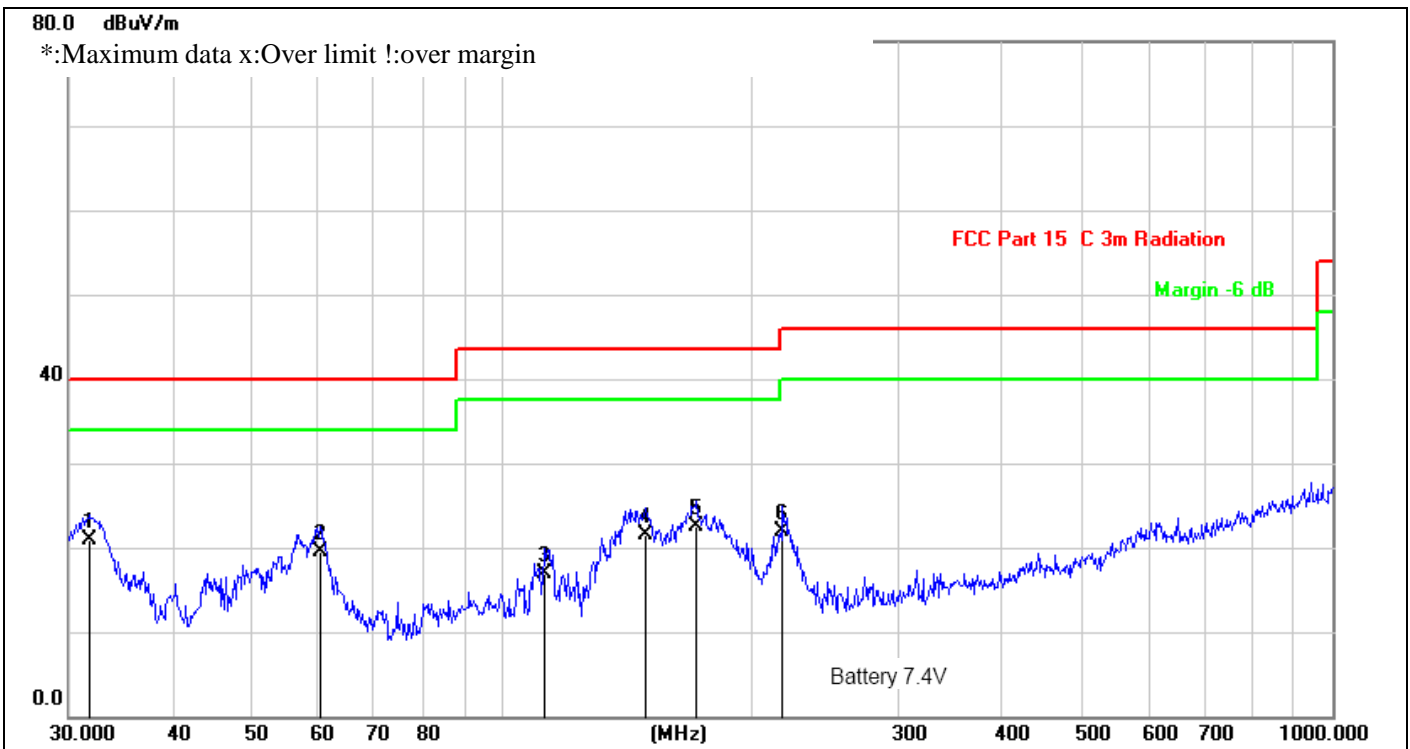

Site:	LAB	Antenna::Vertical	Temperature(C):26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:	Humidity(%):60%
EUT:	M18/M12 Wireless Jobsite Speaker	Power Rating:	2021-11-02
M/N.:	Cat.No.2891-20	Test Engineer:	AC 120V/60Hz
Mode:	TX2402		Bast
Note:			

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
-----	-----------------	----------------	---------------	----------------	----------------	-------------	------	-------------	---------------	--------




Report No.: EA21090343F00101

25 of 85

1 *	31.8427	39.19	-18.21	20.98	40.00	-19.02	QP			
2	60.2801	35.54	-15.97	19.57	40.00	-20.43	QP			
3	112.5244	33.54	-16.63	16.91	43.50	-26.59	QP			
4	148.9625	40.45	-18.85	21.60	43.50	-21.90	QP			
5	171.3926	40.05	-17.64	22.41	43.50	-21.09	QP			
6	217.5443	37.31	-15.47	21.84	46.00	-24.16	QP			


*:Maximum data x:Over limit !:over margin

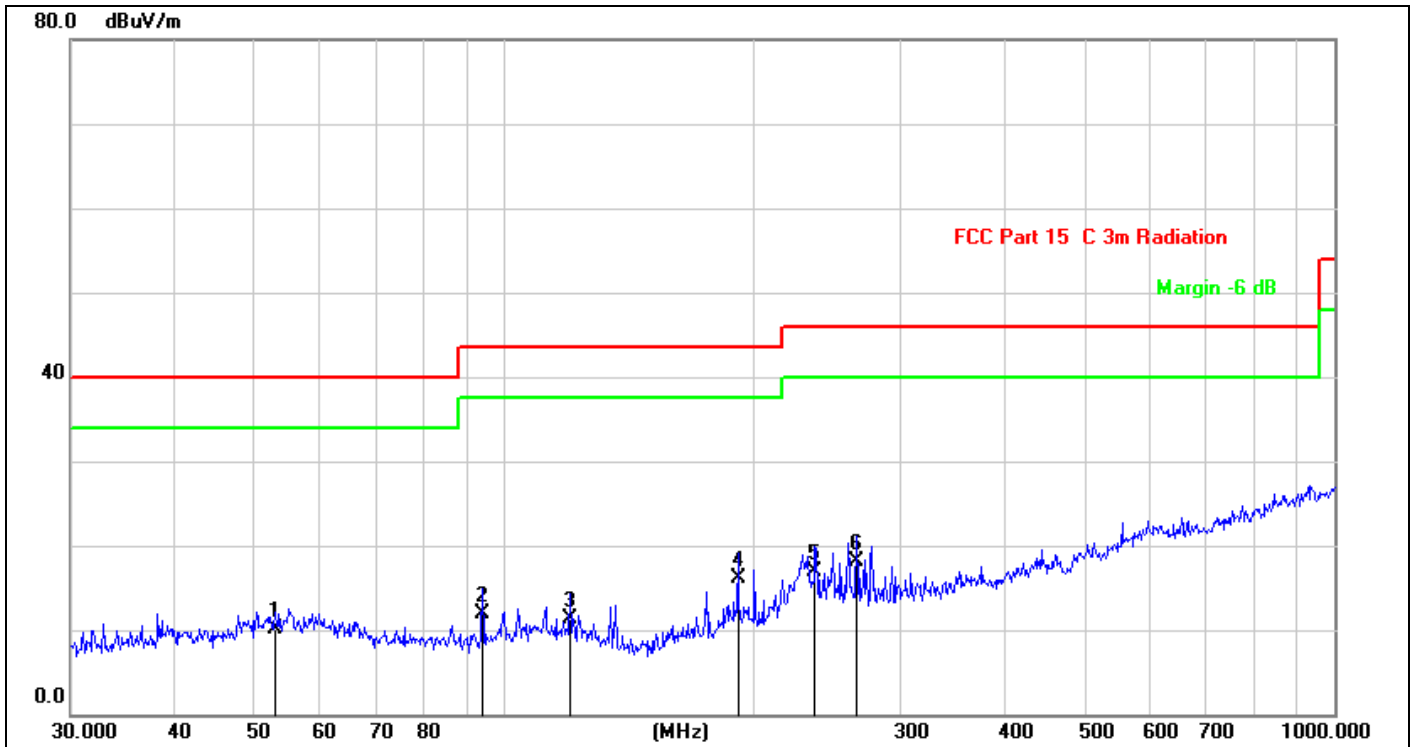

Site:	LAB	Antenna::	Horizontal	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation	Test Time:		Humidity(%):	60%
EUT:	M18/M12 Wireless Jobsite Speaker	Power Rating:		Battery	18V
M/N.:	Cat.No.2891-20	Test Engineer:		Bast	
Mode:	TX2402				
Note:					




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	52.9453	25.95	-15.93	10.02	40.00	-29.98	QP			
2	94.0979	29.95	-18.12	11.83	43.50	-31.67	QP			
3	119.8556	28.38	-17.16	11.22	43.50	-32.28	QP			
4 *	191.0738	32.95	-16.84	16.11	43.50	-27.39	QP			
5	236.6447	31.73	-14.83	16.90	46.00	-29.10	QP			
6	265.6757	32.02	-13.93	18.09	46.00	-27.91	QP			

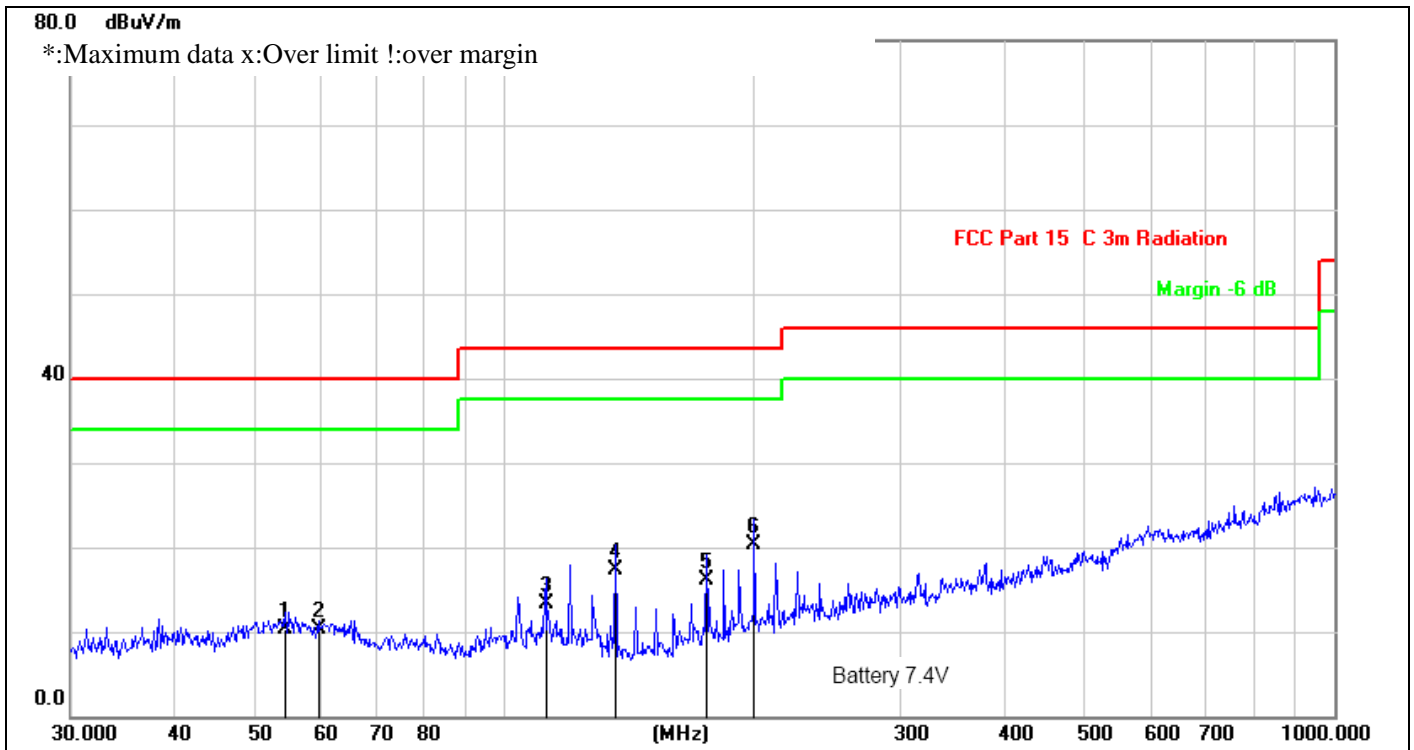

Site:	LAB	Antenna::	Vertical	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation			Humidity(%):	60%
EUT:	M18/M12 Wireless Jobsite Speaker	Test Time:		2021-11-02	
M/N.:	Cat.No.2891-20	Power Rating:		Battery 18V	
Mode:	TX2402	Test Engineer:		Bast	
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	54.4516	26.18	-15.92	10.26	40.00	-29.74	QP			
2	59.6493	26.28	-15.92	10.36	40.00	-29.64	QP			
3	112.1305	29.92	-16.60	13.32	43.50	-30.18	QP			
4	135.9822	36.08	-18.78	17.30	43.50	-26.20	QP			
5	175.0368	33.59	-17.57	16.02	43.50	-27.48	QP			
6 *	199.9856	36.65	-16.32	20.33	43.50	-23.17	QP			

*:Maximum data x:Over limit !:over margin

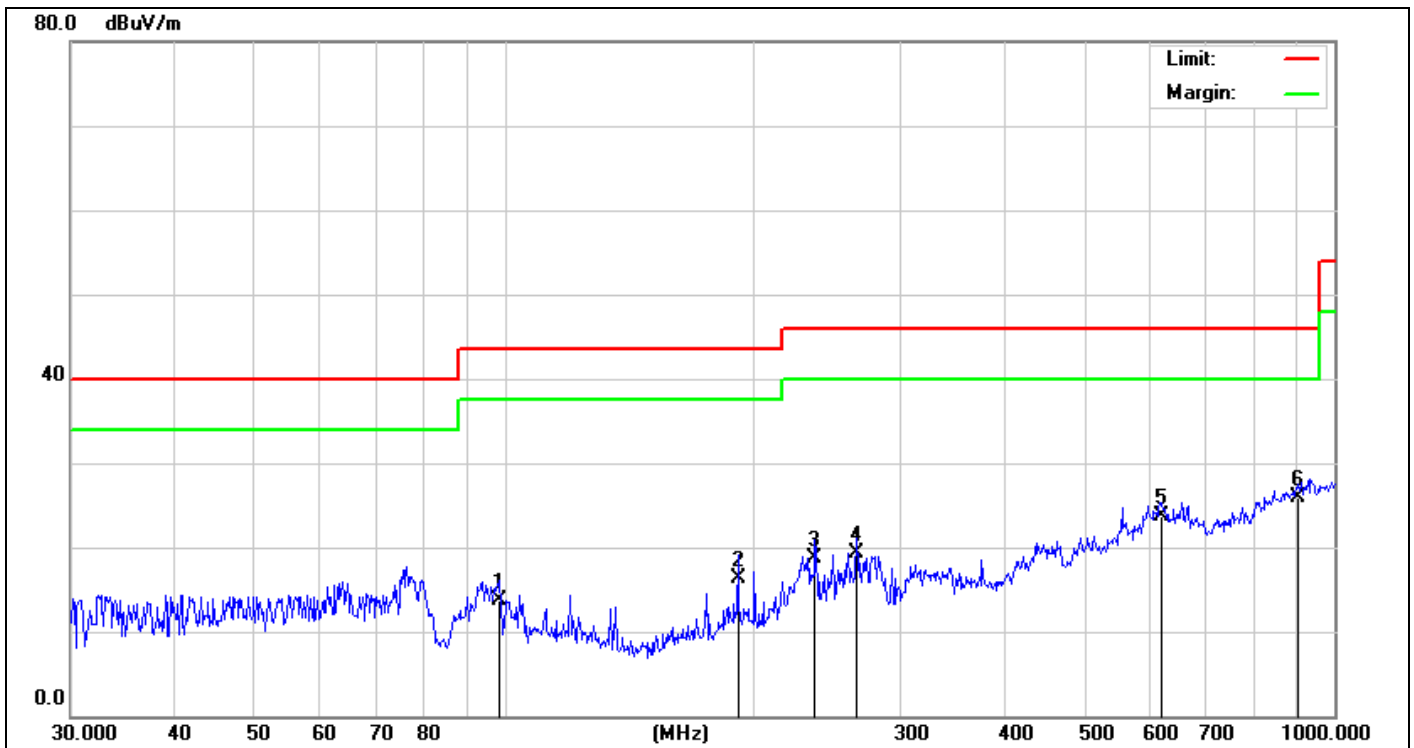

Site:	LAB	Antenna::	Horizontal	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation			Humidity(%):	60%
EUT:	M18/M12 Wireless Jobsite Speaker	Test Time:			2021-11-02
M/N.:	Cat.No.2891-20	Power Rating:		Battery	12V
Mode:	TX2402	Test Engineer:		Bast	
Note:					


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	98.4865	31.25	-17.46	13.79	43.50	-29.71	QP			
2	191.0738	33.05	-16.84	16.21	43.50	-27.29	QP			
3	236.6447	33.52	-14.83	18.69	46.00	-27.31	QP			
4	265.6757	33.14	-13.93	19.21	46.00	-26.79	QP			
5	618.5366	30.02	-6.27	23.75	46.00	-22.25	QP			



Report No.: EA21090343F00101

28 of 85

6 *	903.3093	28.63	-2.65	25.98	46.00	-20.02	QP			
-----	----------	-------	-------	-------	-------	--------	----	--	--	--

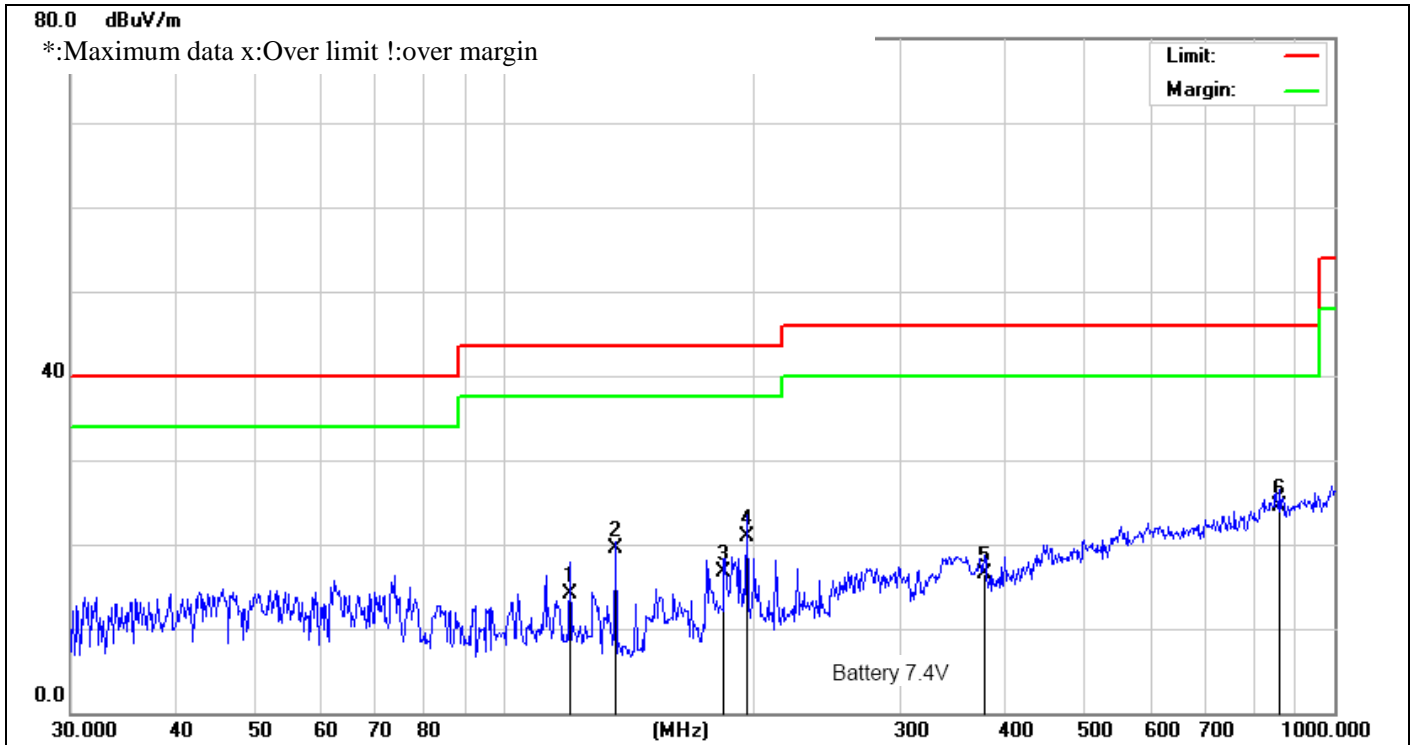

Site:	LAB	Antenna::	Vertical	Temperature(C):	26(C)
Limit:	FCC Part 15 C 3m Radiation	Humidity(%):	60%	Test Time:	2021-11-02
EUT:	M18/M12 Wireless Jobsite Speaker	Power Rating:	Battery 12V	Test Engineer:	Bast
M/N.:	Cat.No.2891-20				
Mode:	TX2402				
Note:					

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)	Remark
1	119.8555	31.20	-17.16	14.04	43.50	-29.46	QP			
2	135.9822	38.32	-18.78	19.54	43.50	-23.96	QP			
3	183.8437	34.02	-17.26	16.76	43.50	-26.74	QP			
4	195.8220	37.52	-16.56	20.96	43.50	-22.54	QP			
5	378.5842	28.32	-11.86	16.46	46.00	-29.54	QP			
6 *	860.0352	27.62	-3.19	24.43	46.00	-21.57	QP			

*:Maximum data x:Over limit !:over margin

**Above 1000MHz~10th Harmonics:**

Please refer to the following data.

Operation Mode: GFSK (CH1: 2402MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	95.55	76.32	-32.3	63.25	44.02	74	54	-10.75	-9.98
7206	V	98.55	79.58	-37.25	61.3	42.33	74	54	-12.7	-11.67
9608	V	97.65	78.27	-39.8	57.85	38.47	74	54	-16.15	-15.53
12010	V	97.02	78.02	-40.5	56.52	37.52	74	54	-17.48	-16.48
14412	V	97.02	78.22	-41.7	55.32	36.52	74	54	-18.68	-17.48
16814	V	94.32	75.62	-40	54.32	35.62	74	54	-19.68	-18.38
4804	H	94.65	75.36	-31.4	63.25	43.96	74	54	-10.75	-10.04
7206	H	95.82	77.02	-35.5	60.32	41.52	74	54	-13.68	-12.48
9608	H	96.32	77.55	-38.3	58.02	39.25	74	54	-15.98	-14.75
12010	H	96.66	77.63	-39	57.66	38.63	74	54	-16.34	-15.37
14412	H	98.32	79.22	-42	56.32	37.22	74	54	-17.68	-16.78
16814	H	94.33	75.44	-39.3	55.03	36.14	74	54	-18.97	-17.86

Operation Mode: GFSK (CH40: 2441MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4882	V	95.92	76.41	-32.3	63.62	44.11	74	54	-10.38	-9.89
7323	V	98.22	78.52	-37.2	61.02	41.32	74	54	-12.98	-12.68
9764	V	97.92	79.05	-39.6	58.32	39.45	74	54	-15.68	-14.55
12205	V	97.83	78.82	-40.5	57.33	38.32	74	54	-16.67	-15.68
14646	V	97.25	78.65	-41	56.25	37.65	74	54	-17.75	-16.35
17087	V	96.42	77.24	-41.1	55.32	36.14	74	54	-18.68	-17.86
4882	H	94.85	75.12	-31.6	63.25	43.52	74	54	-10.75	-10.48
7323	H	96.39	76.92	-35.7	60.69	41.22	74	54	-13.31	-12.78
9764	H	97.04	77.86	-38.3	58.74	39.56	74	54	-15.26	-14.44
12205	H	96.32	77.52	-39	57.32	38.52	74	54	-16.68	-15.48
14646	H	98.14	79.52	-42	56.14	37.52	74	54	-17.86	-16.48
17087	H	96.64	77.82	-41.5	55.14	36.32	74	54	-18.86	-17.68



Operation Mode: GFSK (CH79: 2480MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	95.82	76.32	-32.3	63.52	44.02	74	54	-10.48	-9.98
7440	V	98.42	79.52	-37.2	61.22	42.32	74	54	-12.78	-11.68
9920	V	97.92	79.15	-39.6	58.32	39.55	74	54	-15.68	-14.45
12400	V	98.03	79.06	-40.7	57.33	38.36	74	54	-16.67	-15.64
14880	V	97.32	78.52	-41	56.32	37.52	74	54	-17.68	-16.48
17360	V	96.24	77.12	-41.1	55.14	36.02	74	54	-18.86	-17.98
4960	H	94.82	75.73	-31.6	63.22	44.13	74	54	-10.78	-9.87
7440	H	96.73	77.02	-35.7	61.03	41.32	74	54	-12.97	-12.68
9920	H	96.42	77.68	-38.1	58.32	39.58	74	54	-15.68	-14.42
12400	H	95.33	76.58	-39	56.33	37.58	74	54	-17.67	-16.42
14880	H	97.52	78.41	-42	55.52	36.41	74	54	-18.48	-17.59
17360	H	96.86	78.35	-41.5	55.36	36.85	74	54	-18.64	-17.15

Operation Mode: Pi/4-DQPSK (CH1: 2402MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	94.42	75.32	-32.3	62.12	43.02	74	54	-11.9	-10.98
7206	V	96.83	77.43	-37.2	59.63	40.23	74	54	-14.4	-13.77
9608	V	98.12	79.32	-39.8	58.32	39.52	74	54	-15.7	-14.48
12010	V	96.82	77.82	-40.5	56.32	37.32	74	54	-17.7	-16.68
14412	V	97.95	78.84	-41.7	56.25	37.14	74	54	-17.8	-16.86
16814	V	95.74	96.03	-40	55.74	56.03	74	54	-18.3	2.03
4804	H	93.63	73.56	-31.6	62.03	41.96	74	54	-12	-12.04
7206	H	94.83	75.82	-35.5	59.33	40.32	74	54	-14.7	-13.68
9608	H	95.93	76.62	-38.3	57.63	38.32	74	54	-16.4	-15.68
12010	H	95.72	76.95	-39.4	56.32	37.55	74	54	-17.7	-16.45
14412	H	98.33	78.52	-42	56.33	36.52	74	54	-17.7	-17.48
16814	H	95.04	75.55	-39.3	55.74	36.25	74	54	-18.3	-17.75



Report No.: EA21090343F00101

31 of 85

Operation Mode: Pi/4-DQPSK (CH40: 2441MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4882	V	95.21	75.55	-32.3	62.91	43.25	74	54	-11.09	-10.75
7323	V	97.45	78.85	-37.2	60.25	41.65	74	54	-13.75	-12.35
9764	V	98.46	79.07	-39.8	58.66	39.27	74	54	-15.34	-14.73
12205	V	97.08	78.08	-40.5	56.58	37.58	74	54	-17.42	-16.42
14646	V	97.32	78.25	-41	56.32	37.25	74	54	-17.68	-16.75
17087	V	97.28	78.12	-41.1	56.18	37.02	74	54	-17.82	-16.98
4882	H	94.07	74.62	-31.6	62.47	43.02	74	54	-11.53	-10.98
7323	H	95.48	76.08	-35.5	59.98	40.58	74	54	-14.02	-13.42
9764	H	96.26	77.12	-38.3	57.96	38.82	74	54	-16.04	-15.18
12205	H	95.88	76.25	-39	56.88	37.25	74	54	-17.12	-16.75
14646	H	98.32	79.02	-42	56.32	37.02	74	54	-17.68	-16.98
17087	H	97.88	78.65	-41.4	56.48	37.25	74	54	-17.52	-16.75

Operation Mode: Pi/4-DQPSK (CH79: 2480MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	94.56	75.42	-32.3	62.26	43.12	74	54	-11.74	-10.88
7440	V	96.83	77.52	-37.2	59.63	40.32	74	54	-14.37	-13.68
9920	V	98.12	79.12	-39.8	58.32	39.32	74	54	-15.68	-14.68
12400	V	97.82	78.82	-40.5	57.32	38.32	74	54	-16.68	-15.68
14880	V	97.32	77.38	-41	56.32	36.38	74	54	-17.68	-17.62
17360	V	97.12	77.72	-41.1	56.02	36.62	74	54	-17.98	-17.38
4960	H	93.63	74.63	-31.6	62.03	43.03	74	54	-11.97	-10.97
7440	H	94.86	75.75	-35.5	59.36	40.25	74	54	-14.64	-13.75
9920	H	96.44	77.71	-38.3	58.14	39.41	74	54	-15.86	-14.59
12400	H	95.32	75.36	-39	56.32	36.36	74	54	-17.68	-17.64
14880	H	99.32	79.58	-42	57.32	37.58	74	54	-16.68	-16.42
17360	H	96.82	77.82	-41.5	55.32	36.32	74	54	-18.68	-17.68

Operation Mode: 8DPSK (CH1: 2402MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4804	V	95.7	75.52	-32.3	63.4	43.22	74	54	-10.6	-10.8
7206	V	98.52	78.89	-37.2	61.32	41.69	74	54	-12.7	-12.3
9608	V	98.43	79.14	-39.8	58.63	39.34	74	54	-15.4	-14.7
12010	V	97.82	78.82	-40.5	57.32	38.32	74	54	-16.7	-15.7
14412	V	98.72	80.05	-41.7	57.02	38.35	74	54	-17	-15.7
16814	V	96.32	77.32	-40	56.32	37.32	74	54	-17.7	-16.7
4804	H	94.75	74.9	-31.6	63.15	43.30	74	54	-10.9	-10.7
7206	H	96.82	77.52	-35.5	61.32	42.02	74	54	-12.7	-12
9608	H	96.62	77.92	-38.3	58.32	39.62	74	54	-15.7	-14.4
12010	H	96.63	77.32	-39	57.63	38.32	74	54	-16.4	-15.7
14412	H	99.32	79.11	-42	57.32	37.11	74	54	-16.7	-16.9
16814	H	94.62	75.82	-39.3	55.32	36.52	74	54	-18.7	-17.5

Operation Mode: 8DPSK (CH40: 2441MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol. H/V	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4882	V	95.42	76.04	-32.3	63.12	43.74	74	54	-10.88	-10.26
7323	V	98.43	79.33	-37.2	61.23	42.13	74	54	-12.77	-11.87
9764	V	98.12	78.82	-39.8	58.32	39.02	74	54	-15.68	-14.98
12205	V	97.82	78.75	-40.5	57.32	38.25	74	54	-16.68	-15.75
14646	V	98.25	79.02	-41	57.25	38.02	74	54	-16.75	-15.98
17087	V	97.42	78.12	-41.1	56.32	37.02	74	54	-17.68	-16.98
4882	H	94.62	74.85	-31.6	63.02	43.25	74	54	-10.98	-10.75
7323	H	96.75	77.82	-35.5	61.25	42.32	74	54	-12.75	-11.68
9764	H	96.62	77.82	-38.3	58.32	39.52	74	54	-15.68	-14.48
12205	H	96.62	77.63	-39	57.62	38.63	74	54	-16.38	-15.37
14646	H	98.78	79.45	-42	56.78	37.45	74	54	-17.22	-16.55
17087	H	96.53	78.08	-41.5	55.03	36.58	74	54	-18.97	-17.42


Operation Mode: 8DPSK (CH79: 2480MHz) Test Date : 2021-11-03

Freq. (MHz)	Ant. Pol.	Reading Level(dBuV/m)		Correct Factor dB	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
4960	V	94.32	75.62	-32.3	62.02	43.32	74	54	-11.98	-10.68
7440	V	97.53	78.53	-37.2	60.33	41.33	74	54	-13.67	-12.67
9920	V	98.12	79.32	-39.8	58.32	39.52	74	54	-15.68	-14.48
12400	V	97.82	78.82	-40.5	57.32	38.32	74	54	-16.68	-15.68
14880	V	97.33	78.12	-41	56.33	37.12	74	54	-17.67	-16.88
17360	V	96.79	77.73	-41.1	55.69	36.63	74	54	-18.31	-17.37
4960	H	93.73	74.23	-31.6	62.13	42.63	74	54	-11.87	-11.37
7440	H	95.82	76.52	-35.5	60.32	41.02	74	54	-13.68	-12.98
9920	H	96.85	77.74	-38.3	58.55	39.44	74	54	-15.45	-14.56
12400	H	96.69	77.62	-39	57.69	38.62	74	54	-16.31	-15.38
14880	H	98.32	79.85	-42	56.32	37.85	74	54	-17.68	-16.15
17360	H	96.82	77.64	-41.5	55.32	36.14	74	54	-18.68	-17.86

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
 - (4) Measuring frequencies from 1GHz to 25GHz.

7.5 Radiated Measurement Photos:

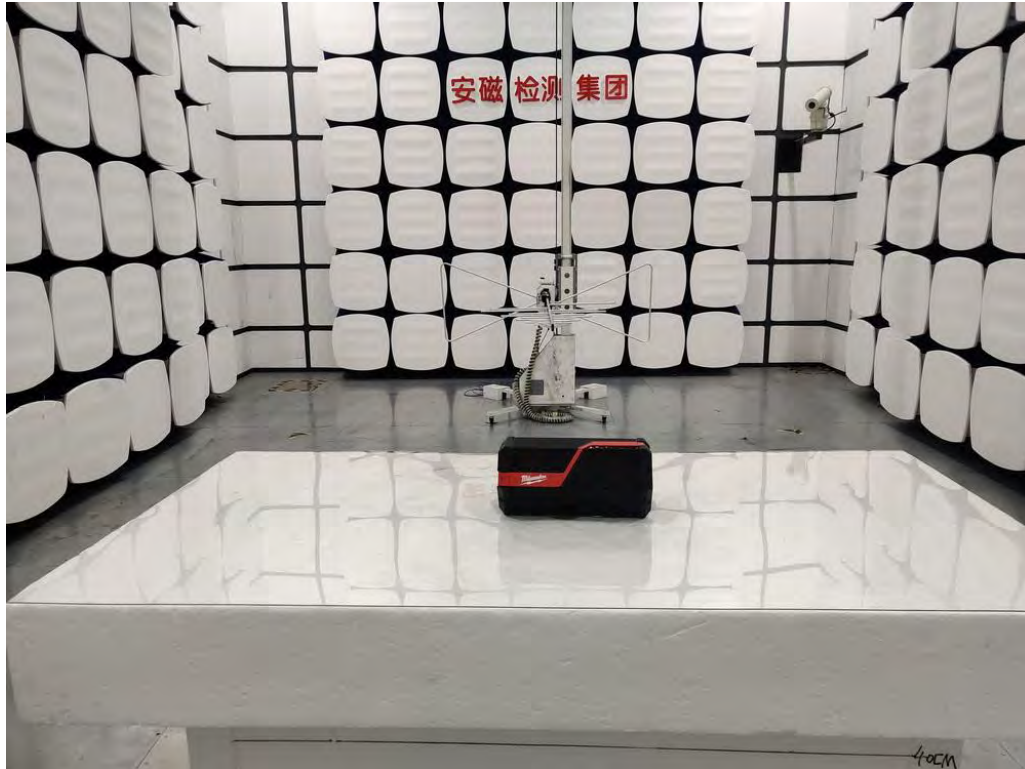


8. Channel Separation test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2021-11-19
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2021-11-19

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

8.4 Measurement Results:

Refer to attached data chart.



Report No.: EA21090343F00101


36 of 85

Spectrum Detector:	PK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 20dB Down BW(kHz)
1	2402	1001	>942
40	2441	1001	>946
79	2480	1001	>939



Date: 29.OCT.2021 14:57:44

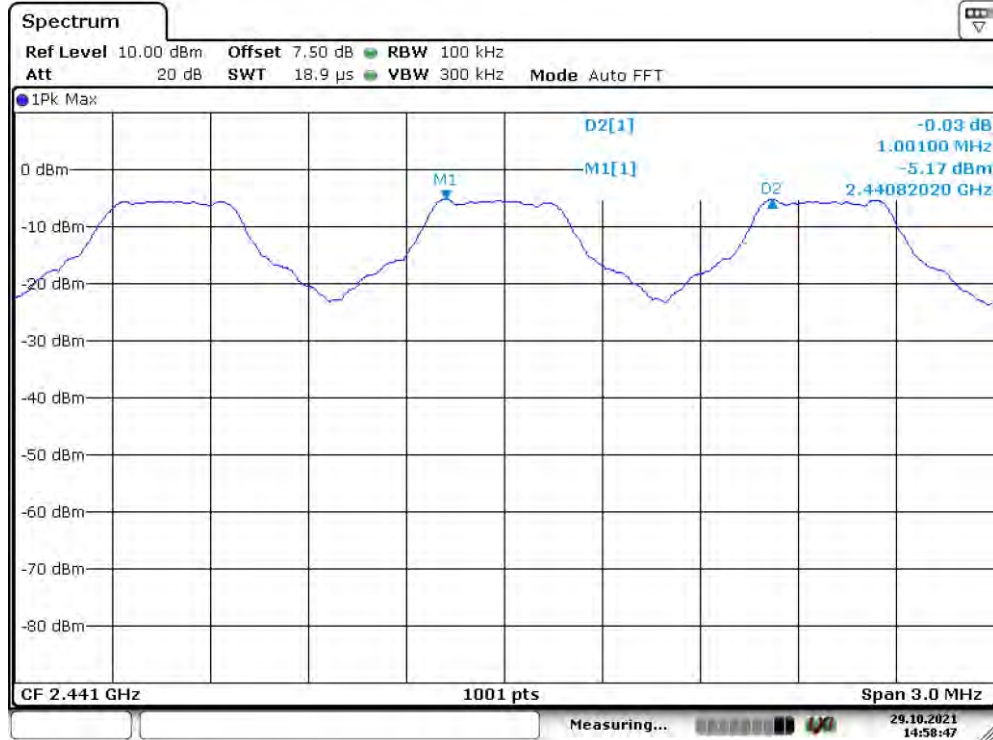

Date: 29.OCT.2021 14:58:46




Date: 29.OCT.2021 14:59:14

Spectrum Detector:	PK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	Π/4-DQPSK		


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>893
40	2441	1001	>877
79	2480	1001	>887



Date: 29.OCT.2021 15:00:21

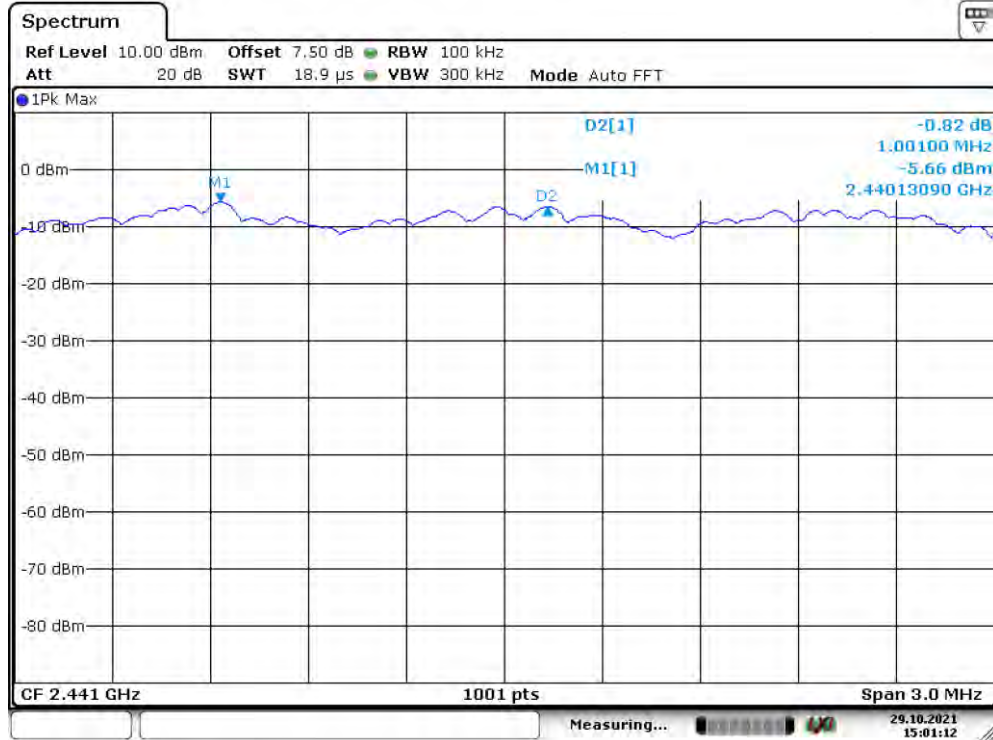

Date: 29.OCT.2021 15:01:12

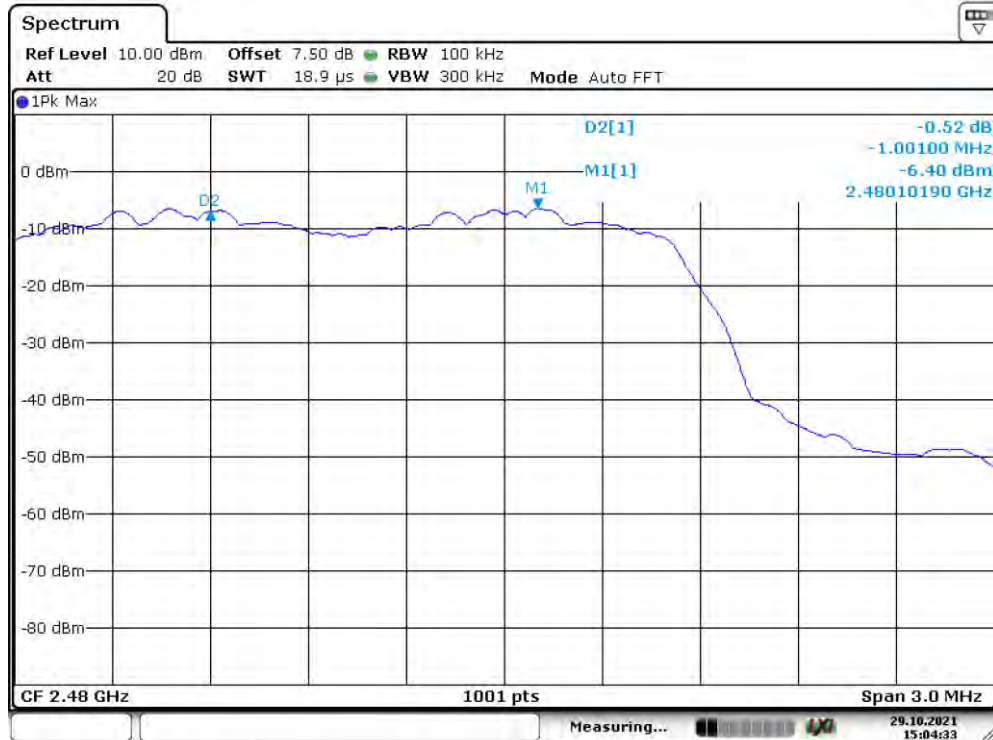


Date: 29.OCT.2021 15:04:33

Spectrum Detector:	PK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1001	>872
40	2441	1001	>857
79	2480	1001	>869



Date: 29.OCT.2021 15:05:42

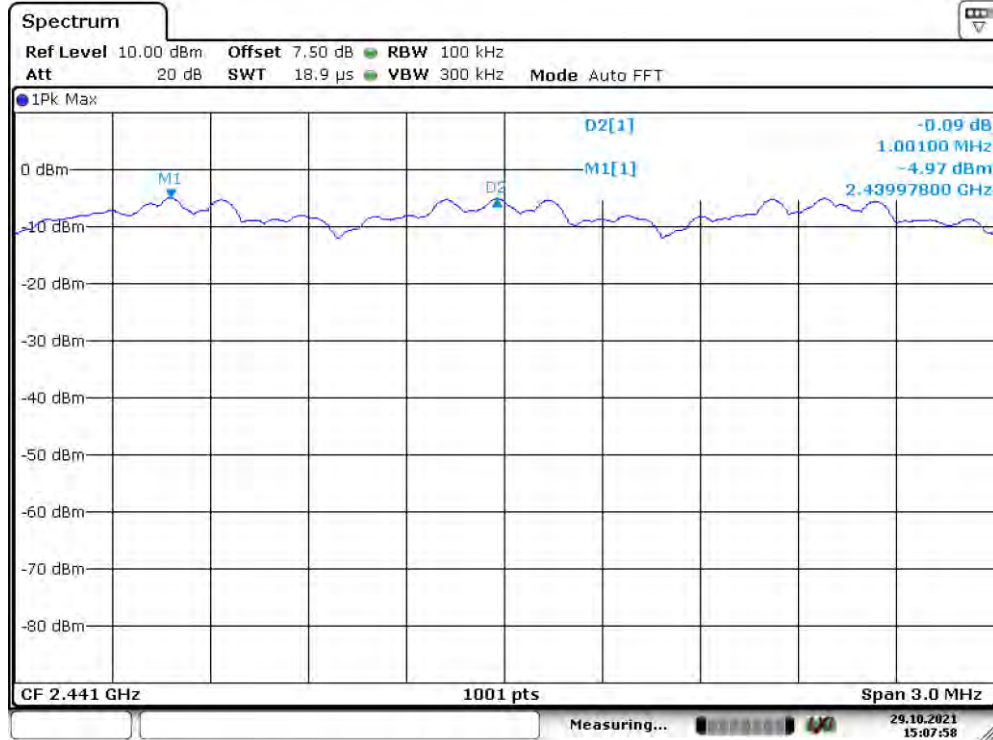

Date: 29.OCT.2021 15:07:58




Date: 29.OCT.2021 15:08:55

9. 20dB Bandwidth test

9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2021-11-19
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2021-11-19


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	942
40	2441	946
79	2480	939

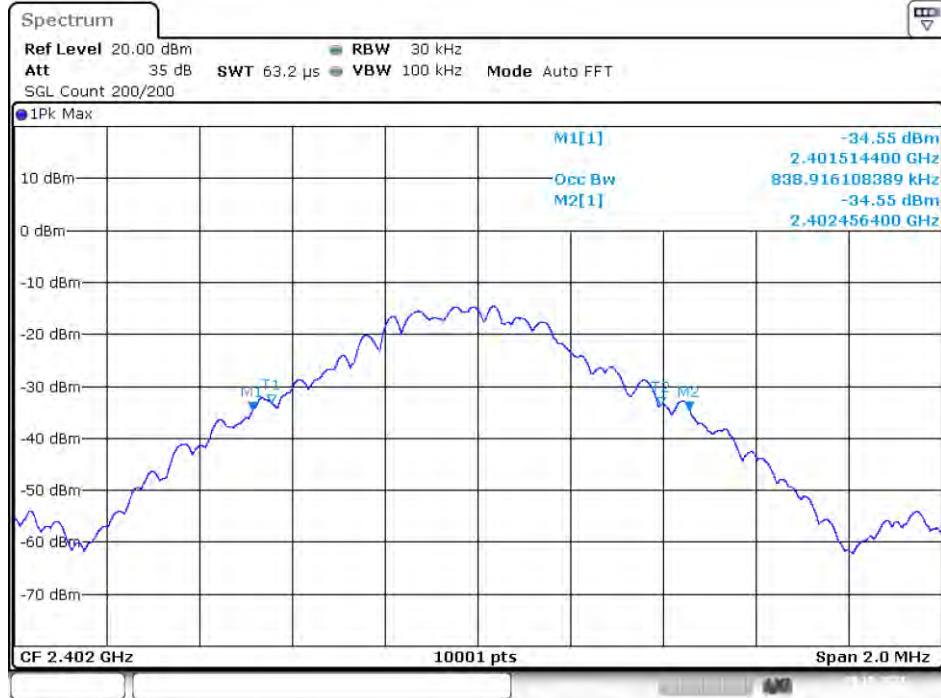

Date: 29.OCT.2021 14:09:05



Date: 29.OCT.2021 14:17:24

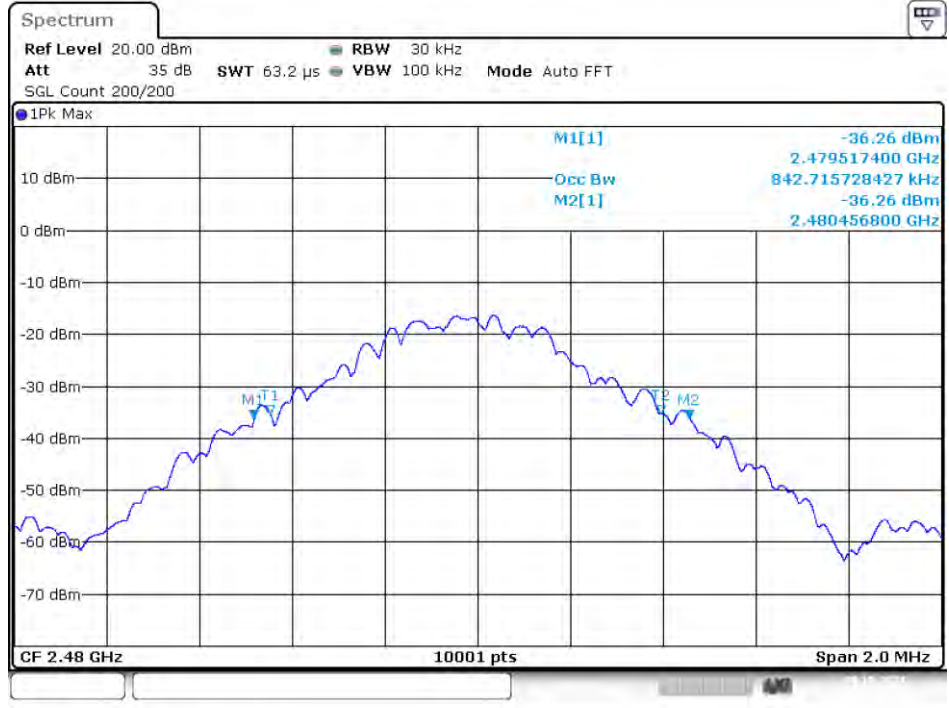

Date: 29.OCT.2021 14:18:57


Report No.: EA21090343F00101

45 of 85

Spectrum Detector: PK
 Test By: Best
 Test Result: PASS
 Modulation: П/4-DQPSK

Test Date : Oct. 29, 2021
 Temperature : 24°C
 Humidity : 53 %


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1340
40	2441	1316
79	2480	1331

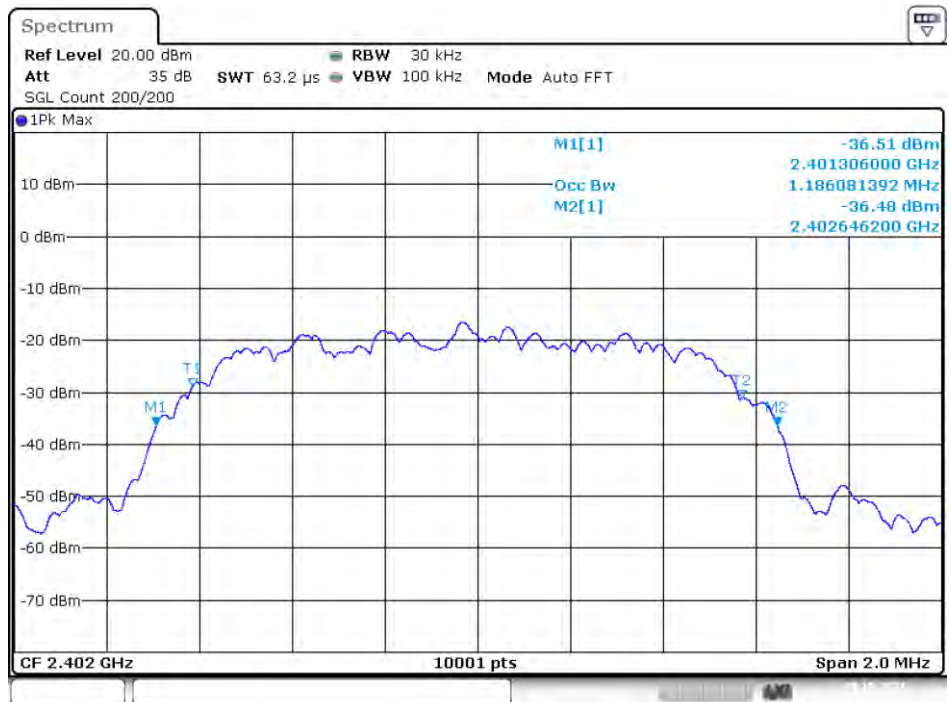

Date: 29.OCT.2021 14:24:15



Date: 29.OCT.2021 14:29:41

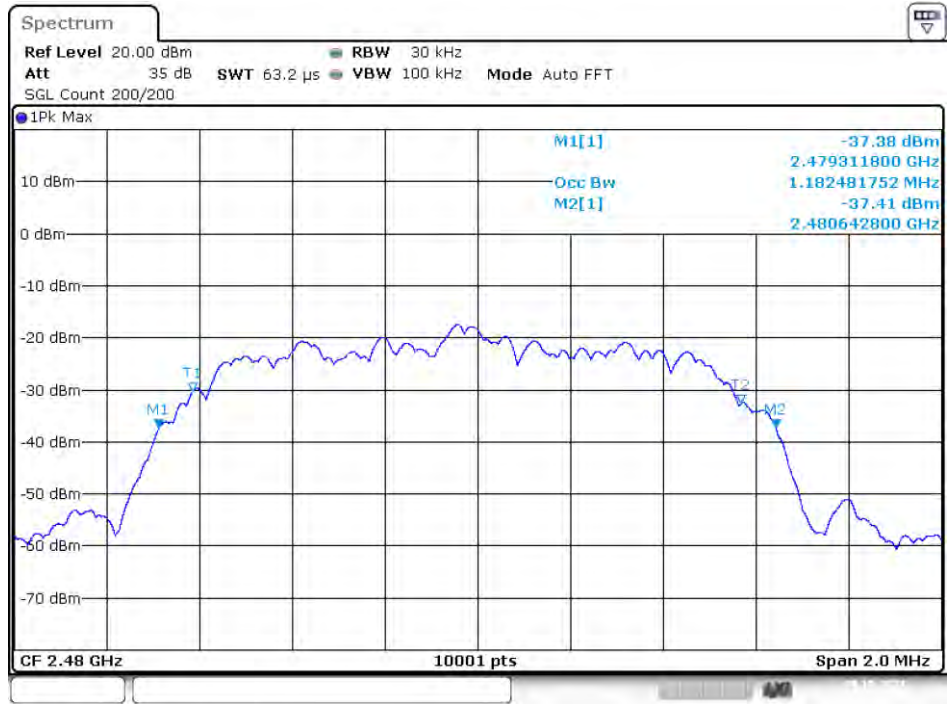


Date: 29.OCT.2021 14:31:01


Spectrum Detector: PK
 Test By: Best
 Test Result: PASS
 Modulation: 8DPSK

Test Date : Oct. 29, 2021
 Temperature : 24°C
 Humidity : 53 %


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1308
40	2441	1286
79	2480	1304

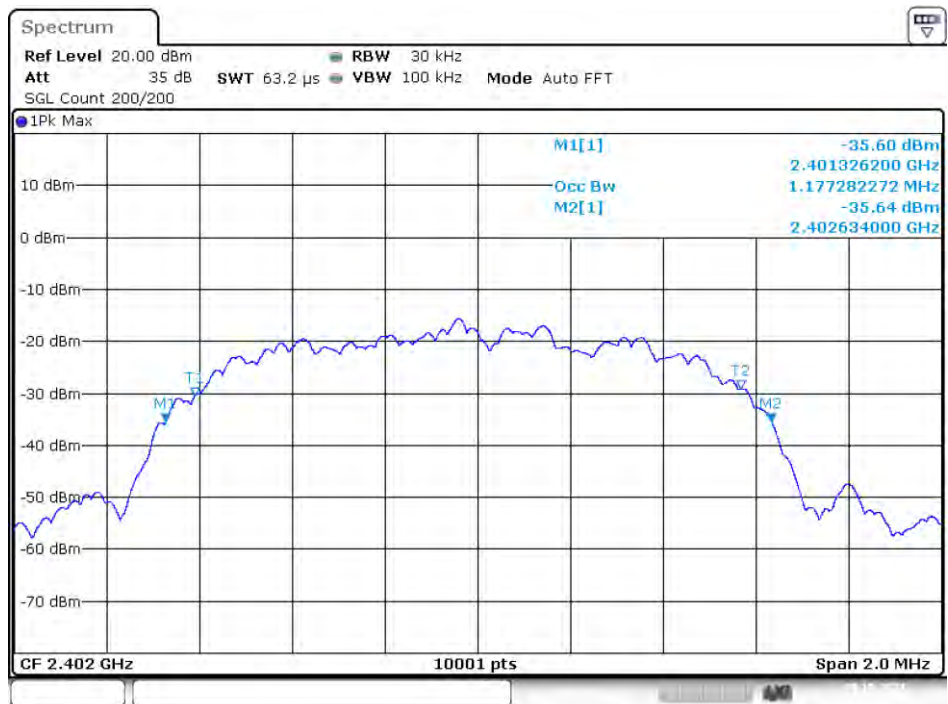

Date: 29.OCT.2021 14:34:45

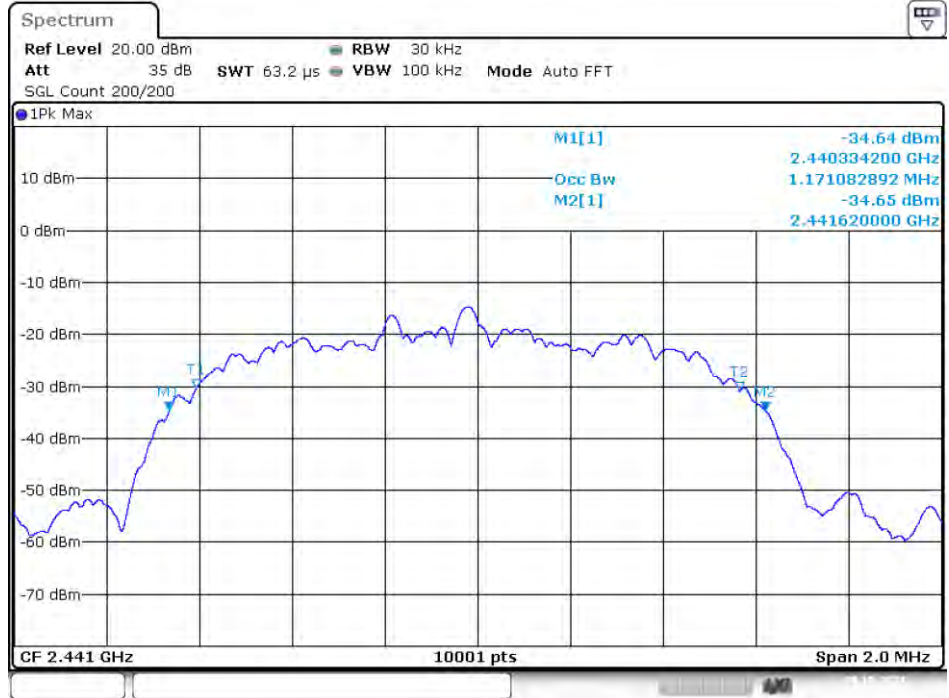

Date: 29.OCT.2021 14:45:27

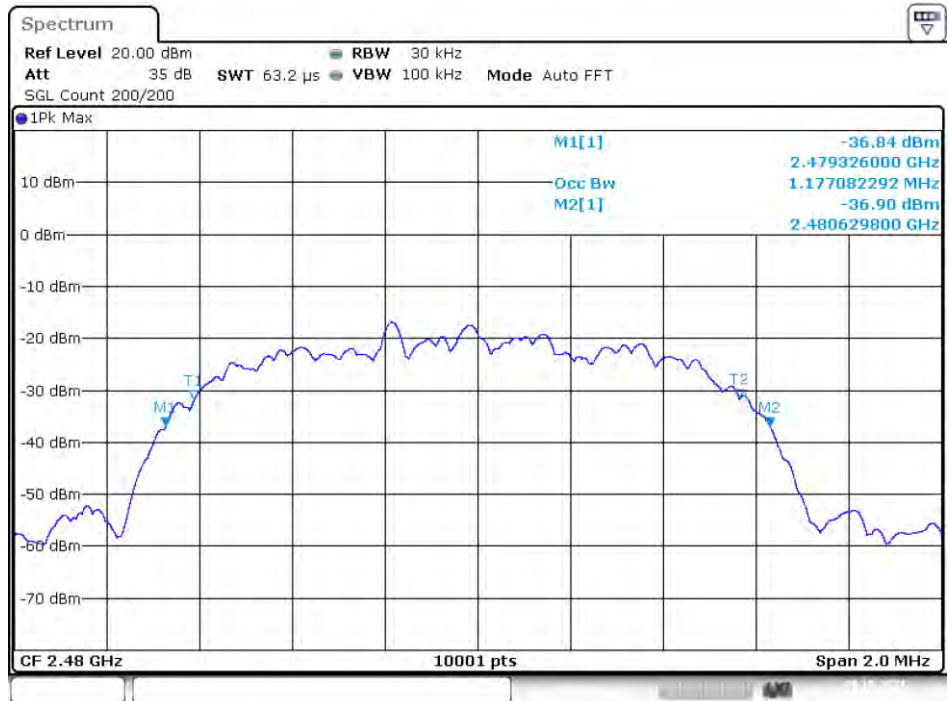

Date: 29.OCT.2021 14:43:55

10. Quantity of Hopping Channel Test

10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2021-11-19
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2021-11-19


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

10.4 Measurement Results:

Refer to attached data chart.

Worst Test Mode	GFSK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

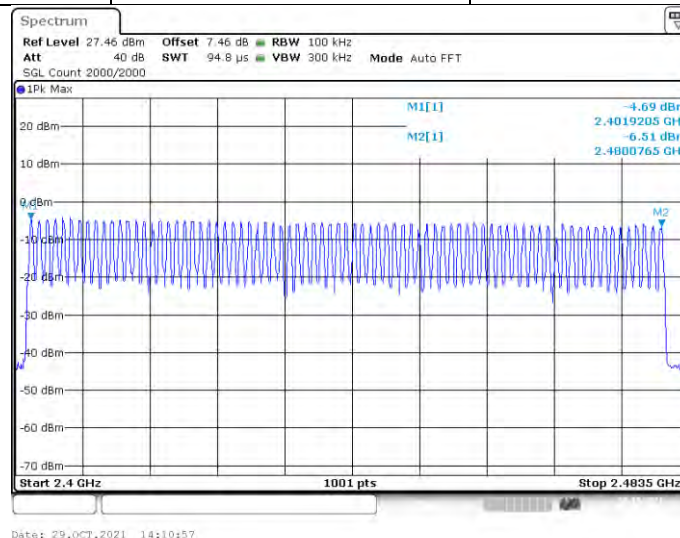

11. Time of Occupancy (Dwell Time) test

11.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:


$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate = $1600 * 1/\text{s}$ for DH1 packets = 1600 s^{-1}
- hop rate = $1600/3 * 1/\text{s}$ for DH3 packets = 533.33 s^{-1}
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

11.2 Test SET-UP (Block Diagram of Configuration)



11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2021-11-19
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2021-11-19

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

11.4 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.


Modulation:	GFSK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

11.5 Test result

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.385	123.2	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.641	262.56	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.890	308.28	400


Remark: The results of worst cased was recorded.

DH1:

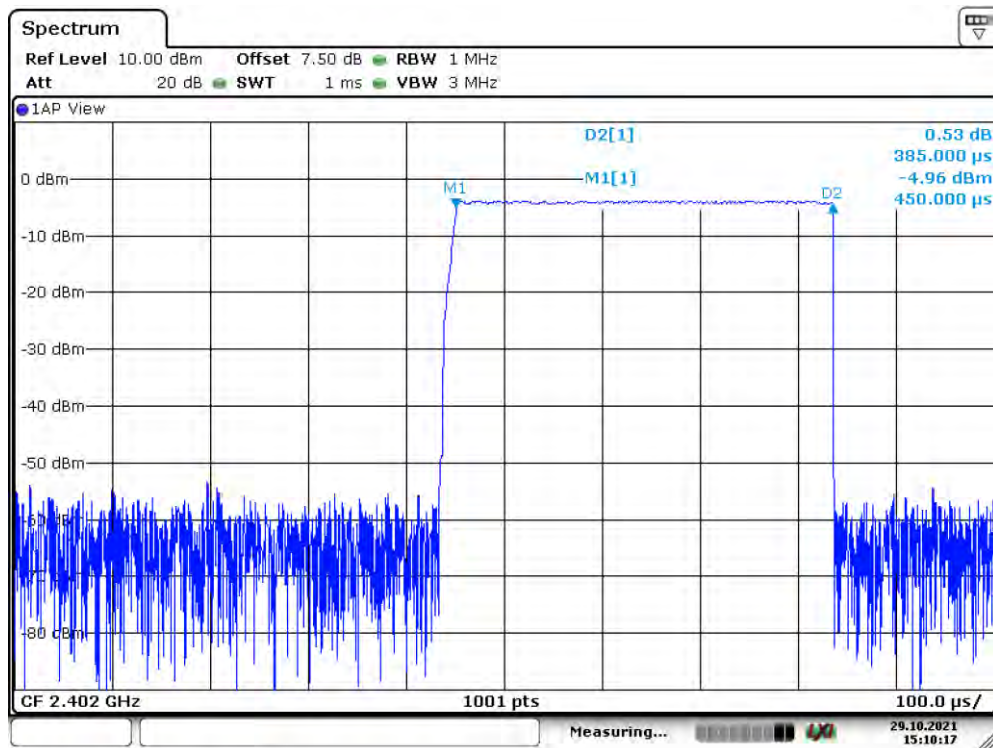


Date: 29.OCT.2021 15:10:16

DH3:

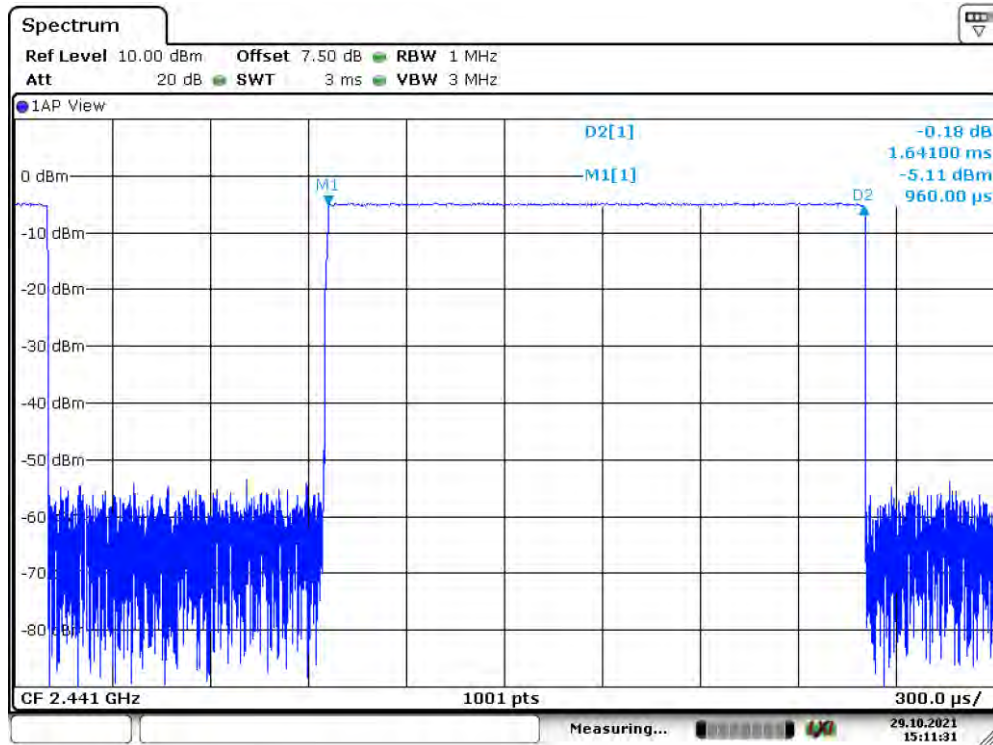

Date: 29.OCT.2021 15:11:30

DH5:

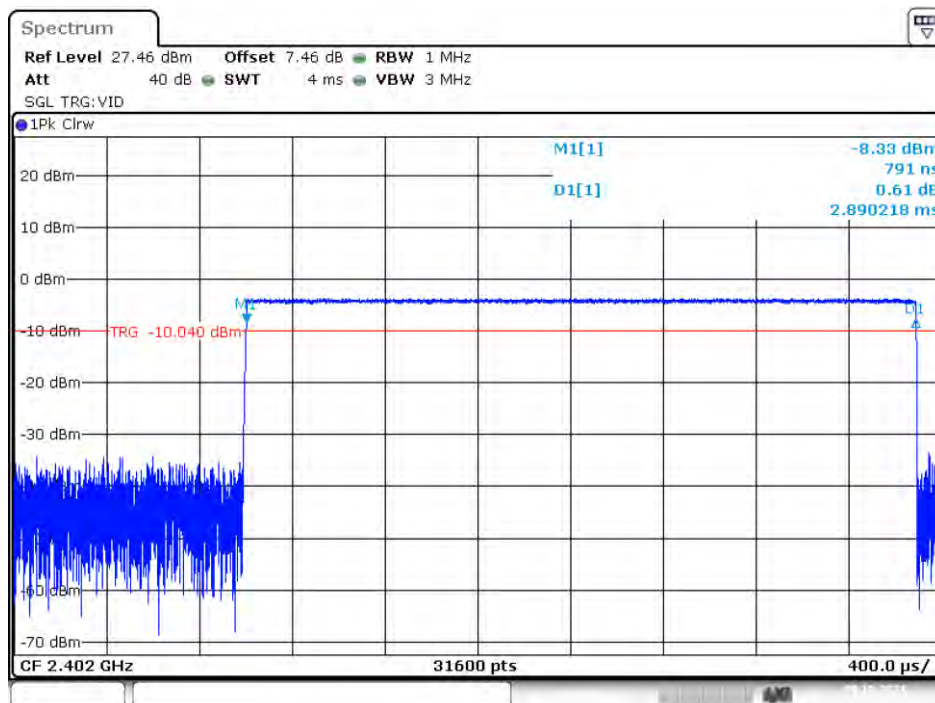

Date: 29.OCT.2021 14:11:17

12. MAXIMUM PEAK OUTPUT POWER TEST

12.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

12.2 Test SET-UP (Block Diagram of Configuration)



12.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2021-11-19
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2021-11-19


Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


12.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-3.85	0.412	1000	PASS
40	2441	-4.67	0.341	1000	PASS
79	2480	-5.34	0.292	1000	PASS

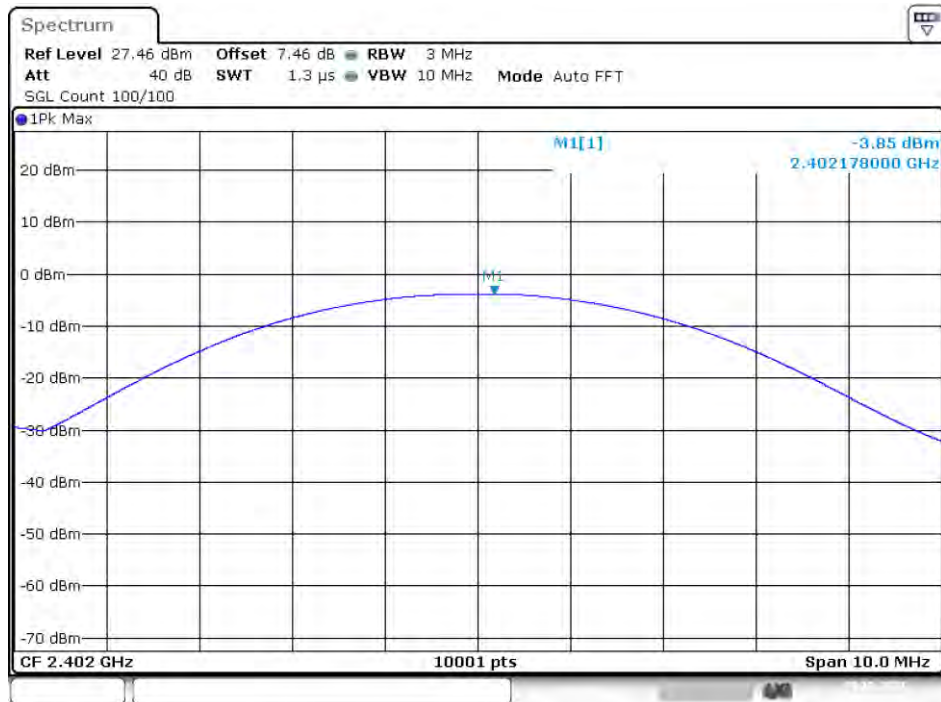

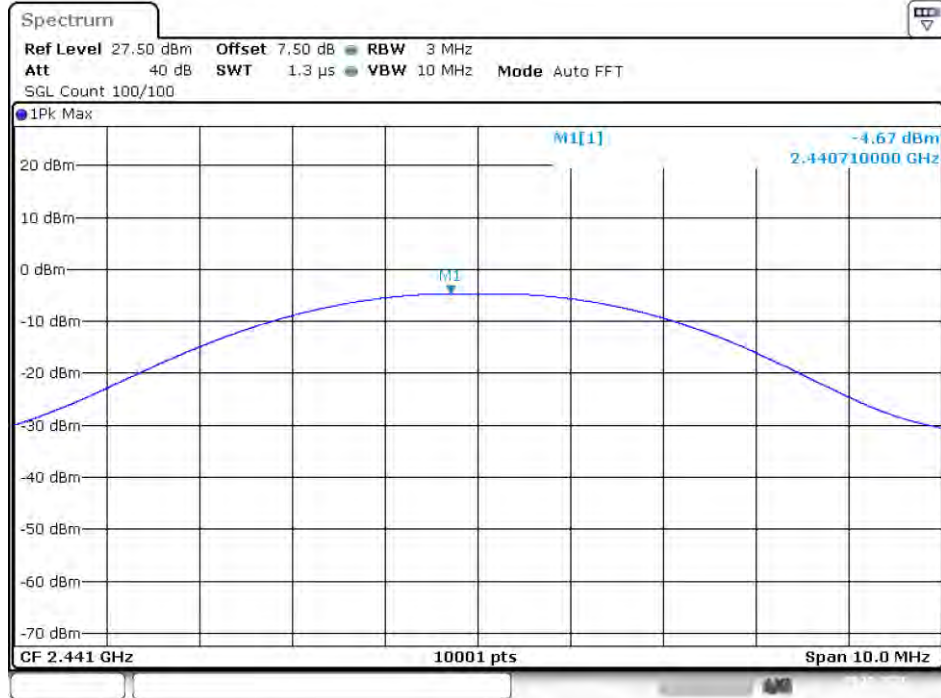

Date: 29.OCT.2021 14:16:48

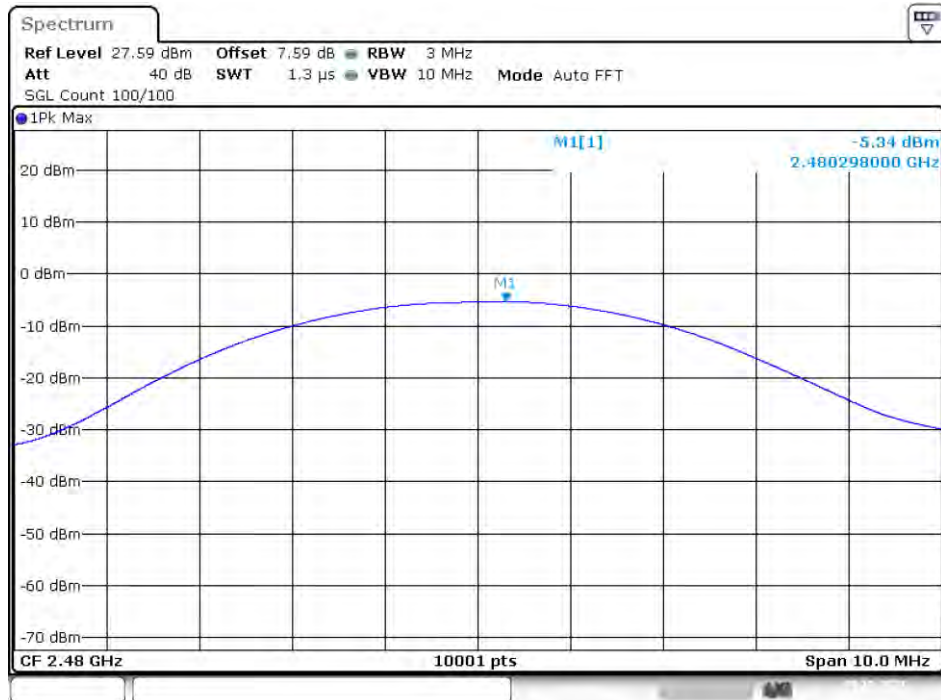


Date: 29.OCT.2021 14:18:40




Report No.: EA21090343F00101
Spectrum Detector: PK
Test By: Best
Test Result: PASS
Modulation: $\pi/4$ -DQPSK

56 of 85
Test Date : Oct. 29, 2021
Temperature : 24 °C
Humidity : 53 %


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-1.86	0.652	125	PASS
40	2441	-2.59	0.551	125	PASS
79	2480	-2.8	0.525	125	PASS

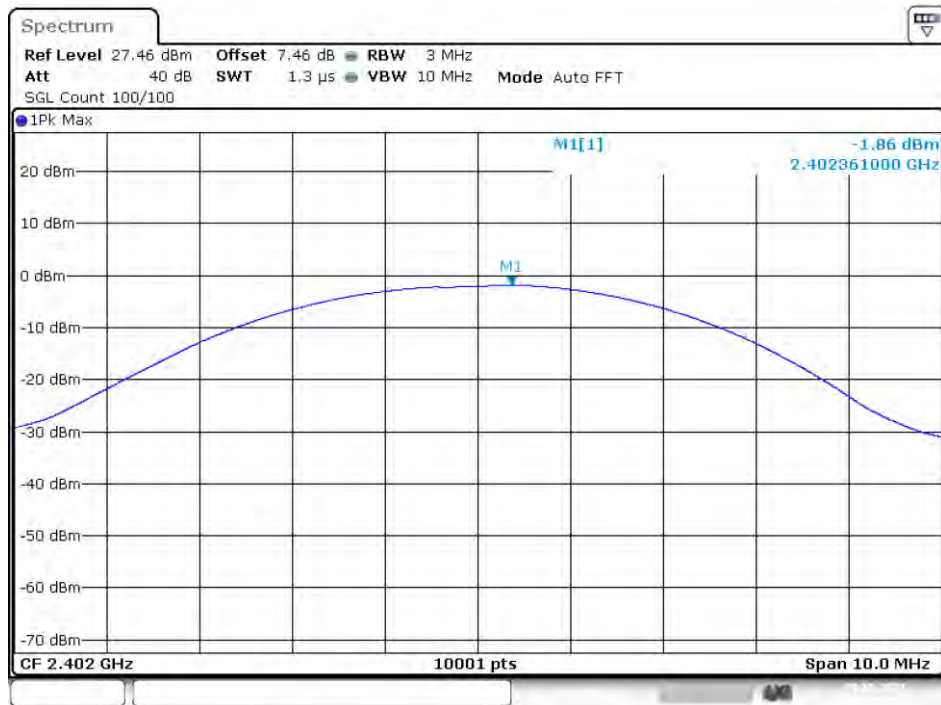

Date: 29.OCT.2021 14:20:23

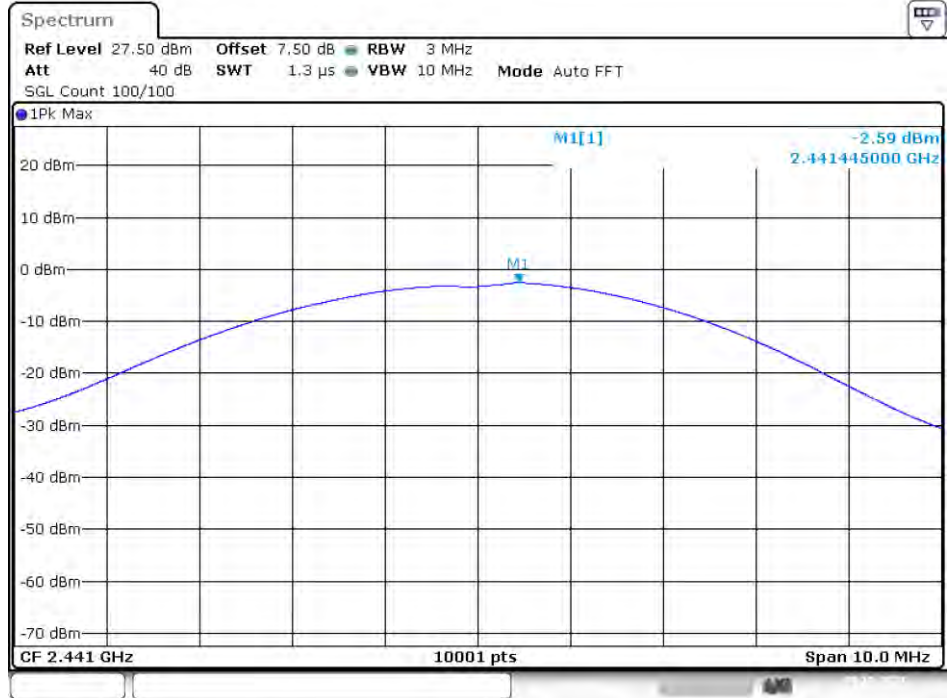

Date: 29.OCT.2021 14:29:26

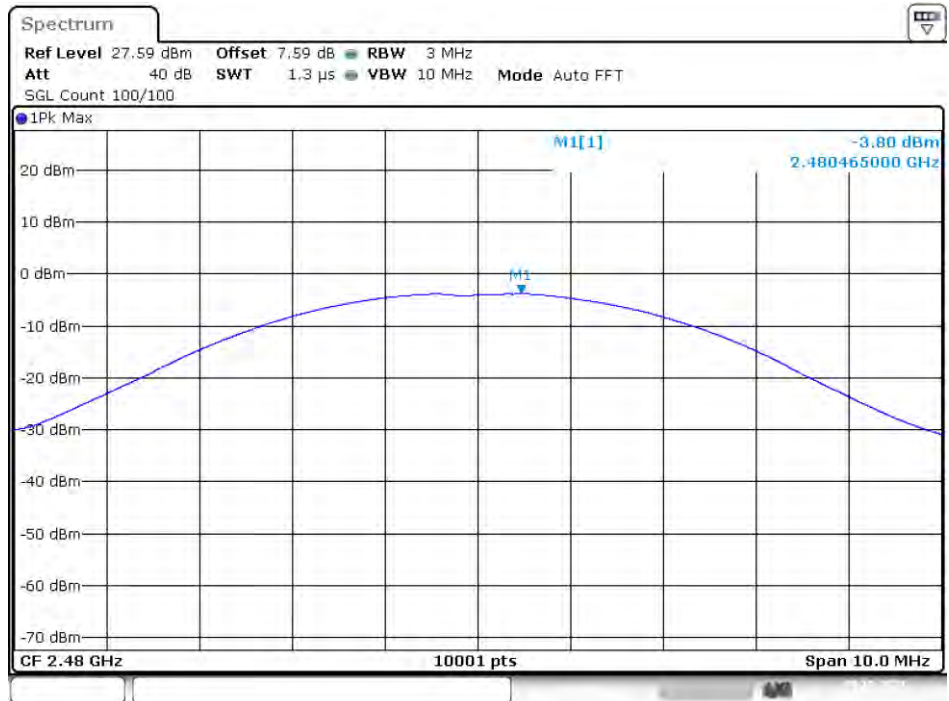


Date: 29.OCT.2021 14:30:44




Report No.: EA21090343F00101
Spectrum Detector: PK
Test By: Best
Test Result: PASS
Modulation: 8DPSK

58 of 85
Test Date : 2021-11-03
Temperature : 24 °C
Humidity : 53 %


Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
01	2402	-1.45	0.716	125	PASS
40	2441	-2.29	0.590	125	PASS
79	2480	-2.89	0.514	125	PASS

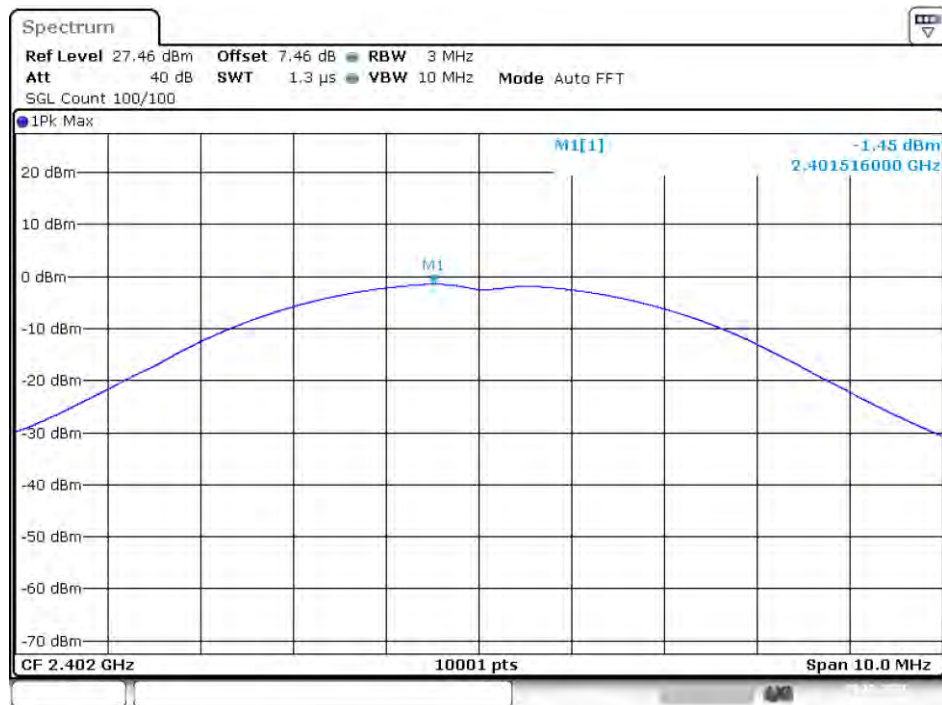

Date: 29.OCT.2021 14:34:29

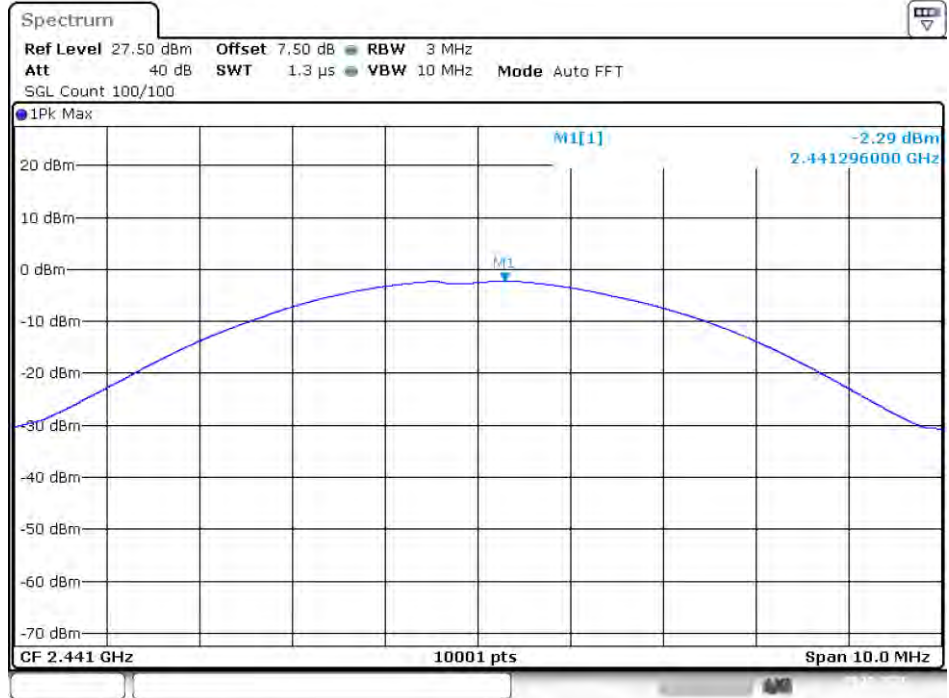

Date: 29.OCT.2021 14:45:12

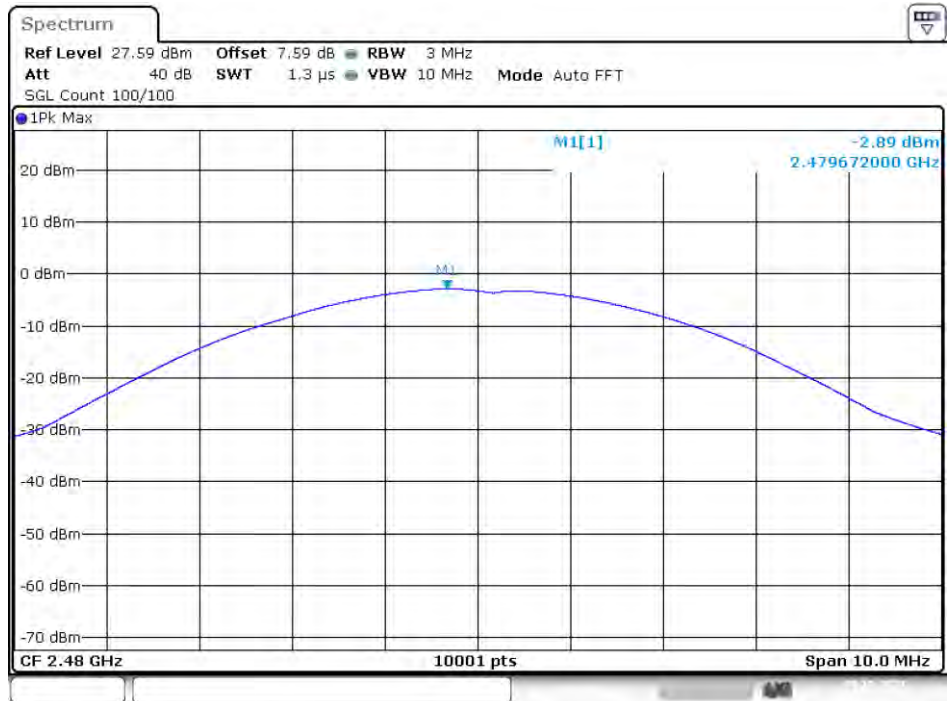

Date: 29.OCT.2021 14:43:38

13. Band EDGE test

13.1 Measurement Procedure

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the ban edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:


EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

13.2 Test SET-UP (Block Diagram of Configuration)

For Conducted Test



For Radiated emission Test

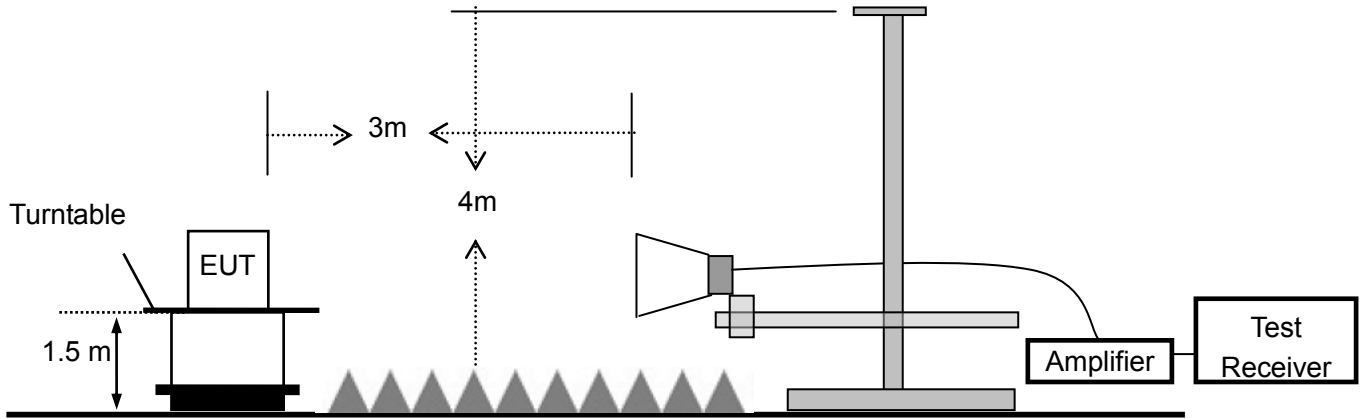

13.3 Measurement Equipment Used:

For Conducted Test

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	CALIBRATED UNTIL
Spectrum Analyzer	Rohde & Schwarz	FSV40	US40240623	2021-11-19
Coaxial Cable	Gigalink Microwave	ZT40	19022092	2021-11-19
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	2021-11-19

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

For Radiated emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Signal Analyzer	Rohde & Schwarz	FSV40	US40240623	2022-05-23
2	Broadband RF Power Amplifier	AEROFLEX	AEROFLEX100KHz-40G Hz	J1013130524 001	2022-05-23
3	DRG Horn Antenna	A.H.SYSTEMS	SAS-574	J2031090612 123	2022-05-23
4	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92J-2m	N/A	2022-05-23
5	RF Cable	Gigalink Microwave	ZT40-2.92J-2.92J-0.3m	N/A	2022-05-23

13.4 Measurement Results:

Refer to attached data chart.


Spectrum Detector:	PK	Test Date :	Oct. 29, 2021
Test By:	Best	Temperature :	24 °C
Test Result:	PASS	Humidity :	53 %

1. Conducted Test


For Non-Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2349	GFSK	-4.12	-41.78	37.66	>20dBc
2379.7	pi/4-DQPSK	-5.26	-42.21	36.95	>20dBc
2333.7	8DPSK	-3.94	-41.96	38.02	>20dBc
2497.2	GFSK	-5.88	-41.87	35.99	>20dBc
2498.2	pi/4-DQPSK	-7.26	-41.82	34.56	>20dBc
2489.7	8DPSK	-6.50	-42.90	36.40	>20dBc

Test plots of GFSK

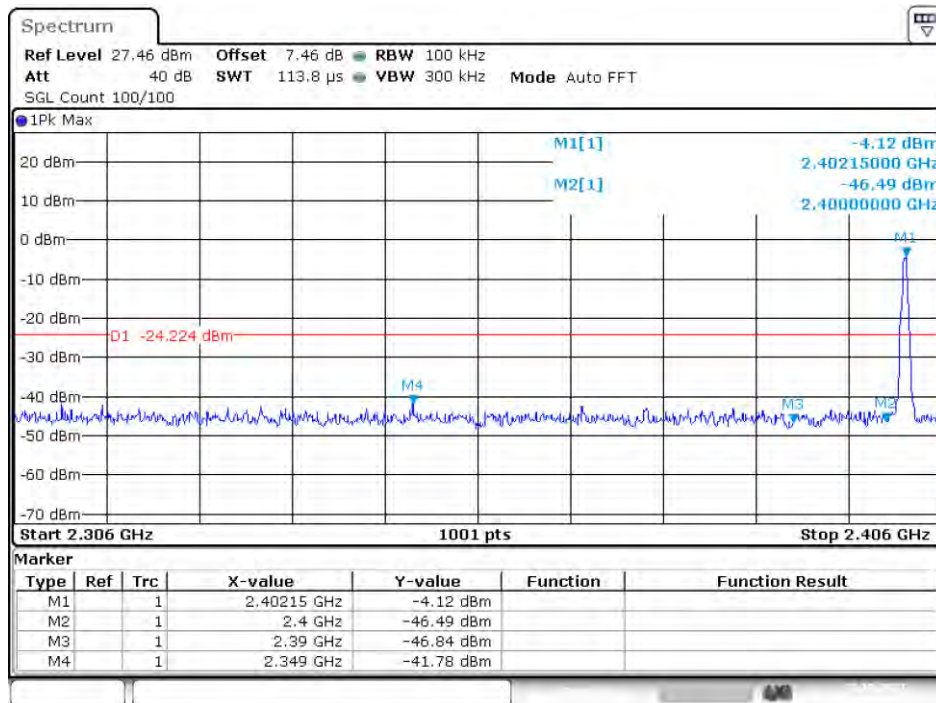


Date: 29.OCT.2021 14:09:24

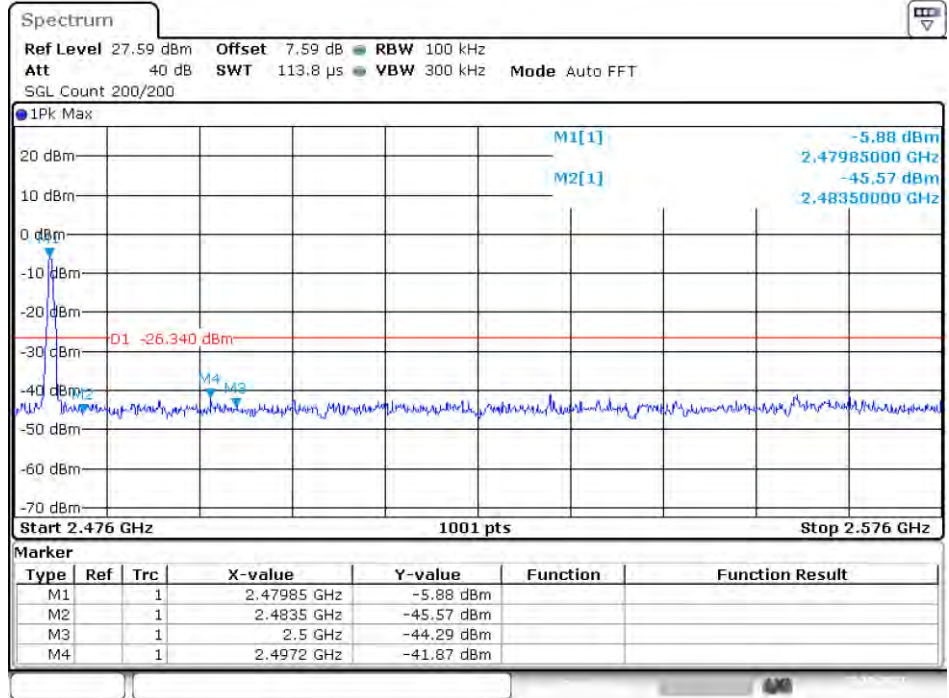


Date: 29.OCT.2021 14:19:24

Test plots of pi/4-DQPSK

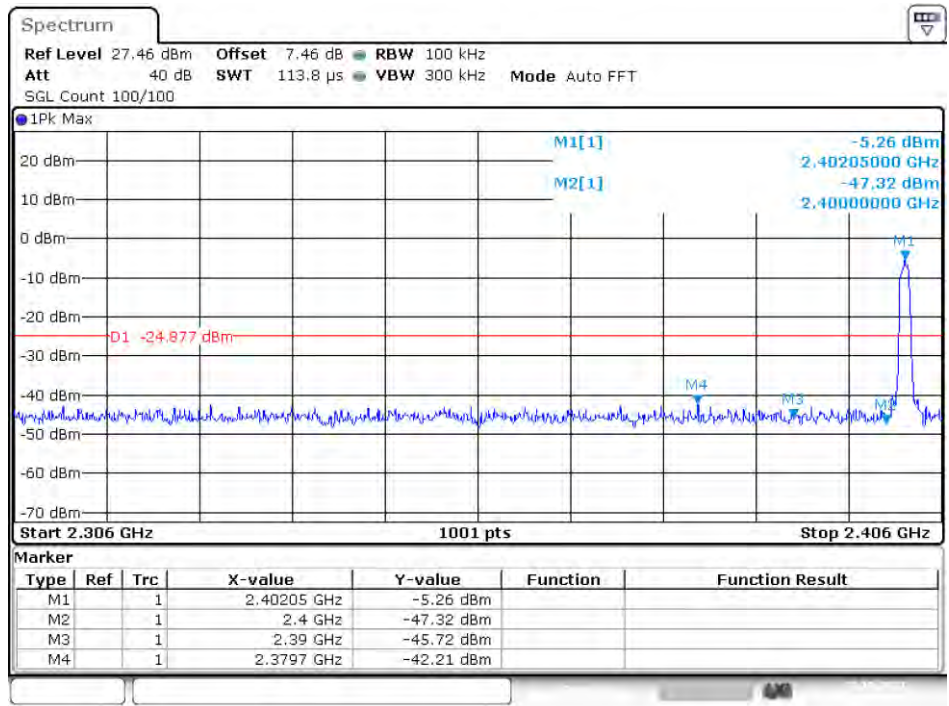


Date: 29.OCT.2021 14:24:29

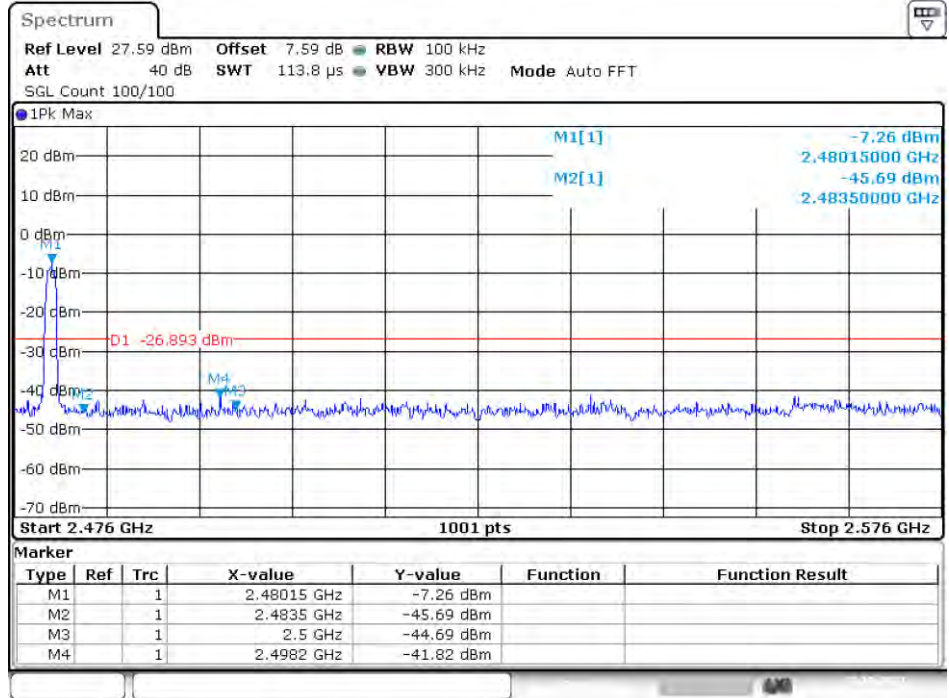


Date: 29.OCT.2021 14:31:19

Test plots of 8DPSK

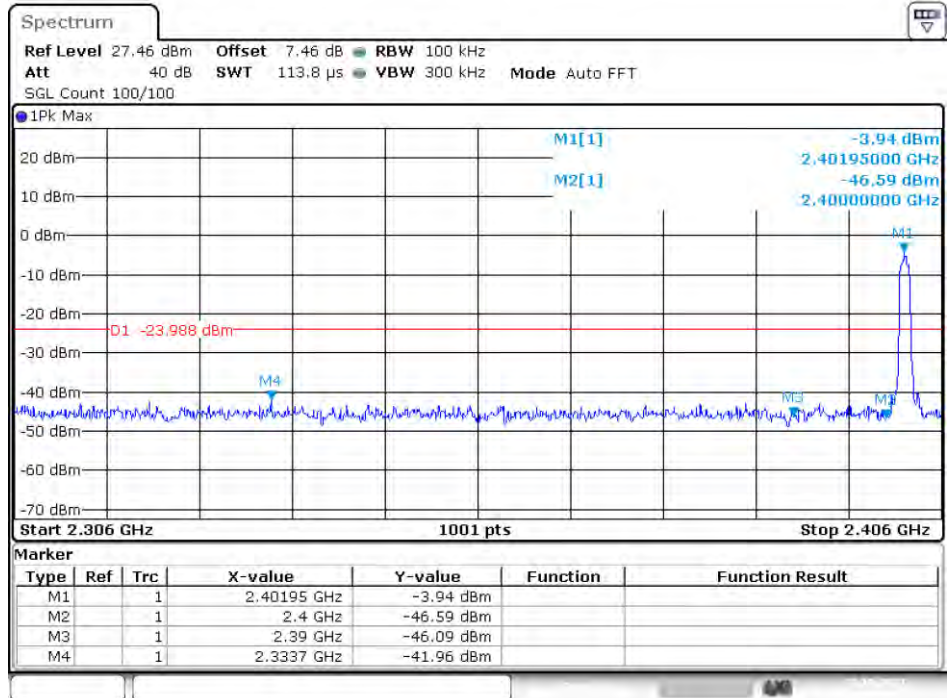

Date: 29.OCT.2021 14:35:21

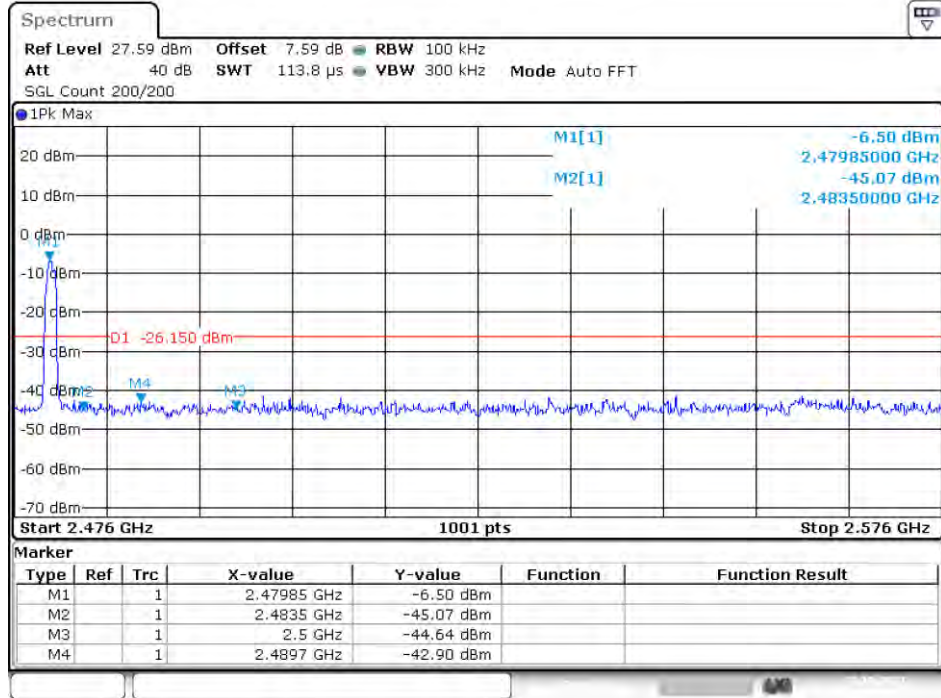


Date: 29.OCT.2021 14:44:20


For Hopping Mode:

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Emission(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2319	GFSK	-4.68	-41.79	37.11	>20dBc
2314.4	pi/4-DQPSK	-7.39	-42.51	35.12	>20dBc
2320.7	8DPSK	-6.00	-42.49	36.49	>20dBc
2490.9	GFSK	-6.45	-42.92	36.47	>20dBc
2490.7	pi/4-DQPSK	-5.97	-41.27	35.3	>20dBc
2489.5	8DPSK	-7.42	-42.56	35.14	>20dBc

Test plots of GFSK

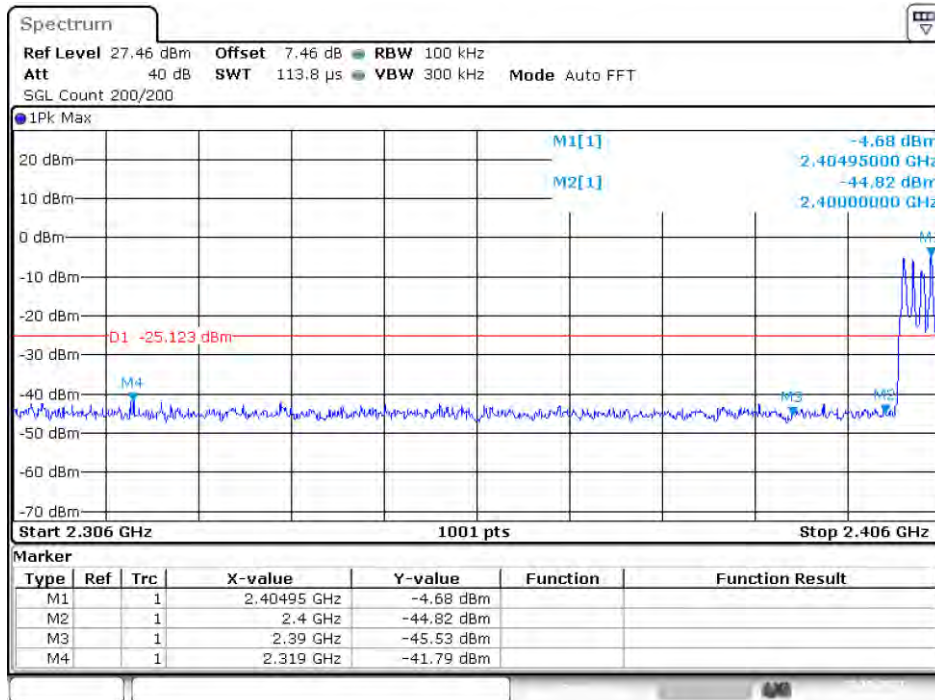


Date: 29.OCT.2021 14:11:58

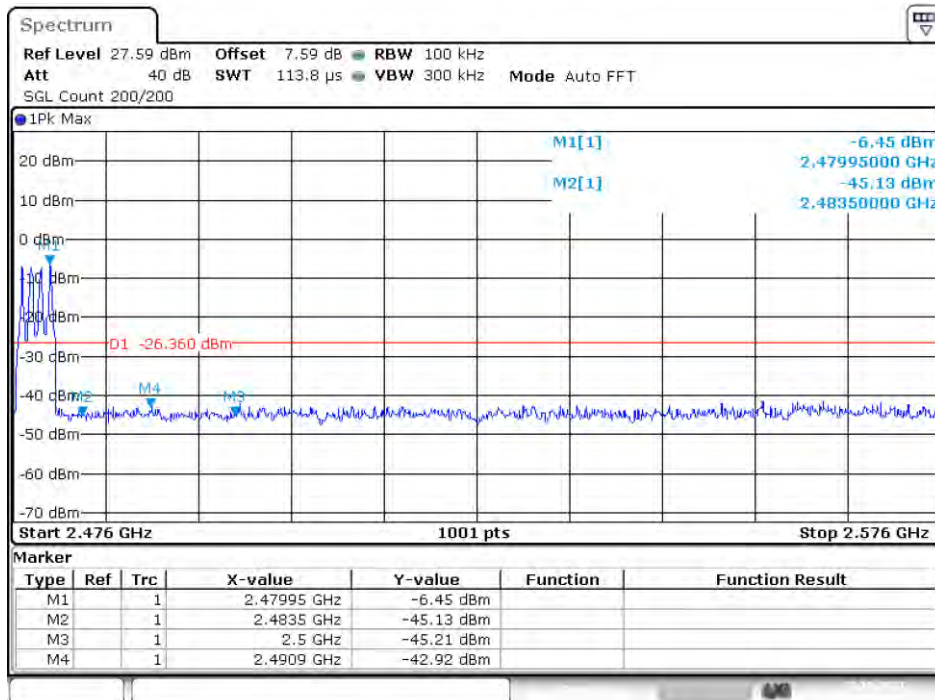


Date: 29.OCT.2021 14:16:08

Test plots of pi/4-DQPSK

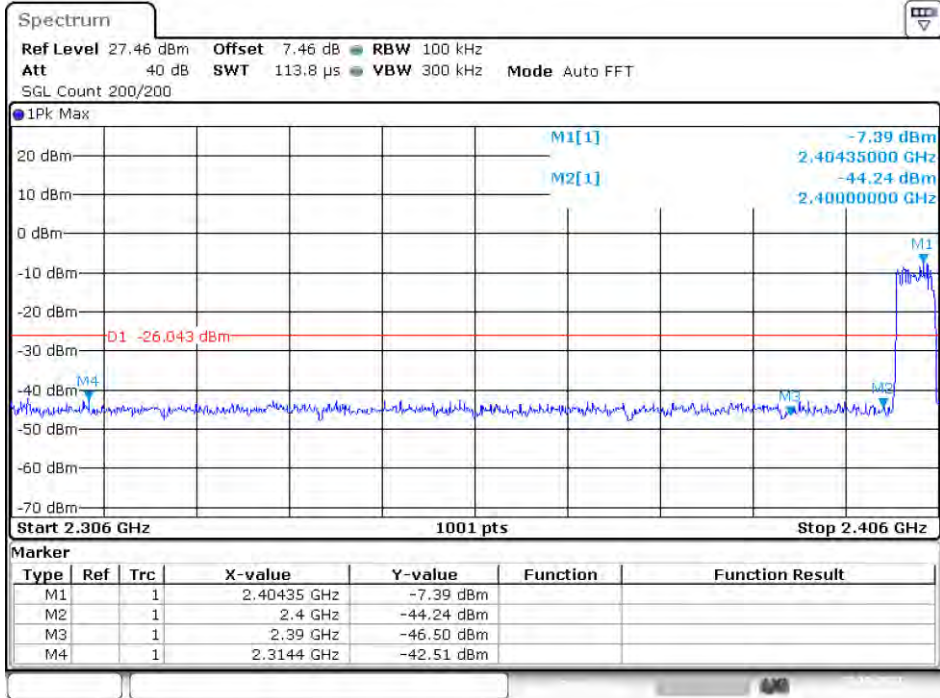


Date: 29.OCT.2021 14:27:07

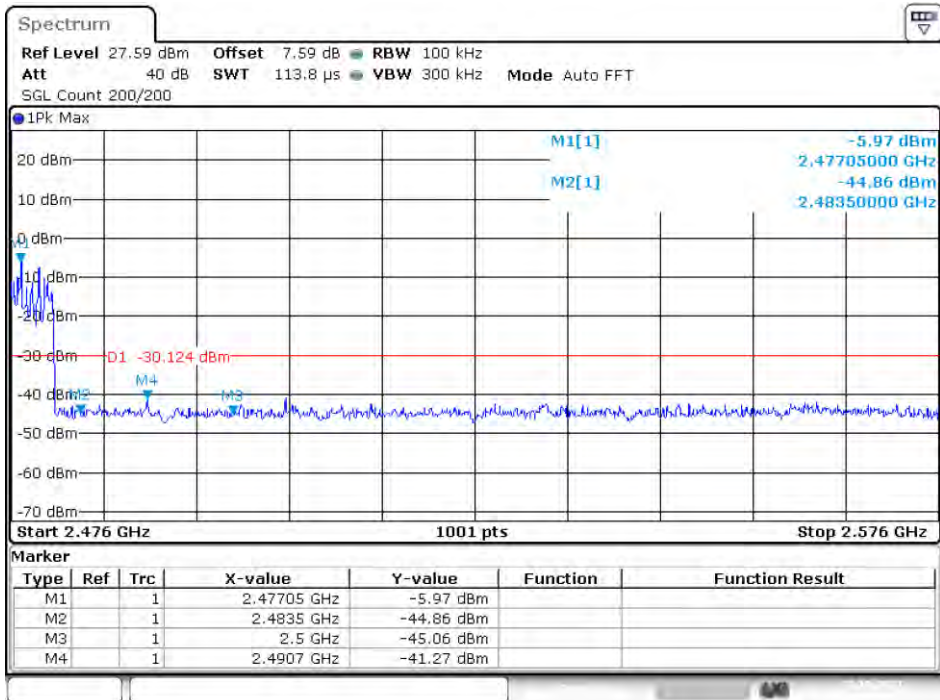


Date: 29.OCT.2021 14:33:55

Test plots of 8DPSK

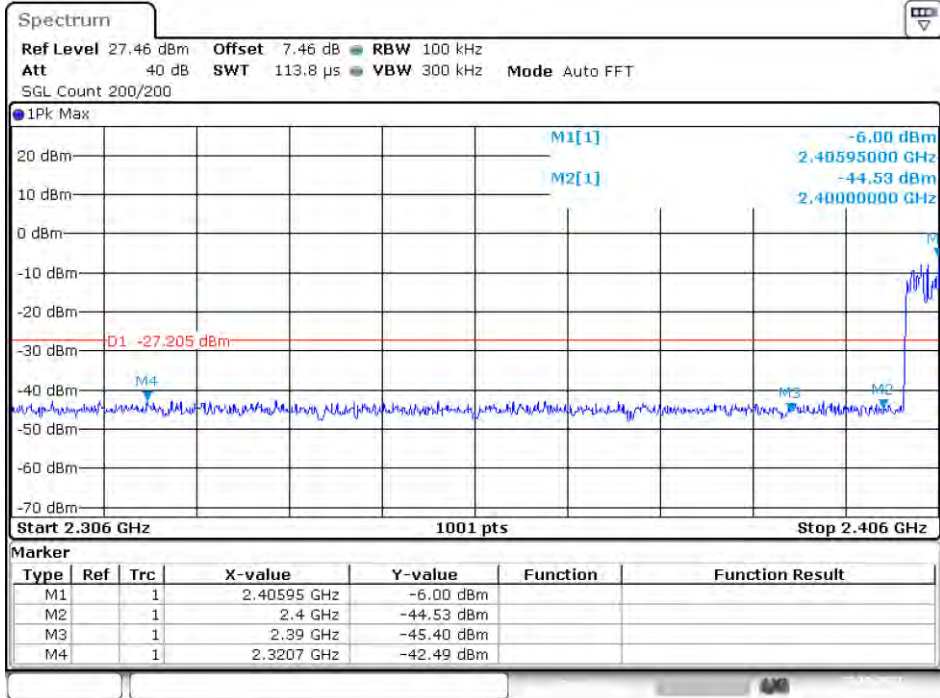

Date: 29.OCT.2021 14:38:56

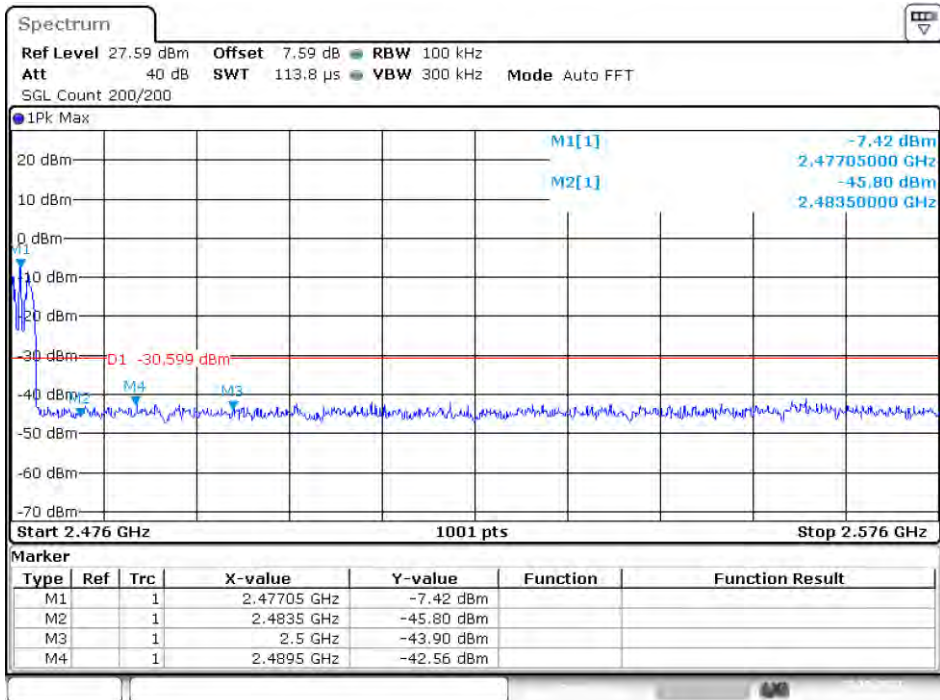


2. Radiated emission Test Worst test modulation GFSK



Report No.: EA21090343F00101
 For Non-Hopping Mode:

69 of 85

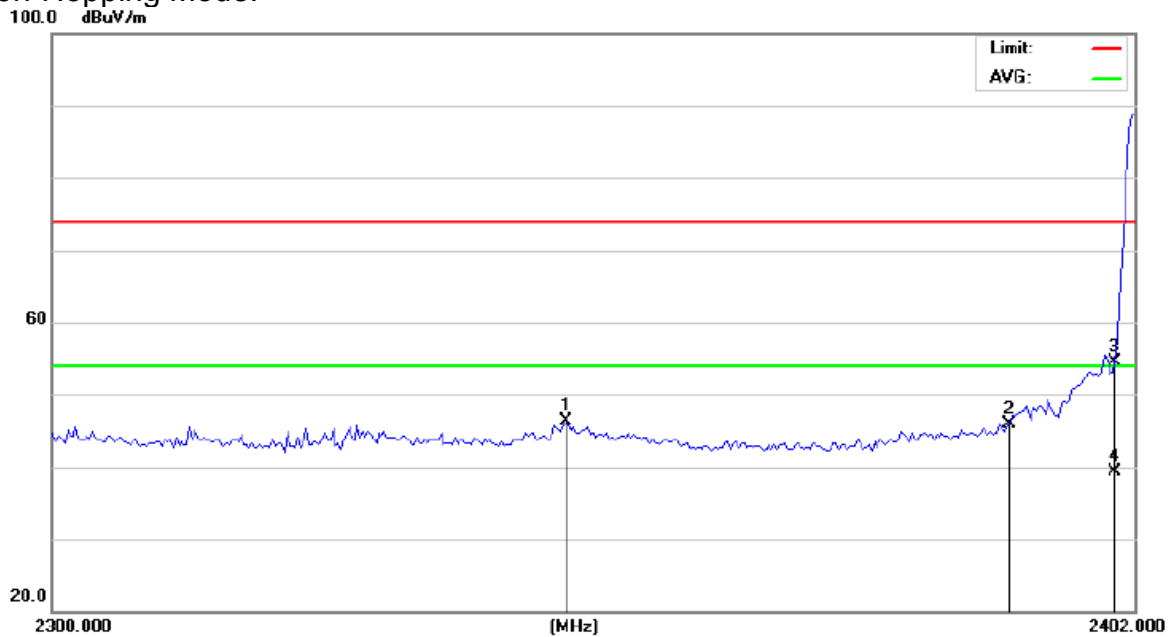

Site 843 Polarization: *Horizontal* Temperature: 26.5(C)
 Limit: FCC Part 15 C 3m Above1G(Peak) Power: Battery 18V Humidity: 60.6 %
 Mode: DSS(TX2402)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2347.898	51.34	-5.11	46.23	74.00	-27.77	peak			
2		2390.000	50.74	-4.82	45.92	74.00	-28.08	peak			
3		2400.000	59.20	-4.75	54.45	74.00	-19.55	peak			
4	*	2400.000	44.15	-4.75	39.40	54.00	-14.60	AVG			

*:Maximum data x:Over limit !:over margin


(Reference Only)



Report No.: EA21090343F00101

70 of 85

100.0 dBuV/m

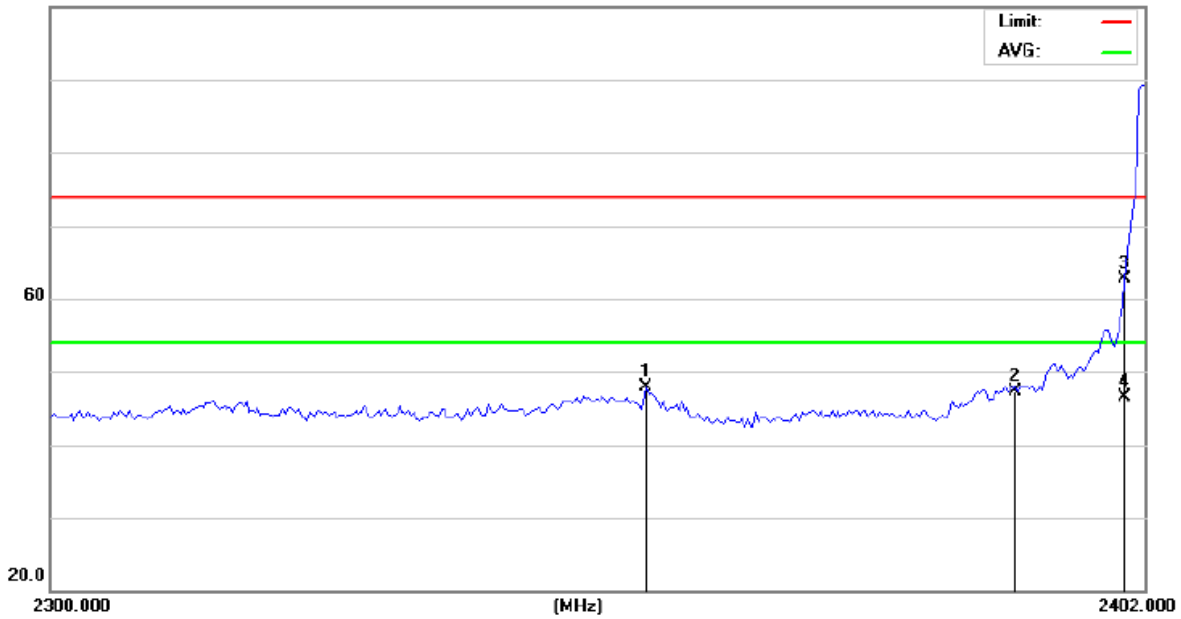

Site 843 Polarization: **Vertical** Temperature: 26.5(C)
 Limit: FCC Part 15 C 3m Above1G(Peak) Power: Battery 18V Humidity: 60.6 %
 Mode: DSS(TX2402)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2355.041	52.91	-5.06	47.85	74.00	-26.15	peak		
2		2390.000	52.18	-4.82	47.36	74.00	-26.64	peak		
3		2400.000	67.50	-4.75	62.75	74.00	-11.25	peak		
4	*	2400.000	51.22	-4.75	46.47	54.00	-7.53	AVG		


*:Maximum data x:Over limit l:over margin

⟨Reference Only



Report No.: EA21090343F00101

71 of 85

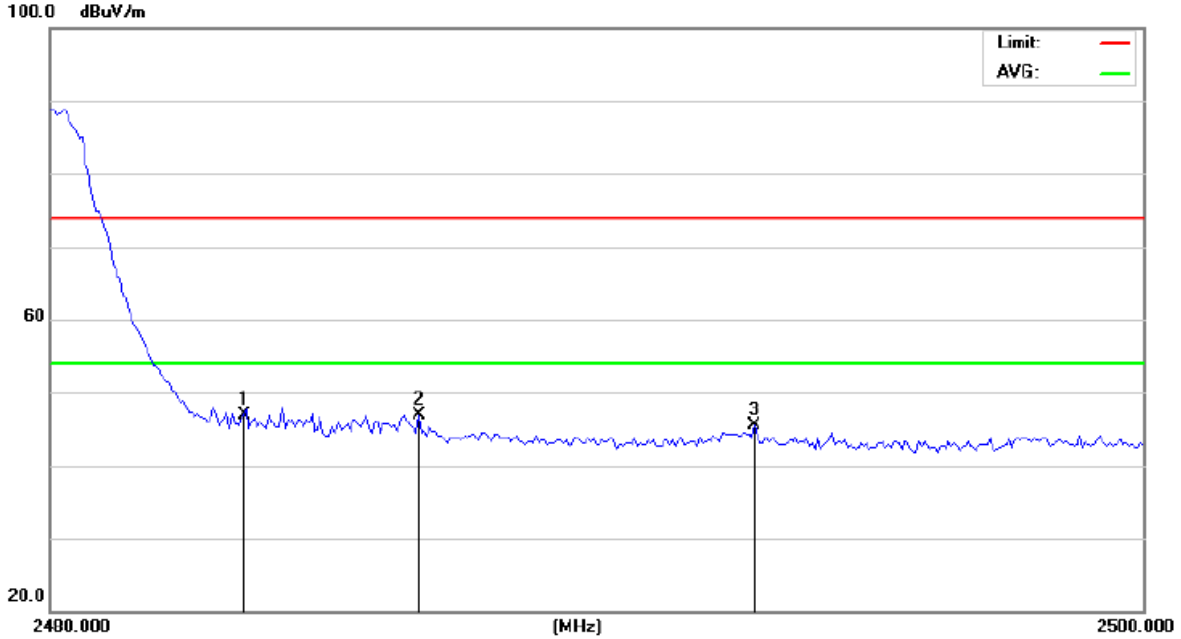

Site 843

Polarization: **Horizontal**

Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: Battery 18V

Humidity: 60.6 %

Mode: DSS(TX2480)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2483.500	51.05	-4.19	46.86	74.00	-27.14	peak		
2	*	2486.732	51.16	-4.18	46.98	74.00	-27.02	peak		
3		2492.882	49.58	-4.14	45.44	74.00	-28.56	peak		


*:Maximum data x:Over limit !:over margin

⟨Reference Only



Report No.: EA21090343F00101

72 of 85

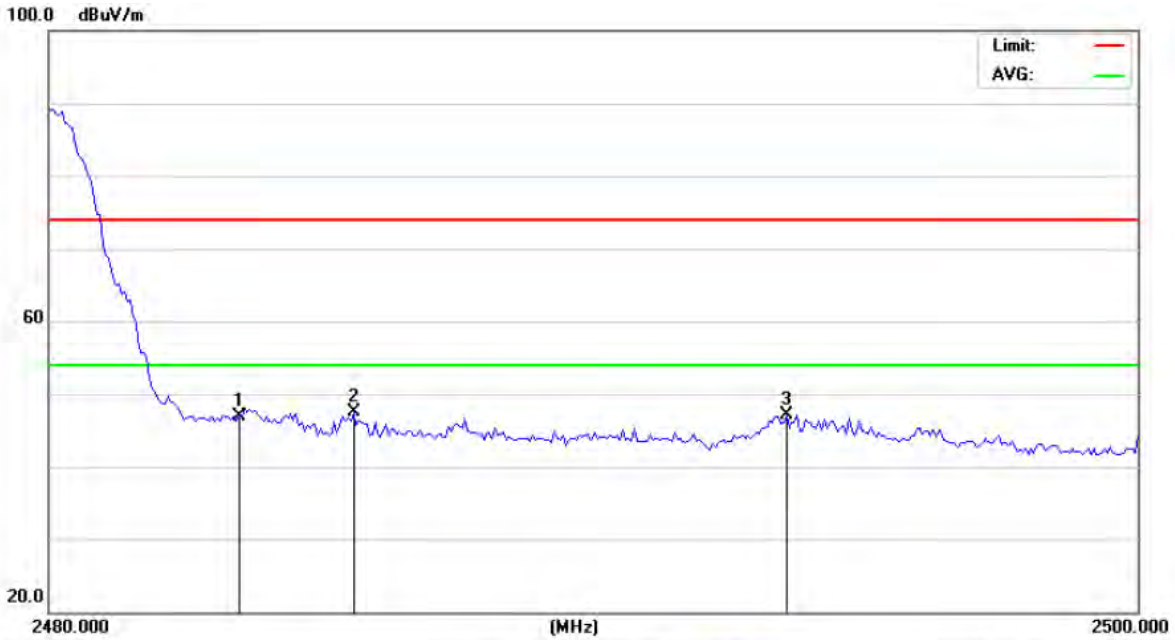

Site 843 Polarization: **Vertical** Temperature: 26.5(C)
 Limit: FCC Part 15 C 3m Above1G(Peak) Power: Battery 18V Humidity: 60.6 %
 Mode: DSS(TX2480)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1		2483.500	51.14	-4.19	46.95	74.00	-27.05			peak
2	*	2485.584	51.62	-4.18	47.44	74.00	-26.56			peak
3		2493.532	51.26	-4.14	47.12	74.00	-26.88			peak

*:Maximum data x:Over limit !:over margin

⟨Reference Only




Report No.: EA21090343F00101

73 of 85

For Hopping Mode:

100.0 dBuV/m

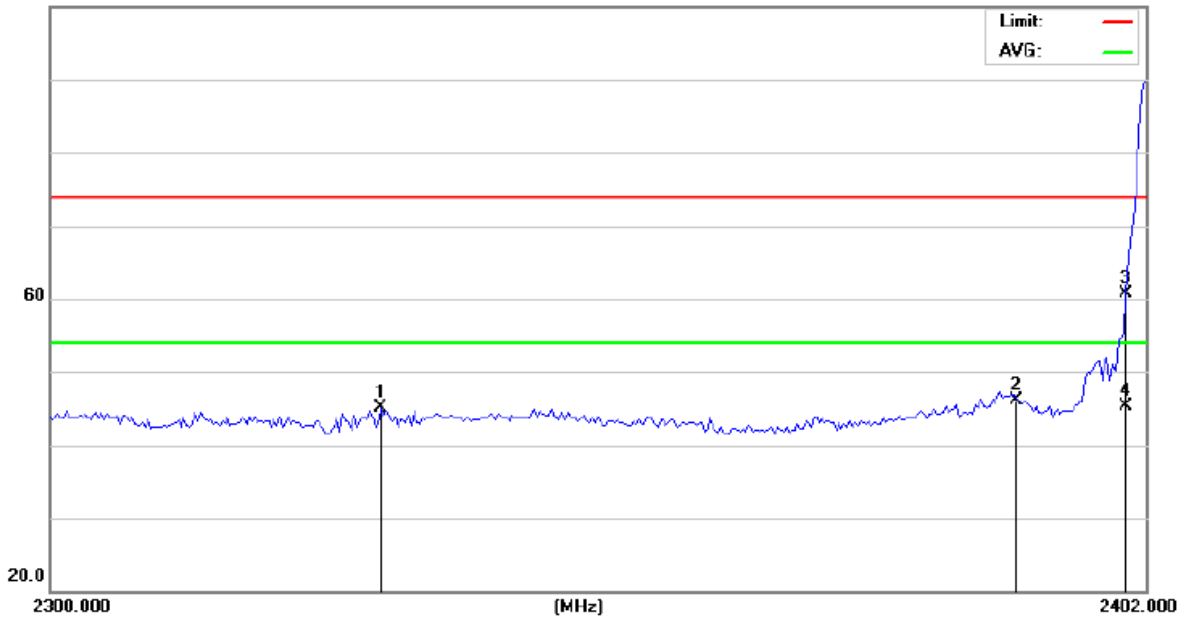

Site 843

Polarization: *Horizontal*

Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: Battery 18V

Humidity: 60.6 %


Mode: Hopping

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2330.389	50.39	-5.21	45.18	74.00	-28.82			peak
2		2390.000	51.01	-4.82	46.19	74.00	-27.81			peak
3		2400.000	65.44	-4.75	60.69	74.00	-13.31			peak
4	*	2400.000	50.02	-4.75	45.27	54.00	-8.73			AVG

*:Maximum data x:Over limit !:over margin


<Reference Only

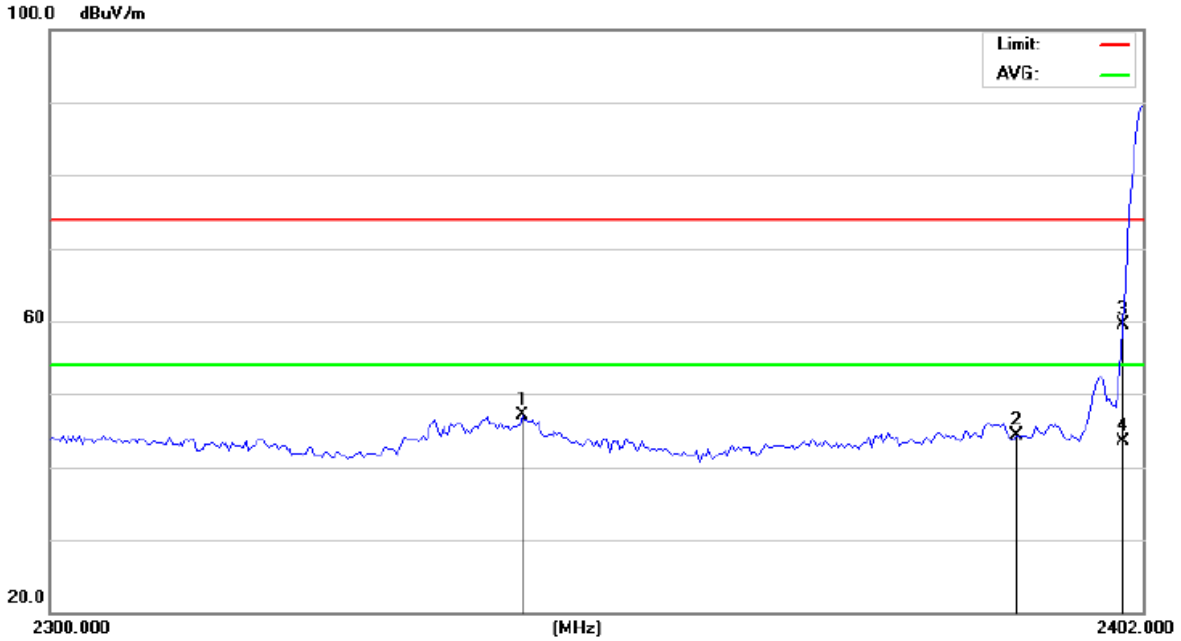

Site 843
Limit: FCC Part 15 C 3m Above1G(Peak)
Mode: Hopping
Note:
Polarization: **Vertical**
Power: Battery 18V
Temperature: 26.5(C)
Humidity: 60.6 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2343.572	52.29	-5.13	47.16	74.00	-26.84			peak
2		2390.000	49.03	-4.82	44.21	74.00	-29.79			peak
3		2400.000	64.16	-4.75	59.41	74.00	-14.59			peak
4	*	2400.000	48.25	-4.75	43.50	54.00	-10.50			AVG

*:Maximum data x:Over limit !:over margin <Reference Only

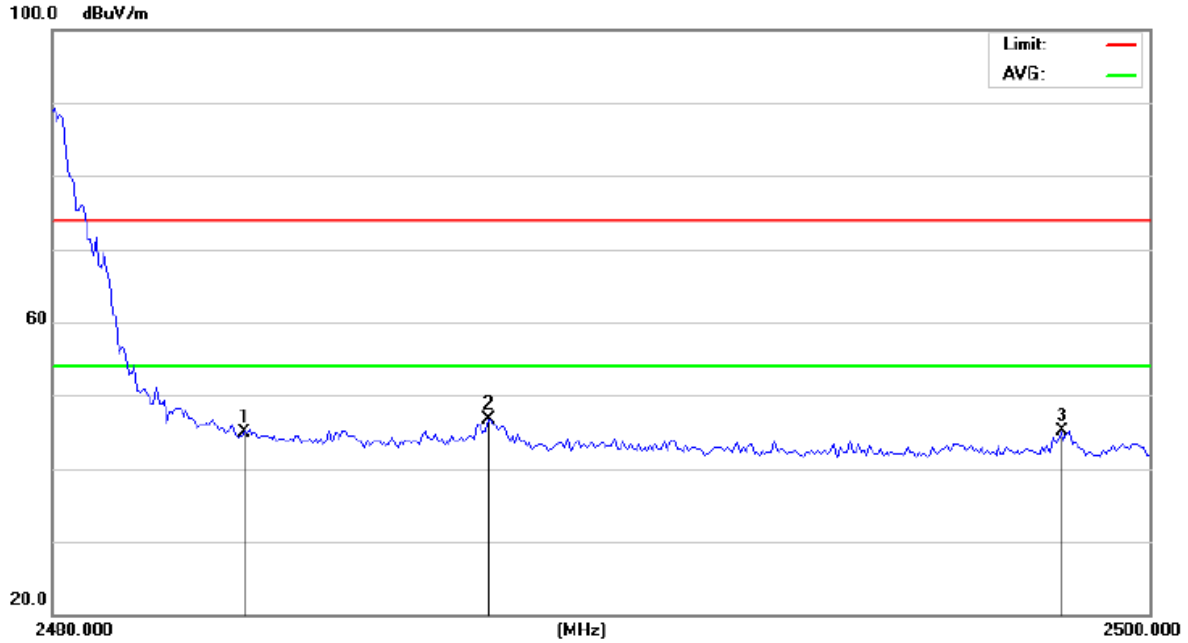

Site 843

Polarization: *Horizontal*

Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: Battery 18V

Humidity: 60.6 %


Mode: Hopping

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree
1		2483.500	49.12	-4.19	44.93	74.00	-29.07	peak	
2	*	2487.931	50.78	-4.16	46.62	74.00	-27.38	peak	
3		2498.394	49.28	-4.10	45.18	74.00	-28.82	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

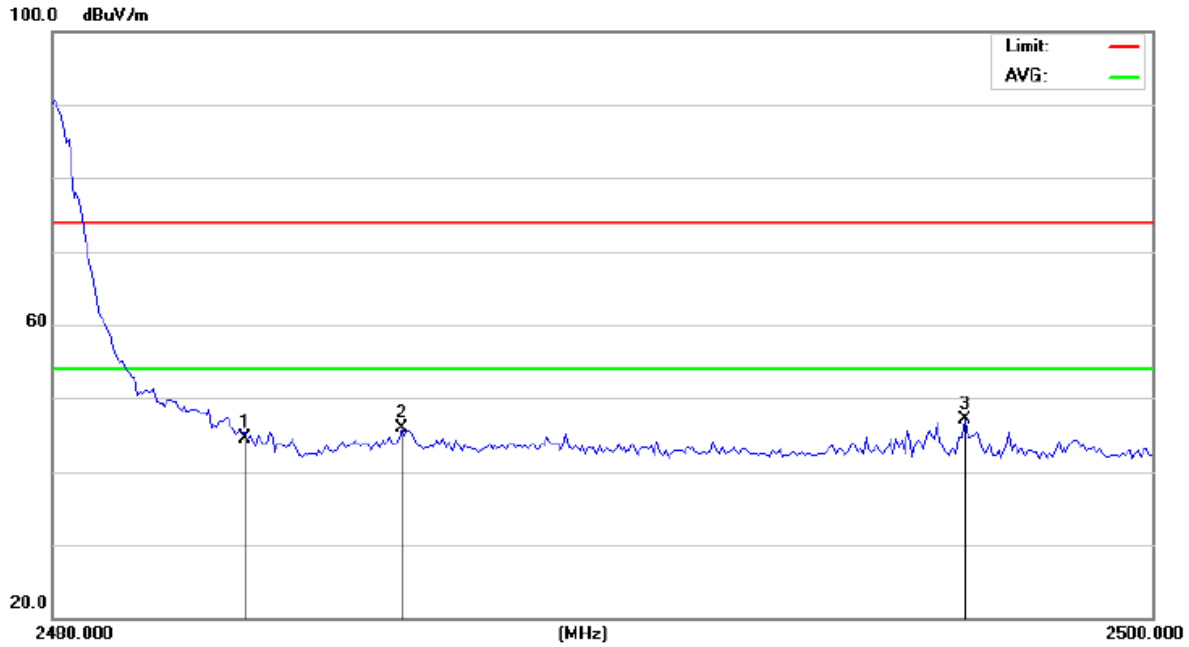

Site 843 Polarization: **Vertical** Temperature: 26.5(C)

Limit: FCC Part 15 C 3m Above1G(Peak)

Power: Battery 18V

Humidity: 60.6 %

Mode: Hopping

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2483.500	48.72	-4.19	44.53	74.00	-29.47	peak		
2		2486.333	50.13	-4.18	45.95	74.00	-28.05	peak		
3	*	2496.589	51.18	-4.11	47.07	74.00	-26.93	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

14. Antenna Application

14.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:



Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.



14.2 Result


The EUT's antenna, permanent attached antenna, used a PIFA antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.


15. Photos of EUT





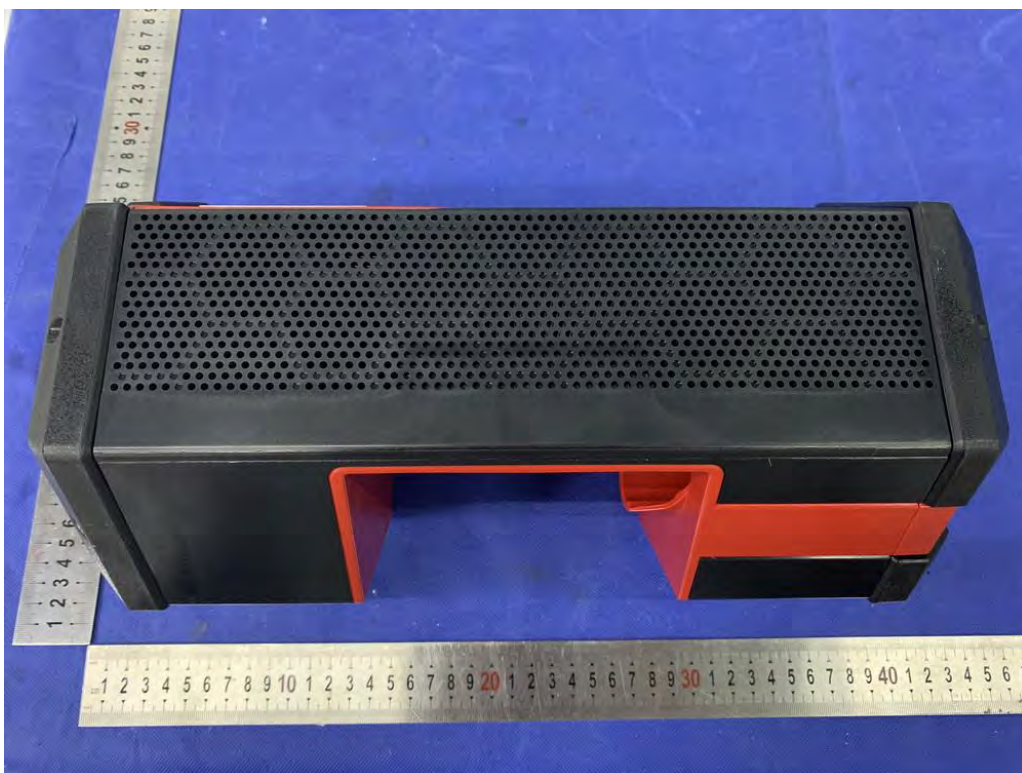
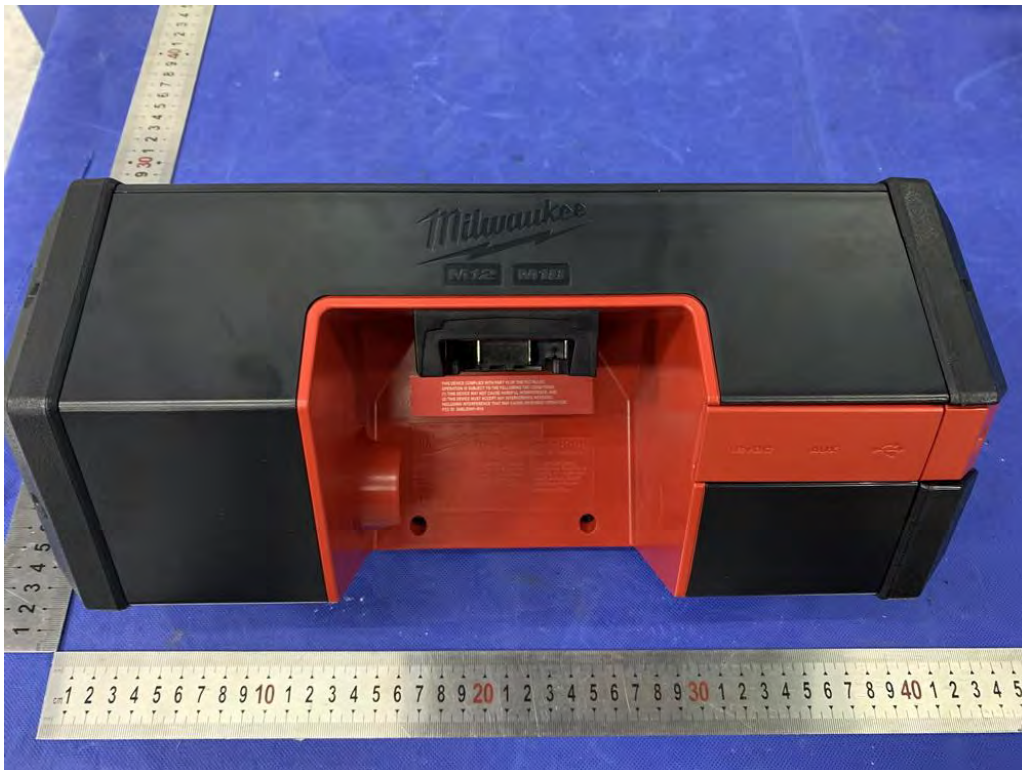


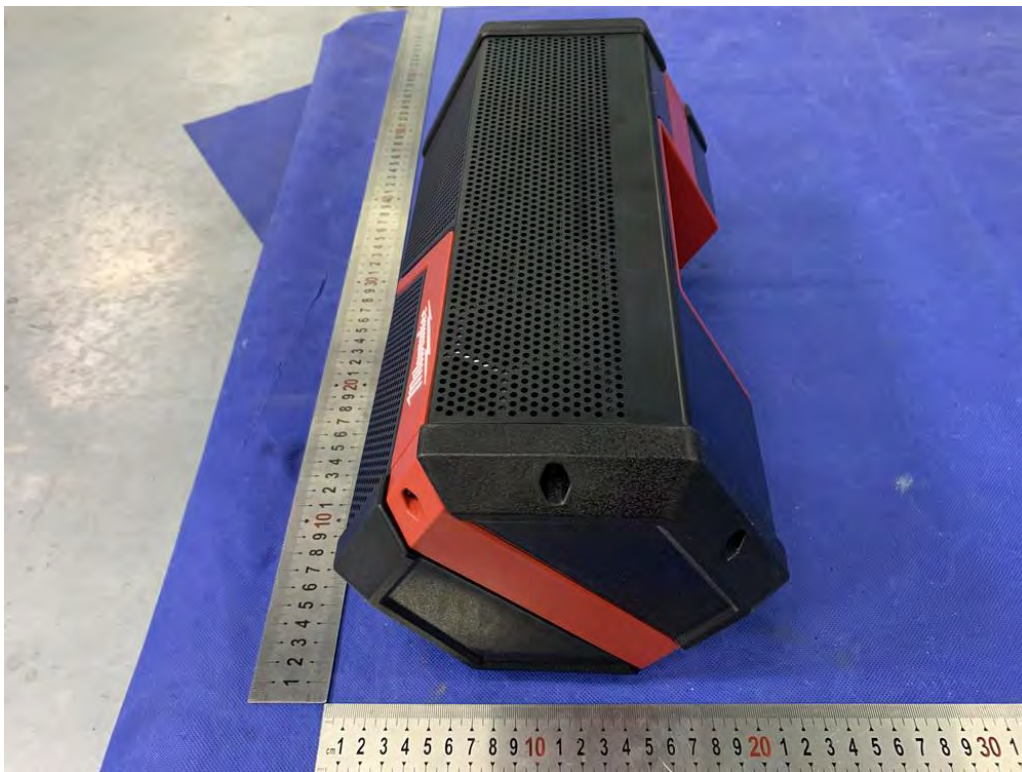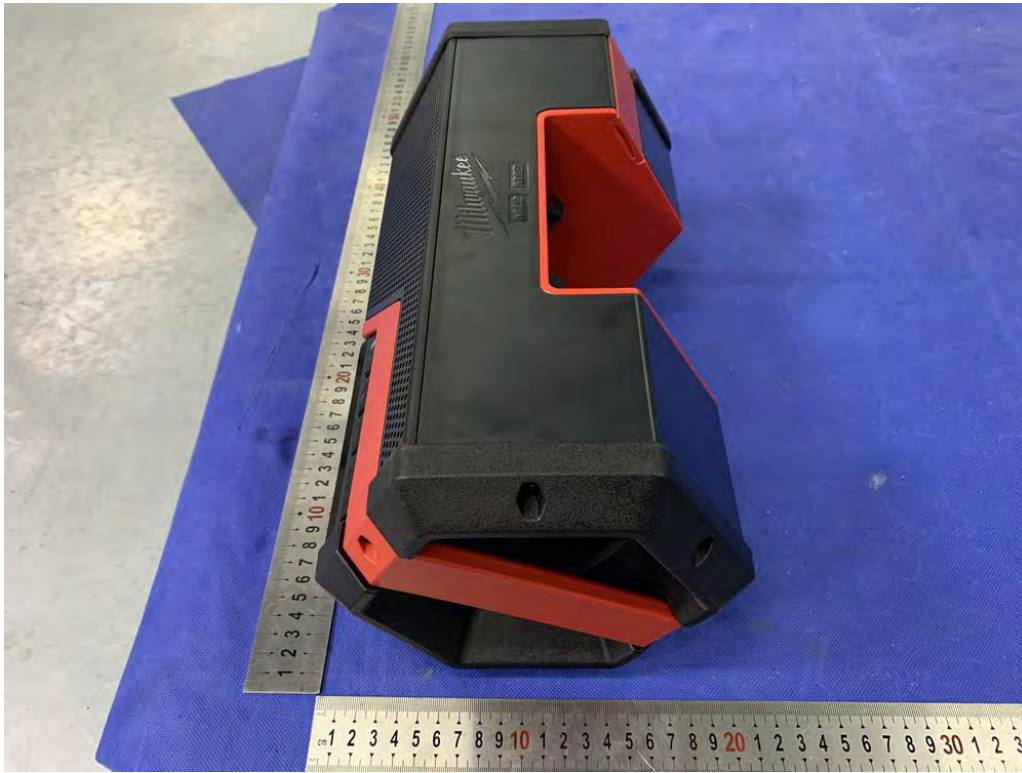


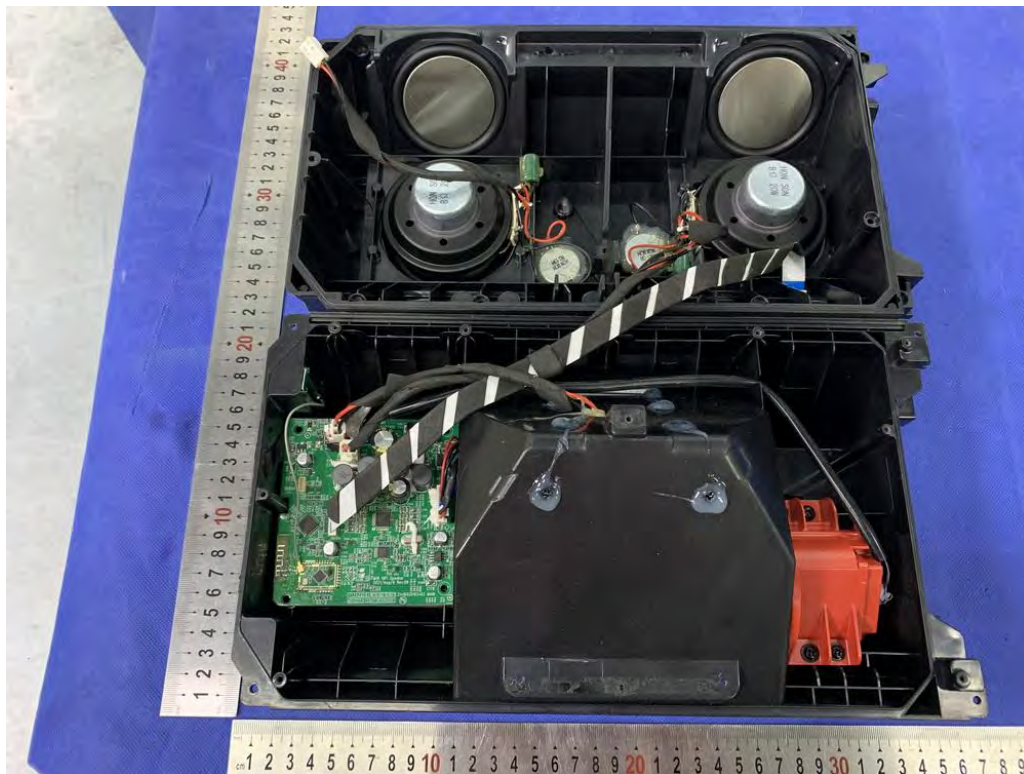

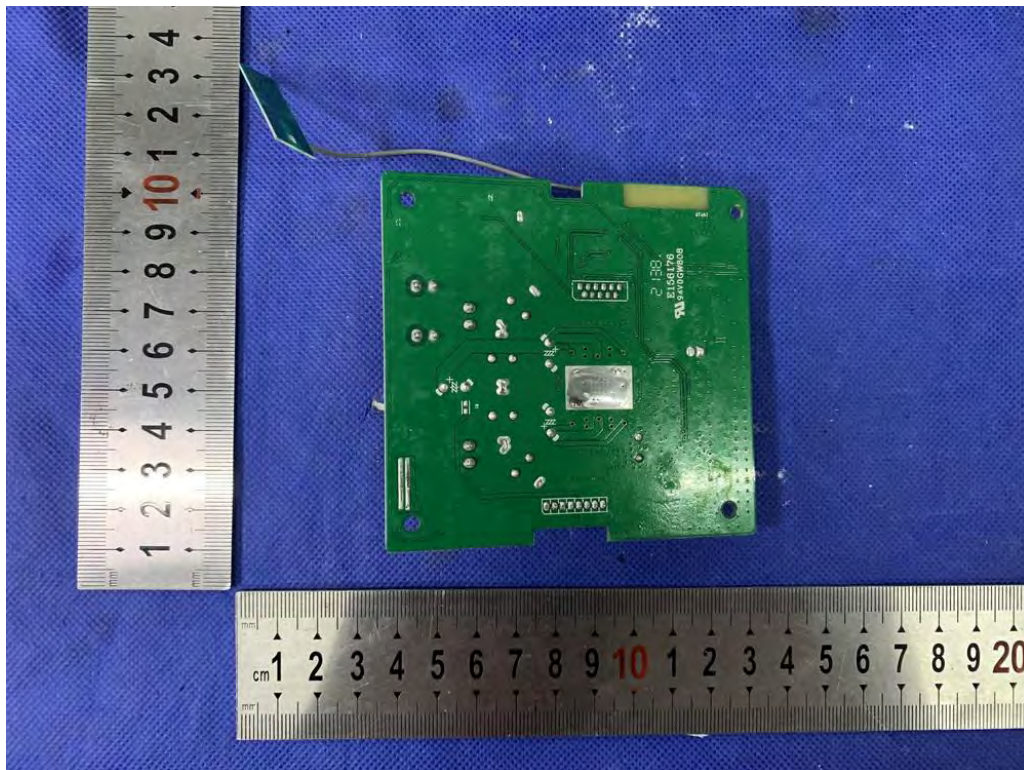

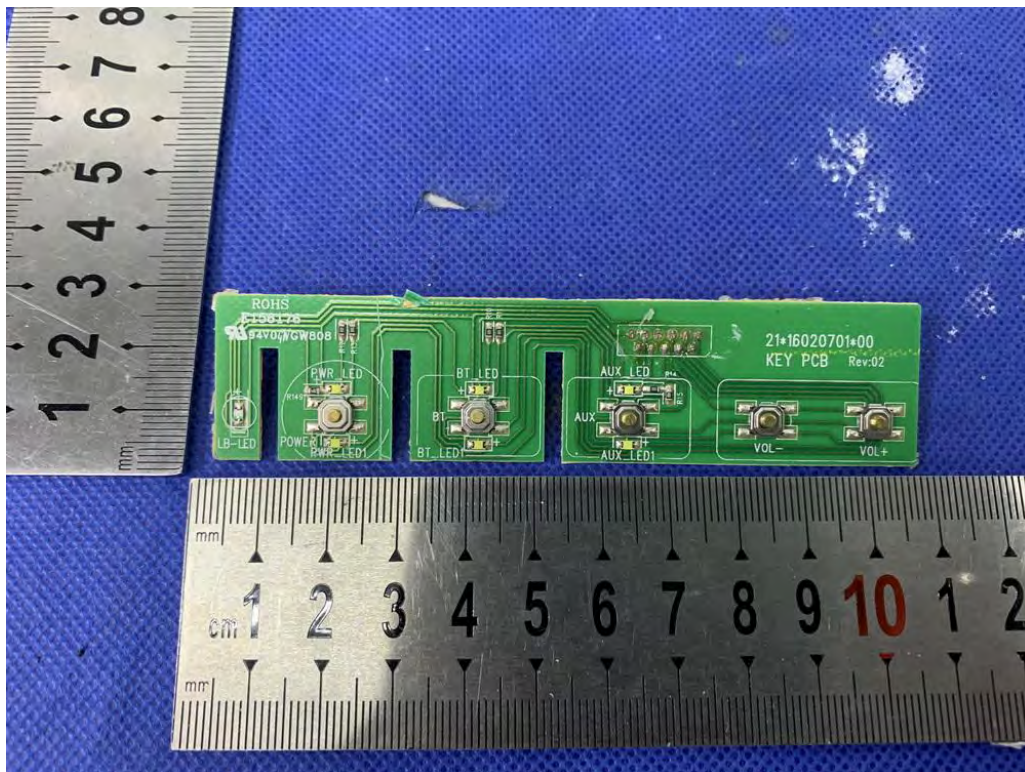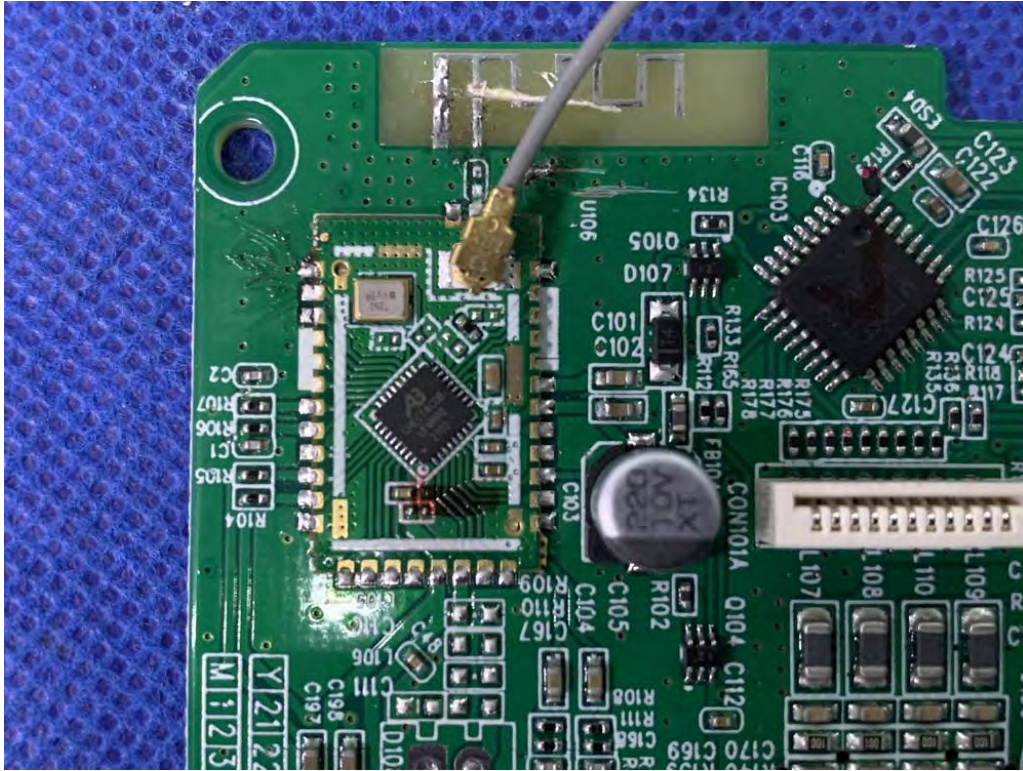

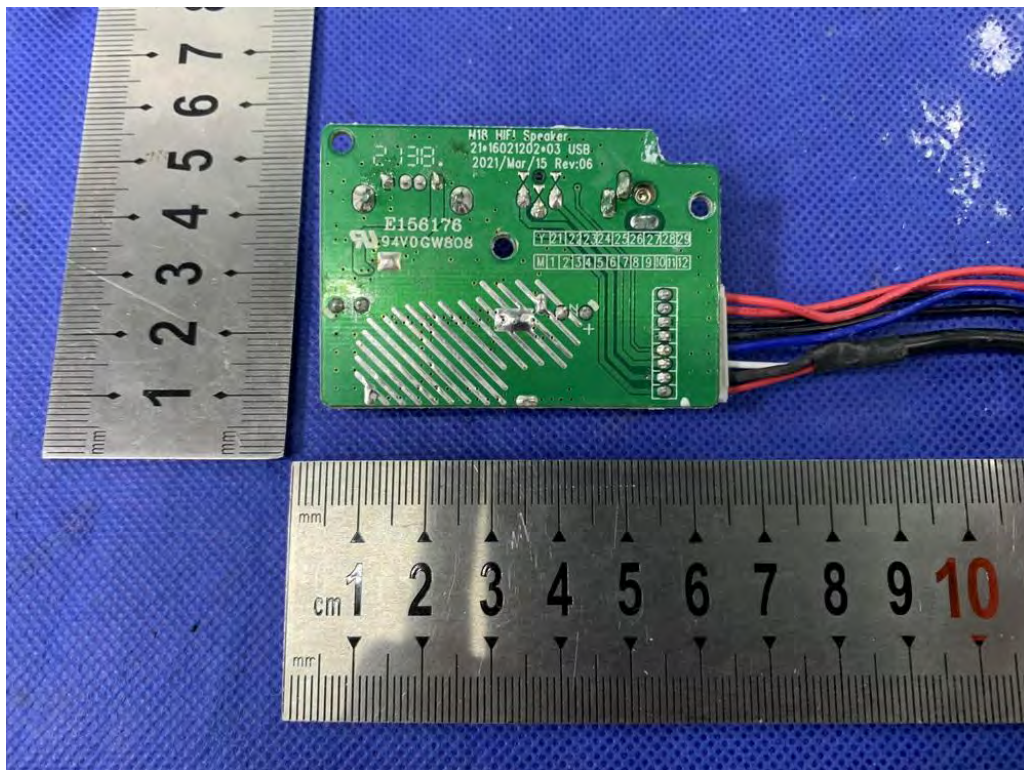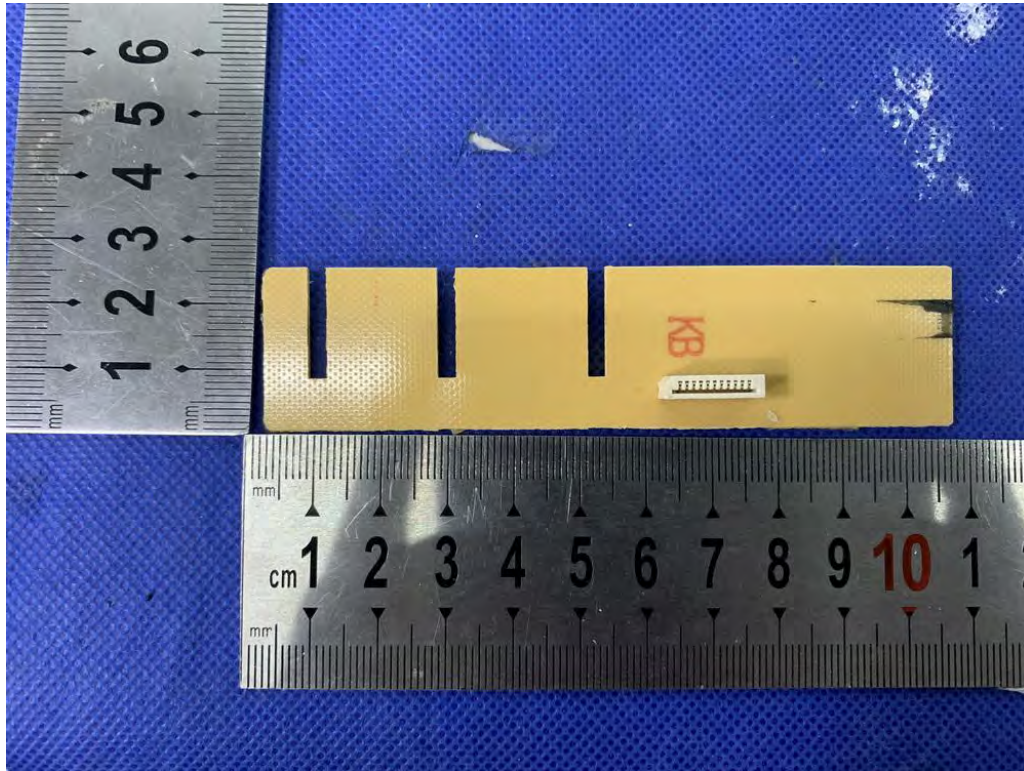

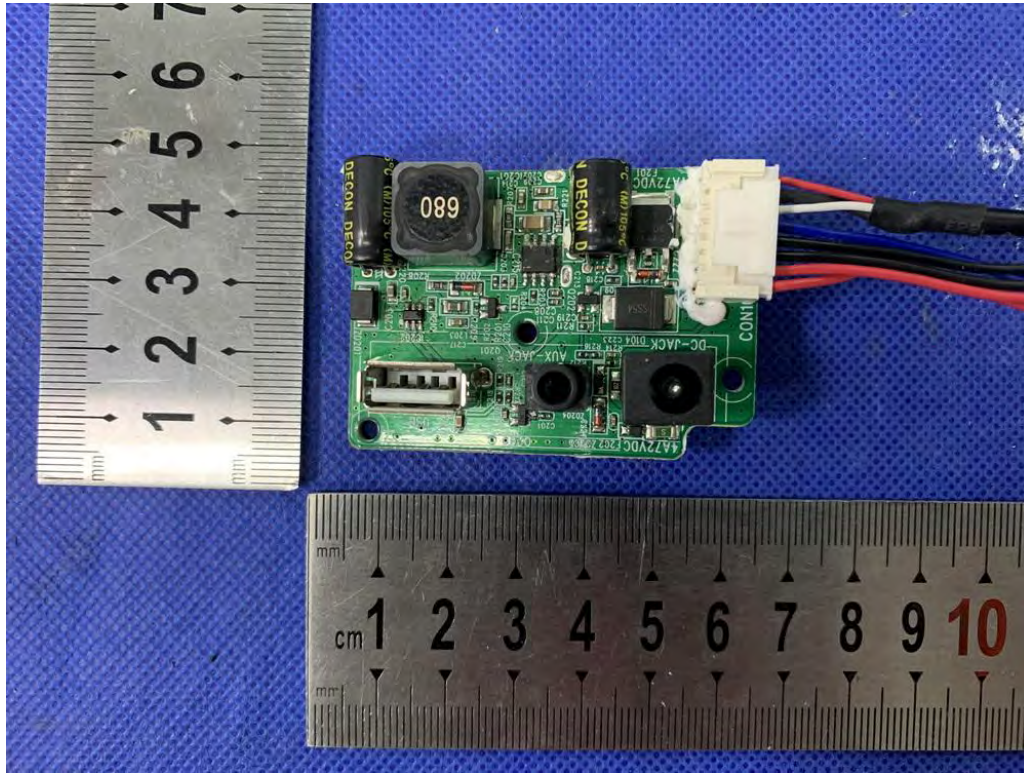

-----The end of Report-----