



MEASUREMENT REPORT

FCC PART 15.247 WLAN 802.11b/g/n

FCC ID: 2ABLK-804MESH

APPLICANT: Calix Inc.

Application Type: Certification

Product: 804Mesh Dual Wi-Fi

Model No.: 804MESH

Brand Name: Calix

FCC Classification: Digital Transmission System (DTS)

FCC Rule Part(s): Part15 Subpart C (Section 15.247)

Test Procedure(s): ANSI C63.10-2013, KDB 558074 D01v04
KDB 662911 D01v02r01

Test Date: September 13 ~ 27, 2017

Reviewed By : Sunny Sun
(Sunny Sun)

Approved By : Marlin Chen
(Marlin Chen)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01v04. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1709RSU00401	Rev. 01	Initial Report	10-18-2017	Valid

CONTENTS

Description	Page
W§2.1033 General Information.....	5
1. INTRODUCTION.....	6
1.1. Scope.....	6
1.2. MRT Test Location.....	6
2. PRODUCT INFORMATION.....	7
2.1. Feature of Equipment under Test	7
2.2. Working Frequencies	8
2.3. Description of Available Antennas.....	8
2.4. Description of Antenna RF Port	9
2.5. Test Mode	9
2.6. Description of Test Software	10
2.7. Device Capabilities	10
2.8. Test Configuration.....	11
2.9. EMI Suppression Device(s)/Modifications.....	11
2.10. Labeling Requirements	11
3. DESCRIPTION of TEST	12
3.1. Evaluation Procedure.....	12
3.2. AC Line Conducted Emissions.....	12
3.3. Radiated Emissions	13
4. ANTENNA REQUIREMENTS	14
5. TEST EQUIPMENT CALIBRATION DATE.....	15
6. MEASUREMENT UNCERTAINTY.....	16
7. TEST RESULT	17
7.1. Summary.....	17
7.2. 6dB Bandwidth Measurement	18
7.2.1. Test Limit	18
7.2.2. Test Procedure used	18
7.2.3. Test Setting	18
7.2.4. Test Setup	18
7.2.5. Test Result	19
7.3. Output Power Measurement	25
7.3.1. Test Limit	25

7.3.2.	Test Procedure Used.....	25
7.3.3.	Test Setting	25
7.3.4.	Test Setup	25
7.3.5.	Test Result of Output Power	26
7.4.	Power Spectral Density Measurement.....	28
7.4.1.	Test Limit	28
7.4.2.	Test Procedure Used.....	28
7.4.3.	Test Setting	28
7.4.4.	Test Setup	29
7.4.5.	Test Result	30
7.5.	Conducted Band Edge and Out-of-Band Emissions.....	38
7.5.1.	Test Limit	38
7.5.2.	Test Procedure Used.....	38
7.5.3.	Test Setting	38
7.5.4.	Test Setup	39
7.5.5.	Test Result	40
7.6.	Radiated Spurious Emission Measurement.....	51
7.6.1.	Test Limit	51
7.6.2.	Test Procedure Used.....	51
7.6.3.	Test Setting	51
7.6.4.	Test Setup	53
7.6.5.	Test Result	55
7.7.	Radiated Restricted Band Edge Measurement.....	72
7.7.1.	Test Limit	72
7.7.2.	Test Result	74
7.8.	AC Conducted Emissions Measurement	114
7.8.1.	Test Limit	114
7.8.2.	Test Setup	114
7.8.3.	Test Result	115
8.	CONCLUSION	117

§2.1033 General Information

Applicant:	Calix Inc.
Applicant Address:	1035 N. McDowell Blvd Petaluma, CA94954 U.S.A
Manufacturer:	Wuxi MitraStar Technology Co.Ltd
Manufacturer Address:	1-1# Minshan Road, Wuxi New Wu District, Jiangsu, P.R.C.
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
MRT Registration No.:	893164
FCC Rule Part(s):	Part15 Subpart C (Section 15.247)
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	804Mesh Dual Wi-Fi
Model No.:	804MESH
Brand Name:	Calix
Wi-Fi Specification:	802.11a/b/g/n/ac
Frequency Range	<p><u>2.4GHz:</u> For 802.11b/g/n-HT20: 2412 ~ 2462 MHz For 802.11n-HT40: 2422 ~ 2452 MHz</p> <p><u>5GHz:</u> For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz, 5745~5825MHz For 802.11n-HT40/ac-VHT40: 5190~5230MHz, 5755~5795MHz For 802.11ac-VHT80: 5210MHz, 5775MHz</p>
2.4GHz Maximum Average Output Power	802.11b: 24.17dBm; 802.11g: 21.45dBm 802.11n-HT20: 23.89dBm; 802.11n-HT40: 23.26dBm
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Modulation Technology	CCK, DQPSK, DBPSK for DSSS 16QAM, 64QAM, 256QAM, QPSK, BPSK for OFDM

2.2. Working Frequencies

Channel List for 802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

Channel List for 802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--


2.3. Description of Available Antennas

Antenna Type	Frequency Band (GHz)	T _x Paths	Directional Gain (dBi)	
			Non Beam Forming Mode	CDD & Beam-Forming Mode
PCB Antenna	2.4	2	1.40	--
	5.2	4	--	8.90
	5.8	4	--	9.00

Note:

- Transmit at 2.4GHz support two antennas, and support four antennas at 5GHz transmit.
- The EUT working on Beam Forming mode at 802.11n/ac, and working on CDD mode at 802.11a.
- Correlated signals include, but are not limited to, signals transmitted in any of the following modes:
 - Any transmit Beam Forming mode, whether fixed or adaptive (e.g., phased array modes, closed loop MIMO modes, Transmitter Adaptive Antenna modes, Maximum Ratio Transmission (MRT) modes, and Statistical Eigen Beam Forming (EBF) modes).
- Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, \dots, G_N dBi
 - transmit signals are correlated, then
 - Directional gain = $10 \log\left[\frac{(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2}{N_{ANT}}\right]$ dBi [Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

2.4. Description of Antenna RF Port

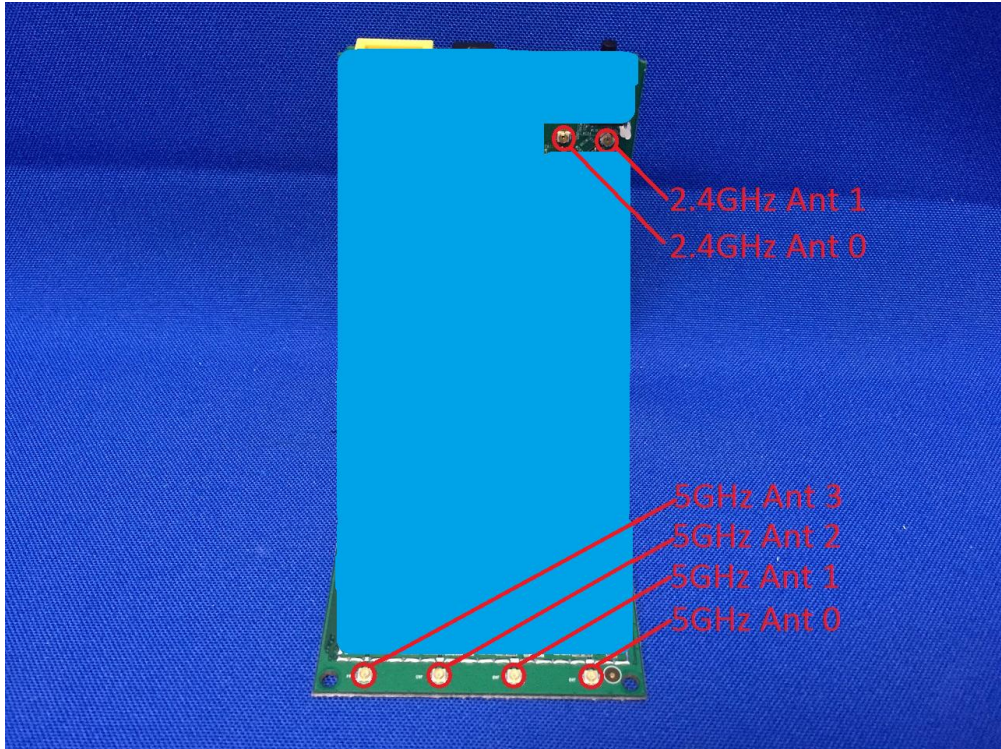Antenna RF Port						
--	2.4GHz RF Port		5GHz RF Port			
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1	Ant 2	Ant 3
						

2.5. Test Mode

Test Mode	Mode 1: Transmit by 802.11b
	Mode 2: Transmit by 802.11g
	Mode 3: Transmit by 802.11n-HT20
	Mode 4: Transmit by 802.11n-HT40

2.6. Description of Test Software

The test utility software used during testing was “RTL819x”, and the version was “v3.3”.


2.7. Device Capabilities


This device contains the following capabilities:

2.4GHz WLAN (DTS) and 5GHzWLAN (NII)

Note: 2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 D01v04. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	98.58 %
802.11g	90.44 %
802.11n-HT20	77.97 %
802.11n-HT40	67.18 %

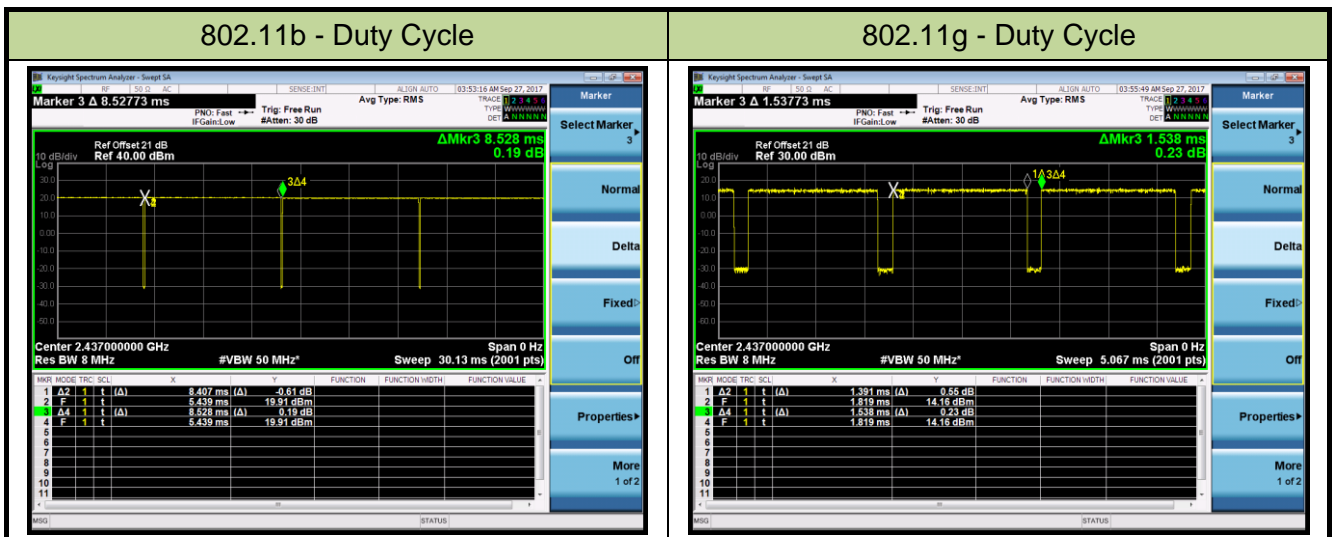

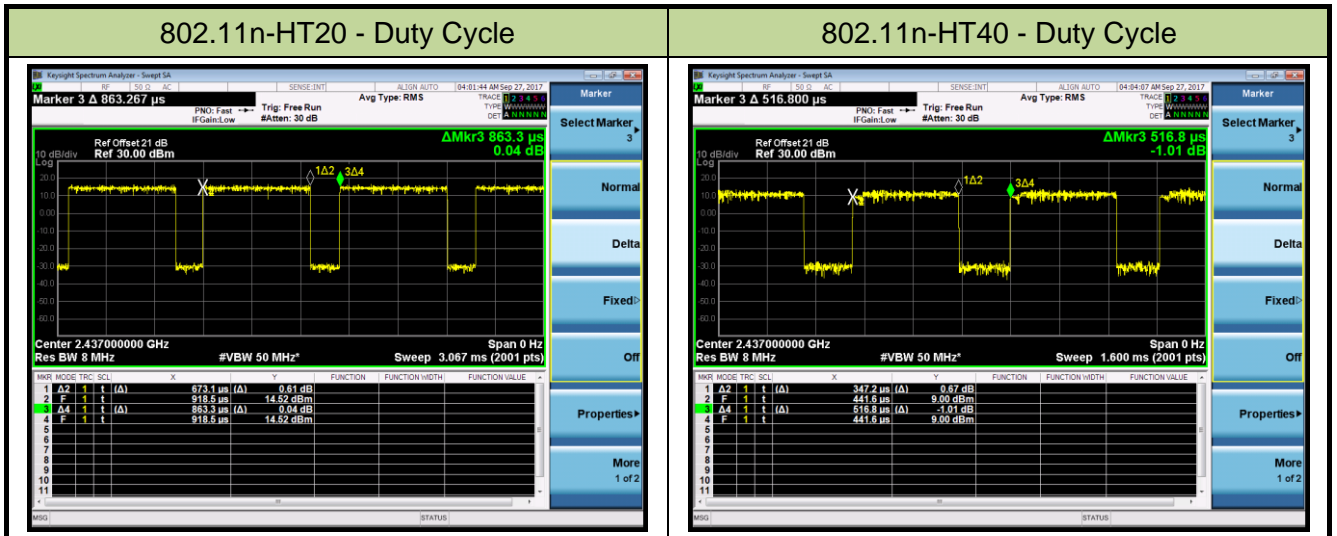

2.8. Test Configuration

The **804Mesh Dual Wi-Fi** was tested per the guidance of KDB 558074 D01v04. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance provided in KDB 558074 D01v04 were used in the measurement of the **804Mesh Dual Wi-Fi**.

Deviation from measurement procedure.....None

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the **804Mesh Dual Wi-Fi** is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The **804Mesh Dual Wi-Fi** unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2018/04/24
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2018/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2018/06/20
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06181	1 year	2017/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2018/05/10

Radiated Disturbance - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Agilent	N9038A	MRTSUE06125	1 year	2018/08/03
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2018/03/28
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2017/11/21
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2017/11/19
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06023	1 year	2017/10/22
Broadband Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06024	1 year	2018/01/04
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06183	1 year	2017/12/20
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2018/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Agilent	N9038A	MRTSUE06125	1 year	2018/08/03
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2017/12/06
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2018/03/27
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/22

Software	Version	Function
e3	V8.3.5	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 150kHz~30MHz: $\pm 3.46\text{dB}$
Radiated Emission Measurement - AC1
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz ~ 1GHz: $\pm 4.18\text{dB}$ 1GHz ~ 25GHz: $\pm 4.76\text{dB}$

7. TEST RESULT

7.1. Summary

Product Name: 804Mesh Dual Wi-Fi
FCC ID: 2ABLK-804MESH
FCC Classification: Digital Transmission System (DTS)
Data Rate(s) Tested: 1Mbps ~ 11Mbps (b); 6Mbps ~ 54Mbps (g);
MCS8 for 802.11n-HT20MHz;
MCS8 for 802.11n-HT40MHz.

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	≥ 500kHz	Conducted	Pass	Section 7.2
15.247(b)(3)	Output Power	Refer to Section 7.3		Pass	Section 7.3
15.247(e)	Power Spectral Density	Refer to Section 7.4		Pass	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	≥ 30dBc(Average)		Pass	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.8

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) Test Items “6dB Bandwidth” & “Band Edge / Out-of-Band Emissions” have been assessed single and MIMO transmission, and showed the worst test data in this report.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

KDB 558074 D01v04 - Section 8.2 Option 2

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

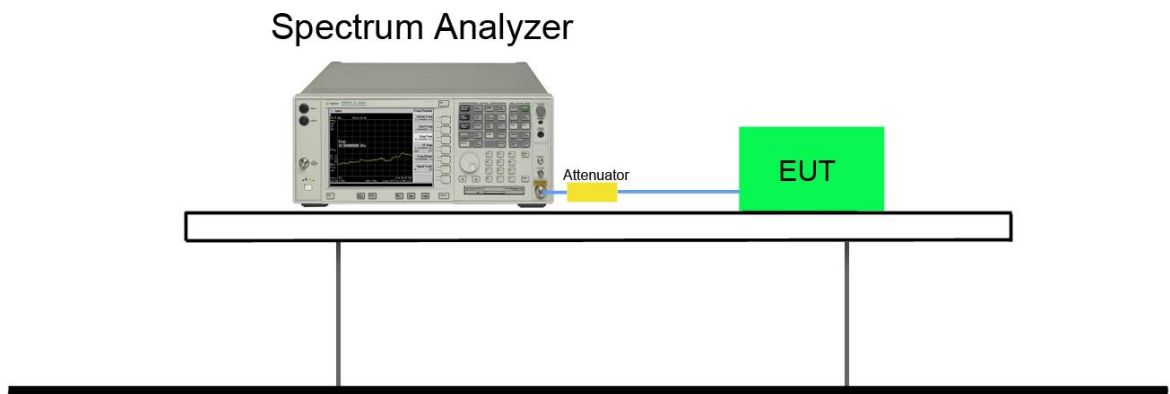





7.2.5. Test Result




Product	804Mesh Dual Wi-Fi	Temperature	27°C
Test Engineer	Hunk Li	Relative Humidity	65%
Test Site	TR3	Test Date	2017/09/27
Test Item	6dB Bandwidth		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
Ant 0						
802.11b	1Mbps	01	2412	10.06	≥ 0.5	Pass
802.11b	1Mbps	06	2437	10.10	≥ 0.5	Pass
802.11b	1Mbps	11	2462	10.03	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.34	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.36	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.36	≥ 0.5	Pass
Ant 1						
802.11g	6Mbps	01	2412	16.40	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.37	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.39	≥ 0.5	Pass
Ant 0 / Ant 0 + 1						
802.11n-HT20	MCS0	01	2412	17.57	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.55	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.57	≥ 0.5	Pass
802.11n-HT40	MCS0	03	2422	35.51	≥ 0.5	Pass
802.11n-HT40	MCS0	06	2437	35.50	≥ 0.5	Pass
802.11n-HT40	MCS0	09	2452	35.51	≥ 0.5	Pass

802.11b 6dB Bandwidth - Ant 0
Channel 01 (2412MHz)

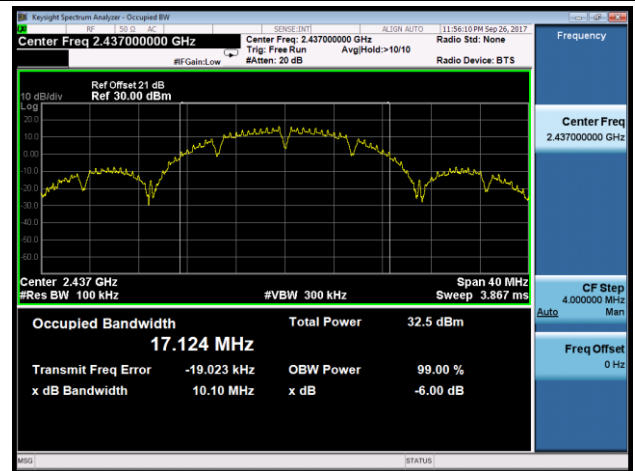
Channel 06 (2437MHz)

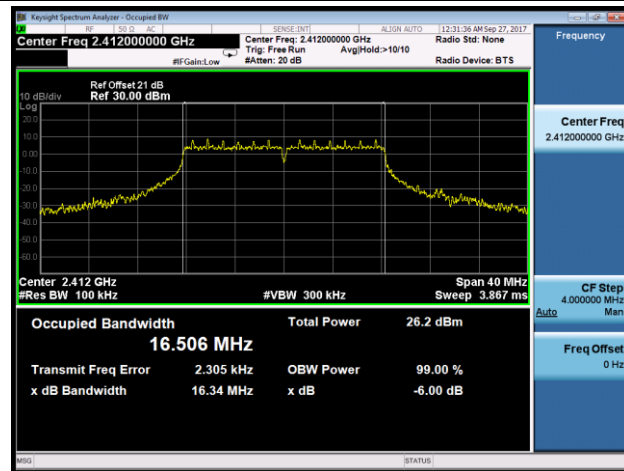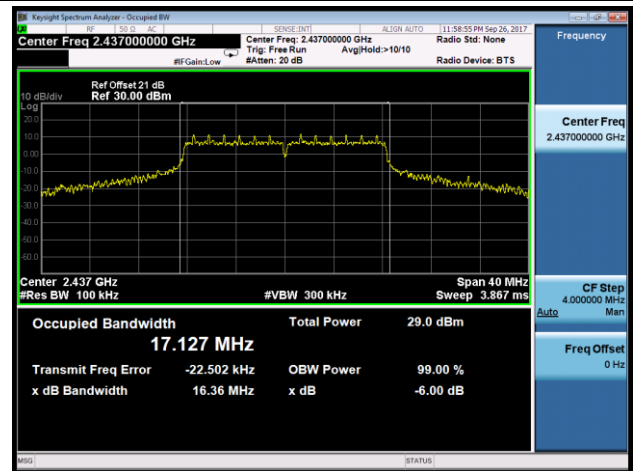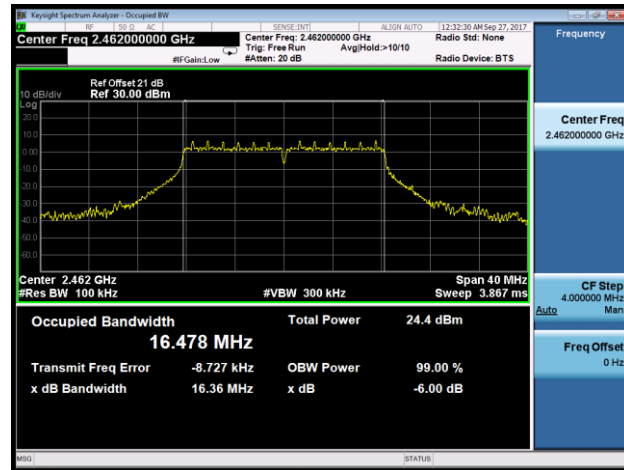Channel 11 (2462MHz)

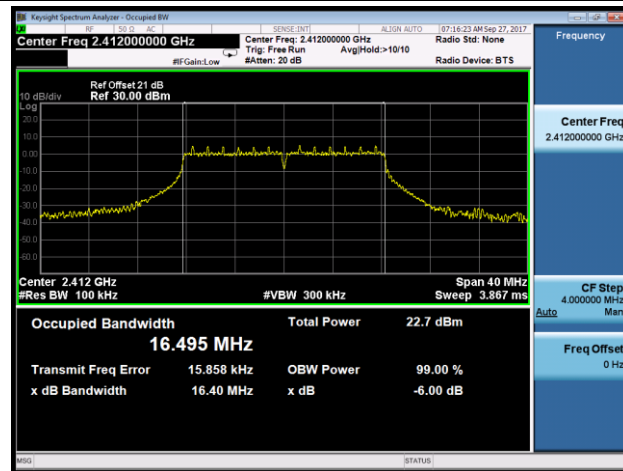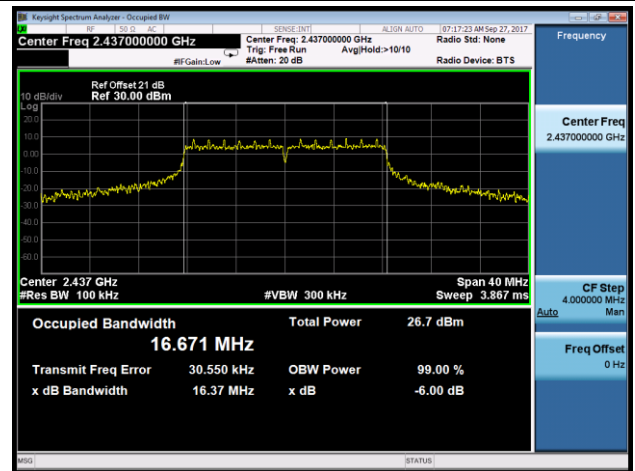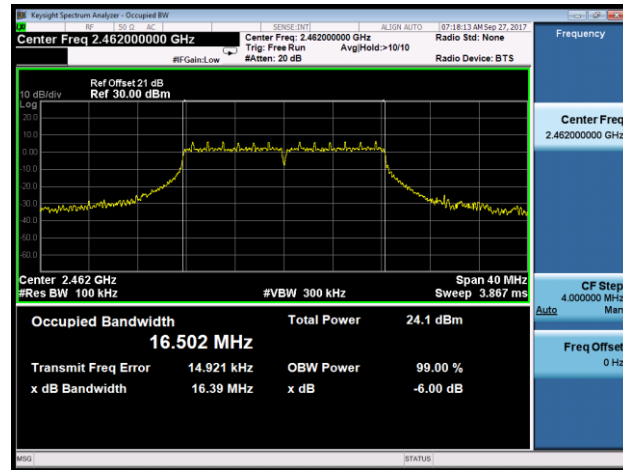
802.11g 6dB Bandwidth - Ant 0
Channel 01 (2412MHz)

Channel 06 (2437MHz)

Channel 11 (2462MHz)

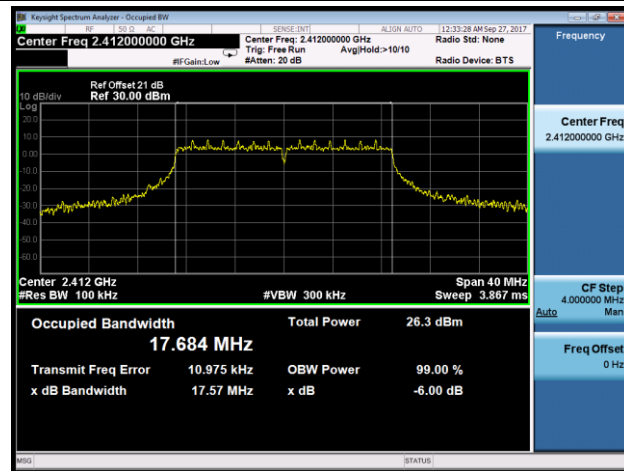
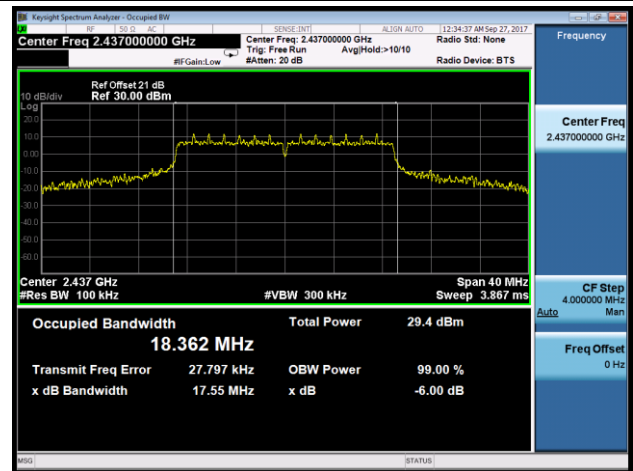
802.11g 6dB Bandwidth - Ant 1
Channel 01 (2412MHz)

Channel 06 (2437MHz)

Channel 11 (2462MHz)


802.11n-HT20 6dB Bandwidth - Ant 0 / Ant 0 + 1

Channel 01 (2412MHz)



Channel 06 (2437MHz)




Channel 11 (2462MHz)




802.11n-HT40 6dB Bandwidth - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

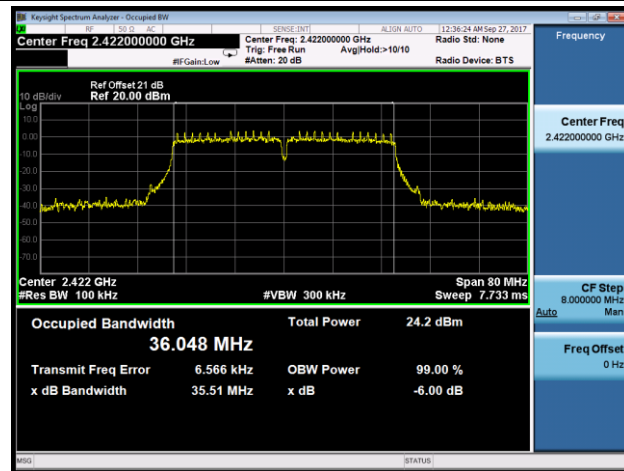

Channel 06 (2437MHz)

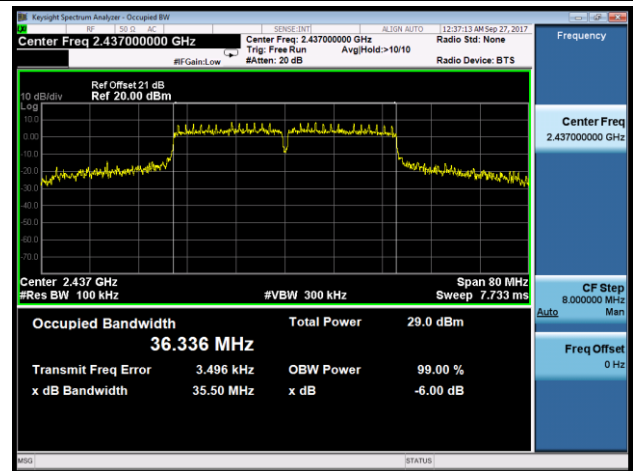

Channel 09 (2452MHz)

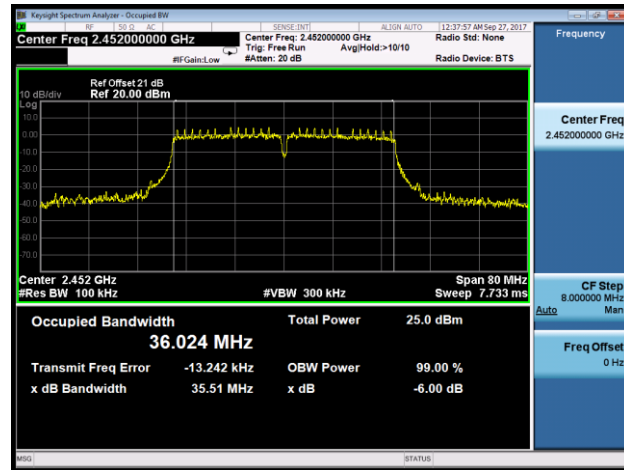

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm).

7.3.2. Test Procedure Used


KDB 558074 D01v04 - Section 9.2.3.2 AVGPM-G Average Power Method

7.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.3.4. Test Setup

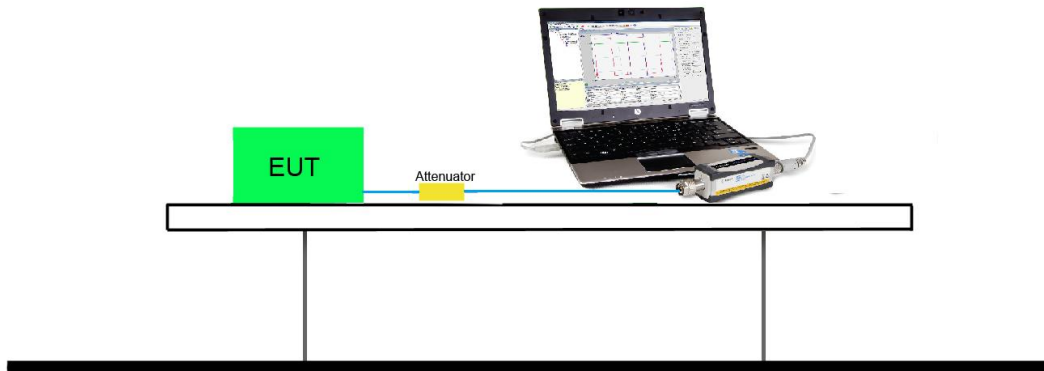

7.3.5. Test Result of Output Power

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
Ant 0					
802.11b	20	6	2437	1Mbps	24.17
				5.5Mbps	23.67
				11Mbps	23.14
802.11g	20	6	2437	6Mbps	21.45
				24Mbps	21.03
				54Mbps	20.78
802.11n	20	6	2437	MCS0	21.83
				MCS4	21.46
				MCS7	21.04
802.11n	40	6	2437	MCS0	21.13
				MCS4	20.87
				MCS7	20.56

Product	804Mesh Dual Wi-Fi	Temperature	27°C
Test Engineer	Hunk Li	Relative Humidity	65%
Test Site	TR3	Test Date	2017/09/15
Test Item	Output Power		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
Ant 0								
11b	1Mbps	1	2412	21.64	--	21.64	≤ 30	Pass
11b	1Mbps	6	2437	24.17	--	24.17	≤ 30	Pass
11b	1Mbps	11	2462	21.62	--	21.62	≤ 30	Pass
11g	6Mbps	1	2412	18.35	--	18.35	≤ 30	Pass
11g	6Mbps	6	2437	21.45	--	21.45	≤ 30	Pass
11g	6Mbps	11	2462	17.21	--	17.21	≤ 30	Pass
Ant 1								
11g	6Mbps	1	2412	--	15.94	15.94	≤ 30	Pass
11g	6Mbps	6	2437	--	19.84	19.84	≤ 30	Pass
11g	6Mbps	11	2462	--	17.32	17.32	≤ 30	Pass
Ant 0 + 1								
11n-HT20	MCS0	1	2412	18.48	16.02	20.43	≤ 30	Pass
11n-HT20	MCS0	6	2437	21.83	19.67	23.89	≤ 30	Pass
11n-HT20	MCS0	11	2462	18.14	16.75	20.51	≤ 30	Pass
11n-HT40	MCS0	3	2422	16.34	13.89	18.30	≤ 30	Pass
11n-HT40	MCS0	6	2437	21.13	19.15	23.26	≤ 30	Pass
11n-HT40	MCS0	9	2452	17.28	15.56	19.51	≤ 30	Pass

Note: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)}\}$ (dBm).

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


7.4.2. Test Procedure Used

KDB 558074 D01v04 - Section 10.5 Method AVGPSD

7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10kHz
5. VBW = 30kHz
6. Detector = RMS
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a, to the measured PSD to compute the average PSD during the actual transmission time.
13. Add Constant Factor = $10 \cdot \log(3\text{kHz} / 10\text{kHz}) = -5.23$

7.4.4. Test Setup

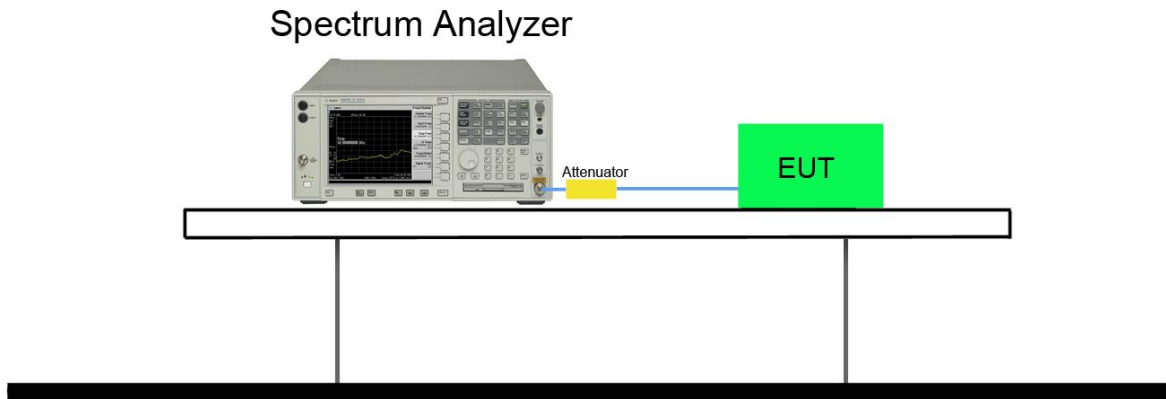

7.4.5. Test Result

Product	804Mesh Dual Wi-Fi	Temperature	27°C
Test Engineer	Hunk Li	Relative Humidity	65%
Test Site	TR3	Test Date	2017/09/27
Test Item	Power Spectral Density		


Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 AVGPSD (dBm / 10kHz)	Ant 1 AVGPSD (dBm / 10kHz)	Duty Cycle (%)	Constant Factor	Total AVGPSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
Ant 0										
11b	1Mbps	1	2412	-5.08	--	98.58	-5.23	-10.25	≤ 8.0	Pass
11b	1Mbps	6	2437	-1.39	--	98.58	-5.23	-6.56	≤ 8.0	Pass
11b	1Mbps	11	2462	-5.35	--	98.58	-5.23	-10.52	≤ 8.0	Pass
11g	6Mbps	1	2412	-10.70	--	90.44	-5.23	-15.49	≤ 8.0	Pass
11g	6Mbps	6	2437	-7.51	--	90.44	-5.23	-12.30	≤ 8.0	Pass
11g	6Mbps	11	2462	-12.10	--	90.44	-5.23	-16.89	≤ 8.0	Pass
Ant 1										
11g	6Mbps	1	2412	--	-13.12	90.44	-5.23	-17.91	≤ 8.0	Pass
11g	6Mbps	6	2437	--	-9.57	90.44	-5.23	-14.36	≤ 8.0	Pass
11g	6Mbps	11	2462	--	-12.05	90.44	-5.23	-16.84	≤ 8.0	Pass
Ant 0 + 1										
11n-HT20	MCS0	1	2412	-10.76	-13.18	77.97	-5.23	-12.94	≤ 8.0	Pass
11n-HT20	MCS0	6	2437	-7.58	-8.96	77.97	-5.23	-9.35	≤ 8.0	Pass
11n-HT20	MCS0	11	2462	-11.38	-12.75	77.97	-5.23	-13.15	≤ 8.0	Pass
11n-HT40	MCS0	3	2422	-14.37	-17.10	67.18	-5.23	-16.01	≤ 8.0	Pass
11n-HT40	MCS0	6	2437	-10.75	-11.37	67.18	-5.23	-11.54	≤ 8.0	Pass
11n-HT40	MCS0	9	2452	-14.00	-14.72	67.18	-5.23	-14.84	≤ 8.0	Pass

Note 1: The total AVGPSD = AVGPSD + 10*log(1/duty cycle) + Constant Factor.

Note 2: The total AVGPSD = $10 \cdot \log\{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)}\} + 10 \cdot \log(1/\text{duty cycle}) + \text{Constant Factor}$.

802.11b AVGPSD - Ant 0


Channel 01 (2412MHz)

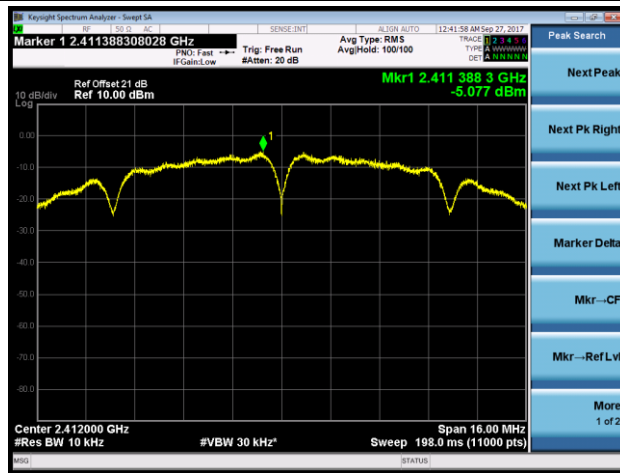

Channel 06 (2437MHz)




Channel 11 (2462MHz)

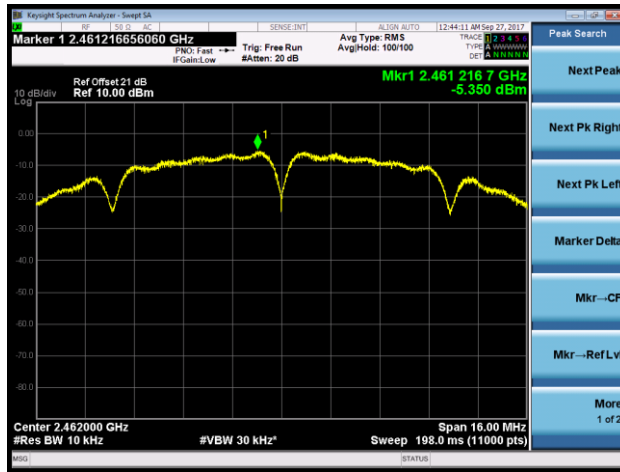


802.11g AVGPDS - Ant 0


Channel 01 (2412MHz)

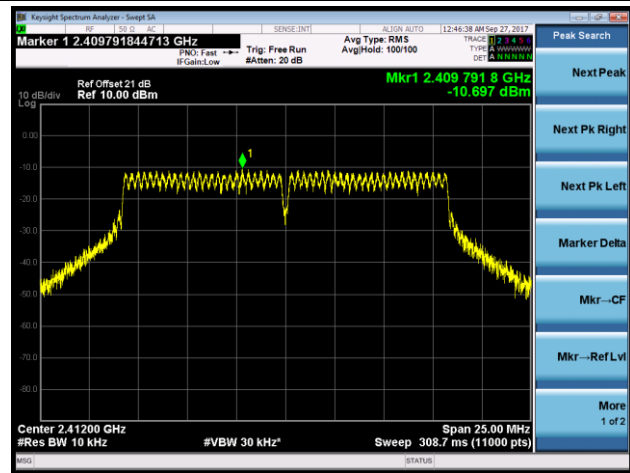

Channel 06 (2437MHz)

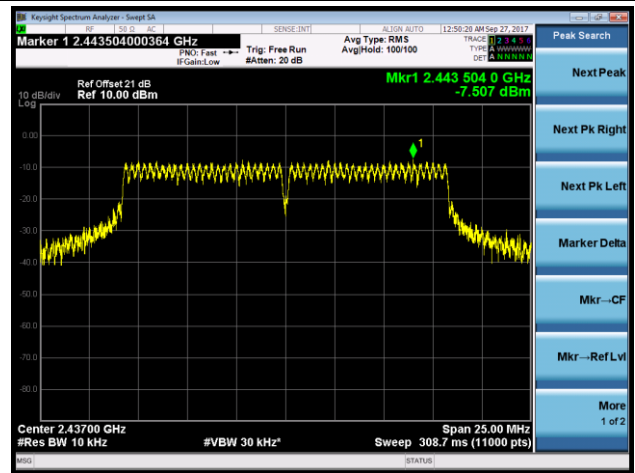


Channel 11 (2462MHz)

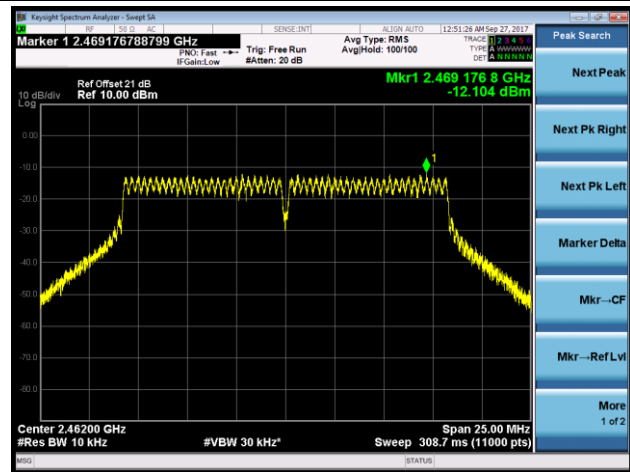


802.11g AVGPDS - Ant 1


Channel 01 (2412MHz)

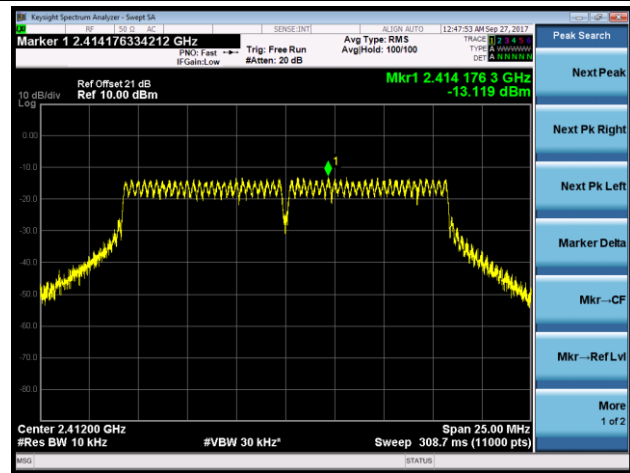

Channel 06 (2437MHz)

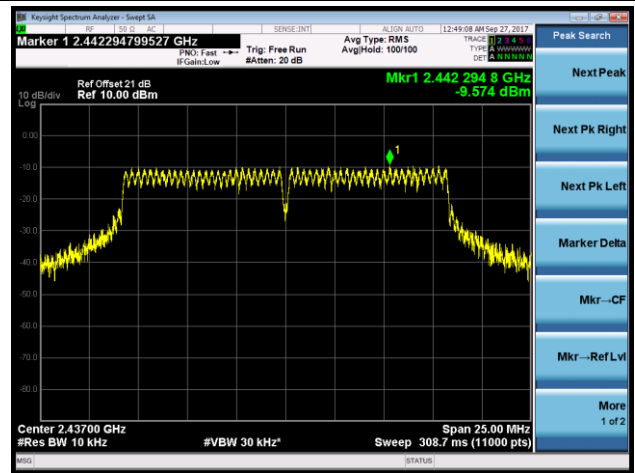


Channel 11 (2462MHz)

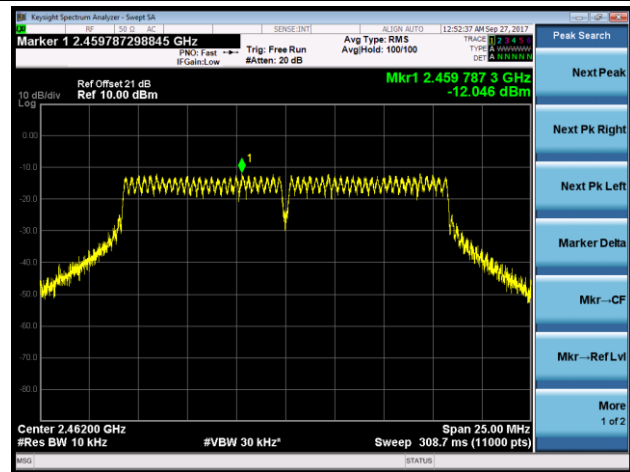


802.11n-HT20 AVGPSD - Ant 0 / Ant 0 + 1


Channel 01 (2412MHz)

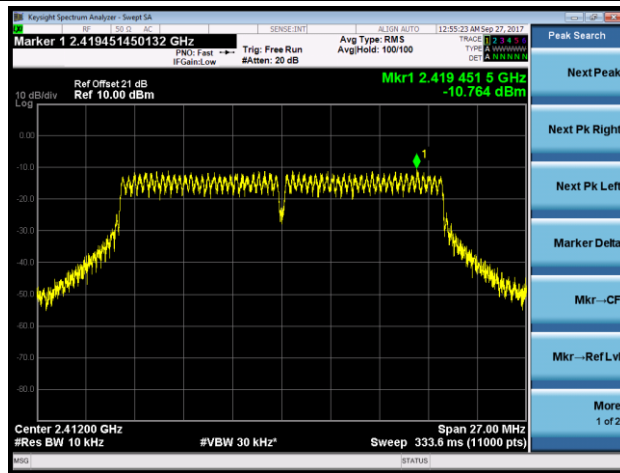

Channel 06 (2437MHz)

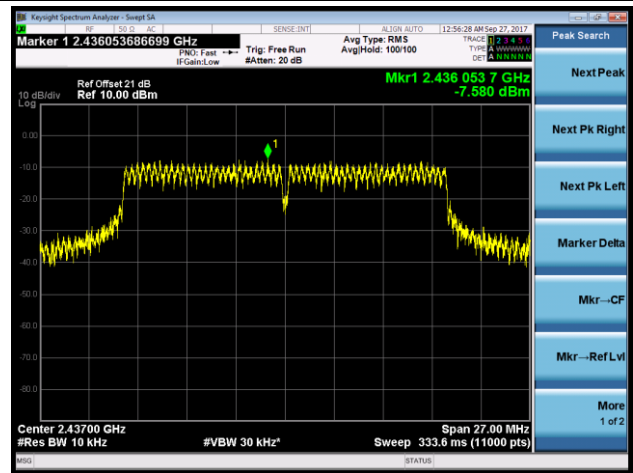


Channel 11 (2462MHz)

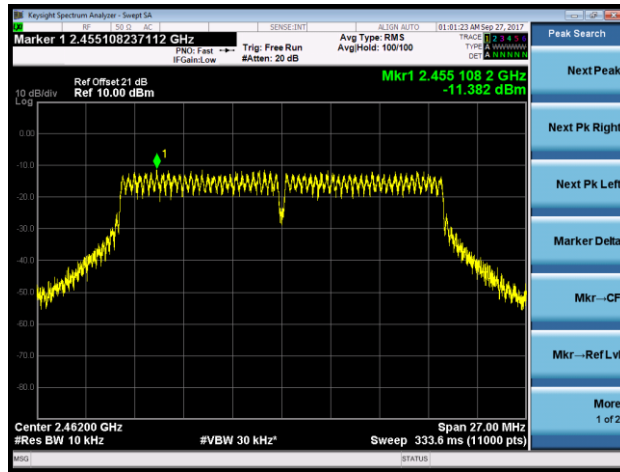


802.11n-HT40 AVGPSD - Ant 0 / Ant 0 + 1


Channel 03 (2422MHz)

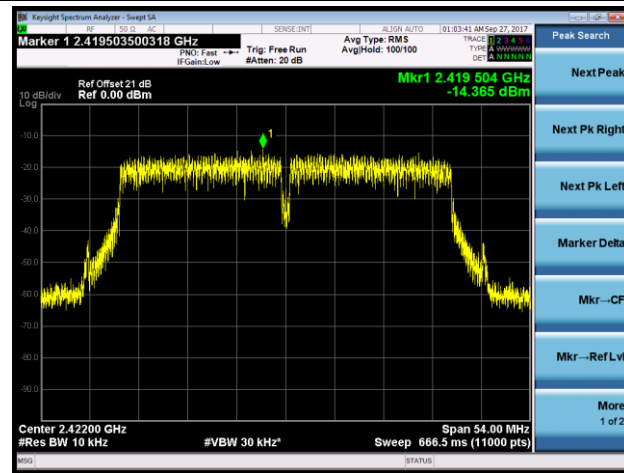

Channel 06 (2437MHz)

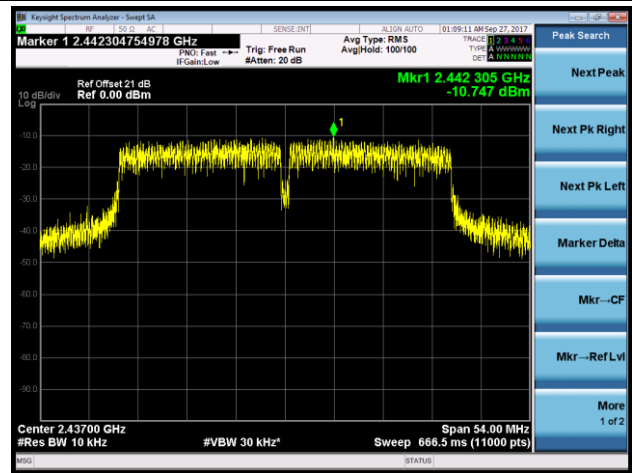


Channel 09 (2452MHz)

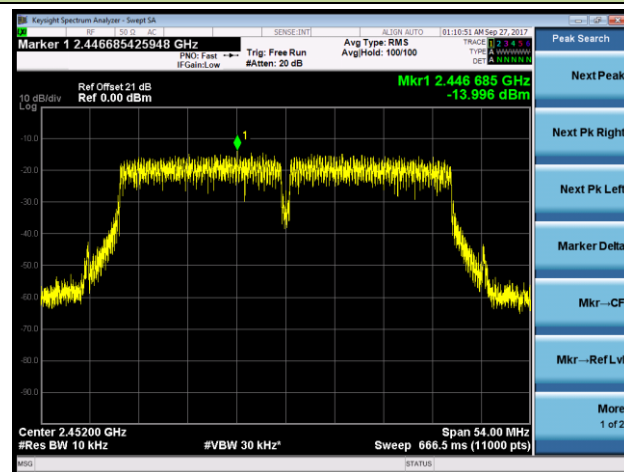


802.11n-HT20 AVGPSD - Ant 1 / Ant 0 + 1


Channel 01 (2412MHz)

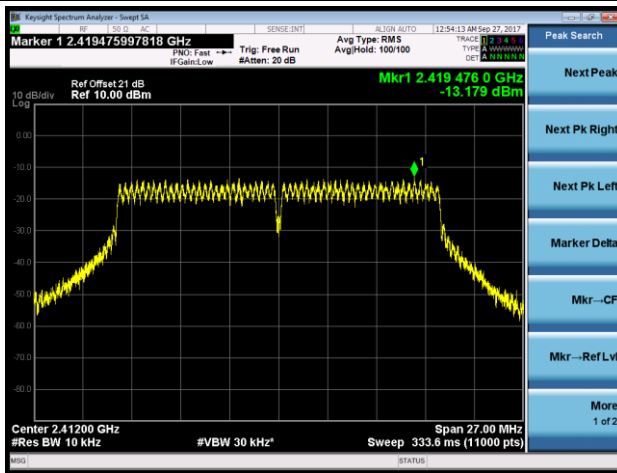

Channel 06 (2437MHz)

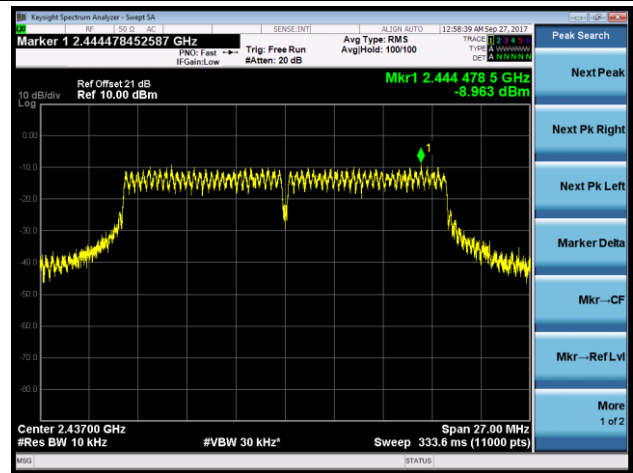


Channel 11 (2462MHz)

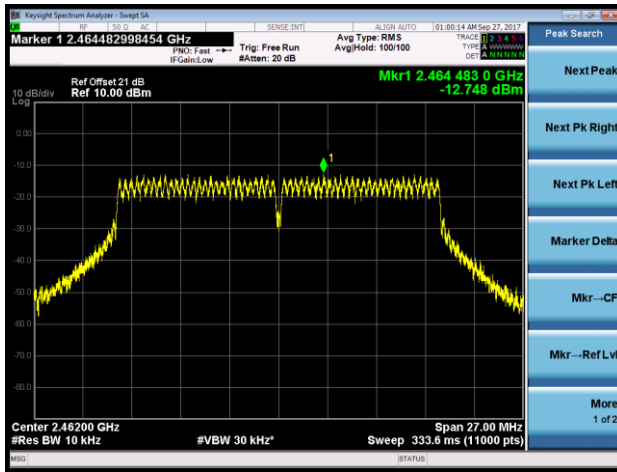


802.11n-HT40 AVGPSD - Ant 1 / Ant 0 + 1


Channel 03 (2422MHz)

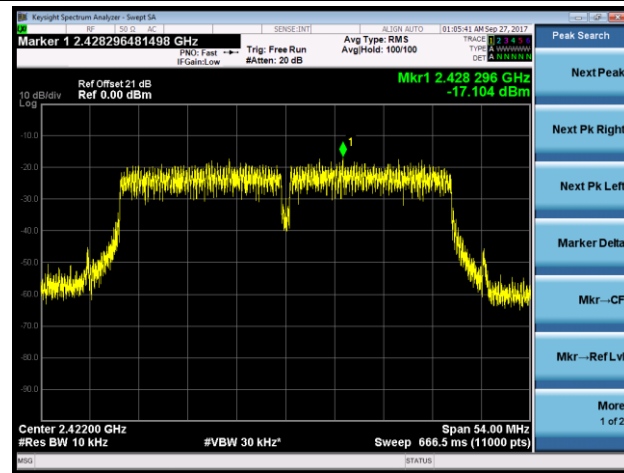

Channel 06 (2437MHz)

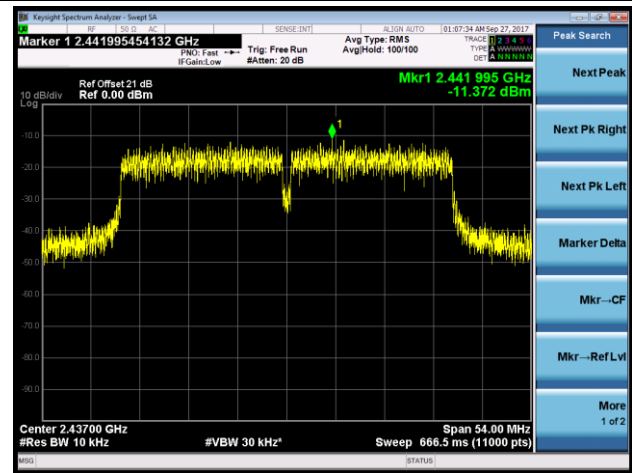

Channel 09 (2452MHz)

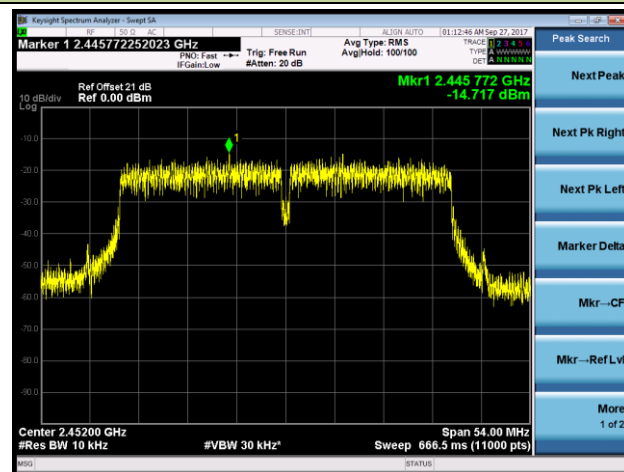

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

KDB 558074 D01v04 - Section 11.2 & Section 11.3

7.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

7.5.4. Test Setup

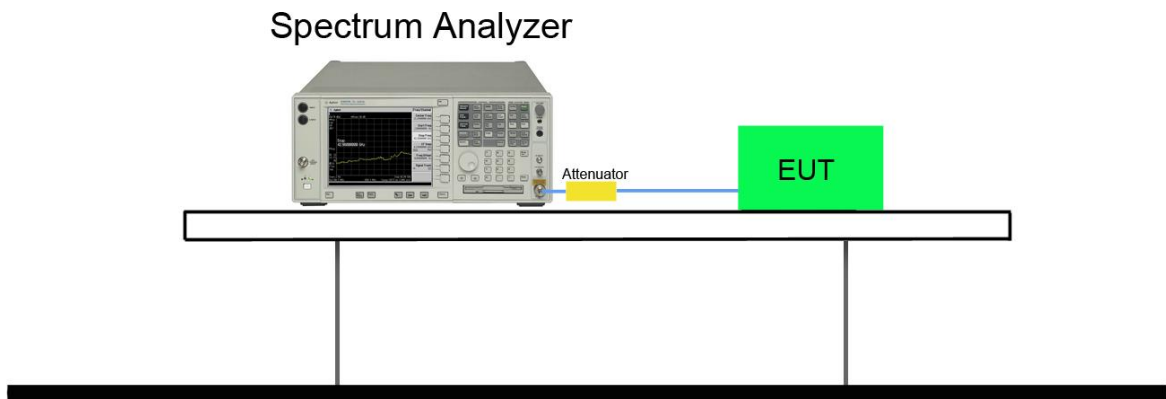

7.5.5. Test Result


Product	804Mesh Dual Wi-Fi	Temperature	27°C
Test Engineer	Hunk Li	Relative Humidity	65%
Test Site	TR3	Test Date	2017/09/27
Test Item	Conducted Band Edge and Out-of-Band Emissions		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
Ant 0					
802.11b	1Mbps	01	2412	30dBc	Pass
802.11b	1Mbps	06	2437	30dBc	Pass
802.11b	1Mbps	11	2462	30dBc	Pass
802.11g	6Mbps	01	2412	30dBc	Pass
802.11g	6Mbps	06	2437	30dBc	Pass
802.11g	6Mbps	11	2462	30dBc	Pass
Ant 1					
802.11g	6Mbps	01	2412	30dBc	Pass
802.11g	6Mbps	06	2437	30dBc	Pass
802.11g	6Mbps	11	2462	30dBc	Pass
Ant 0 / Ant 0 + 1					
802.11n-HT20	MCS0	01	2412	30dBc	Pass
802.11n-HT20	MCS0	06	2437	30dBc	Pass
802.11n-HT20	MCS0	11	2462	30dBc	Pass
802.11n-HT40	MCS0	03	2422	30dBc	Pass
802.11n-HT40	MCS0	06	2437	30dBc	Pass
802.11n-HT40	MCS0	09	2452	30dBc	Pass


802.11b Out-of-Band Emissions - Ant 0

Channel 01 (2412MHz)


100kHz PSD reference Level

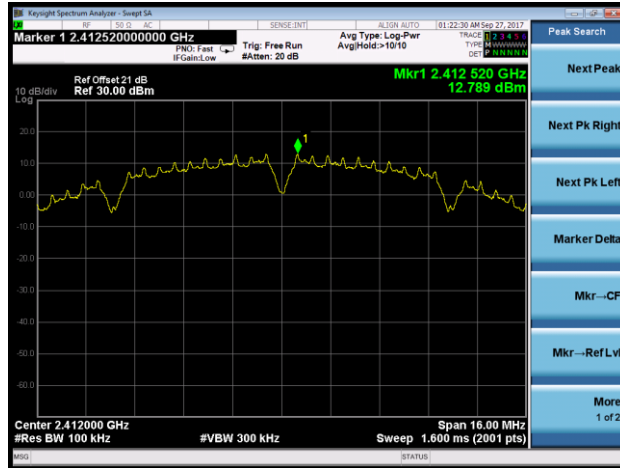

Low Band Edge

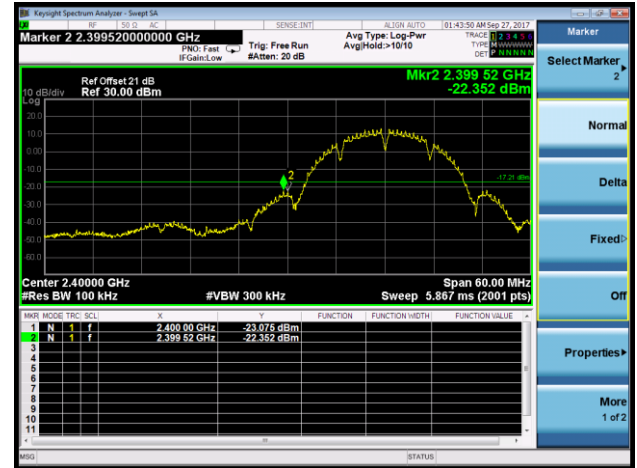


Spurious Emission

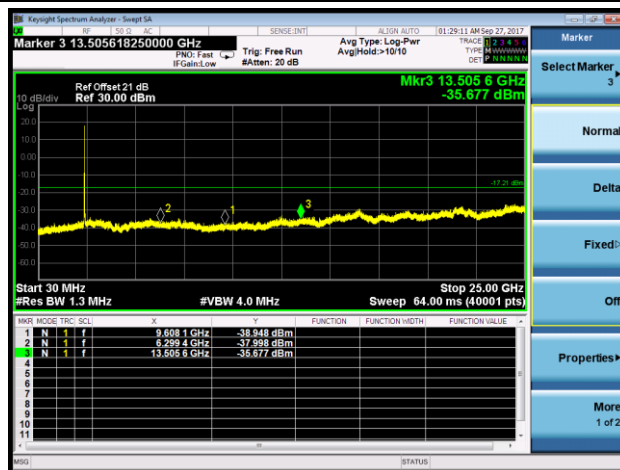


Channel 06 (2437MHz)

100kHz PSD reference Level

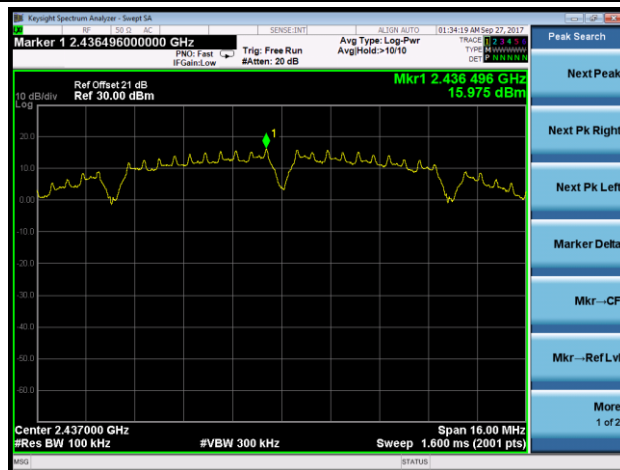

Spurious Emission

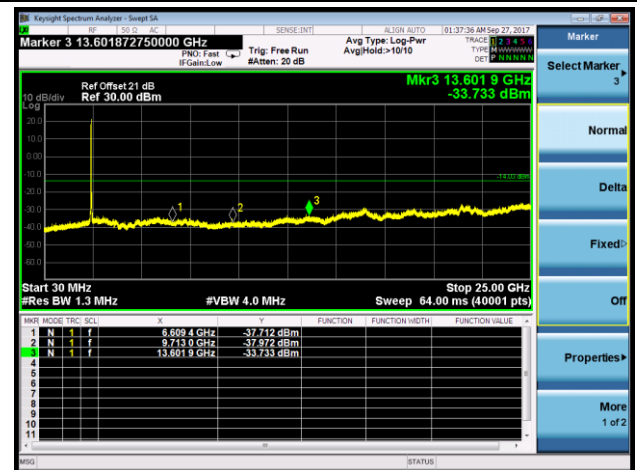


Channel 11 (2462MHz)


100kHz PSD reference Level



High Band Edge

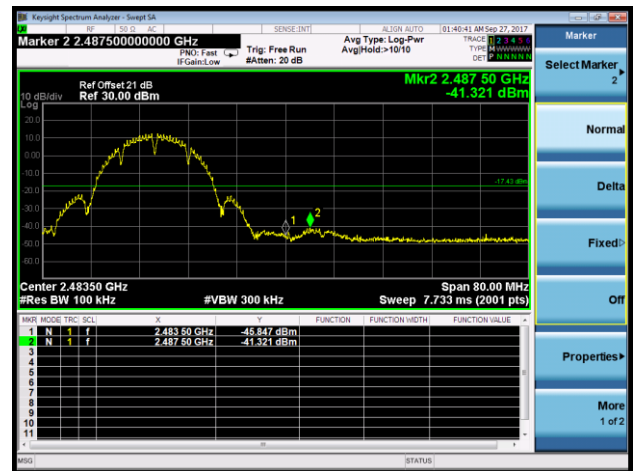


Spurious Emission

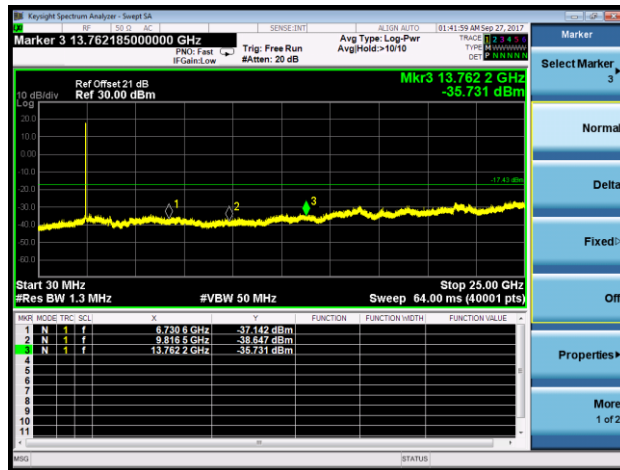


802.11g Out-of-Band Emissions - Ant 0

Channel 01 (2412MHz)


100kHz PSD reference Level

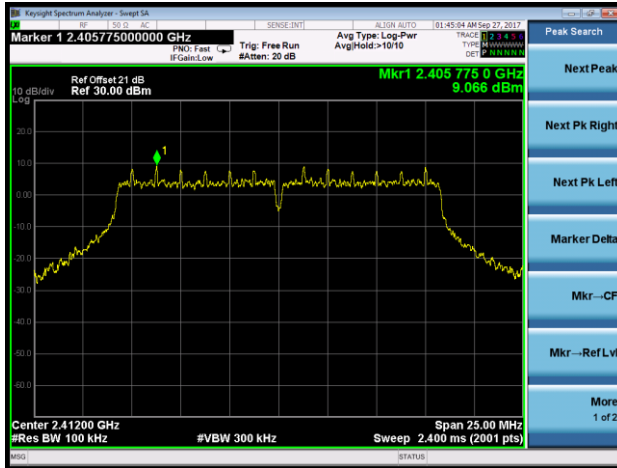

Low Band Edge

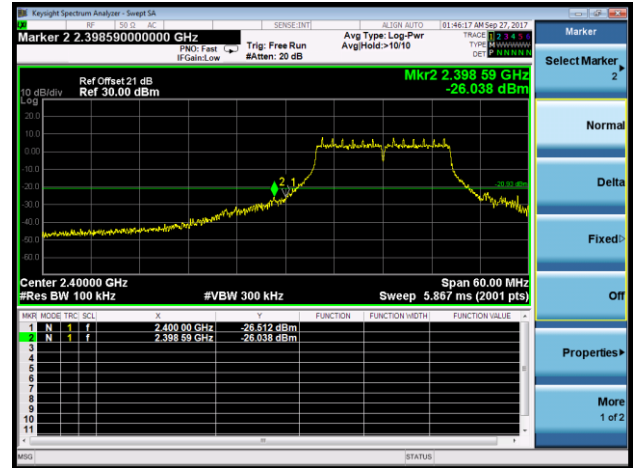


Spurious Emission

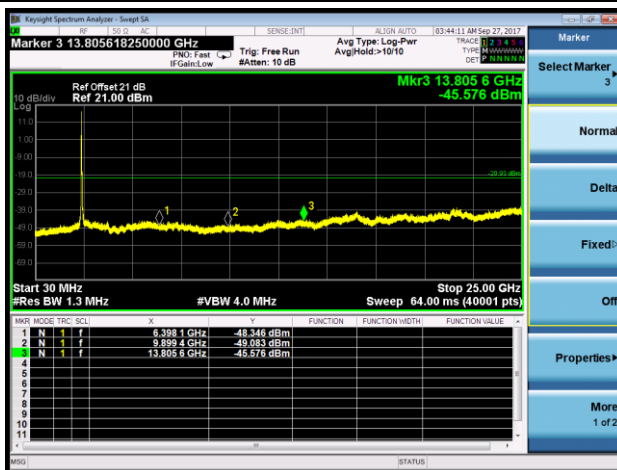

Channel 06 (2437MHz)

100kHz PSD reference Level

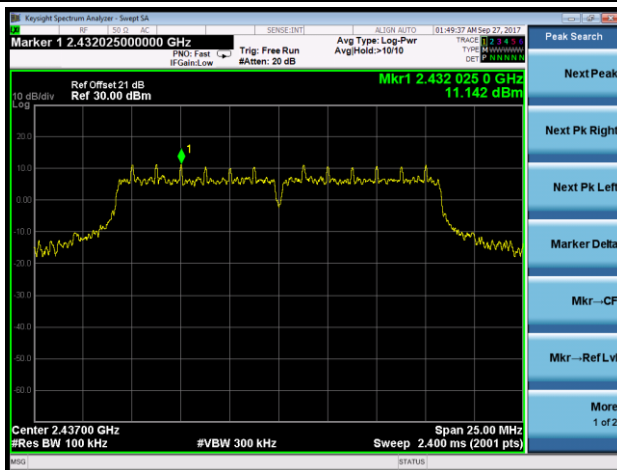

Spurious Emission

