




# RADIO EXPOSURE TEST REPORT

**FCC ID** : 2ABLK-GM2037  
**Equipment** : GigaSpire Mesh BLAST u6me  
**Brand Name** : Calix  
**Model Name** : u6me  
**Applicant** : Calix Inc.  
1035 N. McDowell Blvd. Petaluma, CA94954 U.S.A.  
**Manufacturer** : Calix Inc.  
1035 N. McDowell Blvd. Petaluma, CA94954 U.S.A.  
**Standard** : 47 CFR Part 2.1091

The product was received on Oct. 14, 2021, and testing was started from Oct. 14, 2021 and completed on Jan. 20, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

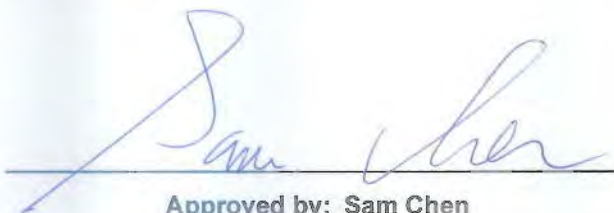

Approved by: Sam Chen

**Sporton International Inc. Hsinchu Laboratory**  
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 EUT General Information .....	5
1.2 Testing Location .....	7
1.3 Table for EUT supports functions.....	7
<b>2 Maximum Permissible Exposure .....</b>	<b>8</b>
2.1 Limit of Maximum Permissible Exposure .....	8
2.2 MPE Calculation Method.....	8
2.3 Calculated Result and Limit.....	9
<b>Photographs of EUT v01</b>	





## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

**Declaration of Conformity:**

1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to report "Measurement Uncertainty".

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: **Sam Chen**

Report Producer: **Penny Kao**



# 1 General Description

## 1.1 EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) VHT: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
6GHz	5925-7125	6115-7095	802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)



**1.1.1 Antenna Information**

Ant.	Port			Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz					
1	1	1	-	GALTRONICS	02102140-07461-2	Dipole	U.FL	Note1
2	2	2	-	GALTRONICS	02102140-07461-1	Dipole	U.FL	
3	-	-	1	GALTRONICS	02102475-07461-2	Dipole	U.FL	
4	-	-	2	GALTRONICS	02102475-07461-1	Dipole	U.FL	

Note 1:

Ant.	Port			Antenna Gain (dBi)						
	WLAN 2.4GHz	WLAN 5GHz	WLAN 6GHz	WLAN 2.4GHz	WLAN 5GHz		WLAN 6GHz			
					UNII 1	UNII 3	UNII 5	UNII 6	UNII 7	UNII 8
1	1	1	-	2.617	3.761	3.221	-	-	-	-
2	2	2	-	2.626	3.600	3.333	-	-	-	-
3	-	-	1	-	-	-	2.558	2.781	3.076	2.982
4	-	-	2	-	-	-	3.076	3.246	3.429	3.347

Note 2: The above information was declared by manufacturer.

Note 3: Directional gain information

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

Ex.

Directional Gain (NSS1) formula :

$$DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

$$NSS1(g1,1) = 10^{G1/20} ; NSS1(g1,2) = 10^{G2/20}$$

$$g_{j,k} = (NSS1(g1,1) + NSS1(g1,2))^2$$

$$DG = 10 \log[(NSS1(g1,1) + NSS1(g1,2) / N_{ANT})] => 10 \log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$$

Where ;

G1 = Ant 1 Gain ; G2 = Ant 2 Gain

2.4GHz DG = 5.632 dBi

5 GHz U-NII-1 DG = 6.691 dBi

5 GHz U-NII-3 DG = 6.287 dBi



The EUT has four antennas.

**For 2.4GHz function:**

**For IEEE 802.11 b/g/n/VHT/ax mode (2TX/2RX)**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac/ax mode (2TX/2RX)**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**For 6GHz function:**

**For IEEE 802.11ax mode (2TX/2RX)**

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

**1.1.2 Accessories**

Accessories				
No.	Equipment Name	Brand Name	Model Name	Rating
1	Adapter	Ktec	KSA-24W-120200HU	INPUT: 100-240V~50/60Hz, 0.6A OUTPUT: 12V, 2.0A

**1.2 Testing Location**

Testing Location Information	
Test Lab. : Sporton International Inc. Hsinchu Laboratory	
Hsinchu	ADD: No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan (R.O.C.)
(TAF: 3787)	TEL: 886-3-656-9065      FAX: 886-3-656-9085
Test site Designation No. TW3787 with FCC.	
Conformity Assessment Body Identifier (CABID) TW3787 with ISED.	

**1.3 Table for EUT supports functions**

Function
AP Router
Extender



## 2 Maximum Permissible Exposure

### 2.1 Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	*(100)	<6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	<6
30-300	61.4	0.163	1.0	<6
300-1500	-	-	f/300	<6
1500-100,000	-	-	5	<6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	<30
30-300	27.5	0.073	0.2	<30
300-1500	-	-	f/1500	<30
1500-100,000	-	-	1.0	<30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 2.2 MPE Calculation Method

The MPE was calculated at 24 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$





### 2.3 Calculated Result and Limit

**Exposure Environment: General Population / Uncontrolled Exposure**

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )
2.4G;D1D	5.632	26.43	32.06	0.50	32.56	1.80302	24	0.24921	1.00000
5.2G;D1D	6.691	29.29	35.98	0.01	35.99	3.97192	24	0.54873	1.00000
5.8G;D1D	6.287	29.69	35.98	0.01	35.99	3.97192	24	0.54873	1.00000
6.2G;D1D	5.831	-	27.13	0.50	27.63	0.57943	24	0.08005	1.00000
6.4G;D1D	6.027	-	26.90	0.50	27.40	0.54954	24	0.07592	1.00000
6.7G;D1D	6.265	-	27.61	0.50	28.11	0.64714	24	0.08940	1.00000
7.0G;D1D	6.179	-	24.98	0.50	25.48	0.35318	24	0.04879	1.00000

**Simultaneous Transmission Analysis Mode: WLAN 2.4GHz+WLAN 5GHz + WLAN 6GHz**

Mode	DG (dBi)	Power (dBm)	EIRP (dBm)	Tolerance (dB)	Tune-up EIRP (dBm)	Tune-up EIRP (W)	Distance (cm)	S (mW/cm <sup>2</sup> )	S Limit (mW/cm <sup>2</sup> )	Ratio (S/Limit)
2.4G;D1D	5.632	26.43	32.06	0.50	32.56	1.80385	24	0.24921	1.00000	0.24921
5.8G;D1D	6.287	29.69	35.98	0.01	35.99	3.97192	24	0.54873	1.00000	0.54873
6.7G;D1D	6.265	-	27.61	0.50	28.11	0.64714	24	0.08940	1.00000	0.08940
									Sum Ratio	0.88734
									Ratio Limit	1

Note: The above antenna gain was declared by manufacturer.

————THE END————