



FCC Part 15C Measurement and Test Report

For

Trend-tech Technology Co., Limited

**Room 205, Building No. 5, YaoXing HuaYuan, XinHuiDaDao No. 45, XinHui
District, JiangMen City, GuangDong Province, China | Postage Code:529100**

FCC ID: 2ABM8-AC3

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>AC1200 Dual Band USB WiFi Adapter</u>
Tested Model:	<u>AC3</u>
Report No.:	<u>WTX19X12088111W-2</u>
Sample Receipt Date:	<u>2019-12-18</u>
Tested Date:	<u>2019-12-18 to 2020-01-09</u>
Issued Date:	<u>2020-01-09</u>
Tested By:	<u>Jack Huang / Engineer</u> <i>Jack Huang</i>
Reviewed By:	<u>Lion Cai / RF Manager</u> <i>Lion Cai</i>
Approved & Authorized By:	<u>Silin Chen / Manager</u> <i>Silin Chen</i>
Prepared By:	Shenzhen SEM Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.



TABLE OF CONTENTS

1. GENERAL INFORMATION.....4

 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

 1.2 TEST STANDARDS.....5

 1.3 TEST METHODOLOGY.....5

 1.4 TEST FACILITY.....5

 1.5 EUT SETUP AND TEST MODE.....6

 1.6 MEASUREMENT UNCERTAINTY.....7

 1.7 TEST EQUIPMENT LIST AND DETAILS.....8

2. SUMMARY OF TEST RESULTS.....10

3. RF EXPOSURE.....11

 3.1 STANDARD APPLICABLE.....11

 3.2 TEST RESULT.....11

4. ANTENNA REQUIREMENT.....12

 4.1 STANDARD APPLICABLE.....12

 4.2 EVALUATION INFORMATION.....12

5. POWER SPECTRAL DENSITY.....13

 5.1 STANDARD APPLICABLE.....13

 5.2 TEST PROCEDURE.....13

 5.3 SUMMARY OF TEST RESULTS/PLOTS.....13

6. DTS BANDWIDTH.....22

 6.1 STANDARD APPLICABLE.....22

 6.2 TEST PROCEDURE.....22

 6.3 SUMMARY OF TEST RESULTS/PLOTS.....22

7. RF OUTPUT POWER.....31

 7.1 STANDARD APPLICABLE.....31

 7.2 TEST PROCEDURE.....31

 7.3 SUMMARY OF TEST RESULTS/PLOTS.....31

8. FIELD STRENGTH OF SPURIOUS EMISSIONS.....41

 8.1 STANDARD APPLICABLE.....41

 8.2 TEST PROCEDURE.....41

 8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....43

 8.4 SUMMARY OF TEST RESULTS/PLOTS.....43

9. OUT OF BAND EMISSIONS.....52

 9.1 STANDARD APPLICABLE.....52

 9.2 TEST PROCEDURE.....52

 9.3 SUMMARY OF TEST RESULTS/PLOTS.....53

10. CONDUCTED EMISSIONS.....86

 10.1 TEST PROCEDURE.....86

 10.2 BASIC TEST SETUP BLOCK DIAGRAM.....86

 10.3 TEST RECEIVER SETUP.....86

 10.4 SUMMARY OF TEST RESULTS/PLOTS.....86



Report version

Version No.	Date of issue	Description
Rev.00	2020-01-09	Original
/	/	/



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Trend-tech Technology Co., Limited
 Address of applicant: Room 205, Building No. 5, YaoXing HuaYuan, XinHuiDaDao No. 45, XinHui District, JiangMen City, GuangDong Province, China | Postage Code:529100

Manufacturer: Trend-tech Technology Co., Limited
 Address of manufacturer: Room 205, Building No. 5, YaoXing HuaYuan, XinHuiDaDao No. 45, XinHui District, JiangMen City, GuangDong Province, China | Postage Code:529100

General Description of EUT	
Product Name:	AC1200 Dual Band USB WiFi Adapter
Trade Name:	BrosTrend
Model No.:	AC3
Adding Model(s):	AC1, AC5, AC1L, AC3L, AC5L
Rated Voltage:	DC5V
Power Adapter Model:	/
<p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model AC3, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 802.11b/g/n(HT20) 2422-2452MHz for 802.11n(HT40)
RF Output Power:	17.20dBm (Conducted)
Type of Modulation:	DBPSK,BPSK,DQPSK,QPSK,16QAM,64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 300Mbps
Quantity of Channels:	11 for 802.11b/g/n(HT20); 7 for 802.11n(HT40)
Channel Separation:	5MHz
Type of Antenna:	External Antenna
Antenna Gain:	5.0dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 15.247 Meas Guidance v05r02: Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

662911 D01 Multiple Transmitter Output v02r01: Emissions Testing of Transmitters with Multiple Outputs in the Same Band

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM4	802.11n-HT40	Low:2422MHz, Middle:2437MHz,High:2452MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Extension Cradle	1.52	Unshielded	Without Ferrite
CD	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	EB12648265



1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17



Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing



2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1093	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable



3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1091, the mobile transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.



4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two External antennas, fulfill the requirement of this section.



5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.3, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Test Result(dBm/3kHz)		Total dBm	Limit dBm/3kHz
		Antenna 1	Antenna 2		
802.11b_11Mbps	2412	-17.7	-17.44	/	8
	2437	-18.63	-18.31	/	8
	2462	-19.51	-19.11	/	8
802.11g_54Mbps	2412	-19.91	-19.89	/	8
	2437	-21.31	-21.07	/	8
	2462	-22.53	-22.75	/	8
802.11n-HT20_MCS7	2412	-20.97	-20.57	-17.76	8
	2437	-22.01	-21.97	-18.98	8
	2462	-23.36	-22.87	-20.10	8
802.11n-HT40_MCS7	2422	-23.68	-25.1	-21.32	8
	2437	-24.85	-25.93	-22.35	8
	2452	-25.48	-26.8	-23.08	8



Please refer to the following test plots:

➤ Antenna 1

<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	



<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	



<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	



<p>802.11n-HT40-Low</p>	
<p>802.11n-HT40-Middle</p>	
<p>802.11n-HT40-High</p>	

➤ Antenna 2

<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	



<p>802.11g-Low</p>	
<p>802.11g-Middle</p>	
<p>802.11g-High</p>	



<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	



<p>802.11n-HT40-Low</p>	<p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.40670 GHz 25.1 dBm #Avg Log 10 dB/ Offst 1 dB Marker 2.40670000 GHz -25.1 dBm M1 S2 S3 FC AA Center 2.422 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.42170 GHz -25.93 dBm #Avg Log 10 dB/ Offst 1 dB Marker 2.42170000 GHz -25.93 dBm M1 S2 S3 FC AA Center 2.437 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T Ref 0 dBm Atten 10 dB Mkr1 2.43670 GHz -26.8 dBm #Avg Log 10 dB/ Offst 1 dB Marker 2.43670000 GHz -26.8 dBm M1 S2 S3 FC AA Center 2.452 GHz Span 60 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 10.85 s (1001 pts)</p>



6. DTS Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Test Result(MHz)		Limit kHz
		Antenna 1	Antenna 2	
802.11b_11Mbps	2412	9.545	9.110	≥ 500
	2437	9.093	9.102	≥ 500
	2462	9.565	9.096	≥ 500
802.11g_54Mbps	2412	16.567	16.560	≥ 500
	2437	16.529	16.517	≥ 500
	2462	16.566	16.553	≥ 500
802.11n-HT20_MCS7	2412	17.779	17.750	≥ 500
	2437	17.690	17.729	≥ 500
	2462	17.776	17.727	≥ 500
802.11n-HT40_MCS7	2422	36.495	36.487	≥ 500
	2437	36.472	36.477	≥ 500
	2452	36.477	36.493	≥ 500

Please refer to the following test plots:



➤ Antenna 1

<p>802.11b-Low</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.5716 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 20.031 kHz x dB Bandwidth 9.545 MHz</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11b-Middle</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.6324 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -43.795 kHz x dB Bandwidth 9.093 MHz</p> <p>Center Freq 2.4370000 GHz</p> <p>Start Freq 2.4220000 GHz</p> <p>Stop Freq 2.4520000 GHz</p> <p>CF Step 3.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.6954 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -2.014 kHz x dB Bandwidth 9.565 MHz</p> <p>Center Freq 2.4620000 GHz</p> <p>Start Freq 2.4470000 GHz</p> <p>Stop Freq 2.4770000 GHz</p> <p>CF Step 3.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>



<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4956 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -14.471 kHz</p> <p>x dB Bandwidth 16.567 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5092 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -40.456 kHz</p> <p>x dB Bandwidth 16.529 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5050 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -22.160 kHz</p> <p>x dB Bandwidth 16.566 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>



<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6827 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -3.021 kHz x dB Bandwidth 17.779 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6749 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.561 kHz x dB Bandwidth 17.690 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6923 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -13.890 kHz x dB Bandwidth 17.776 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>



<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.1763 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 3.710 kHz x dB Bandwidth 36.495 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.1831 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -13.633 kHz x dB Bandwidth 36.472 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 36.1958 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -8.965 kHz x dB Bandwidth 36.477 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>



➤ Antenna 2

<p>802.11b-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.5303 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 20.522 kHz x dB Bandwidth 9.110 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.5815 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -42.888 kHz x dB Bandwidth 9.102 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 13.6315 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 18.887 kHz x dB Bandwidth 9.096 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>



<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4802 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -9.761 kHz x dB Bandwidth 16.560 MHz</p> <p>Freq/Channel: Center Freq 2.41200000 GHz, Start Freq 2.39700000 GHz, Stop Freq 2.42700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4882 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -28.376 kHz x dB Bandwidth 16.517 MHz</p> <p>Freq/Channel: Center Freq 2.43700000 GHz, Start Freq 2.42200000 GHz, Stop Freq 2.45200000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4951 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -26.413 kHz x dB Bandwidth 16.553 MHz</p> <p>Freq/Channel: Center Freq 2.46200000 GHz, Start Freq 2.44700000 GHz, Stop Freq 2.47700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>



<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6668 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 3.333 kHz x dB Bandwidth 17.750 MHz</p> <p>Freq/Channel Center Freq 2.41200000 GHz Start Freq 2.39700000 GHz Stop Freq 2.42700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6476 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -2.164 kHz x dB Bandwidth 17.729 MHz</p> <p>Freq/Channel Center Freq 2.43700000 GHz Start Freq 2.42200000 GHz Stop Freq 2.45200000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6551 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -4.917 kHz x dB Bandwidth 17.727 MHz</p> <p>Freq/Channel Center Freq 2.46200000 GHz Start Freq 2.44700000 GHz Stop Freq 2.47700000 GHz CF Step 3.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>



<p>802.11n-HT40-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.422 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.422 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.1369 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 9.426 kHz x dB Bandwidth 36.487 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.42200000 GHz</p> <p>Start Freq 2.39200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.1479 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -10.101 kHz x dB Bandwidth 36.477 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.40700000 GHz</p> <p>Stop Freq 2.46700000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT40-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.452 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 2.452 GHz Span 60 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 36.1737 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 5.328 kHz x dB Bandwidth 36.493 MHz</p> <p>Freq/Channel</p> <p>Center Freq 2.45200000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.48200000 GHz</p> <p>CF Step 6.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.2.2 and ANSI C63.10-2013 Subclause 11.9.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.3 Summary of Test Results/Plots



Test Mode	Test Channel MHz	Test Result(dBm)		Total dBm	Output Power mW	Limit mW
		Antenna 1	Antenna 2			
802.11b	2412	16.72	17.15	/	51.88	1000
	2437	16.67	16.60	/	46.45	1000
	2462	16.73	16.56	/	47.10	1000
802.11g	2412	14.64	14.73	/	29.72	1000
	2437	14.76	14.23	/	29.92	1000
	2462	15.15	14.32	/	32.92	1000
802.11n HT20	2412	13.77	14.57	17.20	52.46	1000
	2437	13.72	13.73	16.74	47.16	1000
	2462	13.91	14.25	17.09	51.21	1000
802.11n HT40	2422	12.44	12.16	15.31	33.98	1000
	2437	12.27	12.47	15.38	34.53	1000
	2452	12.20	12.13	15.18	32.93	1000

Please refer to the following test plots:



➤ Antenna 1

<p>802.11b-Low 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>16.72 dBm / 20.0000 MHz -55.88 dBm/Hz</p>
<p>802.11b-Middle 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>16.67 dBm / 20.0000 MHz -56.34 dBm/Hz</p>
<p>802.11b-High 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>16.73 dBm / 20.0000 MHz -56.28 dBm/Hz</p>



<p>802.11g-Low 54Mbps</p>	
<p>802.11g-Middle 54Mbps</p>	
<p>802.11g-High 54Mbps</p>	



<p>802.11n-HT20-Low MCS7</p>	
<p>802.11n-HT20-Middle MCS7</p>	
<p>802.11n-HT20-High MCS7</p>	



<p>802.11n-HT40-Low MCS7</p>	
<p>802.11n-HT40-Middle MCS7</p>	
<p>802.11n-HT40-High MCS7</p>	



➤ Antenna 2

<p>802.11b-Low 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offset 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>17.15 dBm / 20.0000 MHz -55.86 dBm/Hz</p>
<p>802.11b-Middle 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.437 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offset 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>16.60 dBm / 20.0000 MHz -56.41 dBm/Hz</p>
<p>802.11b-High 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.462 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offset 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>16.56 dBm / 20.0000 MHz -56.21 dBm/Hz</p>



<p>802.11g-Low 54Mbps</p>	<p>Agilent R T Trace/View Ch Freq 2.412 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.73 dBm / 20.0000 MHz -58.28 dBm/Hz</p>
<p>802.11g-Middle 54Mbps</p>	<p>Agilent R T Trace/View Ch Freq 2.437 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.23 dBm / 20.0000 MHz -58.78 dBm/Hz</p>
<p>802.11g-High 54Mbps</p>	<p>Agilent R T Trace/View Ch Freq 2.462 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts) Channel Power Power Spectral Density 14.32 dBm / 20.0000 MHz -58.69 dBm/Hz</p>



<p>802.11n-HT20-Low MCS7</p>	
<p>802.11n-HT20-Middle MCS7</p>	
<p>802.11n-HT20-High MCS7</p>	



<p>802.11n-HT40-Low MCS7</p>	
<p>802.11n-HT40-Middle MCS7</p>	
<p>802.11n-HT40-High MCS7</p>	

8. Field Strength of Spurious Emissions

8.1 Standard Applicable



According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

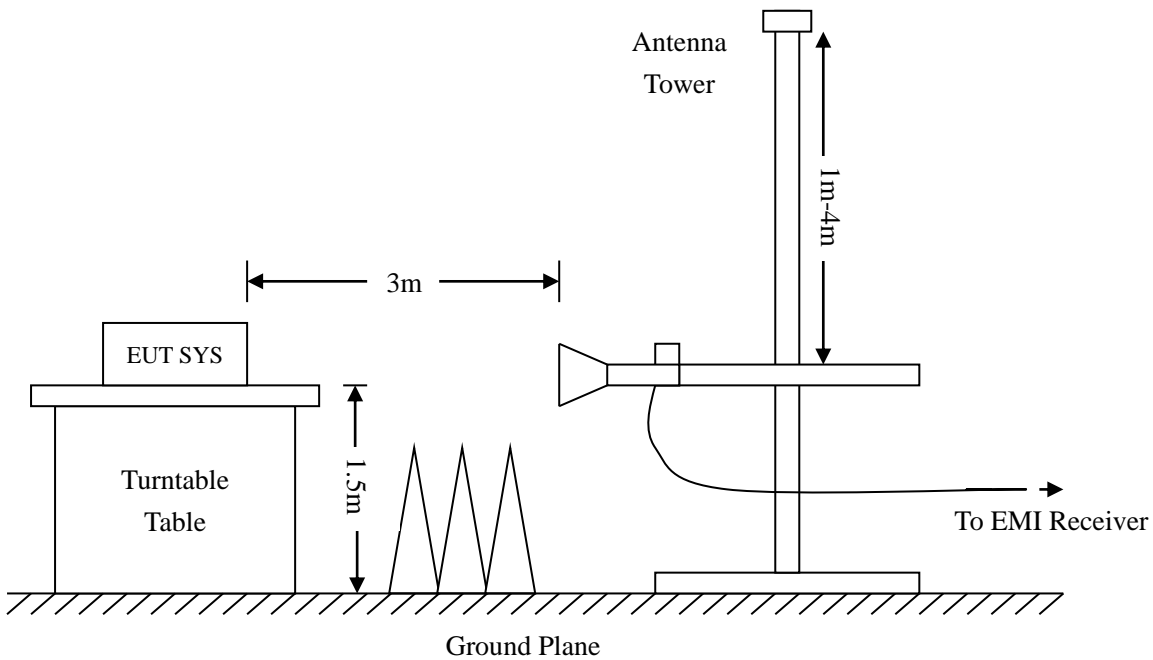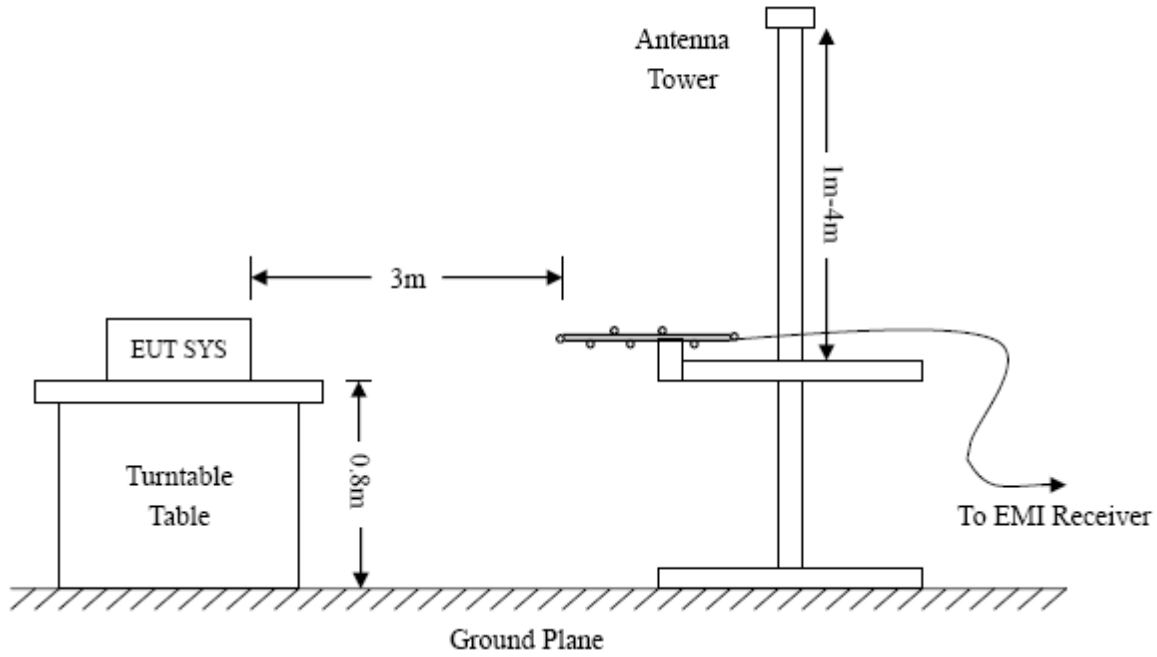

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV



8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.4 Summary of Test Results/Plots


Note: 1. This EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.



- Spurious Emissions Below 1GHz
- Worst case Antenna 1


802.11b_11Mbps(Worst case)			
Test Channel	Low	Polarity:	Horizontal

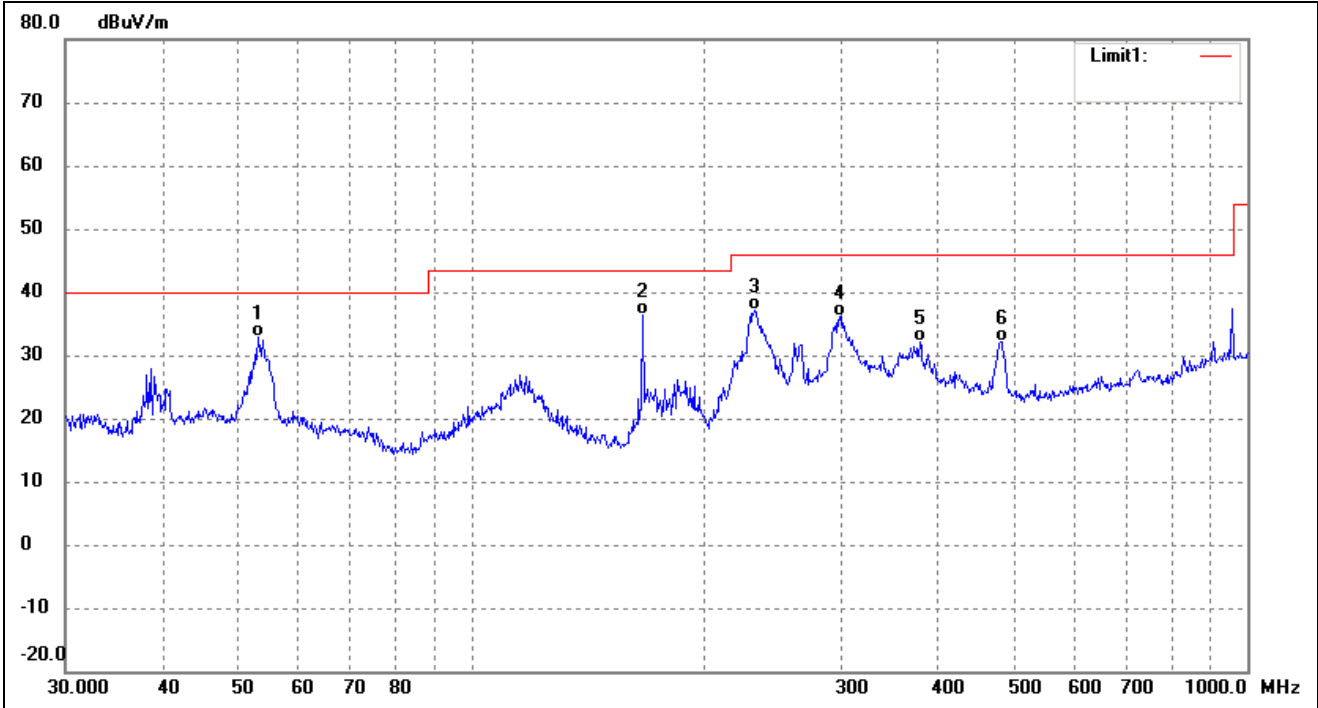

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.1313	47.34	-14.53	32.81	40.00	-7.19	77	100	peak
2	166.0680	52.28	-15.94	36.34	43.50	-7.16	105	100	peak
3	231.7179	48.77	-11.64	37.13	46.00	-8.87	128	100	peak
4	298.2681	44.01	-7.97	36.04	46.00	-9.96	94	100	peak
5	378.5843	40.00	-7.95	32.05	46.00	-13.95	116	100	peak
6	482.2156	40.19	-8.04	32.15	46.00	-13.85	306	100	peak




802.11b_11Mbps(Worst case)			
Test Channel	Low	Polarity:	Vertical

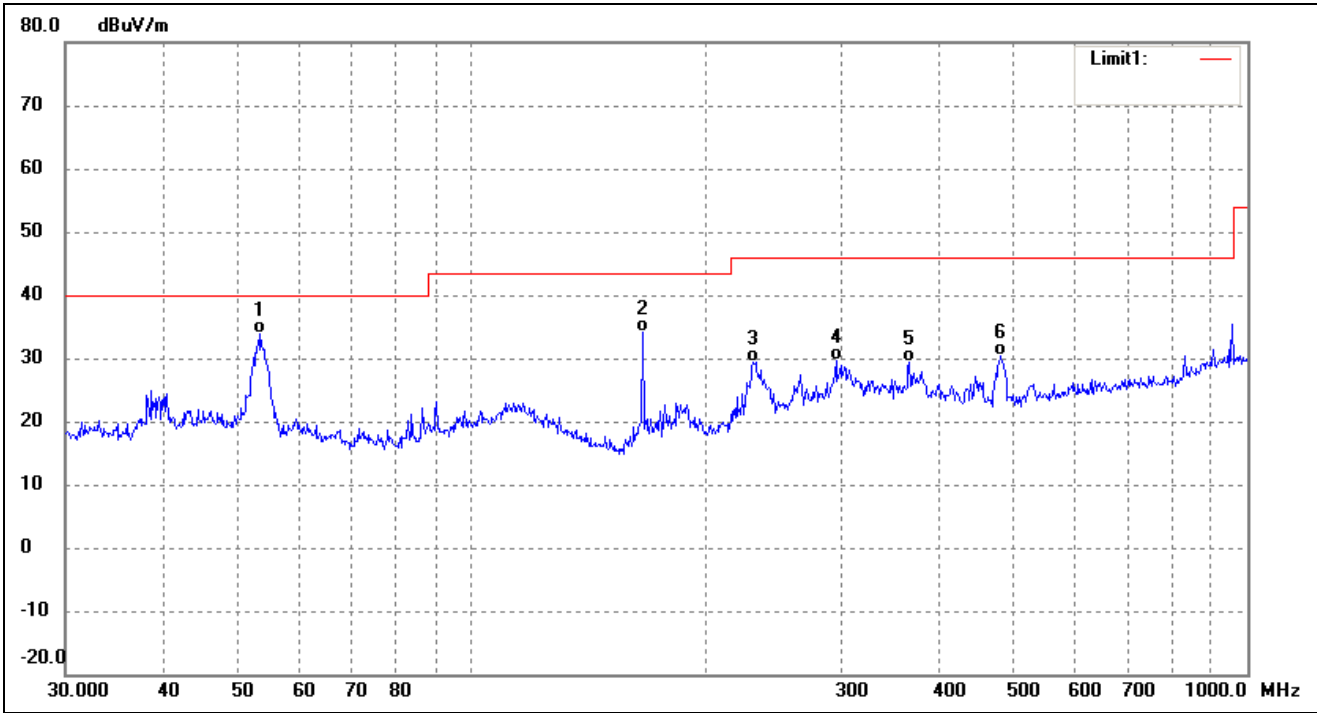

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	48.62	-14.64	33.98	40.00	-6.02	357	100	peak
2	166.6514	49.99	-15.90	34.09	43.50	-9.41	298	100	peak
3	230.9068	41.19	-11.69	29.50	46.00	-16.50	68	100	peak
4	295.1469	37.95	-8.24	29.71	46.00	-16.29	156	100	peak
5	366.8231	37.30	-7.84	29.46	46.00	-16.54	180	100	peak
6	480.5276	38.35	-8.05	30.30	46.00	-15.70	300	100	peak




802.11b_11Mbps(Worst case)			
Test Channel	Middle	Polarity:	Horizontal

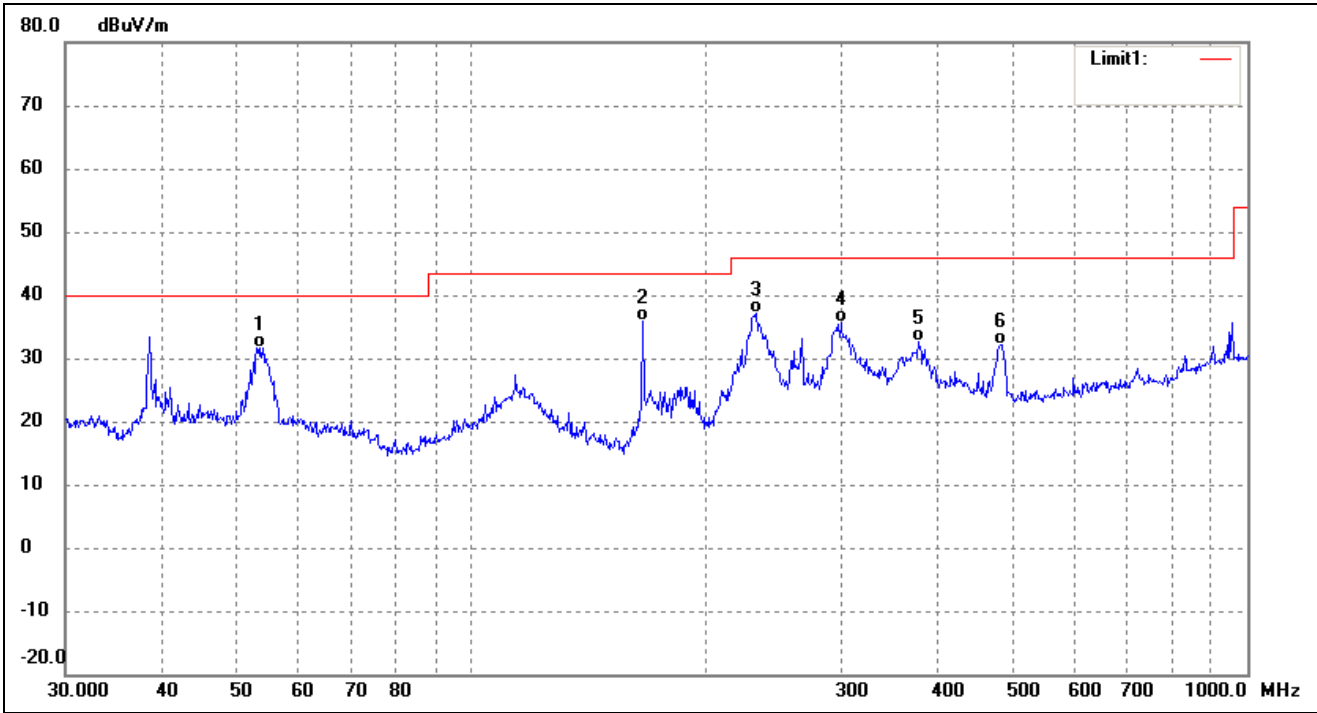

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	46.21	-14.64	31.57	40.00	-8.43	84	100	peak
2	166.0680	51.71	-15.94	35.77	43.50	-7.73	137	100	peak
3	233.3487	48.72	-11.53	37.19	46.00	-8.81	71	100	peak
4	299.3158	43.43	-7.87	35.56	46.00	-10.44	108	100	peak
5	377.2591	40.62	-7.95	32.67	46.00	-13.33	124	100	peak
6	480.5276	40.19	-8.05	32.14	46.00	-13.86	338	100	peak




802.11b_11Mbps(Worst case)			
Test Channel	Middle	Polarity:	Vertical

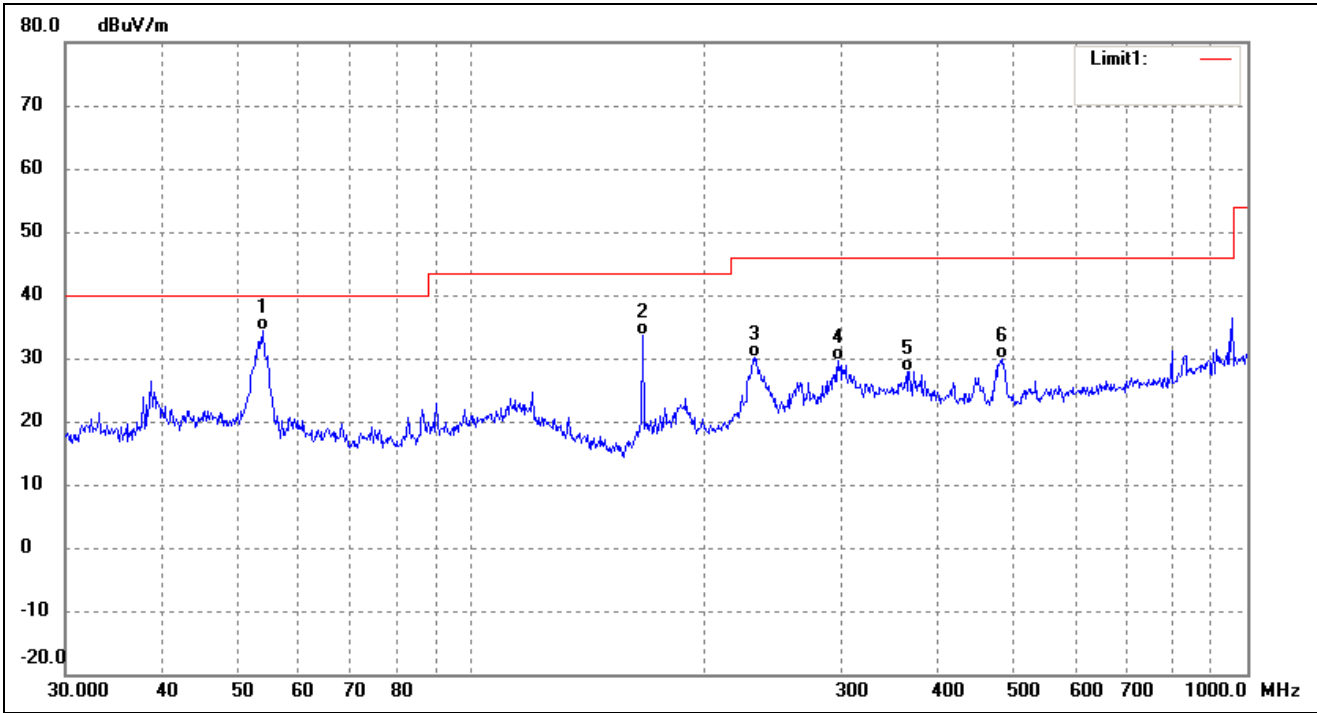

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.8817	49.07	-14.75	34.32	40.00	-5.68	209	100	peak
2	166.6513	49.46	-15.90	33.56	43.50	-9.94	100	100	peak
3	231.7178	41.68	-11.64	30.04	46.00	-15.96	239	100	peak
4	297.2241	37.73	-8.07	29.66	46.00	-16.34	100	100	peak
5	365.5391	35.82	-7.83	27.99	46.00	-18.01	199	100	peak
6	483.9094	37.88	-8.02	29.86	46.00	-16.14	211	100	peak




802.11b_11Mbps(Worst case)			
Test Channel	High	Polarity:	Horizontal

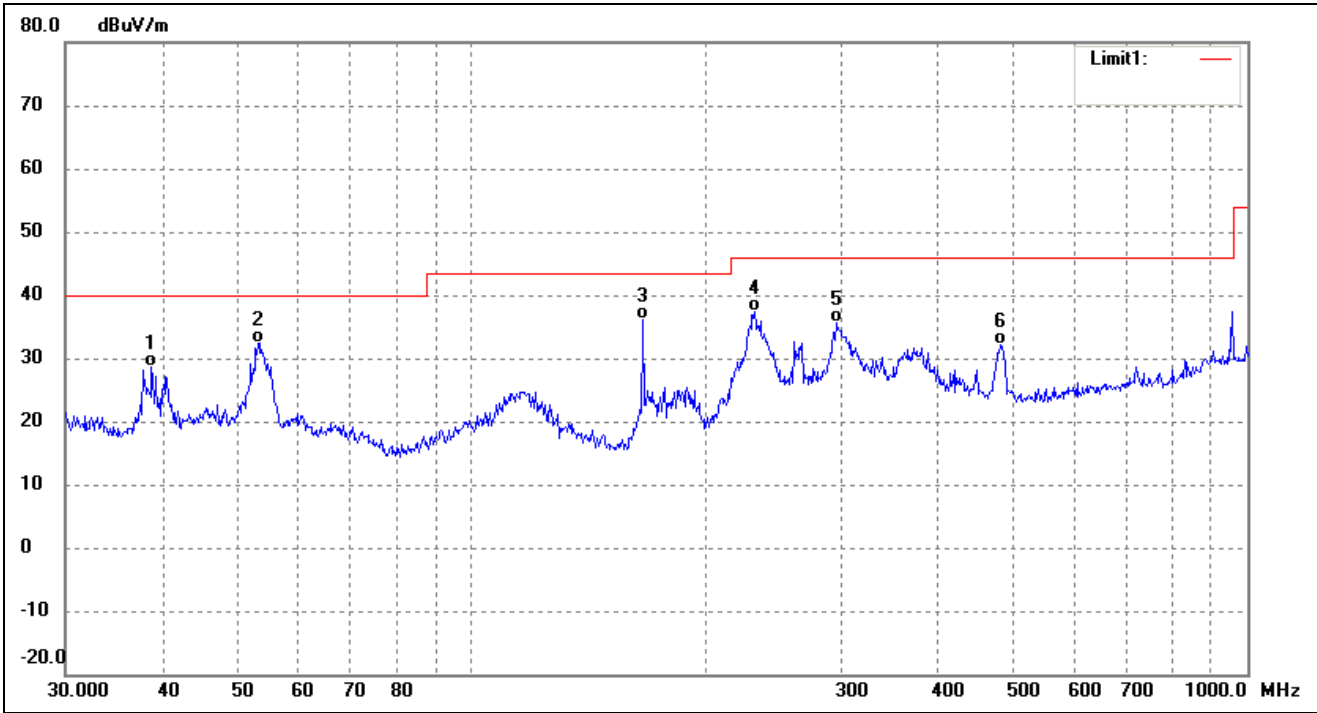

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	38.7518	43.24	-14.64	28.60	40.00	-11.40	189	100	peak
2	53.1313	46.92	-14.53	32.39	40.00	-7.61	184	100	peak
3	166.6514	51.94	-15.90	36.04	43.50	-7.46	53	100	peak
4	231.7179	48.93	-11.64	37.29	46.00	-8.71	107	100	peak
5	295.1469	43.83	-8.24	35.59	46.00	-10.41	89	100	peak
6	480.5276	40.21	-8.05	32.16	46.00	-13.84	326	100	peak



802.11b_11Mbps(Worst case)			
Test Channel	High	Polarity:	Vertical

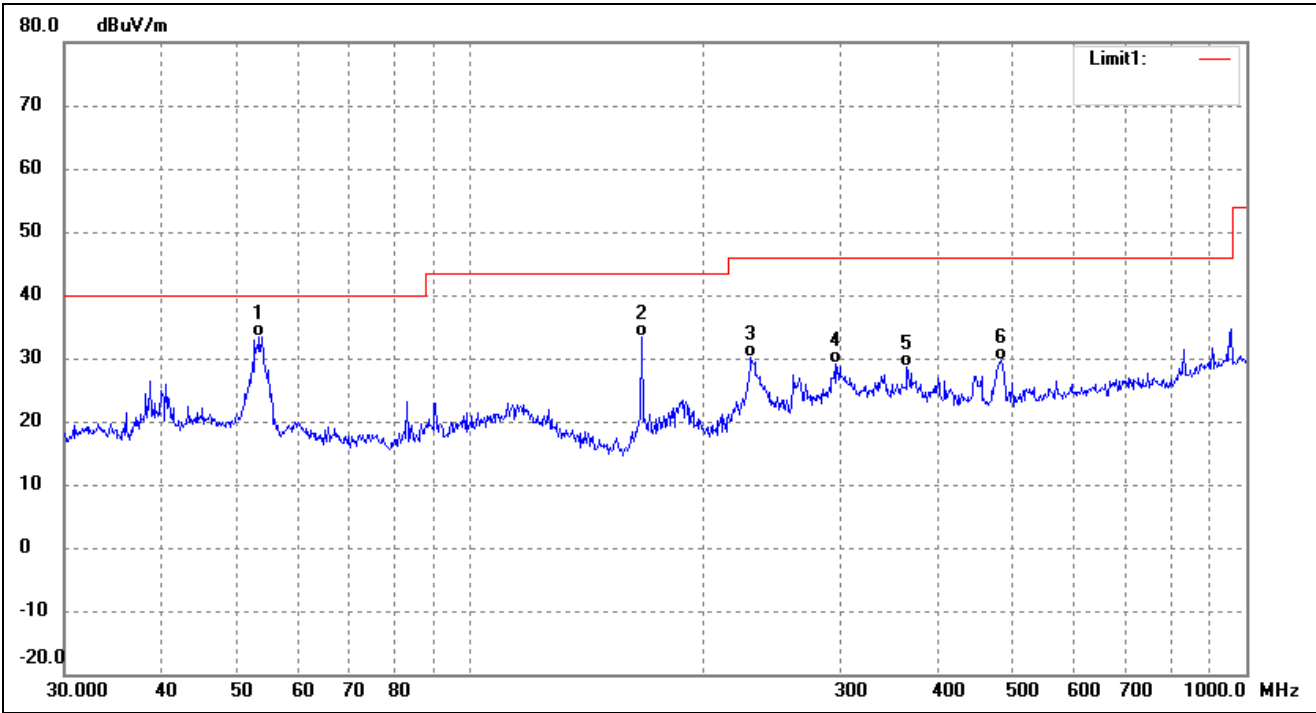

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	53.5052	48.01	-14.64	33.37	40.00	-6.63	55	100	peak
2	166.6514	49.31	-15.90	33.41	43.50	-10.09	247	100	peak
3	230.0985	41.96	-11.74	30.22	46.00	-15.78	99	100	peak
4	295.1469	37.26	-8.24	29.02	46.00	-16.98	237	100	peak
5	365.5391	36.37	-7.83	28.54	46.00	-17.46	152	100	peak
6	483.9094	37.67	-8.02	29.65	46.00	-16.35	195	100	peak



- Spurious Emissions Above 1GHz
- Ant1
- Test Mode: 802.11b_11Mbps(worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	60.11	-3.86	56.25	74	-17.75	H	PK
4824.000	43.78	-3.86	39.92	54	-14.08	H	AV
7236.000	57.51	1.10	58.61	74	-15.39	H	PK
7236.000	39.82	1.10	40.92	54	-13.08	H	AV
4824.000	61.01	-3.86	57.15	74	-16.85	V	PK
4824.000	46.29	-3.86	42.43	54	-11.57	V	AV
7236.000	54.73	1.10	55.83	74	-18.17	V	PK
7236.000	37.85	1.10	38.95	54	-15.05	V	AV
Middle Channel-2437MHz							
4874.000	59.18	-3.74	55.44	74	-18.56	H	PK
4874.000	40.88	-3.74	37.14	54	-16.86	H	AV
7311.000	54.07	1.47	55.54	74	-18.46	H	PK
7311.000	37.52	1.47	38.99	54	-15.01	H	AV
4874.000	61.89	-3.74	58.15	74	-15.85	V	PK
4874.000	44.37	-3.74	40.63	54	-13.37	V	AV
7311.000	58.93	1.47	60.40	74	-13.60	V	PK
7311.000	39.11	1.47	40.58	54	-13.42	V	AV
High Channel-2462MHz							
4924.000	59.92	-3.63	56.29	74	-17.71	H	PK
4924.000	44.30	-3.63	40.67	54	-13.33	H	AV
7386.000	54.47	1.62	56.09	74	-17.91	H	PK
7386.000	41.75	1.62	43.37	54	-10.63	H	AV
4924.000	62.58	-3.63	58.95	74	-15.05	V	PK
4924.000	45.19	-3.63	41.56	54	-12.44	V	AV
7386.000	56.56	1.62	58.18	74	-15.82	V	PK
7386.000	42.86	1.62	44.48	54	-9.52	V	AV



- Ant2
- Test Mode: 802.11b_11Mbps(worst case)

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	61.66	-3.86	57.80	74	-16.20	H	PK
4824.000	45.23	-3.86	41.37	54	-12.63	H	AV
7236.000	55.56	1.10	56.66	74	-17.34	H	PK
7236.000	41.04	1.10	42.14	54	-11.86	H	AV
4824.000	60.05	-3.86	56.19	74	-17.81	V	PK
4824.000	43.69	-3.86	39.83	54	-14.17	V	AV
7236.000	58.82	1.10	59.92	74	-14.08	V	PK
7236.000	42.59	1.10	43.69	54	-10.31	V	AV
Middle Channel-2437MHz							
4874.000	63.08	-3.74	59.34	74	-14.66	H	PK
4874.000	41.16	-3.74	37.42	54	-16.58	H	AV
7311.000	57.82	1.47	59.29	74	-14.71	H	PK
7311.000	40.79	1.47	42.26	54	-11.74	H	AV
4874.000	60.40	-3.74	56.66	74	-17.34	V	PK
4874.000	43.59	-3.74	39.85	54	-14.15	V	AV
7311.000	55.56	1.47	57.03	74	-16.97	V	PK
7311.000	39.97	1.47	41.44	54	-12.56	V	AV
High Channel-2462MHz							
4924.000	59.95	-3.63	56.32	74	-17.68	H	PK
4924.000	42.55	-3.63	38.92	54	-15.08	H	AV
7386.000	53.23	1.62	54.85	74	-19.15	H	PK
7386.000	40.92	1.62	42.54	54	-11.46	H	AV
4924.000	63.03	-3.63	59.40	74	-14.60	V	PK
4924.000	45.52	-3.63	41.89	54	-12.11	V	AV
7386.000	53.99	1.62	55.61	74	-18.39	V	PK
7386.000	41.28	1.62	42.90	54	-11.10	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

**B. Antenna-port conducted measurements**

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9.
- b) VBW \geq $[3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Table 9—RBW as a function of frequency

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.


9.3 Summary of Test Results/Plots



➤ Radiated test

➤ Antenna 1(worst case)


802.11b_11Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

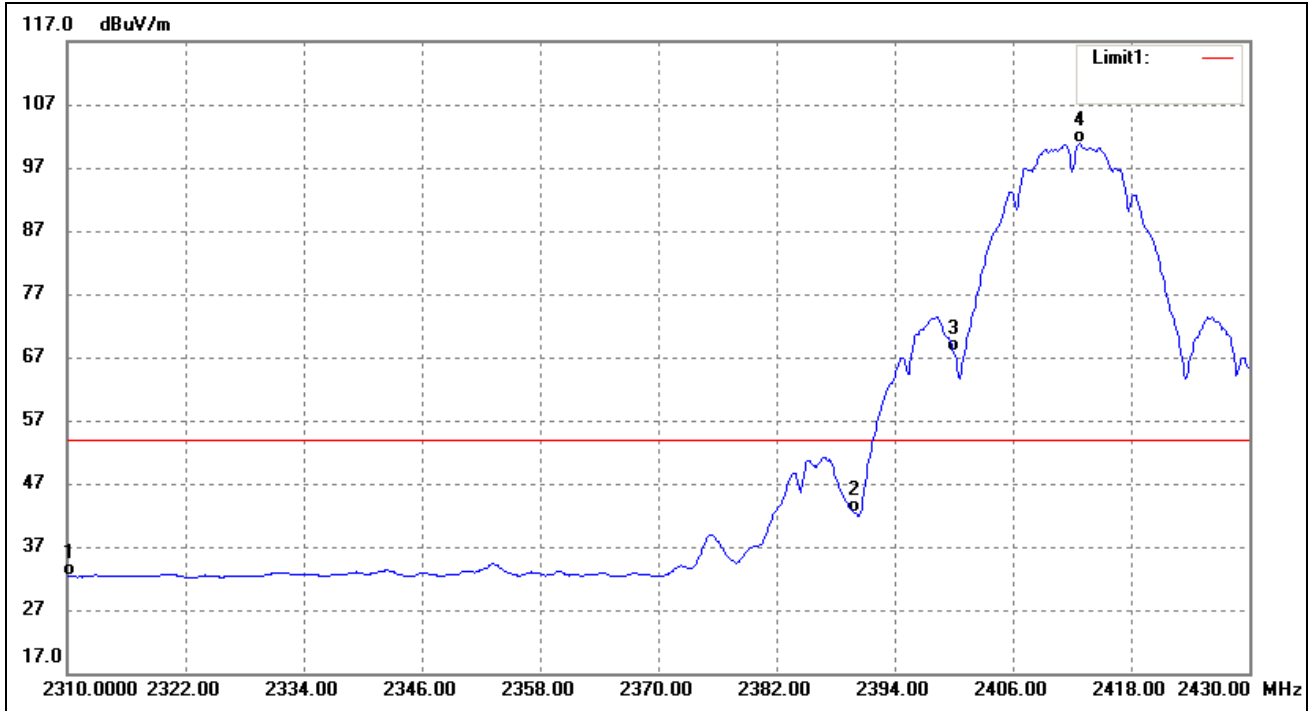

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.99	-9.66	32.33	54.00	-21.67	Average Detector
		54.41	-9.66	44.75	74.00	-29.25	Peak Detector
2	2390.000	51.87	-9.50	42.37	54.00	-11.63	Average Detector
		62.58	-9.50	53.08	74.00	-20.92	Peak Detector
3	2400.000	77.40	-9.48	67.92	Delta=32.89dBc		Average Detector
4	2412.840	110.27	-9.46	100.81			Average Detector




802.11b_11Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

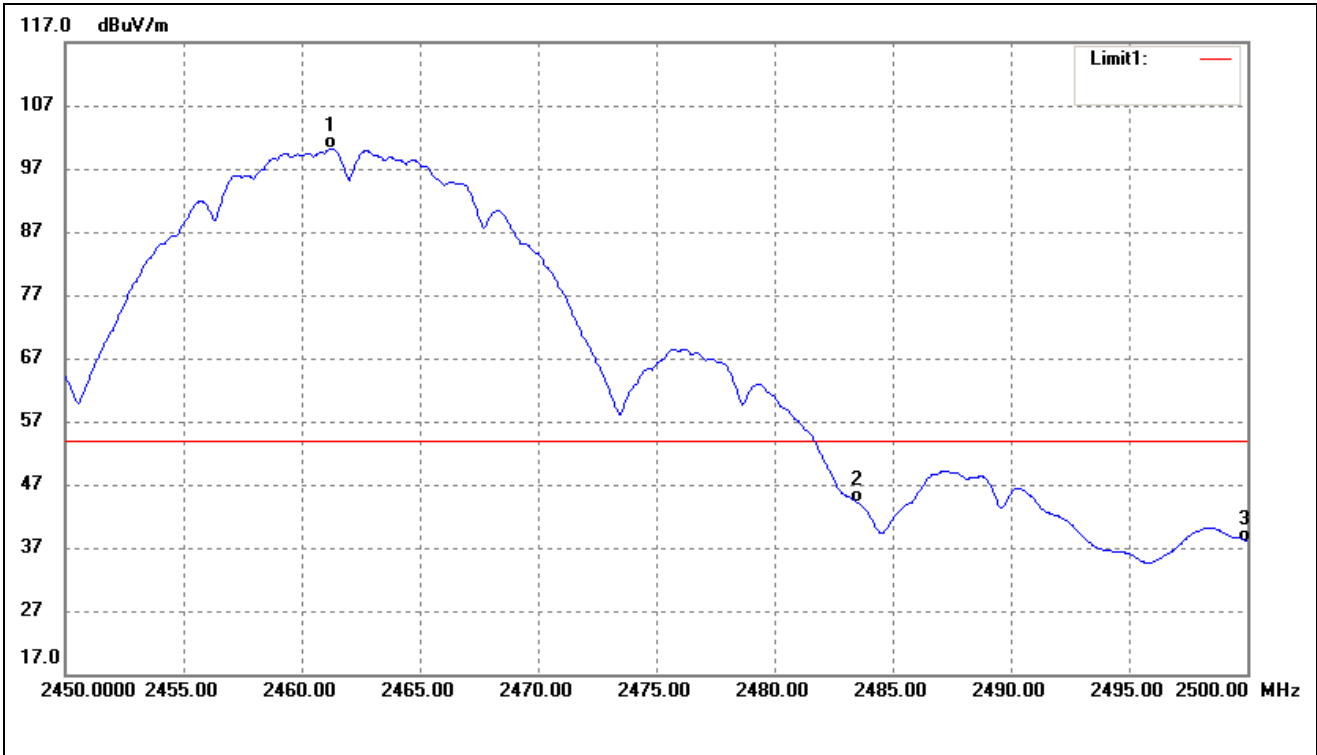

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.250	109.49	-9.36	100.13	/	/	Average Detector
	2460.950	114.11	-9.36	104.75	/	/	Peak Detector
2	2483.500	53.56	-9.31	44.25	54.00	-9.75	Average Detector
	2483.500	62.72	-9.31	53.41	74.00	-20.59	Peak Detector
3	2500.000	47.19	-9.28	37.91	54.00	-16.09	Average Detector
	2500.000	58.97	-9.28	49.69	74.00	-24.31	Peak Detector




802.11g_54Mbps			
Test Channel	Low	Polarity:	Vertical(worst case)

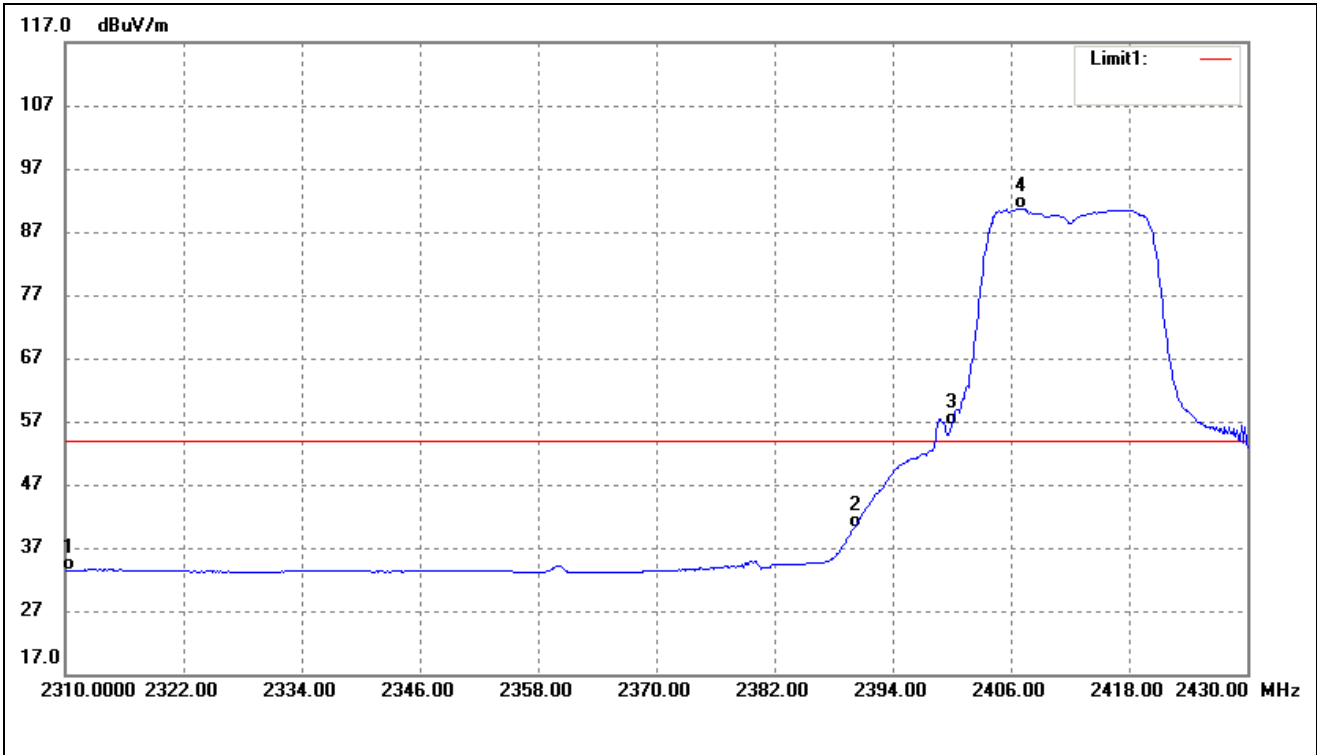

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.01	-9.66	33.35	54.00	-20.65	Average Detector
	2310.000	55.55	-9.66	45.89	74.00	-28.11	Peak Detector
2	2390.000	49.63	-9.50	40.13	54.00	-13.87	Average Detector
	2390.000	72.99	-9.50	63.49	74.00	-10.51	Peak Detector
3	2400.000	65.86	-9.48	56.38	Delta=34.27dBc		Average Detector
4	2407.080	100.12	-9.47	90.65			Average Detector




802.11g_54Mbps			
Test Channel	High	Polarity:	Vertical(worst case)

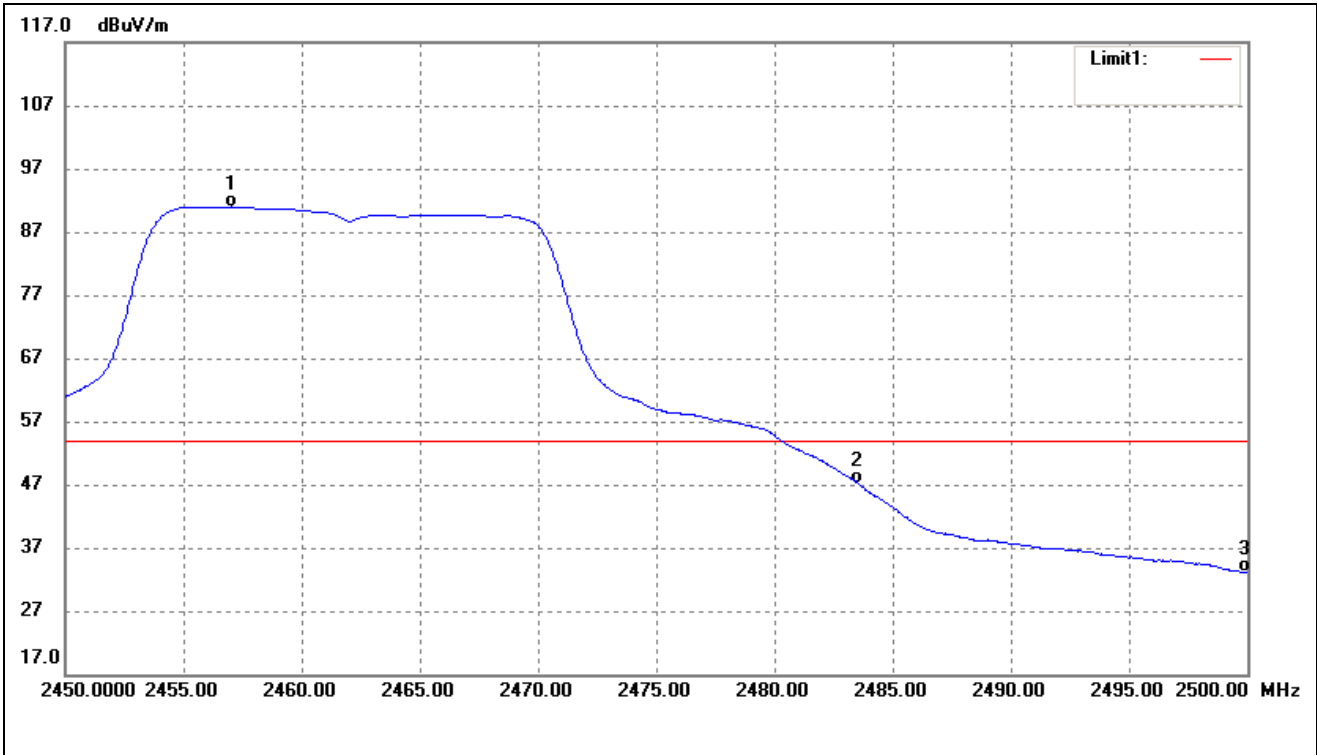

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2457.050	100.36	-9.36	91.00	/	/	Average Detector
	2458.300	110.59	-9.36	101.23	/	/	Peak Detector
2	2483.500	56.56	-9.31	47.25	54.00	-6.75	Average Detector
	2483.500	76.09	-9.31	66.78	74.00	-7.22	Peak Detector
3	2500.000	42.45	-9.28	33.17	54.00	-20.83	Average Detector
	2500.000	57.92	-9.28	48.64	74.00	-25.36	Peak Detector




802.11n-HT20_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

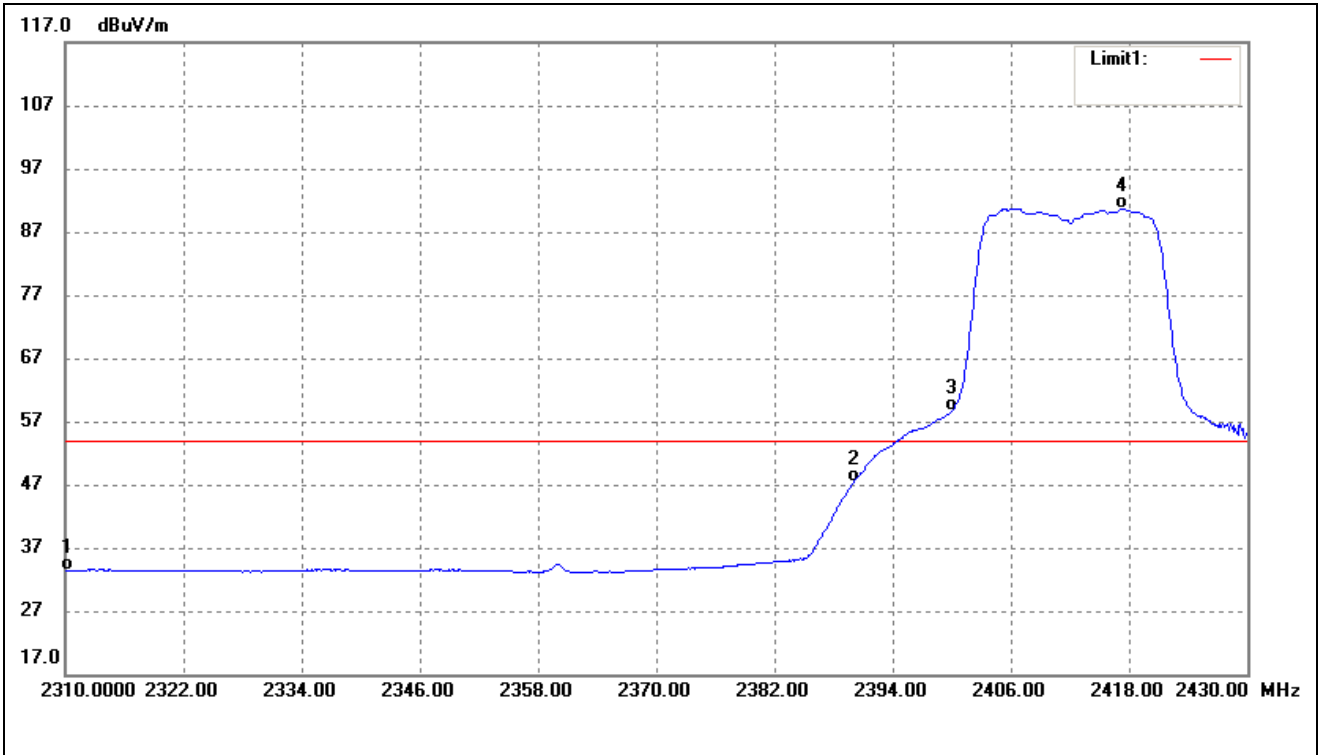

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.01	-9.66	33.35	54.00	-20.65	Average Detector
	2310.000	54.72	-9.66	45.06	74.00	-28.94	Peak Detector
2	2390.000	56.99	-9.50	47.49	54.00	-6.51	Average Detector
	2390.000	81.14	-9.50	71.64	74.00	-2.36	Peak Detector
3	2400.000	68.11	-9.48	58.63	Delta=32.02dBc		Average Detector
4	2417.280	100.10	-9.45	90.65			Average Detector




802.11n-HT20_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

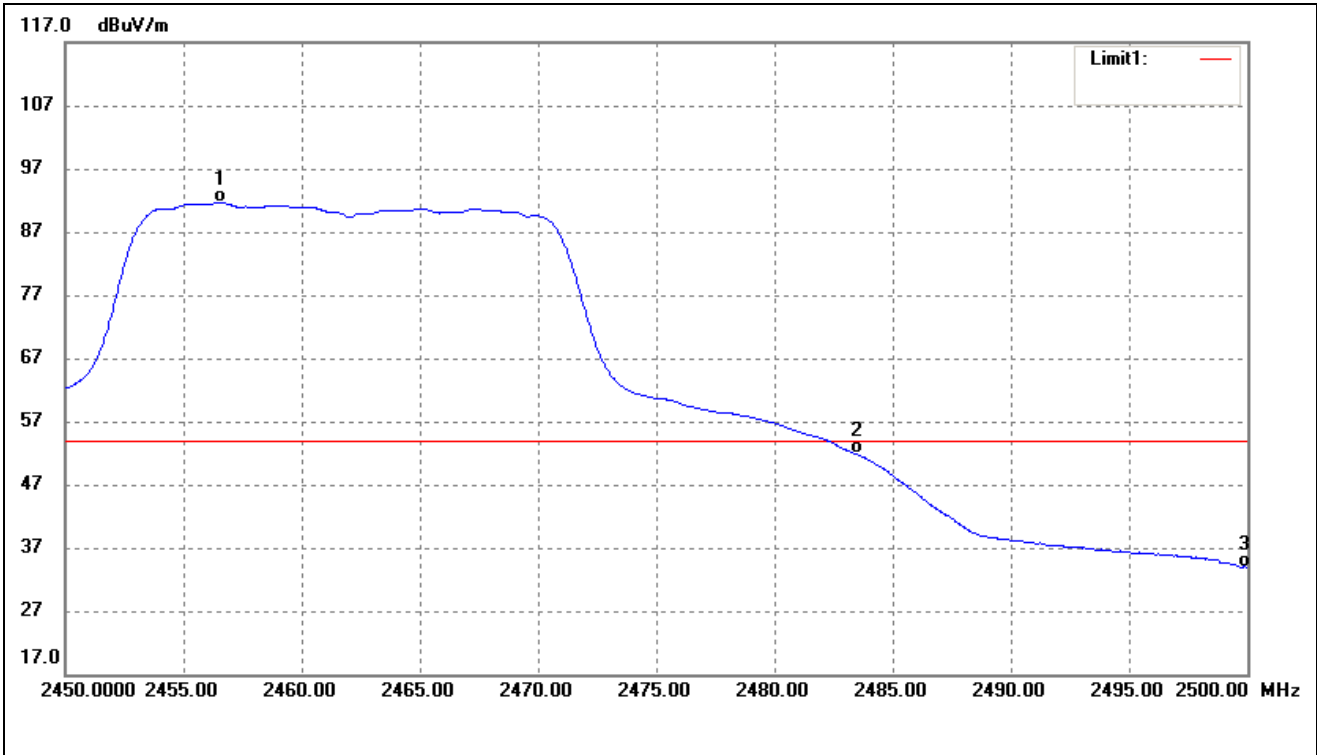

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2456.550	100.91	-9.36	91.55	/	/	Average Detector
	2458.800	111.63	-9.36	102.27	/	/	Peak Detector
2	2483.500	61.09	-9.31	51.78	54.00	-2.22	Average Detector
	2483.500	80.82	-9.31	71.51	74.00	-2.49	Peak Detector
3	2500.000	43.17	-9.28	33.89	54.00	-20.11	Average Detector
	2500.000	56.89	-9.28	47.61	74.00	-26.39	Peak Detector




802.11n-HT40_MCS7			
Test Channel	Low	Polarity:	Vertical(worst case)

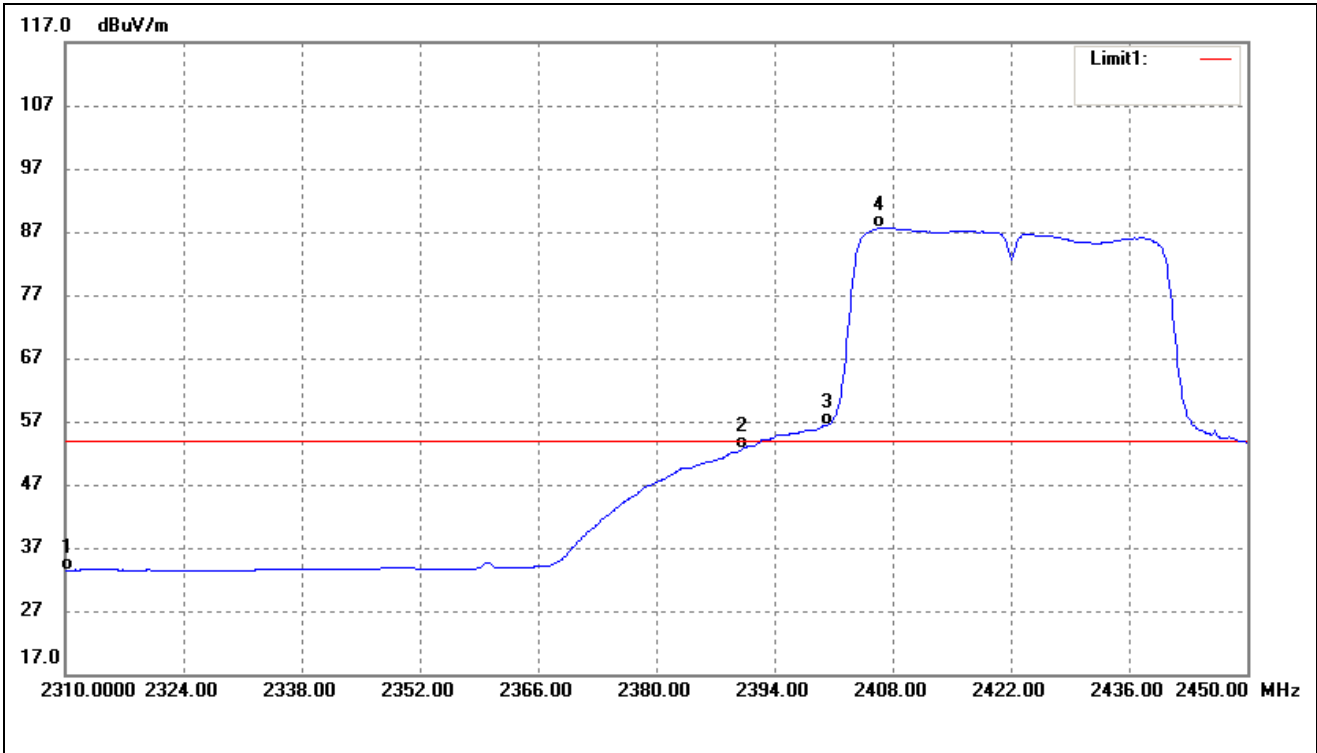

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.02	-9.66	33.36	54.00	-20.64	Average Detector
	2310.000	54.94	-9.66	45.28	74.00	-28.72	Peak Detector
2	2390.000	62.02	-9.50	52.52	54.00	-1.48	Average Detector
	2390.000	75.95	-9.50	66.45	74.00	-7.55	Peak Detector
3	2400.000	65.86	-9.48	56.38	Delta=31.2dBc		Average Detector
4	2406.460	97.05	-9.47	87.58			Average Detector



802.11n-HT40_MCS7			
Test Channel	High	Polarity:	Vertical(worst case)

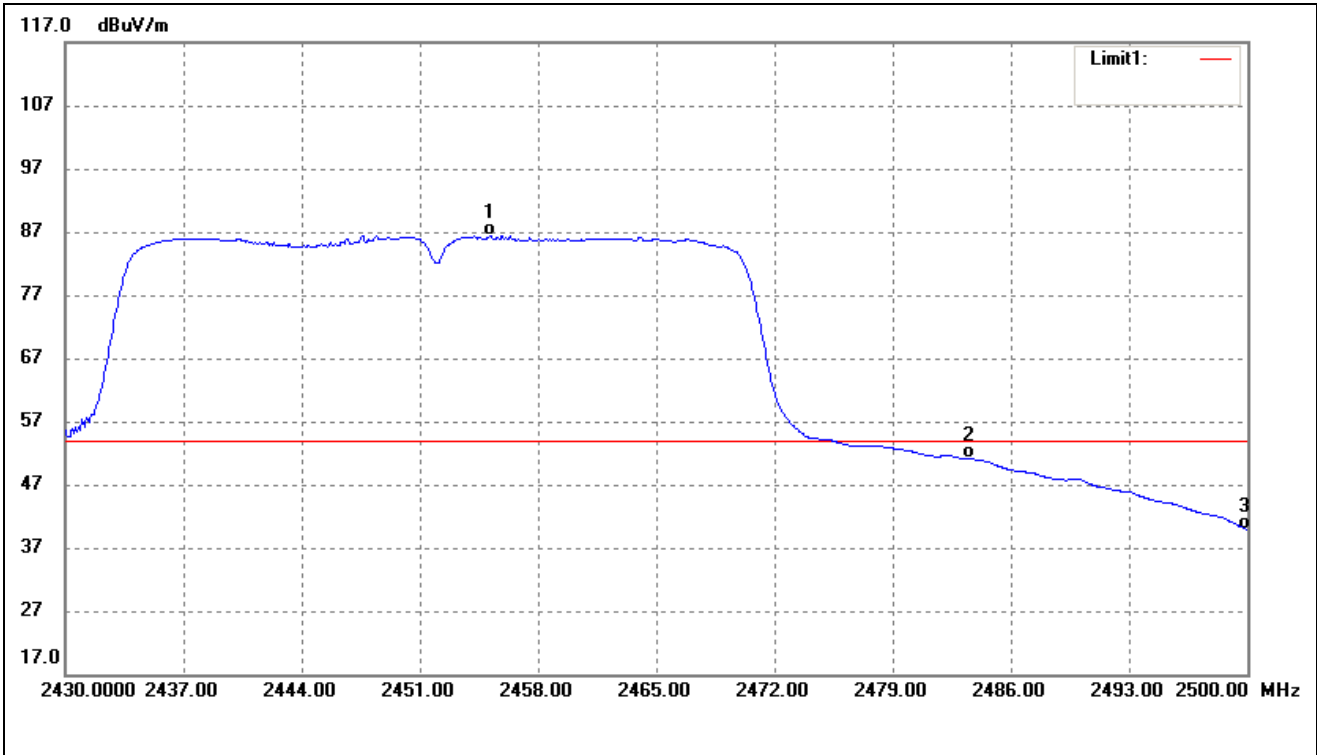



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2455.130	95.71	-9.37	86.34	/	/	Average Detector
	2449.670	106.48	-9.39	97.09	/	/	Peak Detector
2	2483.500	60.36	-9.31	51.05	54.00	-2.95	Average Detector
	2483.500	73.65	-9.31	64.34	74.00	-9.66	Peak Detector
3	2500.000	49.08	-9.28	39.80	54.00	-14.20	Average Detector
	2500.000	65.58	-9.28	56.30	74.00	-17.70	Peak Detector



➤ Antenna 1

802.11b_11Mbps



Low

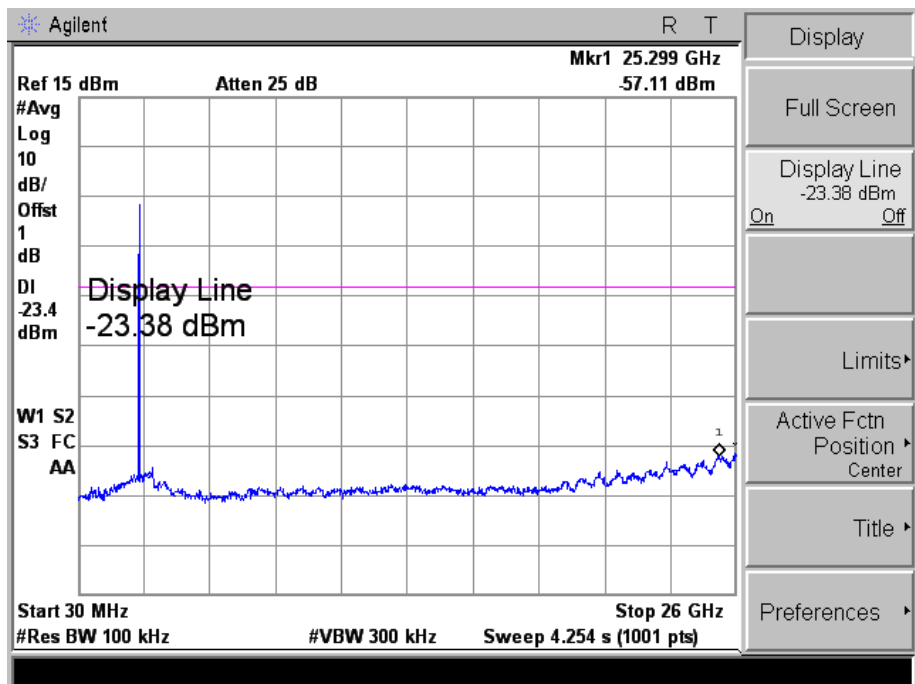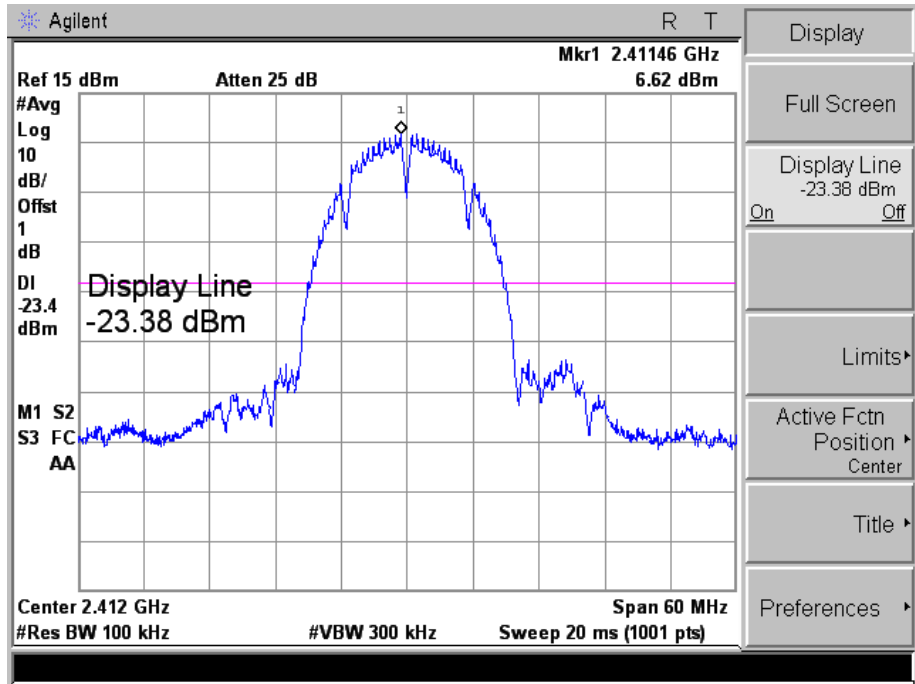



802.11b_11Mbps



Middle

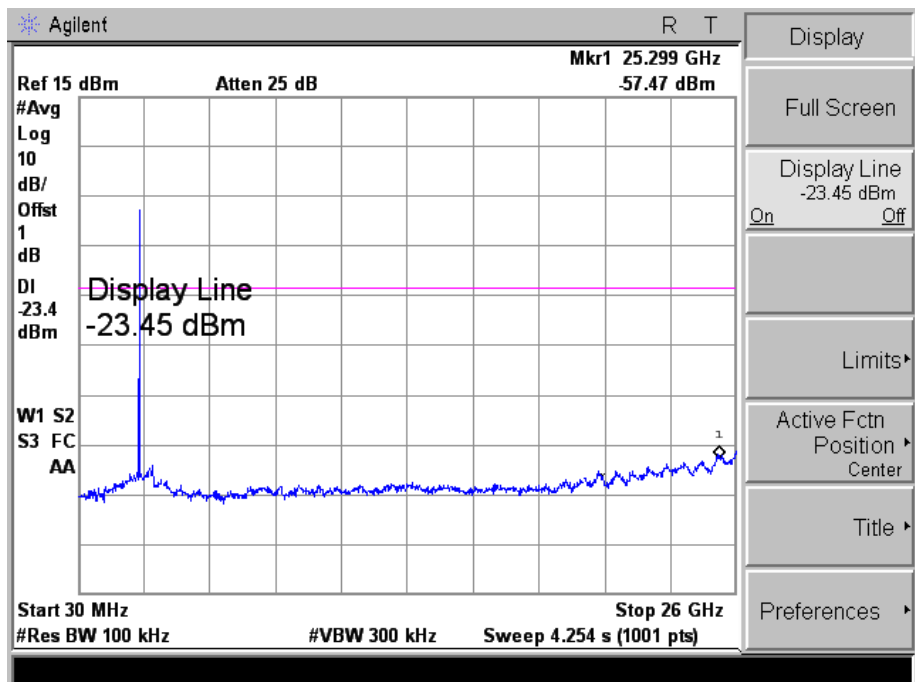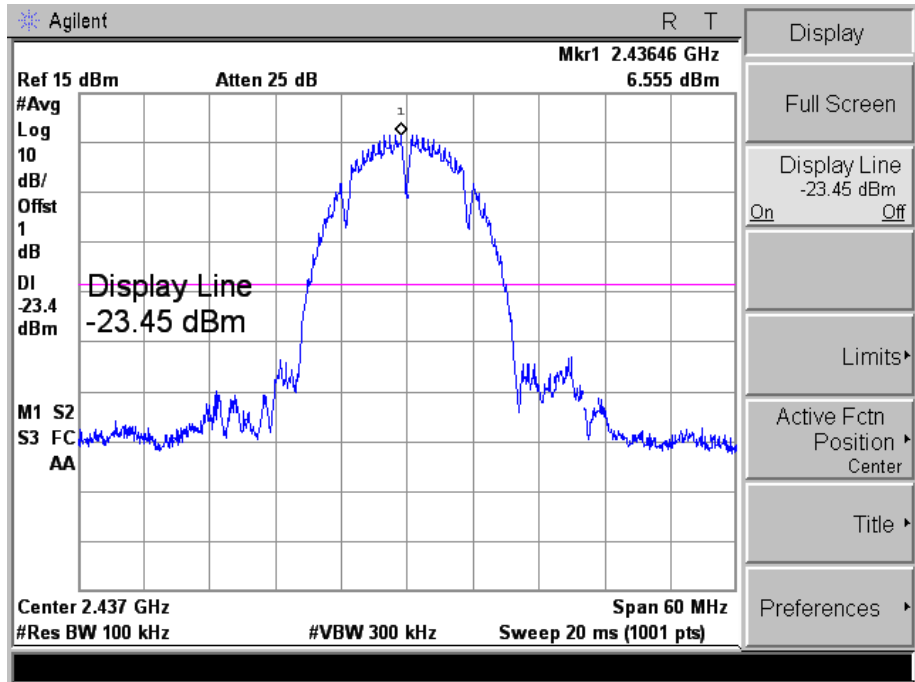



802.11b_11Mbps



High

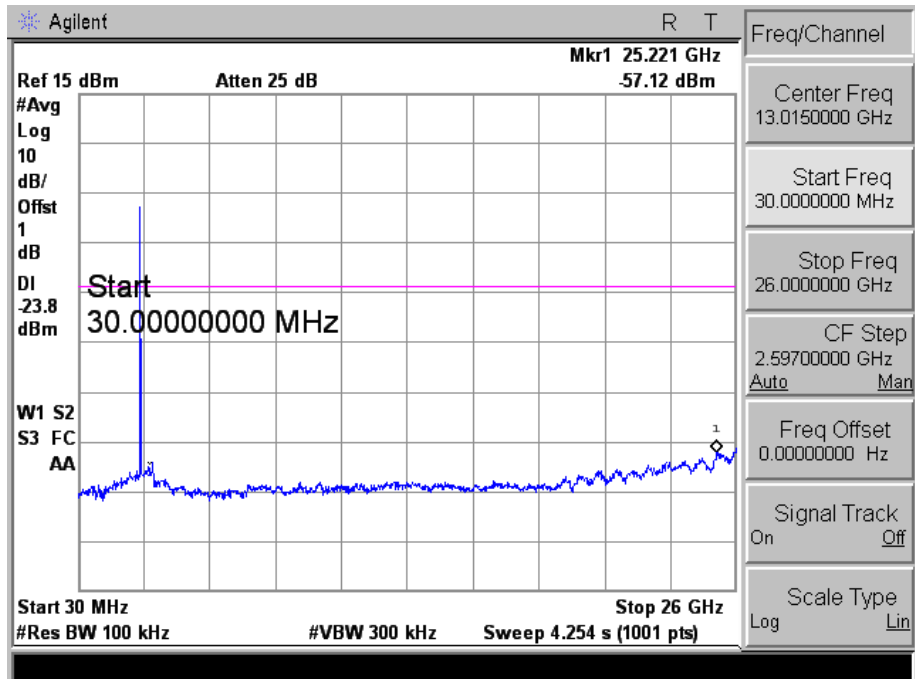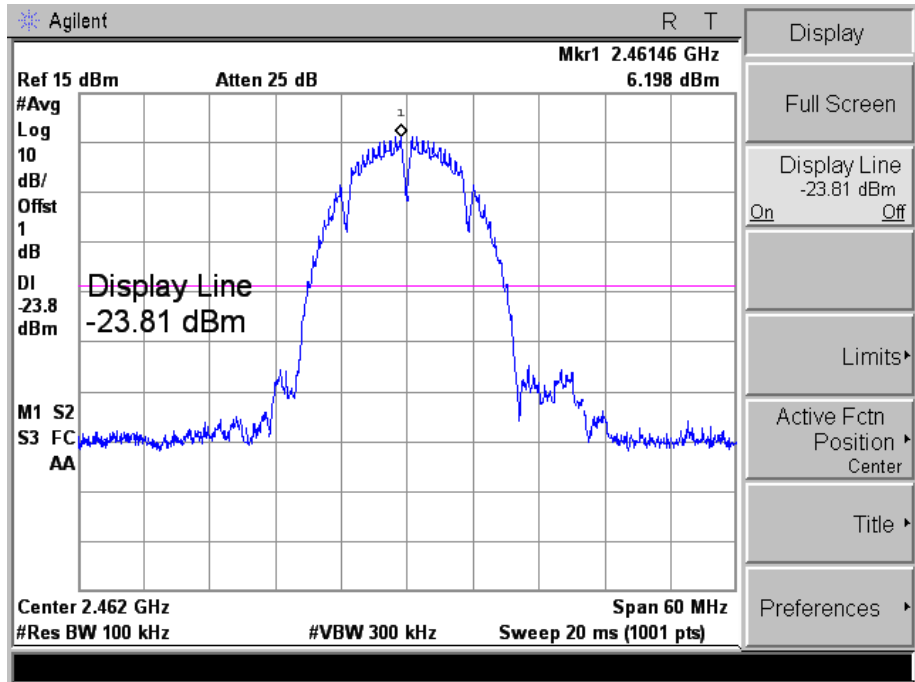



802.11g_54Mbps



Low

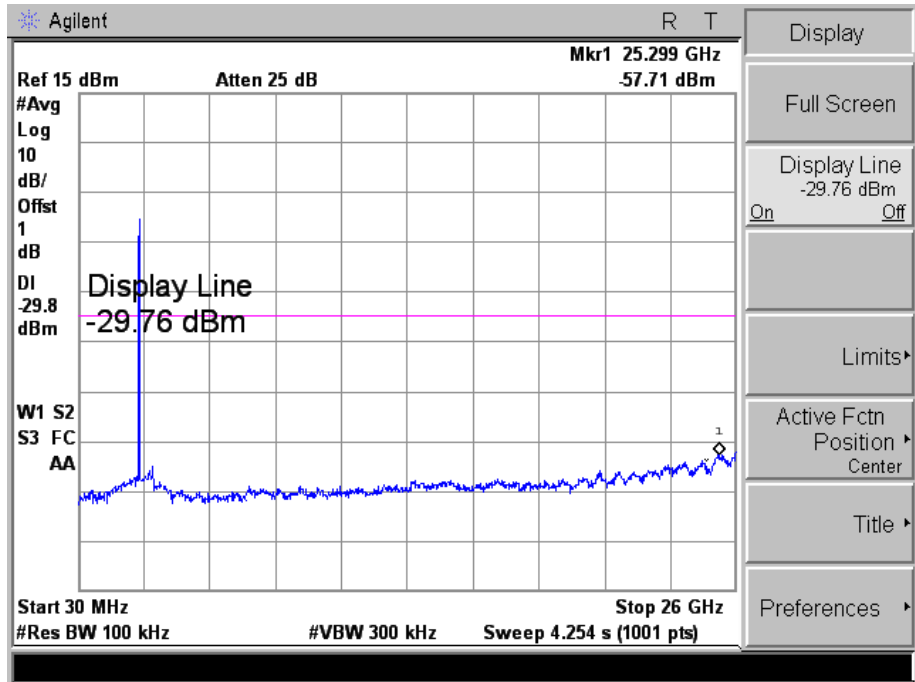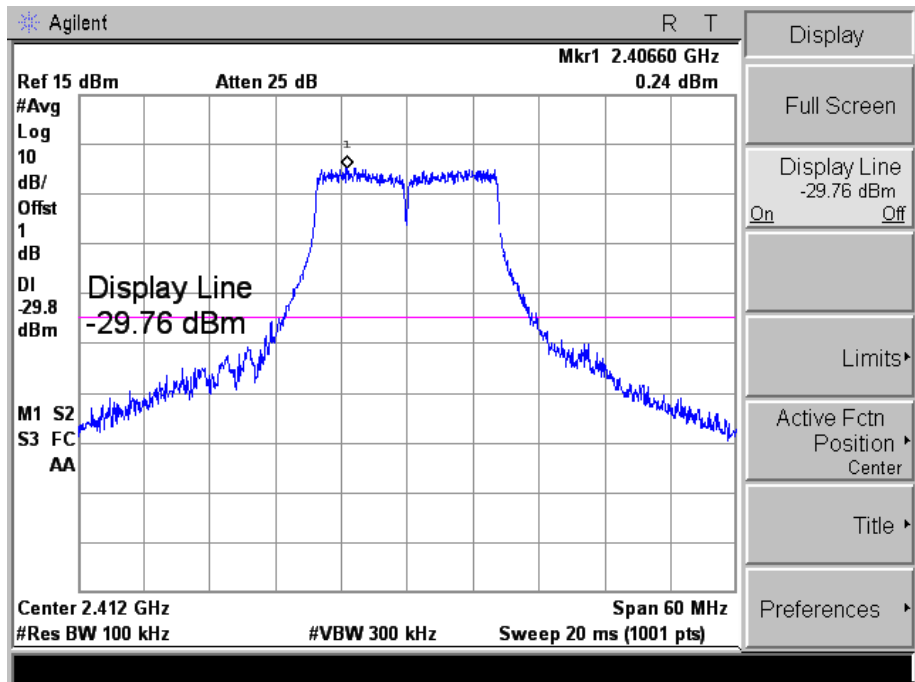



802.11g_54Mbps



Middle

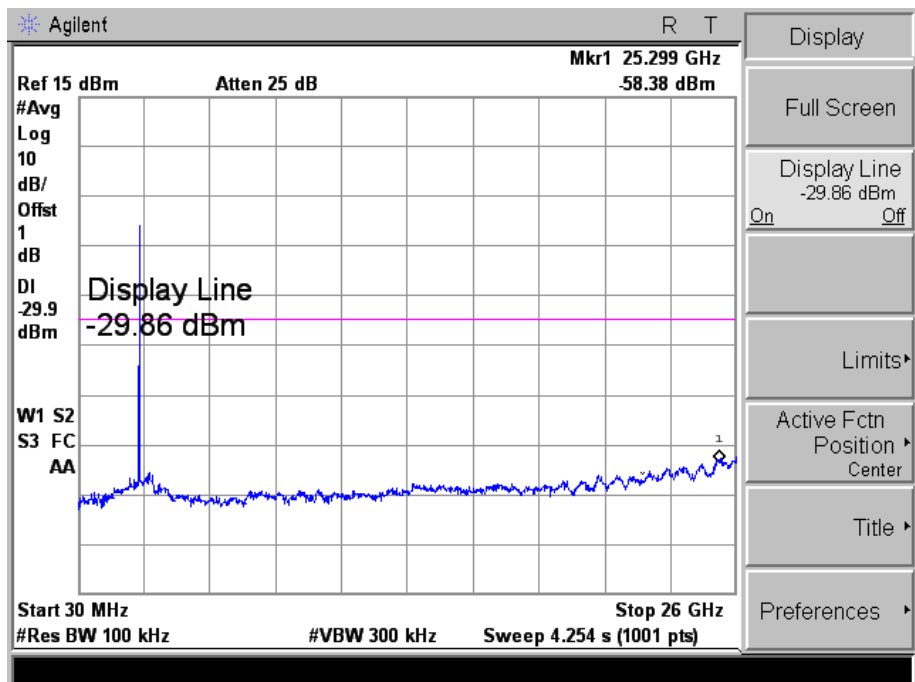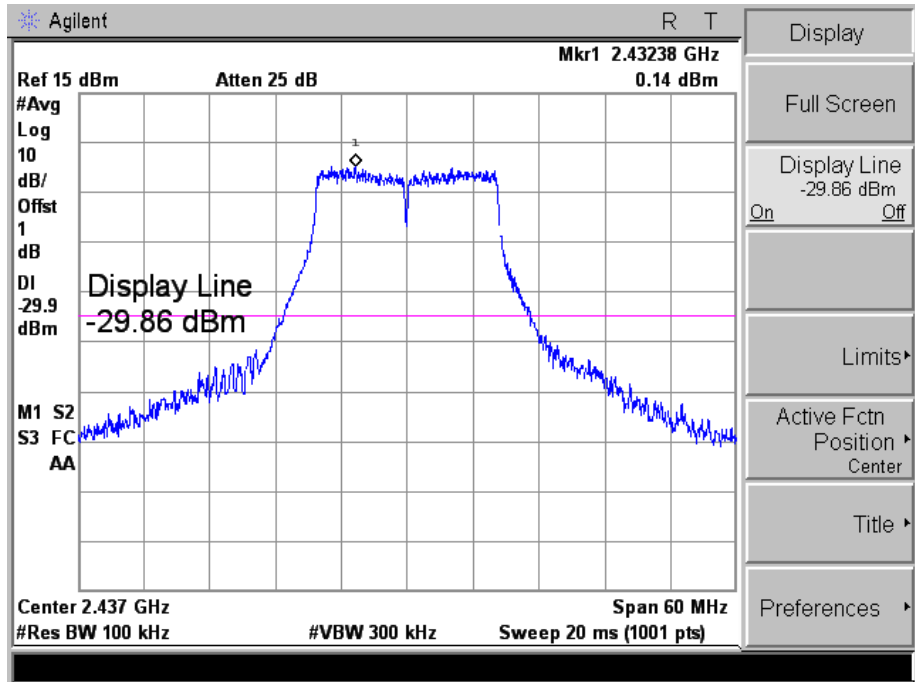



802.11g_54Mbps



High

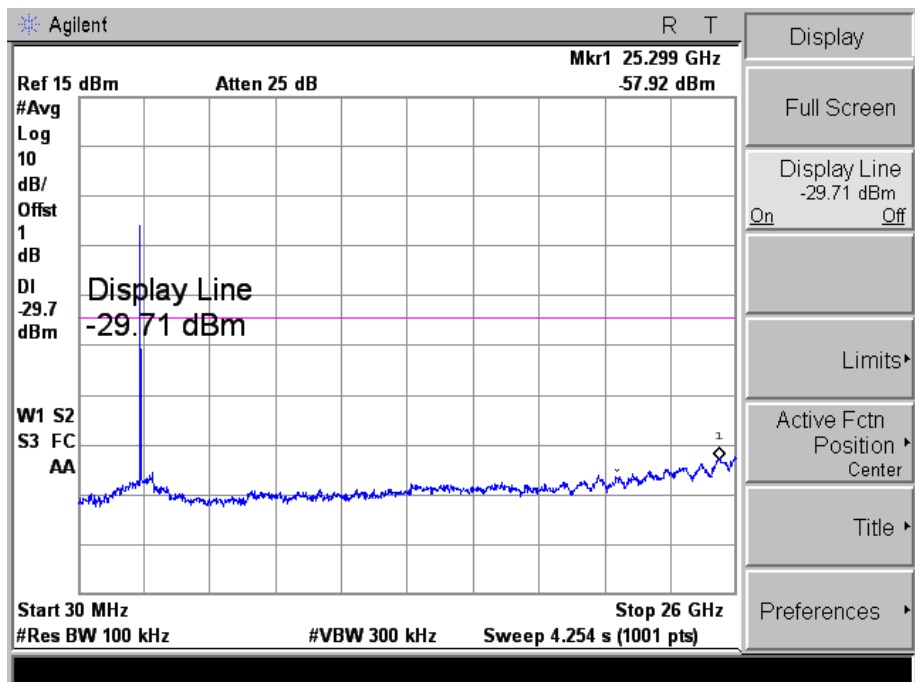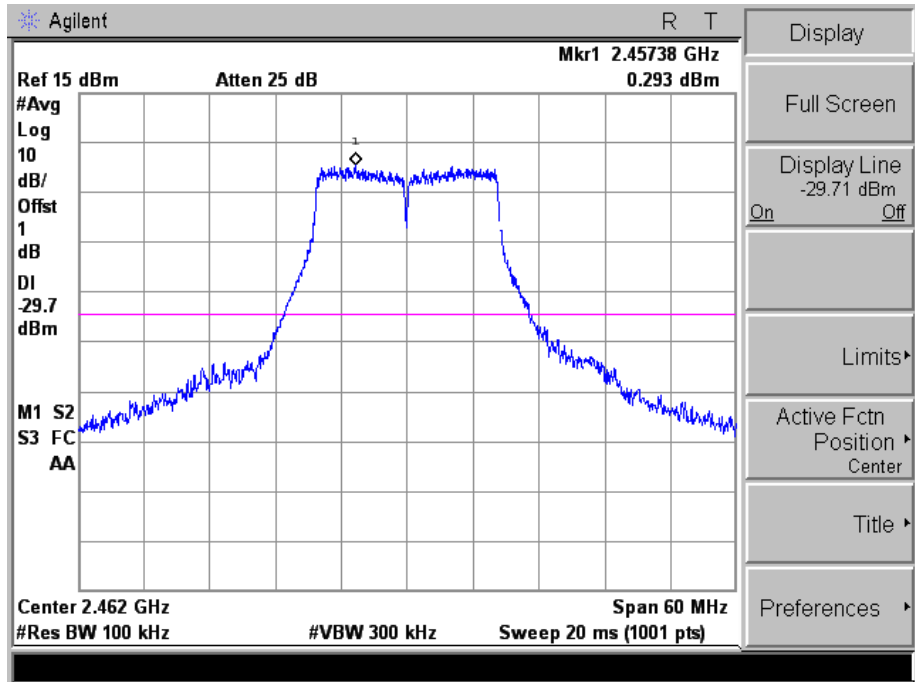



802.11n-HT20_MCS7



Low

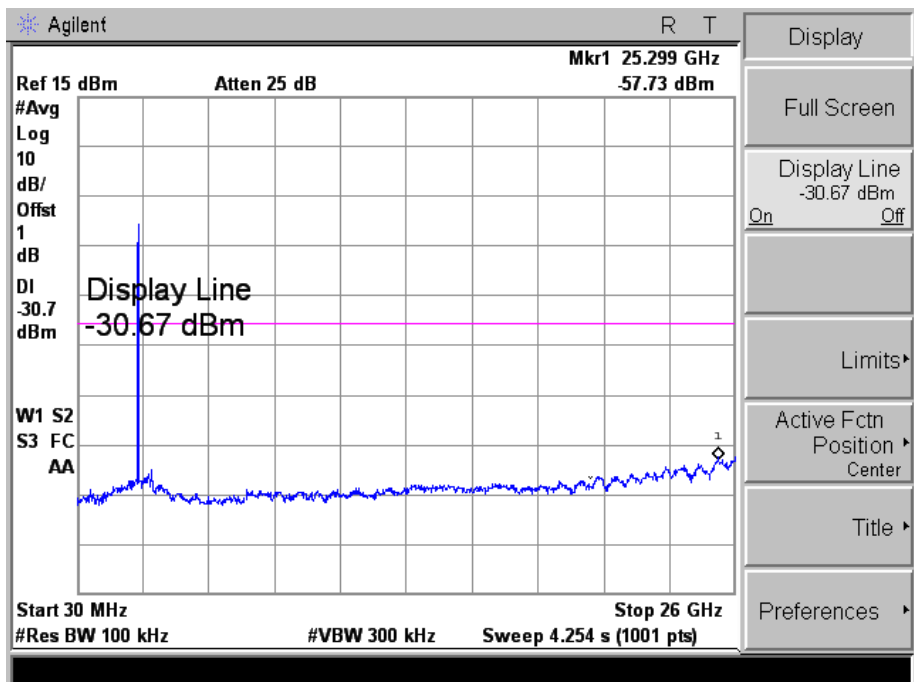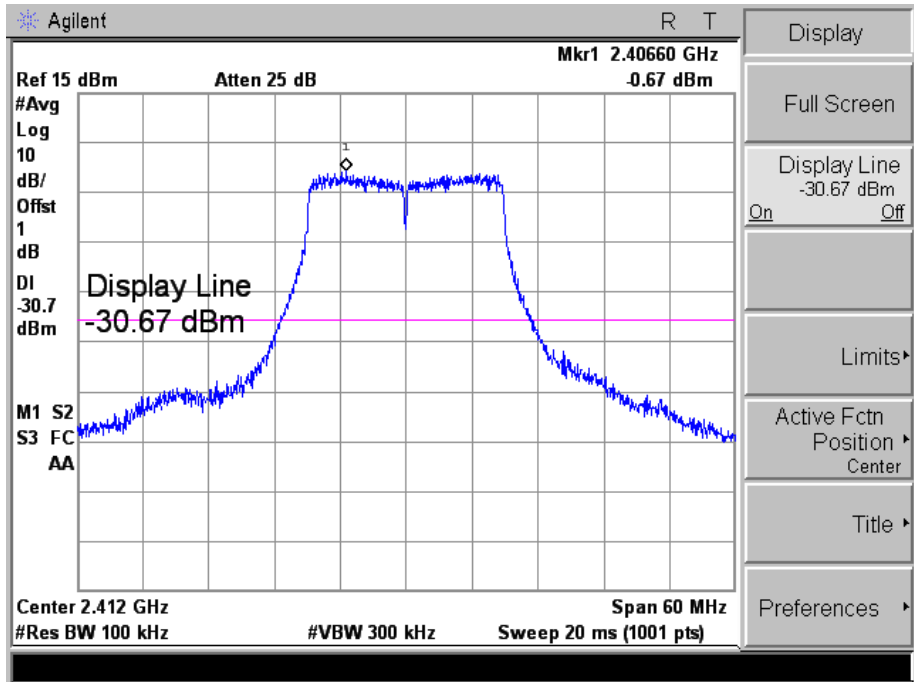



802.11n-HT20_MCS7



Middle

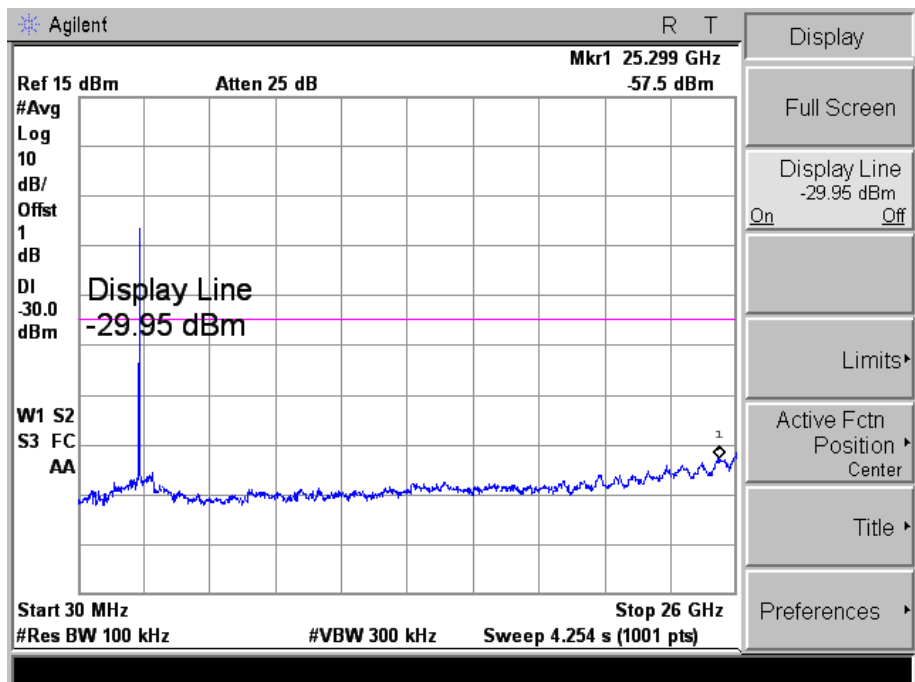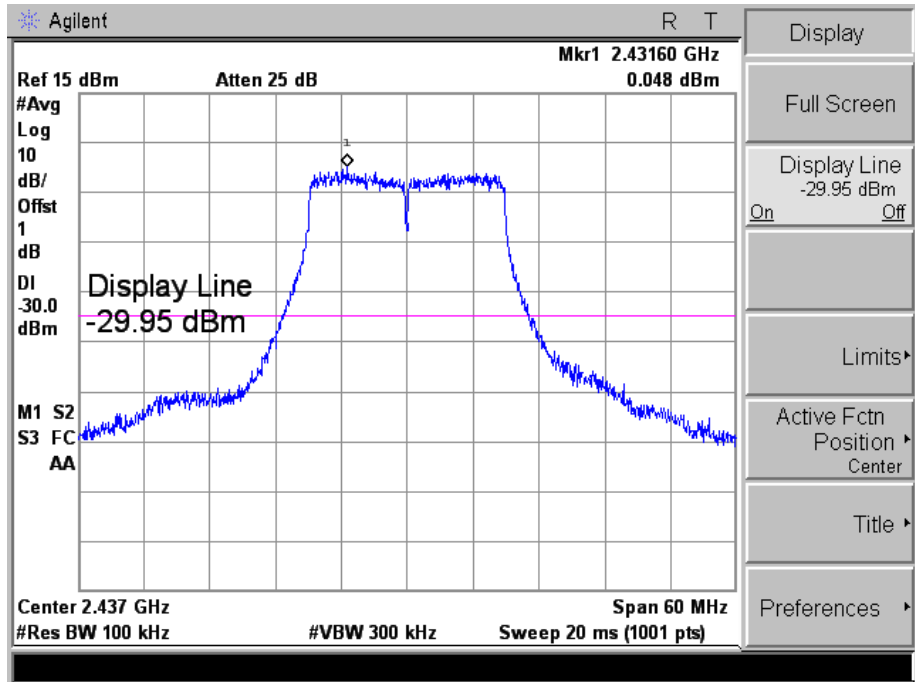



802.11n-HT20_MCS7



High

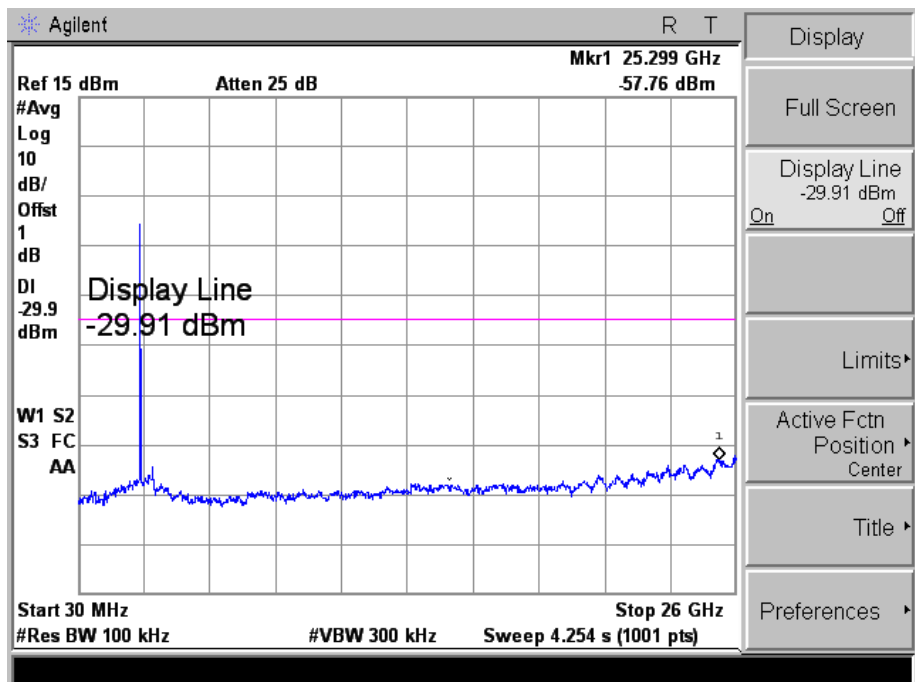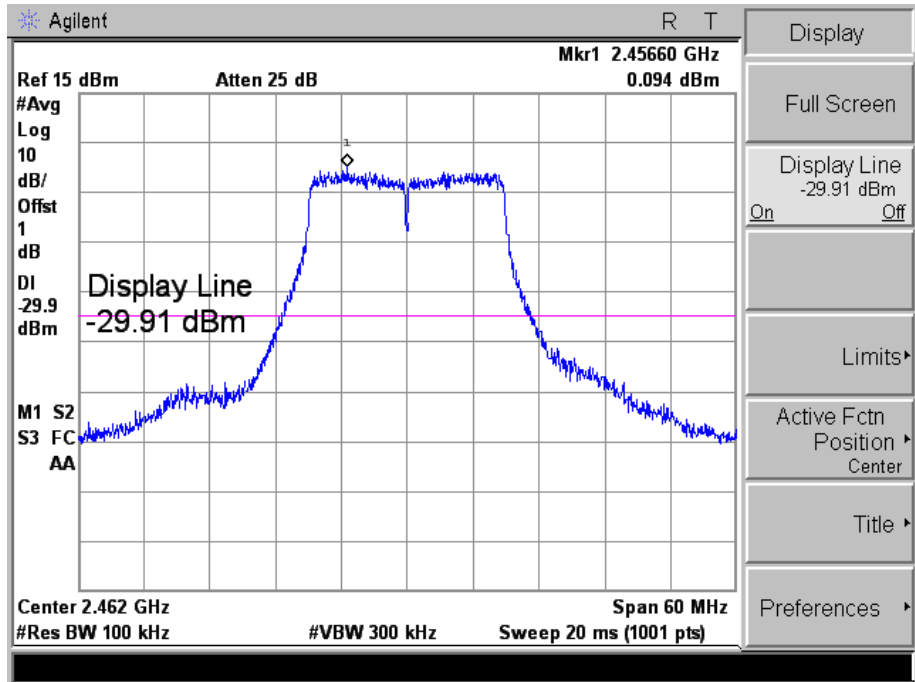



802.11n-HT40_MCS7



Low

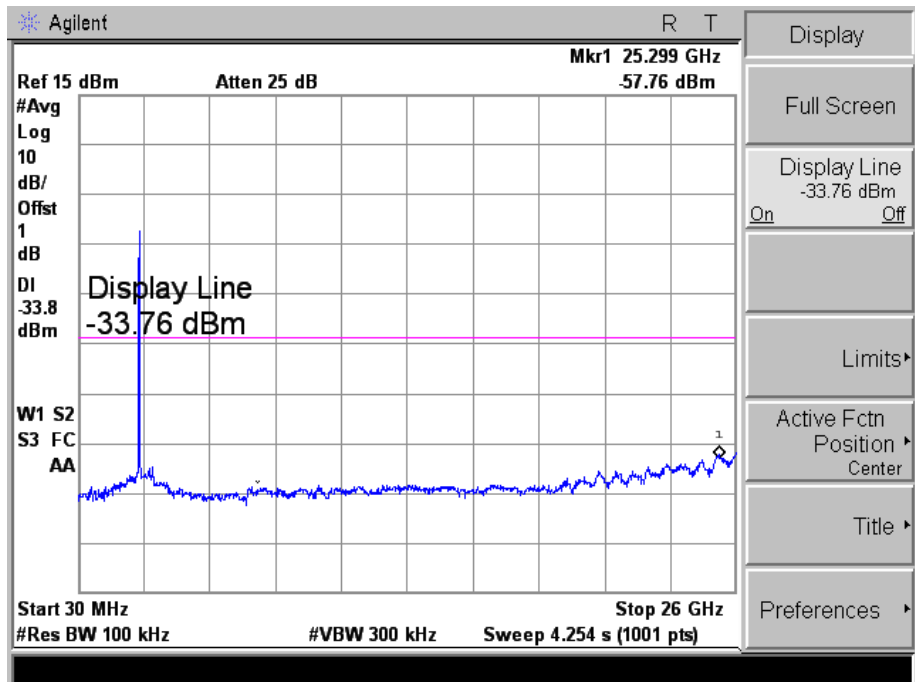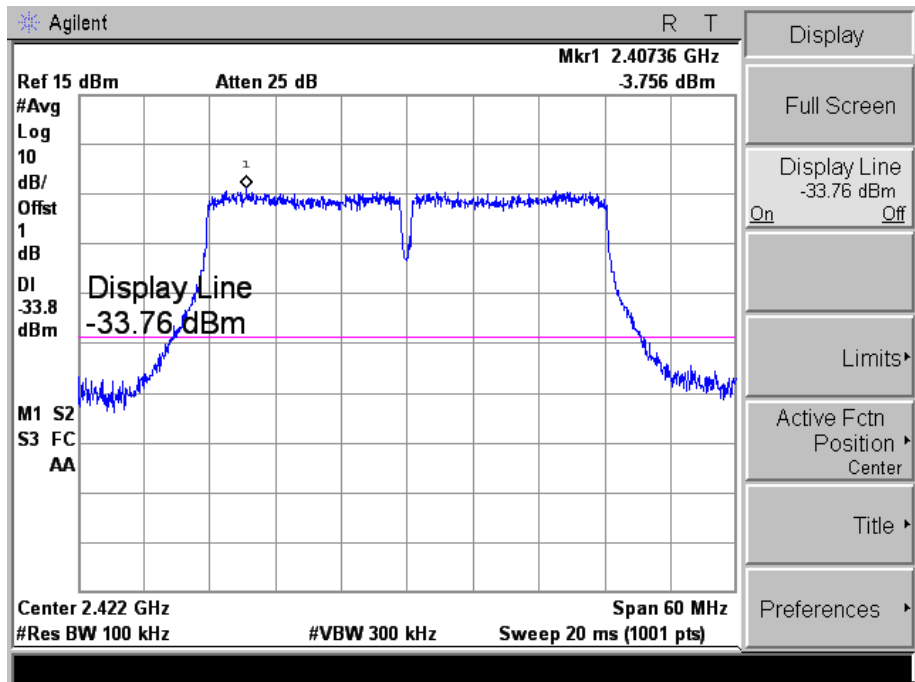



802.11n-HT40_MCS7



Middle

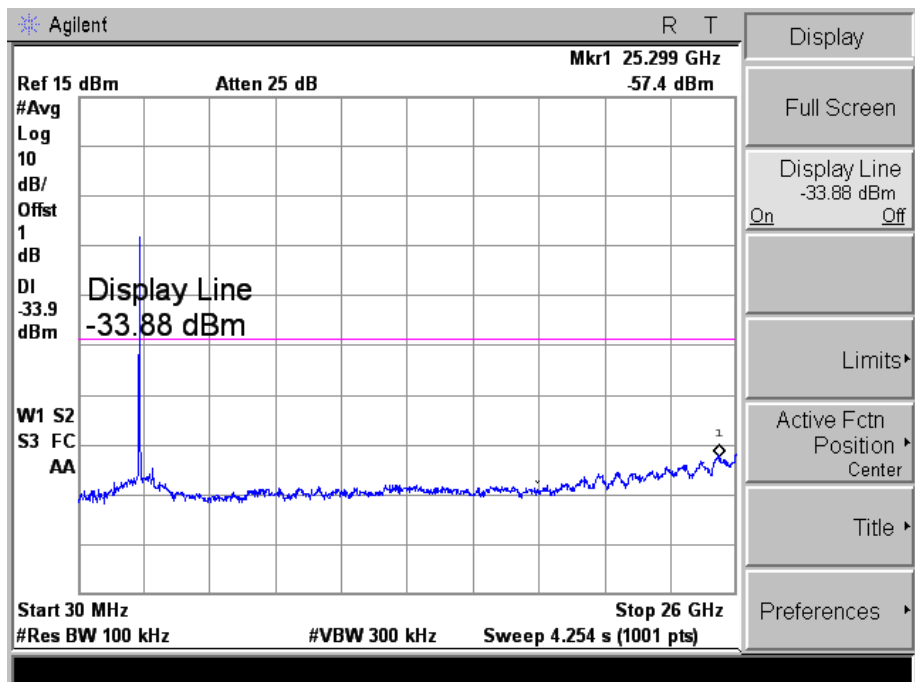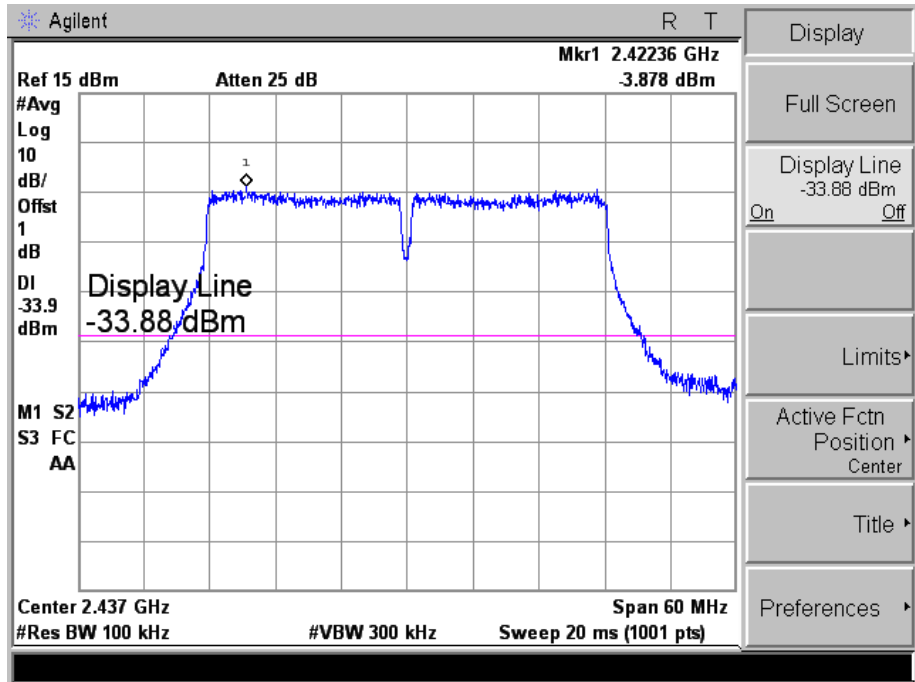



802.11n-HT40_MCS7

High

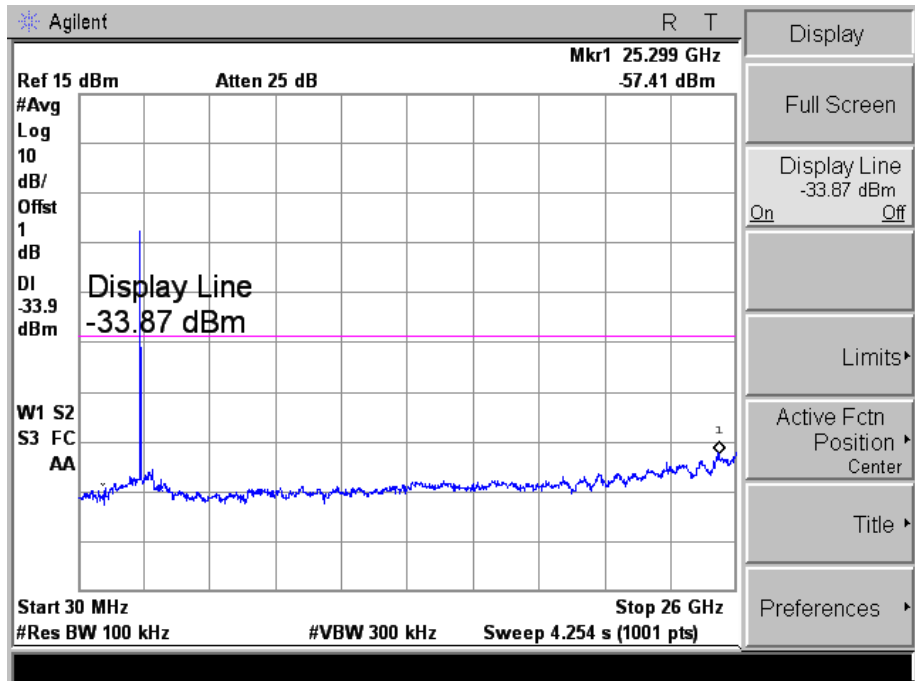
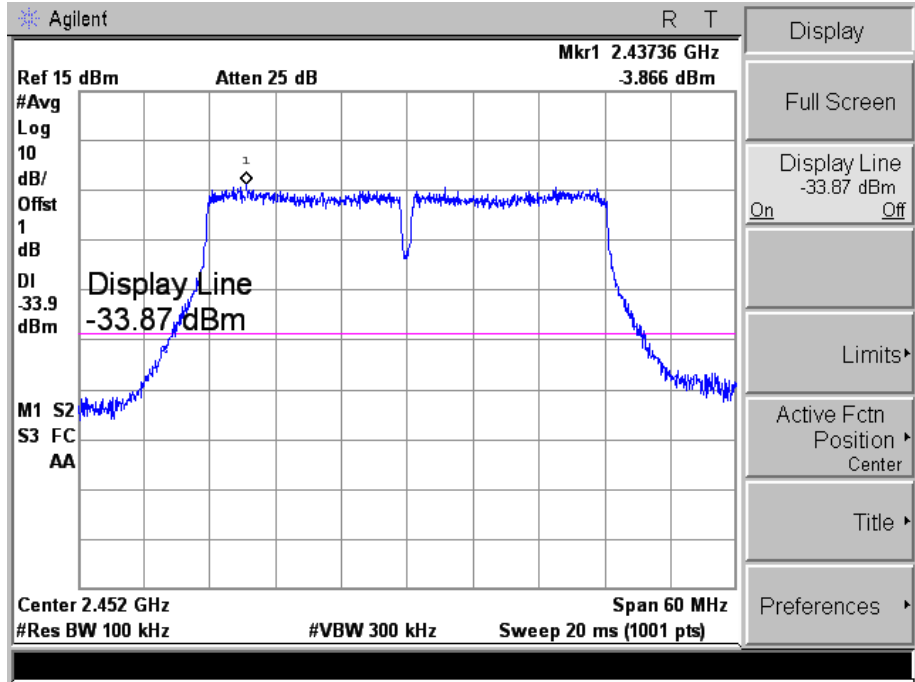




➤ Antenna 2

802.11b_11Mbps



Low

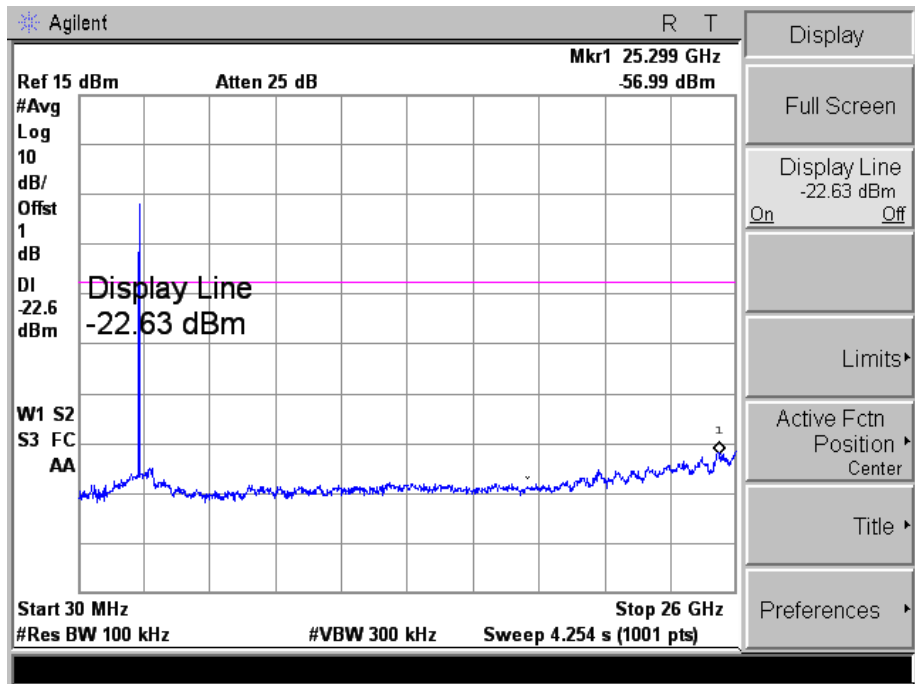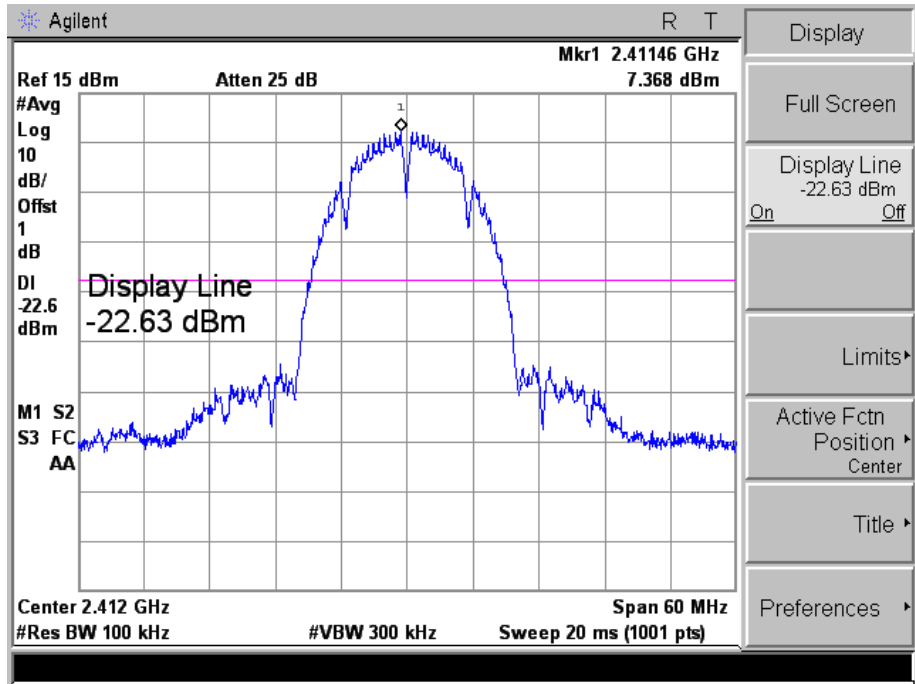



802.11b_11Mbps



Middle

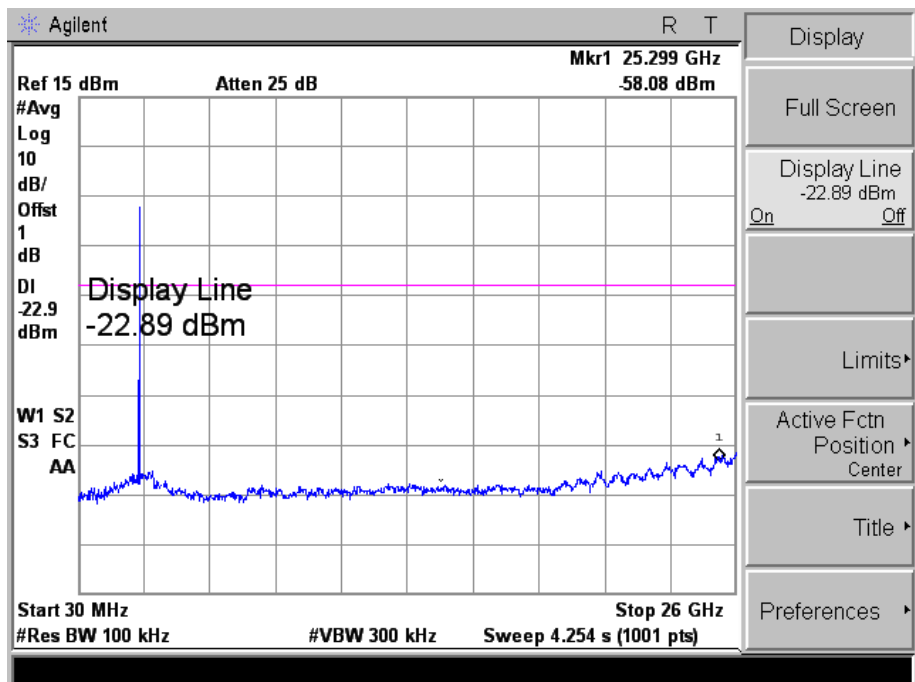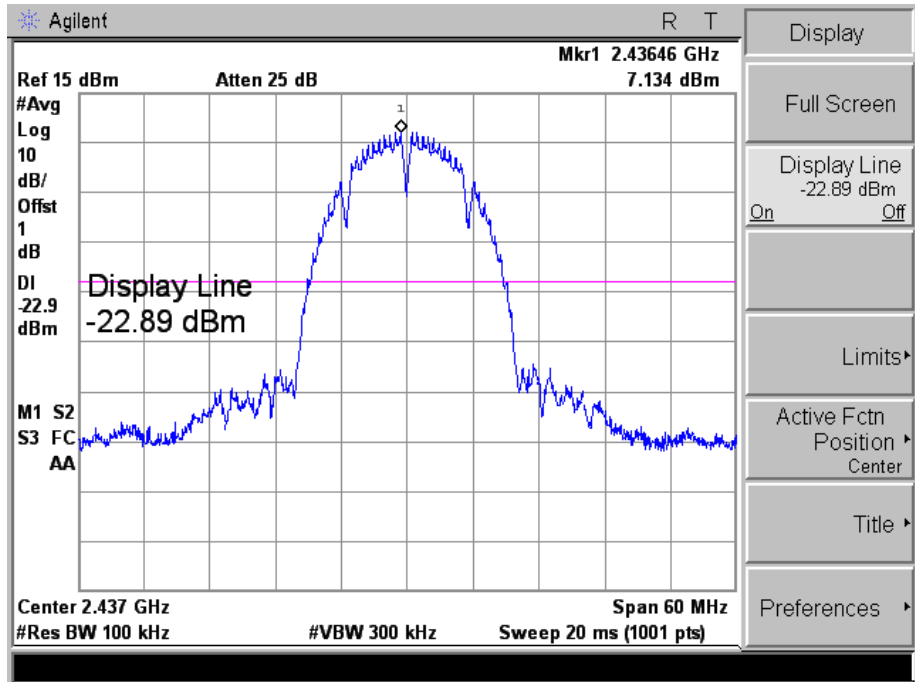



802.11b_11Mbps



High

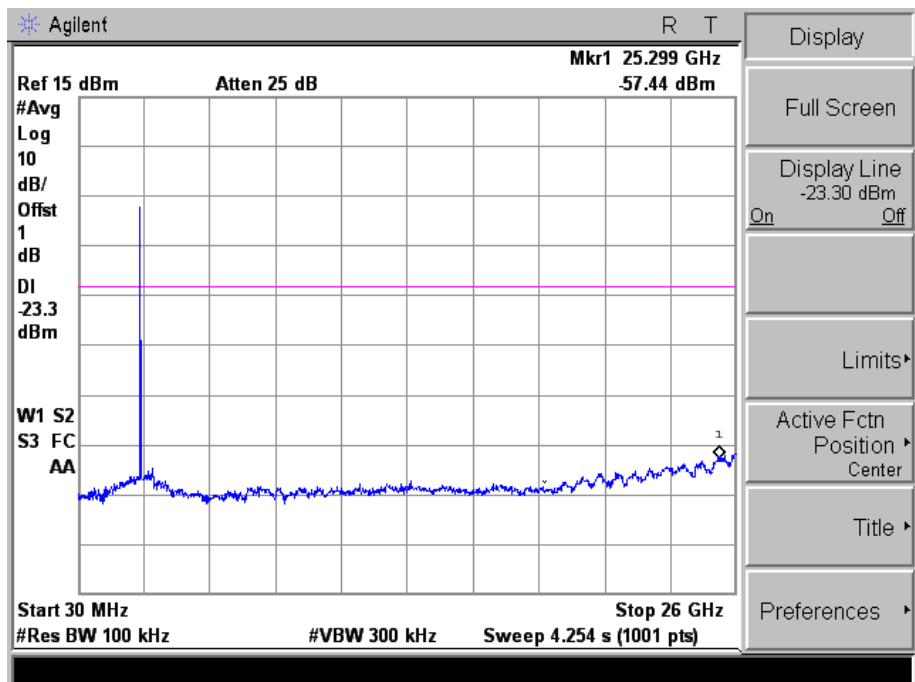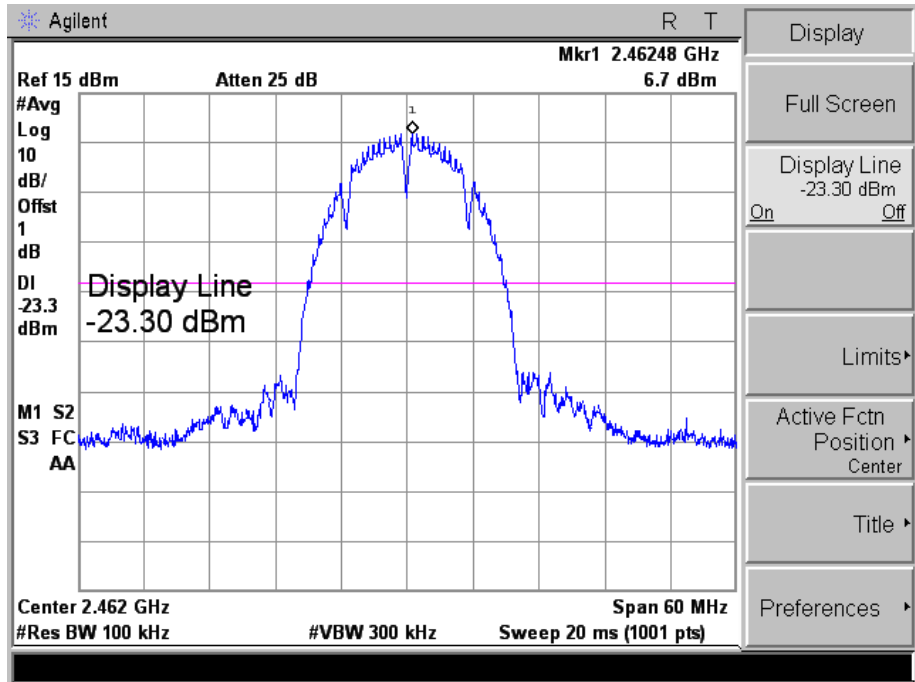



802.11g_54Mbps



Low

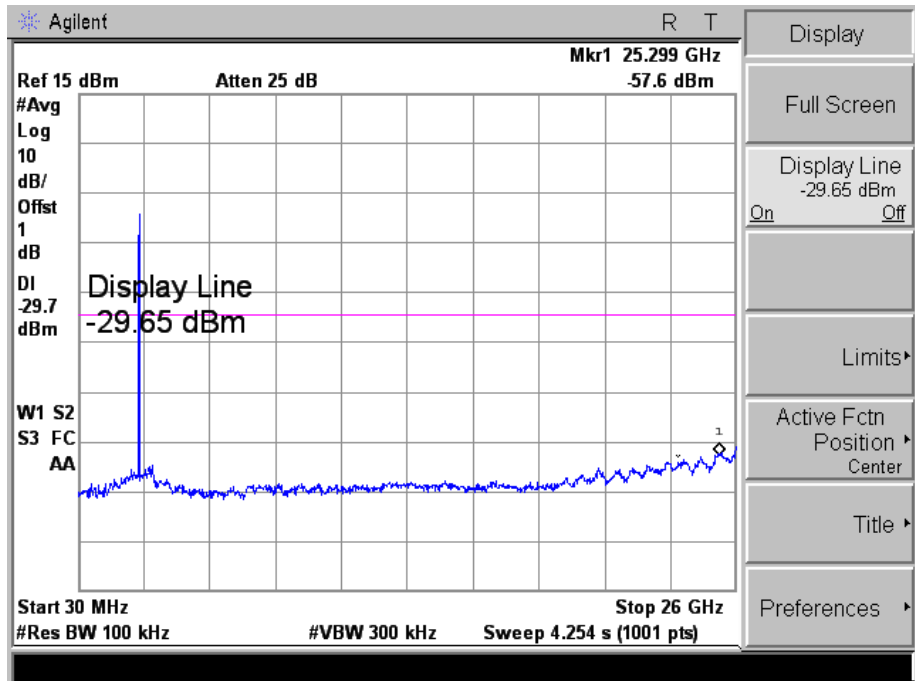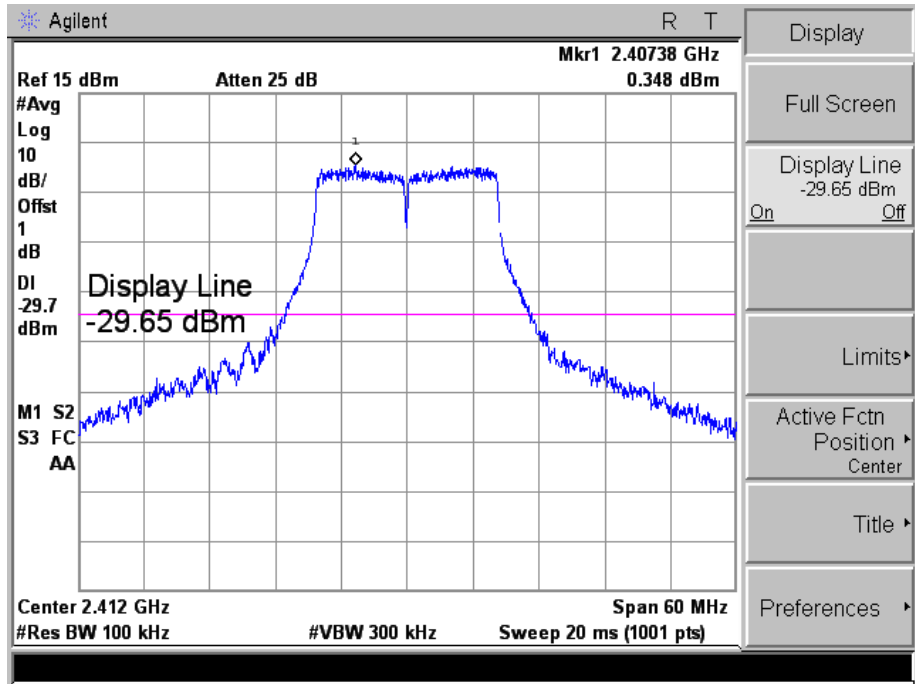



802.11g_54Mbps



Middle

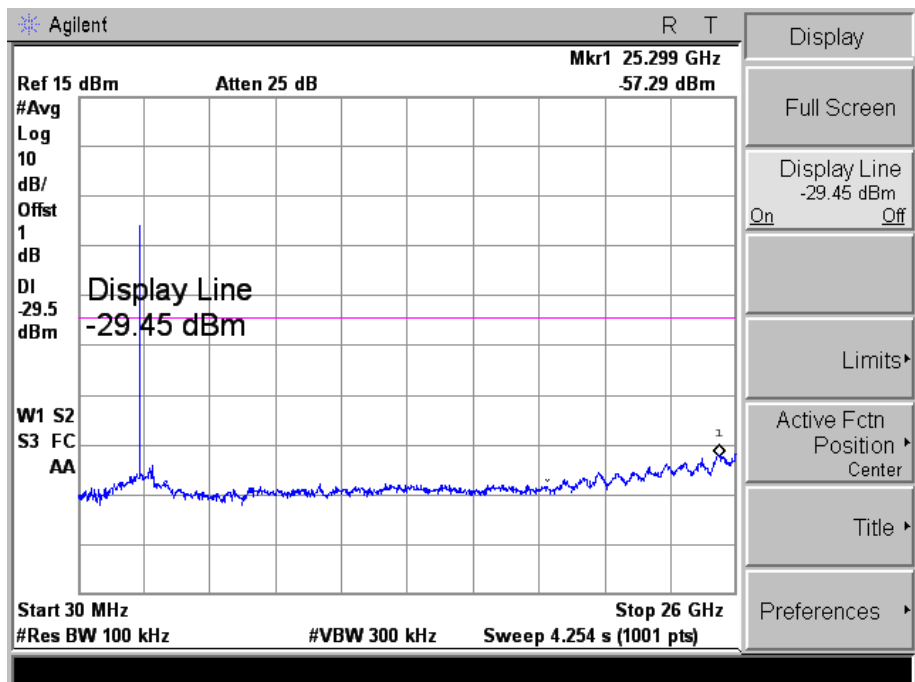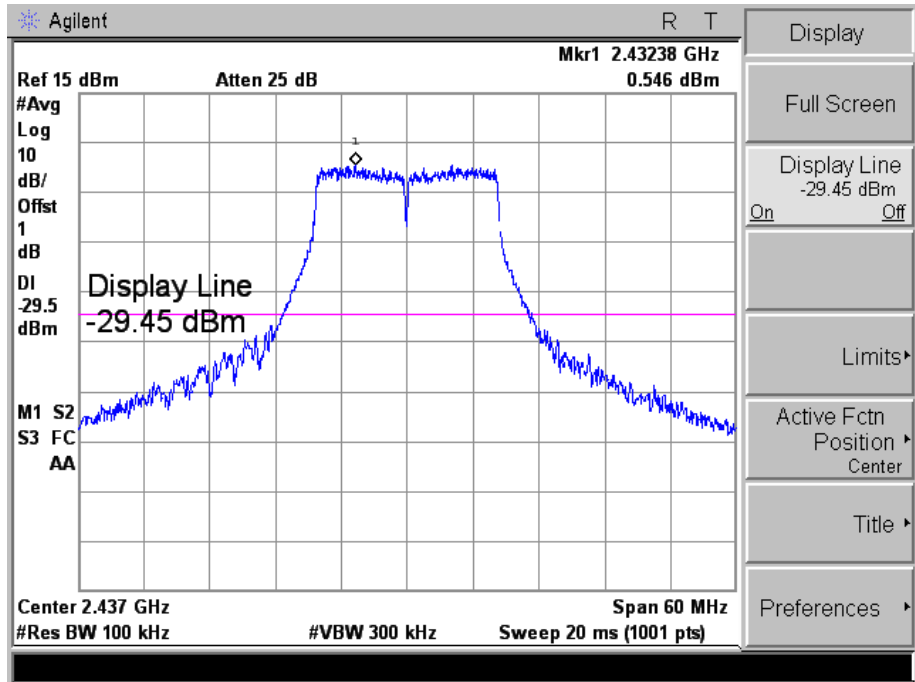



802.11g_54Mbps



High

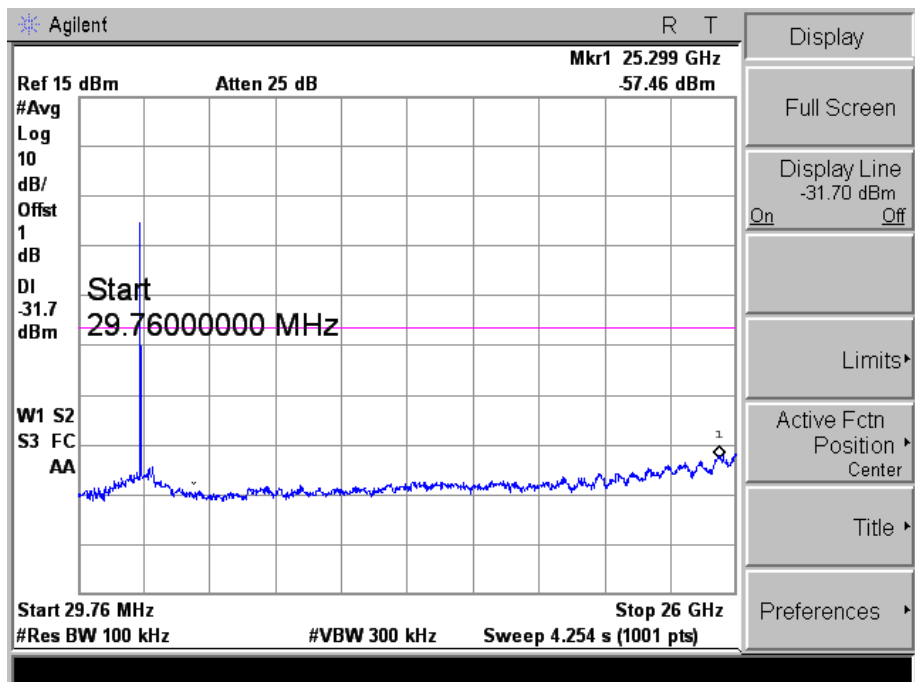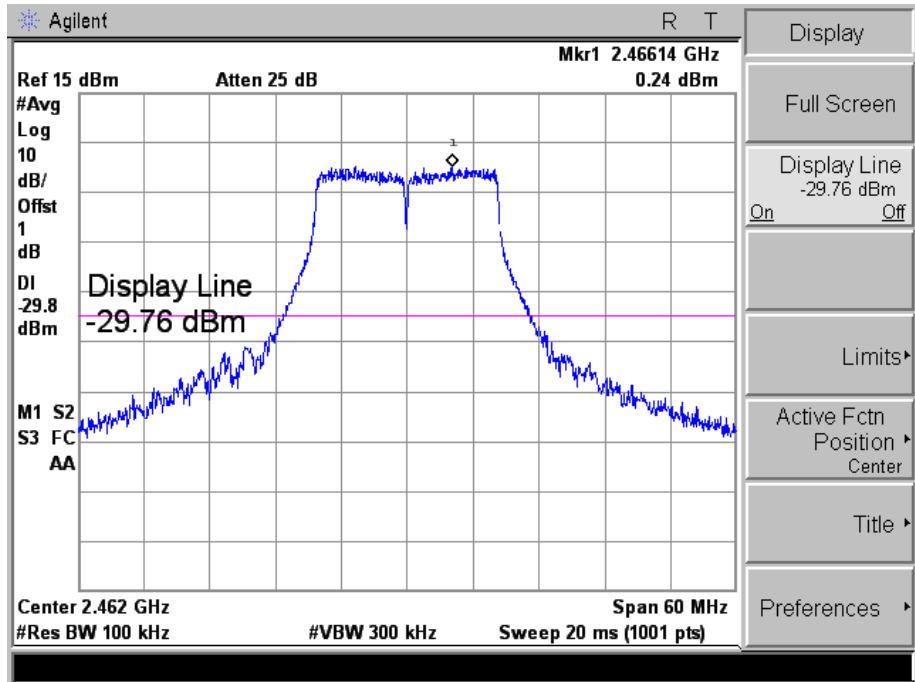



802.11n-HT20_MCS7



Low

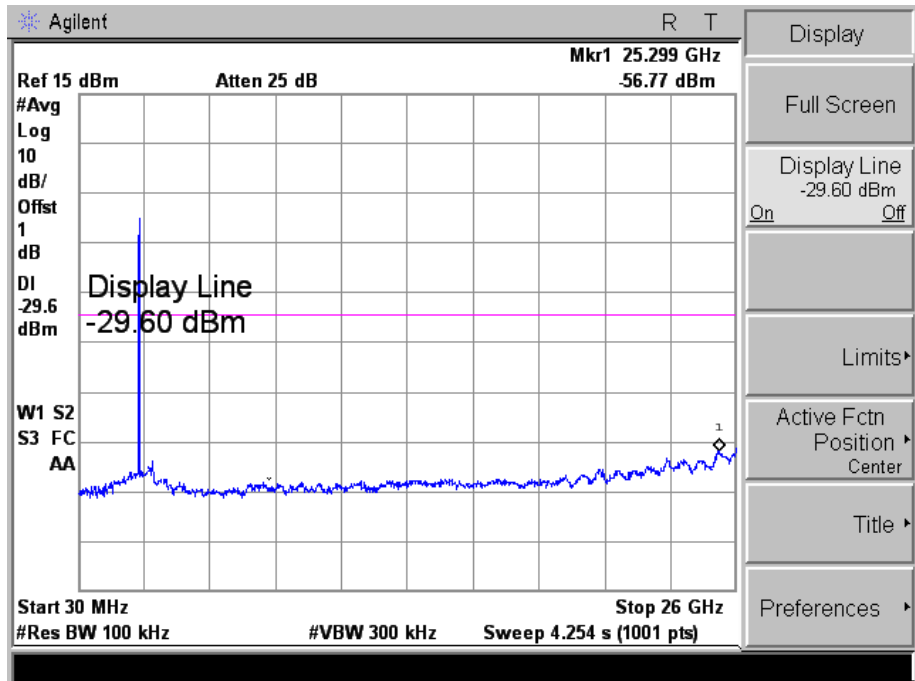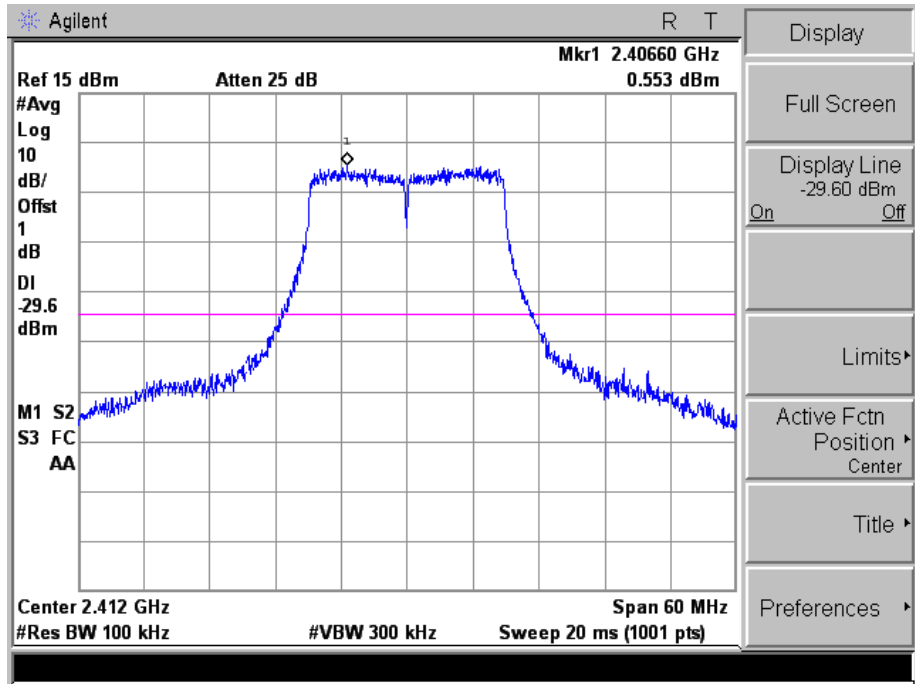



802.11n-HT20_MCS7



Middle

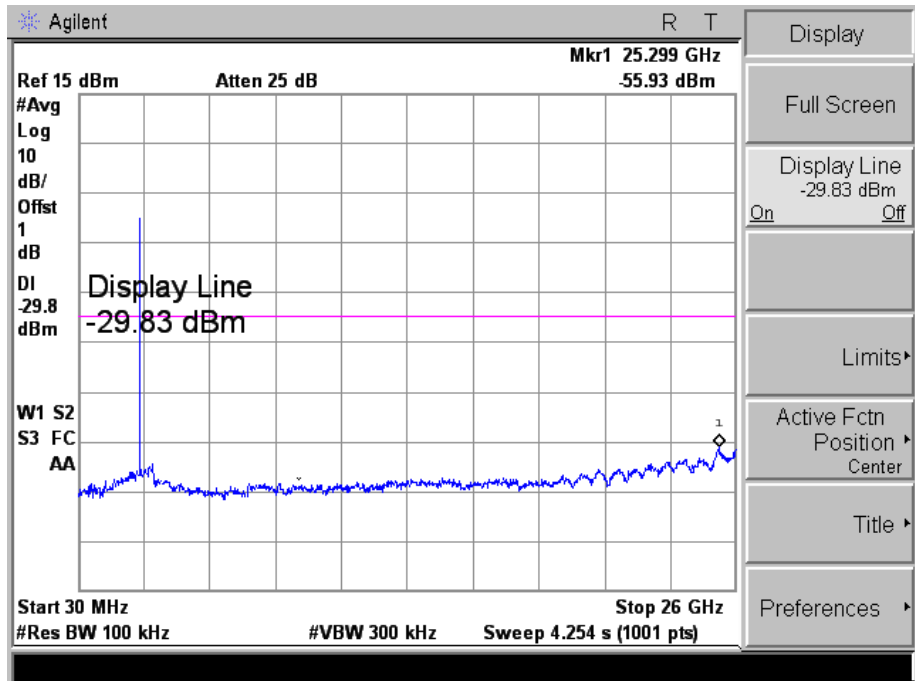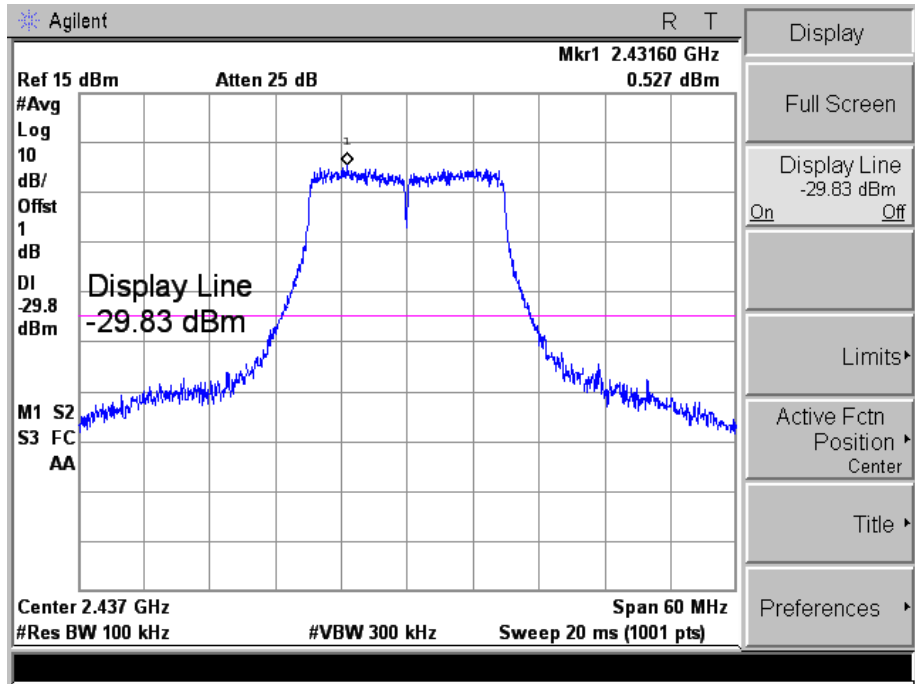



802.11n-HT20_MCS7



High

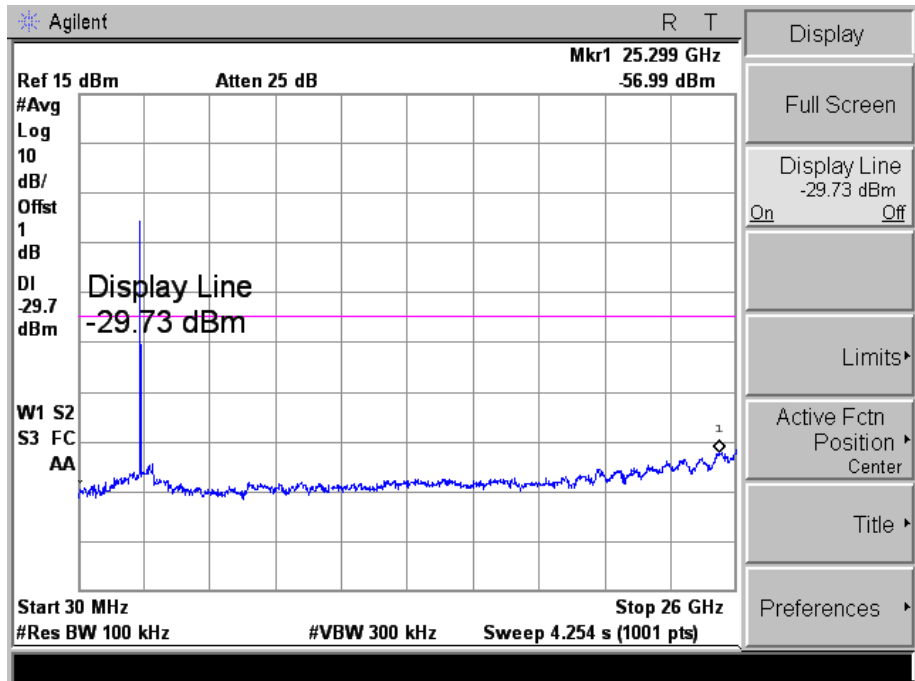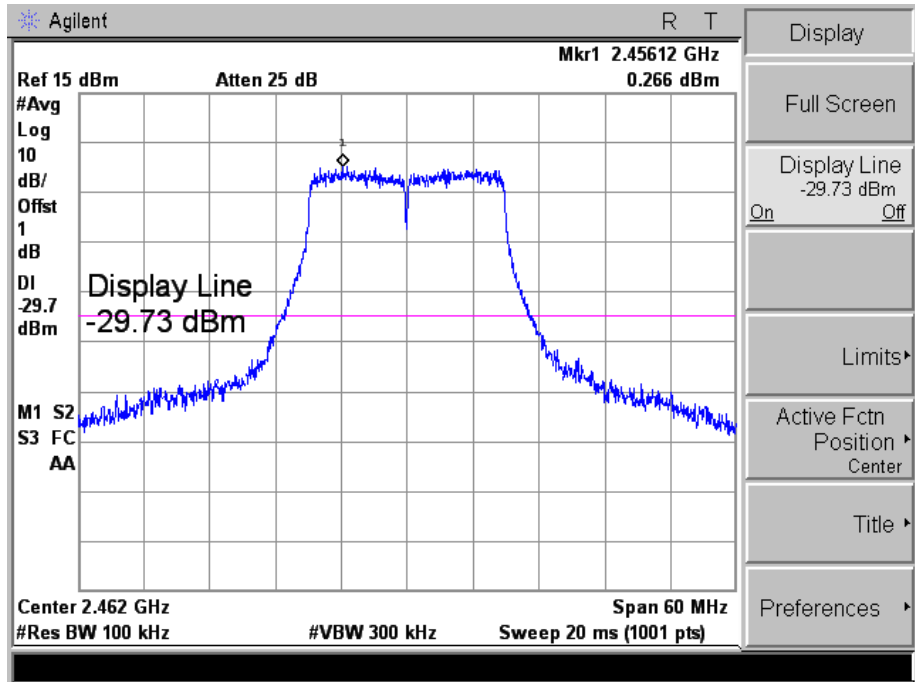



802.11n-HT40_MCS7



Low

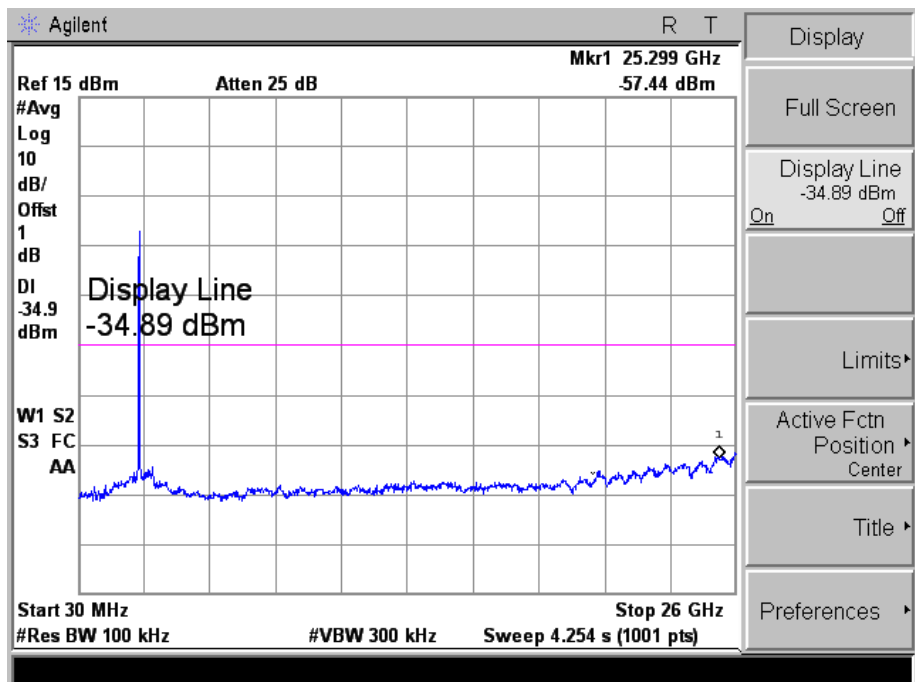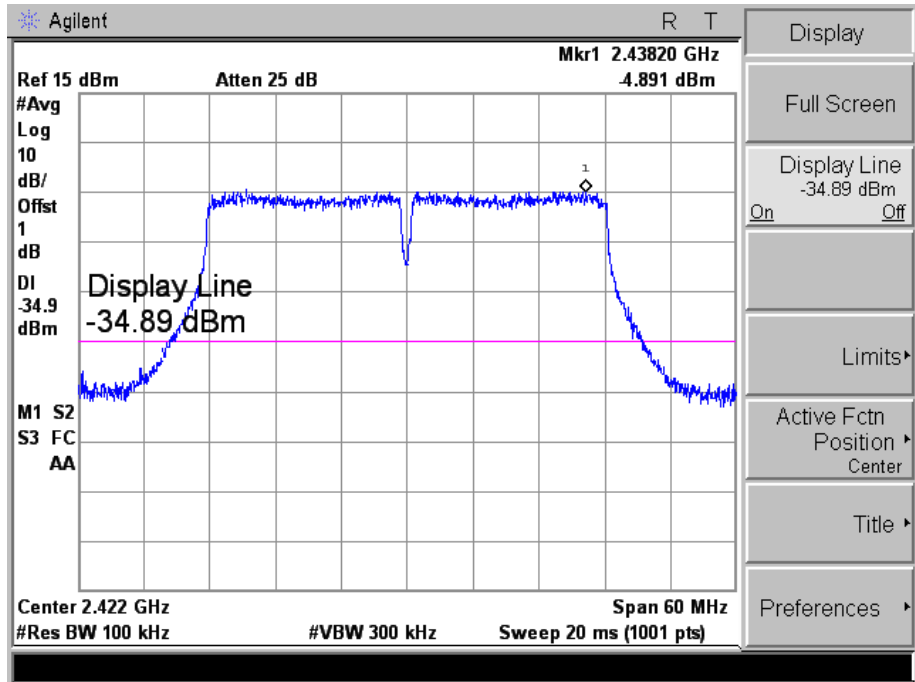



802.11n-HT40_MCS7



Middle

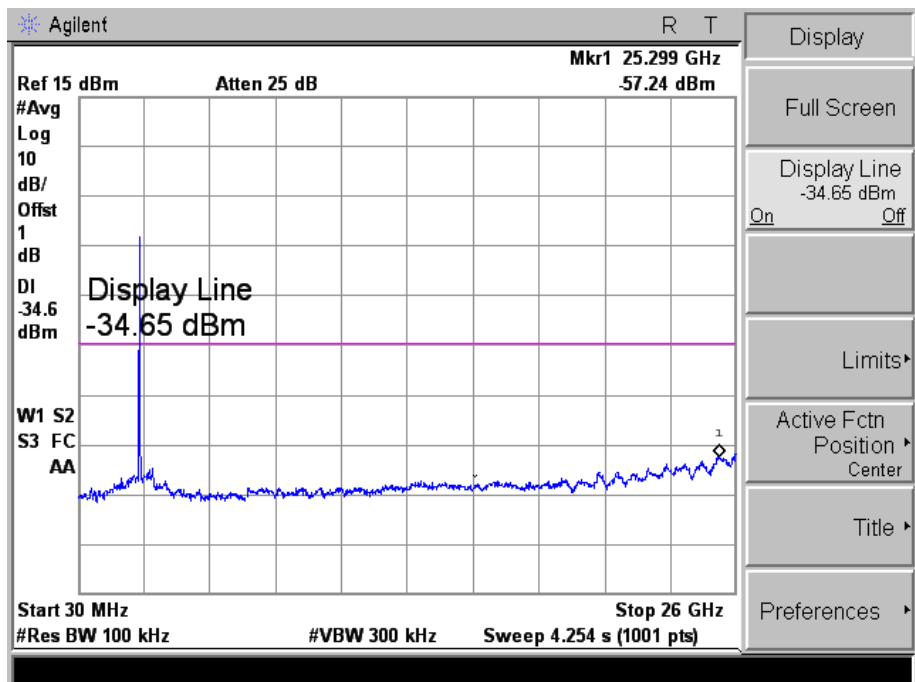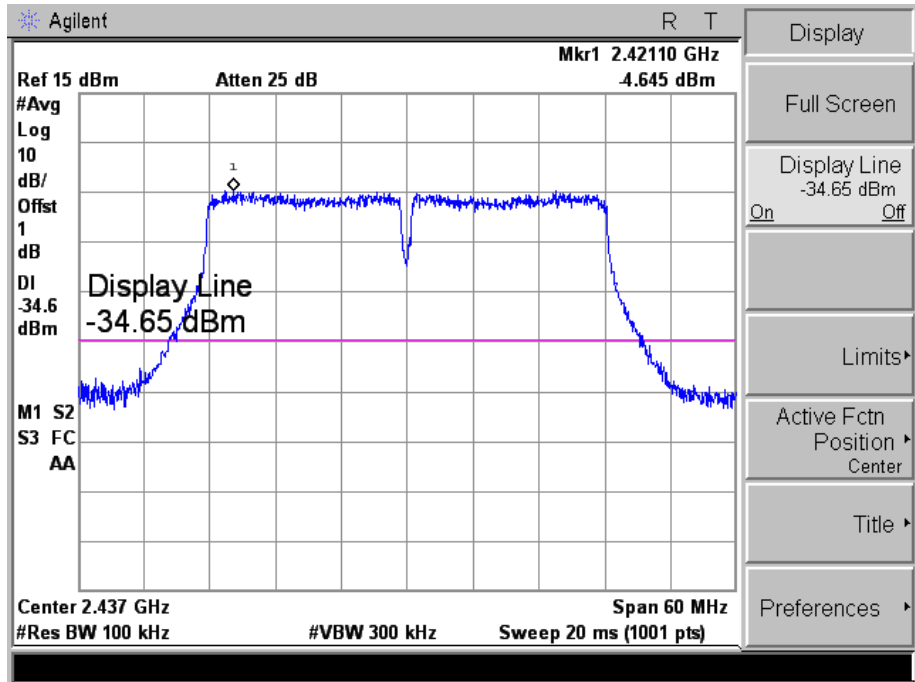



802.11n-HT40_MCS7

High

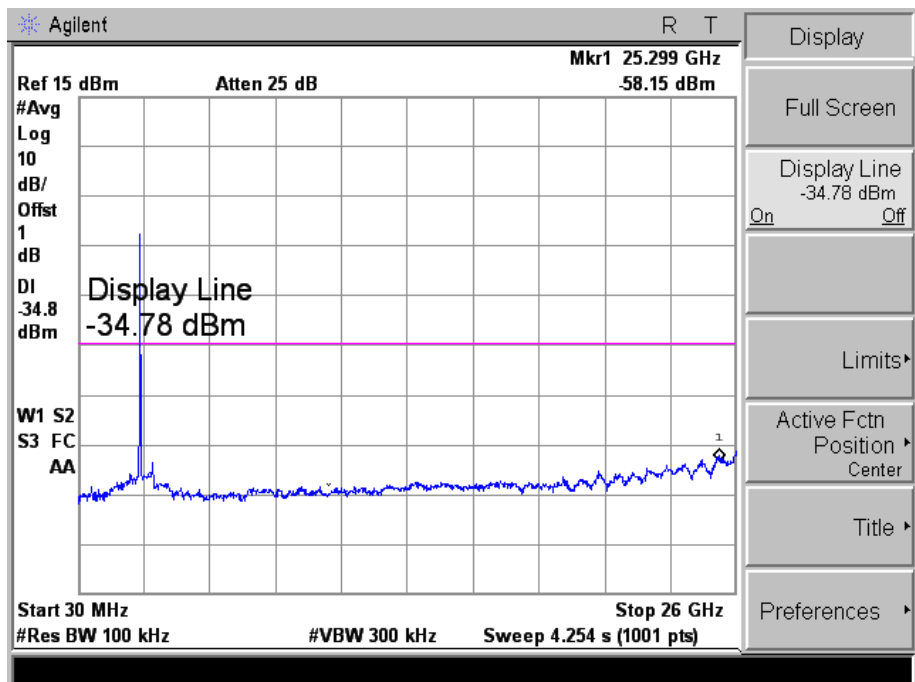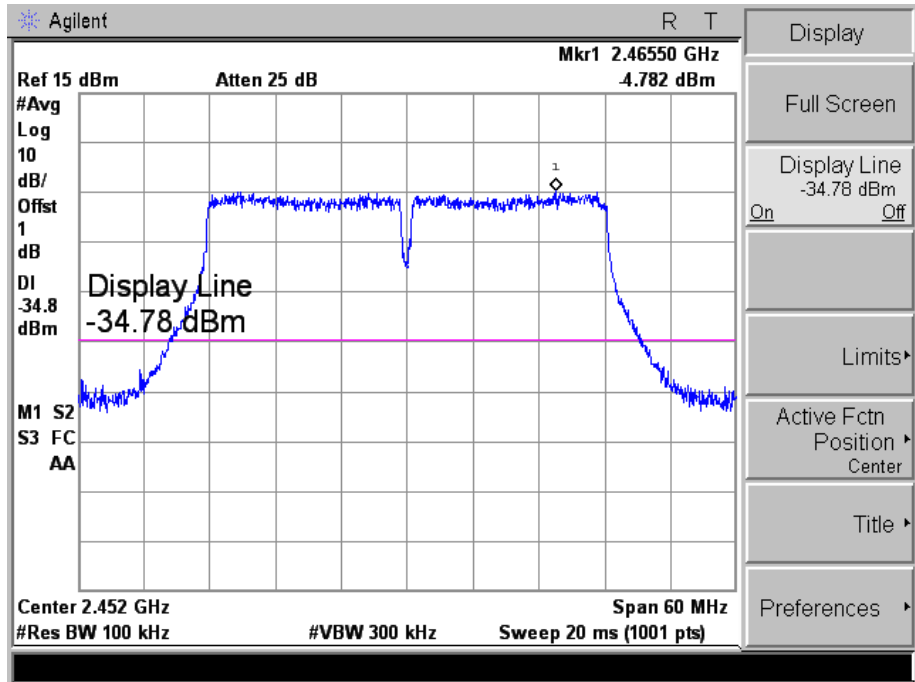


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

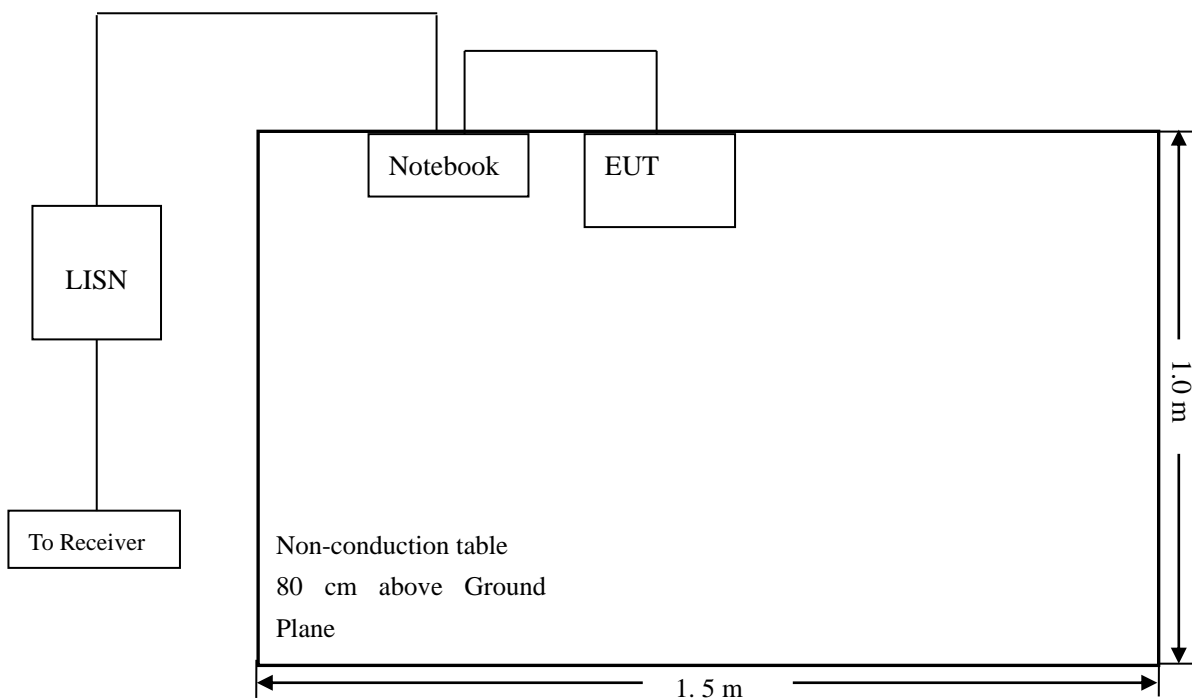

10.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

- Start Frequency 150 kHz
- Stop Frequency 30 MHz
- Sweep Speed Auto
- IF Bandwidth..... 10 kHz
- Quasi-Peak Adapter Bandwidth 9 kHz
- Quasi-Peak Adapter Mode Normal

10.4 Summary of Test Results/Plots




Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

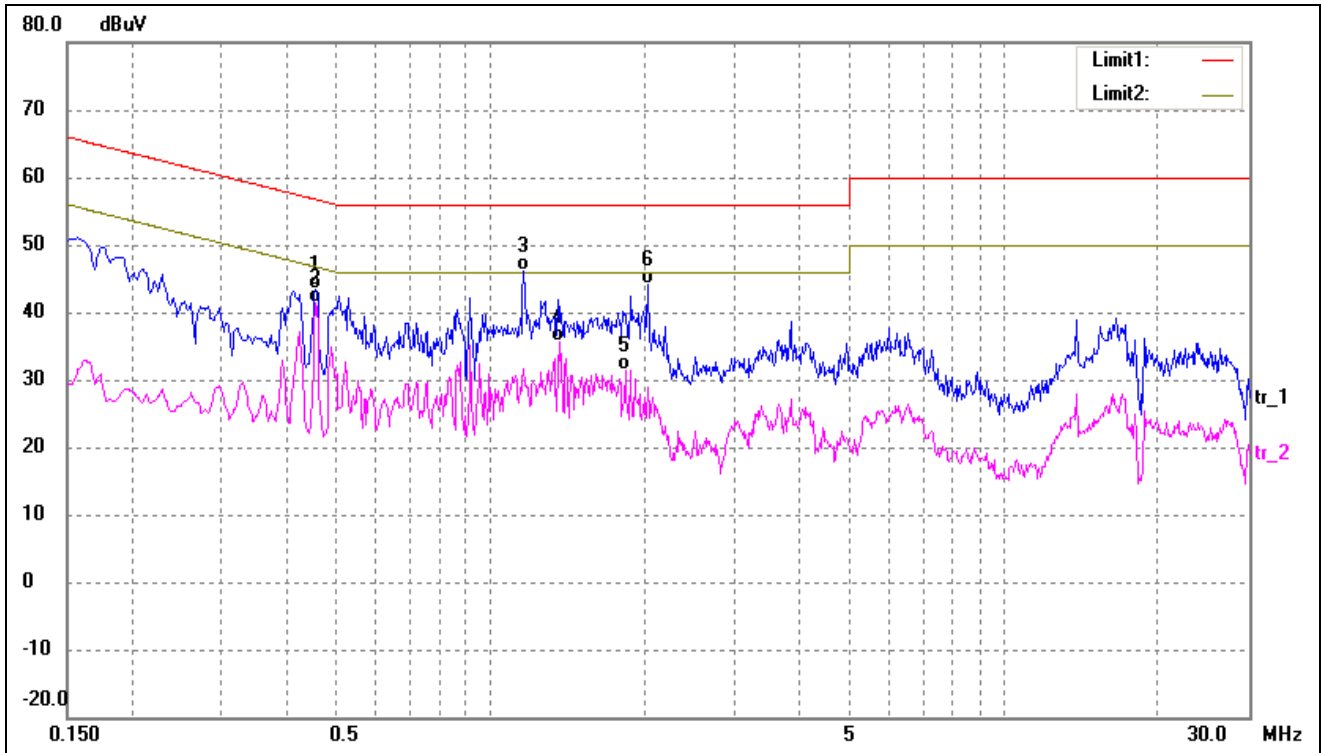

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4580	33.40	10.02	43.42	56.73	-13.31	QP
2*	0.4580	31.37	10.02	41.39	46.73	-5.34	AVG
3	1.1620	35.84	10.38	46.22	56.00	-9.78	QP
4	1.3660	25.32	10.37	35.69	46.00	-10.31	AVG
5	1.8300	20.96	10.37	31.33	46.00	-14.67	AVG
6	2.0260	33.73	10.37	44.10	56.00	-11.90	QP



Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

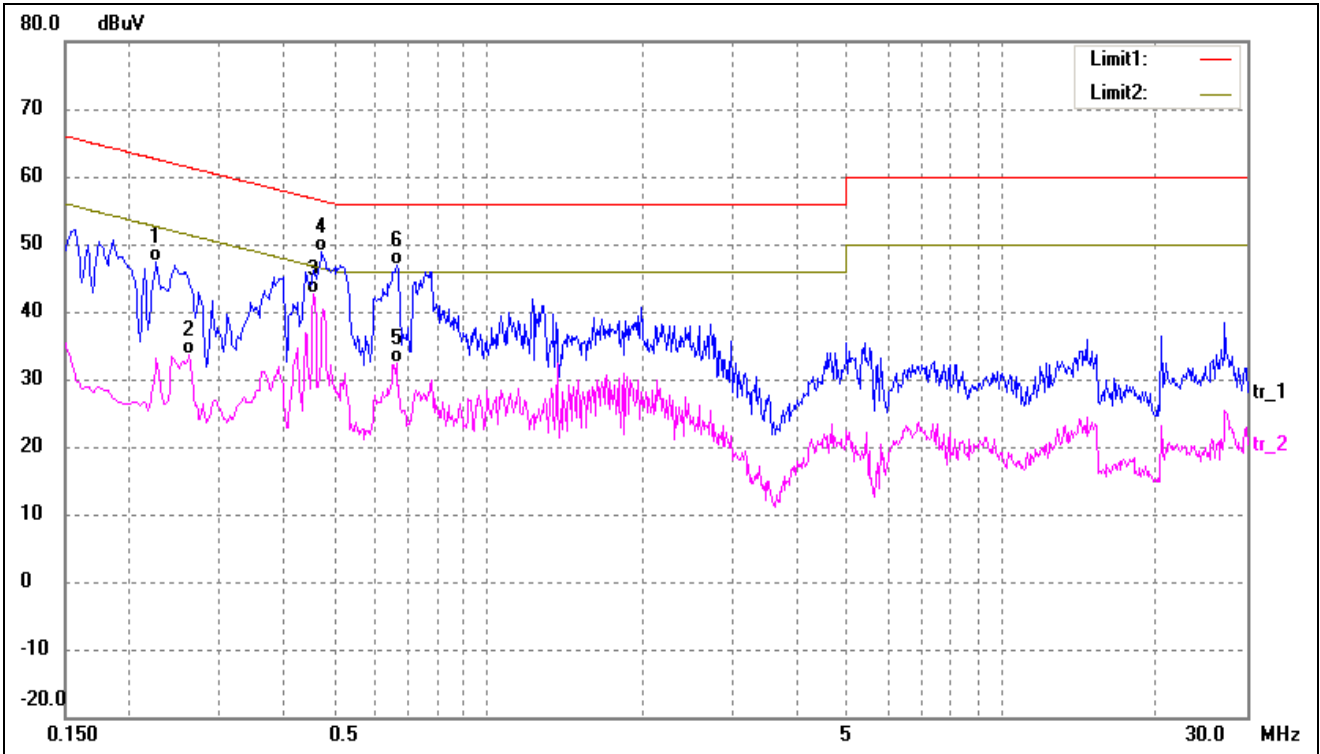

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.2260	37.43	9.99	47.42	62.59	-15.17	QP
2	0.2620	23.65	10.02	33.67	51.36	-17.69	AVG
3*	0.4580	32.66	10.02	42.68	46.73	-4.05	AVG
4	0.4740	38.91	10.02	48.93	56.44	-7.51	QP
5	0.6620	22.24	10.05	32.29	46.00	-13.71	AVG
6	0.6660	36.85	10.05	46.90	56.00	-9.10	QP

***** END OF REPORT *****