


[TestMode: TX high channel]; [Polarity: Horizontal]

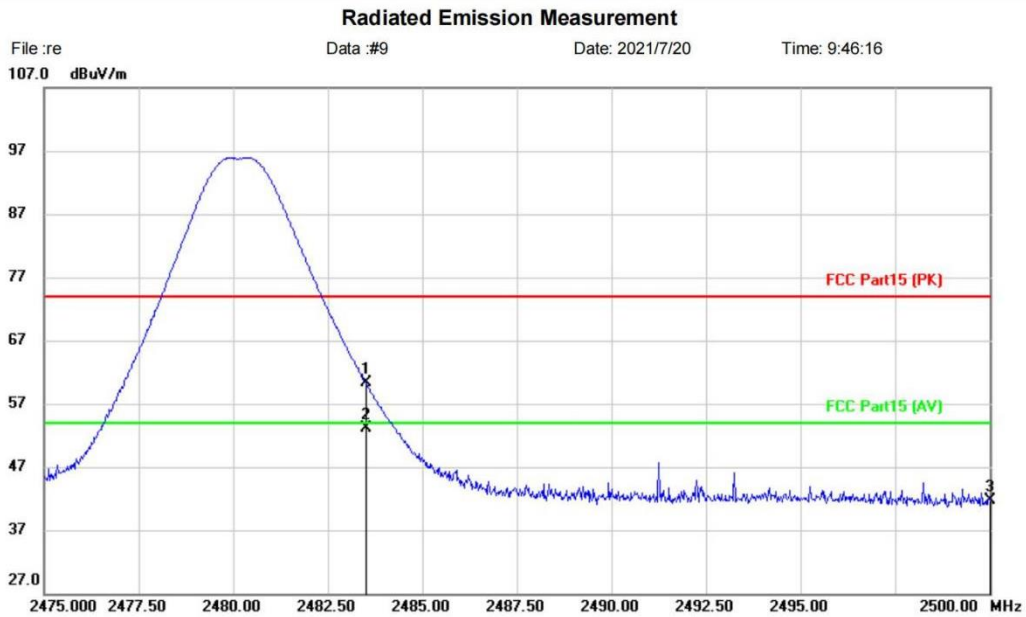

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: BT module	Distance:	
M/N: RF-BM-2652P3		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	64.10	-3.84	60.26	74.00	-13.74	peak		
2	*	2483.500	56.98	-3.84	53.14	54.00	-0.86	AVG		
3		2500.000	45.51	-3.78	41.73	74.00	-32.27	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

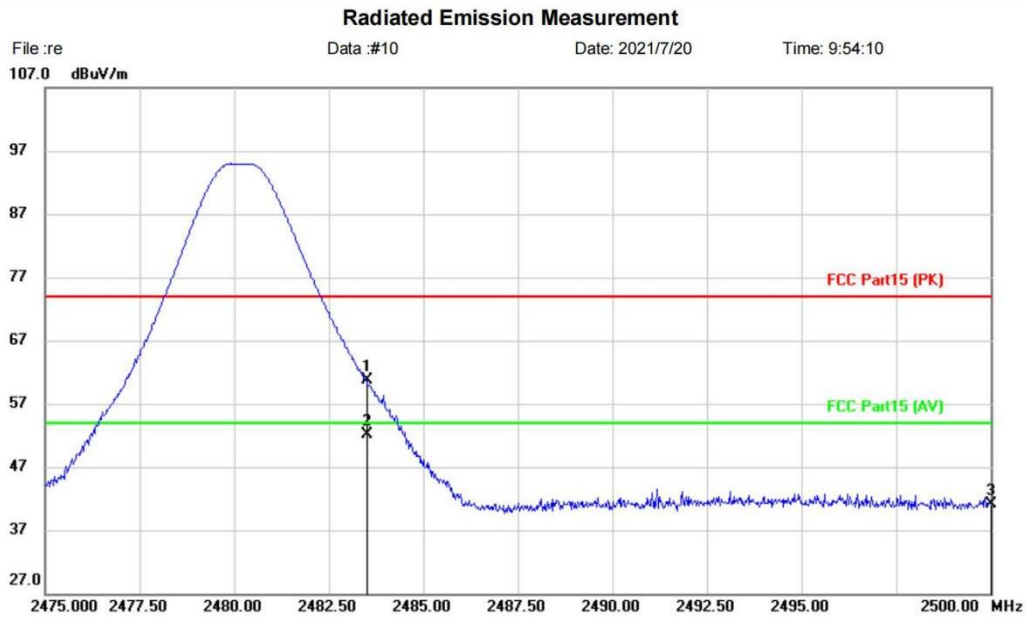

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: BT module	Distance:	
M/N: RF-BM-2652P3		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		2483.500	64.62	-3.84	60.78	74.00	-13.22	peak	
2	*	2483.500	55.99	-3.84	52.15	54.00	-1.85	AVG	
3		2500.000	44.89	-3.78	41.11	74.00	-32.89	peak	


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

BLE 2M

[TestMode: TX Low channel]; [Polarity: Horizontal]

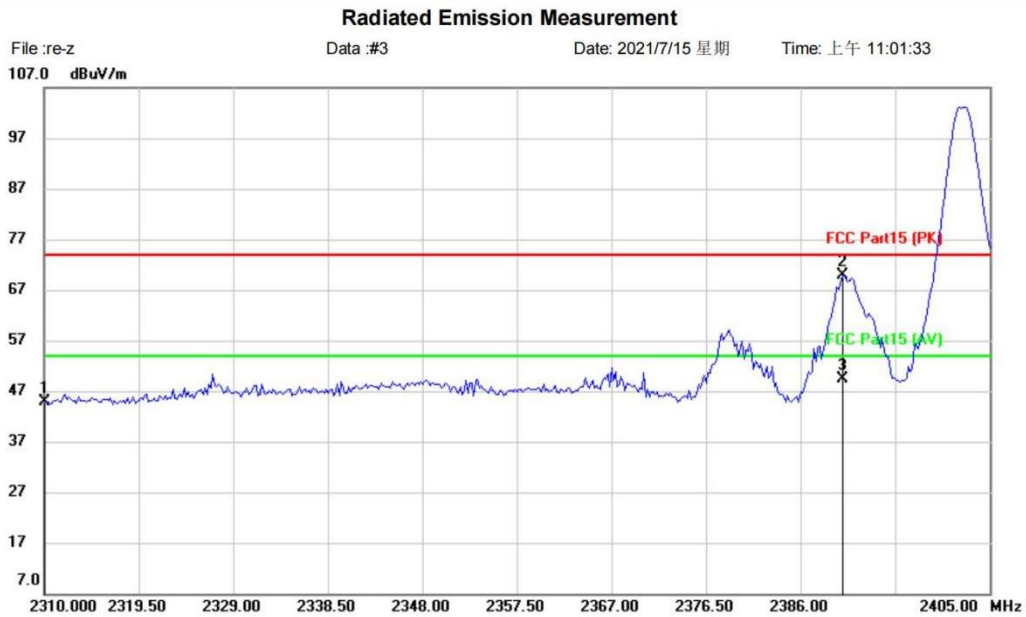

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: BT module	Distance:	
M/N: RF-BM-2652P3		
Mode: TX-L		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	49.43	-4.61	44.82	74.00	-29.18	peak		
2	*	2390.000	74.11	-4.27	69.84	74.00	-4.16	peak		
3		2390.000	53.73	-4.27	49.46	54.00	-4.54	AVG		


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

Radiated Emission Measurement

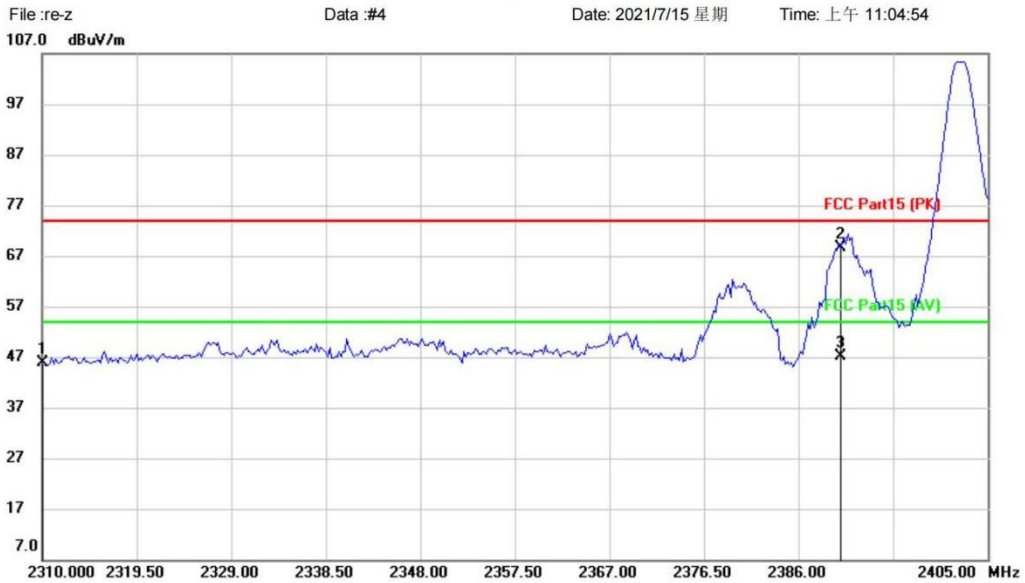

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: BT module	Distance:	
M/N: RF-BM-2652P3		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2310.000	50.37	-4.61	45.76	74.00	-28.24	peak		
2	*	2390.000	72.82	-4.27	68.55	74.00	-5.45	peak		
3		2390.000	51.42	-4.27	47.15	54.00	-6.85	AVG		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

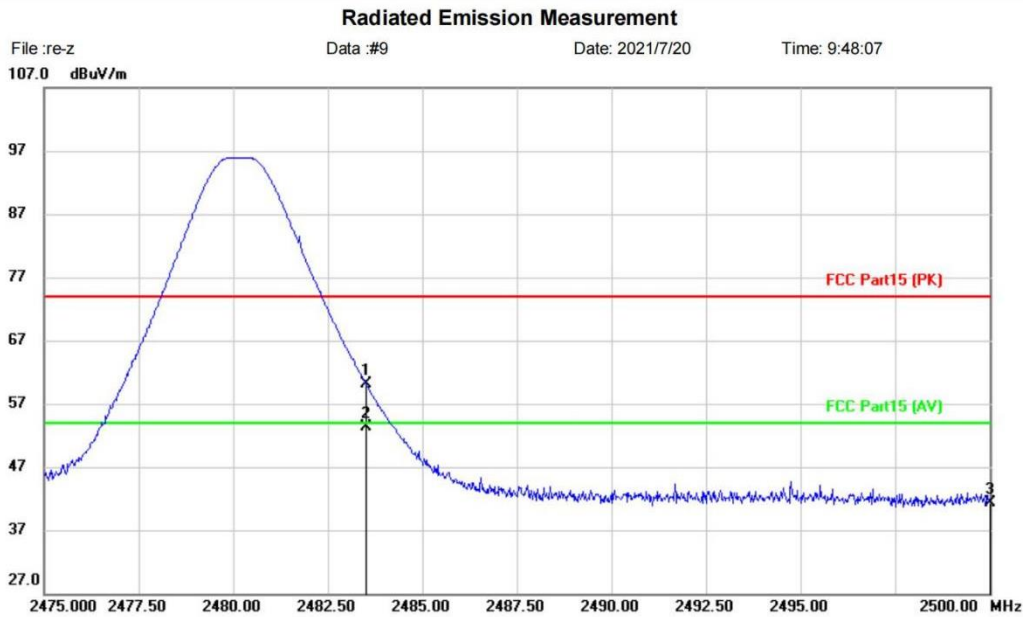

Site	Polarization: Horizontal	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: BT module	Distance:	
M/N: RF-BM-2652P3		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	63.98	-3.84	60.14	74.00	-13.86	peak		
2	*	2483.500	57.21	-3.84	53.37	54.00	-0.63	AVG		
3		2500.000	45.18	-3.78	41.40	74.00	-32.60	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

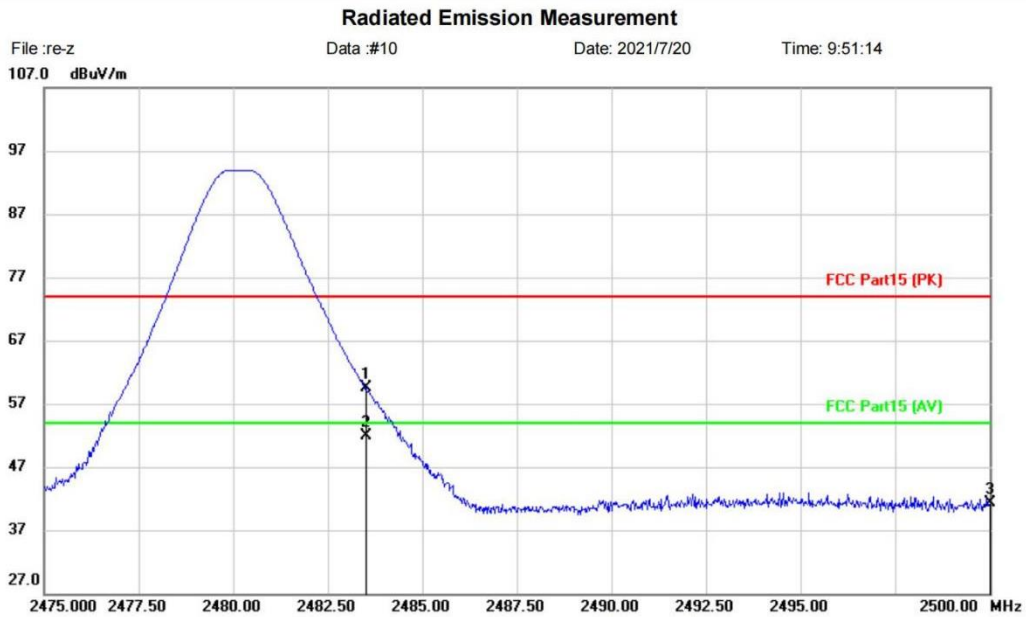

Site	Polarization: Vertical	Temperature:
Limit: FCC Part15 (PK)	Power:	Humidity: %
EUT: BT module	Distance:	
M/N: RF-BM-2652P3		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.500	63.30	-3.84	59.46	74.00	-14.54	peak		
2	*	2483.500	55.80	-3.84	51.96	54.00	-2.04	AVG		
3		2500.000	45.00	-3.78	41.22	74.00	-32.78	peak		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass


14 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

14.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

14.2 BLOCK DIAGRAM OF TEST SETUP

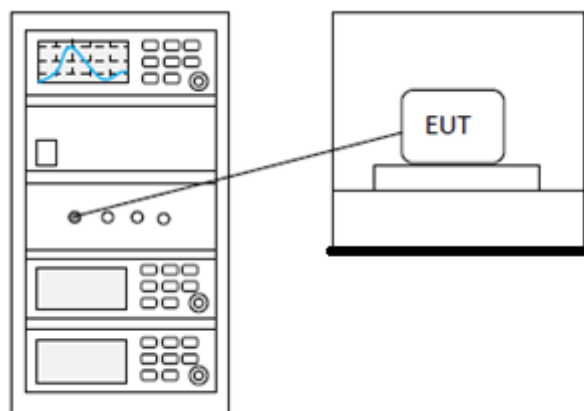

14.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


15 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

15.1 LIMITS

Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	------------------------------------------------------------------------------------------

15.2 BLOCK DIAGRAM OF TEST SETUP

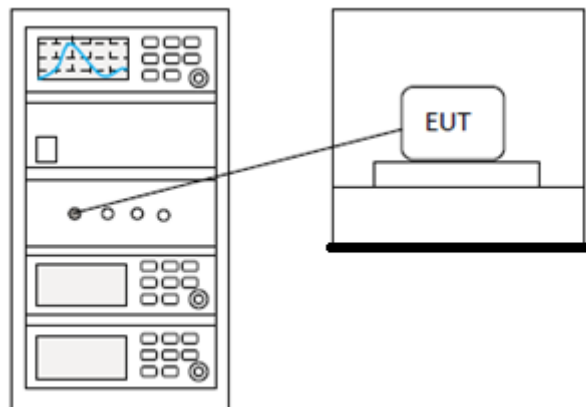

15.3 TEST DATA

Pass: Please Refer To Appendix: For Details


16 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

16.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

16.2 BLOCK DIAGRAM OF TEST SETUP

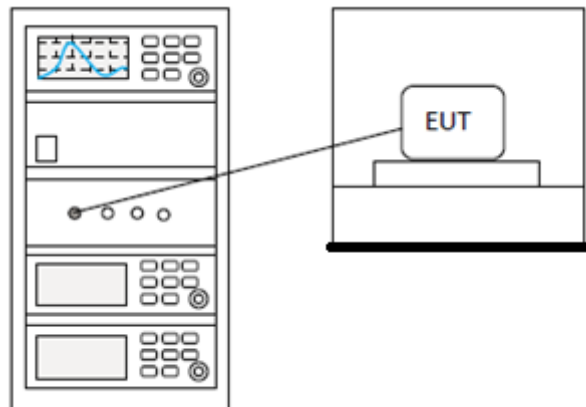

16.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


17 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

17.1 LIMITS

Limit:	≥500 kHz
---------------	----------

17.2 BLOCK DIAGRAM OF TEST SETUP

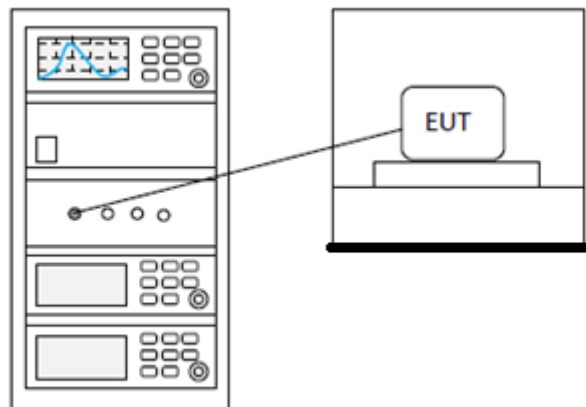

17.3 TEST DATA

Pass: Please Refer To Appendix: For Details

18 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


18.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0 dBi.

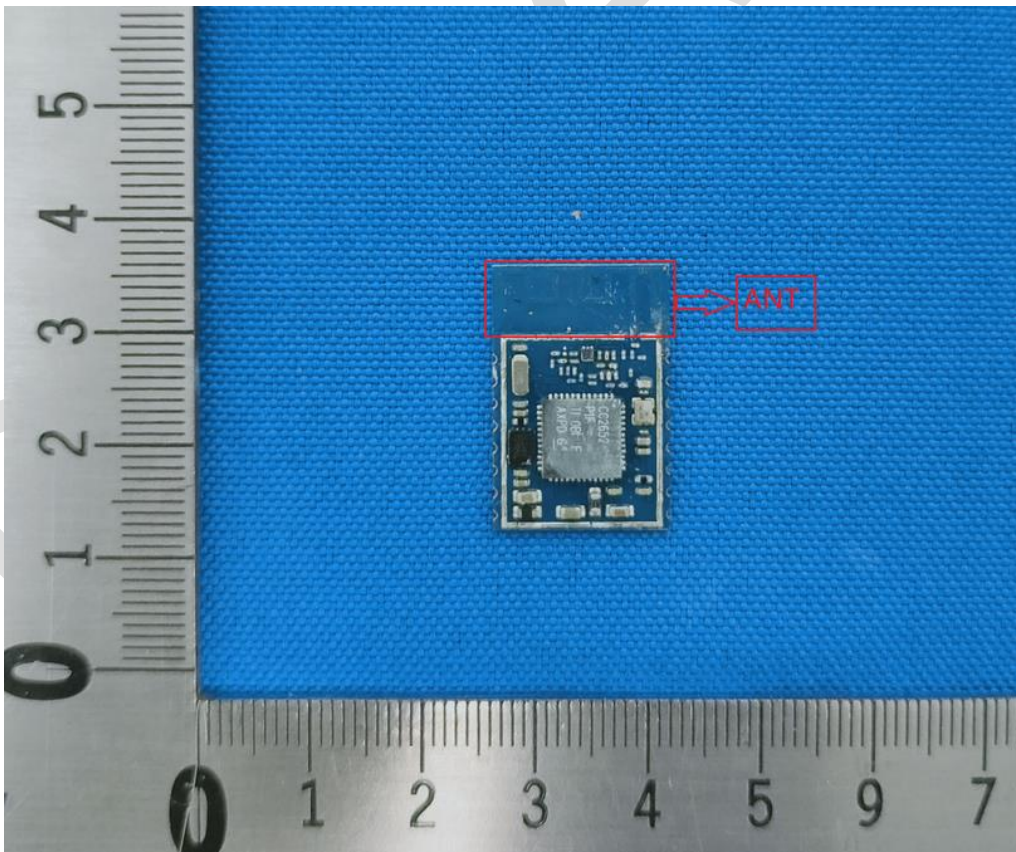


19 APPENDIX


19.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	0.301	0	0.301	30	Pass
NVNT	BLE 1M	2442	Ant1	0.077	0	0.077	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.76	0	-0.76	30	Pass
NVNT	BLE 2M	2402	Ant1	0.205	0	0.205	30	Pass
NVNT	BLE 2M	2442	Ant1	0.126	0	0.126	30	Pass
NVNT	BLE 2M	2480	Ant1	-0.758	0	-0.758	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

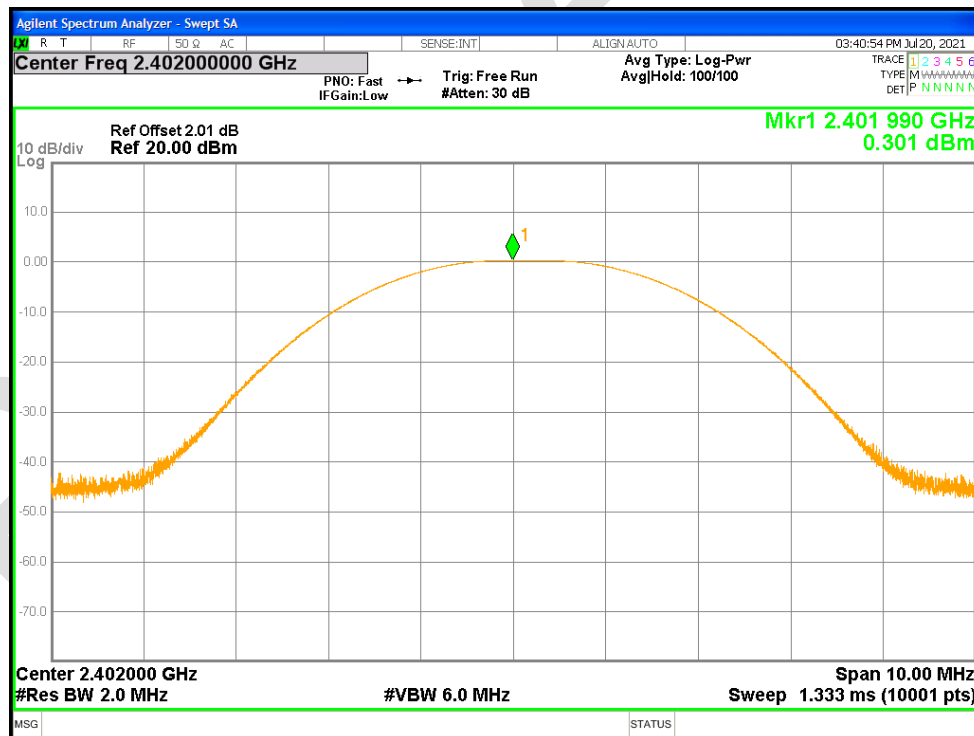


Power NVNT BLE 1M 2442MHz Ant1

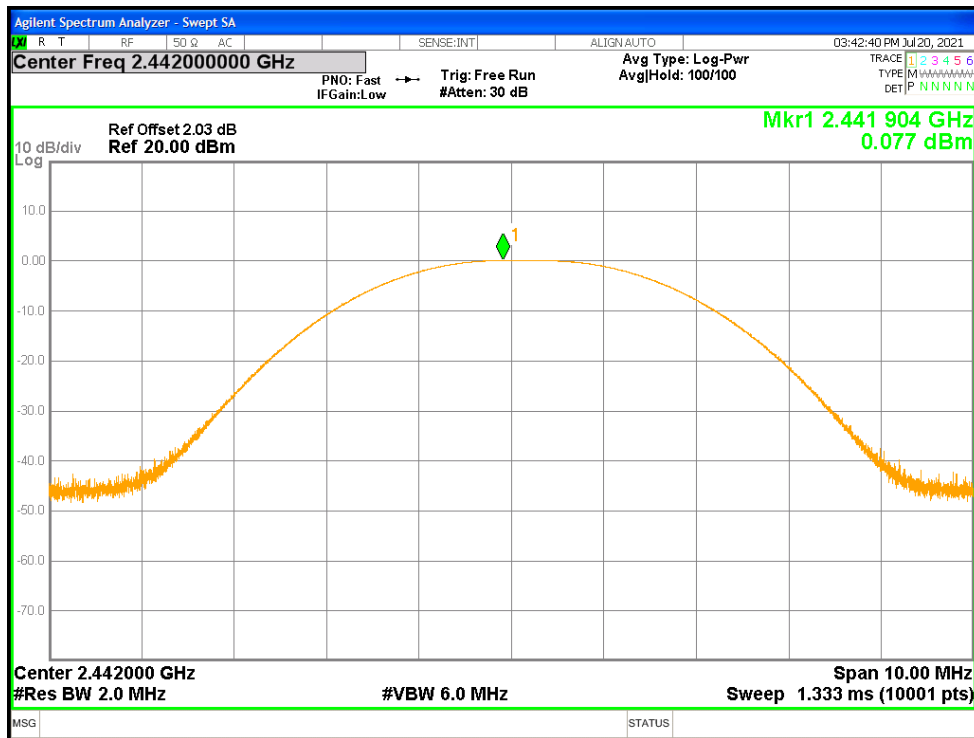


Power NVNT BLE 1M 2480MHz Ant1

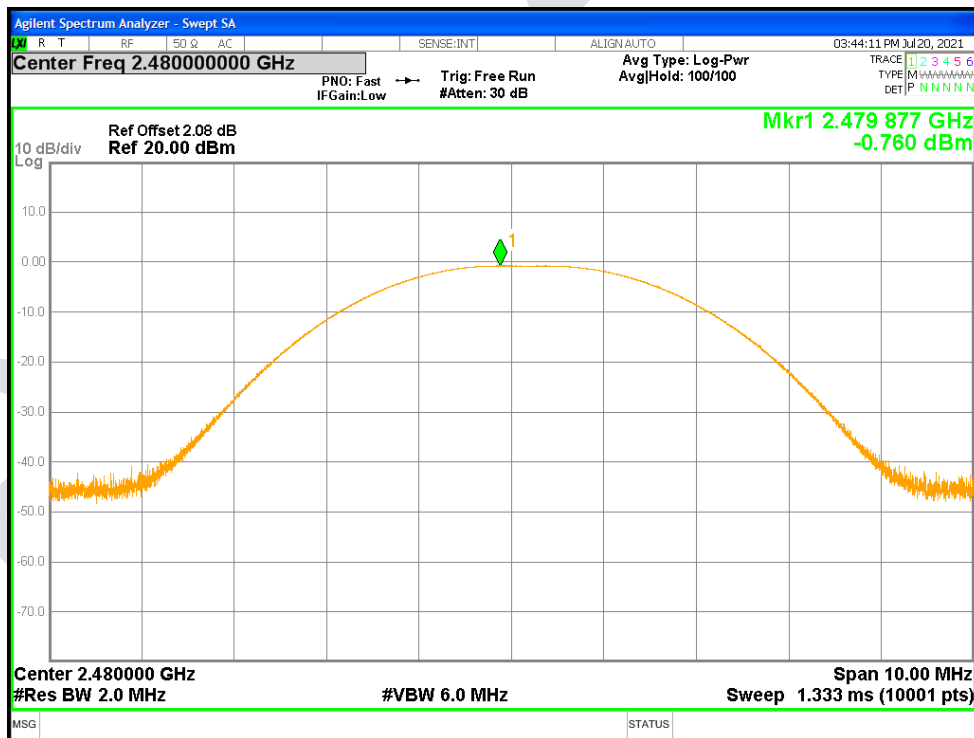


Power NVNT BLE 2M 2402MHz Ant1

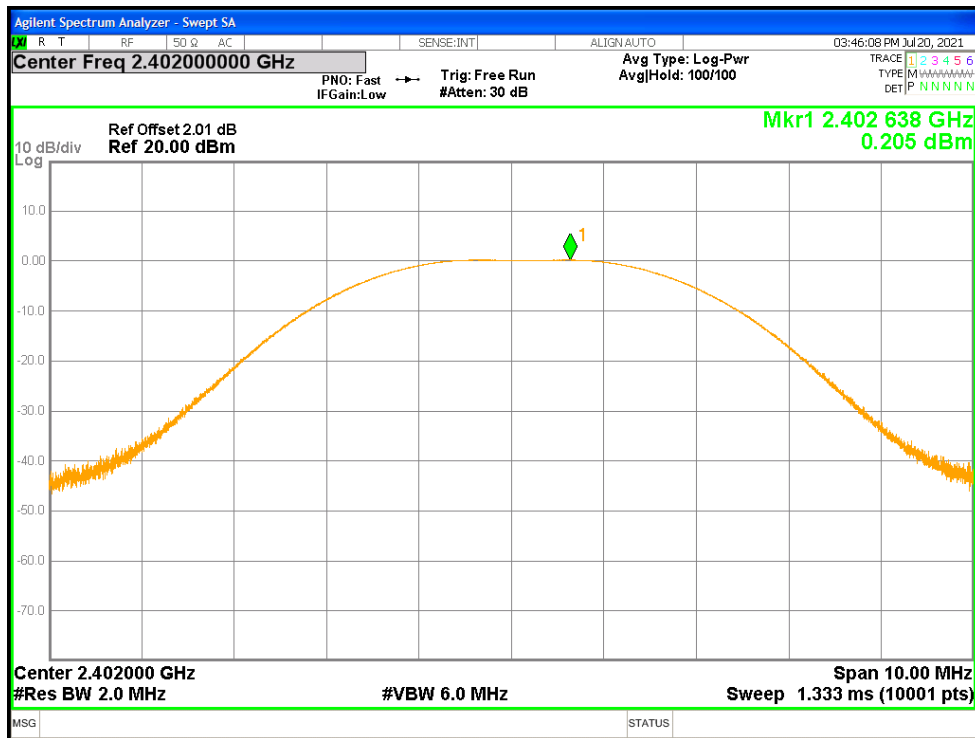

Power NVNT BLE 2M 2442MHz Ant1

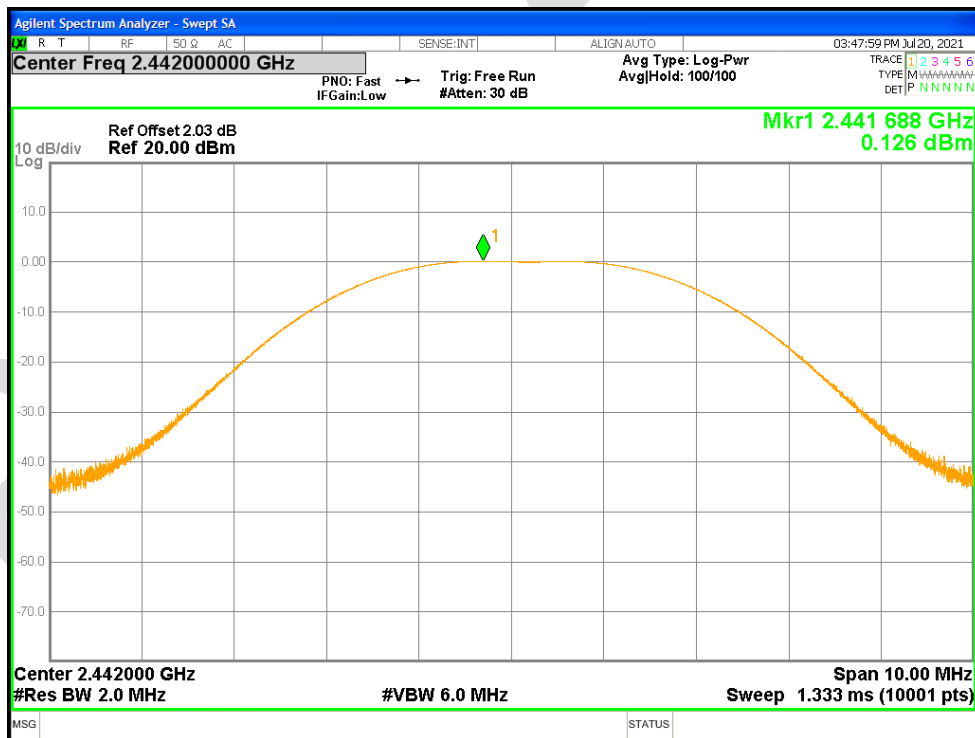


Power NVNT BLE 2M 2480MHz Ant1

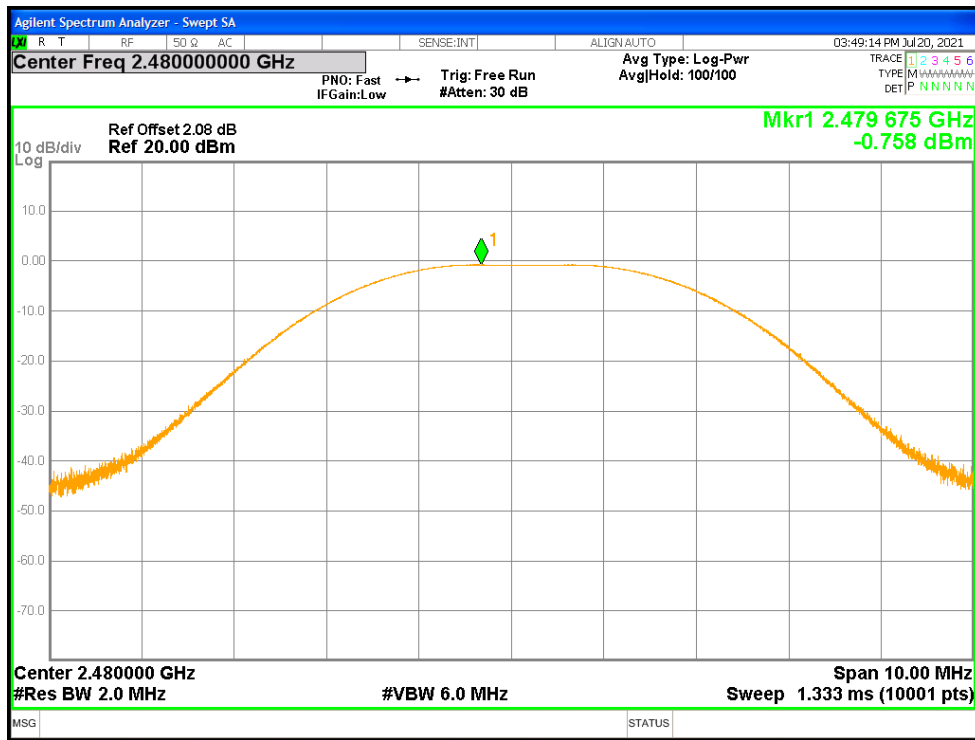


19.2 -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.733	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.706	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.687	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.393	0.5	Pass
NVNT	BLE 2M	2442	Ant1	1.427	0.5	Pass
NVNT	BLE 2M	2480	Ant1	1.301	0.5	Pass


-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

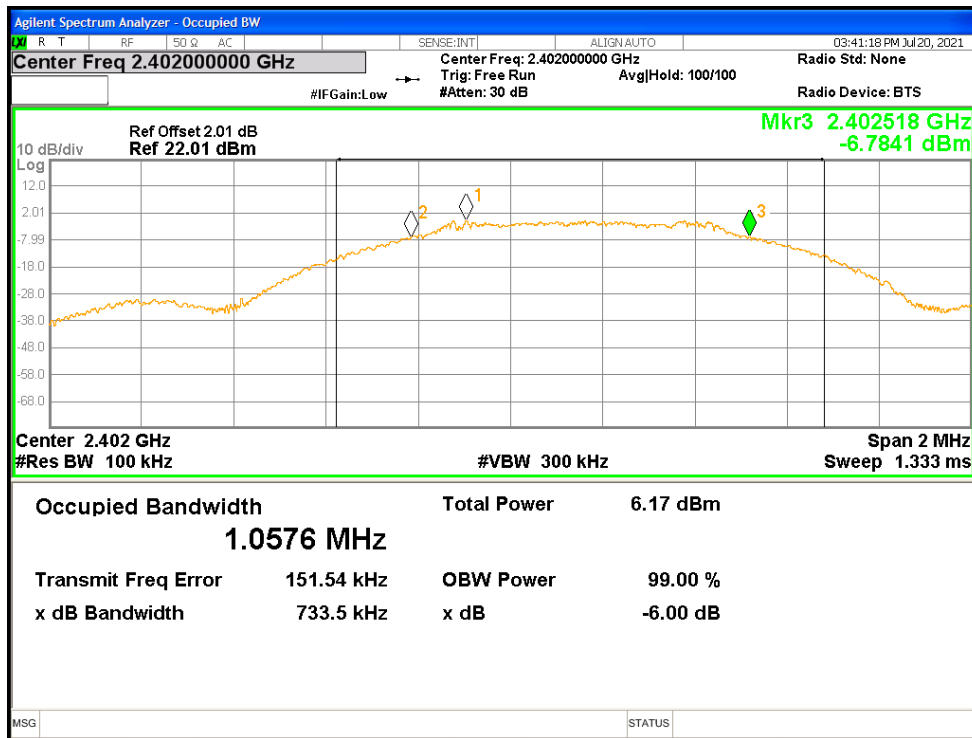


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

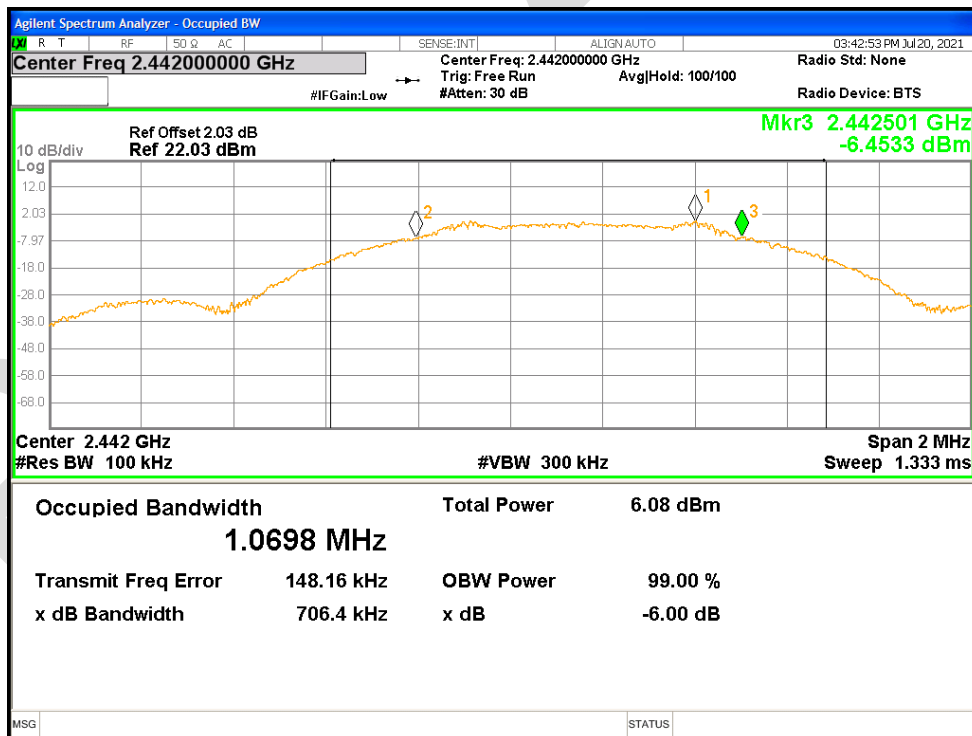


-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

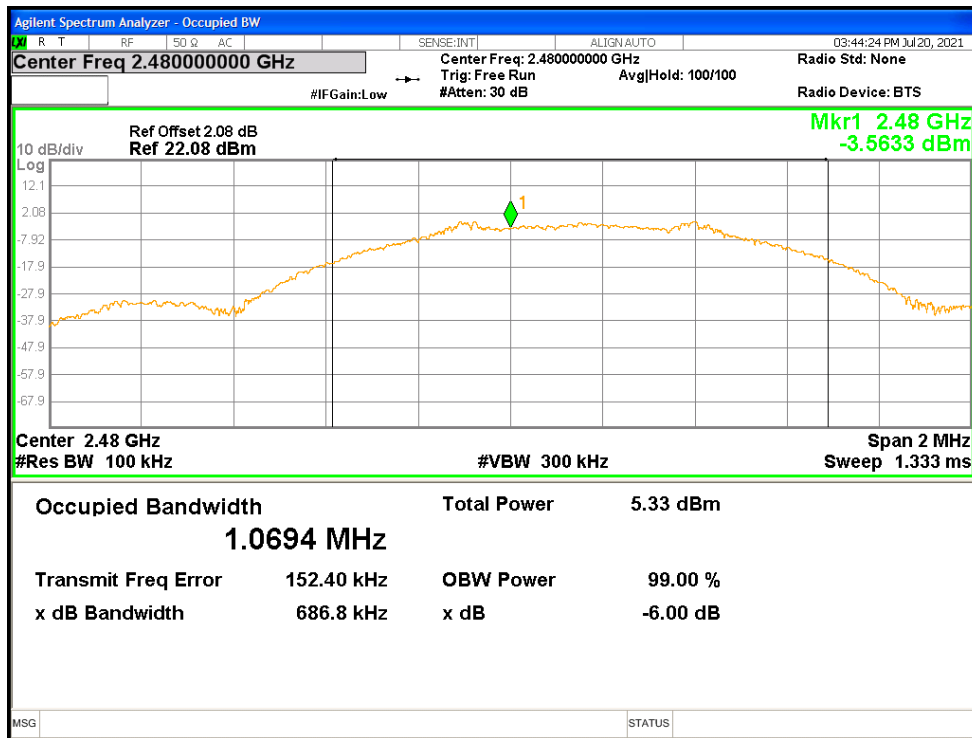


-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

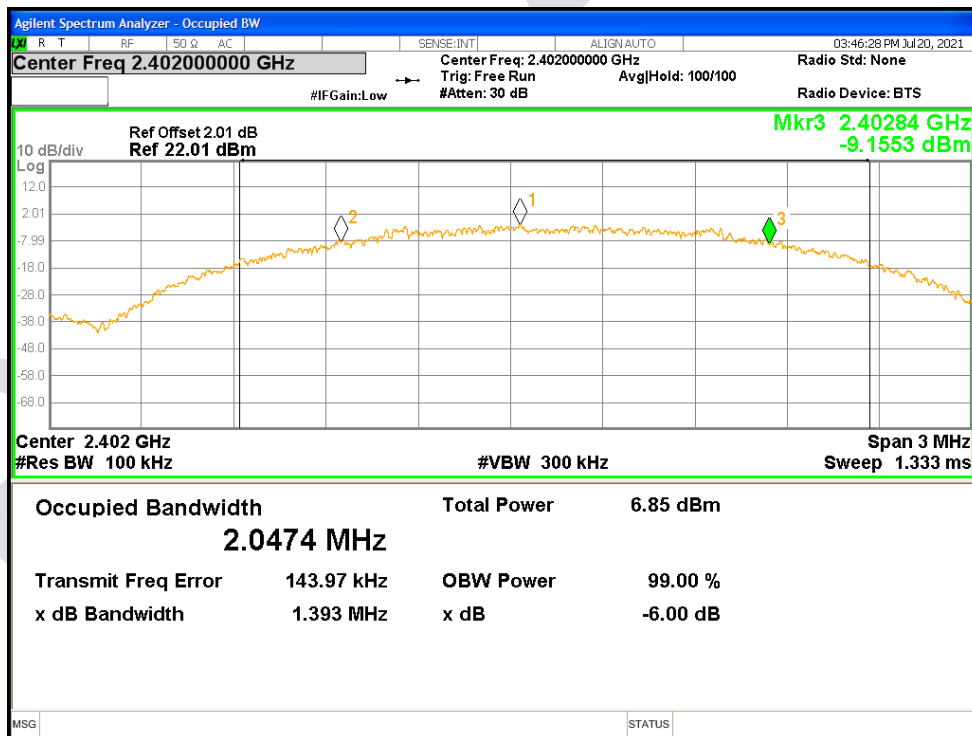

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1

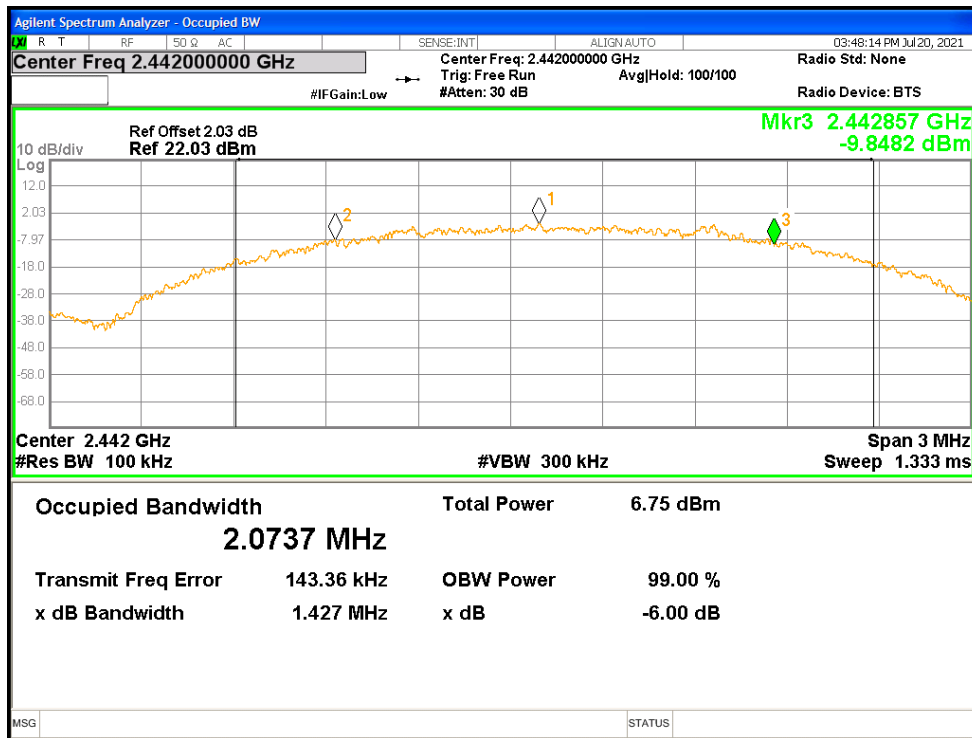



-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1

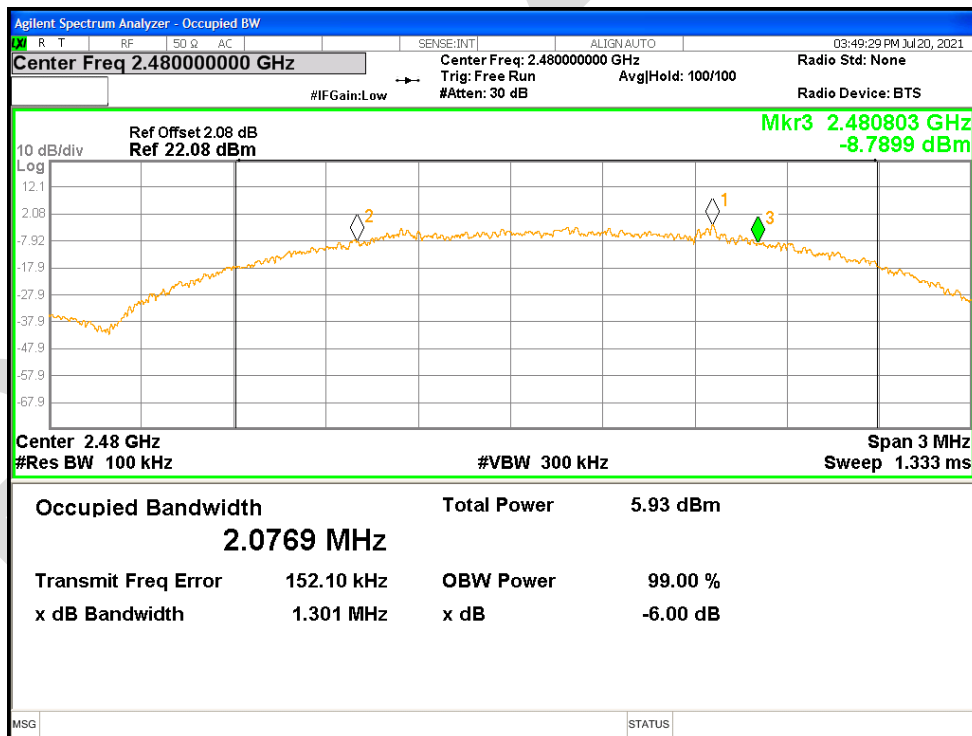


19.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.039196847
NVNT	BLE 1M	2442	Ant1	1.068015244
NVNT	BLE 1M	2480	Ant1	1.069196551
NVNT	BLE 2M	2402	Ant1	2.049123499
NVNT	BLE 2M	2442	Ant1	2.050307355
NVNT	BLE 2M	2480	Ant1	2.073436979

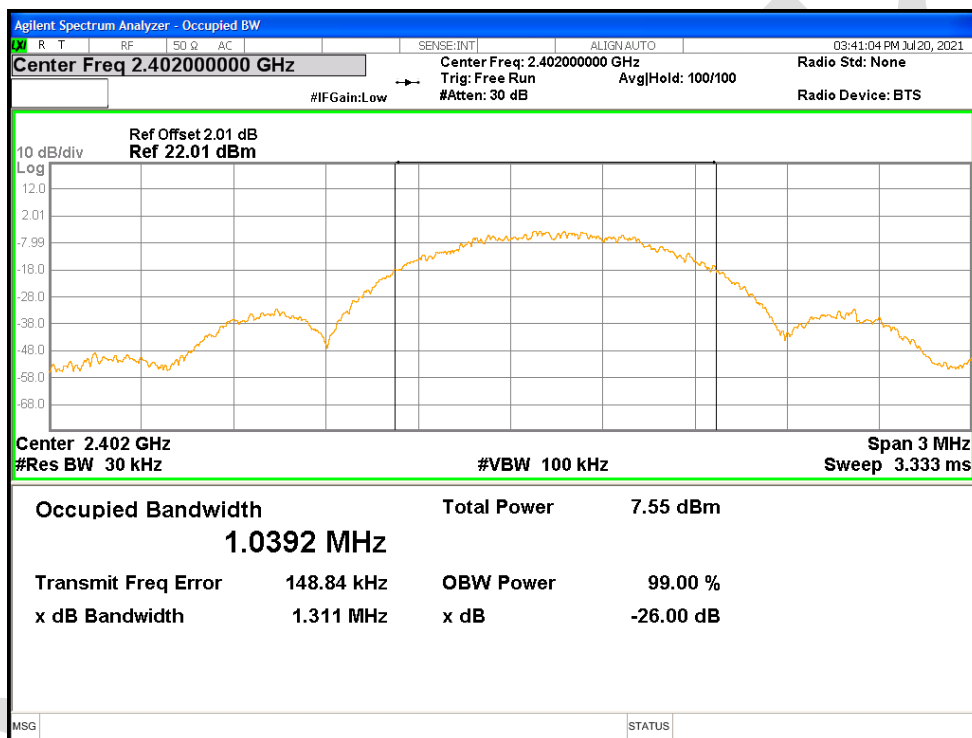
OBW NVNT BLE 1M 2402MHz Ant1

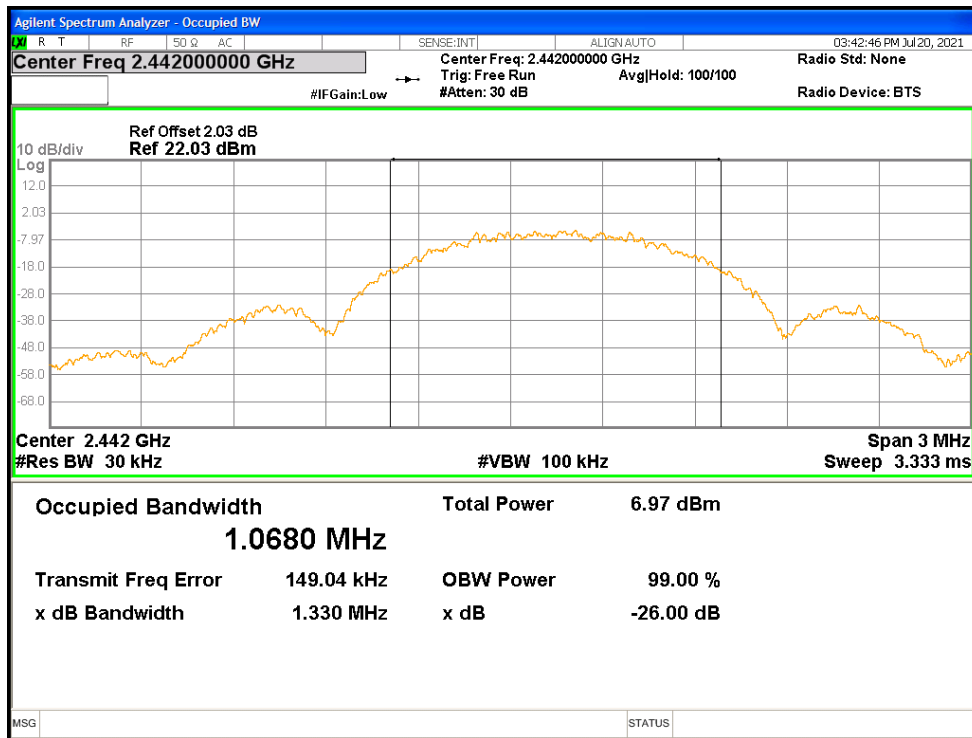OBW NVNT BLE 1M 2442MHz Ant1

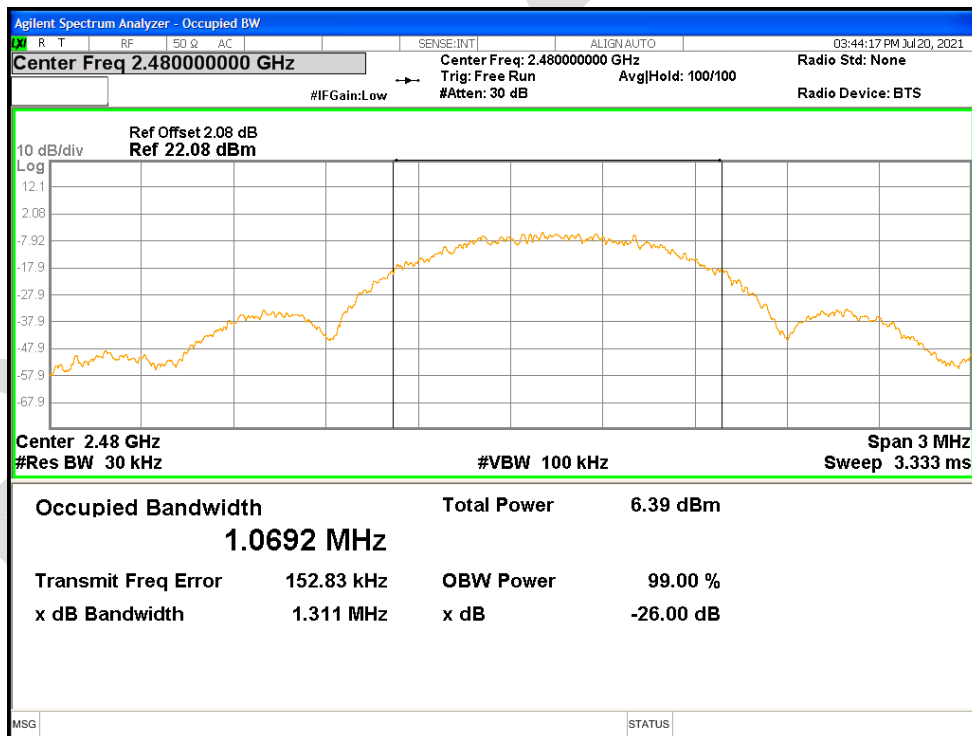


OBW NVNT BLE 1M 2480MHz Ant1

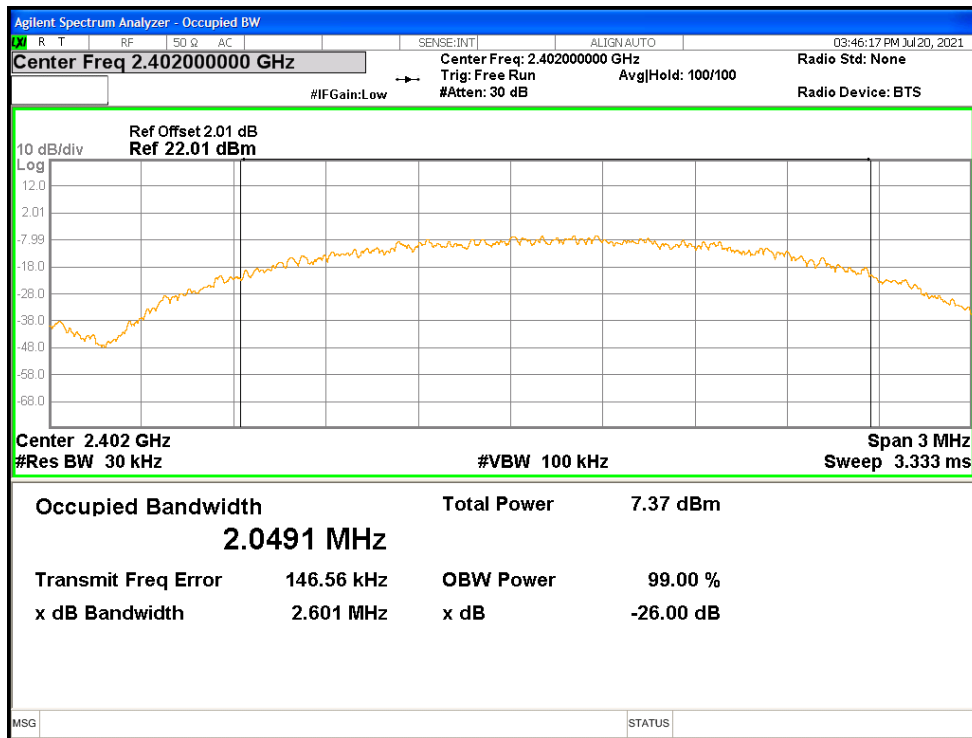


OBW NVNT BLE 2M 2402MHz Ant1



OBW NVNT BLE 2M 2442MHz Ant1

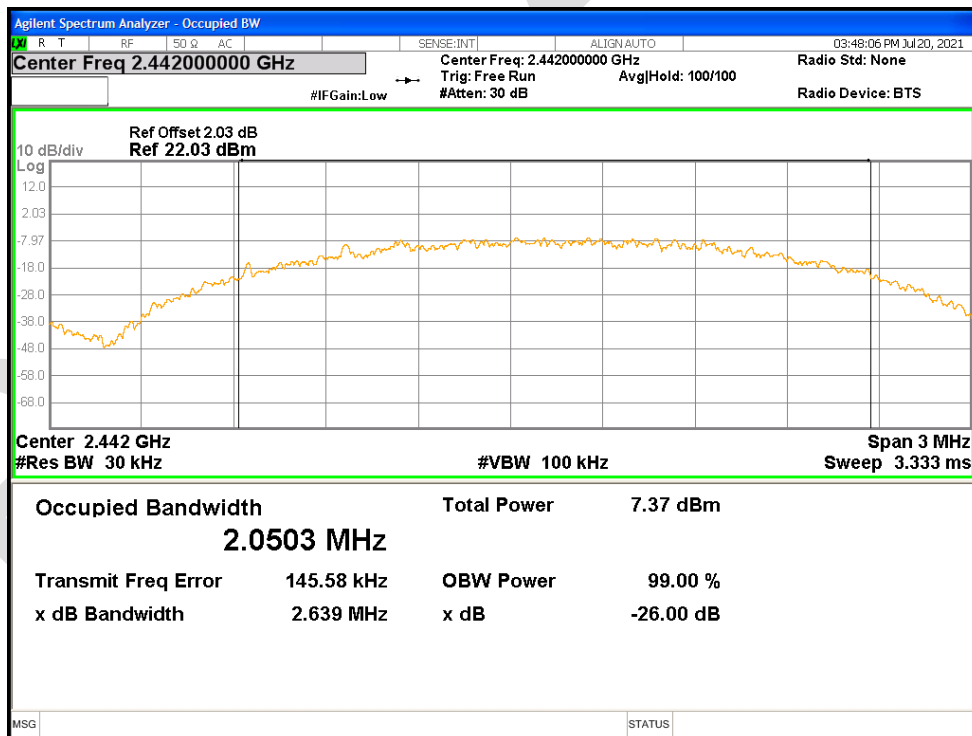


OBW NVNT BLE 2M 2480MHz Ant1

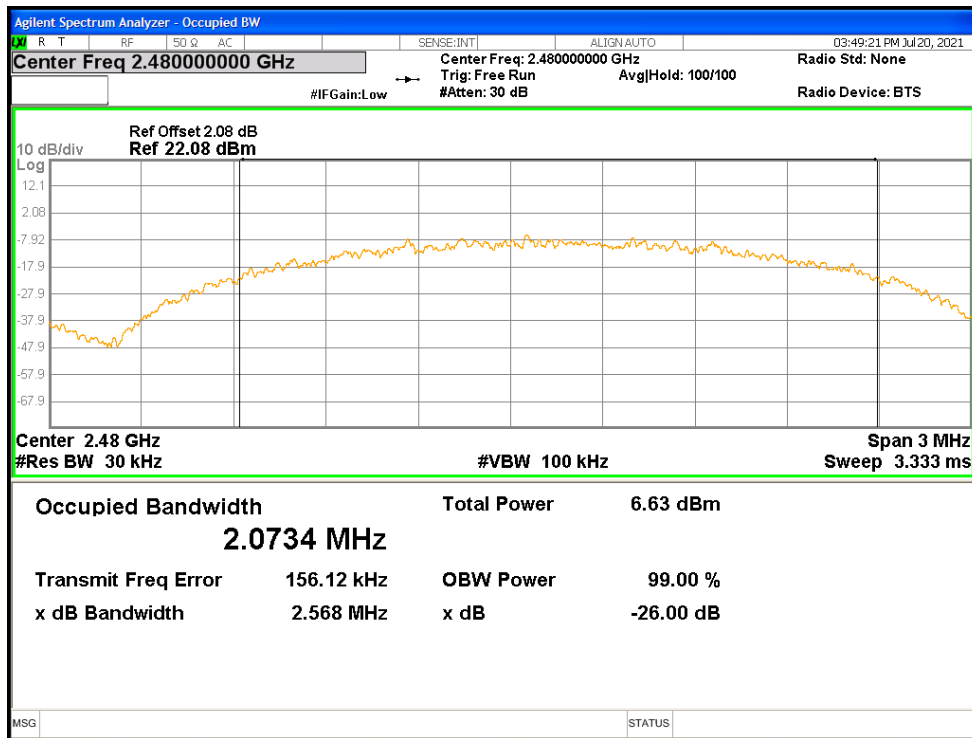


19.4 MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.469	8	Pass
NVNT	BLE 1M	2442	Ant1	-7.512	8	Pass
NVNT	BLE 1M	2480	Ant1	-7.291	8	Pass
NVNT	BLE 2M	2402	Ant1	-6.927	8	Pass
NVNT	BLE 2M	2442	Ant1	-7.495	8	Pass
NVNT	BLE 2M	2480	Ant1	-10.479	8	Pass


PSD NVNT BLE 1M 2402MHz Ant1

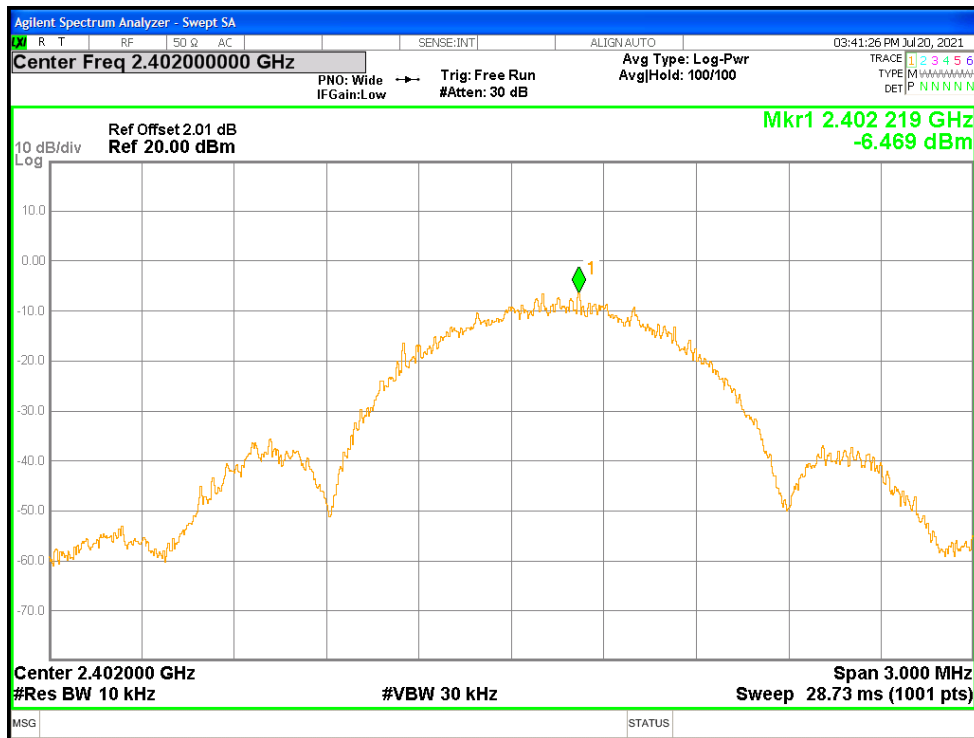


PSD NVNT BLE 1M 2442MHz Ant1

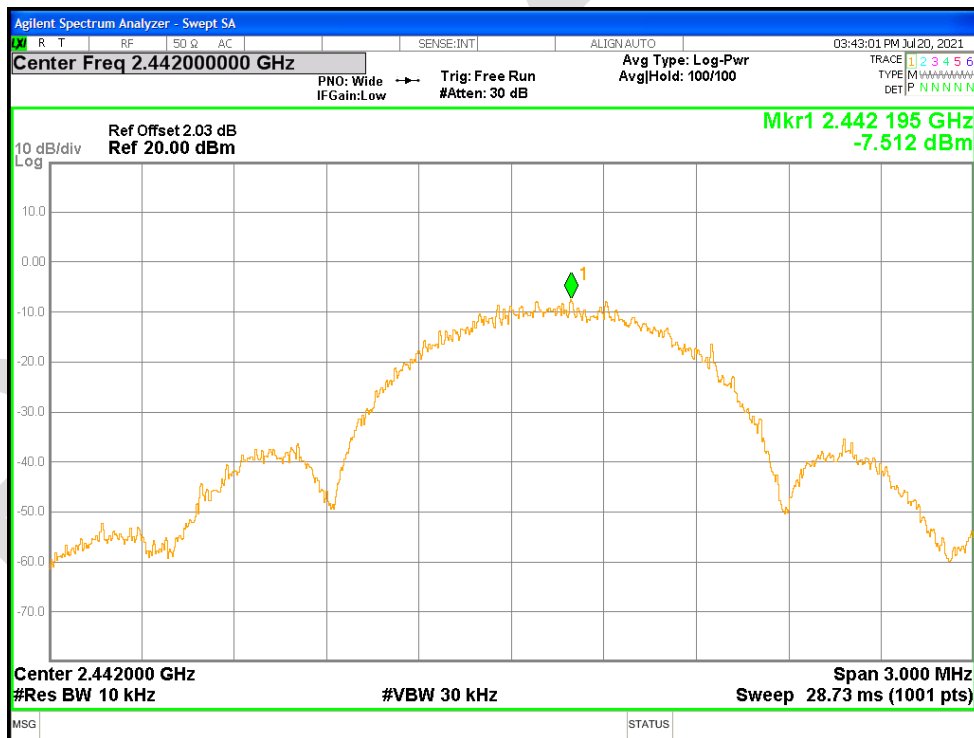


PSD NVNT BLE 1M 2480MHz Ant1

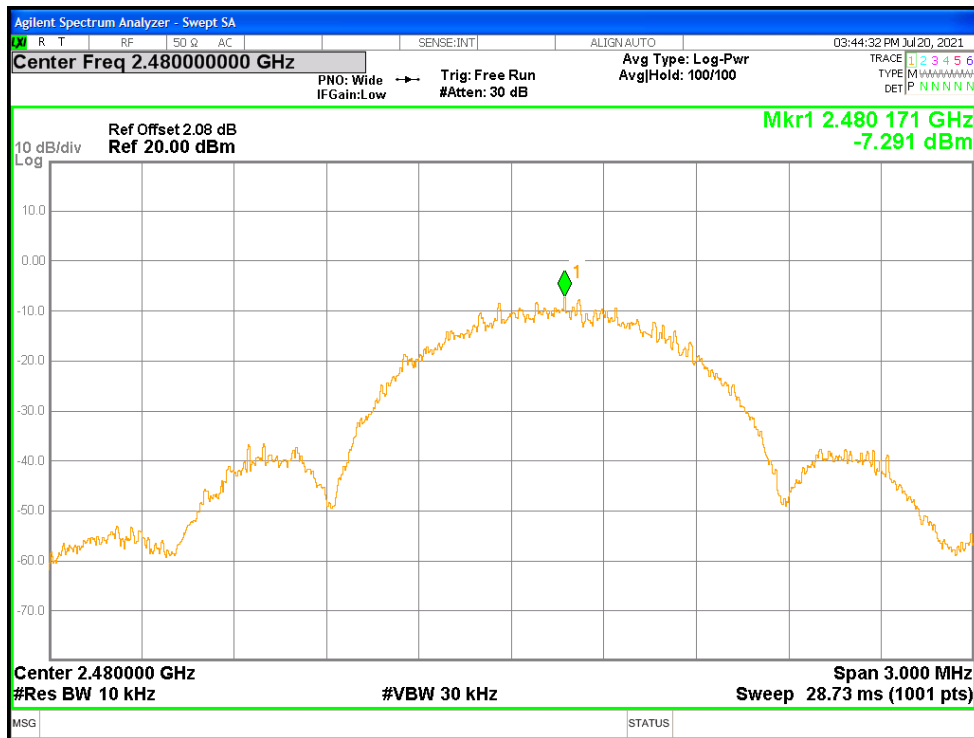


PSD NVNT BLE 2M 2402MHz Ant1

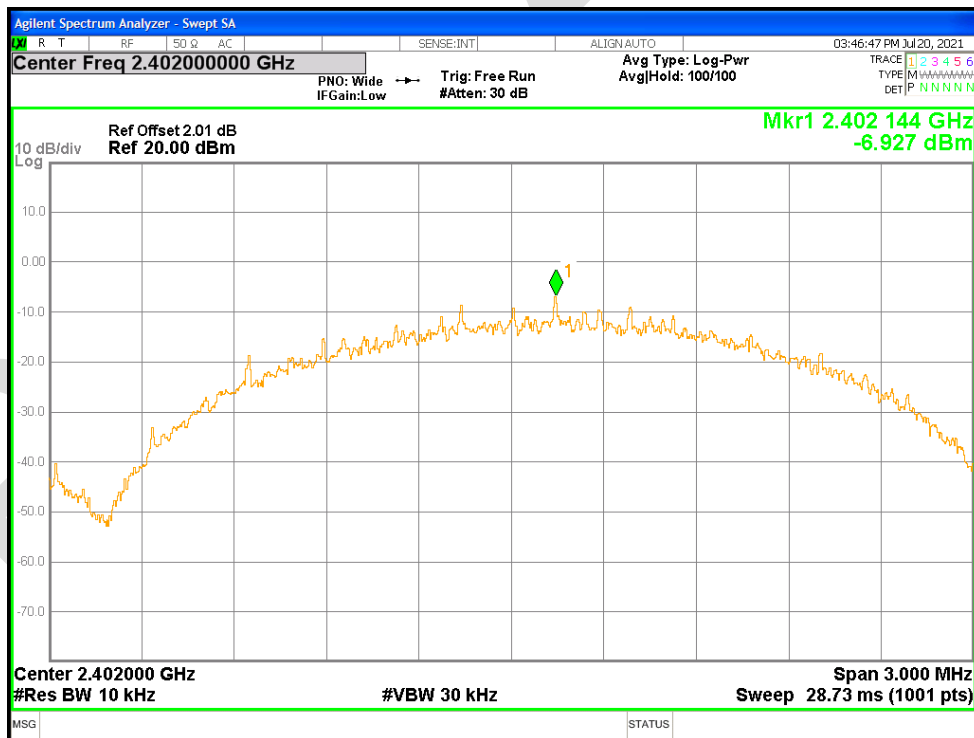

PSD NVNT BLE 2M 2442MHz Ant1

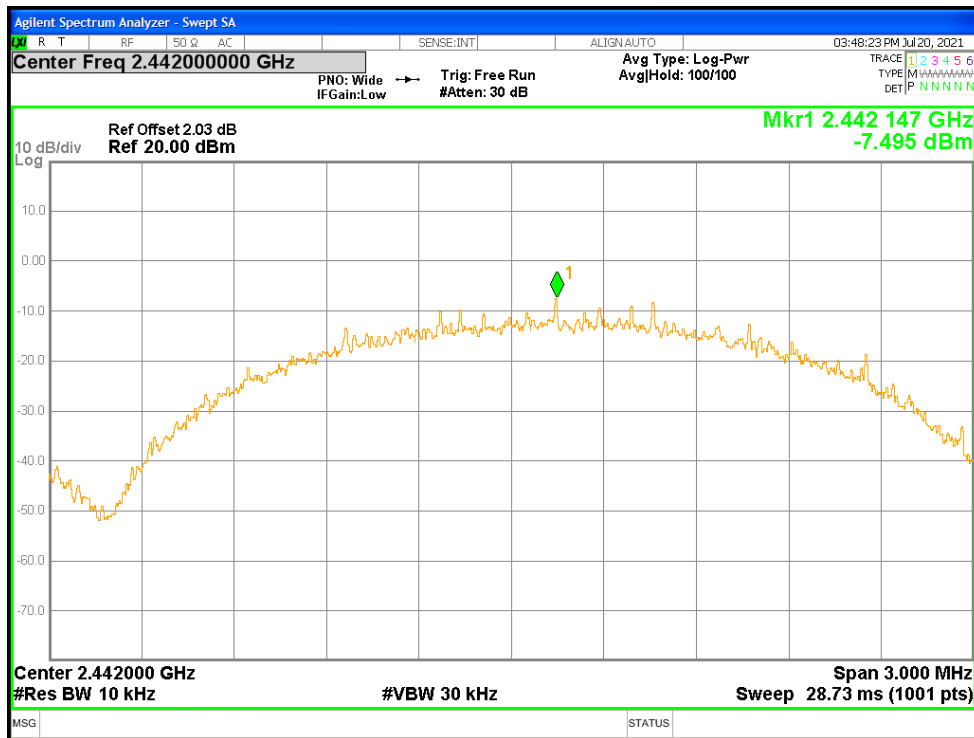

PSD NVNT BLE 2M 2480MHz Ant1

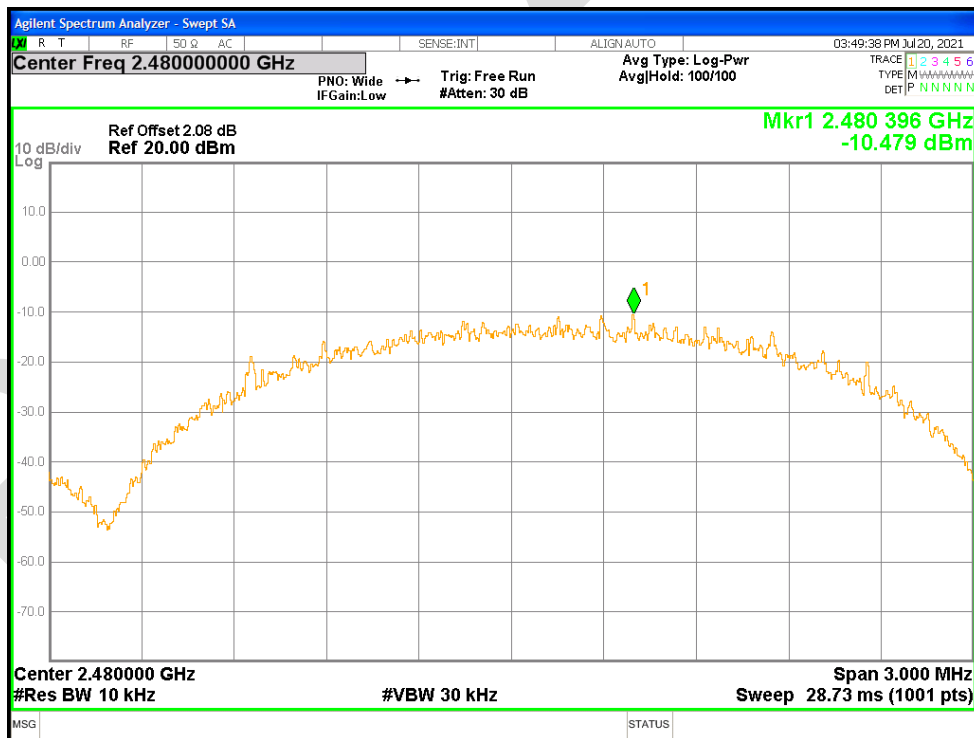
Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-55	-30	Pass
NVNT	BLE 1M	2480	Ant1	-53.79	-30	Pass
NVNT	BLE 2M	2402	Ant1	-53.47	-30	Pass

NVNT	BLE 2M	2480	Ant1	-51.51	-30	Pass
------	--------	------	------	--------	-----	------

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

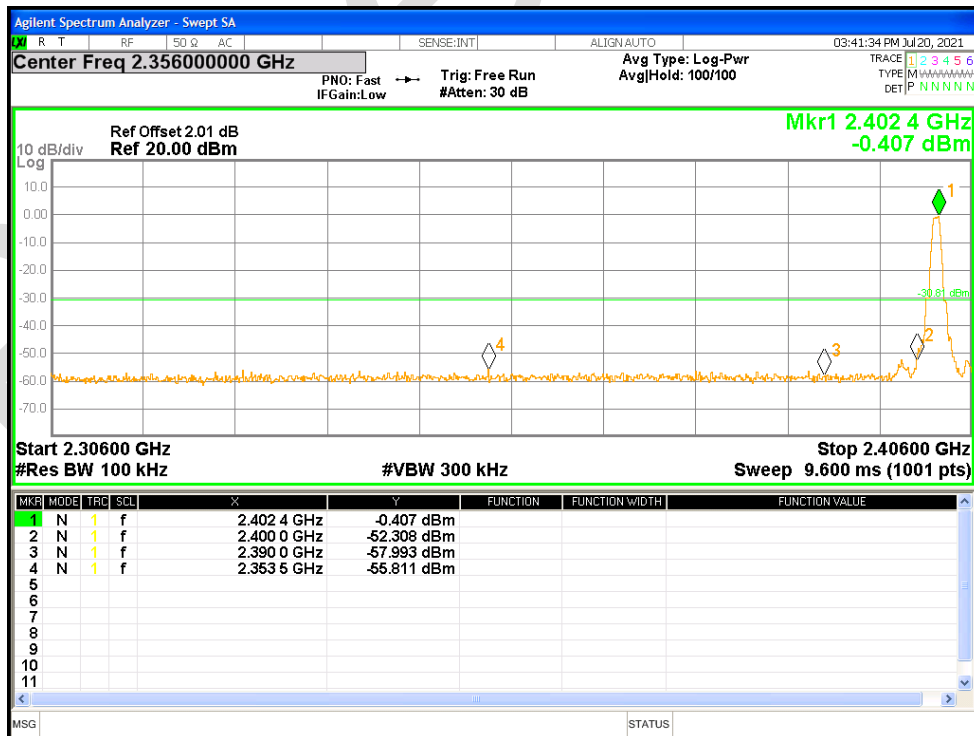


Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

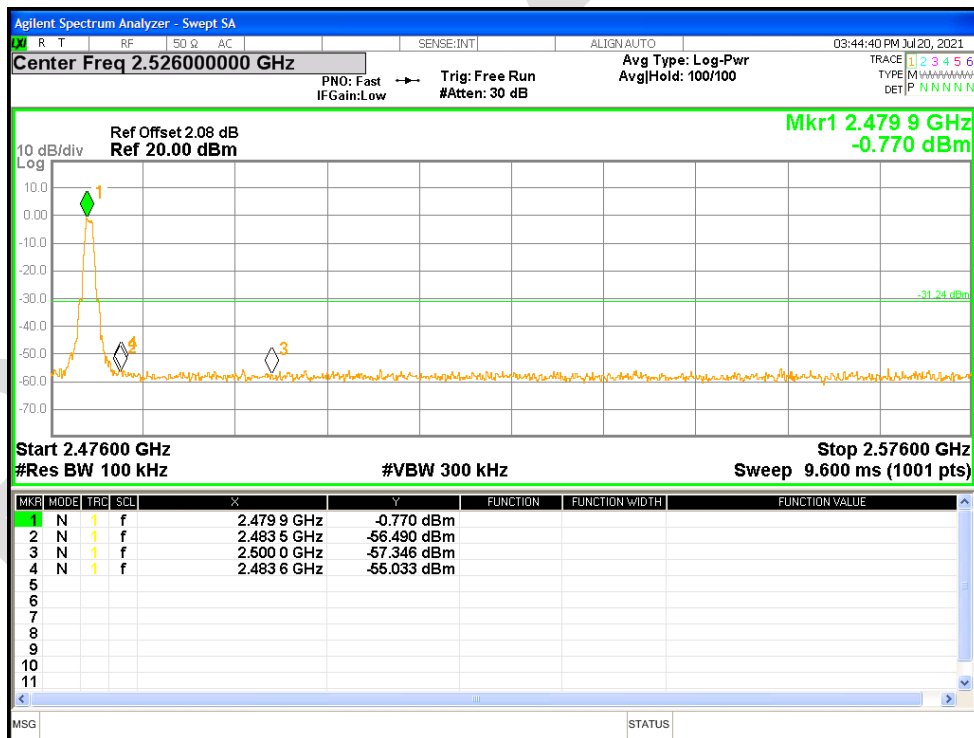


Band Edge NVNT BLE 2M 2402MHz Ant1 Ref

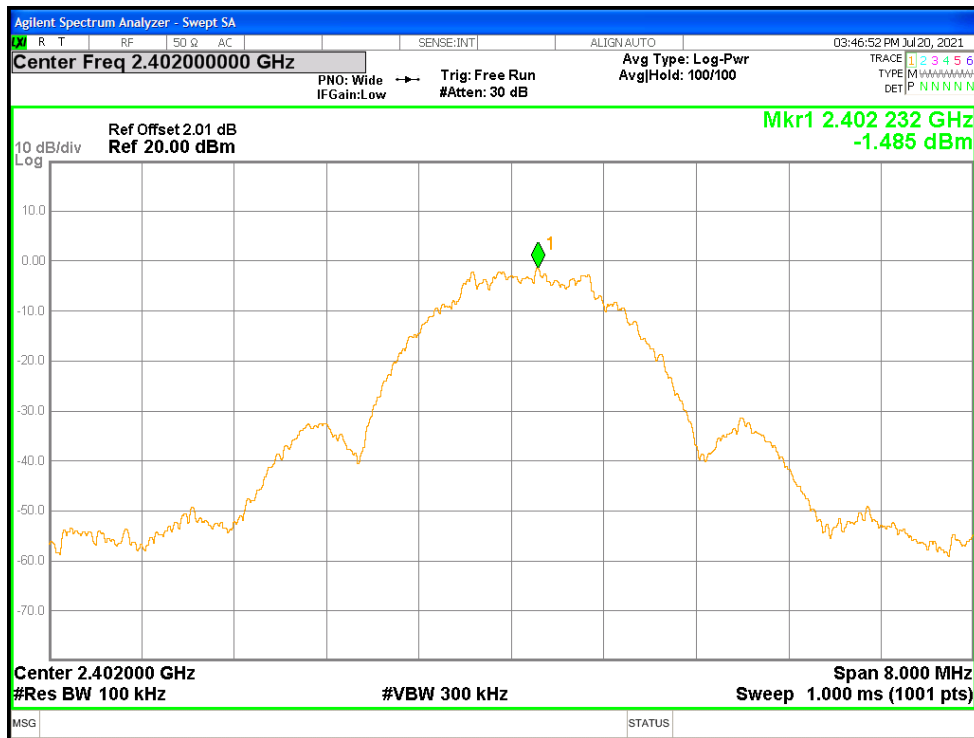


Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

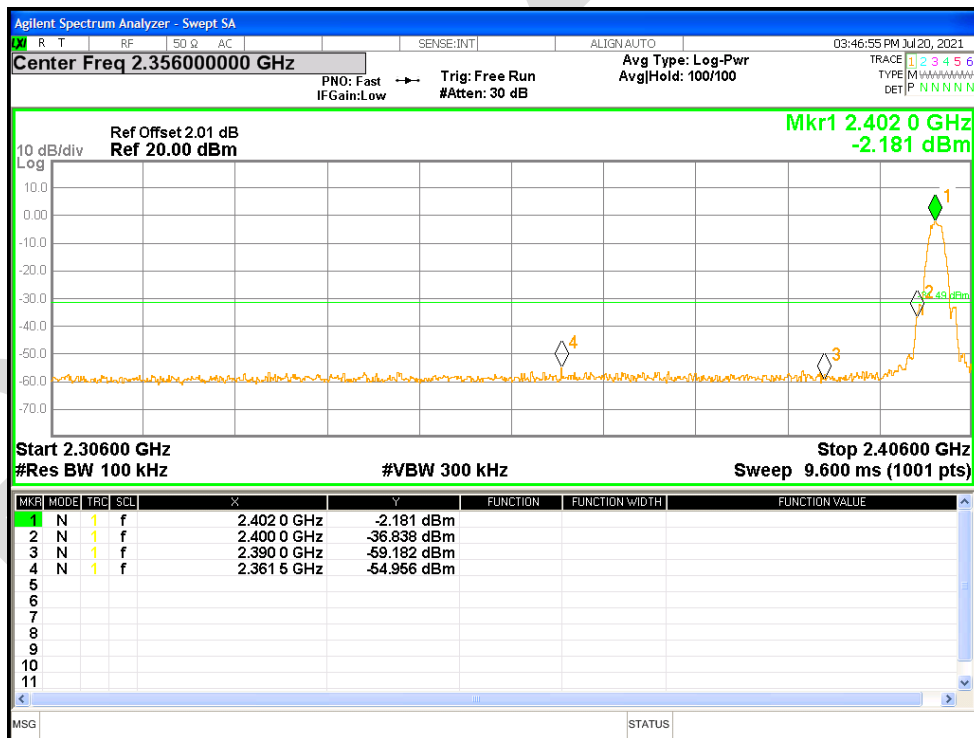

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref

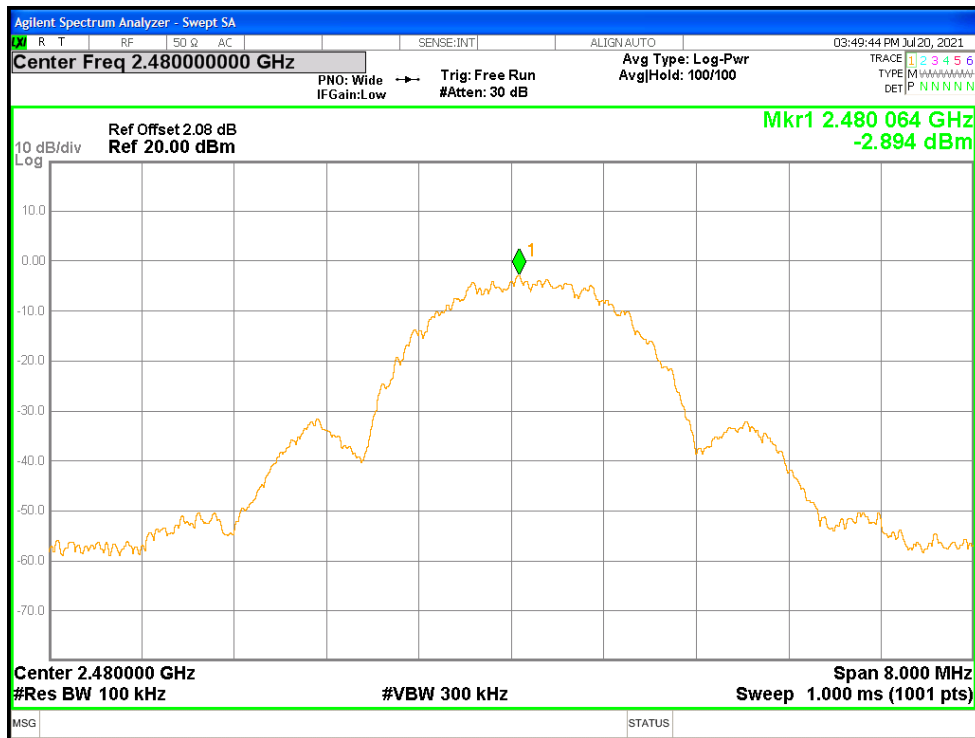


Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

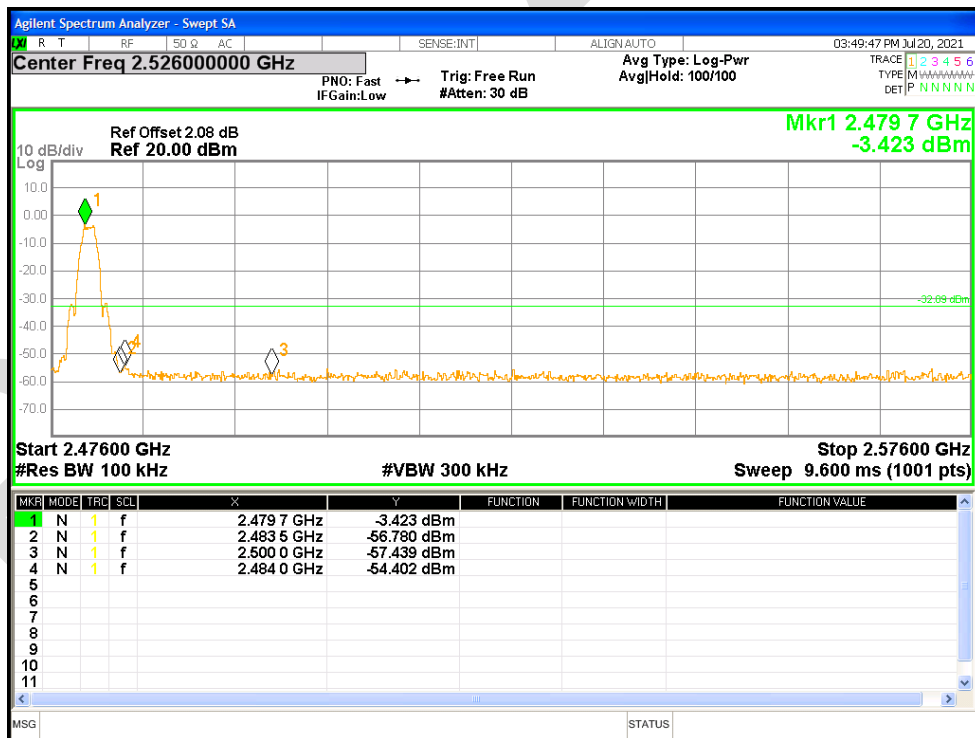


19.5 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-45.49	-30	Pass
NVNT	BLE 1M	2442	Ant1	-44.5	-30	Pass
NVNT	BLE 1M	2480	Ant1	-44.13	-30	Pass
NVNT	BLE 2M	2402	Ant1	-44.57	-30	Pass
NVNT	BLE 2M	2442	Ant1	-43.86	-30	Pass
NVNT	BLE 2M	2480	Ant1	-41.13	-30	Pass


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

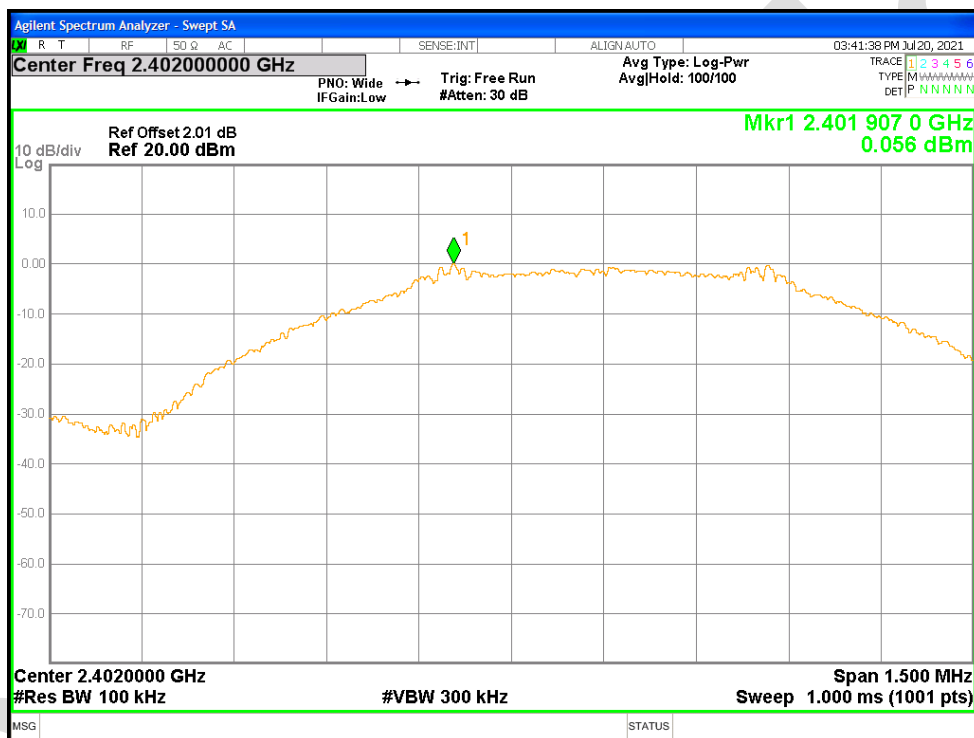


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

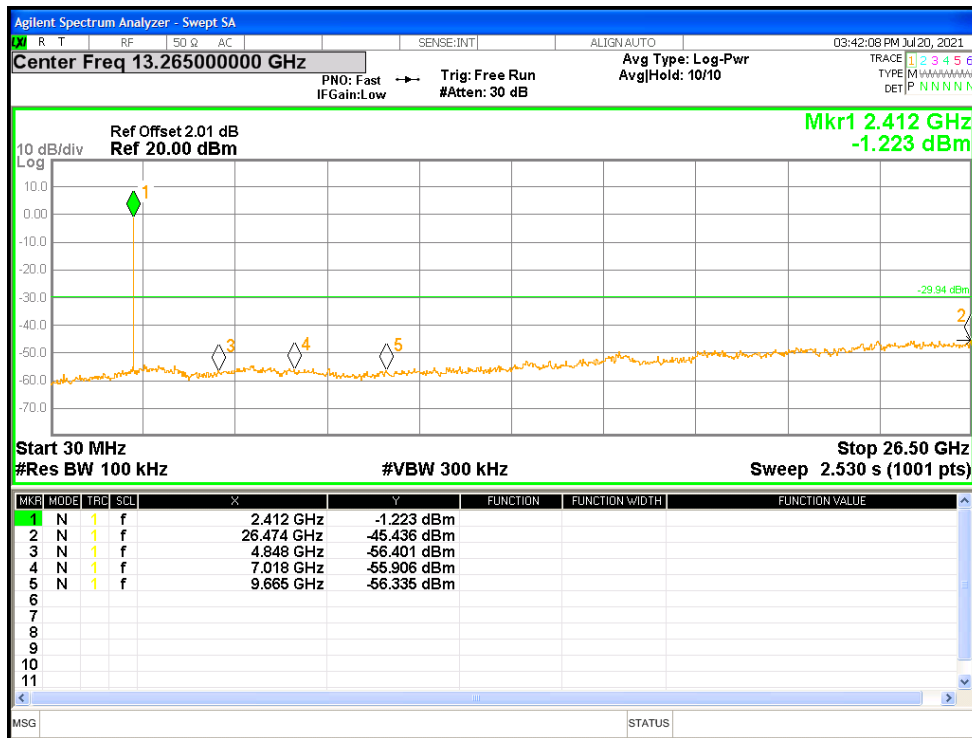


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref

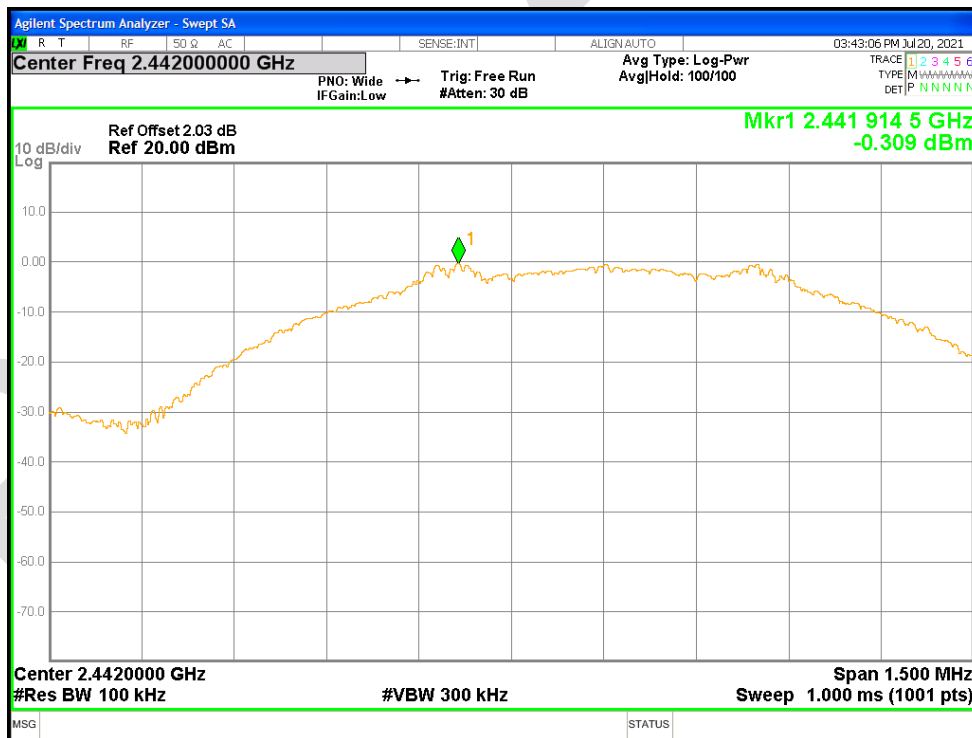


Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

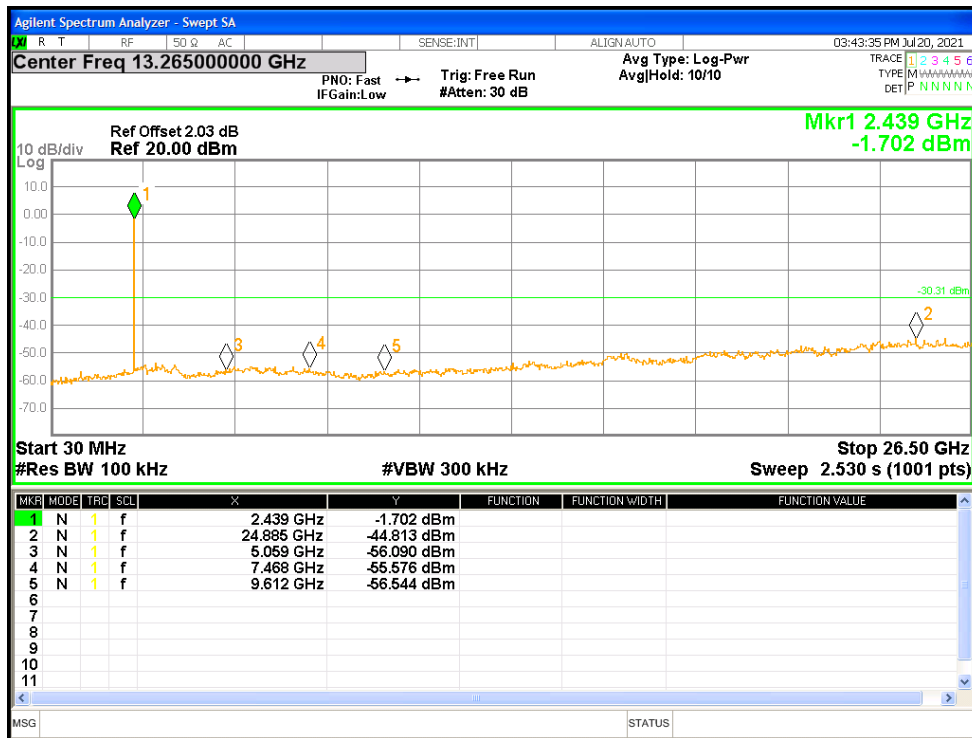


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

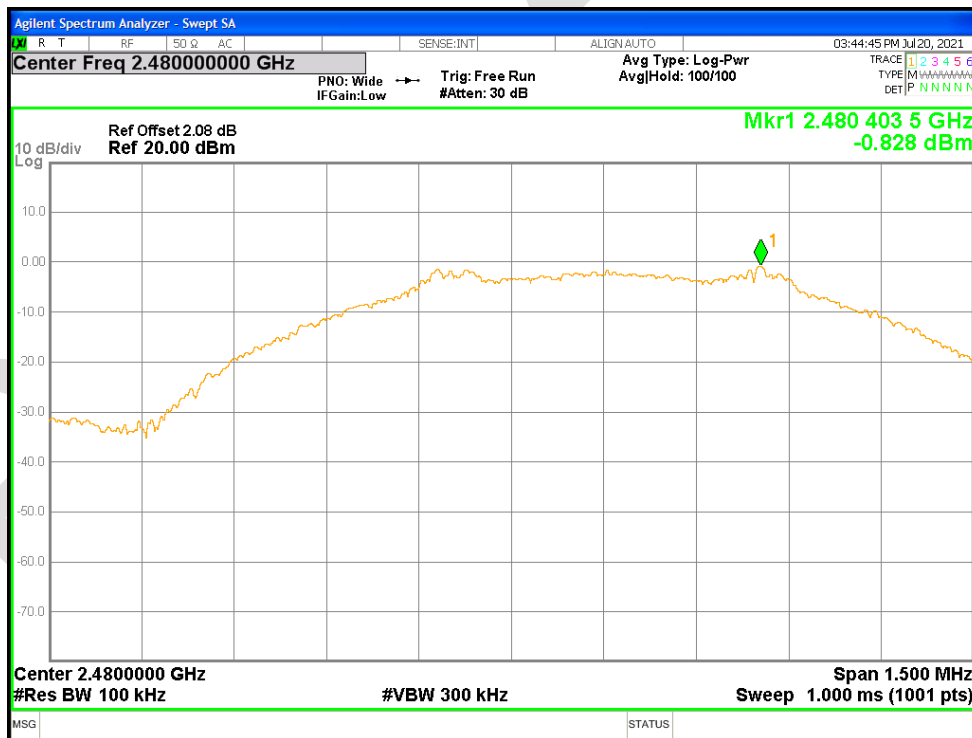


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

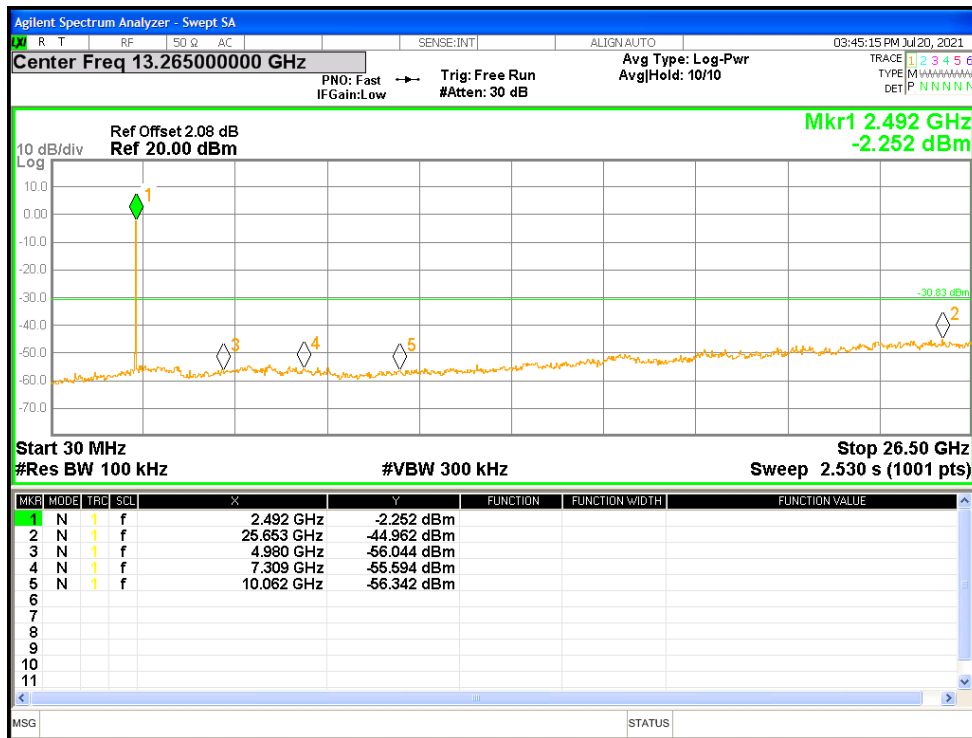


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref

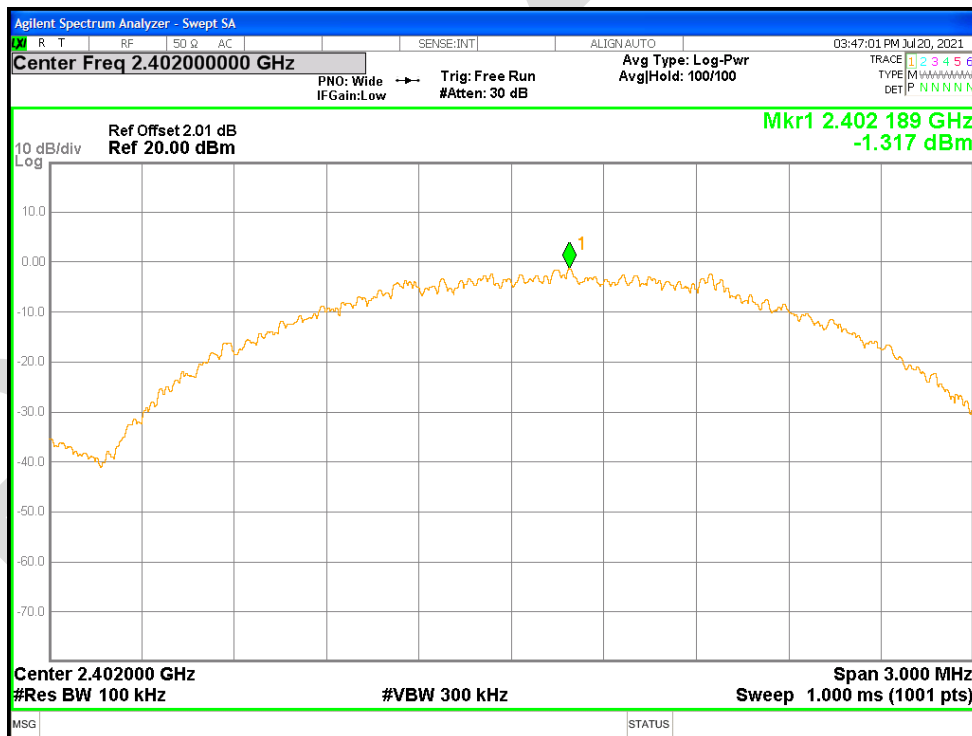


Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

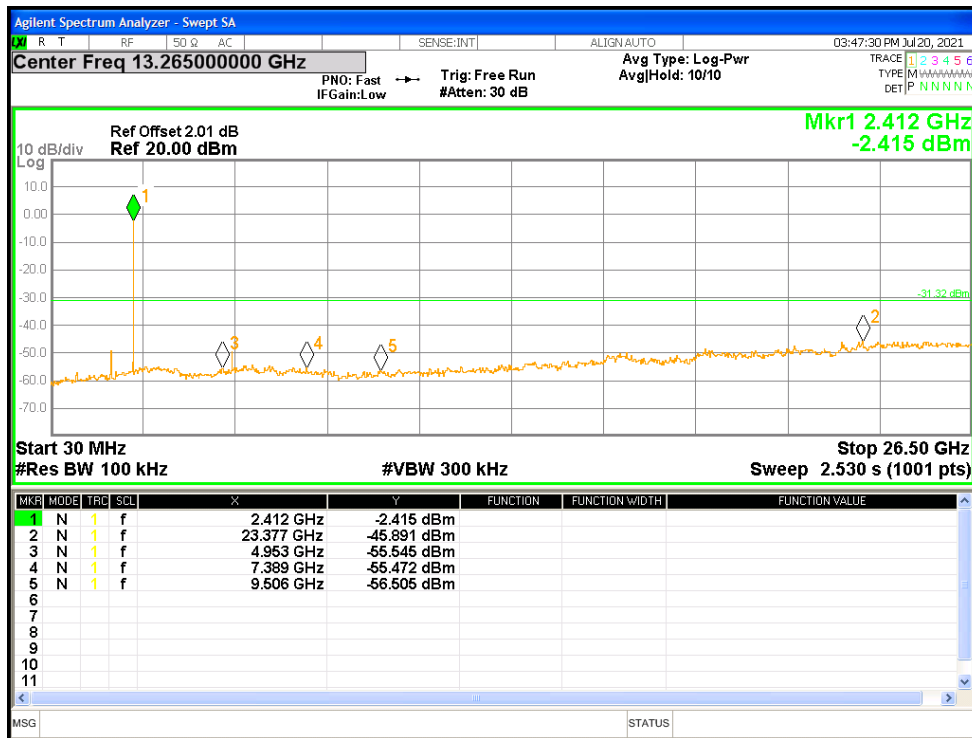


Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Ref

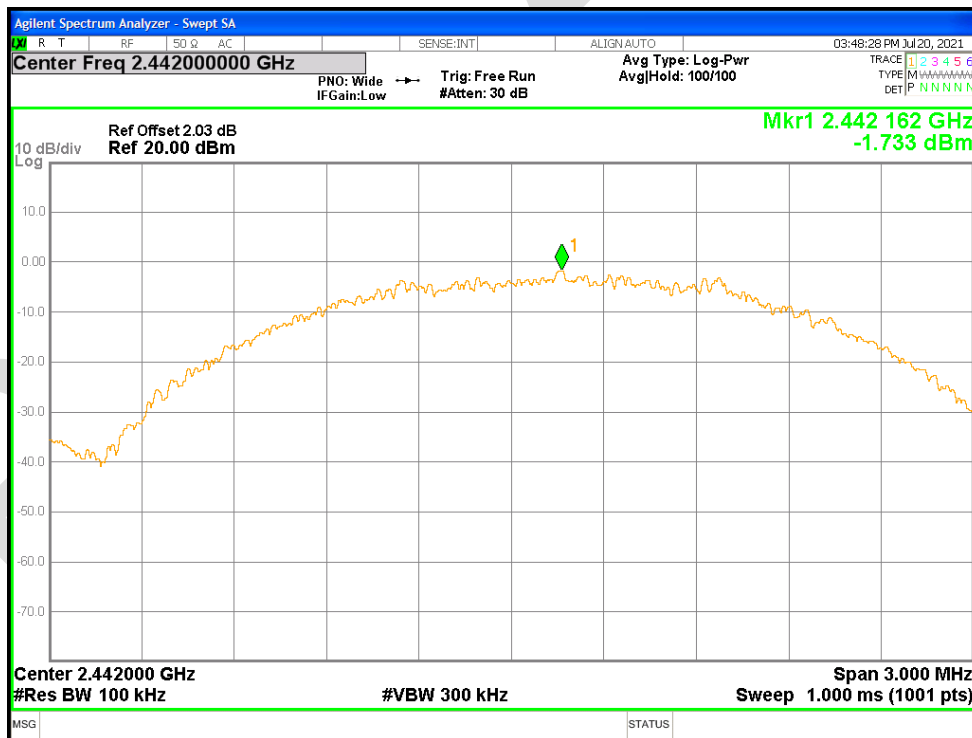


Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Emission

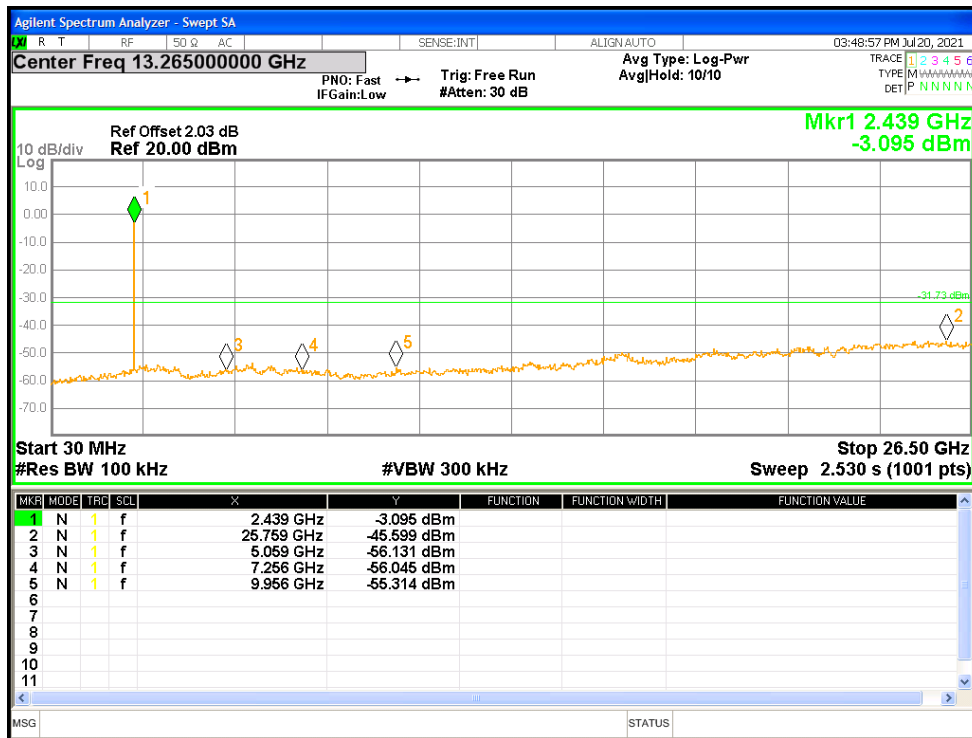

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref

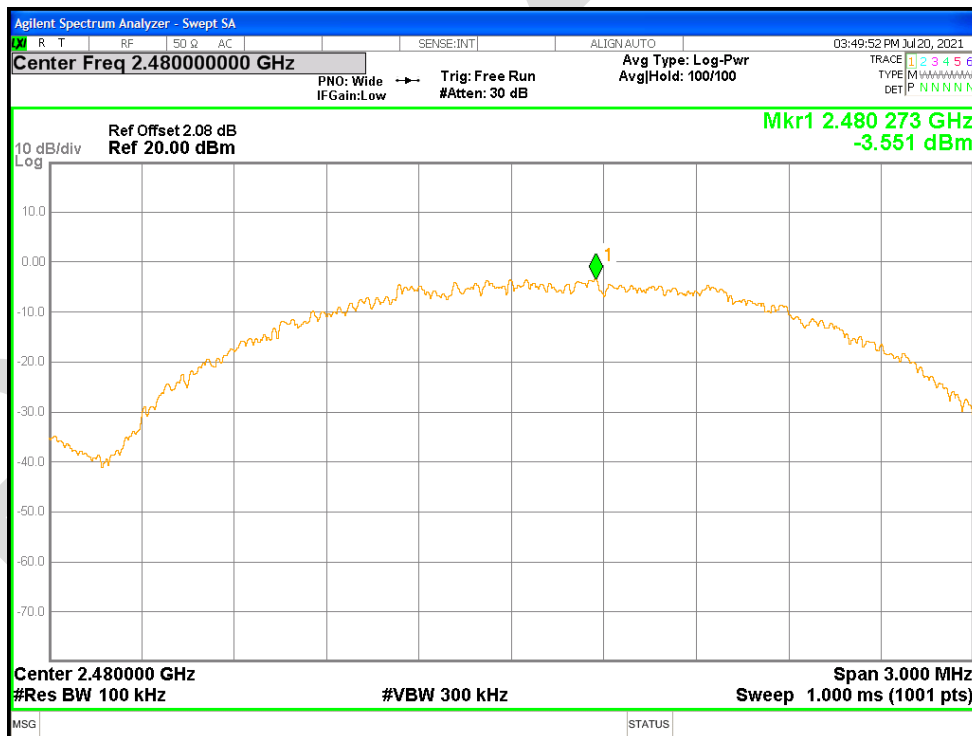

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

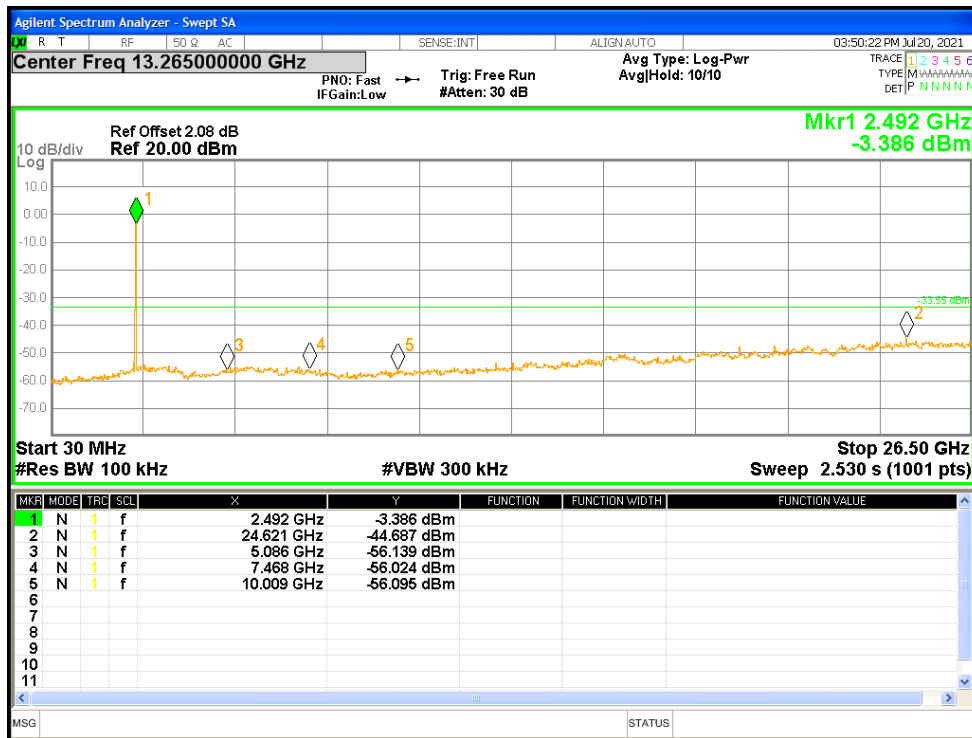


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions

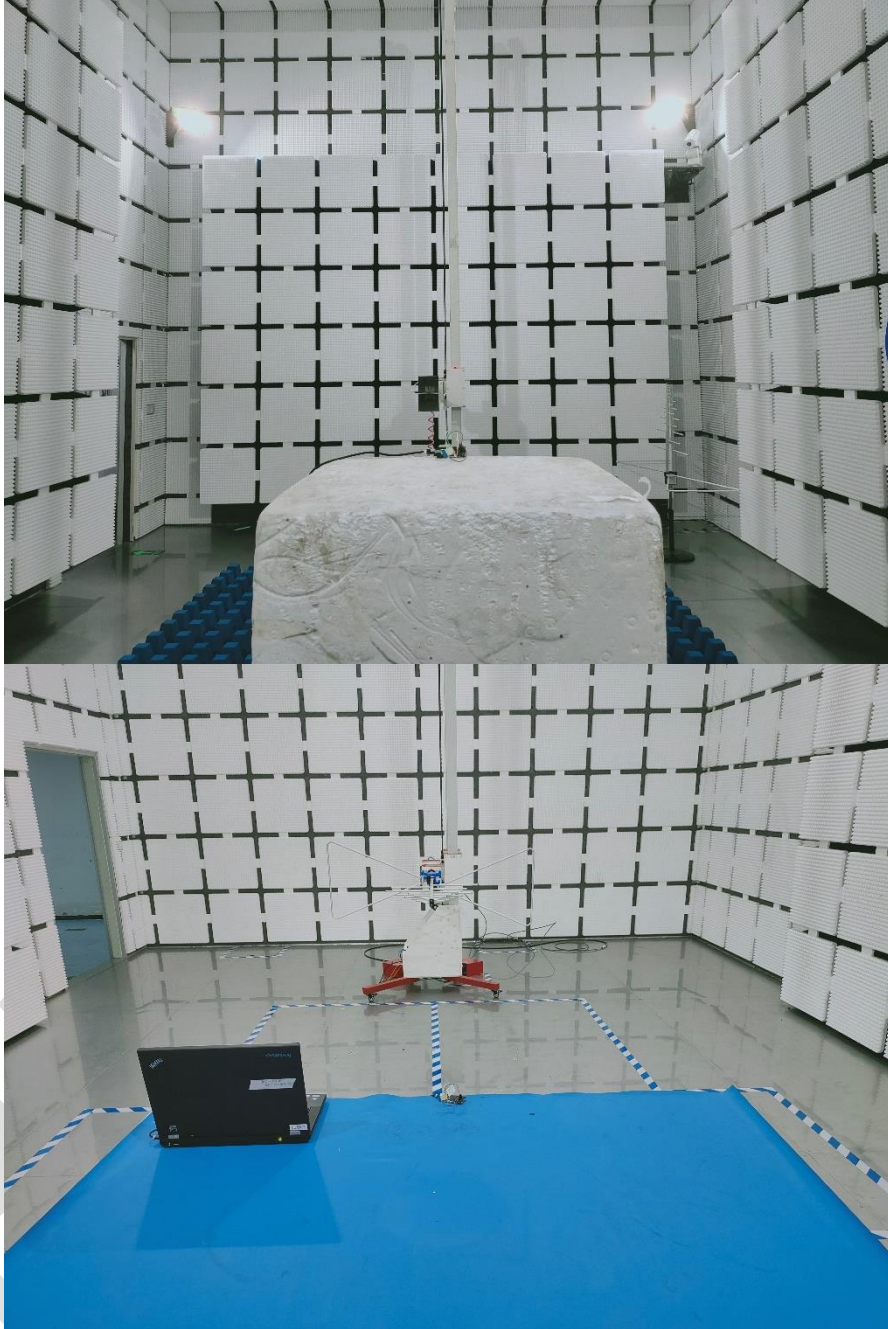

APPENDIX B: PHOTOGRAPHS OF THE EUT

(Reference to the test report NO.BLA-EMC-202106-A9301)

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia