

FCC TEST REPORT

For

Shenzhen VStarcam Technology Co.,Ltd

IP CAMERA

Model No.: T7838WIP

Additional models NO.: Please refer to page 75

Prepared for

Address

: Shenzhen VStarcam Technology Co.,Ltd

: 5th Floor, F Building, Wanda Industrial Area, Zhoushi Road, Shiyan Town, Bao'an District, Shenzhen City, Guangdong, China

Prepared by

Address

: Shenzhen LCS Compliance Testing Laboratory Ltd.

: 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Date of receipt of test sample : January 03, 2014

Number of tested samples : 1

Serial number : Prototype

Date of Test : January 03, 2014 - January 13, 2014

Date of Report : January 13, 2014

FCC TEST REPORT
FCC CFR 47 PART 15 C(15.247): 2012

Report Reference No. : LCS140103030TF

Date of Issue : January 13, 2014

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards Partial application of Harmonised standards
Other standard testing method

Applicant's Name : Shenzhen VStarcam Technology Co.,Ltd

Address : 5th Floor, F Building, Wanda Industrial Area, Zhoushi Road, Shiyan Town, Bao'an District, Shenzhen City, Guangdong, China

Test Specification

Standard : FCC CFR 47 PART 15 C(15.247): 2012

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : IP CAMERA

Trade Mark : 

Model/ Type reference : T7838WIP

Ratings : Input:100~240V, 50/60Hz, 0.65A max; Output:DC 5V, 2A


Result : Positive

Compiled by:



Jacky Li/ File administrators

Supervised by:



Fox Zhang/ Technique principal

Approved by:



Gavin Liang/ Manager

FCC -- TEST REPORT

| | |
|---|--|
| Test Report No. : LCS140103030TF | <u>January 13, 2014</u> Date of issue |
|---|--|

Type / Model..... : T7838WIP

EUT..... : IP CAMERA

Applicant..... : Shenzhen VStarcam Technology Co.,Ltd

Address..... : 5th Floor, F Building, Wanda Industrial Area, Zhoushi Road,
Shiyan Town, Bao an District, Shenzhen City, Guangdong,
China

Telephone..... : /

Fax..... : /

Manufacturer..... : Shenzhen VStarcam Technology Co.,Ltd

Address..... : 5th Floor, F Building, Wanda Industrial Area, Zhoushi Road,
Shiyan Town, Bao an District, Shenzhen City, Guangdong,
China

Telephone..... : /

Fax..... : /

Factory..... : Shenzhen VStarcam Technology Co.,Ltd

Address..... : 5th Floor, F Building, Wanda Industrial Area, Zhoushi Road,
Shiyan Town, Bao an District, Shenzhen City, Guangdong,
China

Telephone..... : /

Fax..... : /

| | |
|--------------------|-----------------|
| Test Result | Positive |
|--------------------|-----------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

| | |
|---|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1. DESCRIPTION OF DEVICE (EUT) | 5 |
| 1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS | 6 |
| 1.3. EXTERNAL I/O CABLE | 6 |
| 1.4. DESCRIPTION OF TEST FACILITY | 6 |
| 1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 6 |
| 1.6. MEASUREMENT UNCERTAINTY | 7 |
| 1.7. DESCRIPTION OF TEST MODES | 7 |
| 2. TEST METHODOLOGY | 8 |
| 2.1. EUT CONFIGURATION | 8 |
| 2.2. EUT EXERCISE | 8 |
| 2.3. GENERAL TEST PROCEDURES | 8 |
| 3. SYSTEM TEST CONFIGURATION | 9 |
| 3.1. JUSTIFICATION | 9 |
| 3.2. EUT EXERCISE SOFTWARE | 9 |
| 3.3. SPECIAL ACCESSORIES | 9 |
| 3.4. BLOCK DIAGRAM/SCHEMATICS | 9 |
| 3.5. EQUIPMENT MODIFICATIONS | 9 |
| 3.6. TEST SETUP | 9 |
| 4. SUMMARY OF TEST RESULTS..... | 10 |
| 5. TEST RESULT | 11 |
| 5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT | 11 |
| 5.2. POWER SPECTRAL DENSITY MEASUREMENT | 13 |
| 5.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT | 21 |
| 5.4. OCCUPIED BANDWIDTH | 29 |
| 5.5. RADIATED EMISSIONS MEASUREMENT | 37 |
| 5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST | 50 |
| 5.7. POWER LINE CONDUCTED EMISSIONS | 61 |
| 5.8. ANTENNA REQUIREMENTS | 63 |
| 6. LIST OF MEASURING EQUIPMENTS..... | 64 |
| 7. MANUFACTURER/ APPROVAL HOLDER DECLARATION..... | 65 |

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : IP CAMERA

Model Number : T7838WIP

Power Supply : Input:100~240V, 50/60Hz, 0.65A max; Output:DC 5V, 2A

Frequency Range : 2412.00-2462.00MHz

Channel Spacing : 5MHz

Channel Number : 11 Channels for 20MHz Bandwidth
7 Channels for 40MHz Bandwidth

Modulation Technology : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11n: OFDM (64QAM, 16QAM,QPSK,BPSK)

Data Rates : IEEE 802.11b: 1-11Mbps
IEEE 802.11g: 6-54Mbps
IEEE 802.11n: MCS0-MCS15

Antenna Type And Gain : Detachable antenna: 2dBi(Max.)

1.2. Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|------------|---------------|-------------|
| -- | Adapter | GTF-050200 | -- | DOC |

1.3. External I/O Cable

| Cable Description | Length (M) | From/Port | To |
|-------------------|------------|-----------|------|
| RJ45 | 0.8 | RJ45 | RJ45 |

1.4. Description of Test Facility

Site Description

EMC Lab.

: Accredited by CNAS, June 04, 2010

The Certificate Registration Number. is L4595.

Accredited by FCC, July 14, 2011

The Certificate Registration Number. is 899208.

Accredited by Industry Canada, May. 02, 2011

The Certificate Registration Number. is 9642A-1

Accredited by VCCI, Japan January 30, 2012

The Certificate Registration Number. is C-4260 and R-3804

Accredited by ESMD, April 24, 2012

The Certificate Registration Number. is ARCB0108.

Accredited by UL, June 11, 2012

The Certificate Registration Number. is 100571-492.

Accredited by TUV, November 21, 2012

The Certificate Registration Number. is SCN1081

Accredited by Intertek, December 21, 2012

The Certificate Registration Number. is 2011-RTL-L1-50.

1.5. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

| Test Item | Frequency Range | Uncertainty | Note |
|--------------------------|-----------------|-------------|------|
| Radiation Uncertainty : | 9KHz~30MHz | ±3.10dB | (1) |
| | 30MHz~200MHz | ±2.96dB | (1) |
| | 200MHz~1000MHz | ±3.10dB | (1) |
| | 1GHz~26.5GHz | ±3.80dB | (1) |
| | 26.5GHz~40GHz | ±3.90dB | (1) |
| Conduction Uncertainty : | 150kHz~30MHz | ±1.63dB | (1) |
| Power disturbance | 30MHz~300MHz | ±1.60dB | (1) |

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description Of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(High Channel).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be 802.11b mode(High Channel).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode : 1 Mbps, DSSS.

802.11g Mode : 6 Mbps, OFDM.

802.11n Mode HT20:.MCS0, OFDM.

802.11n Mode HT40:.MCS8, OFDM.

Channel List & Frequency

802.11b/g/n(HT20)

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2412~2462MHz | 1 | 2412 | 7 | 2442 |
| | 2 | 2417 | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | 2457 |
| | 5 | 2432 | 11 | 2462 |
| | 6 | 2437 | -- | -- |

802.11n(HT40)

| Frequency Band | Channel No. | Frequency(MHz) | Channel No. | Frequency(MHz) |
|----------------|-------------|----------------|-------------|----------------|
| 2422~2452MHz | 1 | -- | 7 | 2442 |
| | 2 | -- | 8 | 2447 |
| | 3 | 2422 | 9 | 2452 |
| | 4 | 2427 | 10 | -- |
| | 5 | 2432 | 11 | -- |
| | 6 | 2437 | -- | -- |

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance v03r01 and KDB 6622911 are required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

| Applied Standard: FCC Part 15 Subpart C | | |
|---|---|-----------|
| FCC Rules | Description of Test | Result |
| §15.247(b) | Maximum Conducted Output Power | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |
| §15.247(a)(2) | 6dB Bandwidth | Compliant |
| §15.247(a) | Occupied Bandwidth | Compliant |
| §15.209, §15.247(d) | Radiated and Conducted Spurious Emissions | Compliant |
| §15.205 | Emissions at Restricted Band | Compliant |
| §15.207(a) | Conducted Emissions | Compliant |
| §15.203 | Antenna Requirements | Compliant |
| §15.247(i)§2.1093 | RF Exposure | Compliant |

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement

5.1.1. Standard Applicable

According to §15.247(b): For systems using digital modulation in the 2400-2483.5 MHz and 5725-5850 MHz band, the limit for maximum peak conducted output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter peak output power.


5.1.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the power meter.

5.1.3. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.4. Test Setup Layout

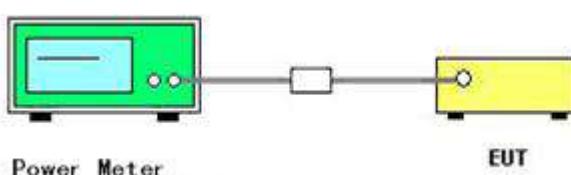

5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.6. Test Result of Maximum Conducted Output Power

| | | | |
|---------------|-------|----------------|-------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jacky | Configurations | 802.11b/g/n |

802.11b

| Channel | Frequency (MHz) | Conducted Peak Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------------|----------------------------|------------------|----------|
| 1 | 2412 | 14.42 | 30 | Complies |
| 6 | 2437 | 14.37 | 30 | Complies |
| 11 | 2462 | 13.38 | 30 | Complies |

802.11g

| Channel | Frequency (MHz) | Conducted Peak Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------------|----------------------------|------------------|----------|
| 1 | 2412 | 10.80 | 30 | Complies |
| 6 | 2437 | 10.10 | 30 | Complies |
| 11 | 2462 | 9.11 | 30 | Complies |

802.11n HT20

| Channel | Frequency (MHz) | Conducted Peak Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------------|----------------------------|------------------|----------|
| 1 | 2412 | 10.77 | 30 | Complies |
| 6 | 2437 | 9.84 | 30 | Complies |
| 11 | 2462 | 8.93 | 30 | Complies |

802.11n HT40

| Channel | Frequency (MHz) | Conducted Peak Power (dBm) | Max. Limit (dBm) | Result |
|---------|-----------------|----------------------------|------------------|----------|
| 3 | 2422 | 9.72 | 30 | Complies |
| 6 | 2437 | 8.88 | 30 | Complies |
| 9 | 2452 | 8.28 | 30 | Complies |

5.2. Power Spectral Density Measurement

5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


5.2.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

5.2.3. Test Procedures

1. The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 100 kHz.
4. Set the VBW $\geq 3 \times \text{RBW}$
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level in any 3 kHz band segment within the fundamental EBW.

5.2.4. Test Setup Layout

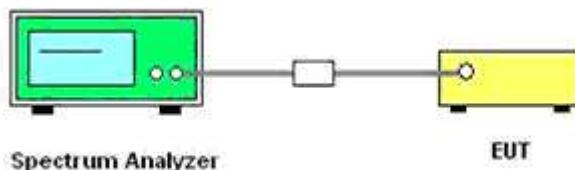

5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.6. Test Result of Power Spectral Density

| | | | |
|---------------|-------|----------------|-------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jakcy | Configurations | 802.11b/g/n |

802.11b

| Channel | Frequency (MHz) | Power Density (dBm/100KHz) | Max. Limit (dBm/3KHz) | Result |
|---------|-----------------|----------------------------|-----------------------|----------|
| 1 | 2412 | 0.557 | 8 | Complies |
| 6 | 2437 | 0.258 | 8 | Complies |
| 11 | 2462 | -0.568 | 8 | Complies |

802.11g

| Channel | Frequency (MHz) | Power Density (dBm/3KHz) | Max. Limit (dBm/3KHz) | Result |
|---------|-----------------|--------------------------|-----------------------|----------|
| 1 | 2412 | -4.994 | 8 | Complies |
| 6 | 2437 | -6.317 | 8 | Complies |
| 11 | 2462 | -7.130 | 8 | Complies |



802.11n HT20


| Channel | Frequency (MHz) | Power Density (dBm/3KHz) | Max. Limit (dBm/3KHz) | Result |
|---------|-----------------|--------------------------|-----------------------|----------|
| 1 | 2412 | -4.943 | 8 | Complies |
| 6 | 2437 | -6.513 | 8 | Complies |
| 11 | 2462 | -7.767 | 8 | Complies |

802.11n HT40


| Channel | Frequency (MHz) | Power Density (dBm/3KHz) | Max. Limit (dBm/3KHz) | Result |
|---------|-----------------|--------------------------|-----------------------|----------|
| 3 | 2422 | -9.022 | 8 | Complies |
| 6 | 2437 | -9.932 | 8 | Complies |
| 9 | 2452 | -10.680 | 8 | Complies |



802.11b power density

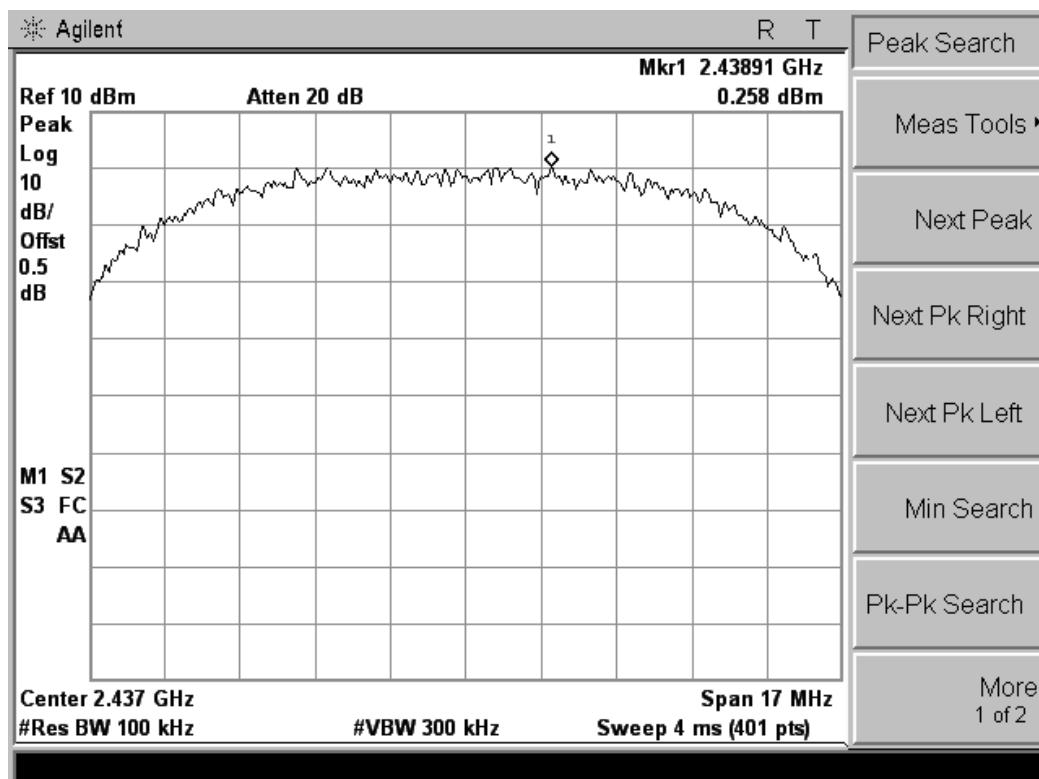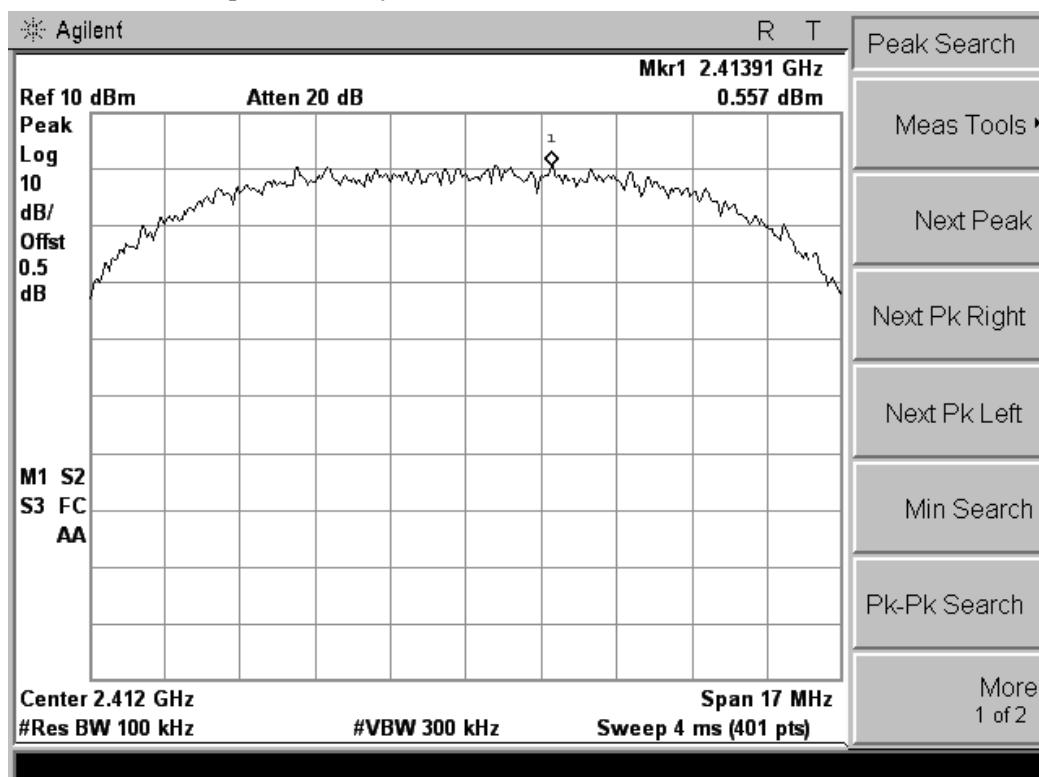

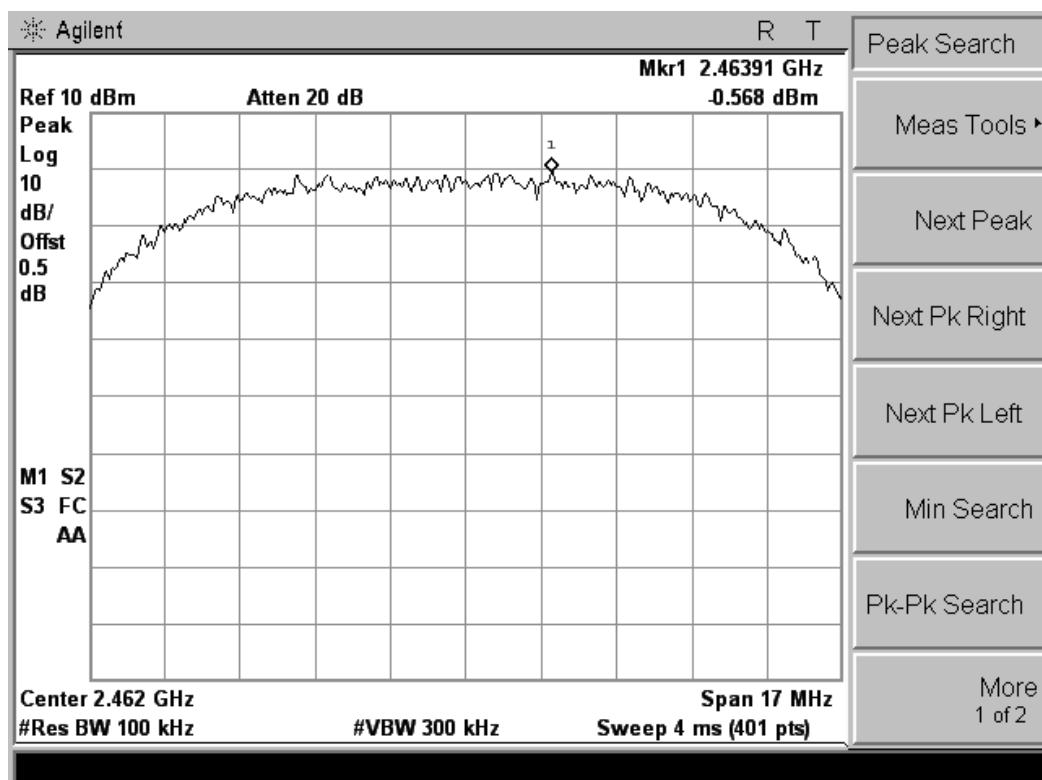



802.11g power density

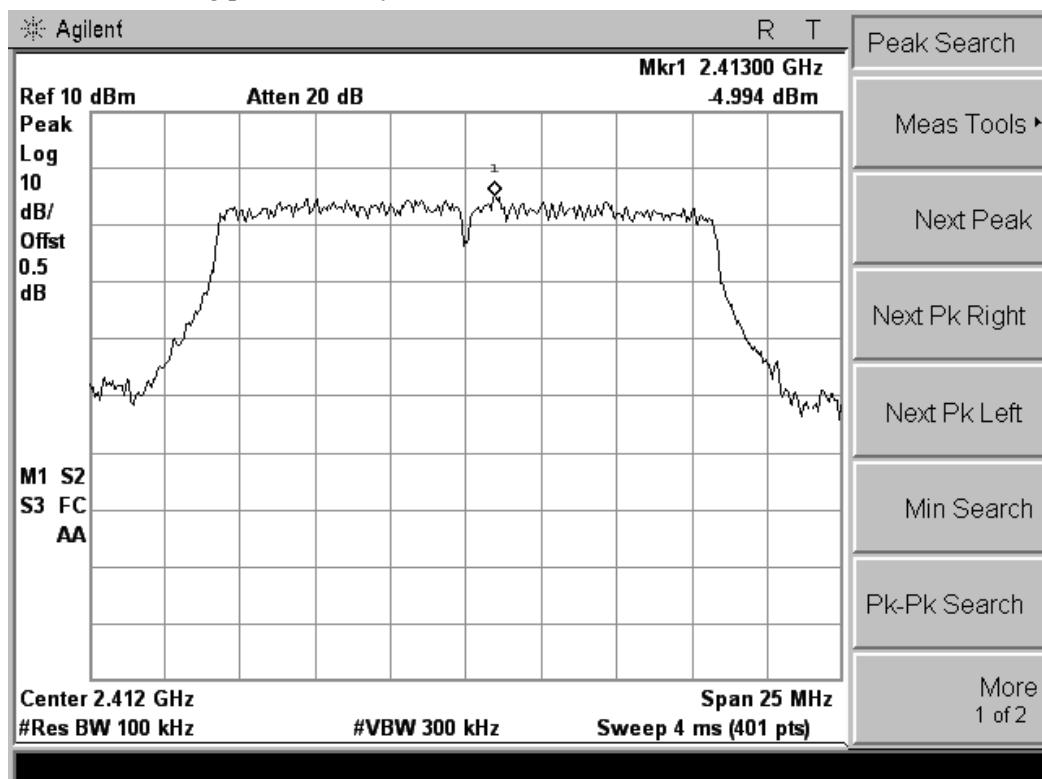

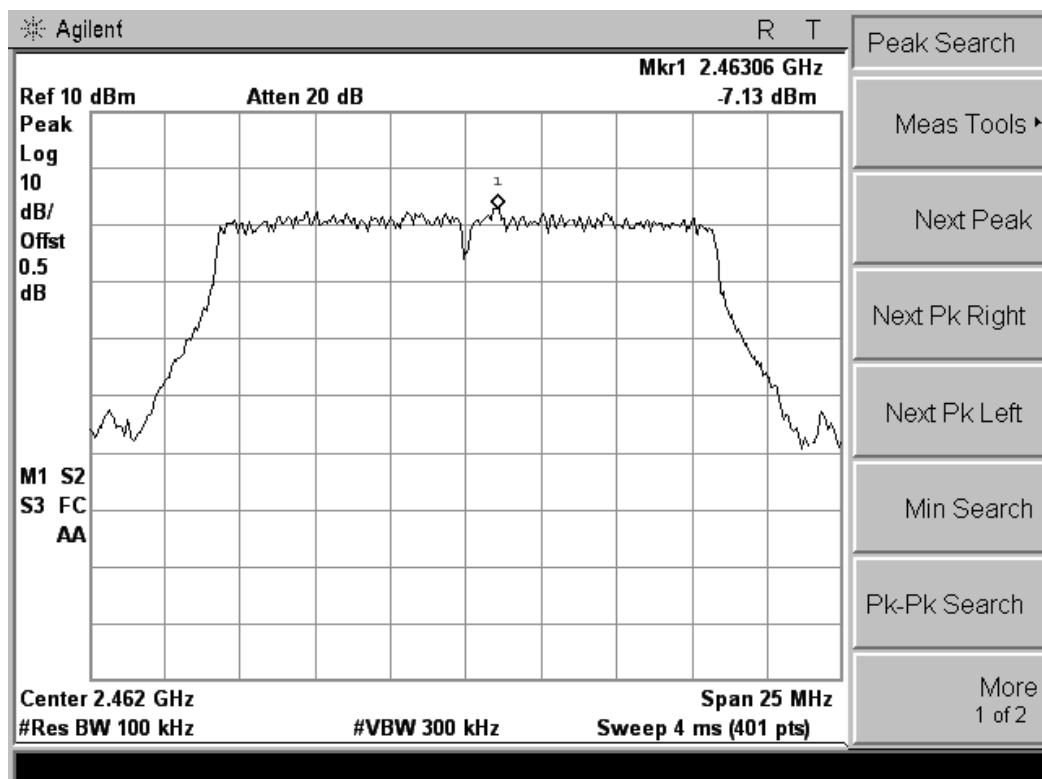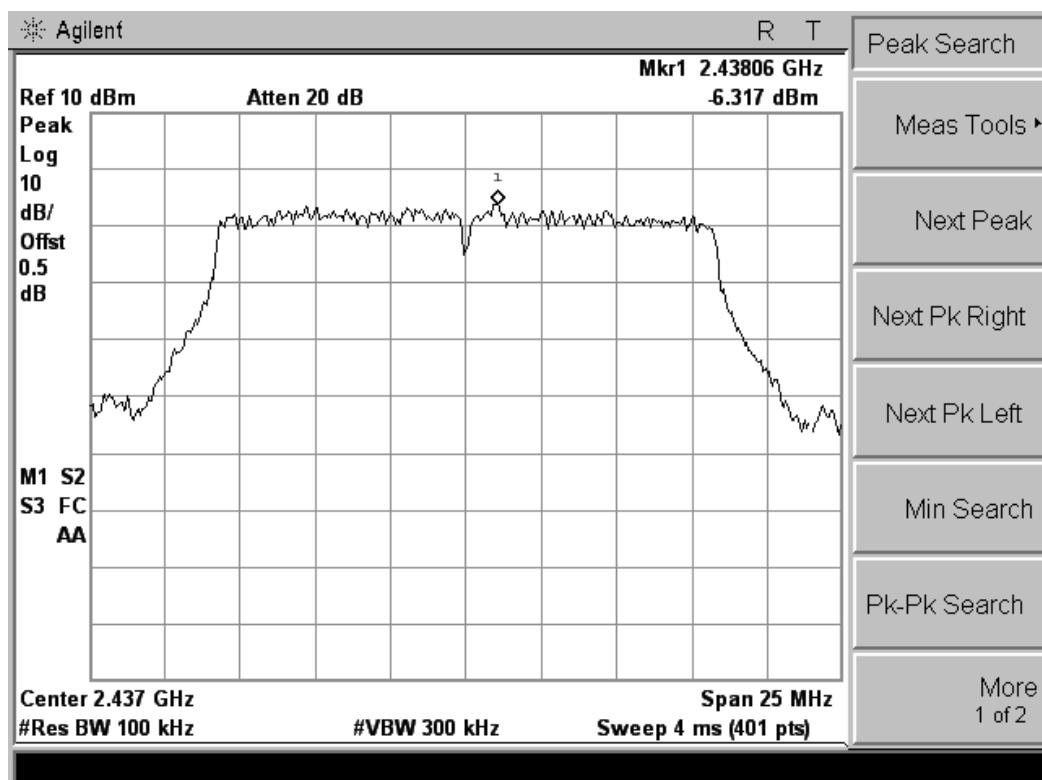




802.11n HT20 power density

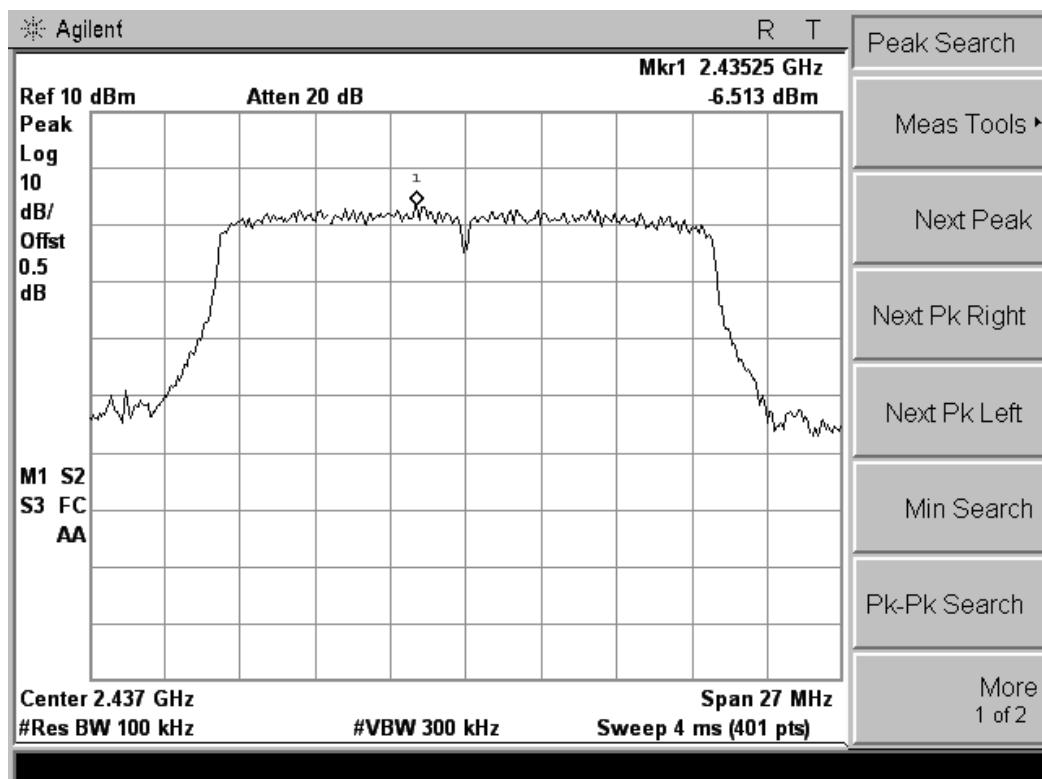

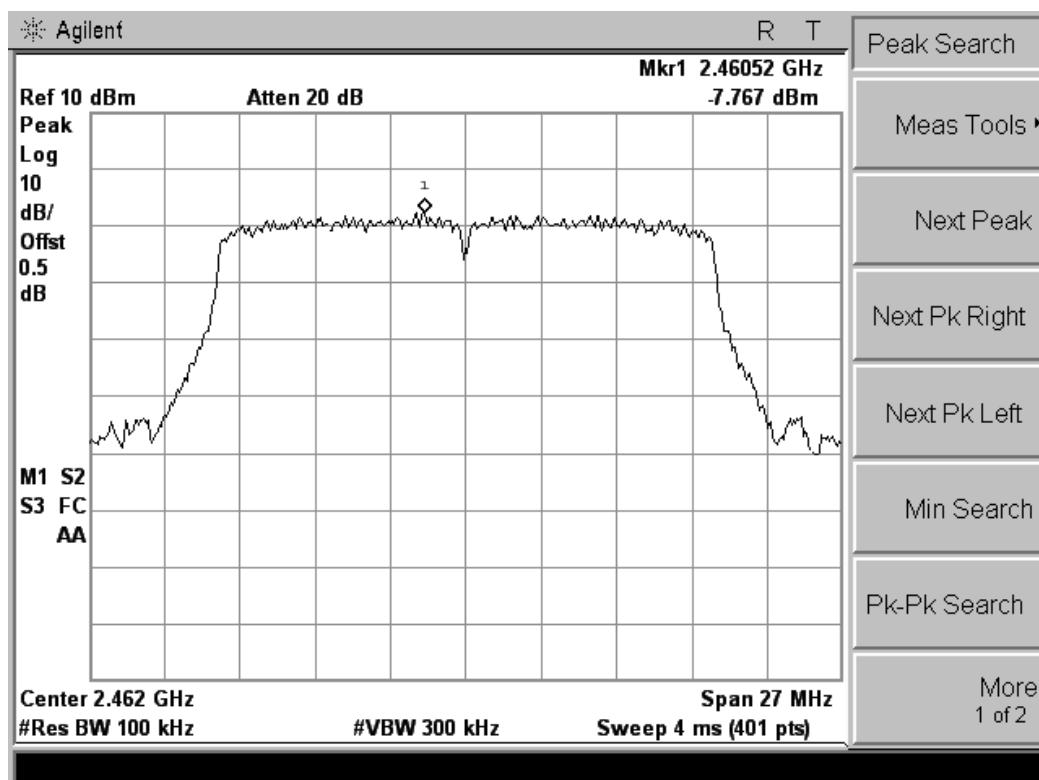

802.11n HT40 power density

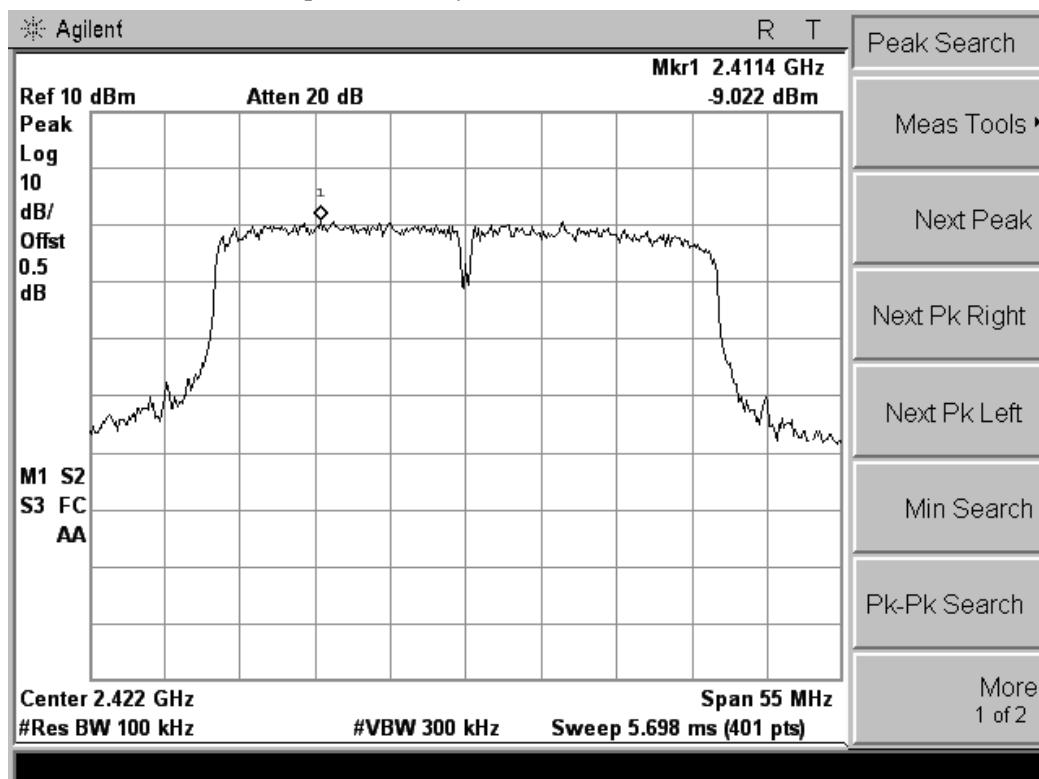

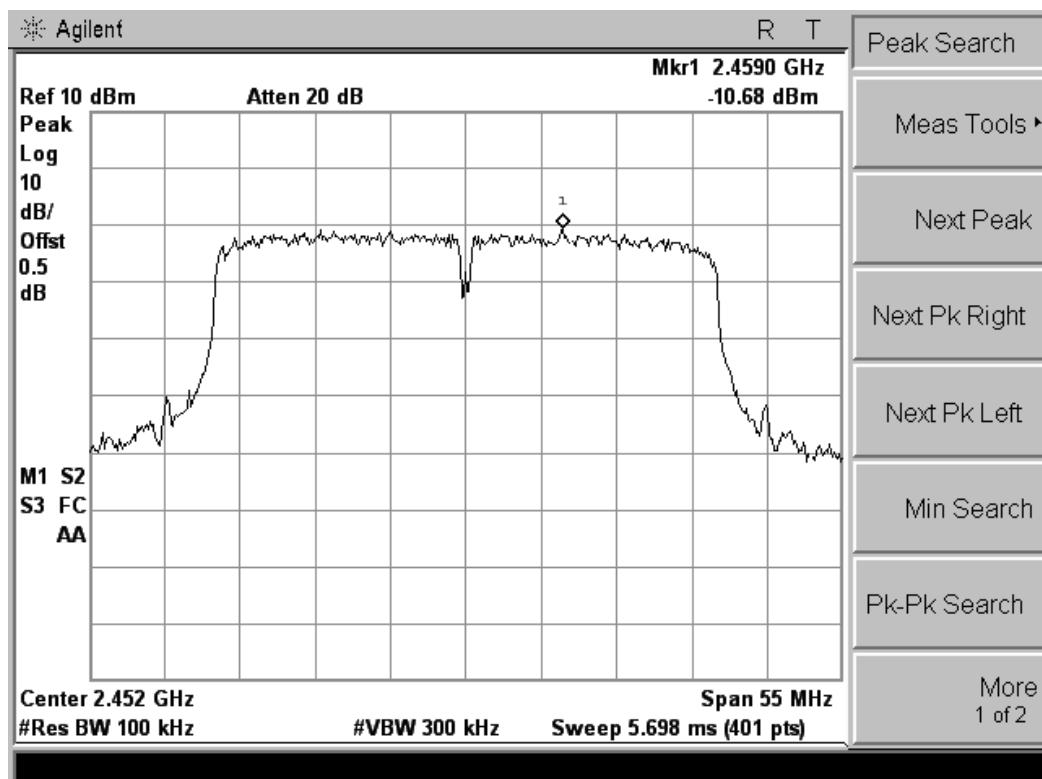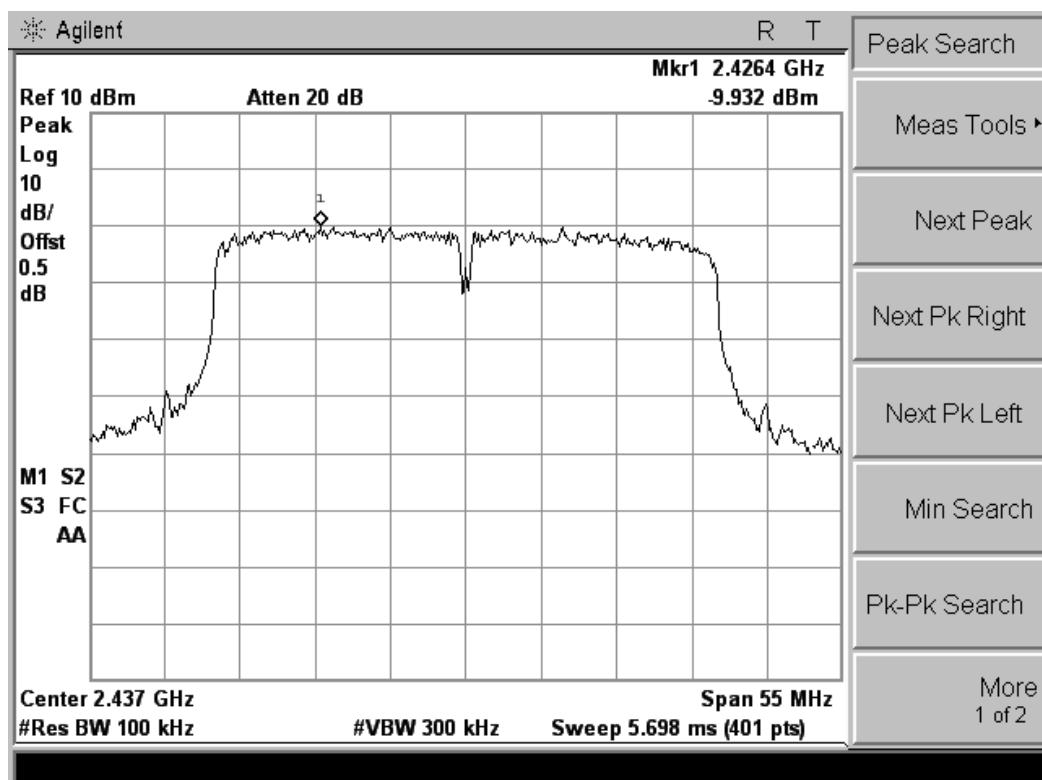

5.3. 6 dB Spectrum Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.247(a)(2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

5.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

| Spectrum Parameter | Setting |
|--------------------|----------|
| Attenuation | Auto |
| Span Frequency | > RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | 100ms |

5.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

5.3.4. Test Setup Layout

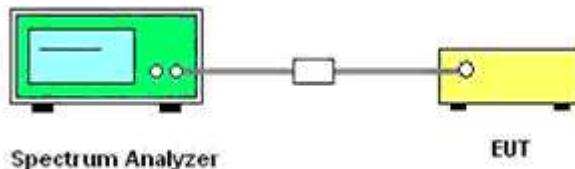

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.3.6. Test Result of 6dB Spectrum Bandwidth

| | | | |
|---------------|-------|----------------|-------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jacky | Configurations | 802.11b/g/n |

802.11b

| Channel | Frequency | 6dB Bandwidth (MHz) | Min. Limit (kHz) | Result |
|---------|-----------|---------------------|------------------|----------|
| 1 | 2412 | 11.435 | 500 | Complies |
| 6 | 2437 | 11.430 | 500 | Complies |
| 11 | 2462 | 11.492 | 500 | Complies |

802.11g

| Channel | Frequency | 6dB Bandwidth (MHz) | Min. Limit (kHz) | Result |
|---------|-----------|---------------------|------------------|----------|
| 1 | 2412 | 16.504 | 500 | Complies |
| 6 | 2437 | 16.511 | 500 | Complies |
| 11 | 2462 | 16.542 | 500 | Complies |



802.11n HT20


| Channel | Frequency | 6dB Bandwidth (MHz) | Min. Limit (kHz) | Result |
|---------|-----------|---------------------|------------------|----------|
| 1 | 2412 | 17.678 | 500 | Complies |
| 6 | 2437 | 17.686 | 500 | Complies |
| 11 | 2462 | 17.745 | 500 | Complies |

802.11n HT40


| Channel | Frequency | 6dB Bandwidth (MHz) | Min. Limit (kHz) | Result |
|---------|-----------|---------------------|------------------|----------|
| 3 | 2422 | 36.039 | 500 | Complies |
| 6 | 2437 | 36.059 | 500 | Complies |
| 9 | 2452 | 36.137 | 500 | Complies |



802.11b channel, 6dB bandwidth

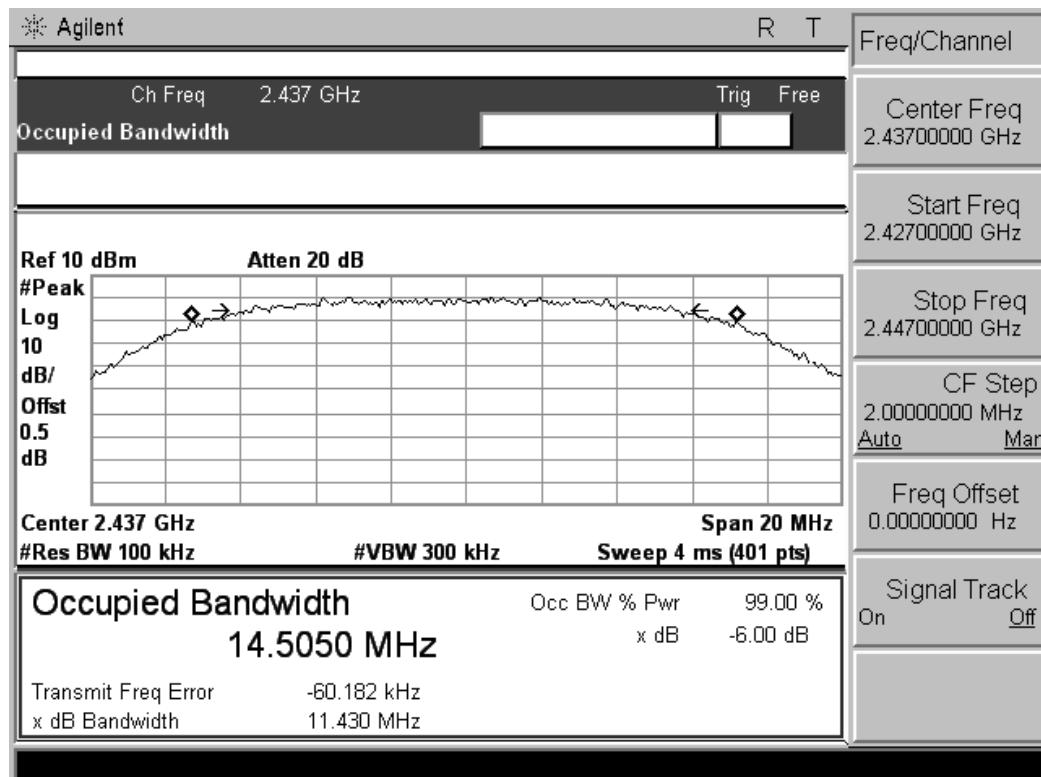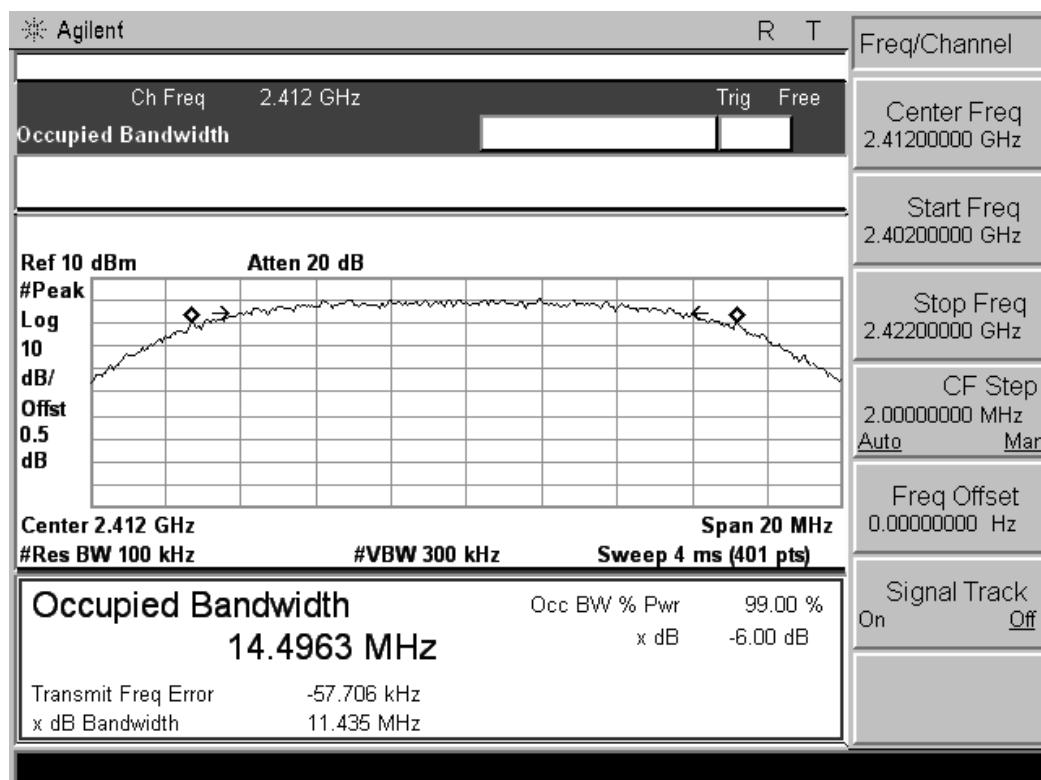


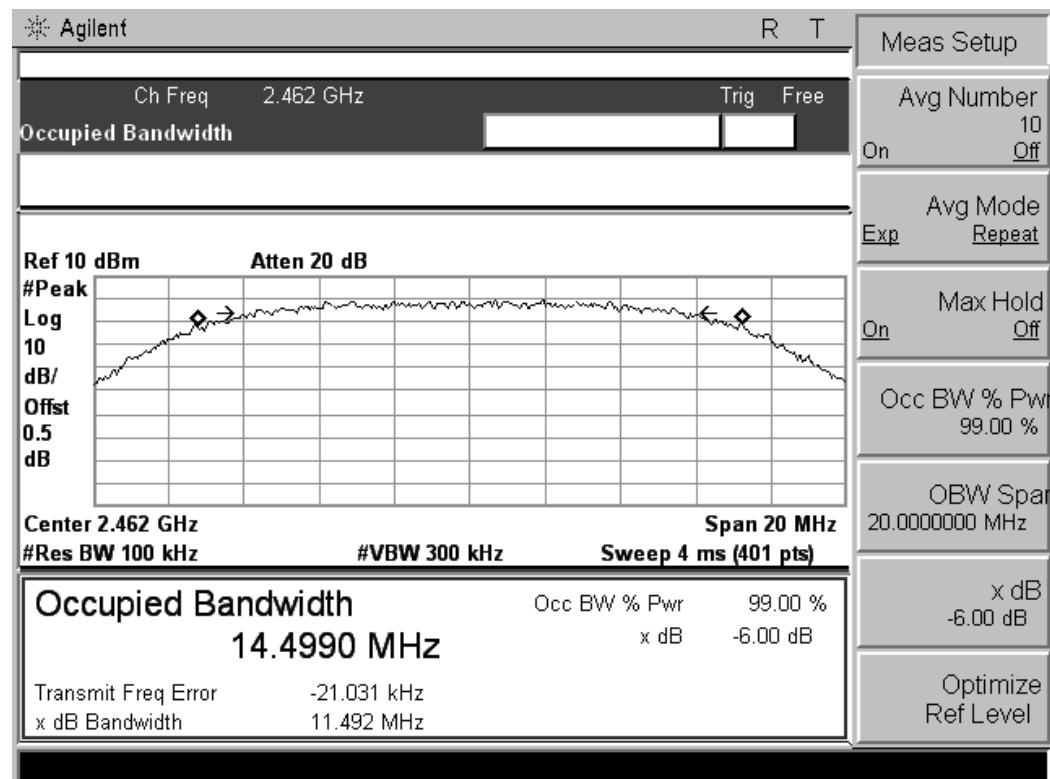



802.11g channel, 6dB bandwidth

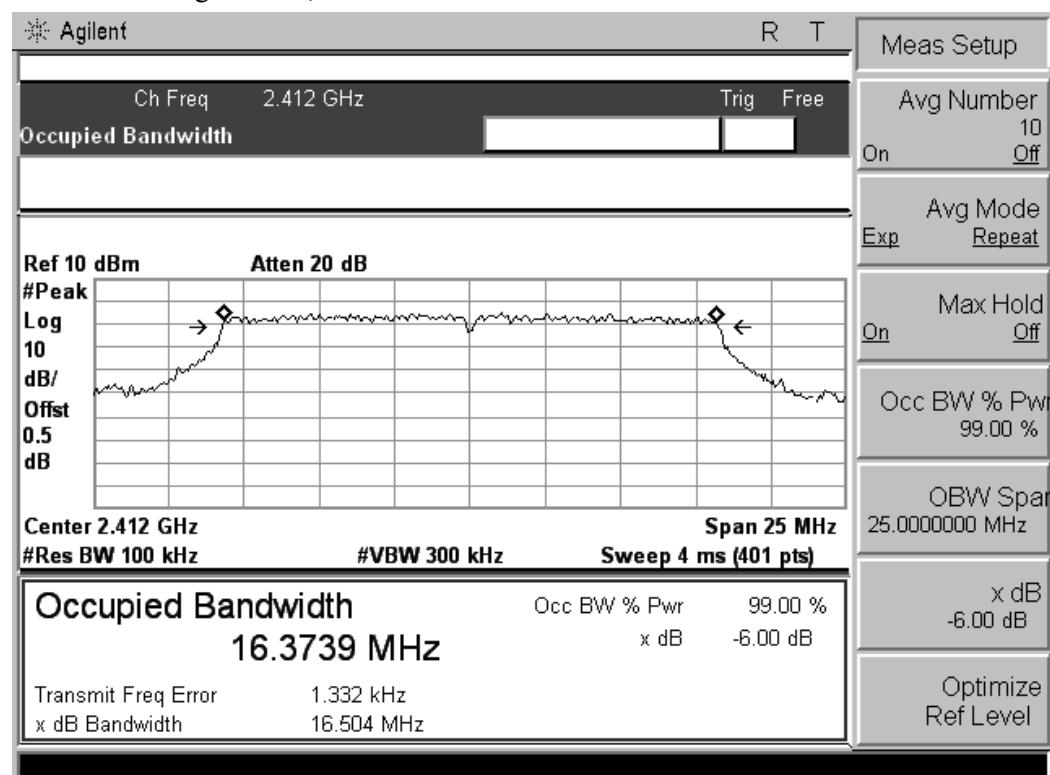

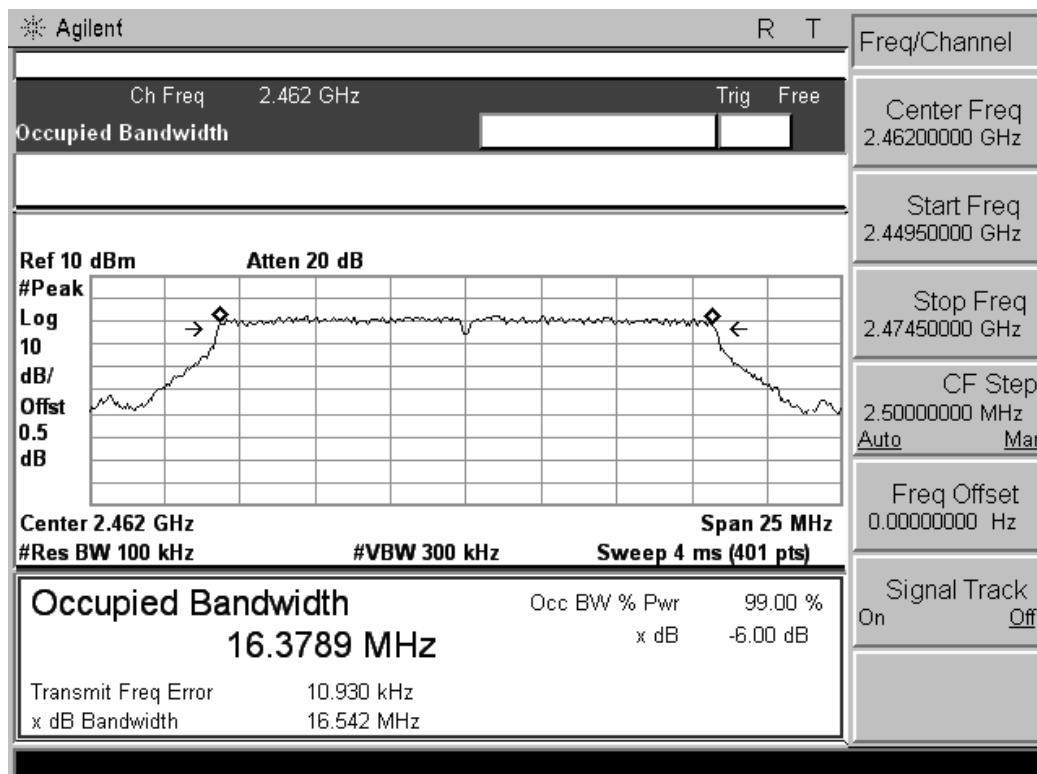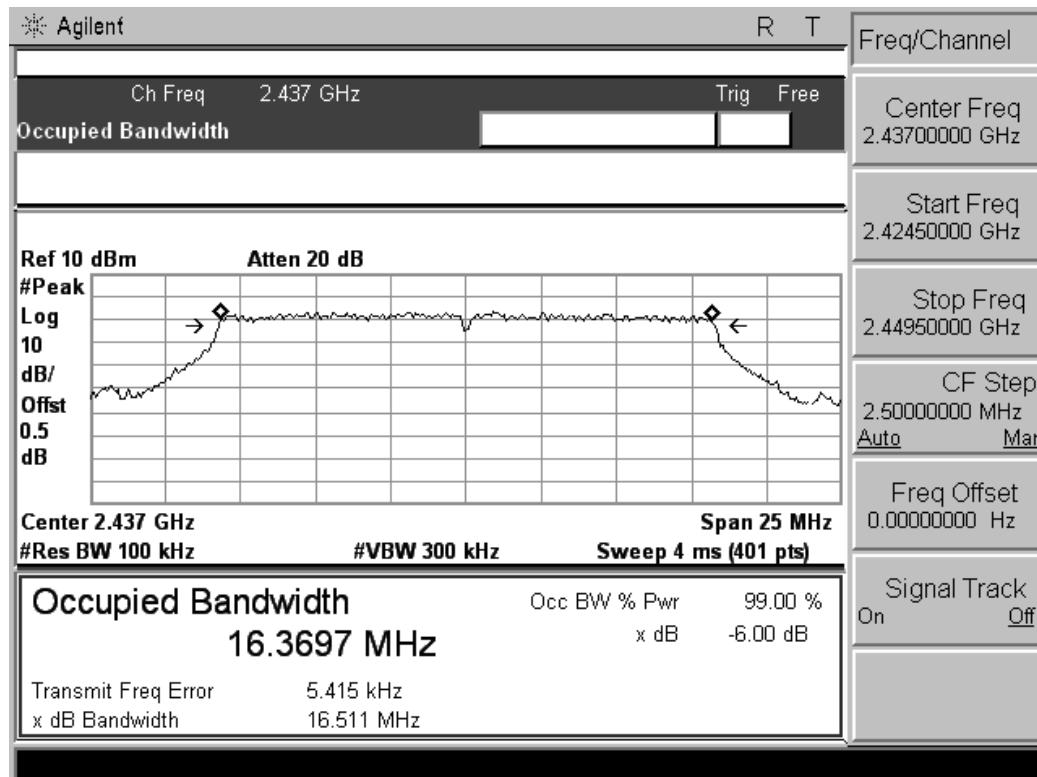




802.11n HT20 channel, 6dB bandwidth

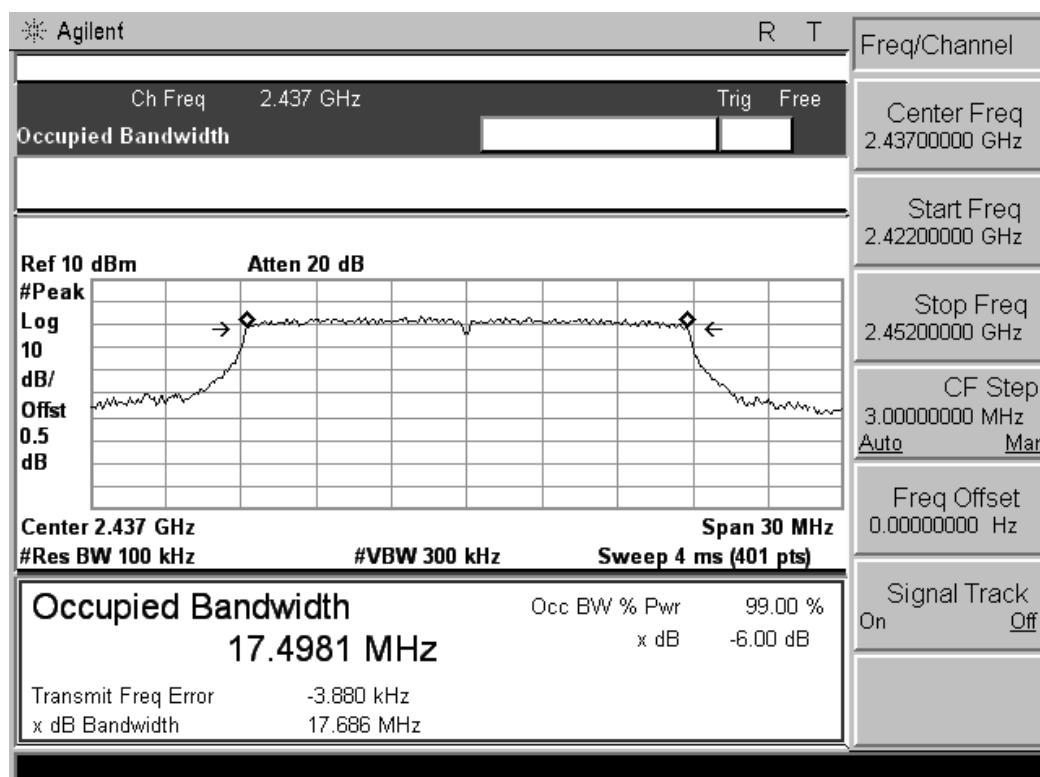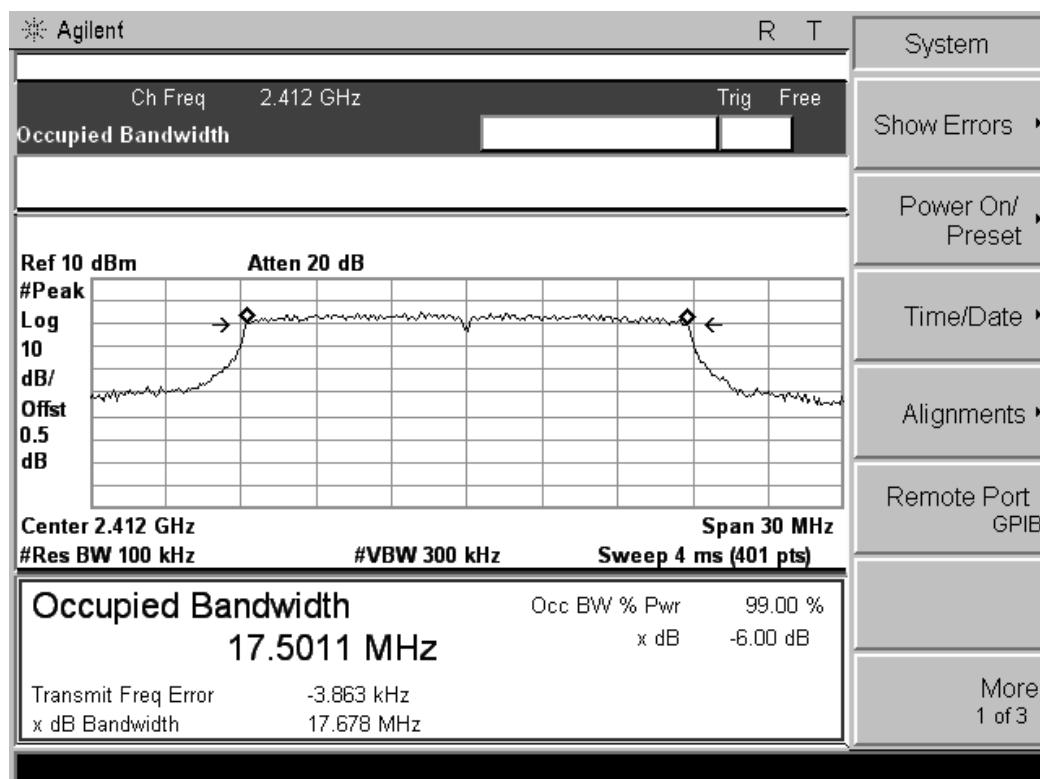

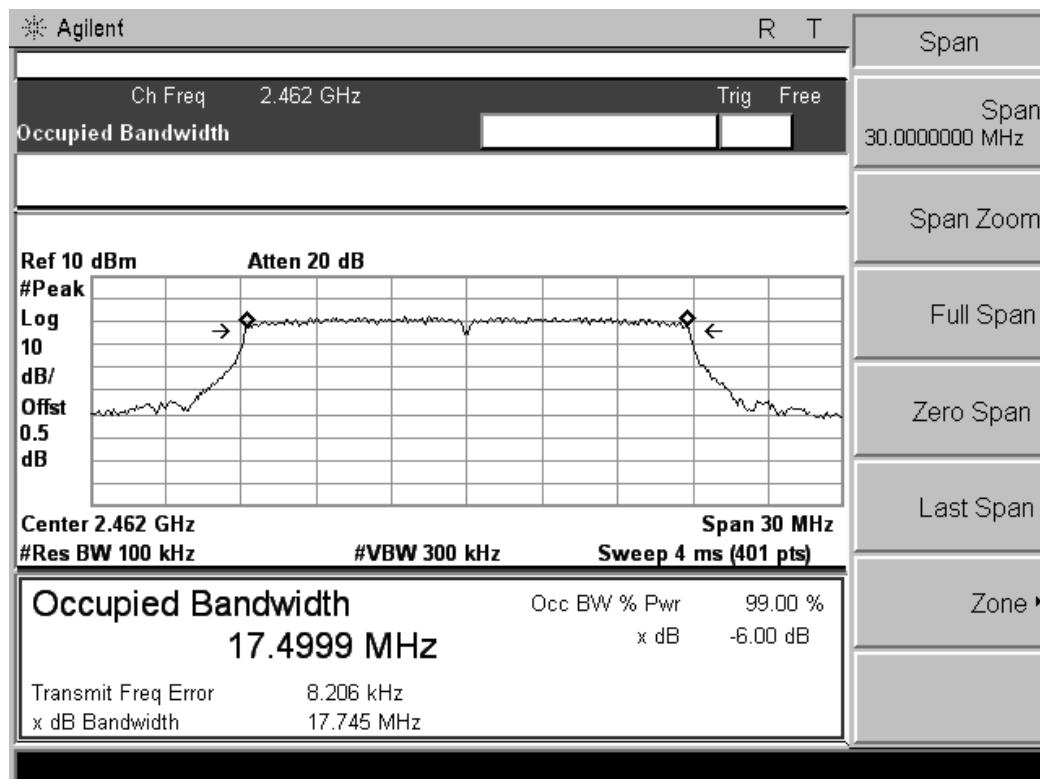

802.11n HT40 channel, 6dB bandwidth

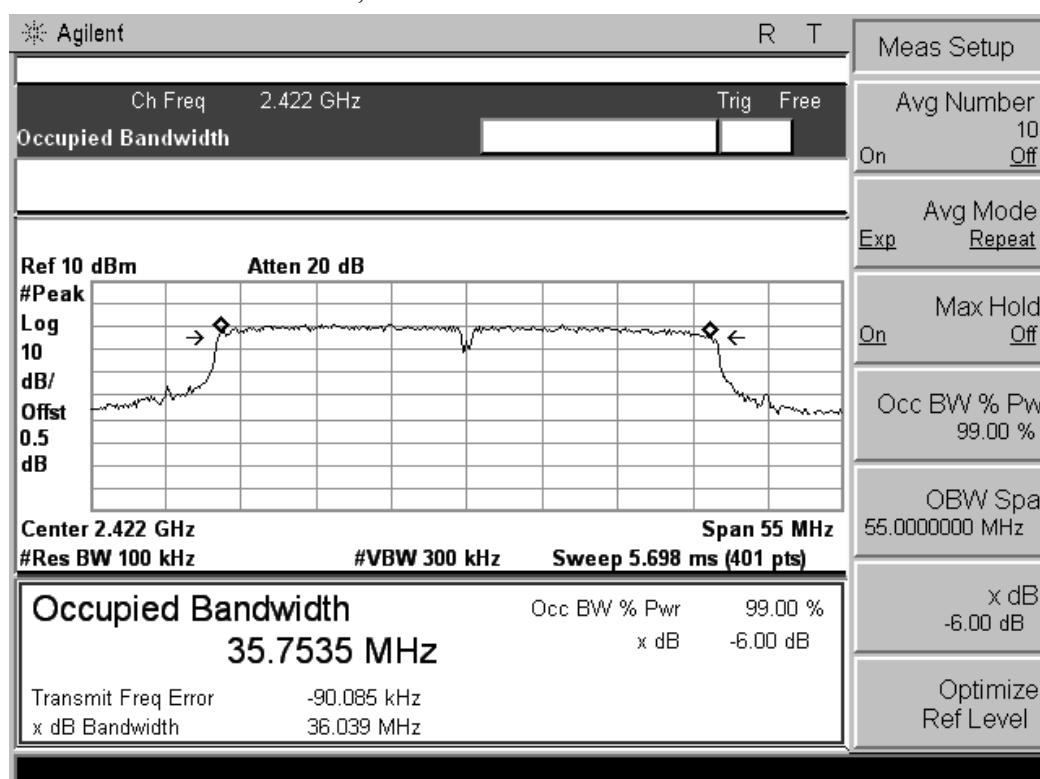

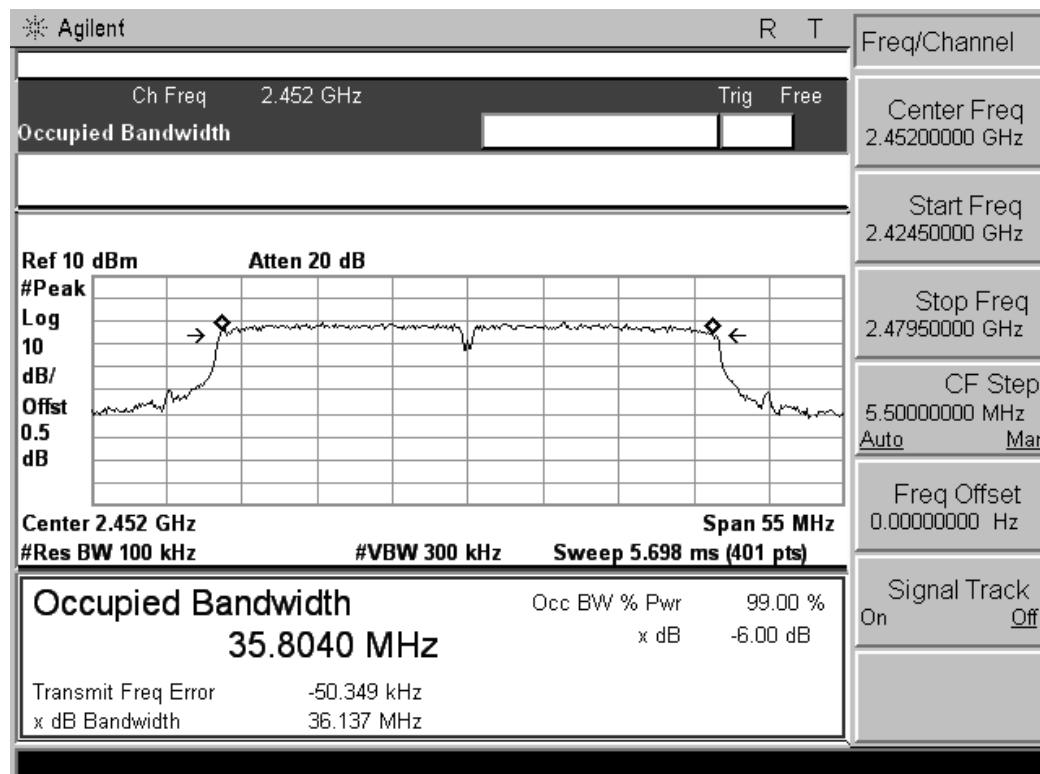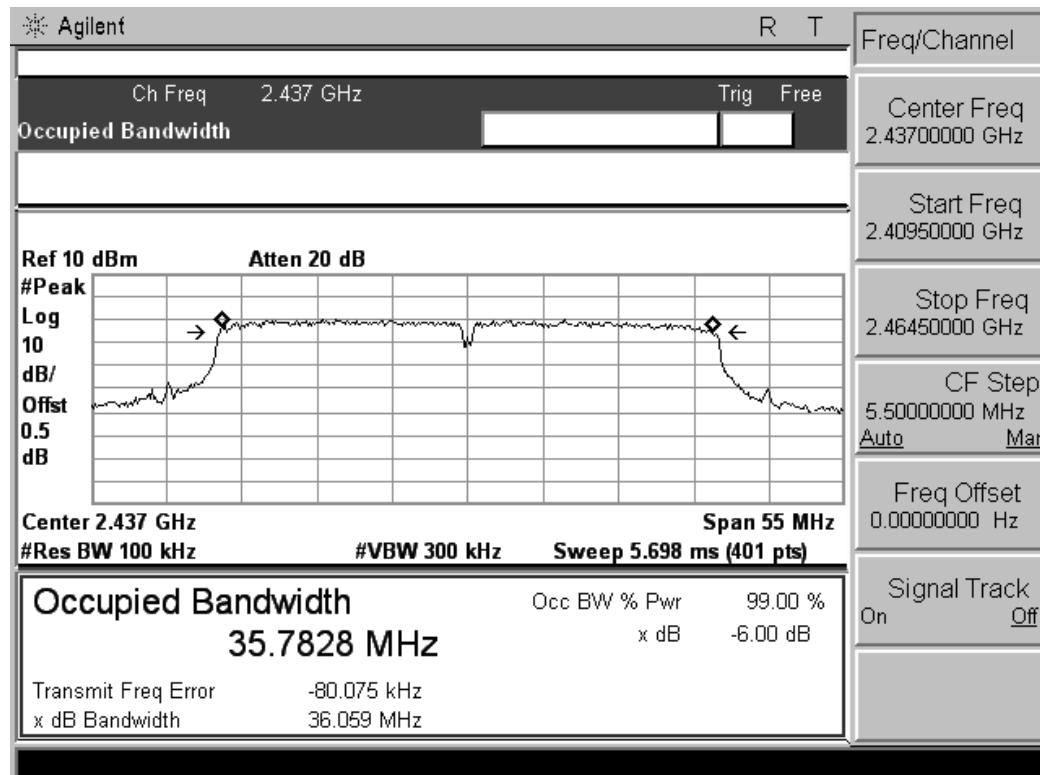

5.4. Occupied Bandwidth

5.4.1. Standard Applicable

According to §15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.


| Spectrum Parameter | Setting |
|--------------------|----------------------|
| Attenuation | Auto |
| Span Frequency | > RBW |
| RBW | 1% to 3% of the band |
| VBW | 3 times the RBW |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | 100ms |

5

5.4.3. Test Procedures

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth measurement function is utilized.

5.4.4. Test Setup Layout

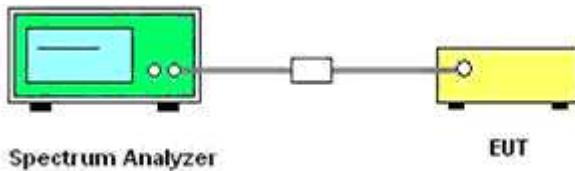

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Test Result of 99% Occupied Bandwidth.

| | | | |
|---------------|-------|----------------|-------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jacky | Configurations | 802.11b/g/n |

802.11b

| Channel | Frequency (MHz) | 99% OBW (MHz) |
|---------|--------------------|------------------|
| 1 | 2412 | 14.4963 |
| 6 | 2437 | 14.5050 |
| 11 | 2462 | 14.4990 |

802.11g

| Channel | Frequency (MHz) | 99% OBW (MHz) |
|---------|--------------------|------------------|
| 1 | 2412 | 16.3739 |
| 6 | 2437 | 16.3697 |
| 11 | 2462 | 16.3789 |



802.11n HT20


| Channel | Frequency (MHz) | 99% OBW (MHz) |
|---------|--------------------|------------------|
| 1 | 2412 | 17.5011 |
| 6 | 2437 | 17.4981 |
| 11 | 2462 | 17.4999 |

802.11n HT40


| Channel | Frequency (MHz) | 99% OBW (MHz) |
|---------|--------------------|------------------|
| 3 | 2422 | 35.7535 |
| 6 | 2437 | 35.7828 |
| 9 | 2452 | 35.8040 |



802.11b channel, 99% Occupied Bandwidth

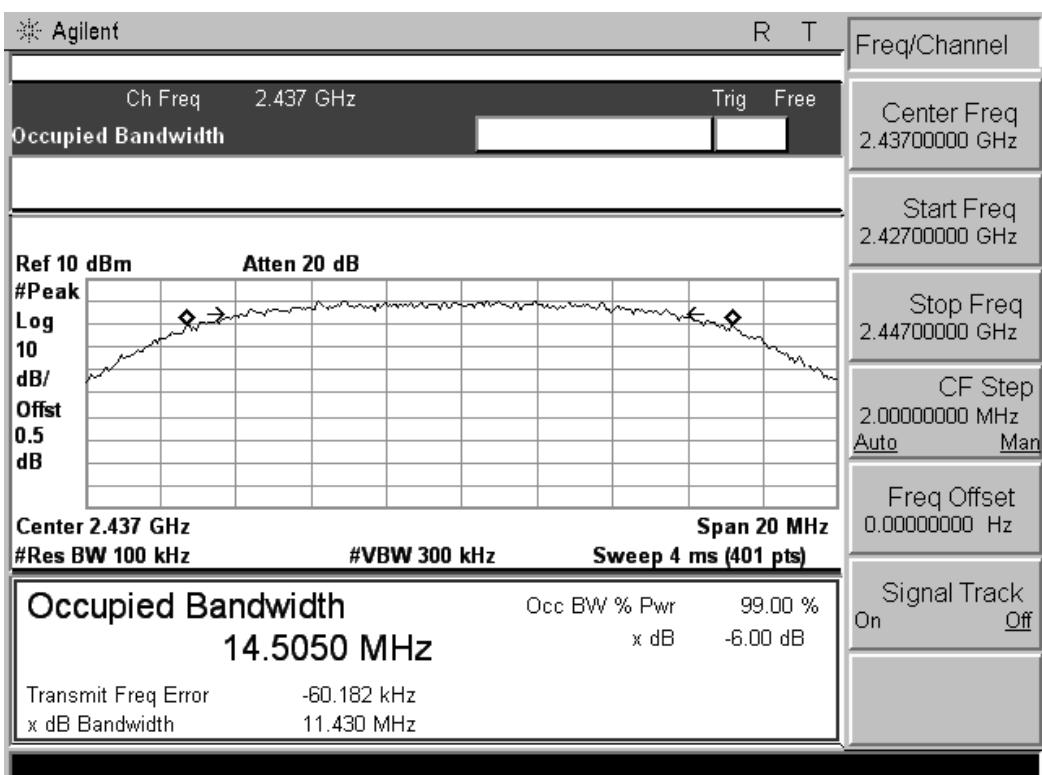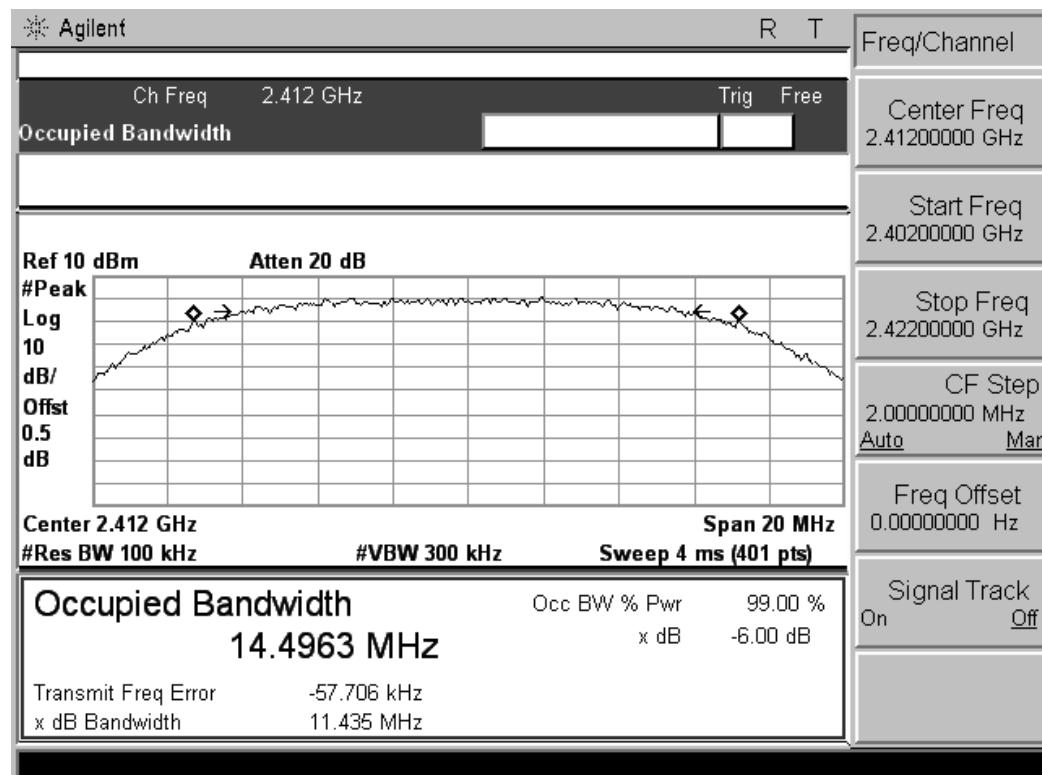


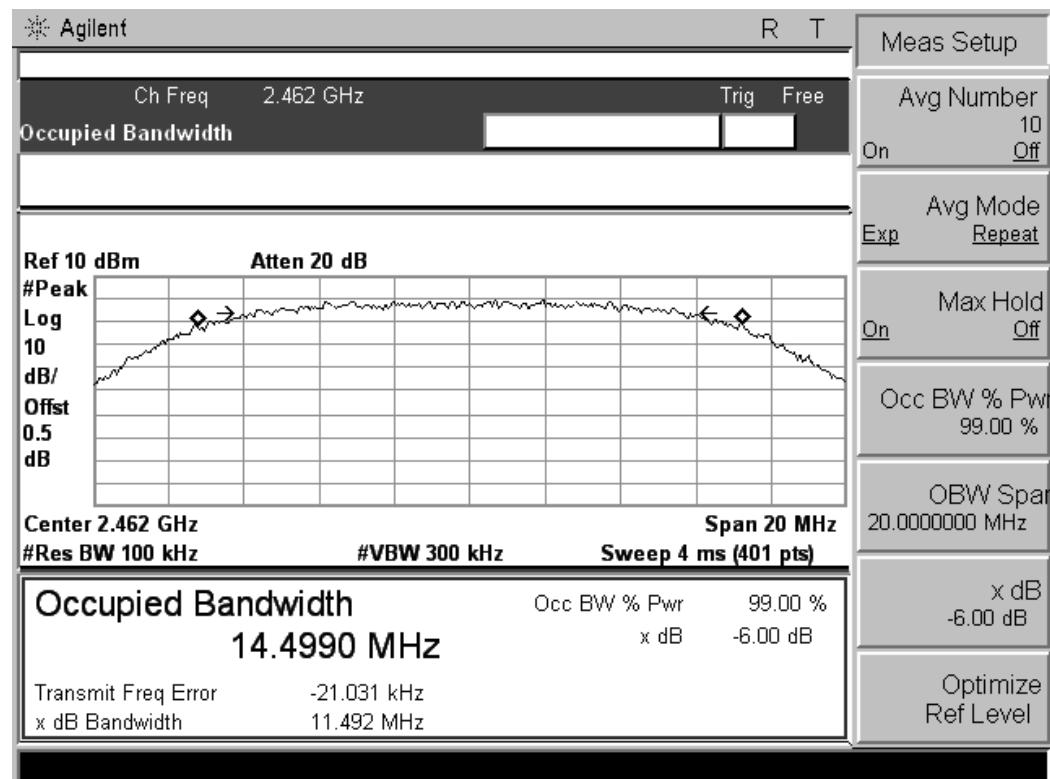



802.11g channel, 99% Occupied Bandwidth

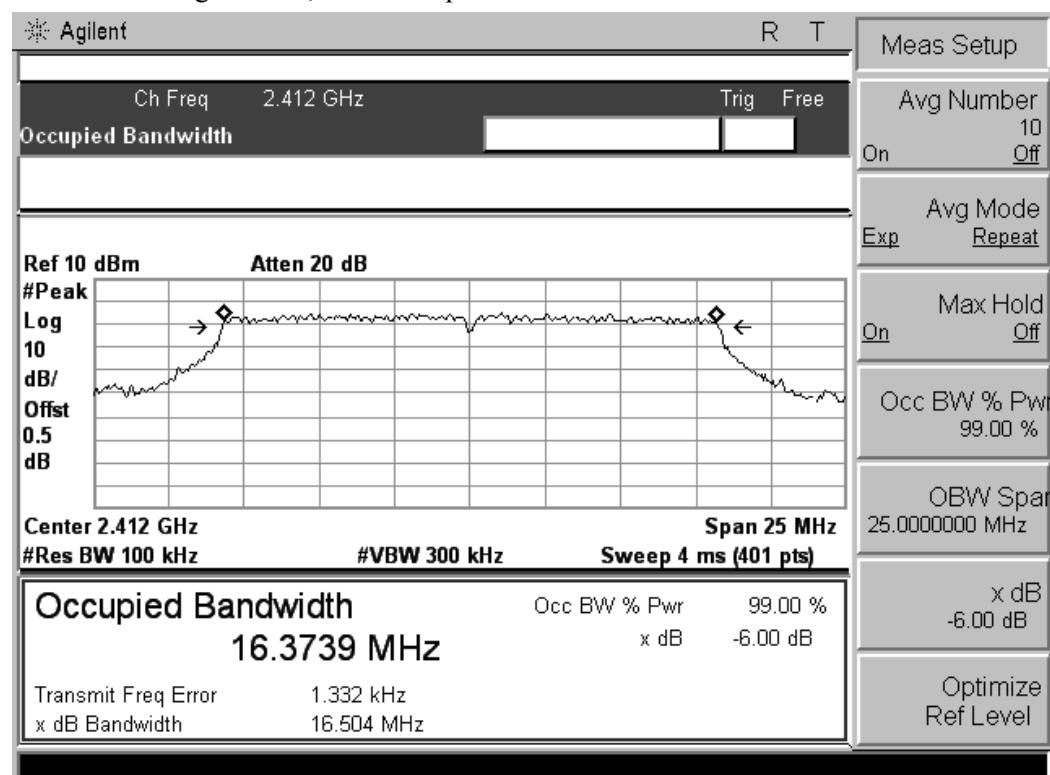

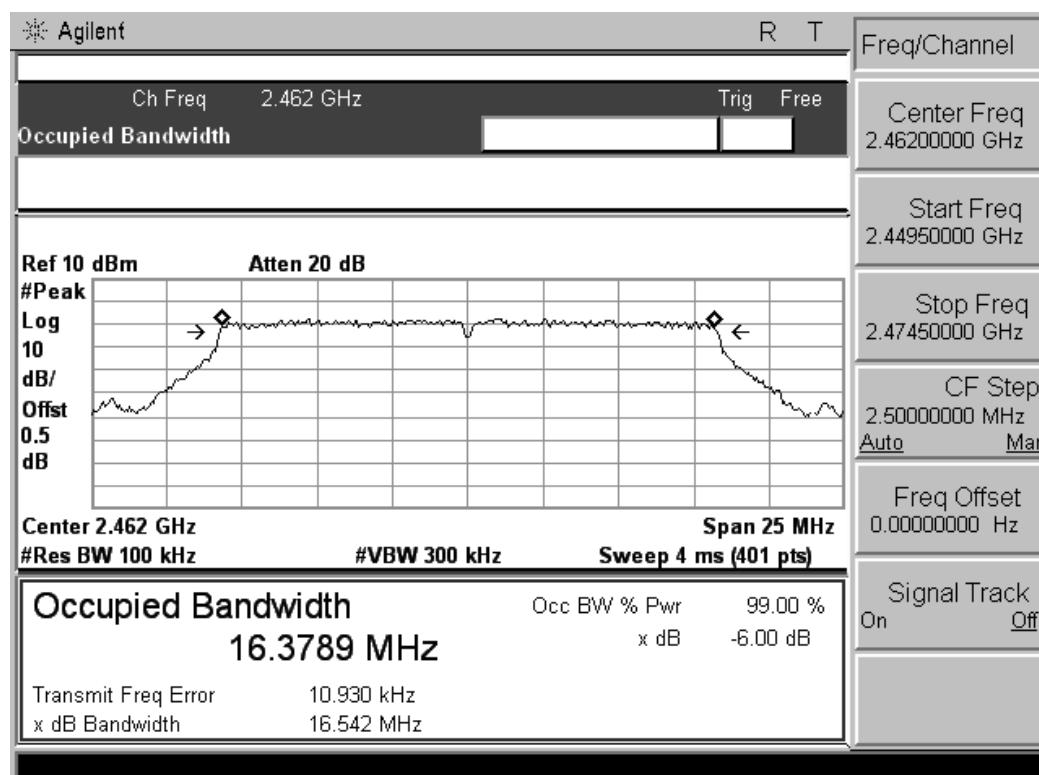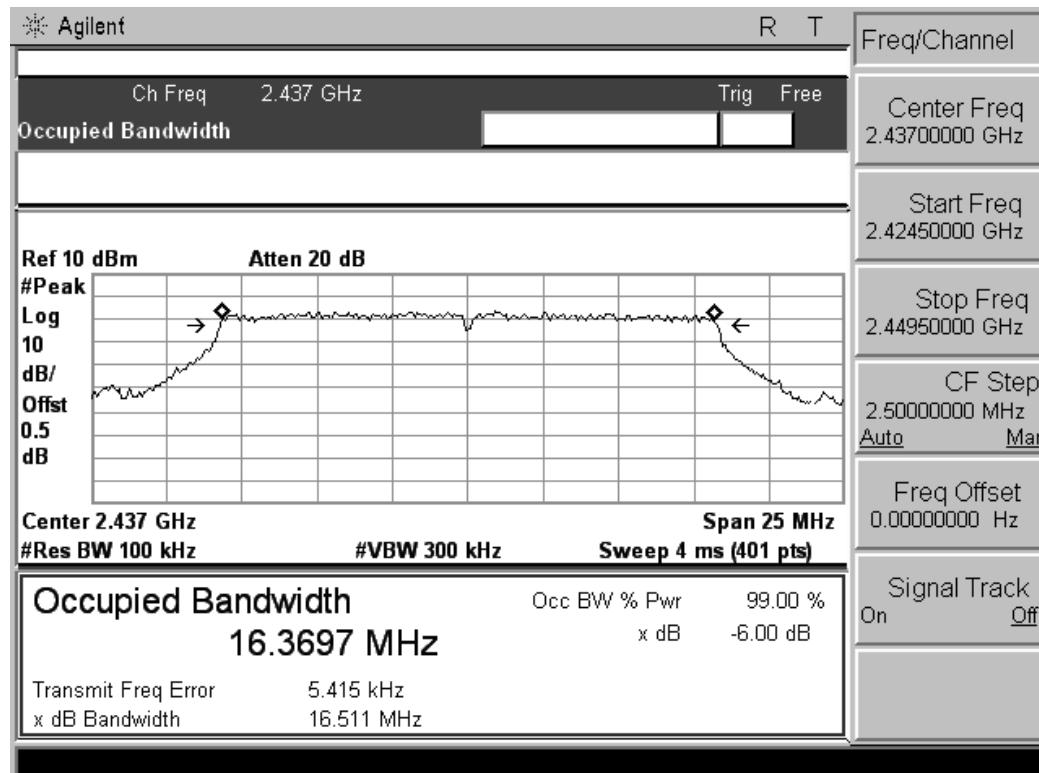




802.11n HT20 channel, 99% Occupied Bandwidth

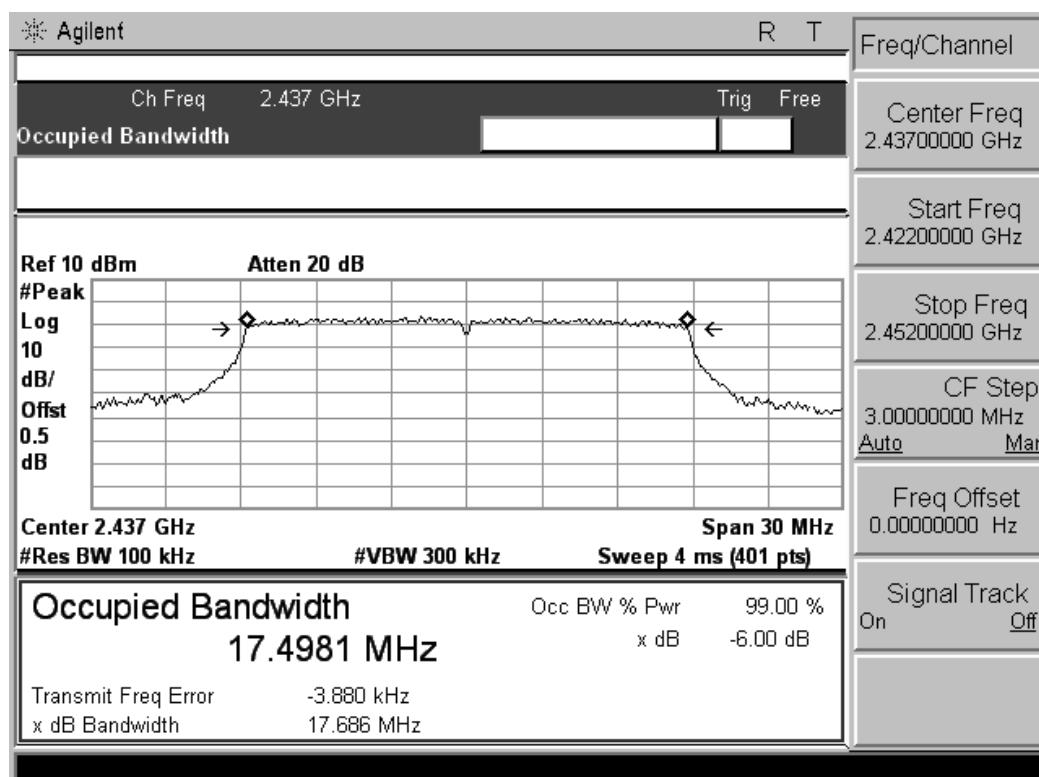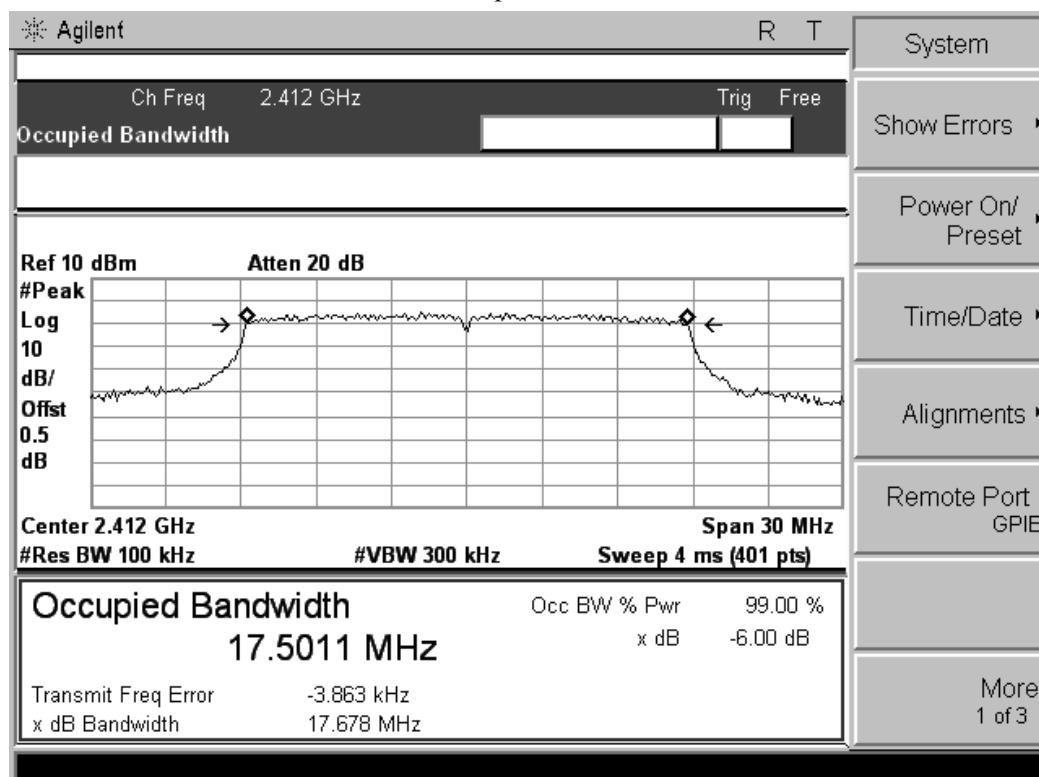

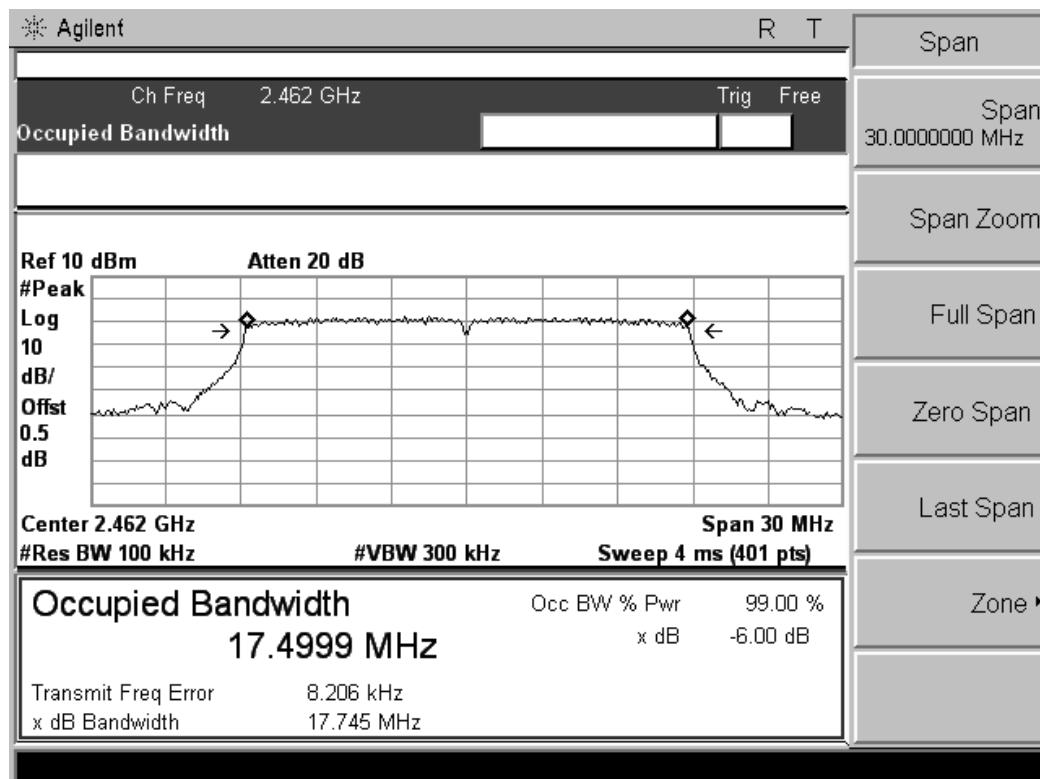

802.11n HT40 channel, 99% Occupied Bandwidth

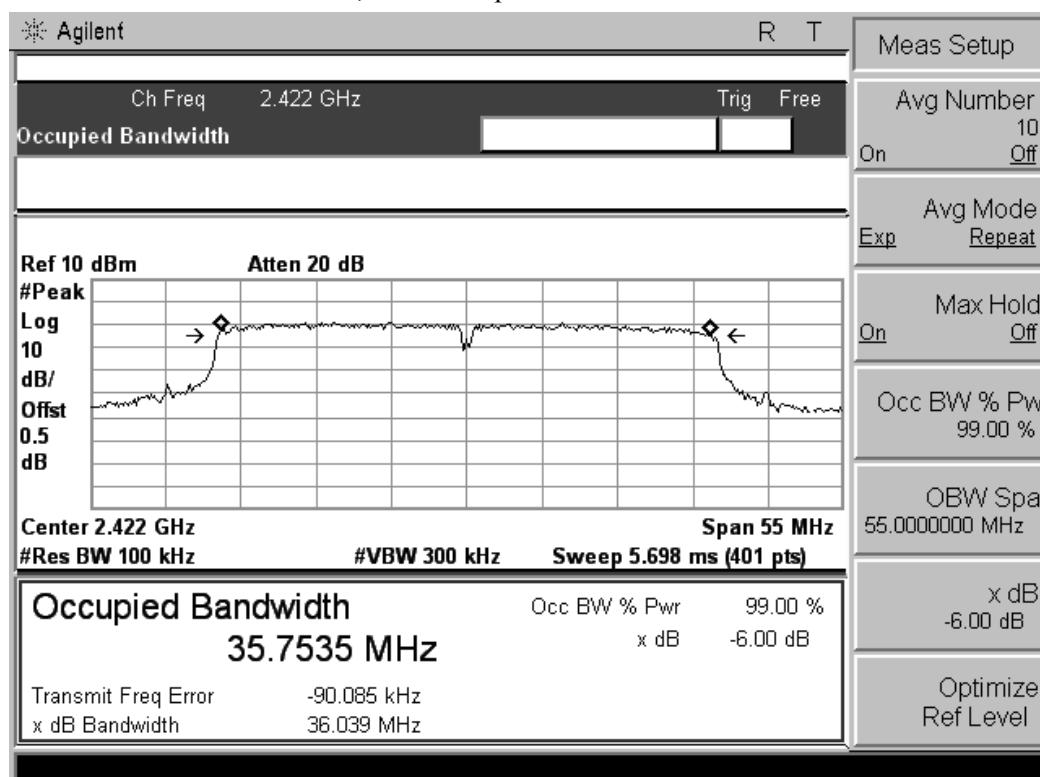

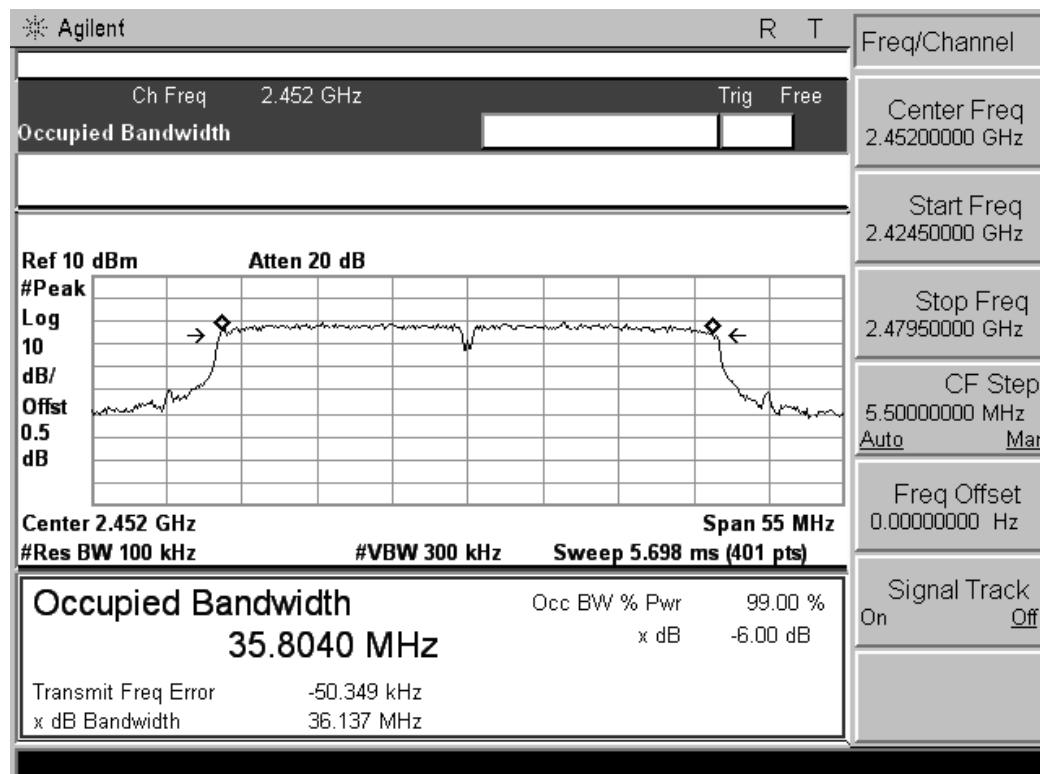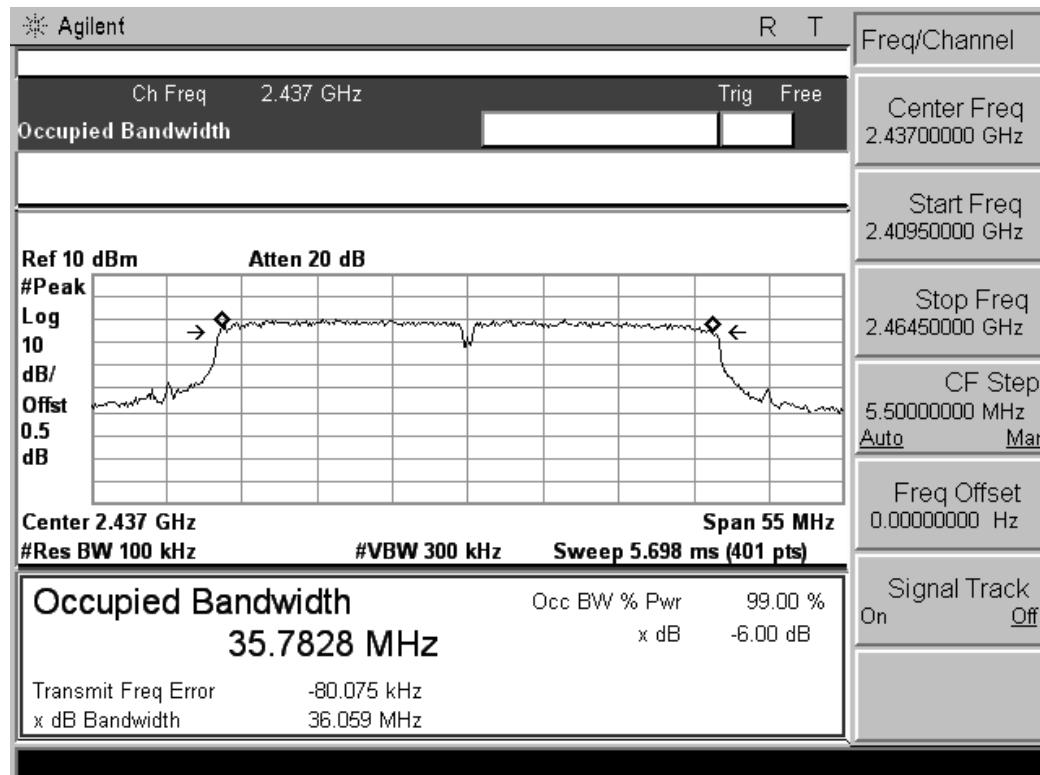

5.5. Radiated Emissions Measurement

5.5.1. Standard Applicable

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies(MHz) | Field Strength(microvolts/meter) | Measurement Distance(meters) |
|------------------|----------------------------------|------------------------------|
| 0.009~0.490 | 2400/F(KHz) | 300 |
| 0.490~1.705 | 24000/F(KHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

5.5.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter | Setting |
|---|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (Emission in restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |
| RB / VB (Emission in non-restricted band) | 1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 100kHz for QP |


5.5.3. Test Procedures

- Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.


4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

5.5.4. Test Setup Layout

For radiated emissions below 30MHz

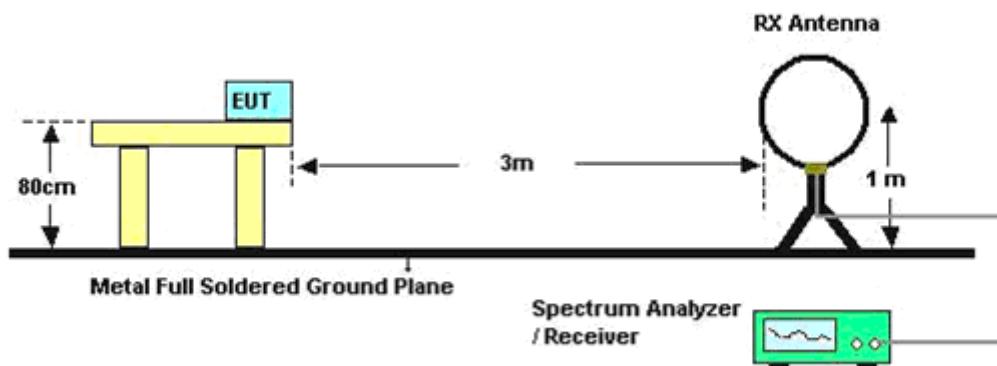

For radiated emissions above 30MHz

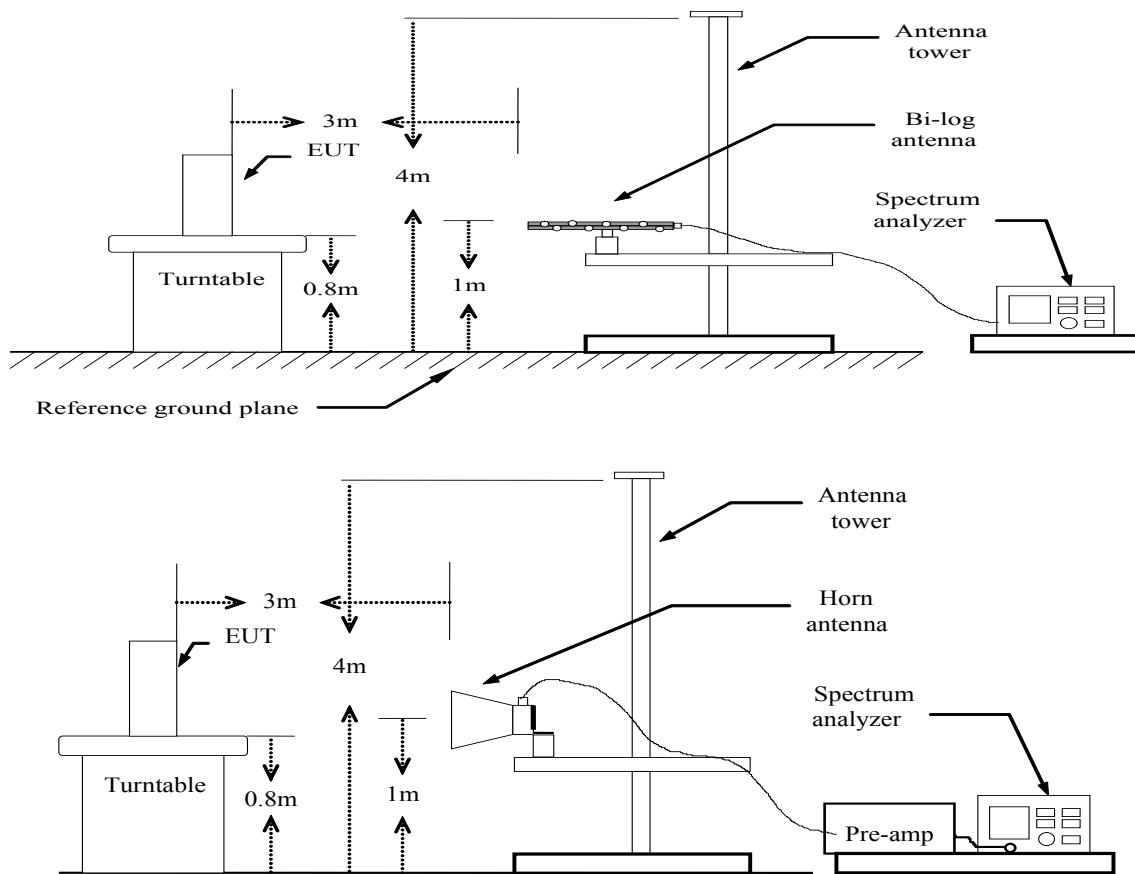

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distanc [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9kHz~30MHz)

| | | | |
|---------------|-------|----------------|-------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jacky | Configurations | 802.11b/g/n |

| Freq. (MHz) | Level (dBuV) | Over Limit (dB) | Over Limit (dBuV) | Remark |
|----------------|-----------------|--------------------|----------------------|----------|
| - | - | - | - | See Note |

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

| | | | |
|---------------|-------|----------------|-------------------|
| Temperature | 25°C | Humidity | 60% |
| Test Engineer | Jacky | Configurations | 802.11b (High CH) |


Test result for 802.11b (High Channel)

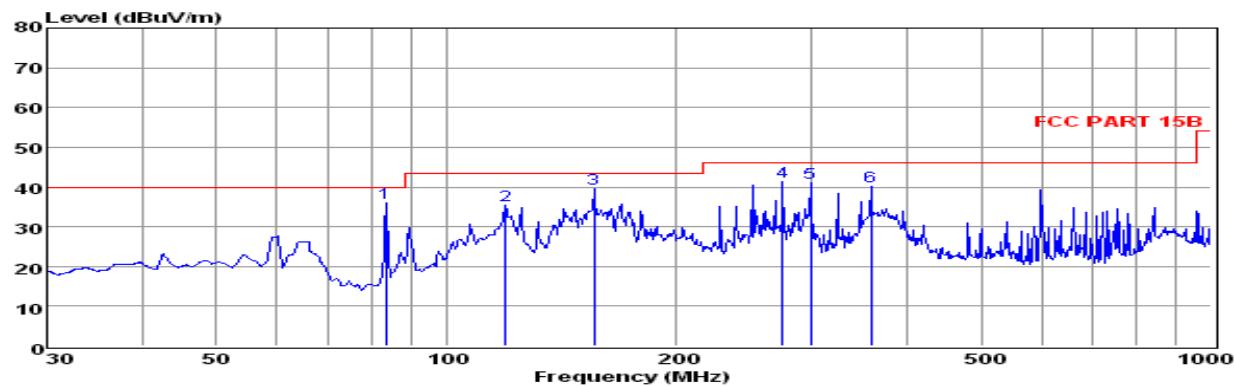

Env. / Ins: 24 °C / 56%
EUT: IP CAMERA
M/N: T7838WIP
Power Rating: AC 120V / 60Hz
Test Mode: TX-B-H
Operator: JACKY
Memo:
pol: HORIZONTAL

| Freq MHz | Reading dBuV | Cable Loss dB | Antfac dB/m | Measured dBuV/m | | Limit dBuV/m | Over dB | Remark |
|-------------|-----------------|------------------|----------------|--------------------|-----------------|-----------------|------------|--------|
| | | | | Measured dBuV/m | Limit dBuV/m | | | |
| 1 83.23 | 25.79 | 0.54 | 9.68 | 36.01 | 40.00 | -3.99 | QP | |
| 2 119.44 | 24.31 | 0.64 | 10.58 | 35.53 | 43.50 | -7.97 | QP | |
| 3 155.91 | 30.38 | 0.76 | 8.50 | 39.64 | 43.50 | -3.86 | QP | |
| 4 275.16 | 27.71 | 1.00 | 12.52 | 41.23 | 46.00 | -4.77 | QP | |
| 5 299.32 | 26.82 | 1.13 | 13.05 | 41.00 | 46.00 | -5.00 | QP | |
| 6 359.19 | 24.48 | 1.18 | 14.42 | 40.08 | 46.00 | -5.92 | QP | |

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the offficial limit are not reported

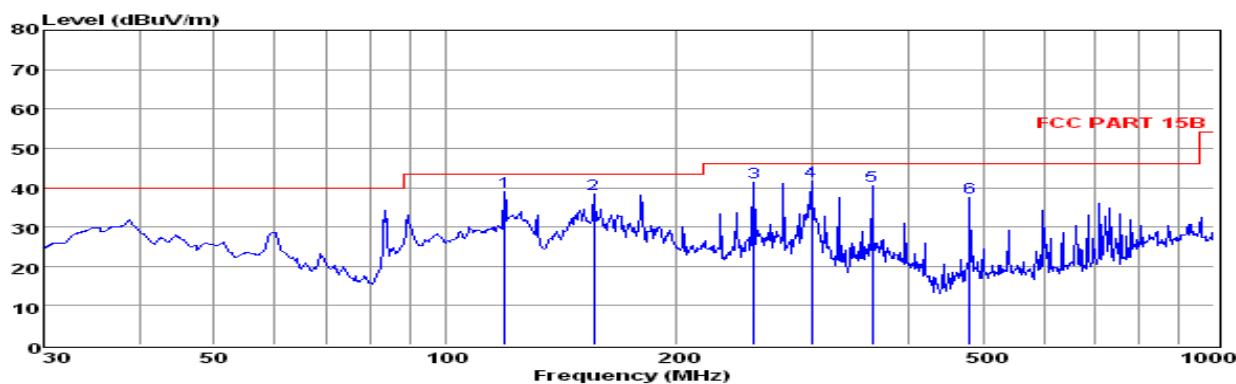

Env./Ins:

24 °C / 56%

EUT:

IP CAMERA

M/N:

T7838WIP

Power Rating:

AC 120V/ 60Hz

Test Mode:

TX-B-H

Operator:

JACKY

Memo:

VERTICAL

| Freq | Reading | CabLoss | Antfac | Measured | Limit | Over | Remark |
|----------|---------|---------|--------|----------|--------|-------|--------|
| MHz | dBuV | dB | dB/m | dBuV/m | dBuV/m | dB | |
| 1 119.44 | 27.72 | 0.64 | 10.58 | 38.94 | 43.50 | -4.56 | QP |
| 2 155.91 | 29.19 | 0.76 | 8.50 | 38.45 | 43.50 | -5.05 | QP |
| 3 252.06 | 28.35 | 0.90 | 12.07 | 41.32 | 46.00 | -4.68 | QP |
| 4 299.32 | 27.50 | 1.13 | 13.05 | 41.68 | 46.00 | -4.32 | QP |
| 5 359.19 | 24.70 | 1.18 | 14.42 | 40.30 | 46.00 | -5.70 | QP |
| 6 480.53 | 20.20 | 1.31 | 16.08 | 37.59 | 46.00 | -8.41 | QP |

Note: 1. All readings are Quasi-peak values.

2. Measured = Reading + Antenna Factor + Cable Loss

3. The emission that are 20db blow the official limit are not reported

Note:*Pre-scan all mode and recorded the worst case results in this report (802.11b (High Channel)).**Emission level (dBuV/m) = 20 log Emission level (uV/m).**Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preampl Factor = Level.*

5.5.8. Results for Radiated Emissions (Above 1GHz)

802.11b

Channel 1

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4824.00 | 62.28 | 33.06 | 35.04 | 3.94 | 64.24 | 74 | -9.76 | Peak | Horizontal |
| 4824.00 | 46.39 | 33.06 | 35.04 | 3.94 | 48.35 | 54 | -5.65 | Average | Horizontal |
| 4824.00 | 61.45 | 33.06 | 35.04 | 3.94 | 63.41 | 74 | -10.59 | Peak | Vertical |
| 4824.00 | 45.31 | 33.06 | 35.04 | 3.94 | 47.27 | 54 | -6.73 | Average | Vertical |

Channel 6

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4874.00 | 62.41 | 33.16 | 35.15 | 3.96 | 64.38 | 74 | -9.62 | Peak | Horizontal |
| 4874.00 | 46.59 | 33.16 | 35.15 | 3.96 | 48.56 | 54 | -5.44 | Average | Horizontal |
| 4874.00 | 61.77 | 33.16 | 35.15 | 3.96 | 63.74 | 74 | -10.26 | Peak | Vertical |
| 4874.00 | 45.89 | 33.16 | 35.15 | 3.96 | 47.86 | 54 | -6.14 | Average | Vertical |

Channel 11

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4924.00 | 62.36 | 33.26 | 35.14 | 3.98 | 64.46 | 74 | -9.54 | Peak | Horizontal |
| 4924.00 | 46.26 | 33.26 | 35.14 | 3.98 | 48.36 | 54 | -5.64 | Average | Horizontal |
| 4924.00 | 61.79 | 33.26 | 35.14 | 3.98 | 63.89 | 74 | -10.11 | Peak | Vertical |
| 4924.00 | 45.44 | 33.26 | 35.14 | 3.98 | 47.54 | 54 | -6.46 | Average | Vertical |

802.11g

Channel 1

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4824.00 | 60.40 | 33.06 | 35.04 | 3.94 | 62.36 | 74 | -11.64 | Peak | Horizontal |
| 4824.00 | 44.33 | 33.06 | 35.04 | 3.94 | 46.29 | 54 | -7.71 | Average | Horizontal |
| 4824.00 | 59.68 | 33.06 | 35.04 | 3.94 | 61.64 | 74 | -12.36 | Peak | Vertical |
| 4824.00 | 43.88 | 33.06 | 35.04 | 3.94 | 45.84 | 54 | -8.16 | Average | Vertical |

Channel 6

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4874.00 | 60.50 | 33.16 | 35.15 | 3.96 | 62.47 | 74 | -11.53 | Peak | Horizontal |
| 4874.00 | 44.24 | 33.16 | 35.15 | 3.96 | 46.21 | 54 | -7.79 | Average | Horizontal |
| 4874.00 | 59.09 | 33.16 | 35.15 | 3.96 | 61.06 | 74 | -12.94 | Peak | Vertical |
| 4874.00 | 43.61 | 33.16 | 35.15 | 3.96 | 45.58 | 54 | -8.42 | Average | Vertical |

Channel 11

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4924.00 | 60.20 | 33.26 | 35.14 | 3.98 | 62.30 | 74 | -11.7 | Peak | Horizontal |
| 4924.00 | 44.04 | 33.26 | 35.14 | 3.98 | 46.14 | 54 | -7.86 | Average | Horizontal |
| 4924.00 | 59.16 | 33.26 | 35.14 | 3.98 | 61.26 | 74 | -12.74 | Peak | Vertical |
| 4924.00 | 43.18 | 33.26 | 35.14 | 3.98 | 45.28 | 54 | -8.72 | Average | Vertical |

802.11n HT20

Channel 1

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4824.00 | 59.89 | 33.06 | 35.04 | 3.94 | 61.85 | 74 | -12.15 | Peak | Horizontal |
| 4824.00 | 44.06 | 33.06 | 35.04 | 3.94 | 46.02 | 54 | -7.98 | Average | Horizontal |
| 4824.00 | 59.45 | 33.06 | 35.04 | 3.94 | 61.41 | 74 | -12.59 | Peak | Vertical |
| 4824.00 | 43.09 | 33.06 | 35.04 | 3.94 | 45.05 | 54 | -8.95 | Average | Vertical |

Channel 6

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measure d dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|------------------------|-----------------|--------------|---------|------------|
| 4874.00 | 59.39 | 33.16 | 35.15 | 3.96 | 61.36 | 74 | -12.64 | Peak | Horizontal |
| 4874.00 | 44.00 | 33.16 | 35.15 | 3.96 | 45.97 | 54 | -8.03 | Average | Horizontal |
| 4874.00 | 59.26 | 33.16 | 35.15 | 3.96 | 61.23 | 74 | -12.77 | Peak | Vertical |
| 4874.00 | 42.92 | 33.16 | 35.15 | 3.96 | 44.89 | 54 | -9.11 | Average | Vertical |

Channel 11

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4924.00 | 59.15 | 33.26 | 35.14 | 3.98 | 61.25 | 74 | -12.75 | Peak | Horizontal |
| 4924.00 | 43.75 | 33.26 | 35.14 | 3.98 | 45.85 | 54 | -8.15 | Average | Horizontal |
| 4924.00 | 59.04 | 33.26 | 35.14 | 3.98 | 61.14 | 74 | -12.86 | Peak | Vertical |
| 4924.00 | 42.55 | 33.26 | 35.14 | 3.98 | 44.65 | 54 | -9.35 | Average | Vertical |

802.11n HT40

Channel 3

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4844.00 | 59.32 | 33.06 | 35.04 | 3.94 | 61.28 | 74 | -12.72 | Peak | Horizontal |
| 4844.00 | 43.55 | 33.06 | 35.04 | 3.94 | 45.51 | 54 | -8.49 | Average | Horizontal |
| 4844.00 | 58.66 | 33.06 | 35.04 | 3.94 | 60.62 | 74 | -13.38 | Peak | Vertical |
| 4844.00 | 42.38 | 33.06 | 35.04 | 3.94 | 44.34 | 54 | -9.66 | Average | Vertical |

Channel 6

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4874.00 | 59.19 | 33.16 | 35.15 | 3.96 | 61.16 | 74 | -12.84 | Peak | Horizontal |
| 4874.00 | 43.41 | 33.16 | 35.15 | 3.96 | 45.38 | 54 | -8.62 | Average | Horizontal |
| 4874.00 | 58.57 | 33.16 | 35.15 | 3.96 | 60.54 | 74 | -13.46 | Peak | Vertical |
| 4874.00 | 42.65 | 33.16 | 35.15 | 3.96 | 44.62 | 54 | -9.38 | Average | Vertical |

Channel 9

| Freq. MHz | Reading dBuv | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuv/m | Limit dBuv/m | Margin dB | Remark | Pol. |
|--------------|-----------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 4904.00 | 59.31 | 33.26 | 35.14 | 3.98 | 61.41 | 74 | -12.59 | Peak | Horizontal |
| 4904.00 | 43.15 | 33.26 | 35.14 | 3.98 | 45.25 | 54 | -8.75 | Average | Horizontal |
| 4904.00 | 58.64 | 33.26 | 35.14 | 3.98 | 60.74 | 74 | -13.26 | Peak | Vertical |
| 4904.00 | 42.22 | 33.26 | 35.14 | 3.98 | 44.32 | 54 | -9.68 | Average | Vertical |

Notes:

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic or 40GHz (which is less) were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

5.5.9. Results of Band Edges Test (Radiated)

802.11b

Tx-2412

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2390.00 | 52.1 | 32.89 | 35.16 | 3.51 | 53.34 | 74 | -20.66 | Peak | Horizontal |
| 2390.00 | 40.88 | 32.89 | 35.16 | 3.51 | 42.12 | 54 | -11.88 | Average | Horizontal |
| 2400.00 | 54.15 | 32.92 | 35.16 | 3.54 | 55.45 | 74 | -18.55 | Peak | Horizontal |
| 2400.00 | 41.96 | 32.92 | 35.16 | 3.54 | 43.26 | 54 | -10.74 | Average | Horizontal |
| 2390.00 | 52.17 | 32.89 | 35.16 | 3.51 | 53.41 | 74 | -20.59 | Peak | Vertical |
| 2390.00 | 41.01 | 32.89 | 35.16 | 3.51 | 42.25 | 54 | -11.75 | Average | Vertical |
| 2400.00 | 54.07 | 32.92 | 35.16 | 3.54 | 55.37 | 74 | -18.63 | Peak | Vertical |
| 2400.00 | 40.98 | 32.92 | 35.16 | 3.54 | 42.28 | 54 | -11.72 | Average | Vertical |

Tx-2462

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2483.50 | 51.66 | 33.06 | 35.18 | 3.60 | 53.14 | 74 | -20.86 | Peak | Horizontal |
| 2483.50 | 41.8 | 33.06 | 35.18 | 3.60 | 43.28 | 54 | -10.72 | Average | Horizontal |
| 2483.50 | 50.62 | 33.06 | 35.18 | 3.60 | 52.10 | 74 | -21.9 | Peak | Vertical |
| 2483.50 | 40.61 | 33.06 | 35.18 | 3.60 | 42.09 | 54 | -11.91 | Average | Vertical |

802.11g

Tx-2412

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2390.00 | 51.15 | 32.89 | 35.16 | 3.51 | 52.39 | 74 | -21.61 | Peak | Horizontal |
| 2390.00 | 40.47 | 32.89 | 35.16 | 3.51 | 41.71 | 54 | -12.29 | Average | Horizontal |
| 2400.00 | 53.26 | 32.92 | 35.16 | 3.54 | 54.56 | 74 | -19.44 | Peak | Horizontal |
| 2400.00 | 41.65 | 32.92 | 35.16 | 3.54 | 42.95 | 54 | -11.05 | Average | Horizontal |
| 2390.00 | 49.94 | 32.89 | 35.16 | 3.51 | 51.18 | 74 | -22.82 | Peak | Vertical |
| 2390.00 | 40.63 | 32.89 | 35.16 | 3.51 | 41.87 | 54 | -12.13 | Average | Vertical |
| 2400.00 | 52.91 | 32.92 | 35.16 | 3.54 | 54.21 | 74 | -19.79 | Peak | Vertical |
| 2400.00 | 41.05 | 32.92 | 35.16 | 3.54 | 42.35 | 54 | -11.65 | Average | Vertical |

Tx-2462

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2483.50 | 52.14 | 33.06 | 35.18 | 3.60 | 53.62 | 74 | -20.38 | Peak | Horizontal |
| 2483.50 | 40.70 | 33.06 | 35.18 | 3.60 | 42.18 | 54 | -11.82 | Average | Horizontal |
| 2483.50 | 50.73 | 33.06 | 35.18 | 3.60 | 52.21 | 74 | -21.79 | Peak | Vertical |
| 2483.50 | 40.82 | 33.06 | 35.18 | 3.60 | 42.30 | 54 | -11.70 | Average | Vertical |

802.11n(HT20)

Tx-2412

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2390.00 | 51.17 | 32.89 | 35.16 | 3.51 | 52.41 | 74 | -21.59 | Peak | Horizontal |
| 2390.00 | 39.81 | 32.89 | 35.16 | 3.51 | 41.05 | 54 | -12.95 | Average | Horizontal |
| 2400.00 | 52.57 | 32.92 | 35.16 | 3.54 | 53.87 | 74 | -20.13 | Peak | Horizontal |
| 2400.00 | 40.84 | 32.92 | 35.16 | 3.54 | 42.14 | 54 | -11.86 | Average | Horizontal |
| 2390.00 | 50.97 | 32.89 | 35.16 | 3.51 | 52.21 | 74 | -21.79 | Peak | Vertical |
| 2390.00 | 40.01 | 32.89 | 35.16 | 3.51 | 41.25 | 54 | -12.75 | Average | Vertical |
| 2400.00 | 52.21 | 32.92 | 35.16 | 3.54 | 53.51 | 74 | -20.49 | Peak | Vertical |
| 2400.00 | 41.25 | 32.92 | 35.16 | 3.54 | 42.55 | 54 | -11.45 | Average | Vertical |

Tx-2462

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2483.50 | 52.37 | 33.06 | 35.18 | 3.60 | 53.85 | 74 | -20.15 | Peak | Horizontal |
| 2483.50 | 41.95 | 33.06 | 35.18 | 3.60 | 43.43 | 54 | -10.57 | Average | Horizontal |
| 2483.50 | 51.26 | 33.06 | 35.18 | 3.60 | 52.74 | 74 | -21.26 | Peak | Vertical |
| 2483.50 | 40.75 | 33.06 | 35.18 | 3.60 | 42.23 | 54 | -11.77 | Average | Vertical |

802.11n(HT40)

Tx-2422

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2390.00 | 50.43 | 32.89 | 35.16 | 3.51 | 51.67 | 74 | -22.33 | Peak | Horizontal |
| 2390.00 | 37.98 | 32.89 | 35.16 | 3.51 | 39.22 | 54 | -14.78 | Average | Horizontal |
| 2400.00 | 51.35 | 32.92 | 35.16 | 3.54 | 52.65 | 74 | -21.35 | Peak | Horizontal |
| 2400.00 | 40.17 | 32.92 | 35.16 | 3.54 | 41.47 | 54 | -12.53 | Average | Horizontal |
| 2390.00 | 49.73 | 32.89 | 35.16 | 3.51 | 50.97 | 74 | -23.03 | Peak | Vertical |
| 2390.00 | 38.11 | 32.89 | 35.16 | 3.51 | 39.35 | 54 | -14.65 | Average | Vertical |
| 2400.00 | 51.94 | 32.92 | 35.16 | 3.54 | 53.24 | 74 | -20.76 | Peak | Vertical |
| 2400.00 | 40.34 | 32.92 | 35.16 | 3.54 | 41.64 | 54 | -12.36 | Average | Vertical |

Tx-2452

| Freq. MHz | Readin g Level dBuV | Ant. Fac. dB/m | Pre. Fac. dB | Cab. Loss dB | Measured dBuV/m | Limit dBuV/m | Margin dB | Remark | Pol. |
|--------------|------------------------------|----------------------|--------------------|--------------------|--------------------|-----------------|--------------|---------|------------|
| 2483.50 | 50.74 | 33.06 | 35.18 | 3.60 | 52.22 | 74 | -21.78 | Peak | Horizontal |
| 2483.50 | 41.38 | 33.06 | 35.18 | 3.60 | 42.86 | 54 | -11.14 | Average | Horizontal |
| 2483.50 | 50.77 | 33.06 | 35.18 | 3.60 | 52.25 | 74 | -21.75 | Peak | Vertical |
| 2483.50 | 40.31 | 33.06 | 35.18 | 3.60 | 41.79 | 54 | -12.21 | Average | Vertical |

5.6. Conducted Spurious Emissions and Band Edges Test

5.6.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2. Measuring Instruments and Setting

Please refer to section 6 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting |
|---|---------------|
| Detector | Peak |
| Attenuation | Auto |
| RB / VB (Emission in restricted band) | 100KHz/300KHz |
| RB / VB (Emission in non-restricted band) | 100KHz/300KHz |

5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz

The spectrum from 9kHz to 40GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.6.4. Test Setup Layout



This test setup layout is the same as that shown in section 5.4.4.


5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.6.6. Test Results of Conducted Spurious Emissions



802.11b

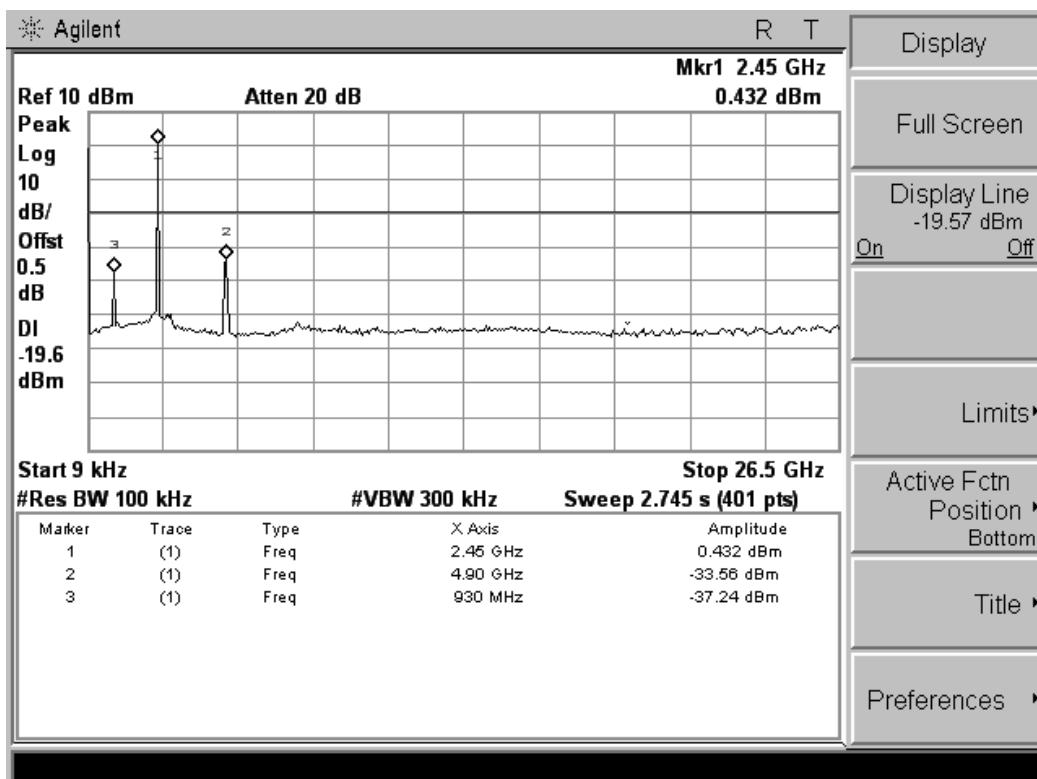
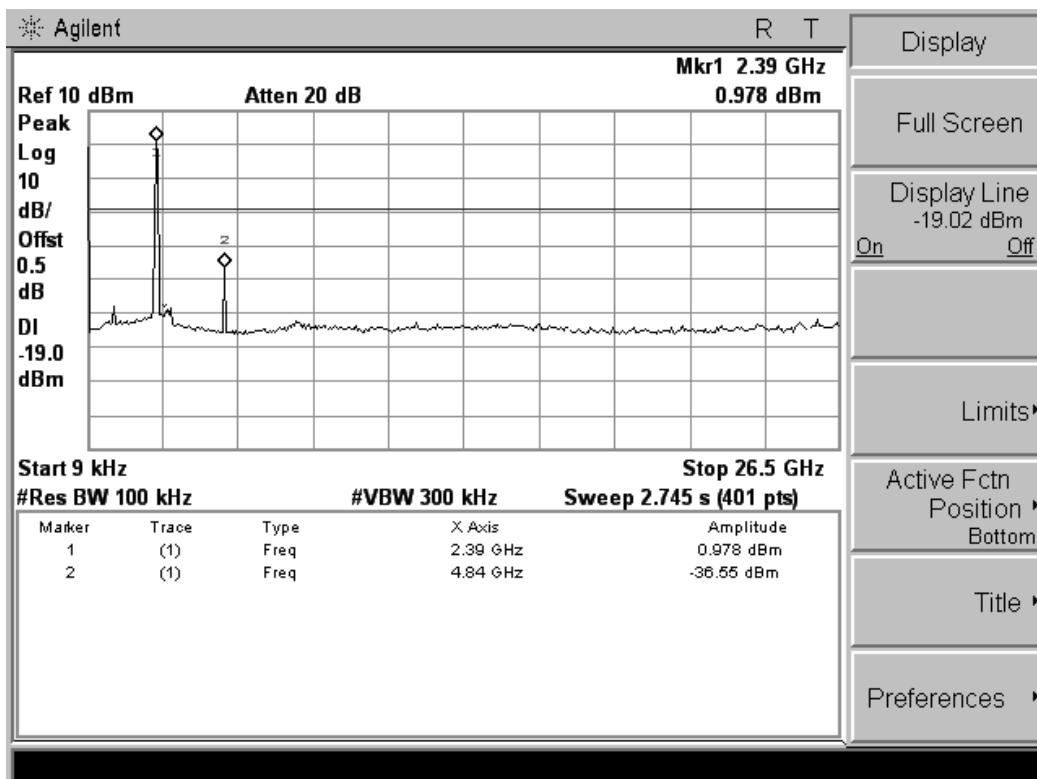


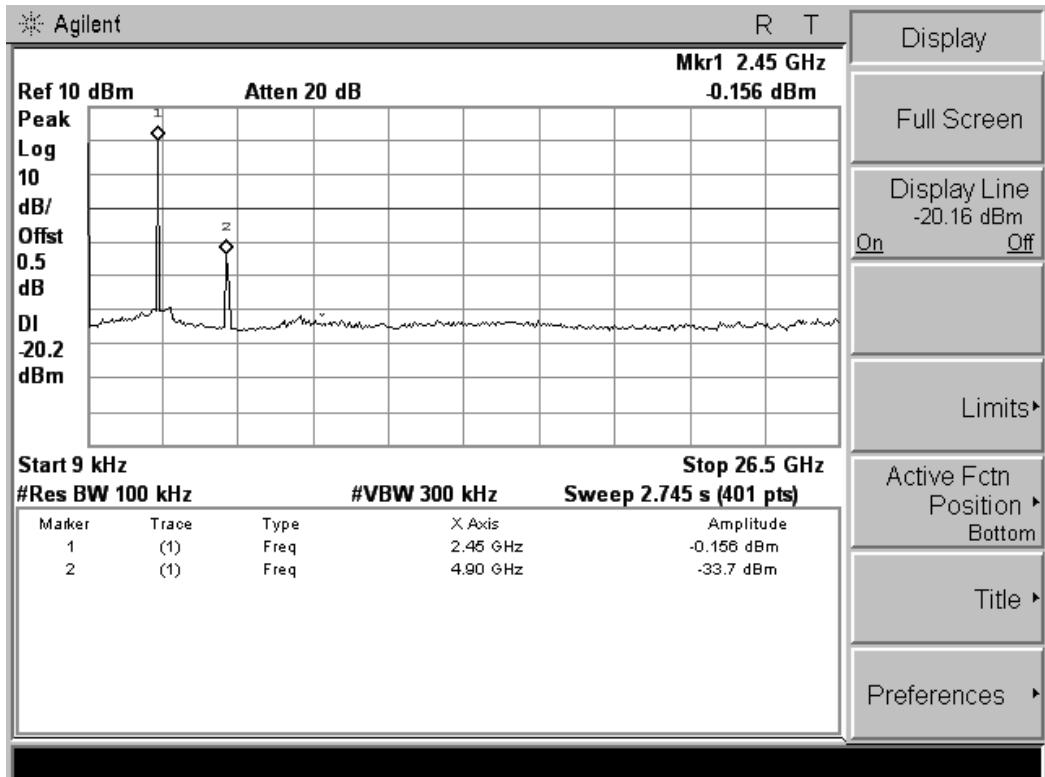


802.11g

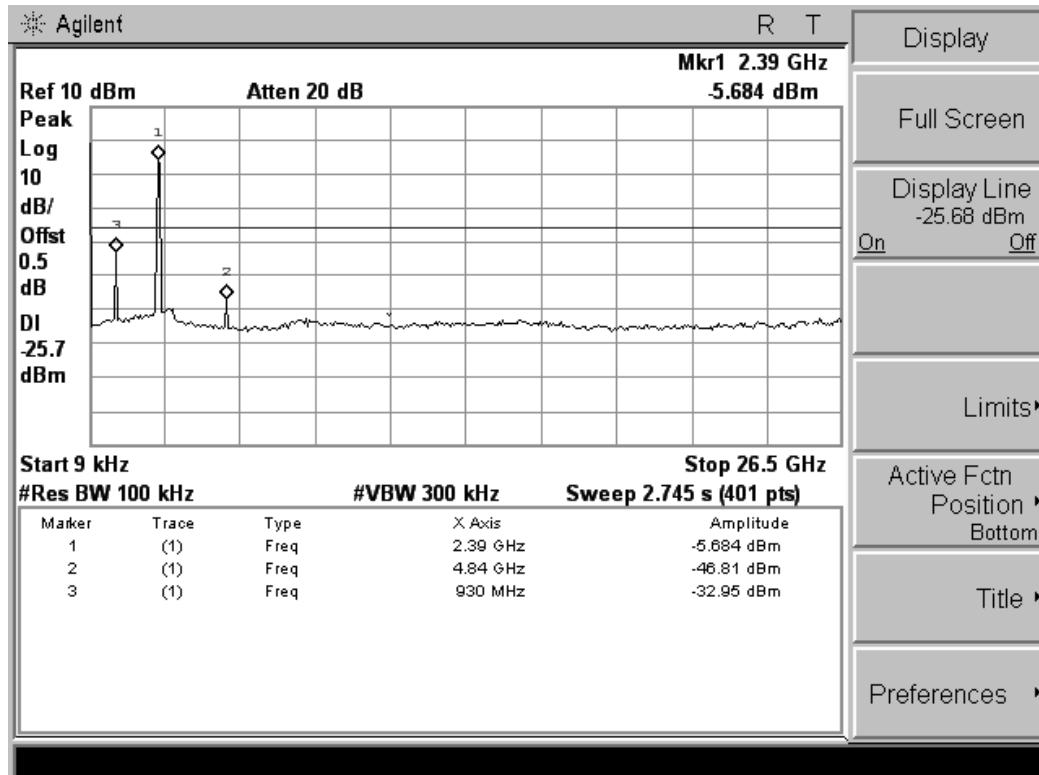


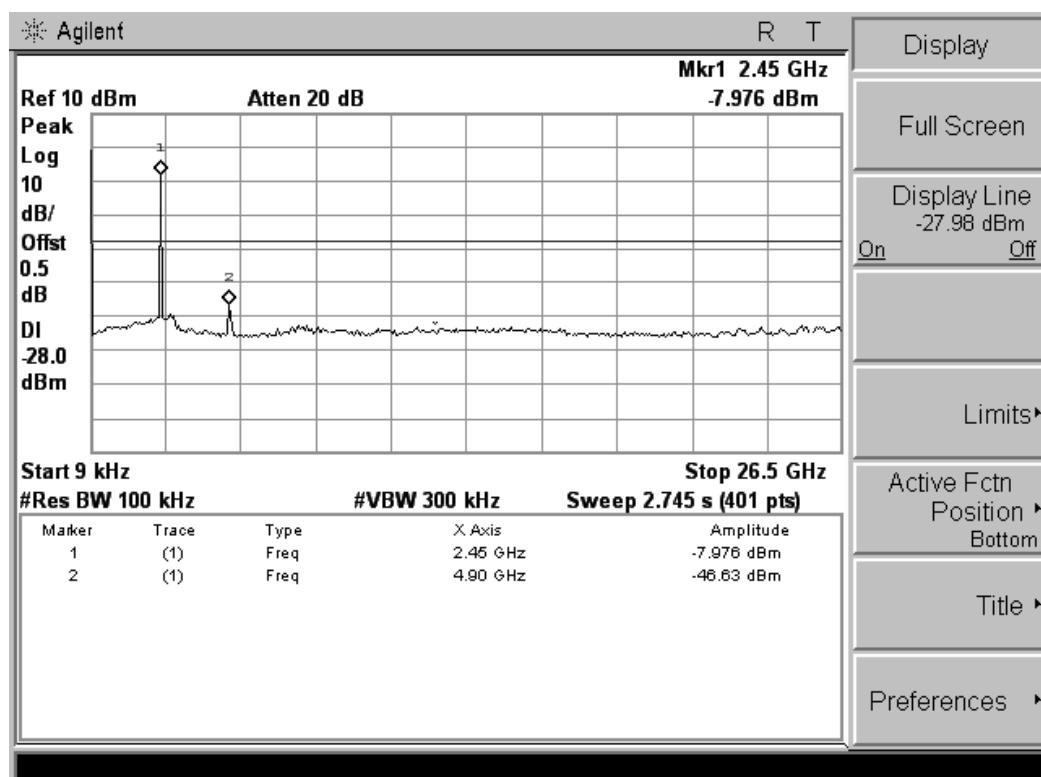
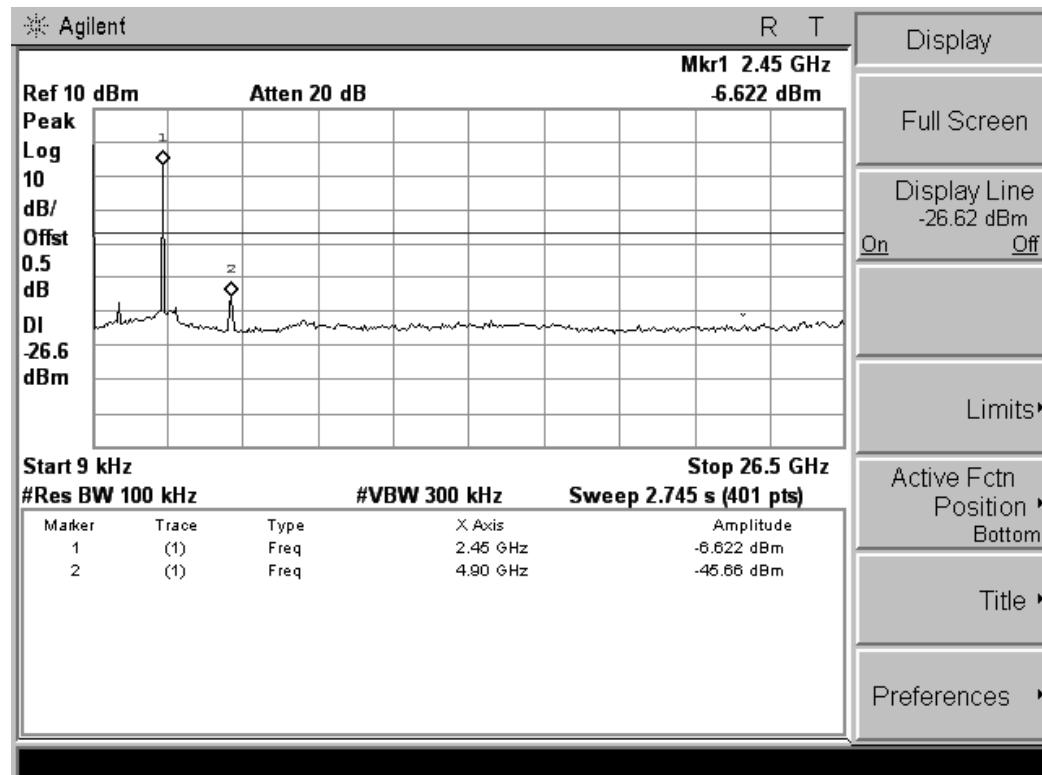


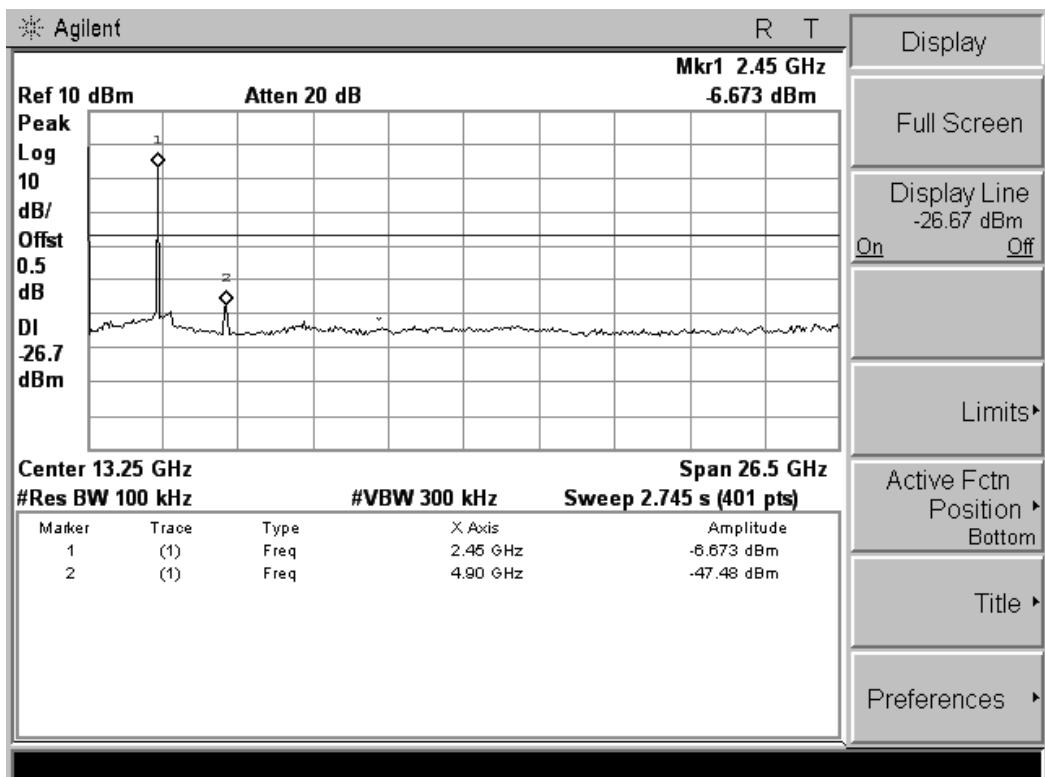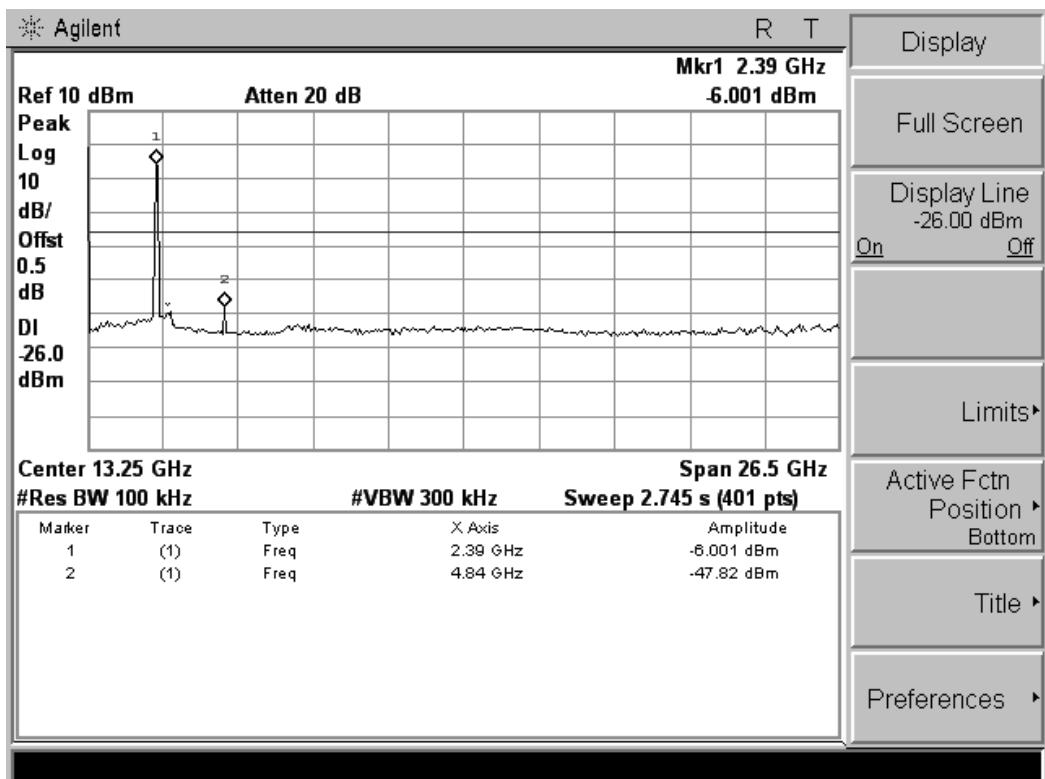802.11n HT20

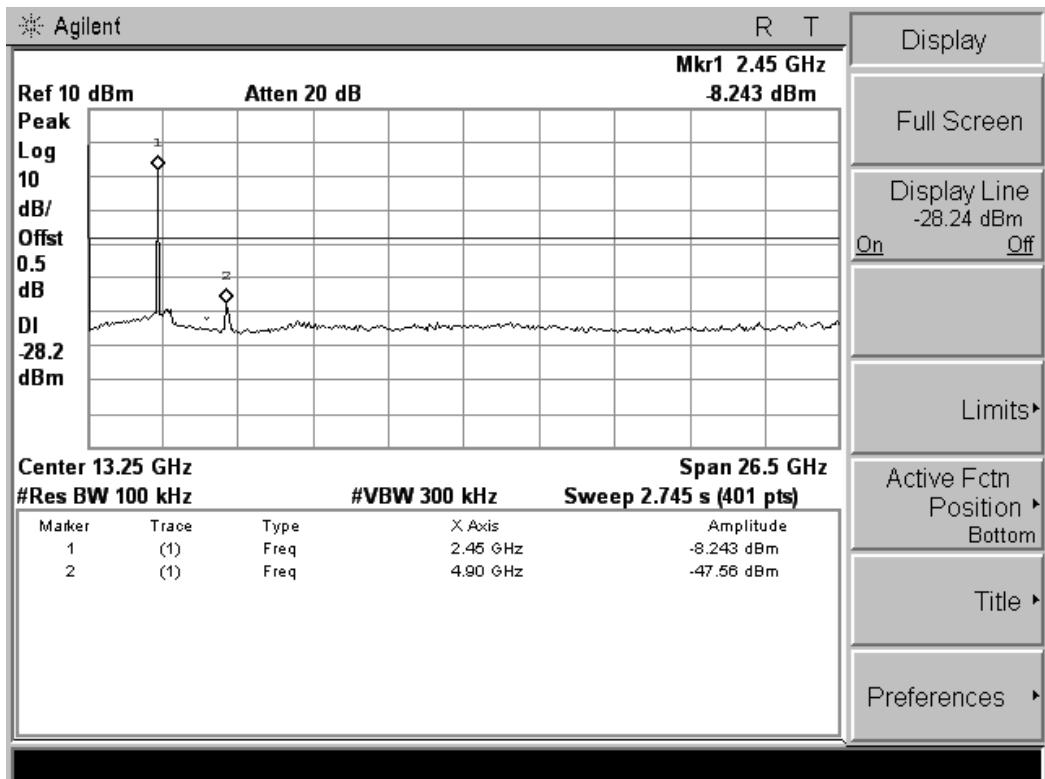



802.11n HT40


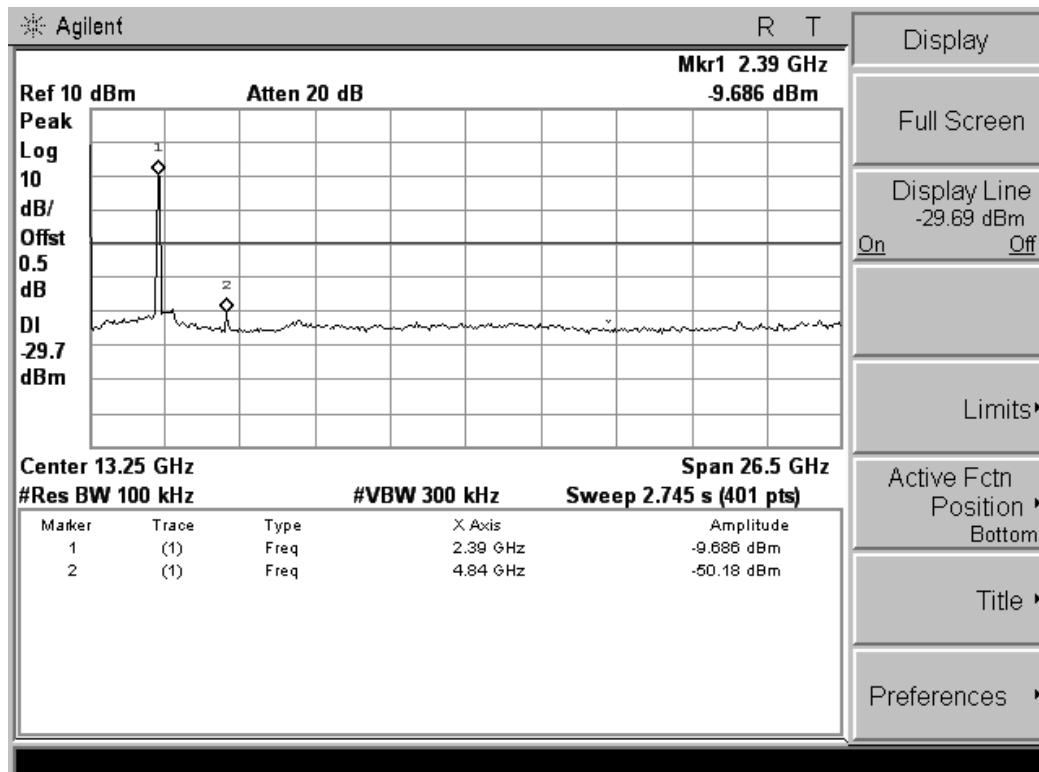


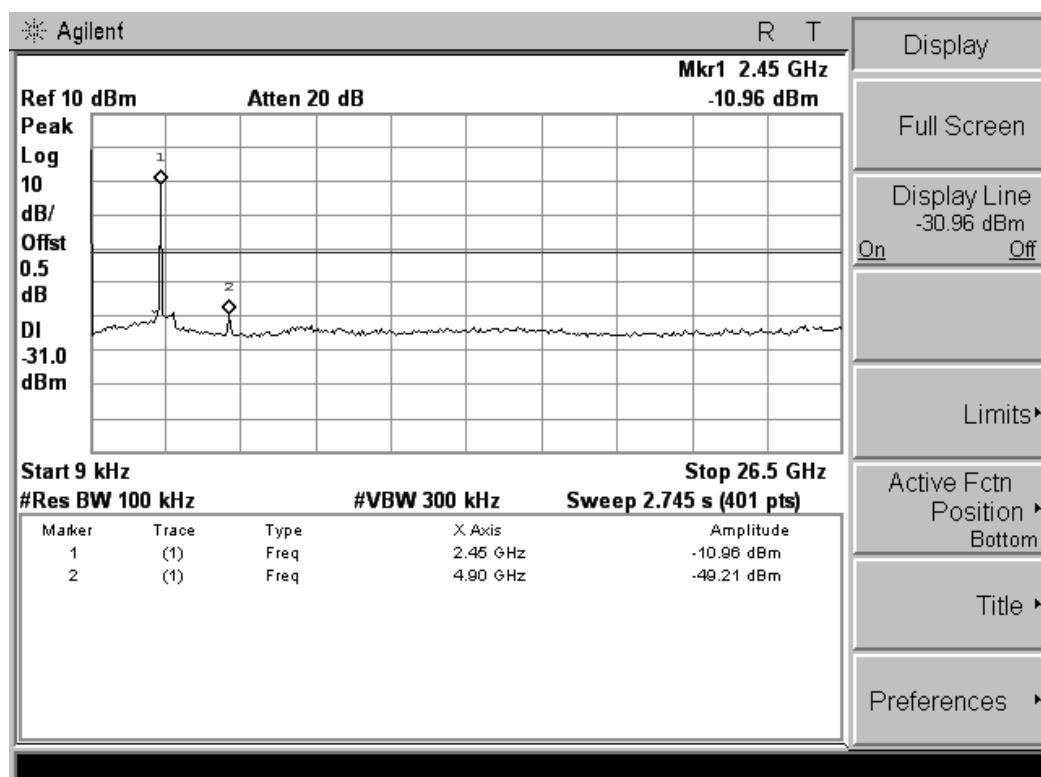
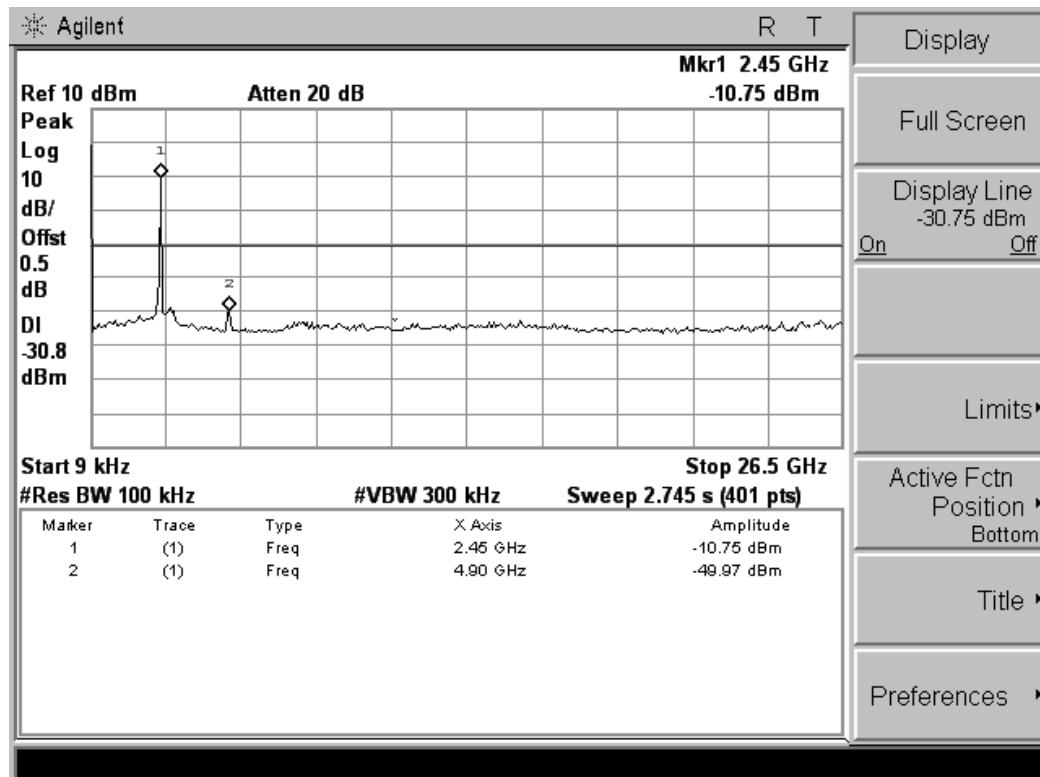




5.6.7. Test Results of Band Edges Test

802.11b

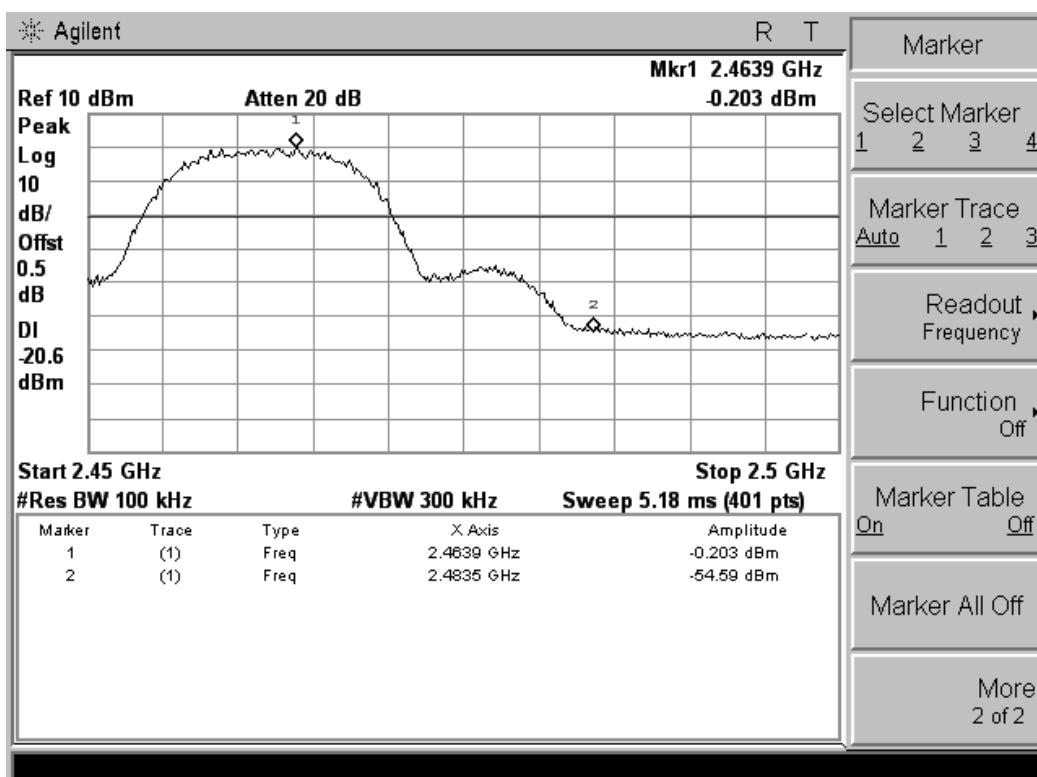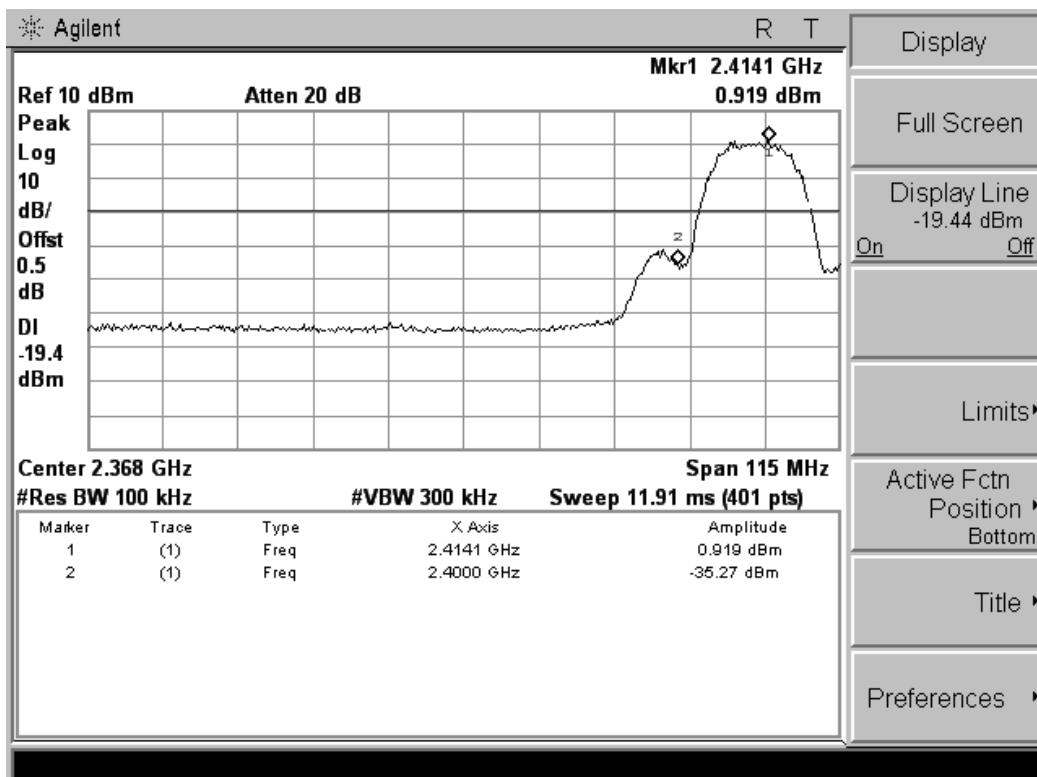

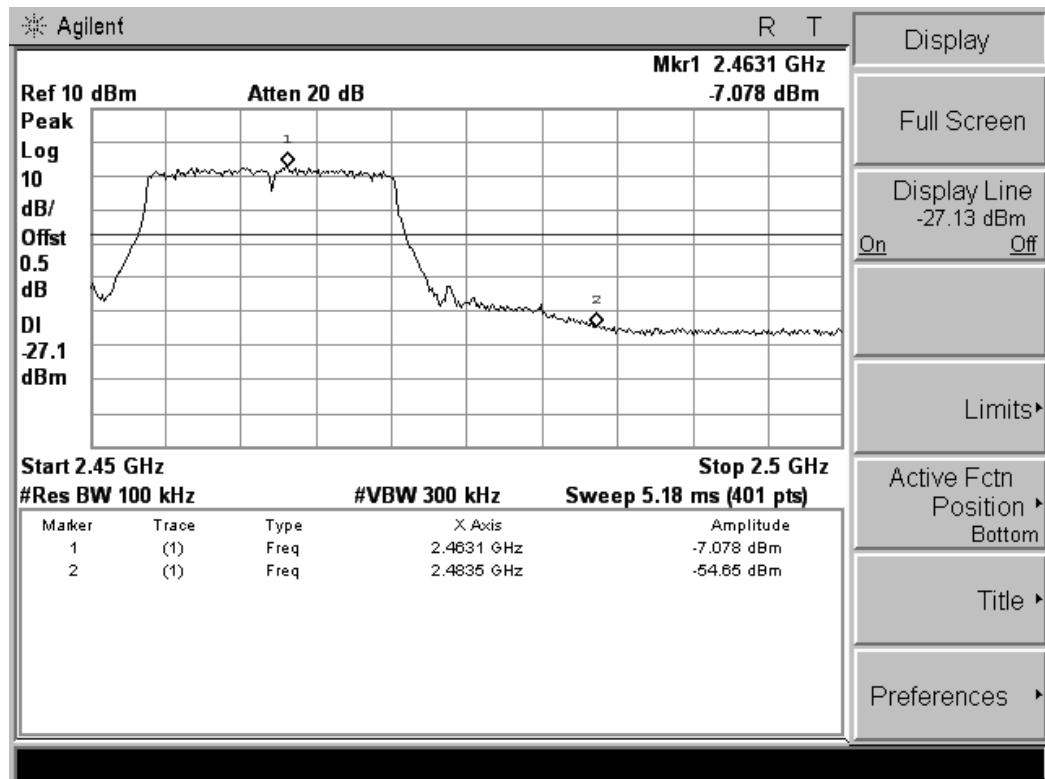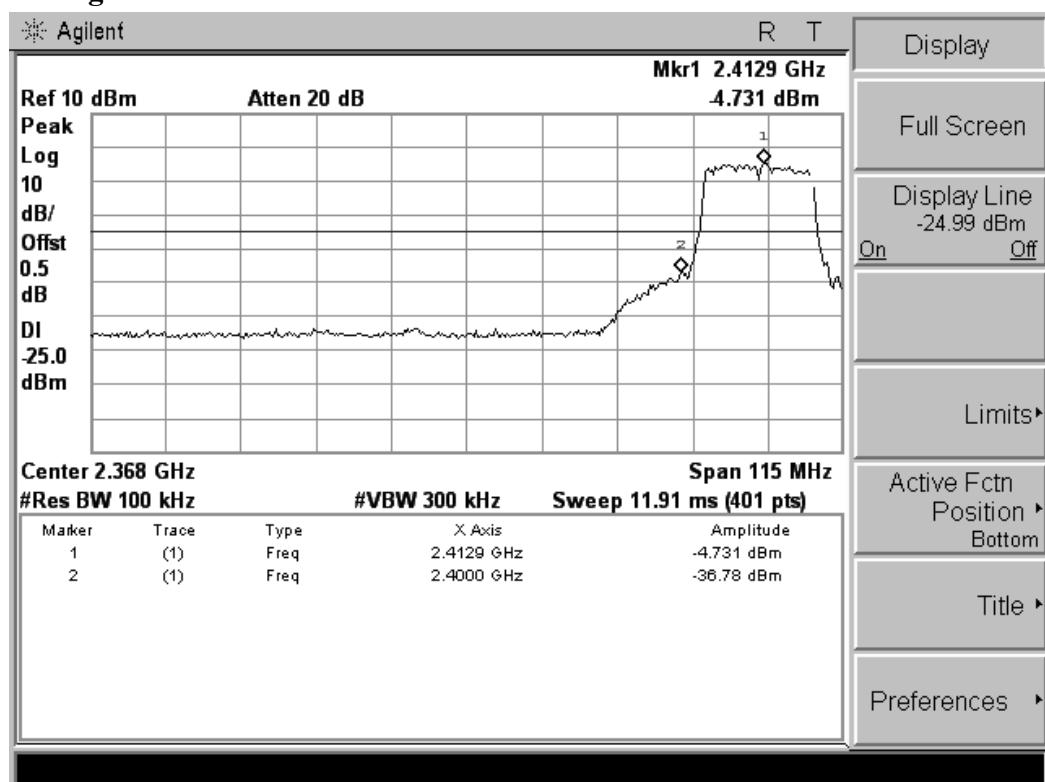802.11g

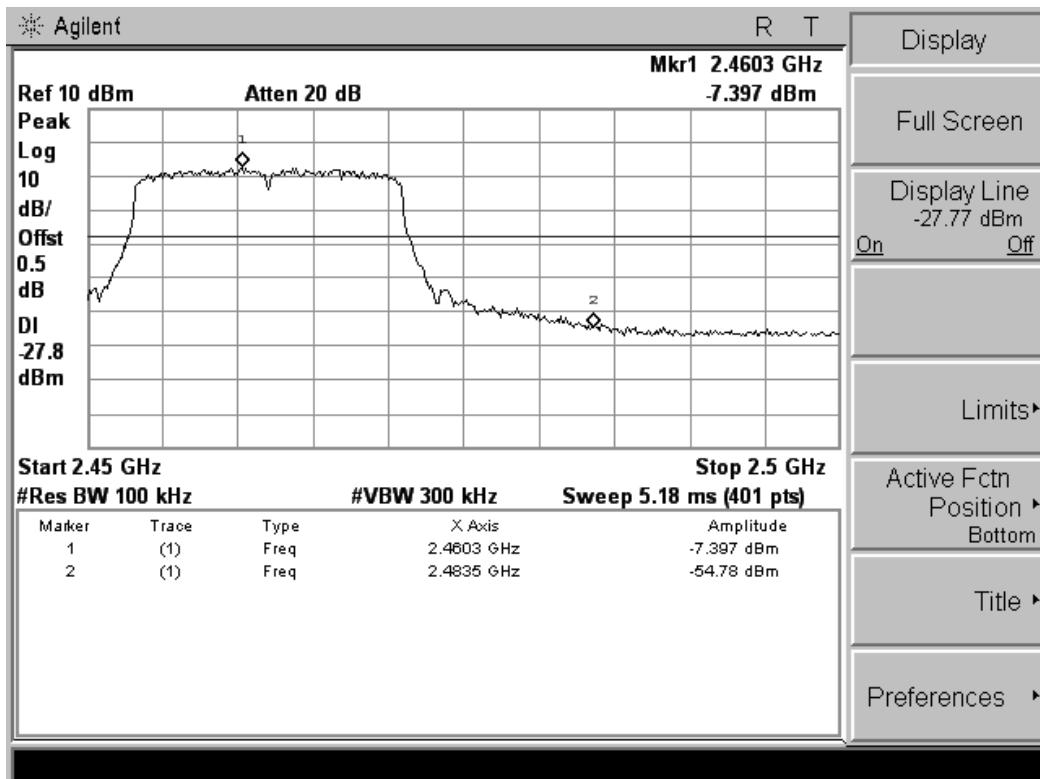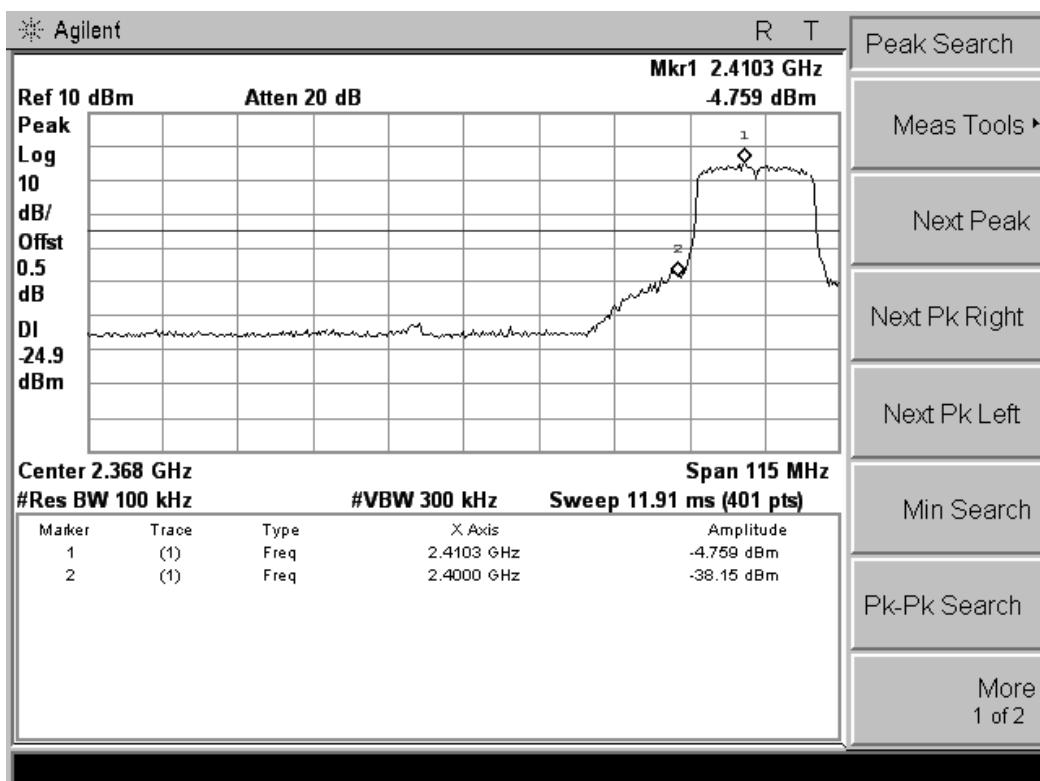802.11n HT20

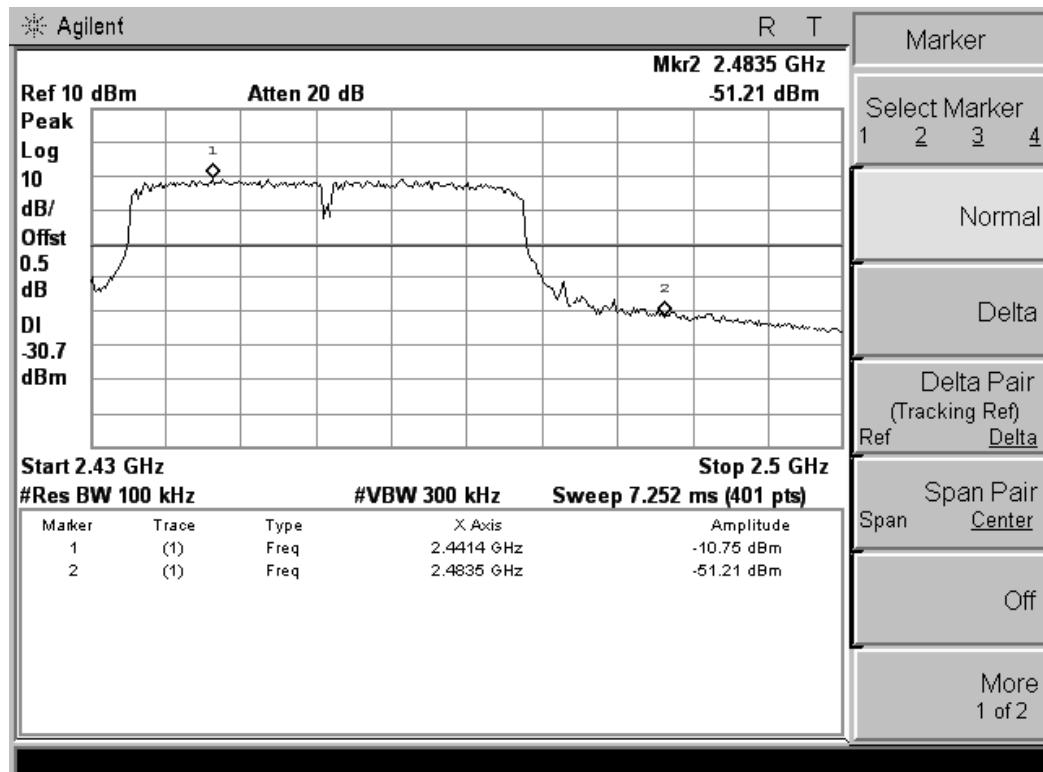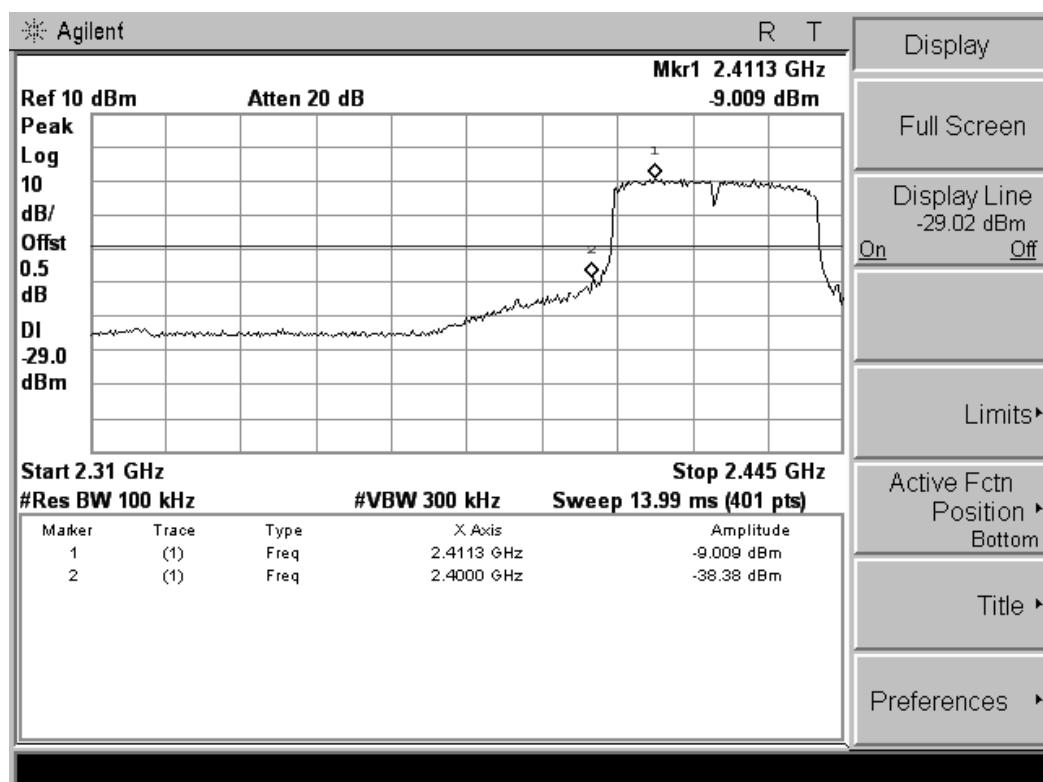802.11n HT40


5.7. Power line conducted emissions

5.7.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|--------------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

5.7.2 Block Diagram of Test Setup


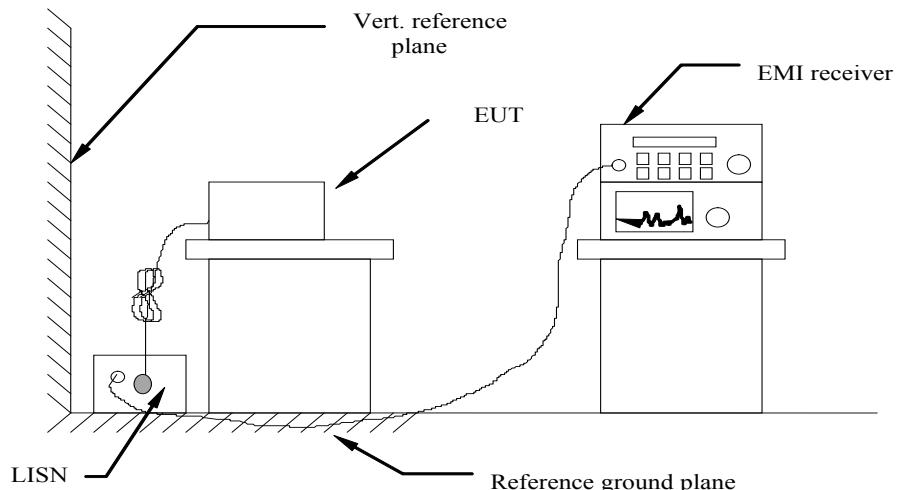


5.7.3 Test Results

PASS.

The test data please refer to following page.

Test result for 802.11b (High Channel)

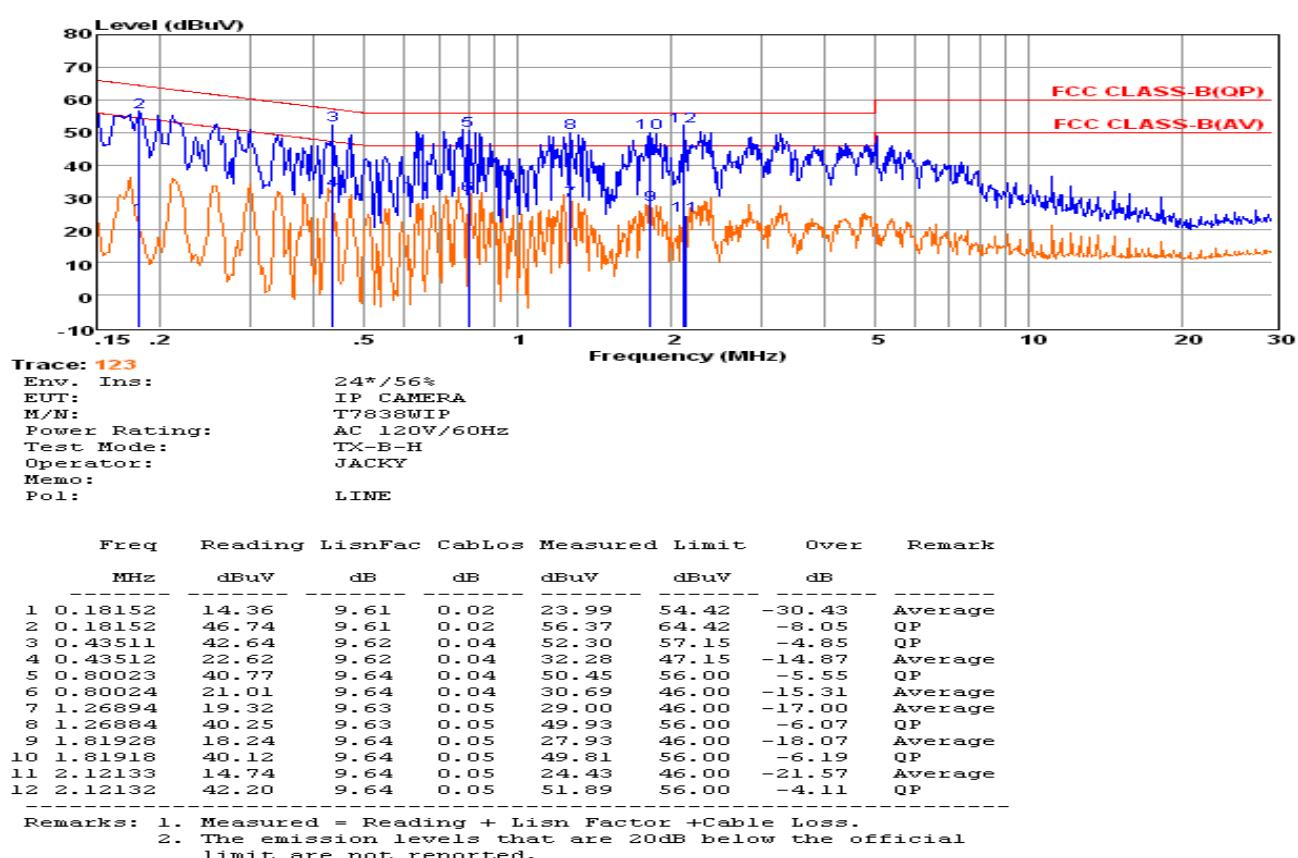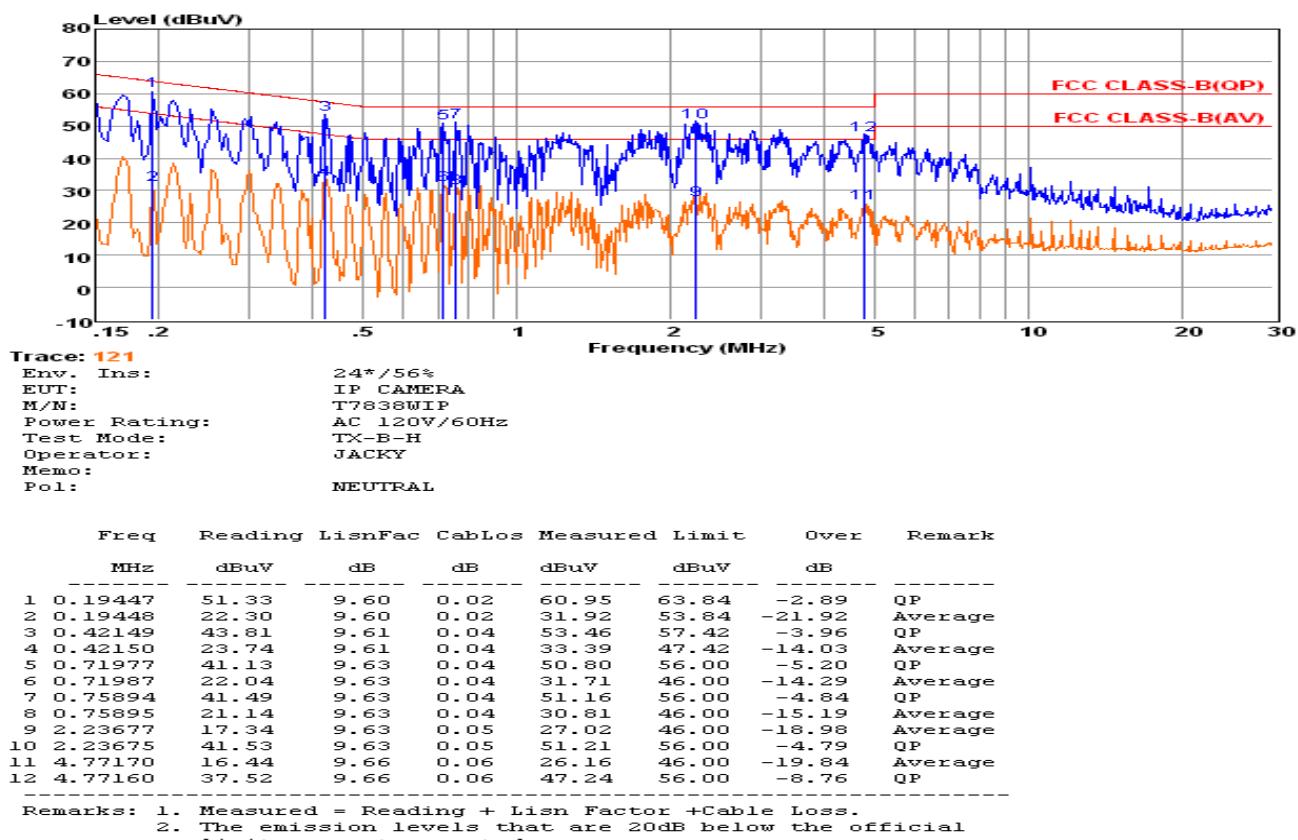

***Note: Pre-scan all mode and recorded the worst case results in this report (802.11b (Low Channel)).

5.8. Antenna Requirements

5.8.1. Standard Applicable

According to § 15.203 & RSS-Gen, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.8.2. Antenna Connector Construction

The detachable antenna (which max. gain is 2.0dBi) is a RP-SMA. Please see EUT photo for details.

5.8.3. Results: Compliance.

6. LIST OF MEASURING EQUIPMENTS

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Cal Date | Due Date |
|-------------------------------|----------------|----------------------------------|-------------|-----------------|--------------|--------------|
| EMC Receiver | R&S | ESCS 30 | 100174 | 9kHz – 2.75GHz | June 18,2013 | June 17,2014 |
| Signal analyzer | Agilent | E4448A(External mixers to 40GHz) | US44300469 | 9kHz~40GHz | July 16,2013 | July 15,2014 |
| LISN | MESS Tec | NNB-2/16Z | 99079 | 9KHz-30MHz | June 18,2013 | June 17,2014 |
| LISN (Support Unit) | EMCO | 3819/2NM | 9703-1839 | 9KHz-30MHz | June 18,2013 | June 17,2014 |
| RF Cable-CON | UTIFLEX | 3102-26886-4 | CB049 | 9KHz-30MHz | June 18,2013 | June 17,2014 |
| ISN | SCHAFFNER | ISN ST08 | 21653 | 9KHz-30MHz | June 18,2013 | June 17,2014 |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH03-HY | 30M-1GHz 3m | June 18,2013 | June 17,2014 |
| Amplifier | SCHAFFNER | COA9231A | 18667 | 9kHz-2GHz | June 18,2013 | June 17,2014 |
| Amplifier | Agilent | 8449B | 3008A02120 | 1GHz-26.5GHz | July 16,2013 | July 15,2014 |
| Amplifier | MITEQ | AMF-6F-260400 | 9121372 | 26.5GHz-40GHz | July 16,2013 | July 15,2014 |
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | 9k-26.5GHz | July 16,2013 | July 15,2014 |
| Loop Antenna | R&S | HFH2-Z2 | 860004/001 | 9k-30MHz | June 18,2013 | June 17,2014 |
| By-log Antenna | SCHWARZBECK | VULB9163 | 9163-470 | 30MHz-1GHz | June 10,2013 | June 09,2014 |
| Horn Antenna | EMCO | 3115 | 6741 | 1GHz-18GHz | June 10,2013 | June 09,2014 |
| Horn Antenna | SCHWARZBECK | BBHA9170 | BBHA9170154 | 15GHz-40GHz | June 10,2013 | June 09,2014 |
| RF Cable-R03m | Jye Bao | RG142 | CB021 | 30MHz-1GHz | June 18,2013 | June 17,2014 |
| RF Cable-HIGH | SUHNER | SUCOFLEX 106 | 03CH03-HY | 1GHz-40GHz | June 18,2013 | June 17,2014 |
| Spectrum Meter | R&S | FSP 30 | 100023 | 9kHz-30GHz | July 16,2013 | July 15,2014 |
| Power Meter | R&S | NRVS | 100444 | DC-40GHz | June 18,2013 | June 17,2014 |
| Power Sensor | R&S | NRV-Z51 | 100458 | DC-30GHz | June 18,2013 | June 17,2014 |
| Power Sensor | R&S | NRV-Z32 | 10057 | 30MHz-6GHz | June 18,2013 | June 17,2014 |
| AC Power Source | HPC | HPA-500E | HPA-9100024 | AC 0~300V | June 18,2013 | June 17,2014 |
| DC power Soure | GW | GPC-6030D | C671845 | DC 1V-60V | June 18,2013 | June 17,2014 |
| Temp. and Humidig | Giant Force | GTH-225-20-S | MAB0103-00 | N/A | June 18,2013 | June 17,2014 |
| RF CABLE-1m | JYE Bao | RG142 | CB034-1m | 20MHz-7GHz | June 18,2013 | June 17,2014 |
| RF CABLE-2m | JYE Bao | RG142 | CB)35-2m | 20MHz-1GHz | June 18,2013 | June 17,2014 |
| Vector signal Generator | R&S | SMU200A | 102098 | 100kHz~6GHz | June 18,2013 | June 17,2014 |
| Signal Generator | R&S | SMR40 | 10016 | 10MHz~40GHz | July 16,2013 | July 15,2014 |
| Universal Radio Communication | R&S | CMU200 | 112012 | N/A | July 18,2013 | July 17,2014 |

Note: All equipment through GRT EST calibration

7. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following series model(s):

| | | | |
|-------------|----------|----------|----------|
| T7835WIP | T6835WIP | T7837WIP | T7821WIP |
| T7833WIP-X3 | | | |

Belong to the tested device:

Product description : IP CAMERA

Model name : T7838WIP

Remark: PCB board, structure and internal of these model(s) are the same,
So no additional models were tested.

-----THE END OF REPORT-----