



EMC TEST REPORT

Report No.: SET2021-06958

Product Name: Pulse Oximeter

Model No. : CMS50DA

FCC ID: 2ABOGCMS50DA

Applicant: Contec Medical Systems Co., Ltd.

Address: No.112 Qinhuang West Street, Qinhuangdao, China

Received Date: 2021.02.25

Dates of Testing: 2021.02.25 —2021.03.03

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **16** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Pulse Oximeter

Model No. CMS50DA

Trade name **CONTEC™**

Applicant..... Contec Medical Systems Co., Ltd

Applicant Address..... No.112 Qinhuang West Street, Qinhuangdao, China

Manufacturer Contec Medical Systems Co., Ltd

Manufacturer Address No.112 Qinhuang West Street, Qinhuangdao, China

Test Standards..... 47 CFR Part 15 Subpart B

Test Result..... PASS

Tested by Zhang Pei Sen

Pei Sen Zhang Test Engineer 2021.06.03

Reviewed by Chris You

Chris You Senior Engineer 2021.06.03

Approved by Shuangwen Zhang

Shuangwen Zhang, Manager 2021.06.03



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING7**
- 2.1 Test Peripherals7**
- 2.2 Test Mode7**
- Test Setup and Equipments List8**
- 2.2.1 Radiated Emission8
- 3. 47 CFR PART 15B REQUIREMENTS10**
- 3.1 Radiated Emission10**
- 3.1.1 Requirement10
- 3.1.2 Test Description11
- 3.1.3 Test Result11

Change History		
Issue	Date	Reason for change
1.0	2021.06.03	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Pulse Oximeter
Trade Name.....: **CONTEC™**
Brand Name.....: **CONTEC™**
Power supply.....: Battery
Capacitance: 500mAh
Rated Voltage:3.7V

*Note1:*The EUT is a Pulse Oximeter;

*Note 2:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	N/A
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until April 20th, 2023

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 2.6 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 3.91 dB (k=2)
Uncertainty of Radiated Emission: (1~18GHz)	Uc = 4.5 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
N/A	N/A	N/A	N/A	N/A

Support Cable:

Description	Shield Type	Ferrite Core	Length
N/A	N/A	N/A	N/A

2.2 Test Mode

The EUT have the following typical setups during the test:

Setup 1: EUT Working.


Note: Only worst-case mode setup 1 mode data provide at the report

2.3 Test Setup and Equipment List


2.3.1 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

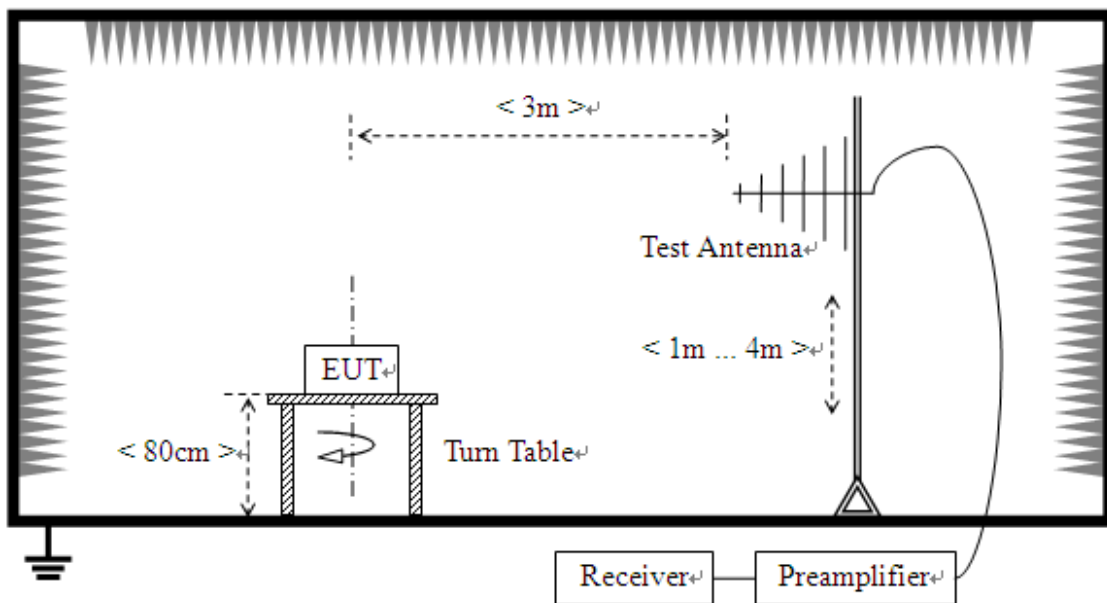

- 2) For radiated emissions above 1GHz

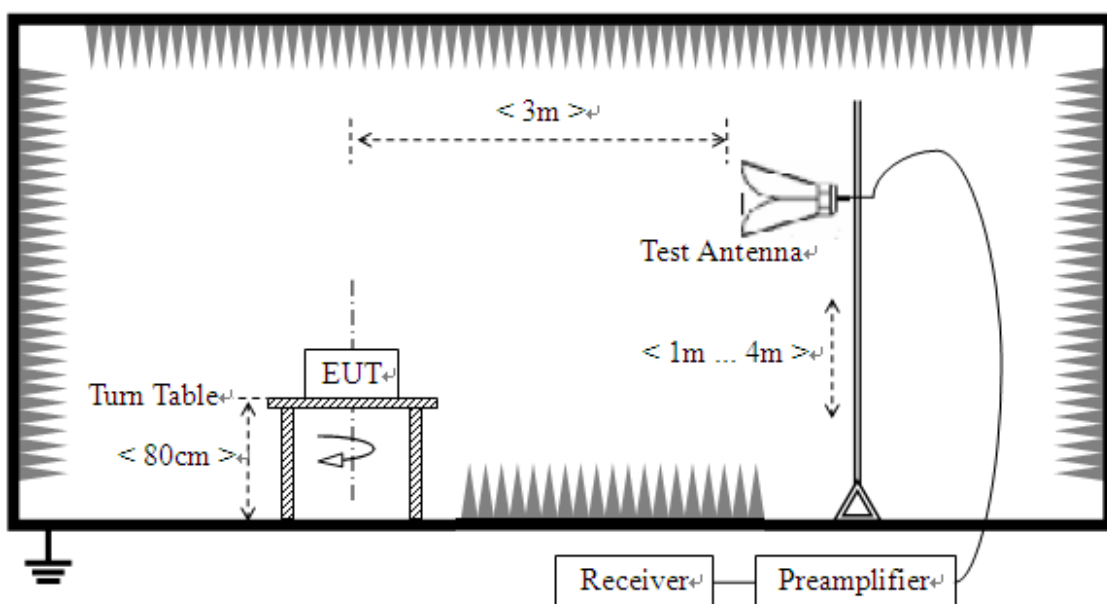

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Software	TS	TS+JS32-RE V2.5.2.0	NA	NA	NA
Test Receiver	KEYSIGHT	N9038A	A141202036	2020.11.21	2021.09.20
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2020.11.21	2021.09.21
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2018.09.06	2021.09.05
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2020.07.01	2021.06.23
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2020.10.21	2021.08.12
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2019.07.30	2021.07.29
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17



3. 47 CFR PART 15B REQUIREMENTS

3.1 Radiated Emission

3.1.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

- a) As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- b) Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- c) For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- d) For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by $20\log \text{Emission Level}(\mu\text{V/m})$.
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$



3.1.2 Test Description

See section 2.3.2 of this report.

3.1.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

Emission Level(dBuV/m)= 20log Emission Level(uV/m)

Corrected Reading=Antenna factor+Cable Loss+Read Level-Preamp Factor= Level




A.Radiation disturbances, antenna polarization:Vertical

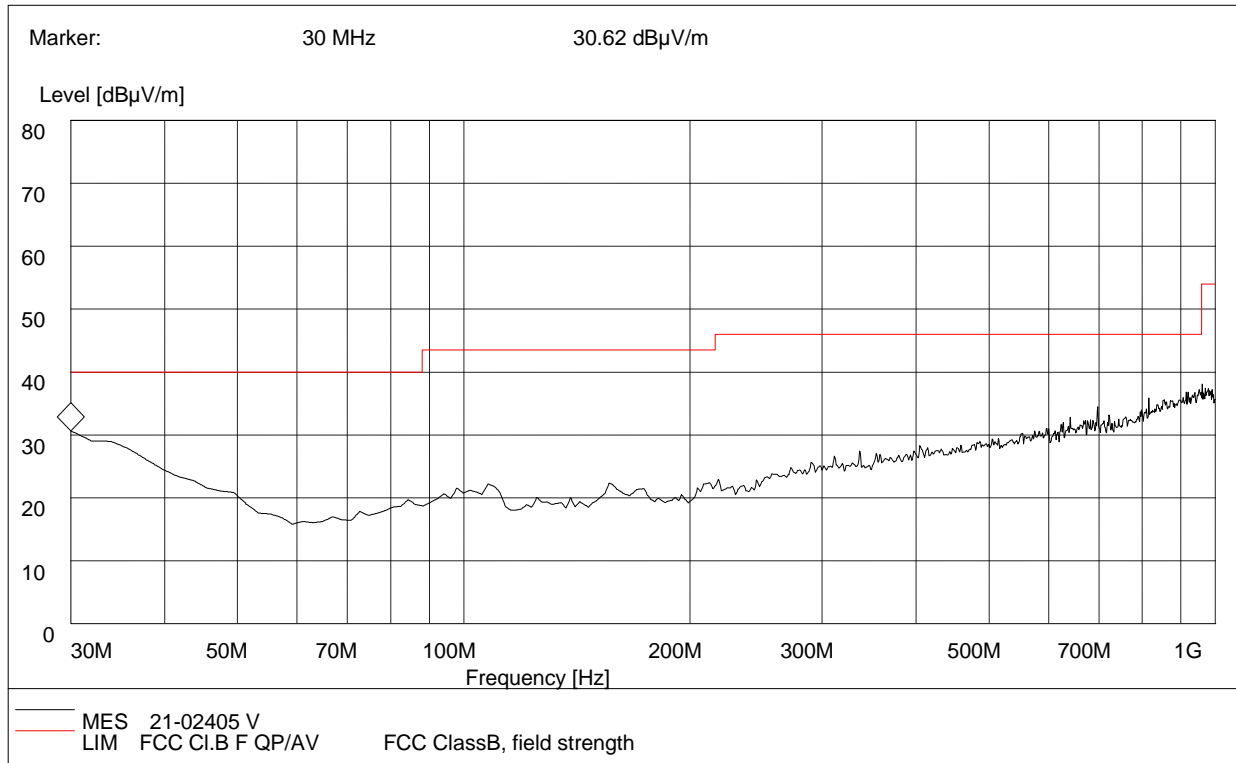

(Plot A: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	28.94	120.000	108	40.0	11.06	Vertical	0.4	26.3	Pass
33.88	27.46	120.000	200	40.0	12.54	Vertical	0.6	26.3	Pass
107.60	22.13	120.000	137	43.5	21.37	Vertical	0.4	26.3	Pass
156.10	22.39	120.000	227	43.5	21.11	Vertical	0.7	29.0	Pass
212.36	22.29	120.000	305	43.5	21.21	Vertical	0.5	29.0	Pass
815.70	32.69	120.000	184	46.0	13.31	Vertical	0.8	29.0	Pass

B.Radiation disturbances, antenna polarization: Horizontal

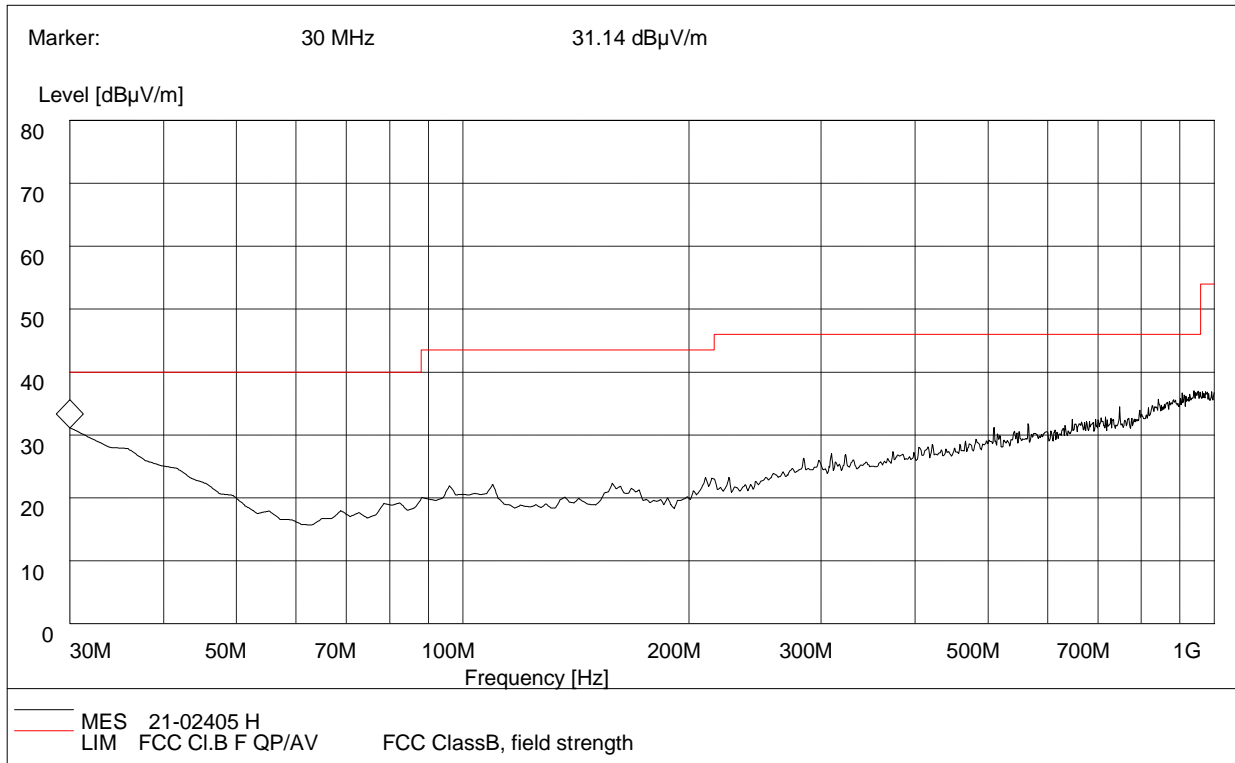


(Plot B: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	29.16	120.000	144	40.0	10.84	Horizontal	0.5	26.3	Pass
35.82	25.79	120.000	168	40.0	14.21	Horizontal	0.5	27.4	Pass
41.64	23.16	120.000	241	40.0	16.84	Horizontal	0.6	29.0	Pass
95.96	21.49	120.000	225	43.5	22.01	Horizontal	0.5	28.3	Pass
109.54	22.02	120.000	139	43.5	21.48	Horizontal	0.4	29.4	Pass
158.04	22.21	120.000	108	43.5	21.29	Horizontal	1.0	28.9	Pass

Test Result: PASS


A.Radiation disturbances, antenna polarization: Horizontal

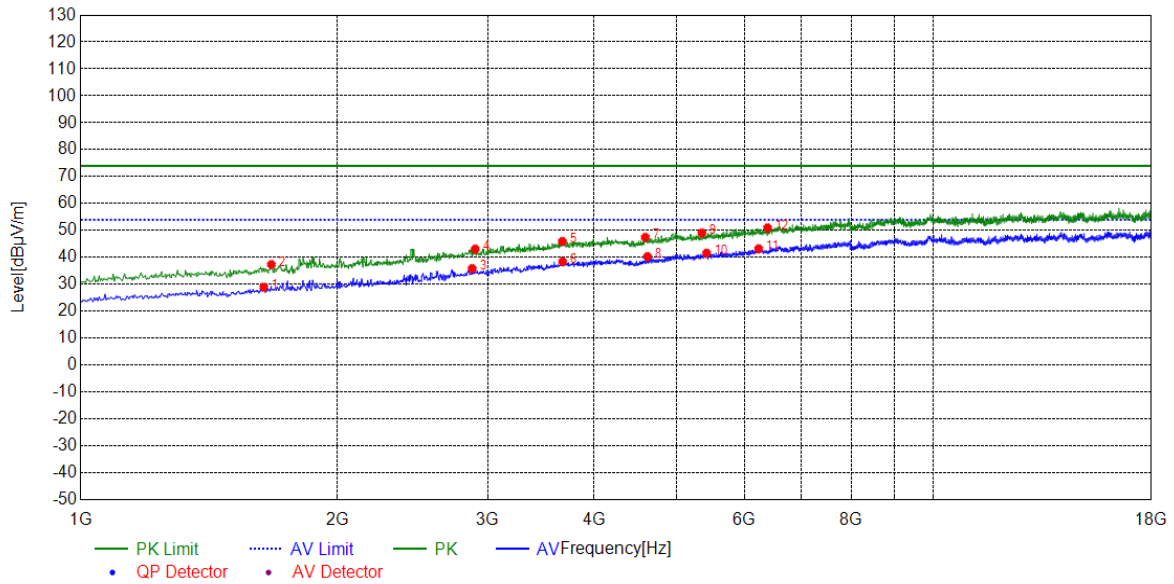

(Plot C: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1639.32	28.95	54.00	25.05	AV	100	70	Horizontal
2	1673.33	37.36	74.00	36.64	PK	100	160	Horizontal
3	2877.17	35.87	54.00	18.13	AV	100	280	Horizontal
4	2900.98	43.11	74.00	30.89	PK	100	40	Horizontal
5	3669.53	45.95	74.00	28.05	PK	100	230	Horizontal
6	3672.93	38.43	54.00	15.57	AV	100	40	Horizontal
7	4591.11	47.45	74.00	26.55	PK	100	240	Horizontal
8	4618.32	40.31	54.00	13.69	AV	100	40	Horizontal
9	5349.46	49.08	74.00	24.92	PK	100	360	Horizontal
10	5417.48	41.61	54.00	12.39	AV	100	230	Horizontal
11	6233.64	43.23	54.00	10.77	AV	100	210	Horizontal
12	6386.67	51.00	74.00	23.00	PK	100	360	Horizontal

B.Radiation disturbances, antenna polarization: Vertical

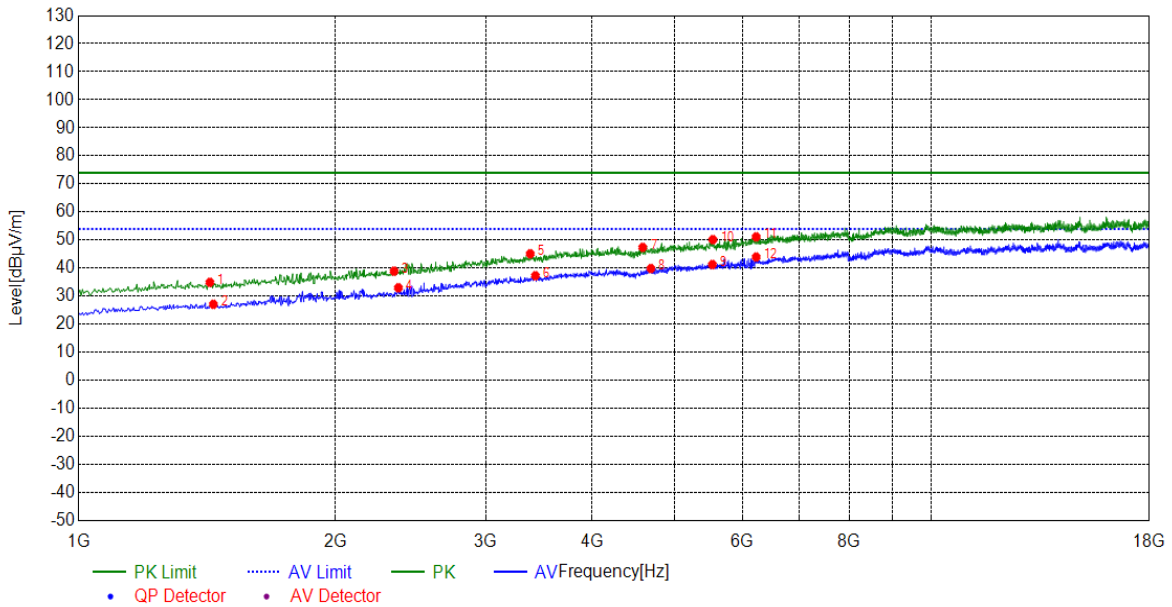

(Plot D: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1425.08	34.94	74.00	39.06	PK	100	100	Vertical
2	1438.68	27.12	54.00	26.88	AV	100	240	Vertical
3	2343.26	38.94	74.00	35.06	PK	100	120	Vertical
4	2370.47	33.01	54.00	20.99	AV	100	270	Vertical
5	3383.87	45.12	74.00	28.88	PK	100	100	Vertical
6	3431.48	37.31	54.00	16.69	AV	100	240	Vertical
7	4584.31	47.40	74.00	26.60	PK	100	150	Vertical
8	4686.33	39.87	54.00	14.13	AV	100	340	Vertical
9	5533.10	41.31	54.00	12.69	AV	100	320	Vertical
10	5539.90	50.16	74.00	23.84	PK	100	180	Vertical
11	6226.84	51.15	74.00	22.85	PK	100	130	Vertical
12	6226.84	43.98	54.00	10.02	AV	100	140	Vertical

-----End of Report-----