



EMC TEST REPORT

Report No.: SET2021-10838

Product Name: Pulse Oximeter

FCC ID: 2ABOGCMS50Q1

Model No. : CMS50Q1

Applicant: Contec Medical Systems Co., Ltd.

Address: No. 112 Qinhuang West Street Qinhuangdao China

Dates of Testing: 2021.08.11 —2021.08.24

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of **20** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name..... Pulse Oximeter

Model No. CMS50Q1

Trade name **CONTEC™**

Brand name **CONTEC™**

Applicant..... Contec Medical Systems Co., Ltd.

Applicant Address..... No. 112 Qinhuang West Street Qinhuangdao China

Manufacturer Contec Medical Systems Co., Ltd.

Manufacturer Address No. 112 Qinhuang West Street Qinhuangdao China

Test Standards..... 47 CFR Part 15 Subpart B

Test Result..... PASS

Tested by Zhang Pei Sen

PeiSen Zhang Test Engineer

2021.08.24

Reviewed by Chris You

Chris You Senior Engineer

2021.08.24

Approved by Shuangwen Zhang

Shuangwen Zhang, Manager

2021.08.24



TABLE OF CONTENTS

- 1. GENERAL INFORMATION4**
- 1.1 EUT Description4**
- 1.2 Test Standards and Results5**
- 1.3 Facilities and Accreditations6**
- 1.3.1 Facilities6
- 1.3.2 Test Environment Conditions6
- 1.3.3 Measurement Uncertainty6
- 2. TEST CONDITIONS SETTING7**
- 2.1 Test Peripherals7**
- 2.2 Use of Software Checklist7**
- 2.3 Test Mode7**
- 2.4 Test Setup and Equipments List8**
- 2.4.1 Radiated Emission8
- RADIATED EMISSION10**
- 2.4.2 Requirement10
- 2.4.3 Test Description10
- 2.4.4 Test Result11
- APPENDIX II: PHOTOGRAPHS OF EMC TEST CONFIGURATION20**

Change History		
Issue	Date	Reason for change
1.0	2021.08.24	First edition



1. GENERAL INFORMATION

1.1 EUT Description

EUT Name : Pulse Oximeter

Trade Name..... : **CONTEC™**

Brand Name..... : **CONTEC™**

Hardware Version..... : N/A

Software Version : N/A

*Note 1:*The EUT is a Pulse Oximeter;

Note 2: Pulse Oximeter has two prototypes, 1# is the original, 2# is not sleeping state, the screen is always on.

*Note 3:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	N/A
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



1.3 Facilities and Accreditations

1.3.1 Facilities

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until April 19th, 2023.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30th, 2023.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 2.6 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 3.91 dB (k=2)
Uncertainty of Radiated Emission: (1~18GHz)	Uc = 4.5 dB (k=2)
Uncertainty of Radiated Emission: (18~40GHz)	Uc = 4.9 dB (k=2)



2. TEST CONDITIONS SETTING

2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

2.2 Use of Software Checklist

Software	Version number	Manufacturer	Use the project
ES-K1	V1.73	ROHDE&SCHWARZ	Radiated Emissions below 1GHz
TS+	JS32-RE 2.5.2.0	Tonsceng	Radiated Emissions above 1GHz

2.3 Test Mode

The EUT have the following typical setups during the test:

Setup1: EUT(display on) working.

Setup2: EUT(Display off)working


Note: the device contains two type working conditions: one is display always on and one is display can idle off

2.4 Test Setup and Equipments List


2.4.1 Radiated Emission

A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

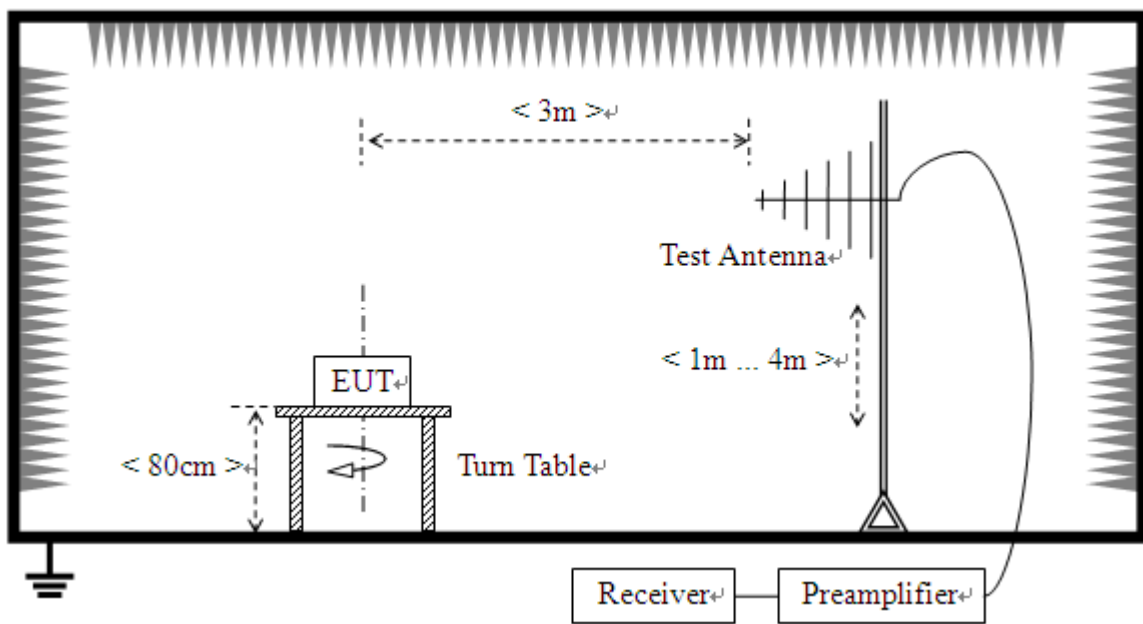

- 2) For radiated emissions above 1GHz

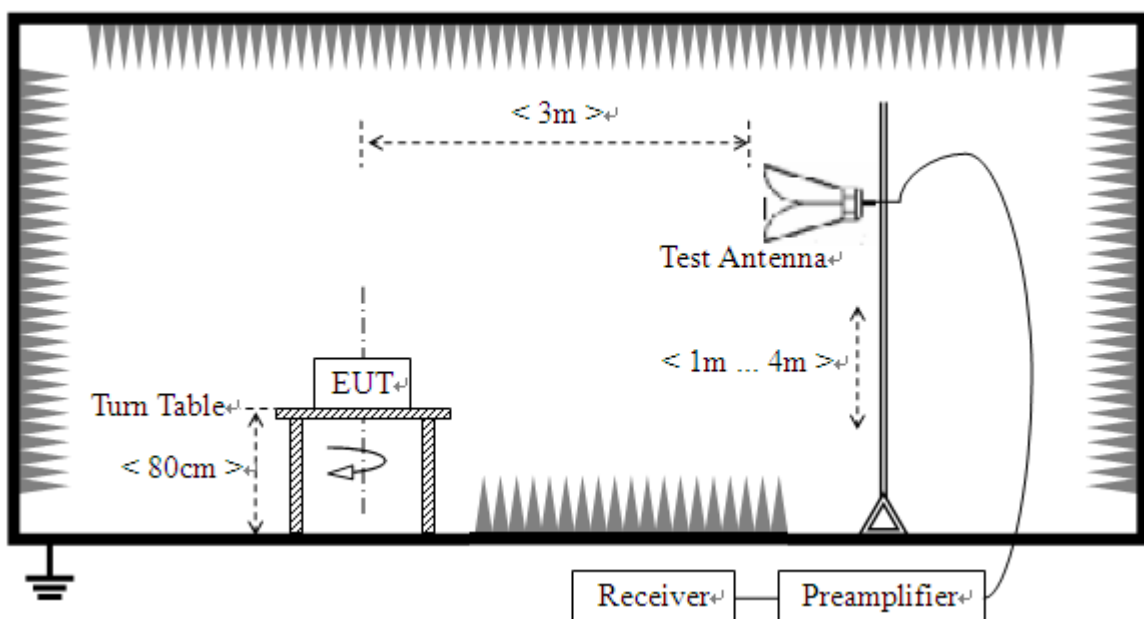

**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2021.06.23	2022.05.23
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2021.08.12	2022.08.02
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2021.07.29	2022.08.02
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17



2.4.2 Radiated Emission

2.4.3 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	($\mu\text{V/m}$)	(dBuV/m)
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in dBuV/m is calculated by $20\log$ Emission Level($\mu\text{V/m}$).
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

2.4.4 Test Description

See section 2.3.2 of this report.



2.4.5 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.


The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

-Emission Level(dBuV/m)= 20log Emission Level(uV/m)

-Corrected Reading=Antenna factor+Cable Loss+Read Level-Preamp Factor= Level


A. Radiation disturbances, antenna polarization: Vertical 1#

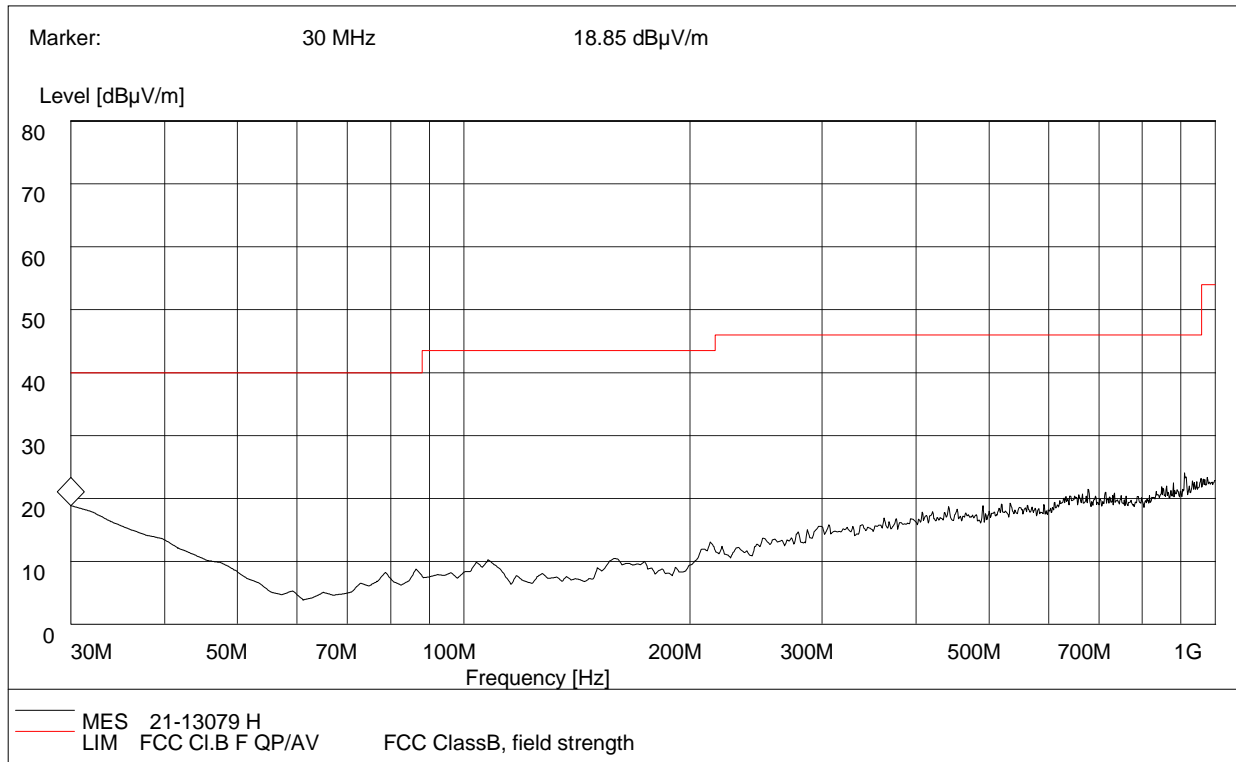

(Plot A: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	18.53	120	100	40.0	21.47	Vertical	0.3	26.0	Pass
78.03	8.25	120	100	40.0	31.75	Vertical	0.4	26.1	Pass
103.21	9.51	120	100	43.5	33.99	Vertical	0.4	26.3	Pass
160.24	10.33	120	100	43.5	33.17	Vertical	0.5	26.4	Pass
212.71	12.03	120	100	43.5	31.47	Vertical	0.6	26.4	Pass
298.25	15.03	120	100	46.0	30.97	Vertical	0.8	27.0	Pass


B.Radiation disturbances, antenna polarization: Horizontal 1#

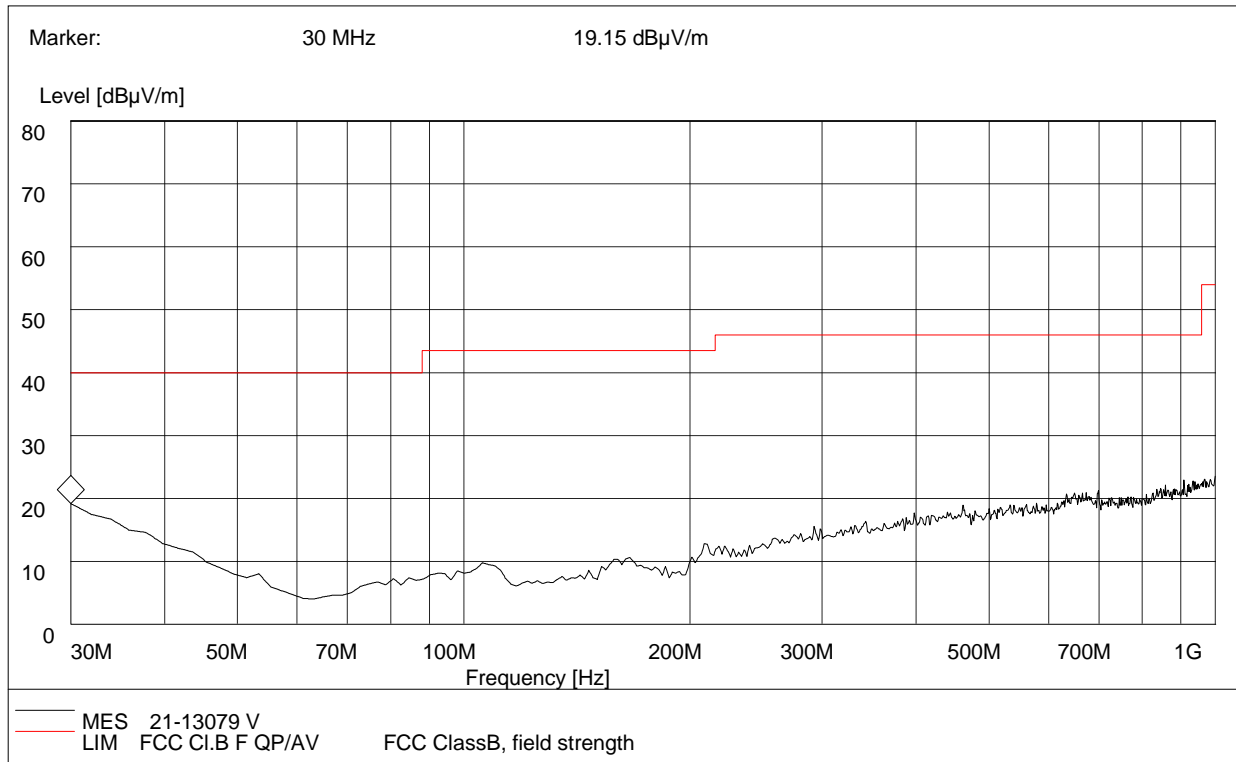

(Plot B: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	19.21	120	100	40.0	20.79	Horizontal	0.4	26.1	Pass
53.03	8.01	120	100	40.0	31.99	Horizontal	0.5	26.2	Pass
107.36	9.14	120	100	40.0	34.36	Horizontal	0.5	26.3	Pass
158.29	10.23	120	100	43.5	33.27	Horizontal	0.6	26.5	Pass
208.31	11.08	120	100	43.5	32.42	Horizontal	0.7	26.8	Pass
292.42	14.09	120	100	43.5	29.41	Horizontal	0.8	27.0	Pass


C.Radiation disturbances, antenna polarization: Vertical 2#

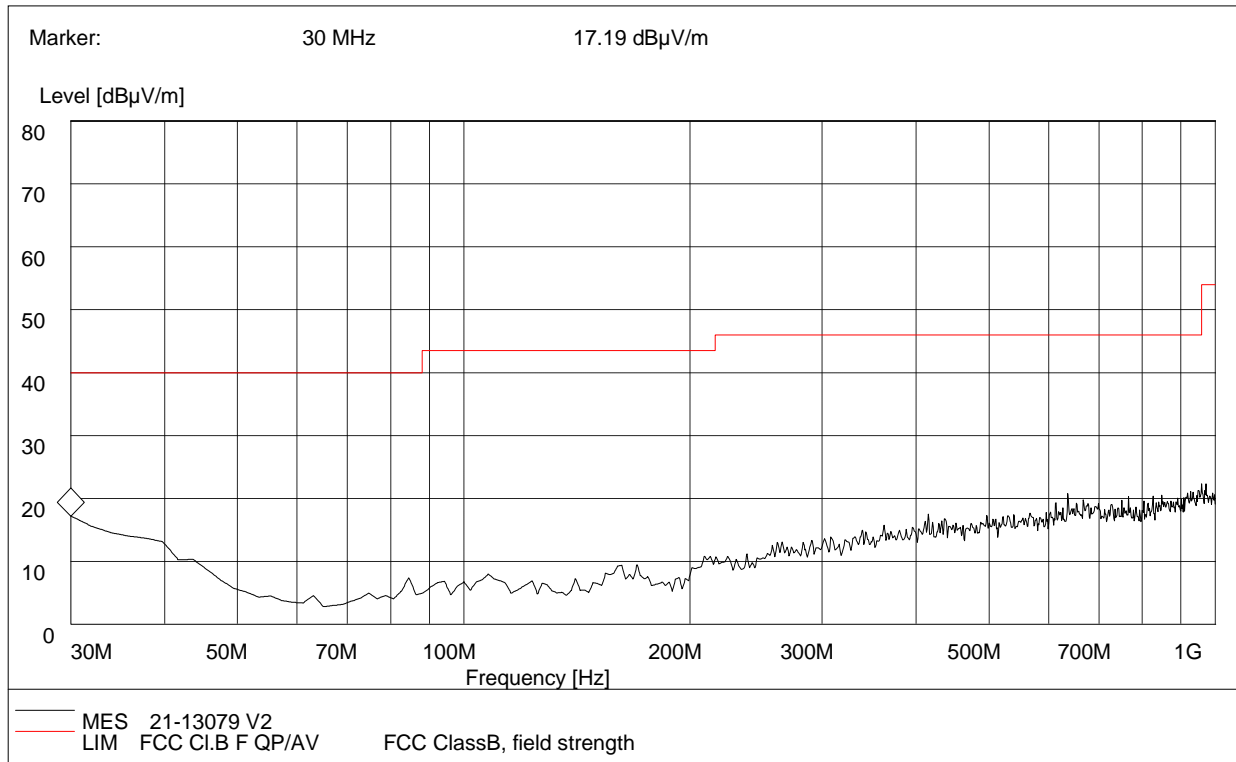

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	17.06	120	100	40.0	22.94	Vertical	0.3	26.0	Pass
39.71	12.06	120	100	40.0	27.94	Vertical	0.4	26.1	Pass
83.04	7.41	120	100	40.0	32.59	Vertical	0.5	26.5	Pass
107.75	8.05	120	100	43.5	35.45	Vertical	0.5	26.4	Pass
162.03	9.35	120	100	43.5	34.15	Vertical	0.6	26.8	Pass
208.23	10.80	120	100	43.5	32.70	Vertical	0.7	27.1	Pass

D.Radiation disturbances, antenna polarization: Horizontal 2#

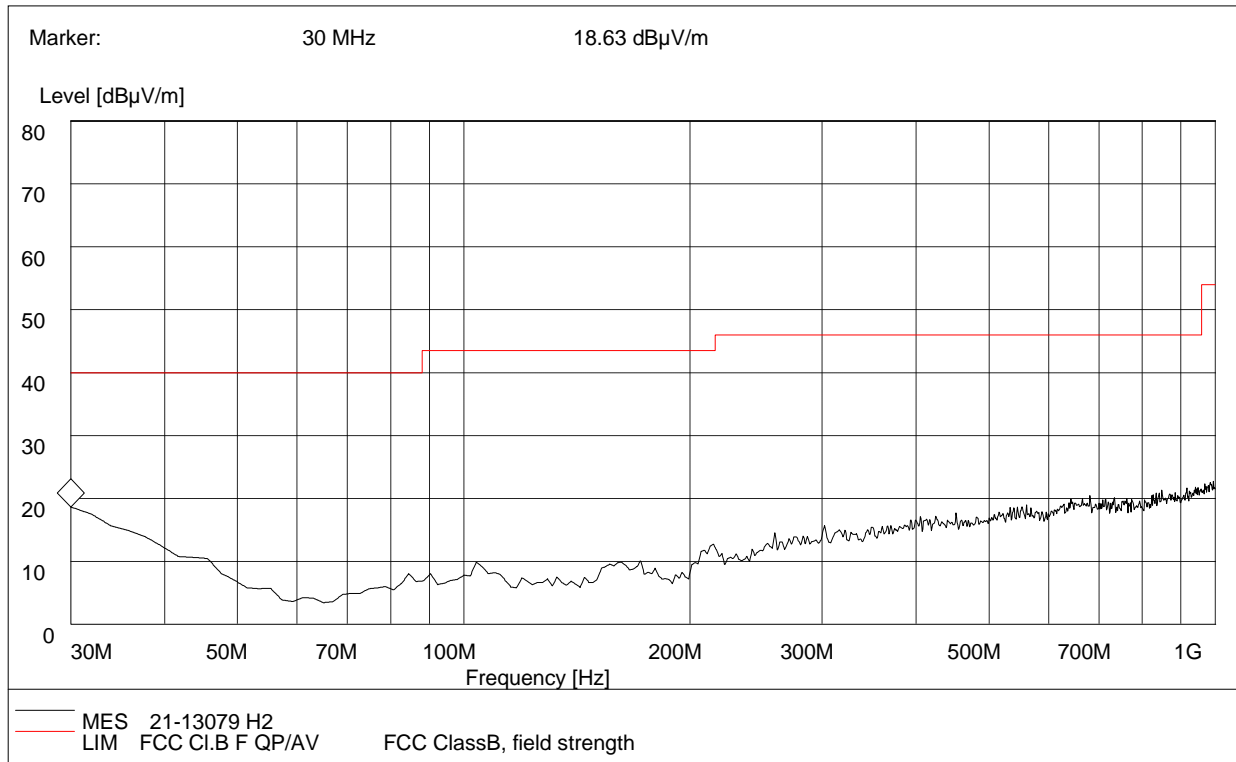


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	18.53	120	100	40.0	21.47	Horizontal	0.4	26.1	Pass
45.25	10.46	120	100	40.0	29.54	Horizontal	0.5	26.2	Pass
84.52	8.01	120	100	40.0	31.99	Horizontal	0.6	26.4	Pass
103.56	9.82	120	100	43.5	33.68	Horizontal	0.6	26.5	Pass
162.03	9.82	120	100	43.5	33.68	Horizontal	0.7	26.5	Pass
214.03	12.75	120	100	43.5	30.75	Horizontal	0.7	27.2	Pass

Test Result: PASS


A.Radiation disturbances, antenna polarization: Horizontal 1#

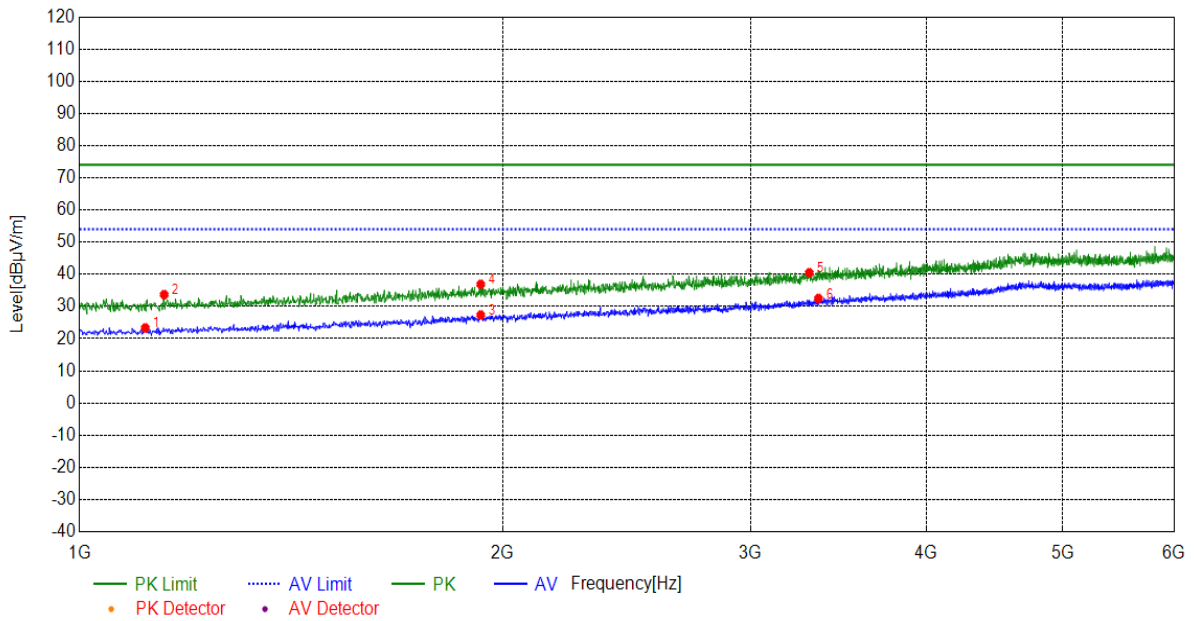

(Plot A: Test Antenna Horizontal 1G – 6G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1113.77	23.34	-15.10	54.00	30.66	AV	100	10	Horizontal
2	1148.78	33.69	-14.98	74.00	40.31	PK	100	10	Horizontal
3	1928.98	27.37	-11.33	54.00	26.63	AV	100	10	Horizontal
4	1928.98	36.90	-11.33	74.00	37.10	PK	100	10	Horizontal
5	3303.07	40.48	-5.81	74.00	33.52	PK	100	10	Horizontal
6	3353.08	32.51	-5.56	54.00	21.49	AV	100	10	Horizontal


B.Radiation disturbances, antenna polarization: Vertical 1#

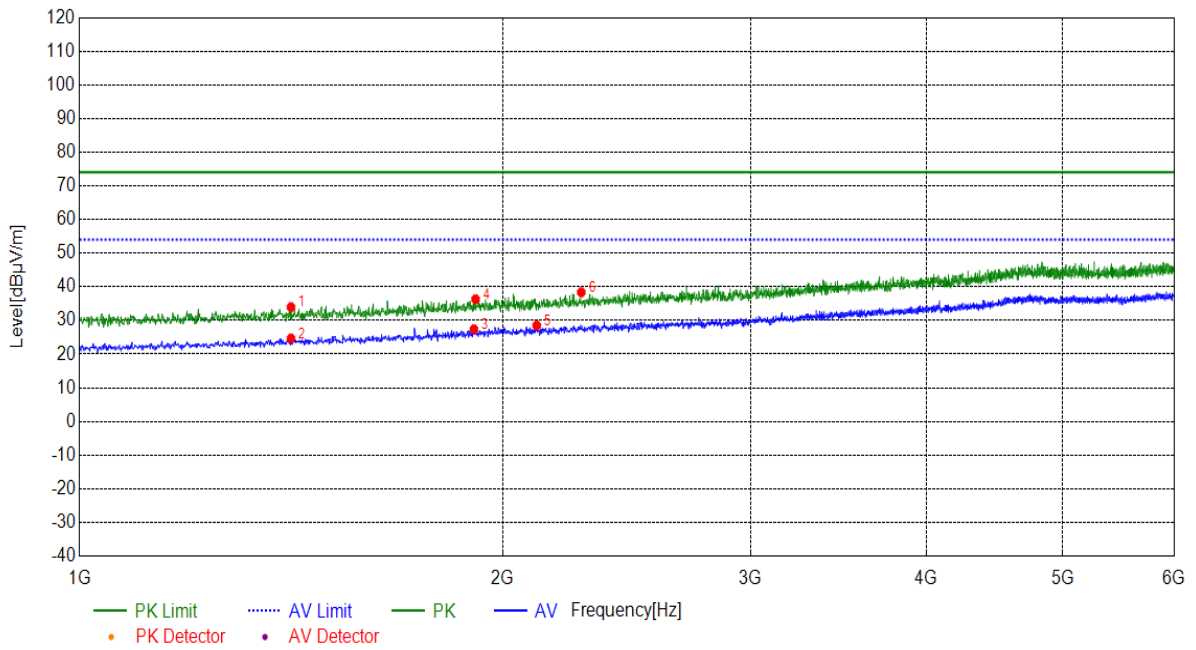

(Plot B: Test Antenna Vertical 1G – 6G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1413.85	33.97	-13.90	74.00	40.03	PK	100	0	Vertical
2	1413.85	24.68	-13.90	54.00	29.32	AV	100	0	Vertical
3	1907.72	27.40	-11.43	54.00	26.60	AV	100	0	Vertical
4	1912.72	36.32	-11.41	74.00	37.68	PK	100	0	Vertical
5	2114.02	28.52	-10.66	54.00	25.48	AV	100	0	Vertical
6	2274.06	38.40	-10.09	74.00	35.60	PK	100	0	Vertical


C.Radiation disturbances, antenna polarization: Horizontal 2#

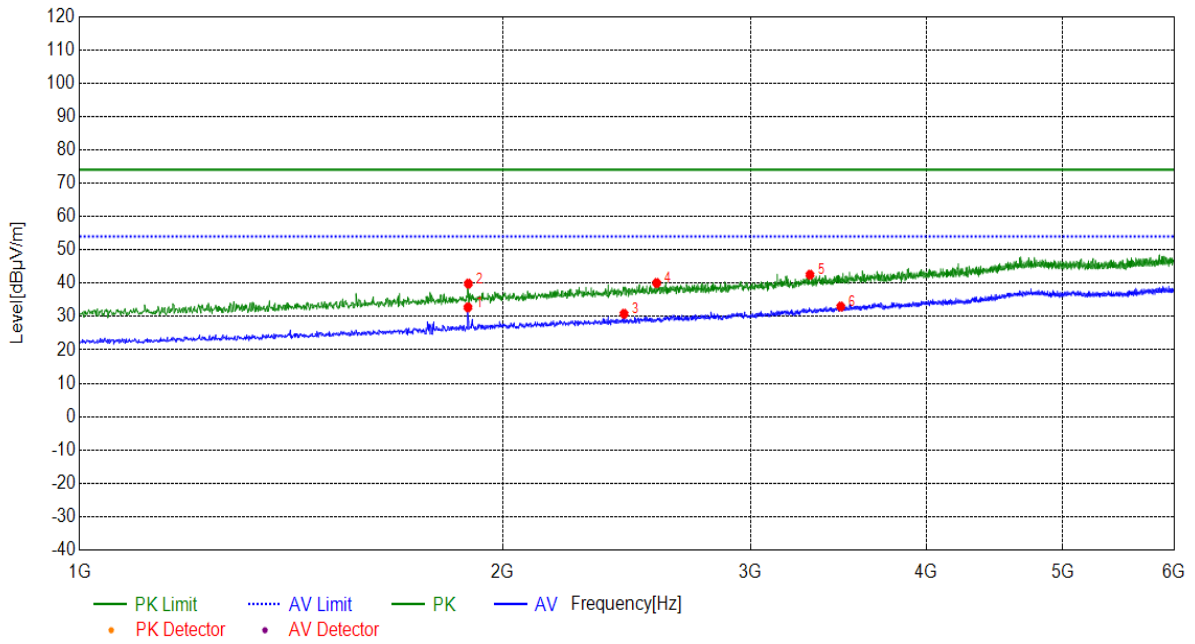

(Plot A: Test Antenna Horizontal 1G – 6G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1888.97	32.78	-11.53	54.00	21.22	AV	100	60	Horizontal
2	1890.22	39.86	-11.52	74.00	34.14	PK	100	60	Horizontal
3	2439.10	30.83	-9.51	54.00	23.17	AV	100	20	Horizontal
4	2572.89	40.07	-9.01	74.00	33.93	PK	100	20	Horizontal
5	3306.82	42.56	-5.80	74.00	31.44	PK	100	80	Horizontal
6	3478.11	33.01	-5.08	54.00	20.99	AV	100	10	Horizontal

D.Radiation disturbances, antenna polarization: Vertical 2#

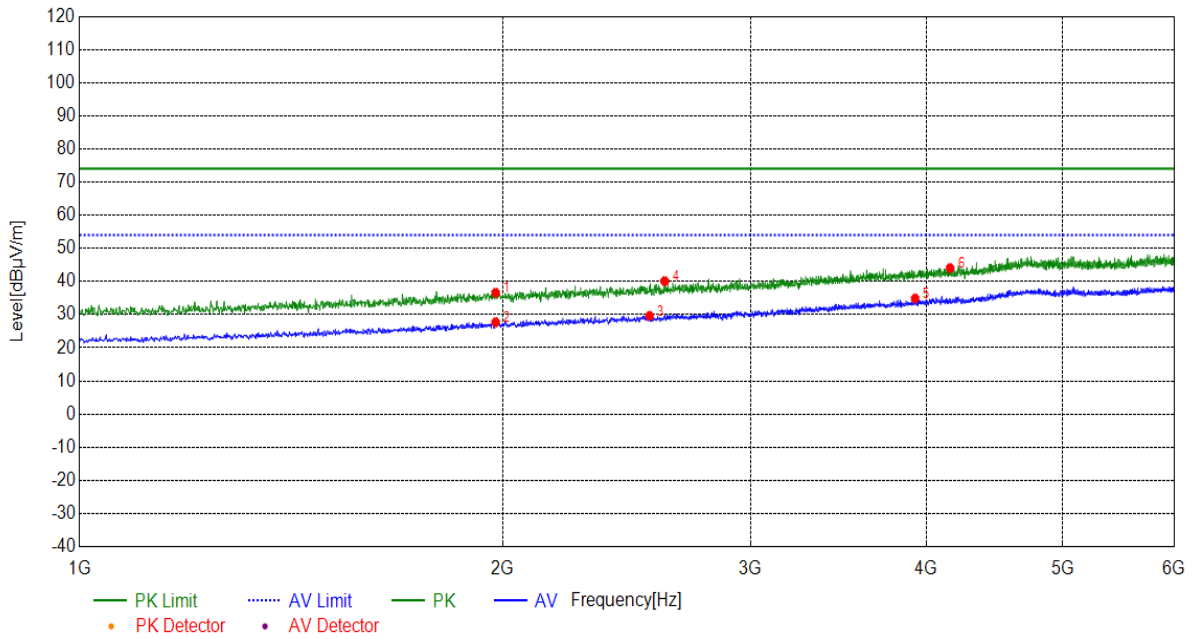

(Plot B: Test Antenna Vertical 1G – 6G)

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1976.49	36.59	-11.10	74.00	37.41	PK	100	20	Vertical
2	1976.49	27.73	-11.10	54.00	26.27	AV	100	10	Vertical
3	2542.88	29.65	-9.10	54.00	24.35	AV	100	10	Vertical
4	2606.65	40.11	-8.88	74.00	33.89	PK	100	10	Vertical
5	3928.23	34.90	-3.49	54.00	19.10	AV	100	20	Vertical
6	4159.53	44.06	-2.74	74.00	29.94	PK	100	20	Vertical


Test Result: PASS

Appendix II: Photographs of EMC Test Configuration

1. Radiated Emission Measurement below 1GHz



2. Radiated Emission Measurement above 1GHz

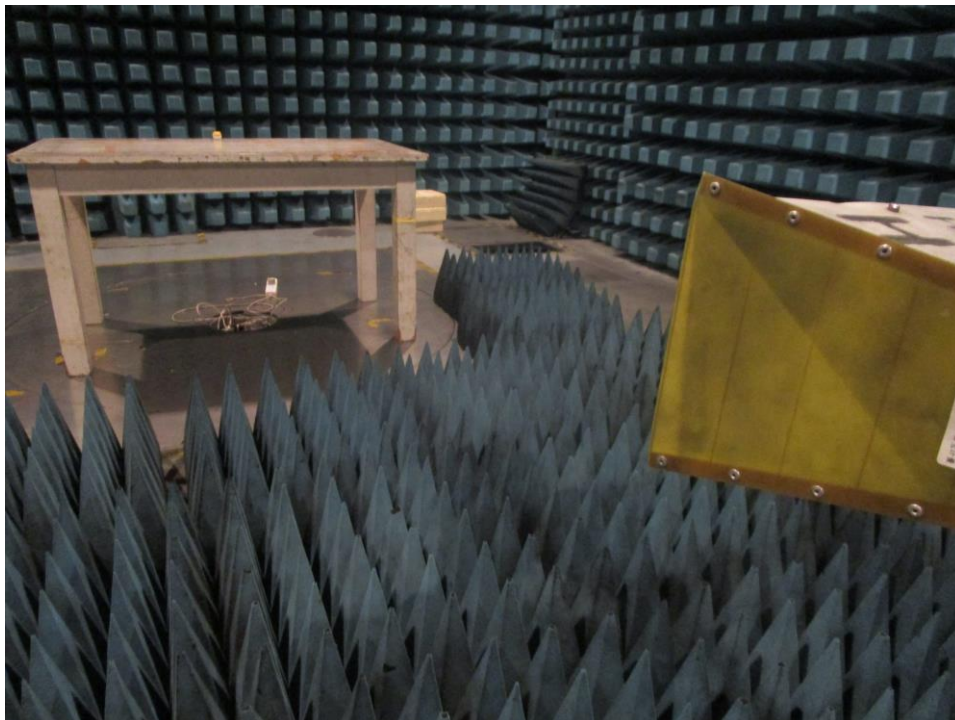

-----End of Report-----