



# Compliance Certification Services Inc.

Report No: C141017S01-SF

FCC ID: 2ABOSSKY60Q

Date of Issue :November 4, 2014

GSM 850-Right Head Cheek Low CH128 .....	3
GSM 850-Right Head Tilted Low CH128.....	4
GSM 850-Left Head Cheek Low CH128 .....	5
GSM 850-Left Head Tilted Low CH128.....	6
PCS 1900-Right Head Cheek Middle CH661 .....	7
PCS 1900-Right Head Tilted Middle CH661 .....	8
PCS 1900-Left Head Cheek Middle CH661 .....	9
PCS 1900-Left Head Tilted Middle CH661.....	10
WCDMA Band II-Right Head Cheek Middle CH9400 .....	11
WCDMA Band II-Right Head Tilted Middle CH9400.....	12
WCDMA Band II-Left Head Cheek Middle CH9400 .....	13
WCDMA Band II-Left Head Tilted Middle CH9400.....	14
WCDMA Band V-Right Head Cheek Middle CH4182.....	15
WCDMA Band V-Right Head Tilted Middle CH4182 .....	16
WCDMA Band V-Left Head Cheek Middle CH4182.....	17
WCDMA Band V-Left Head Tilted Middle CH4182 .....	18
WIFI-Right Head Cheek Low CH1 .....	19
WIFI-Right Head Cheek Middle CH6.....	20
WIFI-Right Head Cheek High CH11 .....	21
WIFI-Right Head Tilted Low CH1.....	22
WIFI-Right Head Tilted Middle CH6.....	23
WIFI-Right Head Tilted High CH11 .....	24
WIFI-Left Head Cheek Low CH1 .....	25
WIFI-Left Head Tilted Low CH1 .....	26
GPRS 850-Body Front Low CH128 .....	27
GPRS 850-Body Rear Low CH128 .....	28
GPRS 850-Body-Right Low CH128.....	29
GPRS 850-Body-Bottom Low CH128.....	30
GPRS 1900-Body Front Low CH512.....	31
GPRS 1900-Body Front Middle CH661 .....	32
GPRS 1900-Body Front High CH810.....	33
GPRS 1900-Body Rear Low CH512 .....	34
GPRS 1900-Body Rear Middle CH661 .....	35
GPRS 1900-Body Rear High CH810 .....	36
GPRS 1900-Body-Right High CH810.....	37
GPRS 1900-Body-Bottom Low CH512.....	38
GPRS 1900-Body-Bottom Middle CH661 .....	39
GPRS 1900-Body-Bottom High CH810.....	40
WCDMA Band II-Body Front Low CH9262.....	41
WCDMA Band II-Body Front Middle CH9400 .....	42



# **Compliance Certification Services Inc.**

Report No: C141017S01-SF

FCC ID: 2ABOSSKY60Q

Date of Issue :November 4, 2014

<b>WCDMA Band II-Body Front High CH9538</b> .....	43
<b>WCDMA Band II-Body Rear Low CH9262</b> .....	44
<b>WCDMA Band II-Body Rear Middle CH9400</b> .....	45
<b>WCDMA Band II-Body Rear High CH9538</b> .....	46
<b>WCDMA Band II-Body-Right Middle CH9400</b> .....	47
<b>WCDMA Band II-Body-Bottom Low CH9262</b> .....	48
<b>WCDMA Band II-Body-Bottom Middle CH9400</b> .....	49
<b>WCDMA Band II-Body-Bottom High CH9538</b> .....	50
<b>WCDMA Band V-Body Front Middle CH4182</b> .....	51
<b>WCDMA Band V-Body Rear Middle CH4182</b> .....	52
<b>WCDMA Band V-Body-Right Middle CH4182</b> .....	53
<b>WCDMA Band V-Body-Bottom Middle CH4182</b> .....	54
<b>WIFI-Body Front Low CH1</b> .....	55
<b>WIFI-Body Rear Low CH1</b> .....	56
<b>WIFI-Body-Right Low CH1</b> .....	57
<b>WIFI-Body-Top Low CH1</b> .....	58
<b>WIFI-Right Head Tilted Low CH1 repeat</b> .....	59
<b>GPRS 1900-Body-Bottom High CH810 repeat</b> .....	60
<b>WCDMA Band II-Body-Bottom Middle CH9400 repeat</b> .....	61



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**GSM 850-Right Head Cheek Low CH128**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 41.977$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GSM850/Right Head Cheek Low CH128/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.142 W/kg


**GSM850/Right Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.601 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.160 W/kg

**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.145 W/kg

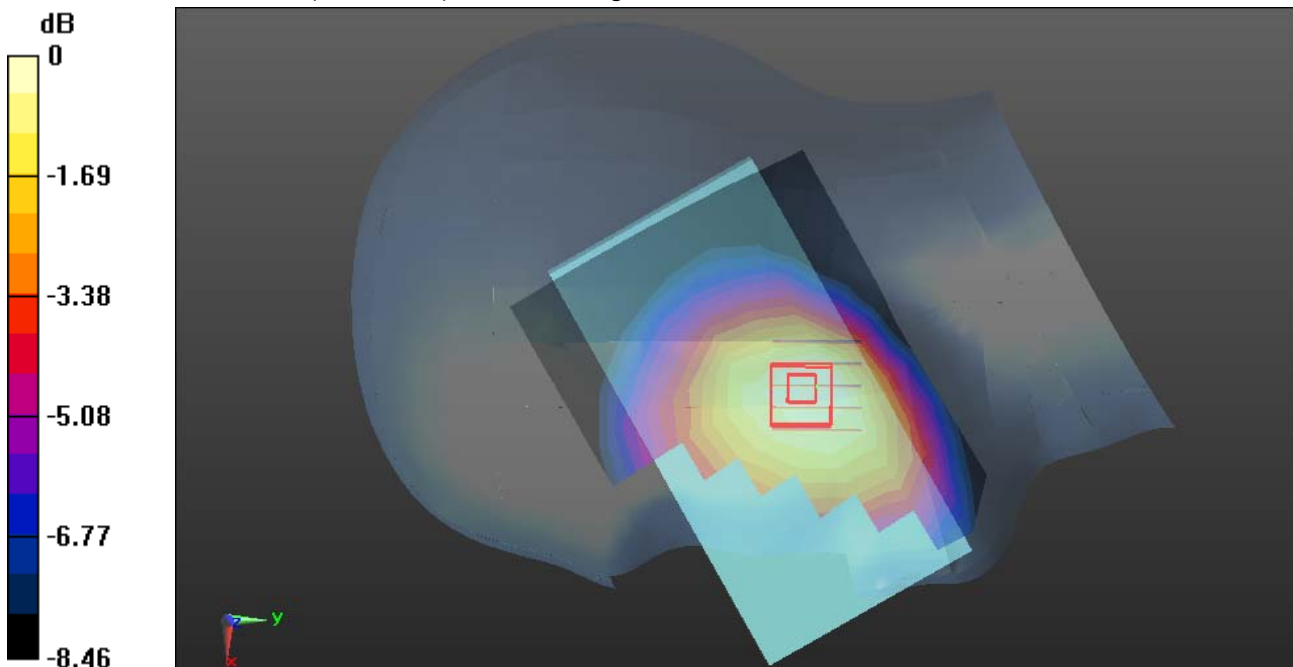

0 dB = 0.145 W/kg = -8.39 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**GSM 850-Right Head Tilted Low CH128**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 41.977$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GSM850/Right Head Tilted Low CH128/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0673 W/kg


**GSM850/Right Head Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.337 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0740 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.0688 W/kg

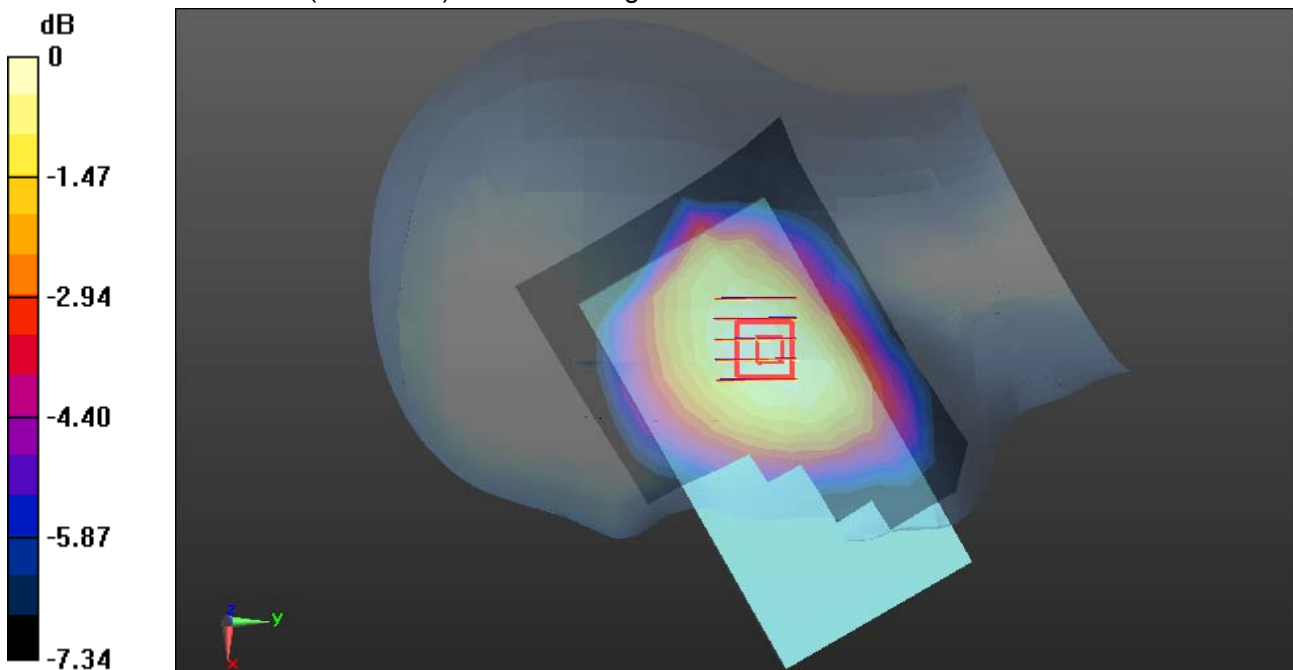

0 dB = 0.0688 W/kg = -11.62 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**GSM 850-Left Head Cheek Low CH128**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 41.977$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GSM850/Left Head Cheek Low CH128/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.123 W/kg


**GSM850/Left Head Cheek Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.719 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.138 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.088 W/kg**

Maximum value of SAR (measured) = 0.125 W/kg

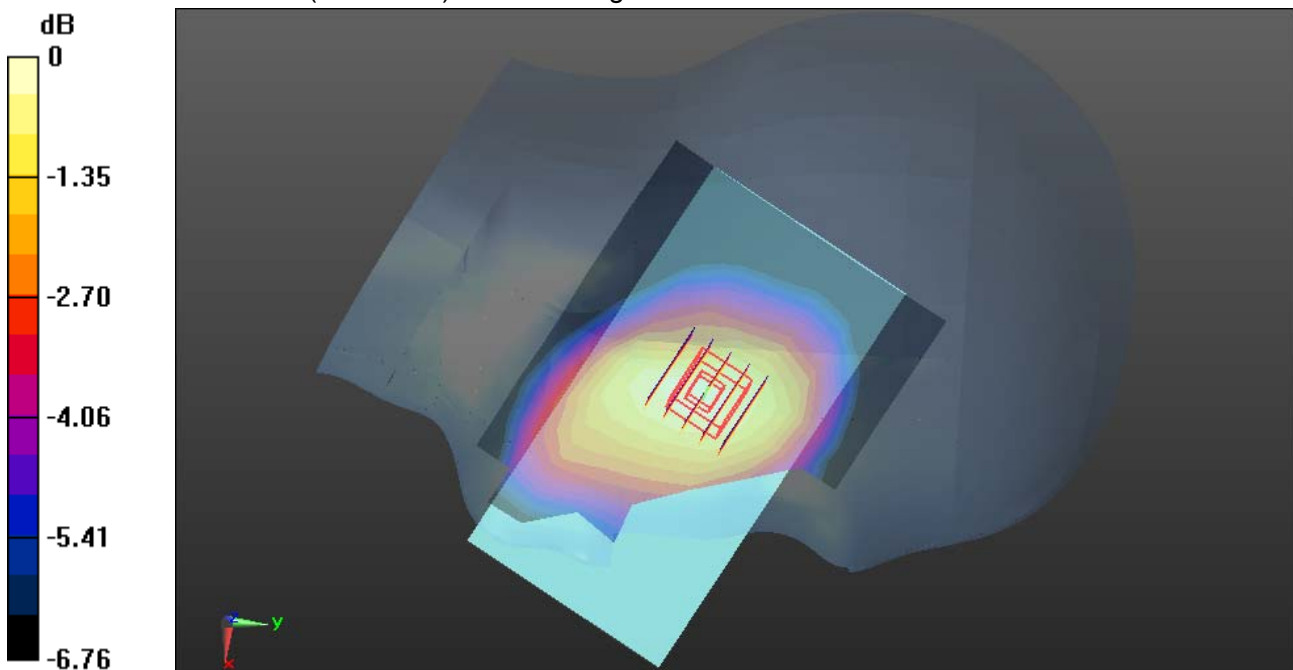

0 dB = 0.125 W/kg = -9.03 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**GSM 850-Left Head Tilted Low CH128**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $f = 825 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 41.977$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GSM850/Left Head Tilted Low CH128/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.0780 W/kg


**GSM850/Left Head Tilted Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.552 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0840 W/kg

**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.0776 W/kg

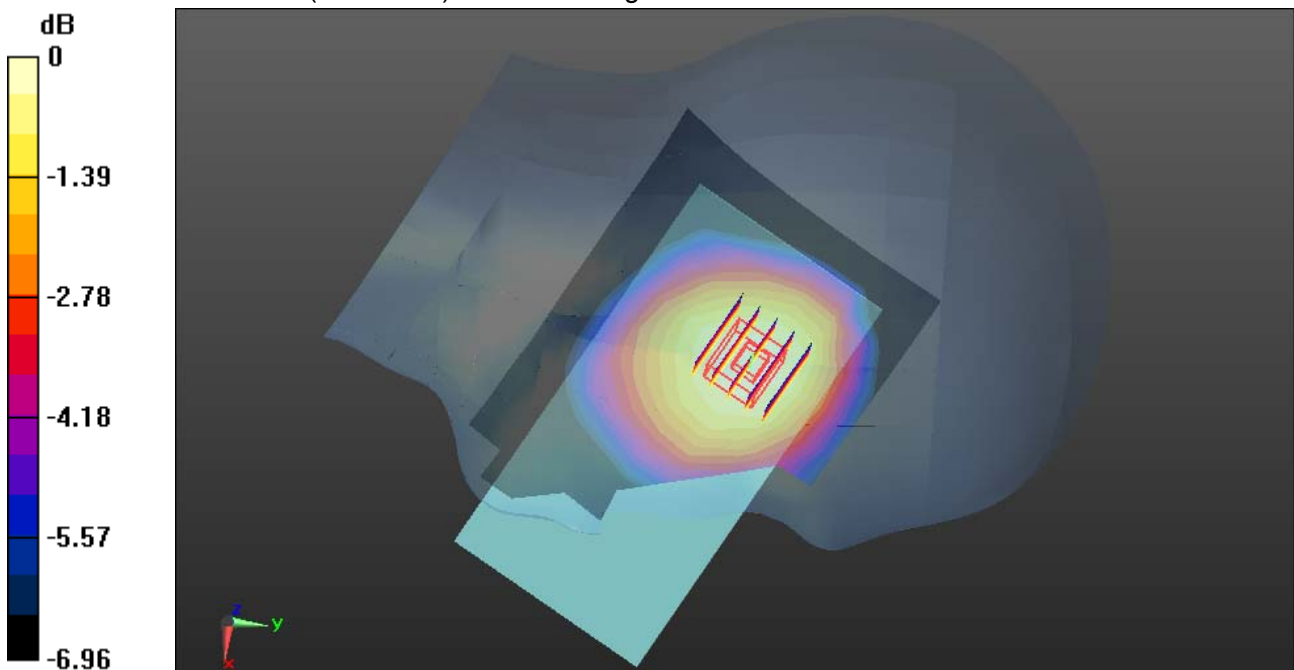

0 dB = 0.0776 W/kg = -11.10 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**PCS 1900-Right Head Cheek Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**PCS 1900/Right Head Cheek Middle CH661/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.108 W/kg


**PCS 1900/Right Head Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.918 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.107 W/kg

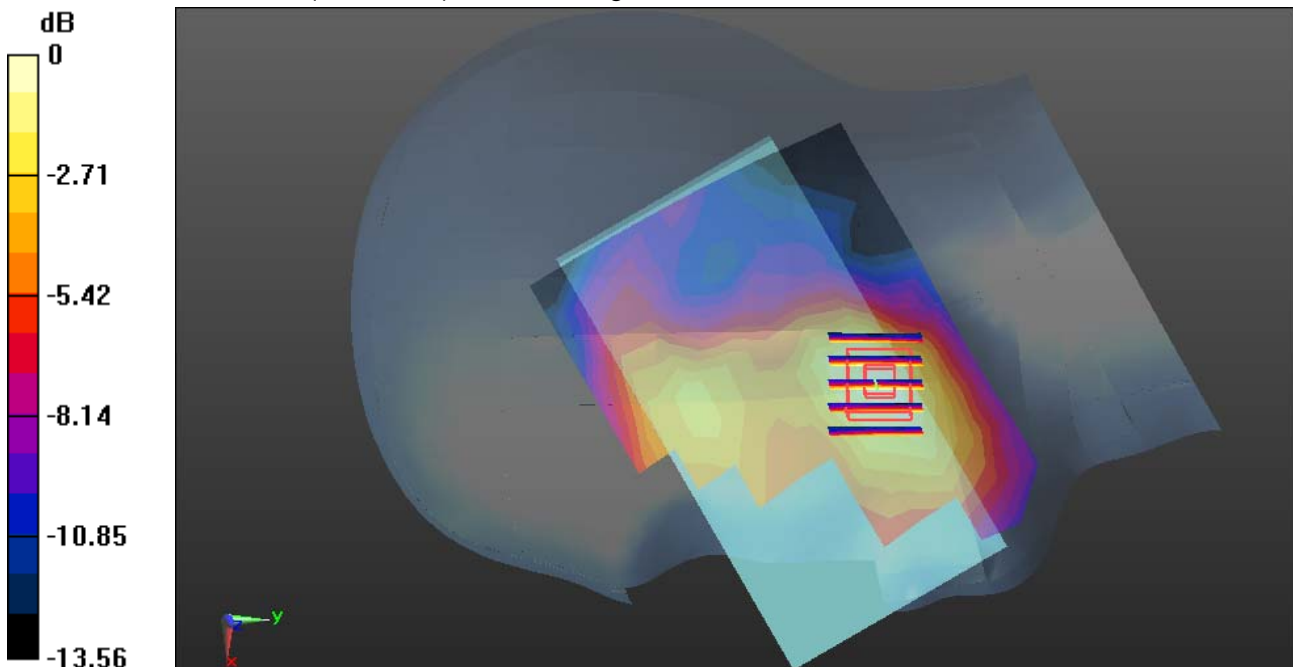

0 dB = 0.107 W/kg = -9.71 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**PCS 1900-Right Head Tilted Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**PCS 1900/Right Head Tilted Middle CH661/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0330 W/kg


**PCS 1900/Right Head Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.352 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0368 W/kg

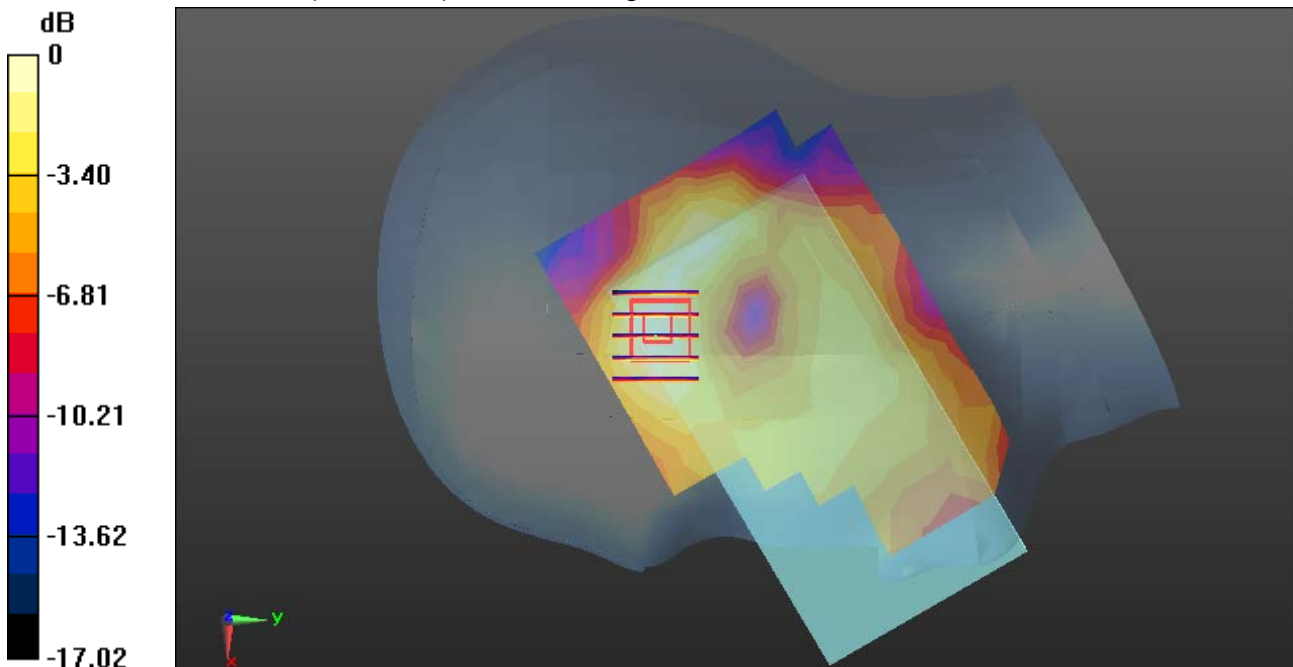

0 dB = 0.0368 W/kg = -14.34 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**PCS 1900-Left Head Cheek Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**PCS 1900/Left Head Cheek Middle CH661/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 W/kg


**PCS 1900/Left Head Cheek Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.380 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.170 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.135 W/kg

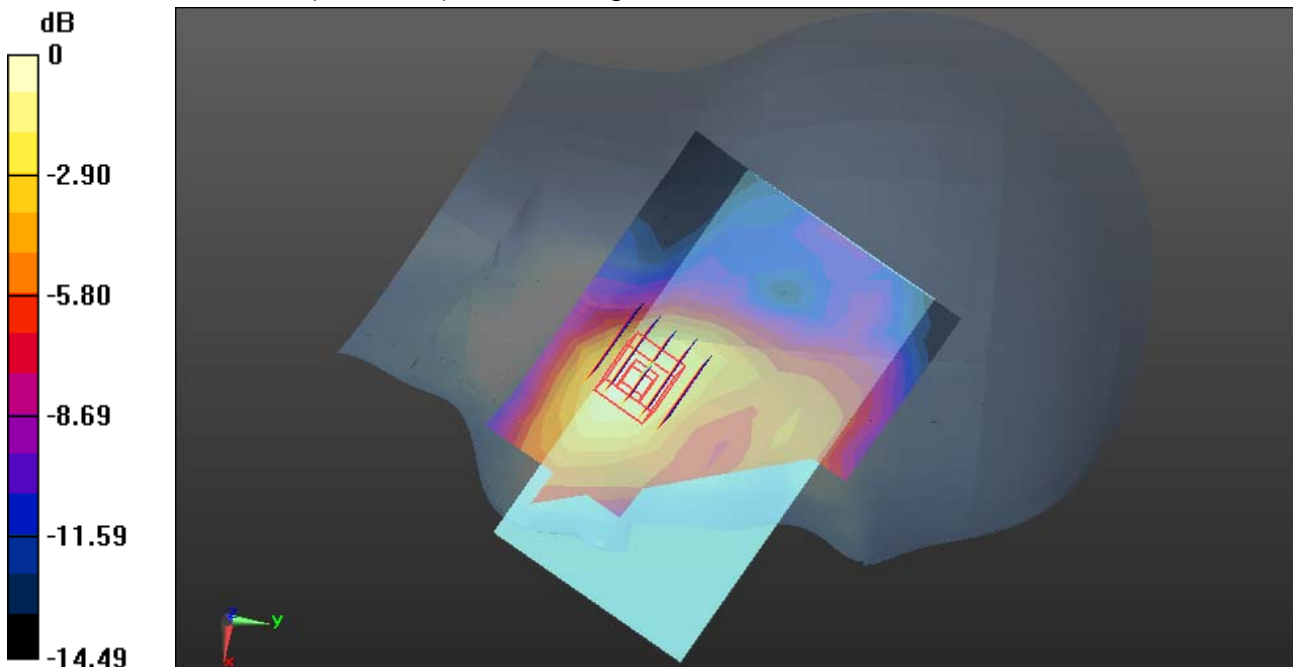

0 dB = 0.135 W/kg = -8.70 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**PCS 1900-Left Head Tilted Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz;Duty Cycle: 1:8.30042

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**PCS 1900/Left Head Tilted Middle CH661/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0403 W/kg


**PCS 1900/Left Head Tilted Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.681 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0530 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0388 W/kg

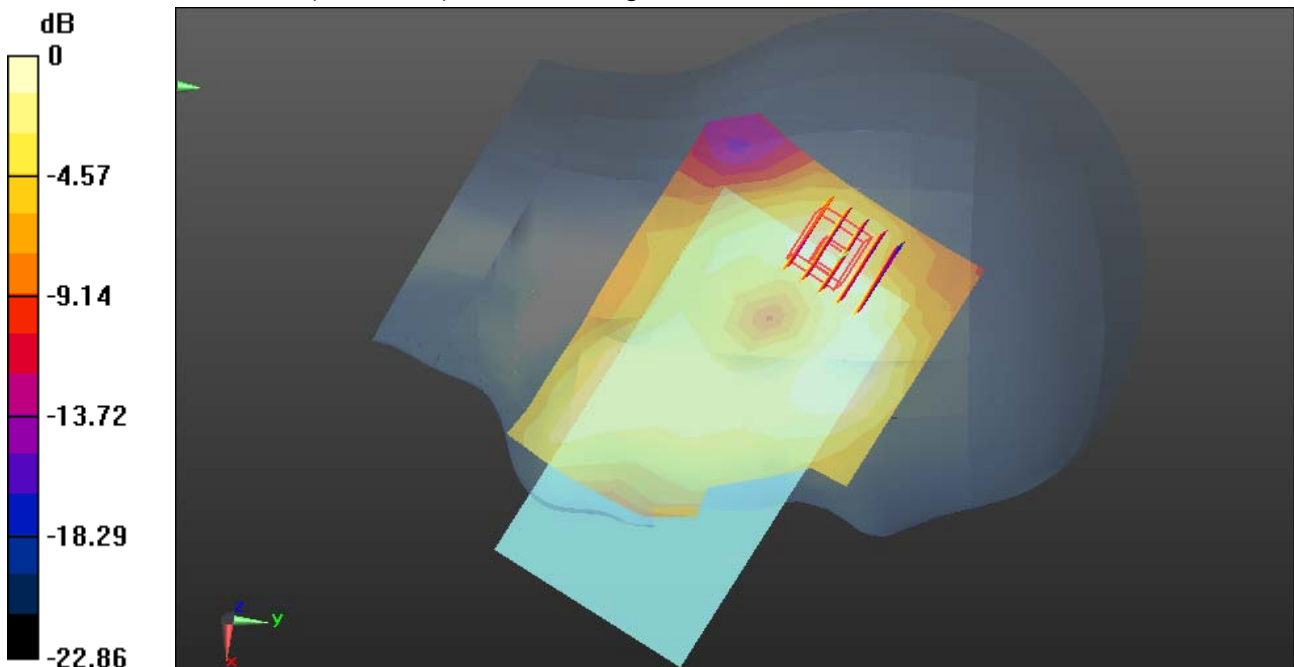

0 dB = 0.0388 W/kg = -14.11 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Right Head Cheek Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Right Head Cheek Middle CH9400/Area Scan (9x12x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.203 W/kg

**WCDMA Band II/Right Head Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 5.817 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.251 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.201 W/kg

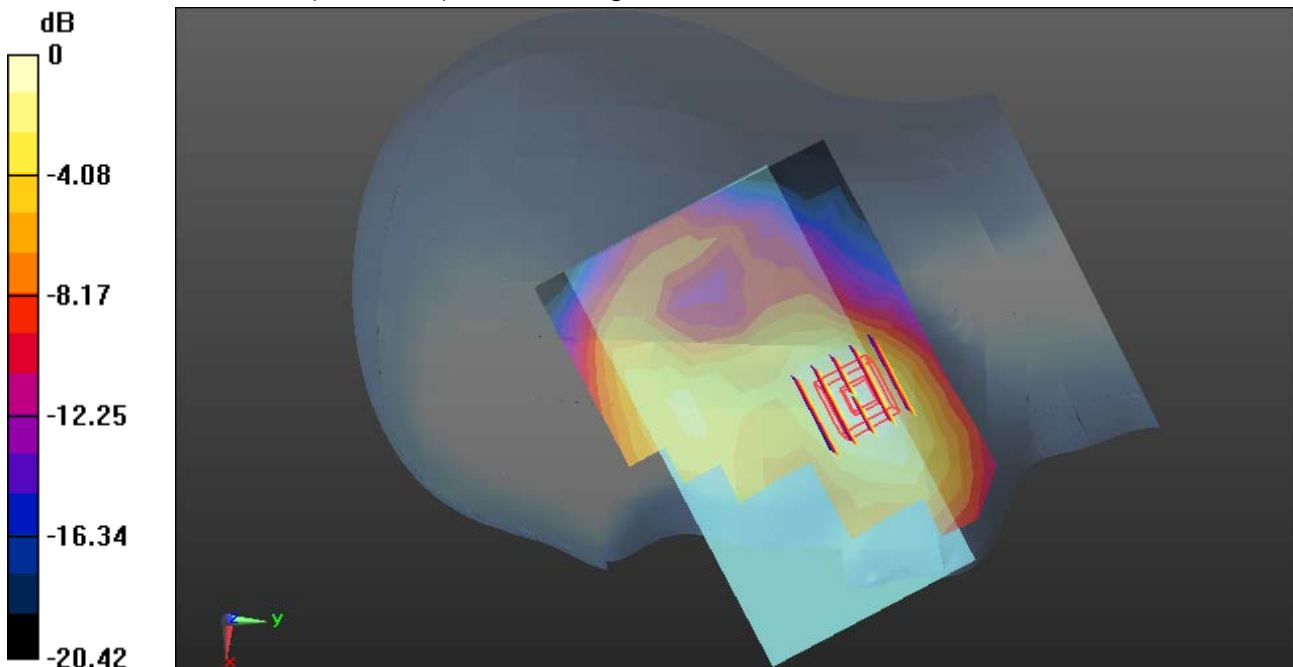

0 dB = 0.201 W/kg = -6.97 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Right Head Tilted Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Right Head Tilted Middle CH9400/Area Scan (9x12x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 0.0868 W/kg

**WCDMA Band II/Right Head Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 8.127 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0932 W/kg

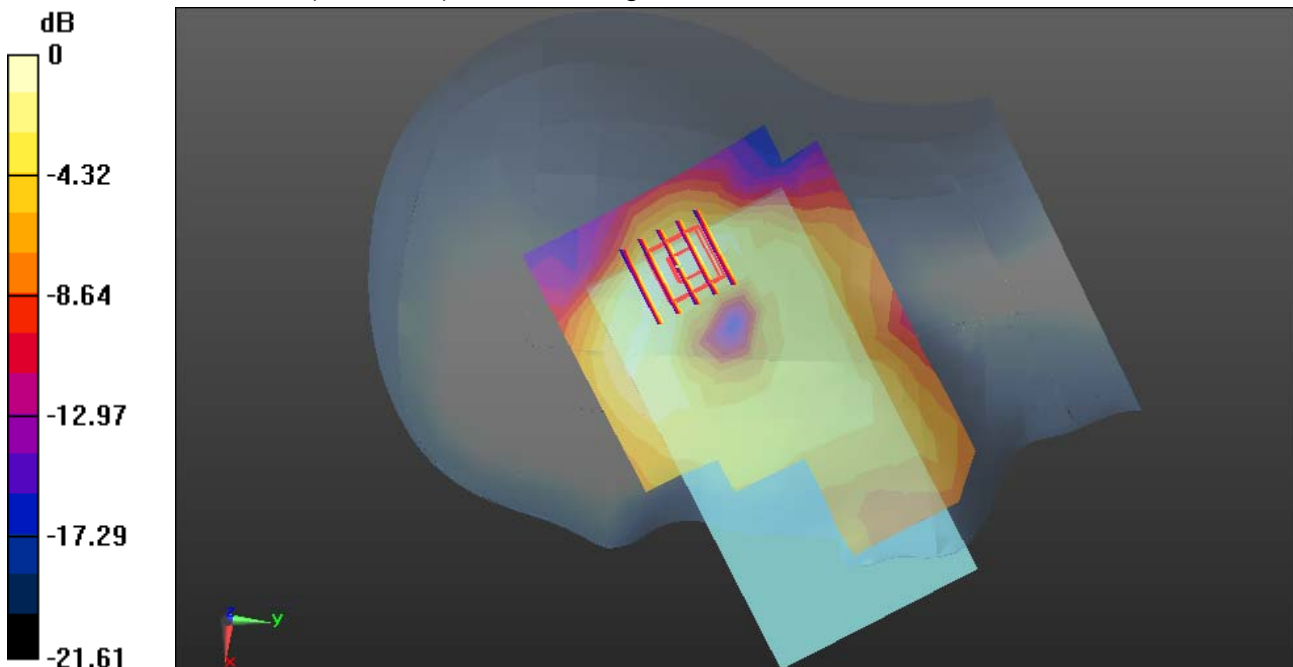

0 dB = 0.0932 W/kg = -10.31 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Left Head Cheek Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Left Head Cheek Middle CH9400/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.211 W/kg

**WCDMA Band II/Left Head Cheek Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.884 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.291 W/kg

**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.094 W/kg**

Maximum value of SAR (measured) = 0.215 W/kg

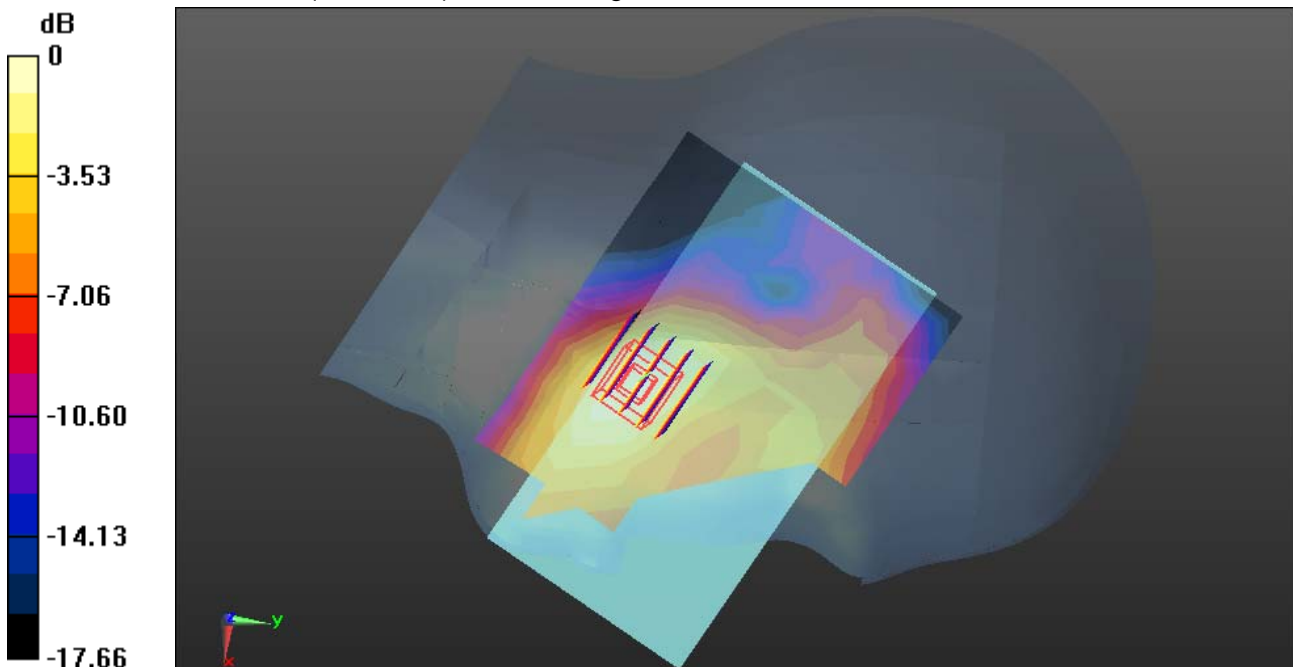

0 dB = 0.215 W/kg = -6.68 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Left Head Tilted Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.571$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.75, 7.75, 7.75); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Left Head Tilted Middle CH9400/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0942 W/kg


**WCDMA Band II/Left Head Tilted Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.805 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.124 W/kg

**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0982 W/kg

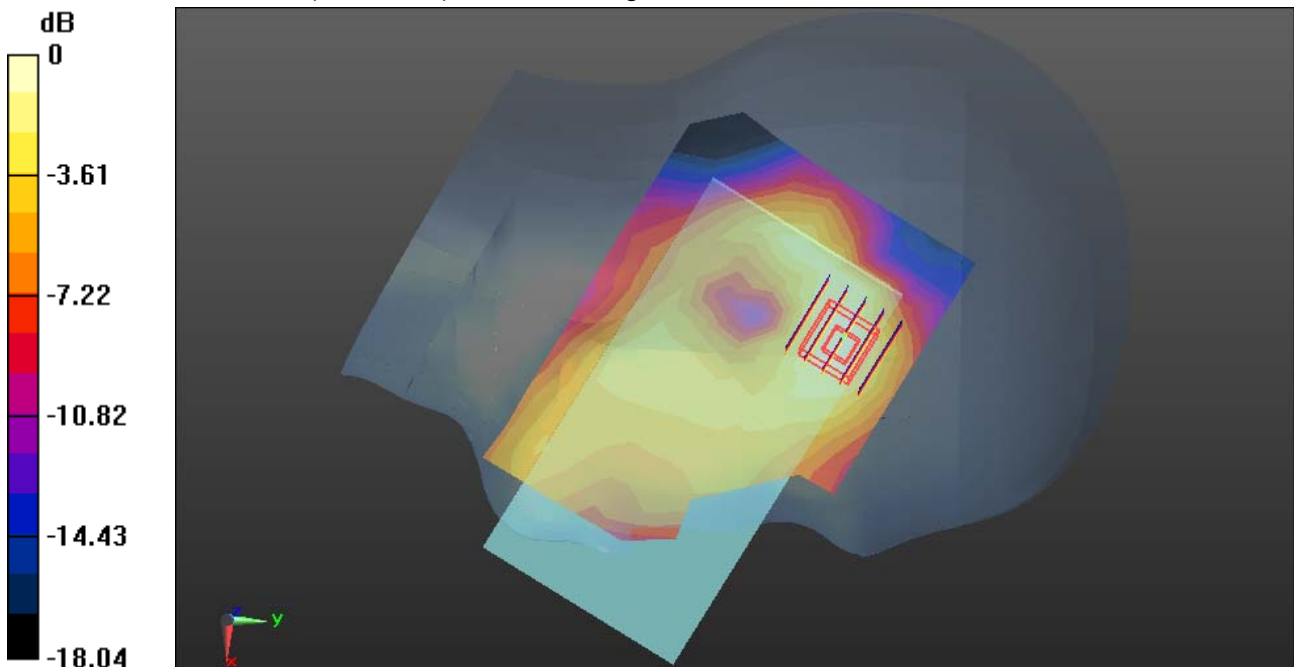

0 dB = 0.0982 W/kg = -10.08 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Right Head Cheek Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 41.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Right Head Cheek Middle CH4182/Area Scan (9x12x1):** Measurement grid:  
dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.264 W/kg

**WCDMA Band V/Right Head Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  
dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.416 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.182 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.260 W/kg

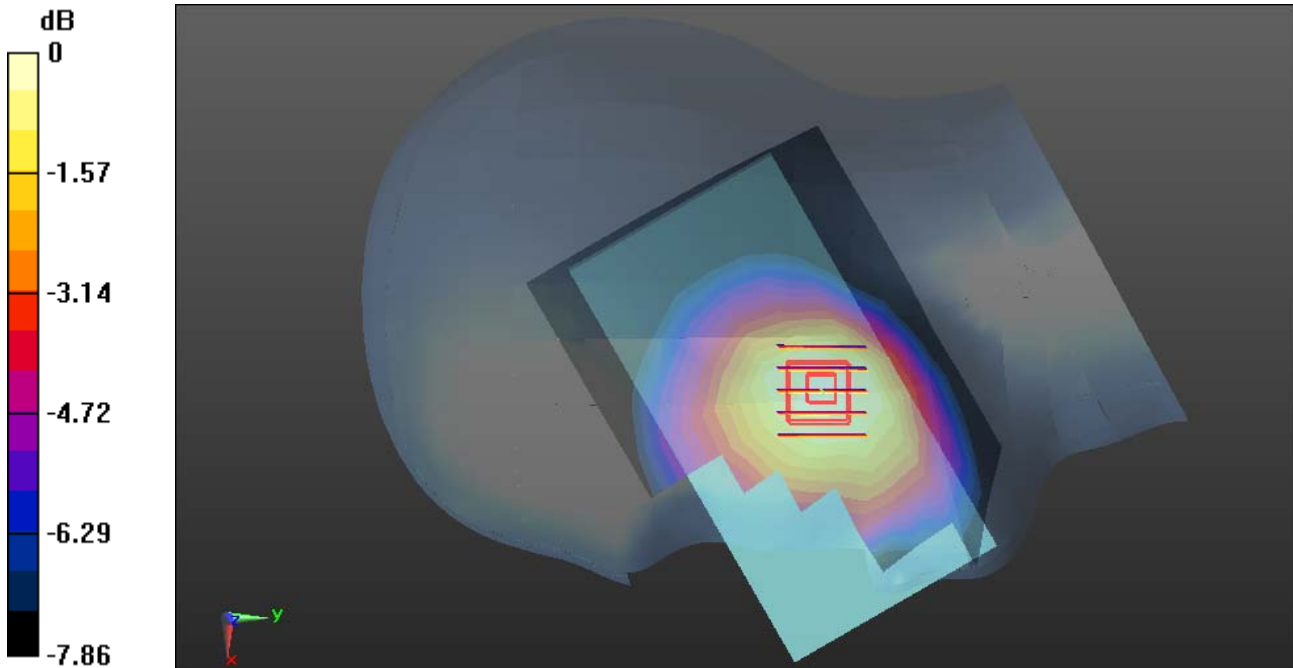

0 dB = 0.260 W/kg = -5.85 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Right Head Tilted Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 41.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Right Head Tilted Middle CH4182/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.154 W/kg

**WCDMA Band V/Right Head Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.36 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.139 W/kg

**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.089 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.127 W/kg

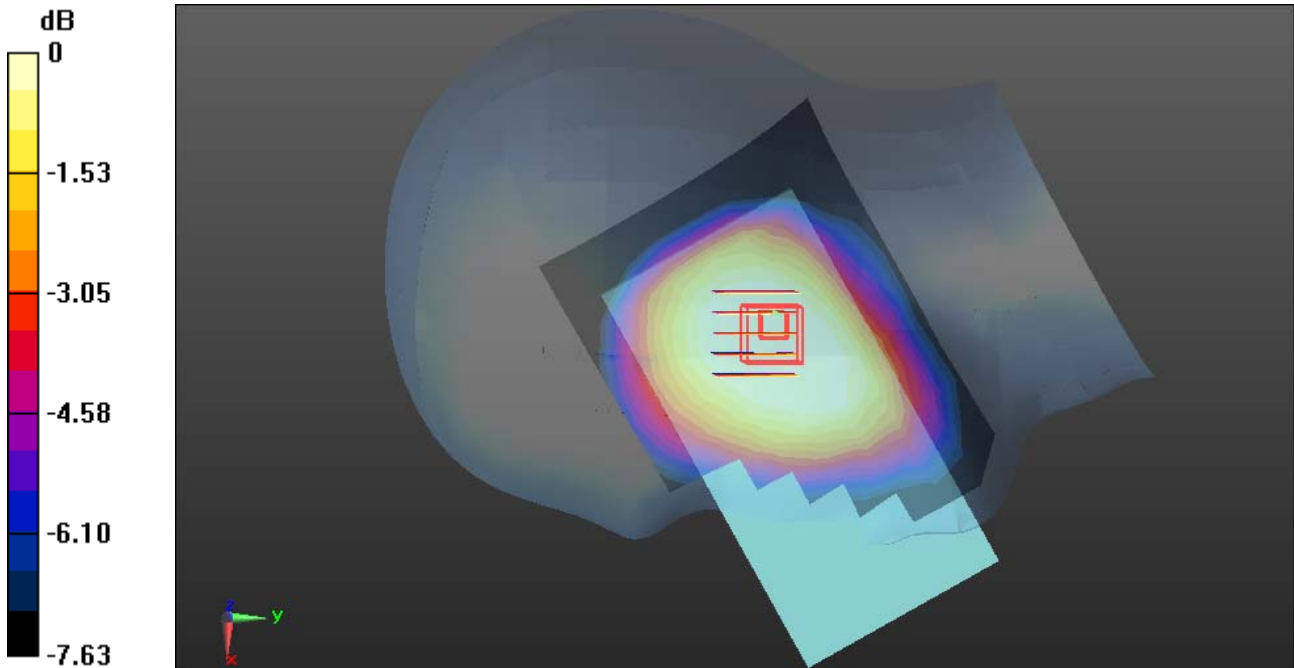

0 dB = 0.127 W/kg = -8.96 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Left Head Cheek Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 41.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Left Head Cheek Middle CH4182/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.224 W/kg

**WCDMA Band V/Left Head Cheek Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 6.663 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.162 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.235 W/kg

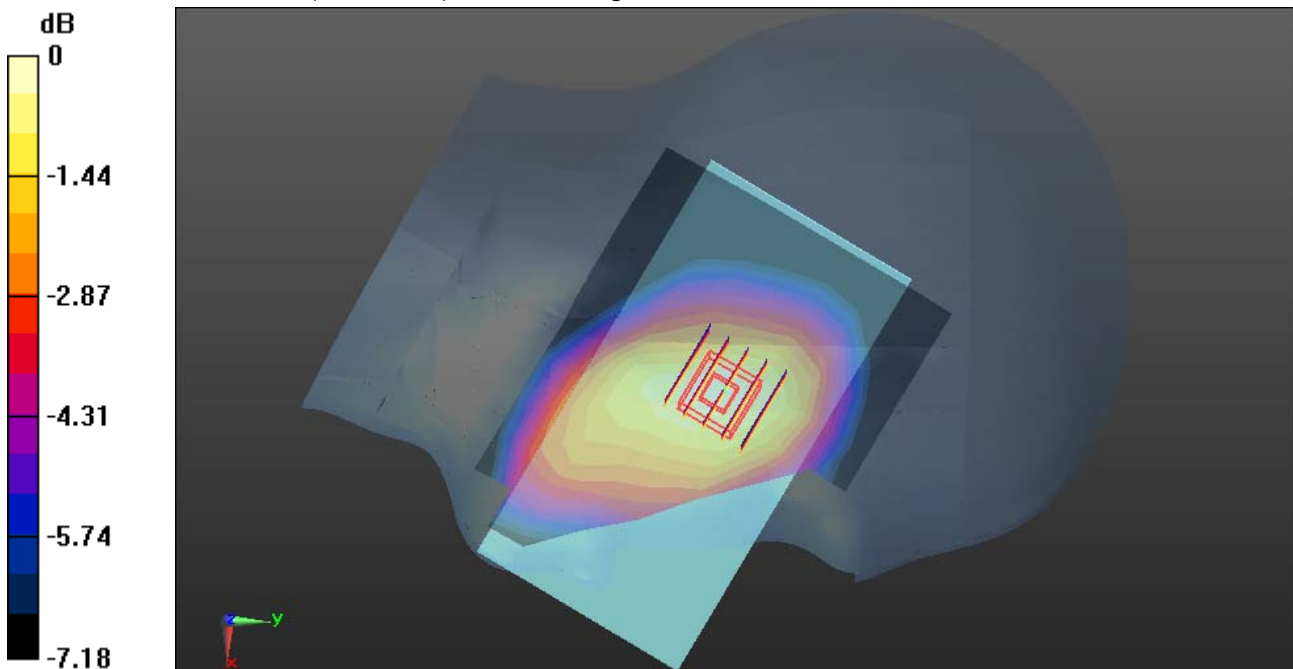

0 dB = 0.235 W/kg = -6.29 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Left Head Tilted Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 41.83$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.3, 9.3, 9.3); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Left Head Tilted Middle CH4182/Area Scan (9x12x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.176 W/kg

**WCDMA Band V/Left Head Tilted Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 9.738 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.127 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.178 W/kg

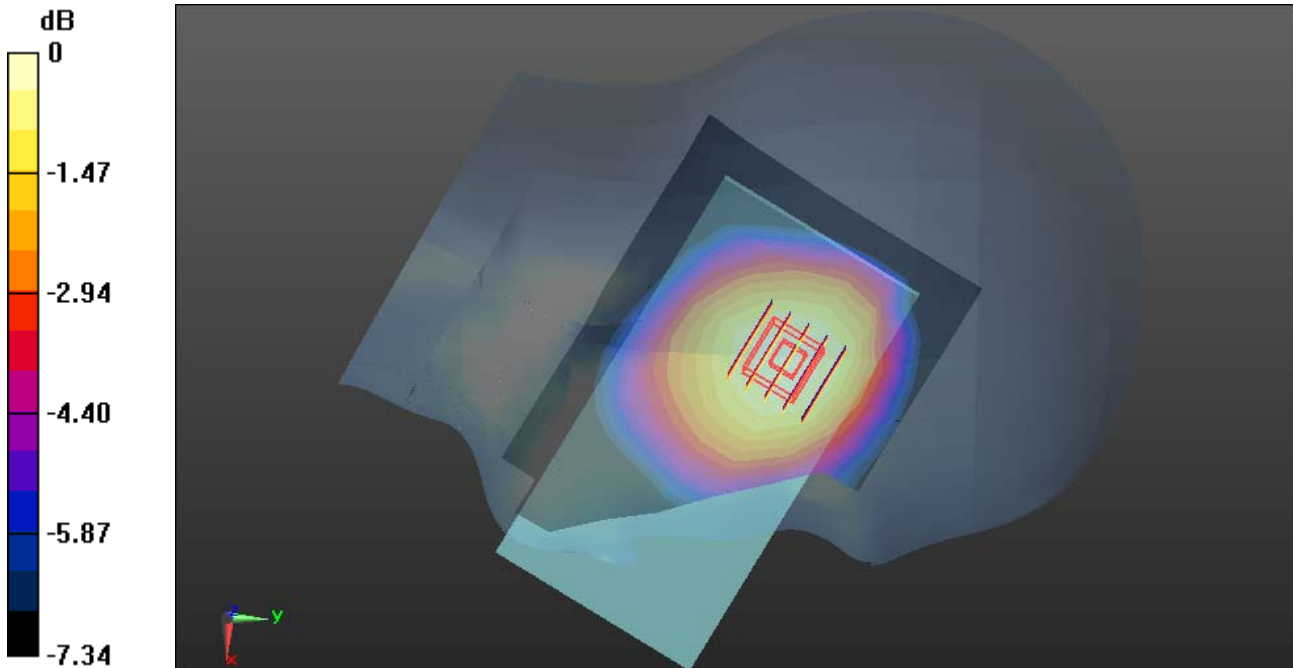

0 dB = 0.178 W/kg = -7.50 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

### WIFI-Right Head Cheek Low CH1

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.736$  S/m;  $\epsilon_r = 39.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Cheek Low CH1/Area Scan (11x14x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.56 W/kg


**WIFI/Right Head Cheek Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.82 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.13 W/kg

**SAR(1 g) = 0.987 W/kg; SAR(10 g) = 0.434 W/kg**

Maximum value of SAR (measured) = 1.93 W/kg

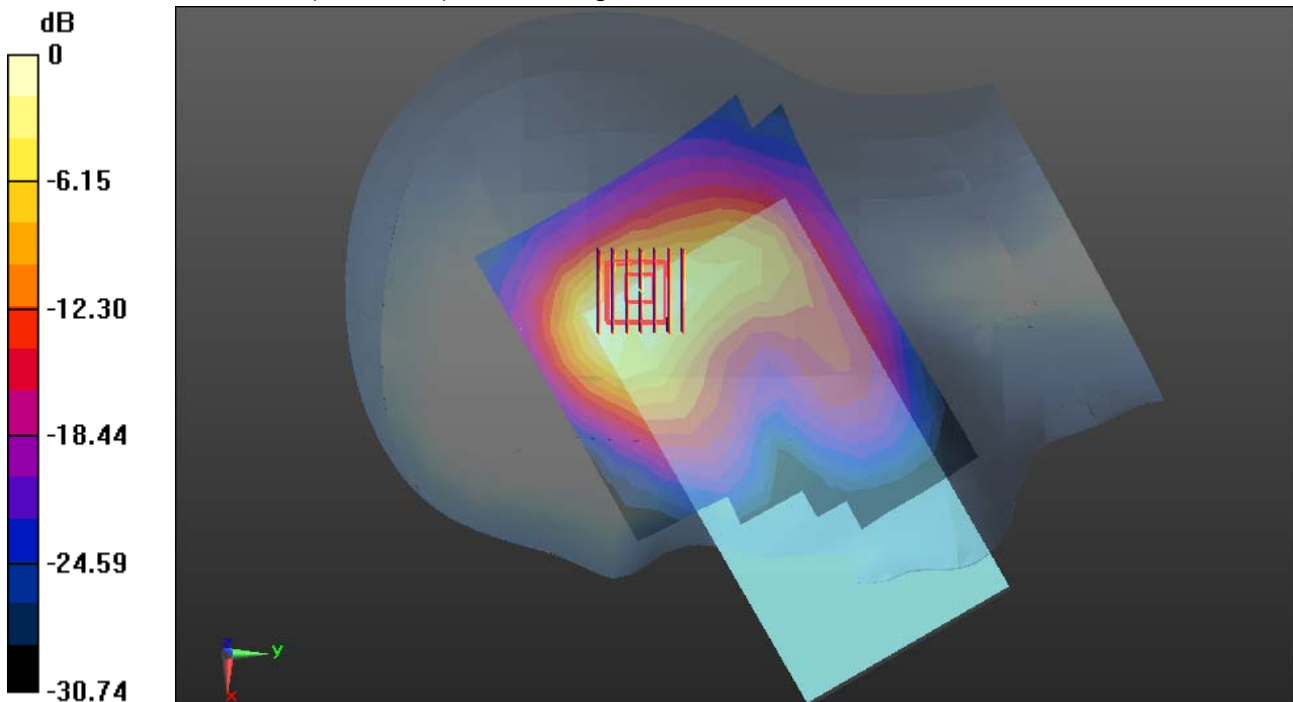

0 dB = 1.93 W/kg = 2.86 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Right Head Cheek Middle CH6**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.764$  S/m;  $\epsilon_r = 39.563$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Cheek Middle CH6/Area Scan (11x9x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.38 W/kg


**WIFI/Right Head Cheek Middle CH6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.24 W/kg

**SAR(1 g) = 0.807 W/kg; SAR(10 g) = 0.338 W/kg**

Maximum value of SAR (measured) = 1.31 W/kg

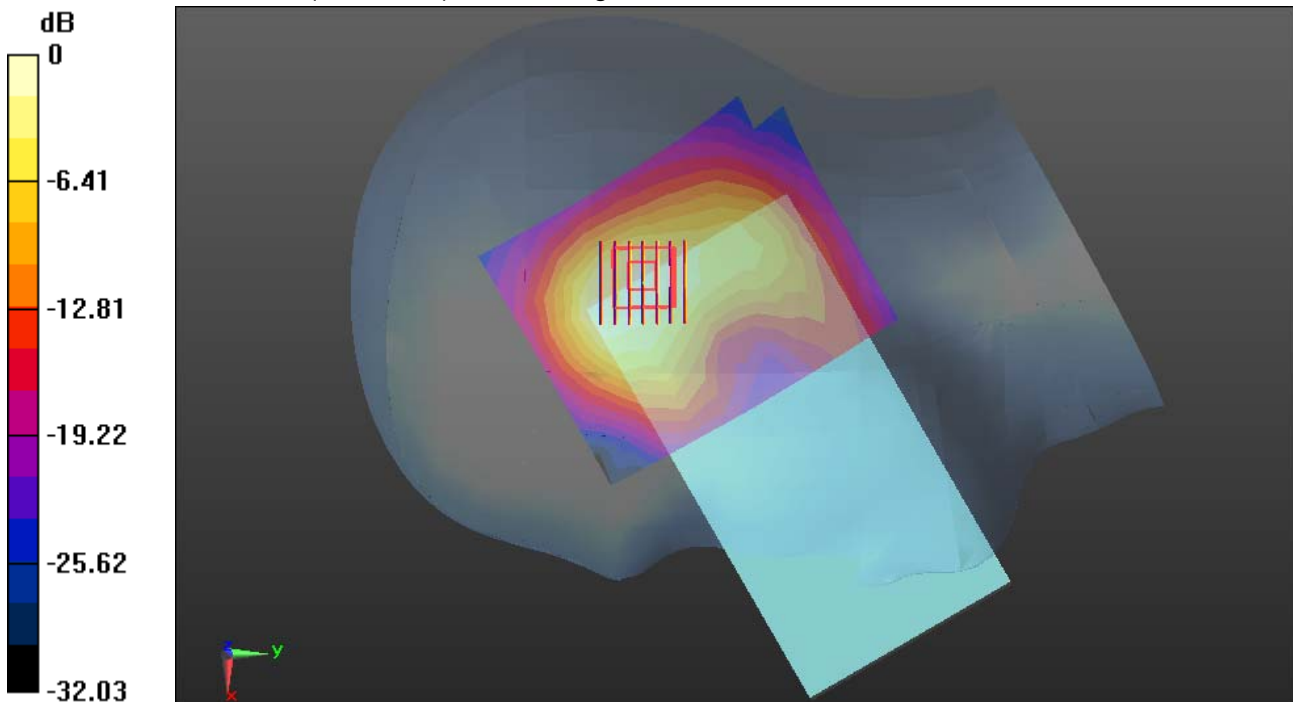

0 dB = 1.31 W/kg = 1.17 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Right Head Cheek High CH11**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.553$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Cheek High CH11/Area Scan (11x9x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.960 W/kg


**WIFI/Right Head Cheek High CH11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm, dz=5mm

Reference Value = 16.33 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.06 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.280 W/kg**

Maximum value of SAR (measured) = 1.24 W/kg

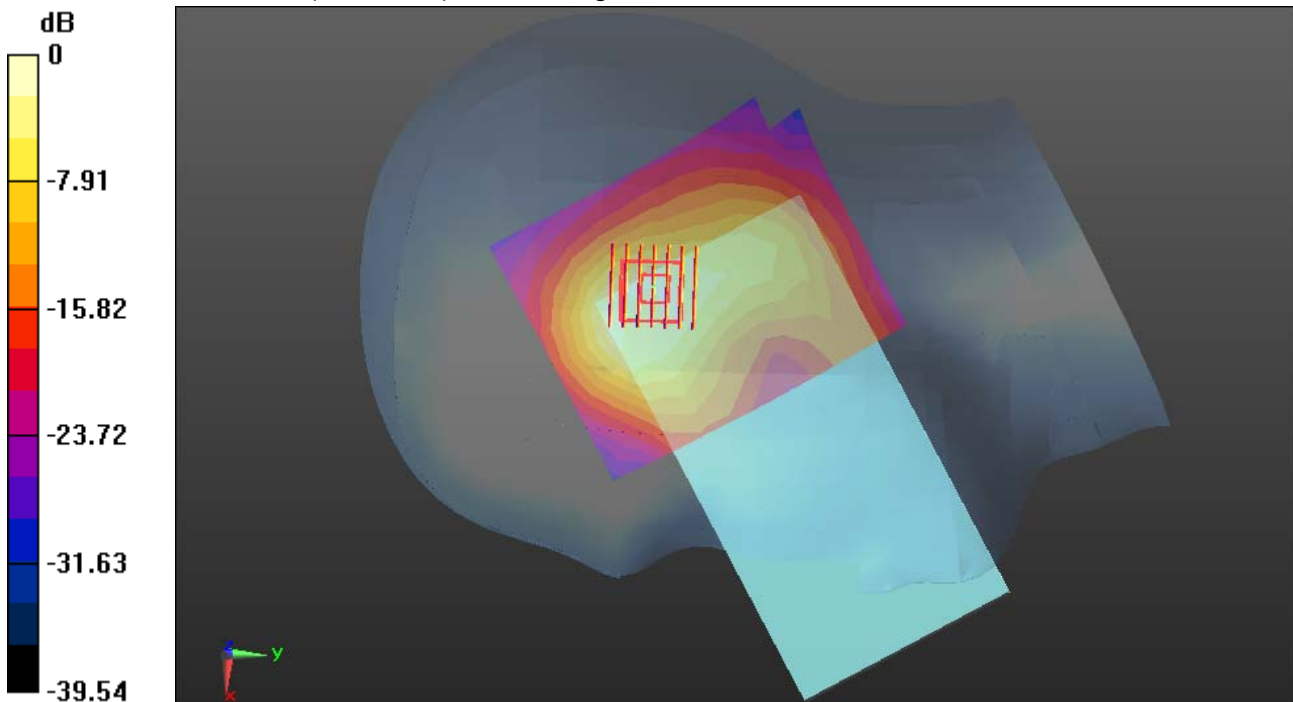

0 dB = 1.24 W/kg = 0.93 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

### WIFI-Right Head Tilted Low CH1

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.736$  S/m;  $\epsilon_r = 39.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Tilted Low CH1/Area Scan (11x14x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.57 W/kg


**WIFI/Right Head Tilted Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.54 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.16 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.414 W/kg**

Maximum value of SAR (measured) = 1.97 W/kg

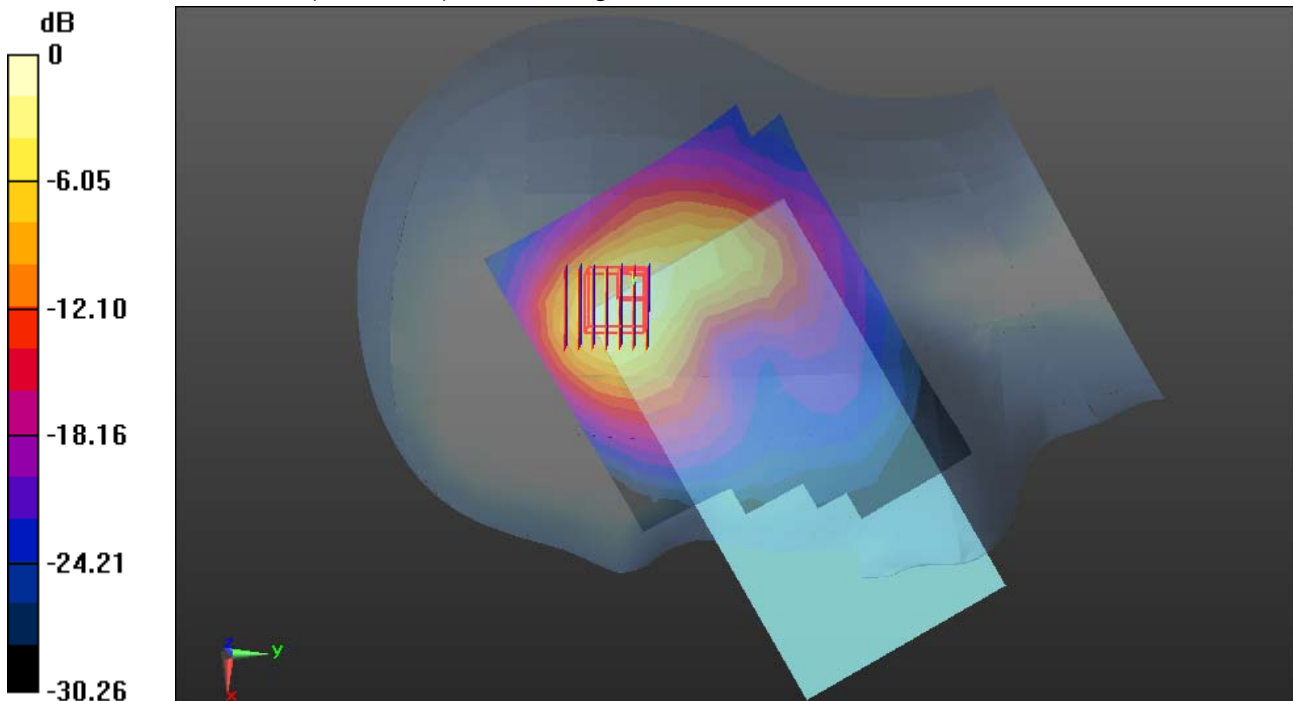

0 dB = 1.97 W/kg = 2.94 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Right Head Tilted Middle CH6**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.764$  S/m;  $\epsilon_r = 39.563$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Tilted Middle CH6/Area Scan (11x9x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 1.22 W/kg


**WIFI/Right Head Tilted Middle CH6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm,  
dy=5mm, dz=5mm

Reference Value = 19.49 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 2.39 W/kg

**SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.358 W/kg**

Maximum value of SAR (measured) = 1.47 W/kg

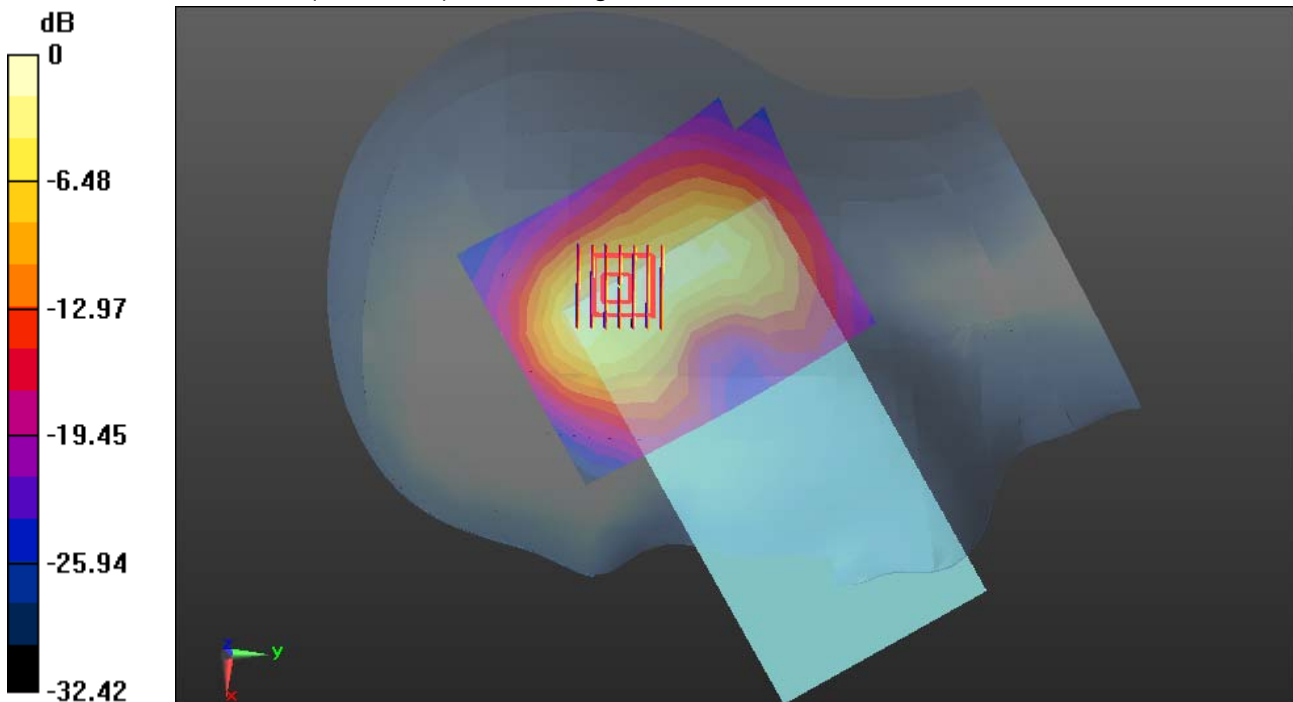

0 dB = 1.47 W/kg = 1.67 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

### WIFI-Right Head Tilted High CH11

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2462 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.797$  S/m;  $\epsilon_r = 39.553$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Tilted High CH11/Area Scan (11x9x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.848 W/kg


**WIFI/Right Head Tilted High CH11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.52 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.262 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

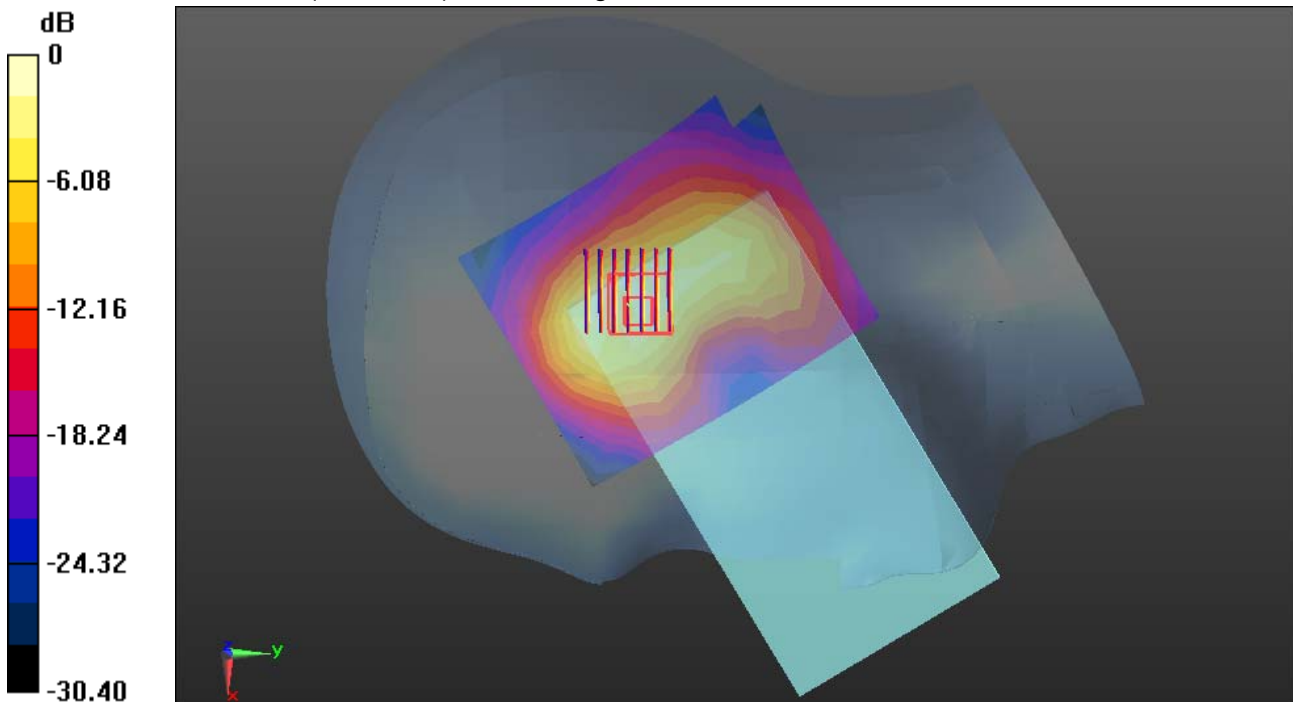

0 dB = 1.05 W/kg = 0.21 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Left Head Cheek Low CH1**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.736$  S/m;  $\epsilon_r = 39.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Left Head Cheek Low CH1/Area Scan (11x15x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.06 W/kg


**WIFI/Left Head Cheek Low CH1/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.69 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.323 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

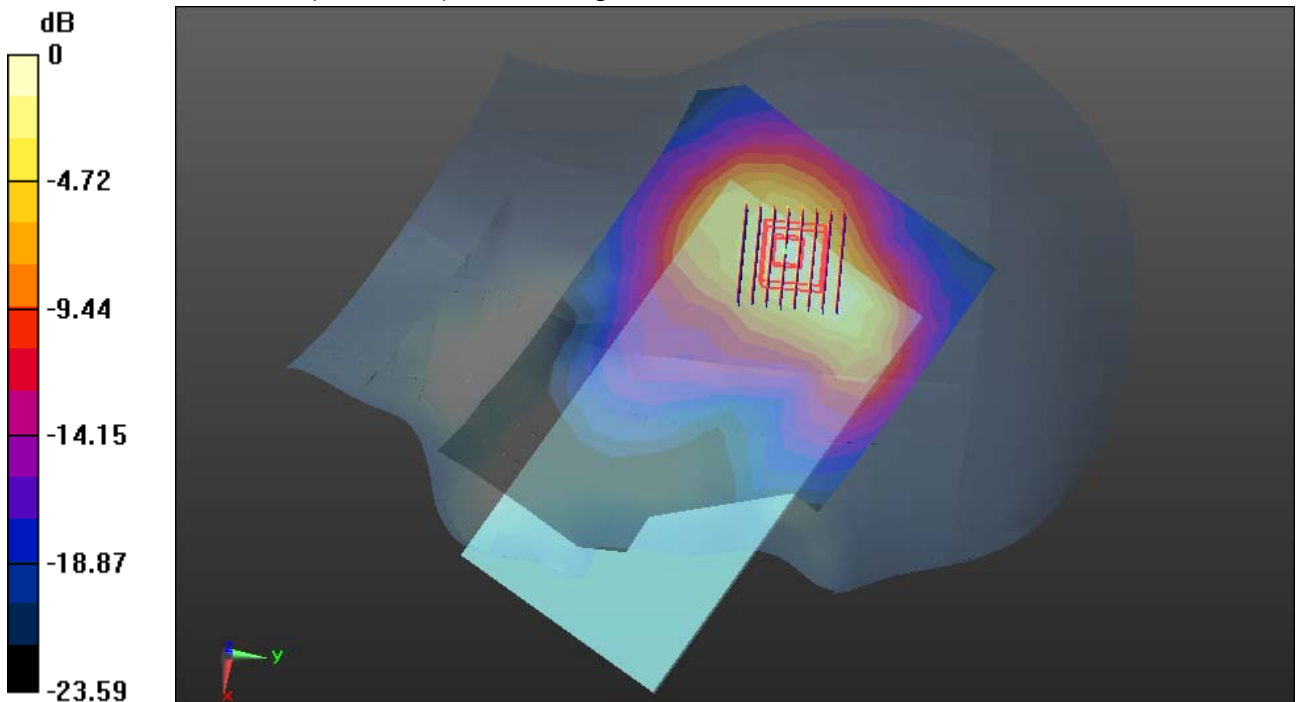

0 dB = 1.11 W/kg = 0.45 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Left Head Tilted Low CH1**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.736$  S/m;  $\epsilon_r = 39.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Left Head Tilted Low CH1/Area Scan (11x14x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (measured) = 0.888 W/kg


**WIFI/Left Head Tilted Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.42 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.29 W/kg

**SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.273 W/kg**

Maximum value of SAR (measured) = 0.886 W/kg

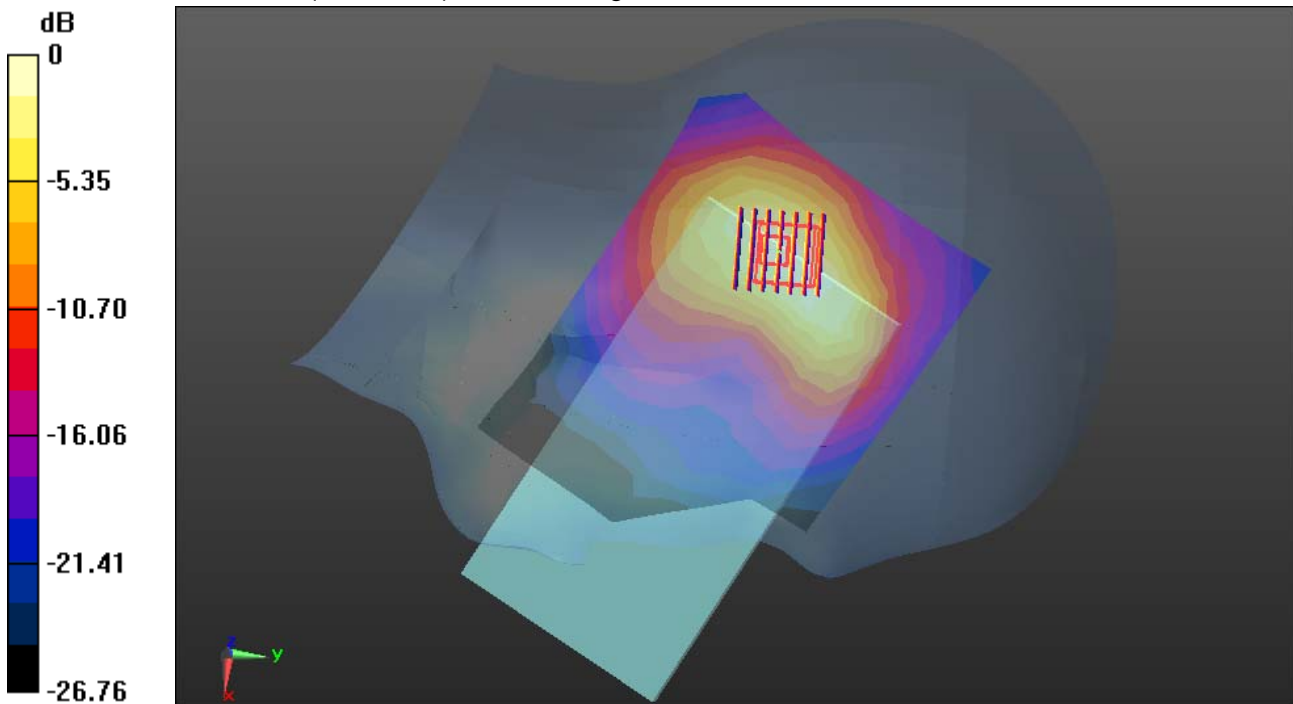

0 dB = 0.886 W/kg = -0.53 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

### GPRS 850-Body Front Low CH128

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 53.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 850/Body Front Low CH128/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.436 W/kg

**GPRS 850/Body Front Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 19.02 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.504 W/kg

**SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.271 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.444 W/kg

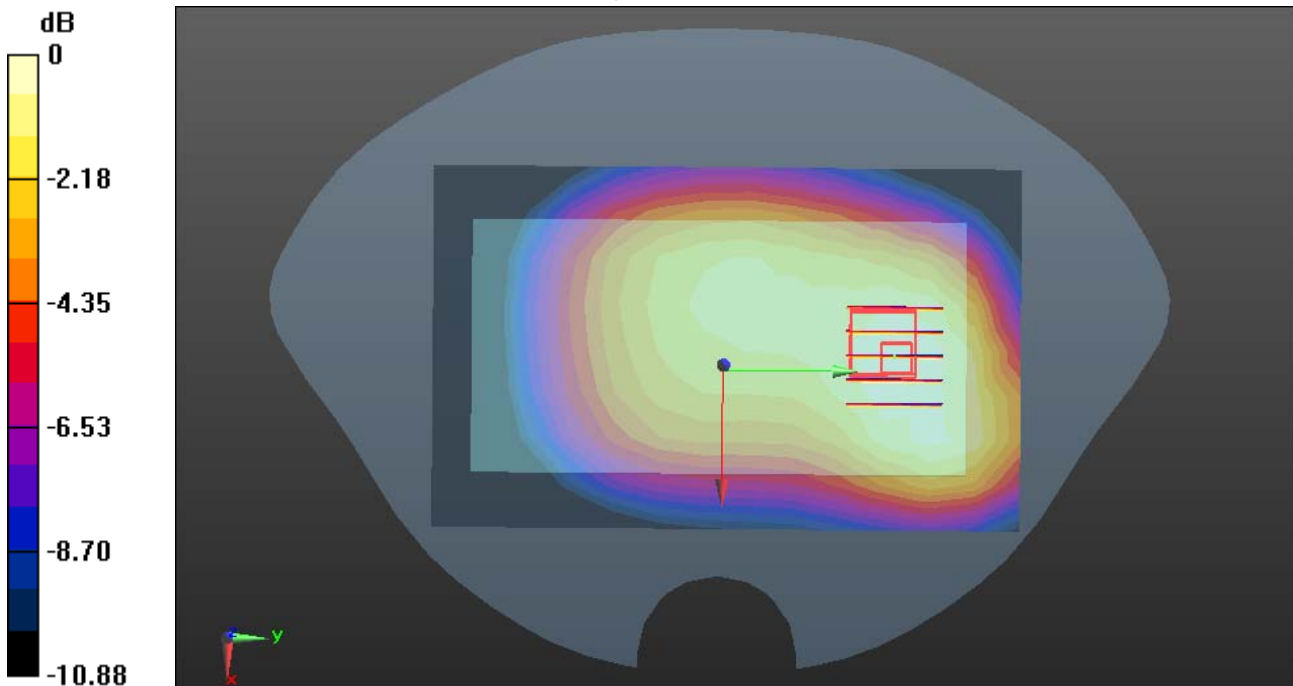

0 dB = 0.444 W/kg = -3.53 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

### GPRS 850-Body Rear Low CH128

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 53.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 850/Body Rear Low CH128/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.578 W/kg

**GPRS 850/Body Rear Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 21.47 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.706 W/kg

**SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.280 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.581 W/kg

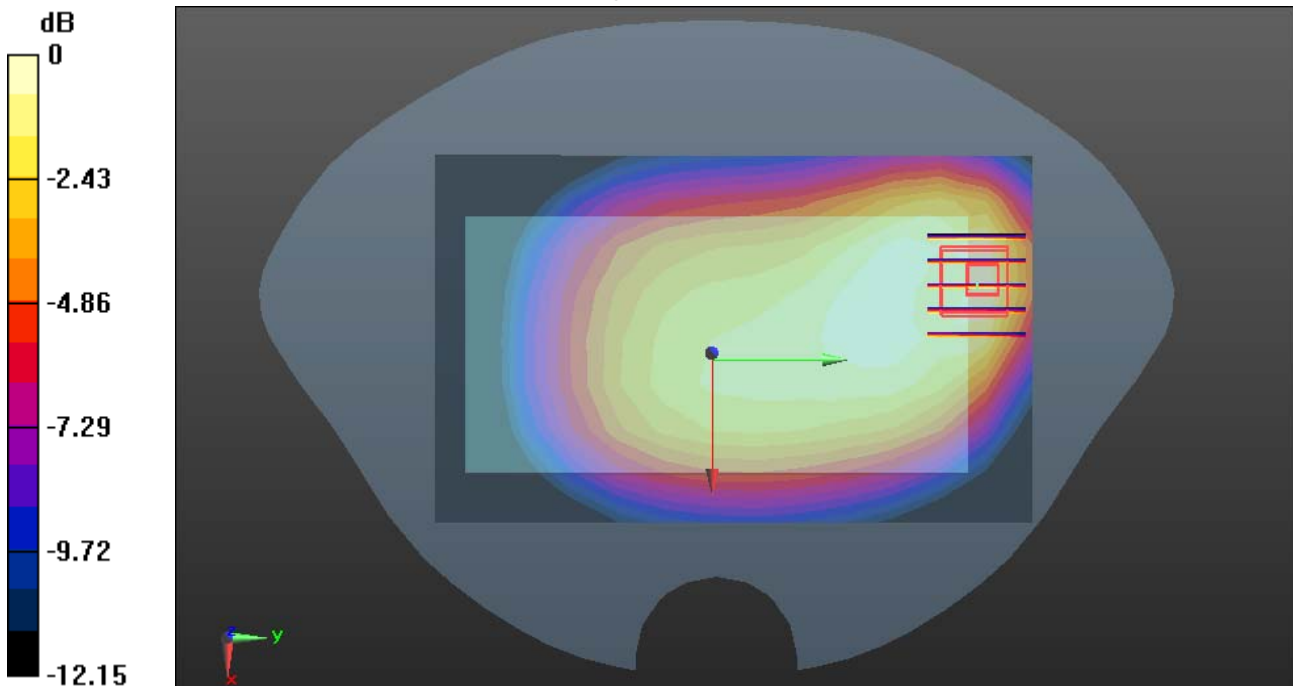

0 dB = 0.581 W/kg = -2.36 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

## GPRS 850-Body-Right Low CH128

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 53.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 850/Body Right Low CH128/Area Scan (13x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.217 W/kg

**GPRS 850/Body Right Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 15.66 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.277 W/kg

**SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.135 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.242 W/kg

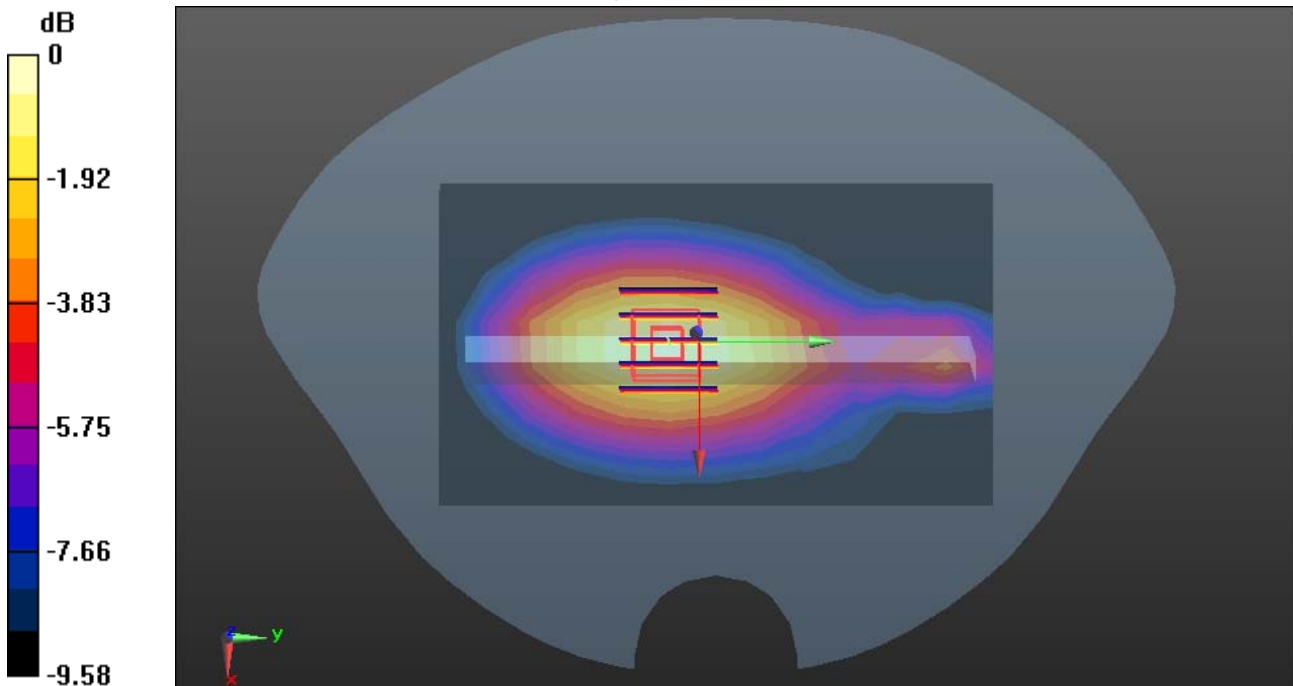

0 dB = 0.242 W/kg = -6.16 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

### GPRS 850-Body-Bottom Low CH128

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 824.2$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 53.006$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 850/Body Bottom Low CH128/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.508 W/kg

**GPRS 850/Body Bottom Low CH128/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 27.21 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.858 W/kg

**SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.261 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.642 W/kg

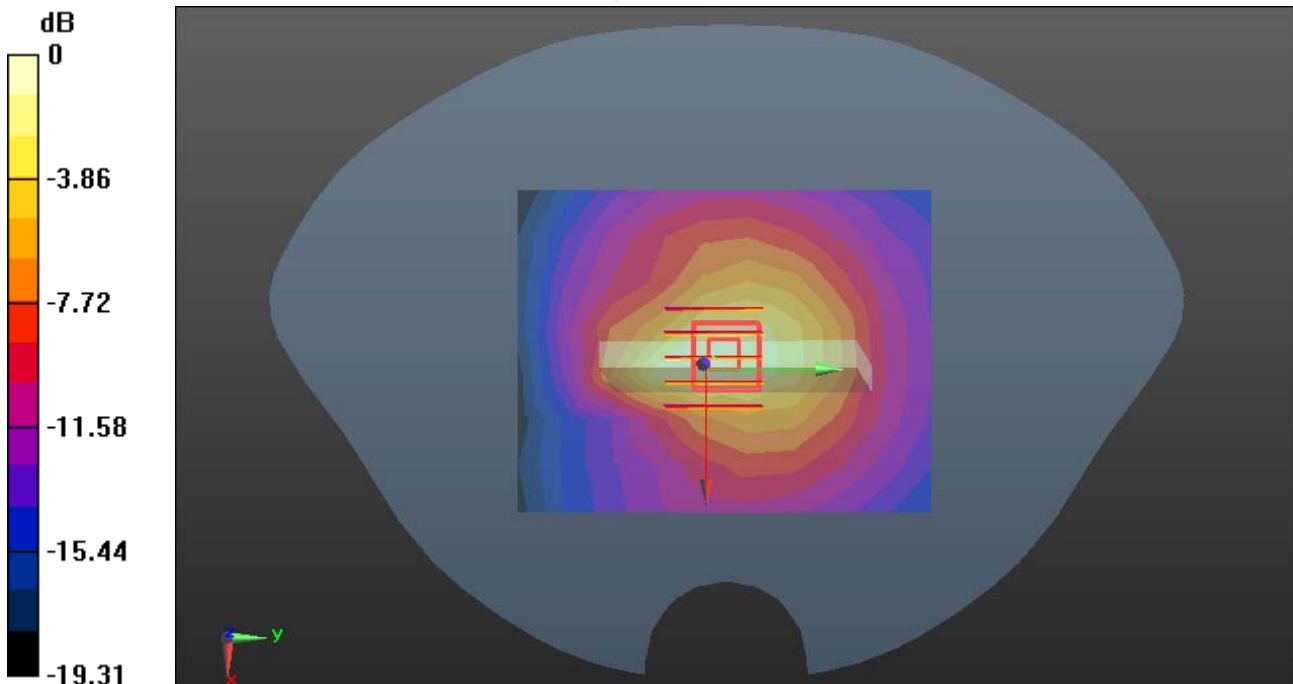

0 dB = 0.642 W/kg = -1.92 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

### GPRS 1900-Body Front Low CH512

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.536$  S/m;  $\epsilon_r = 52.599$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Front Low CH512/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.911 W/kg

**GPRS 1900/Body Front Low CH512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 8.934 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.332 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.940 W/kg

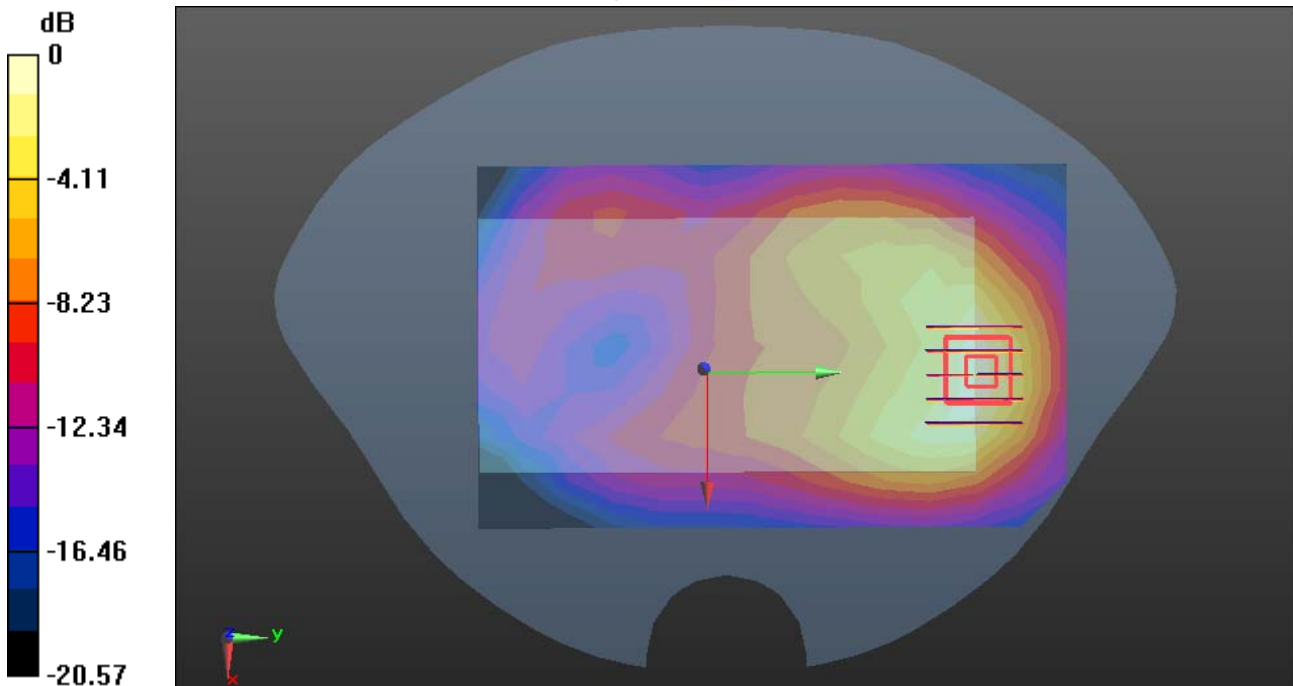

0 dB = 0.940 W/kg = -0.27 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body Front Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Front Middle CH661/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.05 W/kg


**GPRS 1900/Body Front Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.086 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.380 W/kg**

Maximum value of SAR (measured) = 1.09 W/kg

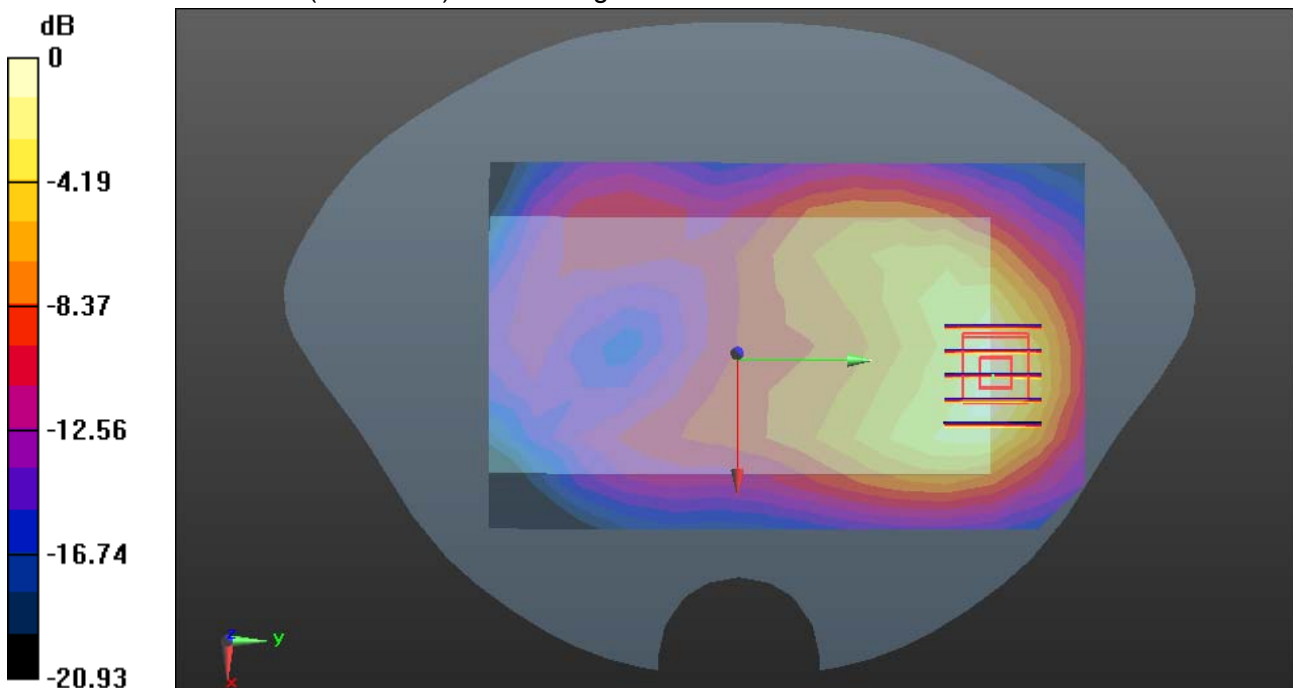

0 dB = 1.09 W/kg = 0.37 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body Front High CH810**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.577$  S/m;  $\epsilon_r = 52.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Front High CH810/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.15 W/kg


**GPRS 1900/Body Front High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.409 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.466 W/kg**

Maximum value of SAR (measured) = 1.37 W/kg

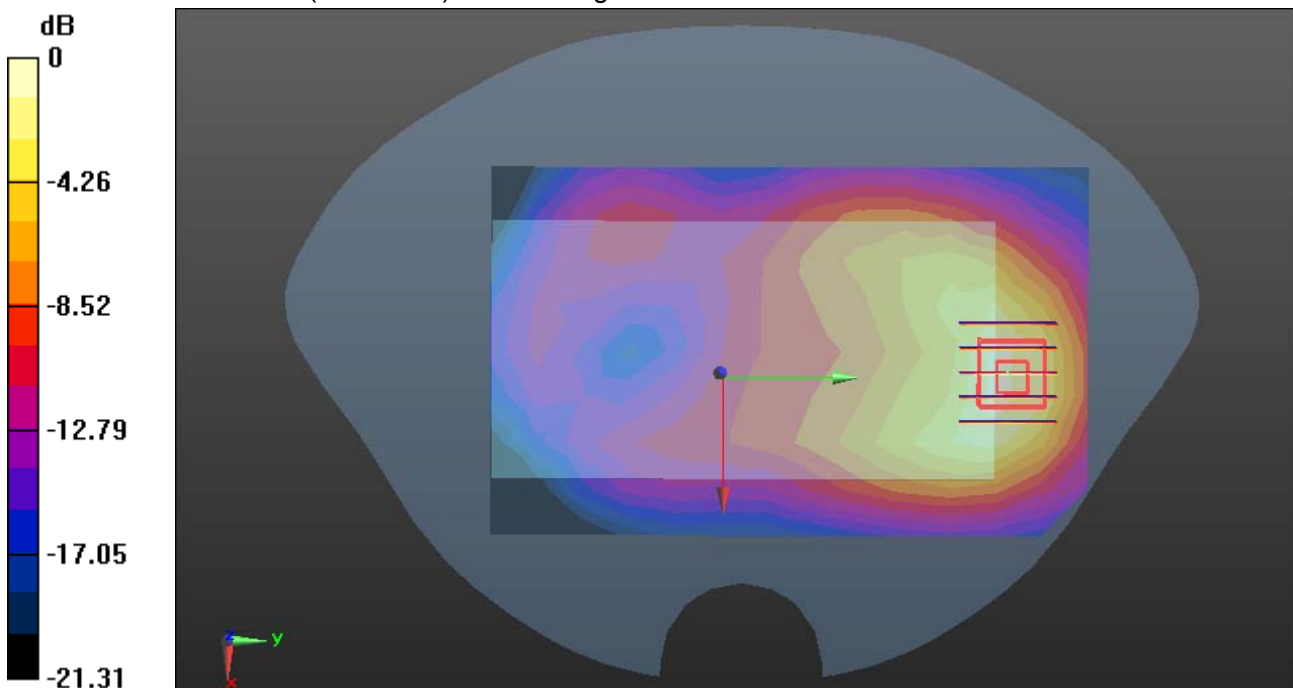

0 dB = 1.37 W/kg = 1.37 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

### GPRS 1900-Body Rear Low CH512

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.536$  S/m;  $\epsilon_r = 52.599$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Rear Low CH512/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.793 W/kg

**GPRS 1900/Body Rear Low CH512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.47 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.599 W/kg; SAR(10 g) = 0.321 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.871 W/kg

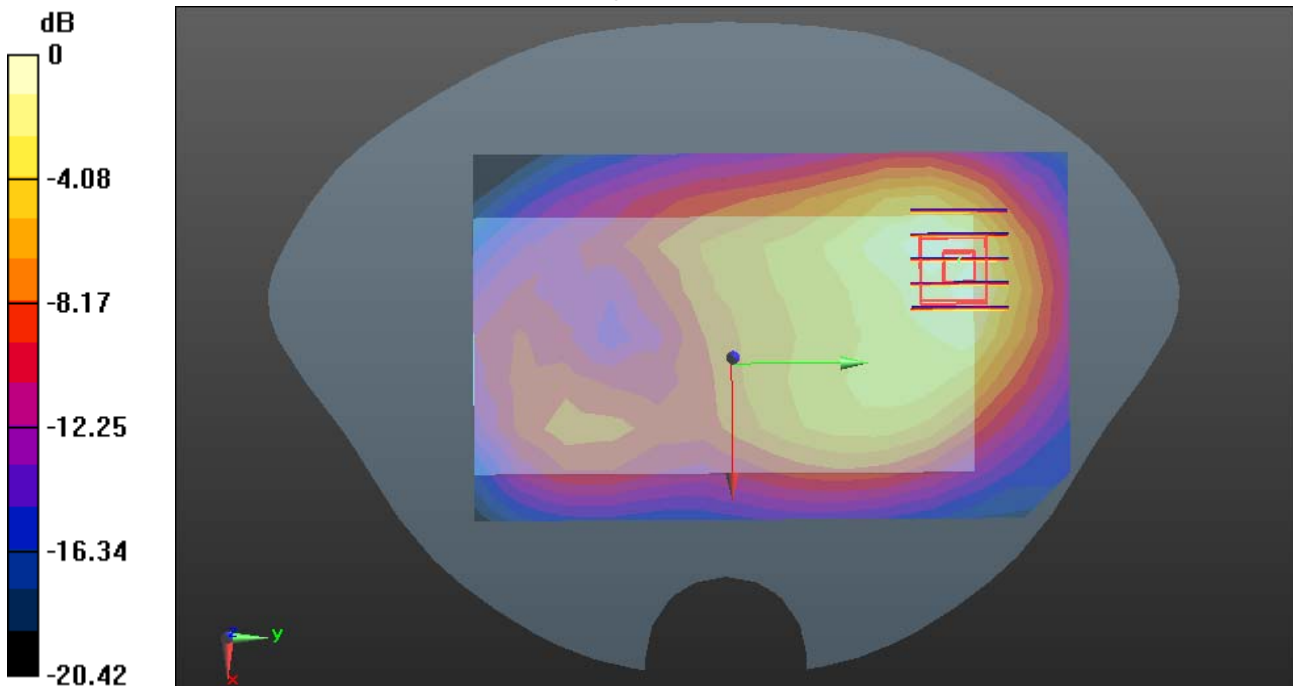

0 dB = 0.871 W/kg = -0.60 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body Rear Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Rear Middle CH661/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.880 W/kg


**GPRS 1900/Body Rear Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.69 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.35 W/kg

**SAR(1 g) = 0.690 W/kg; SAR(10 g) = 0.366 W/kg**

Maximum value of SAR (measured) = 1.01 W/kg

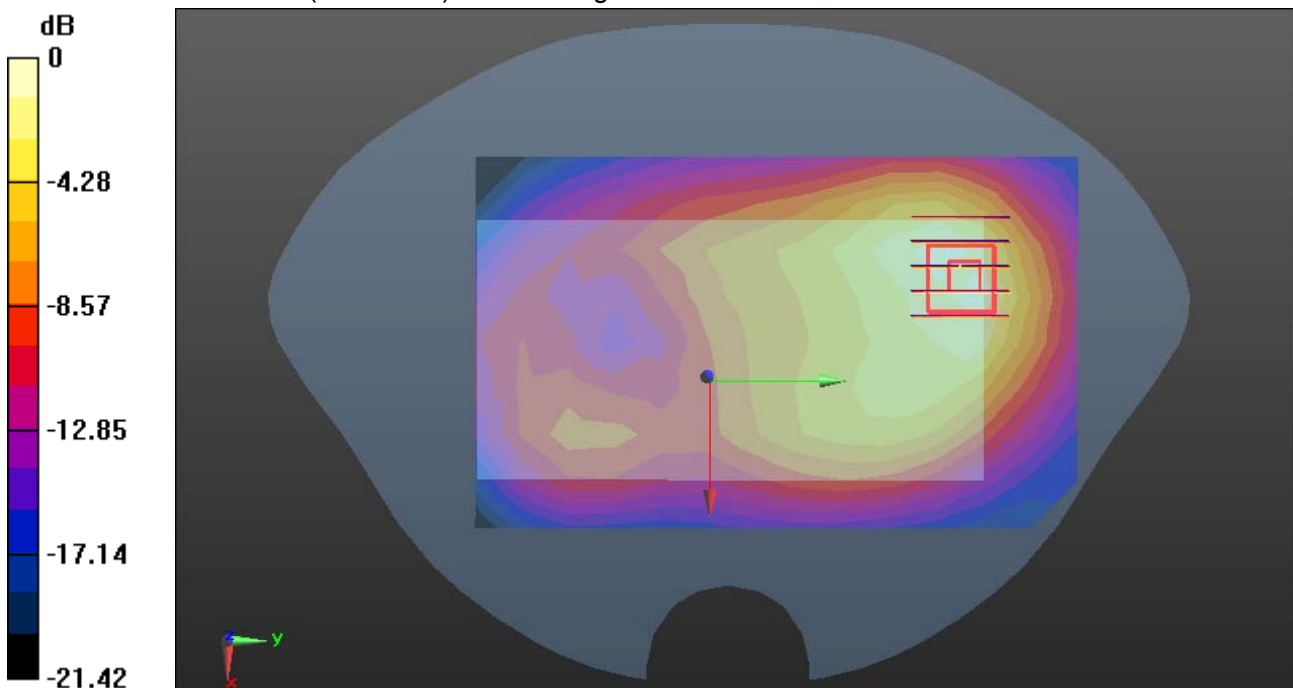

0 dB = 1.01 W/kg = 0.04 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body Rear High CH810**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.577$  S/m;  $\epsilon_r = 52.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Rear High CH810/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 W/kg

**GPRS 1900/Body Rear High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 11.29 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.437 W/kg**

Maximum value of SAR (measured) = 1.21 W/kg

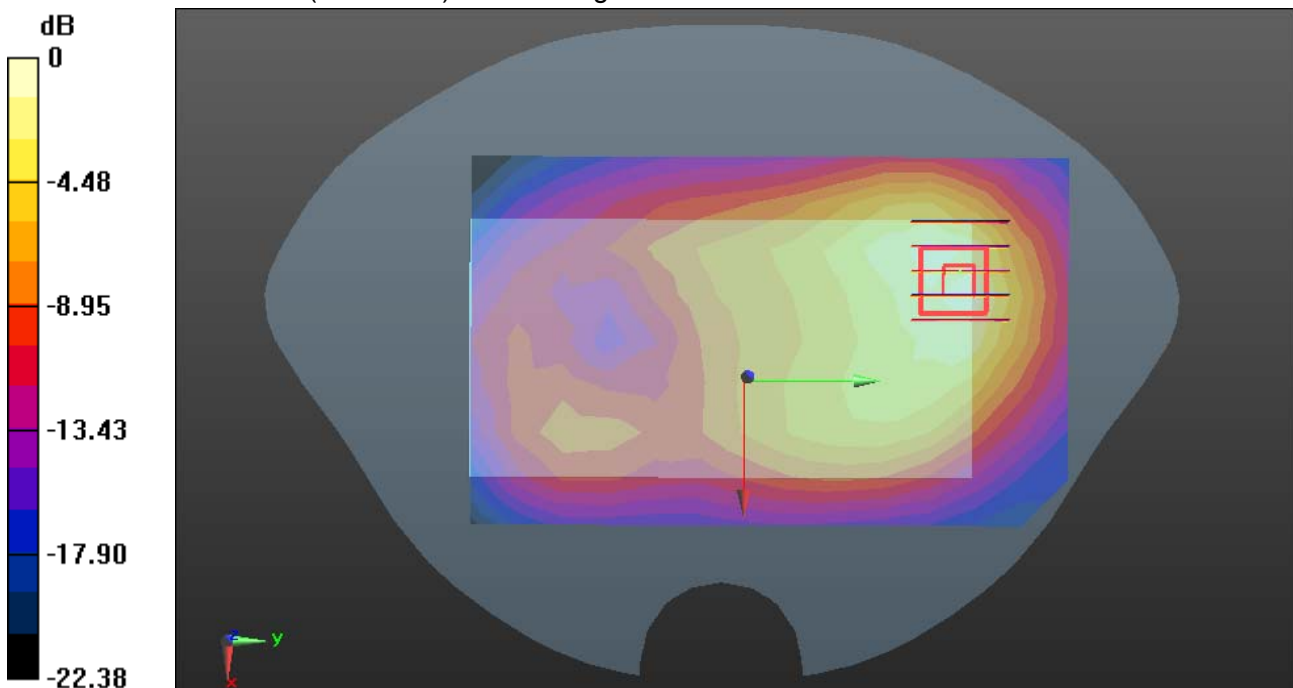

0 dB = 1.21 W/kg = 0.83 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

### GPRS 1900-Body-Right High CH810

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.577$  S/m;  $\epsilon_r = 52.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Right High CH810/Area Scan (14x7x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 0.371 W/kg


**GPRS 1900/Body Right High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.251 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.366 W/kg

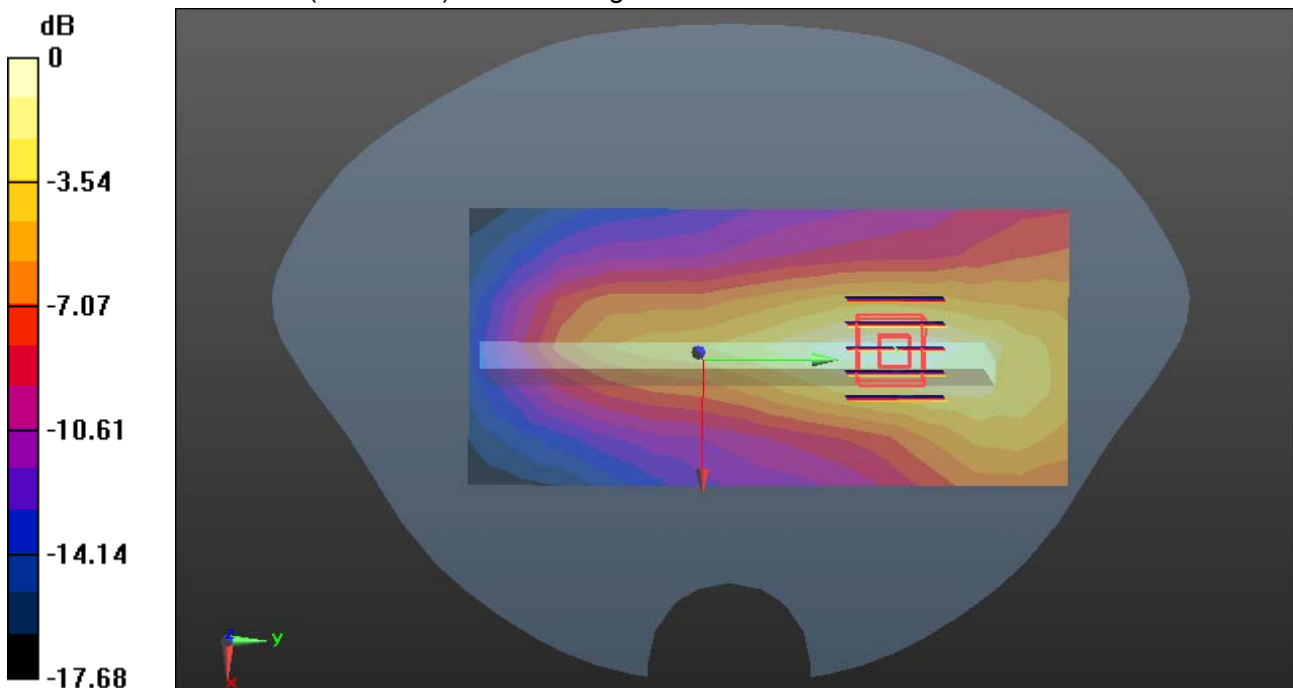

0 dB = 0.366 W/kg = -4.37 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body-Bottom Low CH512**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:2.0797

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.536$  S/m;  $\epsilon_r = 52.599$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Bottom Low CH512/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.12 W/kg

**GPRS 1900/Body Bottom Low CH512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 31.33 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.451 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.33 W/kg

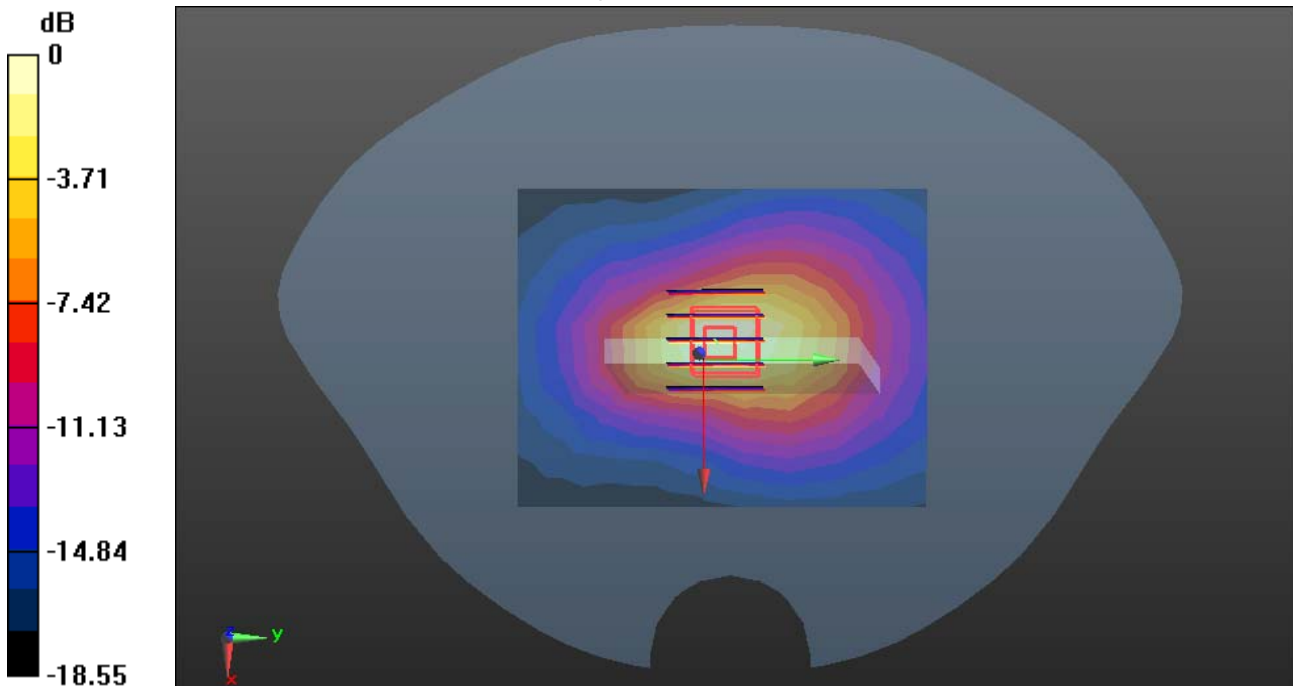

0 dB = 1.33 W/kg = 1.24 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body-Bottom Middle CH661**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Bottom Middle CH661/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.13 W/kg


**GPRS 1900/Body Bottom Middle CH661/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.44 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.506 W/kg**

Maximum value of SAR (measured) = 1.50 W/kg

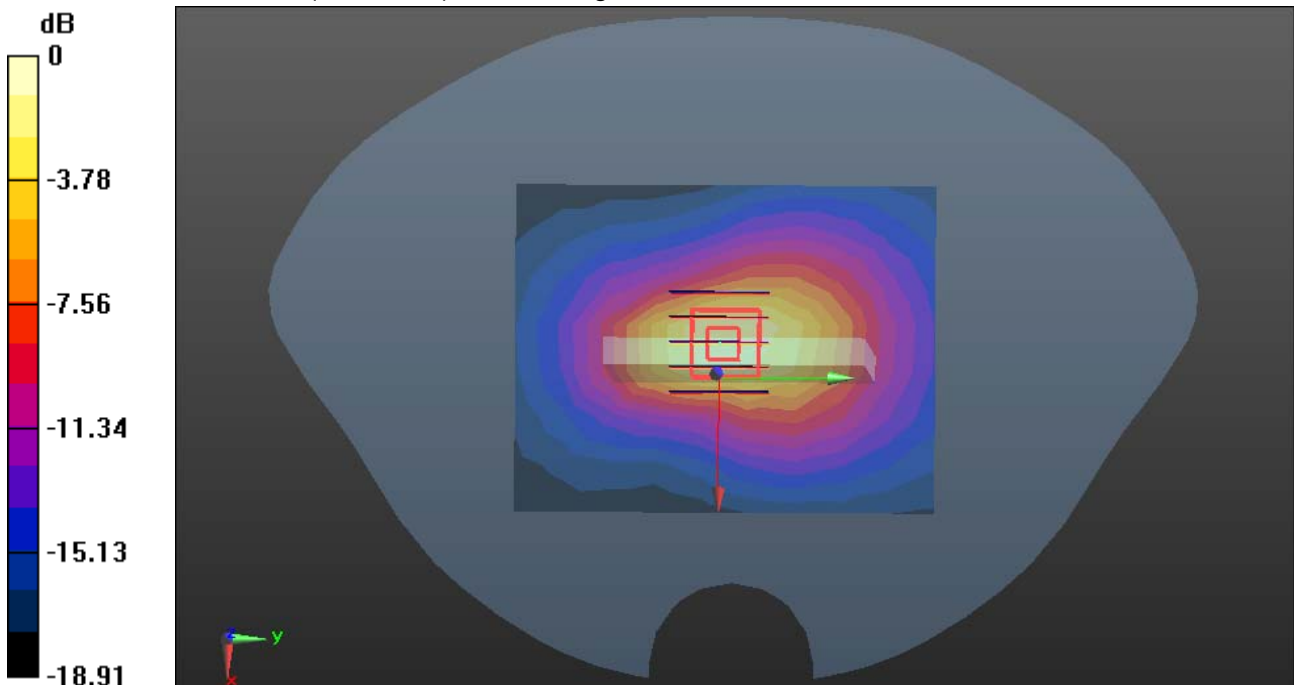

0 dB = 1.50 W/kg = 1.76 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body-Bottom High CH810**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.577$  S/m;  $\epsilon_r = 52.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Bottom High CH810/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 1.36 W/kg


**GPRS 1900/Body Bottom High CH810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.47 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.46 W/kg

**SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.609 W/kg**

Maximum value of SAR (measured) = 1.84 W/kg

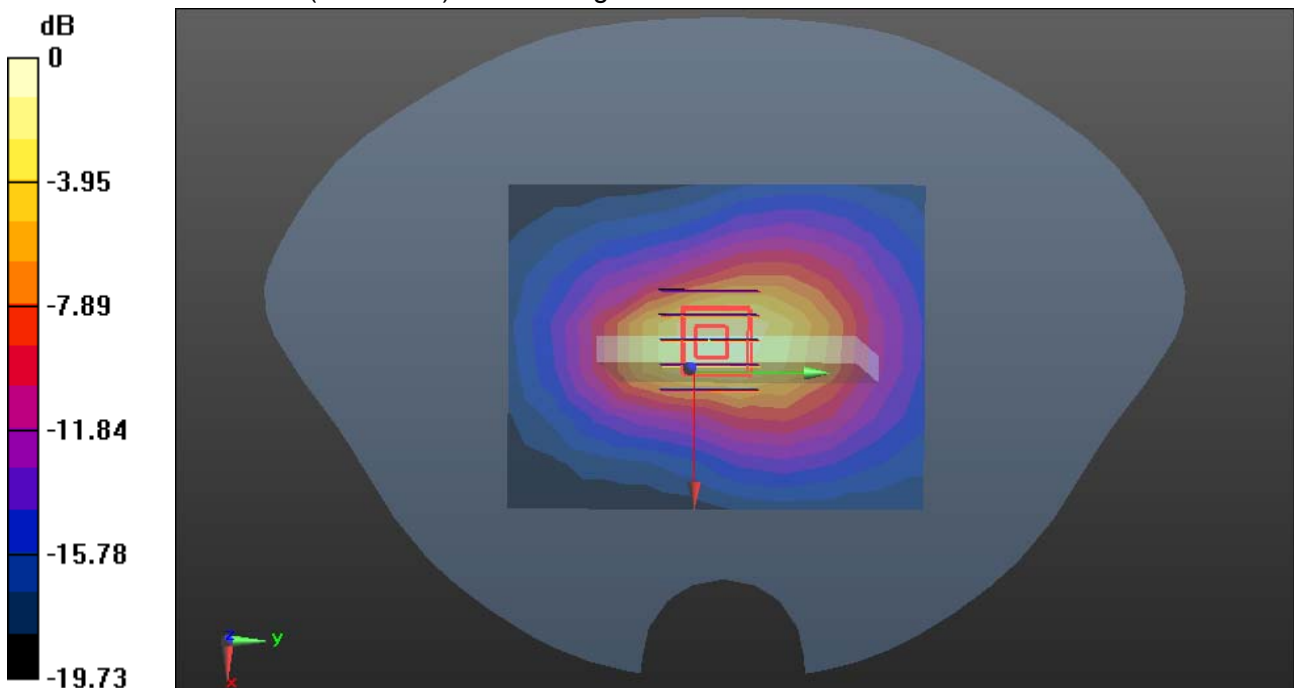

0 dB = 1.84 W/kg = 2.65 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body Front Low CH9262**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Front Low CH9262/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.525 W/kg

**WCDMA Band II/Body Front Low CH9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.343 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.822 W/kg

**SAR(1 g) = 0.430 W/kg; SAR(10 g) = 0.223 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.630 W/kg

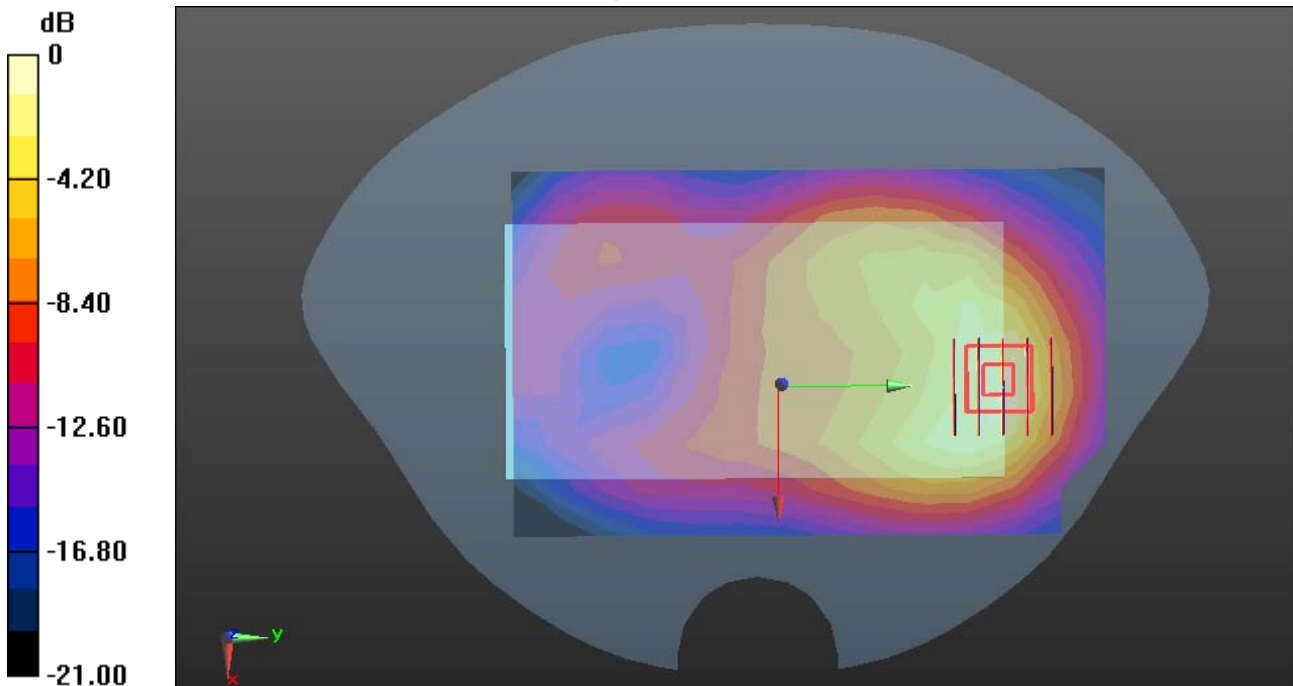

0 dB = 0.630 W/kg = -2.01 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body Front Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Front Middle CH9400/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.02 W/kg

**WCDMA Band II/Body Front Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.461 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.428 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

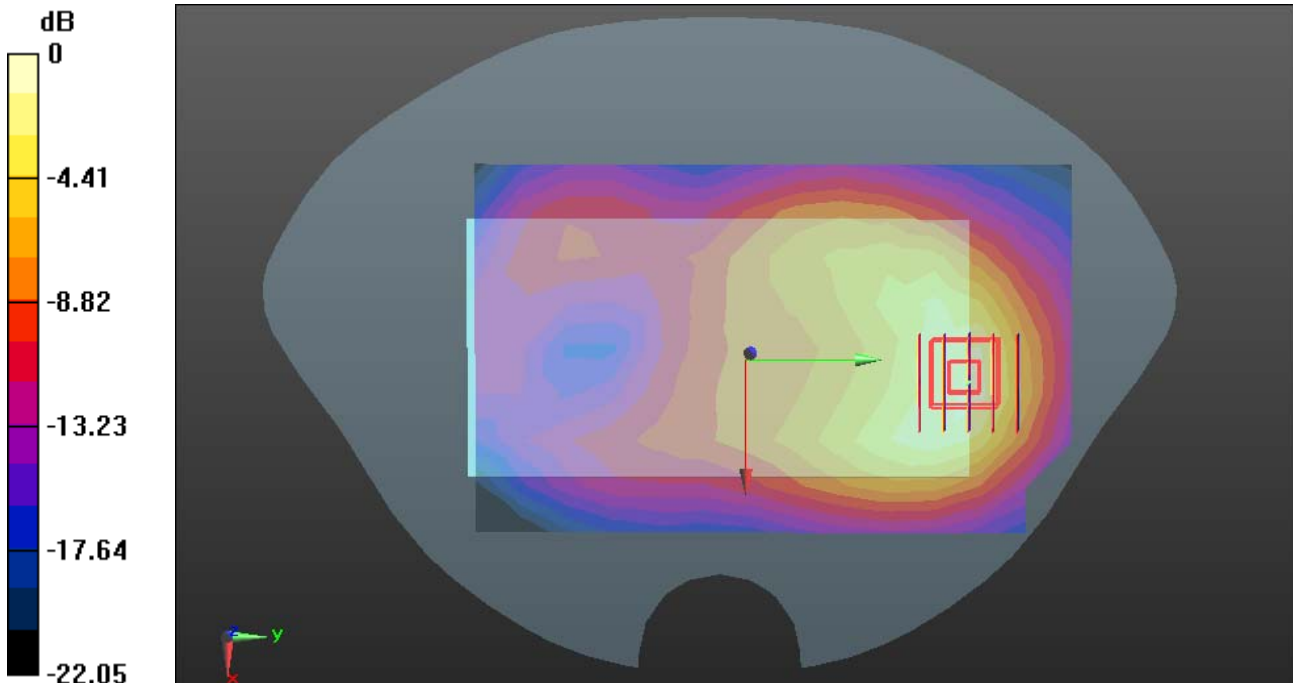

0 dB = 1.22 W/kg = 0.86 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body Front High CH9538**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.572$  S/m;  $\epsilon_r = 52.484$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Front High CH9538/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.976 W/kg


**WCDMA Band II/Body Front High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.285 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 0.802 W/kg; SAR(10 g) = 0.410 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

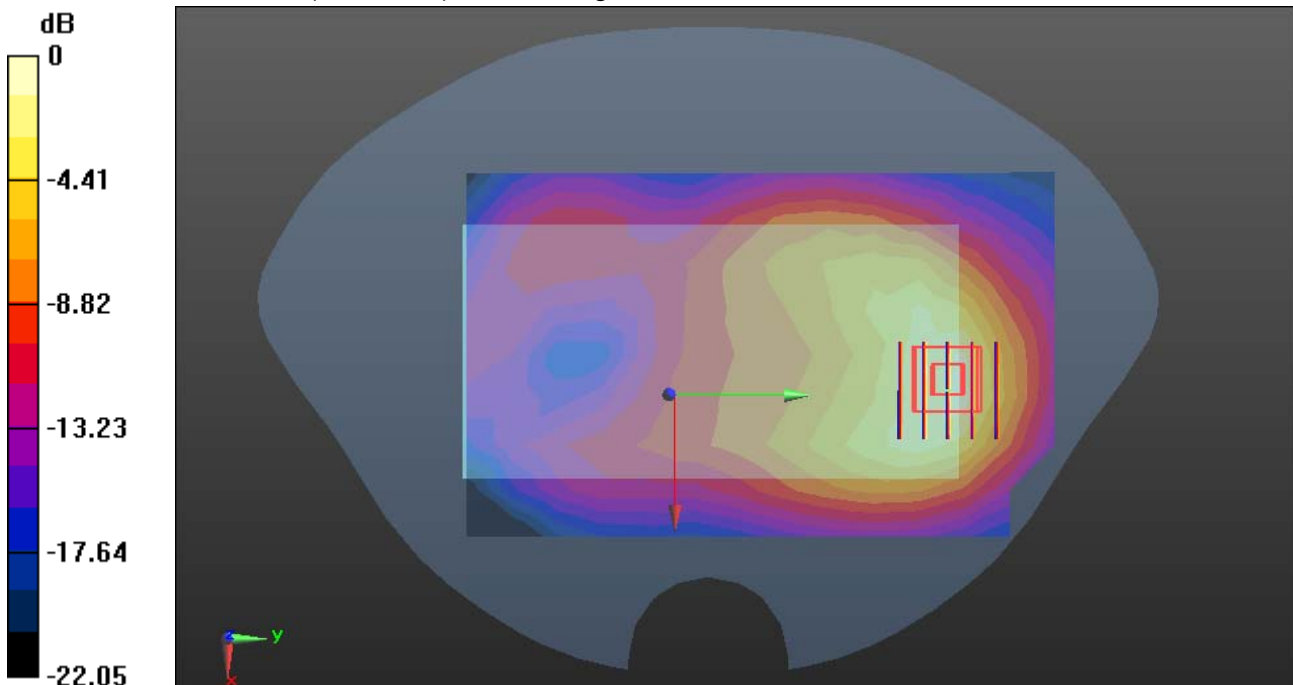

0 dB = 1.18 W/kg = 0.72 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

## WCDMA Band II-Body Rear Low CH9262

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Rear Low CH9262/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.612 W/kg

**WCDMA Band II/Body Rear Low CH9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 7.482 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.812 W/kg

**SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.221 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.603 W/kg

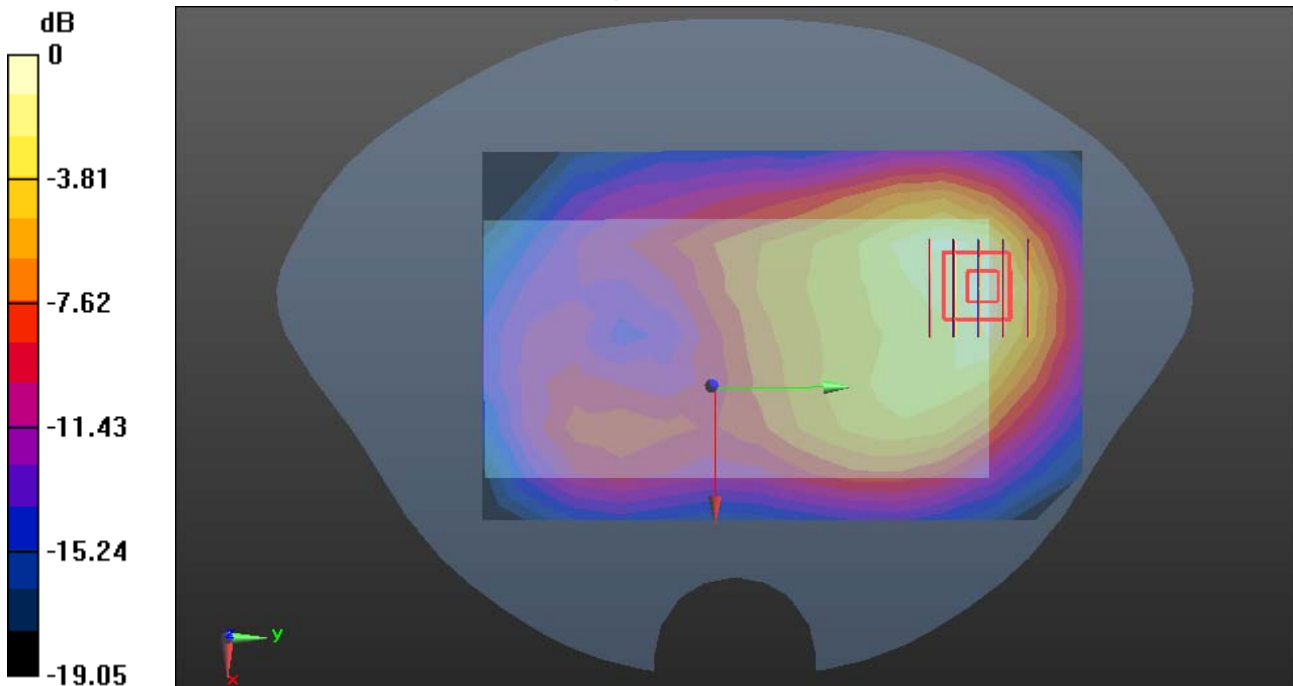

0 dB = 0.603 W/kg = -2.20 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body Rear Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Rear Middle CH9400/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg


**WCDMA Band II/Body Rear Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.14 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.50 W/kg

**SAR(1 g) = 0.766 W/kg; SAR(10 g) = 0.403 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

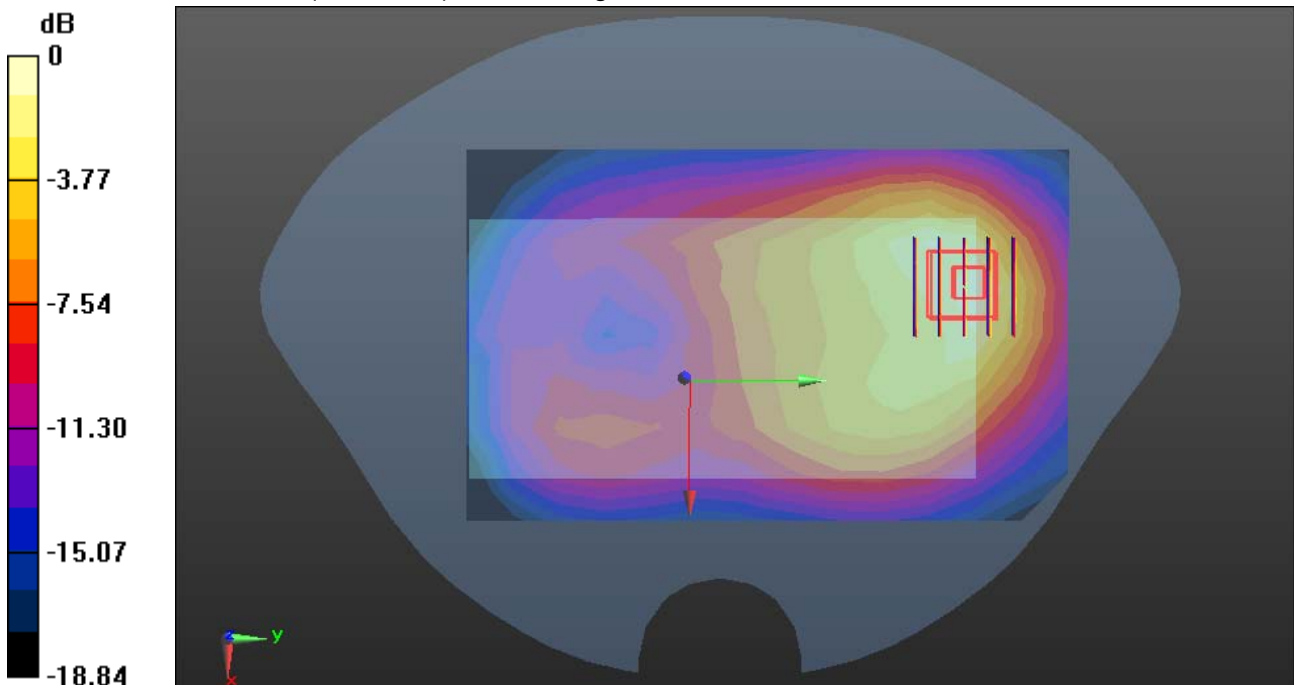

0 dB = 1.11 W/kg = 0.45 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body Rear High CH9538**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.572$  S/m;  $\epsilon_r = 52.484$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Rear High CH9538/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.11 W/kg


**WCDMA Band II/Body Rear High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.49 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.776 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 1.15 W/kg

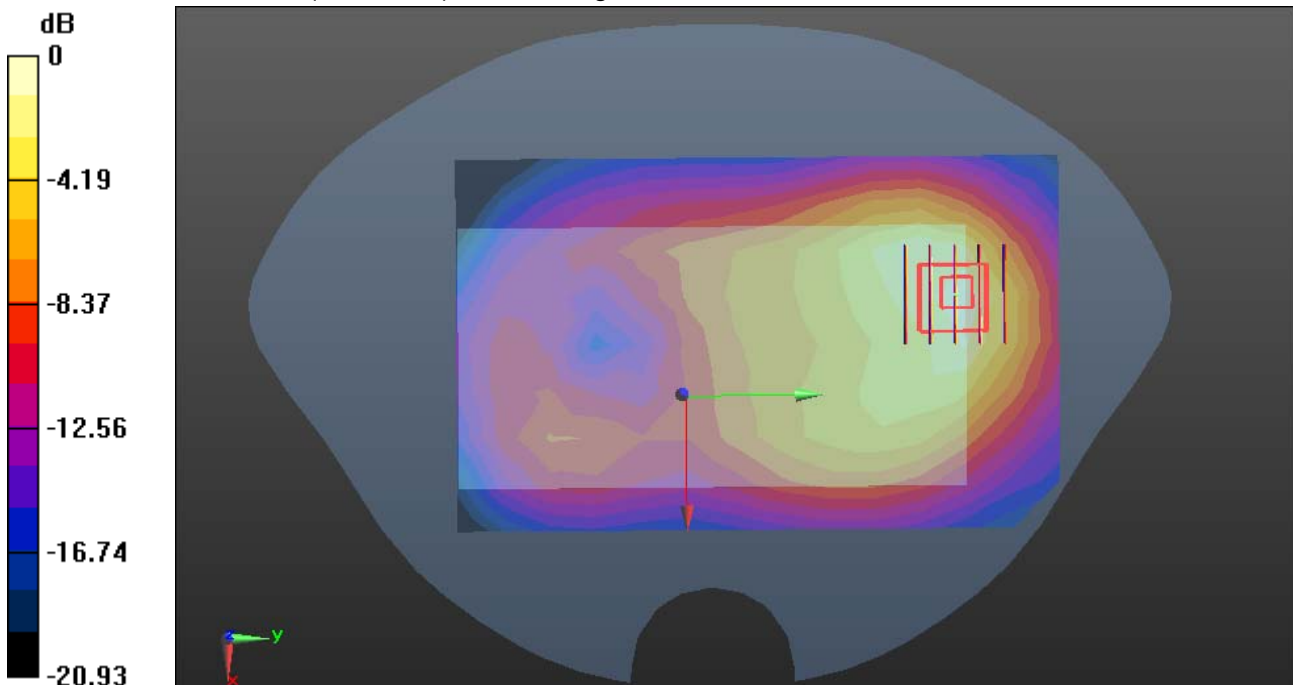

0 dB = 1.15 W/kg = 0.61 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body-Right Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Right Middle CH9400/Area Scan (14x7x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.298 W/kg


**WCDMA Band II/Body Right Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.938 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.408 W/kg

**SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.310 W/kg

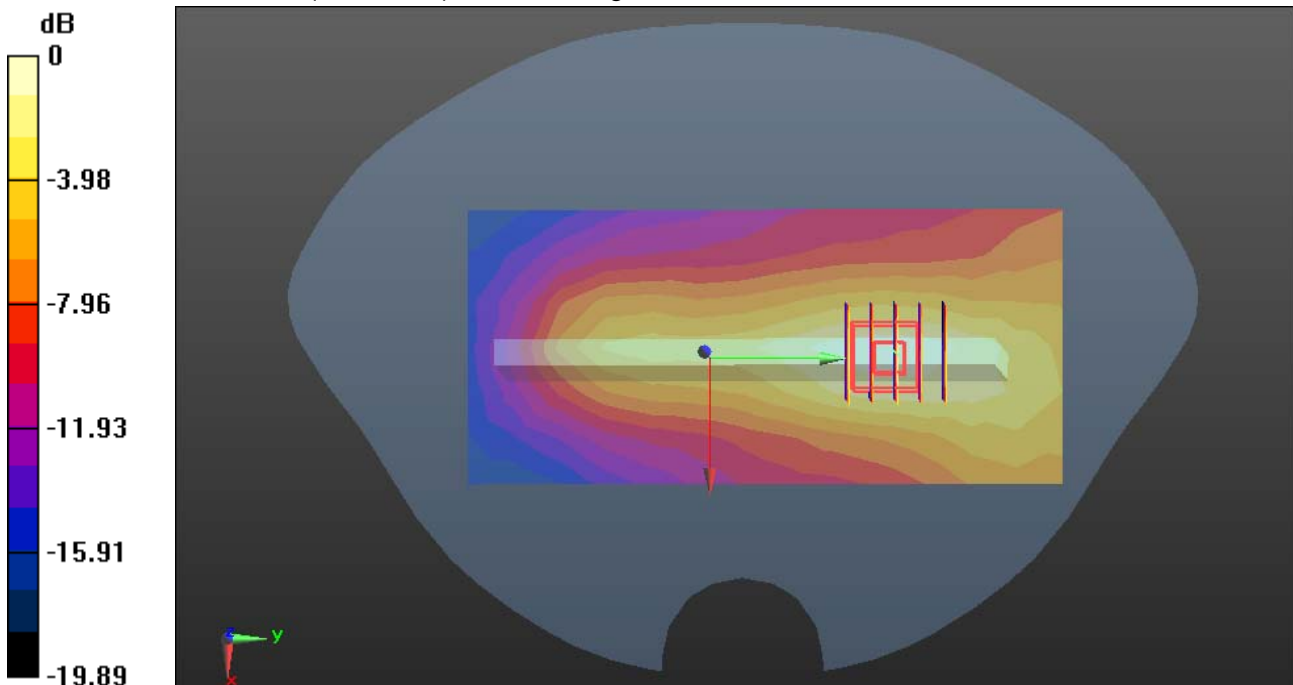

0 dB = 0.310 W/kg = -5.09 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body-Bottom Low CH9262**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.537$  S/m;  $\epsilon_r = 52.602$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Bottom Low CH9262/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.708 W/kg

**WCDMA Band II/Body Bottom Low CH9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.89 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.322 W/kg**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.962 W/kg

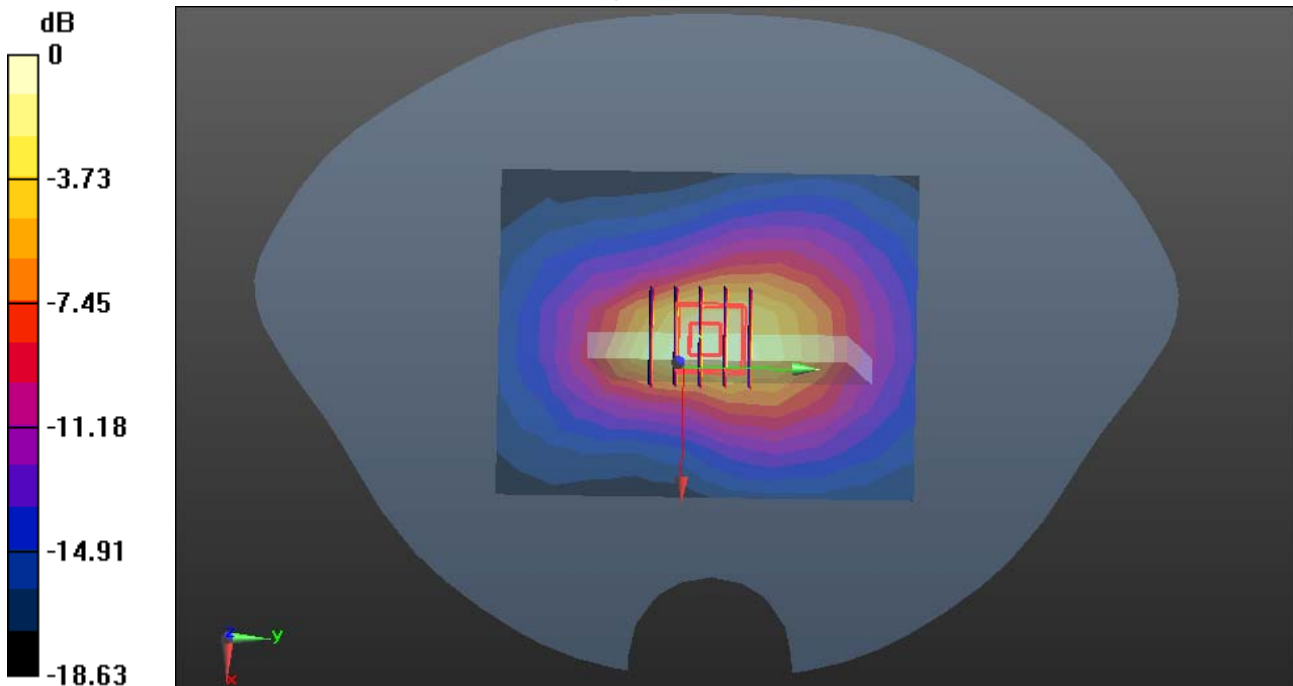

0 dB = 0.962 W/kg = -0.17 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body-Bottom Middle CH9400**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Bottom Middle CH9400/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.46 W/kg

**WCDMA Band II/Body Bottom Middle CH9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.50 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.32 W/kg

**SAR(1 g) = 1.17 W/kg; SAR(10 g) = 0.577 W/kg**

Maximum value of SAR (measured) = 1.74 W/kg

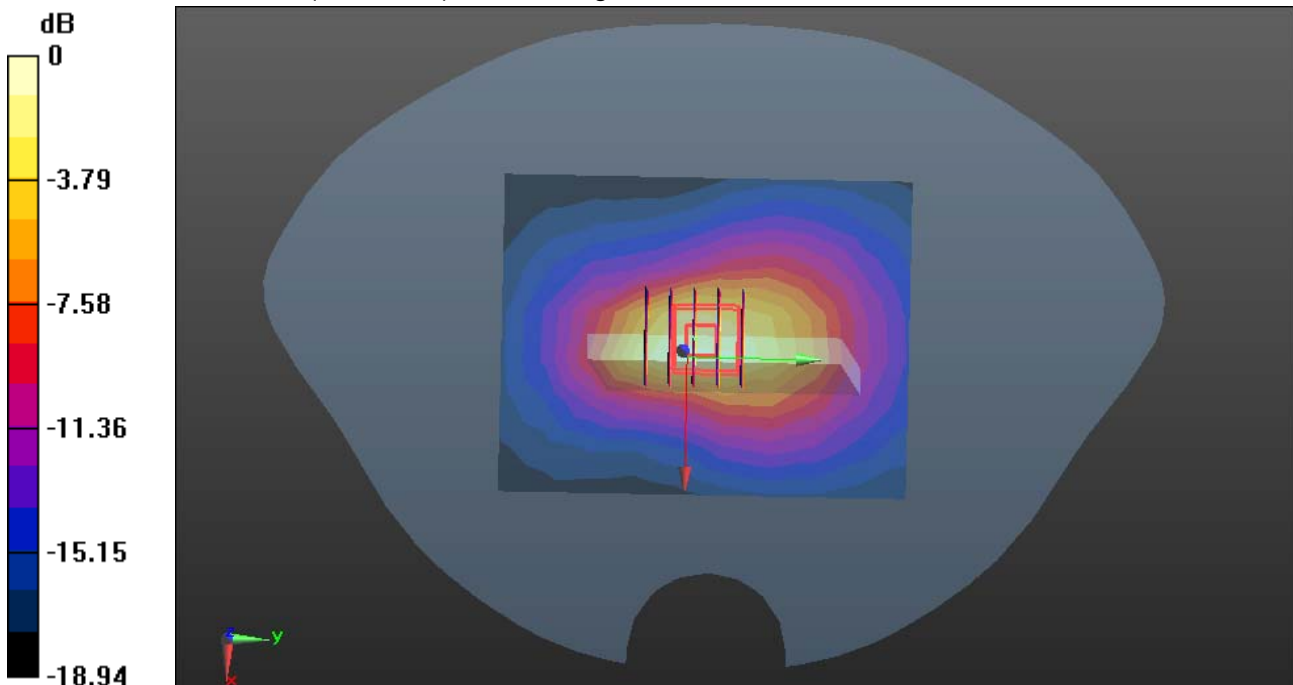

0 dB = 1.74 W/kg = 2.41 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body-Bottom High CH9538**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1908$  MHz;  $\sigma = 1.572$  S/m;  $\epsilon_r = 52.484$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Bottom High CH9538/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.28 W/kg


**WCDMA Band II/Body Bottom High CH9538/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.74 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.27 W/kg

**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.562 W/kg**

Maximum value of SAR (measured) = 1.71 W/kg

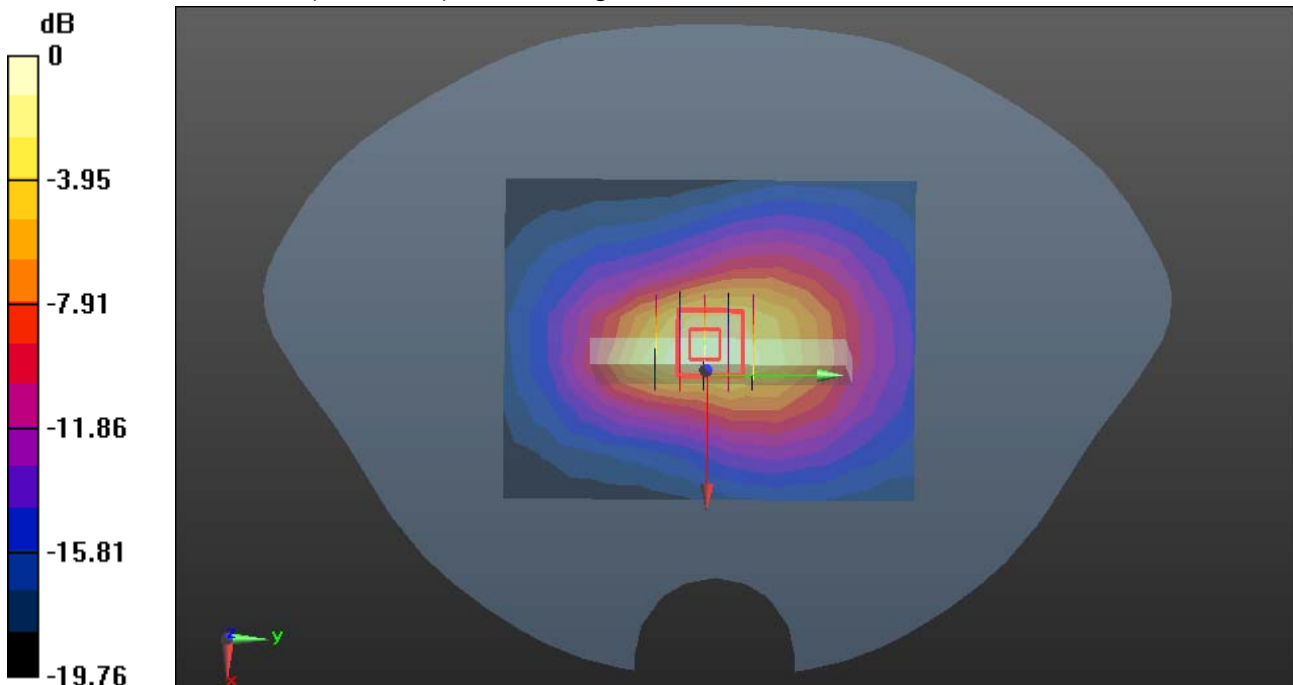

0 dB = 1.71 W/kg = 2.33 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Body Front Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.956 \text{ S/m}$ ;  $\epsilon_r = 52.88$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Body Front Middle CH4182/Area Scan (14x9x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.440 W/kg

**WCDMA Band V/Body Front Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


$dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.49 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.520 W/kg

**SAR(1 g) = 0.366 W/kg; SAR(10 g) = 0.256 W/kg**

Maximum value of SAR (measured) = 0.444 W/kg

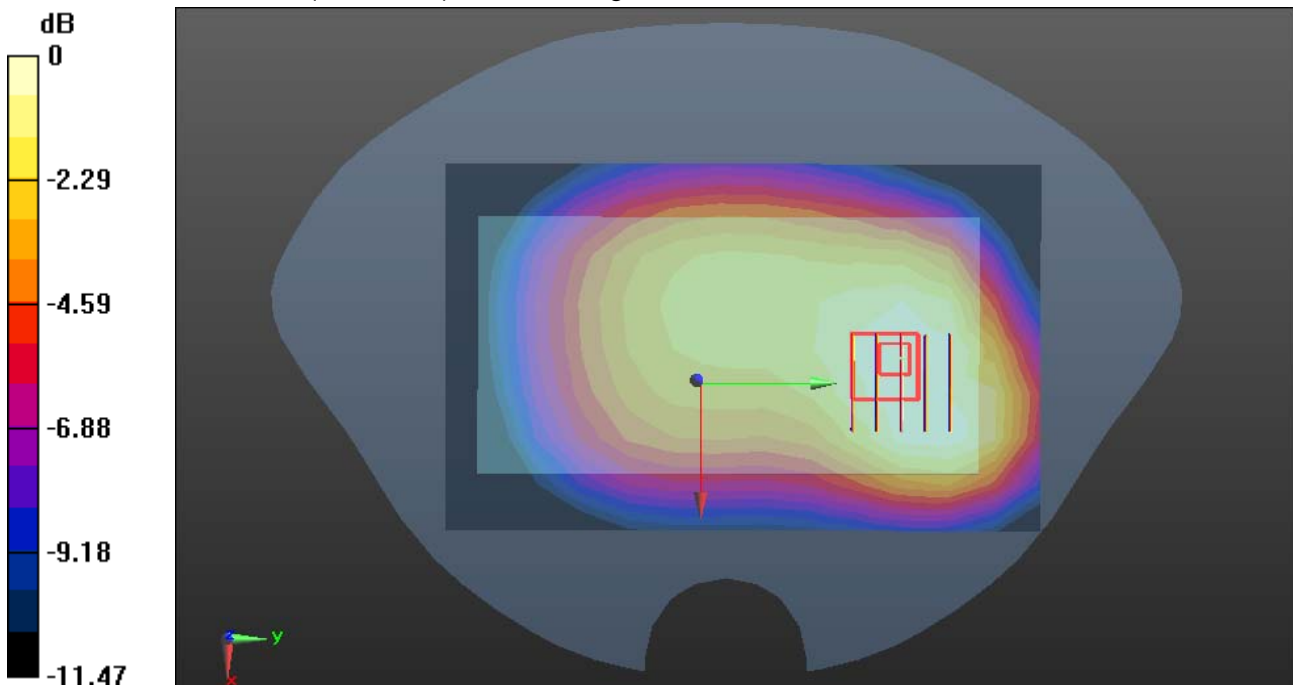

0 dB = 0.444 W/kg = -3.53 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Body Rear Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.956 \text{ S/m}$ ;  $\epsilon_r = 52.88$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Body Rear Middle CH4182/Area Scan (14x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.546 W/kg

**WCDMA Band V/Body Rear Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.39 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.667 W/kg

**SAR(1 g) = 0.458 W/kg; SAR(10 g) = 0.300 W/kg**

Maximum value of SAR (measured) = 0.564 W/kg

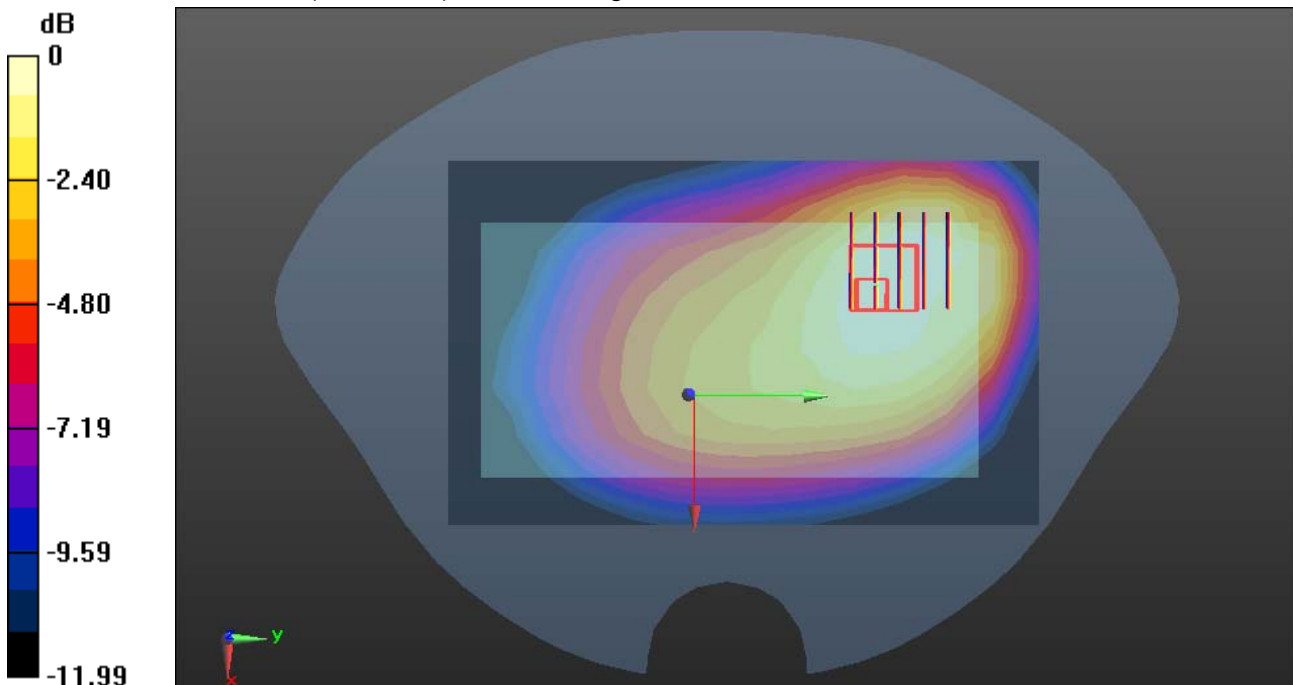

0 dB = 0.564 W/kg = -2.49 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Body-Right Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.956 \text{ S/m}$ ;  $\epsilon_r = 52.88$ ;  $\rho = 1000 \text{ kg/m}^3$

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Body Right Middle CH4182/Area Scan (13x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.231 W/kg

**WCDMA Band V/Body Right Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.30 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.141 W/kg**

Maximum value of SAR (measured) = 0.260 W/kg

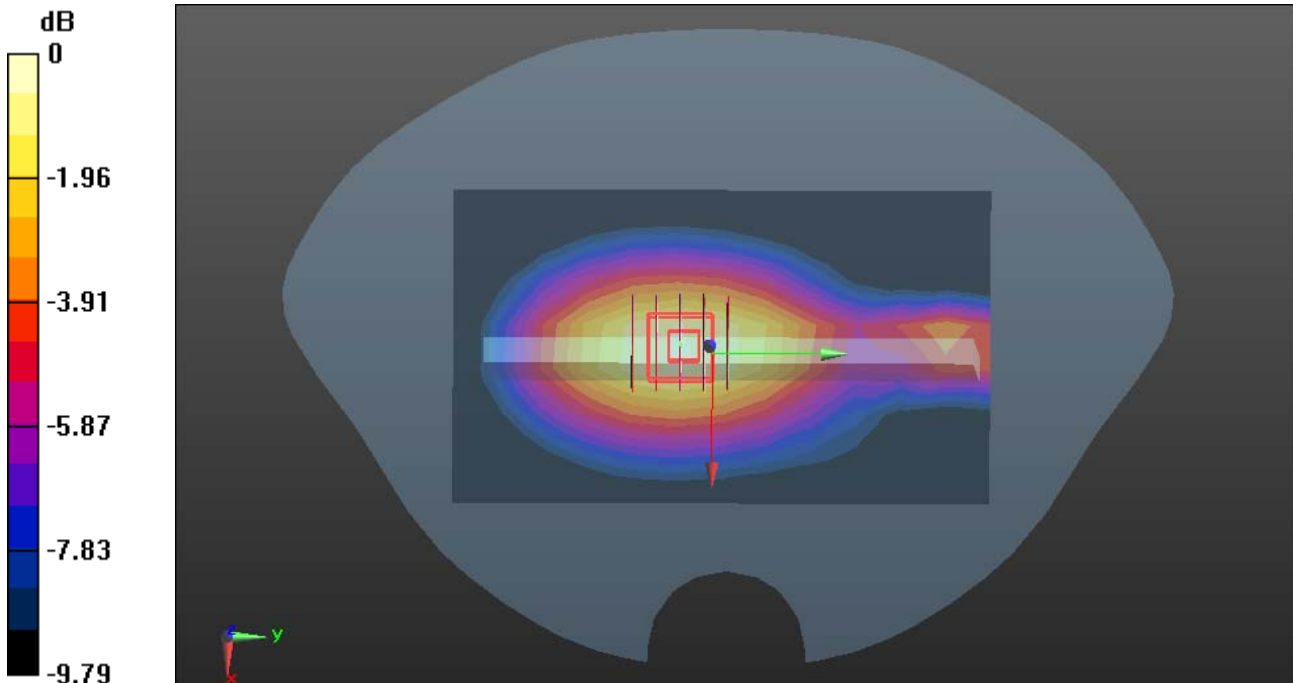

0 dB = 0.260 W/kg = -5.85 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/24/2014

**WCDMA Band V-Body-Bottom Middle CH4182**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band V; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 837$  MHz;  $\sigma = 0.956$  S/m;  $\epsilon_r = 52.88$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.22, 9.22, 9.22); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band V/Body Bottom Middle CH4182/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.442 W/kg

**WCDMA Band V/Body Bottom Middle CH4182/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.73 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.762 W/kg

**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.232 W/kg**

Maximum value of SAR (measured) = 0.586 W/kg

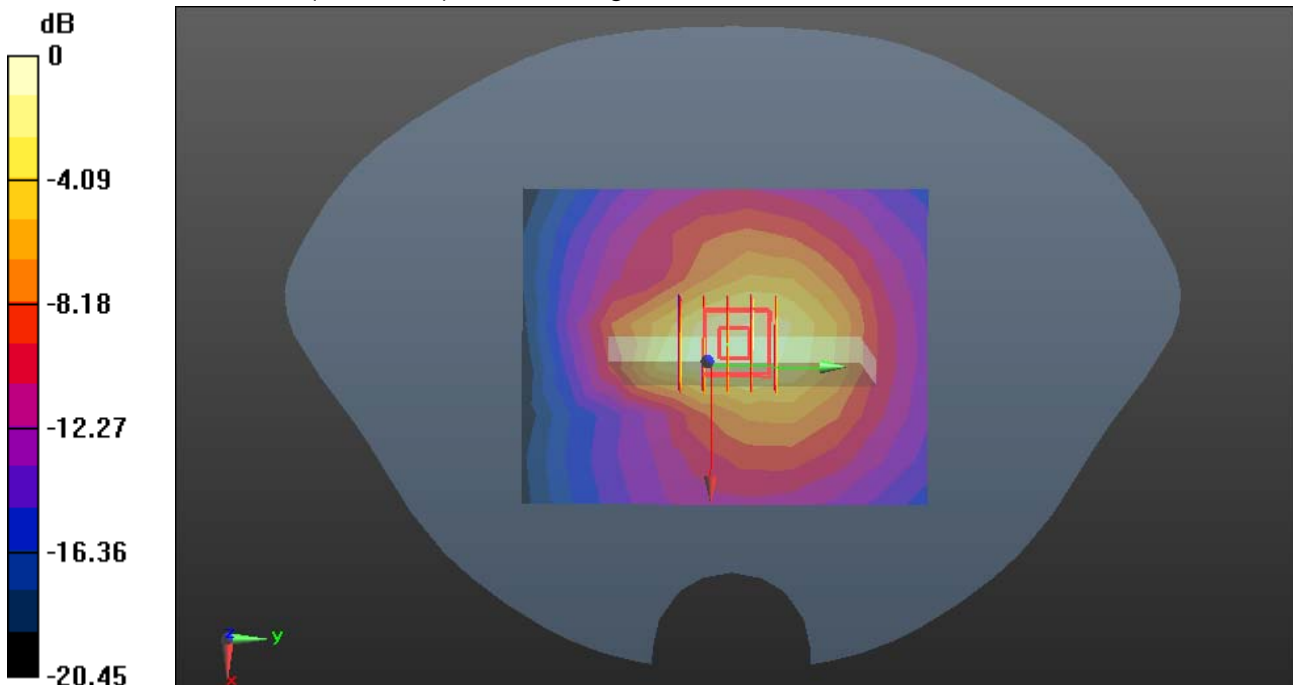

0 dB = 0.586 W/kg = -2.32 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Body Front Low CH1**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 51.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Body Front Low CH1/Area Scan (17x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.339 W/kg


**WIFI/Body Front Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.819 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.534 W/kg

**SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.342 W/kg

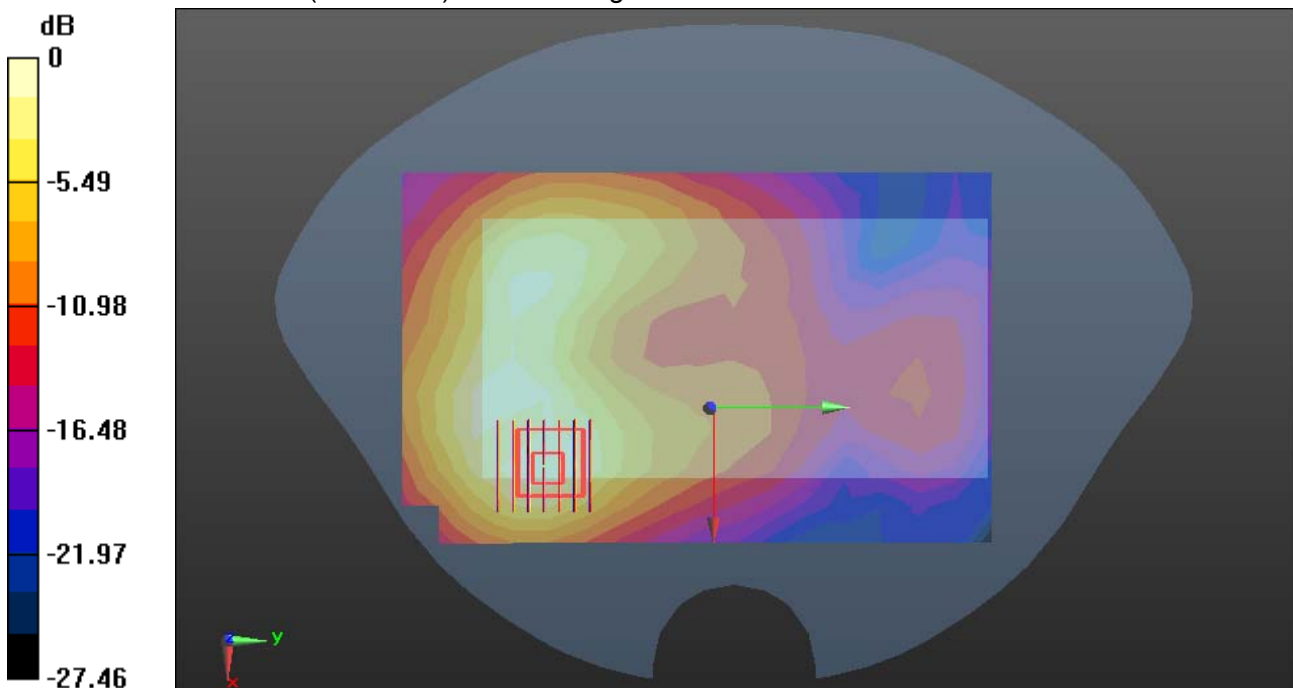

0 dB = 0.342 W/kg = -4.66 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

### WIFI-Body Rear Low CH1

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 51.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Body Rear Low CH1/Area Scan (17x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.498 W/kg


**WIFI/Body Rear Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.196 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.824 W/kg

**SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.166 W/kg**

Maximum value of SAR (measured) = 0.554 W/kg

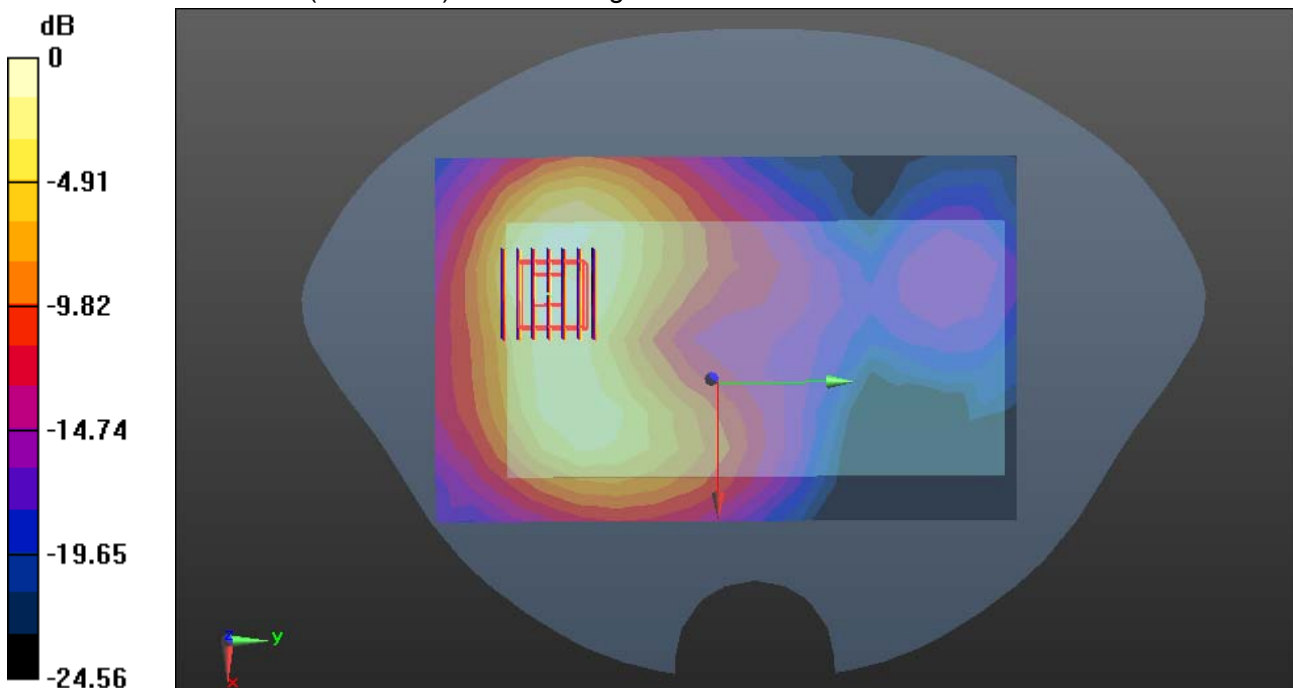

0 dB = 0.554 W/kg = -2.56 dBW/kg





Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

### WIFI-Body-Right Low CH1

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 51.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Body Right Low CH1/Area Scan (18x9x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.340 W/kg


**WIFI/Body Right Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.785 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.524 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.353 W/kg

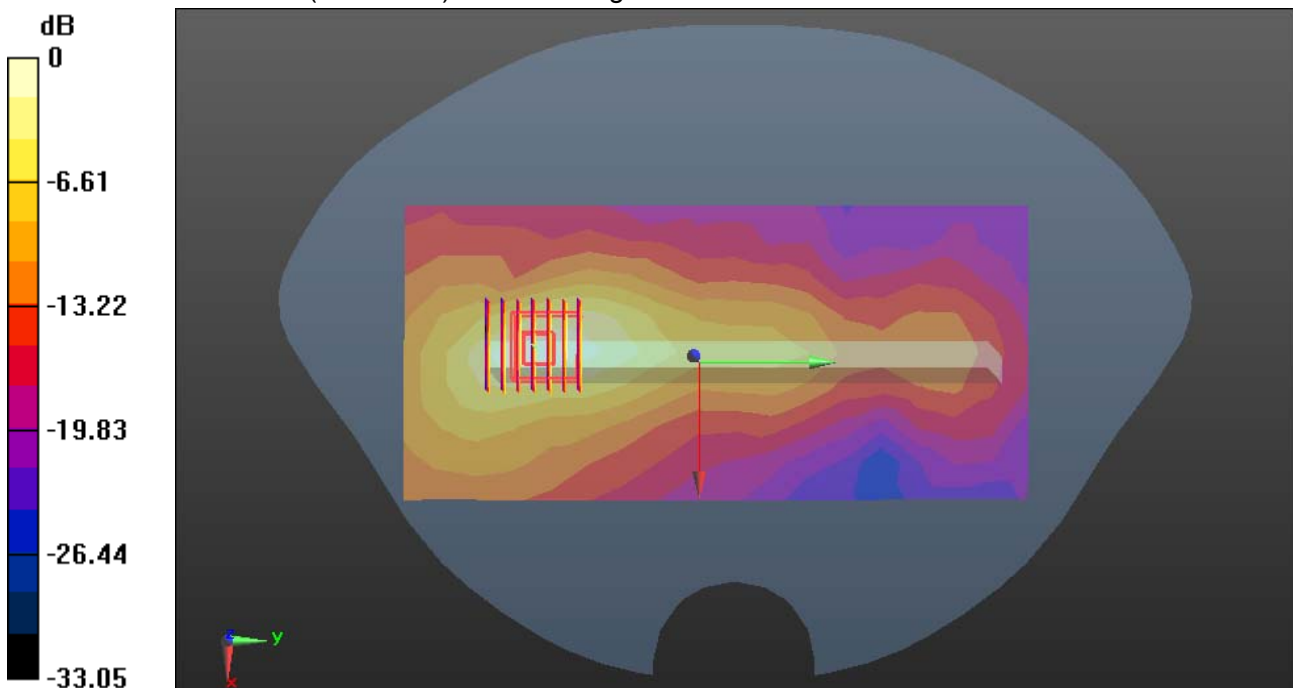

0 dB = 0.353 W/kg = -4.52 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

### WiFi-Body-Top Low CH1

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.874$  S/m;  $\epsilon_r = 51.641$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.82, 6.82, 6.82); Calibrated: 7/28/2014;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WiFi/Body Top Low CH1/Area Scan (12x10x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.532 W/kg


**WiFi/Body Top Low CH1/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.89 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.736 W/kg

**SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.174 W/kg**

Maximum value of SAR (measured) = 0.525 W/kg

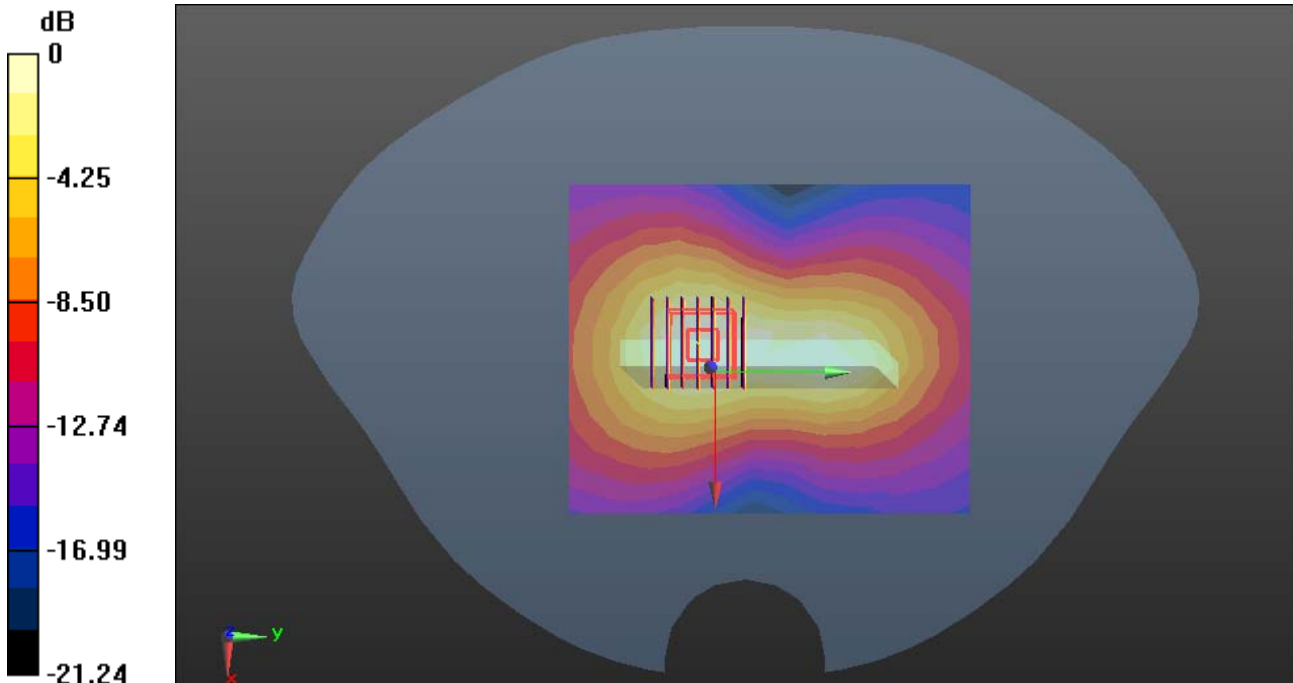

0 dB = 0.525 W/kg = -2.80 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/26/2014

**WIFI-Right Head Tilted Low CH1 repeat**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, IEEE 802.11b (0); Communication System Band: ISM 2.4GHz Band;  
Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.736$  S/m;  $\epsilon_r = 39.733$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.04, 7.04, 7.04); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WIFI/Right Head Tilted Low CH1 repeat/Area Scan (11x12x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.39 W/kg


**WIFI/Right Head Tilted Low CH1 repeat/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.67 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 2.53 W/kg

**SAR(1 g) = 0.984 W/kg; SAR(10 g) = 0.378 W/kg**

Maximum value of SAR (measured) = 1.55 W/kg

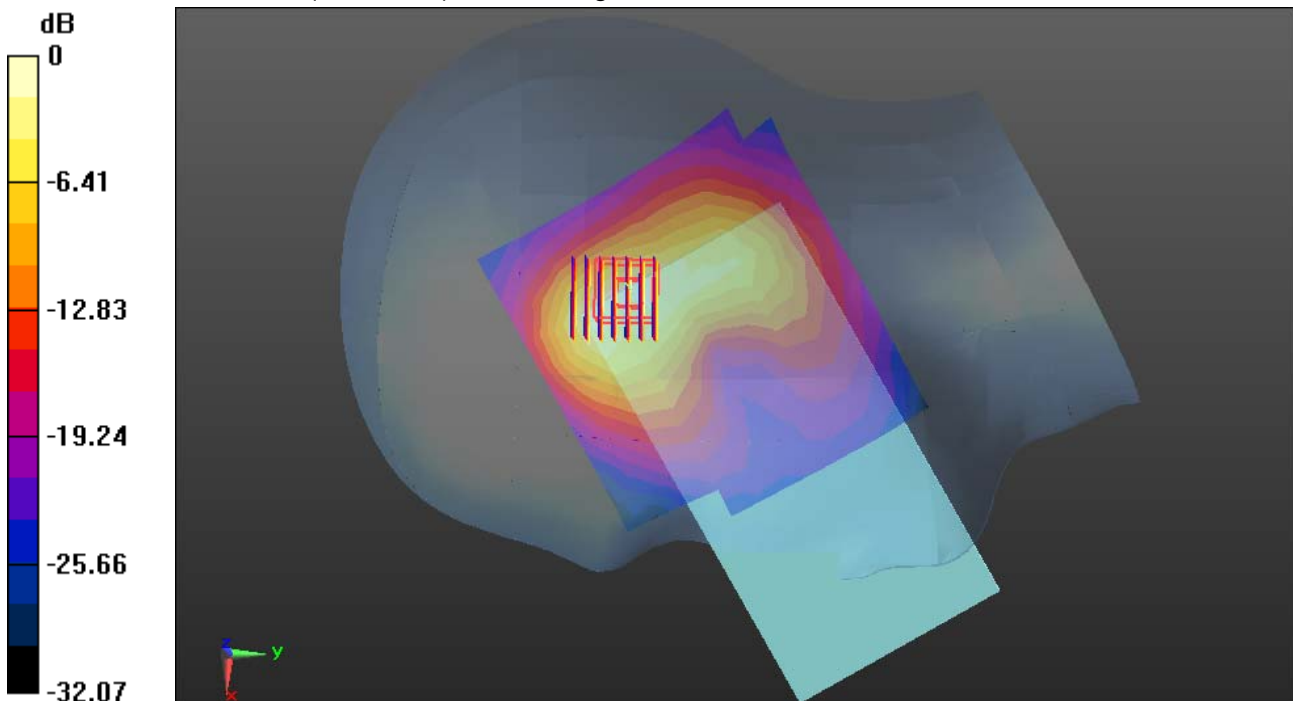

0 dB = 1.55 W/kg = 1.90 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**GPRS 1900-Body-Bottom High CH810 repeat**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, Generic GSM (0); Communication System Band: PCS1900; Frequency: 1909.8 MHz;Duty Cycle: 1:2.0797

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.577$  S/m;  $\epsilon_r = 52.494$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**GPRS 1900/Body Bottom High CH810 repeat/Area Scan (10x8x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.35 W/kg

**GPRS 1900/Body Bottom High CH810 repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.26 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.44 W/kg

**SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.606 W/kg**

Maximum value of SAR (measured) = 1.84 W/kg

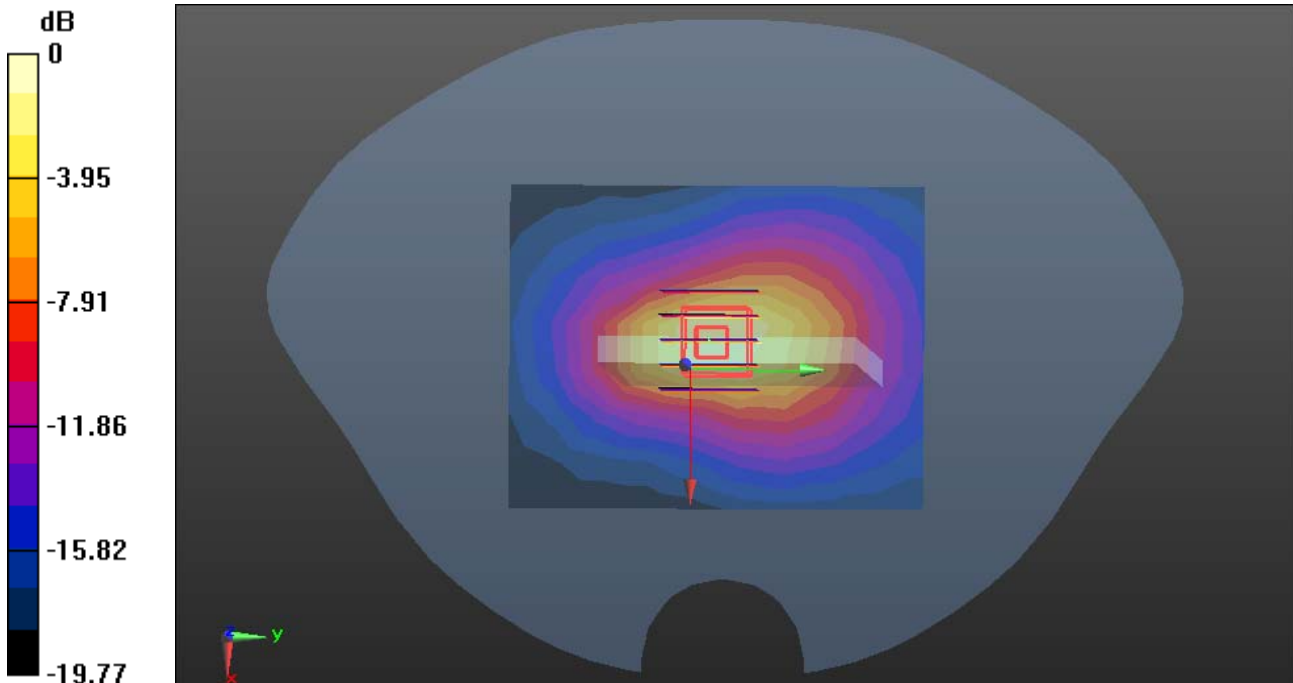

0 dB = 1.84 W/kg = 2.65 dBW/kg



Test Laboratory: Compliance Certification Services Inc.

Date: 10/25/2014

**WCDMA Band II-Body-Bottom Middle CH9400 repeat**

**DUT: Mobile Phone; Type: Sky 6.0Q; Serial: 351372098170192**

Communication System: UID 0, FDD WCDMA (0); Communication System Band: Band II; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.542$  S/m;  $\epsilon_r = 52.596$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Room Ambient Temperature: 22°C; Liquid Temperature: 21.5°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.09, 7.09, 7.09); Calibrated: 7/28/2014;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/22/2014
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS52 52.8.8(1222);
- SEMCAD X Version 14.6.10 (7331)

**WCDMA Band II/Body Bottom Middle CH9400 repeat/Area Scan (10x8x1):** Measurement grid:

$dx=15$ mm,  $dy=15$ mm

Maximum value of SAR (measured) = 1.27 W/kg

**WCDMA Band II/Body Bottom Middle CH9400 repeat/Zoom Scan (5x5x7)/Cube 0:** Measurement


grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm

Reference Value = 32.19 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.29 W/kg

**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.573 W/kg**

Maximum value of SAR (measured) = 1.73 W/kg

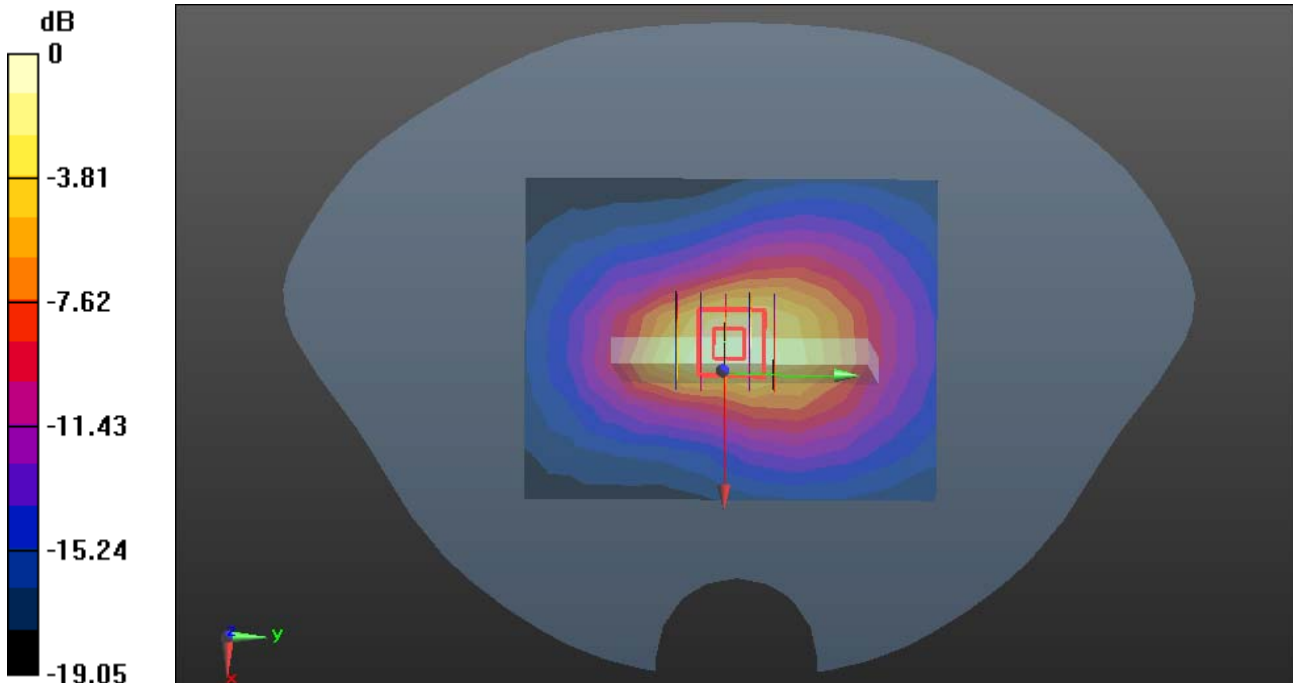

0 dB = 1.73 W/kg = 2.38 dBW/kg