

Test Plot 1#: GSM 850_Head Left Cheek_Middle Channel**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.531 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.448 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.485 W/kg; SAR(10 g) = 0.353 W/kg

Maximum value of SAR (measured) = 0.515 W/kg

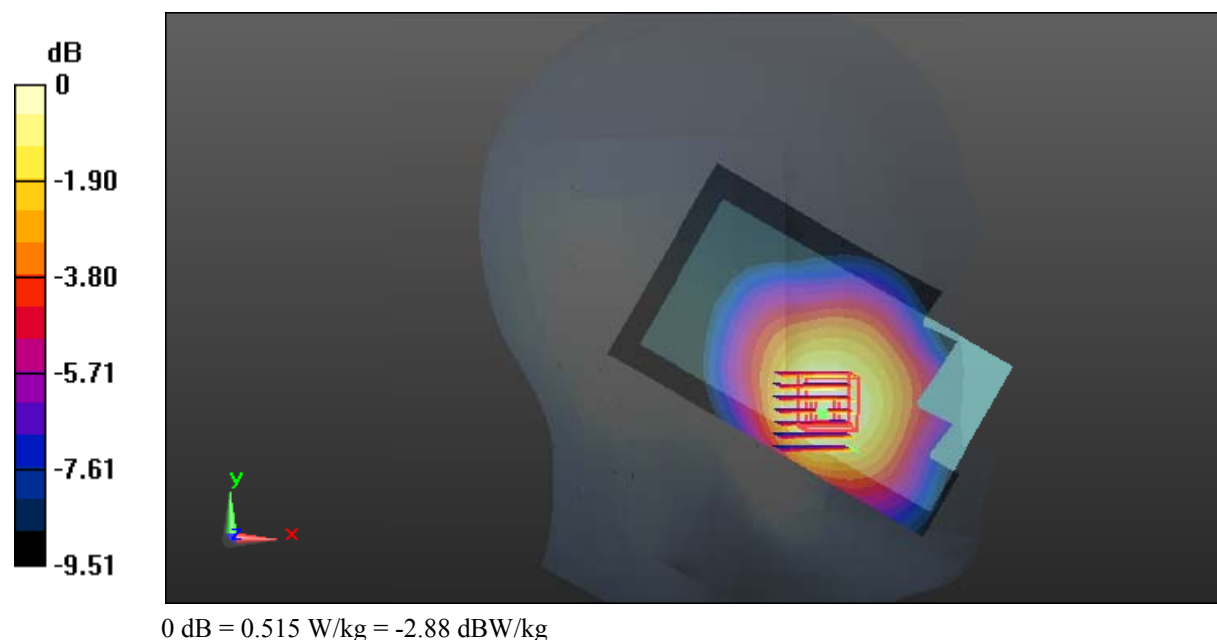

Test Plot 2#: GSM 850_Head Left Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.256 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.00 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.297 W/kg
SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.188 W/kg
 Maximum value of SAR (measured) = 0.245 W/kg

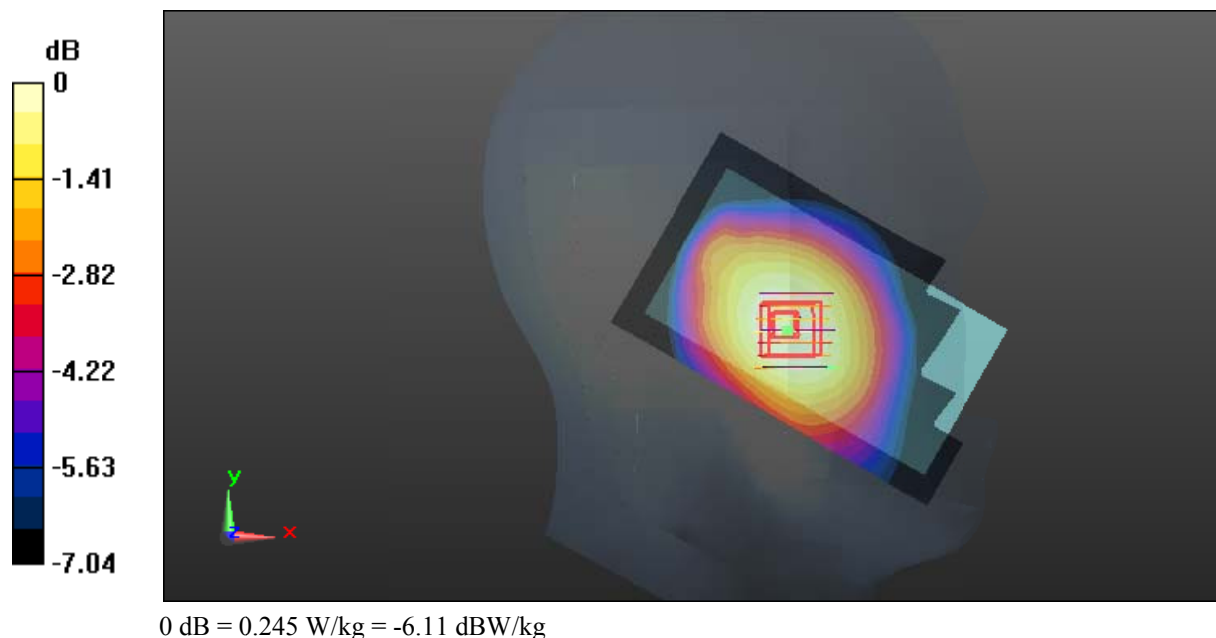

Test Plot 3#: GSM 850_Head Right Cheek_Middle Channel**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.407 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.438 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.557 W/kg

SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.263 W/kg

Maximum value of SAR (measured) = 0.379 W/kg

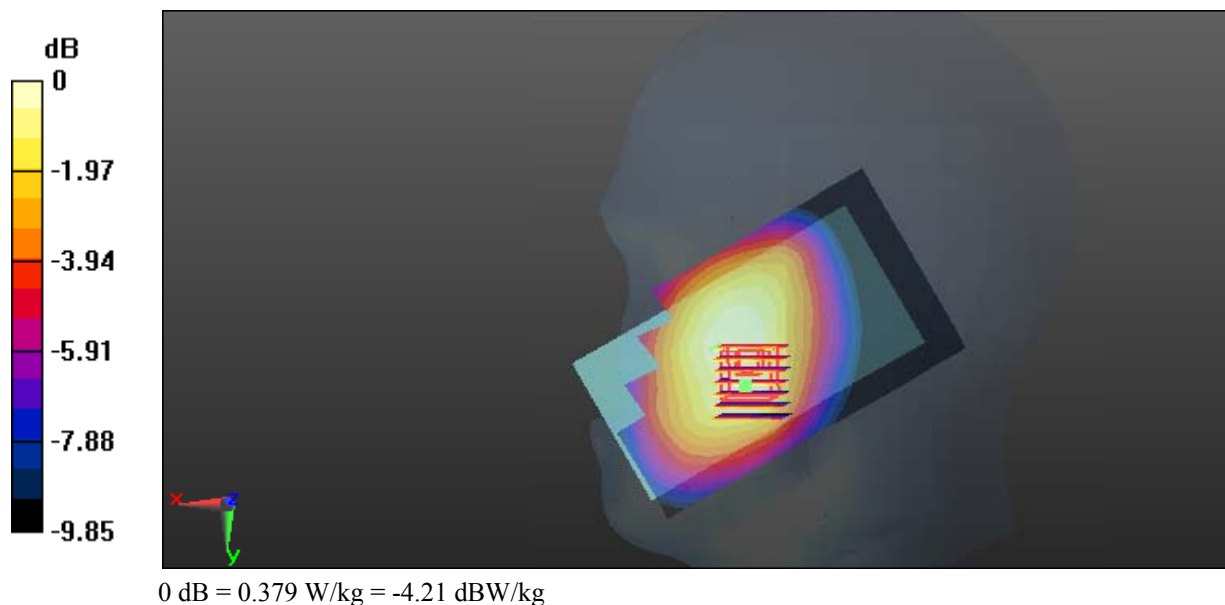

Test Plot 4#: GSM 850_Head Right Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.260 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.89 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.303 W/kg

SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.255 W/kg

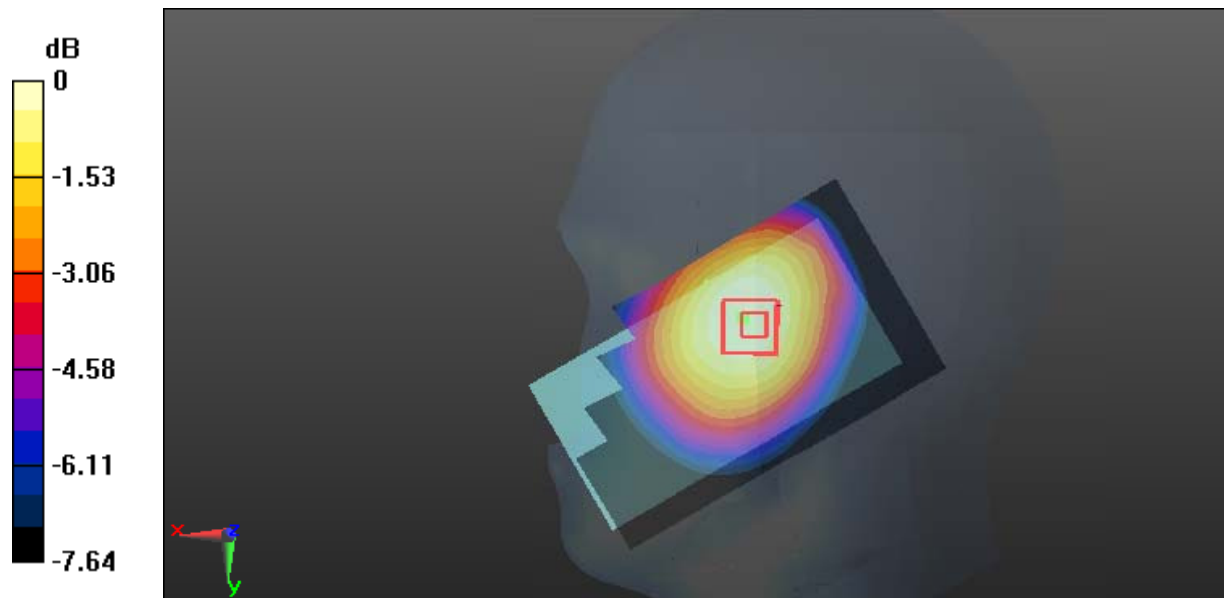

0 dB = 0.255 W/kg = -5.93 dBW/kg

Test Plot 5#: GSM 850_Body Worn Back_Low Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8
 Medium parameters used: 824.2 MHz; $\sigma = 0.978$ S/m; $\epsilon_r = 55.197$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.10 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 32.16 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.749 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

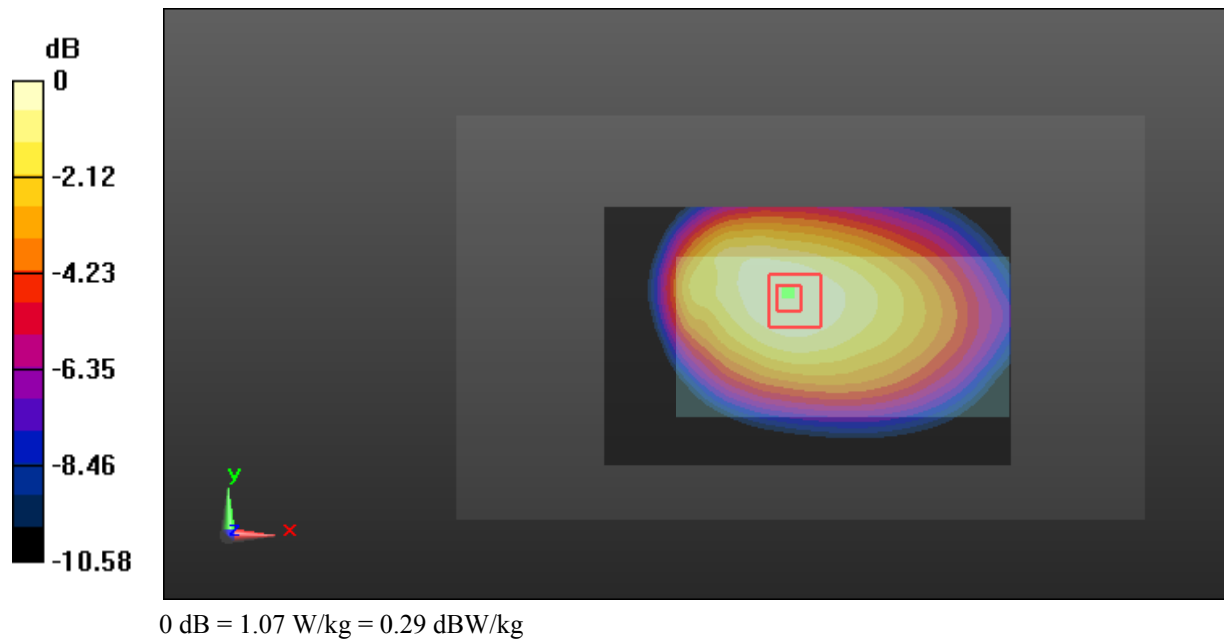

Test Plot 6#: GSM 850_Body Worn Back_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.996 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.37 V/m; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.953 W/kg; SAR(10 g) = 0.678 W/kg
 Maximum value of SAR (measured) = 1.03 W/kg

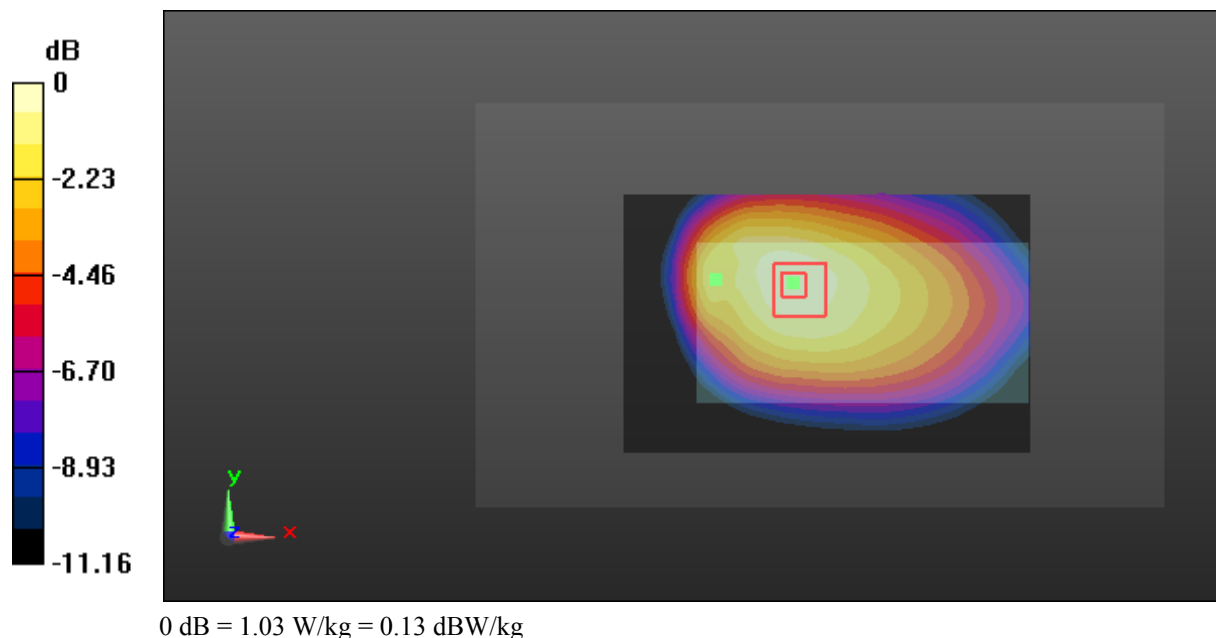

Test Plot 7#: GSM 850_Body Worn Back_High Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 848.8 MHz; $\sigma = 0.996$ S/m; $\epsilon_r = 54.954$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.890 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 29.44 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.880 W/kg; SAR(10 g) = 0.629 W/kg

Maximum value of SAR (measured) = 0.942 W/kg

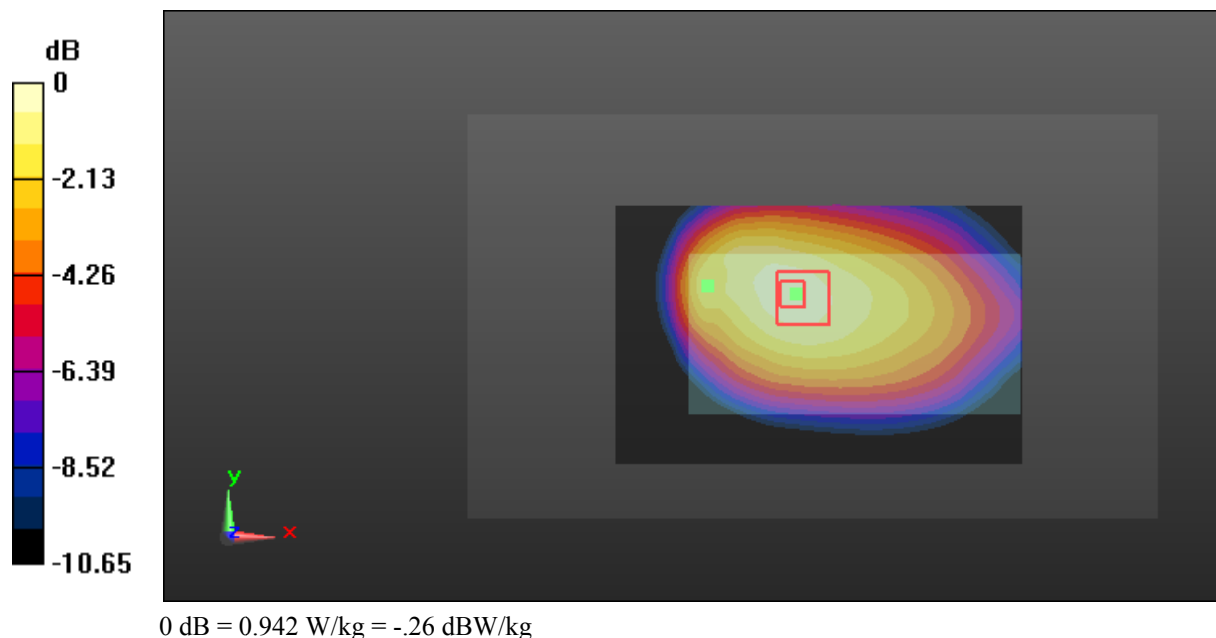

Test Plot 8#: GSM 850_Body Back_Middle Channel**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.857 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.09 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.417 W/kg

Maximum value of SAR (measured) = 0.732 W/kg

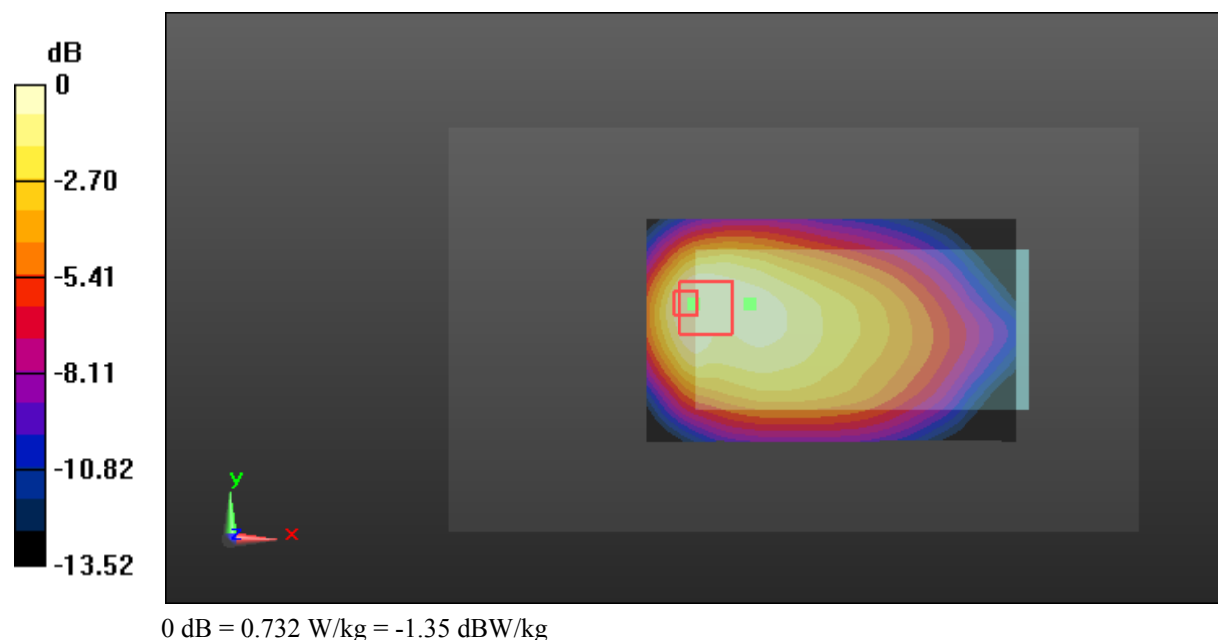

Test Plot 9#: GSM 850_Body Left_Middle Channel**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.445 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.92 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.294 W/kg

Maximum value of SAR (measured) = 0.456 W/kg

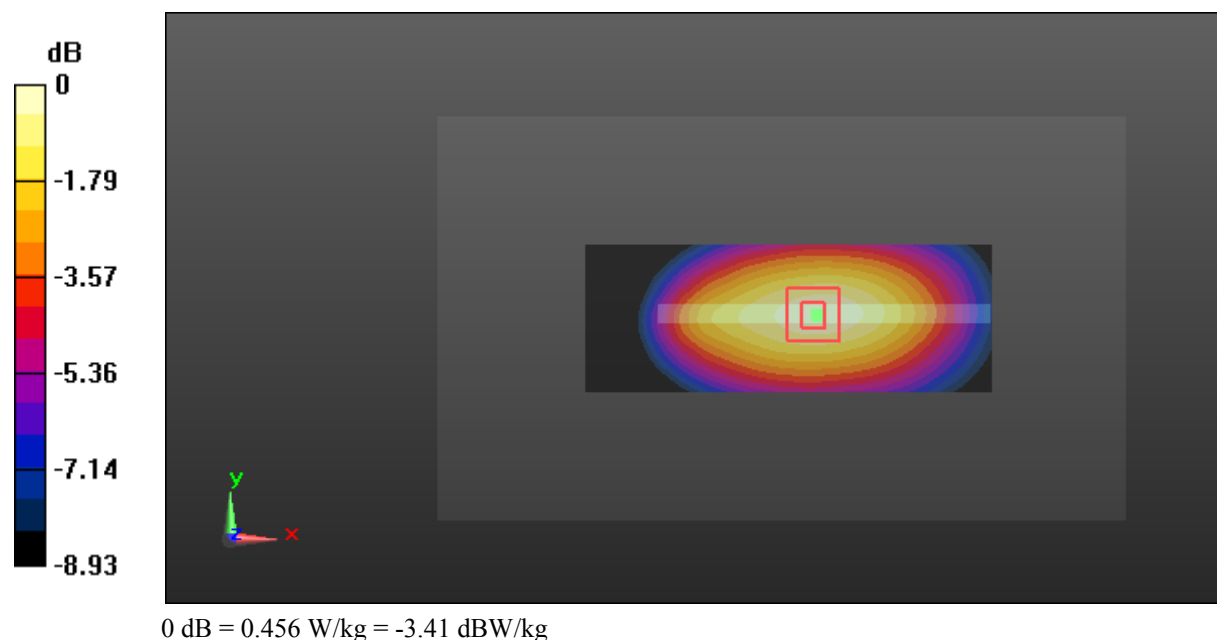

Test Plot 10#: GSM 850_Body Right_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.398 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.52 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.518 W/kg

SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.267 W/kg

Maximum value of SAR (measured) = 0.405 W/kg

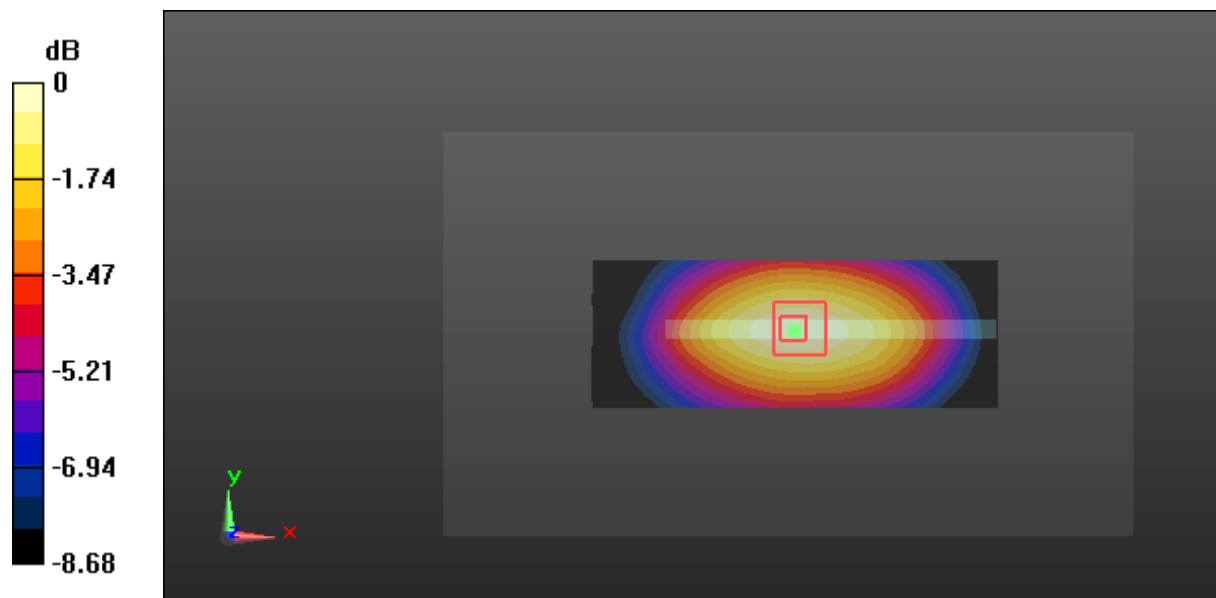

0 dB = 0.405 W/kg = -3.93 dBW/kg

Test Plot 11#: GSM 850_Body Bottom_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.198 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.72 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.311 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.118 W/kg
 Maximum value of SAR (measured) = 0.204 W/kg

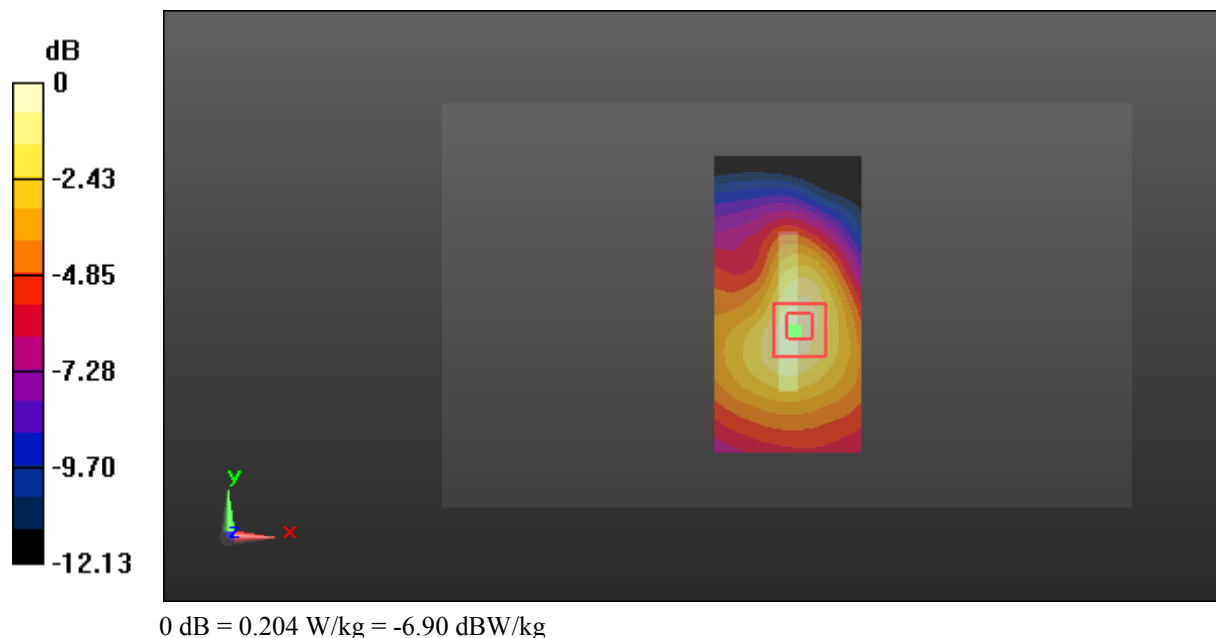

Test Plot 12#: GSM 1900_Head Left Cheek_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.513 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.805 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.776 W/kg

SAR(1 g) = 0.468 W/kg; SAR(10 g) = 0.280 W/kg

Maximum value of SAR (measured) = 0.506 W/kg

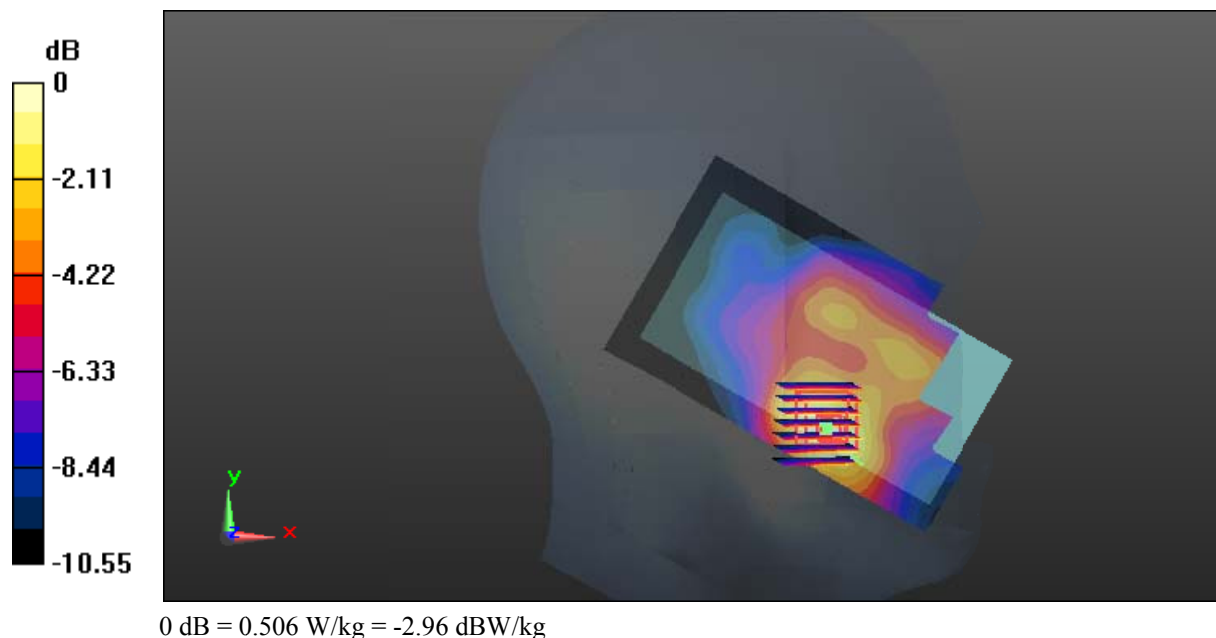

Test Plot 13#: GSM 1900_Head Left Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.105 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.238 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.168 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.066 W/kg

Maximum value of SAR (measured) = 0.106 W/kg

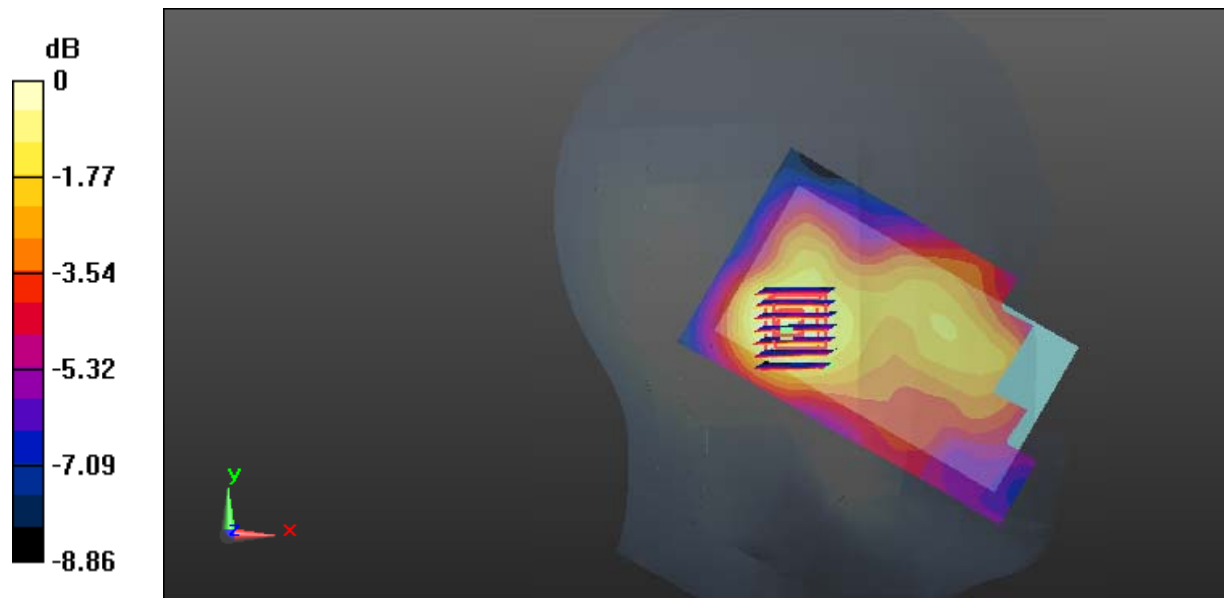

0 dB = 0.106 W/kg = -9.75 dBW/kg

Test Plot 14#: GSM 1900_Head Right Cheek_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.560 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.584 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.930 W/kg

SAR(1 g) = 0.538 W/kg; SAR(10 g) = 0.312 W/kg

Maximum value of SAR (measured) = 0.595 W/kg

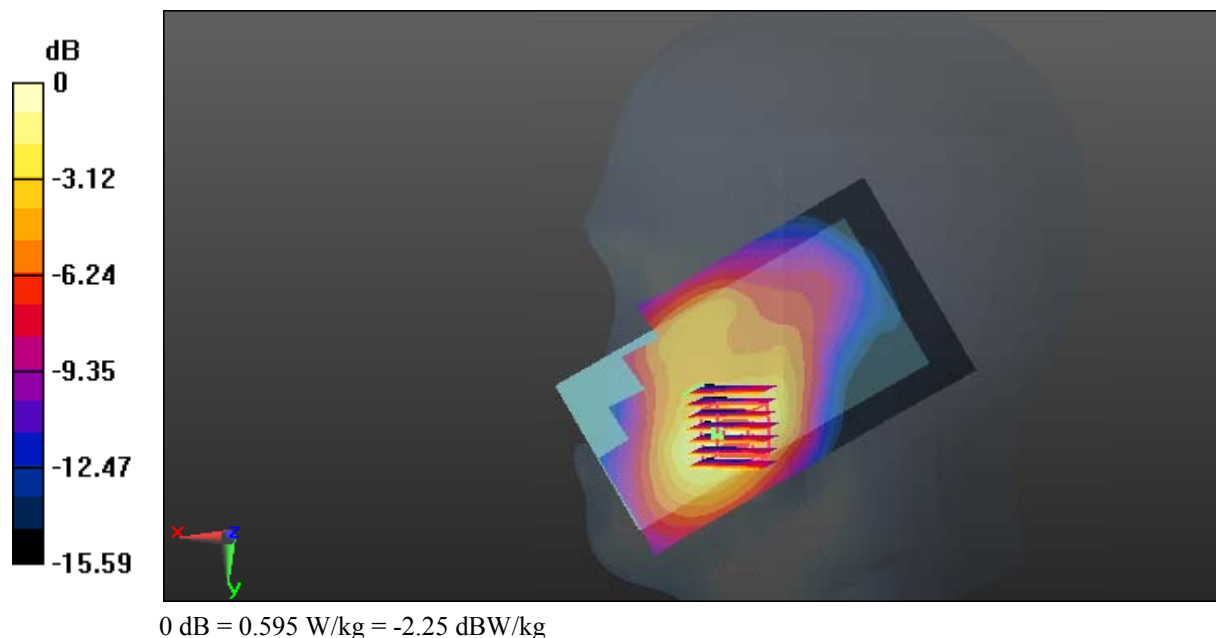

Test Plot 15#: GSM 1900_Head Right Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.170 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.971 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.245 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.169 W/kg

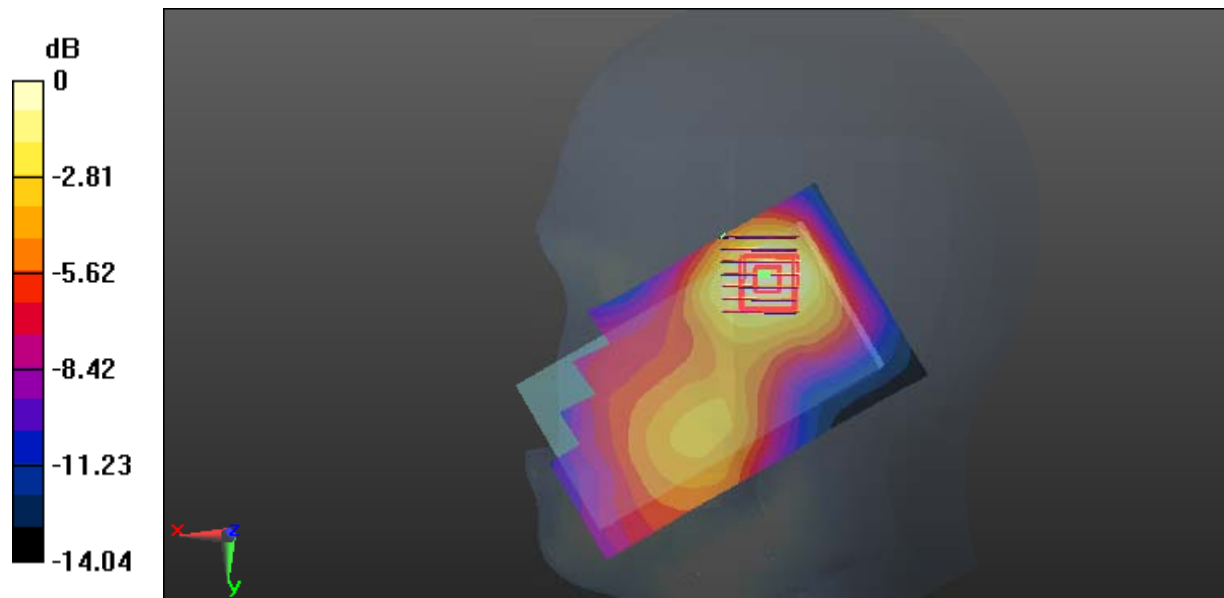

0 dB = 0.169 W/kg = -7.72 dBW/kg

Test Plot 16#: GSM 1900_Body Worn Back_Low Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8
 Medium parameters used: 1850.2 MHz; $\sigma = 1.489$ S/m; $\epsilon_r = 52.366$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.15 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 16.18 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 0.985 W/kg; SAR(10 g) = 0.568 W/kg
 Maximum value of SAR (measured) = 1.08 W/kg

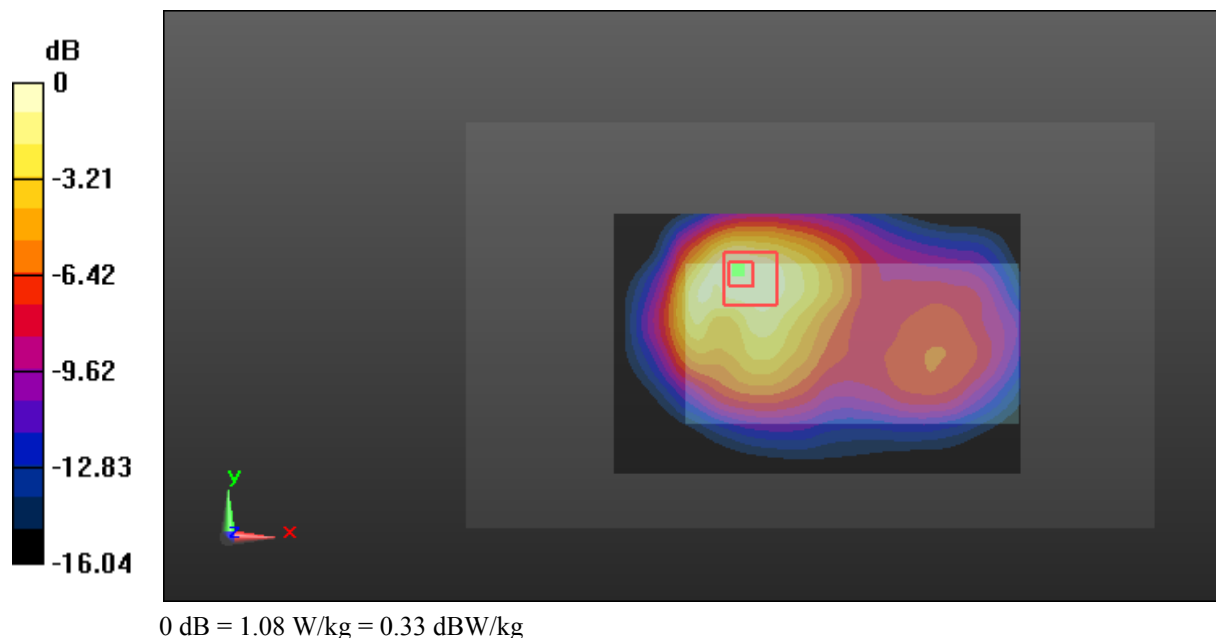

Test Plot 17#: GSM 1900_Body Worn Back_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 16.63 V/m; Power Drift = -0.00 dB
 Peak SAR (extrapolated) = 1.76 W/kg
SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.551 W/kg
 Maximum value of SAR (measured) = 1.06 W/kg

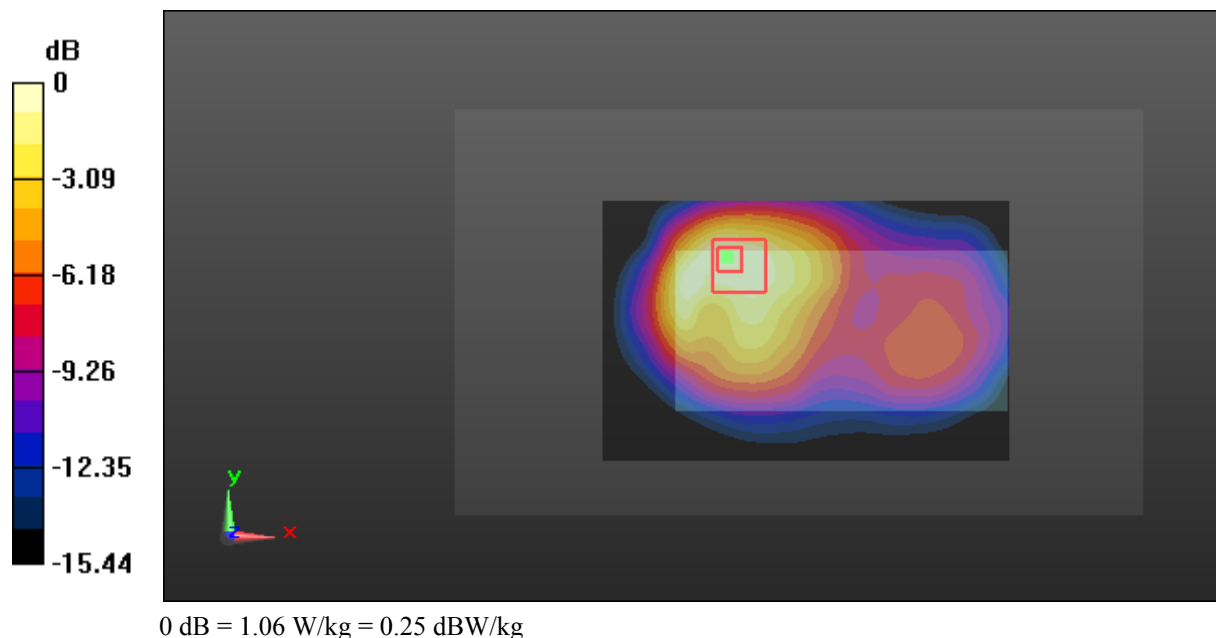

Test Plot 18#: GSM 1900_Body Worn Back_High Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8
 Medium parameters used: 1909.8 MHz; $\sigma = 1.566$ S/m; $\epsilon_r = 52.157$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.63 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.931 W/kg; SAR(10 g) = 0.526 W/kg

Maximum value of SAR (measured) = 1.02 W/kg

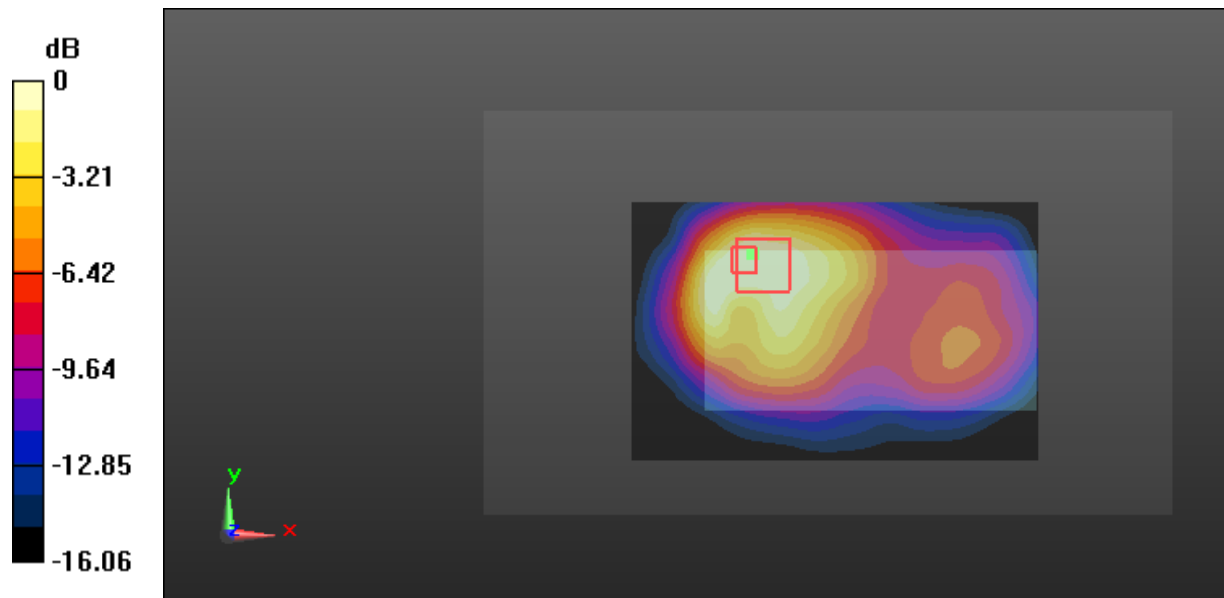

0 dB = 1.02 W/kg = 0.9 dBW/kg

Test Plot 19#: GSM 1900_Body Back_Low Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GPRS-4 slot; Frequency: 1850.2 MHz; Duty Cycle: 1:2
 Medium parameters used: 1850.2 MHz; $\sigma = 1.489$ S/m; $\epsilon_r = 52.366$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.01 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.628 W/kg

Maximum value of SAR (measured) = 1.13 W/kg

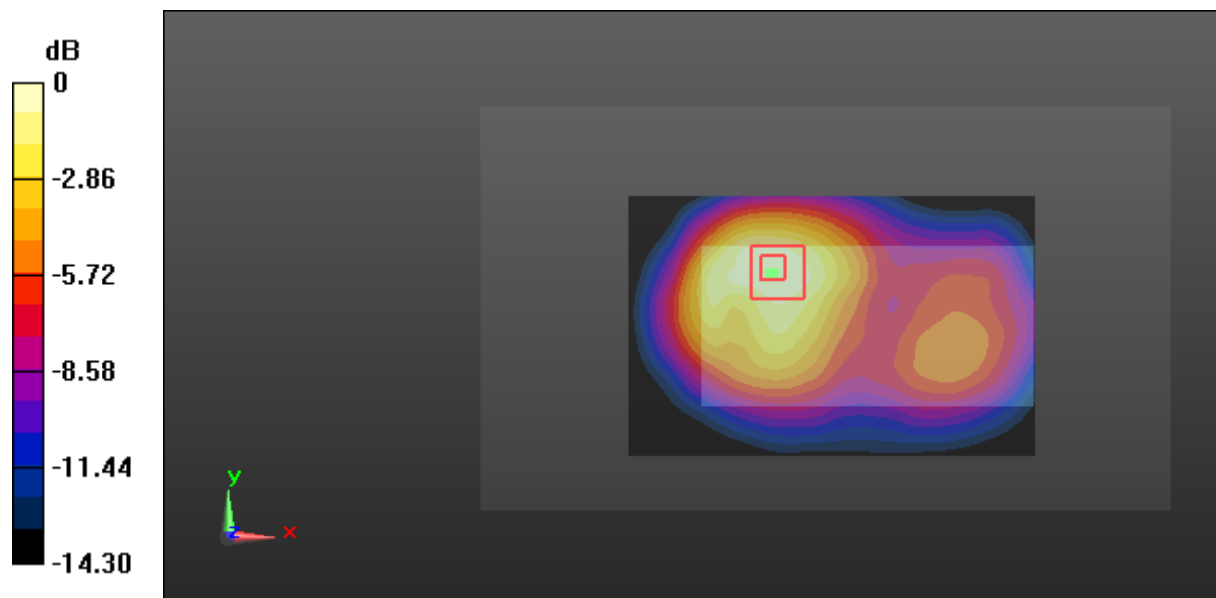

0 dB = 1.13 W/kg = 0.53 dBW/kg

Test Plot 20#: GSM 1900_Body Back_Middle Channel**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used: 1880 MHz; $\sigma = 1.537$ S/m; $\epsilon_r = 52.22$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.47 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.575 W/kg

Maximum value of SAR (measured) = 1.04 W/kg

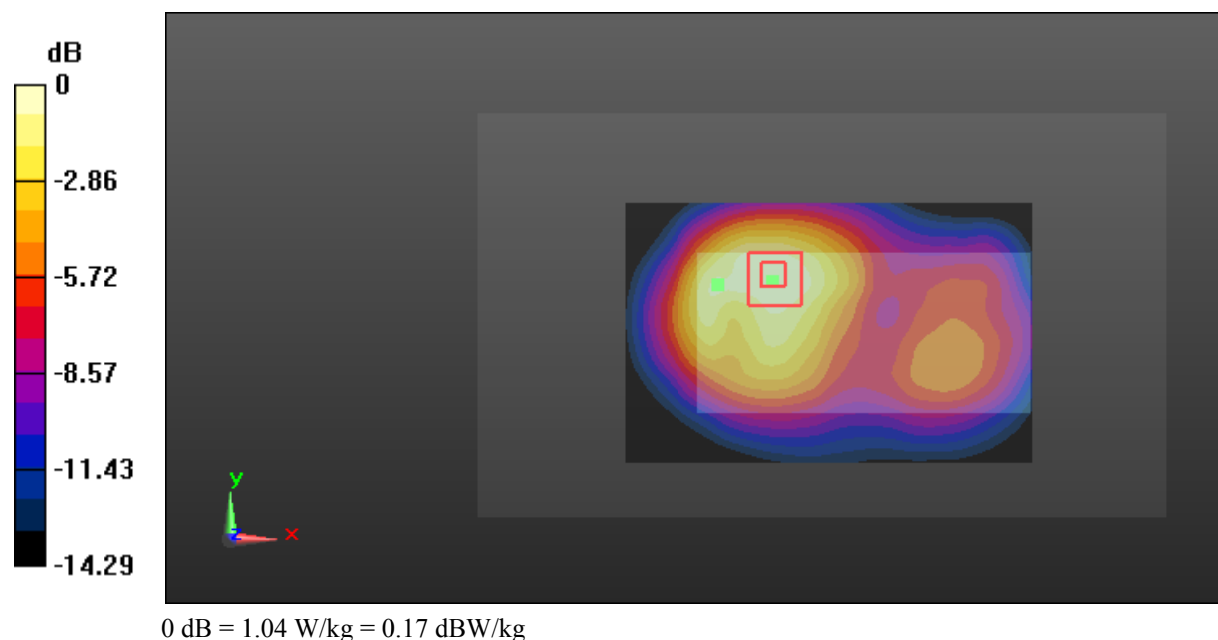

Test Plot 21#: GSM 1900_Body Back_High Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GPRS-4 slot; Frequency: 1909.8 MHz; Duty Cycle: 1:2
 Medium parameters used: 1909.8 MHz; $\sigma = 1.566$ S/m; $\epsilon_r = 52.157$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 18.39 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.565 W/kg
 Maximum value of SAR (measured) = 1.01 W/kg

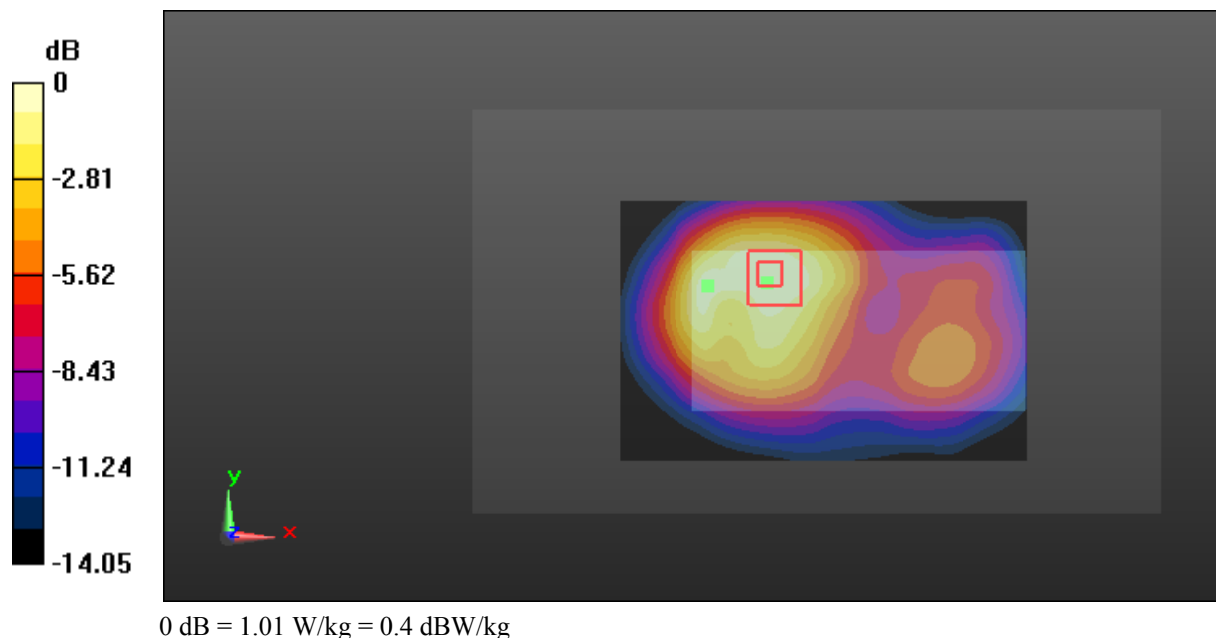

Test Plot 22#: GSM 1900_Body Left_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.260 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.21 V/m; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.388 W/kg
SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.144 W/kg
 Maximum value of SAR (measured) = 0.258 W/kg

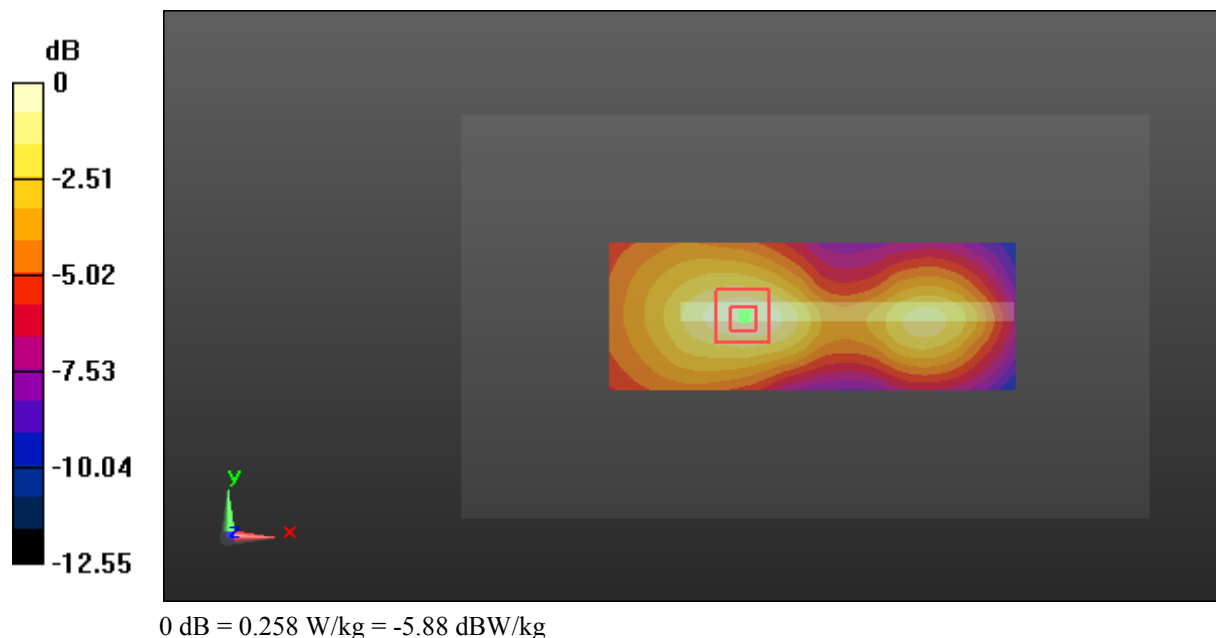

Test Plot 23#: GSM 1900_Body Right_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.591 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 16.65 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.876 W/kg
SAR(1 g) = 0.528 W/kg; SAR(10 g) = 0.306 W/kg
 Maximum value of SAR (measured) = 0.576 W/kg

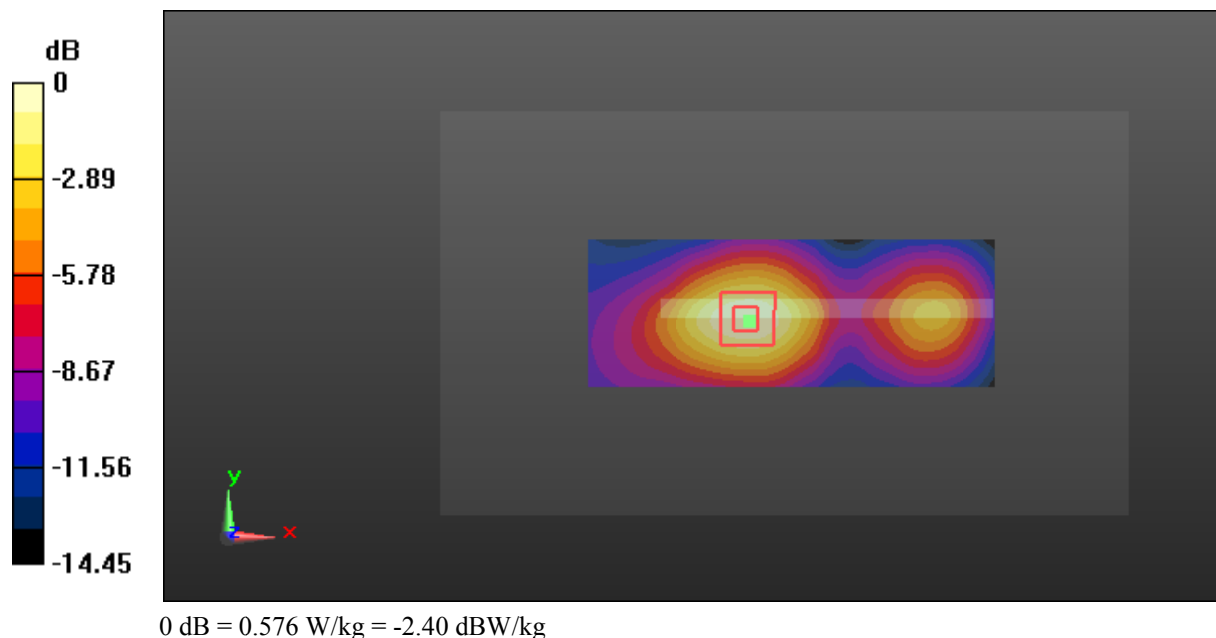

Test Plot 24#: GSM 1900_Body Bottom_Low Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GPRS-4 slot; Frequency: 1850.2 MHz; Duty Cycle: 1:2
 Medium parameters used: 1850.2 MHz; $\sigma = 1.489$ S/m; $\epsilon_r = 52.366$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.877 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.81 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.778 W/kg; SAR(10 g) = 0.408 W/kg

Maximum value of SAR (measured) = 0.886 W/kg

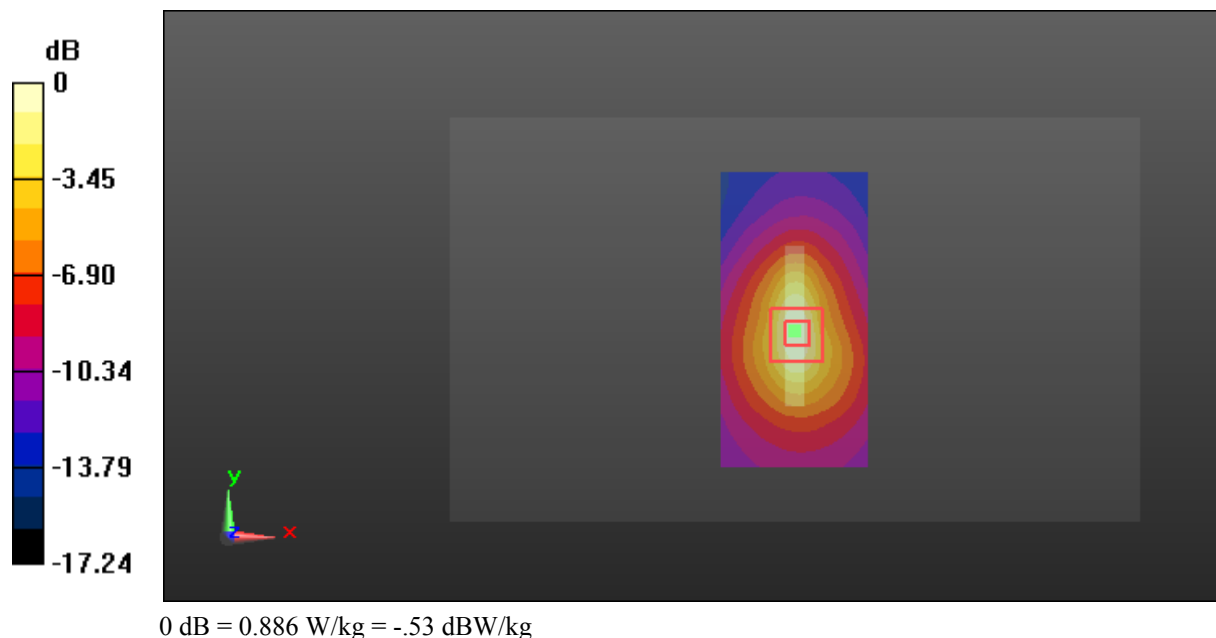

Test Plot 25#: GSM 1900_Body Bottom_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.939 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.33 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.454 W/kg

Maximum value of SAR (measured) = 0.992 W/kg

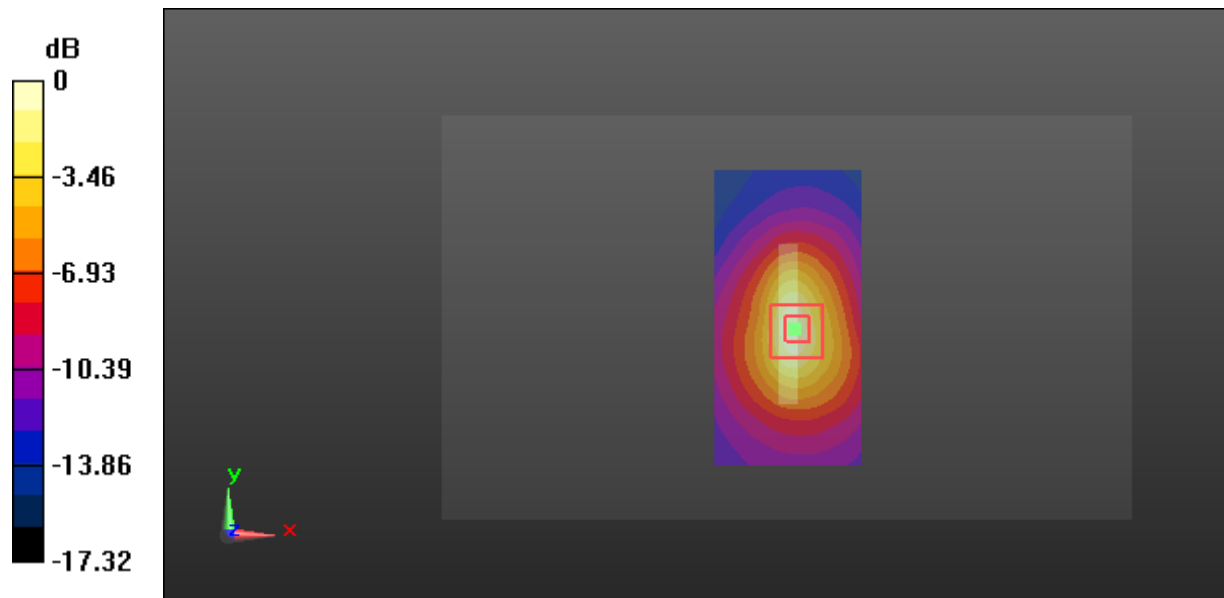

0 dB = 0.992 W/kg = 0.-3 dBW/kg

Test Plot 26#: GSM 1900_Body Bottom_High Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic GPRS-4 slot; Frequency: 1909.8 MHz; Duty Cycle: 1:2
 Medium parameters used: 1909.8 MHz; $\sigma = 1.566$ S/m; $\epsilon_r = 52.157$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.32 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.74 W/kg

SAR(1 g) = 0.991 W/kg; SAR(10 g) = 0.517 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

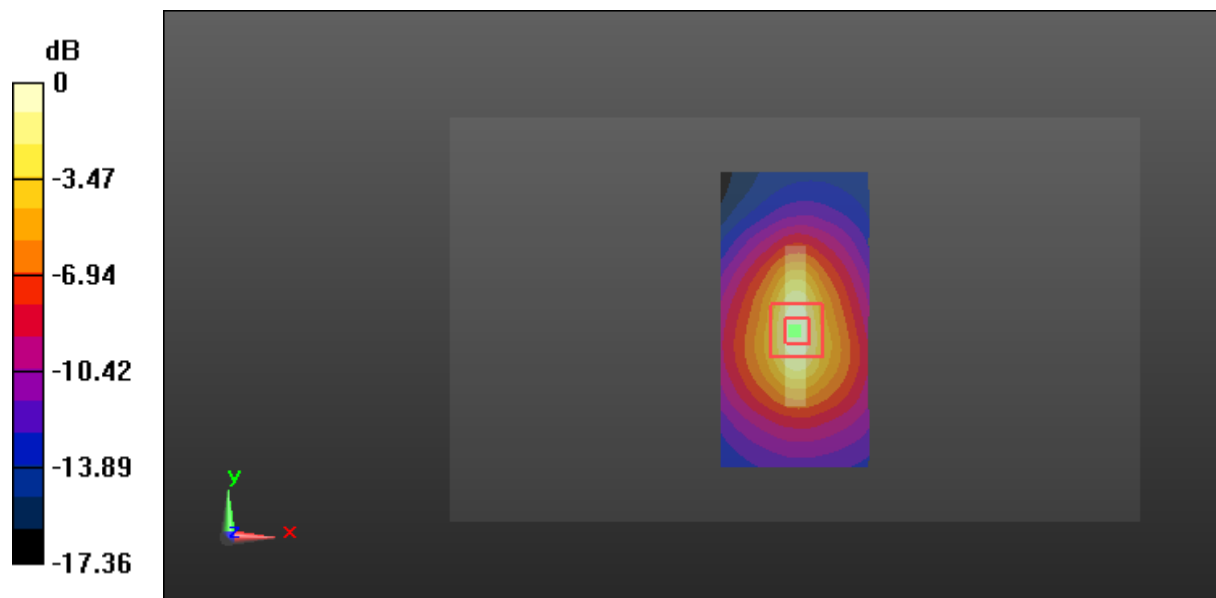

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Plot 27#: WCDMA Band 5_Head Left Cheek_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.280 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.526 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

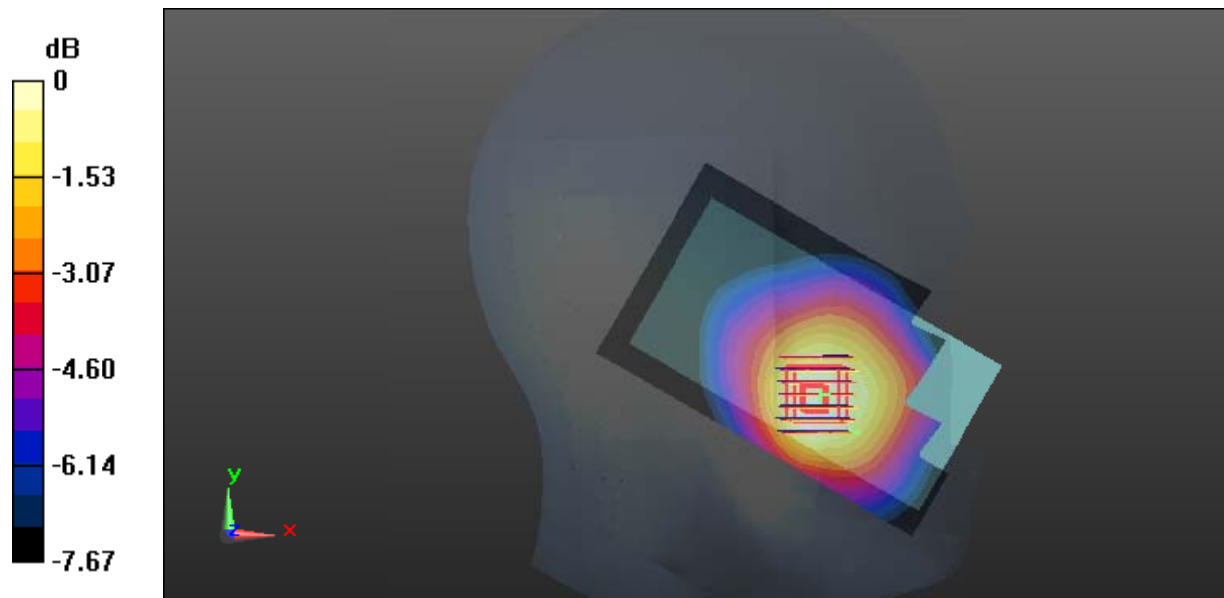

0 dB = 0.271 W/kg = -5.67 dBW/kg

Test Plot 28#: WCDMA Band 5_Head Left Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.150 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.17 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.184 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.121 W/kg
 Maximum value of SAR (measured) = 0.155 W/kg

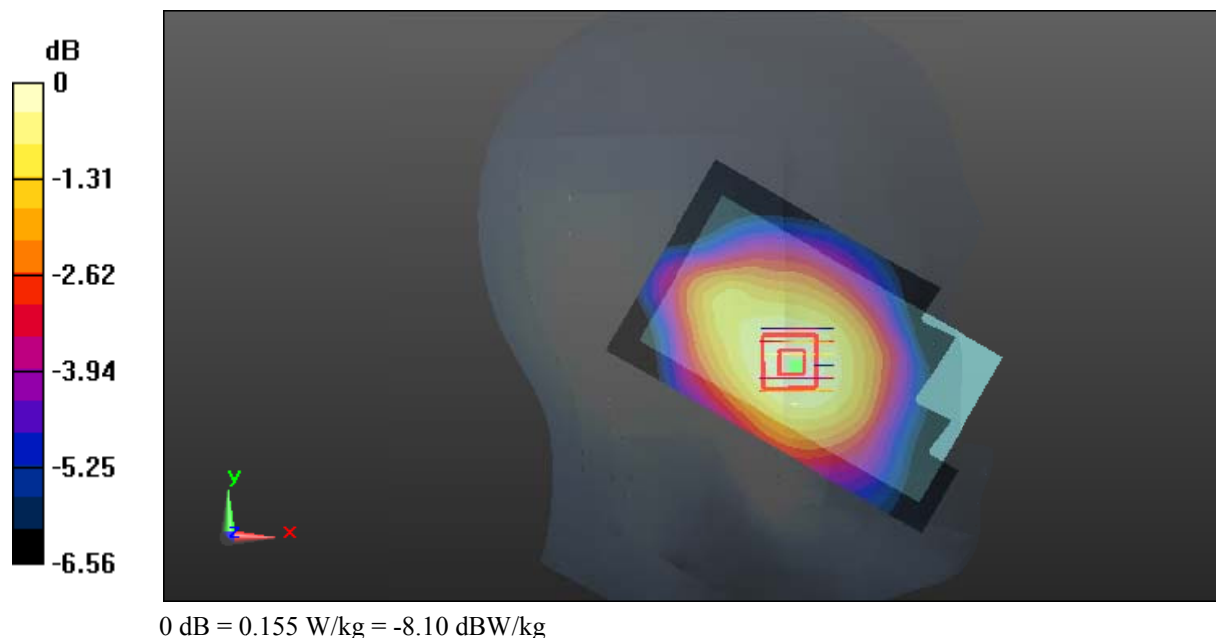

Test Plot 29#: WCDMA Band 5_Head Right Cheek_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.457 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.359 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.380 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.24 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

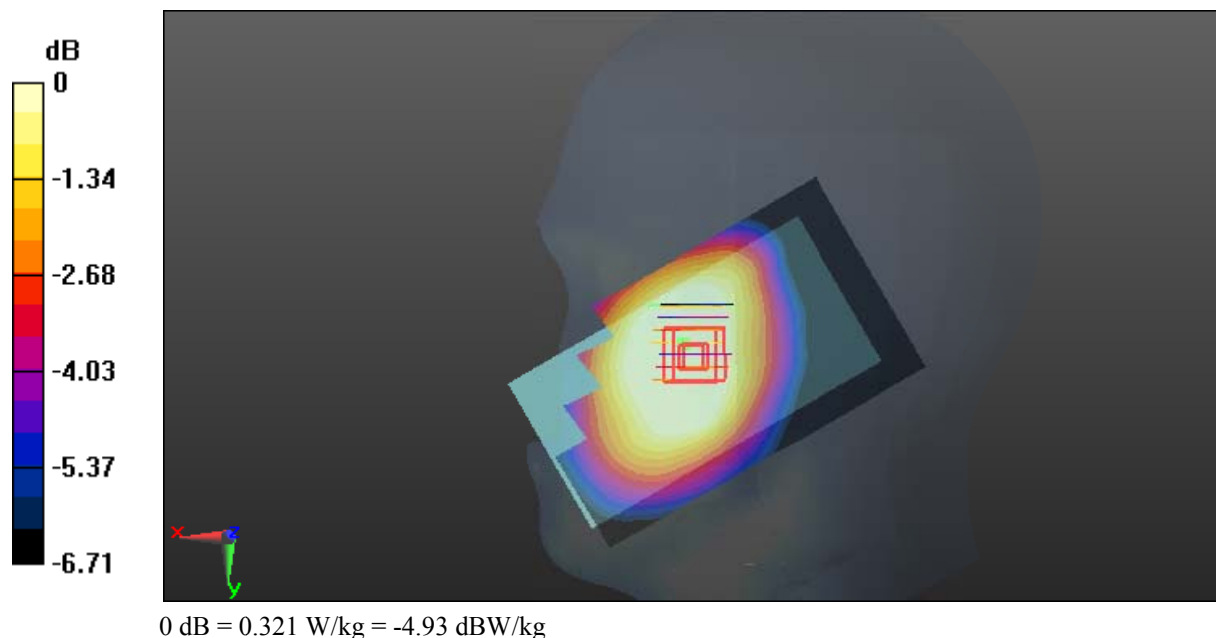

Test Plot 30#: WCDMA Band 5_Head Right Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0794 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.287 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0890 W/kg

SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.057 W/kg

Maximum value of SAR (measured) = 0.0751 W/kg

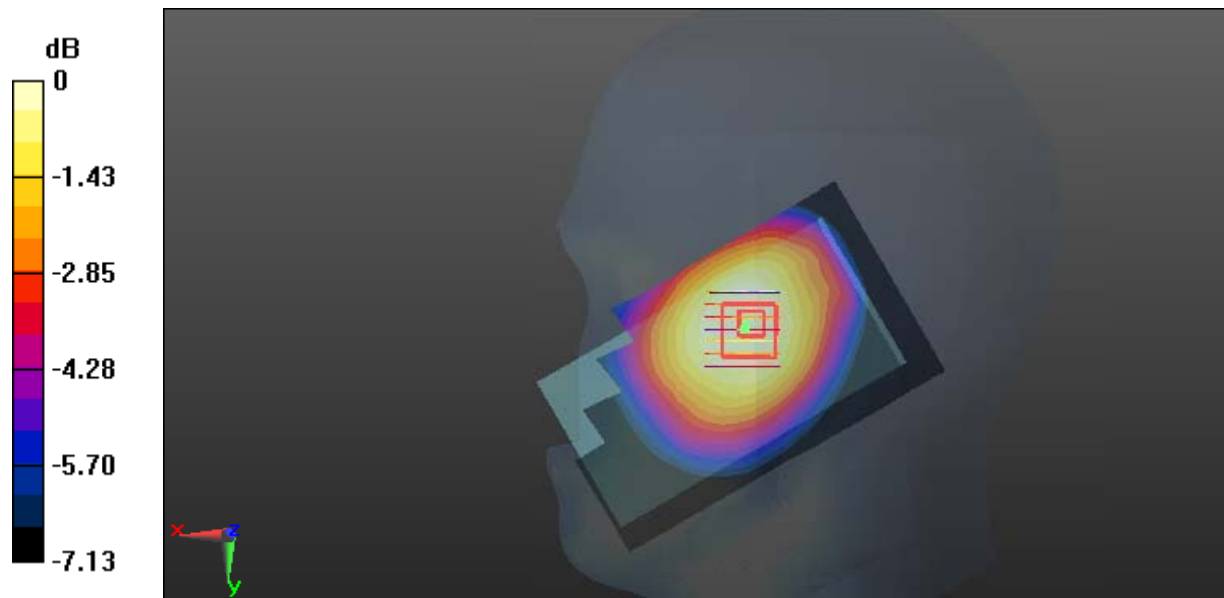

0 dB = 0.0751 W/kg = -11.24 dBW/kg

Test Plot 31#: WCDMA Band 5_Body Worn Back_Low Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used: 826.4 MHz; $\sigma = 0.985$ S/m; $\epsilon_r = 55.129$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.05 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 33.25 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.996 W/kg; SAR(10 g) = 0.730 W/kg

Maximum value of SAR (measured) = 1.05 W/kg

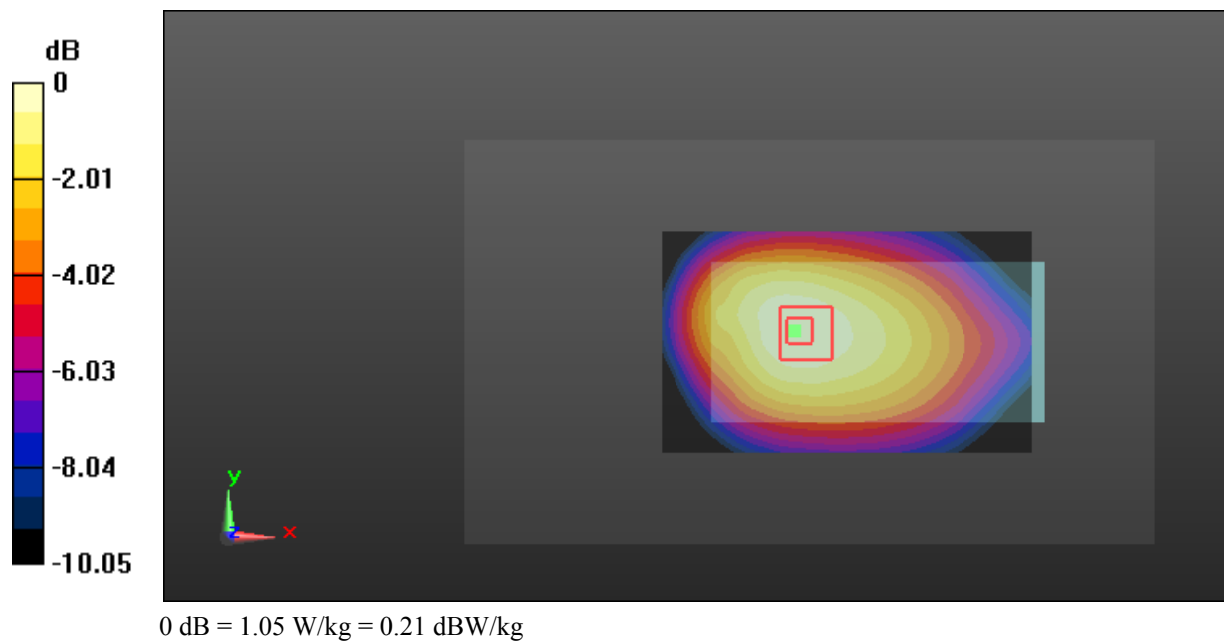

Test Plot 32#: WCDMA Band 5_Body Worn Back_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 34.04 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.51 W/kg

SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.798 W/kg

Maximum value of SAR (measured) = 1.16 W/kg

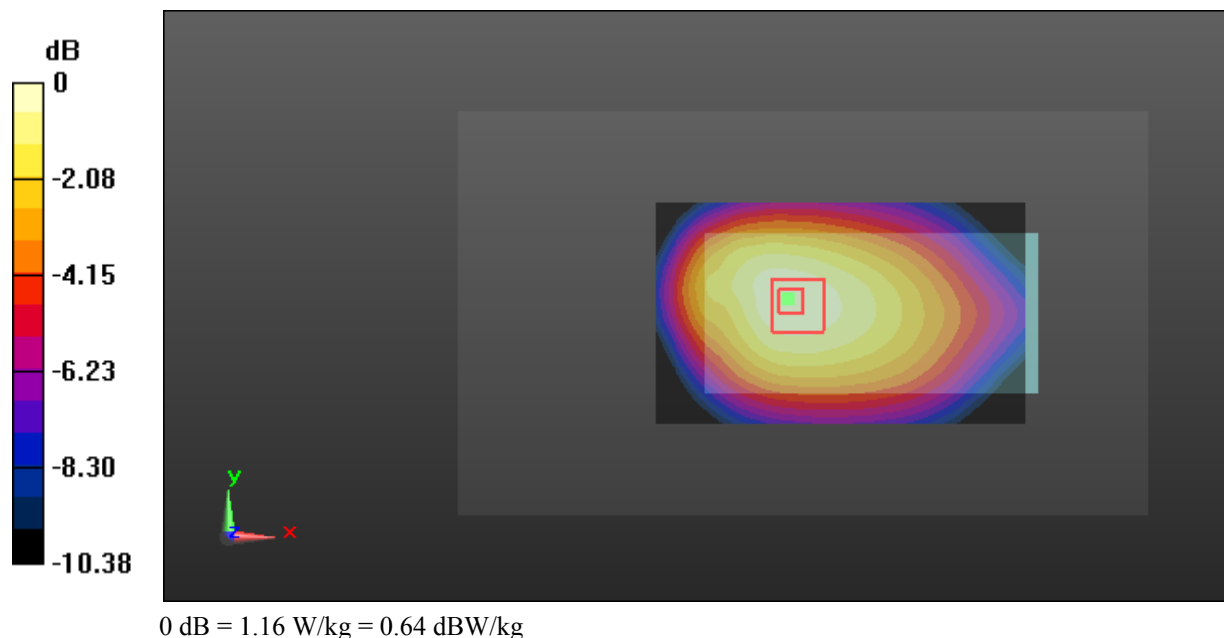

Test Plot 33#: WCDMA Band 5_Body Worn Back_High Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 846.6 MHz; $\sigma = 1.006 \text{ S/m}$; $\epsilon_r = 54.953$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.967 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 30.69 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.923 W/kg; SAR(10 g) = 0.659 W/kg

Maximum value of SAR (measured) = 0.979 W/kg

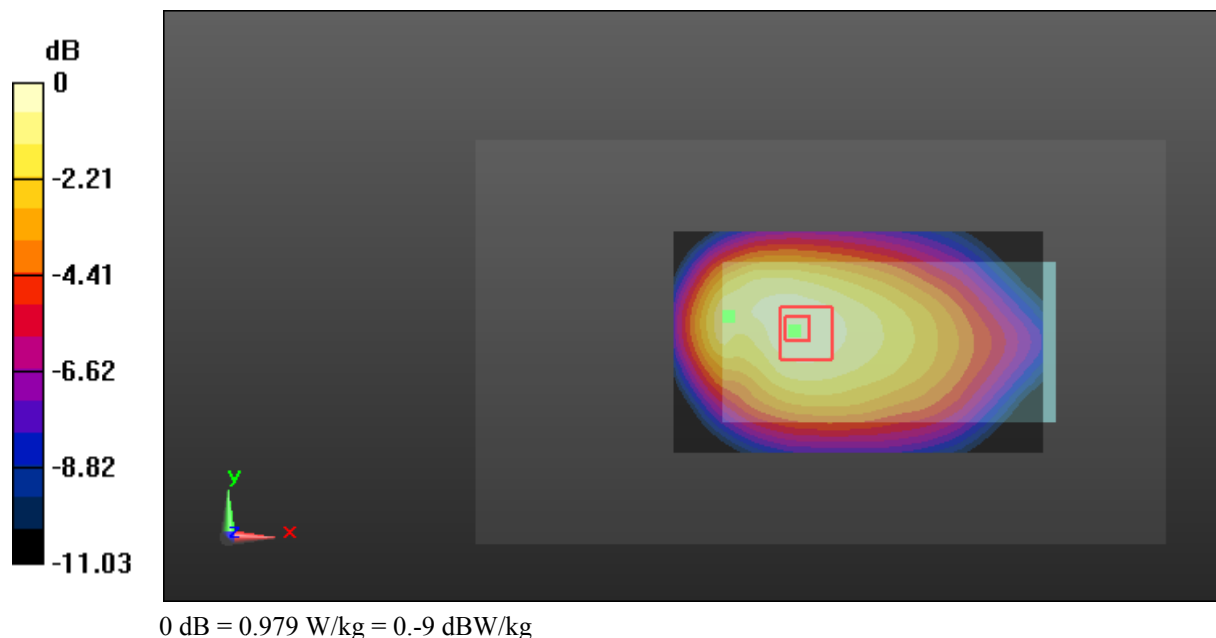

Test Plot 34#: WCDMA Band 5_Body Back_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.601 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.66 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.388 W/kg

Maximum value of SAR (measured) = 0.593 W/kg

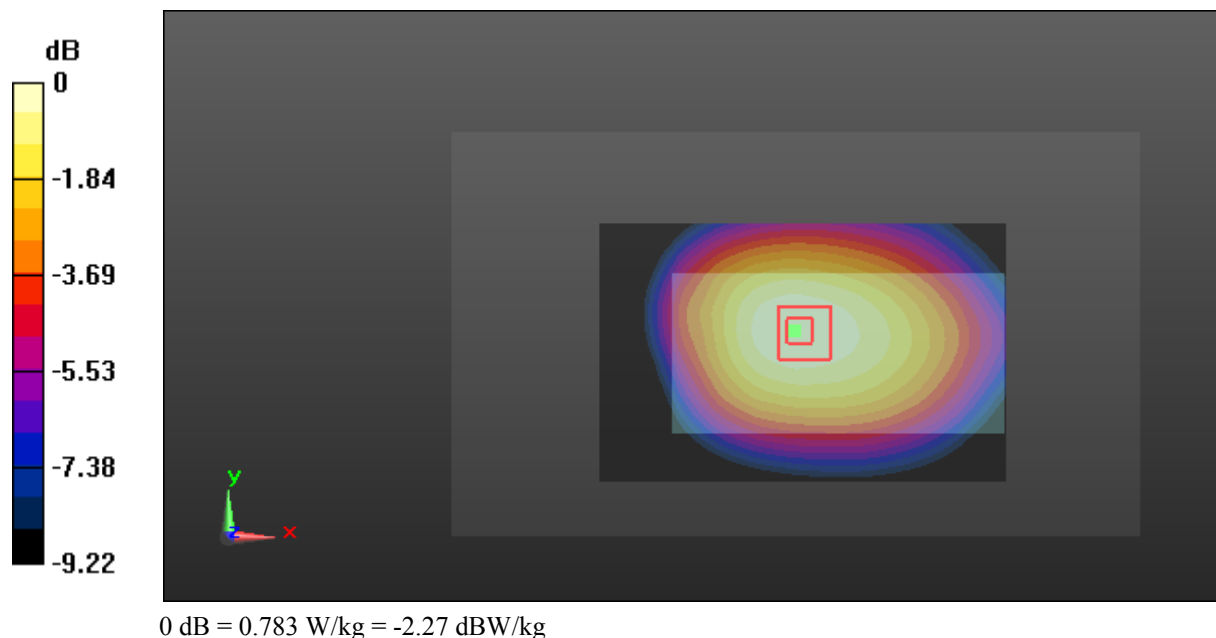

Test Plot 35#: WCDMA Band 5_Body Left_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.577 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.46 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.789 W/kg

SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 0.578 W/kg

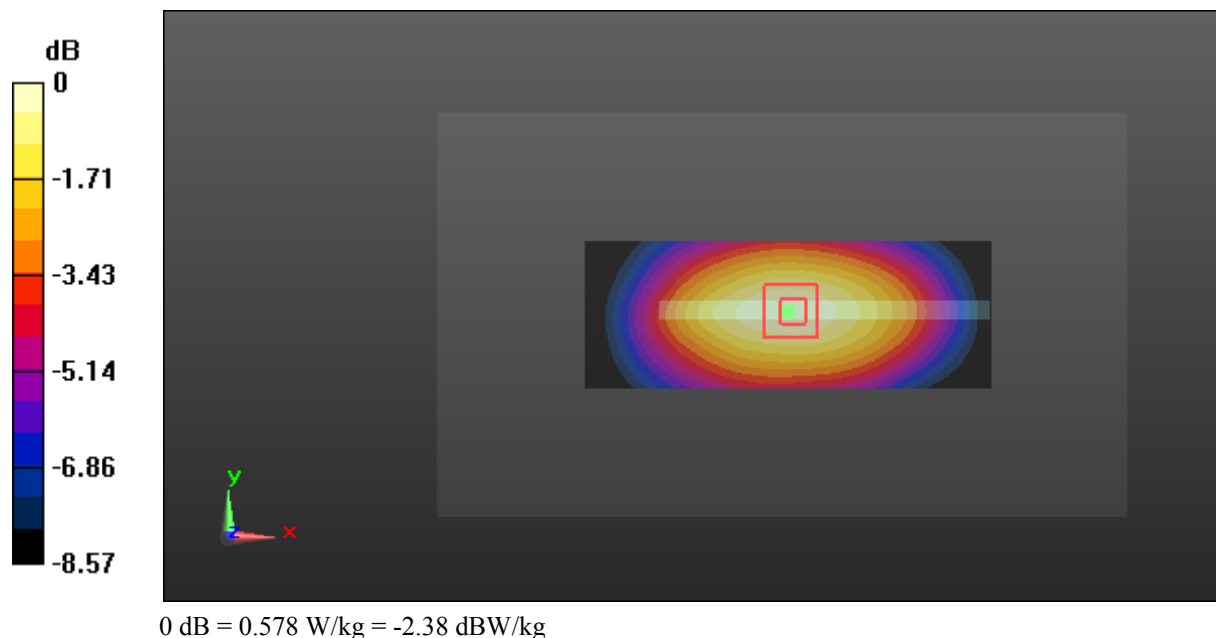

Test Plot 36#: WCDMA Band 5_Body Right_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.615 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.72 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.836 W/kg

SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 0.609 W/kg

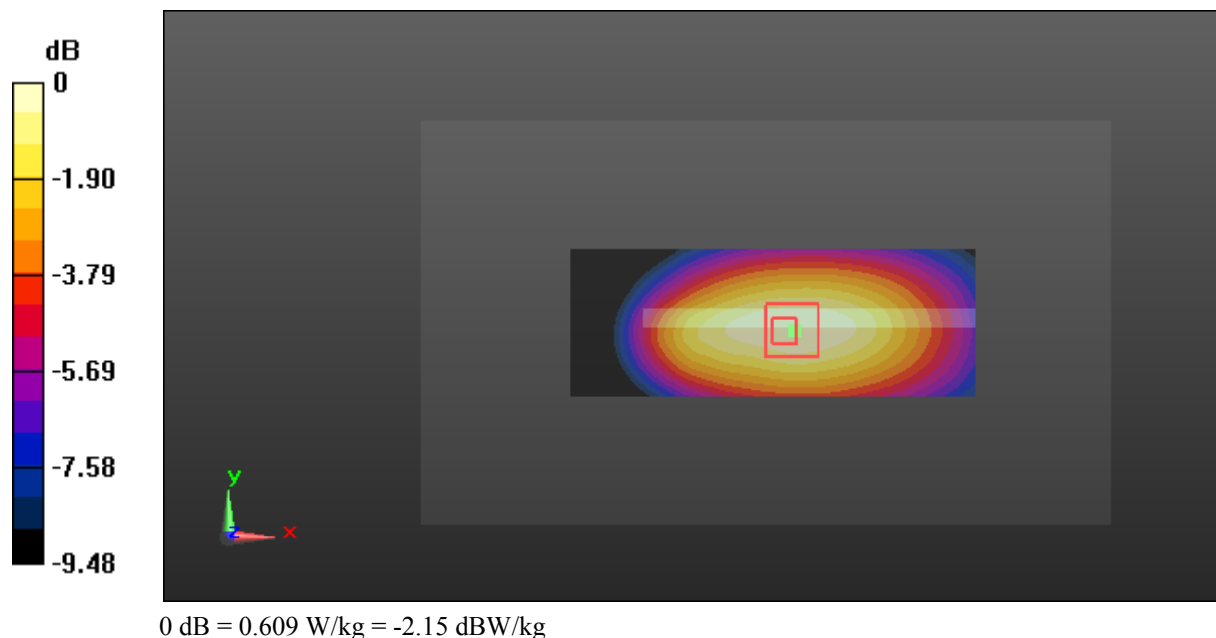

Test Plot 37#: WCDMA Band 5_Body Bottom_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.997$ S/m; $\epsilon_r = 55.021$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.92 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.430 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.176 W/kg

Maximum value of SAR (measured) = 0.292 W/kg

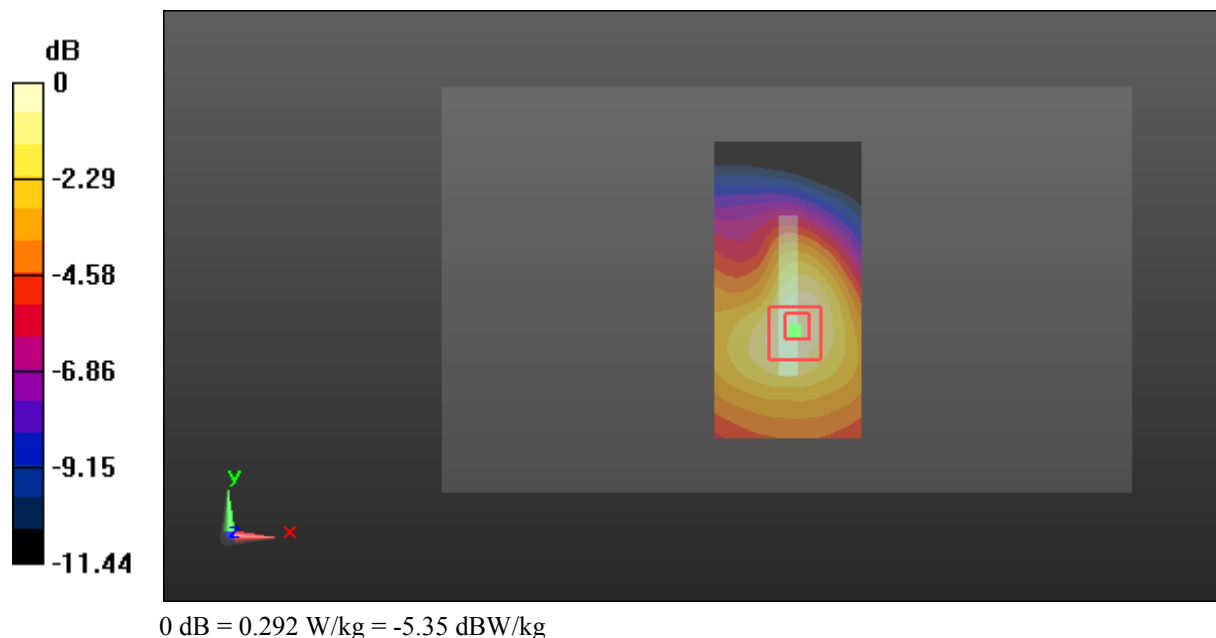

Test Plot 38#: WCDMA Band 2_Head Left Cheek_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.356 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.53 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.0480 W/kg
SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.21 W/kg
 Maximum value of SAR (measured) = 0.348 W/kg

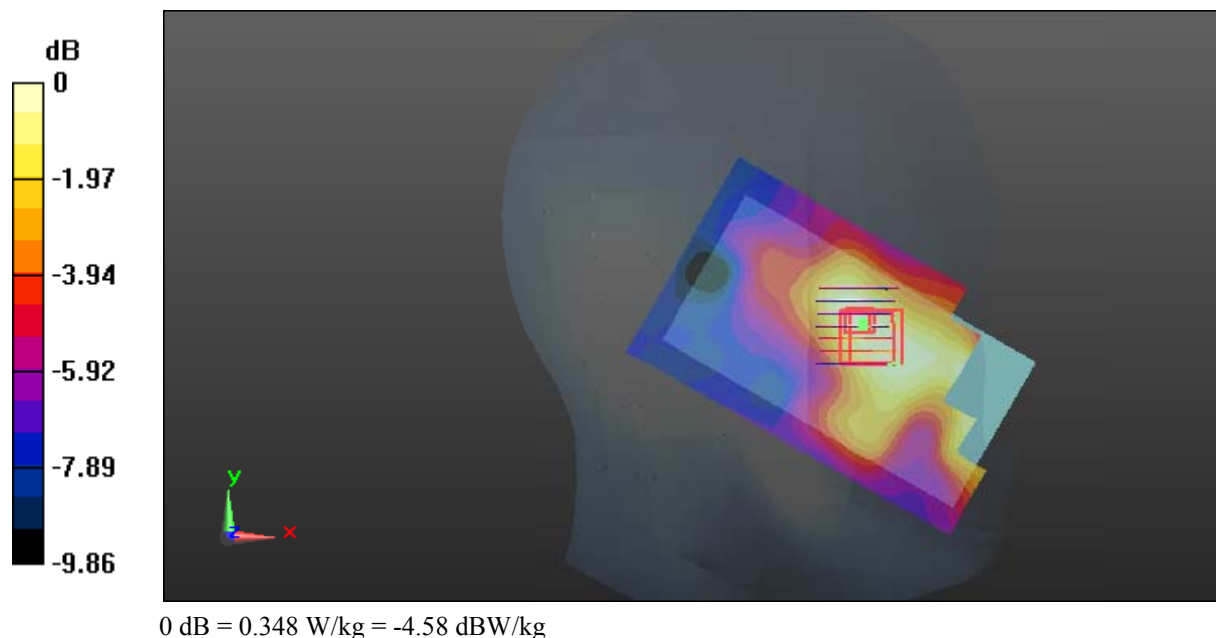

Test Plot 39#: WCDMA Band 2_Head Left Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.147 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.001 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.085 W/kg
 Maximum value of SAR (measured) = 0.144 W/kg

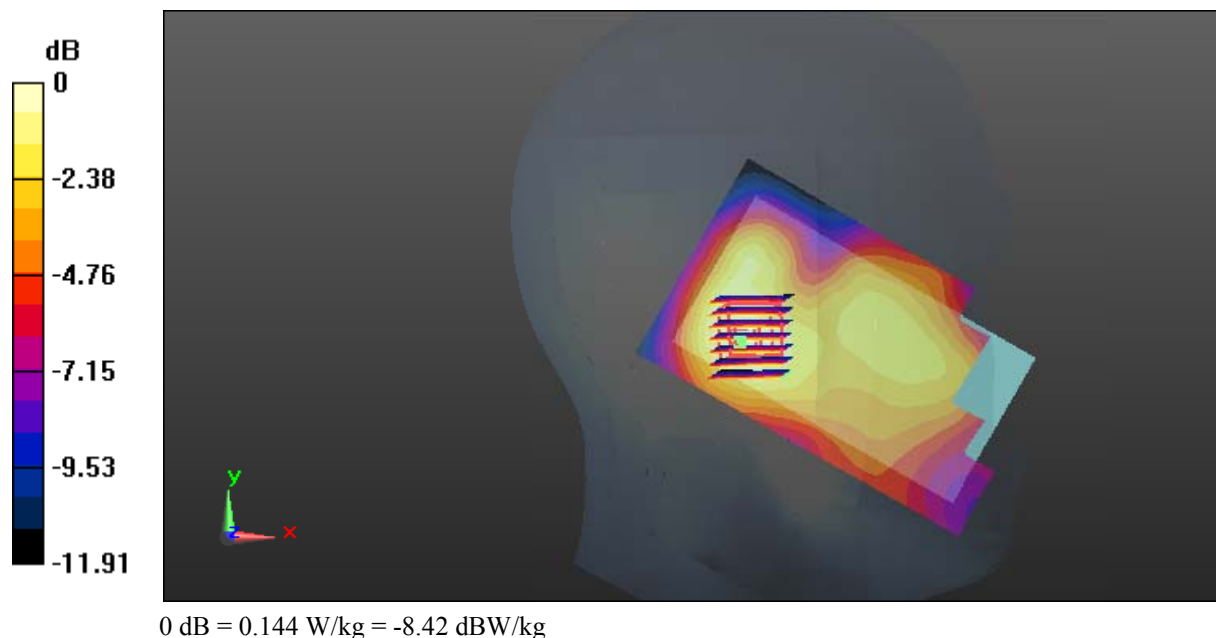

Test Plot 40#: WCDMA Band 2_Head Right Cheek_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.677 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 13.10 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.949 W/kg
SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.389 W/kg
 Maximum value of SAR (measured) = 0.685 W/kg

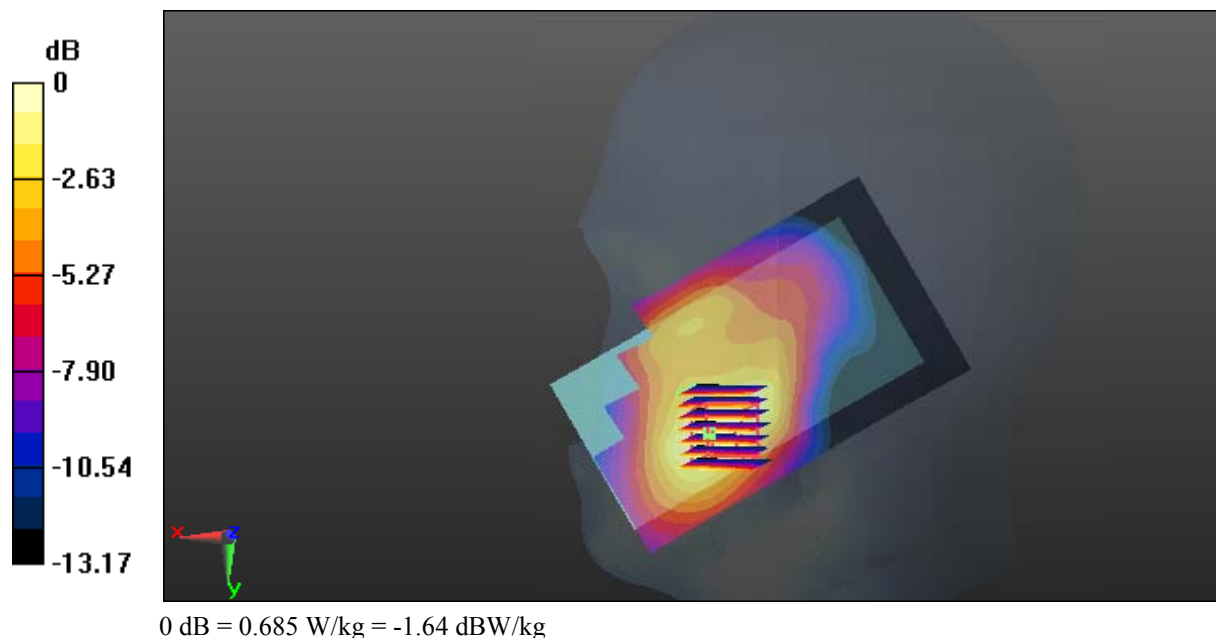

Test Plot 41#: WCDMA Band 2_Head Right Tilt_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.522 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.42 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.594 W/kg

SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.225 W/kg

Maximum value of SAR (measured) = 0.406 W/kg

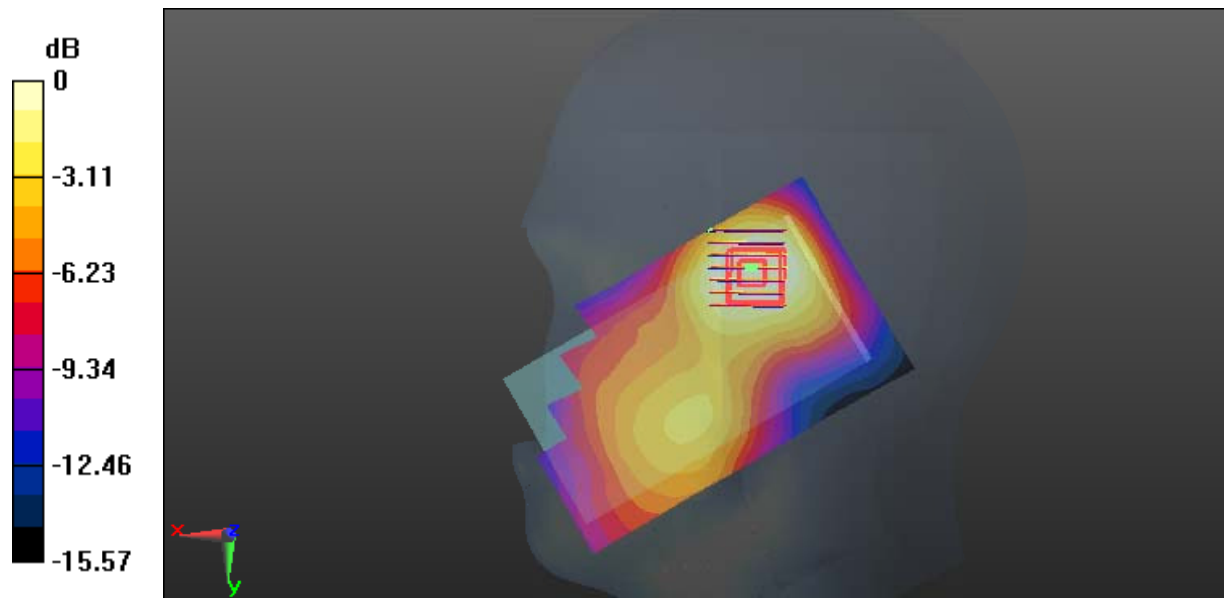

0 dB = 0.406 W/kg = -3.91 dBW/kg

Test Plot 42#: WCDMA Band 2_Body Worn Back_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.818 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.94 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.469 W/kg

Maximum value of SAR (measured) = 0.832 W/kg

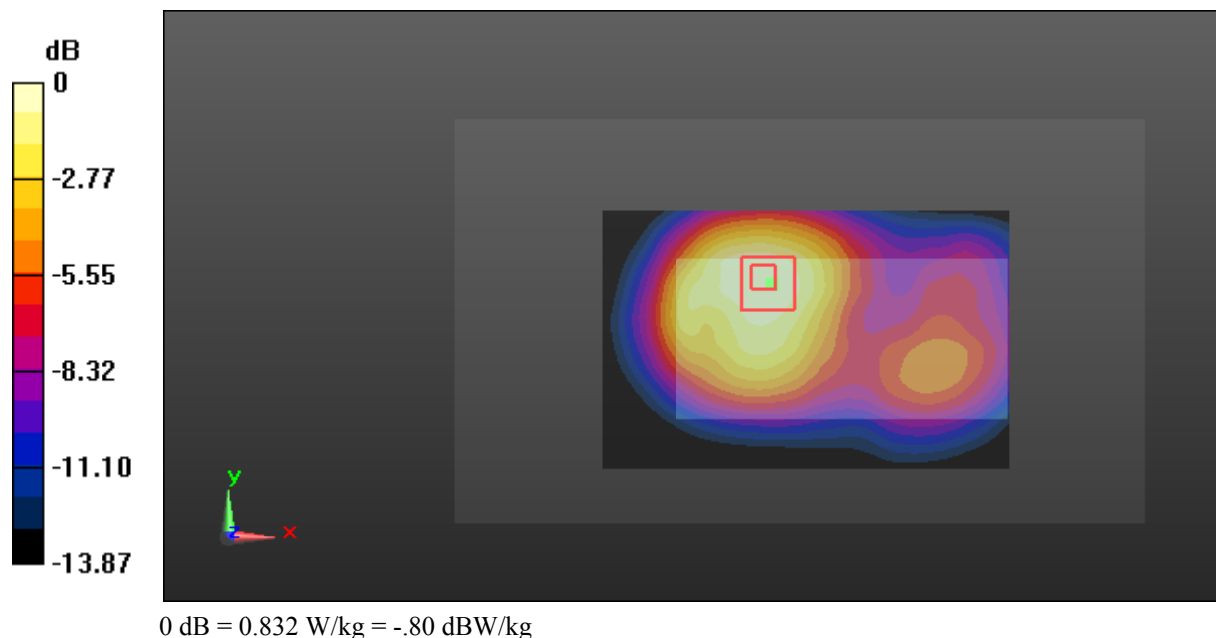

Test Plot 43#: WCDMA Band 2_Body Back_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.601 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.47 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.903 W/kg

SAR(1 g) = 0.566 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 0.609 W/kg

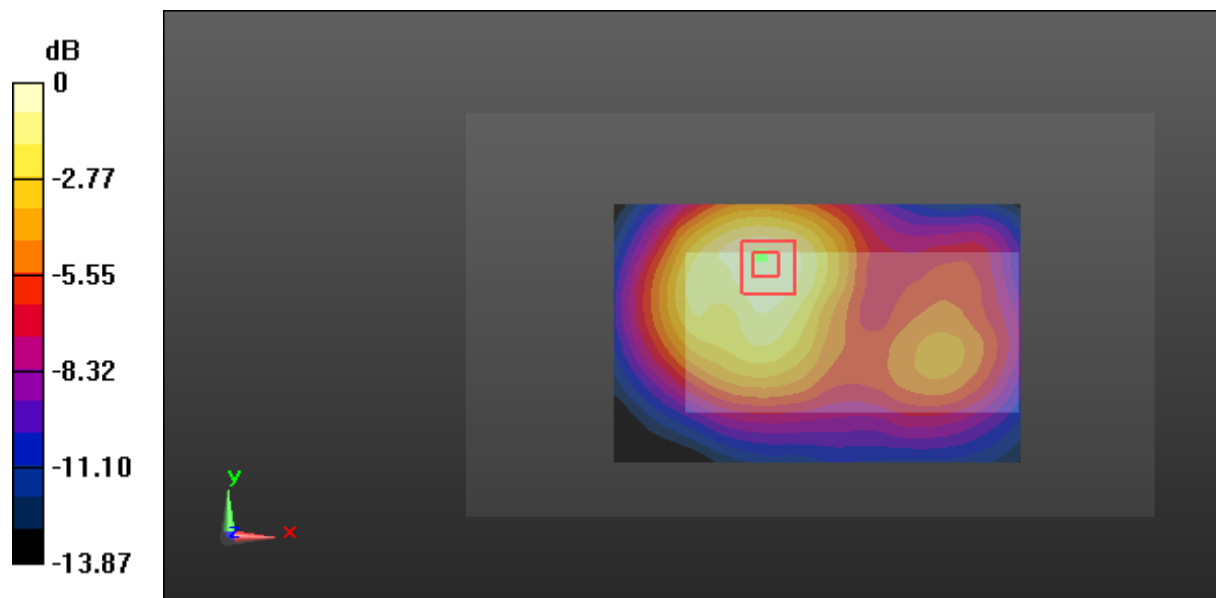

0 dB = 0.609 W/kg = -2.15 dBW/kg

Test Plot 44#: WCDMA Band 2_Body Left_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537$ S/m; $\epsilon_r = 52.22$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.205 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.090 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.317 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.116 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

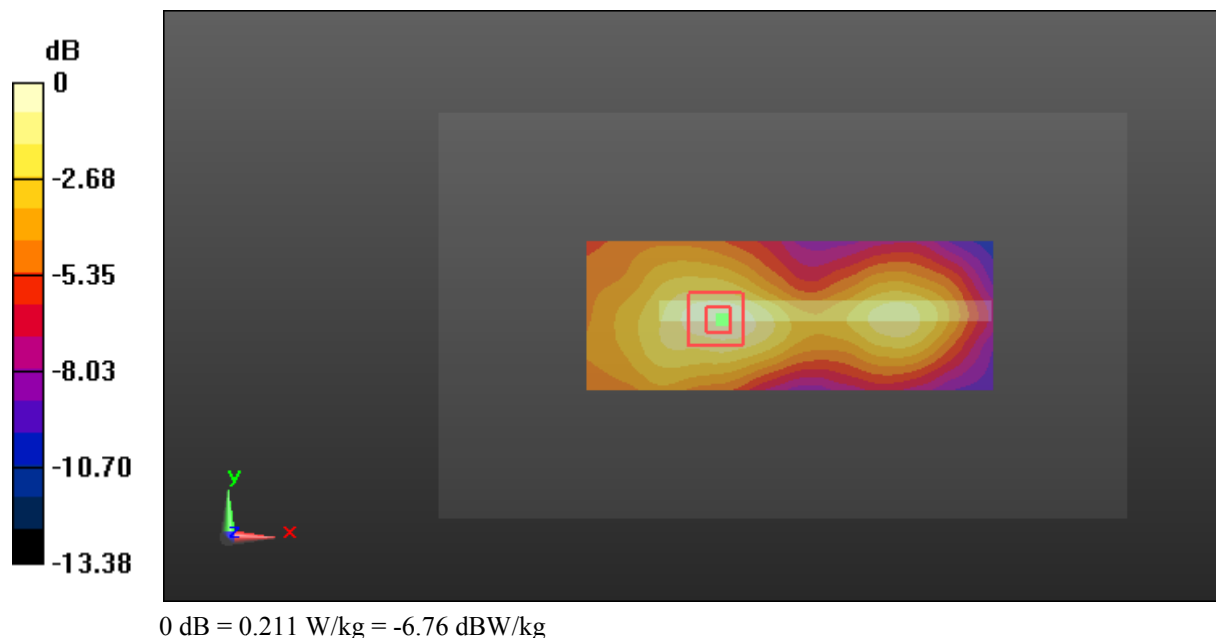

Test Plot 45#: WCDMA Band 2_Body Right_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537$ S/m; $\epsilon_r = 52.22$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.565 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.73 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.497 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.552 W/kg

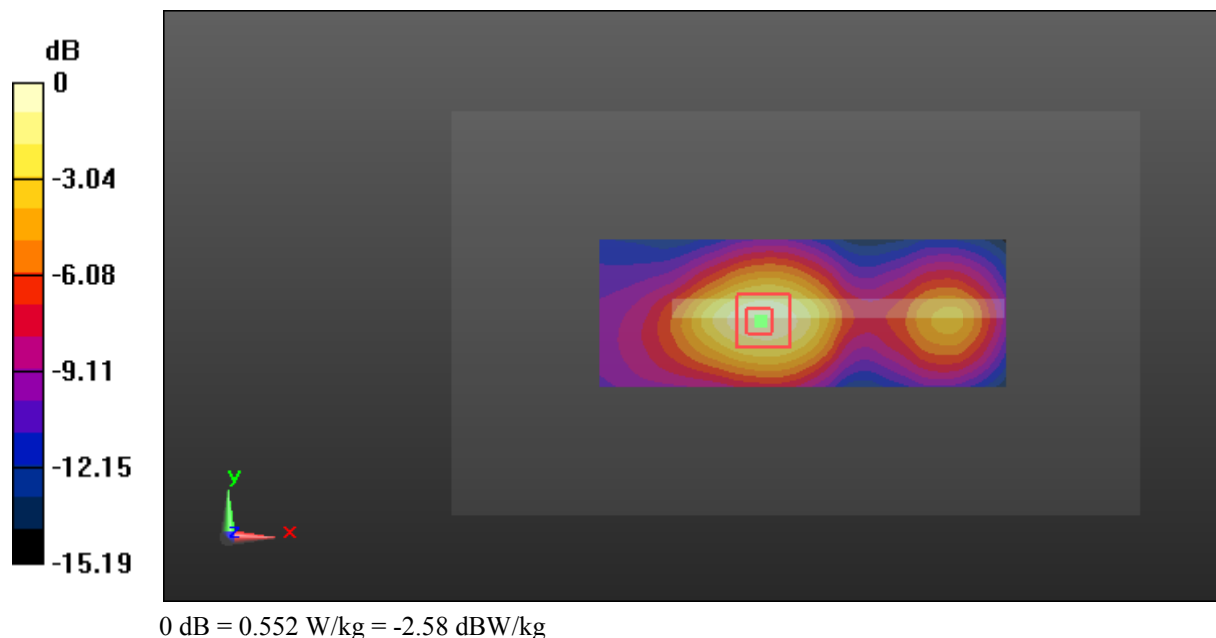

Test Plot 46#: WCDMA Band 2_Body Bottom_Middle Channel

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537$ S/m; $\epsilon_r = 52.22$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.939 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.22 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.746 W/kg; SAR(10 g) = 0.411 W/kg

Maximum value of SAR (measured) = 0.868 W/kg

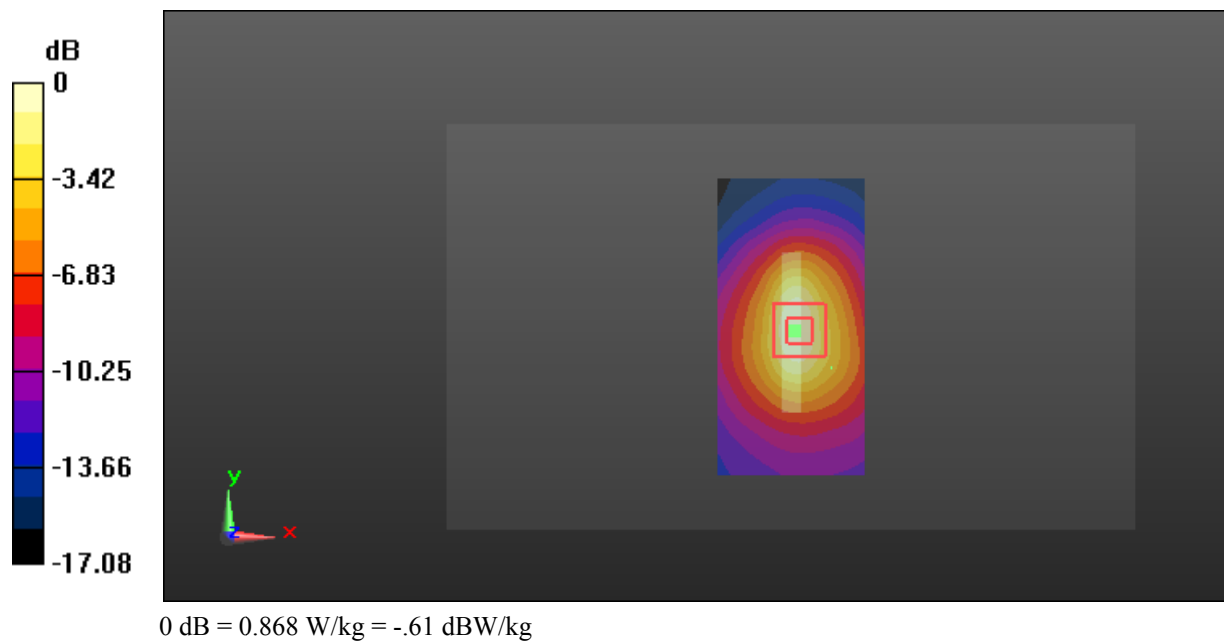

Test Plot 47#: LTE Band 2_Head Left Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.360 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.759 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.546 W/kg
SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.196 W/kg
 Maximum value of SAR (measured) = 0.353 W/kg

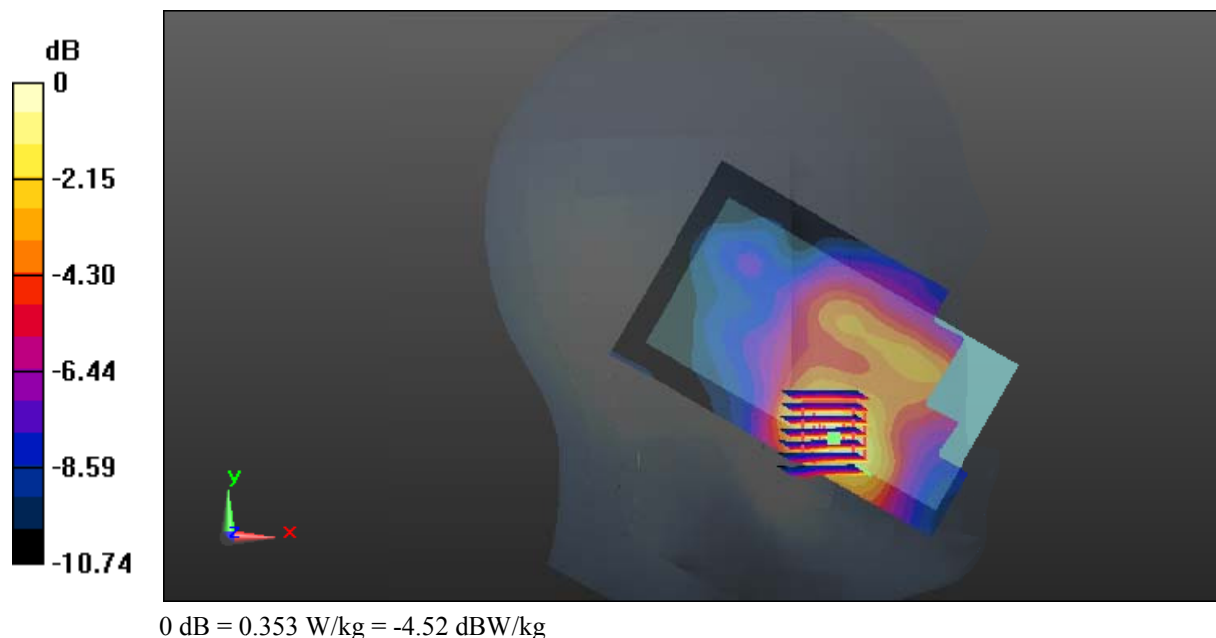

Test Plot 48#: LTE Band 2_Head Left Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.336 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.293 W/kg

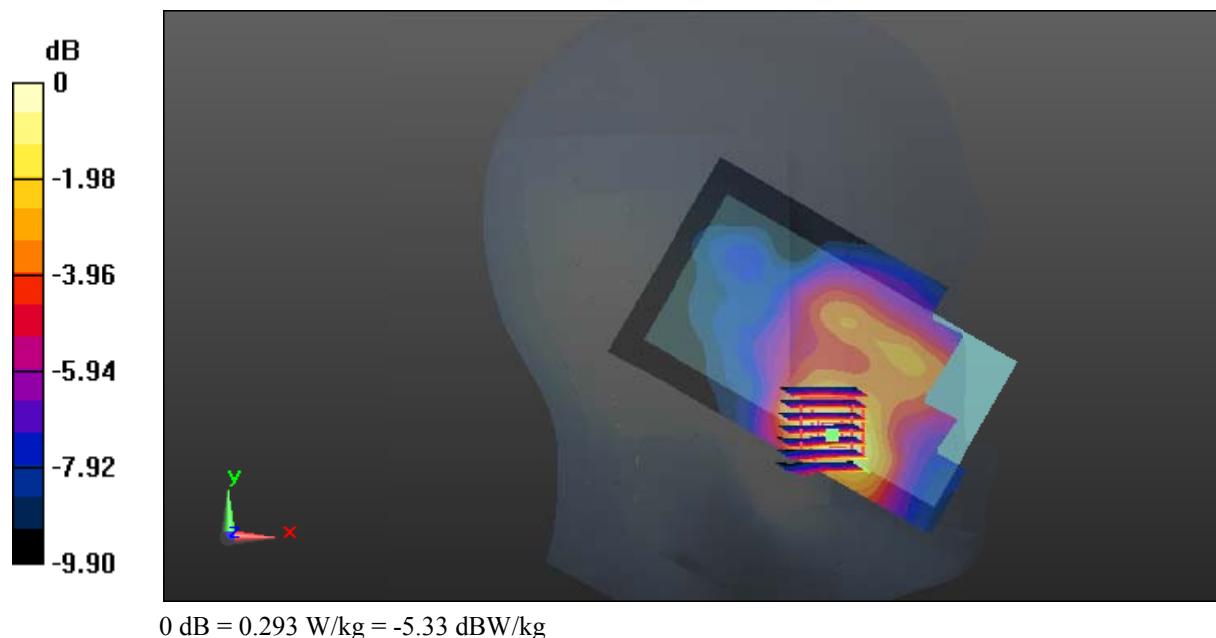

Test Plot 49#: LTE Band 2_Head Left Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0624 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.838 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 0.0970 W/kg
SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.041 W/kg
 Maximum value of SAR (measured) = 0.0620 W/kg

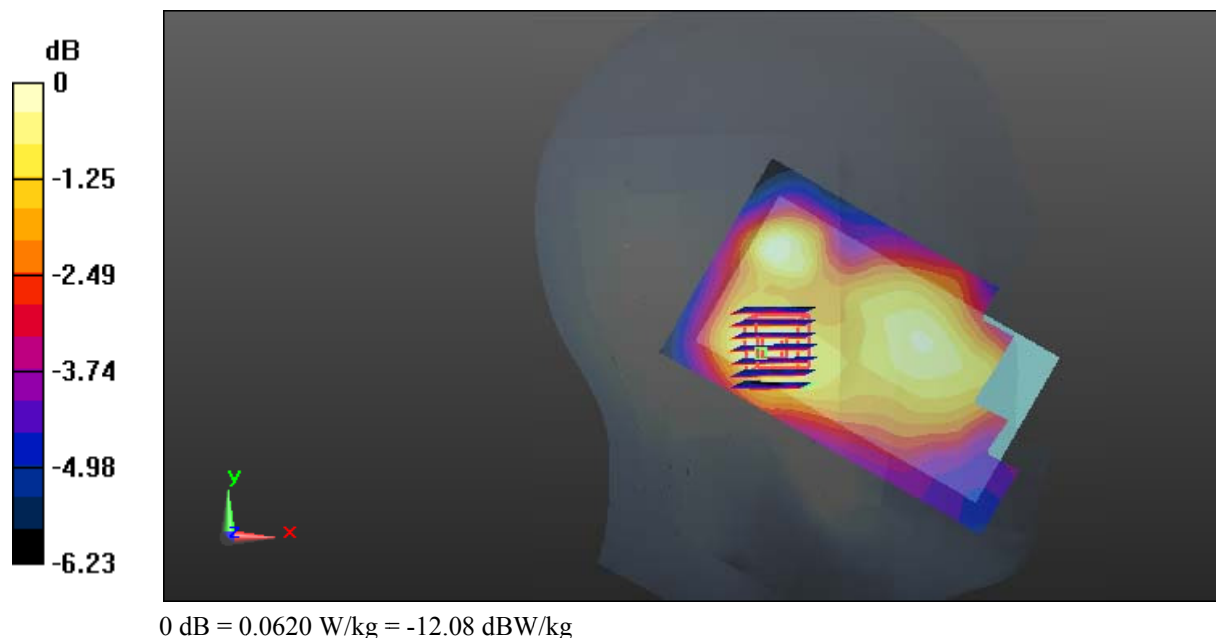

Test Plot 50#: LTE Band 2_Head Left Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0577 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.019 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0551 W/kg

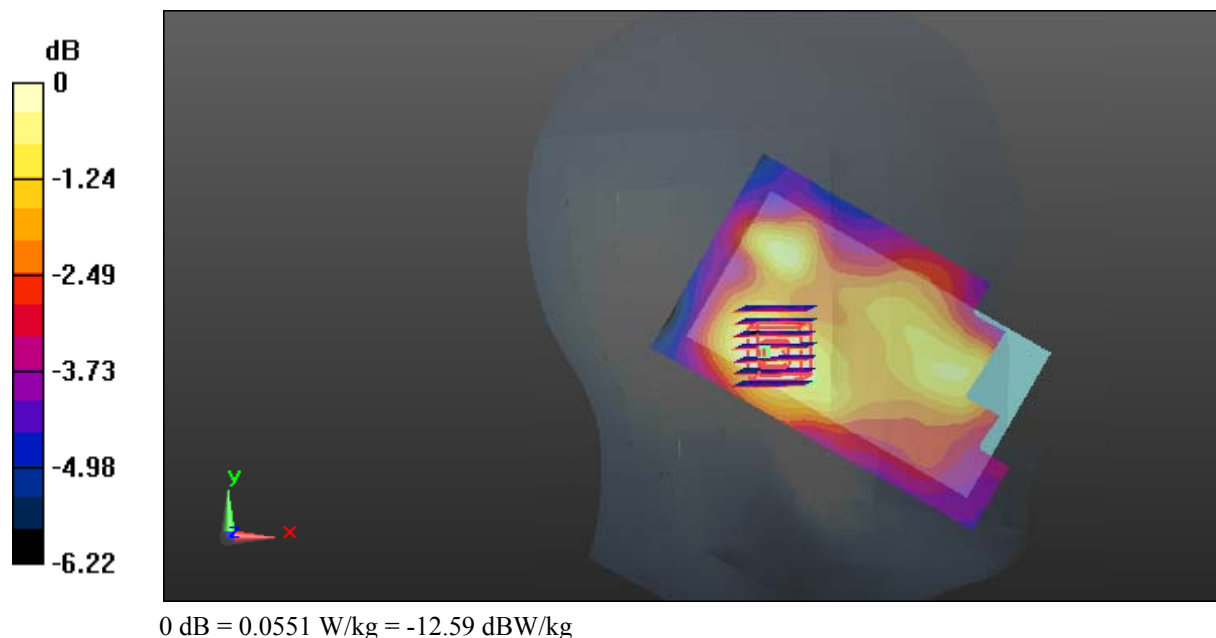

Test Plot 51#: LTE Band 2_Head Right Cheek_Middle Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.318 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.400 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.291 W/kg; SAR(10 g) = 0.169 W/kg

Maximum value of SAR (measured) = 0.318 W/kg

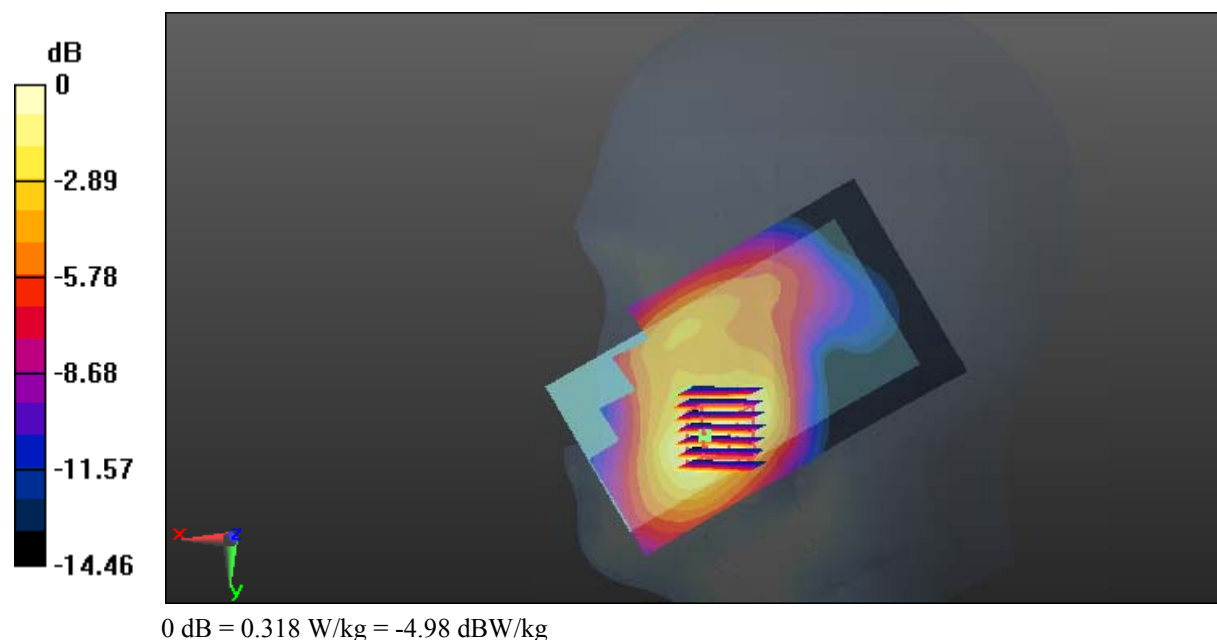

Test Plot 52#: LTE Band 2_Head Right Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.259 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.904 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.259 W/kg

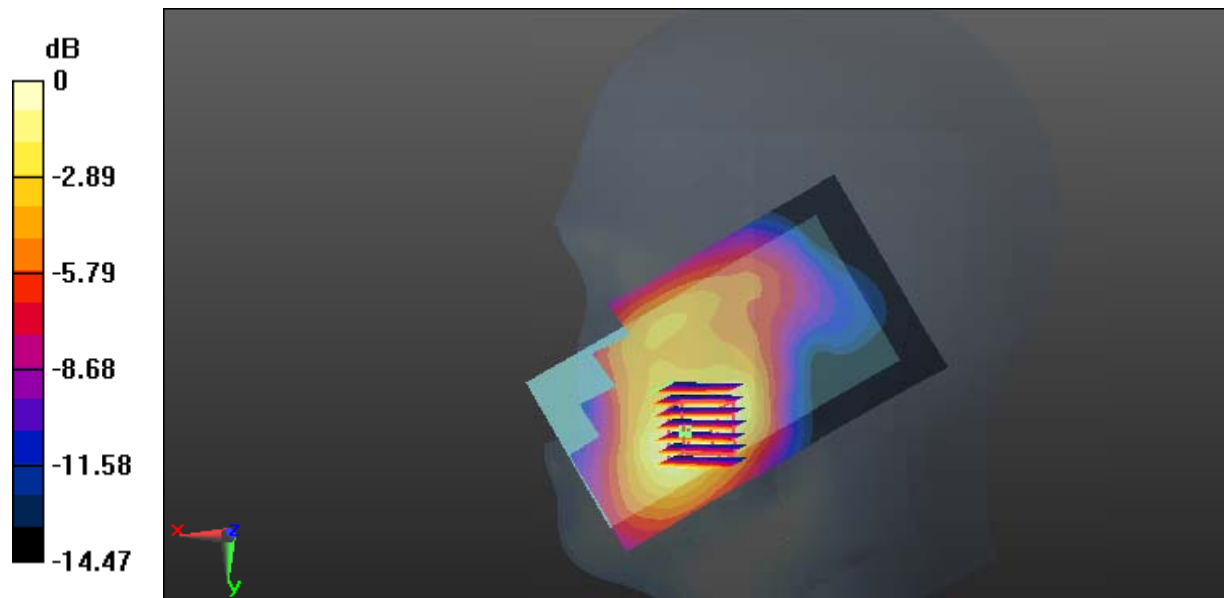

0 dB = 0.259 W/kg = -5.87 dBW/kg

Test Plot 53#: LTE Band 2_Head Right Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419 \text{ S/m}$; $\epsilon_r = 40.056$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.108 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.511 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.156 W/kg
SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.059 W/kg
 Maximum value of SAR (measured) = 0.107 W/kg

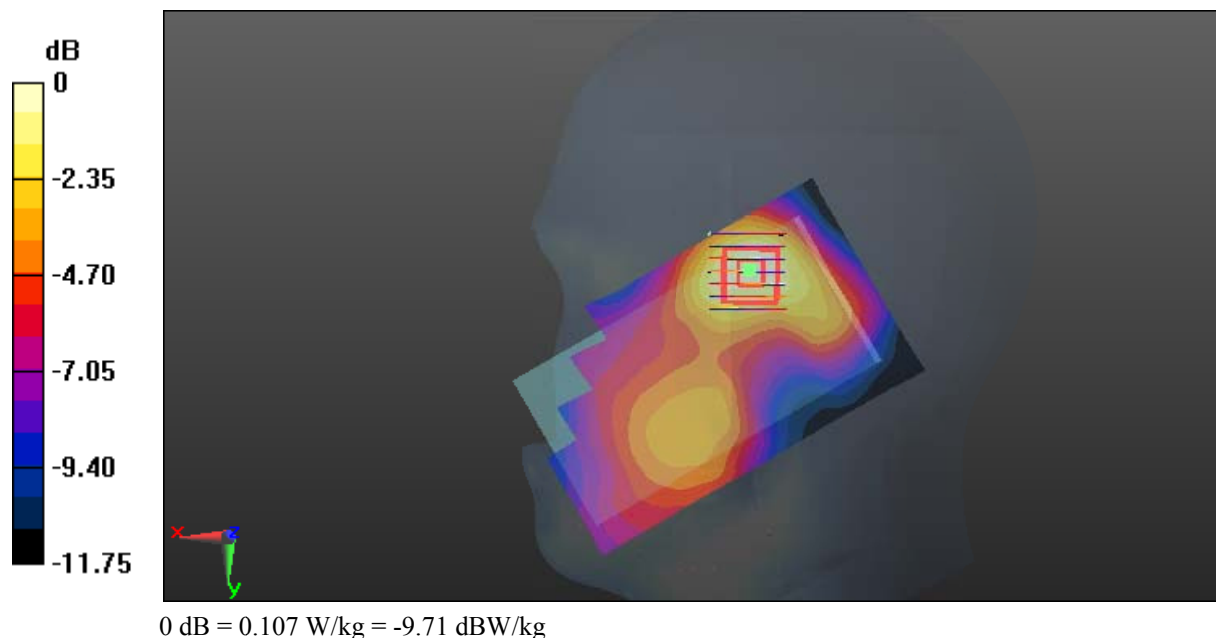

Test Plot 54#: LTE Band 2_Head Right Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.419$ S/m; $\epsilon_r = 40.056$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0871 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.850 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0830 W/kg

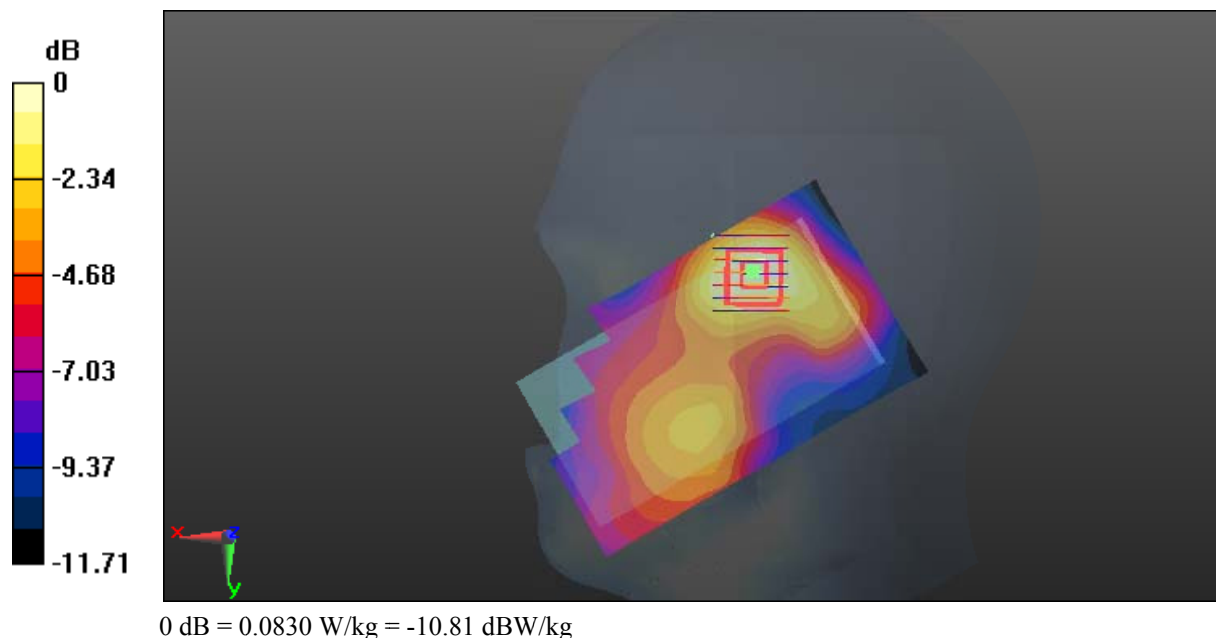

Test Plot 55#: LTE Band 2_Body Back_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.409 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.87 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.618 W/kg
SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.226 W/kg
 Maximum value of SAR (measured) = 0.390 W/kg

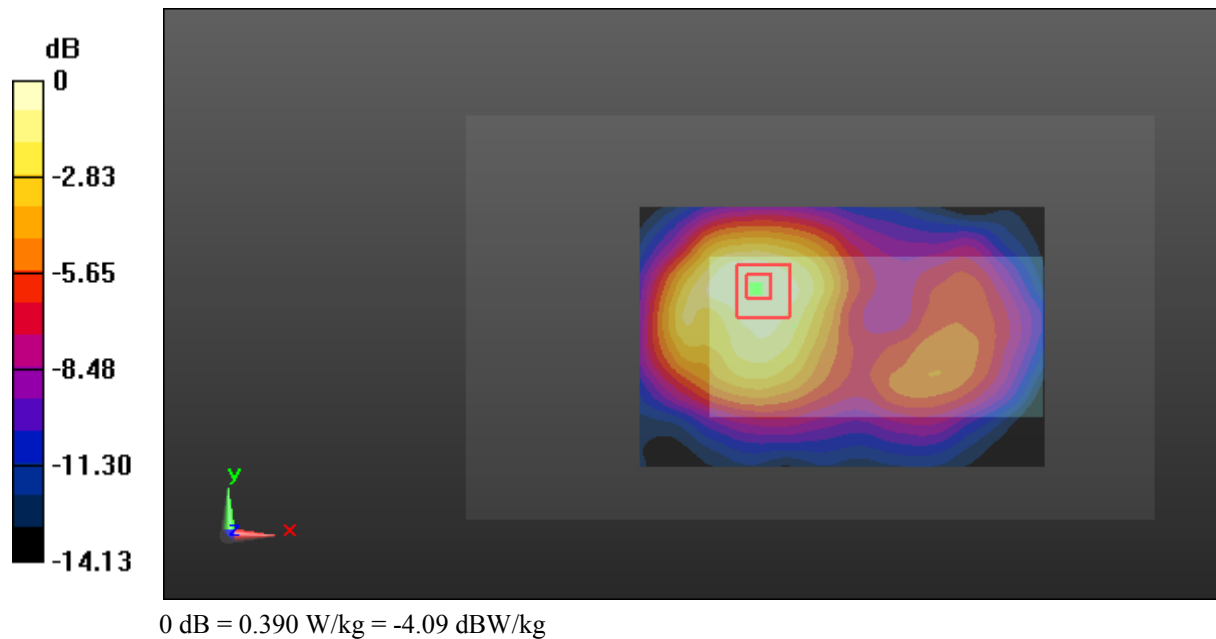

Test Plot 56#: LTE Band 2_Body Back_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x71x1): 21x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.292 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 11.09 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.452 W/kg
SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.157 W/kg
 Maximum value of SAR (measured) = 0.275 W/kg

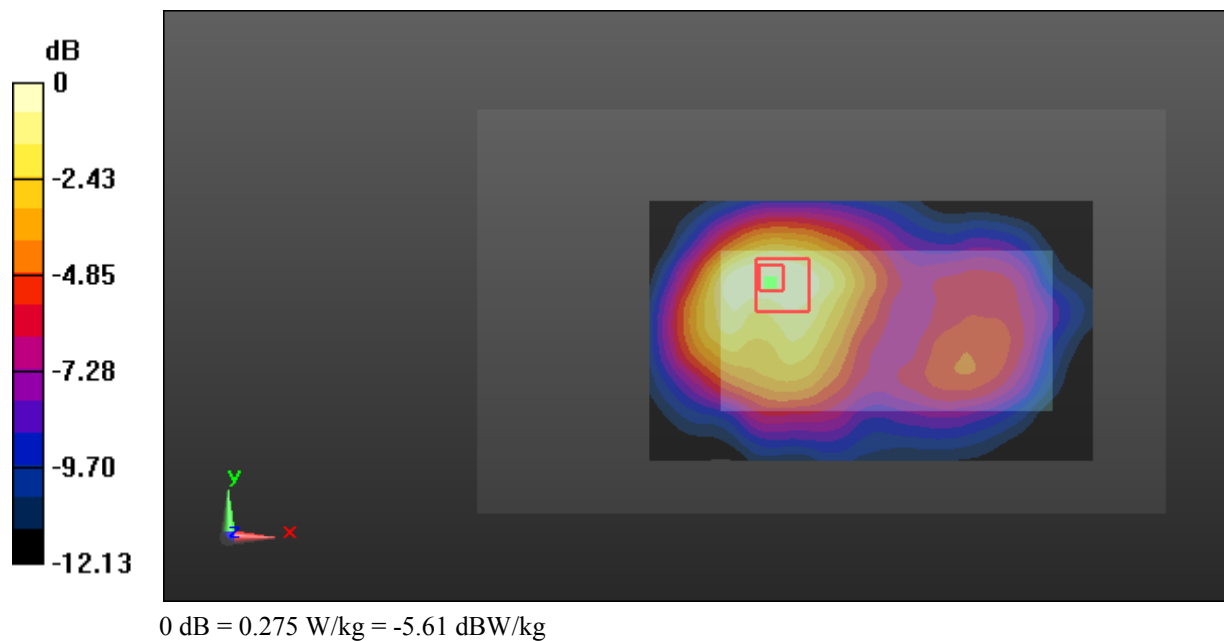

Test Plot 57#: LTE Band 2_Body Left_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): 21x41x1: Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0961 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.051 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.138 W/kg
SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.056 W/kg
 Maximum value of SAR (measured) = 0.0949 W/kg

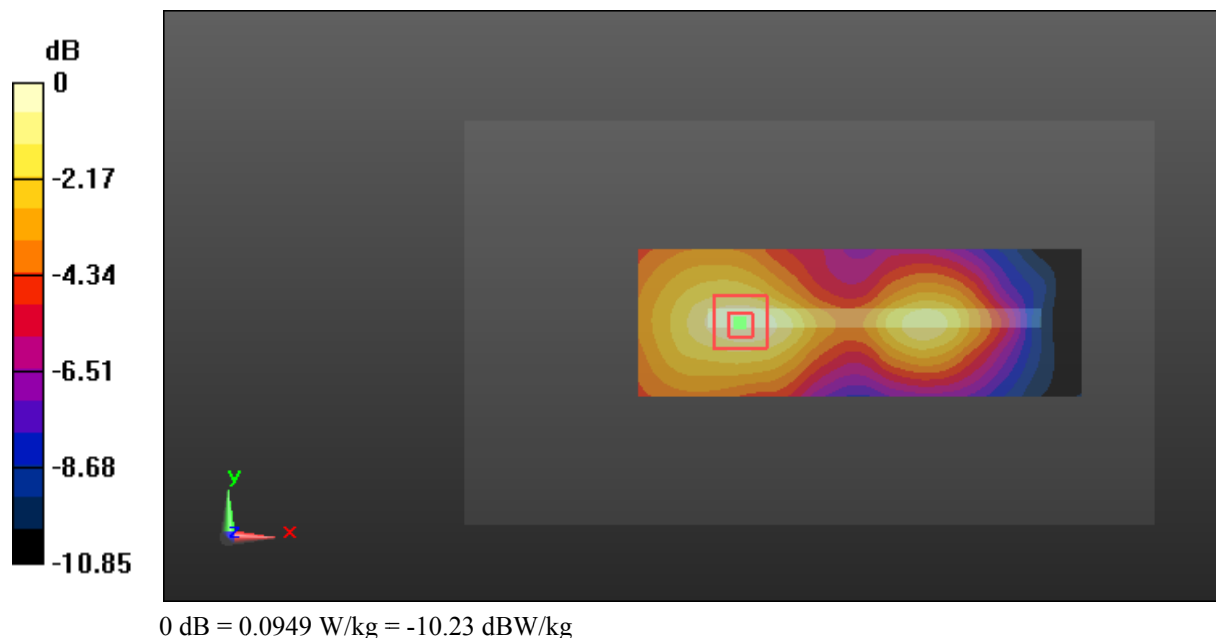

Test Plot 58#: LTE Band 2_Body Left_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537$ S/m; $\epsilon_r = 52.22$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): 21x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0775 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.440 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.114 W/kg
SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.046 W/kg
 Maximum value of SAR (measured) = 0.0811 W/kg

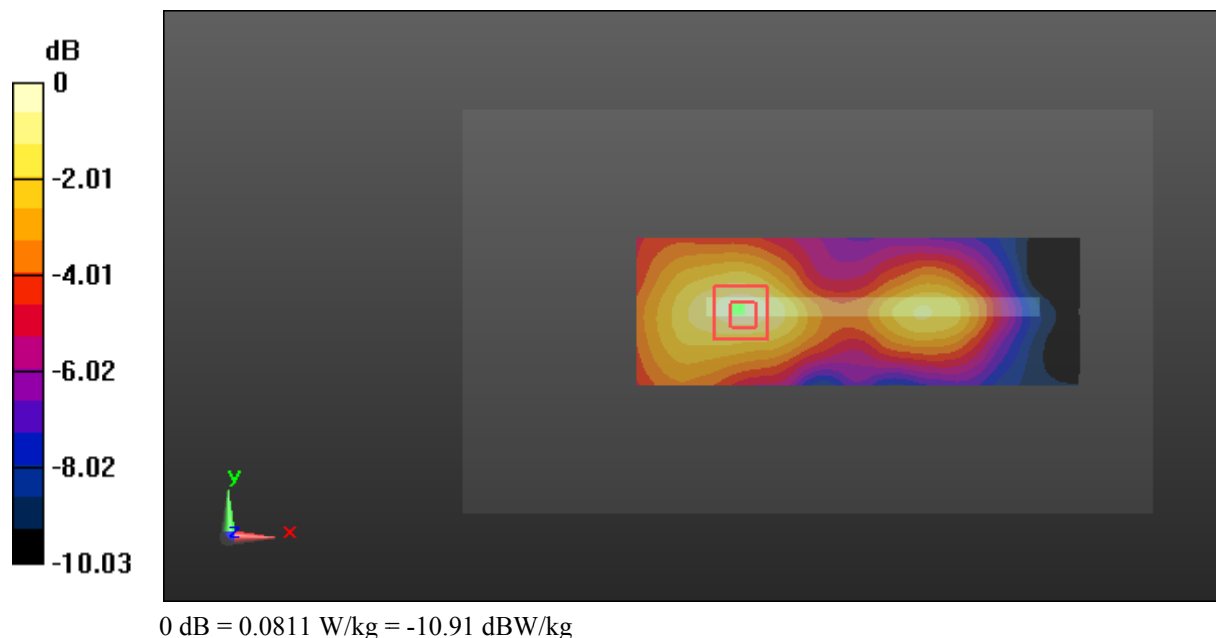

Test Plot 59#: LTE Band 2_Body Right_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): 21x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.194 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 9.921 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.293 W/kg
SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.103 W/kg
 Maximum value of SAR (measured) = 0.192 W/kg

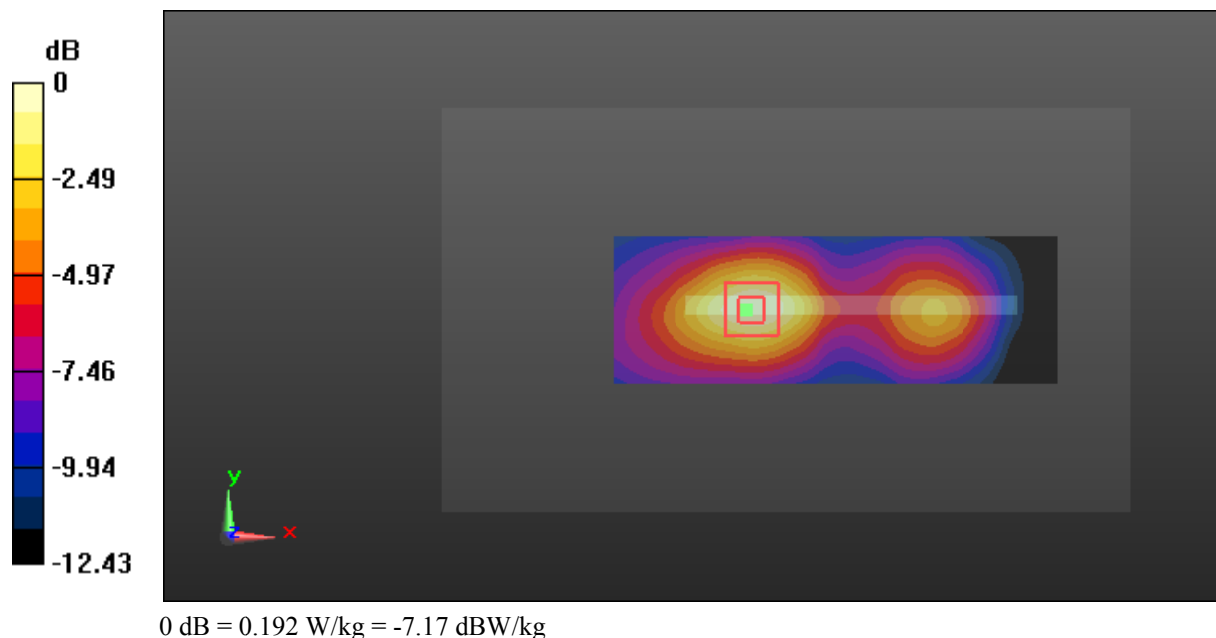

Test Plot 60#: LTE Band 2_Body Right_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x41x1): 21x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.158 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.855 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.238 W/kg
SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.084 W/kg
 Maximum value of SAR (measured) = 0.158 W/kg

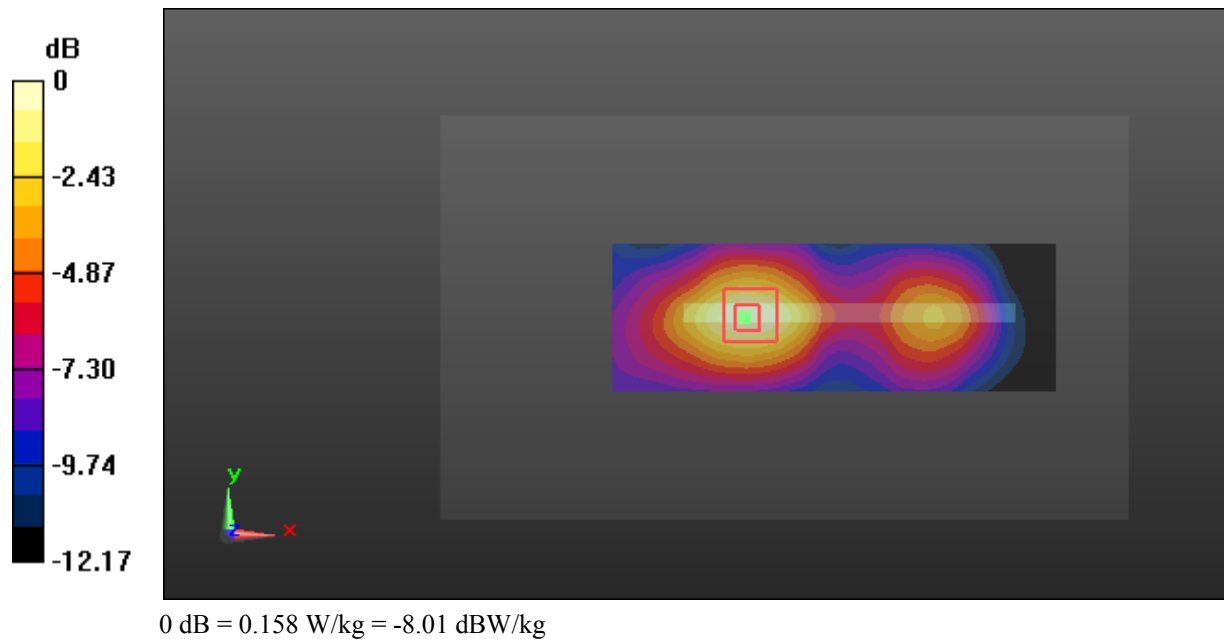

Test Plot 61#: LTE Band 2_Body Bottom_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.348 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.37 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.560 W/kg
SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.170 W/kg
 Maximum value of SAR (measured) = 0.356 W/kg

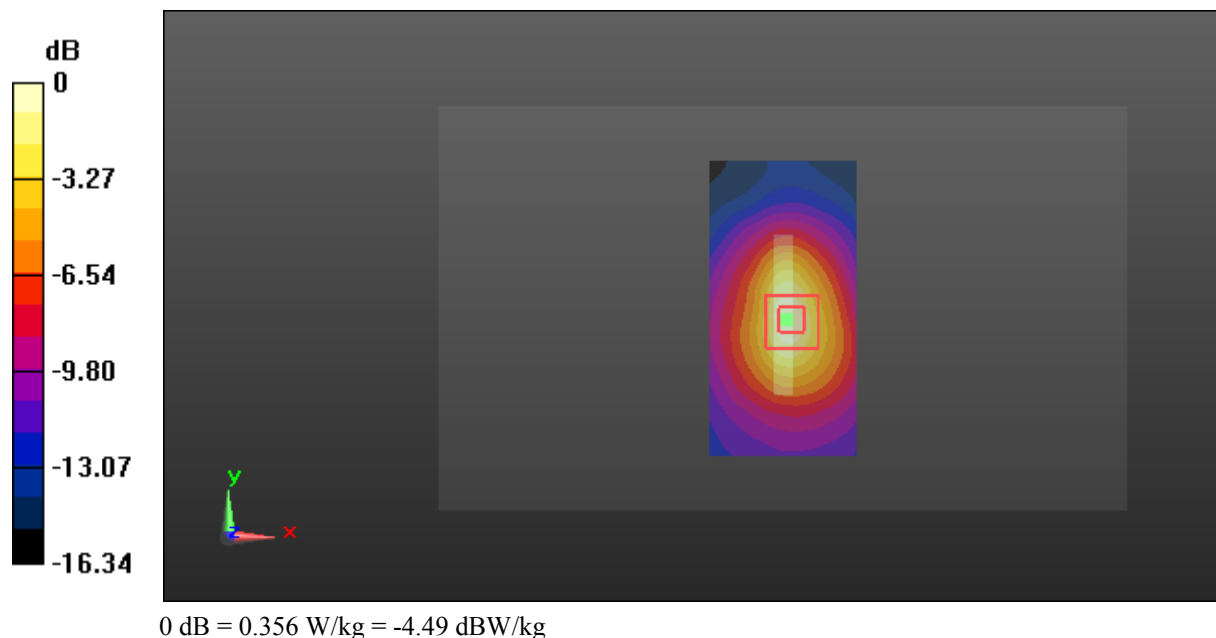

Test Plot 62#: LTE Band 2_Body Bottom_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.537 \text{ S/m}$; $\epsilon_r = 52.22$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.279 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.10 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.444 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.134 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

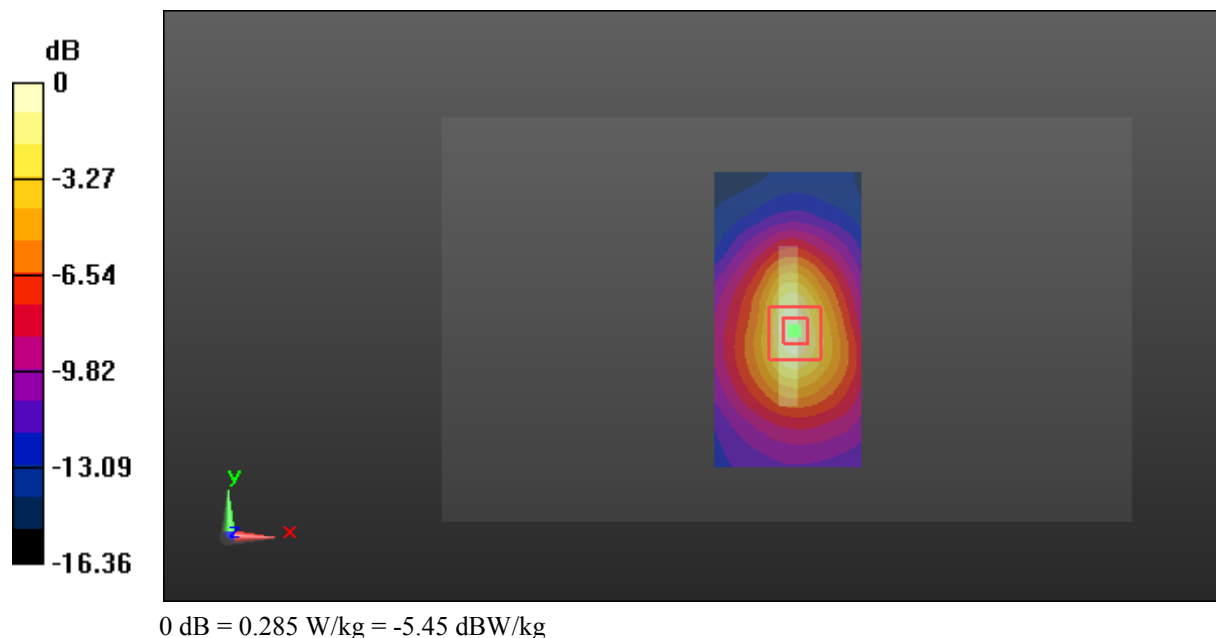

Test Plot 63#: LTE Band 4_Head Left Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.566 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.436 W/kg

SAR(1 g) = 0.282 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

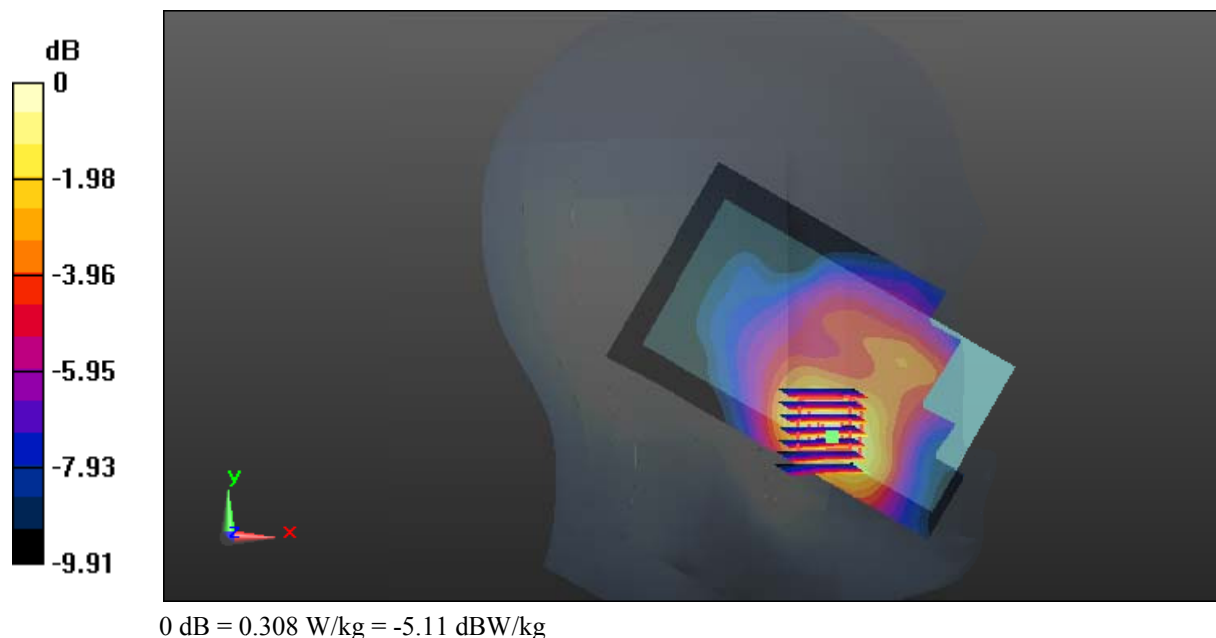

Test Plot 64#: LTE Band 4_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.782 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.338 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.143 W/kg

Maximum value of SAR (measured) = 0.239 W/kg

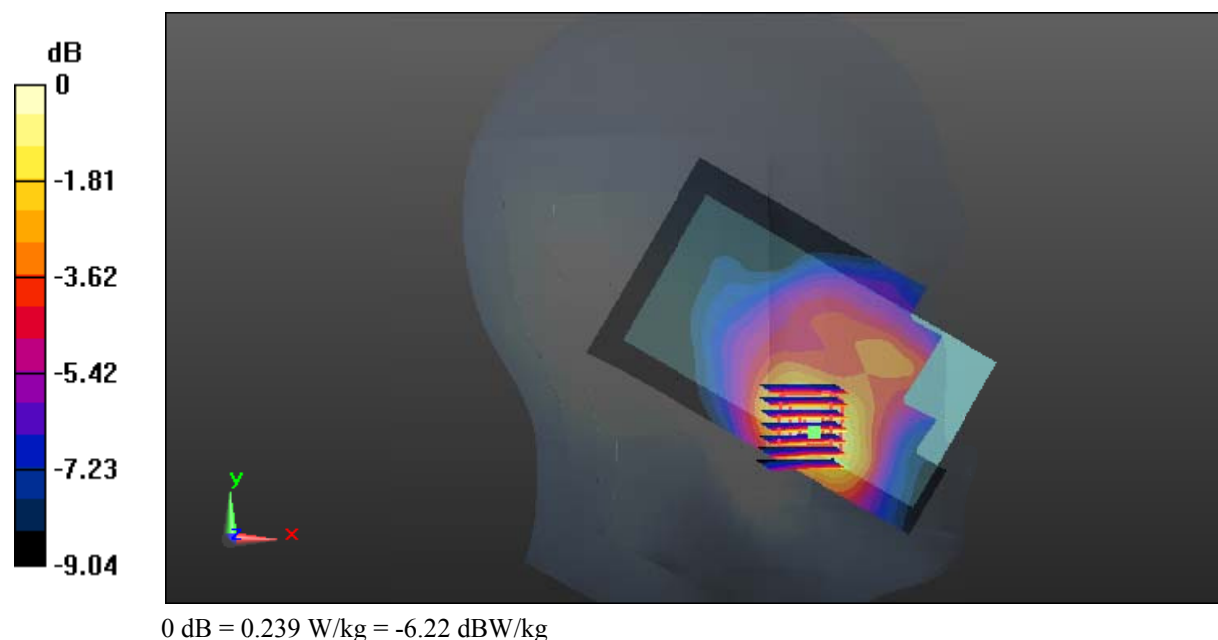

Test Plot 65#: LTE Band 4_Head Left Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0676 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.238 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0950 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.045 W/kg

Maximum value of SAR (measured) = 0.0678 W/kg

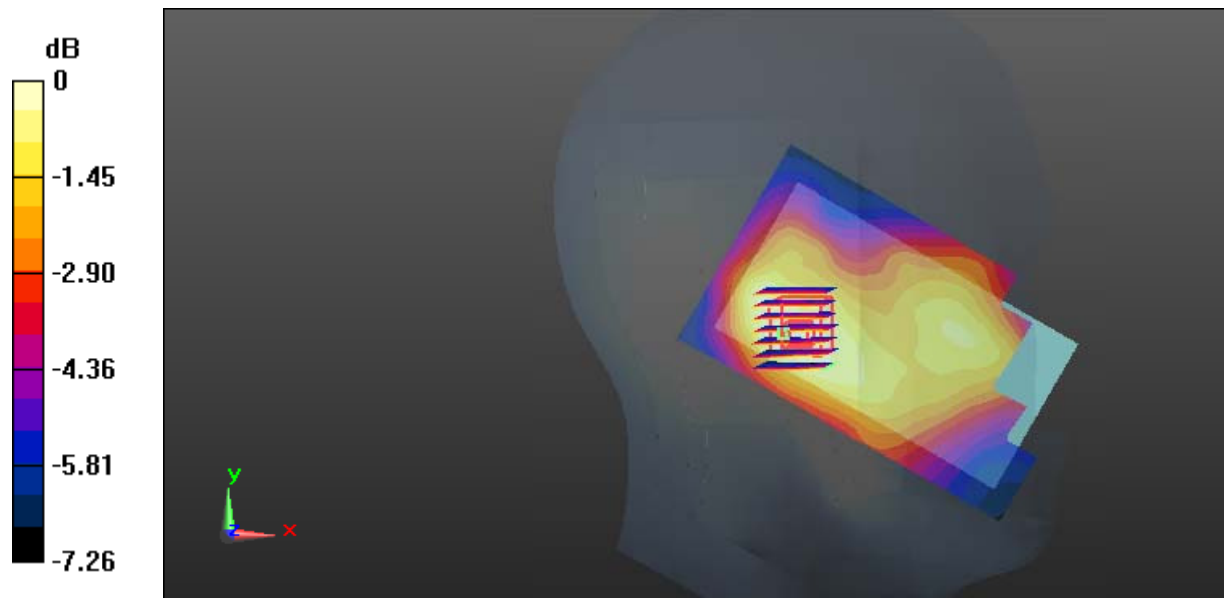

0 dB = 0.0678 W/kg = -11.69 dBW/kg

Test Plot 66#: LTE Band 4_Head Left Tilt_Middle Channel_50%RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0521 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.519 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0720 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0525 W/kg

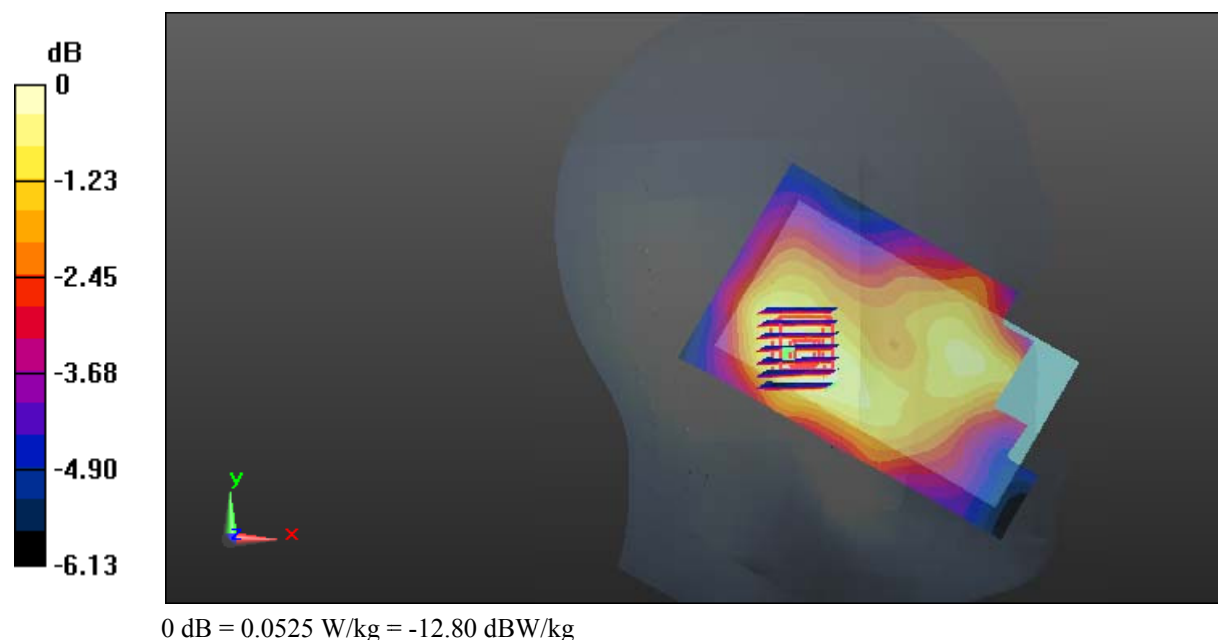

Test Plot 67#: LTE Band 4_Head Right Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.314 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.831 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.451 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.187 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

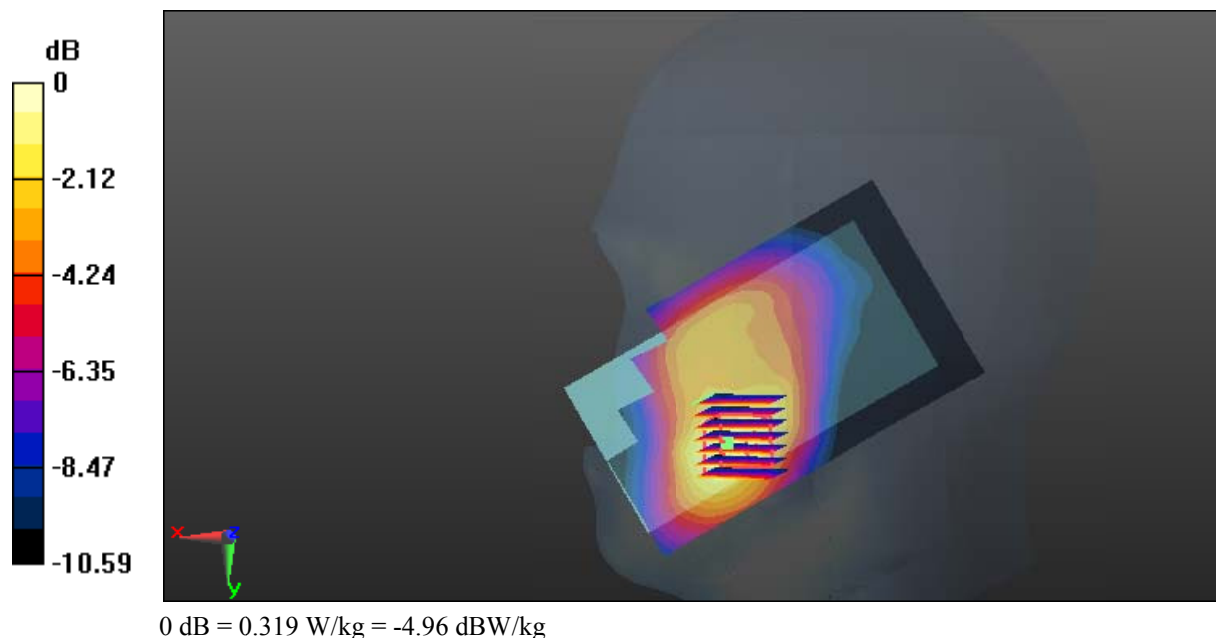

Test Plot 68#: LTE Band 4_Head Right Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.232 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.948 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.231 W/kg

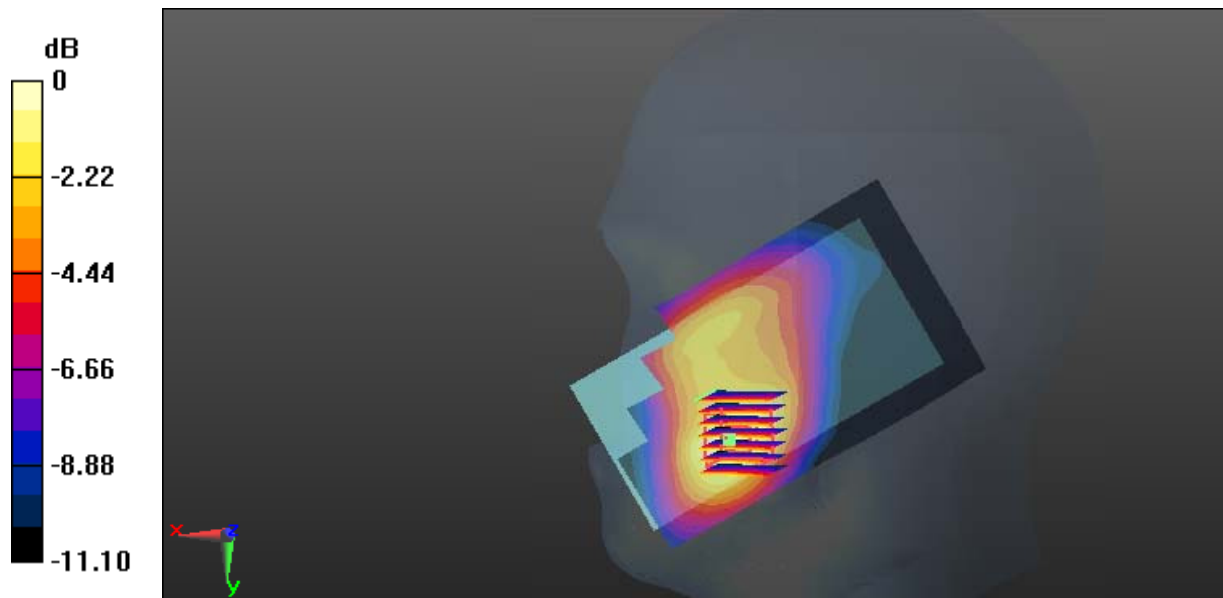

0 dB = 0.231 W/kg = -6.36 dBW/kg

Test Plot 69#: LTE Band 4_Head Right Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0804 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.731 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.103 W/kg
SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.048 W/kg
 Maximum value of SAR (measured) = 0.0764 W/kg

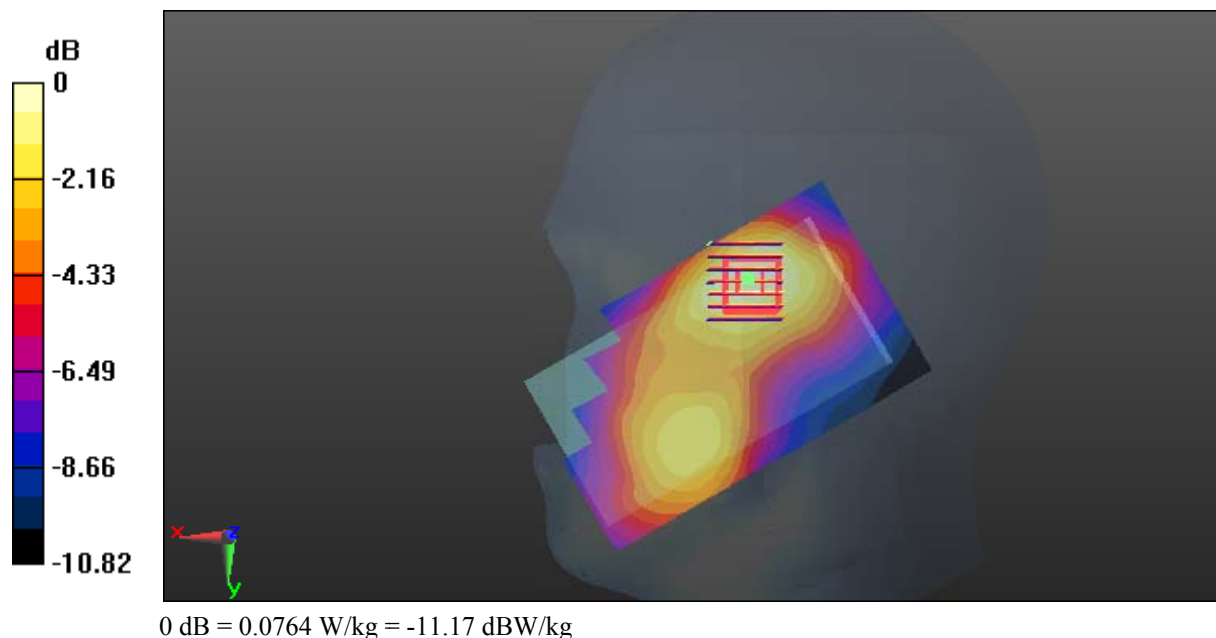

Test Plot 70#: LTE Band 4_Head Right Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0664 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.176 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0632 W/kg

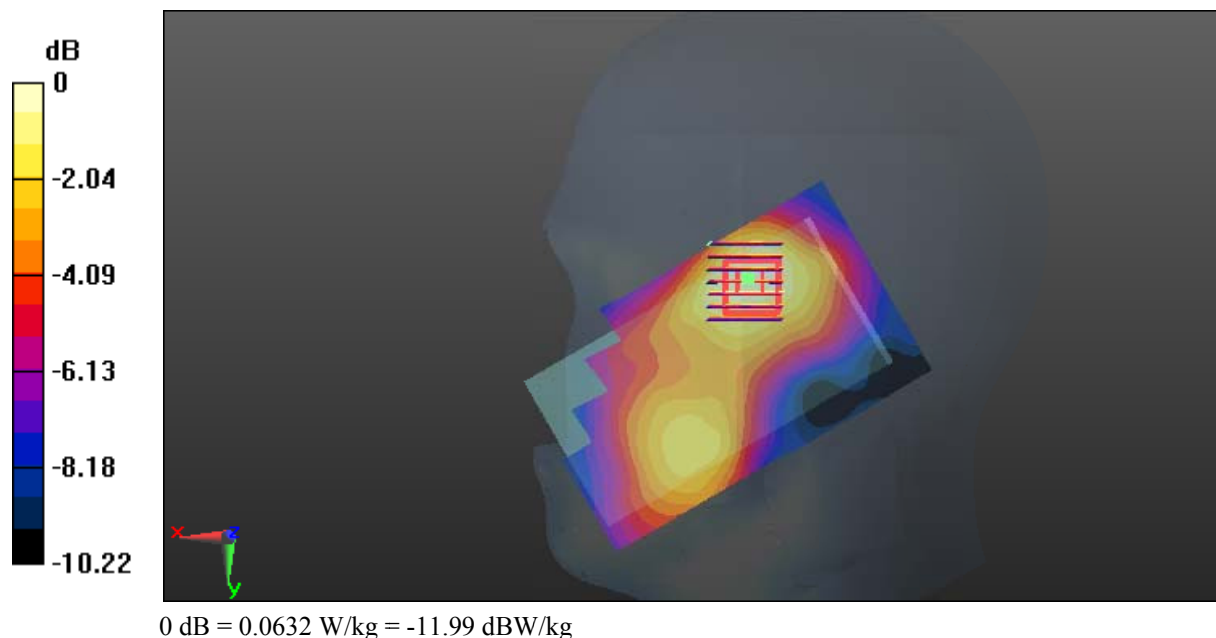

Test Plot 71#: LTE Band 4_Body Back_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.458 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 10.50 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 0.641 W/kg
SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.246 W/kg
 Maximum value of SAR (measured) = 0.426 W/kg

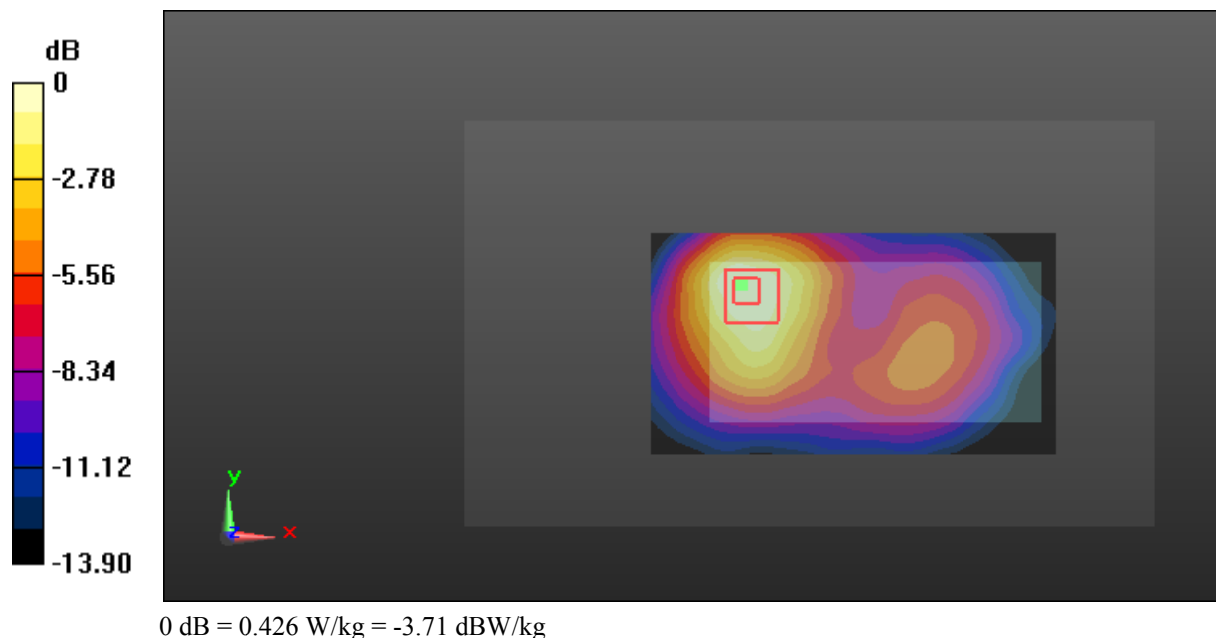

Test Plot 72#: LTE Band 4_Body Back_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.349 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.203 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.490 W/kg

SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.194 W/kg

Maximum value of SAR (measured) = 0.342 W/kg

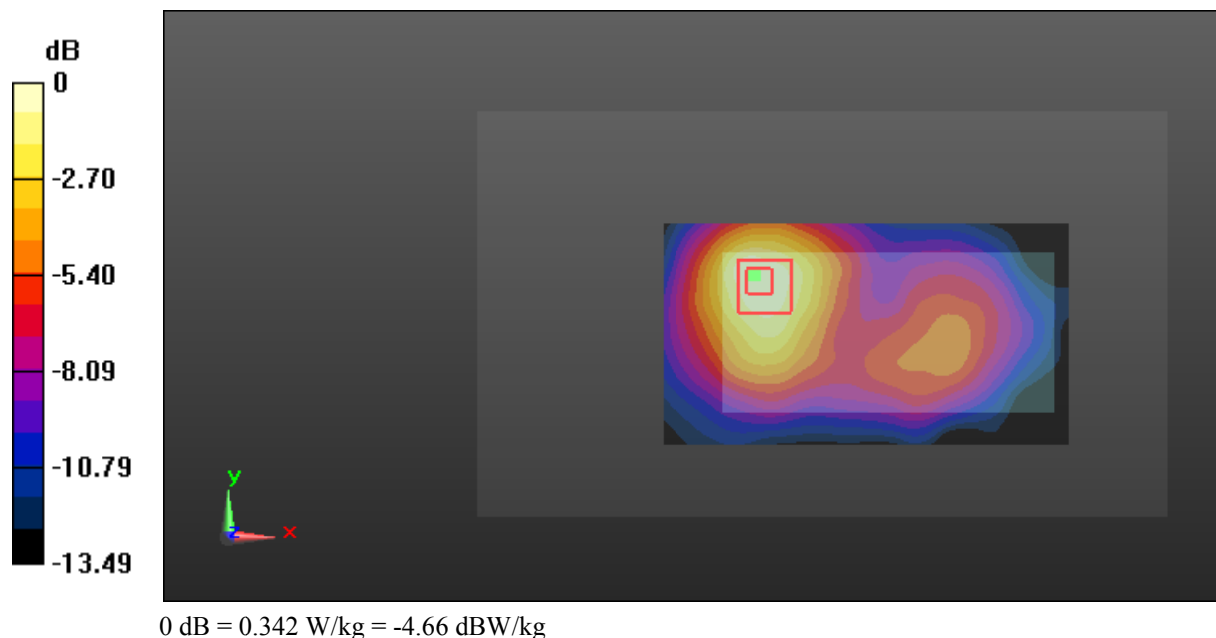

Test Plot 73#: LTE Band 4_Body Left_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0723 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.582 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.125 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0749 W/kg

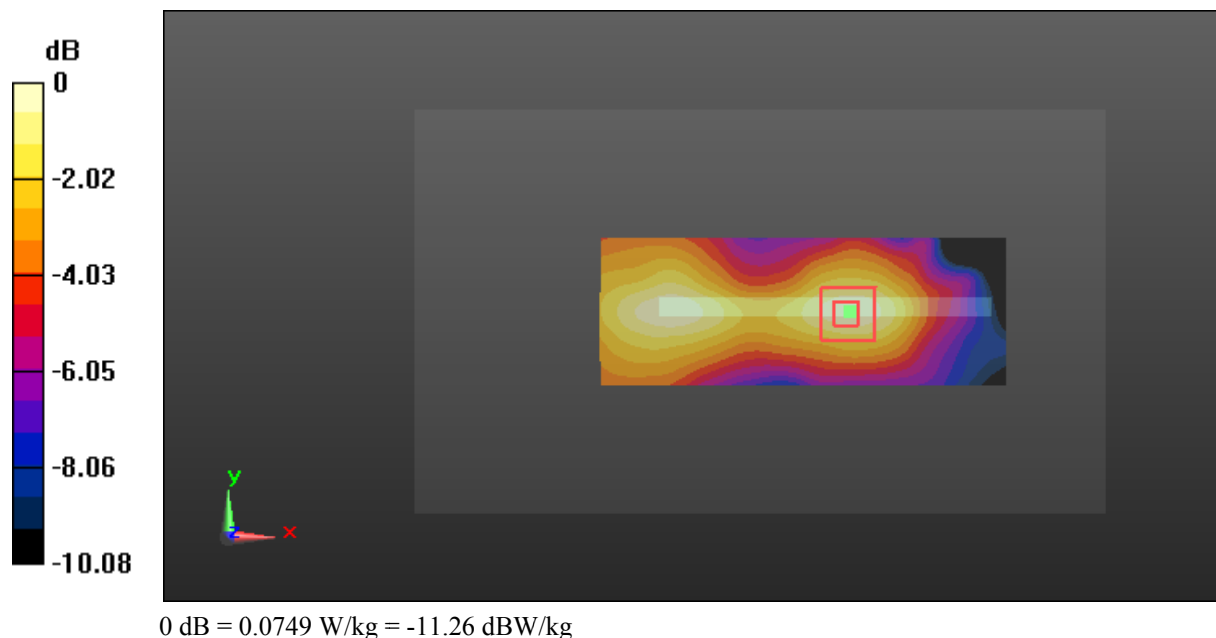

Test Plot 74#: LTE Band 4_Body Left_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0580 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.094 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0860 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0579 W/kg

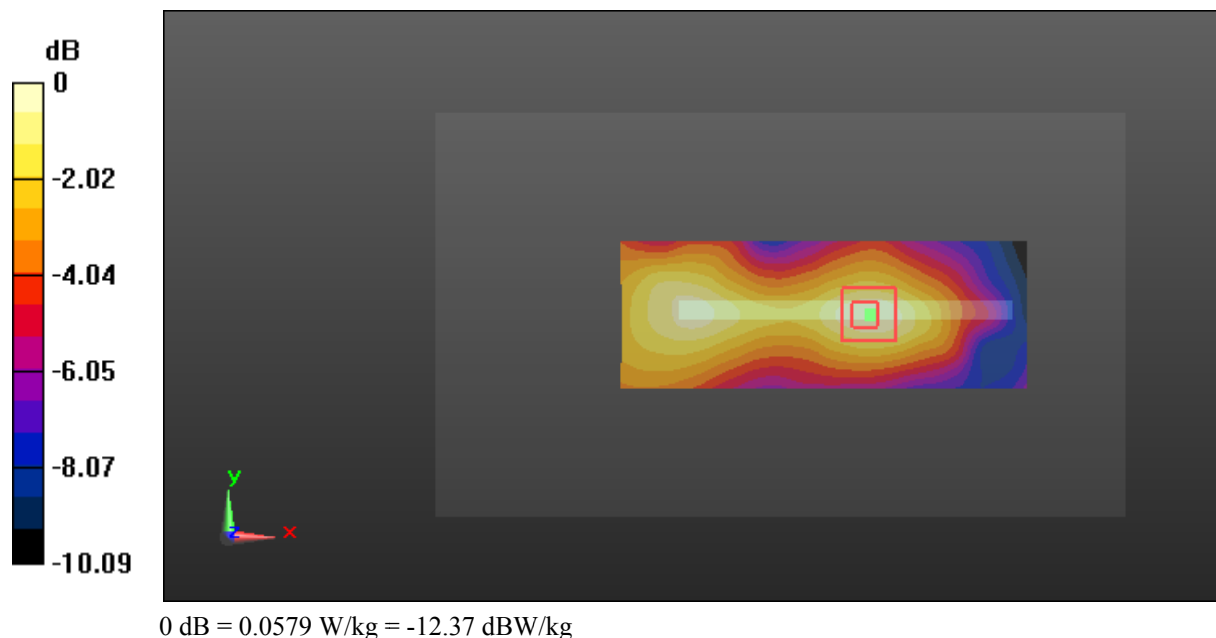

Test Plot 75#: LTE Band 4_Body Right_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.183 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.666 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.162 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

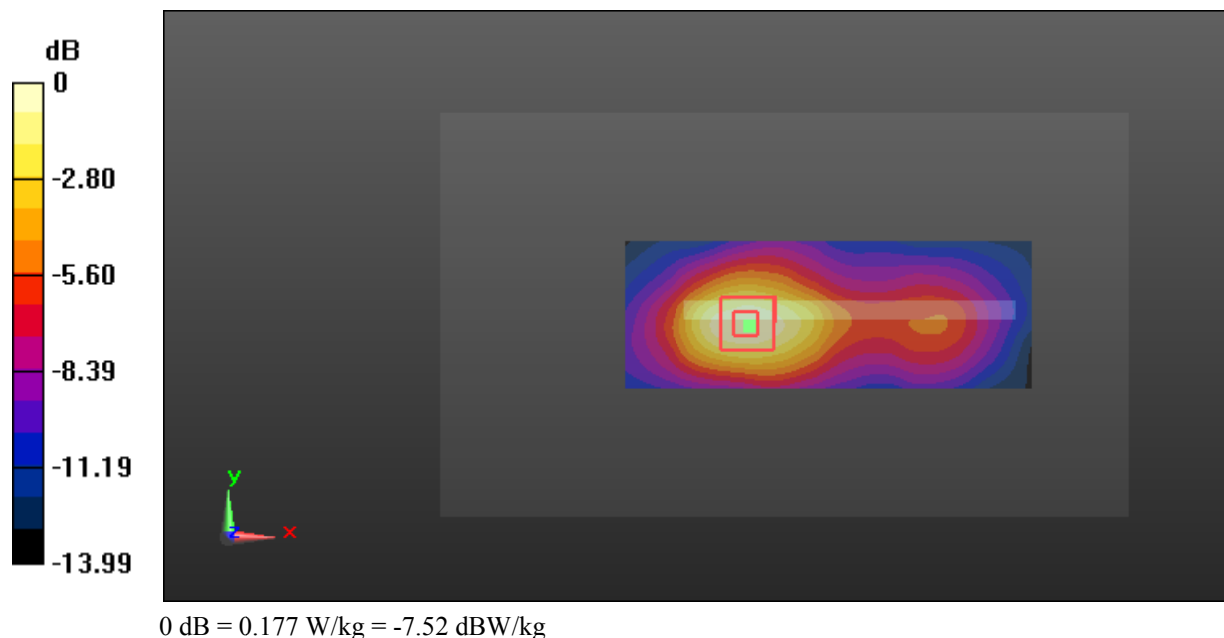

Test Plot 76#: LTE Band 4_Body Right_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.144 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.696 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.143 W/kg

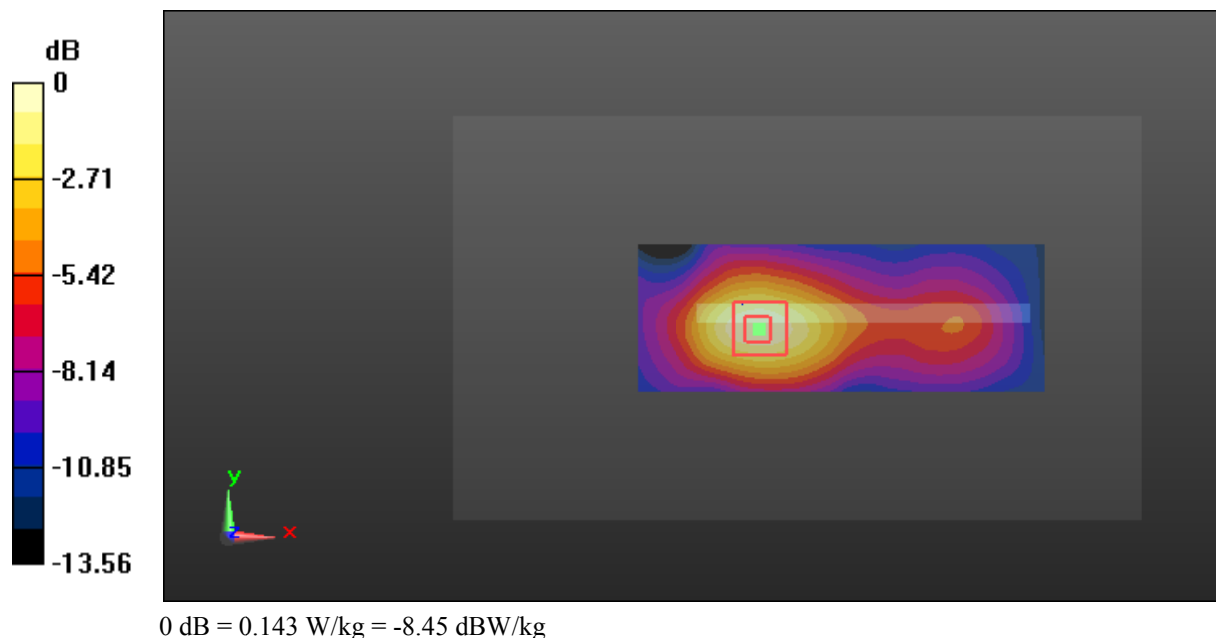

Test Plot 77#: LTE Band 4_Body Bottom_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.205 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.00 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.315 W/kg
SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.105 W/kg
 Maximum value of SAR (measured) = 0.215 W/kg

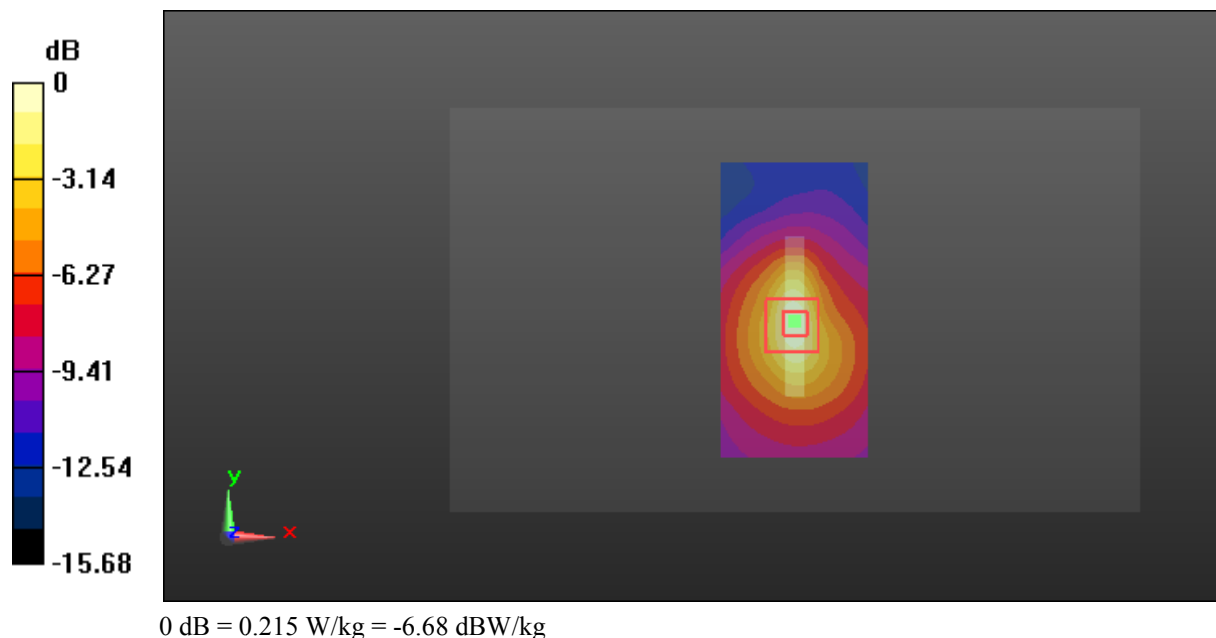

Test Plot 78#: LTE Band 4_Body Bottom_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.487$ S/m; $\epsilon_r = 52.375$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.41 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.166 W/kg

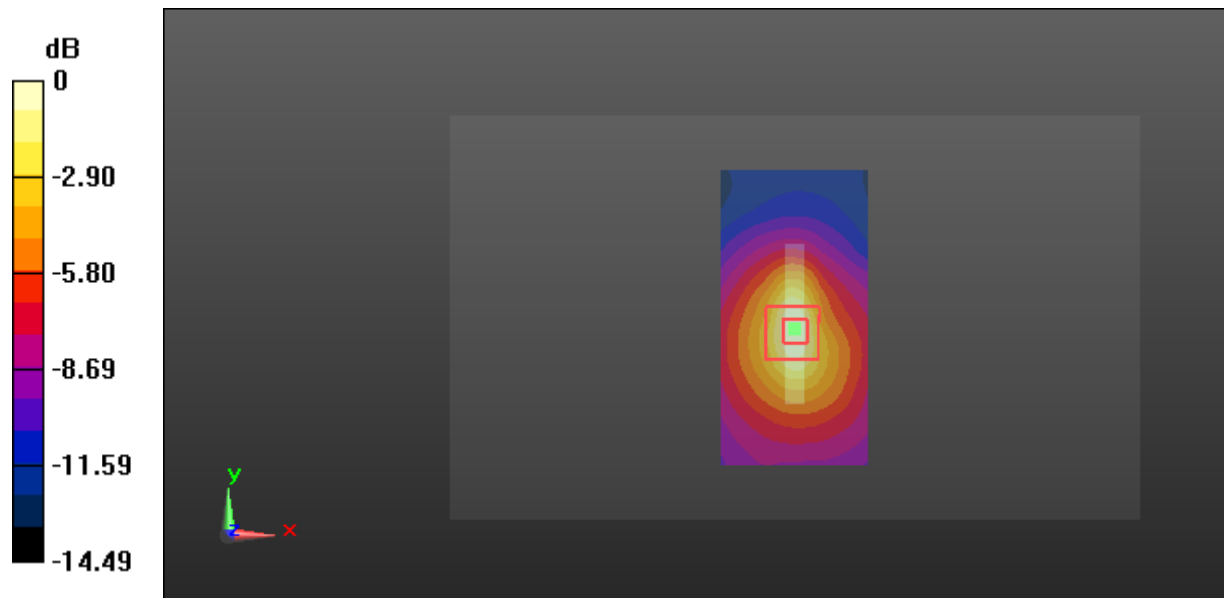

0 dB = 0.166 W/kg = -7.80 dBW/kg

Test Plot 79#: LTE Band 5_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.186 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.185 W/kg

Maximum value of SAR (measured) = 0.251 W/kg

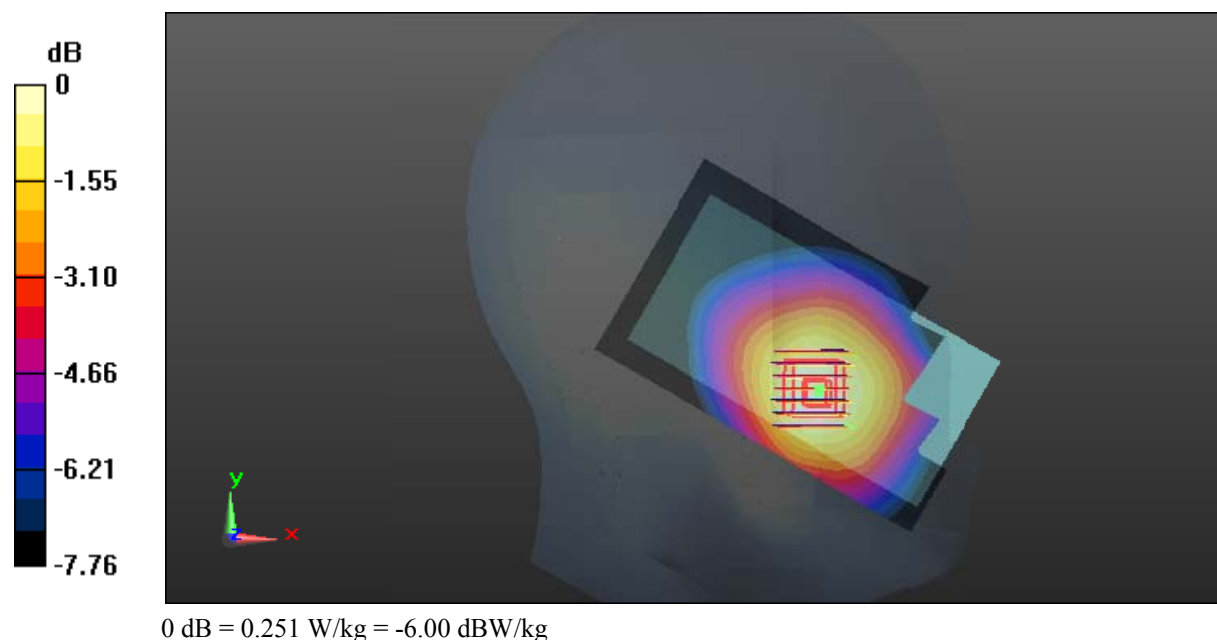

Test Plot 80#: LTE Band 5_Head Left Cheek_Middle Channel_50%RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.210 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.678 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.239 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.210 W/kg

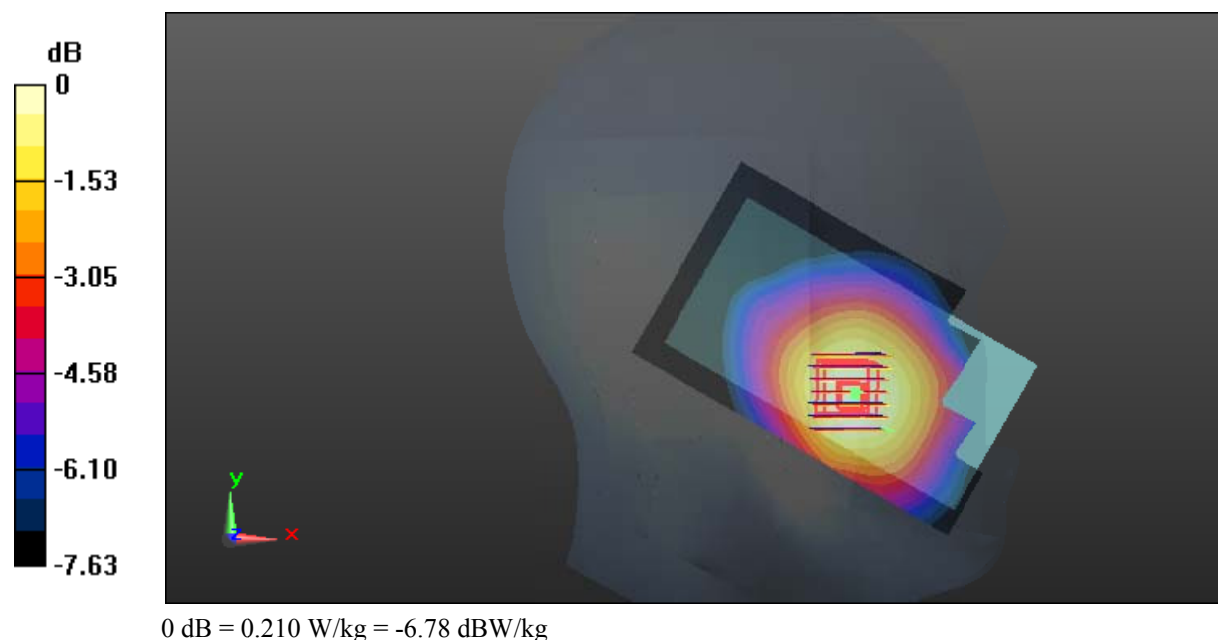

Test Plot 81#: LTE Band 5_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.713 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.123 W/kg

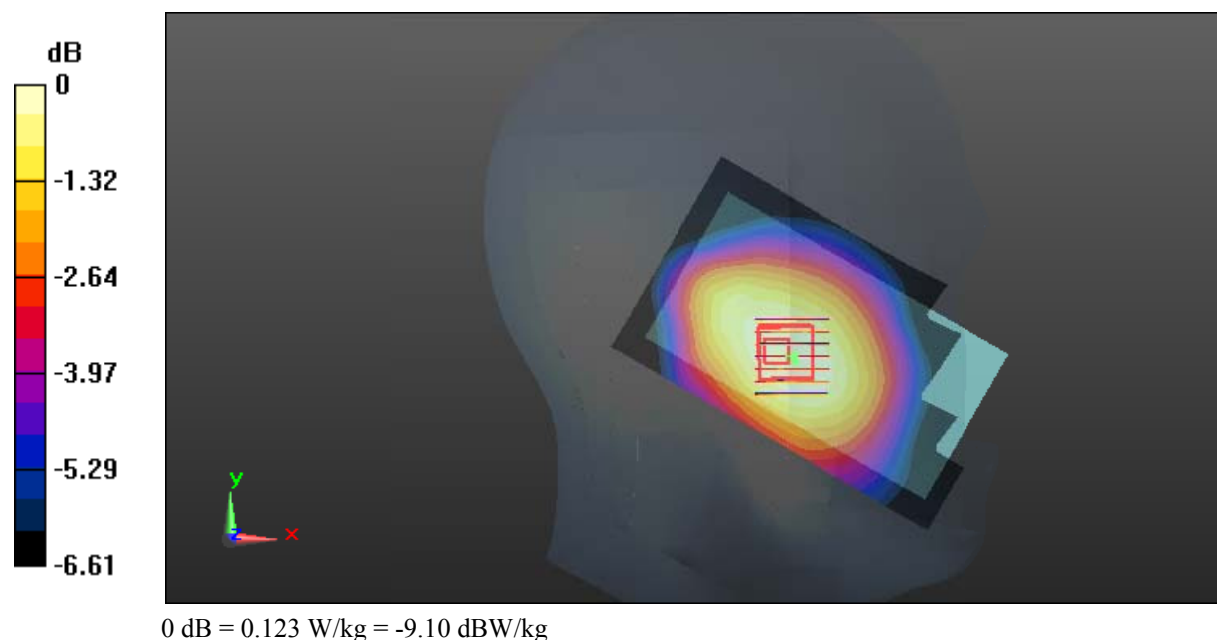

Test Plot 82#: LTE Band 5_Head Left Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.102 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.546 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.0952 W/kg

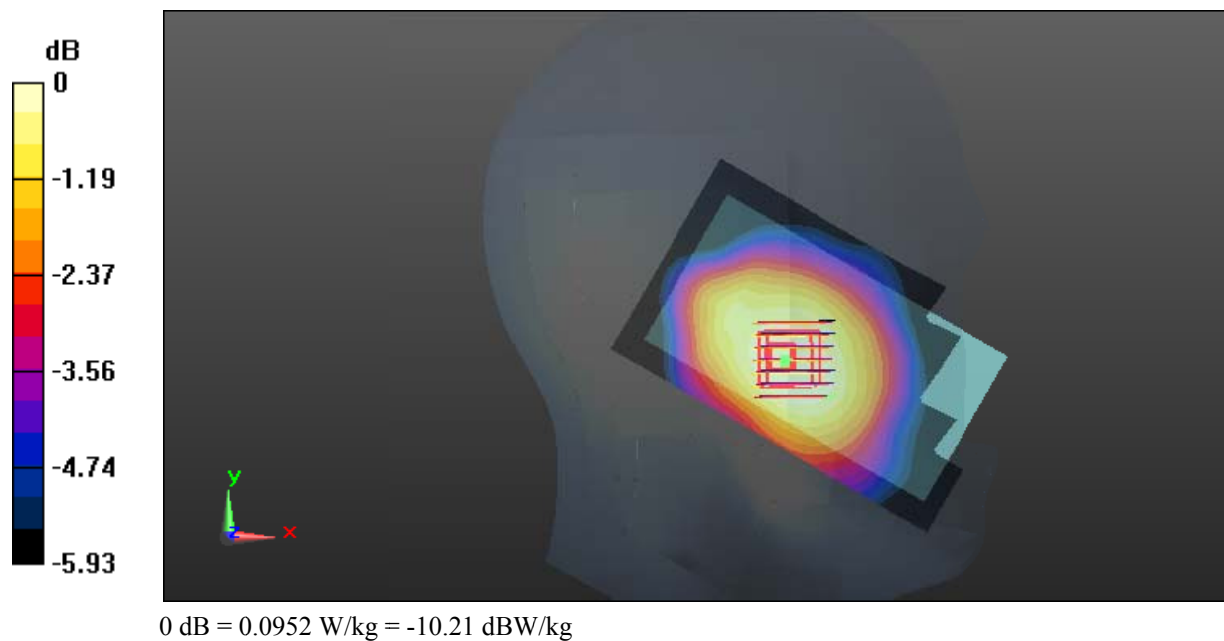

Test Plot 83#: LTE Band 5_Head Right Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.200 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.154 V/m; Power Drift = -0.05 dB
 Peak SAR (extrapolated) = 0.255 W/kg
SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.138 W/kg
 Maximum value of SAR (measured) = 0.190 W/kg

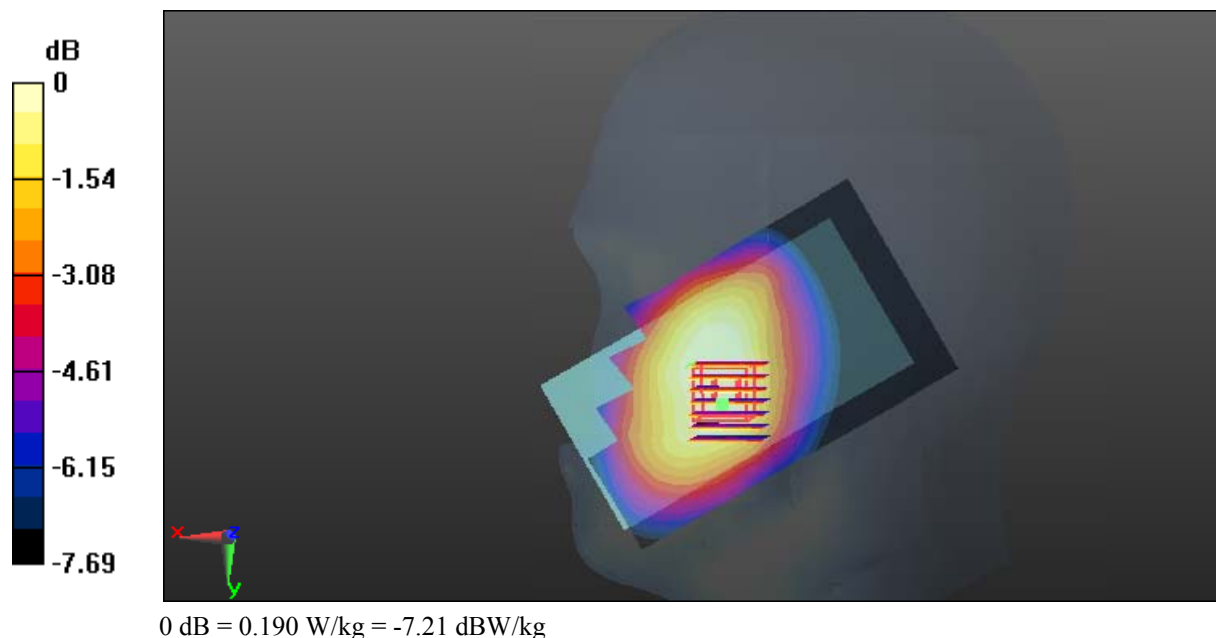

Test Plot 84#: LTE Band 5_Head Right Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.171 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.455 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.216 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

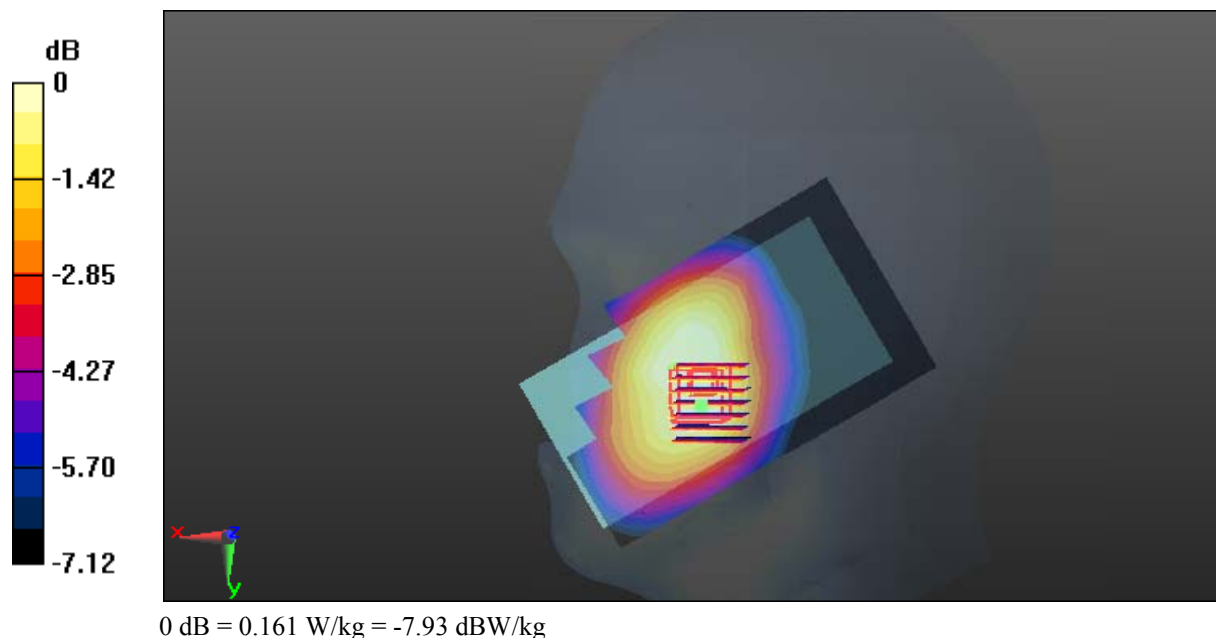

Test Plot 85#: LTE Band 5_Head Right Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.101 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.136 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.119 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.0958 W/kg

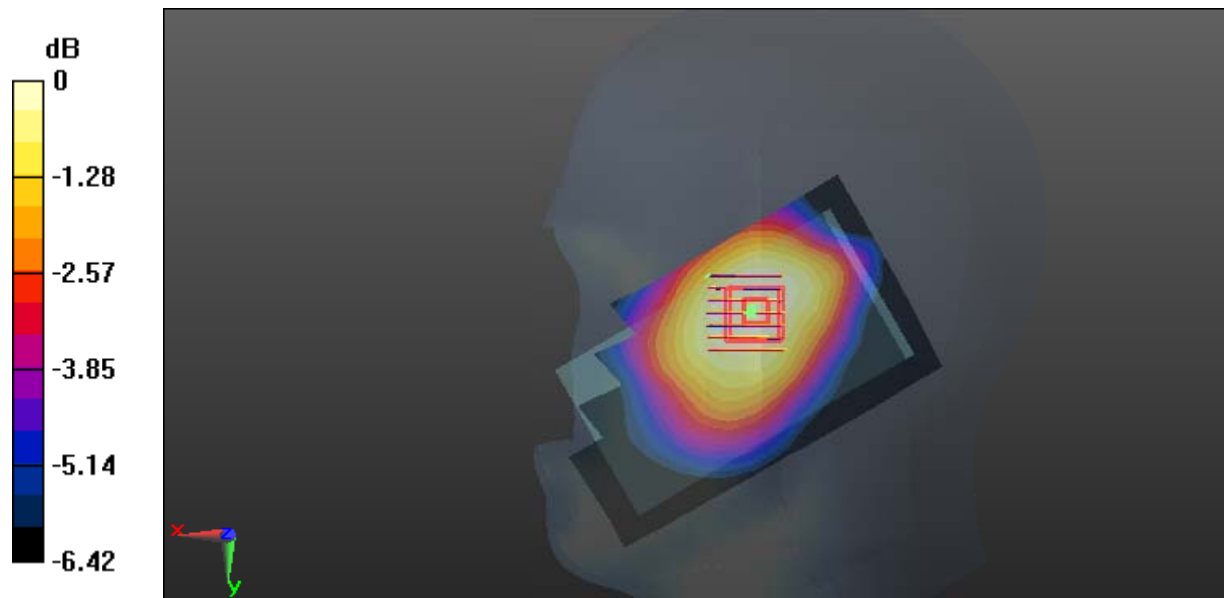

0 dB = 0.0958 W/kg = -10.19 dBW/kg

Test Plot 86#: LTE Band 5_Head Right Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0848 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.630 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0970 W/kg

SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0785 W/kg

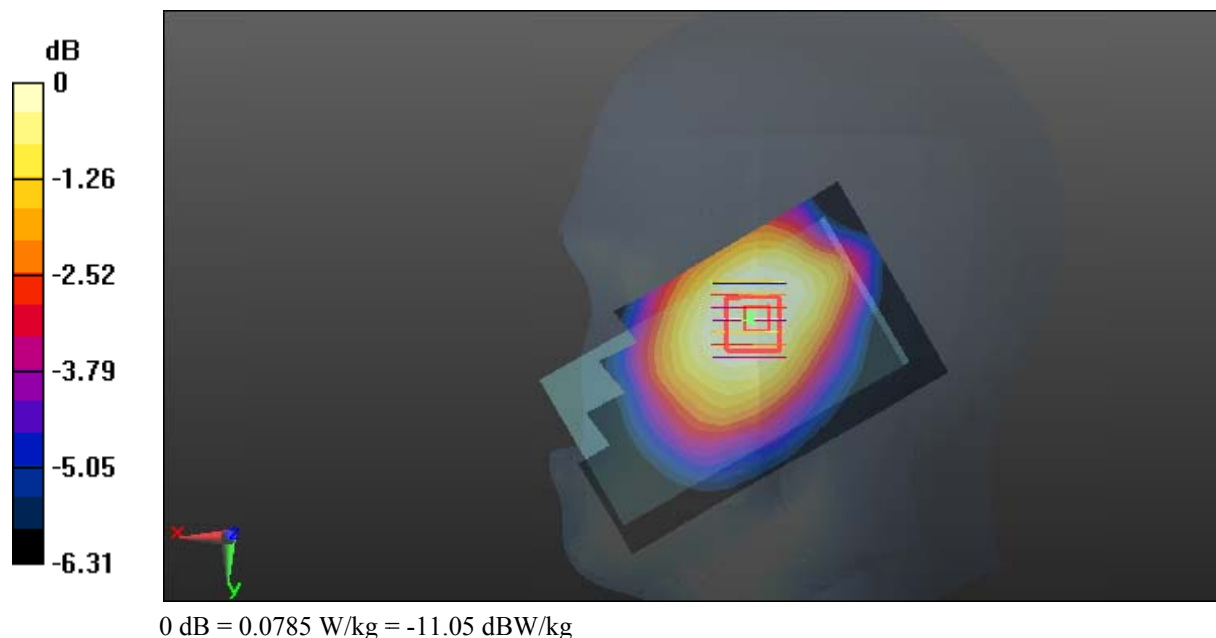

Test Plot 87#: LTE Band 5_Body Back_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.135$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.78 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.279 W/kg; SAR(10 g) = 0.201 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

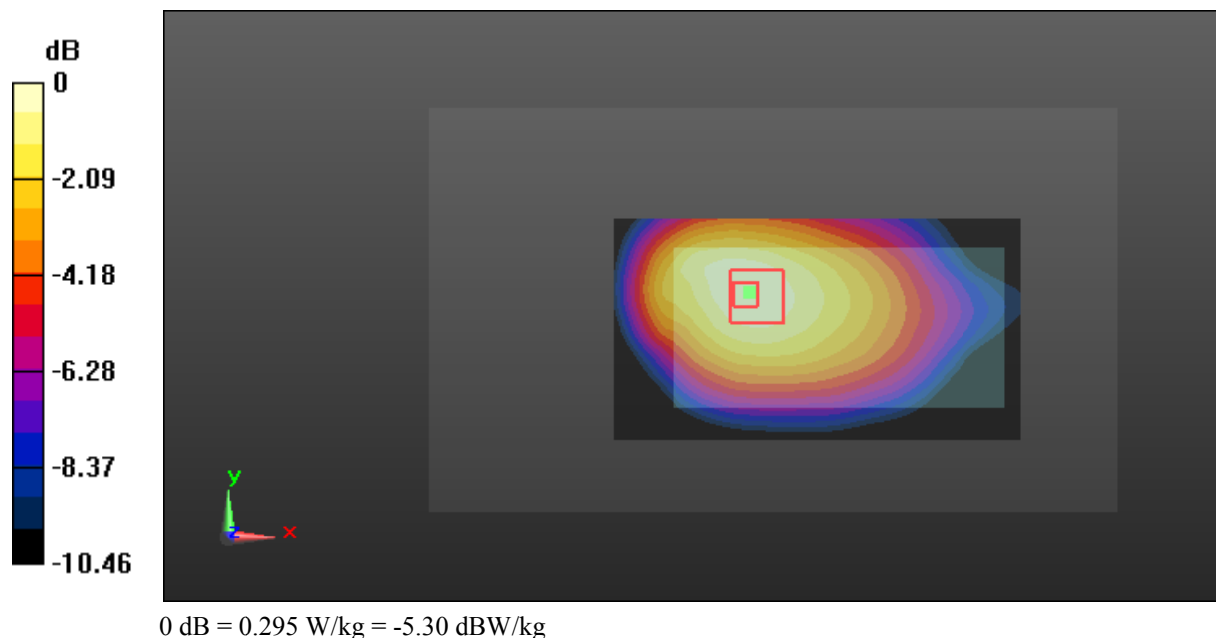

Test Plot 88#: LTE Band 5_Body Back_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971$ S/m; $\epsilon_r = 55.135$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.20 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.166 W/kg

Maximum value of SAR (measured) = 0.243 W/kg

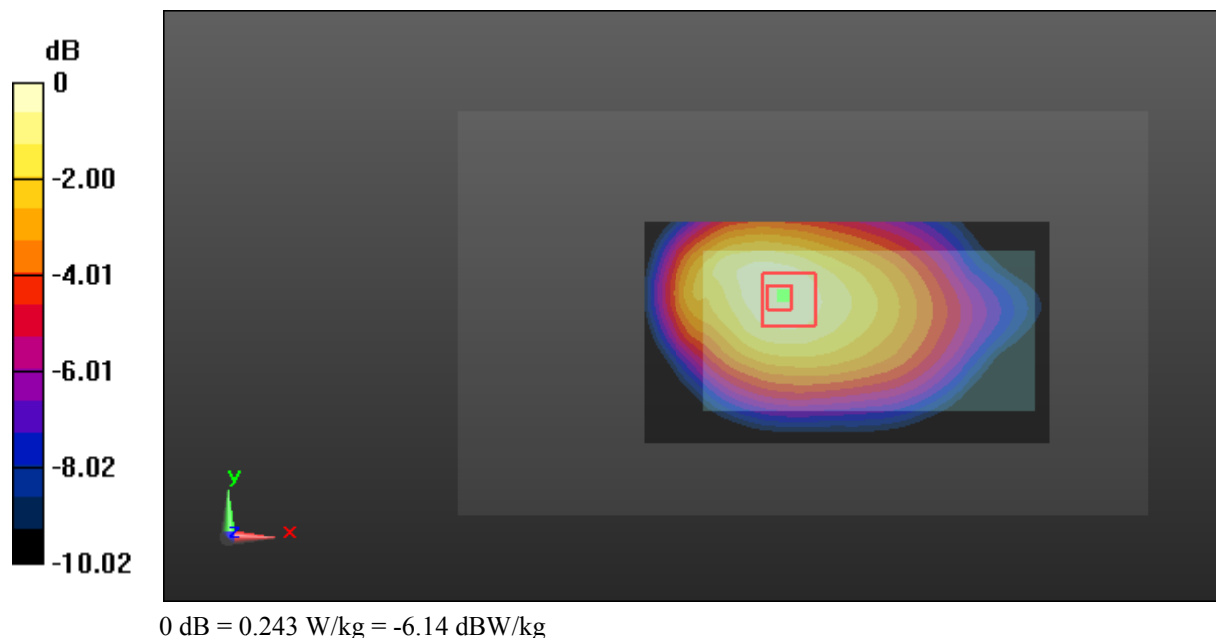

Test Plot 89#: LTE Band 5_Body Left_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.135$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.147 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.08 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.097 W/kg

Maximum value of SAR (measured) = 0.147 W/kg

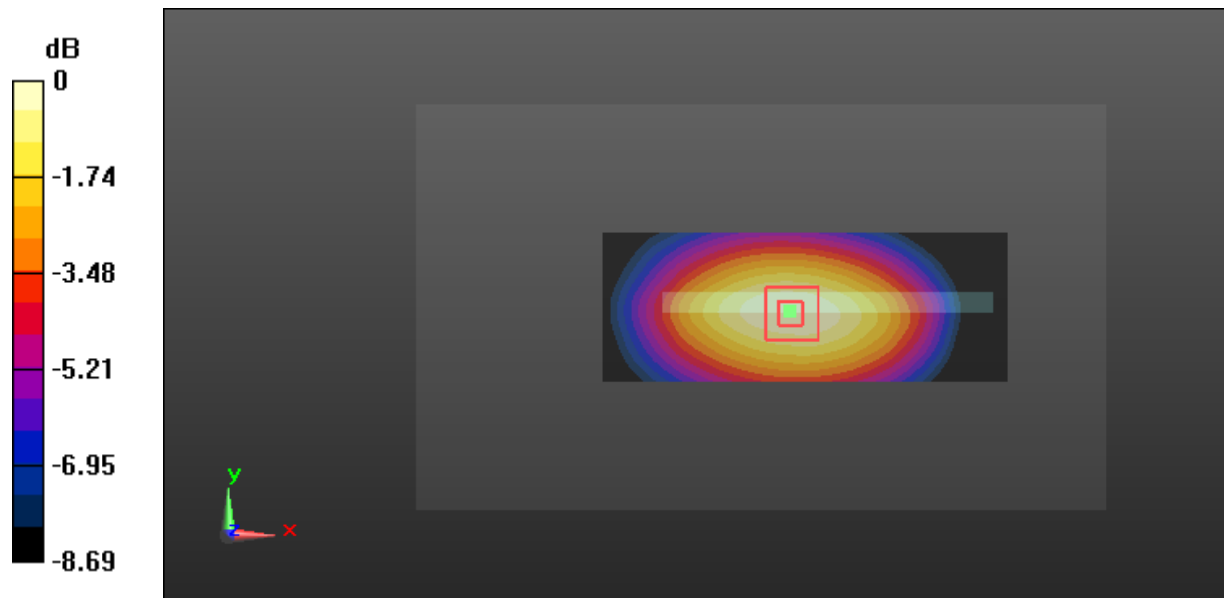

0 dB = 0.147 W/kg = -8.33 dBW/kg

Test Plot 90#: LTE Band 5_Body Left_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.135$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.85 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.156 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

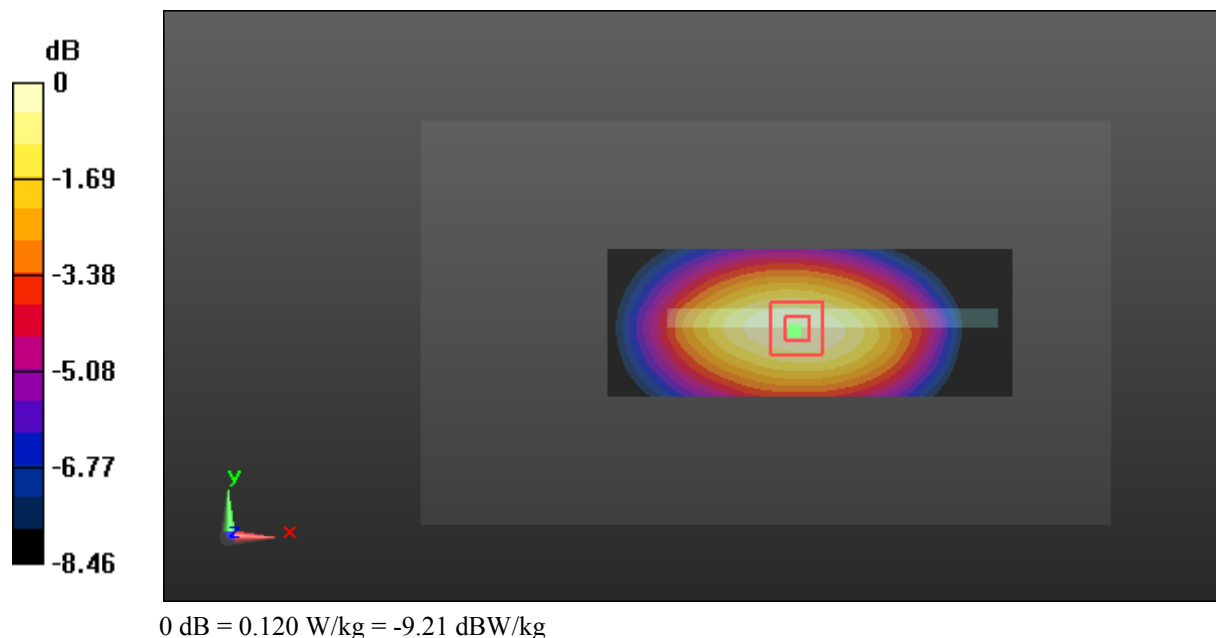

Test Plot 91#: LTE Band 5_Body Right_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.135$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.145 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.00 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.137 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.147 W/kg

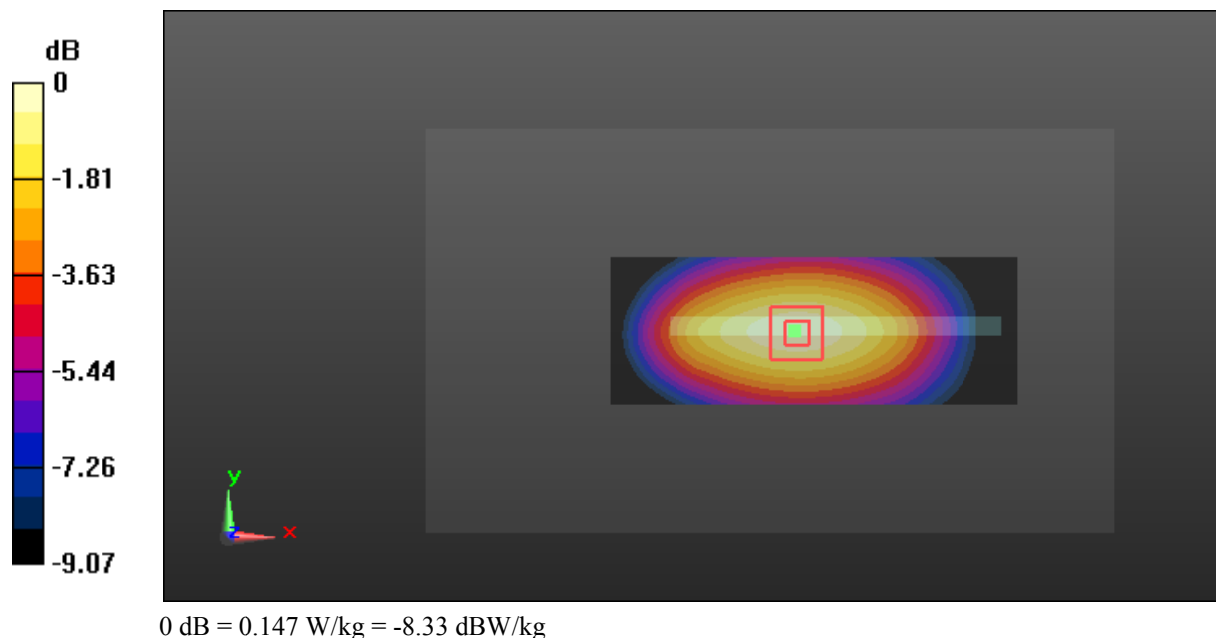

Test Plot 92#: LTE Band 5_Body Right_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971$ S/m; $\epsilon_r = 55.135$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.21 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.164 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

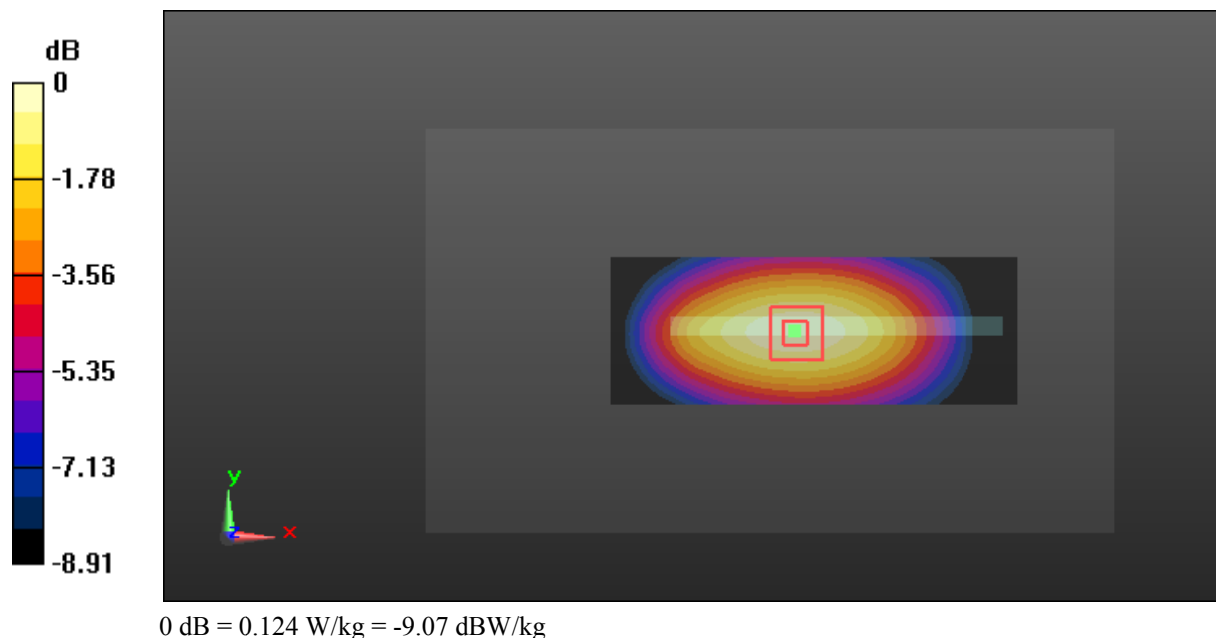

Test Plot 93#: LTE Band 5_Body Bottom_Middle Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.971$ S/m; $\epsilon_r = 55.135$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0428 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.659 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0449 W/kg

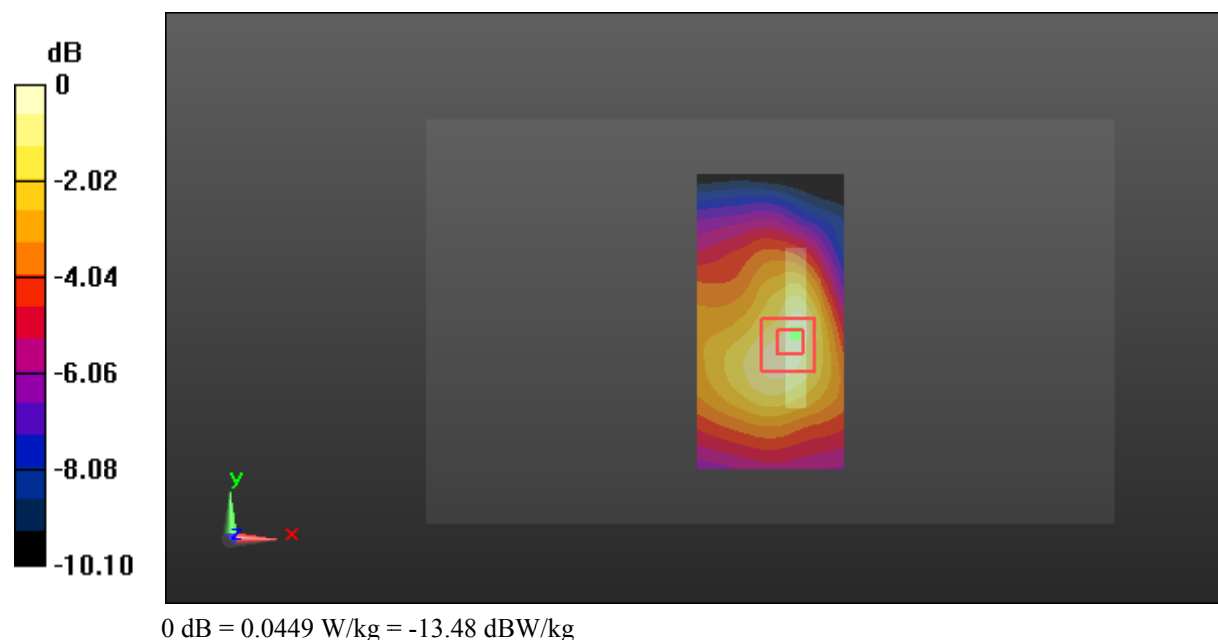

Test Plot 94#: LTE Band 5_Body Bottom_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.971$ S/m; $\epsilon_r = 55.135$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0385 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.146 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0650 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.024 W/kg

Maximum value of SAR (measured) = 0.0403 W/kg

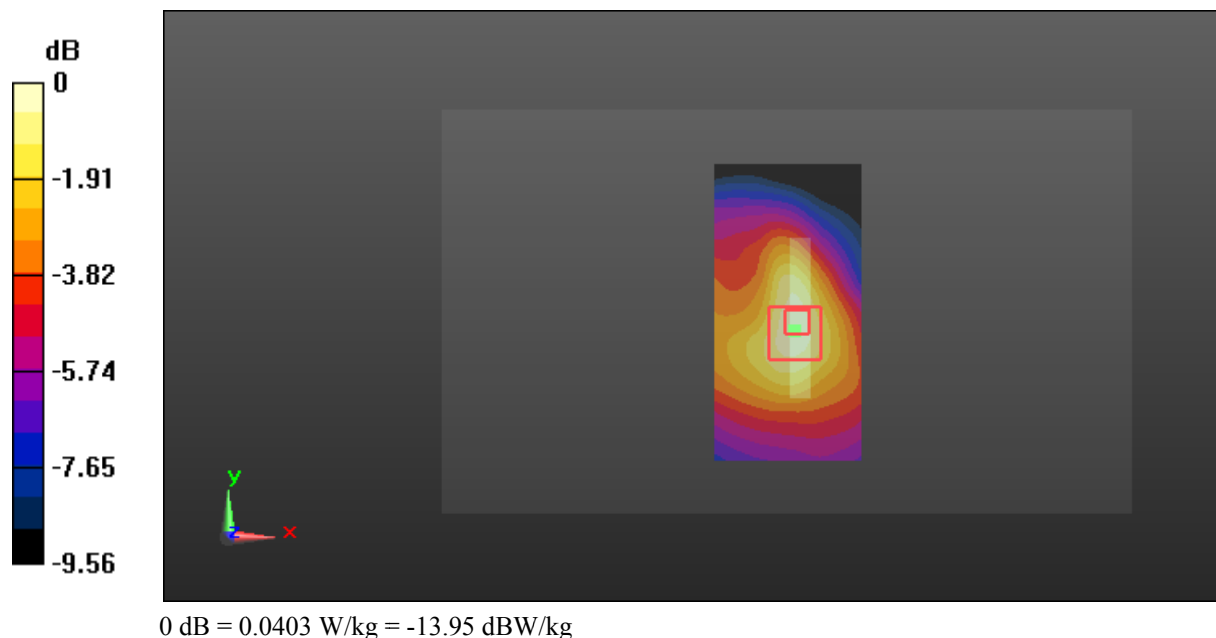

Test Plot 95#: LTE Band 7_Head Left Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931 \text{ S/m}$; $\epsilon_r = 38.427$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0609 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.074 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.0940 W/kg
SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.031 W/kg
 Maximum value of SAR (measured) = 0.0570 W/kg

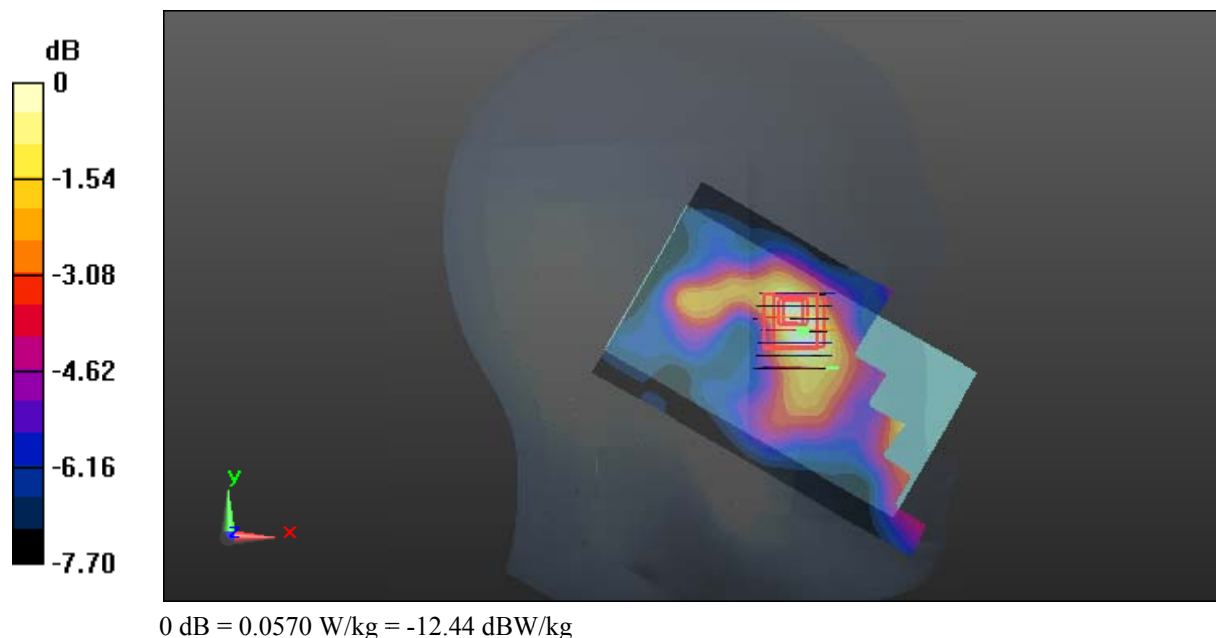

Test Plot 96#: LTE Band 7_Head Left Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 38.427$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0460 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.664 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0780 W/kg

SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0472 W/kg

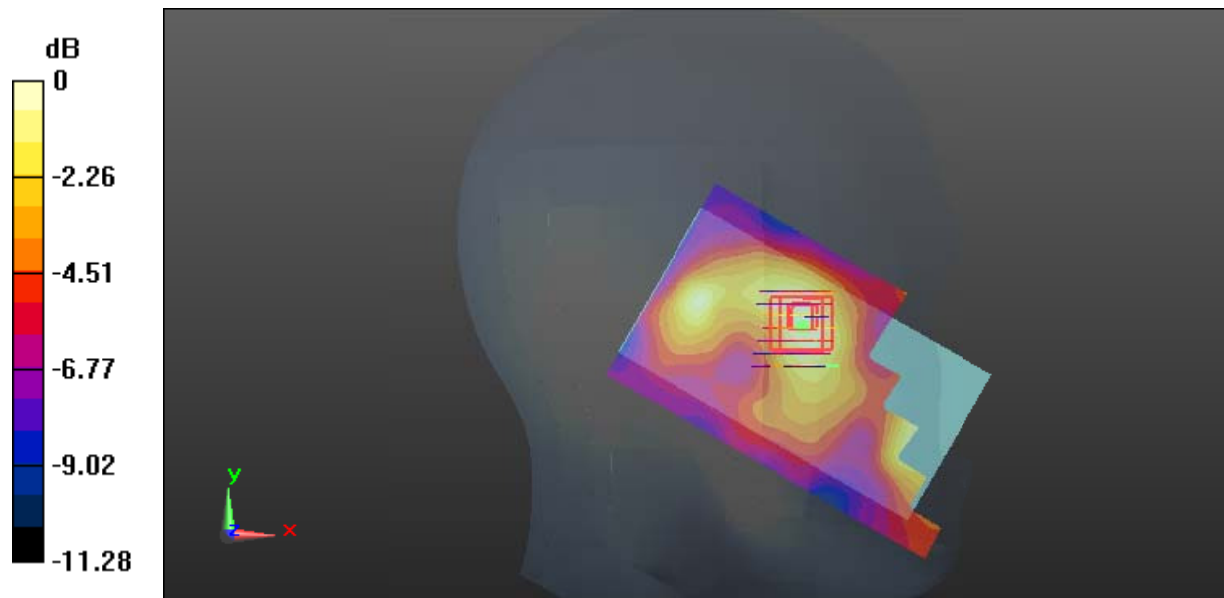

0 dB = 0.0472 W/kg = -13.26 dBW/kg

Test Plot 97#: LTE Band 7_Head Left Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 38.427$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0528 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.186 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0343 W/kg

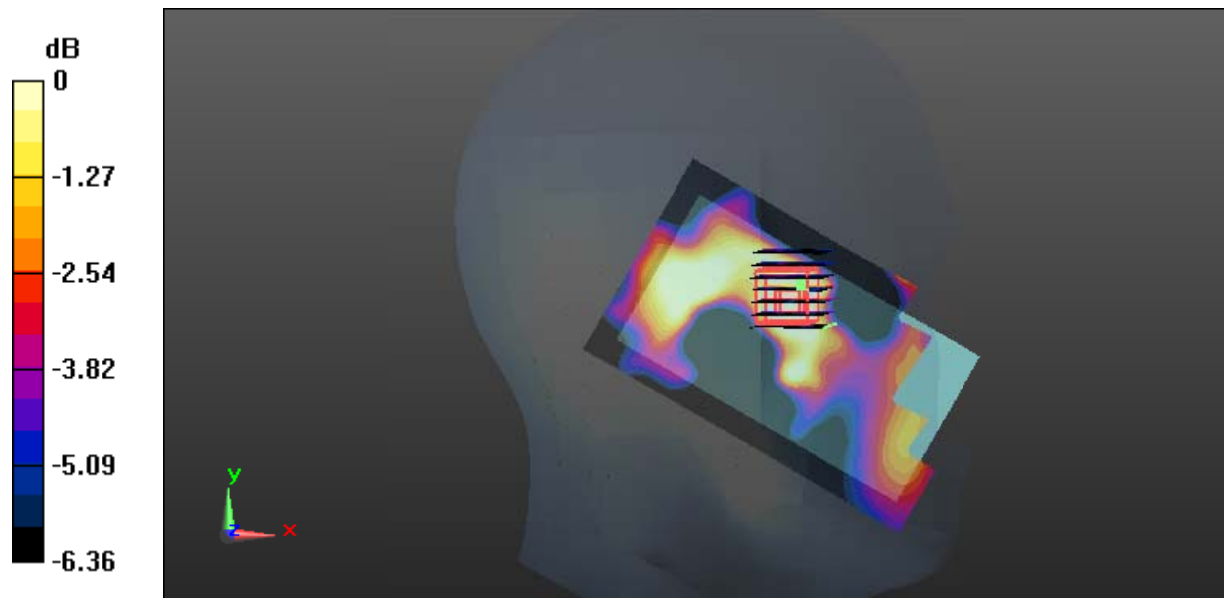

0 dB = 0.0343 W/kg = -14.65 dBW/kg

Test Plot 98#: LTE Band 7_Head Left Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 38.427$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0567 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.883 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0500 W/kg

SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.017 W/kg

Maximum value of SAR (measured) = 0.0295 W/kg

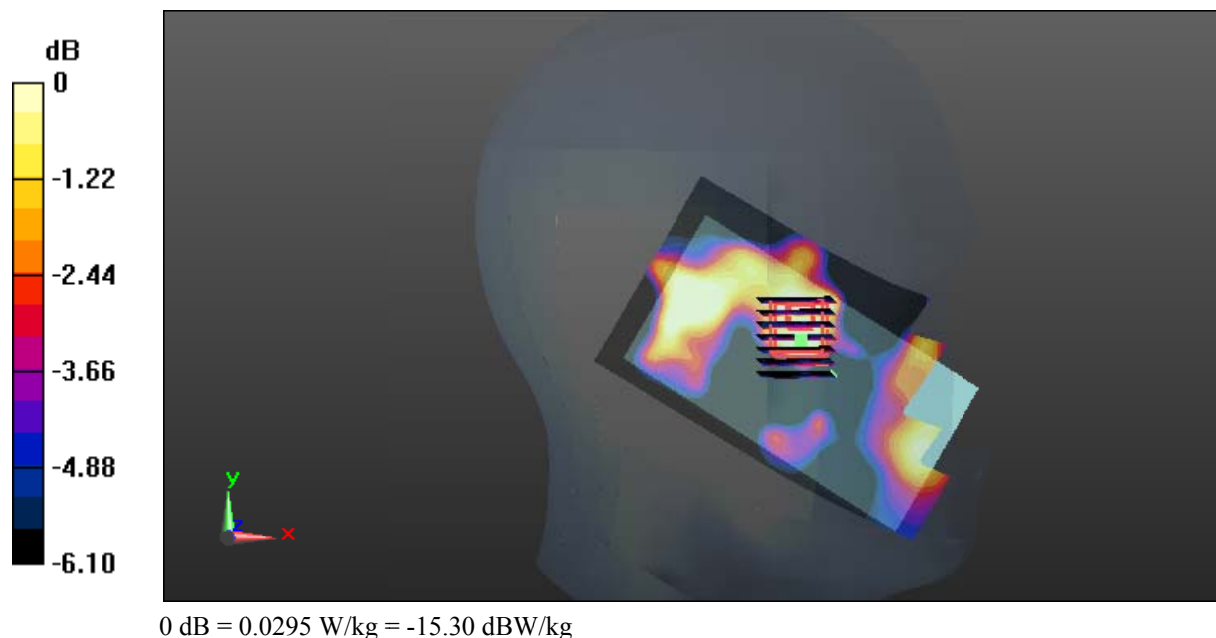

Test Plot 99#: LTE Band 7_Head Right Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931 \text{ S/m}$; $\epsilon_r = 38.427$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.153 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.185 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.242 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.077 W/kg

Maximum value of SAR (measured) = 0.149 W/kg

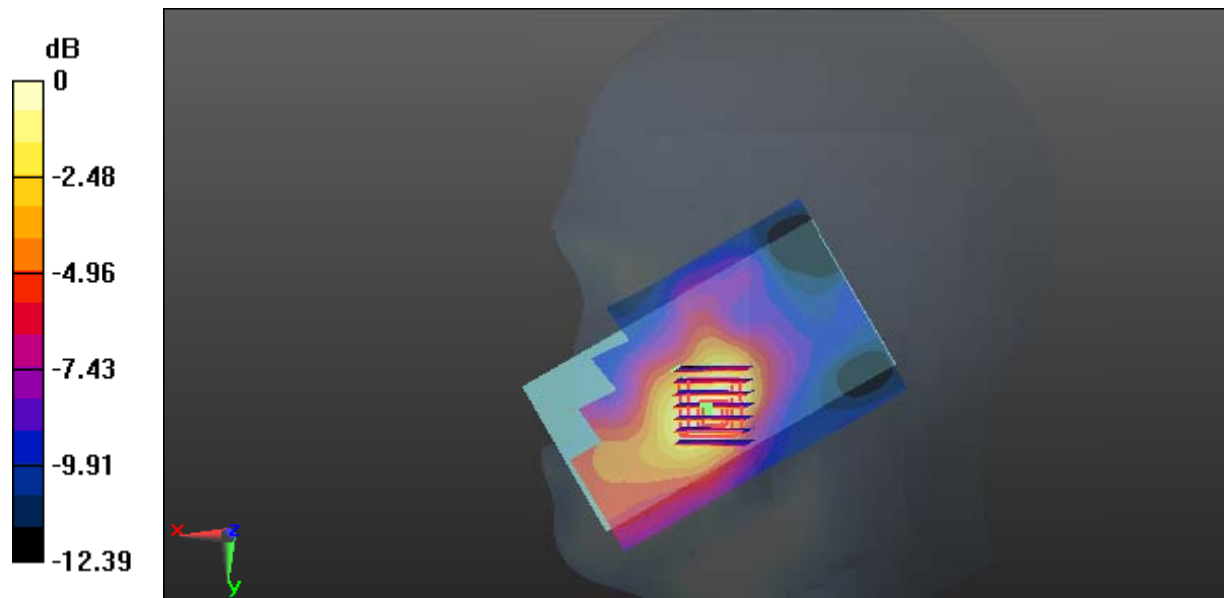

0 dB = 0.149 W/kg = -8.27 dBW/kg

Test Plot 100#: LTE Band 7_Head Right Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931 \text{ S/m}$; $\epsilon_r = 38.427$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.138 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.120 W/kg

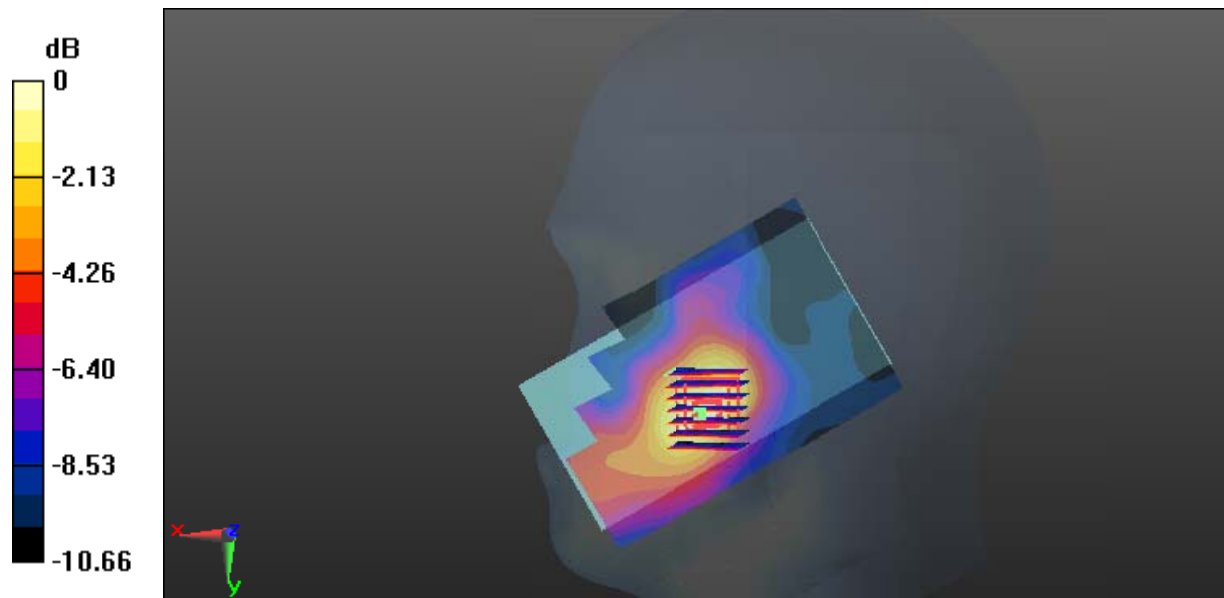

0 dB = 0.120 W/kg = -9.21 dBW/kg

Test Plot 101#: LTE Band 7_Head Right Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 38.427$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0343 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.891 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.0740 W/kg
SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.019 W/kg
 Maximum value of SAR (measured) = 0.0424 W/kg

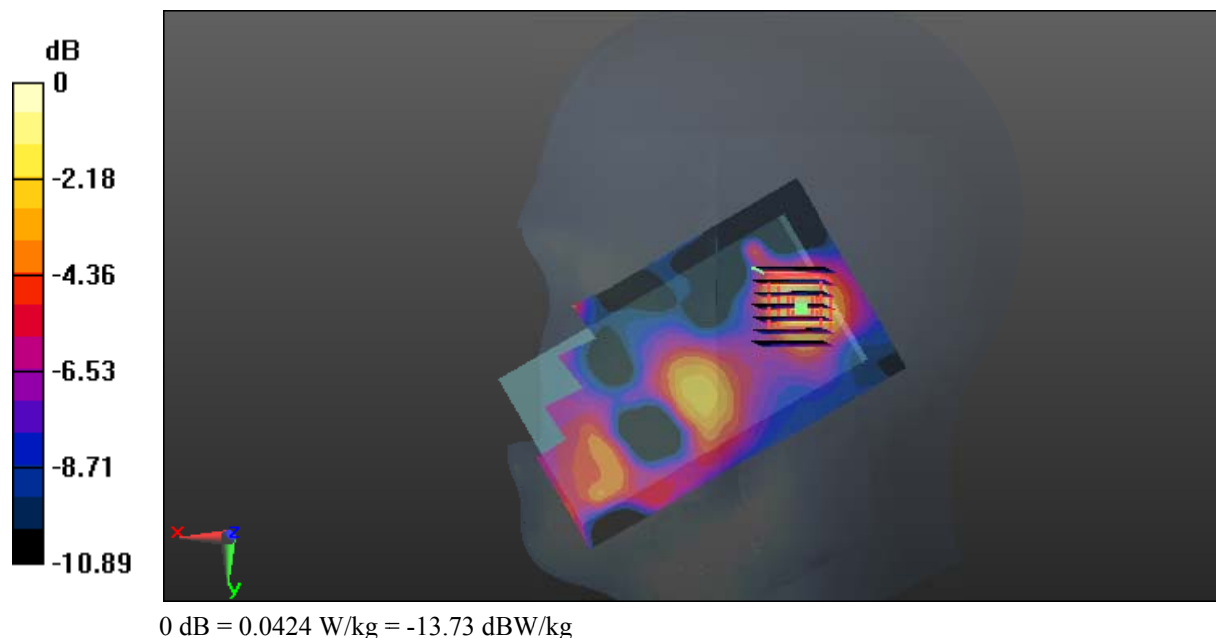

Test Plot 102#: LTE Band 7_Head Right Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 1.931$ S/m; $\epsilon_r = 38.427$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0351 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.967 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.0490 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0280 W/kg

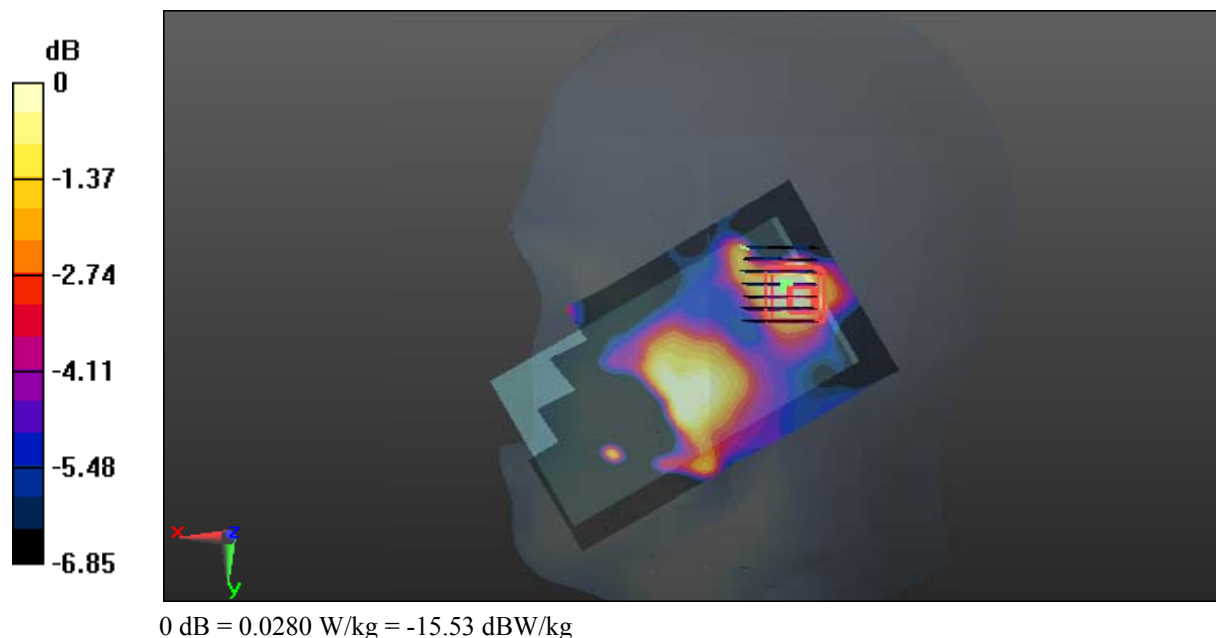

Test Plot 103#: LTE Band 7_Body Back_Low Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
 Medium parameters used: 2510 MHz; $\sigma = 2.072 \text{ S/m}$; $\epsilon_r = 51.826$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.972 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.577 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.449 W/kg

Maximum value of SAR (measured) = 0.968 W/kg

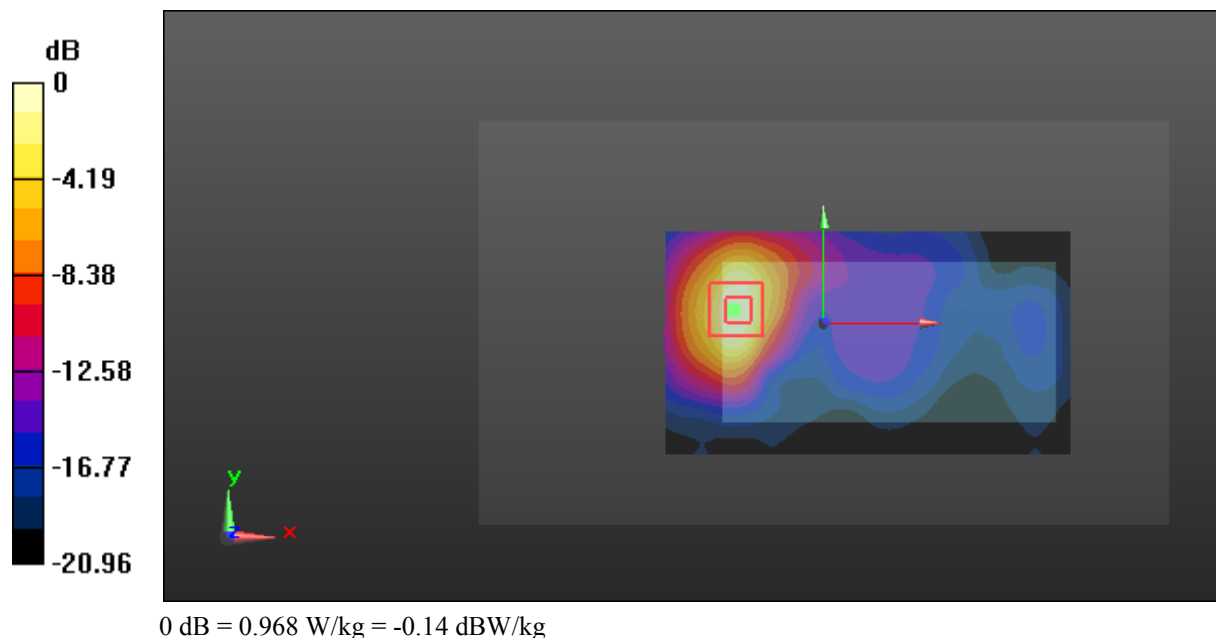

Test Plot 104#: LTE Band 7_Body Back_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126 \text{ S/m}$; $\epsilon_r = 51.669$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.528 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.961 W/kg; SAR(10 g) = 0.462 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

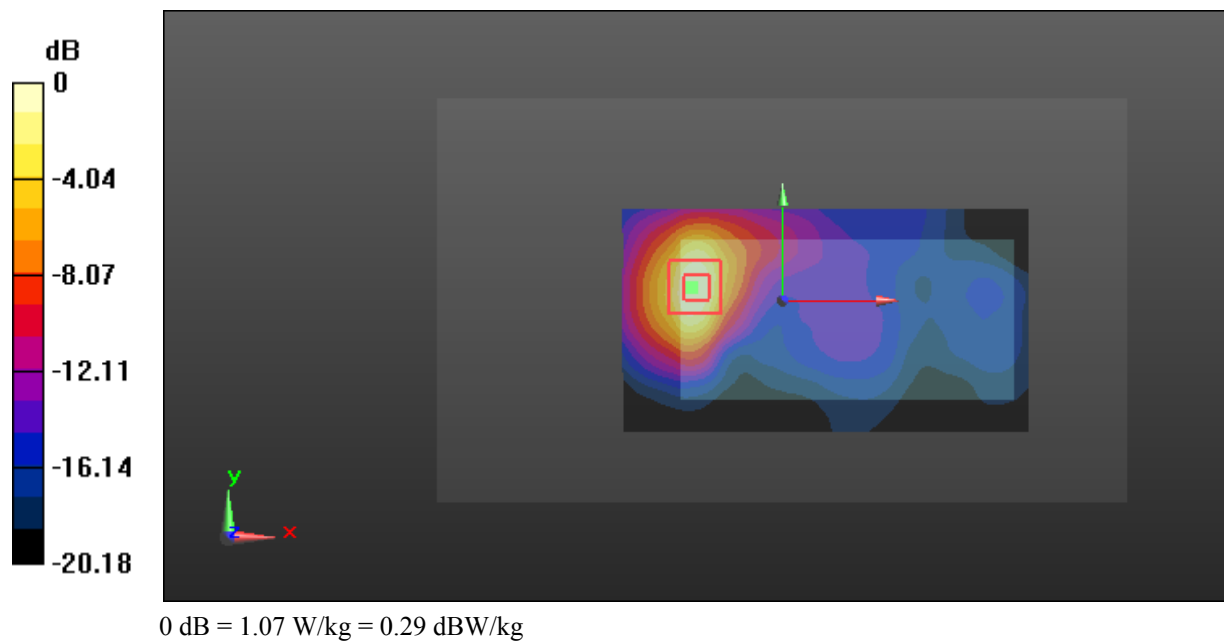

Test Plot 105#: LTE Band 7_Body Back_High Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: 2560 MHz; $\sigma = 2.14$ S/m; $\epsilon_r = 51.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.960 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.469 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 0.932 W/kg

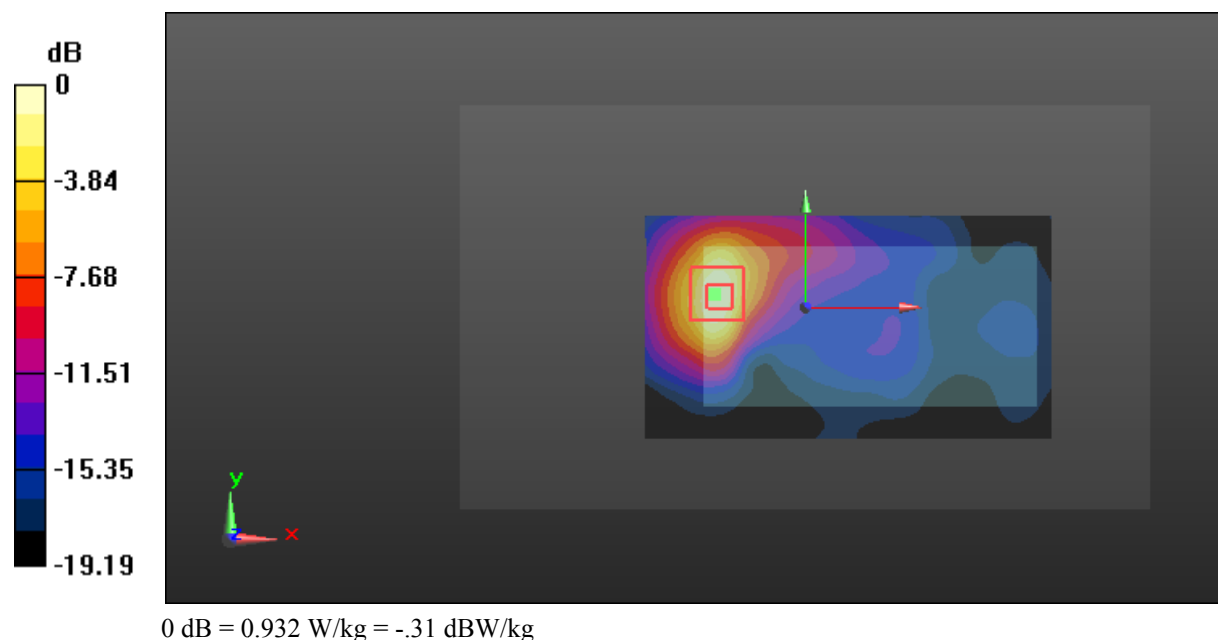

Test Plot 106#: LTE Band 7_Body Back_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126$ S/m; $\epsilon_r = 51.669$; $\rho = 1000$ kg/m³ ;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.788 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.014 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.382 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

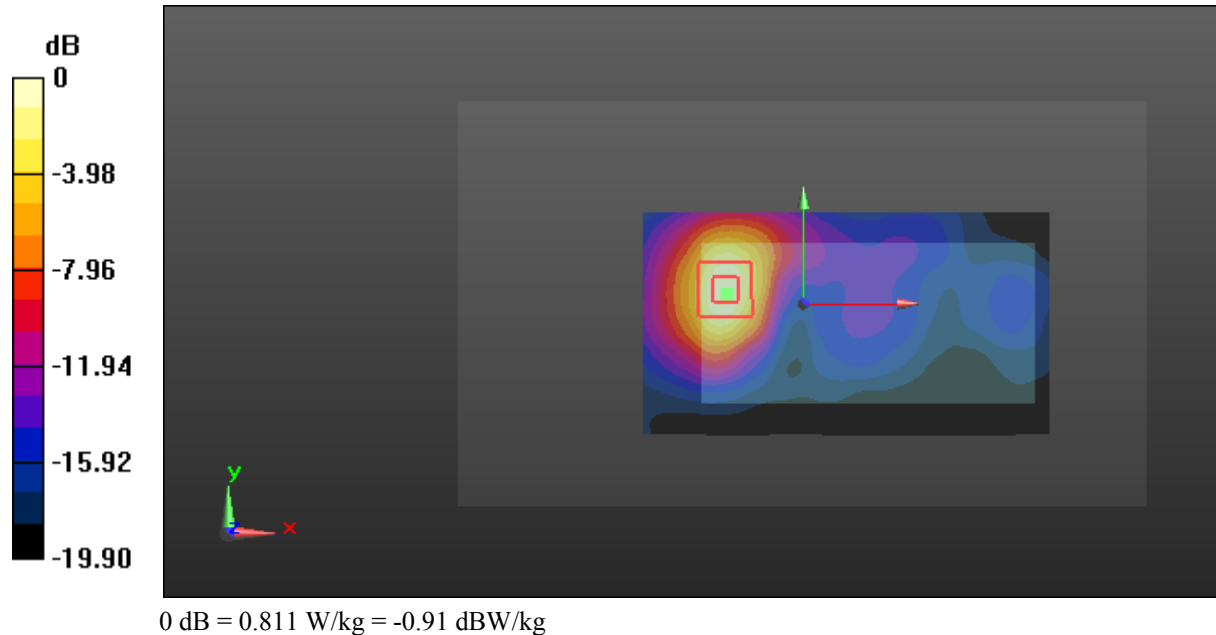

Test Plot 107#: LTE Band 7_Body Left_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126$ S/m; $\epsilon_r = 51.669$; $\rho = 1000$ kg/m³ ;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0317 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.735 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.105 W/kg
SAR(1 g) = 0.031 W/kg; SAR(10 g) = 0.021 W/kg
 Maximum value of SAR (measured) = 0.0339 W/kg

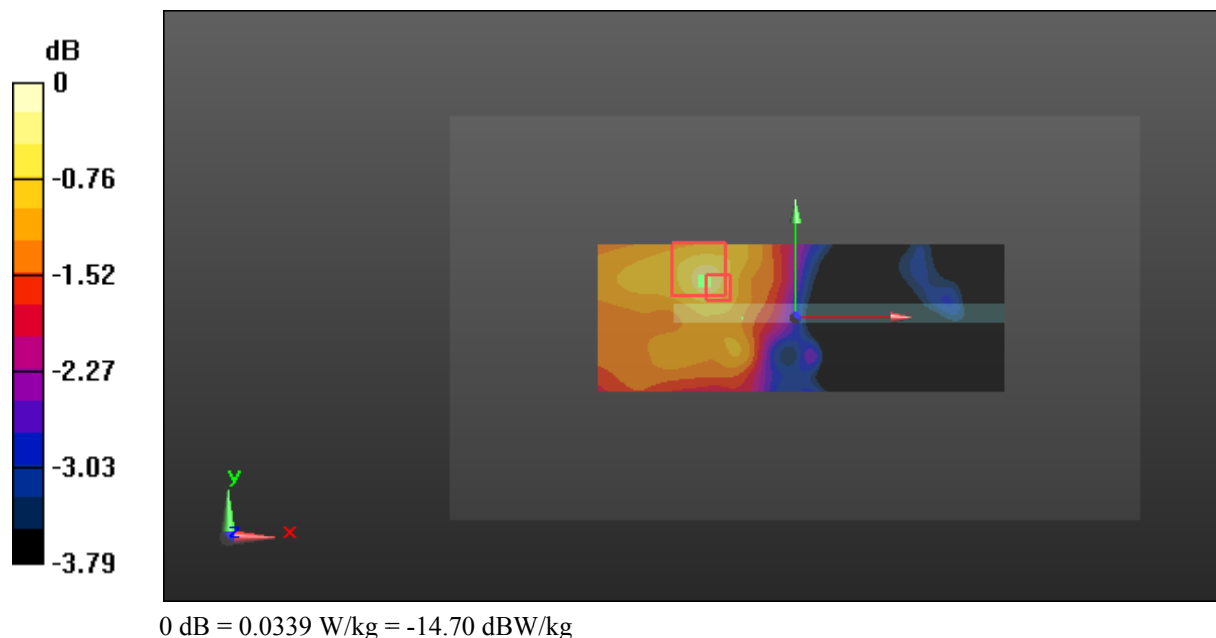

Test Plot 108#: LTE Band 7_Body Left_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126 \text{ S/m}$; $\epsilon_r = 51.669$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0244 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.500 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0730 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0269 W/kg

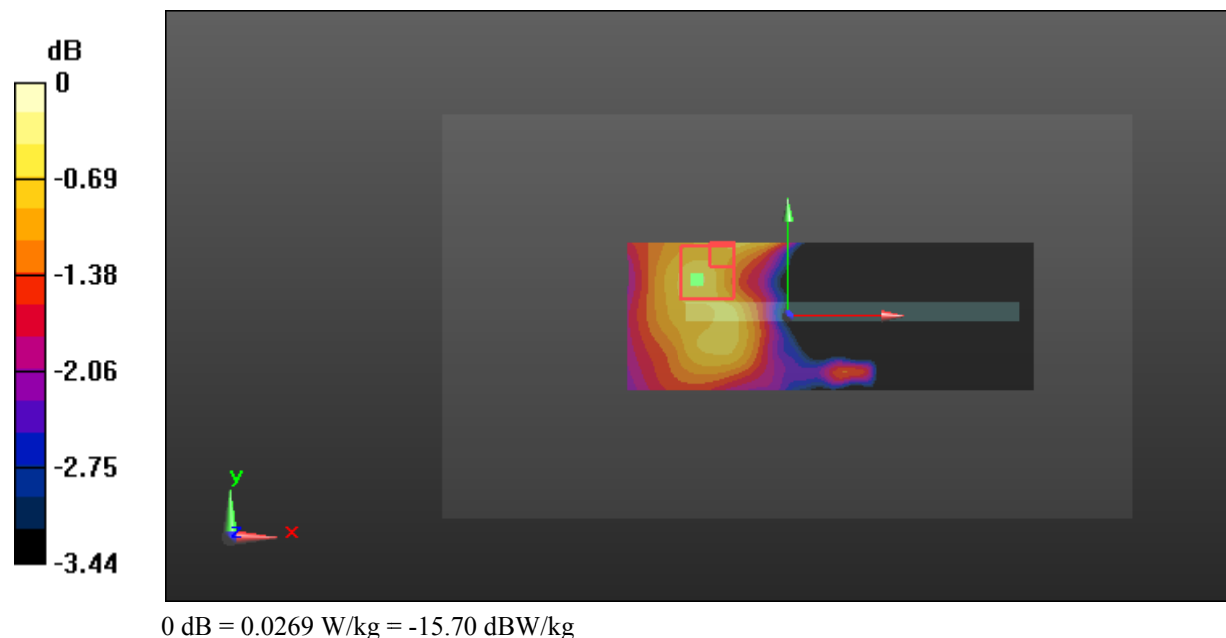

Test Plot 109#: LTE Band 7_Body Right_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126 \text{ S/m}$; $\epsilon_r = 51.669$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.129 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.101 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

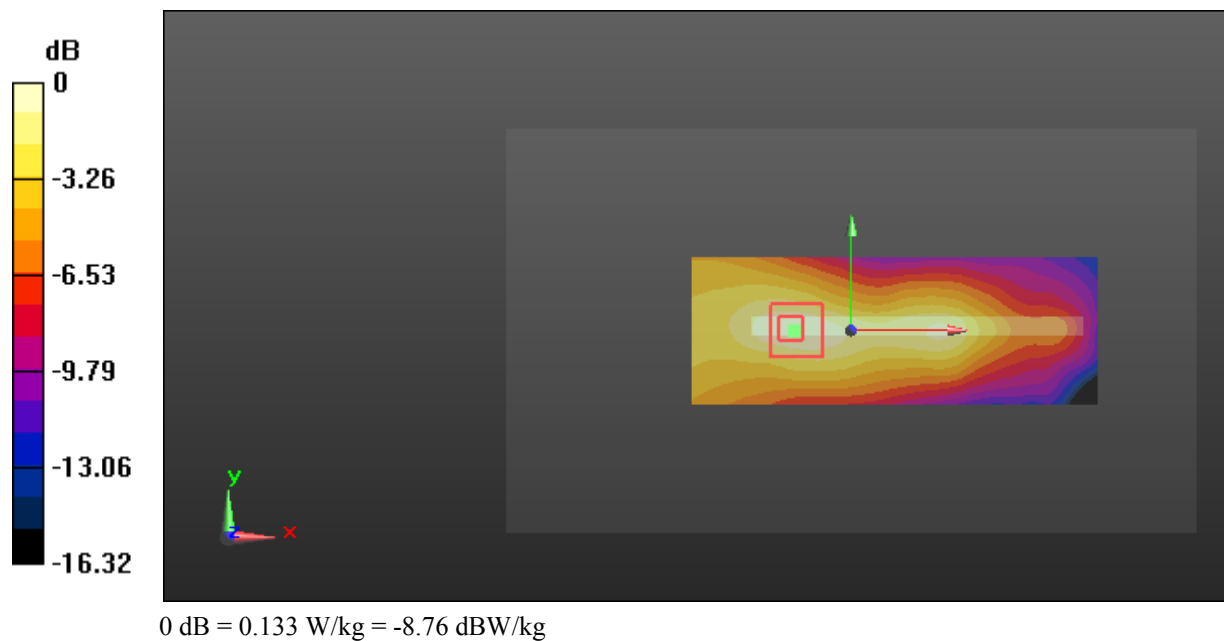

Test Plot 110#: LTE Band 7_Body Right_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126 \text{ S/m}$; $\epsilon_r = 51.669$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.106 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.367 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

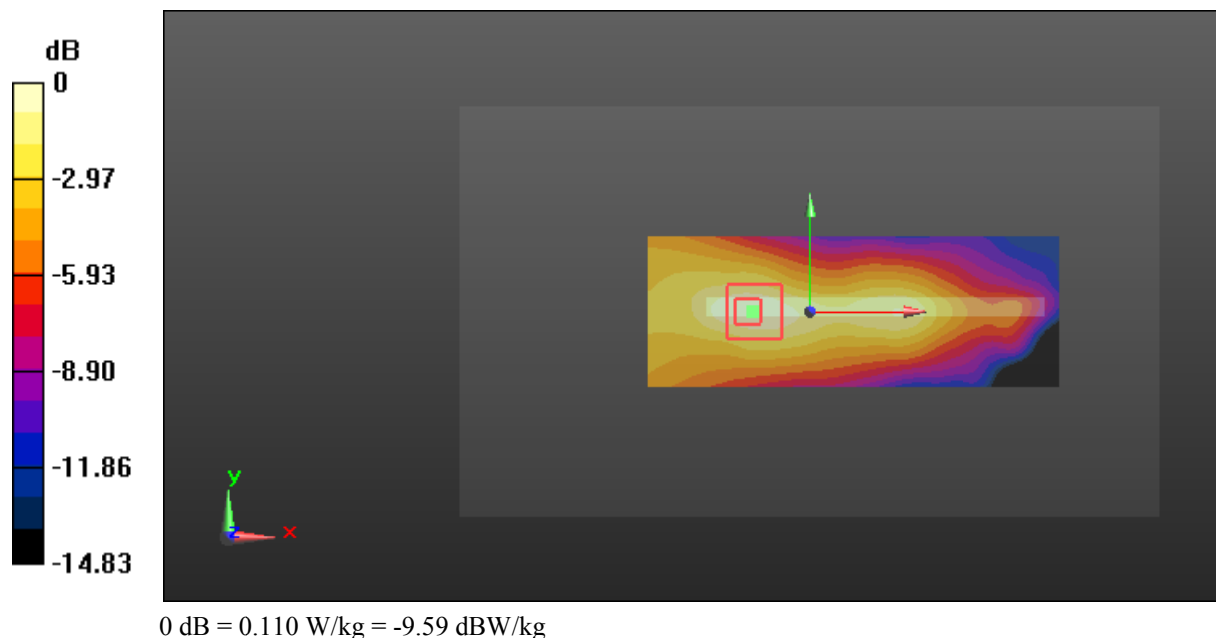

Test Plot 111#: LTE Band 7_Body Bottom_Low Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: 2510 MHz; $\sigma = 2.072$ S/m; $\epsilon_r = 51.826$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.966 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.22 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.408 W/kg

Maximum value of SAR (measured) = 1.06 W/kg

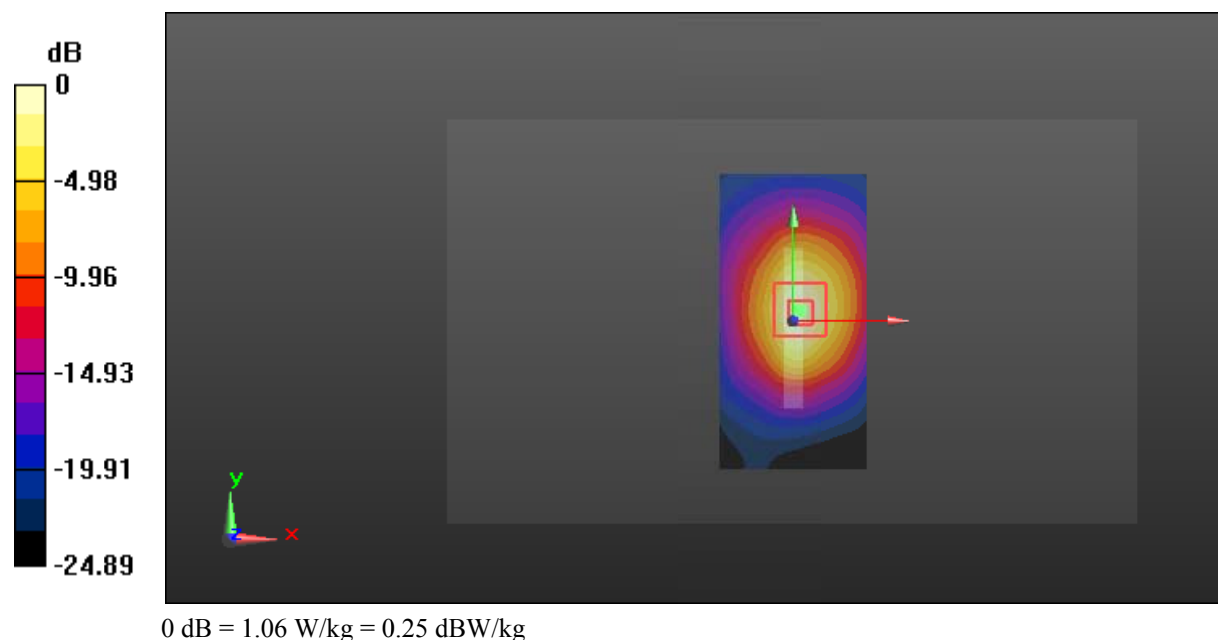

Test Plot 112#: LTE Band 7_Body Bottom_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126 \text{ S/m}$; $\epsilon_r = 51.669$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.70 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 2.31 W/kg

SAR(1 g) = 0.944 W/kg; SAR(10 g) = 0.430 W/kg

Maximum value of SAR (measured) = 1.14 W/kg

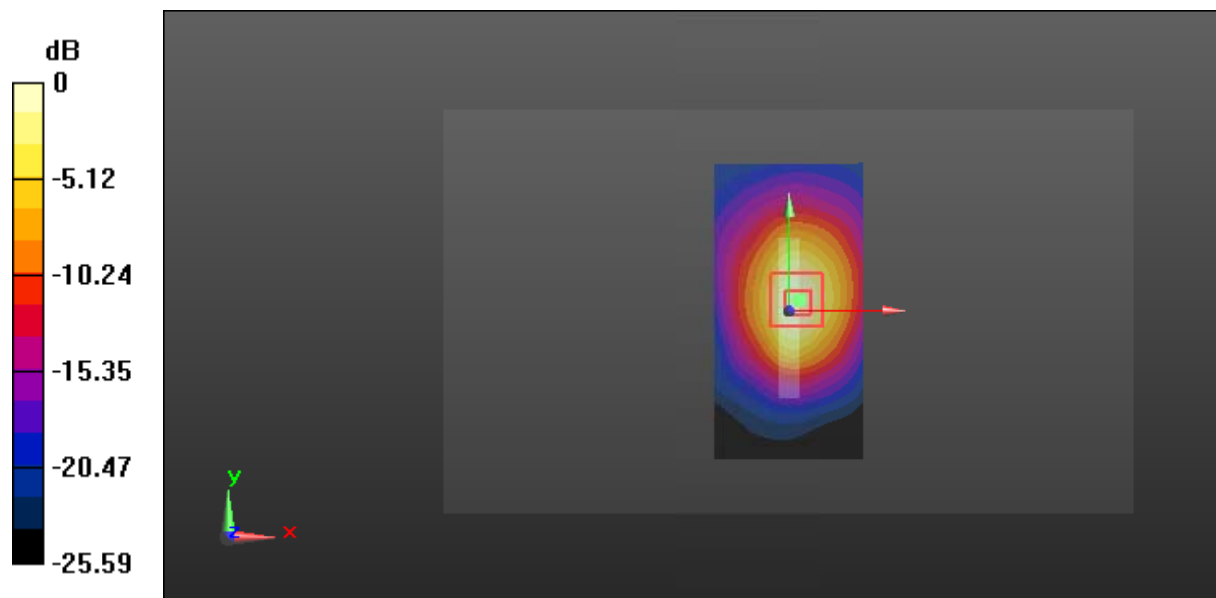

0 dB = 1.14 W/kg = 0.57 dBW/kg

Test Plot 113#: LTE Band 7_Body Bottom_High Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium parameters used: 2560 MHz; $\sigma = 2.14$ S/m; $\epsilon_r = 51.469$; $\rho = 1000$ kg/m³ ;
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.73 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.17 W/kg

SAR(1 g) = 0.89 W/kg; SAR(10 g) = 0.413 W/kg

Maximum value of SAR (measured) = 1.01 W/kg

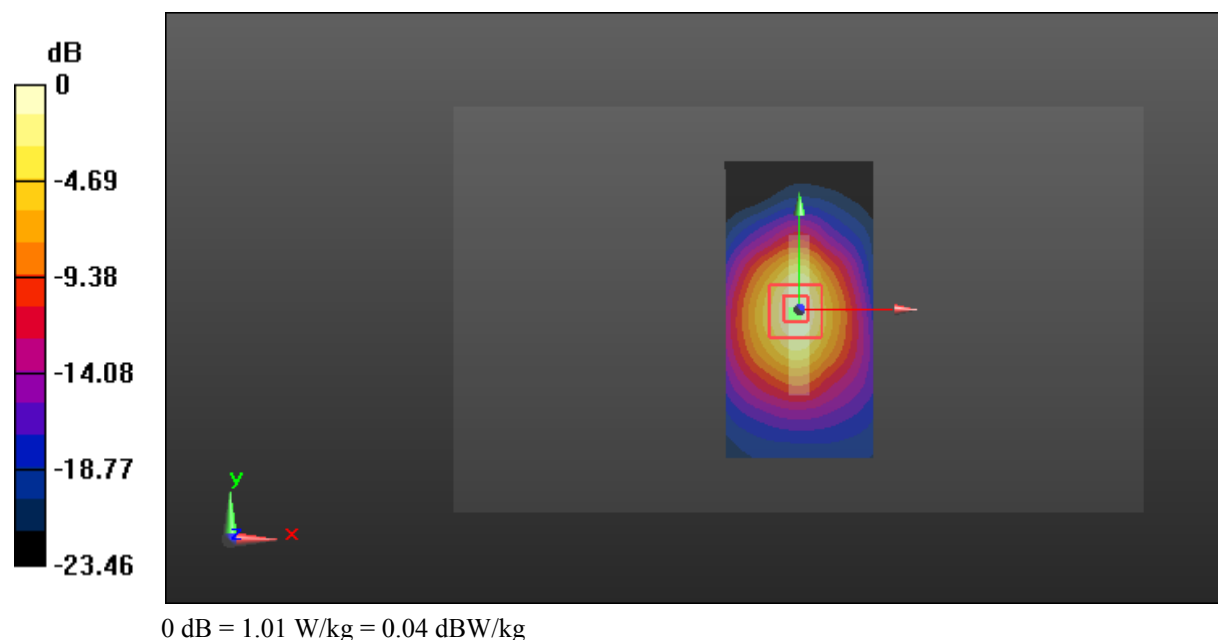

Test Plot 114#: LTE Band 7_Body Bottom_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.126$ S/m; $\epsilon_r = 51.669$; $\rho = 1000$ kg/m³ ;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.774 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.64 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 0.768 W/kg

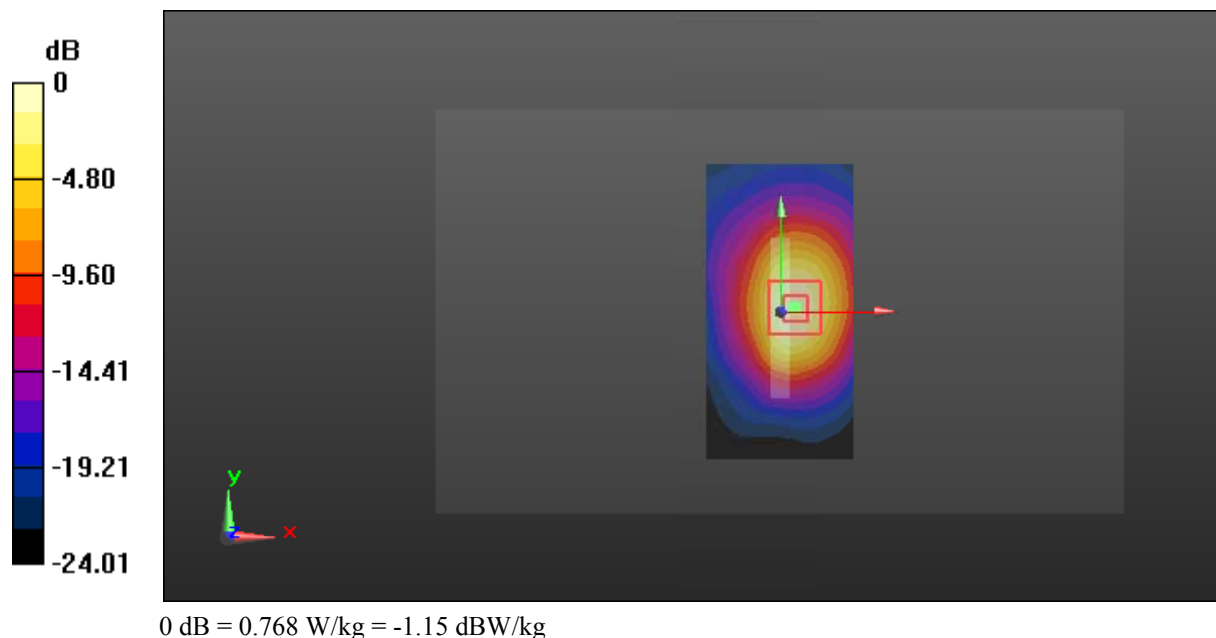

Test Plot 115#: LTE Band 17_Head Left Cheek_Middle Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0566 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.557 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0630 W/kg

SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0517 W/kg

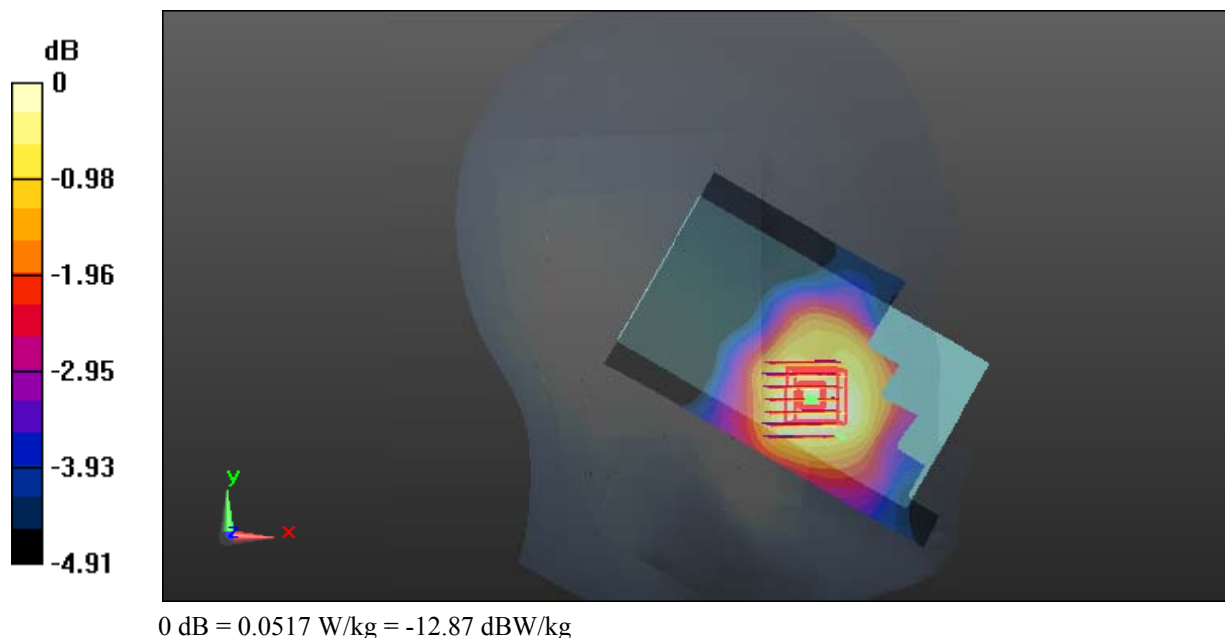

Test Plot 116#: LTE Band 17_Head Left Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0492 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.724 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0560 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.037 W/kg

Maximum value of SAR (measured) = 0.0461 W/kg

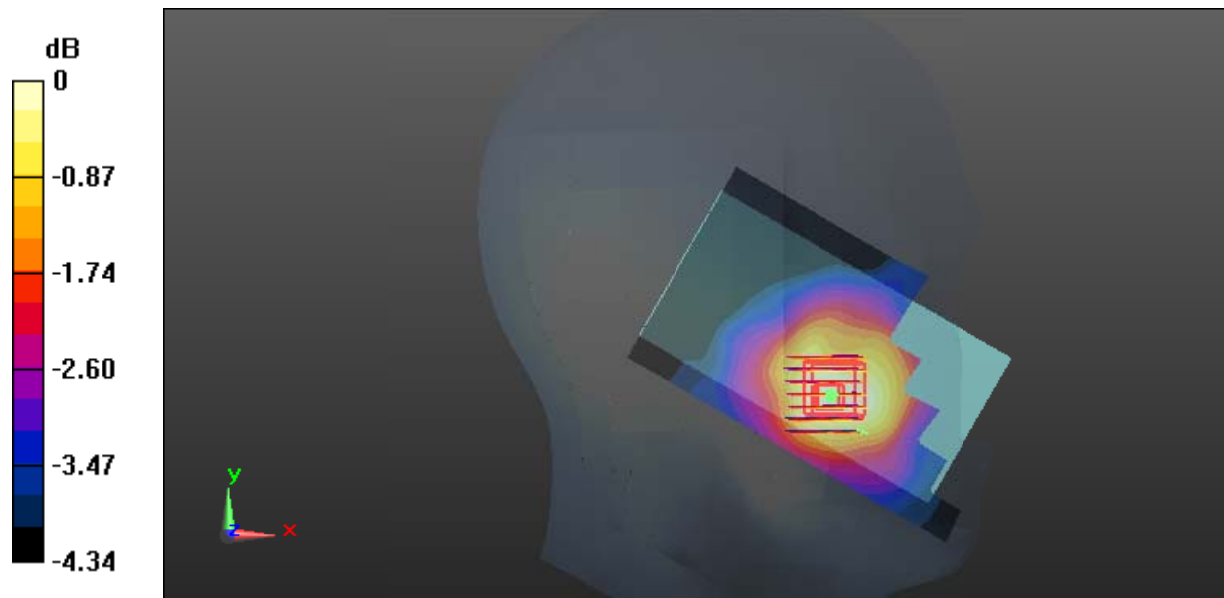

0 dB = 0.0461 W/kg = -13.36 dBW/kg

Test Plot 117#: LTE Band 17_Head Left Tilt_Middle Channel_1RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0233 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.026 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.016 W/kg

Maximum value of SAR (measured) = 0.0193 W/kg

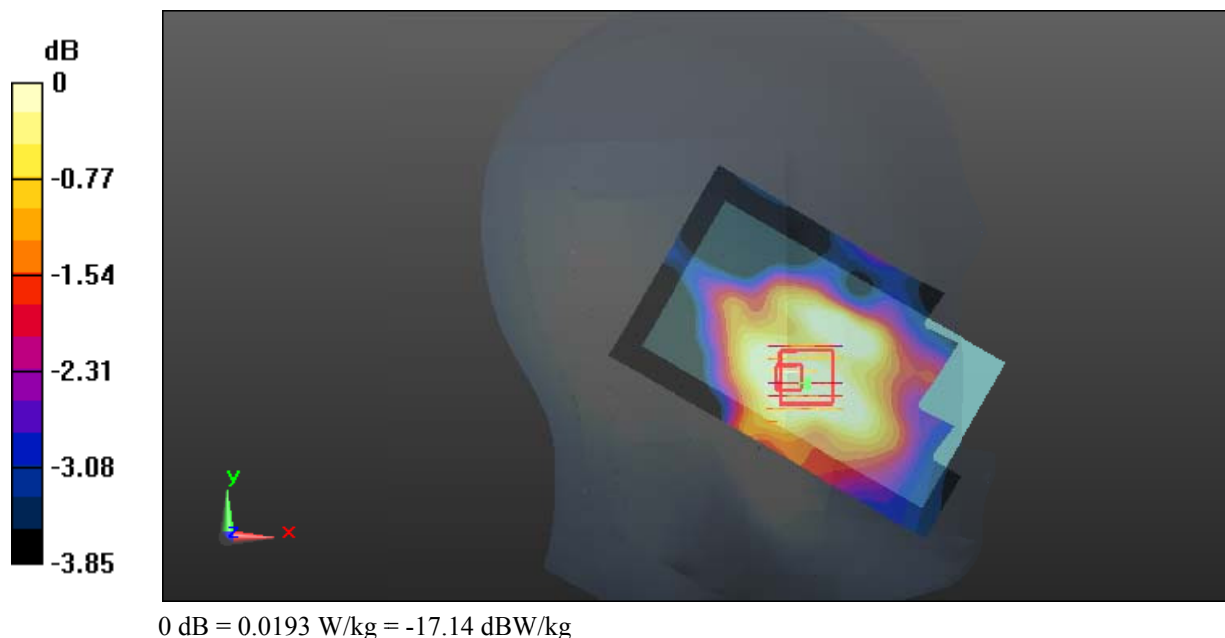

Test Plot 118#: LTE Band 17_Head Left Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0207 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.278 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0200 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0162 W/kg

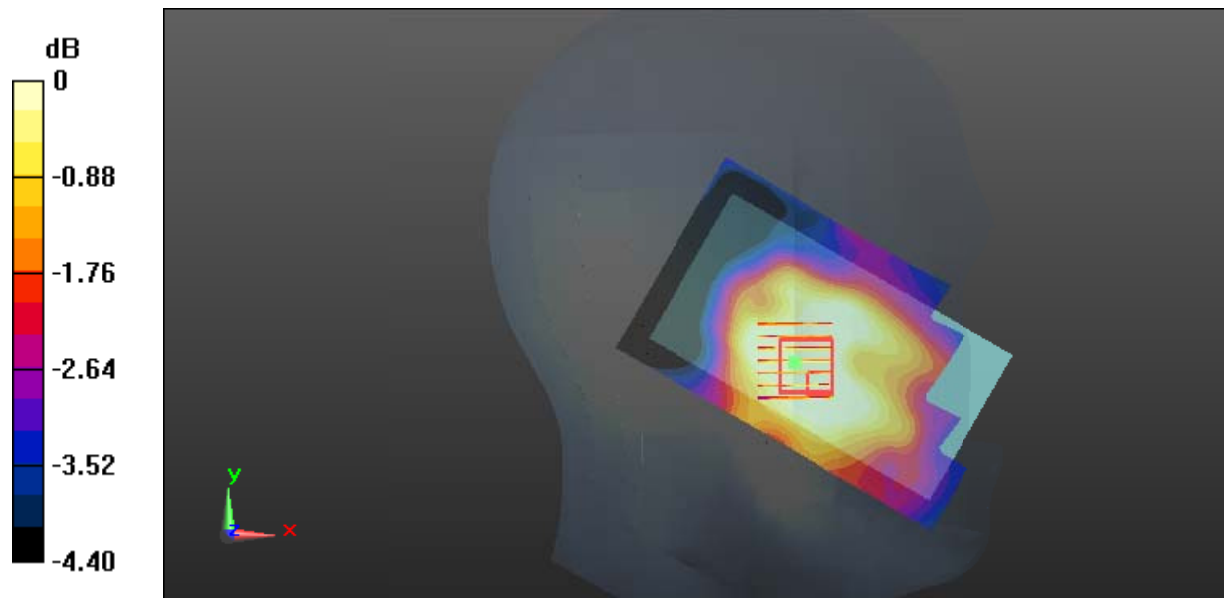

0 dB = 0.0162 W/kg = -17.90 dBW/kg

Test Plot 119#: LTE Band 17_Head Right Cheek_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0513 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.794 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.0640 W/kg
SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.038 W/kg
 Maximum value of SAR (measured) = 0.0475 W/kg

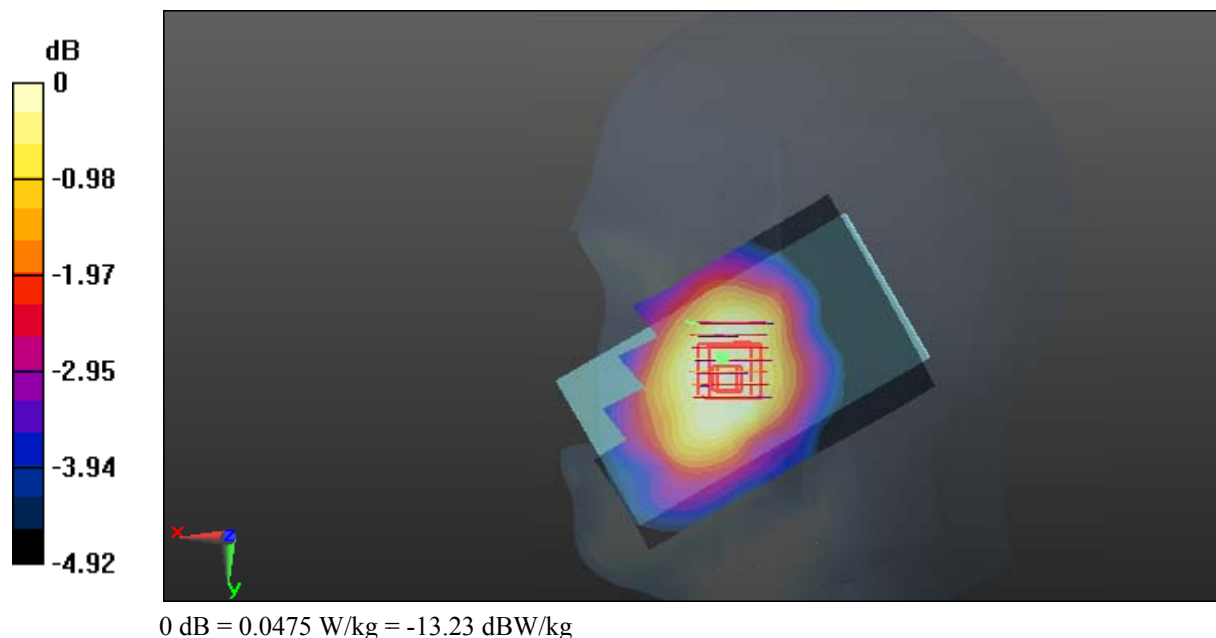

Test Plot 120#: LTE Band 17_Head Right Cheek_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0431 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.095 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0460 W/kg

SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.0404 W/kg

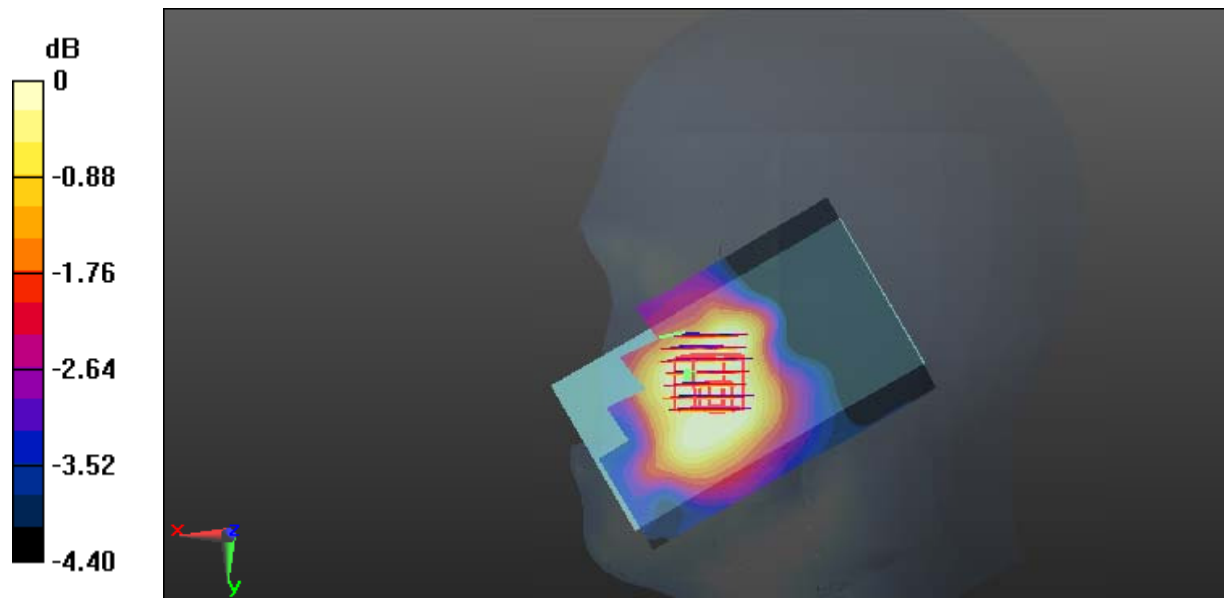

0 dB = 0.0404 W/kg = -13.94 dBW/kg

Test Plot 121#: LTE Band 17_Head Right Tilt_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0266 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.369 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0270 W/kg

SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.019 W/kg

Maximum value of SAR (measured) = 0.0231 W/kg

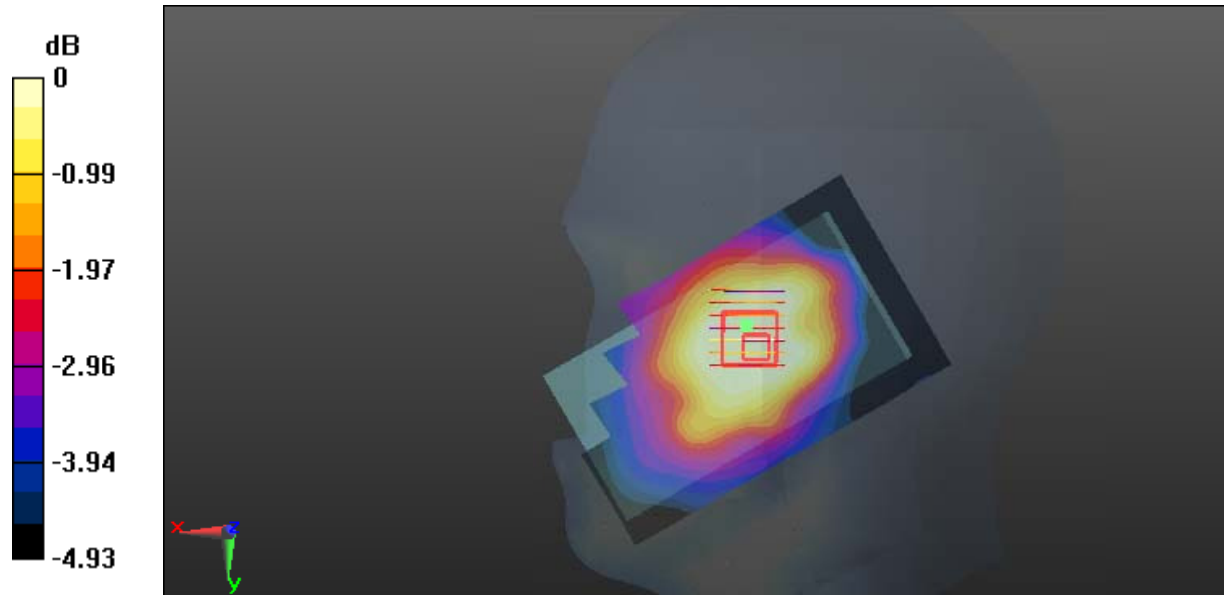

0 dB = 0.0231 W/kg = -16.36 dBW/kg

Test Plot 122#: LTE Band 17_Head Right Tilt_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 41.756$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (61x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0183 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.808 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0220 W/kg

SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0158 W/kg

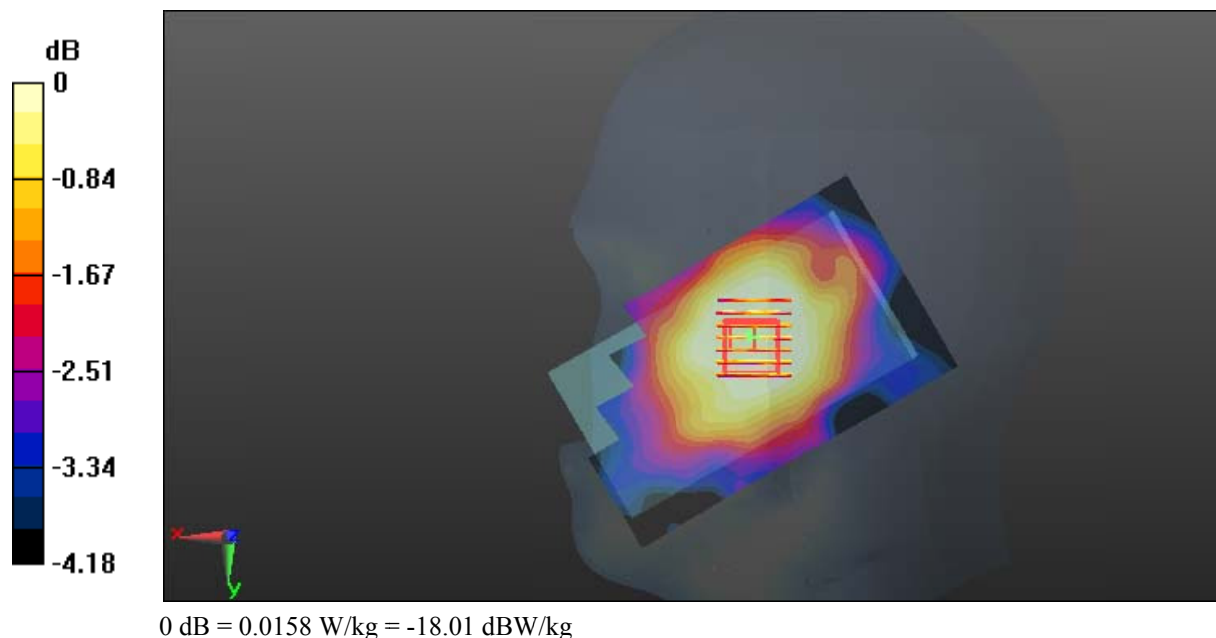

Test Plot 123#: LTE Band 17_Body Back_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.328 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.70 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.548 W/kg

SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.321 W/kg

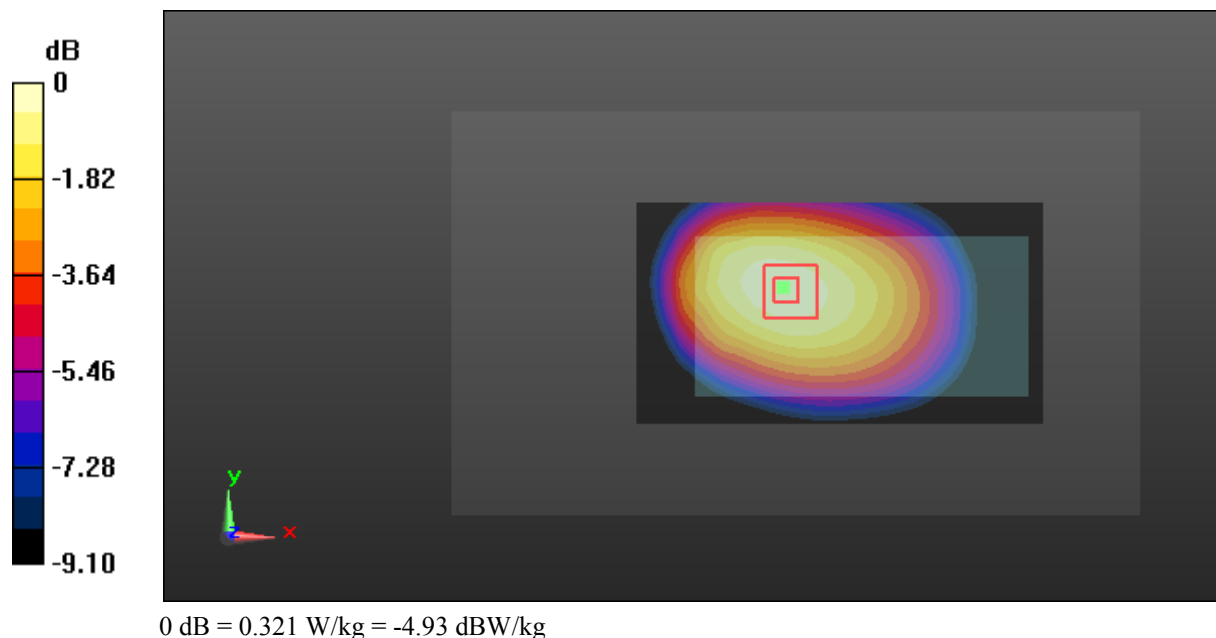

Test Plot 124#: LTE Band 17_Body Back_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.227 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 12.86 V/m; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.325 W/kg
SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.136 W/kg
 Maximum value of SAR (measured) = 0.225 W/kg

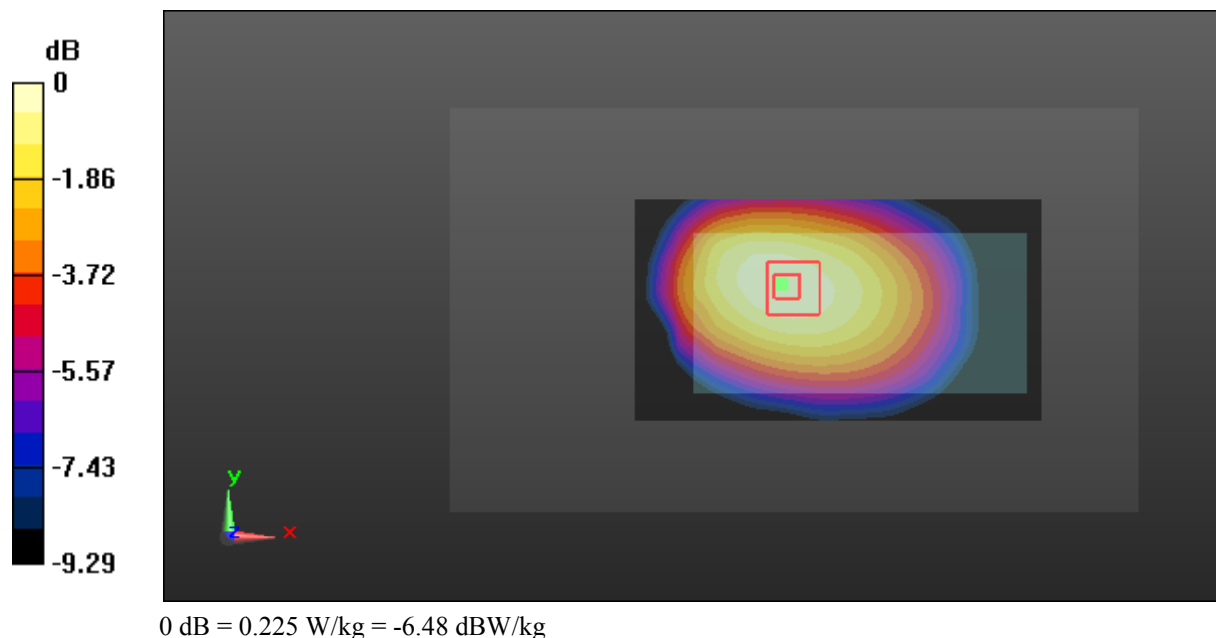

Test Plot 125#: LTE Band 17_Body Left_Middle Channel_1RB

DUT: SkyPhone; Type: Elite 4.5M; Serial: 160816001

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0214 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.721 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0260 W/kg

SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0204 W/kg

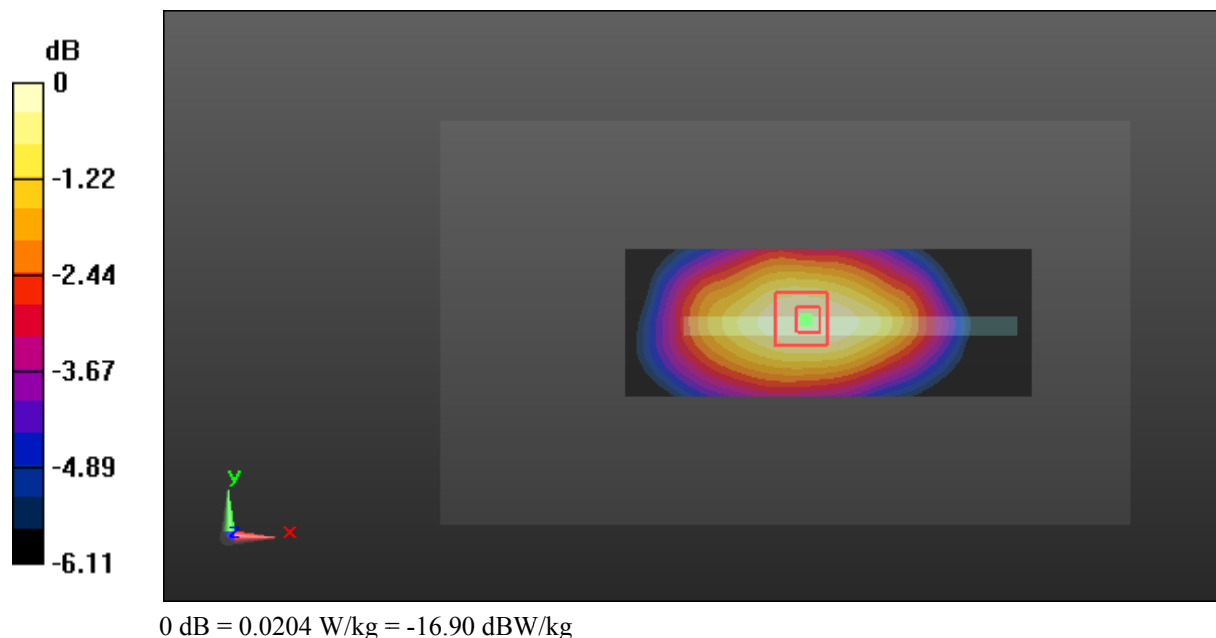

Test Plot 126#: LTE Band 17_Body Left_Middle Channel_50%RB**DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0137 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.766 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.0180 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00983 W/kg

Maximum value of SAR (measured) = 0.0140 W/kg

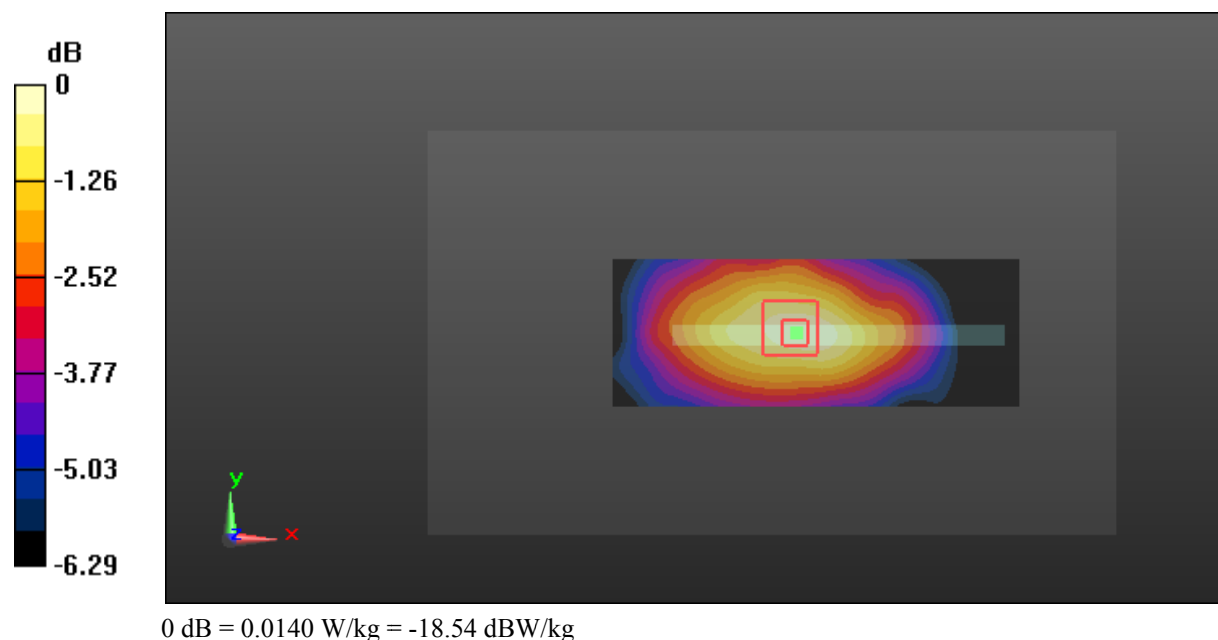

Test Plot 127#: LTE Band 17_Body Right_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0329 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.891 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.023 W/kg

Maximum value of SAR (measured) = 0.0338 W/kg

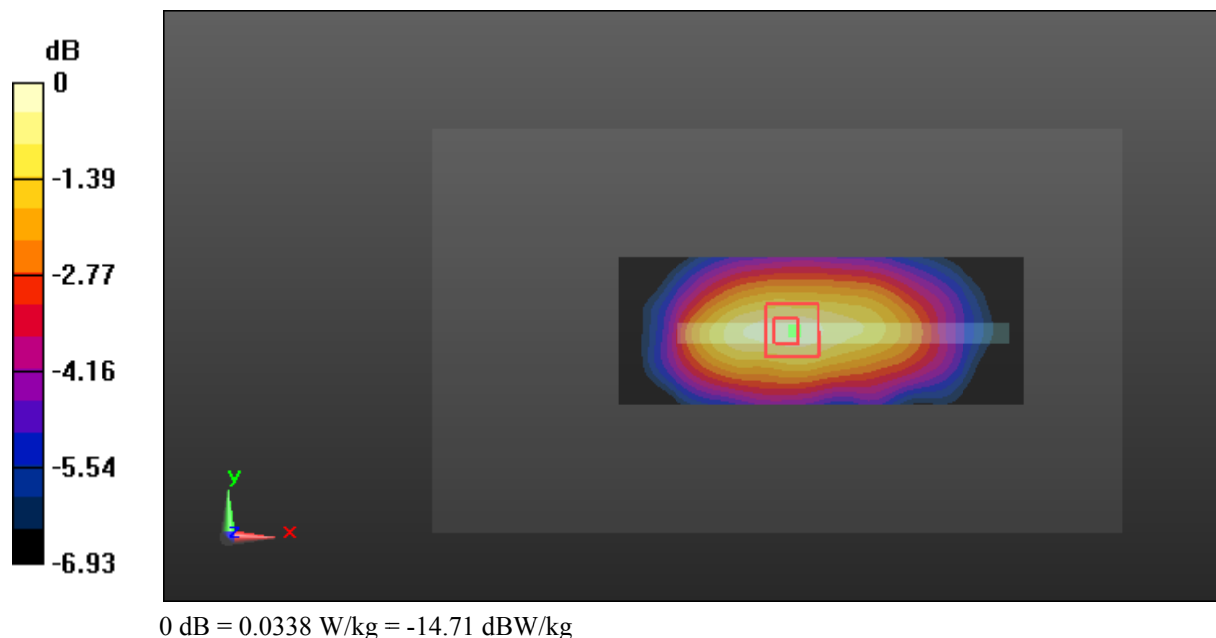

Test Plot 128#: LTE Band 17_Body Right_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0196 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.507 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0290 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0213 W/kg

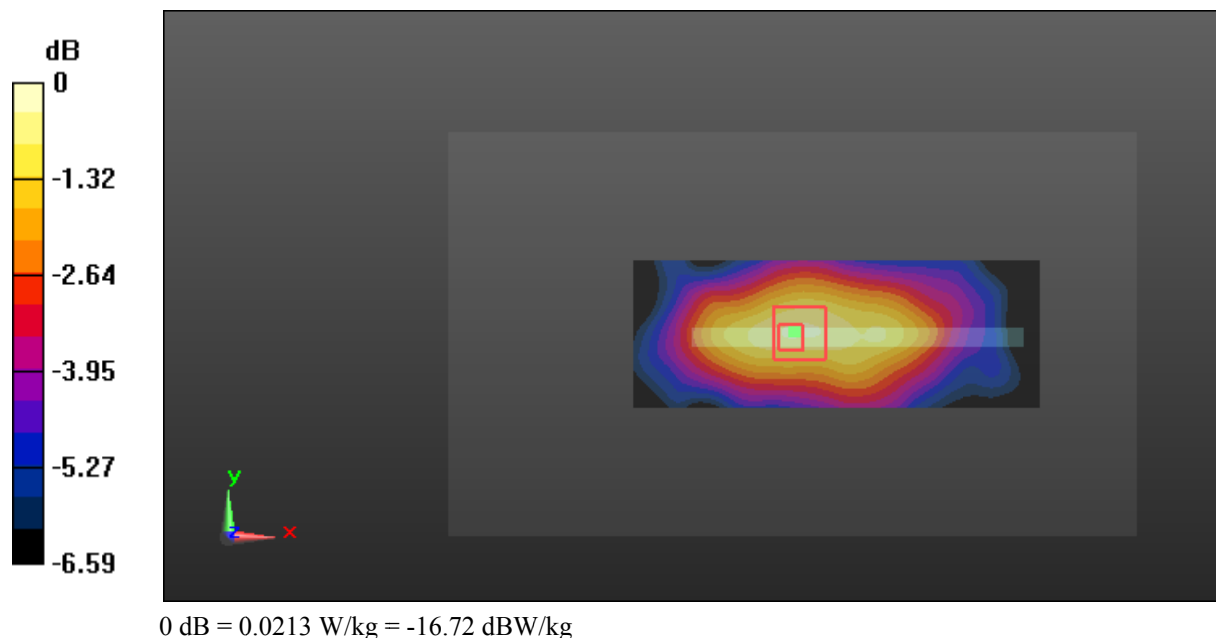

Test Plot 129#: LTE Band 17_Body Bottom_Middle Channel_1RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121


Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0117 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.511 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.0220 W/kg
SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00737 W/kg
 Maximum value of SAR (measured) = 0.0135 W/kg

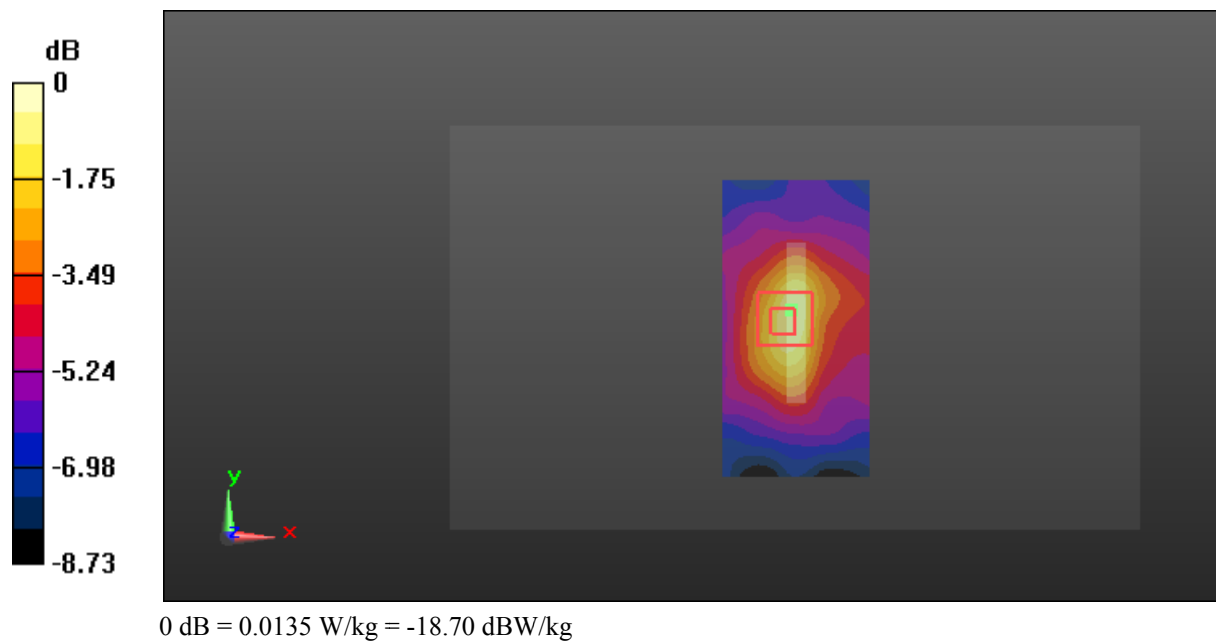

Test Plot 130#: LTE Band 17_Body Bottom_Middle Channel_50%RB

DUT: 4G Smart Phone; Type: ELITE 4.5M ; Serial: 16081600121

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1
 Medium parameters used: 710 MHz; $\sigma = 0.939$ S/m; $\epsilon_r = 53.938$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0114 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.253 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0210 W/kg

SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00673 W/kg

Maximum value of SAR (measured) = 0.0121 W/kg

