

**Test Plot 1#: GSM 850\_Head Left Cheek\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.409 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.270 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.524 W/kg

**SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.278 W/kg**

Maximum value of SAR (measured) = 0.404 W/kg

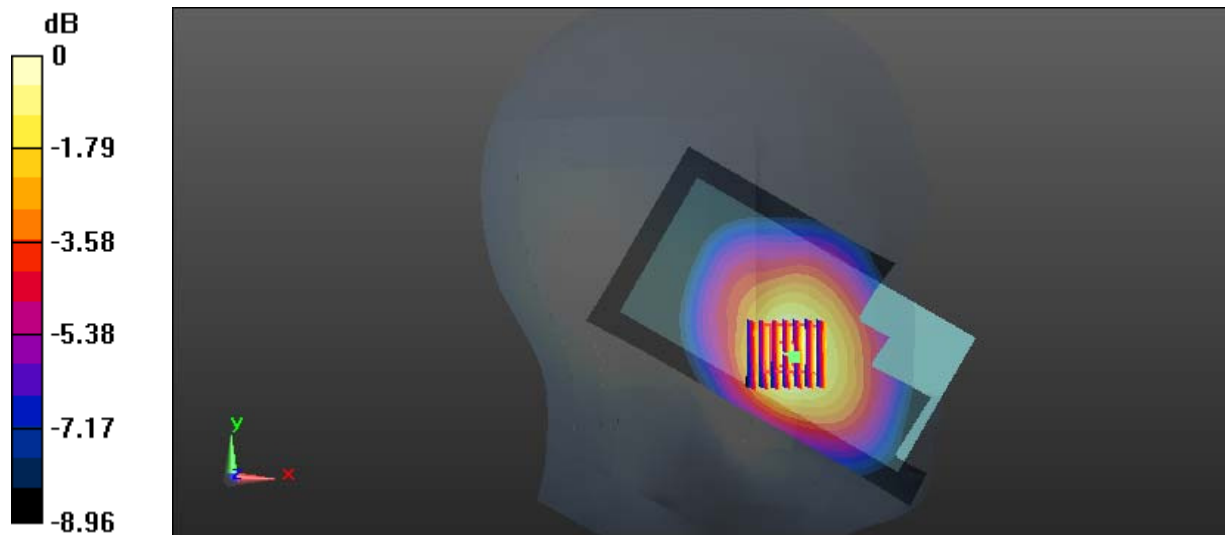

0 dB = 0.404 W/kg = -3.94 dBW/kg

**Test Plot 2#: GSM 850\_Head Left Tilt\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.212 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.45 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.209 W/kg

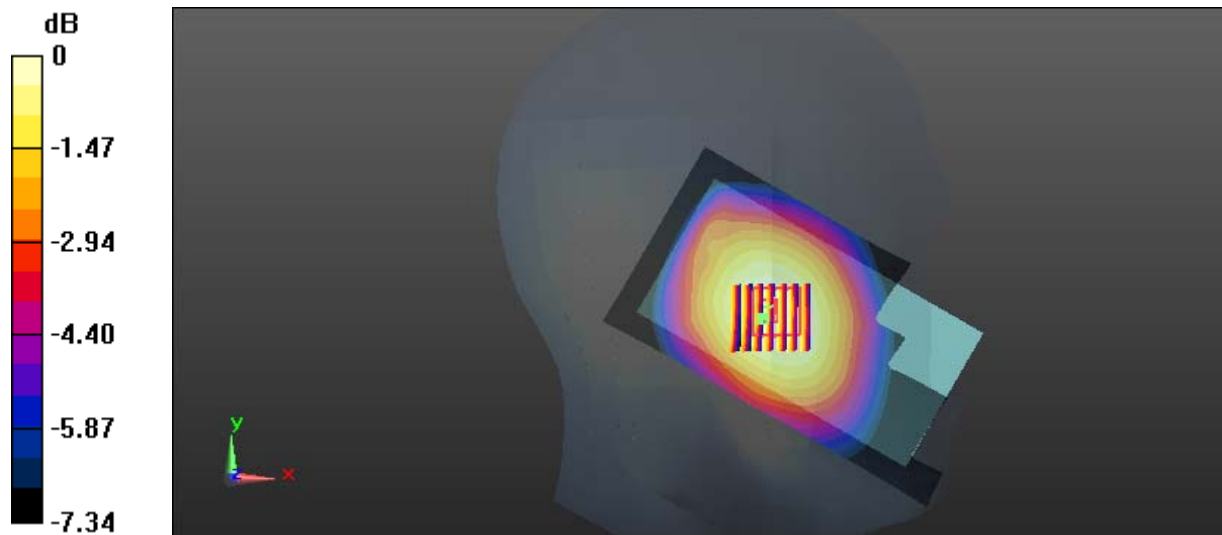

0 dB = 0.209 W/kg = -6.80 dBW/kg

**Test Plot 3#: GSM 850\_Head Right Cheek\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.309 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.390 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.387 W/kg  
**SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.227 W/kg**  
 Maximum value of SAR (measured) = 0.314 W/kg

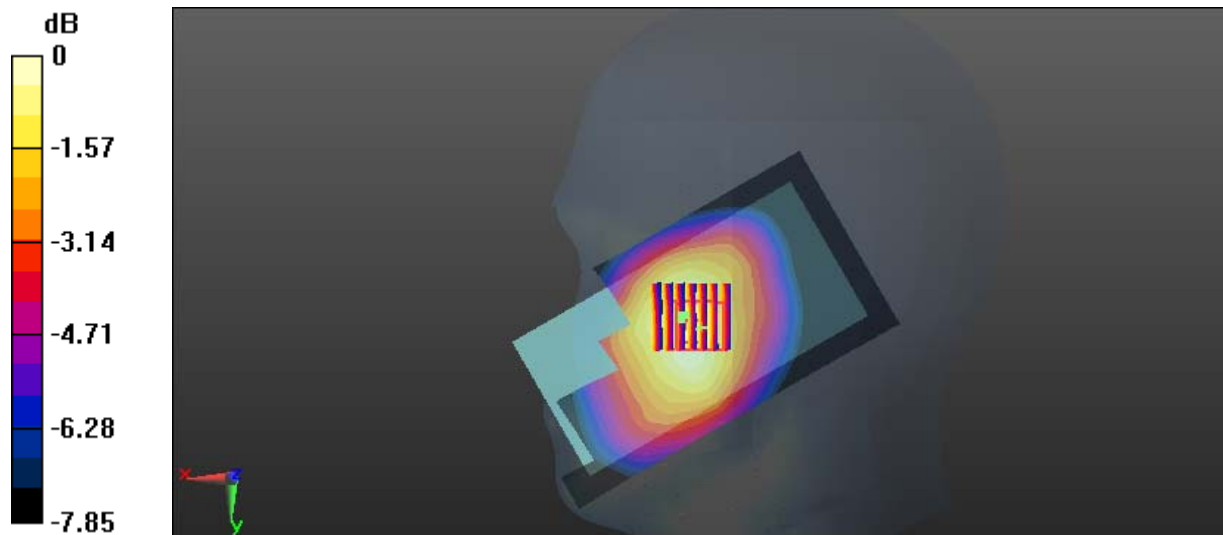

0 dB = 0.314 W/kg = -5.03 dBW/kg

**Test Plot 4#: GSM 850\_Head Right Tilt\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.228 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.01 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.178 W/kg**

Maximum value of SAR (measured) = 0.220 W/kg

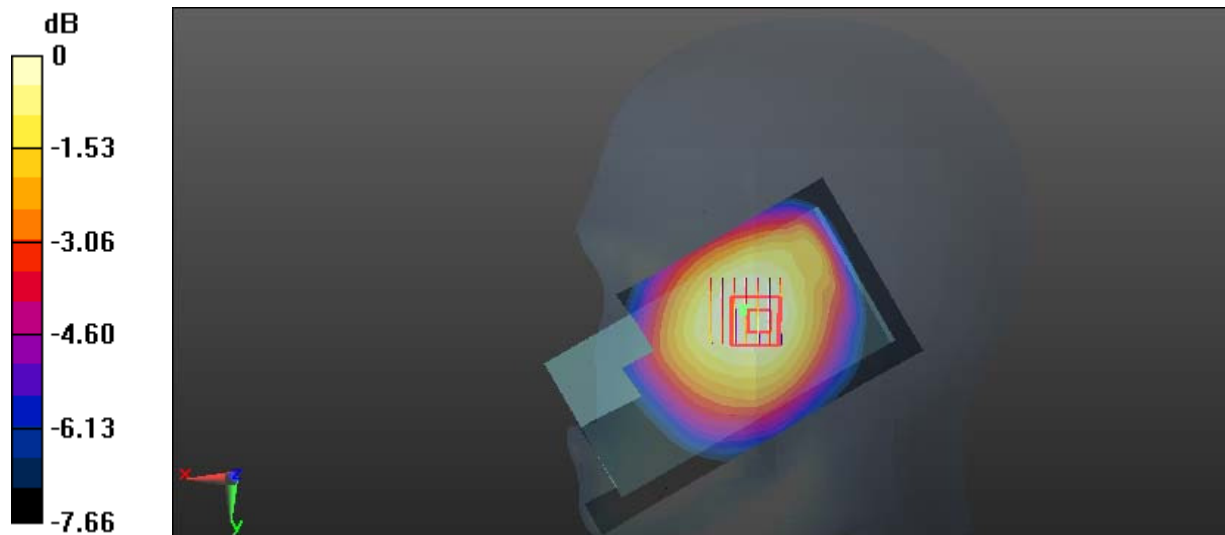

0 dB = 0.220 W/kg = -6.58 dBW/kg

**Test Plot 5#: GSM 850\_Body Worn Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.397 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.14 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.483 W/kg

**SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.294 W/kg**

Maximum value of SAR (measured) = 0.401 W/kg

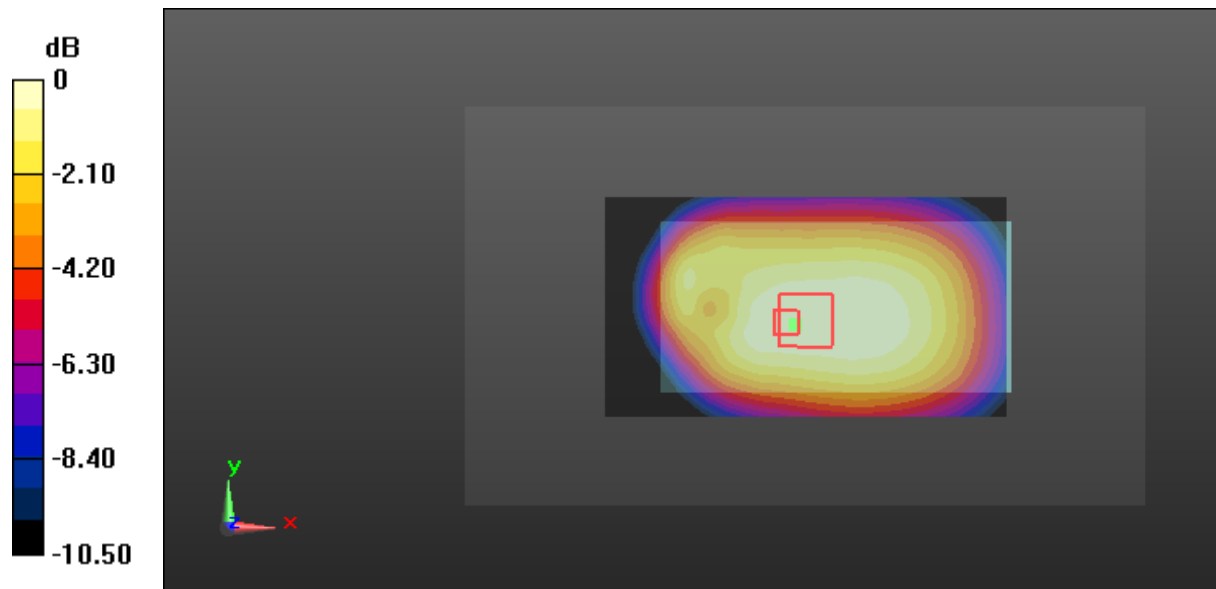

0 dB = 0.401 W/kg = -3.97 dBW/kg

**Test Plot 6#: GSM 850\_Body Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-2 slot; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.798 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.93 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.937 W/kg

**SAR(1 g) = 0.744 W/kg; SAR(10 g) = 0.571 W/kg**

Maximum value of SAR (measured) = 0.778 W/kg

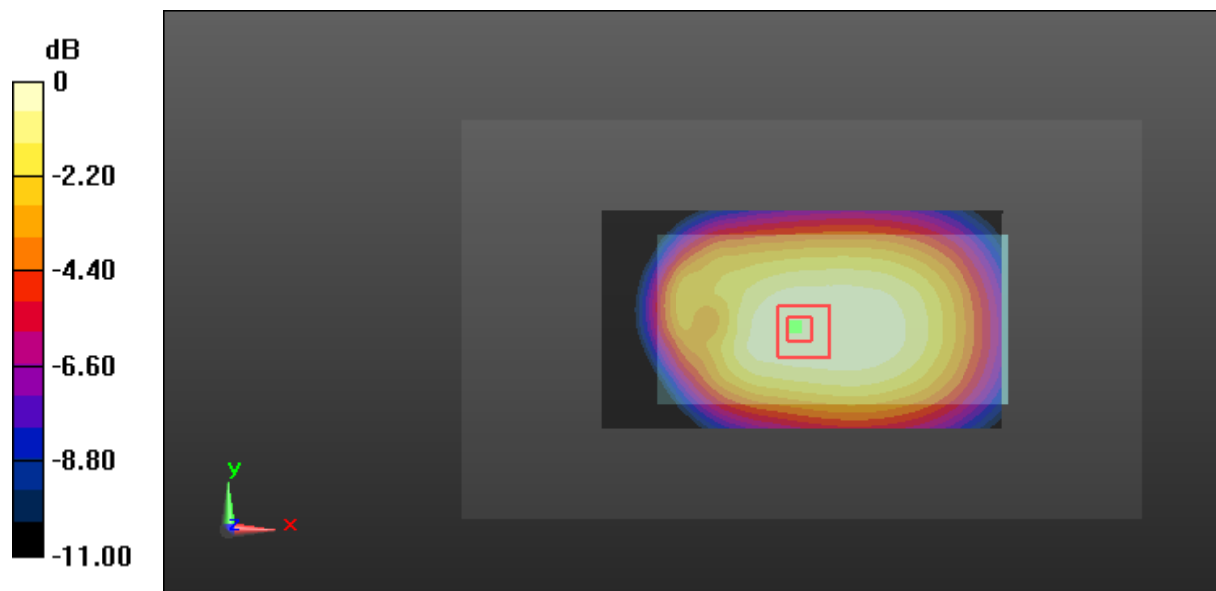

0 dB = 0.778 W/kg = -1.09 dBW/kg

**Test Plot 7#: GSM 850\_Body Left\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-2 slot; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.314 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.08 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.432 W/kg

**SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.308 W/kg

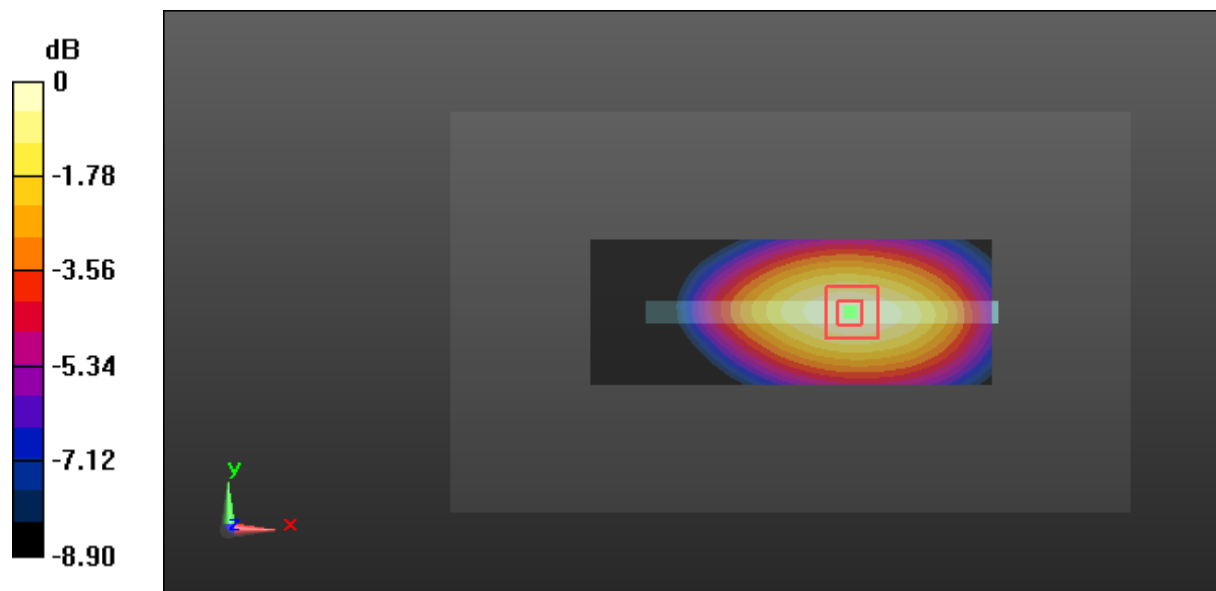

0 dB = 0.308 W/kg = -5.11 dBW/kg

**Test Plot 8#: GSM 850\_Body Right\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-2 slot; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.704 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.88 W/kg

**SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.449 W/kg**

Maximum value of SAR (measured) = 0.684 W/kg

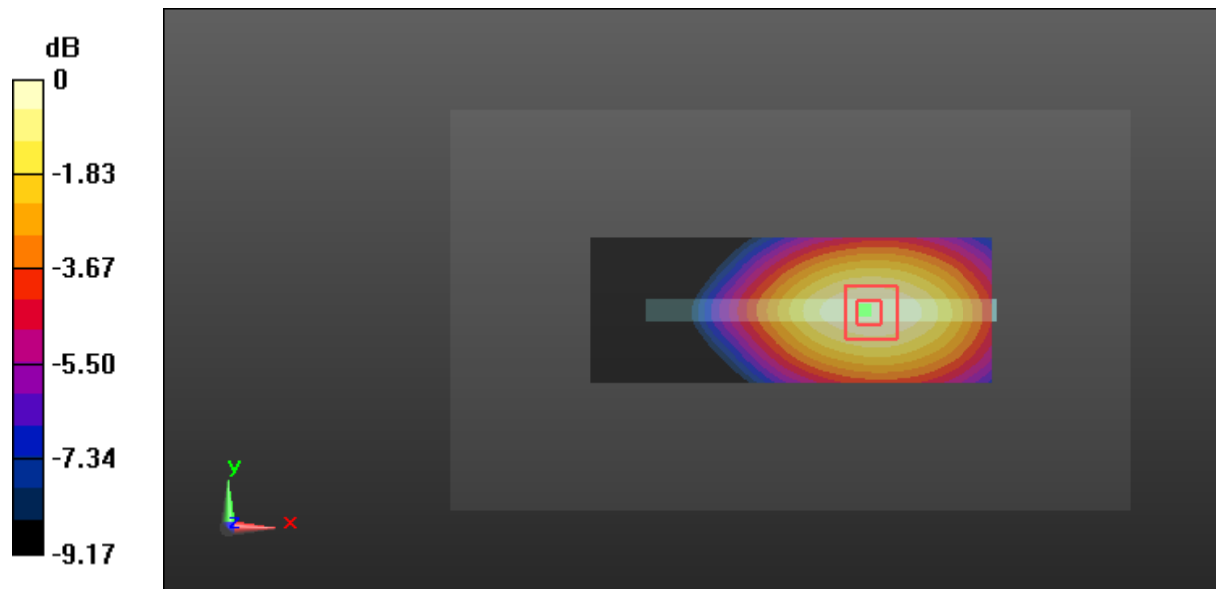

0 dB = 0.684 W/kg = -1.65 dBW/kg



**Test Plot 9#: GSM 850\_Body Bottom\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-2 slot; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.132 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.12 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.217 W/kg

**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.146 W/kg

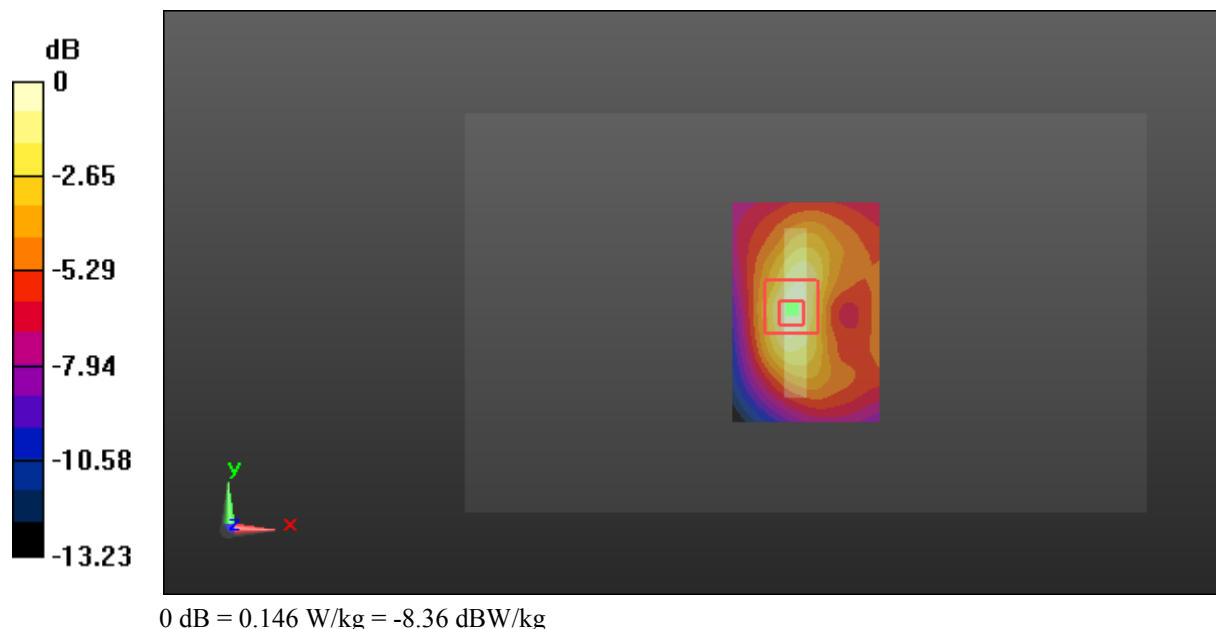

**Test Plot 10#: GSM 1900\_Head Left Cheek\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.155 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.249 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 0.216 W/kg  
**SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.088 W/kg**  
 Maximum value of SAR (measured) = 0.150 W/kg

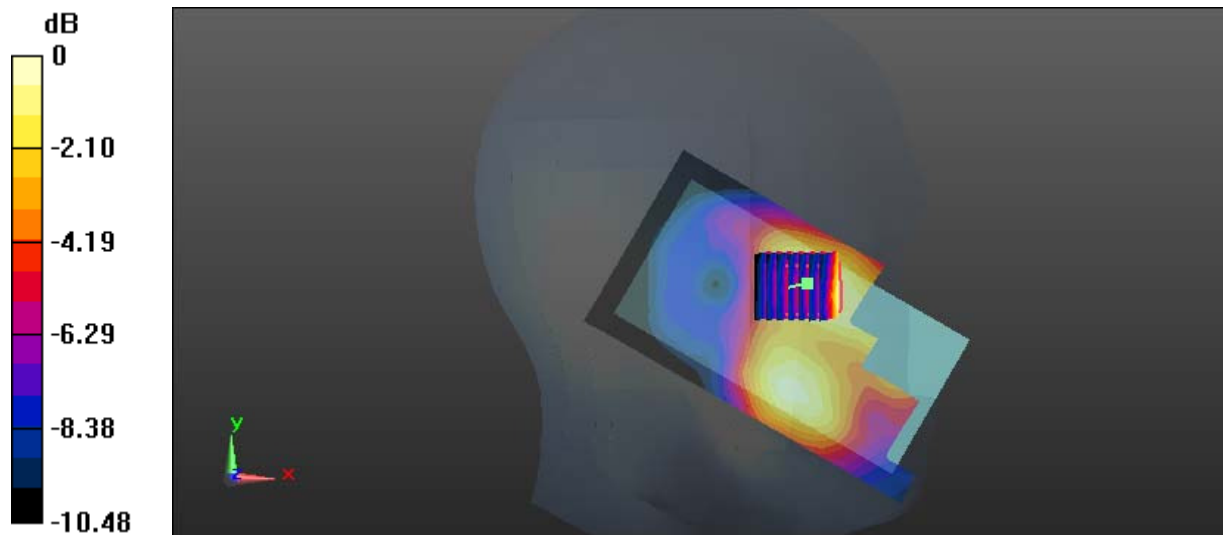

0 dB = 0.150 W/kg = -8.24 dBW/kg

**Test Plot 11#: GSM 1900\_Head Left Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0640 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.678 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.119 W/kg  
**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.033 W/kg**  
 Maximum value of SAR (measured) = 0.0627 W/kg

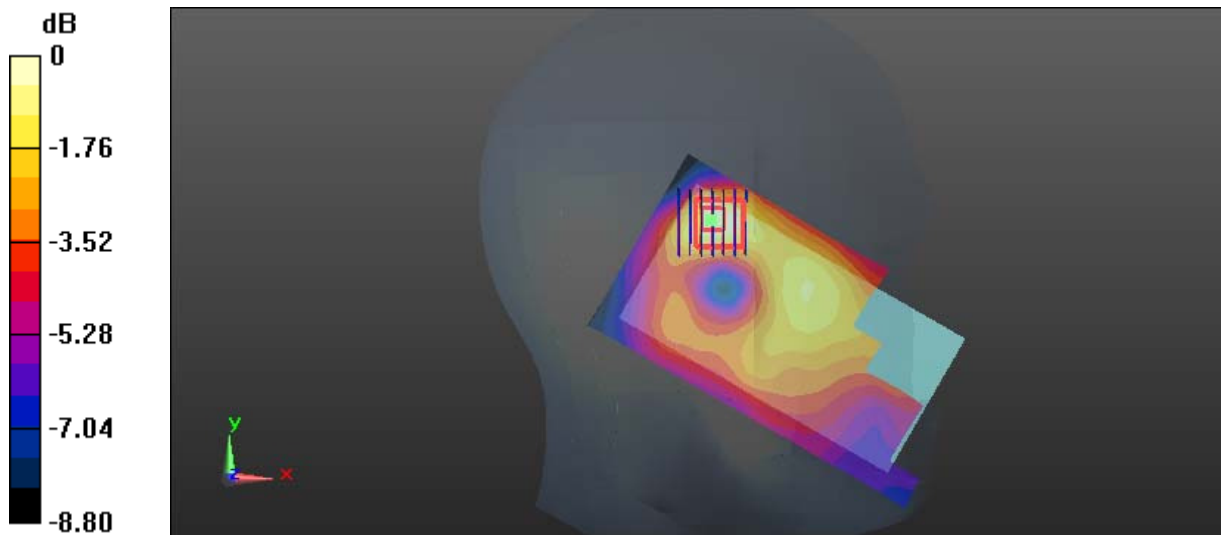

0 dB = 0.0627 W/kg = -12.03 dBW/kg

**Test Plot 12#: GSM 1900\_Head Right Cheek\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.270 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.120 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.419 W/kg  
**SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.150 W/kg**  
 Maximum value of SAR (measured) = 0.276 W/kg

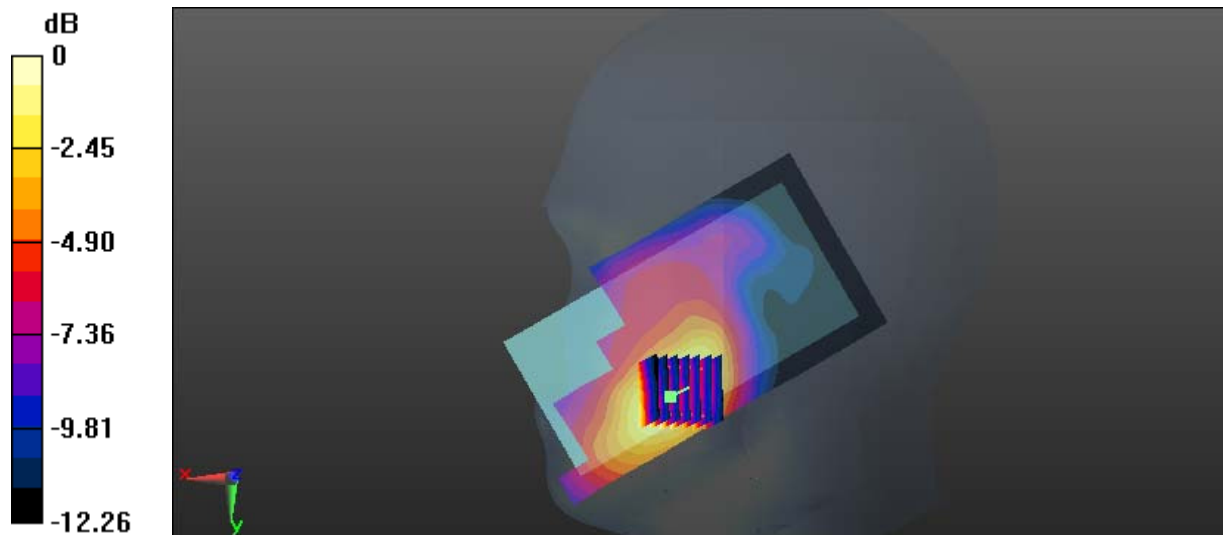

0 dB = 0.276 W/kg = -5.59 dBW/kg

**Test Plot 13#: GSM 1900\_Head Right Tilt\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0656 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.166 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.0850 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0592 W/kg

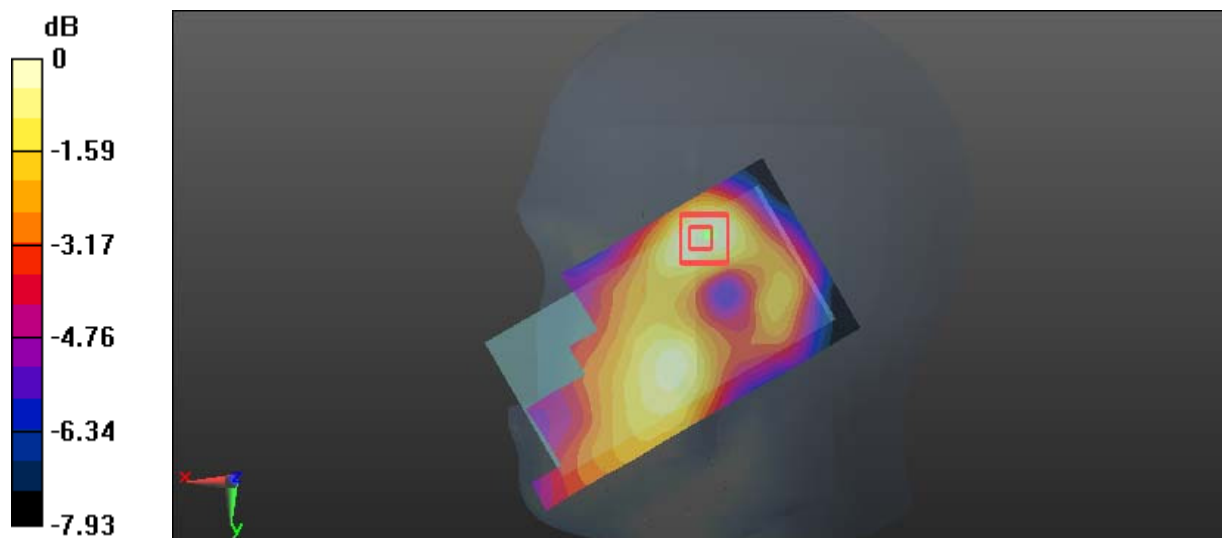

0 dB = 0.0592 W/kg = -12.28 dBW/kg

**Test Plot 14#: GSM 1900\_Body Worn Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541 \text{ S/m}$ ;  $\epsilon_r = 51.684$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.761 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.263 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.335 W/kg**

Maximum value of SAR (measured) = 0.770 W/kg

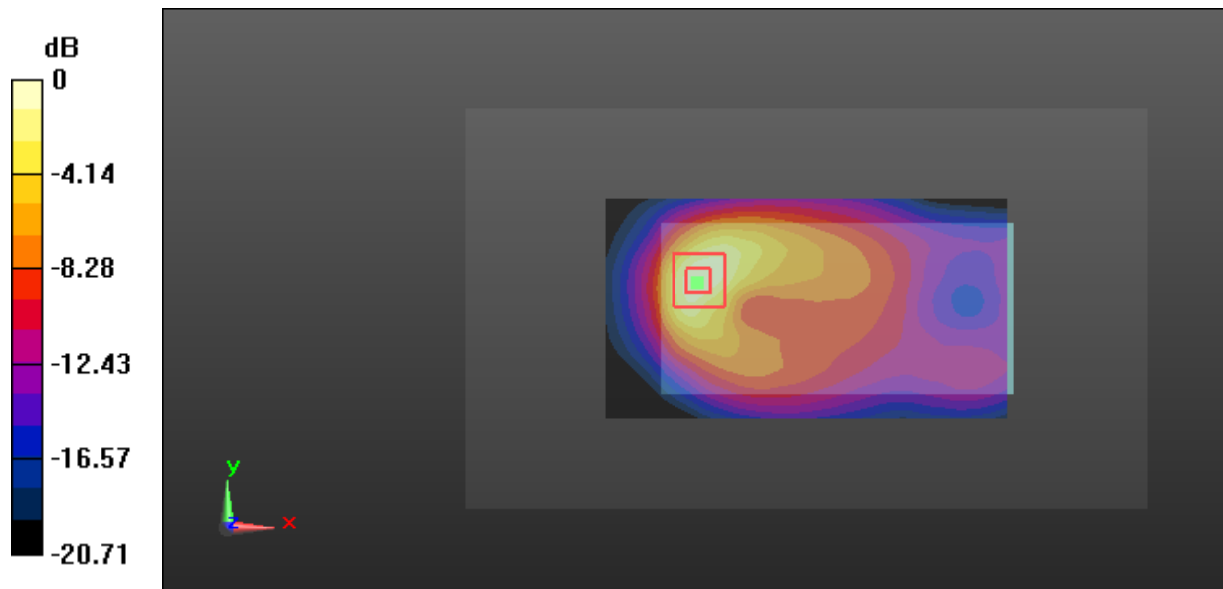

0 dB = 0.770 W/kg = -1.14 dBW/kg

**Test Plot 15#: GSM 1900\_Body Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.523 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.882 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.815 W/kg

**SAR(1 g) = 0.469 W/kg; SAR(10 g) = 0.253 W/kg**

Maximum value of SAR (measured) = 0.525 W/kg

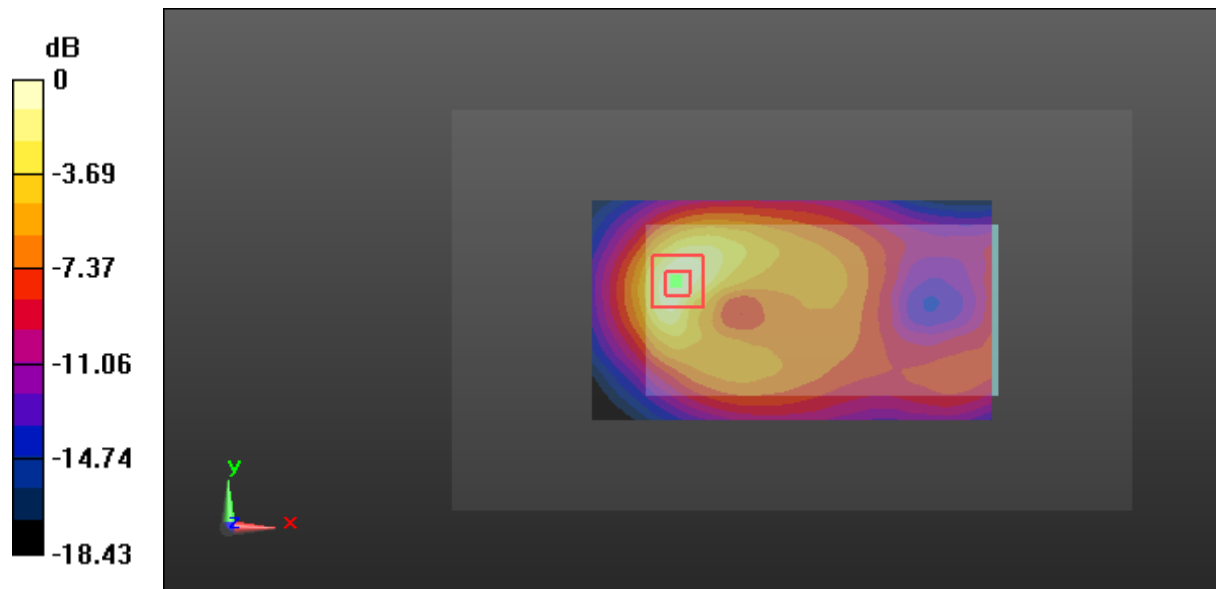

0 dB = 0.525 W/kg = -2.80 dBW/kg

**Test Plot 16#: GSM 1900\_Body Left\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541 \text{ S/m}$ ;  $\epsilon_r = 51.684$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.131 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.481 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.128 W/kg

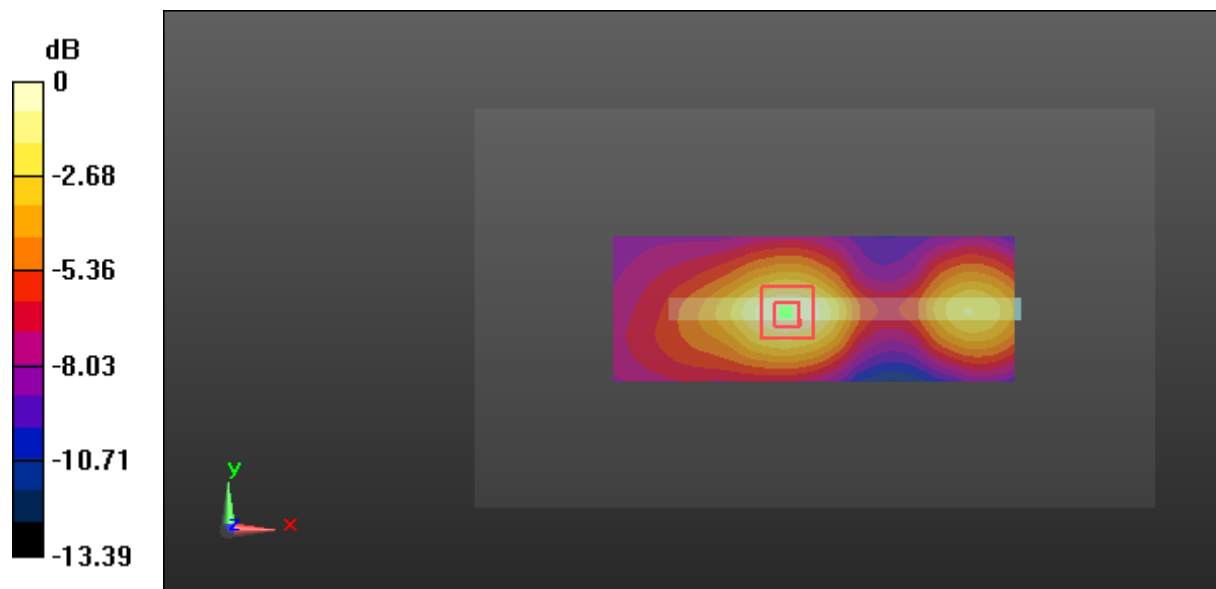

0 dB = 0.128 W/kg = -8.93 dBW/kg



**Test Plot 17#: GSM 1900\_Body Right\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.216 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.313 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.211 W/kg

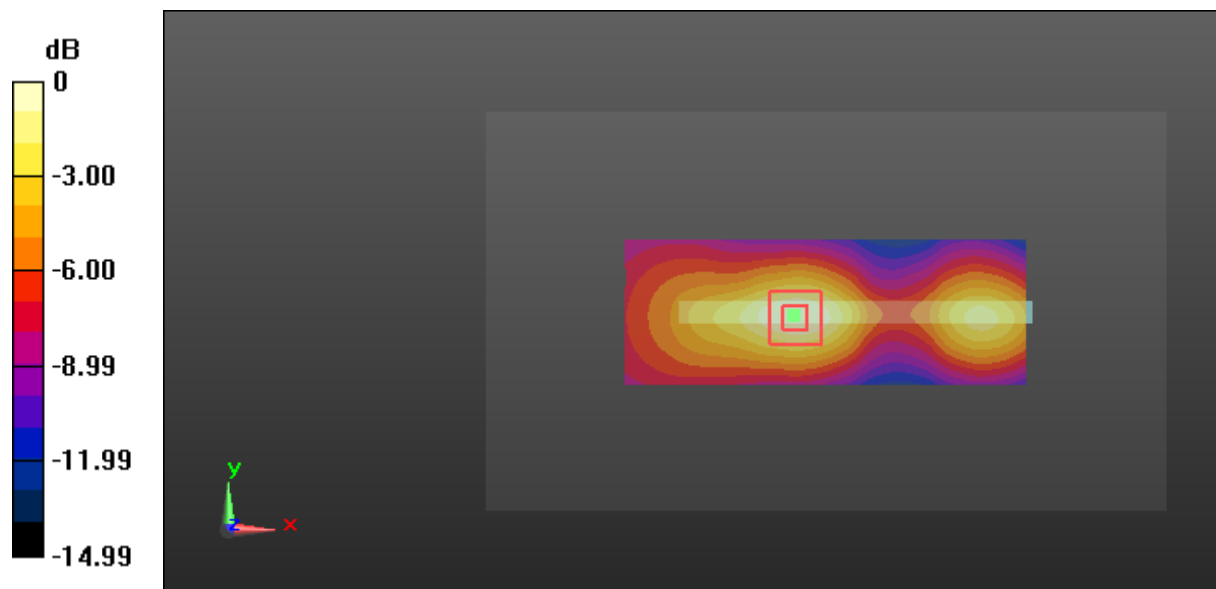

0 dB = 0.211 W/kg = -6.76 dBW/kg

**Test Plot 18#: GSM 1900\_Body Bottom\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541 \text{ S/m}$ ;  $\epsilon_r = 51.684$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.749 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.54 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.18 W/kg

**SAR(1 g) = 0.671 W/kg; SAR(10 g) = 0.347 W/kg**

Maximum value of SAR (measured) = 0.767 W/kg

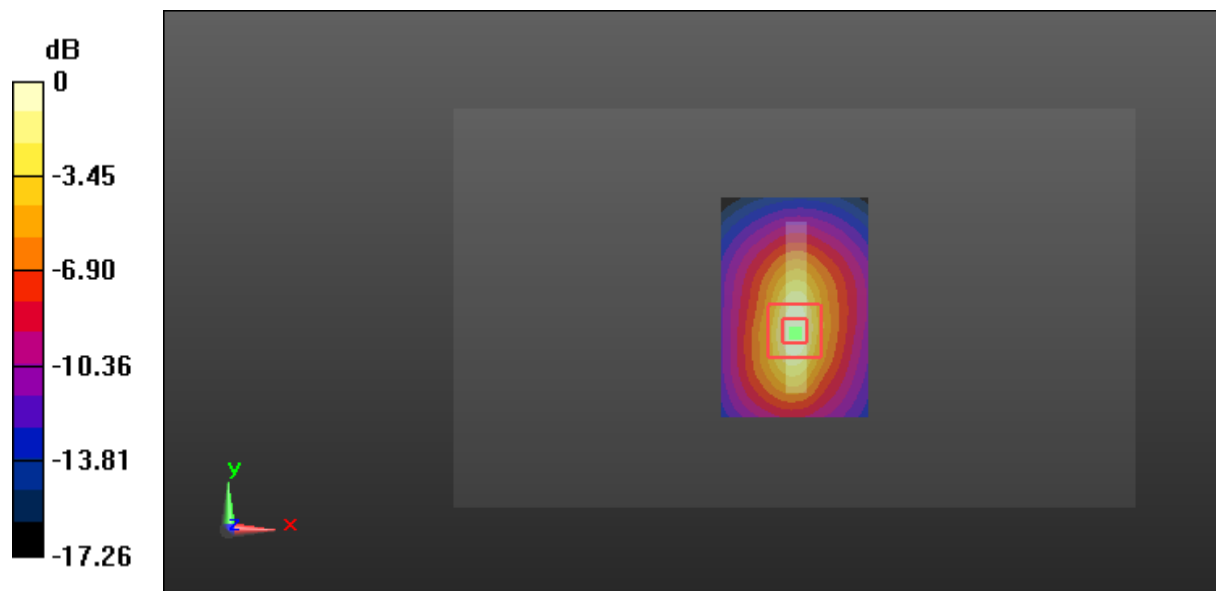

0 dB = 0.767 W/kg = -1.15 dBW/kg

**Test Plot 19#: WCDMA Band 2\_Head Left Cheek\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.235 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.742 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.341 W/kg

**SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.132 W/kg**

Maximum value of SAR (measured) = 0.227 W/kg

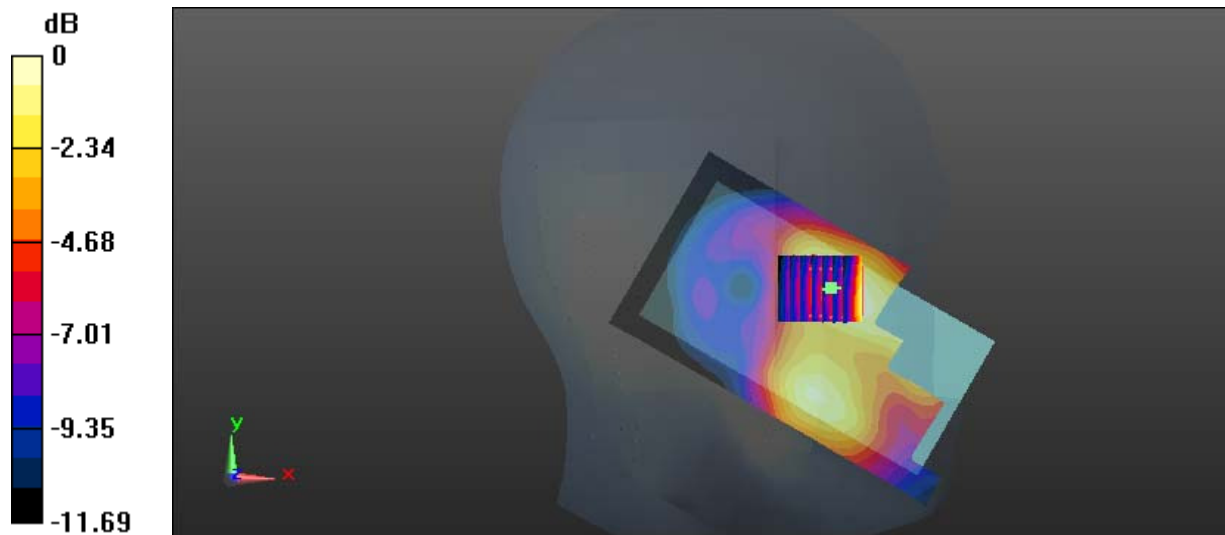

0 dB = 0.227 W/kg = -6.44 dBW/kg

**Test Plot 20#: WCDMA Band 2\_Head Left Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0932 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.797 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.178 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.048 W/kg**  
 Maximum value of SAR (measured) = 0.0920 W/kg

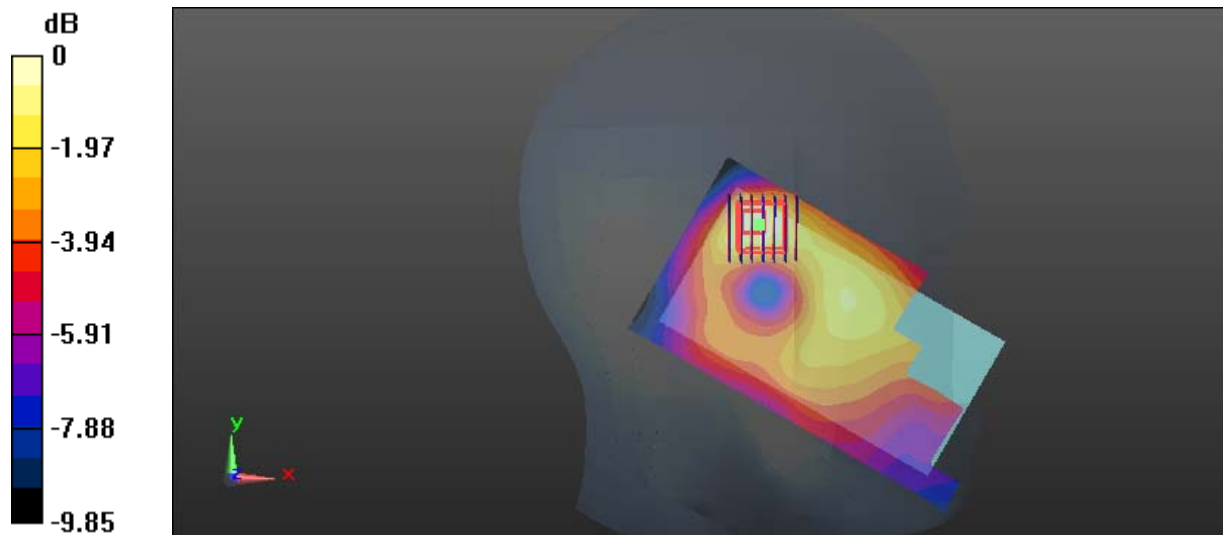

0 dB = 0.0920 W/kg = -10.36 dBW/kg

**Test Plot 21#: WCDMA Band 2\_Head Right Cheek\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.410 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.596 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.629 W/kg  
**SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.227 W/kg**  
 Maximum value of SAR (measured) = 0.412 W/kg

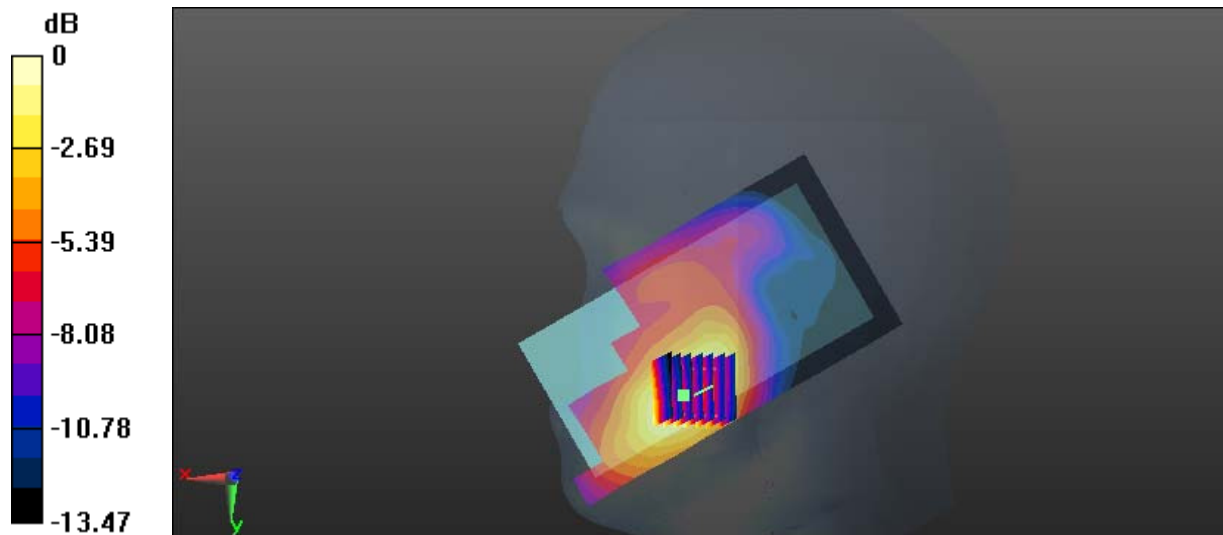

0 dB = 0.412 W/kg = -3.85 dBW/kg

**Test Plot 22#: WCDMA Band 2\_Head Right Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0882 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.156 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.125 W/kg  
**SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.050 W/kg**  
 Maximum value of SAR (measured) = 0.0846 W/kg

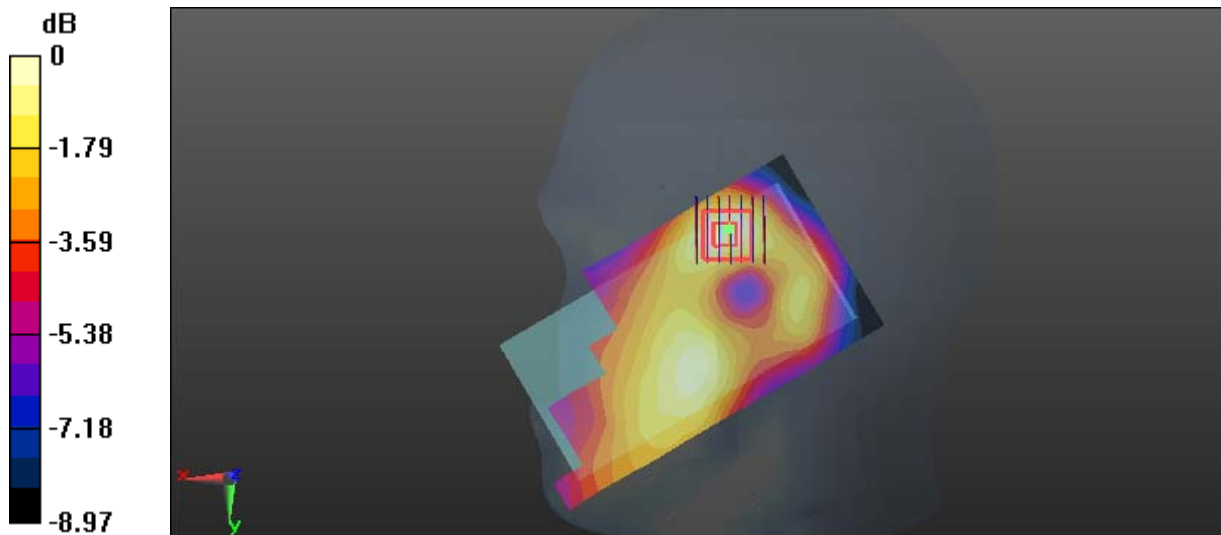

0 dB = 0.0846 W/kg = -10.73 dBW/kg

**Test Plot 23#: WCDMA Band 2\_Body Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.735 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.340 W/kg**

Maximum value of SAR (measured) = 0.725 W/kg

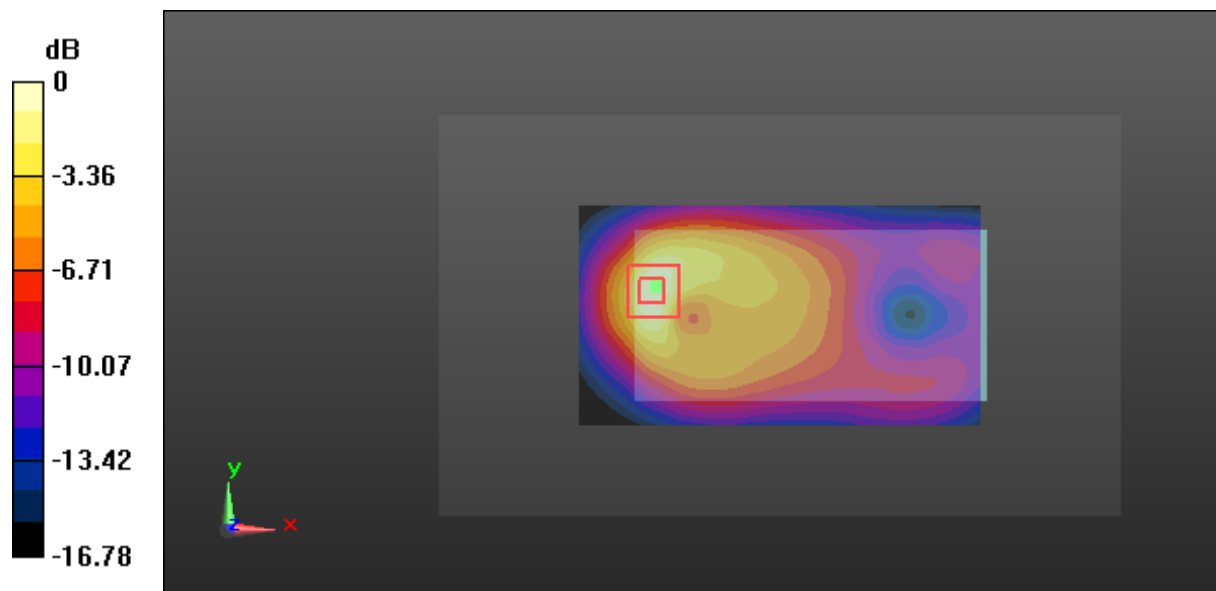

0 dB = 0.725 W/kg = -1.40 dBW/kg

**Test Plot 24#: WCDMA Band 2\_Body Left\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541 \text{ S/m}$ ;  $\epsilon_r = 51.684$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.147 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.191 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.212 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

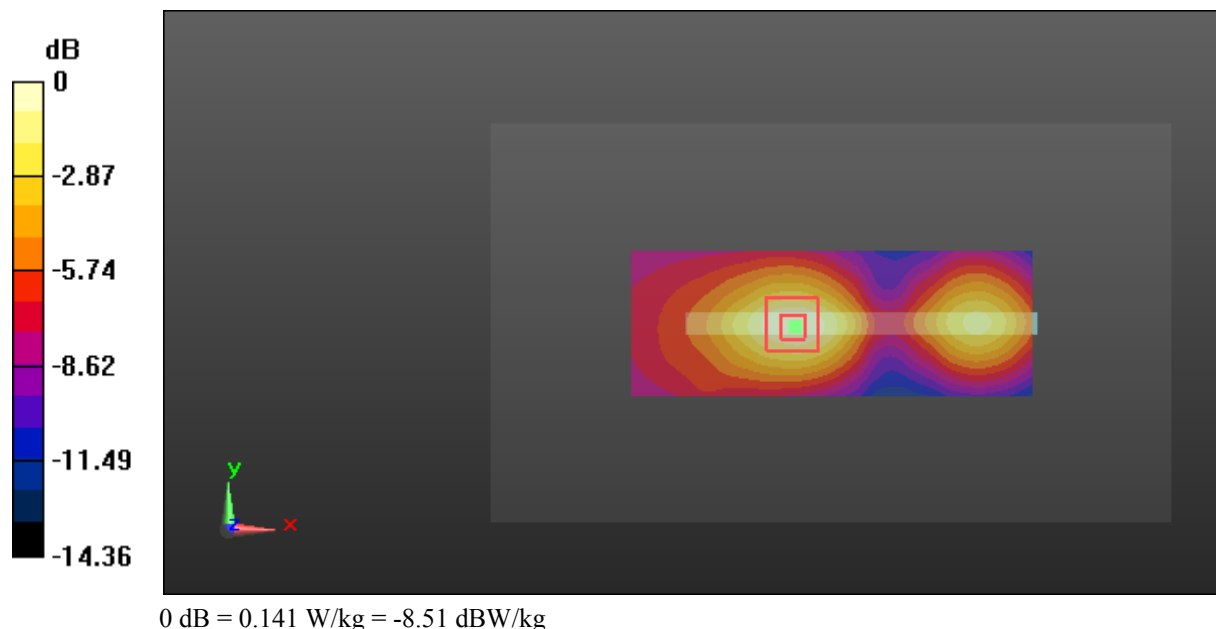



**Test Plot 25#: WCDMA Band 2\_Body Right\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.214 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.921 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.318 W/kg

**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.208 W/kg

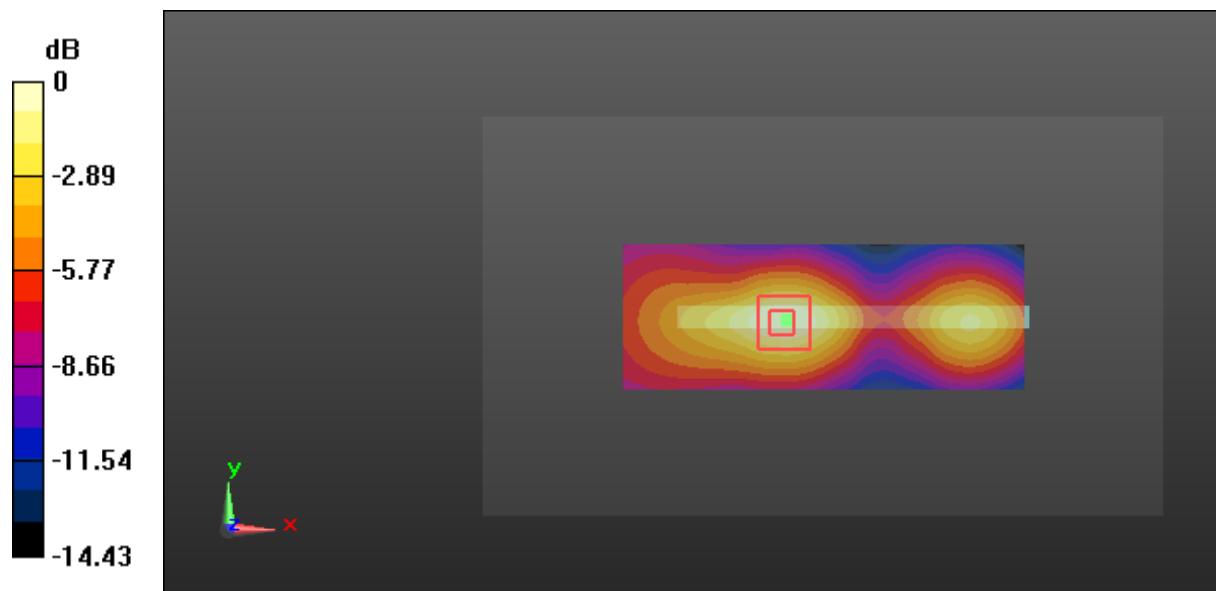

0 dB = 0.208 W/kg = -6.82 dBW/kg

**Test Plot 26#: WCDMA Band 2\_Body Bottom\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.746 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.61 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.349 W/kg**

Maximum value of SAR (measured) = 0.779 W/kg

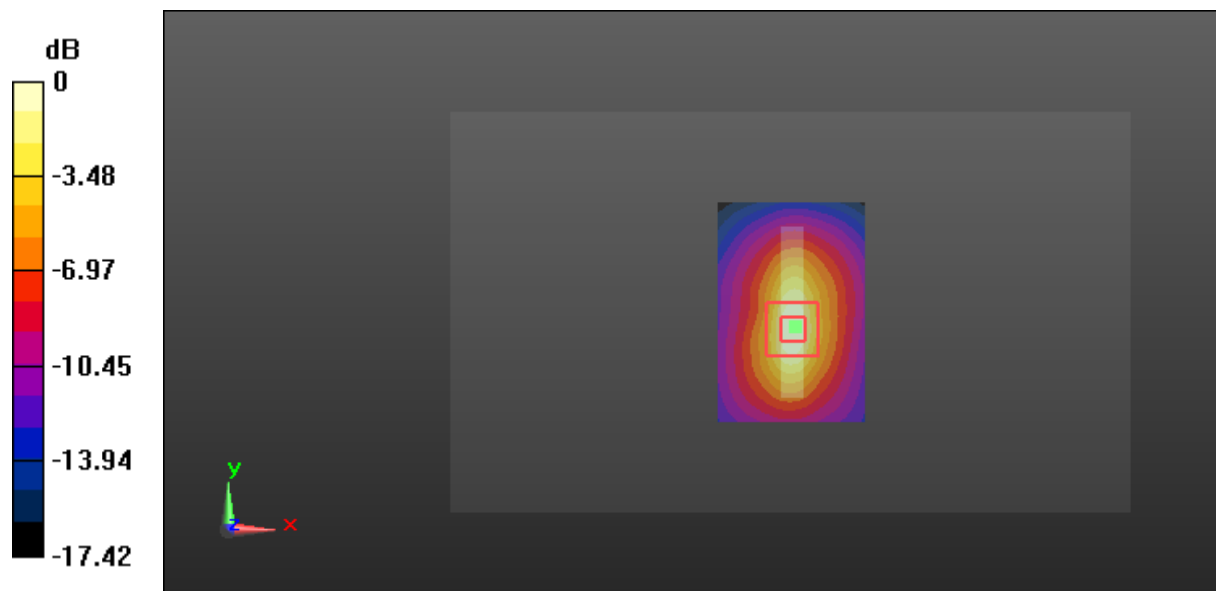

0 dB = 0.779 W/kg = -1.08 dBW/kg

**Test Plot 27#: WCDMA Band 4\_Head Left Cheek\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 39.63$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.437 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.432 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.623 W/kg  
**SAR(1 g) = 0.404 W/kg; SAR(10 g) = 0.252 W/kg**  
 Maximum value of SAR (measured) = 0.436 W/kg

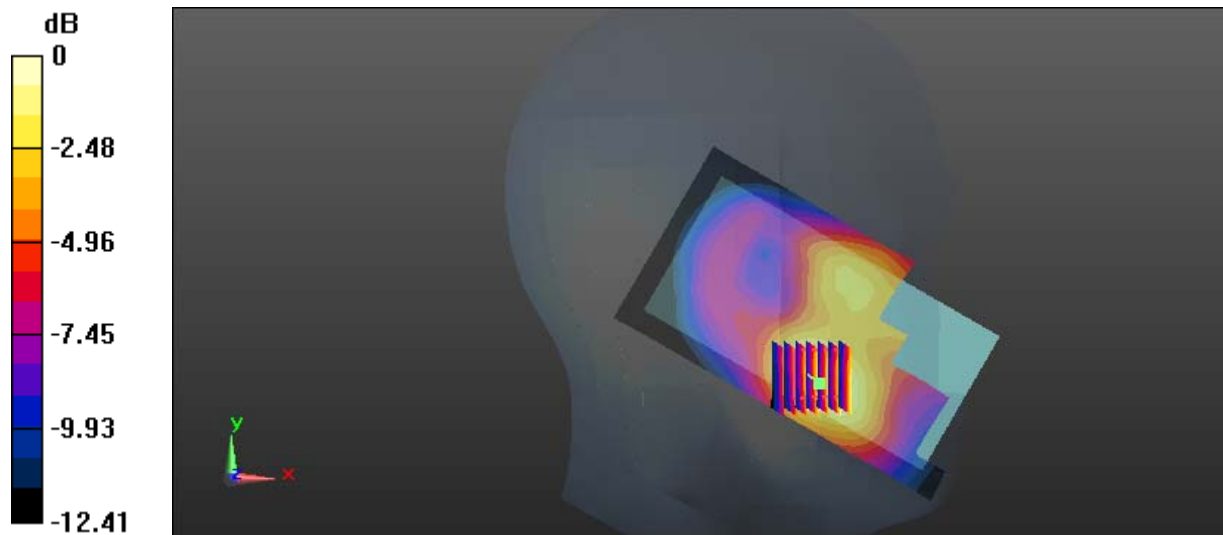

0 dB = 0.436 W/kg = -3.61 dBW/kg

**Test Plot 28#: WCDMA Band 4\_Head Left Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 39.63$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.151 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.708 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.210 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.091 W/kg**

Maximum value of SAR (measured) = 0.146 W/kg

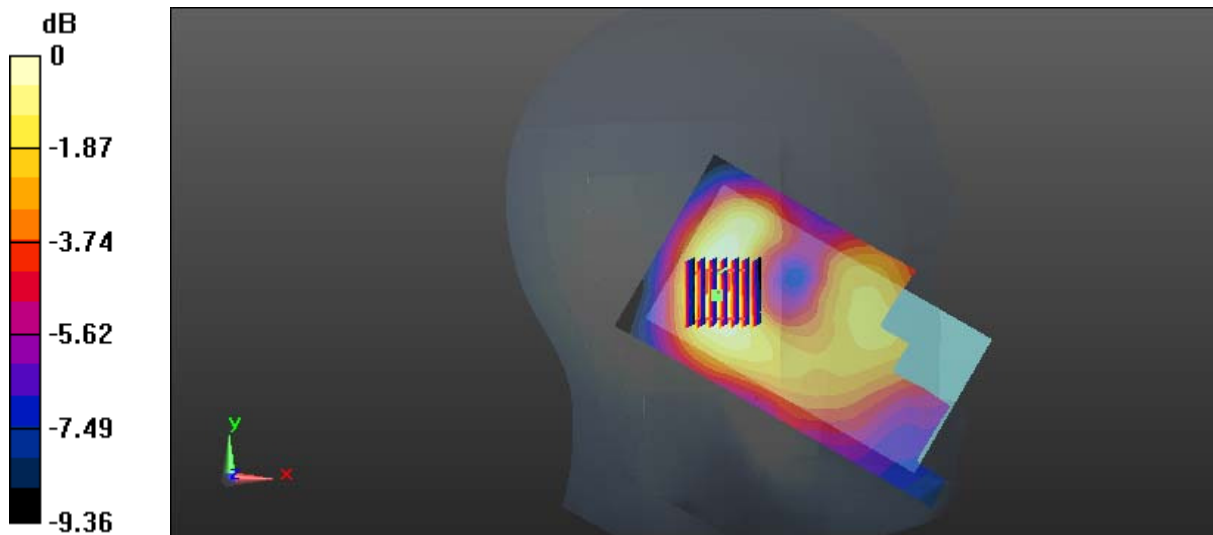

0 dB = 0.146 W/kg = -8.36 dBW/kg

**Test Plot 29#: WCDMA Band 4\_Head Right Cheek\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: WCDMA; Frequency: 1732.6 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 39.63$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.609 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.732 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.889 W/kg  
**SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.353 W/kg**  
 Maximum value of SAR (measured) = 0.618 W/kg

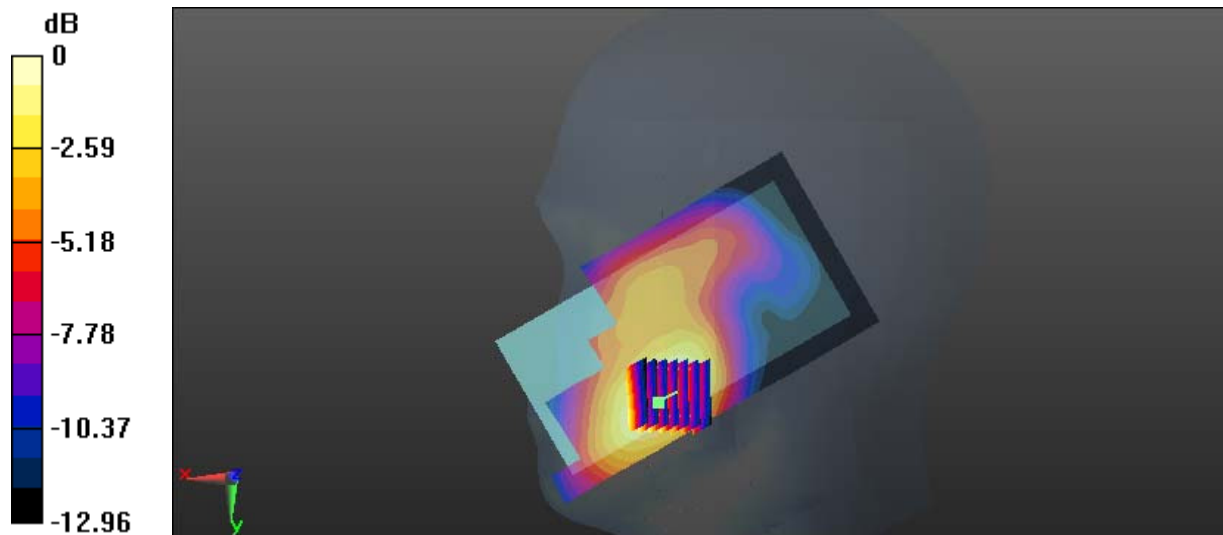

0 dB = 0.618 W/kg = -2.09 dBW/kg

**Test Plot 30#: WCDMA Band 4\_Head Right Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 39.63$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x111x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.241 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.08 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.321 W/kg  
**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.137 W/kg**  
 Maximum value of SAR (measured) = 0.230 W/kg

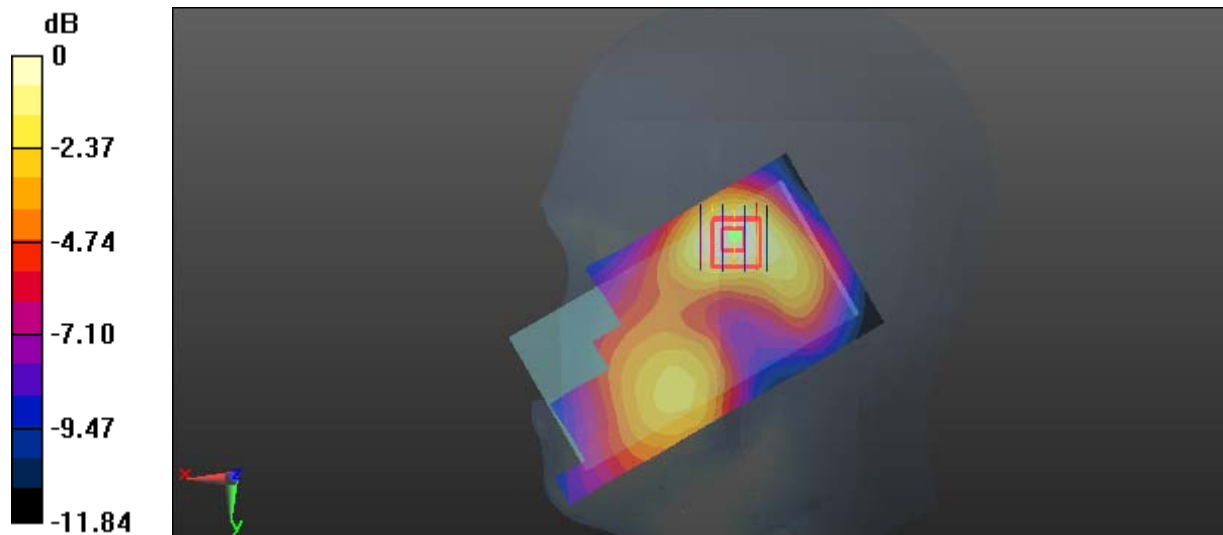

0 dB = 0.230 W/kg = -6.38 dBW/kg

**Test Plot 31#: WCDMA Band 4\_Body Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 53.438$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.443 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.59 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.273 W/kg**

Maximum value of SAR (measured) = 0.450 W/kg

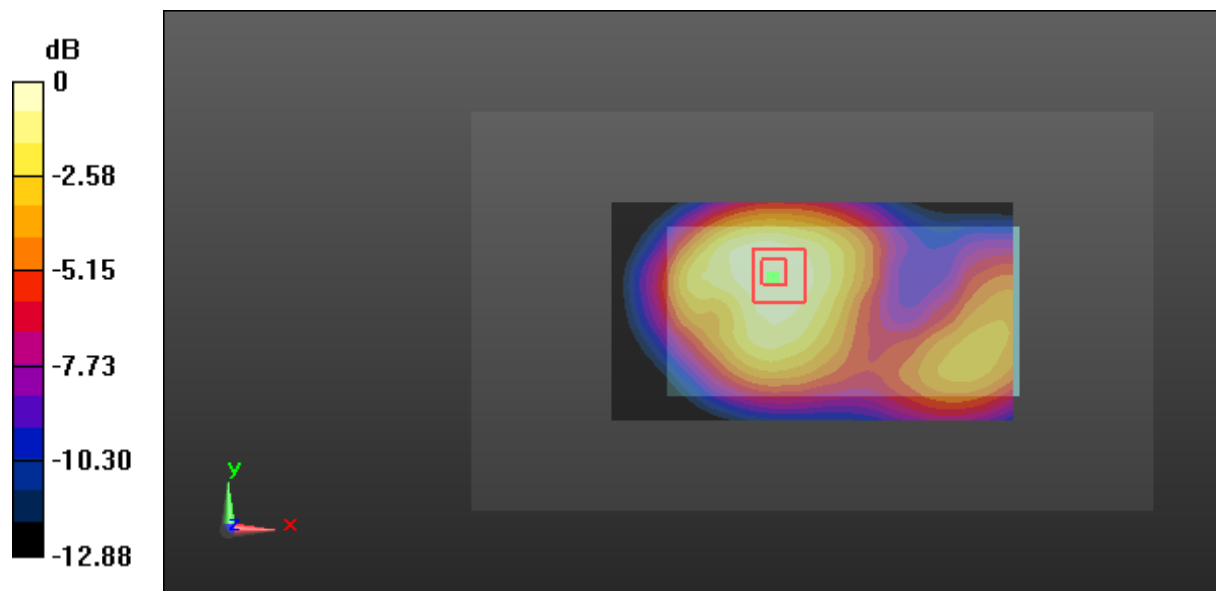

0 dB = 0.450 W/kg = -3.47 dBW/kg

**Test Plot 32#: WCDMA Band 4\_Body Left\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 53.438$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.178 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.961 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

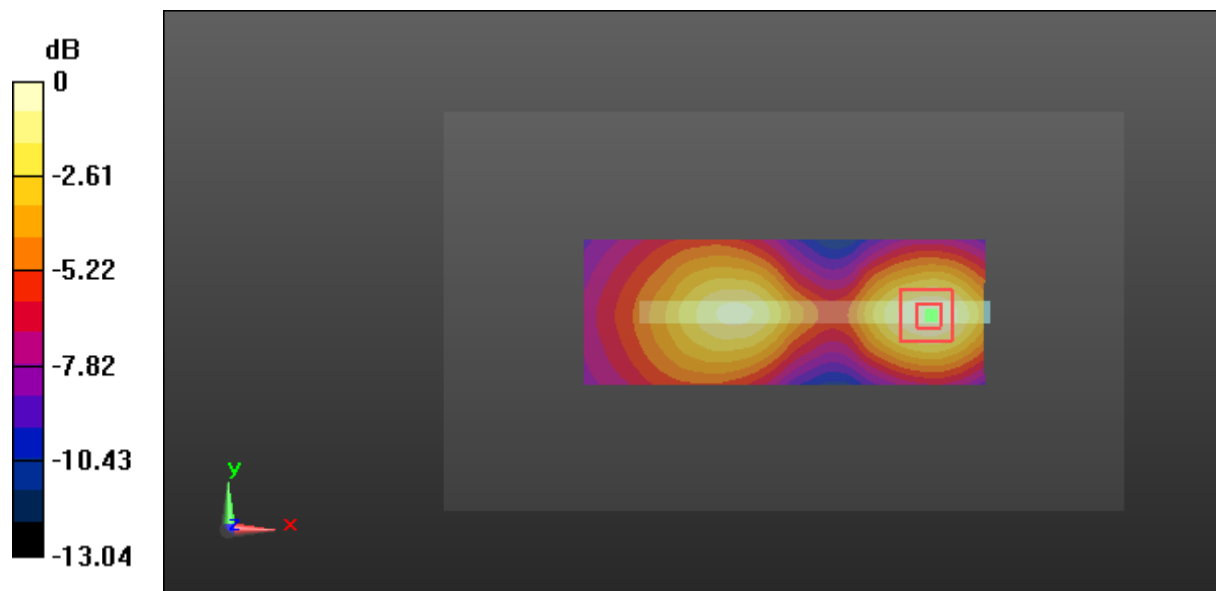

0 dB = 0.174 W/kg = -7.59 dBW/kg



**Test Plot 33#: WCDMA Band 4\_Body Right\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 53.438$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.238 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.40 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.337 W/kg

**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.233 W/kg

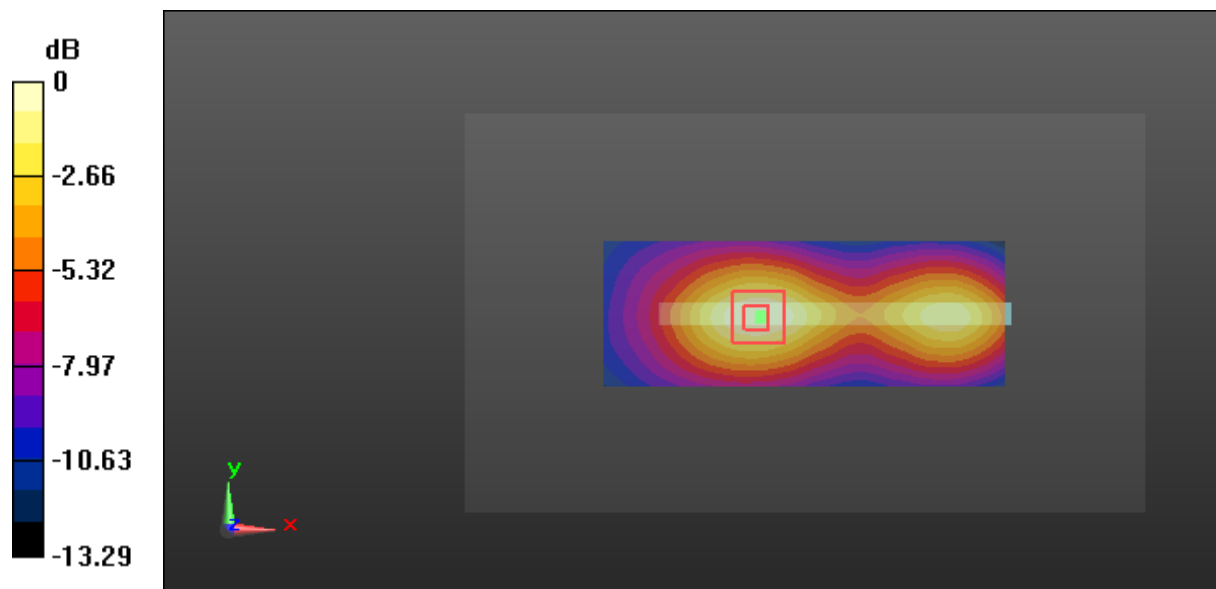

0 dB = 0.233 W/kg = -6.33 dBW/kg

**Test Plot 34#: WCDMA Band 4\_Body Bottom\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.6 MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 53.438$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.454 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 17.14 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.706 W/kg  
**SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.223 W/kg**  
 Maximum value of SAR (measured) = 0.475 W/kg

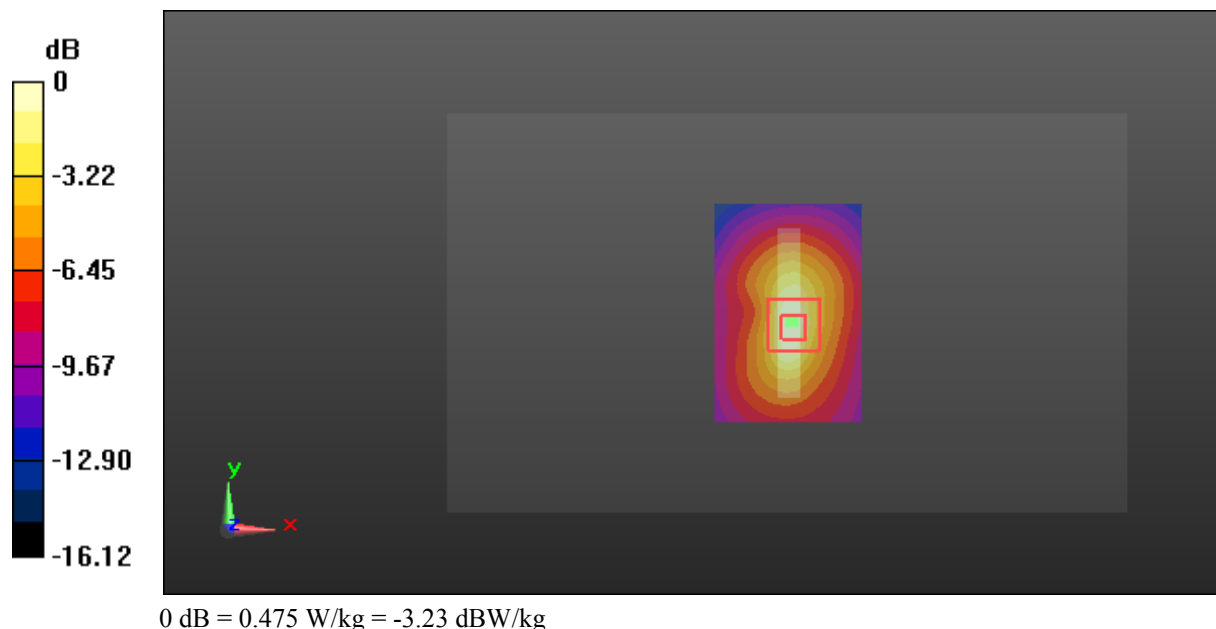

**Test Plot 35#: WCDMA Band 5\_Head Left Cheek\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.323 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 7.361 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 0.388 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.221 W/kg**

Maximum value of SAR (measured) = 0.316 W/kg

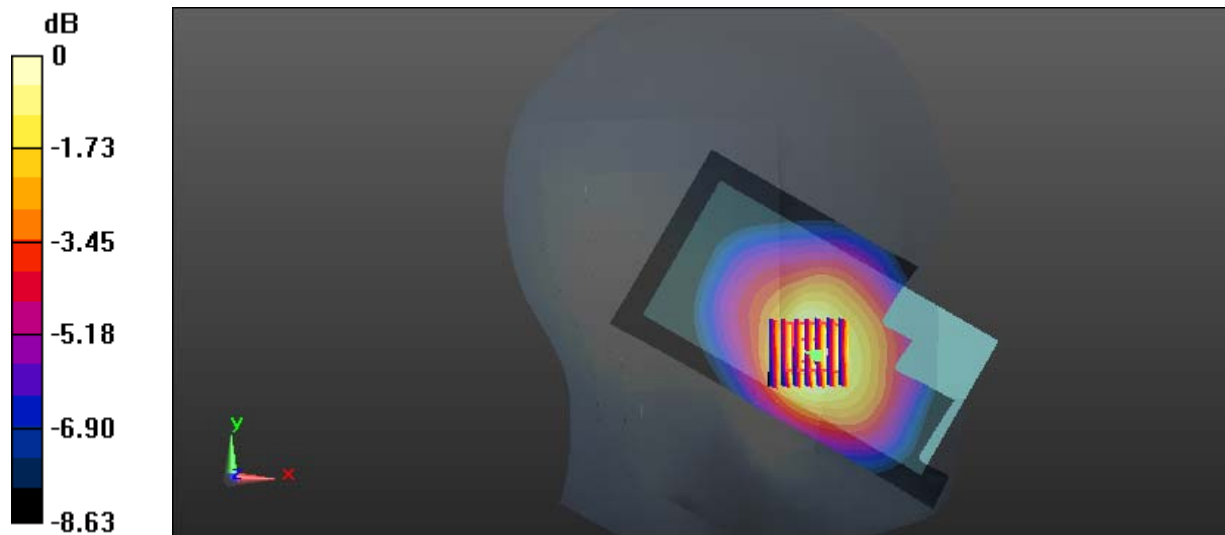

0 dB = 0.316 W/kg = -5.00 dBW/kg

**Test Plot 36: WCDMA Band 5\_Head Left Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.178 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.78 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.195 W/kg

**SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.140 W/kg**

Maximum value of SAR (measured) = 0.179 W/kg

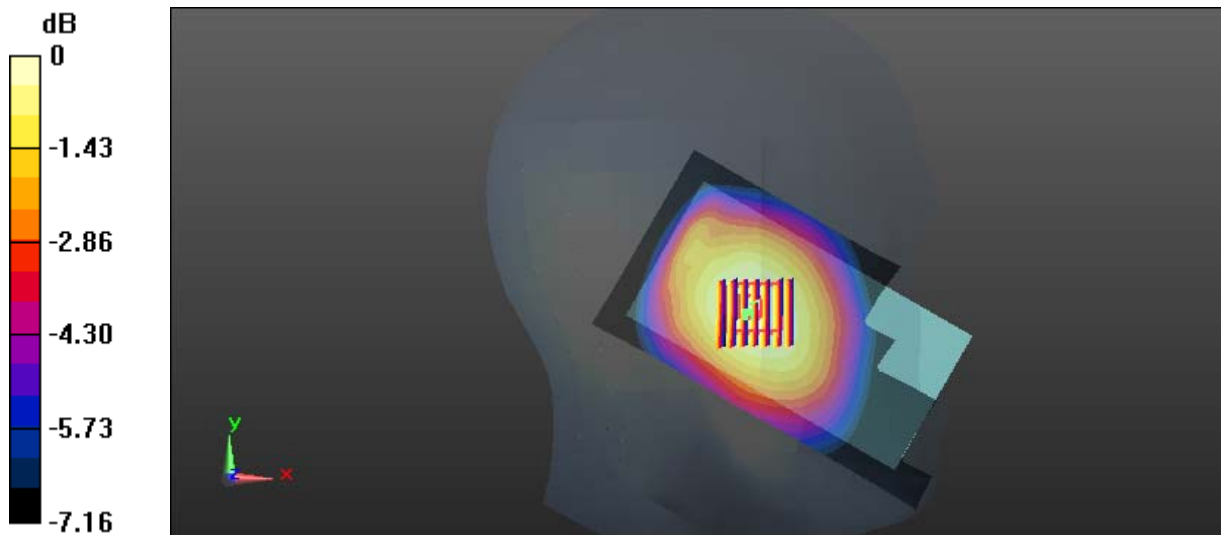

0 dB = 0.179 W/kg = -7.47 dBW/kg

**Test Plot 37: WCDMA Band 5\_Head Right Cheek\_Middle Channel****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.146 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.288 W/kg

**SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.166 W/kg**

Maximum value of SAR (measured) = 0.231 W/kg

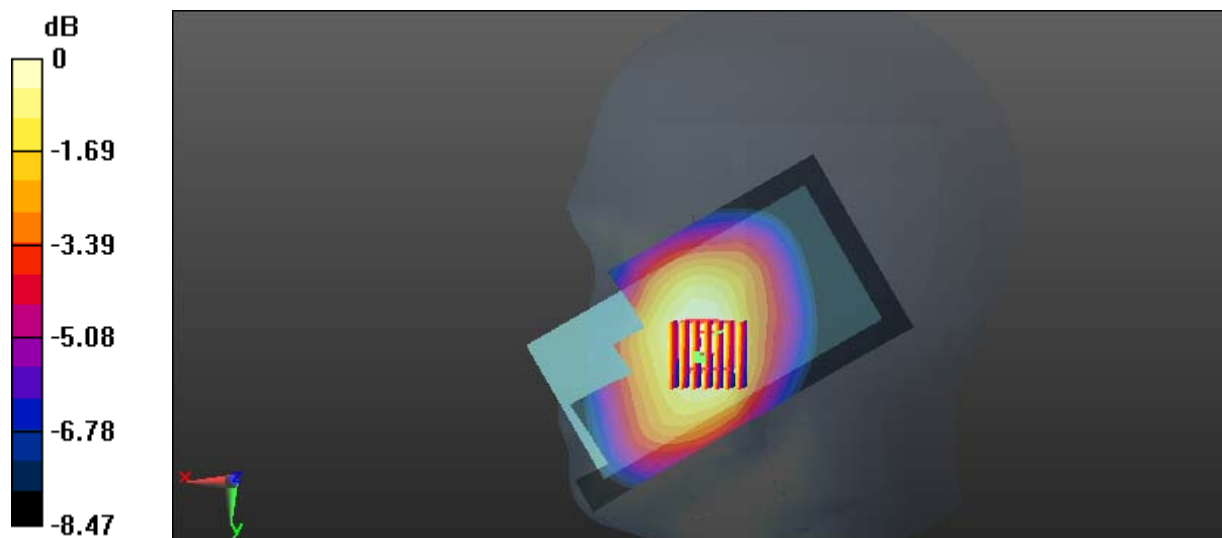

0 dB = 0.231 W/kg = -6.36 dBW/kg

**Test Plot 38: WCDMA Band 5\_Head Right Tilt\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.504$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.169 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.200 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.172 W/kg

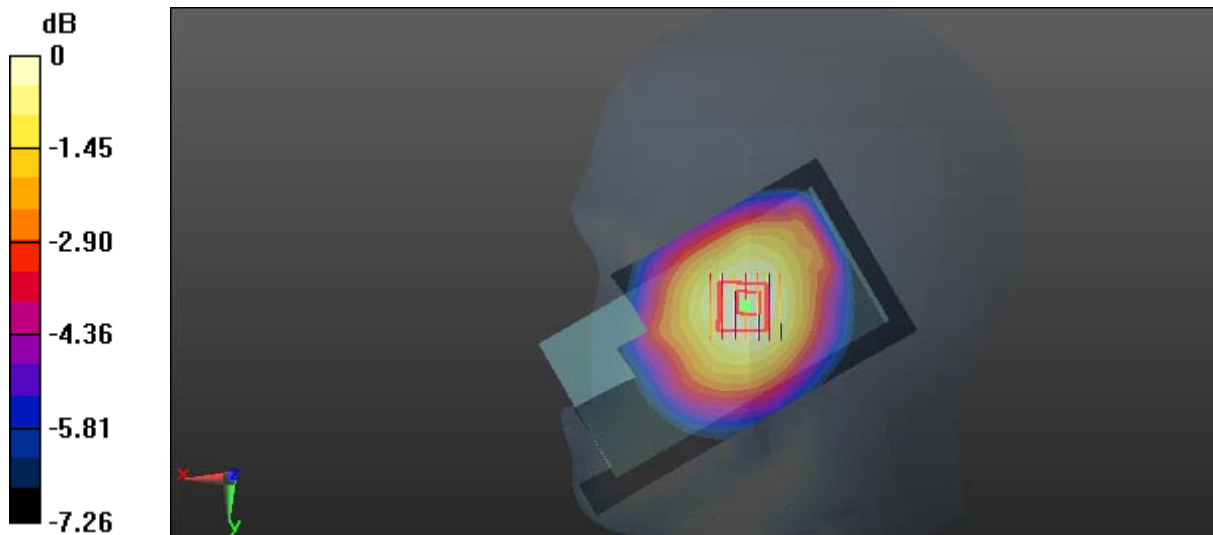

0 dB = 0.172 W/kg = -7.64 dBW/kg

**Test Plot 39: WCDMA Band 5\_Body Back\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.383 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.57 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.364 W/kg; SAR(10 g) = 0.283 W/kg**

Maximum value of SAR (measured) = 0.381 W/kg

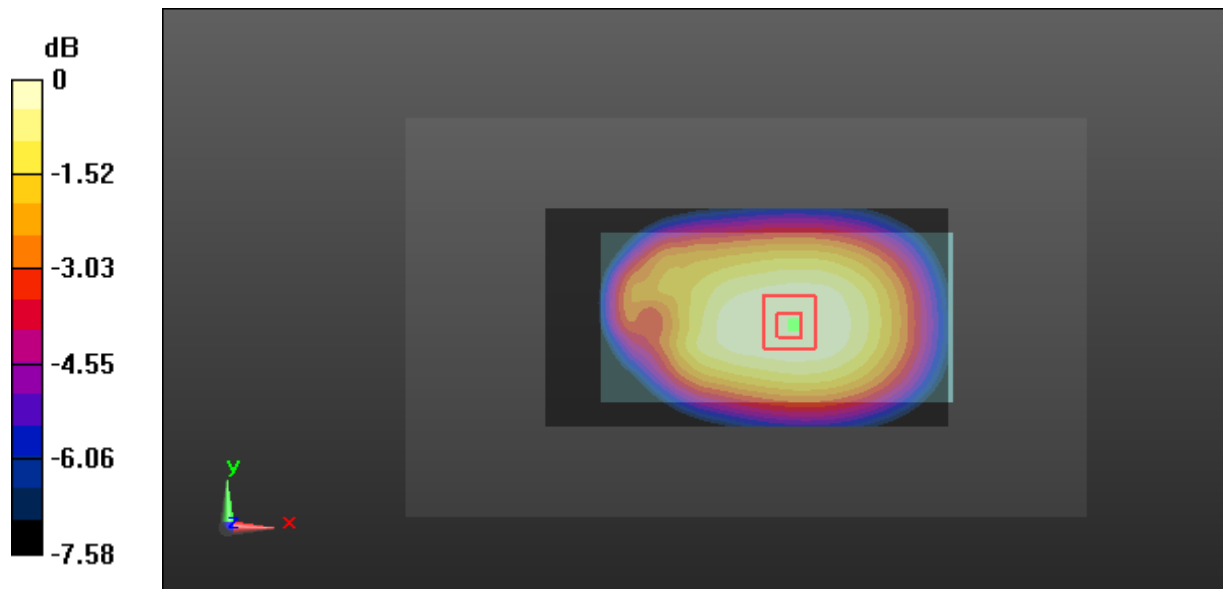

0 dB = 0.381 W/kg = -4.19 dBW/kg

**Test Plot 40 WCDMA Band 5\_Body Left\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.283 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.54 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.376 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 0.283 W/kg

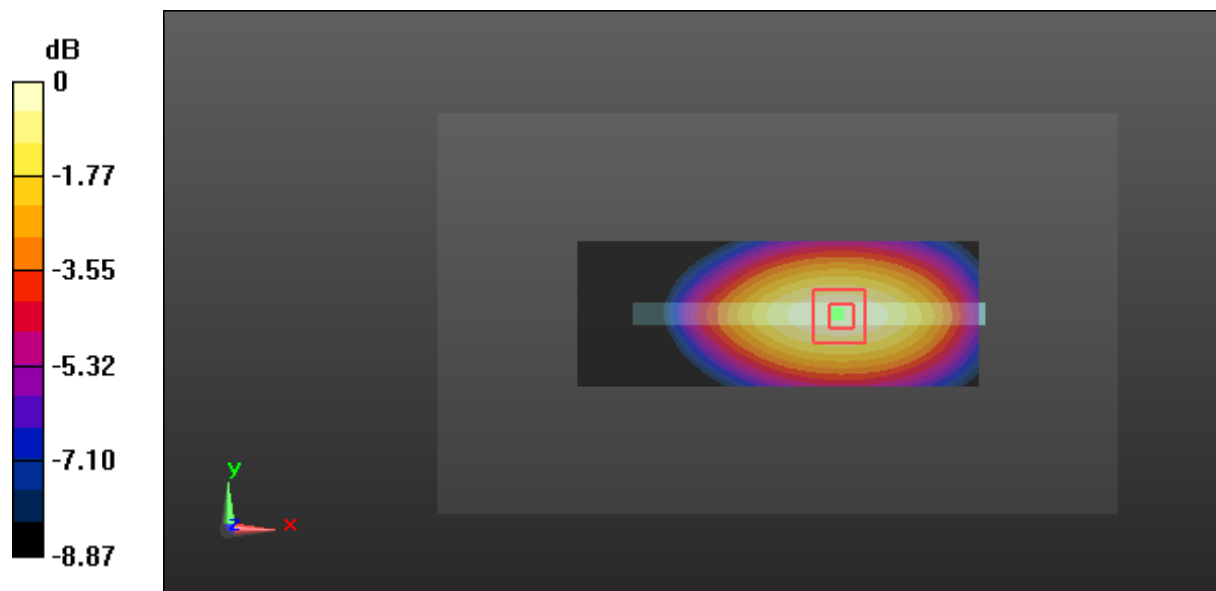

0 dB = 0.283 W/kg = -5.48 dBW/kg



**Test Plot 41 WCDMA Band 5\_Body Right\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.654 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.74 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.870 W/kg

**SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.420 W/kg**

Maximum value of SAR (measured) = 0.649 W/kg

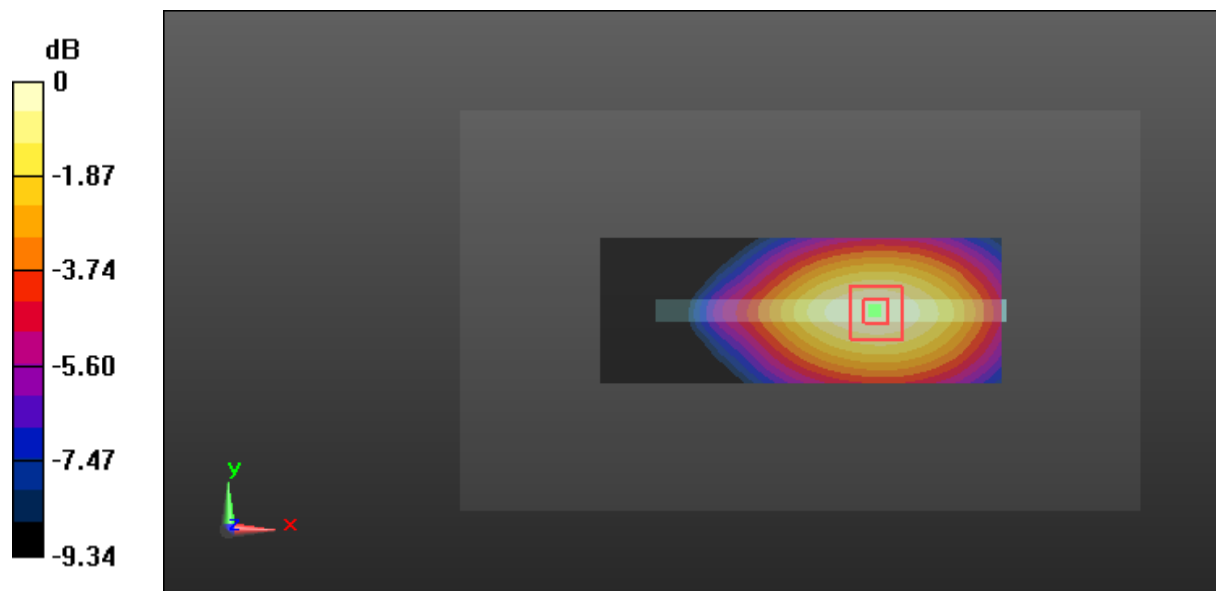

0 dB = 0.649 W/kg = -1.88 dBW/kg

**Test Plot 42 WCDMA Band 5\_Body Bottom\_Middle Channel**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.6 MHz;  $\sigma = 0.994$  S/m;  $\epsilon_r = 54.593$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0628 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.585 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.101 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0656 W/kg

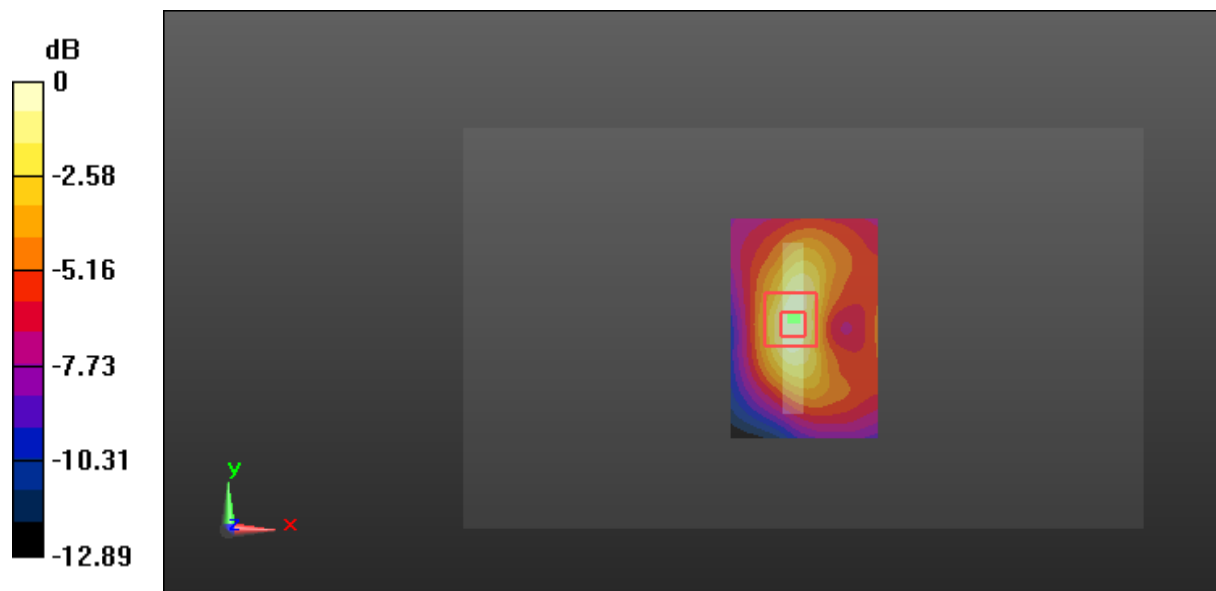

0 dB = 0.0656 W/kg = -11.83 dBW/kg

**Test Plot 43 LTE Band 2\_Head Left Cheek\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.244 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.979 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.369 W/kg  
**SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.146 W/kg**  
 Maximum value of SAR (measured) = 0.245 W/kg

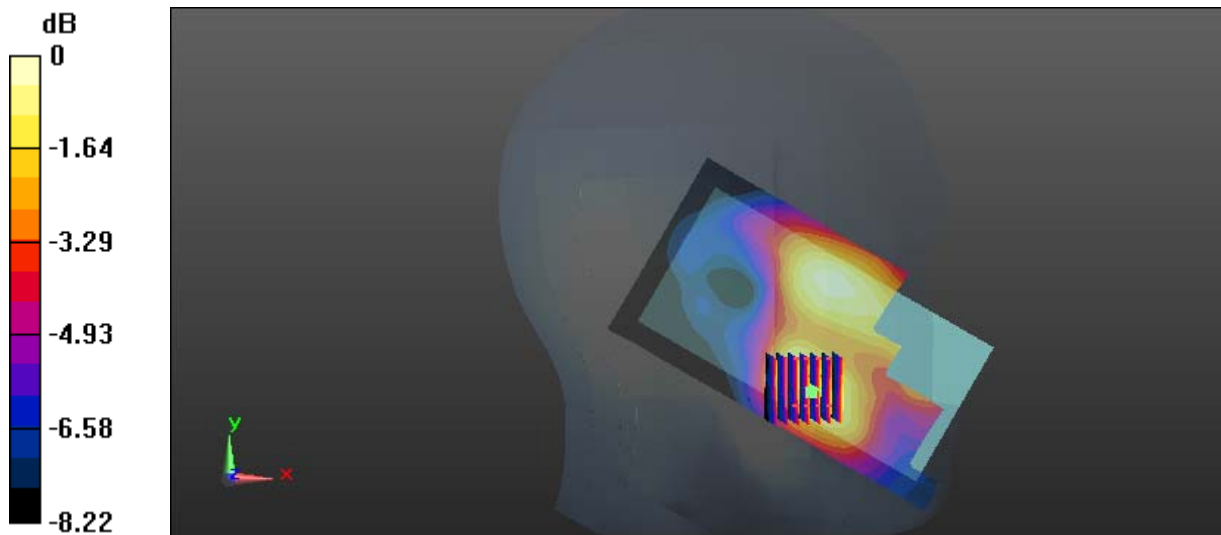

0 dB = 0.245 W/kg = -6.11 dBW/kg

**Test Plot 44 LTE Band 2\_Head Left Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.211 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.779 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.296 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.121 W/kg**  
 Maximum value of SAR (measured) = 0.204 W/kg

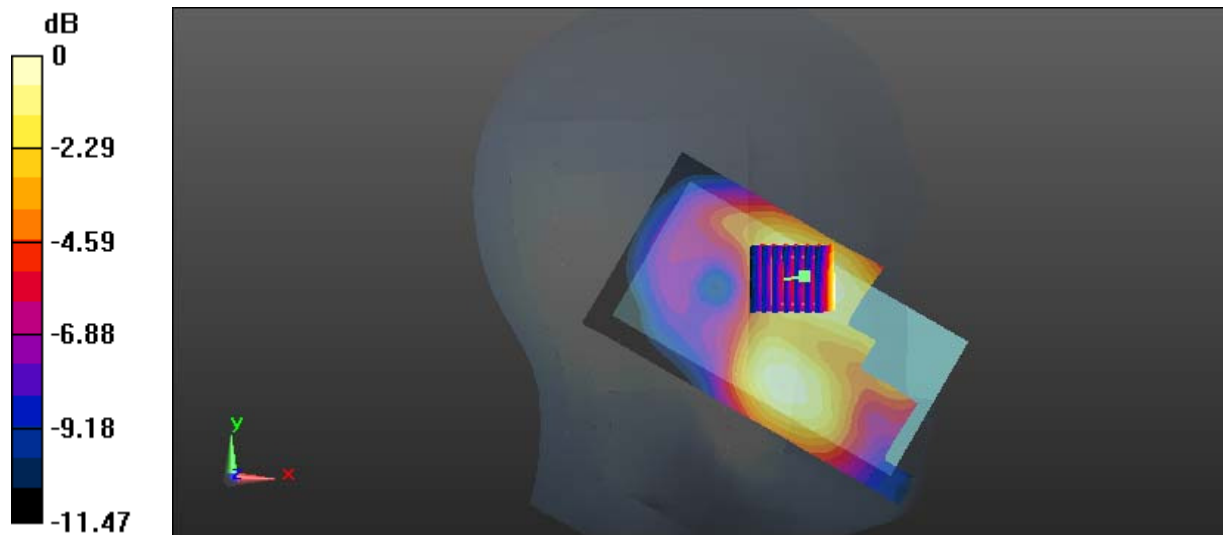

0 dB = 0.204 W/kg = -6.90 dBW/kg

**Test Plot 45LTE Band 2\_Head Left Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.129 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.616 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.197 W/kg  
**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.065 W/kg**  
 Maximum value of SAR (measured) = 0.119 W/kg

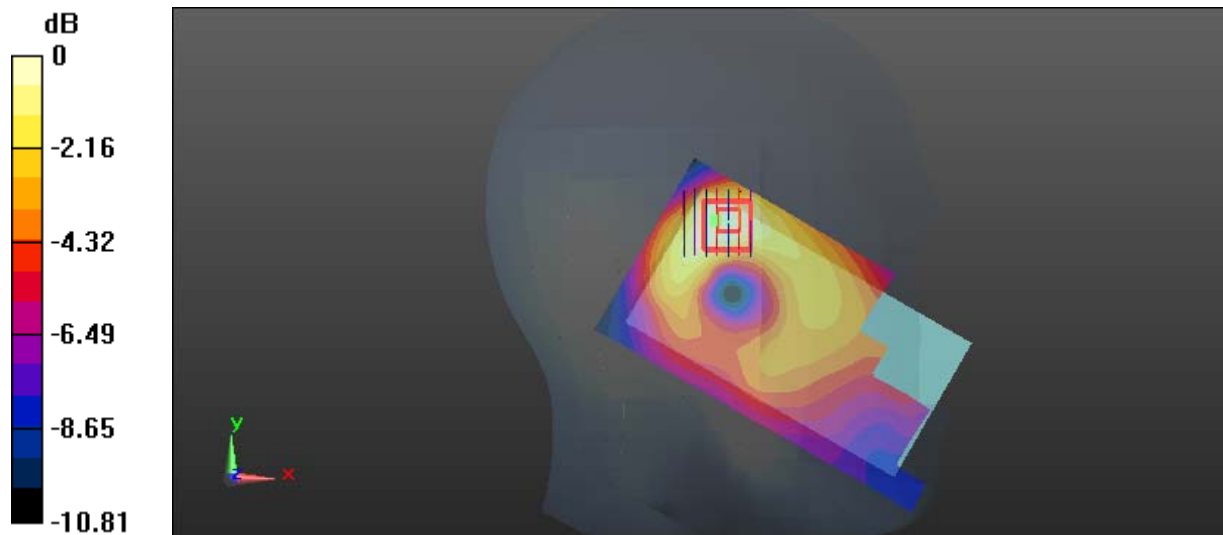

0 dB = 0.119 W/kg = -9.24 dBW/kg

**Test Plot 46: LTE Band 2\_Head Left Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.102 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.055 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.164 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.054 W/kg**  
 Maximum value of SAR (measured) = 0.0975 W/kg

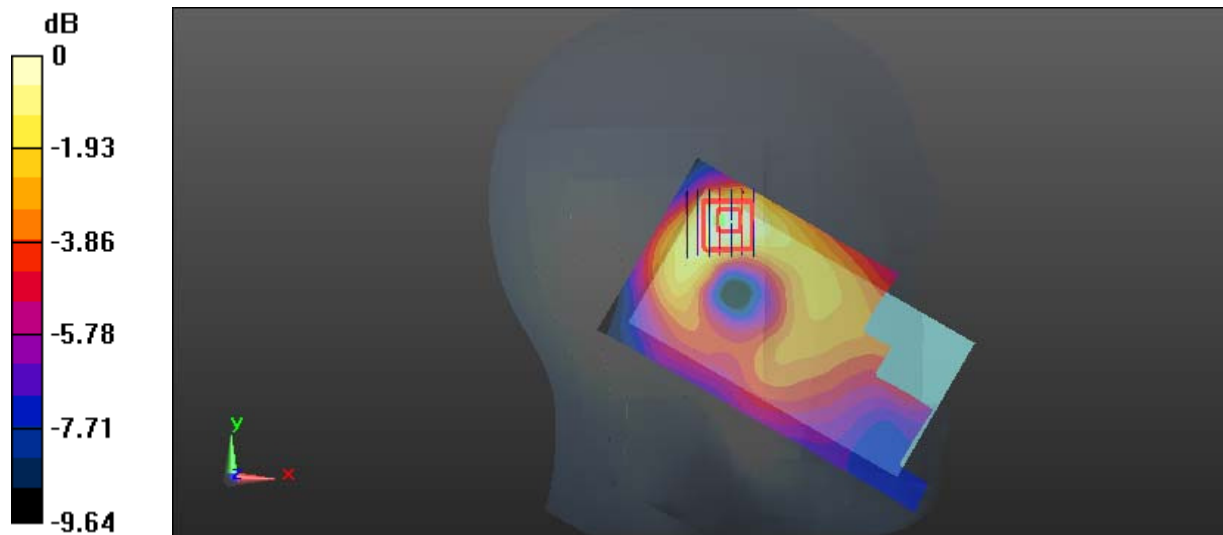

0 dB = 0.0975 W/kg = -10.11 dBW/kg

**Test Plot 47: LTE Band 2\_Head Right Cheek\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.451 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.117 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 0.699 W/kg  
**SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.247 W/kg**  
 Maximum value of SAR (measured) = 0.460 W/kg

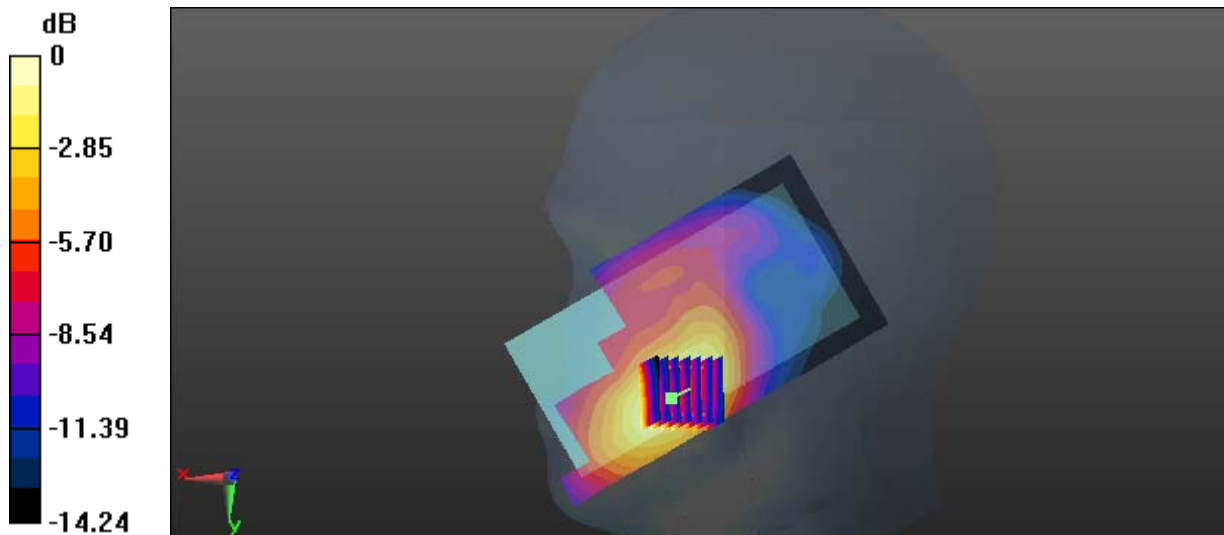

0 dB = 0.460 W/kg = -3.37 dBW/kg

**Test Plot 48: LTE Band 2\_Head Right Cheek\_Middle Channel\_50%RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.323 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.530 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.486 W/kg

**SAR(1 g) = 0.300 W/kg; SAR(10 g) = 0.181 W/kg**

Maximum value of SAR (measured) = 0.326 W/kg

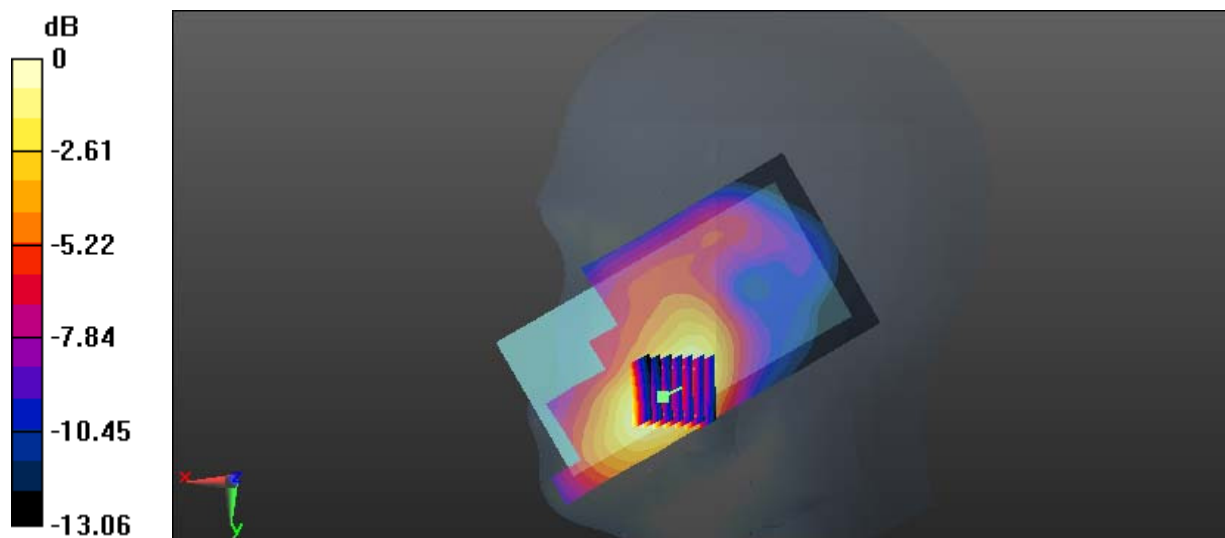

0 dB = 0.326 W/kg = -4.87 dBW/kg



**Test Plot 49: LTE Band 2\_Head Right Tilt\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0889 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.260 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.050 W/kg**

Maximum value of SAR (measured) = 0.0832 W/kg

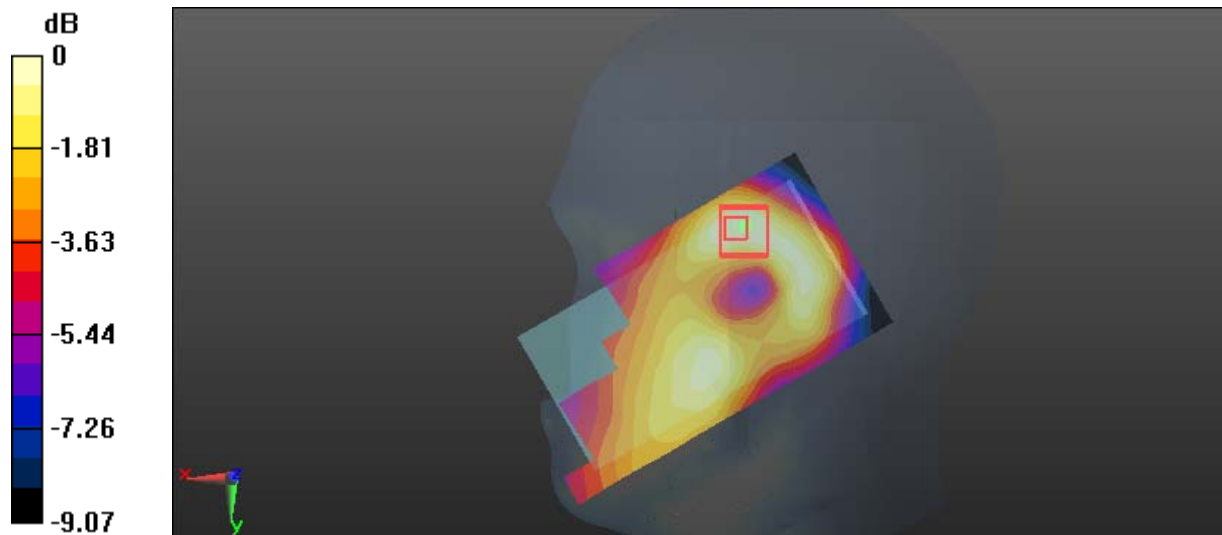

0 dB = 0.0832 W/kg = -10.80 dBW/kg

**Test Plot 50 LTE Band 2\_Head Right Tilt\_Middle Channel\_50%RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used: 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 40.055$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0779 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.700 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.104 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0730 W/kg

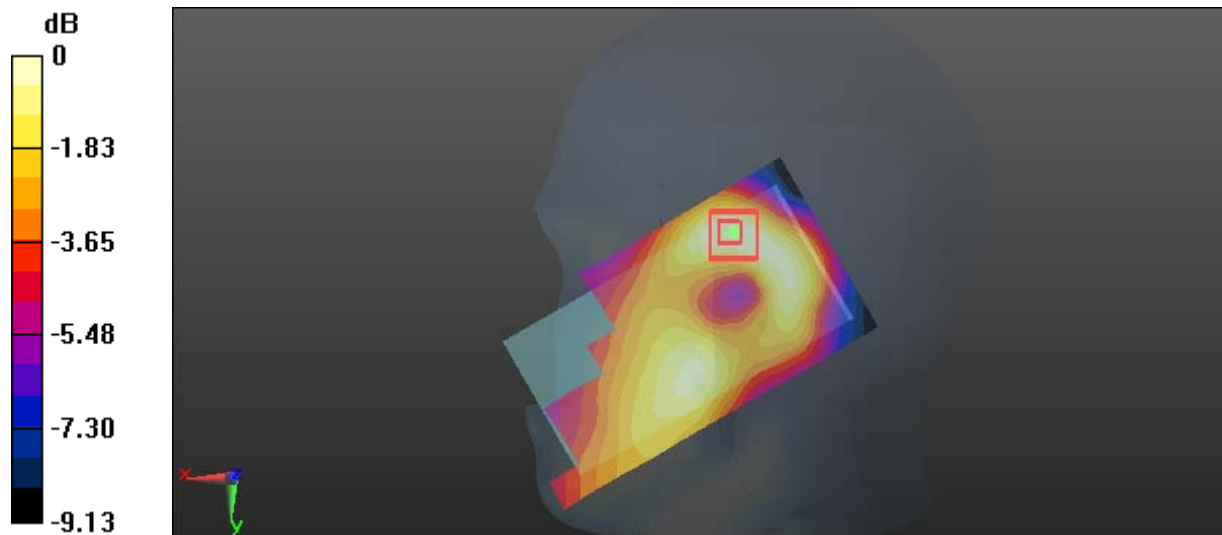

0 dB = 0.0730 W/kg = -11.37 dBW/kg

**Test Plot 51 LTE Band 2\_Body Back\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.720 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.59 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.333 W/kg**

Maximum value of SAR (measured) = 0.700 W/kg

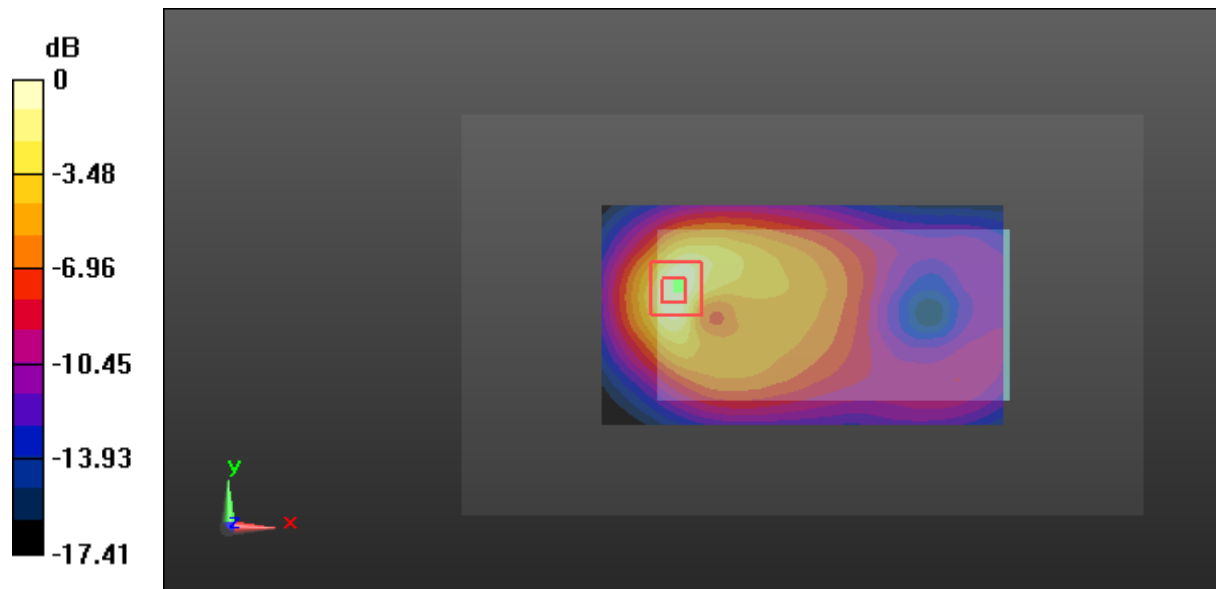

0 dB = 0.700 W/kg = -1.55 dBW/kg

**Test Plot 52 LTE Band 2\_Body Back\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.587 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.70 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.906 W/kg

**SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.274 W/kg**

Maximum value of SAR (measured) = 0.573 W/kg

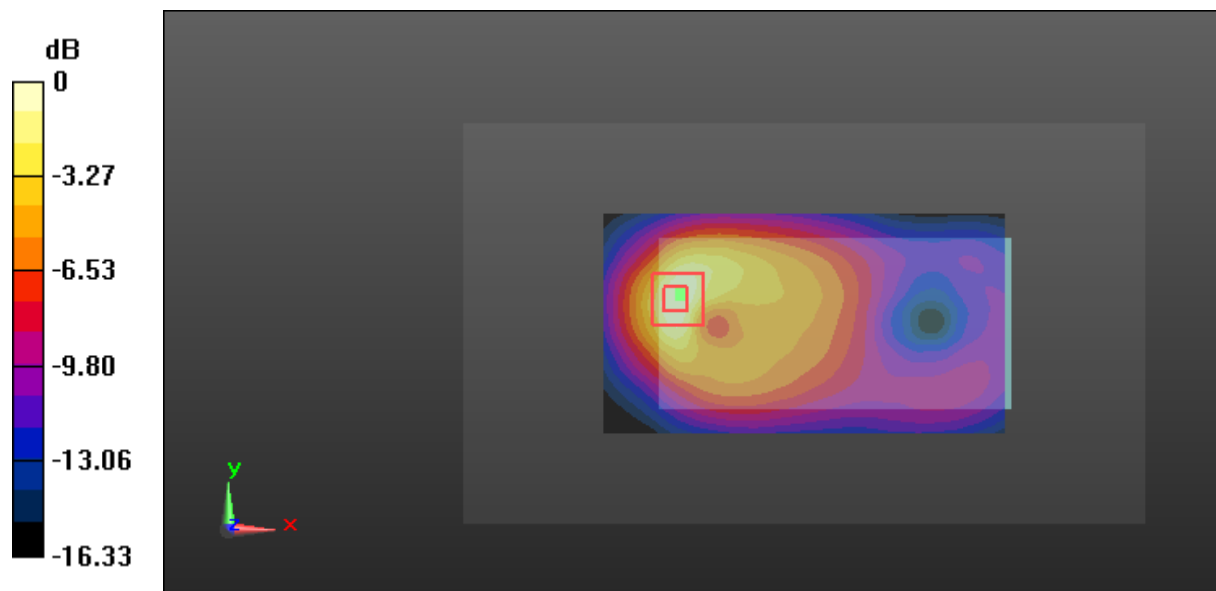

0 dB = 0.573 W/kg = -2.42 dBW/kg

**Test Plot 53 LTE Band 2\_Body Left\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.128 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.232 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.185 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.125 W/kg

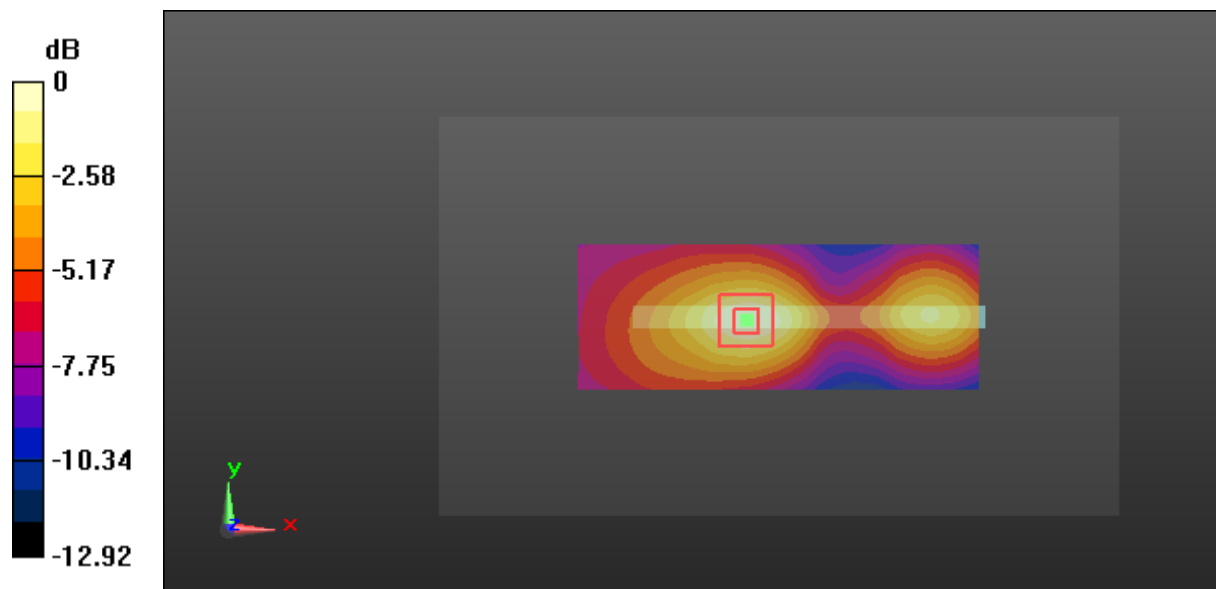

0 dB = 0.125 W/kg = -9.03 dBW/kg

**Test Plot 54: LTE Band 2\_Body Left\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.112 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.689 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.249 W/kg

**SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.110 W/kg

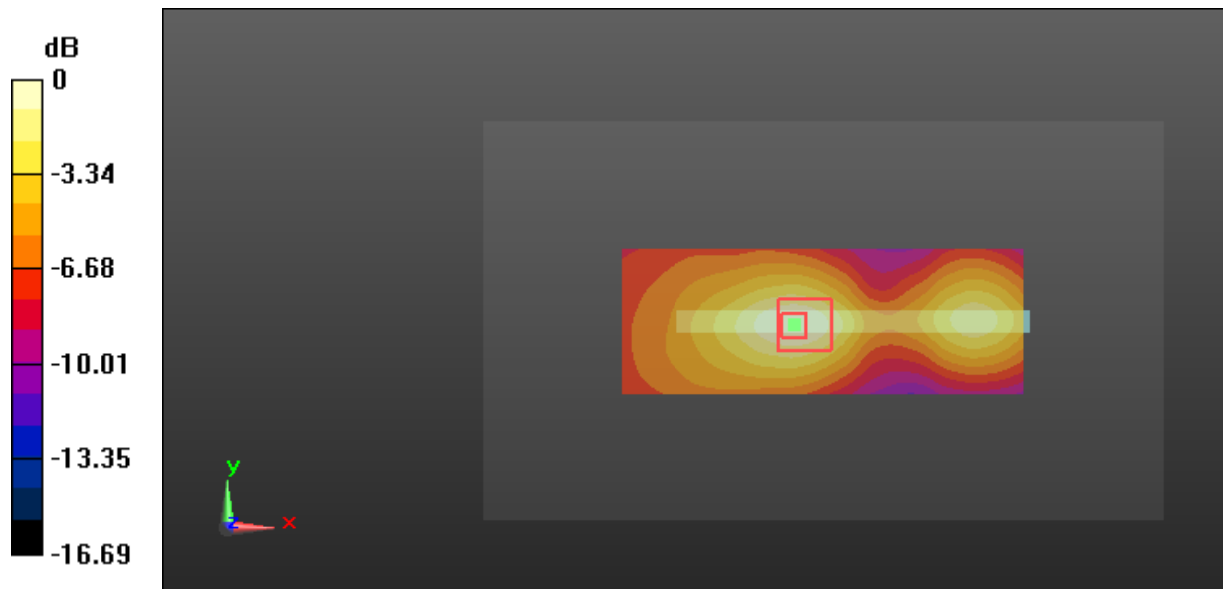

0 dB = 0.110 W/kg = -9.59 dBW/kg

**Test Plot 55: LTE Band 2\_Body Right\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541 \text{ S/m}$ ;  $\epsilon_r = 51.684$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.204 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.735 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.295 W/kg

**SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.197 W/kg

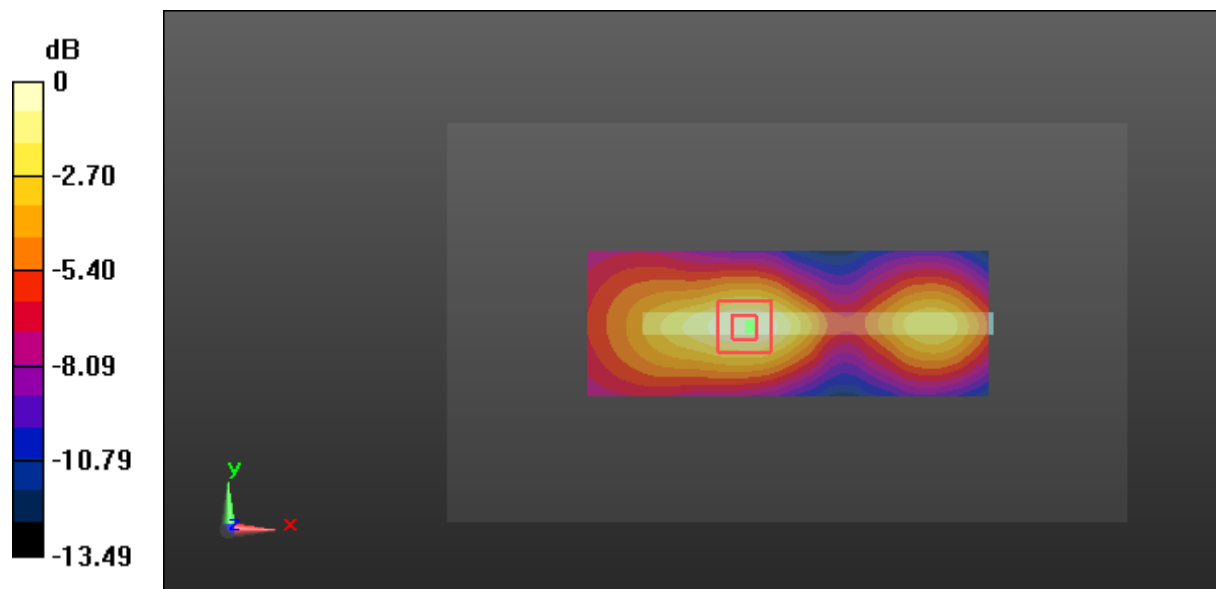

0 dB = 0.197 W/kg = -7.06 dBW/kg

**Test Plot 56: LTE Band 2\_Body Right\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.172 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.765 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.259 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.170 W/kg

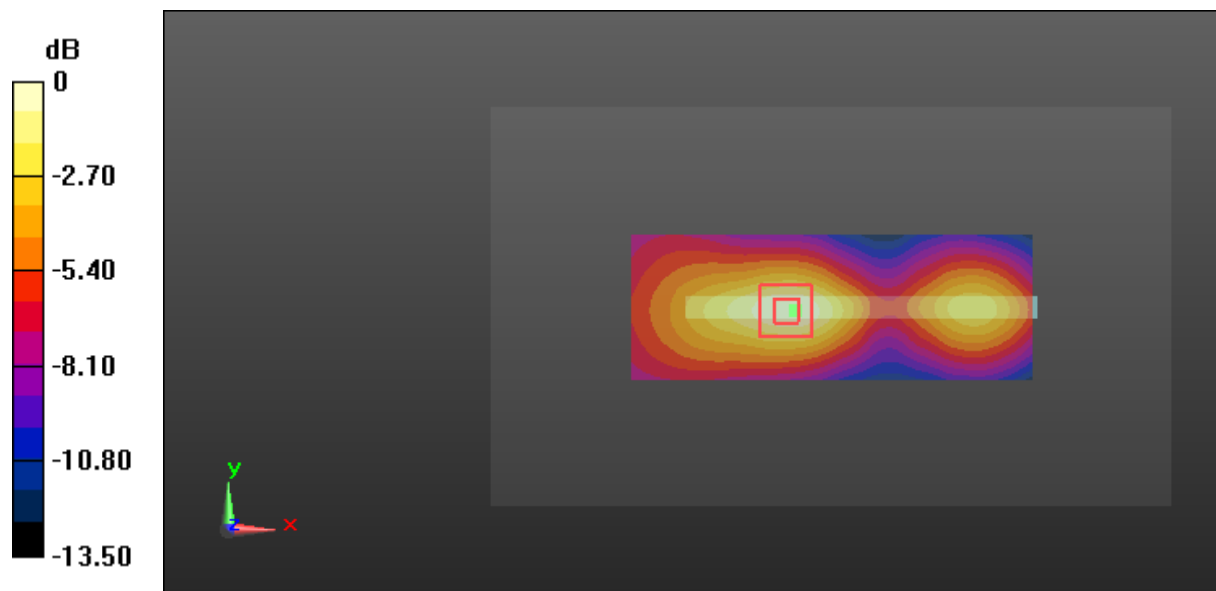

0 dB = 0.170 W/kg = -7.70 dBW/kg



**Test Plot 57: LTE Band 2\_Body Bottom\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.831 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 19.17 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 1.30 W/kg  
**SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.368 W/kg**  
 Maximum value of SAR (measured) = 0.831 W/kg

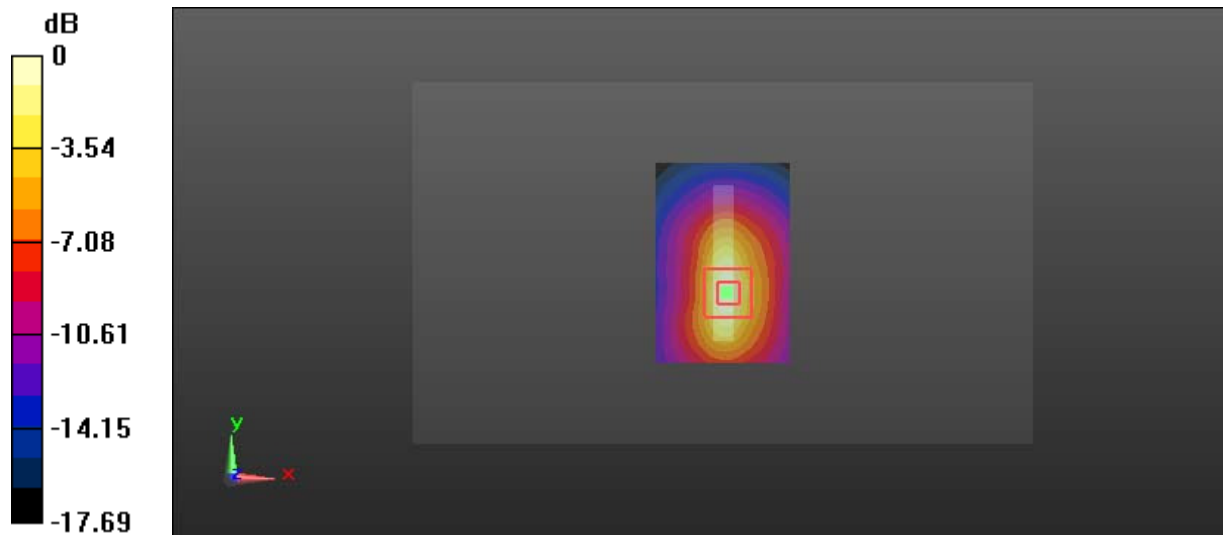

0 dB = 0.831 W/kg = -0.80 dBW/kg

**Test Plot 58: LTE Band 2\_Body Bottom\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1880 MHz;  $\sigma = 1.541$  S/m;  $\epsilon_r = 51.684$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.710 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.33 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.637 W/kg; SAR(10 g) = 0.321 W/kg**

Maximum value of SAR (measured) = 0.727 W/kg

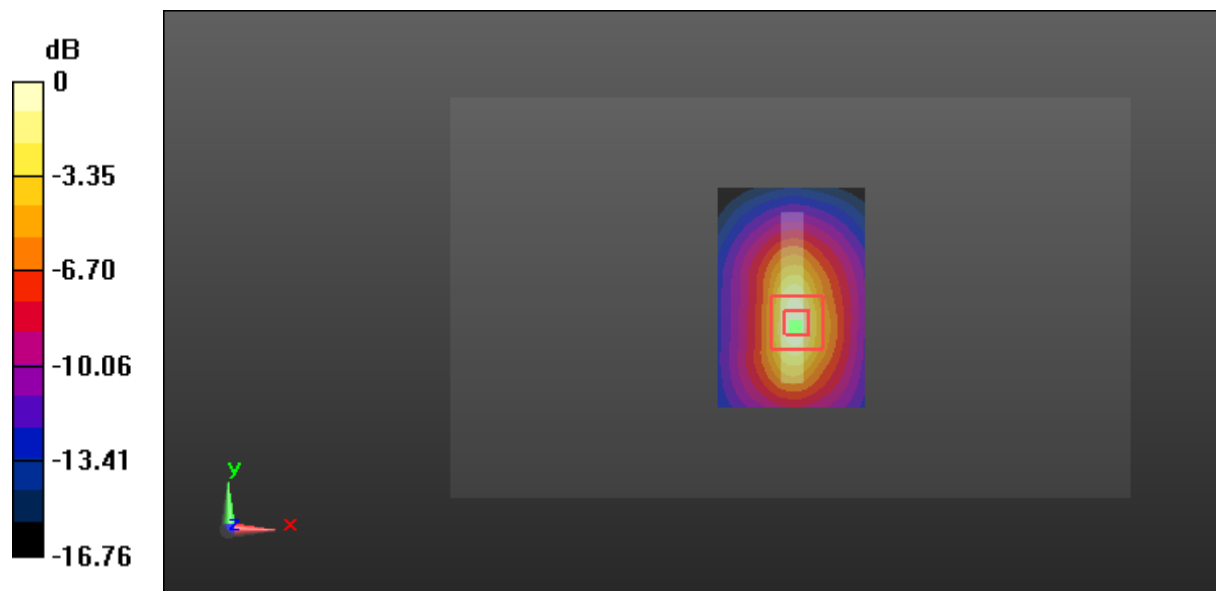

0 dB = 0.727 W/kg = -1.38 dBW/kg

**Test Plot 59: LTE Band 4\_Head Left Cheek\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.362 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.743 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.510 W/kg

**SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.217 W/kg**

Maximum value of SAR (measured) = 0.366 W/kg

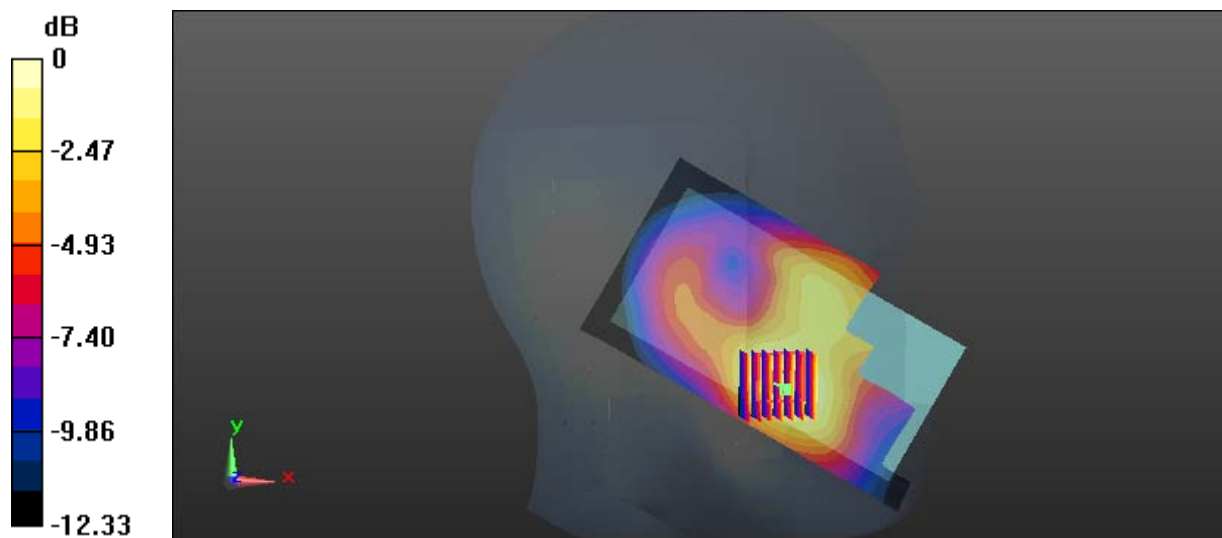

0 dB = 0.366 W/kg = -4.37 dBW/kg

**Test Plot 60 LTE Band 4\_Head Left Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.281 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.431 V/m; Power Drift = 0.10 dB  
 Peak SAR (extrapolated) = 0.393 W/kg  
**SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.168 W/kg**  
 Maximum value of SAR (measured) = 0.281 W/kg

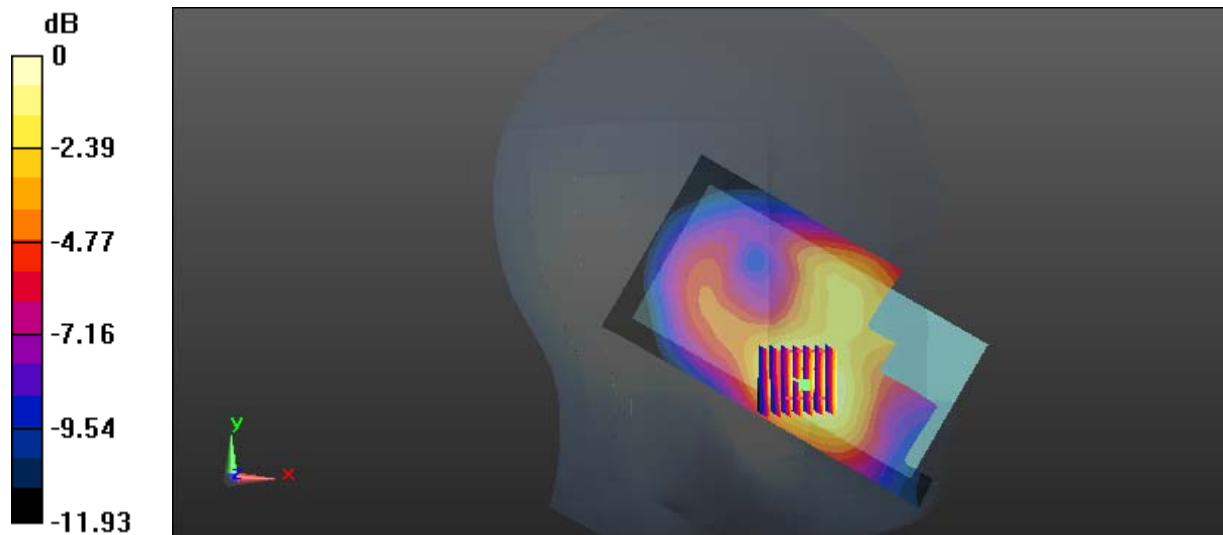

0 dB = 0.281 W/kg = -5.51 dBW/kg

**Test Plot 61#: LTE Band 4\_Head Left Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.175 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.93 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.239 W/kg

**SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.098 W/kg**

Maximum value of SAR (measured) = 0.165 W/kg

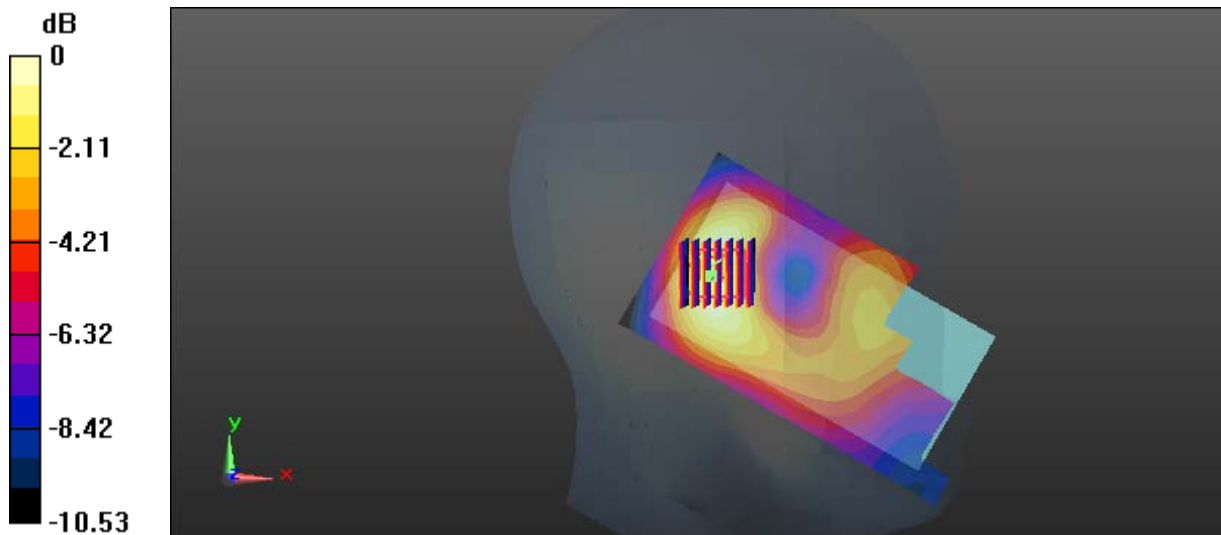

0 dB = 0.165 W/kg = -7.83 dBW/kg

**Test Plot 62#: LTE Band 4\_Head Left Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.134 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.583 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 0.190 W/kg  
**SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.078 W/kg**  
 Maximum value of SAR (measured) = 0.132 W/kg

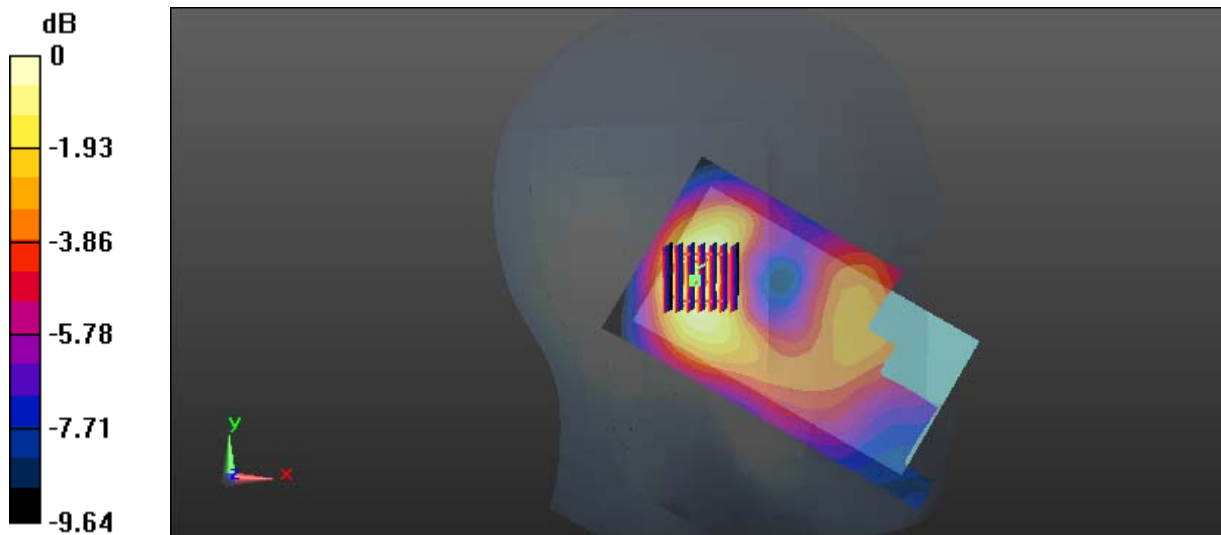

0 dB = 0.132 W/kg = -8.79 dBW/kg

**Test Plot 63#: LTE Band 4\_Head Right Cheek\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.555 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.542 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.776 W/kg  
**SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.321 W/kg**  
 Maximum value of SAR (measured) = 0.547 W/kg

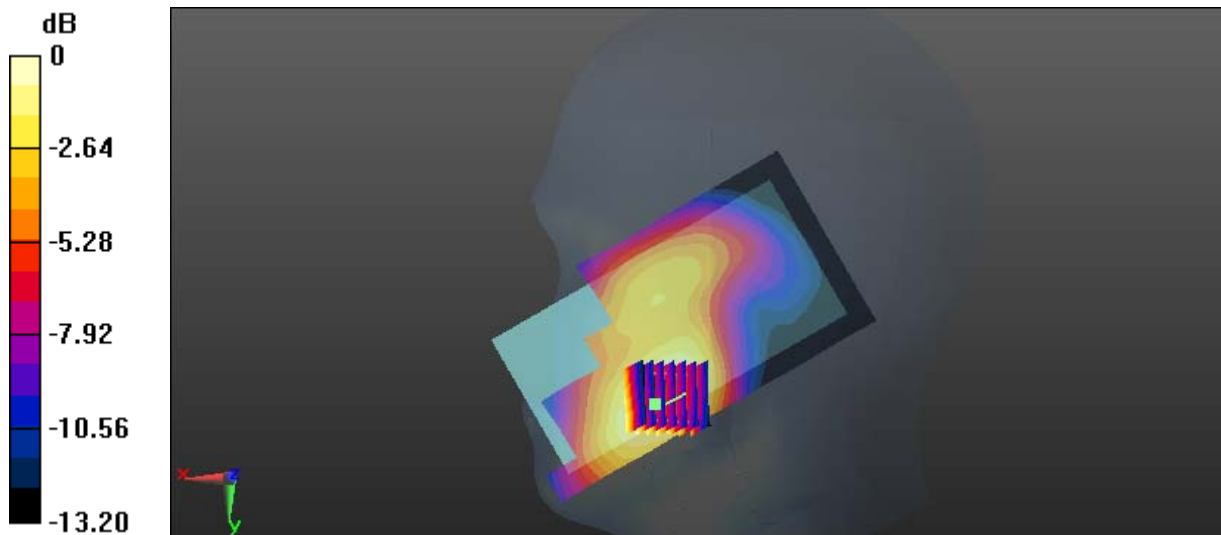

0 dB = 0.547 W/kg = -2.62 dBW/kg

**Test Plot 64#: LTE Band 4\_Head Right Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.444 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.734 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.615 W/kg  
**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.257 W/kg**  
 Maximum value of SAR (measured) = 0.436 W/kg

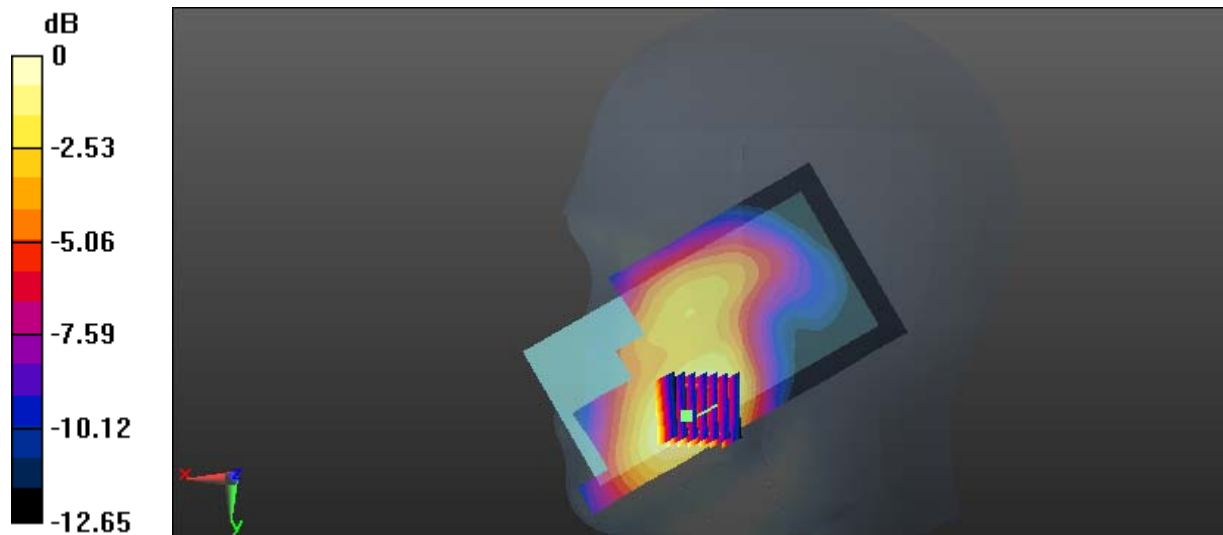

0 dB = 0.436 W/kg = -3.61 dBW/kg



**Test Plot 65#: LTE Band 4\_Head Right Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.235 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.15 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.315 W/kg

**SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.130 W/kg**

Maximum value of SAR (measured) = 0.222 W/kg

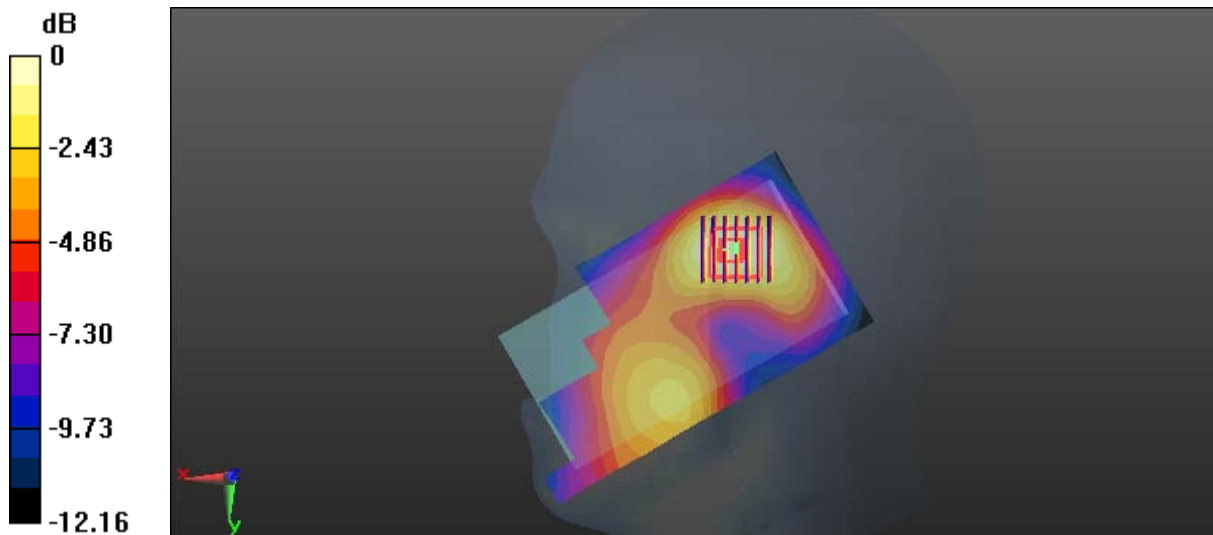

0 dB = 0.222 W/kg = -6.54 dBW/kg

**Test Plot 66#: LTE Band 4\_Head Right Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 39.646$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.183 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.029 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.247 W/kg  
**SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.103 W/kg**  
 Maximum value of SAR (measured) = 0.178 W/kg

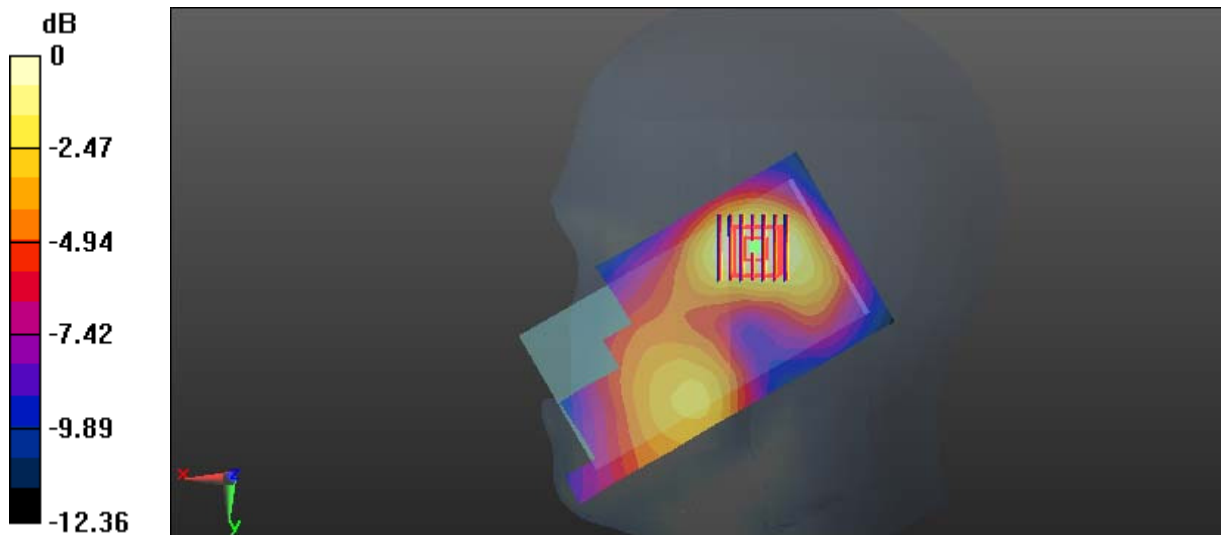

0 dB = 0.178 W/kg = -7.50 dBW/kg

**Test Plot 67#: LTE Band 4\_Body Back\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.684 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.66 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.00 W/kg

**SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 0.666 W/kg

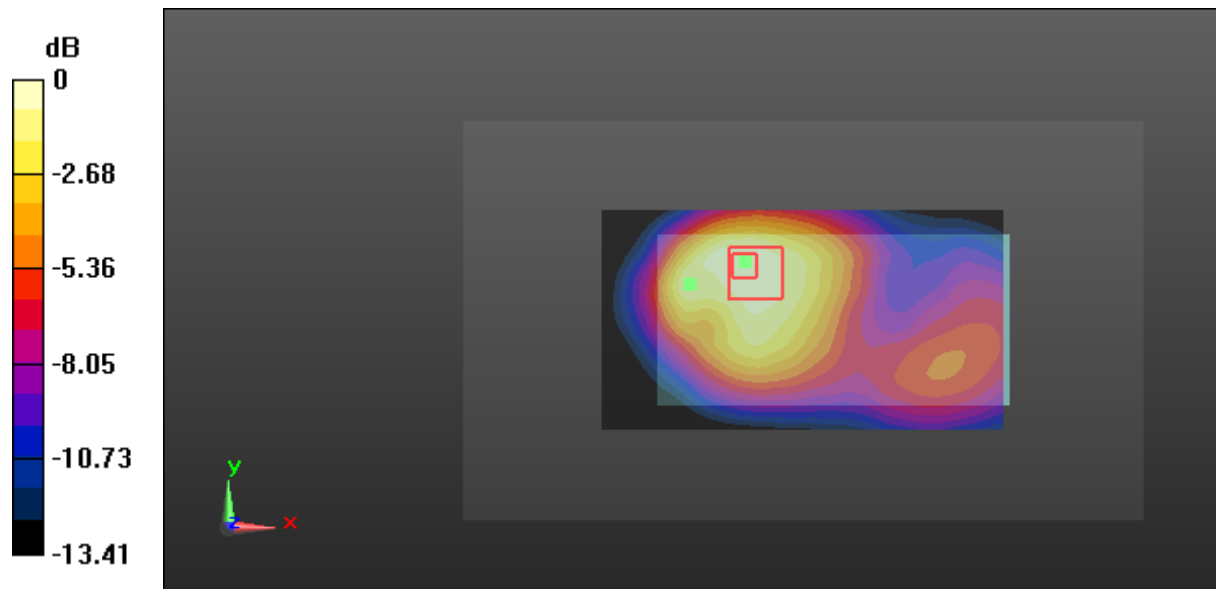

0 dB = 0.666 W/kg = -1.77 dBW/kg

**Test Plot 68#: LTE Band 4\_Body Back\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.537 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.88 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.788 W/kg

**SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.307 W/kg**

Maximum value of SAR (measured) = 0.528 W/kg

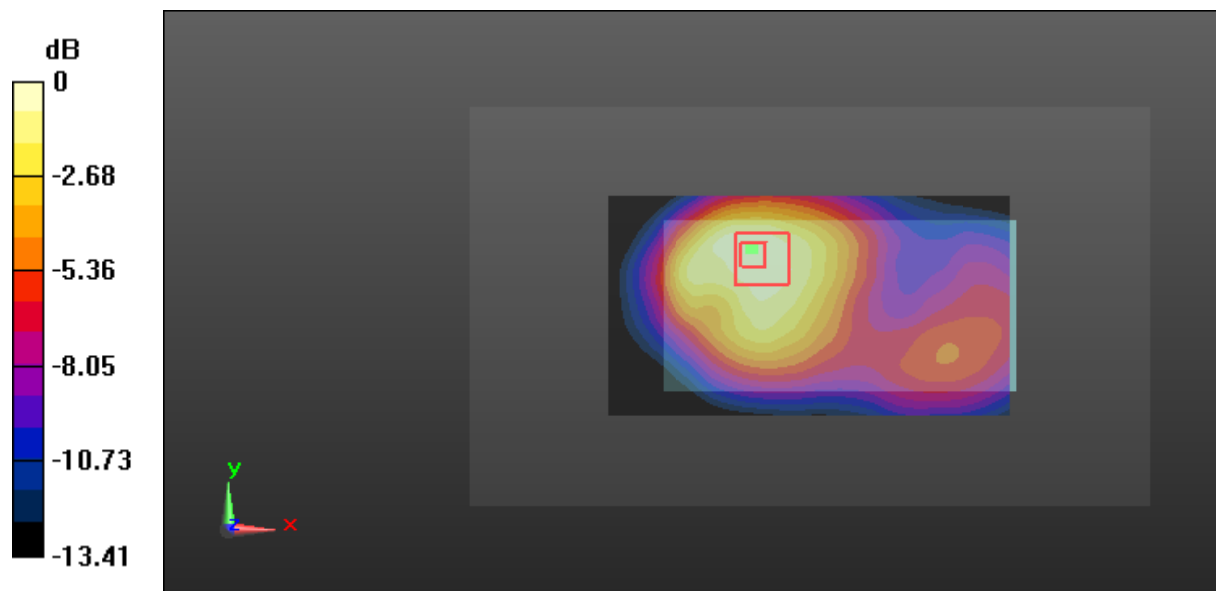

0 dB = 0.528 W/kg = -2.77 dBW/kg

**Test Plot 69#: LTE Band 4\_Body Left\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.157 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.902 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

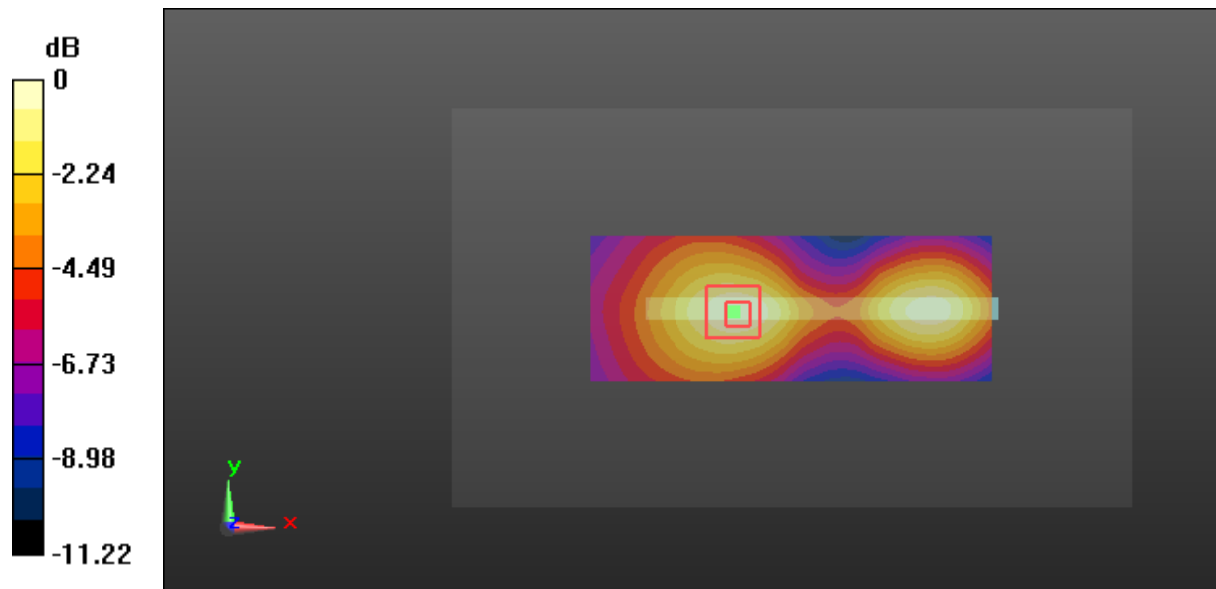

0 dB = 0.158 W/kg = -8.01 dBW/kg

**Test Plot 70#: LTE Band 4\_Body Left\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.129 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.167 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.180 W/kg

**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.074 W/kg**

Maximum value of SAR (measured) = 0.128 W/kg

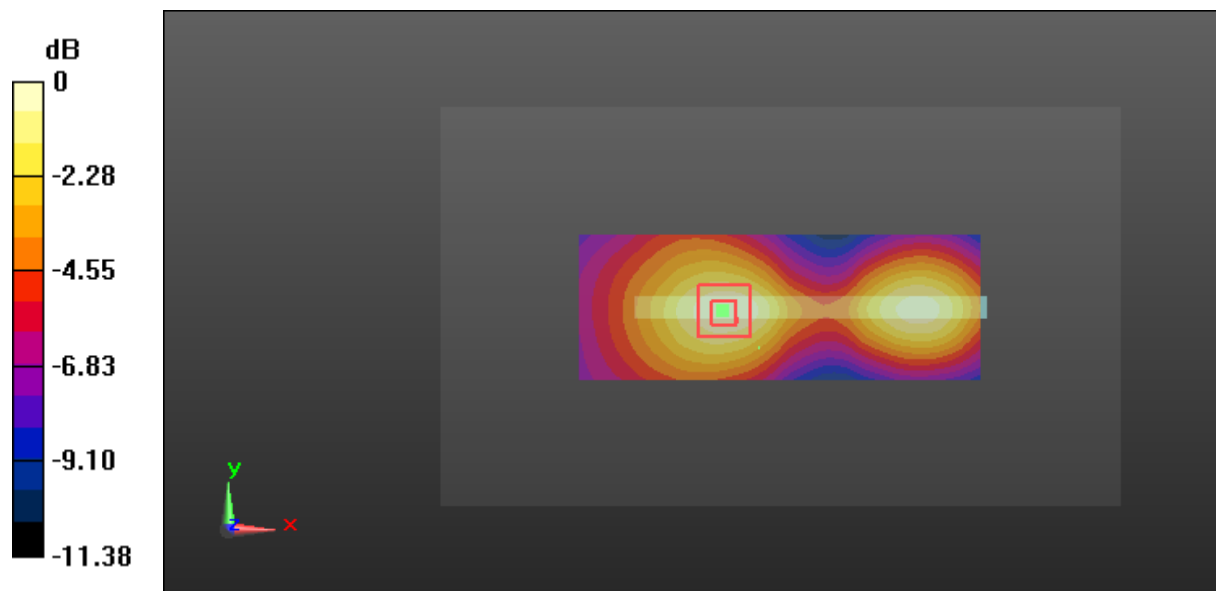

0 dB = 0.128 W/kg = -8.93 dBW/kg

**Test Plot 71#: LTE Band 4\_Body Right\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.205 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.19 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.478 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.203 W/kg

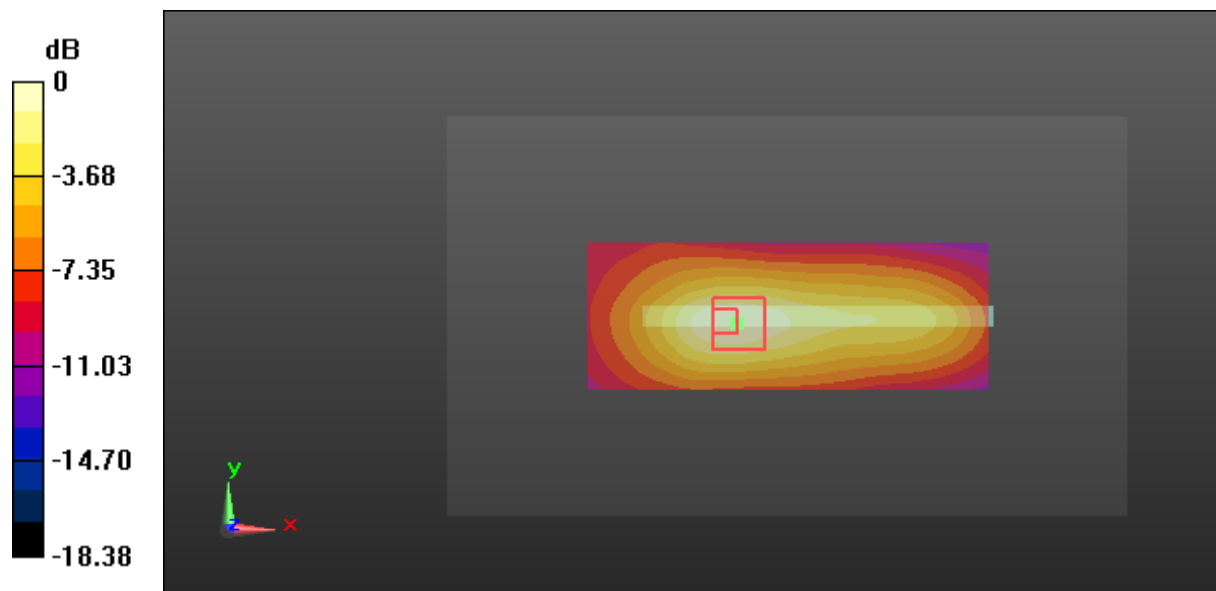

0 dB = 0.203 W/kg = -6.93 dBW/kg

**Test Plot 72#: LTE Band 4\_Body Right\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.143 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.237 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.165 W/kg

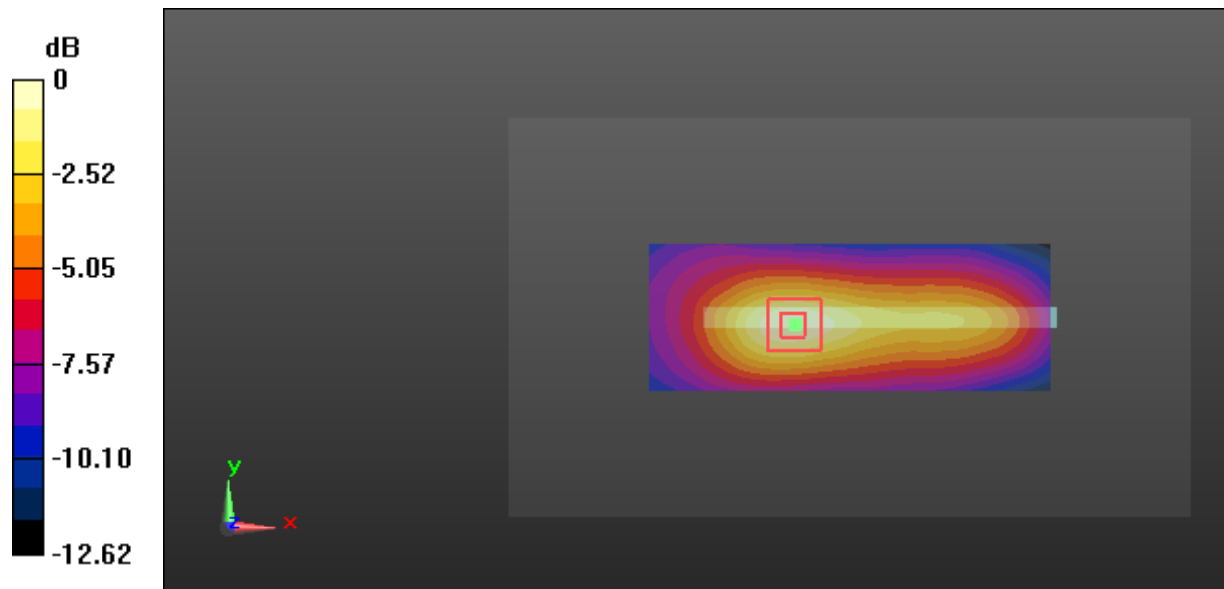

0 dB = 0.165 W/kg = -7.83 dBW/kg



**Test Plot 73#: LTE Band 4\_Body Bottom\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.493 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.63 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.813 W/kg

**SAR(1 g) = 0.473 W/kg; SAR(10 g) = 0.248 W/kg**

Maximum value of SAR (measured) = 0.539 W/kg

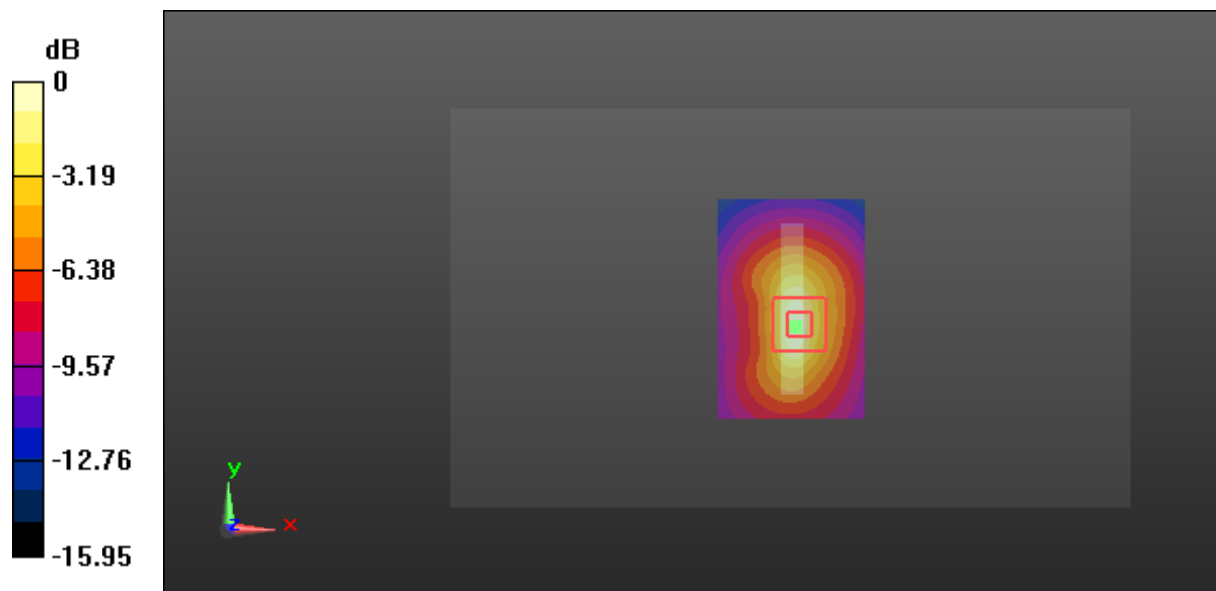

0 dB = 0.539 W/kg = -2.68 dBW/kg

**Test Plot 74#: LTE Band 4\_Body Bottom\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 1732.5 MHz;  $\sigma = 1.499$  S/m;  $\epsilon_r = 53.445$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.376 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.38 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.626 W/kg

**SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.411 W/kg

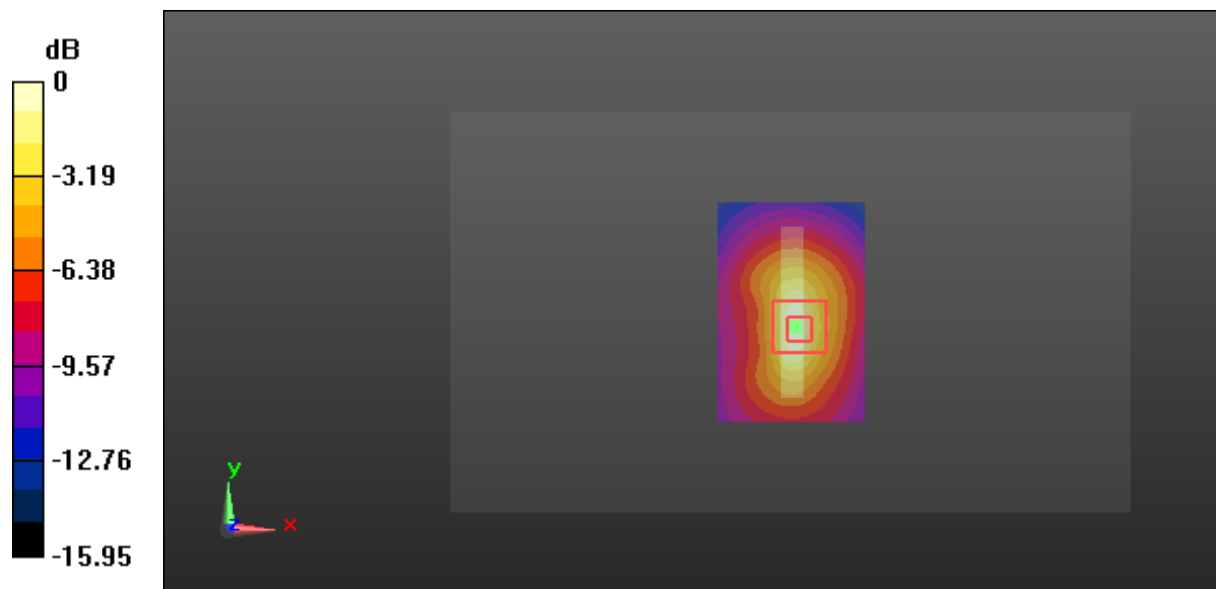

0 dB = 0.411 W/kg = -3.86 dBW/kg

**Test Plot 75#: LTE Band 5\_Head Left Cheek\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.363 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.018 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.408 W/kg

**SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 0.361 W/kg

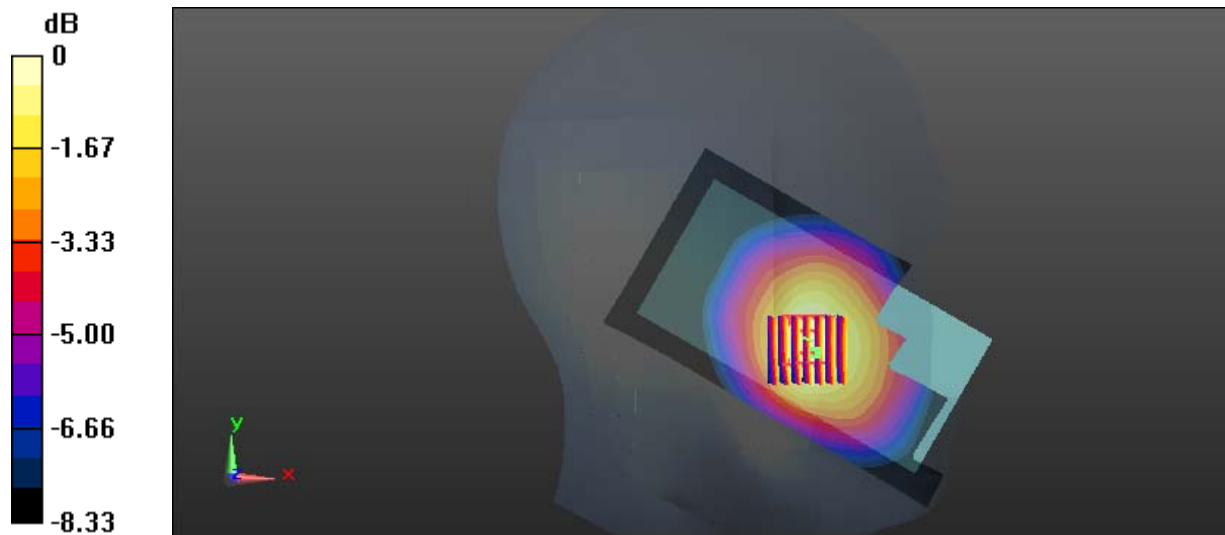

0 dB = 0.361 W/kg = -4.42 dBW/kg

**Test Plot 76#: LTE Band 5\_Head Left Cheek\_Middle Channel\_50%RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.286 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.484 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.324 W/kg

**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.207 W/kg**

Maximum value of SAR (measured) = 0.290 W/kg

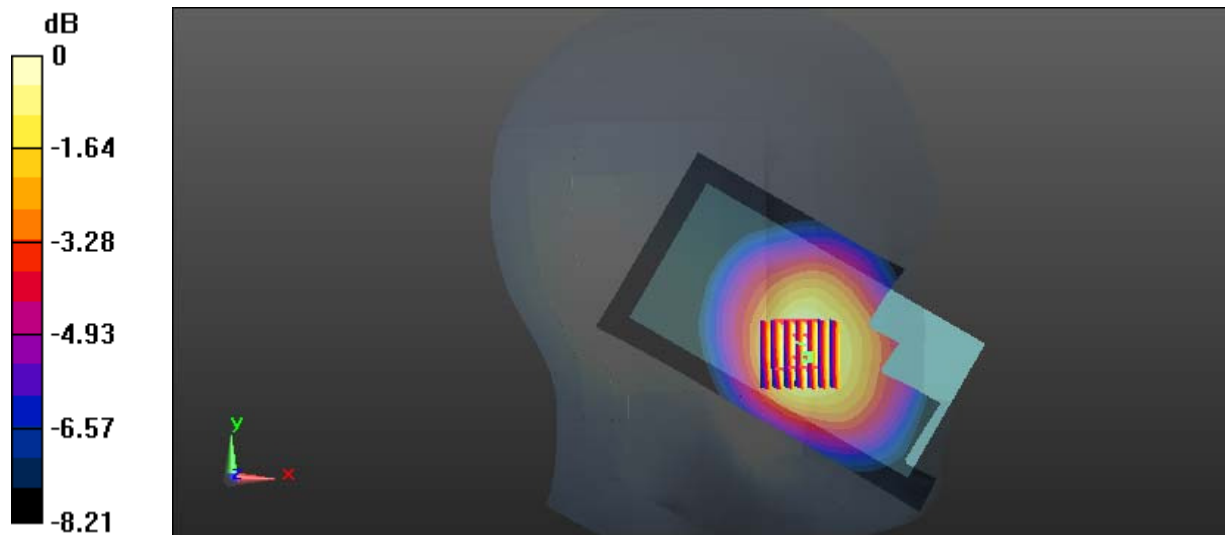

0 dB = 0.290 W/kg = -5.38 dBW/kg

**Test Plot 77#: LTE Band 5\_Head Left Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.217 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.72 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 0.222 W/kg  
**SAR(1 g) = 0.208 W/kg; SAR(10 g) = 0.173 W/kg**  
 Maximum value of SAR (measured) = 0.215 W/kg

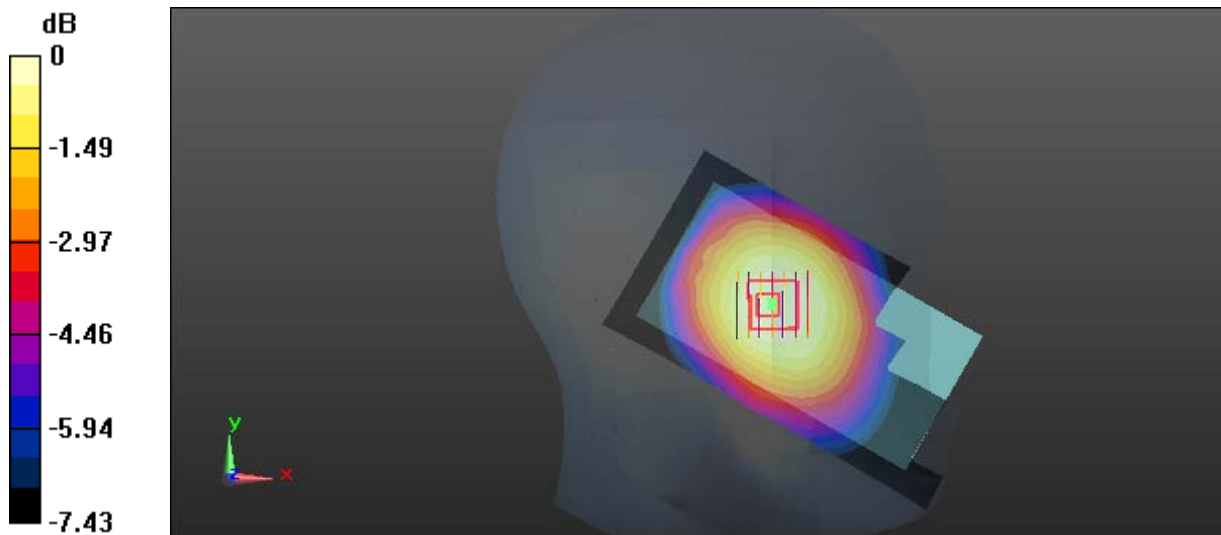

0 dB = 0.215 W/kg = -6.68 dBW/kg

**Test Plot 78#: LTE Band 5\_Head Left Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.173 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.926 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.191 W/kg  
**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.147 W/kg**  
 Maximum value of SAR (measured) = 0.185 W/kg

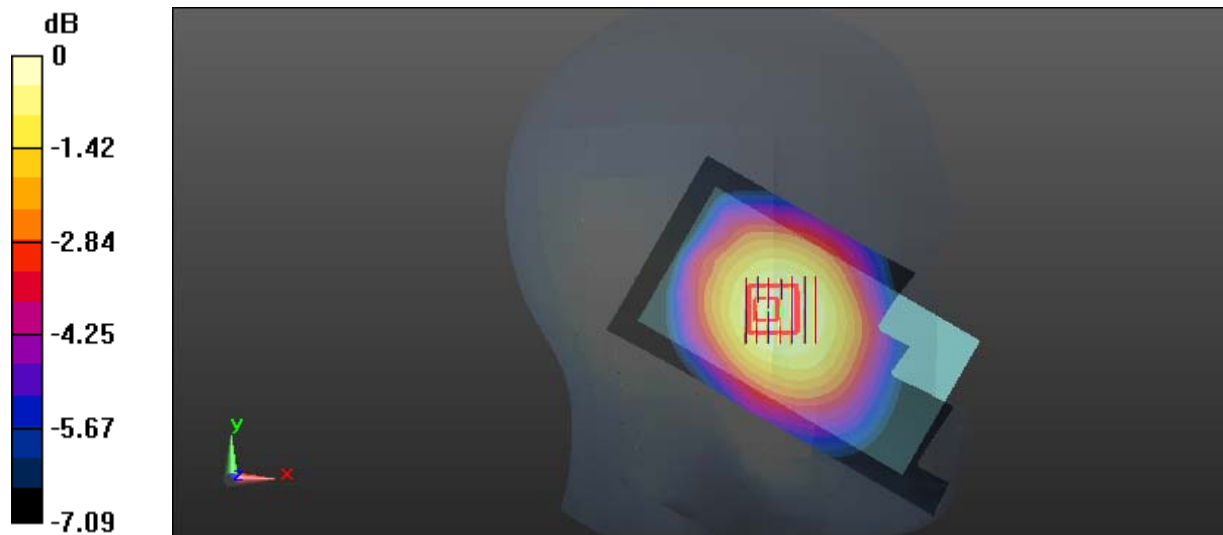

0 dB = 0.185 W/kg = -7.33 dBW/kg

**Test Plot 79#: LTE Band 5\_Head Right Cheek\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.887 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.315 W/kg

**SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 0.259 W/kg

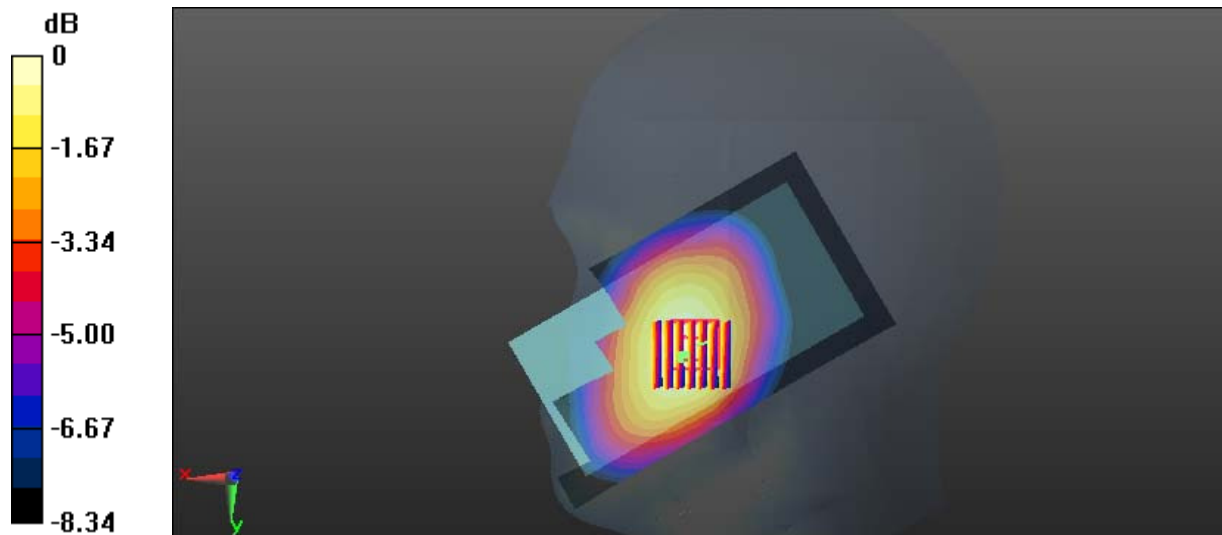

0 dB = 0.259 W/kg = -5.87 dBW/kg

**Test Plot 80#: LTE Band 5\_Head Right Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.216 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.675 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.157 W/kg**  
 Maximum value of SAR (measured) = 0.233 W/kg

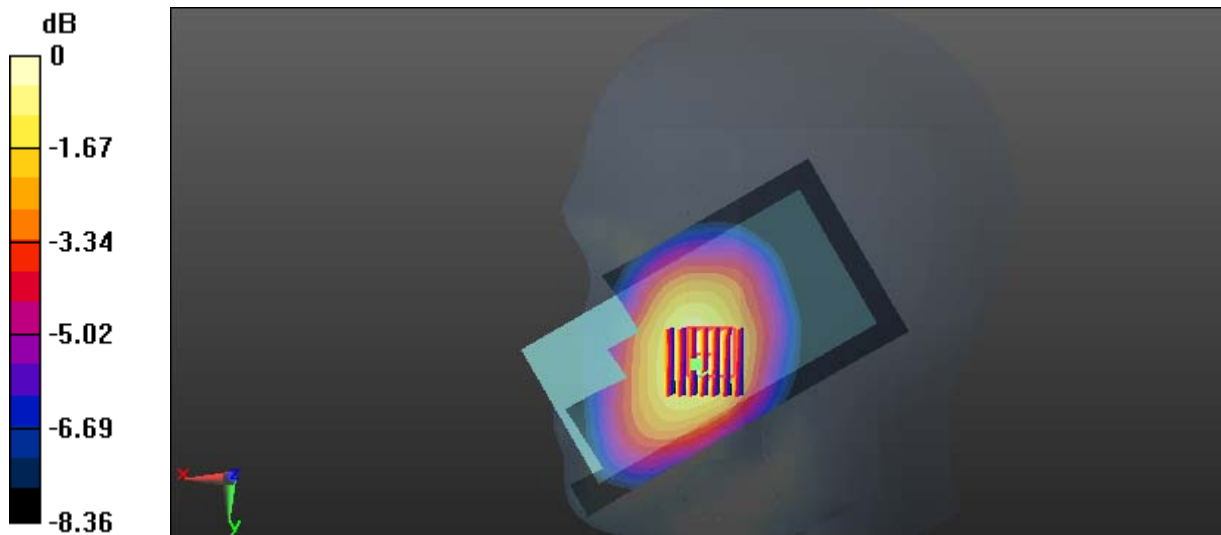

0 dB = 0.233 W/kg = -6.33 dBW/kg



**Test Plot 81#: LTE Band 5\_Head Right Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.181 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.463 V/m; Power Drift = 0.18 dB  
 Peak SAR (extrapolated) = 0.202 W/kg

**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.149 W/kg**  
 Maximum value of SAR (measured) = 0.187 W/kg

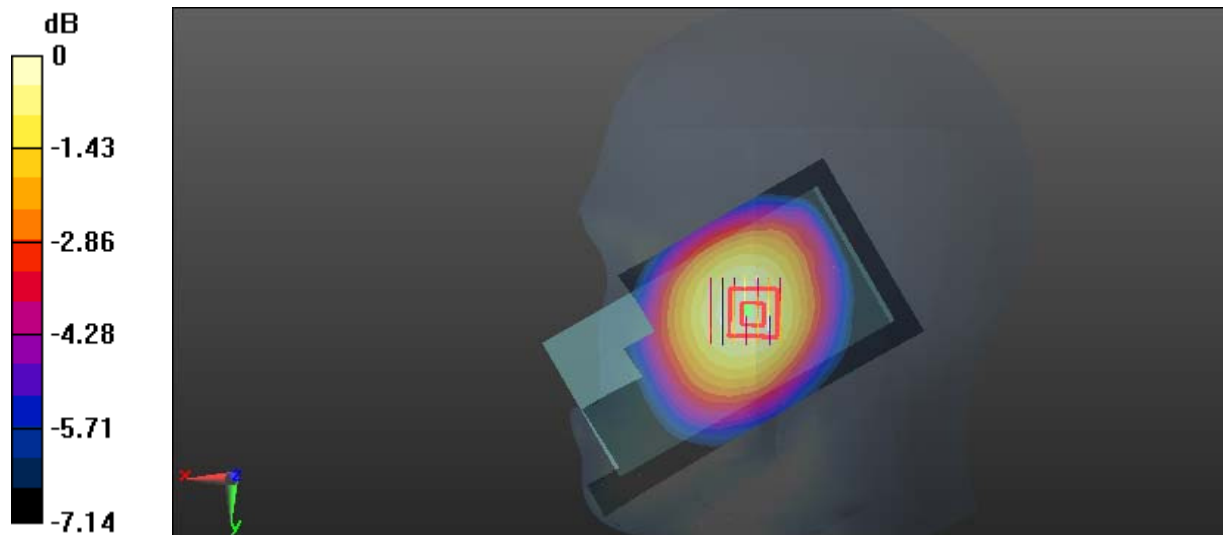

0 dB = 0.187 W/kg = -7.28 dBW/kg

**Test Plot 82#: LTE Band 5\_Head Right Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.887$  S/m;  $\epsilon_r = 42.469$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.146 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 8.284 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.181 W/kg  
**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.128 W/kg**  
 Maximum value of SAR (measured) = 0.160 W/kg

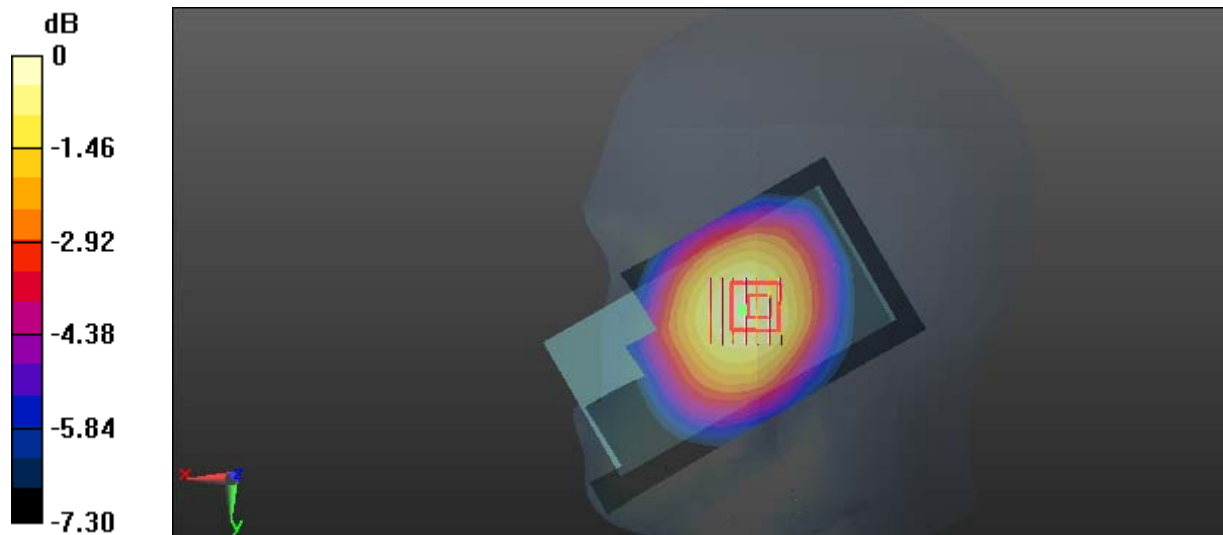

0 dB = 0.160 W/kg = -7.96 dBW/kg

**Test Plot 83#: LTE Band 5\_Body Back\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.644 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.27 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.866 W/kg

**SAR(1 g) = 0.596 W/kg; SAR(10 g) = 0.371 W/kg**

Maximum value of SAR (measured) = 0.626 W/kg

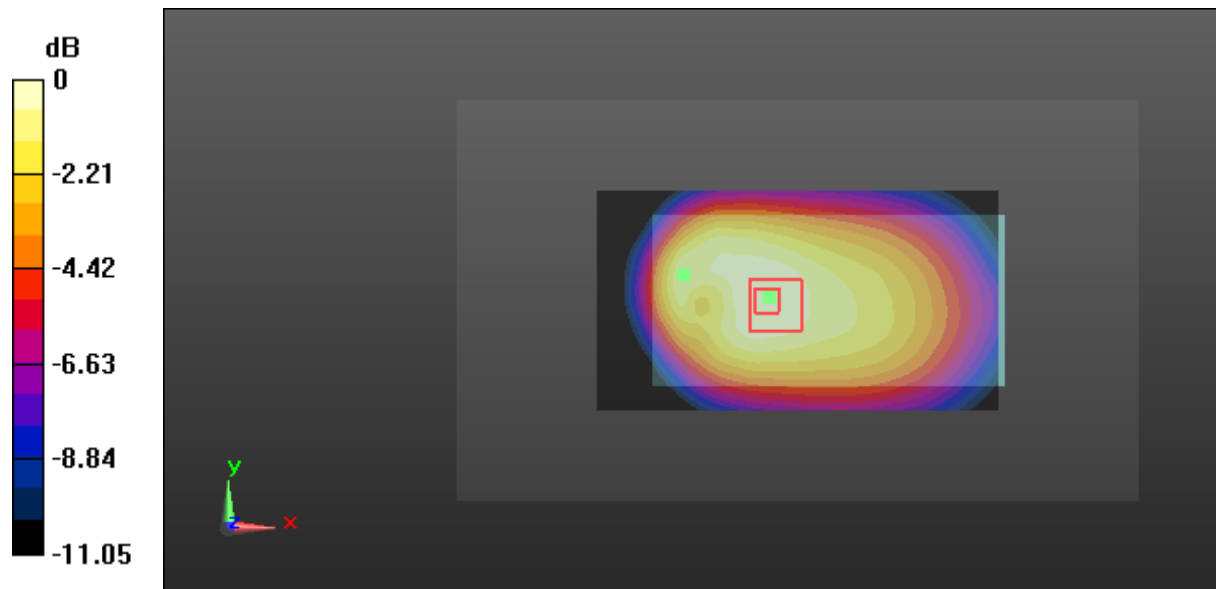

0 dB = 0.626 W/kg = -2.03 dBW/kg

**Test Plot 84#: LTE Band 5\_Body Back\_Middle Channel\_50%RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.522 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.85 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.490 W/kg; SAR(10 g) = 0.321 W/kg**

Maximum value of SAR (measured) = 0.515 W/kg

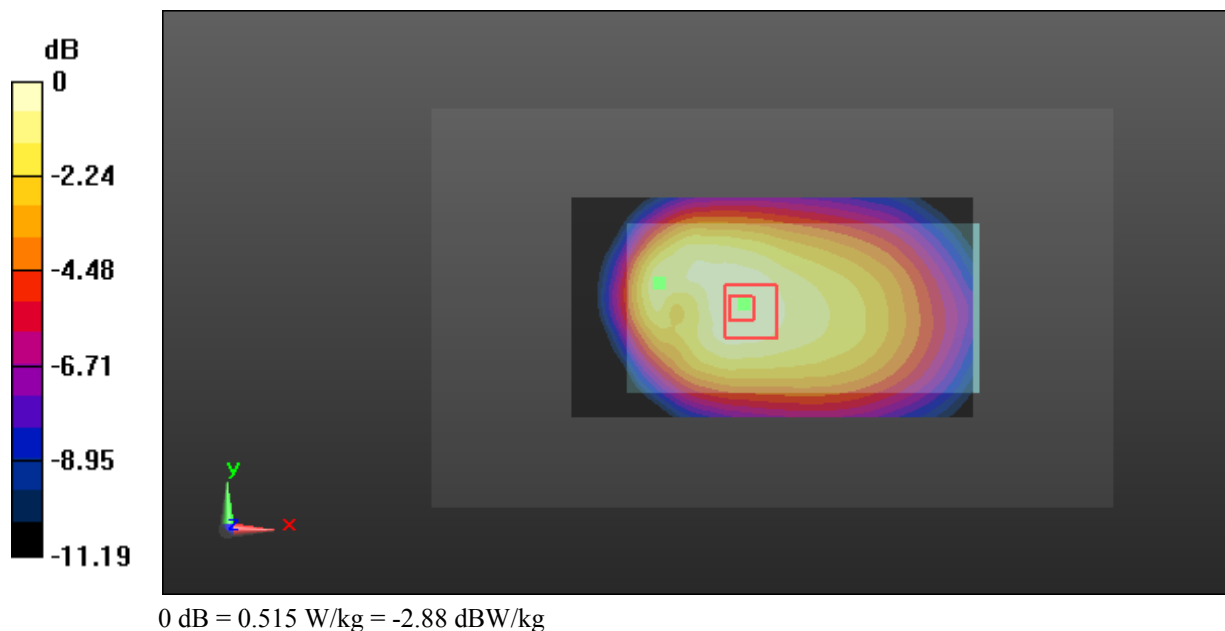

**Test Plot 85#: LTE Band 5\_Body Left\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.260 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.83 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.338 W/kg

**SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 0.259 W/kg

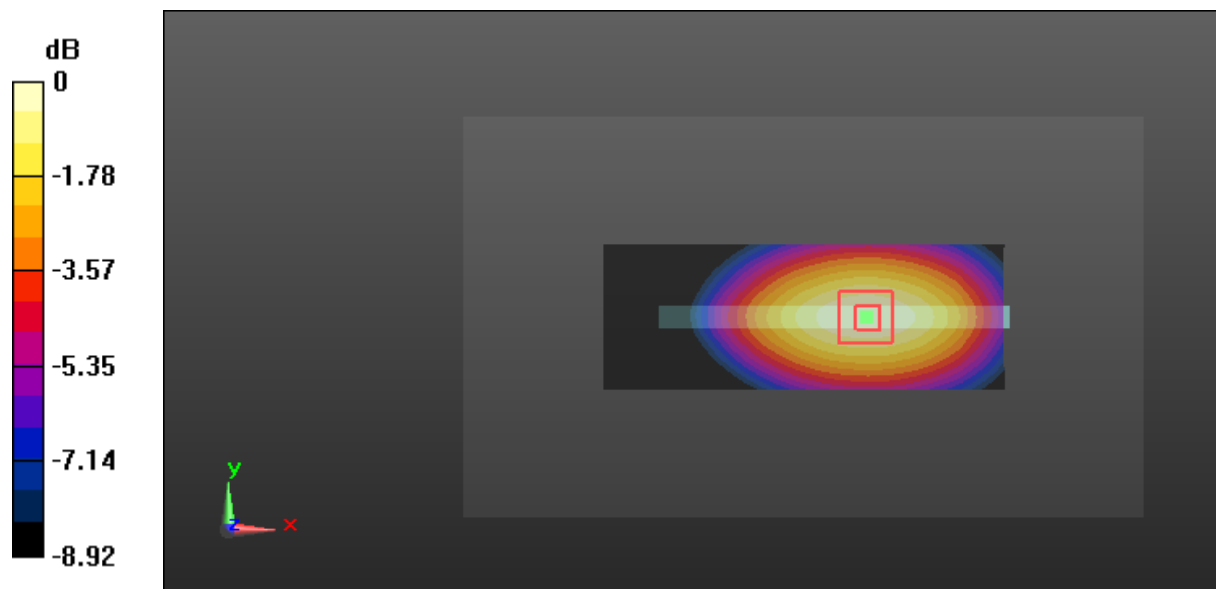

0 dB = 0.259 W/kg = -5.87 dBW/kg

**Test Plot 86#: LTE Band 5\_Body Left\_Middle Channel\_50%RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.210 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.23 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.197 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.210 W/kg

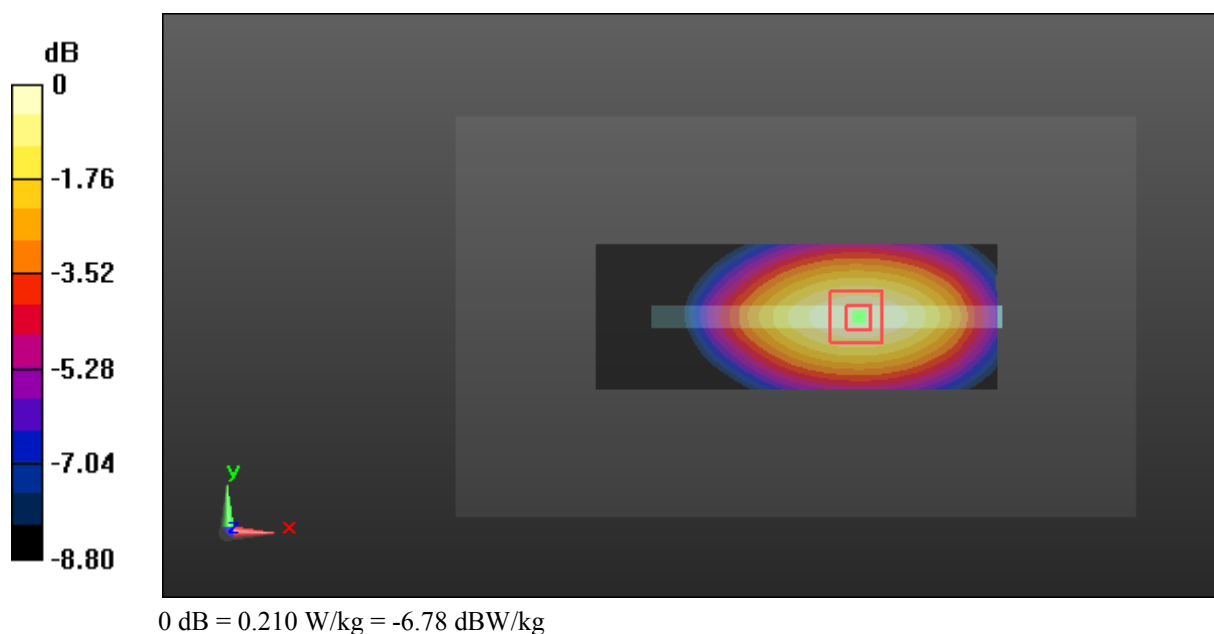

**Test Plot 87#: LTE Band 5\_Body Right\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.182 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.24 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.117 W/kg**

Maximum value of SAR (measured) = 0.180 W/kg

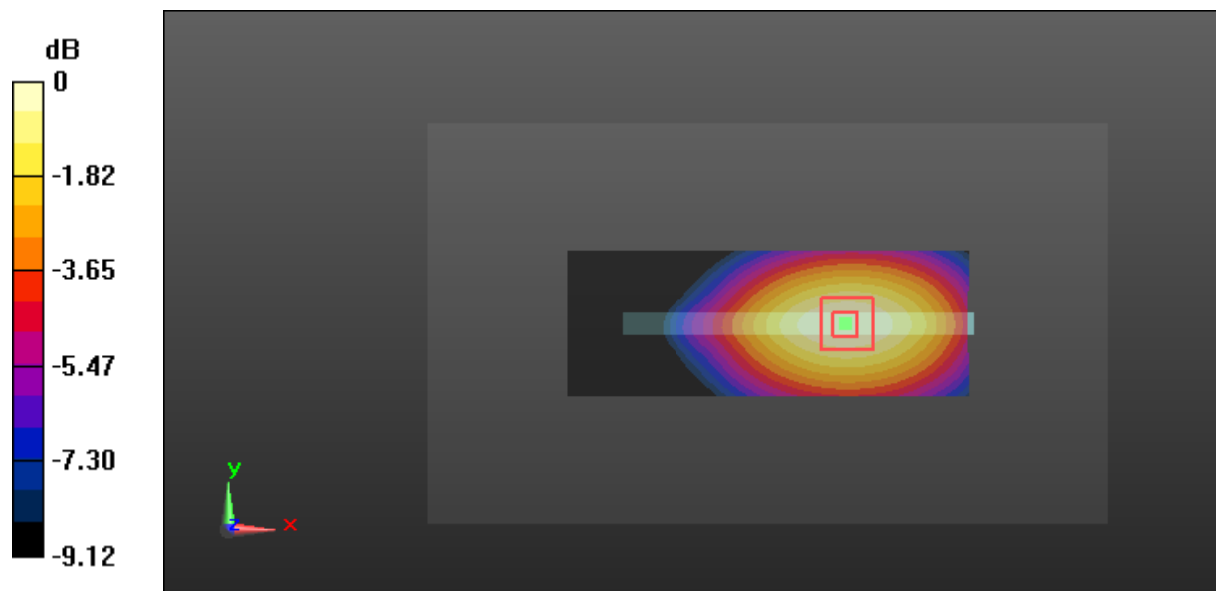

0 dB = 0.180 W/kg = -7.45 dBW/kg

**Test Plot 88#: LTE Band 5\_Body Right\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.159 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.50 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.208 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

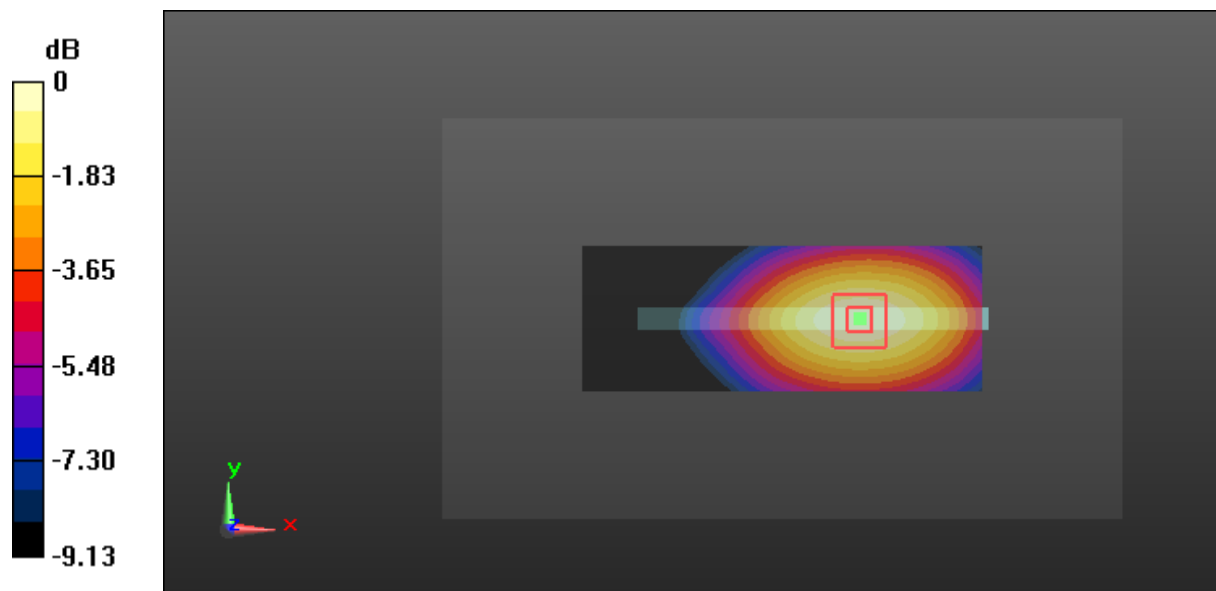

0 dB = 0.159 W/kg = -7.99 dBW/kg



**Test Plot 89#: LTE Band 5\_Body Bottom\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0709 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.546 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.106 W/kg

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0706 W/kg

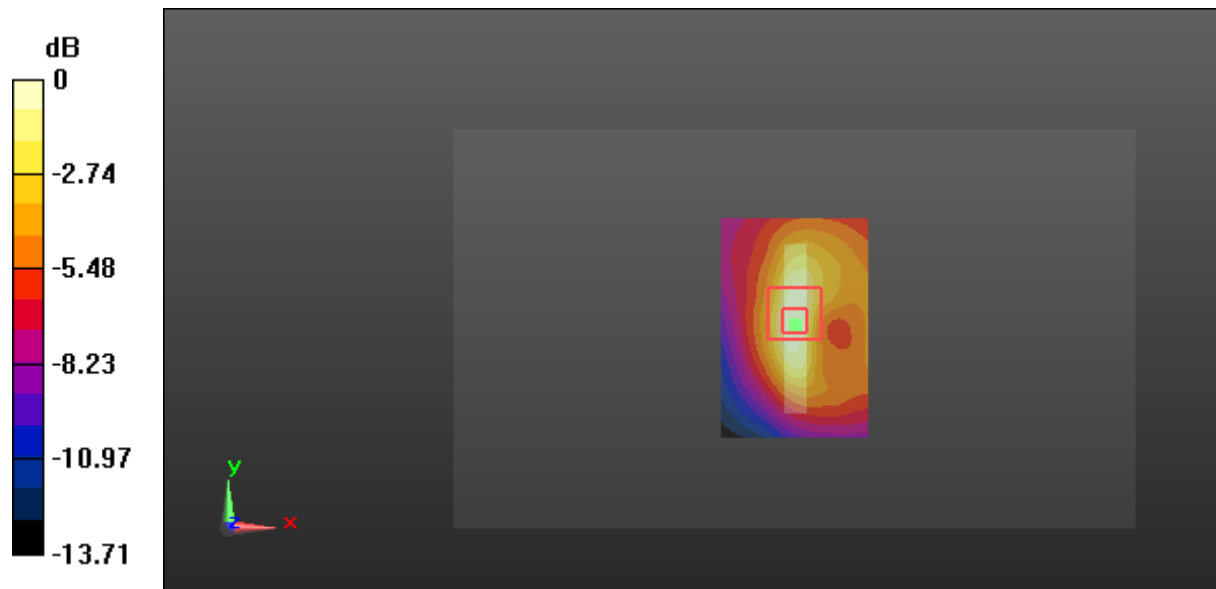

0 dB = 0.0706 W/kg = -11.51 dBW/kg

**Test Plot 90#: LTE Band 5\_Body Bottom\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used: 836.5 MHz;  $\sigma = 0.976$  S/m;  $\epsilon_r = 54.58$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0567 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.633 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0830 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0564 W/kg

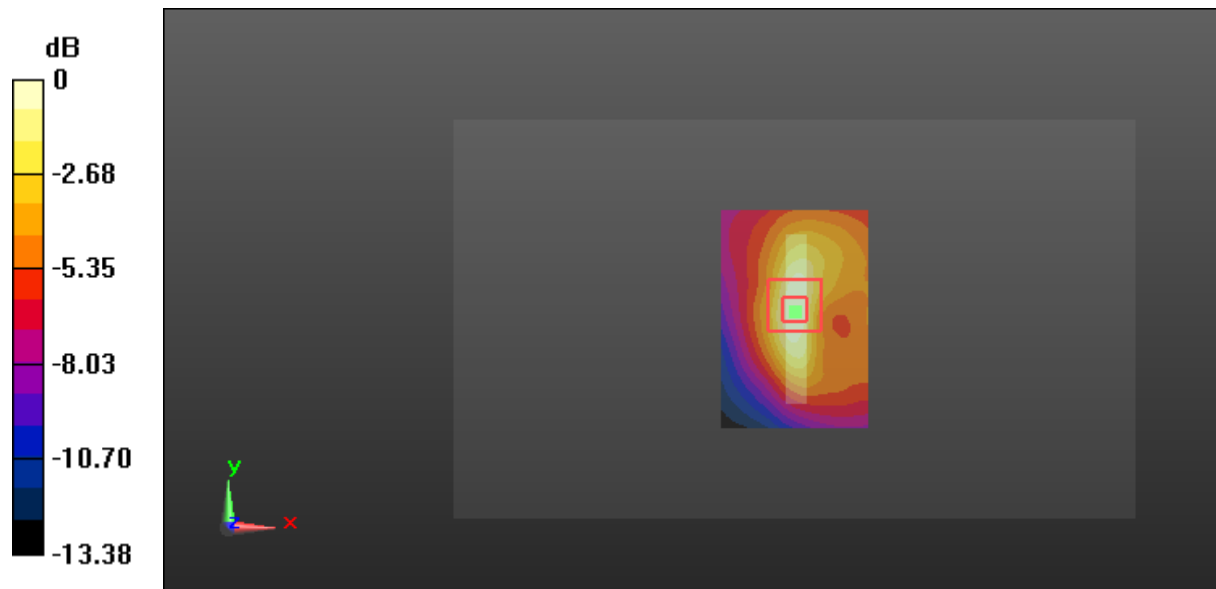

0 dB = 0.0564 W/kg = -12.49 dBW/kg

**Test Plot 91#: LTE Band 7\_Head Left Cheek\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.481 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.016 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.789 W/kg  
**SAR(1 g) = 0.424 W/kg; SAR(10 g) = 0.230 W/kg**  
 Maximum value of SAR (measured) = 0.460 W/kg

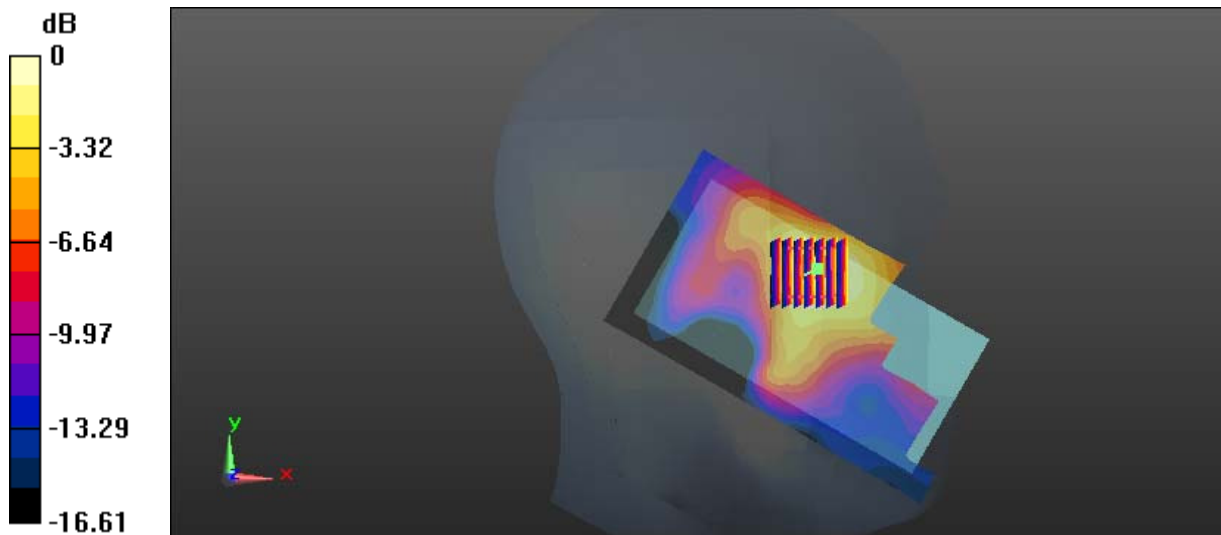

0 dB = 0.460 W/kg = -3.37 dBW/kg

**Test Plot 92#: LTE Band 7\_Head Left Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.378 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.781 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.617 W/kg  
**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.183 W/kg**  
 Maximum value of SAR (measured) = 0.366 W/kg

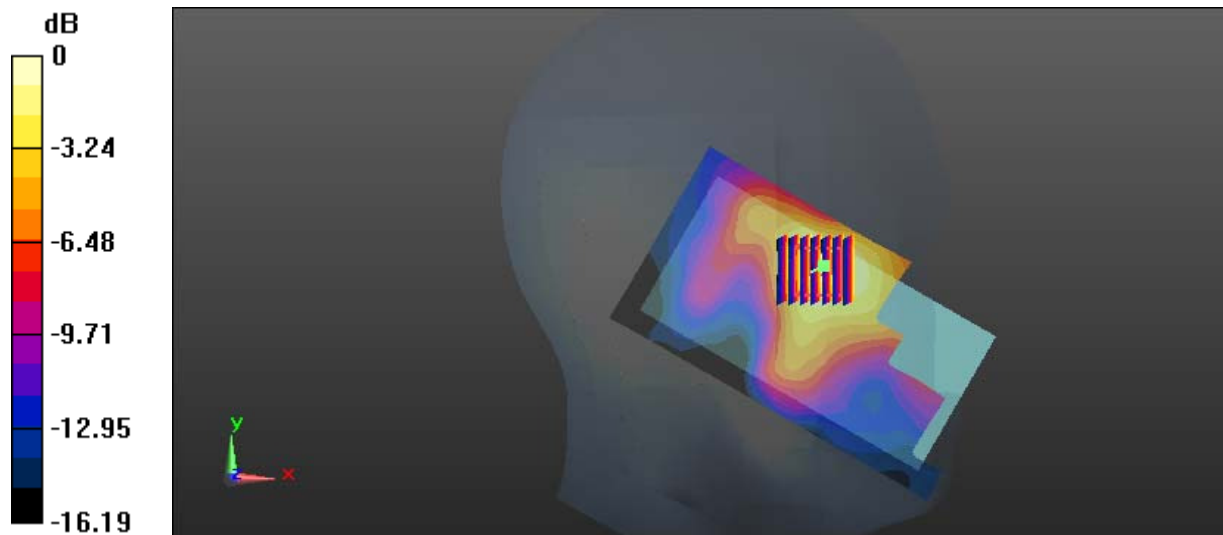

0 dB = 0.366 W/kg = -4.37 dBW/kg

**Test Plot 93#: LTE Band 7\_Head Left Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.293 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.71 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.492 W/kg  
**SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.137 W/kg**  
 Maximum value of SAR (measured) = 0.280 W/kg

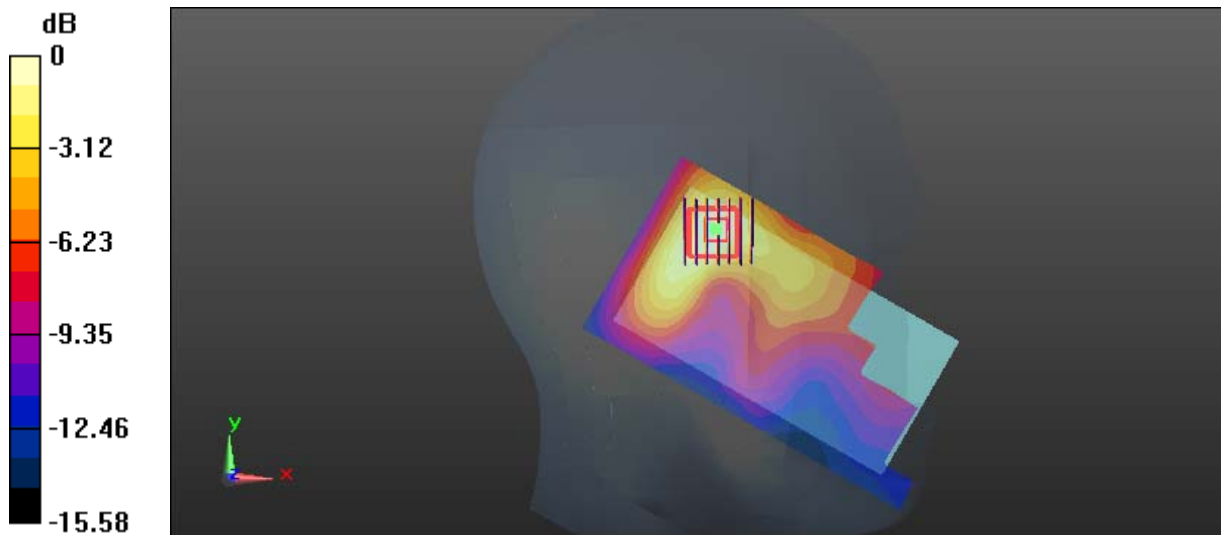

0 dB = 0.280 W/kg = -5.53 dBW/kg

**Test Plot 94#: LTE Band 7\_Head Left Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.224 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.369 V/m; Power Drift = 0.08 dB  
 Peak SAR (extrapolated) = 0.373 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.212 W/kg

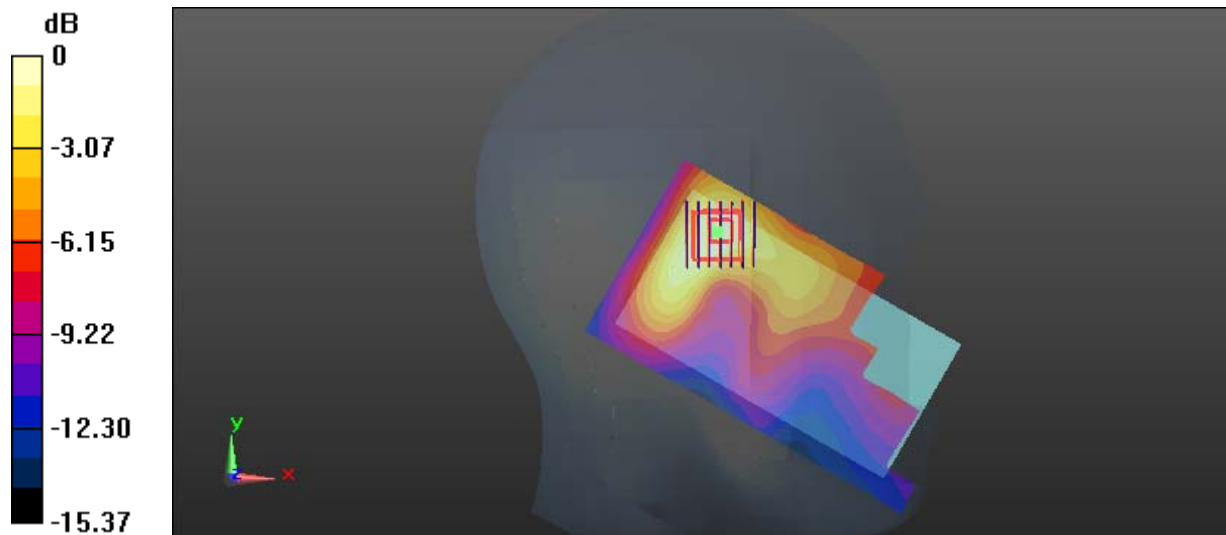

0 dB = 0.212 W/kg = -6.74 dBW/kg

**Test Plot 95#: LTE Band 7\_Head Right Cheek\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.816 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.211 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.391 W/kg**

Maximum value of SAR (measured) = 0.823 W/kg

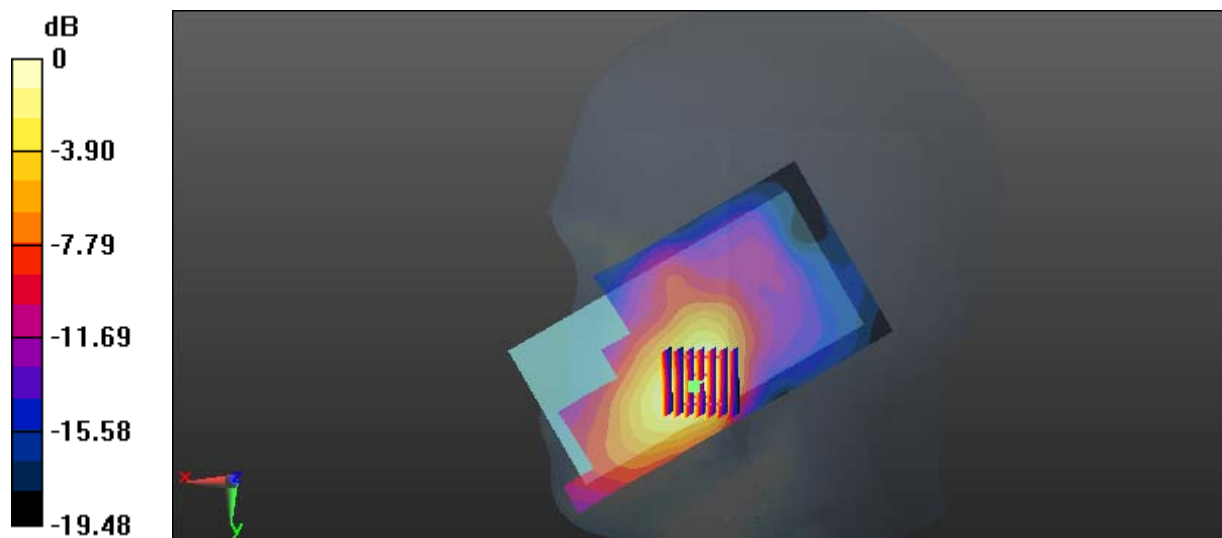

0 dB = 0.823 W/kg = -0.85 dBW/kg

**Test Plot 96#: LTE Band 7\_Head Right Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953 \text{ S/m}$ ;  $\epsilon_r = 38.818$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.707 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.996 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.658 W/kg; SAR(10 g) = 0.350 W/kg**

Maximum value of SAR (measured) = 0.716 W/kg

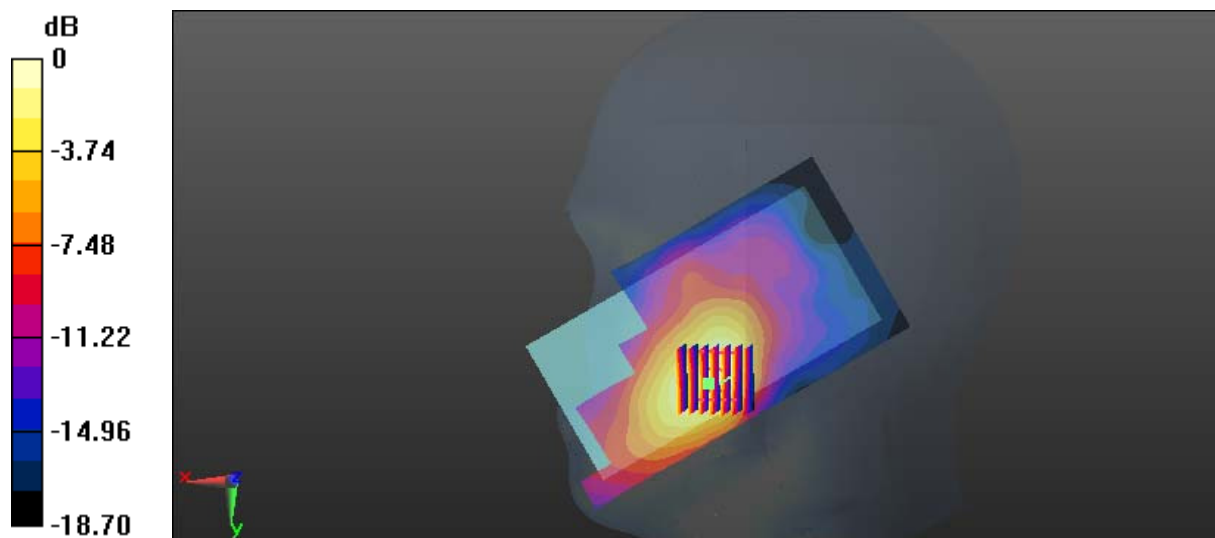

0 dB = 0.716 W/kg = -1.45 dBW/kg



**Test Plot 97#: LTE Band 7\_Head Right Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.207 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.64 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 0.354 W/kg  
**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.103 W/kg**  
 Maximum value of SAR (measured) = 0.212 W/kg

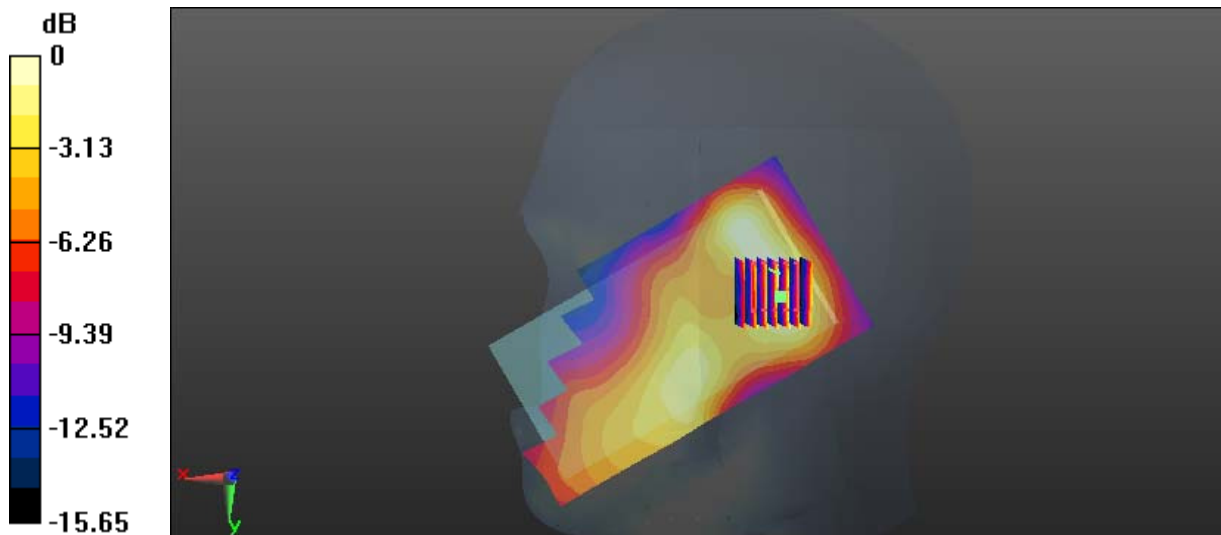

0 dB = 0.212 W/kg = -6.74 dBW/kg

**Test Plot 98#: LTE Band 7\_Head Right Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 1.953$  S/m;  $\epsilon_r = 38.818$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.165 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.566 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.282 W/kg  
**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.082 W/kg**  
 Maximum value of SAR (measured) = 0.166 W/kg

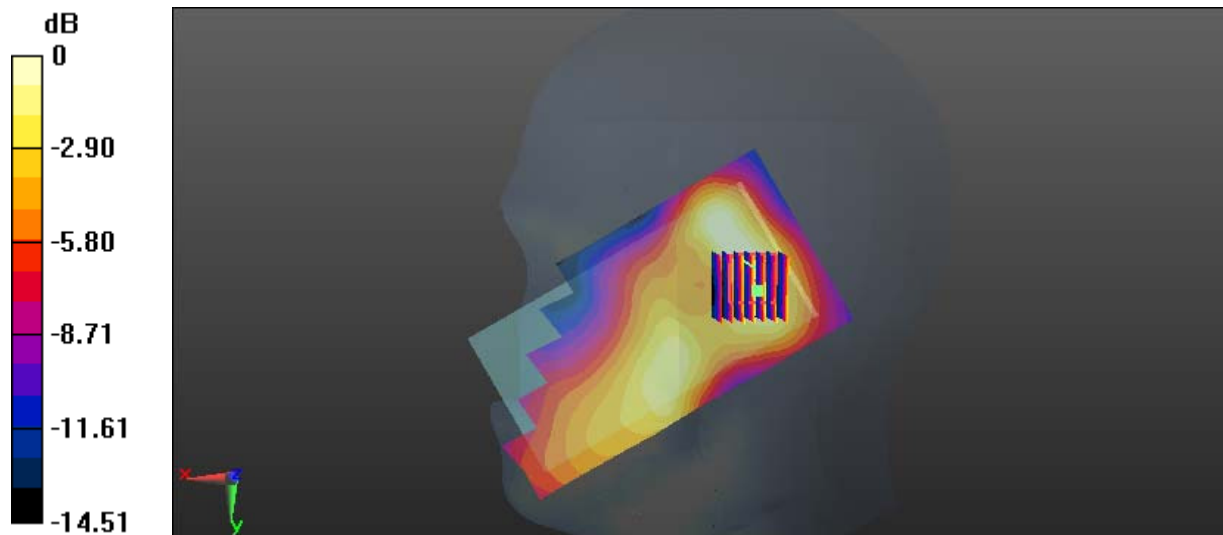

0 dB = 0.166 W/kg = -7.80 dBW/kg

**Test Plot 99#: LTE Band 7\_Body Back\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.590 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.606 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.265 W/kg**

Maximum value of SAR (measured) = 0.622 W/kg

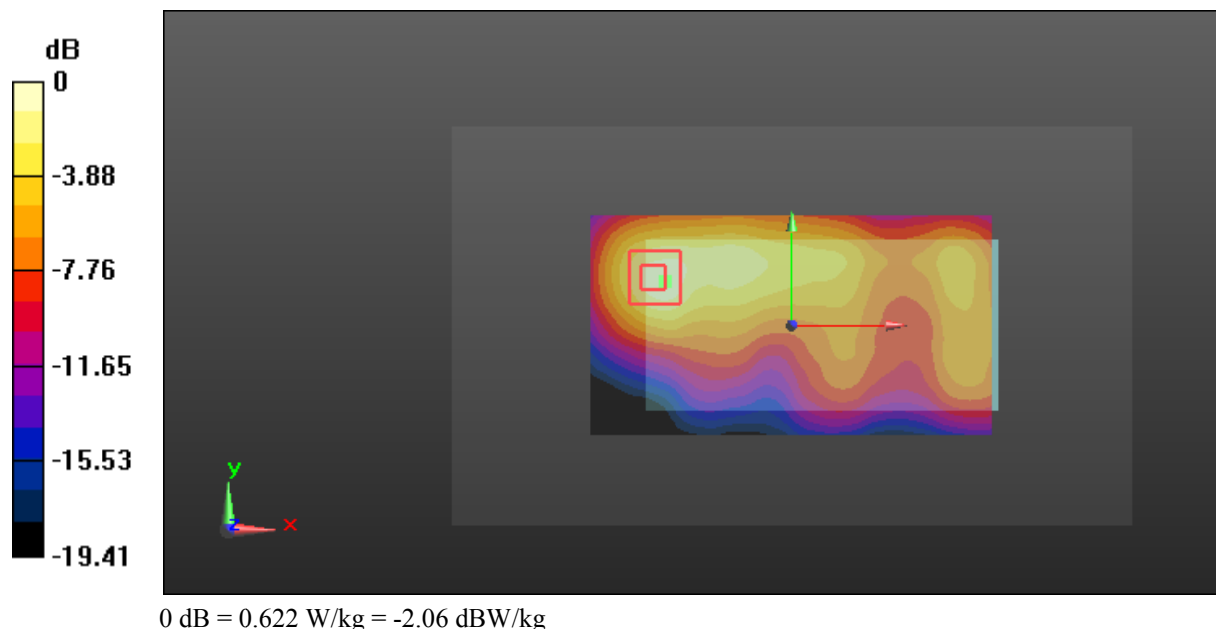

**Test Plot 100#: LTE Band 7\_Body Back\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.471 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.142 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.913 W/kg

**SAR(1 g) = 0.447 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 0.512 W/kg

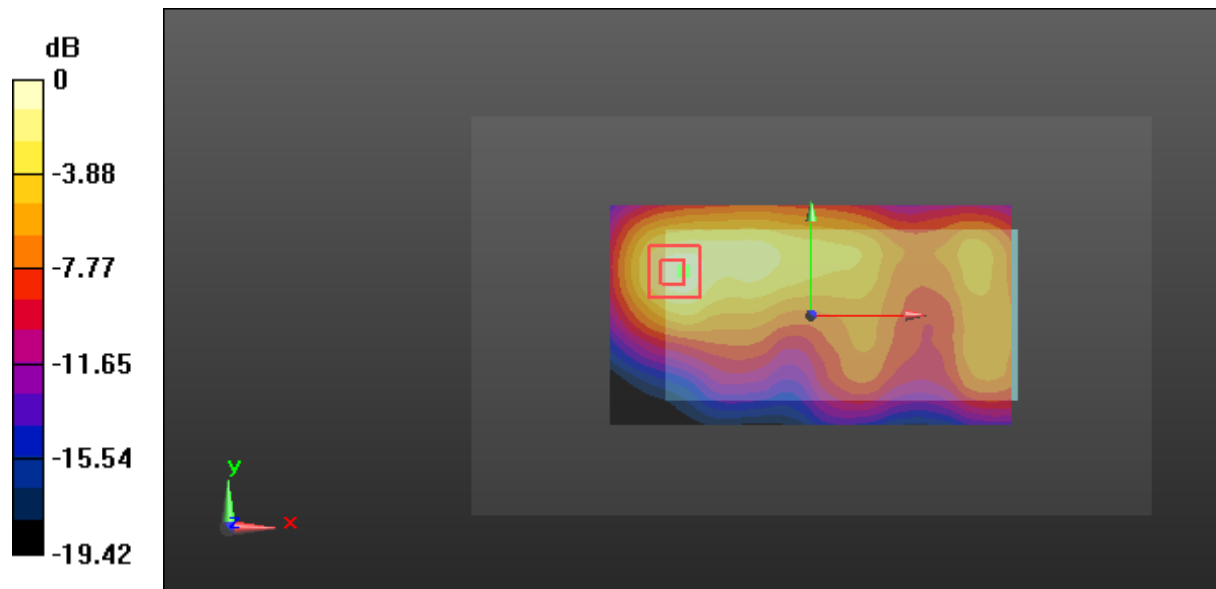

0 dB = 0.512 W/kg = -2.91 dBW/kg

**Test Plot 101#: LTE Band 7\_Body Left\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0756 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.526 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0628 W/kg

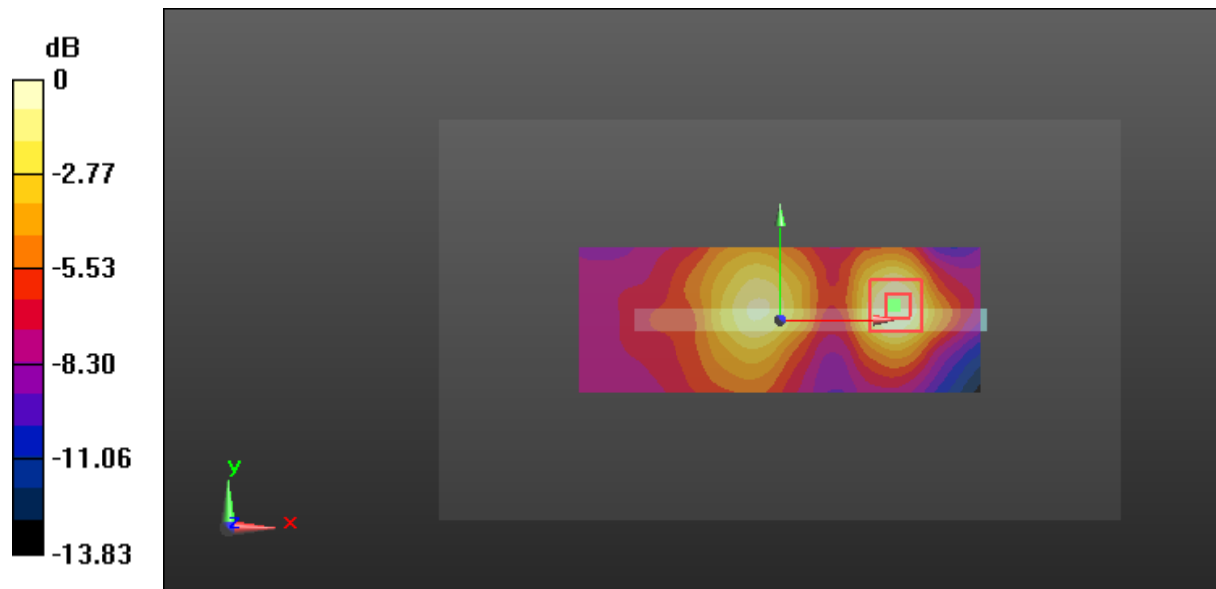

0 dB = 0.0628 W/kg = -12.02 dBW/kg

**Test Plot 102#: LTE Band 7\_Body Left\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0586 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.840 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0485 W/kg

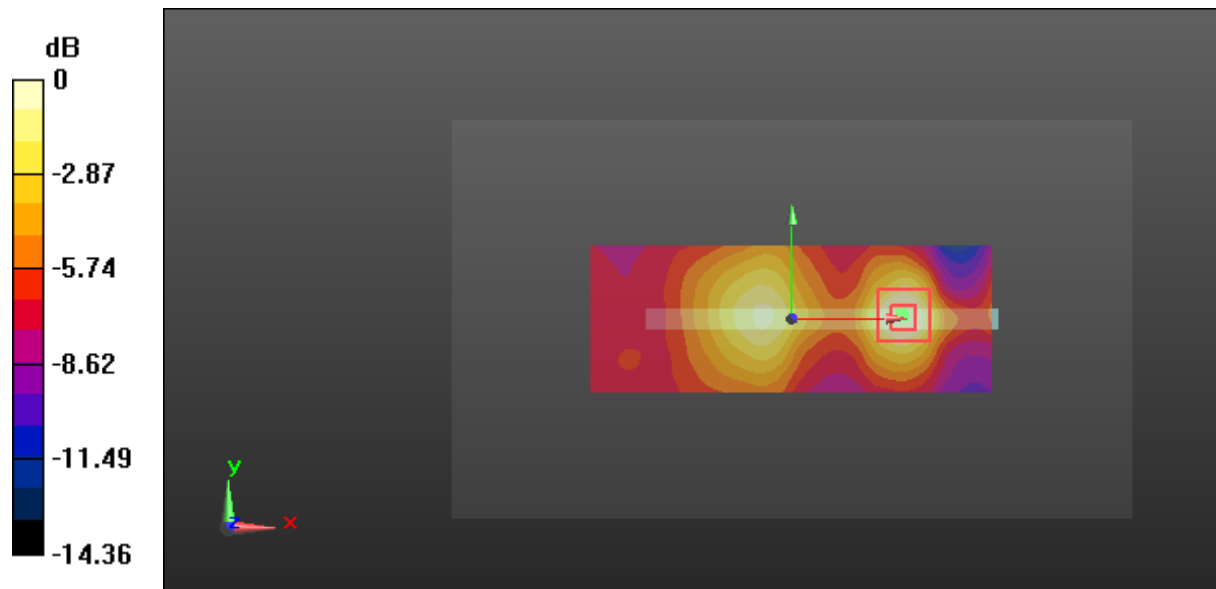

0 dB = 0.0485 W/kg = -13.14 dBW/kg

**Test Plot 103#: LTE Band 7\_Body Right\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.582 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.01 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.962 W/kg

**SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.267 W/kg**

Maximum value of SAR (measured) = 0.565 W/kg

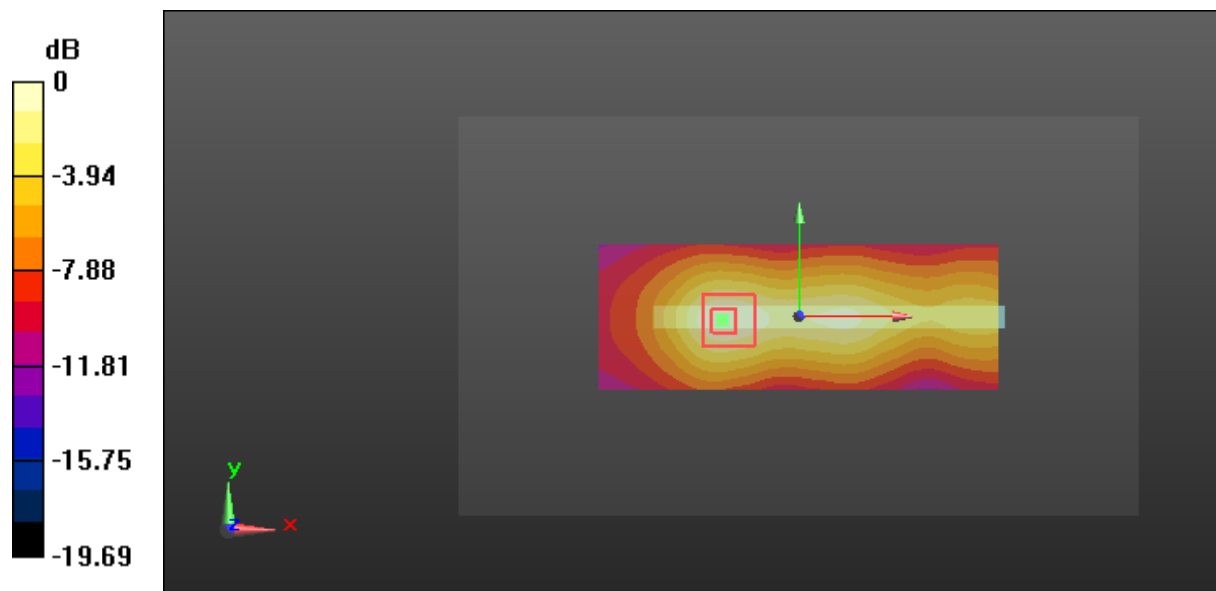

0 dB = 0.565 W/kg = -2.48 dBW/kg

**Test Plot 104#: LTE Band 7\_Body Right\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127 \text{ S/m}$ ;  $\epsilon_r = 52.205$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.440 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.61 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.720 W/kg

**SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.424 W/kg

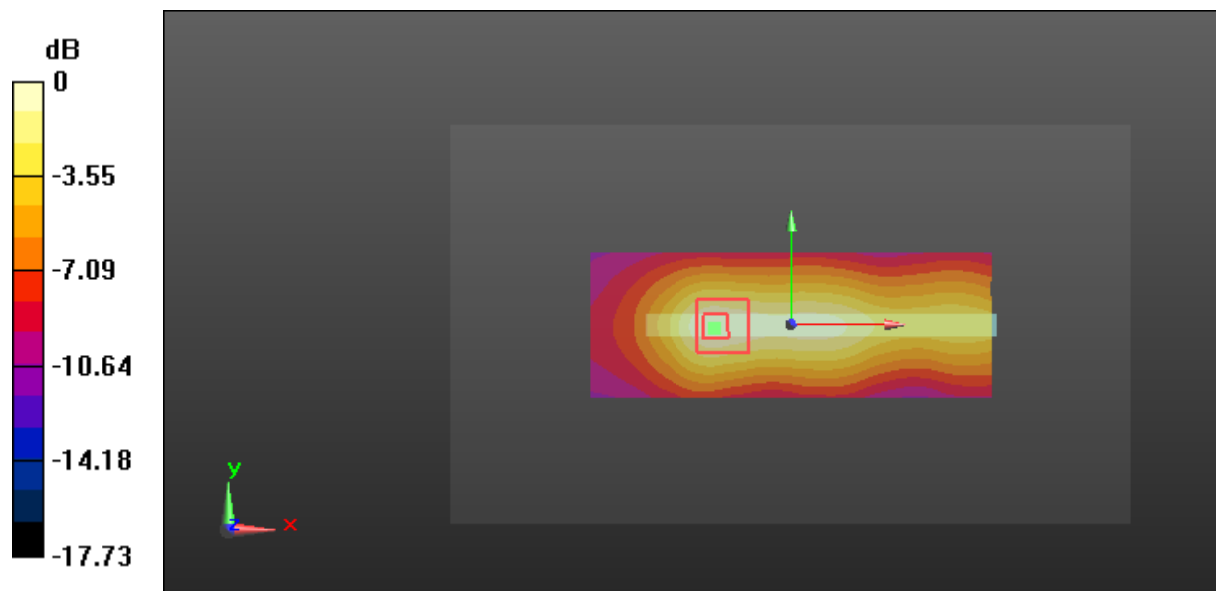

0 dB = 0.424 W/kg = -3.73 dBW/kg



**Test Plot 105#: LTE Band 7\_Body Bottom\_Low Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2510 MHz;  $\sigma = 2.066 \text{ S/m}$ ;  $\epsilon_r = 52.33$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.923 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.45 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.828 W/kg; SAR(10 g) = 0.388 W/kg**

Maximum value of SAR (measured) = 0.917 W/kg

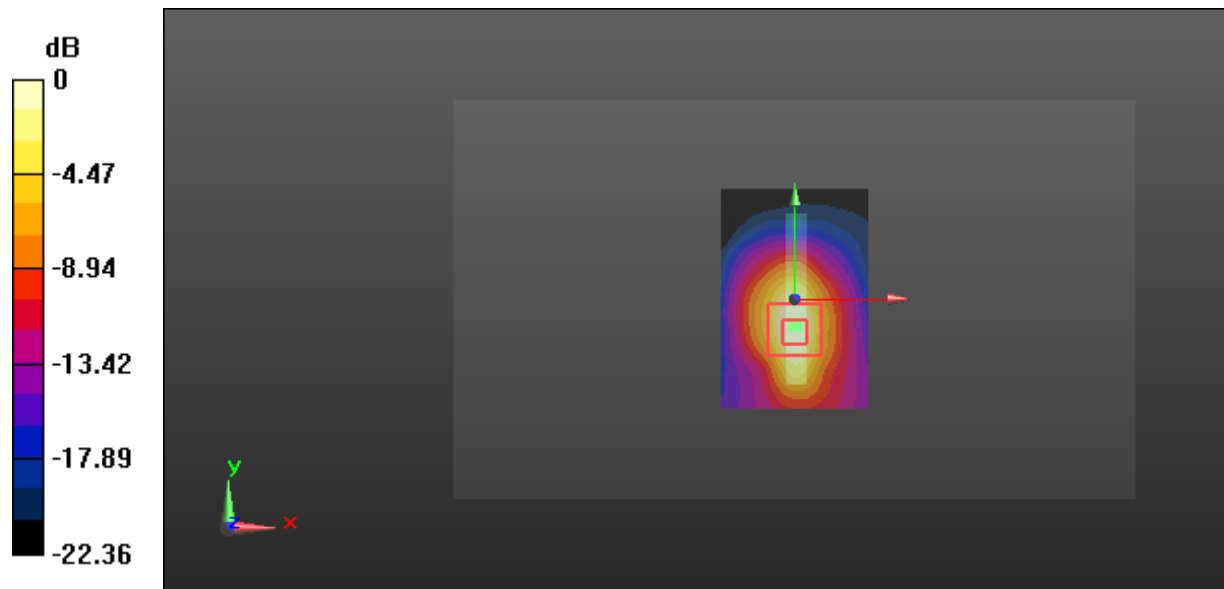

0 dB = 0.917 W/kg = -0.38 dBW/kg

**Test Plot 106#: LTE Band 7\_Body Bottom\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2535 MHz;  $\sigma = 2.127$  S/m;  $\epsilon_r = 52.205$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.941 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.74 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.87 W/kg

**SAR(1 g) = 0.837 W/kg; SAR(10 g) = 0.372 W/kg**

Maximum value of SAR (measured) = 0.928 W/kg

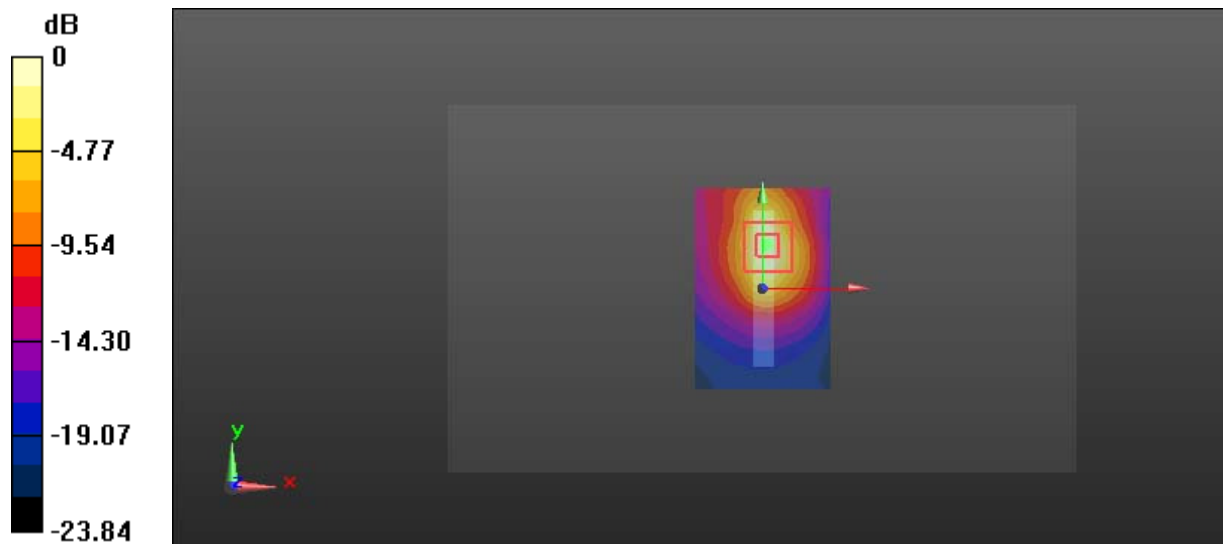

0 dB = 0.928 W/kg = -0.32 dBW/kg

**Test Plot 107#: LTE Band 7\_Body Bottom\_High Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2560 MHz;  $\sigma = 2.131 \text{ S/m}$ ;  $\epsilon_r = 52$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.984 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.60 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.94 W/kg

**SAR(1 g) = 0.908 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

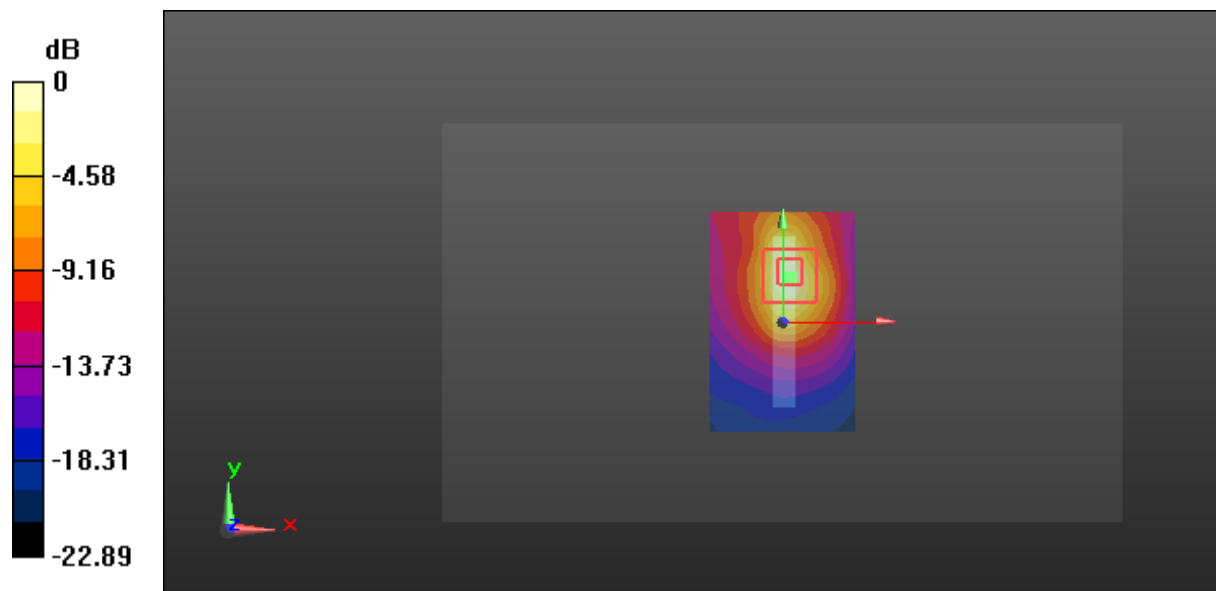

0 dB = 1.05 W/kg = 0.21 dBW/kg

**Test Plot 108#: LTE Band 7\_Body Bottom\_High Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium parameters used: 2560 MHz;  $\sigma = 2.131 \text{ S/m}$ ;  $\epsilon_r = 52$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.733 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.12 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.641 W/kg; SAR(10 g) = 0.338 W/kg**

Maximum value of SAR (measured) = 0.729 W/kg

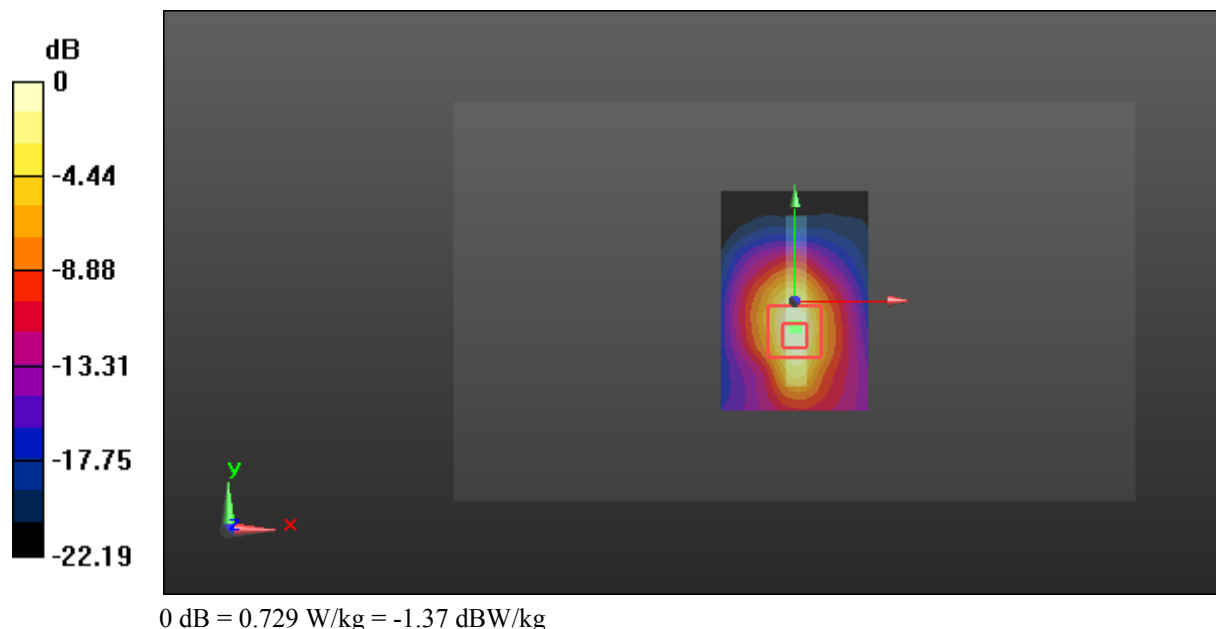

**Test Plot 109#: LTE Band 17\_Head Left Cheek\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.631 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.246 W/kg

**SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.174 W/kg**

Maximum value of SAR (measured) = 0.235 W/kg

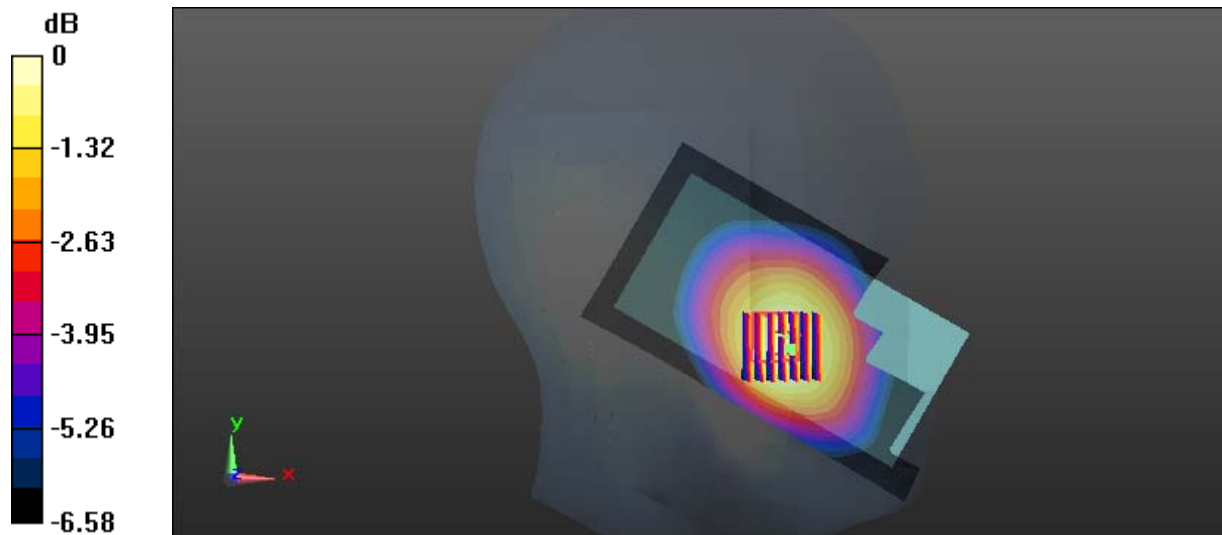

0 dB = 0.235 W/kg = -6.29 dBW/kg

**Test Plot 110#: LTE Band 17\_Head Left Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.200 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.197 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 0.216 W/kg  
**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.139 W/kg**  
 Maximum value of SAR (measured) = 0.187 W/kg

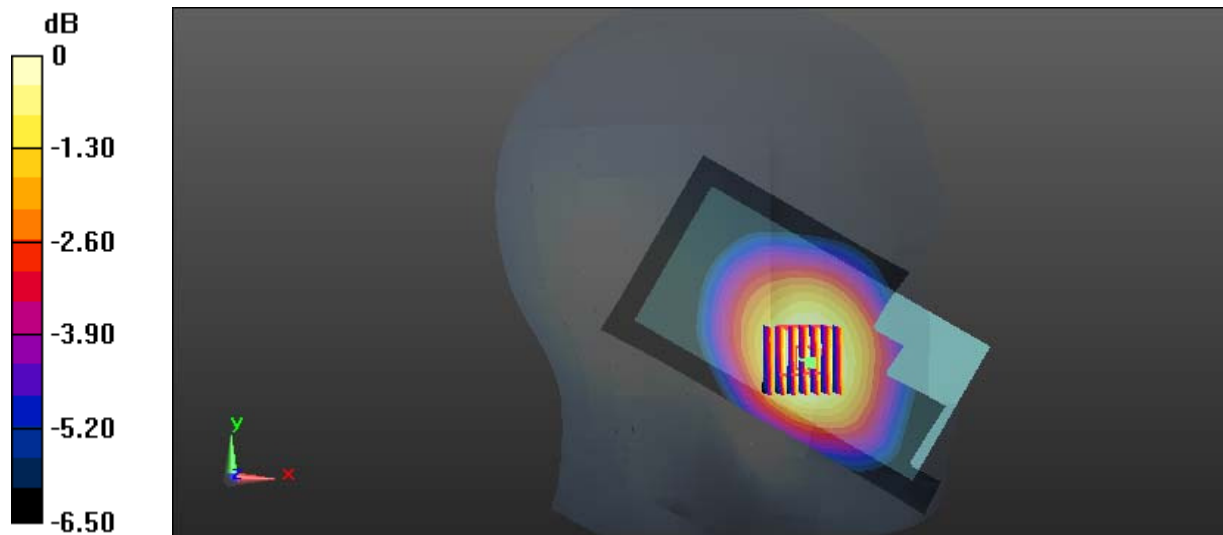

0 dB = 0.187 W/kg = -7.28 dBW/kg

**Test Plot 111#: LTE Band 17\_Head Left Tilt\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.115 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 7.810 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.083 W/kg**  
 Maximum value of SAR (measured) = 0.106 W/kg

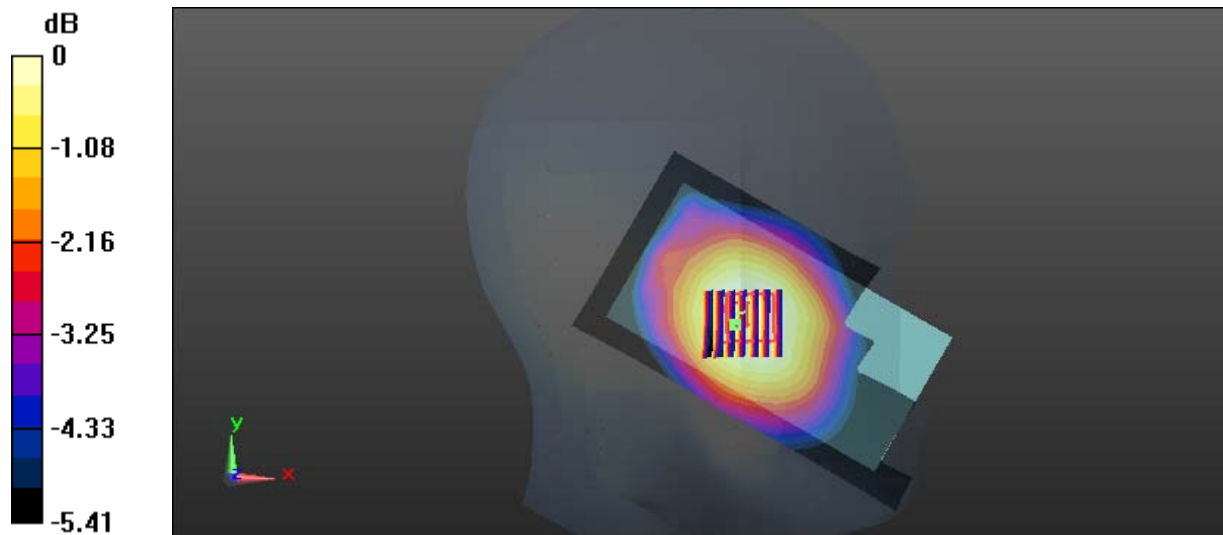

0 dB = 0.106 W/kg = -9.75 dBW/kg

**Test Plot 112#: LTE Band 17\_Head Left Tilt\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.0970 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 6.840 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.102 W/kg  
**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.071 W/kg**  
 Maximum value of SAR (measured) = 0.0914 W/kg

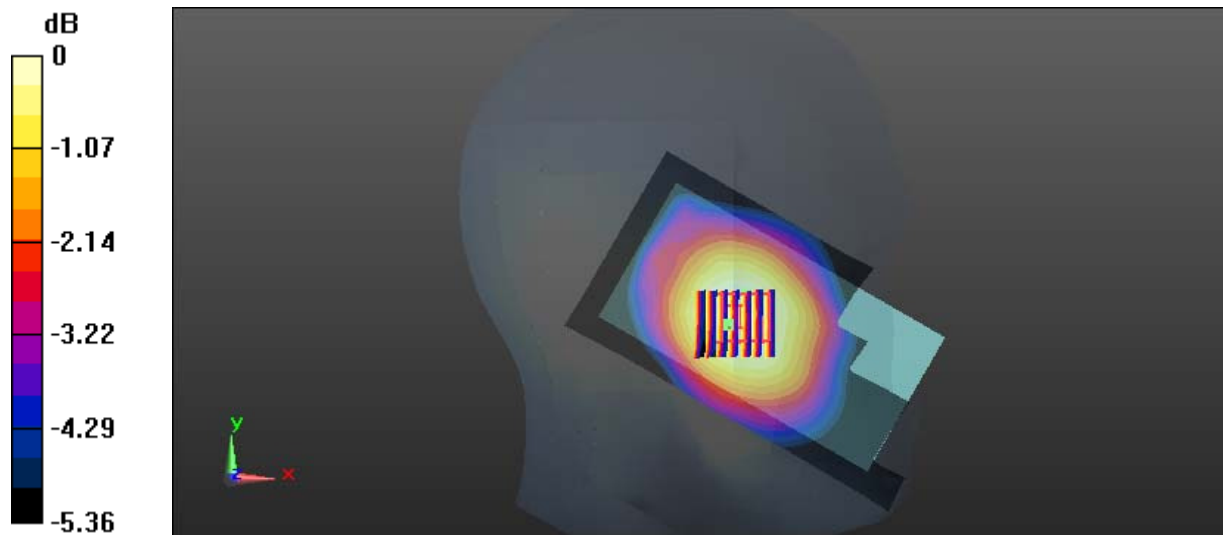

0 dB = 0.0914 W/kg = -10.39 dBW/kg



**Test Plot 113#: LTE Band 17\_Head Right Cheek\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.203 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.535 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.223 W/kg  
**SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.145 W/kg**  
 Maximum value of SAR (measured) = 0.194 W/kg

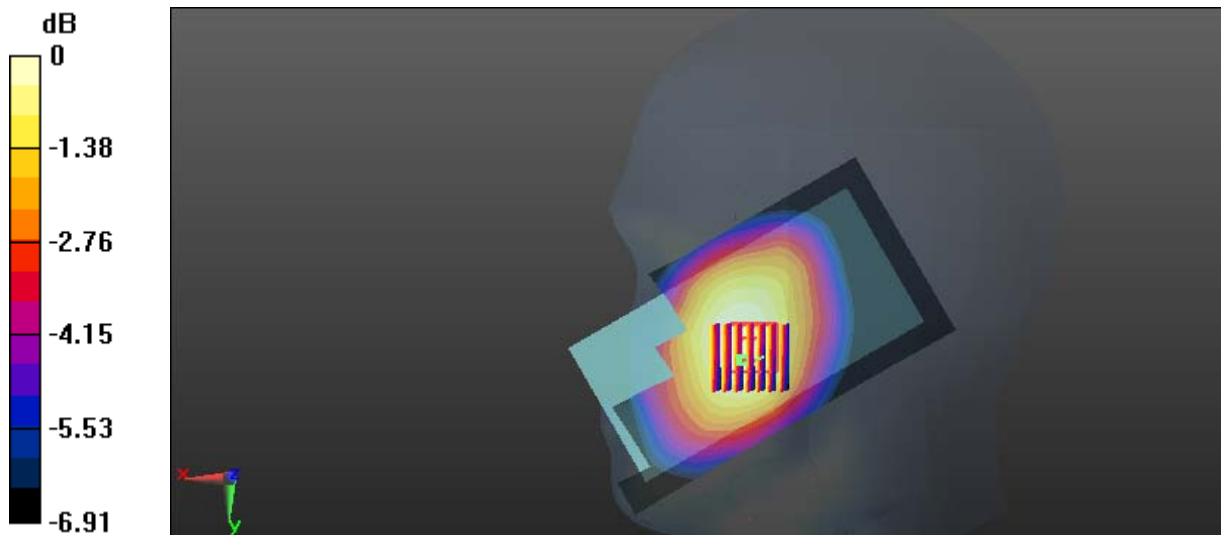

0 dB = 0.194 W/kg = -7.12 dBW/kg

**Test Plot 114#: LTE Band 17\_Head Right Cheek\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.158 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.995 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 0.180 W/kg  
**SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.113 W/kg**  
 Maximum value of SAR (measured) = 0.151 W/kg

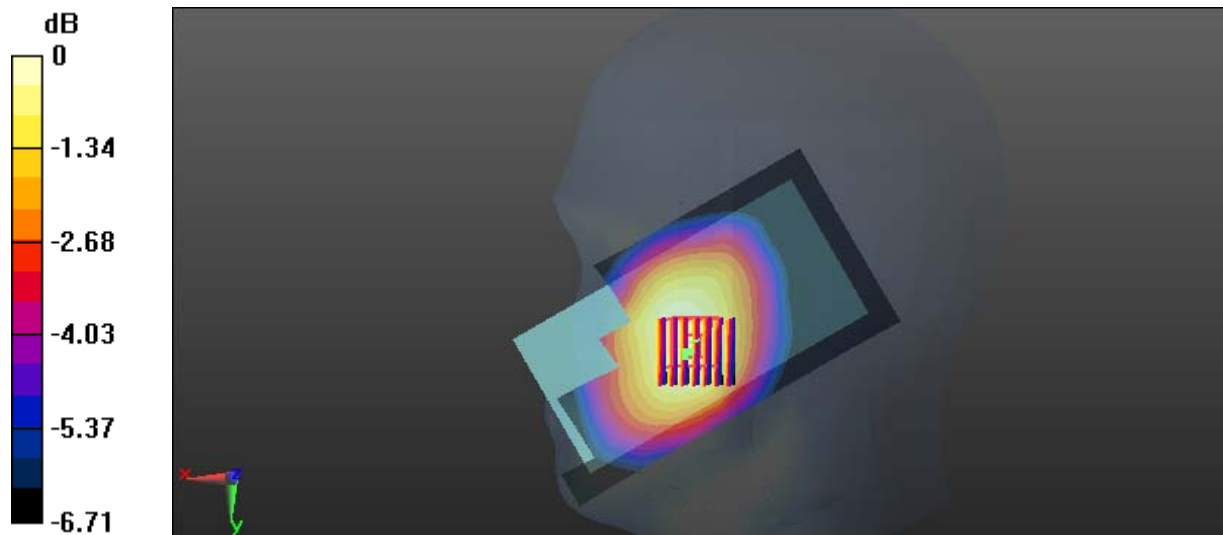

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 115#: LTE Band 17\_Head Right Tilt\_Middle Channel\_1RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.134 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.512 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.125 W/kg

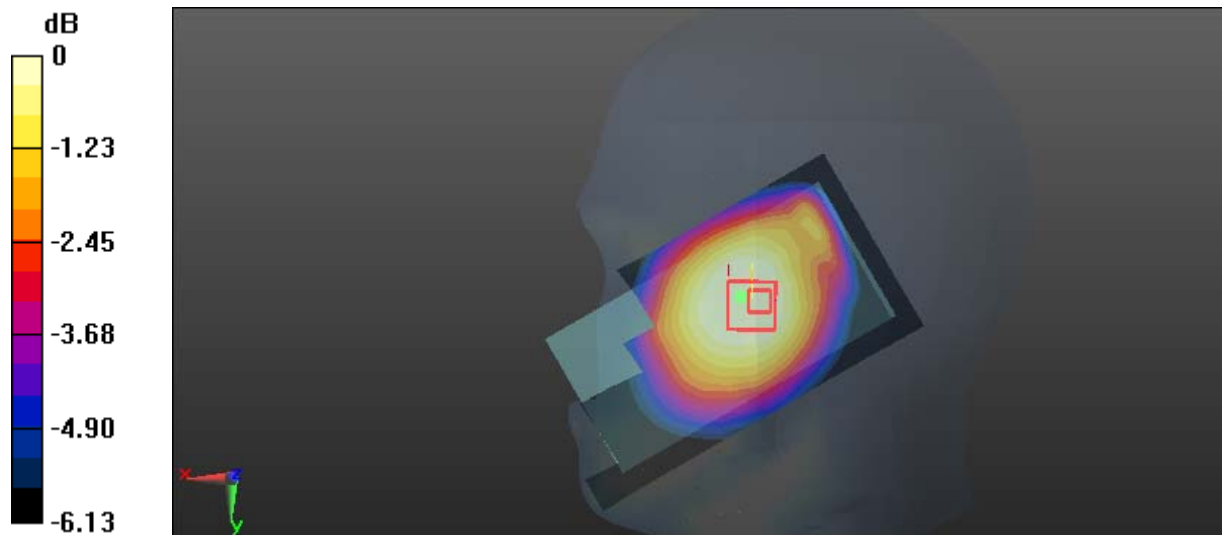

**Test Plot 116#: LTE Band 17\_Head Right Tilt\_Middle Channel\_50%RB****DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used: 710 MHz;  $\sigma = 0.876$  S/m;  $\epsilon_r = 42.604$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.38, 10.38, 10.38); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0972 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.313 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.103 W/kg

**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.0958 W/kg

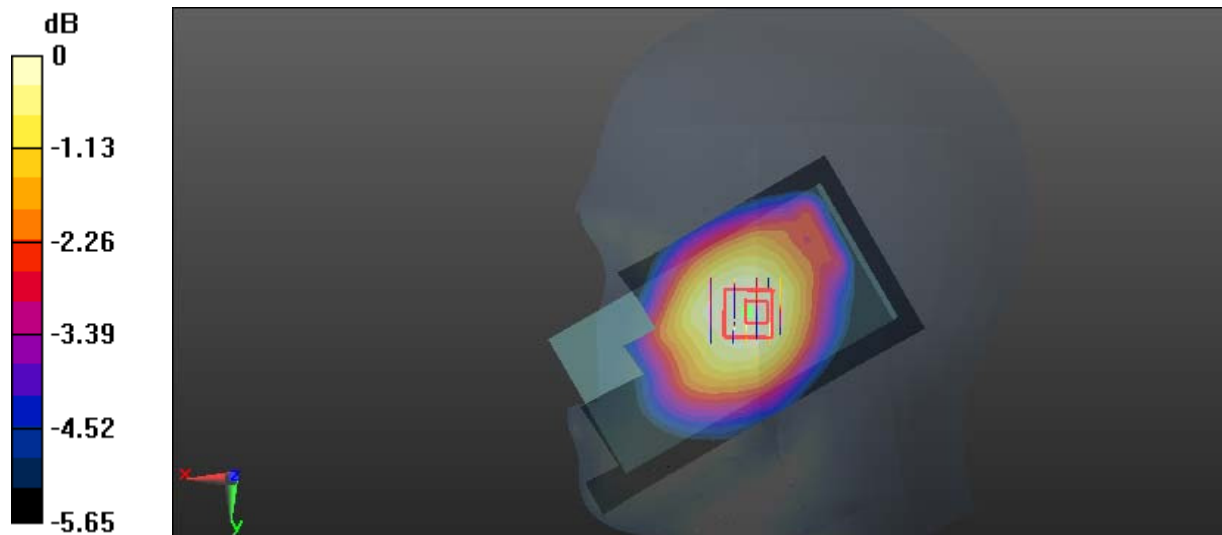

0 dB = 0.0958 W/kg = -10.19 dBW/kg

**Test Plot 117#: LTE Band 17\_Body Back\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**


Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.381 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 20.03 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.452 W/kg  
**SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.283 W/kg**  
 Maximum value of SAR (measured) = 0.379 W/kg

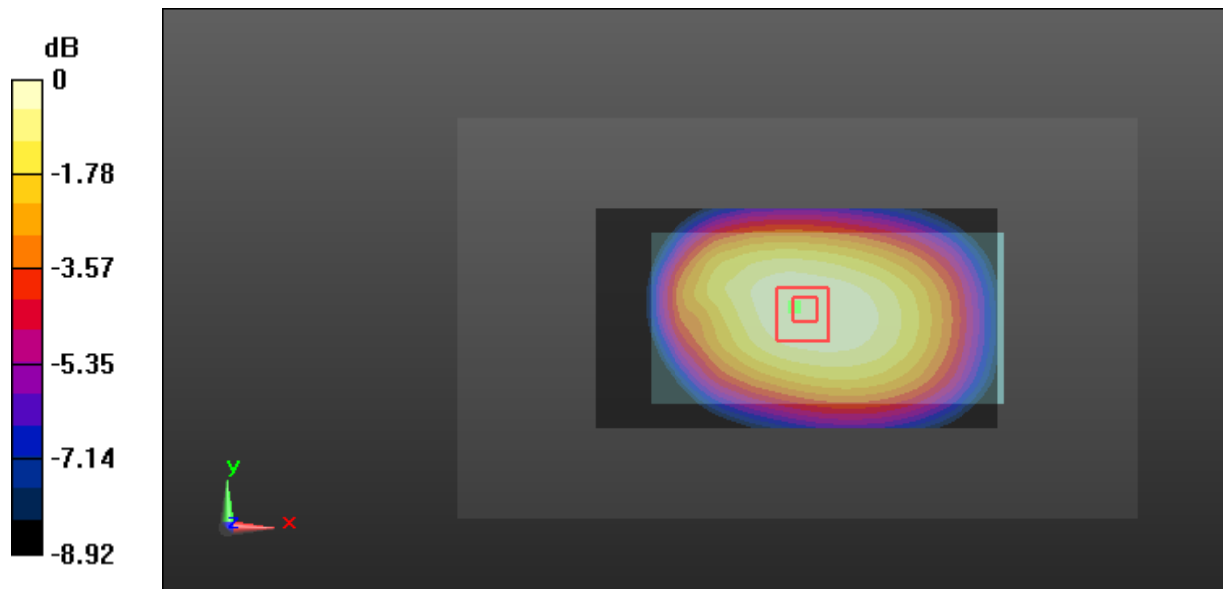

0 dB = 0.379 W/kg = -4.21 dBW/kg

**Test Plot 118#: LTE Band 17\_Body Back\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.82 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.363 W/kg

**SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.227 W/kg**

Maximum value of SAR (measured) = 0.302 W/kg

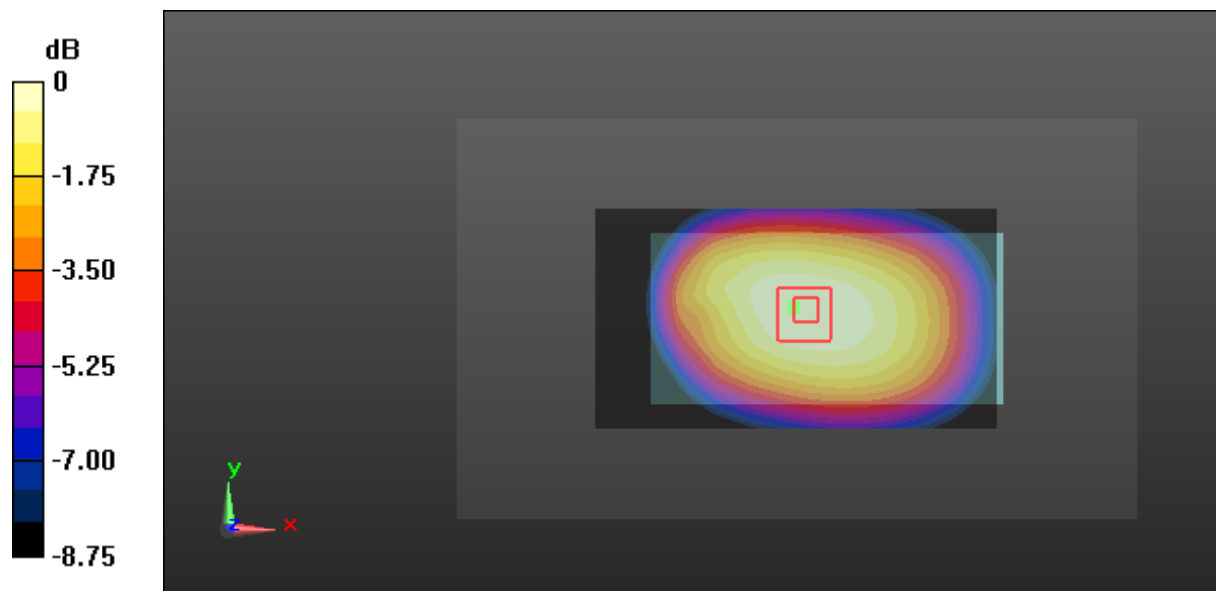

0 dB = 0.302 W/kg = -5.20 dBW/kg

**Test Plot 119#: LTE Band 17\_Body Left\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.150 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.92 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.195 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.102 W/kg**

Maximum value of SAR (measured) = 0.150 W/kg

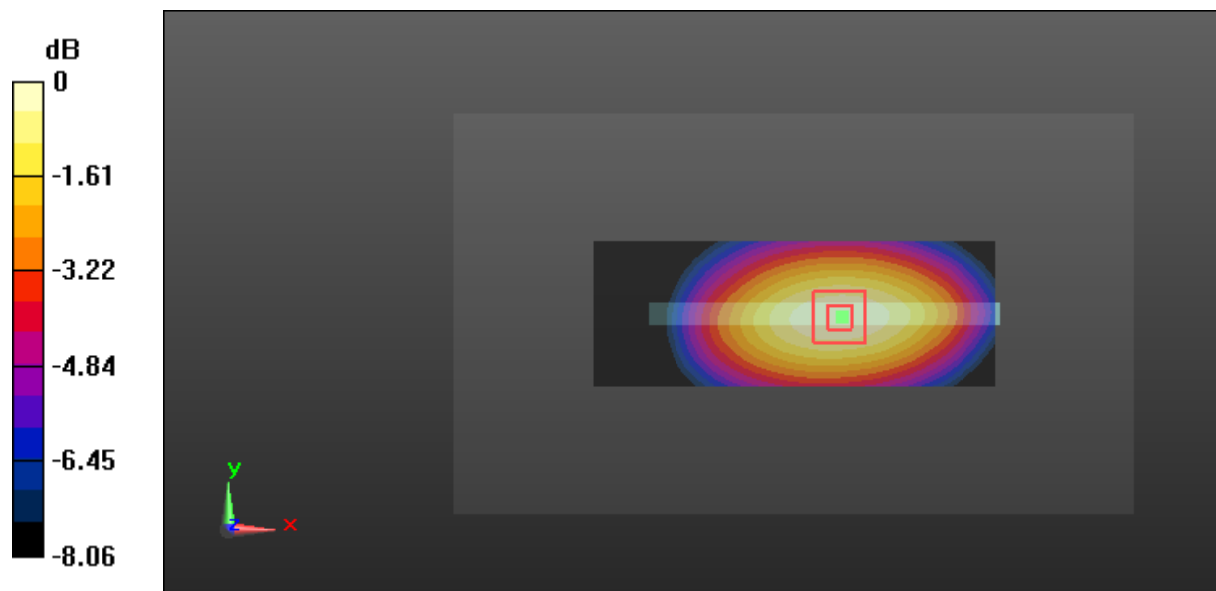

0 dB = 0.150 W/kg = -8.24 dBW/kg

**Test Plot 120#: LTE Band 17\_Body Left\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.116 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.47 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.150 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.116 W/kg

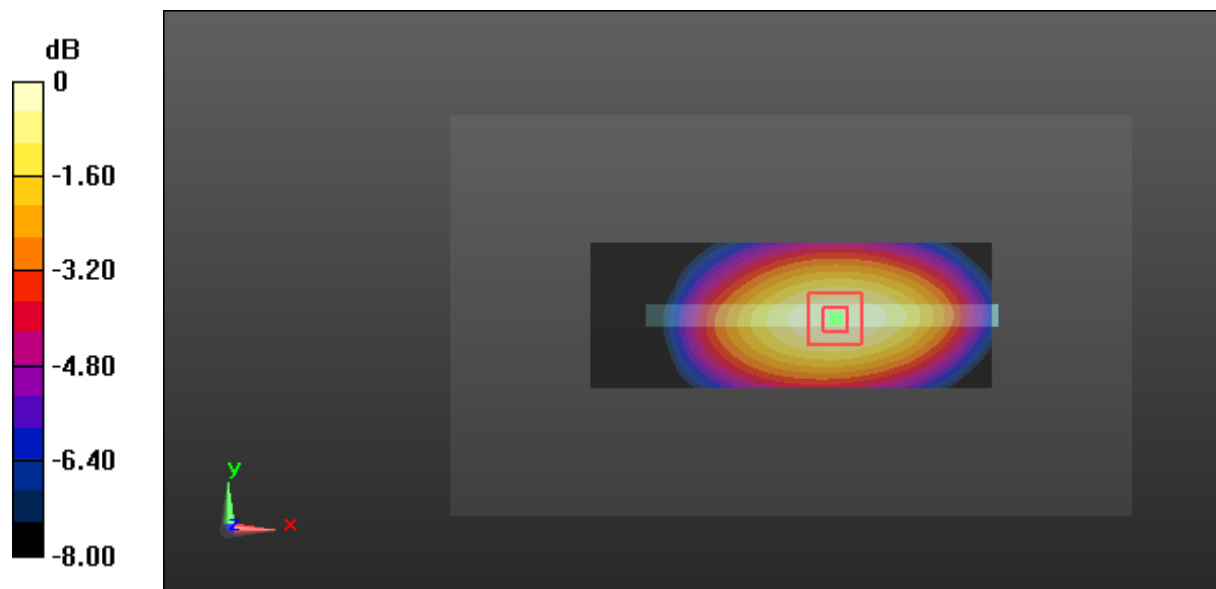

0 dB = 0.116 W/kg = -9.36 dBW/kg



**Test Plot 121#: LTE Band 17\_Body Right\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.256 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.09 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.331 W/kg

**SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.256 W/kg

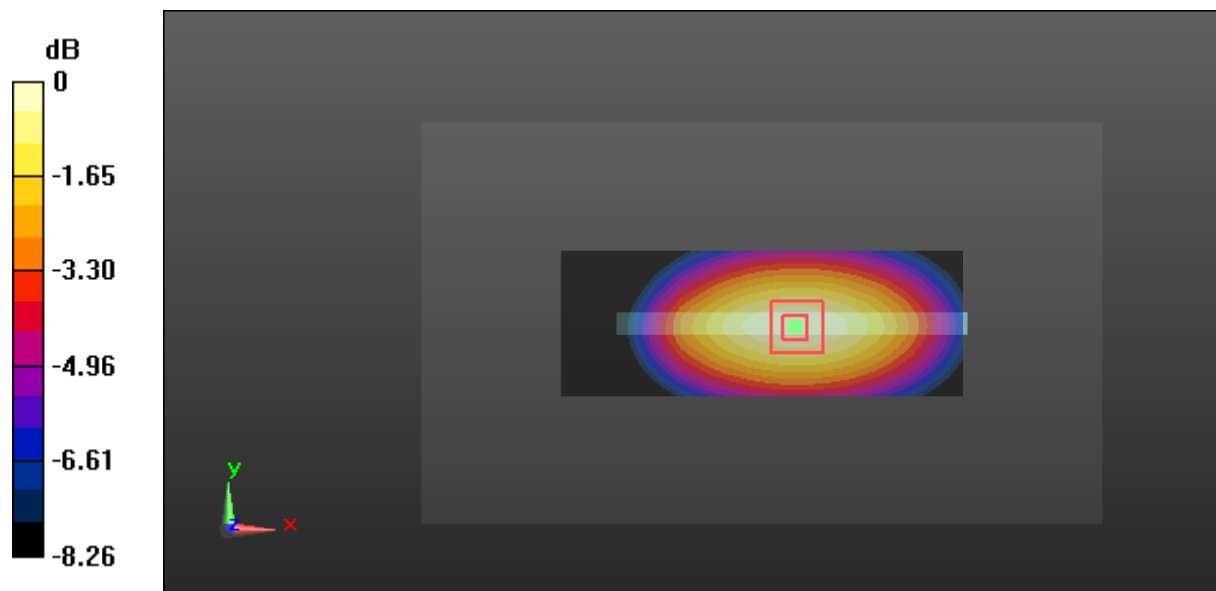

0 dB = 0.256 W/kg = -5.92 dBW/kg

**Test Plot 122#: LTE Band 17\_Body Right\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x41x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.203 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.31 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.266 W/kg

**SAR(1 g) = 0.192 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.204 W/kg

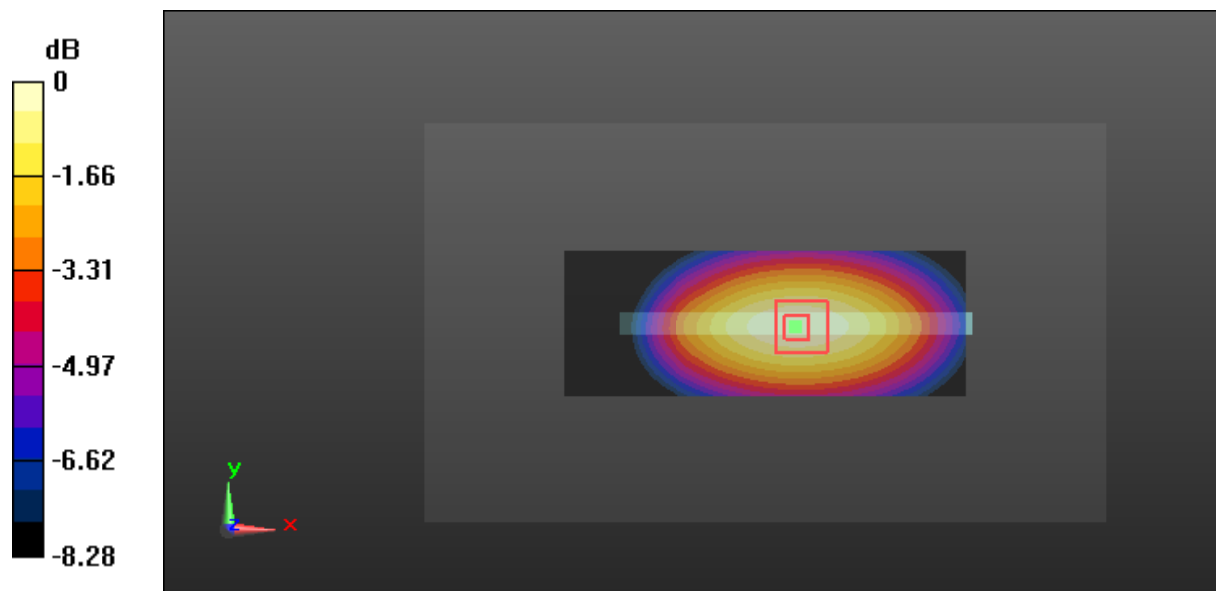

0 dB = 0.204 W/kg = -6.90 dBW/kg

**Test Plot 123#: LTE Band 17\_Body Bottom\_Middle Channel\_1RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0364 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.694 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.0740 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0381 W/kg

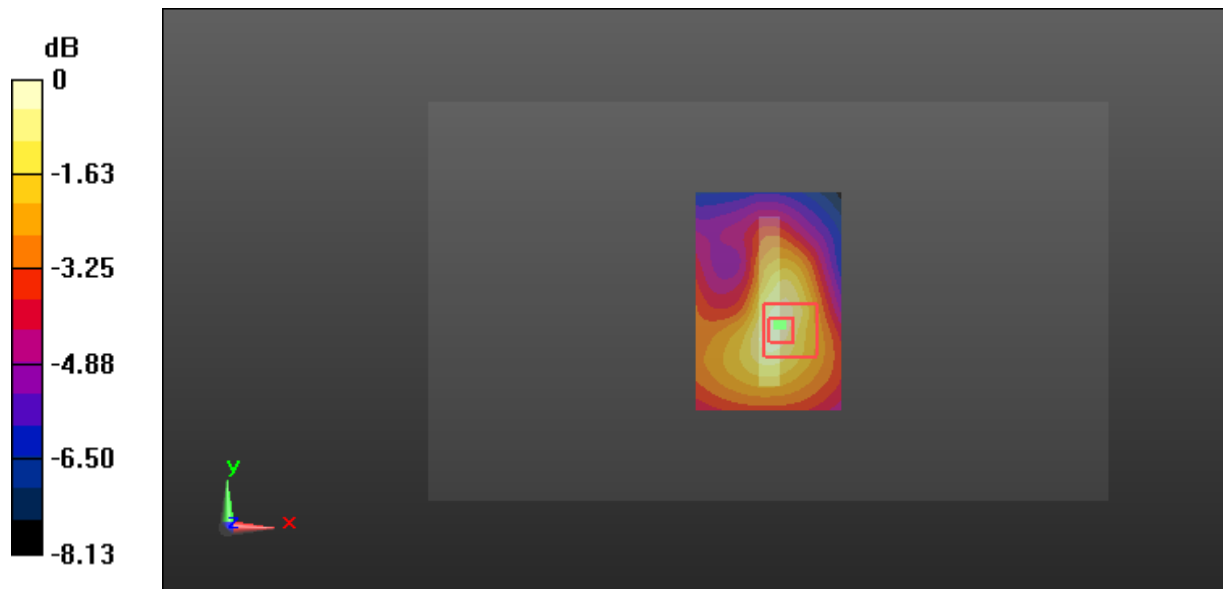

0 dB = 0.0381 W/kg = -14.19 dBW/kg

**Test Plot 124#: LTE Band 17\_Body Bottom\_Middle Channel\_50%RB**

**DUT: 4G Smart Phone; Type: Elite 5.0L+ ; Serial: 16110800121**

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used: 710 MHz;  $\sigma = 0.986$  S/m;  $\epsilon_r = 55.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(10.15, 10.15, 10.15); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (41x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0288 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.402 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0470 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.017 W/kg**

Maximum value of SAR (measured) = 0.0297 W/kg

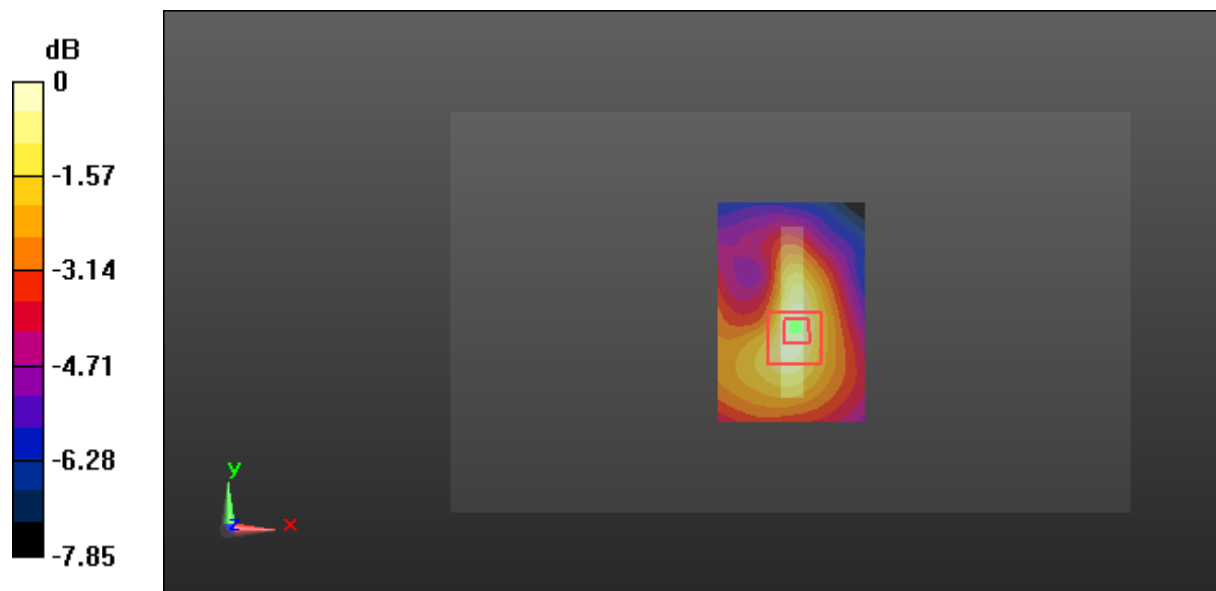

0 dB = 0.0297 W/kg = -15.27 dBW/kg