


Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.474	30	Pass
NVNT	BLE	2442	Ant1	-3.05	30	Pass
NVNT	BLE	2480	Ant1	-3.94	30	Pass

Project No.: JYTSZR2212019



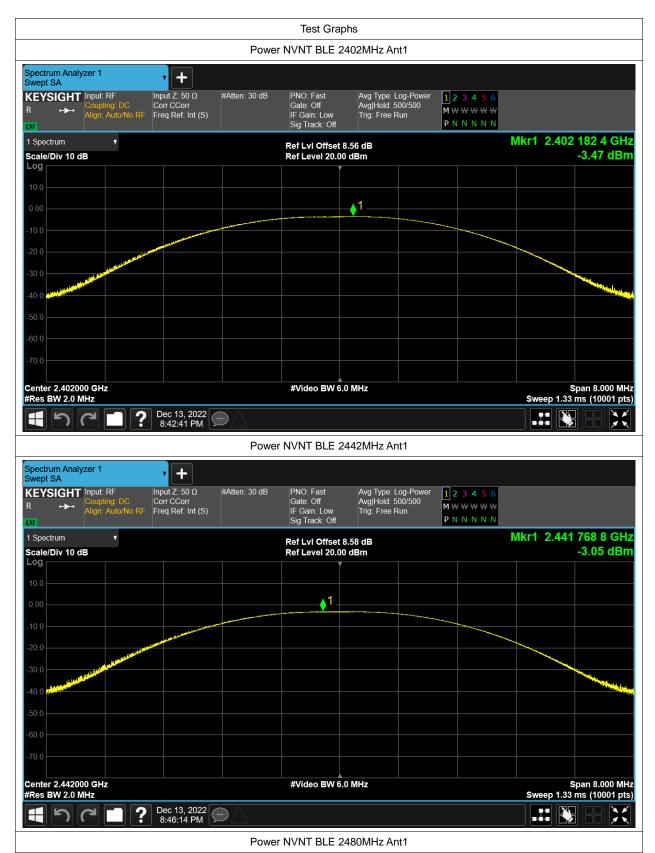







-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.663	0.5	Pass
NVNT	BLE	2442	Ant1	0.662	0.5	Pass
NVNT	BLE	2480	Ant1	0.66	0.5	Pass












Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.03	
NVNT	BLE	2442	Ant1	1.03	
NVNT	BLE	2480	Ant1	1.03	



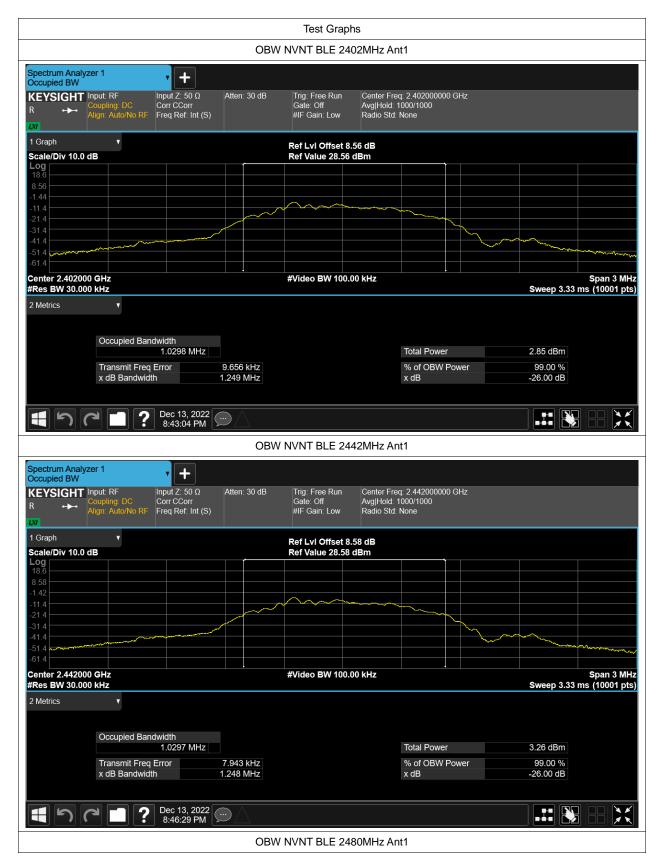







Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-18.882	8	Pass
NVNT	BLE	2442	Ant1	-18.444	8	Pass
NVNT	BLE	2480	Ant1	-19.312	8	Pass












Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-45.81	-20	Pass
NVNT	BLE	2480	Ant1	-45.87	-20	Pass

Project No.: JYTSZR2212019



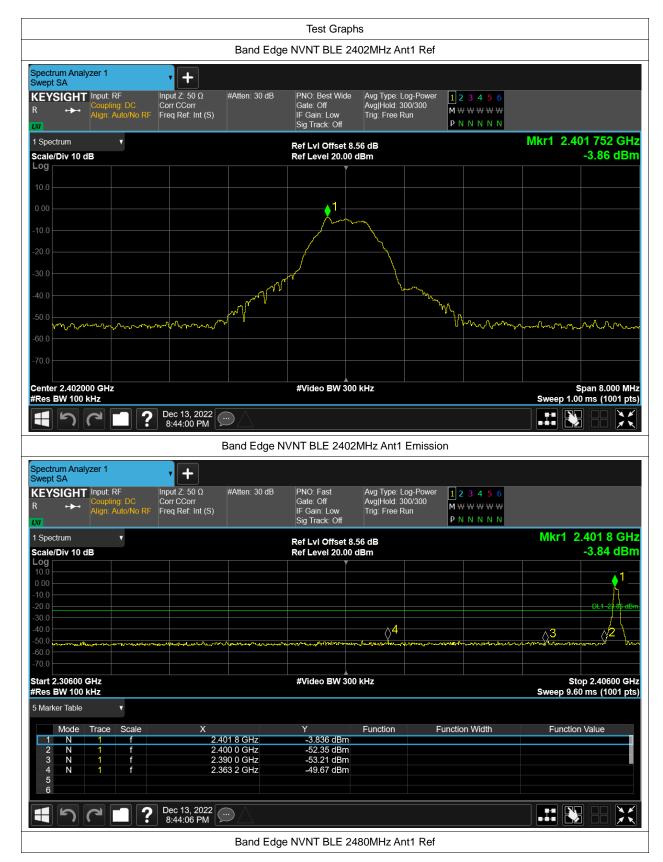



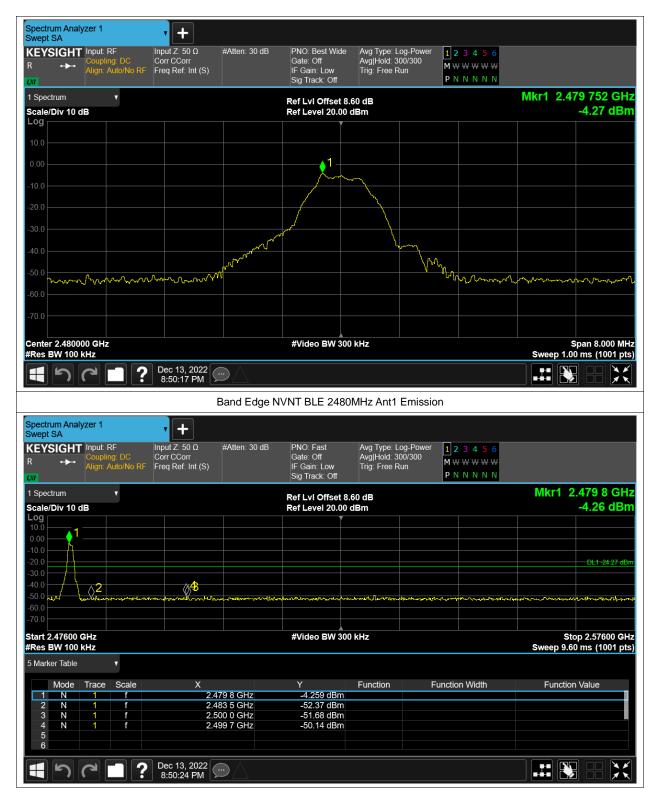



Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-39.56	-20	Pass
NVNT	BLE	2442	Ant1	-40.05	-20	Pass
NVNT	BLE	2480	Ant1	-39.09	-20	Pass







