

Test Report of FCC Part 15 C for FCC Certificate
On Behalf of
TOYS TEKK CORPORATION

FCC ID: 2ABP3EC10368
Product Description: 2.4 GHZ Radio Controlled RC Supersonic Hero
Model No.: EC10368
Supplementary Model No.: N/A

Prepared for: **TOYS TEKK CORPORATION**
1005 E. Las Tunas Drive #777, San Gabriel CA 91776, USA..

Prepared by: **Bontek Compliance Testing Laboratory Co., Ltd.**
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road,
Nanshan, Shenzhen, China
Tel: 86-755-86337020
Fax: 86-755-86337028

Report No.: BCT13LR430E

Issue Date: February 17, 2014

Test Date: February 11~17, 2014

Tested by: Lion Cai **Reviewed by:** Owen Yang
Lion Cai Owen Yang

Approved by: Kendy Wang
Kendy Wang

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 Client Information.....	3
1.2 Related Submittal(s) / Grant (s).....	4
1.3 Test Methodology	4
1.4 Test Facility.....	4
2. SYSTEM TEST CONFIGURATION.....	5
2.1 EUT Configuration	5
2.2 EUT Exercise	5
2.3 General Test Procedures	5
2.4 List of Measuring Equipments	6
3. SUMMARY OF TEST RESULTS.....	7
4. TEST OF CONDUCTED EMISSION	8
4.1 Applicable Standard.....	8
4.2 Test Setup Diagram.....	8
5. TEST OF HOPPING CHANNEL BANDWIDTH	9
5.1 Applicable Standard.....	9
5.2 EUT Setup	9
5.3 Test Equipment List and Details.....	9
5.4 Test Procedure	9
5.5 Test Result.....	9
6. BAND EDGES MEASUREMENT	12
6.1 Limit of Band Edges Measurement	12
6.2 Radiate EUT Setup	12
6.3 Test Procedure	13
6.4 Test Result.....	13
7. SPURIOUS EMISSIONS.....	15
7.1 Limit of Spurious Emissions	15
7.2 EUT Setup	16
7.3 Test Procedure	17
7.4 Spurious Emissions Test Result.....	18
8. ANTENNA REQUIREMENT	28
8.1 Standard Applicable.....	28
8.2 Antenna Connected Construction	28

1. GENERAL INFORMATION

1.1 Client Information

Applicant: **TOYS TEKK CORPORATION**
Address of applicant: 1005 E. Las Tunas Drive #777, San Gabriel CA 91776, USA..
Manufacturer: **ZHONGSHAN FUHAI INDUSTRIAL LTD**
Address of manufacturer: Da Che Industrial District, Nanlang town, Zhongshan City, Guangdong, China.

General Description of E.U.T

Items	Description
EUT Description:	2.4 GHZ Radio Controlled RC Supersonic Hero
Trade Name:	SUPER FLIERS
Model No.:	EC10368
Supplementary Model No.:	N/A
Frequency Band:	2405MHz ~ 2480MHz
Type of modulation	GFSK
Number of Channels:	16
Antenna Gain	0dBi
Antenna Type:	Integral Antenna
Rated Voltage:	9.0V DC from battery

Remark The test data gathered are from the production sample provided by the manufacturer.*

1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with Section 15.107 and 15.109 under the FCC Rules Part 15 Subpart B and Section 15.207, 15.209, 15.249 under the FCC Rules Part 15 Subpart C.

1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Test Facility

All measurement required was performed at laboratory of Shenzhen CTL Testing Technology Co., Ltd. at Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055.

The test facility is recognized, certified, or accredited by the following organizations:

FCC – Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December, 2013.

2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous transmitting application.

2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode. But the EUT is powered by DC 1.5V of battery, this test is not applicable.

Radiated Emissions The EUT is placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

2.4 List of Measuring Equipments

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2013/07/12	2014/07/11
EMI Test Receiver	R&S	ESCI3	103710	2013/07/10	2014/07/09
EMI Test Receiver	R&S	ESPI	1164.6407.07	2013/07/10	2014/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2013/07/06	2014/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2013/07/06	2014/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2013/07/12	2014/07/11
Horn Antenna	SCHWARZBEC K	BBHA9170	1562	2013/07/12	2014/07/11
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2013/07/12	2014/07/11
LISN	R&S	ENV216	101316	2013/07/10	2014/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2013/07/10	2014/07/09
Microwave Preamplifier	HP	8349B	3155A00882	2013/07/10	2014/07/09
Amplifier	HP	8447D	3113A07663	2013/07/10	2014/07/09
Transient Limiter	Com-Power	LIT-153	532226	2013/07/10	2014/07/09

3. SUMMARY OF TEST RESULTS

EUT Fundamental Frequency	FCC Rules	Description of Test	Result
2.405~2.480 GHz	15.207	Disturbance Voltage at The Mains Terminals	N/A , without AC main
	15.215	20 dB Bandwidth	Pass
	15.249	Band Edges Measurement	Pass
	15.249	Spurious Emission	Pass
	15.203	Antenna Requirement	Pass


4. TEST OF CONDUCTED EMISSION

4.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits (dBuV)	
	Quasi-Peak	Average
0.150~0.500	66~56	56~46
0.500~5.000	56	46
5.000~30.00	60	50

4.2 Test Setup Diagram

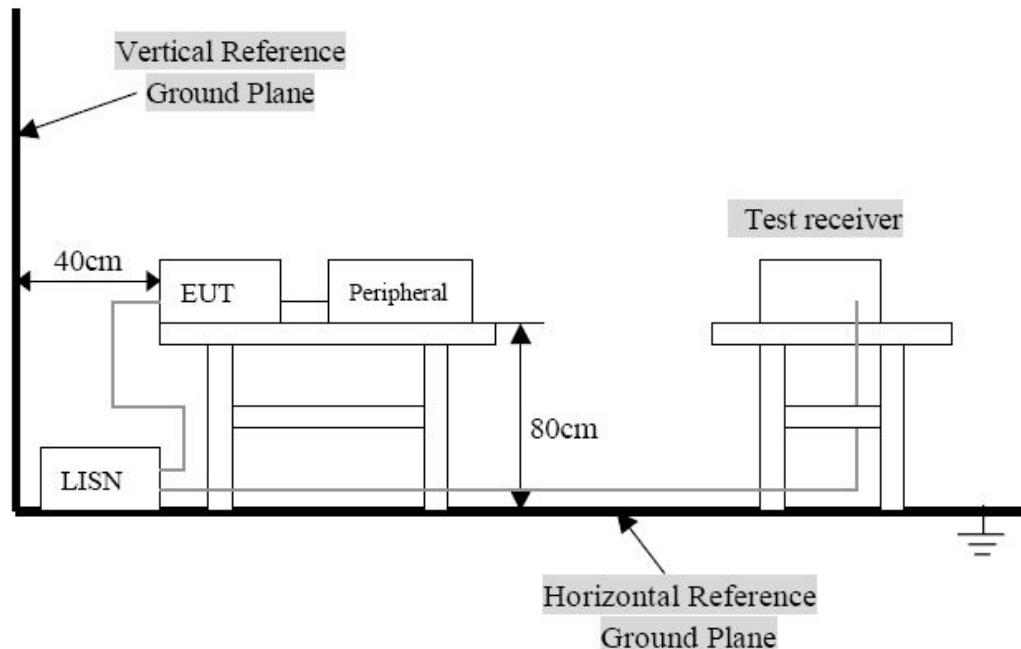

Remark: 1. The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC 15.207 limits.

2. The EUT was charged on the base, and the base was connected to a 120 VAC/ 60Hz power source.


Notes: The EUT is powered by DC 9.0V from battery without AC mains, this test is unapplicable.

5. Test of Hopping Channel Bandwidth

5.1 Applicable Standard

Section 15.215(c): Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

5.2 EUT Setup

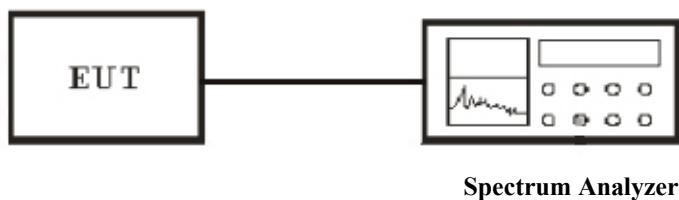

5.3 Test Equipment List and Details

See section 2.4.

5.4 Test Procedure


1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 $RBW \geq 1\%$ of the 20 dB bandwidth, $VBW \geq RBW$
Sweep = auto
Detector function = peak
Trace = max hold
3. The spectrum width with level higher than 20dB below the peak level.
4. Repeat above 1~3 points for the middle and highest channel of the EUT.

5.5 Test Result


Temperature (°C) : 22~23	EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
Humidity (%RH): 50~54	M/N: EC10368
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous transmitting

Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)
GFSK	Low	2405	848
GFSK	Middle	2440	888
GFSK	High	2480	888


Channel Low

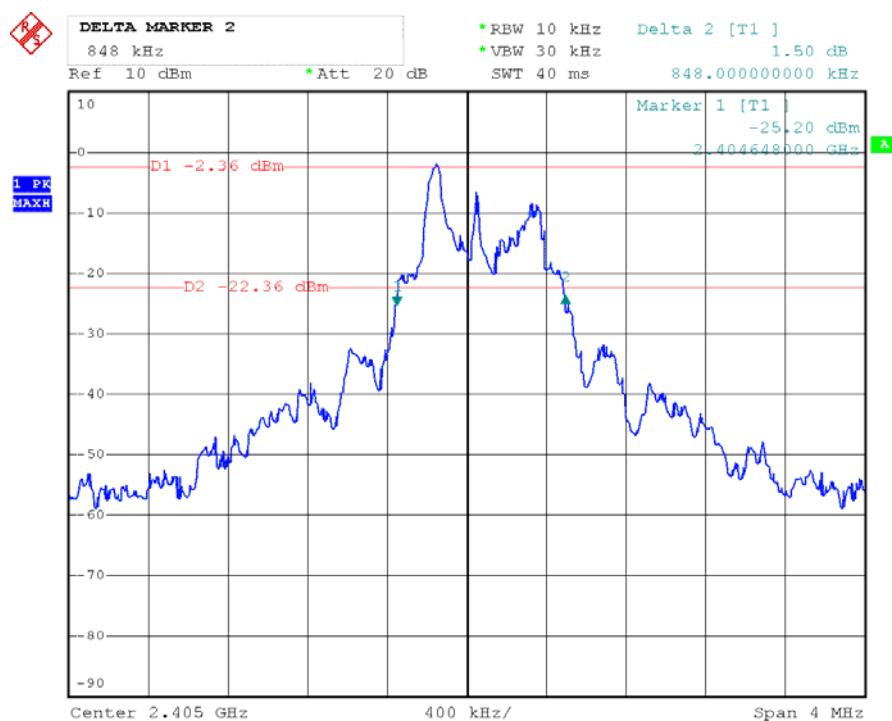

Channel Mid

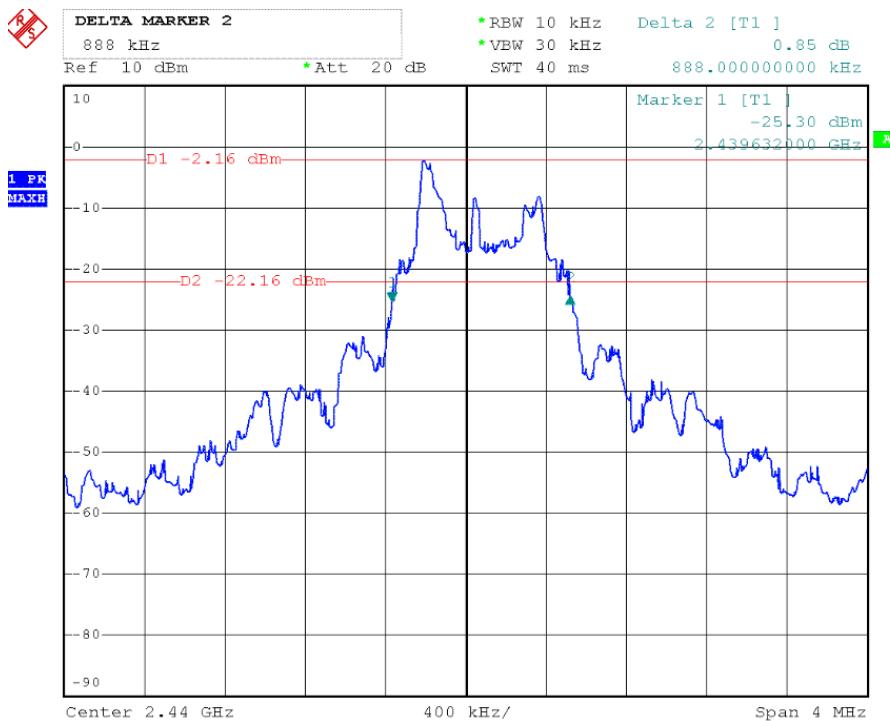

Channel High

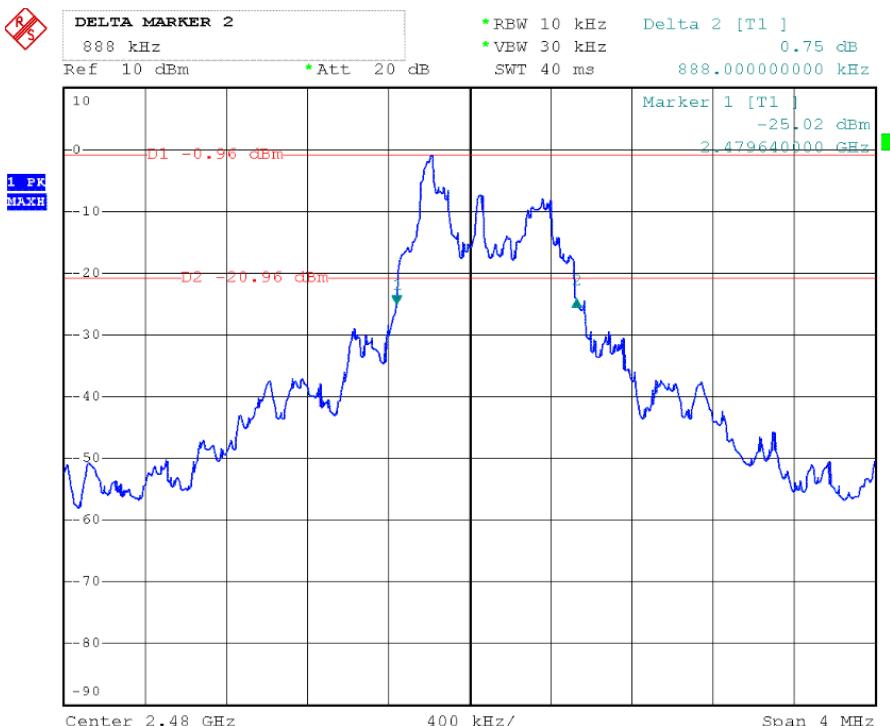

6. BAND EDGES MEASUREMENT

6.1 Limit of Band Edges Measurement

1. In the above emission table, the tighter limit applies at the band edges.
2. As shown in Section 15.35(b), for frequencies above 1000 MHz, the above field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Note: (1) The tighter limit shall apply at the edge between two frequency bands.

(2) The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

6.2 Radiate EUT Setup

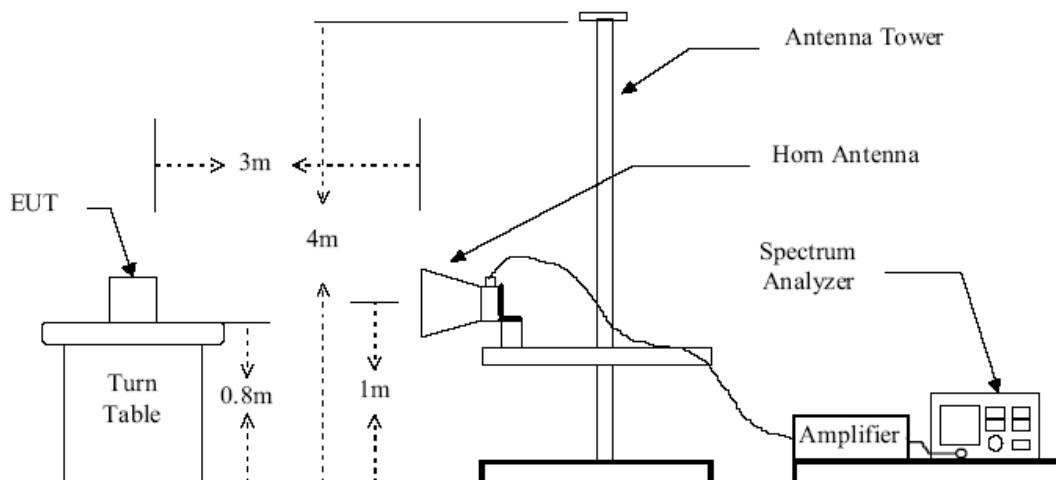


Figure 2 : Frequencies measured above 1 GHz configuration

6.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

6.4 Test Result


Temperature (°C) : 22~23	EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
Humidity (%RH) : 50~54	M/N: EC10368
Barometric Pressure (mbar) : 950~1000	Operation Condition: Continuous transmitting

Radio test result


Frequency (MHz)	Antenna Polarization	Emission Read Value (dB μ V/m)	Limits (dB μ V/m)
2389.45	H	32.67	54
2483.62	H	33.10	54

Frequency (MHz)	Antenna Polarization	Emission Read Value (dB μ V/m)	Limits (dB μ V/m)
2389.45	V	33.37	54
2483.62	V	33.78	54

Conducted test result
CH Low

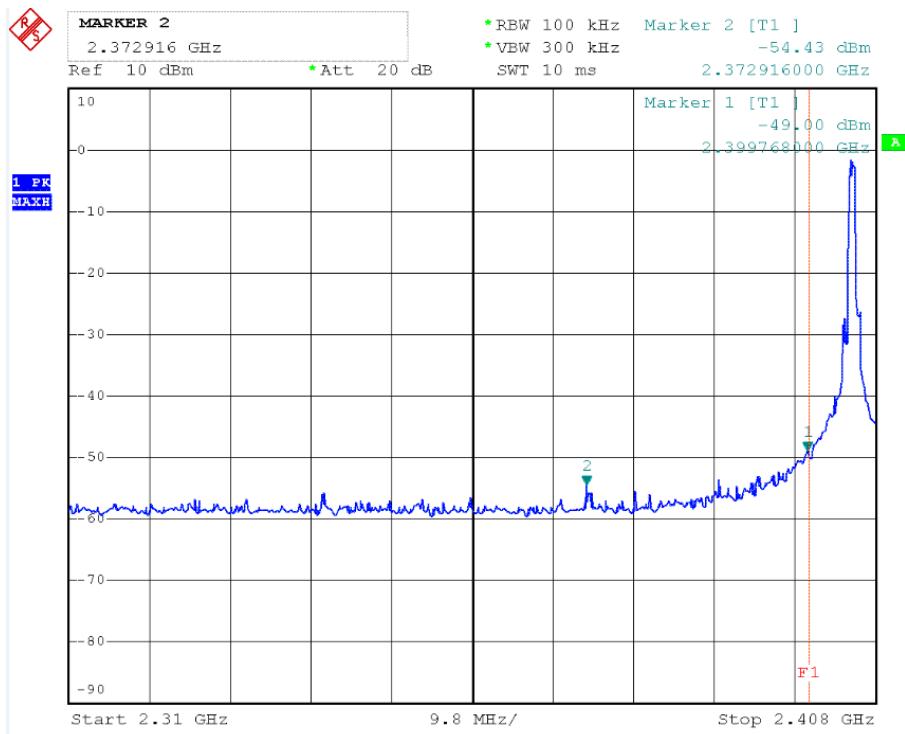

CH High

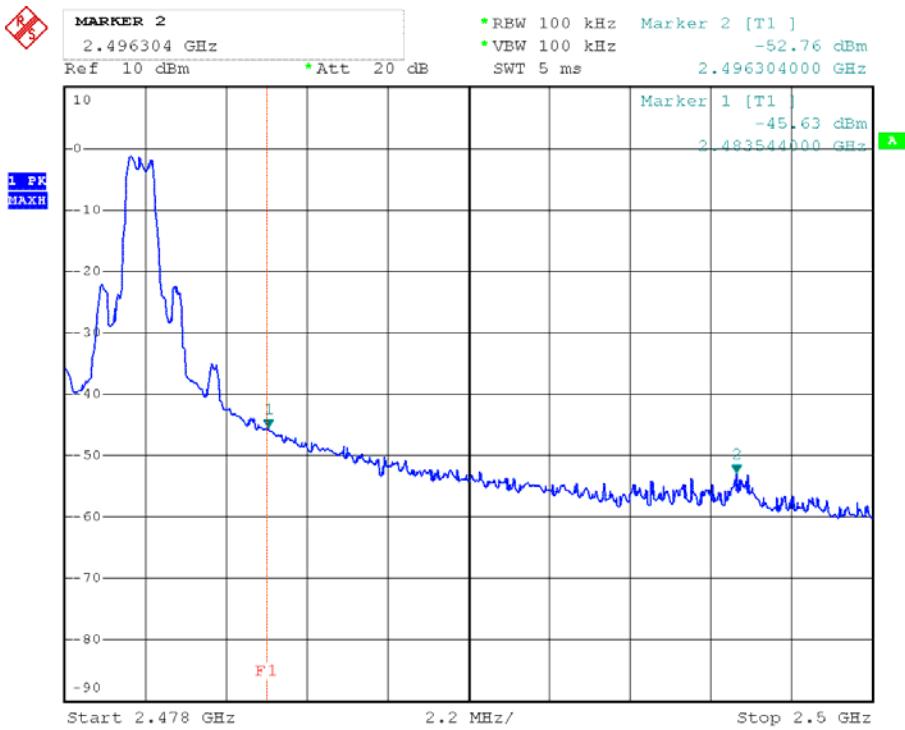

7. SPURIOUS EMISSIONS

7.1 Limit of Spurious Emissions

1. In the section 15.249(a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:
2. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Fundamental Frequency (MHz)	Field Strength of Fundamental Field Strength (mV/m)	Field Strength of Harmonics (μmV/m)
902-928 MHz	50	500
2400 - 2483.5 MHz	50	500
5725 - 5875 MHz	50	500
24.0 - 24.25 GHz	250	2500

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

3. In the above emission table, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

7.2 EUT Setup

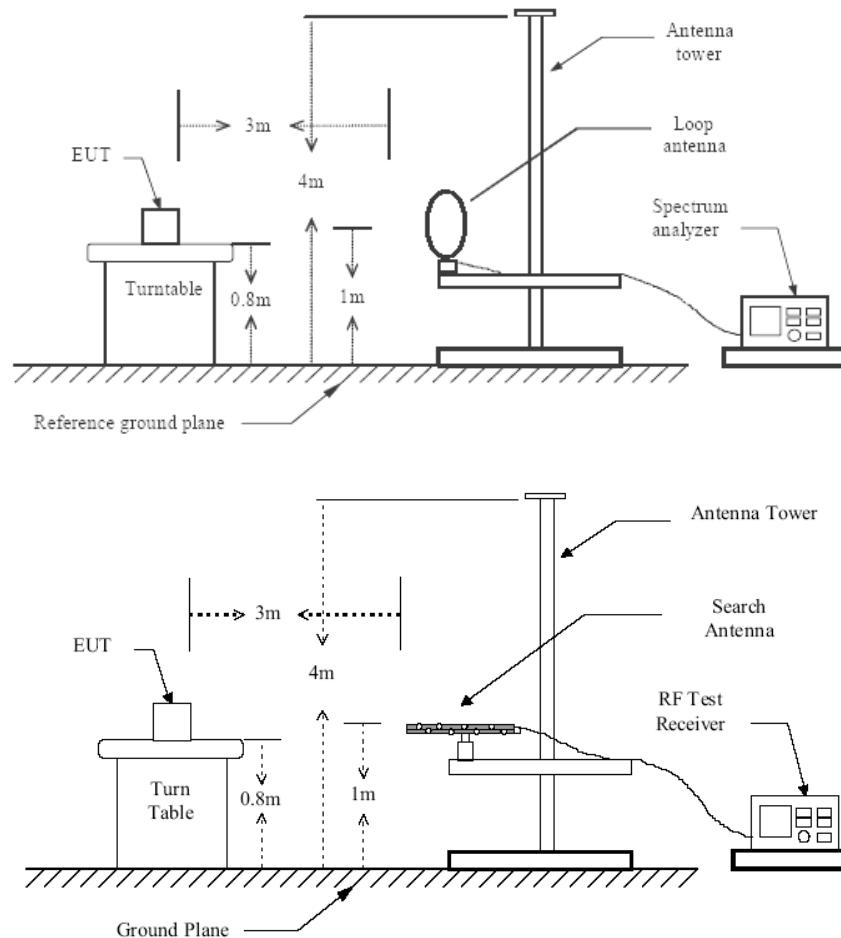


Figure 1 : Frequencies measured below 1 GHz configuration

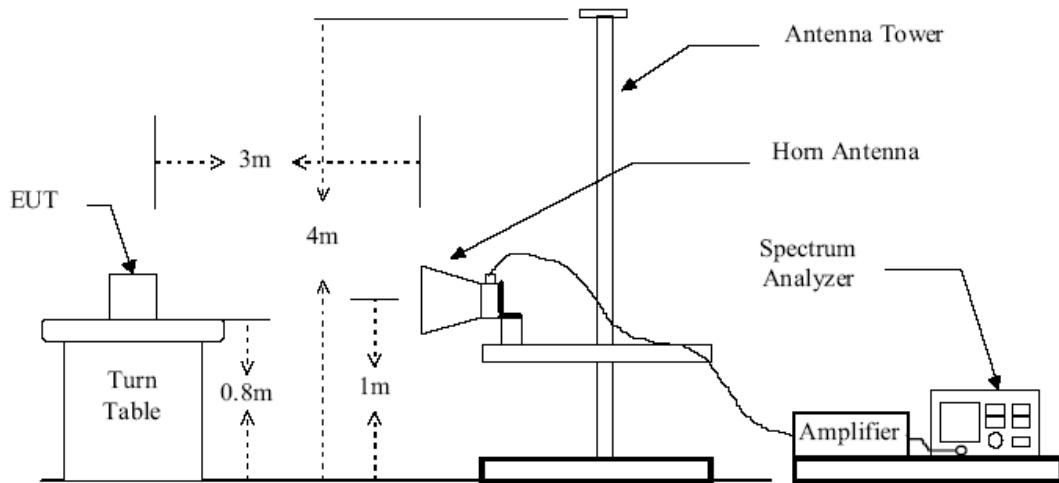


Figure 2 : Frequencies measured above 1 GHz configuration

7.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

- 1). Configure the EUT according to ANSI C63.4:2003.
- 2). The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3). The receiving antenna was placed 3 meters far away from the turntable.
- 4). The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 5). The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.

7.4 Spurious Emissions Test Result

Temperature (°C) : 22~23	EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
Humidity (%RH): 50~54	M/N: SK-078AG
Barometric Pressure (mbar): 950~1000	Operation Condition: Continuous transmitting

Note: In this testing, the EUT was respectively tested in three different orientations. That is:

1. EUT was lie vertically, and then its Antenna oriented upward
2. EUT was lie vertically, and then its Antenna oriented downward
3. EUT was lie flatwise, and then its Antenna oriented to the receiving antenna

The worst test data see following pages

When the EUT was lie flatwise, and its Antenna oriented to the receiving antenna, the worst test data was got as following table.

WORST-CASE RADIATED EMISSION BELOW 30 MHz

Normal operating Mode:


Frequency (MHz)	Meter Reading (dB μ V)	Antenna Factor (dB/M)	Cable Loss (dB)	Emission Levels (dB μ V/M)	Limits (dB μ V/M)	Margin (dB)	Detector Mode PK/QP
0.45	21.35	8.25	1.01	28.59	67	38.41	QP
16.67	22.47	7.57	1.2	28.84	49.5	20.66	QP
22.43	23.59	8.64	1.05	31.18	49.5	18.32	QP
24.05	22.36	7.22	1.69	27.89	49.5	21.61	QP

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
 M/N: EC10368
 Operating Condition: Continuous transmitting
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 9.0V From battery
 Comment: Polarization: Horizontal
 Tem:25°C Hum:50%

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Time	Bandw.	VULB9163 NEW

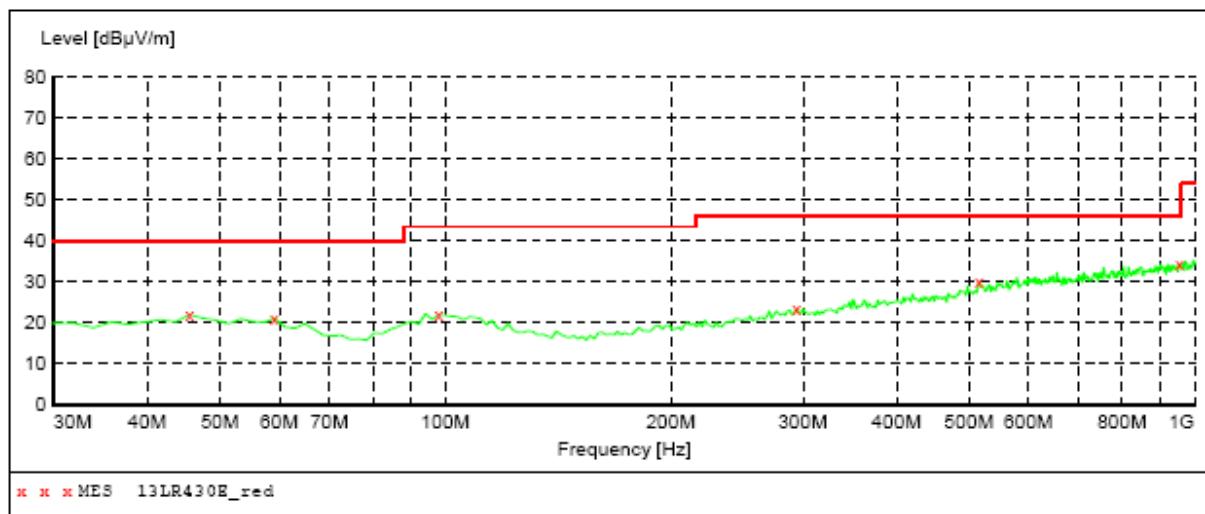

MEASUREMENT RESULT: "13LR430E_red"

3/6/2014 14:35


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
45.520000	22.00	15.9	40.0	18.0	QP	100.0	0.00	HORIZONTAL
59.100000	21.20	14.6	40.0	18.8	QP	100.0	0.00	HORIZONTAL
97.900000	21.90	17.4	43.5	21.6	QP	100.0	0.00	HORIZONTAL
293.840000	23.30	18.6	46.0	22.7	QP	100.0	0.00	HORIZONTAL
515.000000	29.90	24.2	46.0	16.1	QP	100.0	0.00	HORIZONTAL
953.440000	34.40	29.6	46.0	11.6	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Low:

EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
 M/N: EC10368
 Operating Condition: Continuous transmitting
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 9.0V From battery
 Comment: Polarization: Vertical
 Tem:25°C Hum:50%

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

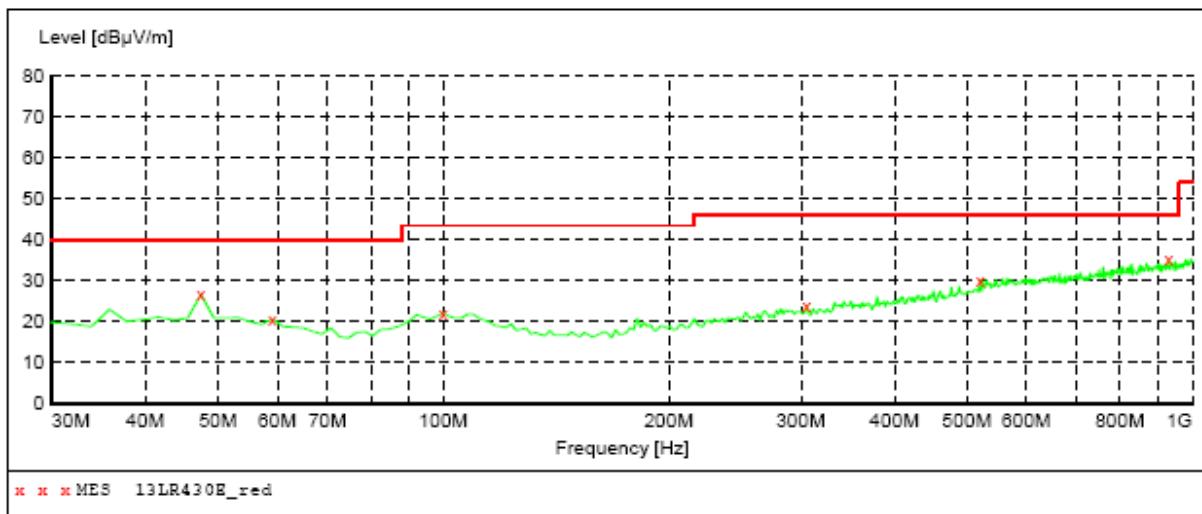

MEASUREMENT RESULT: "13LR430E_red"

2/12/2014 14:32


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
47.460000	26.60	15.8	40.0	13.4	QP	100.0	0.00	VERTICAL
59.100000	20.70	14.6	40.0	19.3	QP	100.0	0.00	VERTICAL
99.840000	22.10	17.5	43.5	21.4	QP	100.0	0.00	VERTICAL
305.480000	24.00	18.9	46.0	22.0	QP	100.0	0.00	VERTICAL
520.820000	30.30	24.3	46.0	15.7	QP	100.0	0.00	VERTICAL
928.220000	35.10	29.4	46.0	10.9	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
 M/N: EC10368
 Operating Condition: Continuous transmitting
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 9.0V From battery
 Comment: Polarization: Horizontal
 Tem:25°C Hum:50%

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

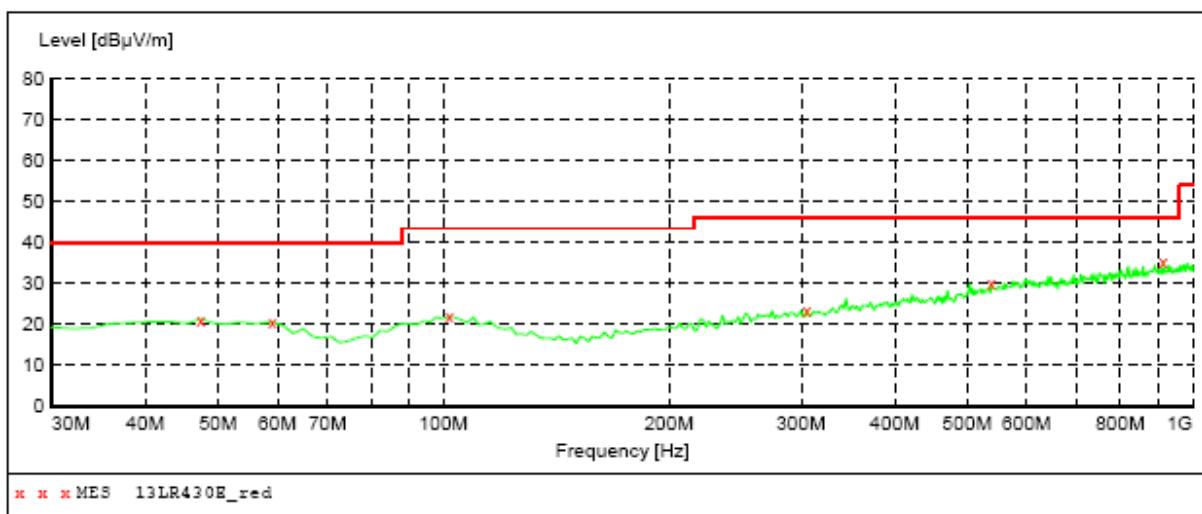

MEASUREMENT RESULT: "13LR430E_red"

2/12/2014 14:37


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
47.460000	21.30	15.8	40.0	18.7	QP	100.0	0.00	HORIZONTAL
59.100000	20.70	14.6	40.0	19.3	QP	100.0	0.00	HORIZONTAL
101.780000	22.00	17.3	43.5	21.5	QP	100.0	0.00	HORIZONTAL
305.480000	23.60	18.9	46.0	22.4	QP	100.0	0.00	HORIZONTAL
538.280000	29.90	24.7	46.0	16.1	QP	100.0	0.00	HORIZONTAL
912.700000	35.60	29.3	46.0	10.4	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel Middle:

EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
 M/N: EC10368
 Operating Condition: Continuous transmitting
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 9.0V From battery
 Comment: Polarization: Vertical
 Tem:25°C Hum:50%

SWEET TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

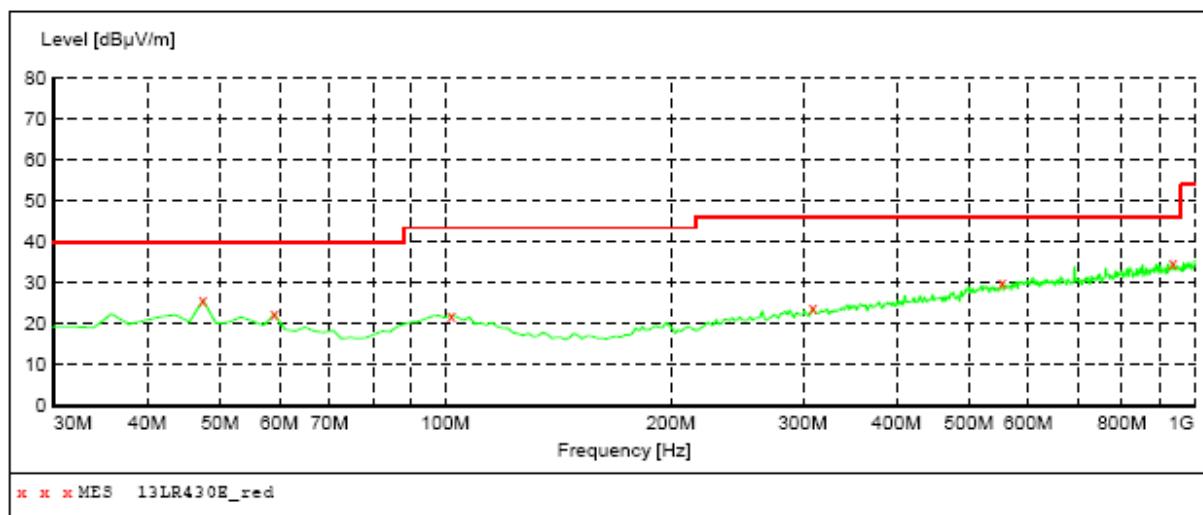

MEASUREMENT RESULT: "13LR430E_red"

2/12/2014 14:30


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	25.80	15.8	40.0	14.2	QP	100.0	0.00	VERTICAL
59.100000	22.40	14.6	40.0	17.6	QP	100.0	0.00	VERTICAL
101.780000	22.20	17.3	43.5	21.3	QP	100.0	0.00	VERTICAL
309.360000	24.10	18.9	46.0	21.9	QP	100.0	0.00	VERTICAL
553.800000	30.10	25.1	46.0	15.9	QP	100.0	0.00	VERTICAL
935.980000	34.80	29.5	46.0	11.2	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
 M/N: EC10368
 Operating Condition: Continuous transmitting
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 9.0V From battery
 Comment: Polarization: Horizontal
 Tem:25°C Hum:50%

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

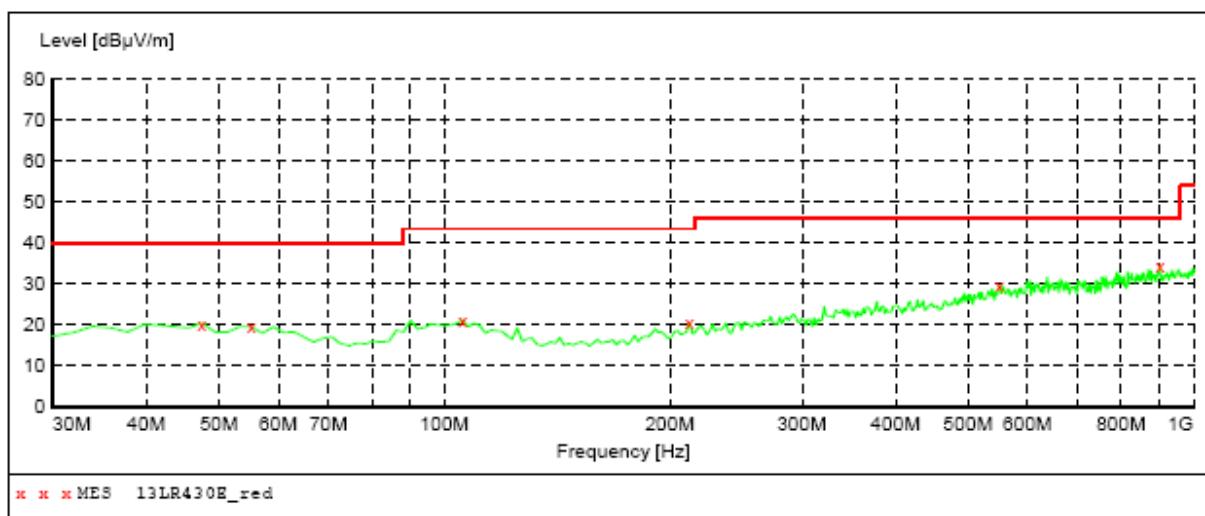

MEASUREMENT RESULT: "13LR430E_red"

3/6/2014 14:42


Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	20.40	15.8	40.0	19.6	QP	100.0	0.00	HORIZONTAL
55.220000	19.60	15.6	40.0	20.4	QP	100.0	0.00	HORIZONTAL
105.660000	21.30	16.9	43.5	22.2	QP	100.0	0.00	HORIZONTAL
212.360000	20.60	15.1	43.5	22.9	QP	100.0	0.00	HORIZONTAL
549.920000	29.50	25.0	46.0	16.5	QP	100.0	0.00	HORIZONTAL
901.060000	34.20	29.2	46.0	11.8	QP	100.0	0.00	HORIZONTAL

The worst Spurious Emission Data Below 1GHz Channel High:

EUT: 2.4 GHZ Radio Controlled RC Supersonic Hero
 M/N: EC10368
 Operating Condition: Continuous transmitting
 Test Site: 3m CHAMBER
 Operator: Chen
 Test Specification: DC 9.0V From battery
 Comment: Polarization: Vertical
 Tem:25°C Hum:50%

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

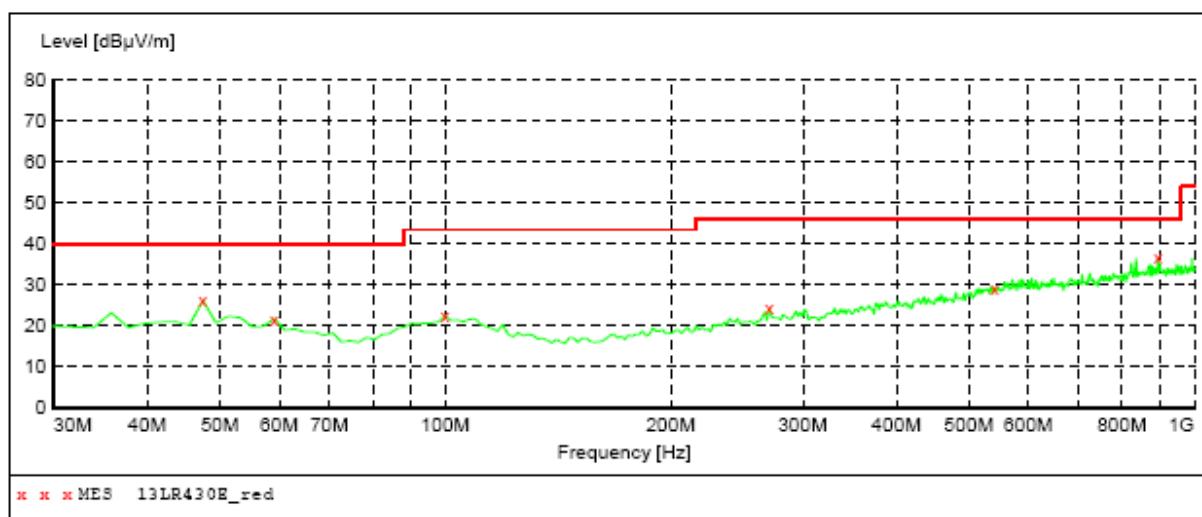

MEASUREMENT RESULT: "13LR430E_red"

2/12/2014 14:33

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det. QP	Height cm	Azimuth deg	Polarization
47.460000	26.20	15.8	40.0	13.8	QP	100.0	0.00	VERTICAL
59.100000	21.80	14.6	40.0	18.2	QP	100.0	0.00	VERTICAL
99.840000	22.50	17.5	43.5	21.0	QP	100.0	0.00	VERTICAL
270.560000	24.30	17.8	46.0	21.7	QP	100.0	0.00	VERTICAL
540.220000	29.40	24.8	46.0	16.6	QP	100.0	0.00	VERTICAL
893.300000	36.50	29.1	46.0	9.5	QP	100.0	0.00	VERTICAL

The worst Spurious Emission Data above 1GHz Channel Low

Maximum Frequency (MHz)	Polarity and Level					Limit (dB μ V/m)	Margin (dB μ V/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dB μ V	Transd	Result dB μ V/m			
2405	H	1	88.37	-7.17	81.2	114	-32.8	P
			76.58	-7.17	69.41	94	-24.59	A
2405	V	1	89.89	-7.17	82.72	114	-31.28	P
			76.78	-7.17	69.61	94	-24.39	A
4810	H	1	40.59	1.12	41.71	74	-32.29	P
			32.33	1.12	33.45	54	-20.55	A
4810	V	1	42.85	1.12	43.97	74	-30.03	P
			32.58	1.12	33.7	54	-20.3	A
7215	H	1	42.39	7.52	49.91	74	-24.09	P
			32.48	7.52	40	54	-14	A
7215	V	1	43.69	7.52	51.21	74	-22.79	P
			32.98	7.52	40.5	54	-13.5	A
9620	H	1	----	----	----	----	----	P
			----	----	----	----	----	A
9620	V	1	----	----	----	----	----	P
			----	----	----	----	----	A
12021.67	H	1	----	----	----	----	----	P
			----	----	----	----	----	A
12021.67	V	1	----	----	----	----	----	P
			----	----	----	----	----	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss+Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

The worst Spurious Emission Data above 1GHz Channel Middle

Maximum Frequency (MHz)	Polarity and Level					Limit (dB μ V/m)	Margin (dB μ V/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dB μ V	Transd	Result dB μ V/m			
2440	H	1	87.39	-6.43	80.96	114	-33.04	P
			75.35	-6.43	68.92	94	-25.08	A
2440	V	1	88.98	-6.43	82.55	114	-31.45	P
			75.63	-6.43	69.2	94	-24.8	A
4880	H	1	42.38	1.23	43.61	74	-30.39	P
			32.79	1.23	34.02	54	-19.98	A
4880	V	1	43.59	1.23	44.82	74	-29.18	P
			32.85	1.23	34.08	54	-19.92	A
7320	H	1	43.09	7.83	50.92	74	-23.08	P
			32.37	7.83	40.2	54	-13.8	A
7320	V	1	43.89	7.83	51.72	74	-22.28	P
			32.85	7.83	40.68	54	-13.32	A
9760	H	1	----	----	----	----	----	P
			----	----	----	----	----	A
9760	V	1	----	----	----	----	----	P
			----	----	----	----	----	A
12191.67	H	1	----	----	----	----	----	P
			----	----	----	----	----	A
12191.67	V	1	----	----	----	----	----	P
			----	----	----	----	----	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss+Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

The worst Spurious Emission Data above 1GHz Channel High

Channel High (2480MHz)								
Maximum Frequency (MHz)	Polarity and Level					Limit (dB μ V/m)	Margin (dB μ V/m)	Mark (P/Q/A)
	Polarity	Height (m)	Reading dB μ V	Transd	Result dB μ V/m			
2480	H	1	88.95	-6.21	82.74	114	-31.26	P
			75.84	-6.21	69.63	94	-24.37	A
2480	V	1	89.97	-6.21	83.76	114	-30.24	P
			76338	-6.21	76331.79	94	76237.79	A
4960	H	1	42.05	1.38	43.43	74	-30.57	P
			32.33	1.38	33.71	54	-20.29	A
4960	V	1	42.58	1.38	43.96	74	-30.04	P
			32.54	1.38	33.92	54	-20.08	A
7440	H	1	41.89	7.82	49.71	74	-24.29	P
			32.33	7.82	40.15	54	-13.85	A
7440	V	1	43.97	7.82	51.79	74	-22.21	P
			33.05	7.82	40.87	54	-13.13	A
9920	H	1	----	----	----	----	----	P
			----	----	----	----	----	A
9920	V	1	----	----	----	----	----	P
			----	----	----	----	----	A
12361.67	H	1	----	----	----	----	----	P
			----	----	----	----	----	A
12361.67	V	1	----	----	----	----	----	P
			----	----	----	----	----	A
25380.37	----	----	----	----	----	----	----	----

Remark: 1. Transd.=Antenna Factor+Cable Loss+Pre-amplifier

Margin = Level-Limit

Mark: P means Peak Value, Q means Quasi Peak Value, A means Average Value

2. Data of measurement within this frequency range shown “ - ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

3. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz.

4. The test limit distance is 3m limit

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

8.2 Antenna Connected Construction

The antenna is designed with permanent attachment and no consideration of replacement.