

# **FCC Test Report**

Report No.: AGC02390201203FE03

FCC ID : 2ABRU-RFM208P24

APPLICATION PURPOSE : Original Equipment

**PRODUCT DESIGNATION**: Multi-Band Wireless Module with PA

**BRAND NAME** : BDE

**MODEL NAME** : BDE-RFM208P-2.4

**APPLICANT**: Guangzhou BDE Technology Inc.

**DATE OF ISSUE** : Apr. 25, 2021

**STANDARD(S)** : FCC Part 15.247

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 45

### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 25, 2021	Valid	Initial Release



### Page 3 of 45

### **TABLE OF CONTENTS**

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. 6 DB BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	15
9. CONDUCTED SPURIOUS EMISSION	17
9.1. MEASUREMENT PROCEDURE	17
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	2!



Page 4 of 45

10.1. MEASUREMENT PROCEDURE	25
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	25
10.3. MEASUREMENT EQUIPMENT USED	25
10.4. LIMITS AND MEASUREMENT RESULT	25
11. RADIATED EMISSION	27
11.1. MEASUREMENT PROCEDURE	27
11.2. TEST SETUP	
11.3. LIMITS AND MEASUREMENT RESULT	29
11.4. TEST RESULT	29
12. FCC LINE CONDUCTED EMISSION TEST	39
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	39
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	40
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	40
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	41
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	43
APPENDIX B. PHOTOGRAPHS OF FUT	45

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 45

### 1. VERIFICATION OF COMPLIANCE

Applicant	Guangzhou BDE Technology Inc.
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China
Manufacturer	Guangzhou BDE Technology Inc.
Address B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, 510663, China	
Factory	Guangzhou BDE Technology Inc.
Address B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Gua 510663, China	
Product Designation	Multi-Band Wireless Module with PA
Brand Name	BDE
Test Model BDE-RFM208P-2.4	
Date of test	Dec. 29, 2020 to Apr. 25, 2021
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Eddy Lin	
	Eddy Liu (Project Engineer)	Apr. 25, 2021
Reviewed By	Max Zhang	
GC .	Max Zhang (Reviewer)	Apr. 25, 2021
Approved By	Towasties	
yo to	Forrest Lei (Authorized Officer)	Apr. 25, 2021



Page 6 of 45

### 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Multi-Band Wireless Module with PA". It is designed by way of utilizing the O-QPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.405 GHz to 2.480GHz			
RF Output Power	4.690dBm (Max)			
Modulation	O-QPSK			
Number of channels	16 Channels			
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)			
Antenna Gain	2.9dBi			
Hardware Version	V1.0			
Software Version	V1.0			
Power Supply DC 3.3V				

### 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	Channel Number	Frequency
	0	2405MHz	8	2445MHz
	1	2410MHz	9	2450MHz
2400~2483.5MHz	2	2415MHz	10	2455MHz
	3	2420MHz	<sub>®</sub> 11	2460MHz
	4	2425MHz	12	2465MHz
	5	2430MHz	13	2470MHz
	6	2435MHz	14	2475MHz
	7	2440MHz	15	2480MHz



Page 7 of 45

### 2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2ABRU-RFM208P24** filing to comply with the FCC Part 15.247 requirements.

### 2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

### 2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

### 2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 8 of 45

### 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.1 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±4.0 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, Uc = ±0.8 dB
- Uncertainty of RF power density, conducted, Uc = ±2.6 dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Page 9 of 45

g/Inspection The test results


he test report.

### 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION			
1	Low channel TX(2405MHz)			
2	Middle channel TX(2440MHz)			
3	High channel TX(2480MHz)			

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

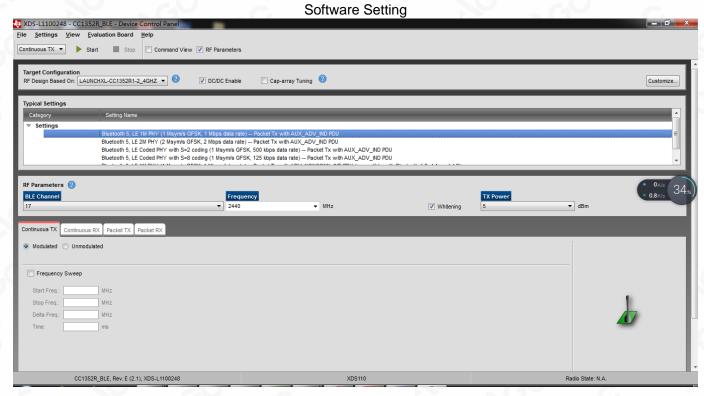




Page 10 of 45


### 5. SYSTEM TEST CONFIGURATION

### **5.1. CONFIGURATION OF TESTED SYSTEM**

Radiated Emission Configure:



Conducted Emission Configure:



### **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
1	Multi-Band Wireless Module with PA	BDE-RFM208P-2.4	2ABRU-RFM208P24	EUT
2	PC	N/A	N/A	AE
3	Control board	CC2642R1/CC2652R1	DC 3.3V	AE

### **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 11 of 45

### 6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

### TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep. 21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Sep. 20, 2019	Sep. 19, 2021
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 12 of 45

### 7. PEAK OUTPUT POWER


### 7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3\*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

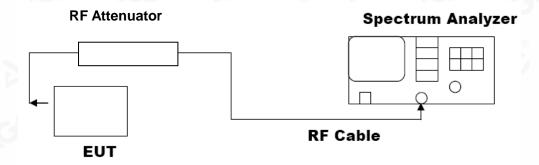



Page 13 of 45

he test results the test report.

### 7.3. LIMITS AND MEASUREMENT RESULT

	PEAK OUTPUT POWER MEA	SUREMENT RESULT					
	FOR GFSK MOUDULATION						
Frequency Peak Power Applicable Limits (GHz) (dBm) Pass or I							
2.405	4.690	30	Pass				
2.440	4.376	30	Pass				
2.480	4.036	30	Pass				

CH<sub>0</sub>





### **CH07**



### CH15





Page 15 of 45

### 8. 6 DB BANDWIDTH

### **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

### **8.3. LIMITS AND MEASUREMENT RESULTS**

	LIMITS AND MEASU	REMENT RESULT			
Applicable Limite	Applicable Limits				
Applicable Limits	Test Data	Criteria			
GC C	Low Channel	1525.8	PASS		
>500KHZ	Middle Channel	1588.8	PASS		
	High Channel	1617.2	PASS		

### TEST PLOT OF BANDWIDTH FOR LOW CHANNEL







### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





Page 17 of 45

### 9. CONDUCTED SPURIOUS EMISSION

### 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

### 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

### 9.4. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT					
Annilla alda I limita	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			







### TEST RESULT FOR ENTIRE FREQUENCY RANGE


O-QPSK MODULATION IN LOW CHANNEL

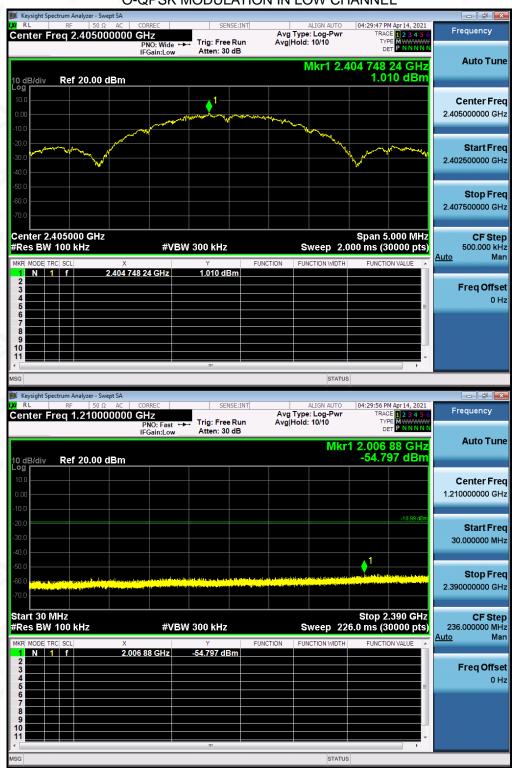





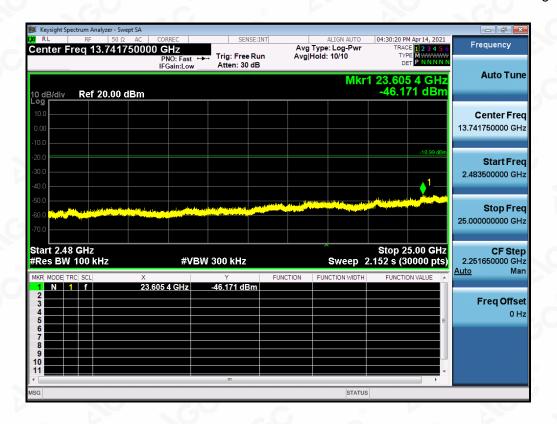








### O-QPSK MODULATION IN MIDDLE CHANNEL








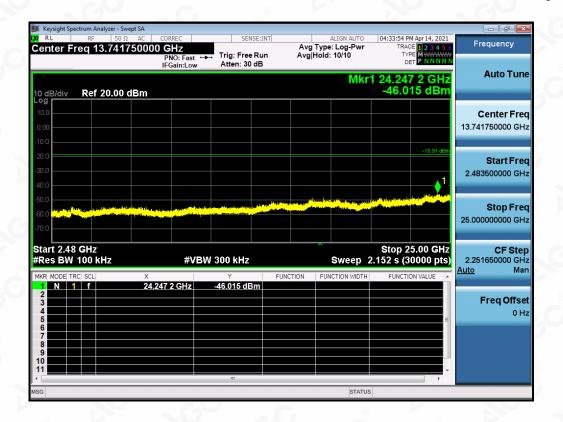







### O-QPSK MODULATION IN HIGH CHANNEL

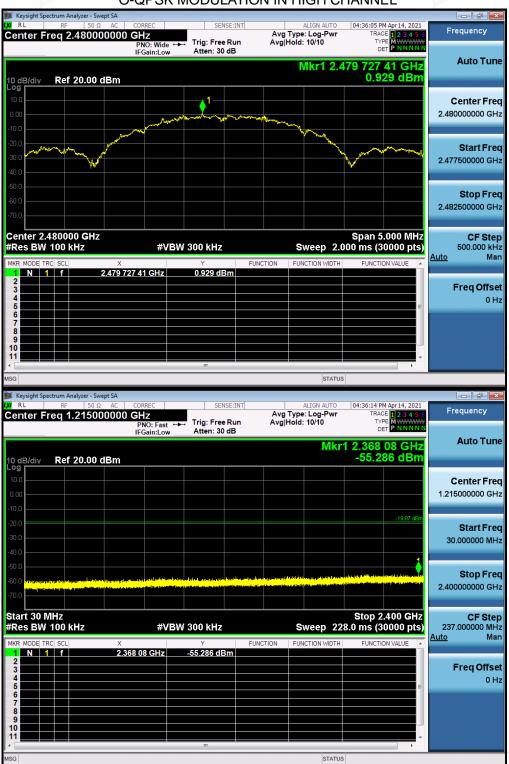






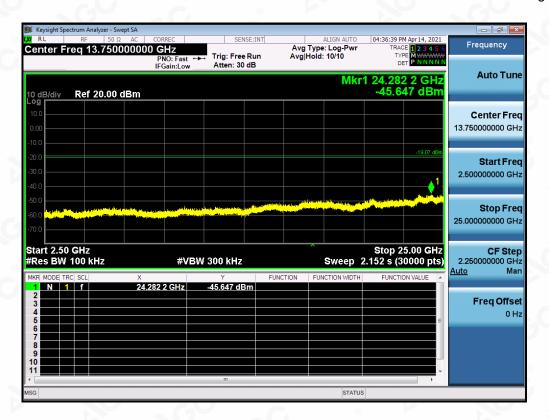

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.





**TEST RESULT FOR BAND EDGE** 

### O-QPSK MODULATION IN LOW CHANNEL



### O-QPSK MODULATION IN HIGH CHANNEL





Page 25 of 45

### 10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### 10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

### 10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


#### 10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.

### 10.4. LIMITS AND MEASUREMENT RESULT

Channel No.	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	-8.821	8	Pass
Middle Channel	-9.309	8	Pass
High Channel	-9.846	8	Pass


### TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

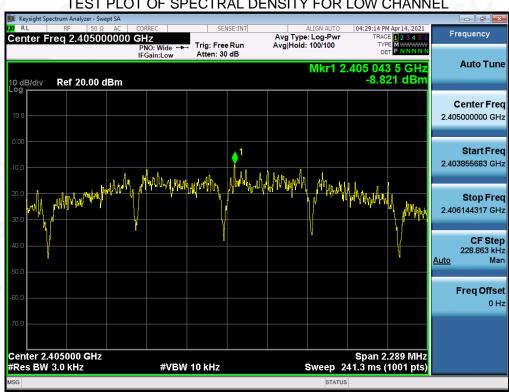





TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

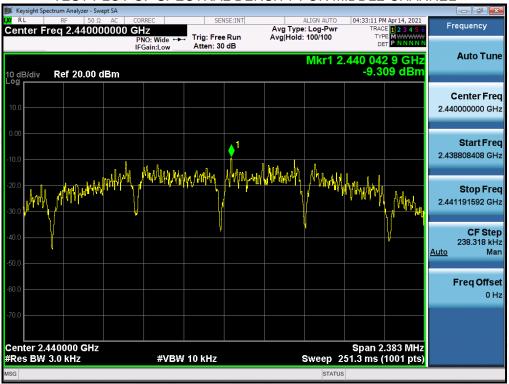

### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL






Page 27 of 45

### 11. RADIATED EMISSION

#### 11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






### 11.2. TEST SETUP


### Radiated Emission Test-Setup Frequency Below 30MHz

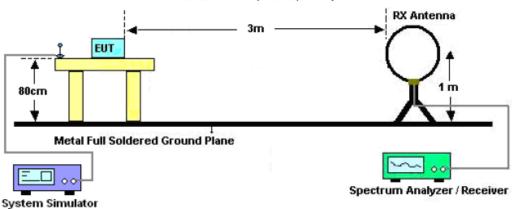

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

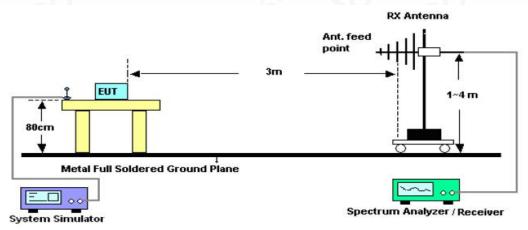

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

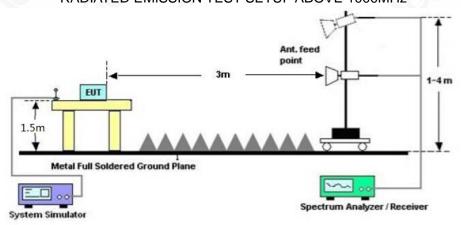



Page 29 of 45

### 11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)		
0.009~0.490	2400/F(kHz)	300		
0.490~1.705	24000/F(kHz)	30		
1.705~30.0	30	30		
30~88	100	3		
88~216	150	3		
216~960	200	3		
Above 960	500	3		

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

### 11.4. TEST RESULT

### **RADIATED EMISSION BELOW 30MHz**


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 30 of 45

### **RADIATED EMISSION BELOW 1GHZ**

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

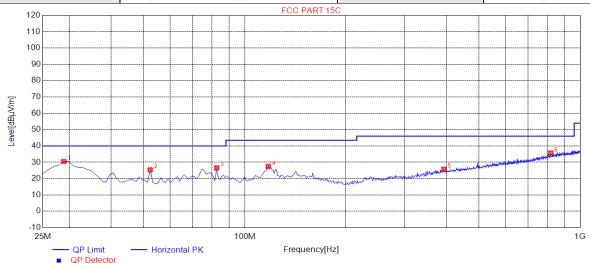

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	28.9000	30.52	10.36	40.00	9.48	100	2	Horizontal
2	52.3000	25.41	11.50	40.00	14.59	100	360	Horizontal
3	82.5250	26.62	7.18	40.00	13.38	100	107	Horizontal
4	117.6250	27.42	13.23	43.50	16.08	100	234	Horizontal
5	392.5750	25.77	19.50	46.00	20.23	100	97	Horizontal
6	816.7000	35.73	28.78	46.00	10.27	100	32	Horizontal

**RESULT: PASS** 


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Psychological Psycholo



Page 31 of 45

/Inspection The test results

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

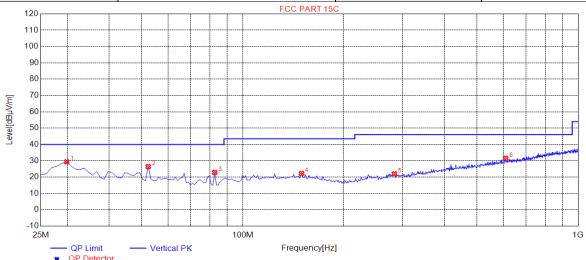

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	29.8750	29.39	9.91	40.00	10.61	100	357	Vertical
2	52.3000	26.47	11.50	40.00	13.53	100	81	Vertical
3	82.5250	22.91	7.18	40.00	17.09	100	25	Vertical
4	149.8000	22.24	14.88	43.50	21.26	100	42	Vertical
5	283.3750	22.01	16.26	46.00	23.99	100	214	Vertical
6	608.0500	31.56	24.44	46.00	14.44	100	259	Vertical

## RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes had been tested. The mode 1 is the worst case and recorded in the report.



Page 32 of 45

g/Inspection The test results

### **RADIATED EMISSION ABOVE 1GHZ**

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
45.13	0.08	45.21	74	-28.79	peak
35.49	0.08	35.57	54	-18.43	AVG
41.27	2.21	43.48	74	-30.52	peak
30.96	2.21	33.17	54	-20.83	AVG
		10	0		-
	_				-6
	(dBµV) 45.13 35.49 41.27	(dBµV) (dB) 45.13 0.08 35.49 0.08 41.27 2.21	(dBμV) (dB) (dBμV/m)   45.13 0.08 45.21   35.49 0.08 35.57   41.27 2.21 43.48	(dBμV) (dB) (dBμV/m) (dBμV/m)   45.13 0.08 45.21 74   35.49 0.08 35.57 54   41.27 2.21 43.48 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m)   45.13 0.08 45.21 74 -28.79   35.49 0.08 35.57 54 -18.43   41.27 2.21 43.48 74 -30.52

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4810.000	46.35	0.08	46.43	74	-27.57	peak
4810.000	35.94	0.08	36.02	54	-17.98	AVG
7215.000	41.28	2.21	43.49	74	-30.51	peak
7215.000	32.43	2.21	34.64	54	-19.36	AVG
8			<i>-</i> .C	***		
emark:	<u> </u>					
ctor = Anter	na Factor + Cable	Loss – Pre-	amplifier.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Fest Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issued by Turther enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 33 of 45

g/Inspection the test results

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.58	0.14	46.72	74	-27.28	peak
4880.000	36.27	0.14	36.41	54	-17.59	AVG
7320.000	42.16	2.36	44.52	74	-29.48	peak
7320.000	32.91	2.36	35.27	54	-18.73	AVG
-C			10	_G	(8)	
Remark:						
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.13	0.14	46.27	74 🌑	-27.73	peak
4880.000	35.27	0.14	35.41	54	-18.59	AVG
7320.000	42.13	2.36	44.49	74	-29.51	peak
7320.000	32.22	2.36	34.58	54	-19.42	AVG
<u> </u>			-0			
Remark:	8					(8)
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festive Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter bedicated Festive Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter bedicated Festive Stamp" and the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day Safter the issuance of the report should be addressed to AGC by agc@agc-cert.com.



Page 34 of 45

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	45.13	0.22	45.35	74	-28.65	peak
4960.000	35.27	0.22	35.49	54	-18.51	AVG
7440.000	40.13	2.64	42.77	74	-31.23	peak
7440.000	30.58	2.64	33.22	54	-20.78	AVG
-C	· ·				<u> </u>	
Remark:	a.C	8				(8)
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Time
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
46.31	0.22	46.53	74	-27.47	peak
36.57	0.22	36.79	54 🌑	-17.21	AVG
40.19	2.64	42.83	74	-31.17	peak
30.56	2.64	33.2	54	-20.8	AVG
	_60	(9)			GU
	(dBµV) 46.31 36.57 40.19	(dBµV) (dB) 46.31 0.22 36.57 0.22 40.19 2.64	(dBμV) (dB) (dBμV/m)   46.31 0.22 46.53   36.57 0.22 36.79   40.19 2.64 42.83	(dBμV) (dB) (dBμV/m) (dBμV/m)   46.31 0.22 46.53 74   36.57 0.22 36.79 54   40.19 2.64 42.83 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m)   46.31 0.22 46.53 74 -27.47   36.57 0.22 36.79 54 -17.21   40.19 2.64 42.83 74 -31.17

### **RESULT: PASS**

### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.




Page 35 of 45

### TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

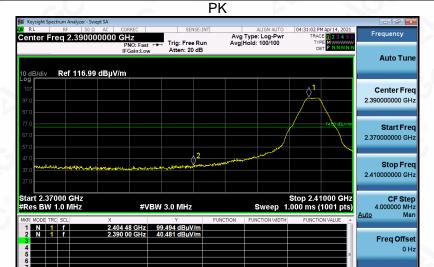

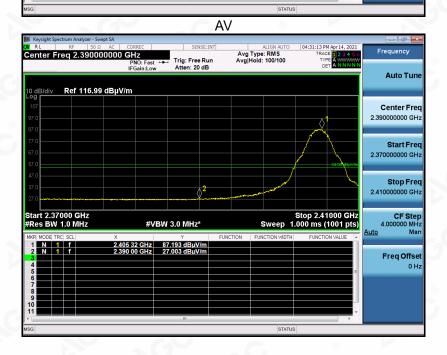


**RESULT: PASS** 




Page 36 of 45

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical



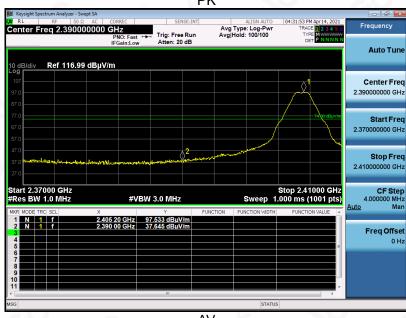

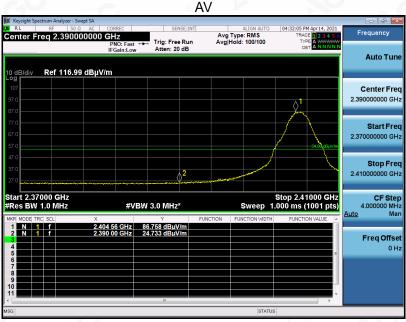

**RESULT: PASS** 




Page 37 of 45

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4	
Temperature	25° C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 3	Antenna	Horizontal	





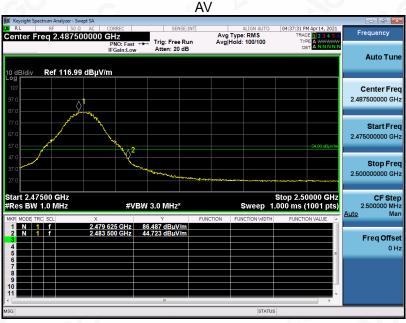


**RESULT: PASS** 




Page 38 of 45

EUT	Multi-Band Wireless Module with PA	Model Name	BDE-RFM208P-2.4
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical



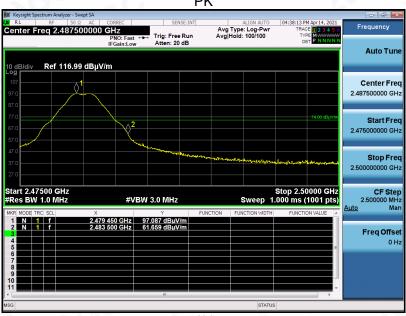

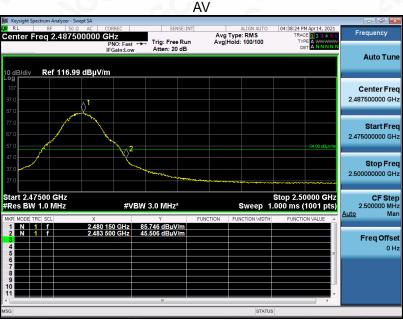

**RESULT: PASS** 

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 39 of 45

### 12. FCC LINE CONDUCTED EMISSION TEST


### 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum R	F Line Voltage
Frequency	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

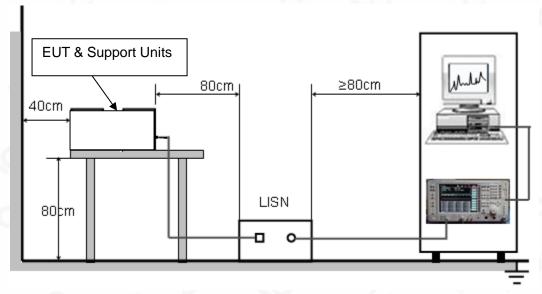



Page 40 of 45

### 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.3V power from control board which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


### 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



### 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

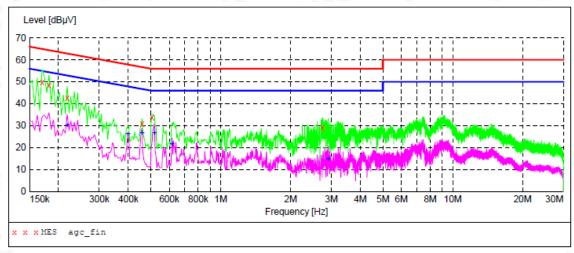

### MEASUREMENT RESULT: "agc\_fin"

2021/4/19 16:05

2021/4/19 16:	05					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.170000 0.182000 0.218000	49.80 48.30 42.50	12.4 12.4 12.4	65 64 63	15.2 16.1 20.4	QP	L1 L1 L1
0.458000 0.506000 2.754000	30.80 33.60 29.10	12.4 12.4 12.4	57 56 56	25.9 22.4 26.9	QP QP	L1 L1 L1

### MEASUREMENT LEDULI. agc\_\_iii.


2021/4/19 16:05

	-					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.218000	30.20	12.4	53	22.7	AV	L1
0.398000	26.20	12.4	48	21.7	AV	L1
0.458000	26.50	12.4	47	20.2	AV	L1
0.518000	26.50	12.4	46	19.5	AV	L1
0.618000	21.50	12.4	46	24.5	AV	L1
2.906000	14.70	12.5	46	31.3	AV	L1

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



### Line Conducted Emission Test Line 2-N

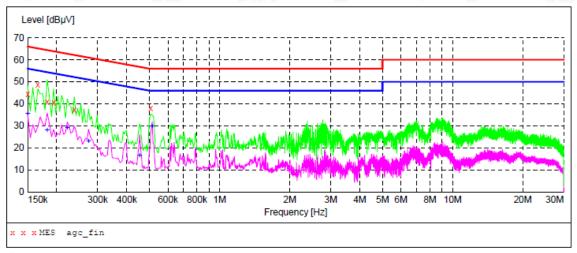

### MEASUREMENT RESULT: "agc fin"

021		16:	

2021/4/15 1	6:13					
Frequency				_	Detector	Line
MHz	dΒμV	dB	dBµ∇	dB		
0.150000	44.40	12.4	66	21.6	QP	N
0.166000	48.60	12.4	65	16.6	QP	N
0.182000	41.00	12.4	64	23.4	QP	N
0.194000	40.40	12.4	64	23.5	QP	N
0.238000	37.30	12.4	62	24.9	QP	N
0.506000	38.00	12.4	56	18.0	QP	N

#### MEASUREMENT LEGGEL . age IIII

2021/4/19 16:15

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000	35.40	12.4	56	20.6	AV	N
0.182000	28.10	12.4	54	26.3	AV	N
0.222000	29.20	12.4	53	23.5	AV	N
0.274000	23.10	12.4	51	27.9	AV	N
0.454000	16.50	12.4	47	30.3	AV	N
0.514000	29.70	12.4	46	16.3	AV	N

**RESULT: PASS** 



Page 43 of 45

### APPENDIX A: PHOTOGRAPHS OF TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 1GHZ




RADIATED EMISSION TEST SETUP ABOVE 1GHZ



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 44 of 45

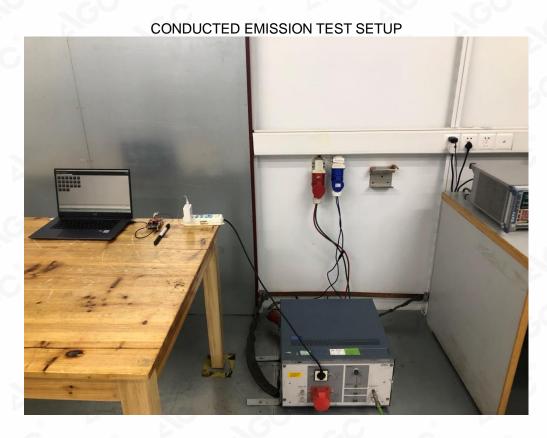



Page 45 of 45

### **APPENDIX B: PHOTOGRAPHS OF EUT**

Refer to the Report No.: AGC02390201203AP02

----END OF REPORT----



### Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. The non-CMA report issued by AGC is only permitted to be used by the client as internal reference use and shall not be used for public demonstration purpose.
- 5. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 6. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 7. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 8. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 9. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 10. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

he test report.