





TEST RESULT FOR BAND EDGE 125 KHz

GFSK MODULATION IN LOW CHANNEL

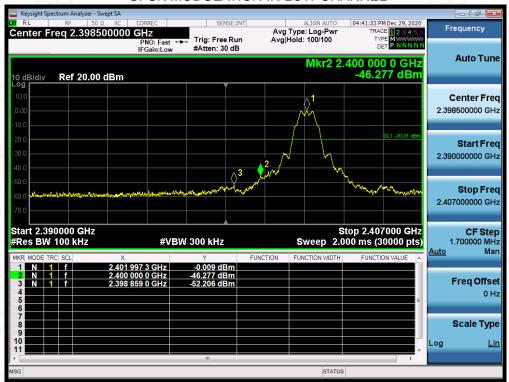


GFSK MODULATION IN HIGH CHANNEL

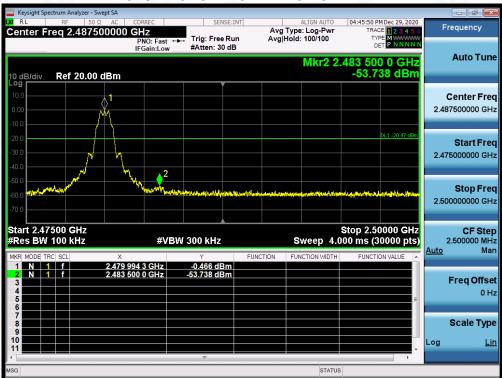


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



500 KHzGFSK MODULATION IN LOW CHANNEL

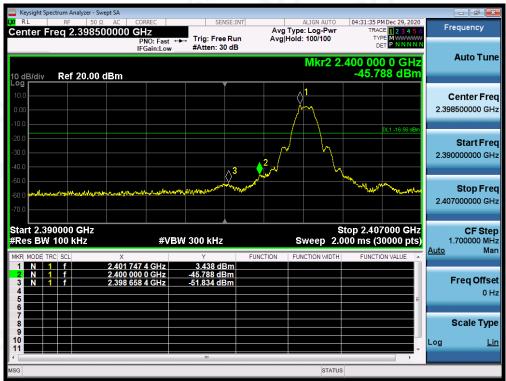


GFSK MODULATION IN HIGH CHANNEL

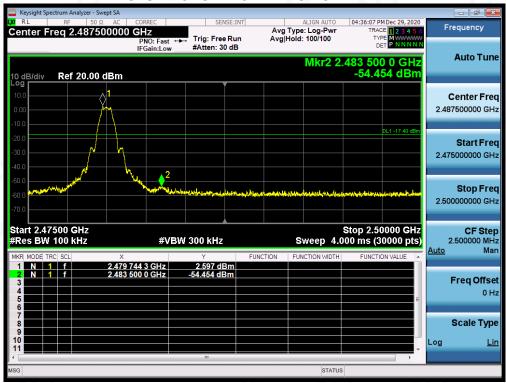


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



1M
GFSK MODULATION IN LOW CHANNEL

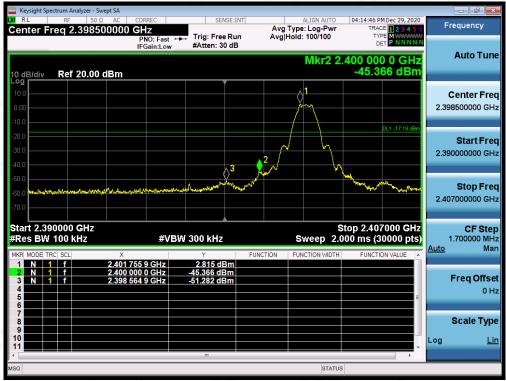


GFSK MODULATION IN HIGH CHANNEL

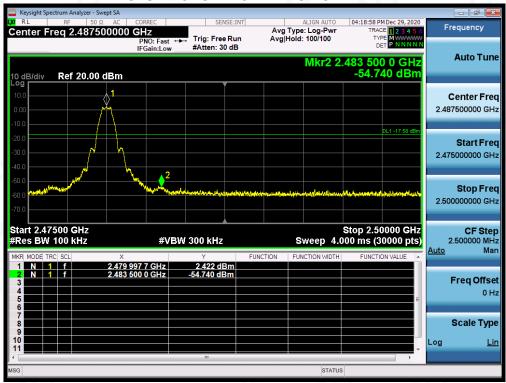


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



2MGFSK MODULATION IN LOW CHANNEL

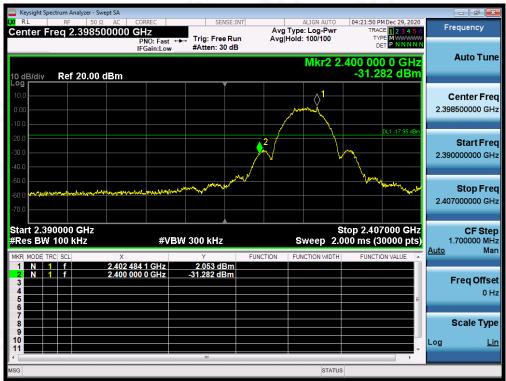

GFSK MODULATION IN HIGH CHANNEL

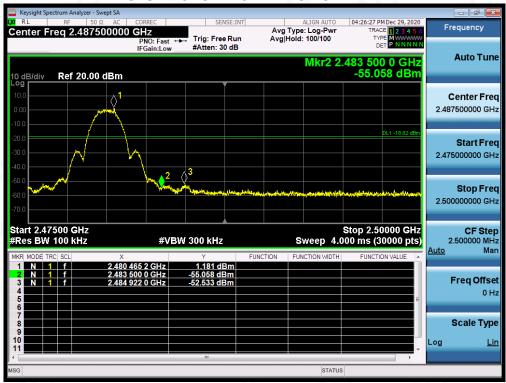

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 58 of 96

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT


125KHz

| Channel No. | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result | |
|----------------|-------------------|---------------------|--------|--|
| Low Channel | -2.472 | 8 | Pass | |
| Middle Channel | -2.629 | 8 | Pass | |
| High Channel | -2.804 | 8 _ () | Pass | |

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.





TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pest no/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 60 of 96

500 KHz


| Channel No. | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result | |
|----------------|-------------------|---------------------|--------|--|
| Low Channel | -8.449 | 8 | Pass | |
| Middle Channel | -8.705 | 8 | Pass | |
| High Channel | -9.329 | 8 | Pass | |

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL






TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

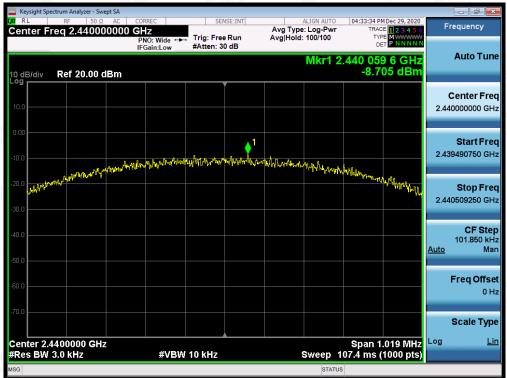

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

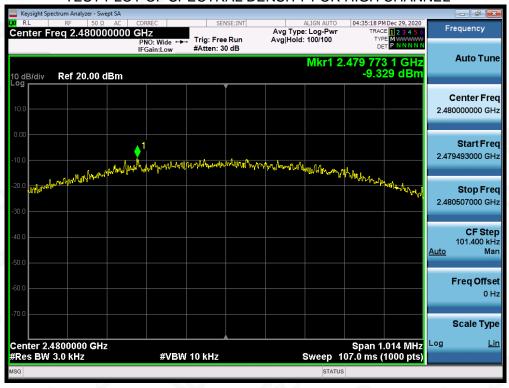

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written portion of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 62 of 96

1M

| Channel No. | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result | |
|----------------|-------------------|---------------------|--------|--|
| Low Channel | -5.057 | 8 | Pass | |
| Middle Channel | -5.042 | 8 | Pass | |
| High Channel | -5.251 | 8 | Pass | |

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL







TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 64 of 96

2M

| Channel No. | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Result |
|----------------|-------------------|---------------------|--------|
| Low Channel | -10.983 | 8 | Pass |
| Middle Channel | -12.346 | 8 | Pass |
| High Channel | -12.583 | 8 | Pass |

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Coedicated Postuagina Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written pathorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL



TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

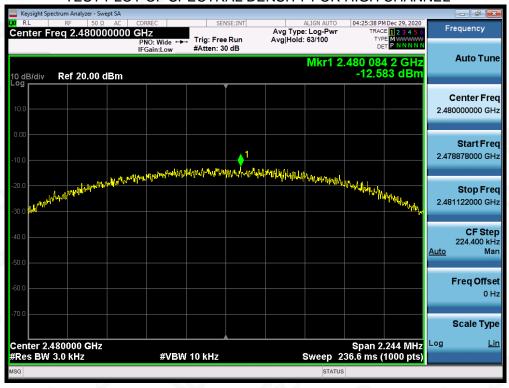




Page 66 of 96

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

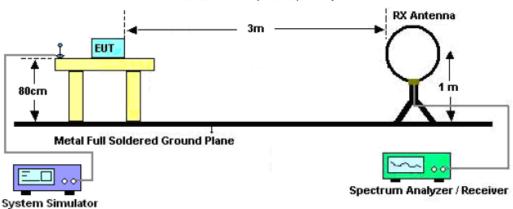

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

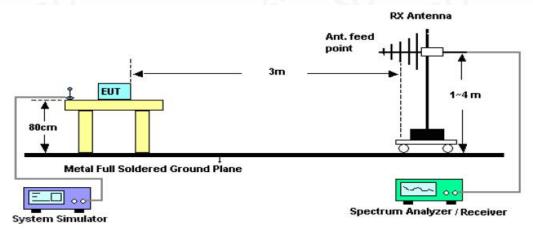

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

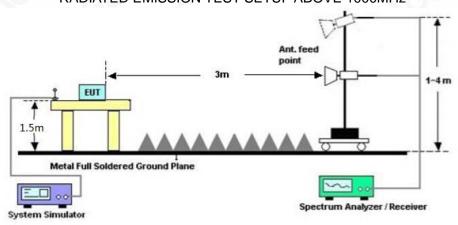

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Coedicated Postuagina Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written pathorization of AGC where the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 68 of 96

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|----------------------|-----------------------------------|-------------------------------|
| 0.009~0.490 | 2400/F(kHz) | 300 |
| 0.490~1.705 | 24000/F(kHz) | 30 |
| 1.705~30.0 | 30 | 30 |
| 30~88 | 100 | 3 |
| 88~216 | 150 | 3 |
| 216~960 | 200 | 3 |
| Above 960 | 500 | 3 |

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter perhorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 69 of 96

RADIATED EMISSION BELOW 1GHZ

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Horizontal |

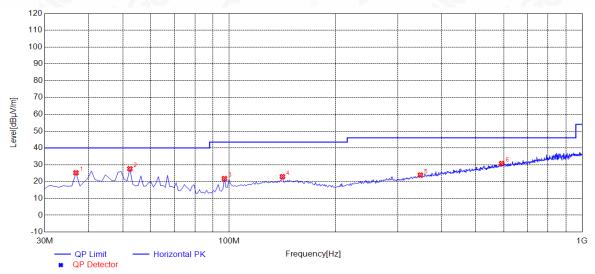

| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|------------|
| 1 | 36.7900 | 25.20 | 11.16 | 40.00 | 14.80 | 200 | 360 | Horizontal |
| 2 | 52.3100 | 27.60 | 11.49 | 40.00 | 12.40 | 100 | 251 | Horizontal |
| 3 | 96.9300 | 21.77 | 10.11 | 43.50 | 21.73 | 200 | 128 | Horizontal |
| 4 | 141.5500 | 22.91 | 14.88 | 43.50 | 20.59 | 100 | 192 | Horizontal |
| 5 | 348.1600 | 23.89 | 17.78 | 46.00 | 22.11 | 200 | 155 | Horizontal |
| 6 | 591.6300 | 30.74 | 24.16 | 46.00 | 15.26 | 100 | 80 | Horizontal |

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 70 of 96

/Inspection The test results

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Vertical |

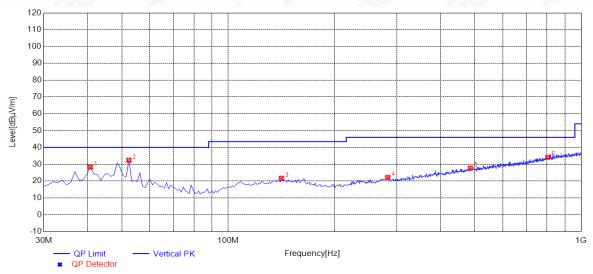

| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
|-----|----------------|-------------------|----------------|-------------------|----------------|----------------|--------------|----------|
| 1 | 40.6700 | 28.20 | 11.91 | 40.00 | 11.80 | 100 | 14 | Vertical |
| 2 | 52.3100 | 32.35 | 11.49 | 40.00 | 7.65 | 100 | 70 | Vertical |
| 3 | 141.5500 | 21.63 | 14.88 | 43.50 | 21.87 | 100 | 202 | Vertical |
| 4 | 283.1700 | 22.14 | 16.26 | 46.00 | 23.86 | 100 | 106 | Vertical |
| 5 | 485.9000 | 27.72 | 21.85 | 46.00 | 18.28 | 100 | 60 | Vertical |
| 6 | 805.0300 | 34.13 | 28.55 | 46.00 | 11.87 | 100 | 34 | Vertical |

RESULT: PASS

Note:

1. Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

2. All test modes of rate had been tested. The mode 1 at 125KHz is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedica Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written bedical presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the infrared production of the test report should be addressed to AGC by agc@agc—cert.com.



Page 71 of 96

RADIATED EMISSION ABOVE 1GHZ

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|---------------|--------------------|-------------|----------------|----------|---------------------|------------|
| (MHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | Value Type |
| 4804.000 | 45.39 | 0.08 | 45.47 | 74 | -28.53 | peak |
| 4804.000 | 35.78 | 0.08 | 35.86 | 54 | -18.14 | AVG |
| 7206.000 | 40.28 | 2.21 | 42.49 | 74 | -31.51 ⁰ | peak |
| 7206.000 | 30.12 | 2.21 | 32.33 | 54 | -21.67 | AVG |
| | | | | | | |
| 8 | | | | (8) | | |
| emark: | ® | | | - 0 | (8) | |
| actor = Anter | nna Factor + Cable | Loss - Pre- | -amplifier. | | | |

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|---------------|--------------------|-------------|----------------|----------|--------|------------|
| (MHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | Value Type |
| 4804.000 | 44.32 | 0.08 | 44.4 | 74 | -29.6 | peak |
| 4804.000 | 34.28 | 0.08 | 34.36 | 54 | -19.64 | AVG |
| 7206.000 | 40.59 | 2.21 | 42.8 | 74 | -31.2 | peak |
| 7206.000 | 30.47 | 2.21 | 32.68 | 54 | -21.32 | AVG |
| <u> </u> | | | 40 | 0 | | |
| | © | | | | 8 | |
| emark: | - Ci | ® | | | - G | ® |
| actor = Anter | nna Factor + Cable | Loss - Pre- | amplifier. | | | -C |



Page 72 of 96

g/Inspection
The test results
the test report.

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 2 | Antenna | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|---------------|-------------------|---------------|----------------|----------|--------|------------|
| (MHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | value Type |
| 4880.000 | 46.28 | 0.14 | 46.42 | 74 | -27.58 | peak |
| 4880.000 | 35.81 | 0.14 | 35.95 | 54 | -18.05 | AVG |
| 7320.000 | 41.07 | 2.36 | 43.43 | 74 | -30.57 | peak |
| 7320.000 | 30.94 | 2.36 | 33.3 | 54 | -20.7 | AVG |
| | 8 | | | | · © | |
| | | | | | | (8) |
| Remark: | 0 | G | 8 | | | 4.G |
| actor = Anter | nna Factor + Cabl | e Loss – Pre- | amplifier. | 0 | | |

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 2 | Antenna | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|---------------|-------------------|-----------------|----------------|----------|--------|------------|
| (MHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | value Type |
| 4880.000 | 46.28 | 0.14 | 46.42 | 74 | -27.58 | peak |
| 4880.000 | 35.74 | 0.14 | 35.88 | 54 | -18.12 | AVG |
| 7320.000 | 41.53 | 2.36 | 43.89 | 74 | -30.11 | peak |
| 7320.000 | 31.58 | 2.36 | 33.94 | 54 | -20.06 | AVG |
| 0 | ® | | 60 | . (| (3) | |
| emark: | -6 | | | | .0 | |
| actor = Anter | na Factor + Cable | e Loss – Pre-ar | mplifier. | | , Ca | |

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesture Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 73 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Horizontal |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|---------------|------------------|---------------|----------------|----------|--------|------------|
| (MHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | Value Type |
| 4960.000 | 44.32 | 0.22 | 44.54 | 74 | -29.46 | peak |
| 4960.000 | 35.19 | 0.22 | 35.41 | 54 | -18.59 | AVG |
| 7440.000 | 39.21 | 2.64 | 41.85 | 74 | -32.15 | peak |
| 7440.000 | 30.06 | 2.64 | 32.7 | 54 | -21.3 | AVG |
| 8 | | | | @ | | |
| | ® | | | - 6 | ® | |
| emark: | a.C | (8) | | 10 | a.C | 0 |
| actor = Anter | na Factor + Cabl | e Loss – Pre- | -amplifier. | | | |

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Vertical |

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Value Type |
|--------------|------------------|----------------|----------------|----------|--------|------------|
| (MHz) | (dBµV) | (dB) | (dBµV/m) | (dBµV/m) | (dB) | value Type |
| 4960.000 | 43.59 | 0.22 | 43.81 | 74 | -30.19 | peak |
| 4960.000 | 34.27 | 0.22 | 34.49 | 54 | -19.51 | AVG |
| 7440.000 | 38.12 | 2.64 | 40.76 | 74 | -33.24 | peak |
| 7440.000 | 29.45 | 2.64 | 32.09 | 54 | -21.91 | AVG |
| | | -6 | ® | | | -0 |
| emark: | | | 0 | 8 | | |
| ctor = Anter | nna Factor + Cab | le Loss – Pre- | amplifier. | | | |

RESULT: PASS

Noto:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes of rate had been tested. The mode 1 at 125KHz is the worst case and recorded in the report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 74 of 96


TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

125 KHz

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Horizontal |



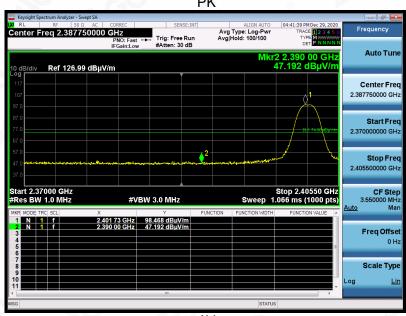

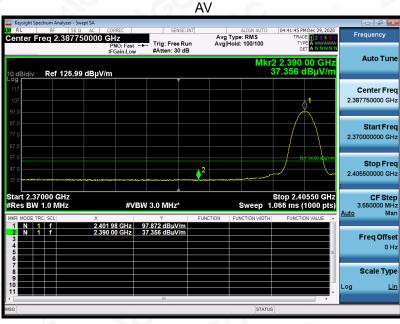

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Belloaded Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 75 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Vertical |



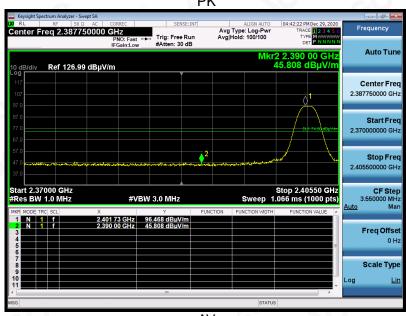

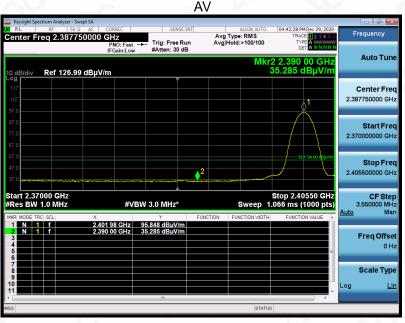


RESULT: PASS




Page 76 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Horizontal |




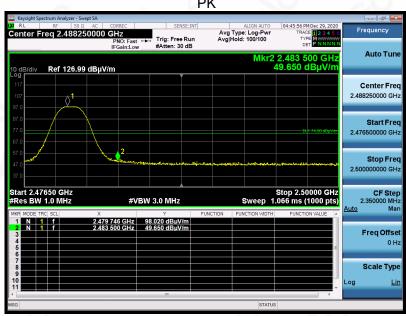

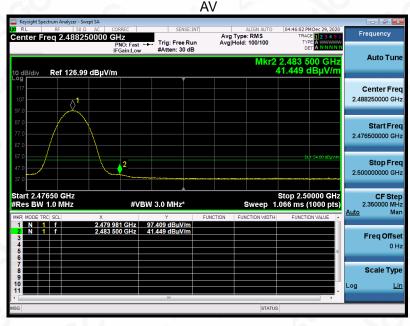


RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Belloaded Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Vertical |

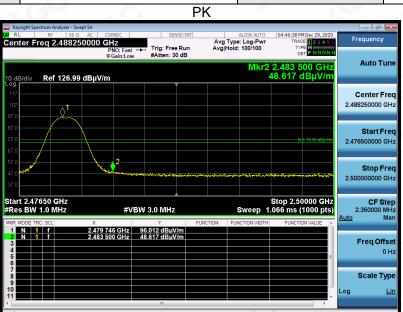

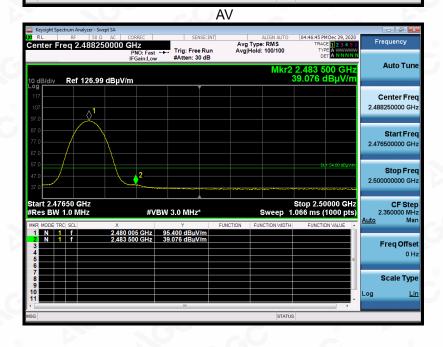

RESULT: PASS




Page 78 of 96

500 KHz

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Horizontal |

PΚ



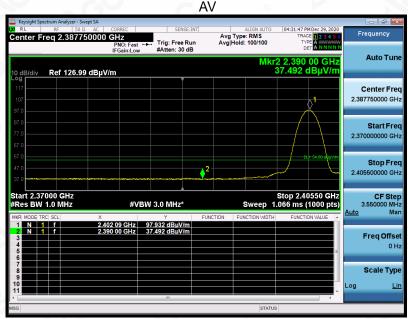

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Belloaded Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 79 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Vertical |



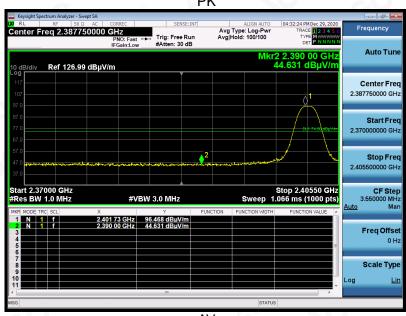

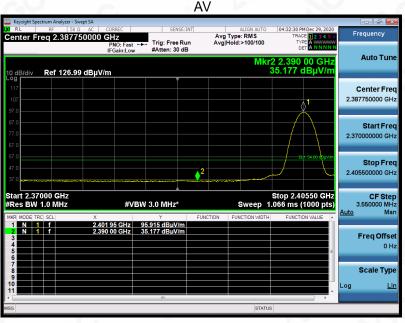


RESULT: PASS




Page 80 of 96


| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Horizontal |



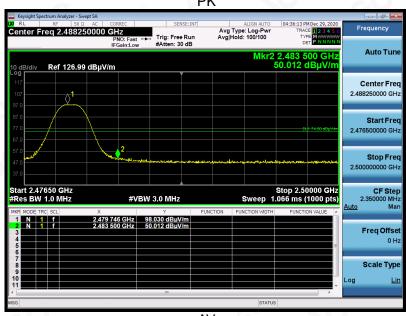

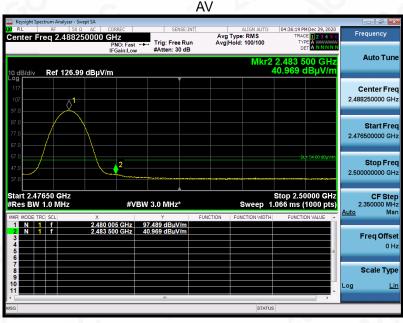



RESULT: PASS





| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Vertical |

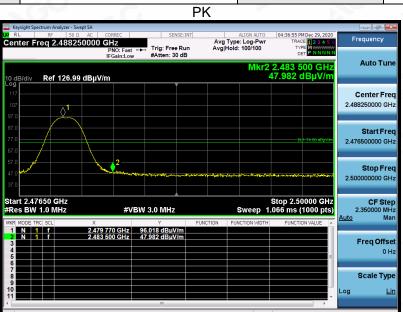

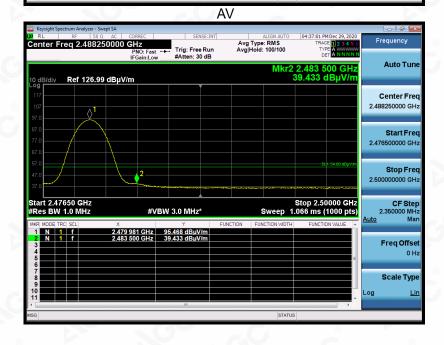

RESULT: PASS





Page 82 of 96

1M

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Horizontal |

PΚ

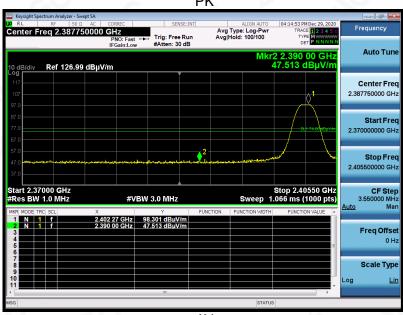

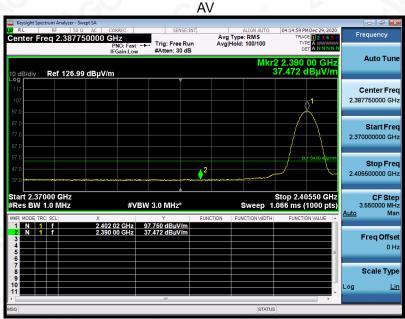

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Belloaded Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 83 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Vertical |



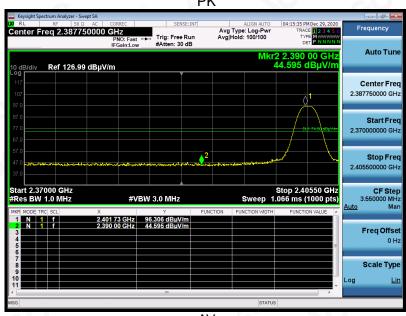

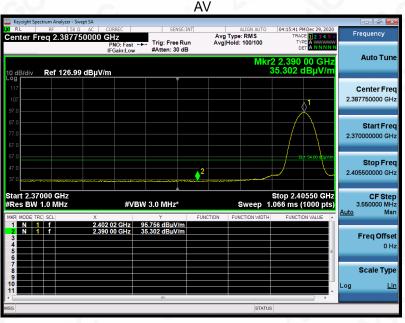


RESULT: PASS




Page 84 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Horizontal |



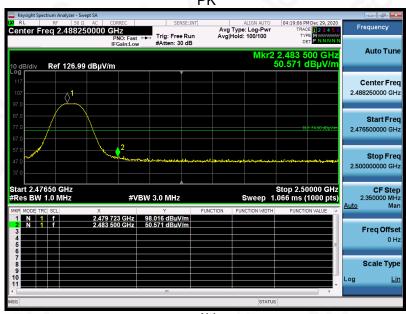

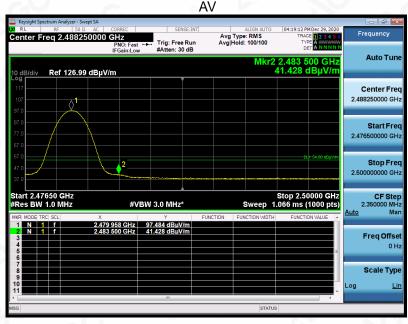

RESULT: PASS




Page 85 of 96


g/Inspection The test results

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Vertical |



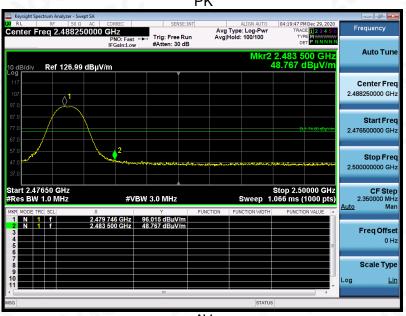



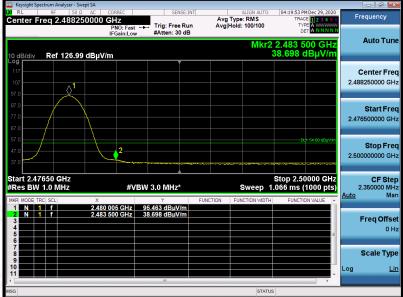

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Sedicated Pesting Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





Page 86 of 96

2M

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Horizontal |



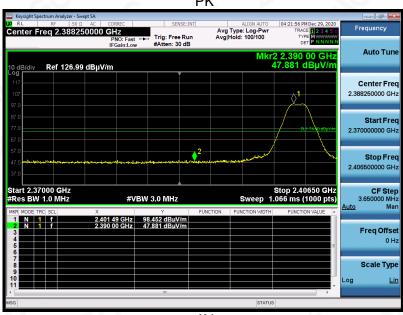

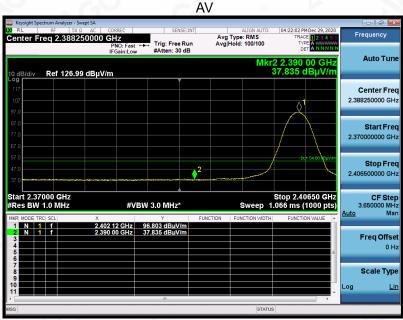

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Belloaded Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written achorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. The test results Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 87 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 1 | Antenna | Vertical |



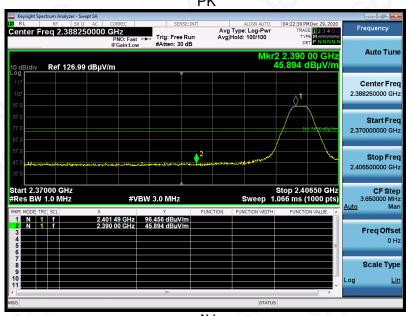

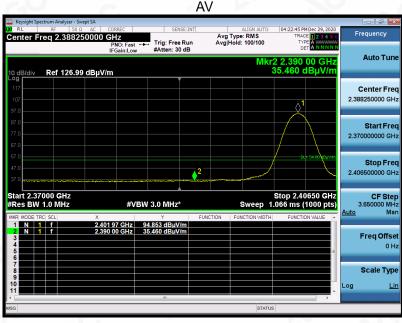

RESULT: PASS


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient responsible to the stamp? Is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 88 of 96

| EUT | Multi-Band Wireless Module with PA | Model Name | BDE-RFM208P-S1 |
|-------------|------------------------------------|-------------------|----------------|
| Temperature | 21.8° C | Relative Humidity | 58% |
| Pressure | 960hPa | Test Voltage | Normal Voltage |
| Test Mode | Mode 3 | Antenna | Horizontal |



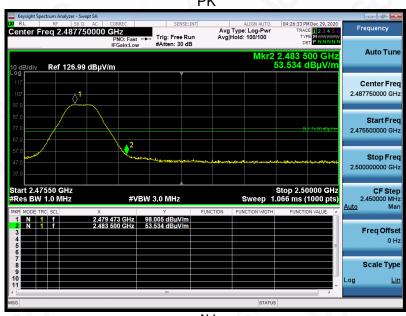

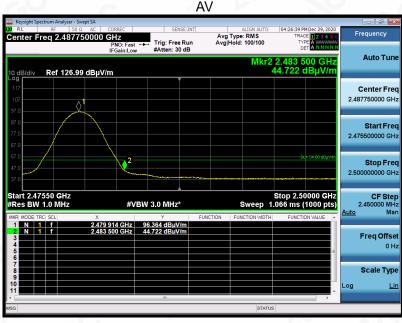

RESULT: PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient responsible to the stamp? Is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 89 of 96

g/Inspection
The test results
If the test report.

| EUT | Multi-Band Wireless Module with PA Model Name | | BDE-RFM208P-S1 | | |
|-------------|---|-------------------|----------------|--|--|
| Temperature | 21.8° C | Relative Humidity | 58% | | |
| Pressure | 960hPa | Test Voltage | Normal Voltage | | |
| Test Mode | Mode 3 | Antenna | Vertical | | |



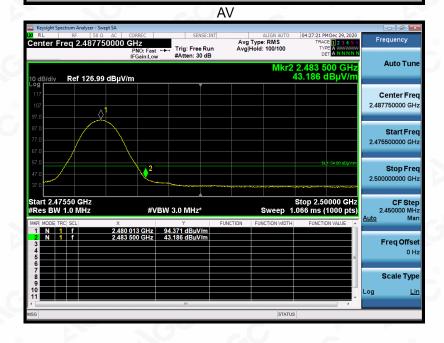

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festivation" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 90 of 96

/Inspection The test results

he test report.

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

| F | Maximum RF Line Voltage | | | | | | |
|---------------|-------------------------|----------------|--|--|--|--|--|
| Frequency | Q.P.(dBuV) | Average(dBuV) | | | | | |
| 150kHz~500kHz | 66-56 | 56-46 | | | | | |
| 500kHz~5MHz | 56 | 46 | | | | | |
| 5MHz~30MHz | 60 | 50 | | | | | |

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

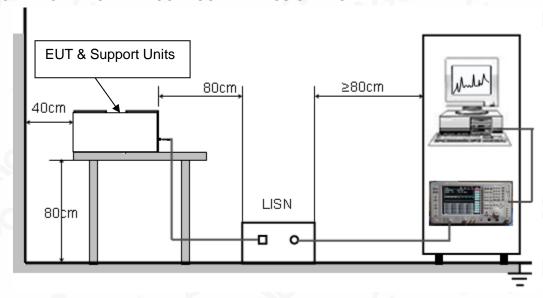

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Goldicated Festamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AG presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 91 of 96

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3.3V power from control board which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exporization of AGE, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 92 of 96

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST


Line Conducted Emission Test Line 1-L

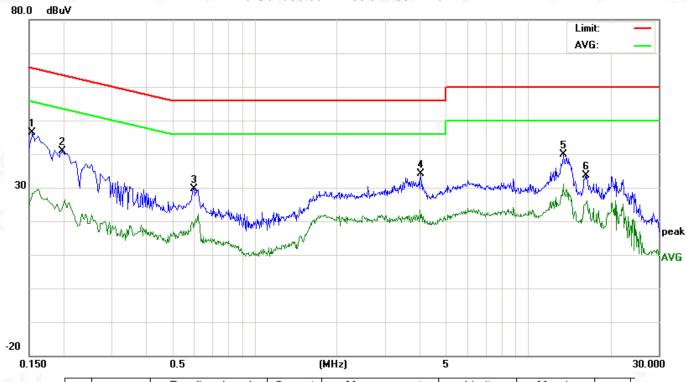

| No. | Freq. (MHz) | Reading_Level (dBuV) | | Correct Factor | Measurement (dBuV) | | Limit (dBuV) | | Margin (dB) | | P/F | | | |
|-----|----------------|-------------------------|-----|-------------------|-----------------------|-------|-----------------|-------|----------------|-------|--------|--------|---|---|
| | | Peak | QP | AVG | dB | Peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1539 | 33.49 | N/A | 15.49 | 12.79 | 46.28 | N/A | 28.28 | 65.78 | 55.78 | -19.50 | -27.50 | Р | Γ |
| 2 | 0.1980 | 28.03 | N/A | 10.98 | 12.86 | 40.89 | N/A | 23.84 | 63.69 | 53.69 | -22.80 | -29.85 | Р | |
| 3 | 0.6020 | 15.87 | N/A | 5.18 | 13.82 | 29.69 | N/A | 19.00 | 56.00 | 46.00 | -26.31 | -27.00 | Р | |
| 4 | 4.0580 | 22.19 | N/A | 9.10 | 11.86 | 34.05 | N/A | 20.96 | 56.00 | 46.00 | -21.95 | -25.04 | Р | |
| 5 | 13.4780 | 26.31 | N/A | 17.71 | 13.47 | 39.78 | N/A | 31.18 | 60.00 | 50.00 | -20.22 | -18.82 | Р | |
| 6 | 16.2620 | 20.28 | N/A | 12.41 | 13.29 | 33.57 | N/A | 25.70 | 60.00 | 50.00 | -26.43 | -24.30 | Р | |



Page 93 of 96

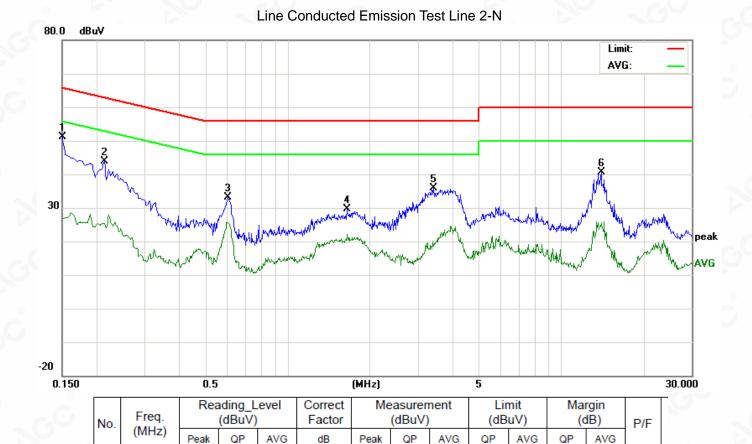

RESULT: PASS

0.1500

0.2140

0.6060

1.6500

3.4340

14.0060

2

3

4

5

6

38.24

31.11

19.43

15.84

22.87

27.10

N/A

N/A

N/A

N/A

N/A

N/A

14.19

12.41

11.85

7.70

5.83

12.22

12.78

12.89

13.82

13.72

12.90

13.49

Note: All test modes of rate had been tested. The mode 1 at 125KHz is the worst case and recorded in the report.

51.02

44.00

33.25

29.56

35.77

40.59

N/A

N/A

N/A

N/A

N/A

26.97

25.30

25.67

21.42

18.73

25.71

65.99

63.04

56.00

56.00

60.00

55.99

53.04

46.00

46.00

50.00

56.00 | 46.00 | -22.75 | -20.33

-14.97 -29.02

-19.04 -27.74

-26.44 -24.58

-20.23 -27.27

-24.29

-19.41

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exhorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc—cert.com.