



FCC Test Report

Report No.: AGC02390221101FE03

FCC ID	:	2ABRU-SG1311P3
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	BDE Sub-1G Wireless Module with PA Based on CC1311P3
BRAND NAME	:	BDE
MODEL NAME	:	BDE-SG1311P3U, BDE-SG1311P3N
APPLICANT	:	Guangzhou BDE Technology Inc.
DATE OF ISSUE	:	Jan. 07, 2023
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0
<u>Attestation of</u>	<u><i>G</i>lo</u>	Compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jan. 07, 2023	Valid	Initial Release



TABLE OF CONTENTS

2. PRODUCT INFORMATION 6 2.1 PRODUCT TECHNICAL DESCRIPTION 6 2.2 TEST FREQUENCY LIST 6 2.3 RELATED SUBMITTAL(S) / GRANT (S) 7 2.4 TEST METHODOLOGY 7 2.5 SPECIAL ACCESSORIES 7 2.6 EQUIPMENT MODIFICATIONS 7 2.7 ANTENNA REQUIREMENT 7 3. TEST ENVIRONMENT 7 3. TEST ENVIRONMENT 8 3.1 ADDRESS OF THE TEST LABORATORY. 8 3.2 TEST FACILITY 8 3.3 ENVIRONMENTAL CONDITIONS 9 3.4 MEASUREMENT UNCERTAINTY 9 3.5 LIST OF EQUIPMENTS USED 10 4.SYSTEM TEST CONFIGURATION 11 4.1 EUT CONFIGURATION 11 4.1 EUT CONFIGURATION 11 4.2 EUT EXERCISE 11 4.3 CONFIGURATION OF TESTED SYSTEM 11 4.4 EQUIPMENT USED IN TESTED SYSTEM 11 4.5 SUMMARY OF TEST RESULTS 12 5. DESCRIPTION OF TEST RODES 13 6. RF OUTPUT POWER 14 6. RF OUTPUT POWER 14 6. RF OUTPUT POWER 14 6. BBANDW	-	ENERAL INFORMATION	-
2.2 TEST FREQUENCY LIST. 6 2.3 RELATED SUBMITTAL(S) / GRANT (S). 7 2.4 TEST METHODOLOGY 7 2.5 SPECIAL ACCESSORIES 7 2.6 EQUIPMENT MODIFICATIONS 7 2.7 ANTENNA REQUIREMENT 7 3. TEST ENVIRONMENT 7 3. TEST ENVIRONMENT 7 3.1 ADDRESS OF THE TEST LABORATORY. 8 3.2 TEST FACILITY 8 3.3 ENVIRONMENTAL CONDITIONS. 9 3.4 MEASUREMENT UNCERTAINTY 9 3.5 LIST OF EQUIPMENTS USED 10 4.SYSTEM TEST CONFIGURATION 11 4.1 EUT CONFIGURATION 11 4.1 EUT CONFIGURATION 11 4.2 EUT EXERCISE 11 4.3 CONFIGURATION OF TESTED SYSTEM 11 4.4 EQUIPMENT USED IN TESTED SYSTEM 11 4.5 SUMMARY OF TEST RESULTS 12 5. DESCRIPTION OF TEST MODES 13 6. RF OUTPUT POWER 14 6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT RESULT 15 7.6 DB BANDWIDTH 15	2. P	RODUCT INFORMATION	6
2.3 RELATED SUBMITTAL(S) / GRANT (S). 7 2.4 TEST METHODOLOGY 7 2.5 SPECIAL ACCESSORIES. 7 2.6 EQUIPMENT MODIFICATIONS 7 2.7 ANTENNA REQUIREMENT 7 3. TEST ENVIRONMENT 8 3.1 ADDRESS OF THE TEST LABORATORY. 8 3.2 TEST FACILITY 8 3.3 ENVIRONMENTAL CONDITIONS. 9 3.4 MEASUREMENT UNCERTAINTY 9 3.5 LIST OF EQUIPMENTS USED 10 4.SYSTEM TEST CONFIGURATION 11 4.1 EUT CONFIGURATION 11 4.2 EUT EXERCISE 11 4.3 CONFIGURATION OF TESTED SYSTEM 11 4.4 EQUIPMENT USED IN TESTED SYSTEM 11 4.5 SUMMARY OF TEST RESULTS 12 5. DESCRIPTION OF TEST RESULTS 12 5. DESCRIPTION OF TEST MODES 13 6. RF OUTPUT POWER 14 6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT RESULT 15 7.6 DB BANDWIDTH 16		2.1 PRODUCT TECHNICAL DESCRIPTION	6
2.4 TEST METHODOLOGY72.5 SPECIAL ACCESSORIES72.6 EQUIPMENT MODIFICATIONS72.7 ANTENNA REQUIREMENT73. TEST ENVIRONMENT73. TEST ENVIRONMENT83.1 ADDRESS OF THE TEST LABORATORY83.2 TEST FACILITY83.3 ENVIRONMENTAL CONDITIONS93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT PROCEDURE146.3 MEASUREMENT RESULT157.6 DB BANDWIDTH16		2.2 TEST FREQUENCY LIST	6
2.5 SPECIAL ACCESSORIES72.6 EQUIPMENT MODIFICATIONS72.7 ANTENNA REQUIREMENT73. TEST ENVIRONMENT73. TEST ENVIRONMENT83.1 ADDRESS OF THE TEST LABORATORY83.2 TEST FACILITY83.3 ENVIRONMENTAL CONDITIONS93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.3 MEASUREMENT PROCEDURE146.3 MEASUREMENT RESULT157.6 DB BANDWIDTH16		2.3 RELATED SUBMITTAL(S) / GRANT (S)	7
2.6 EQUIPMENT MODIFICATIONS72.7 ANTENNA REQUIREMENT73. TEST ENVIRONMENT83.1 ADDRESS OF THE TEST LABORATORY83.2 TEST FACILITY83.3 ENVIRONMENTAL CONDITIONS93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157.6 DB BANDWIDTH16			
2.7 ANTENNA REQUIREMENT 7 3. TEST ENVIRONMENT 8 3.1 ADDRESS OF THE TEST LABORATORY 8 3.2 TEST FACILITY 8 3.3 ENVIRONMENTAL CONDITIONS. 9 3.4 MEASUREMENT UNCERTAINTY 9 3.5 LIST OF EQUIPMENTS USED 10 4.SYSTEM TEST CONFIGURATION 11 4.1 EUT CONFIGURATION 11 4.2 EUT EXERCISE 11 4.3 CONFIGURATION OF TESTED SYSTEM 11 4.4 EQUIPMENT USED IN TESTED SYSTEM 11 4.5 SUMMARY OF TEST RESULTS 12 5. DESCRIPTION OF TEST MODES 13 6. RF OUTPUT POWER 14 6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION) 14 6.3 MEASUREMENT RESULT 15 7. 6 DB BANDWIDTH. 16		2.5 SPECIAL ACCESSORIES	7
3. TEST ENVIRONMENT83.1 ADDRESS OF THE TEST LABORATORY83.2 TEST FACILITY83.2 TEST FACILITY83.3 ENVIRONMENTAL CONDITIONS93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT RESULT146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16		2.6 EQUIPMENT MODIFICATIONS	7
3.1 ADDRESS OF THE TEST LABORATORY83.2 TEST FACILITY83.3 ENVIRONMENTAL CONDITIONS93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16			
3.2 TEST FACILITY83.3 ENVIRONMENTAL CONDITIONS93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED10 4.SYSTEM TEST CONFIGURATION 114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS12 5. DESCRIPTION OF TEST MODES 13 6. RF OUTPUT POWER 146.1 MEASUREMENT PROCEDURE146.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT15 7. 6 DB BANDWIDTH16	3. T	EST ENVIRONMENT	8
3.3 ENVIRONMENTAL CONDITIONS.93.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION.114.1 EUT CONFIGURATION.114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM.114.4 EQUIPMENT USED IN TESTED SYSTEM.114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE.146.2 MEASUREMENT RESULT157.6 DB BANDWIDTH.16		3.1 ADDRESS OF THE TEST LABORATORY	8
3.4 MEASUREMENT UNCERTAINTY93.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157.6 DB BANDWIDTH16		3.2 TEST FACILITY	8
3.5 LIST OF EQUIPMENTS USED104.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16		3.3 ENVIRONMENTAL CONDITIONS	9
4.SYSTEM TEST CONFIGURATION114.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16			-
4.1 EUT CONFIGURATION114.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16		3.5 LIST OF EQUIPMENTS USED	10
4.2 EUT EXERCISE114.3 CONFIGURATION OF TESTED SYSTEM114.4 EQUIPMENT USED IN TESTED SYSTEM114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16	4.S		
4.3 CONFIGURATION OF TESTED SYSTEM.114.4 EQUIPMENT USED IN TESTED SYSTEM.114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16		4.1 EUT CONFIGURATION	11
4.4 EQUIPMENT USED IN TESTED SYSTEM.114.5 SUMMARY OF TEST RESULTS125. DESCRIPTION OF TEST MODES136. RF OUTPUT POWER146.1 MEASUREMENT PROCEDURE146.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)146.3 MEASUREMENT RESULT157. 6 DB BANDWIDTH16		4.2 EUT EXERCISE	11
4.5 SUMMARY OF TEST RESULTS 12 5. DESCRIPTION OF TEST MODES 13 6. RF OUTPUT POWER 14 6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION) 14 6.3 MEASUREMENT RESULT 15 7. 6 DB BANDWIDTH 16		4.3 CONFIGURATION OF TESTED SYSTEM	11
5. DESCRIPTION OF TEST MODES 13 6. RF OUTPUT POWER 14 6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION) 14 6.3 MEASUREMENT RESULT 15 7. 6 DB BANDWIDTH 16			
6. RF OUTPUT POWER 14 6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION) 14 6.3 MEASUREMENT RESULT 15 7. 6 DB BANDWIDTH 16		4.5 SUMMARY OF TEST RESULTS	12
6.1 MEASUREMENT PROCEDURE 14 6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION) 14 6.3 MEASUREMENT RESULT 15 7. 6 DB BANDWIDTH 16	5. C	ESCRIPTION OF TEST MODES	13
6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	6. R	F OUTPUT POWER	14
6.3 MEASUREMENT RESULT		6.1 MEASUREMENT PROCEDURE	14
7. 6 DB BANDWIDTH		6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	14
		6.3 MEASUREMENT RESULT	15
7.1 MEASUREMENT PROCEDURE	7.6	DB BANDWIDTH	16
		7.1 MEASUREMENT PROCEDURE	16
7.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)		7.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	16
7.3 MEASUREMENT RESULTS17		7.3 MEASUREMENT RESULTS	17
8. POWER SPECTRAL DENSITY	8. P	OWER SPECTRAL DENSITY	18
8.1 MEASUREMENT PROCEDURE		8.1 MEASUREMENT PROCEDURE	18
8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)		8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	18
8.3 MEASUREMENT RESULTS		8.3 MEASUREMENT RESULTS	19



9.1 MEASUREMENT LIMIT	20
9.2 MEASUREMENT PROCEDURE	20
9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	20
9.4 MEASUREMENT RESULTS	21
10. RADIATED EMISSION	23
10.1 LIMITS OF RADIATED EMISSION TEST	
10.2 MEASUREMENT PROCEDURE	
10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	25
10.4 MEASUREMENT RESULT	
11. AC POWER LINE CONDUCTED EMISSION TEST	29
11.1 LIMITS OF LINE CONDUCTED EMISSION TEST	
11.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	30
11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	30
11.5 MEASUREMENT RESULTS	31
APPENDIX I: PHOTOGRAPHS OF TEST SETUP	33
APPENDIX II: PHOTOGRAPHS OF TEST EUT	33



1. GENERAL INFORMATION

Applicant	Guangzhou BDE Technology Inc.
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China
Manufacturer	Guangzhou BDE Technology Inc.
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China
Factory	Guangzhou BDE Technology Inc.
Address	B2-403, Chuangyi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China
Product Designation	BDE Sub-1G Wireless Module with PA Based on CC1311P3
Brand Name	BDE
Test Model	BDE-SG1311P3U
Series Model	BDE-SG1311P3N
Difference description	BDE-SG1311P3U use on-board U.FL connector for connecting external antenna, while BDE-SG1311P3N use RF pad for connecting external antenna, otherwise, they the same.
Deviation from Standard	No any deviation from the test method
Date of Receipt	Nov. 22, 2022
Date of Test	Nov. 25, 2022 to Jan. 07, 2023
Test Result	Pass
Test Report Form No	AGCTR-ER-FCC-LoRaV1.0

Prepared By

Reviewed By

an Duan

Alan Duan (Project Engineer)

Jan. 07, 2023

alin Lin

Calvin Liu (Reviewer)

Jan. 07, 2023

Approved By

Max Zhang

Max Zhang (Authorized Officer)

Jan. 07, 2023



2. PRODUCT INFORMATION

2.1 PRODUCT TECHNICAL DESCRIPTION

Equipment Type	LoRa WAN
Hardware Version	V1.0
Software Version	6.3
Frequency Band	915MHz
Operation Frequency Range	915MHz
Modulation Type	GFSK
Number of channels	1 Channel
Maximum Transmitter Power	18.856dBm
Antenna Designation	Whip Antenna
Antenna Gain	3.5dBi
Power Supply	DC 3.3V
Adapter Information	N/A

Note: The product is a custom LoRa protocol.

2.2 TEST FREQUENCY LIST

Channel Number	Frequency
0	915.0 MHz



2.3 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: 2ABRU-SG1311P3, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 TEST METHODOLOGY

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

2.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7 ANTENNA REQUIREMENT

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antennathat uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a brokenantenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmittingantennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The SMA-detachable antenna inside the device cannot be replaced by the user at will, and the antenna port has the uniqueness of RF performance. The gain of the antenna is 3.5dBi.



3. TEST ENVIRONMENT

3.1 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 ENVIRONMENTAL CONDITIONS

NORMAL CONDITIONS EXTREME CONDITIONS					
Temperature range ($^{\circ}$ C)	15 - 35	-20 - 50			
Relative humidty range 20 % - 75 % 20 % - 75 %					
Pressure range (kPa) 86 - 106 86 - 106					
Power supply DC 12V DC 12V					
Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.					

3.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y \pm U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_{c} = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 LIST OF EQUIPMENTS USED

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 07, 2022	Jun. 06, 2023
Test software	R&S	EZ-EMC	Ver. AGC- CON03A1	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Fliter	Micro-tronics	087	N/A	N/A	N/A
Attenuator	Weinachel Corp	58-30-33	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	00034609	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Aug. 04, 2022	Aug. 03, 2024
ANTENNA	SCHWARZBECK	VULB9168	D69250	Jan. 08, 2020	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



4.SYSTEM TEST CONFIGURATION

4.1 EUT CONFIGURATION


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 CONFIGURATION OF TESTED SYSTEM

Conducted Emission Configure:



4.4 EQUIPMENT USED IN TESTED SYSTEM

The Following Peripheral Devices And Interface Cables Were Connected During The Measurement: Test Accessories Come From The Laboratory

Item	Equipment	Model No.	Identifier	Note
1	Redmi notebook PC	XMA2002-AB		Accessories

☑ Test Accessories Come From The Manufacturer

lt	tem	Equipment	Model No.	Identifier	Note
	1	BDE Sub-1G Wireless Module with PA Based on CC1311P3	BDE-SG1311P3U	2ABRU-SG1311P3	EUT



4.5 SUMMARY OF TEST RESULTS

ltem	FCC Rules	Description Of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	Peak Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
4	§15.247 (d)	Conducted Spurious Emission	Pass
5	§15.209	Radiated Emission& Band Edge	Pass
6	§15.207	AC Power Line Conducted Emission	Pass



5. DESCRIPTION OF TEST MODES

	Summary table of Test Cases
	Equipment Specifications / Modulation
Test Item	Lora WAN – GFSK
Radiated&Conducted Test Cases	Mode 1: Lora WAN Tx CH31_915.0 MHz
 The battery is full-charge For Radiated Emission, 3 	rst case was recorded in the report, if no other cases. Ind during the test. Baxis were chosen for testing for each applicable mode. Thod, a temporary antenna connector is provided by the manufacture. Software Setting Diagram
CC1311P3 - Device Control Panel (offin The Settings View Evaluation Board Packet 1X * I Start Stop	
BY Parameters Frequency 915 0000 RX Filter BV 60.3 * bits	
Continuous TX Continuous RX Packet TX Packet Count: 100 http://	Packet RX B02.15 4g Mode Length: D 2 Byte CRC D Whitening Enabled Extended Lister First Mister Packet Data
Transmin Statum Statum Transmin 101010101 Statum Statum 1014 Preamble Count 4 Byrles Sync Wor Preamble Mode: Send 0 as the first pream Add Seq Humber Image: Add Seq Humbe	Addreský d Length: 24 Bits Addreský Séb 12 dd 77 44 fe 9b 72.5, jr 72.5, jr 72



6. RF OUTPUT POWER

6.1 MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

6.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


Spectrum Analyzer





6.3 MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
LoRa 500K BW	915.0	18.856	≤30	Pass	

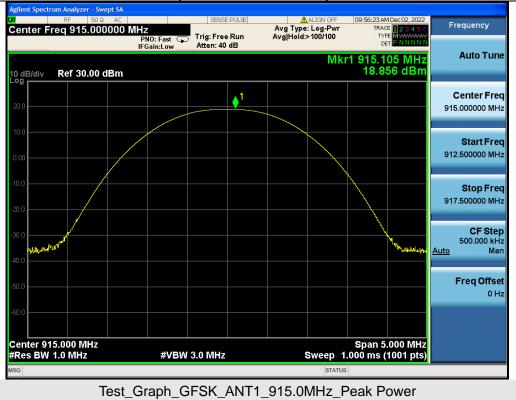

Test Graphs of Conducted Output Power




7.6 DB BANDWIDTH

7.1 MEASUREMENT PROCEDURE

- 1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 6. Measure and record the results in the test report.

7.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

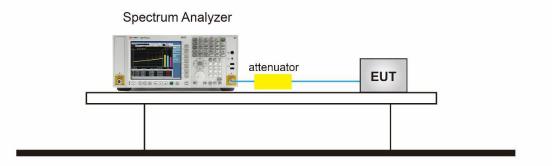



7.3 MEASUREMENT RESULTS

Test Mode	Test Channel (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
LoRa 500K BW	915.0	0.934	≥0.5	Pass

11:31:04 AM Jan 03, 2023 Radio Std: None Center Freq: 915.000000 MHz Trig: Free Run Avg|Ho #Atten: 30 dB Frequency Center Freq 915.000000 MHz Avg|Hold:>10/10 #IFGain:Low Radio Device: BTS Ref 20.00 dBm 0 dB/div mm W **Center Freq** 915.000000 MHz Span 3 MHz Sweep 1 ms Center 915 MHz #Res BW 100 kHz CF Step 300.000 kHz #VBW 300 kHz Man Auto **Total Power** 23.3 dBm Occupied Bandwidth 1.2150 MHz Freq Offset 0 Hz Transmit Freq Error -19.174 kHz **OBW Power** 99.00 % x dB Bandwidth 934.1 kHz x dB -6.00 dB STATUS Test Graph GFSK ANT1 915.0MHz OBW

Test Graphs of Occupied Bandwidth




8. POWER SPECTRAL DENSITY

8.1 MEASUREMENT PROCEDURE

- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 6. Measure and record the results in the test report.
- The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

8.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

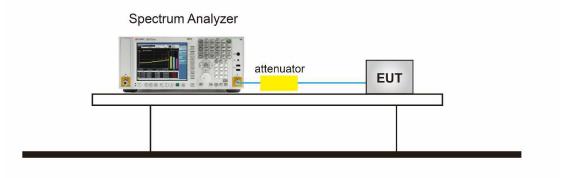



8.3 MEASUREMENT RESULTS

Test Data of Conducted Output Power Spectral Density					
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
LoRa 500K BW	915.0	2.836	≪8	Pass	

Test Graphs of Conducted Output Power Spectral Density





9. CONDUCTED SPURIOUS EMISSION


9.1 MEASUREMENT LIMIT

LIMITS AND ME					
Annlinghin Linsite	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS			
100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS			

9.2 MEASUREMENT PROCEDURE


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
- 4. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 5. Set SPA Trace 1 Max hold, then View.

9.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

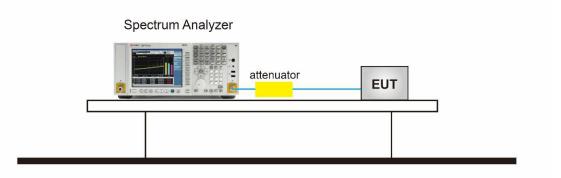




9.4 MEASUREMENT RESULTS

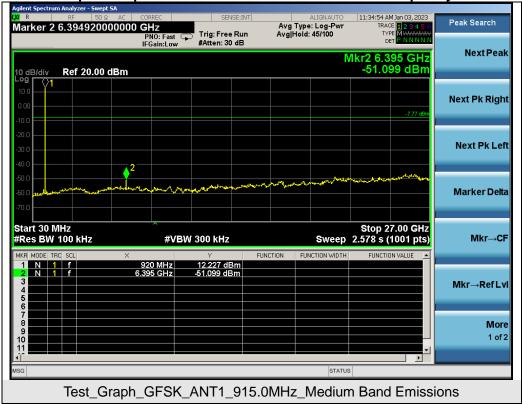

Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



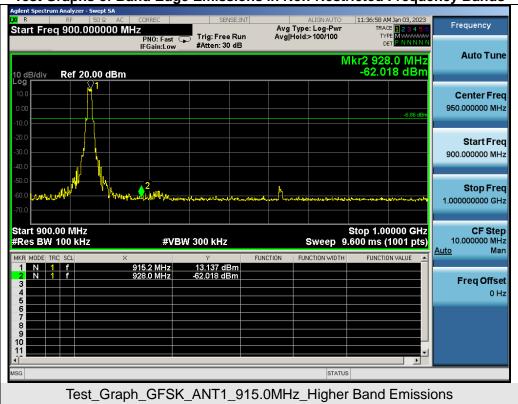

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



10. RADIATED EMISSION

10.1 LIMITS OF RADIATED EMISSION TEST

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.2 MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.

Any rep Ashang alternative by provided ther transmitter aloperates a forrial orgen than on the seconds) e Orbin cases in where is the Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

 Spectrum Parameter
 Setting

 Start ~Stop Frequency
 9KHz~150KHz/RB 200Hz for QP

 Start ~Stop Frequency
 150KHz~30MHz/RB 9KHz for QP

 Start ~Stop Frequency
 30MHz~1000MHz/RB 120KHz for QP

 Start ~Stop Frequency
 1GHz~26.5GHz

 Start ~Stop Frequency
 1MHz/3MHz for Peak, 1MHz/3MHz for Average


The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




10.3 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)


RADIATED EMISSION TEST SETUP 9KHz-30MHz

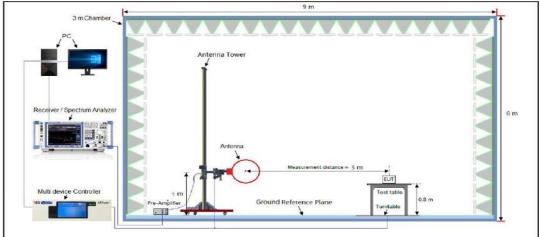

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

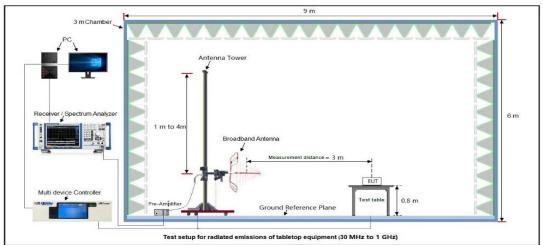

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

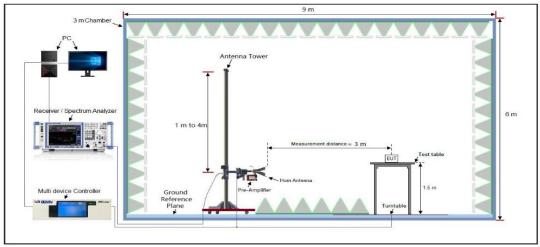

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd


 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



10.4 MEASUREMENT RESULT

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

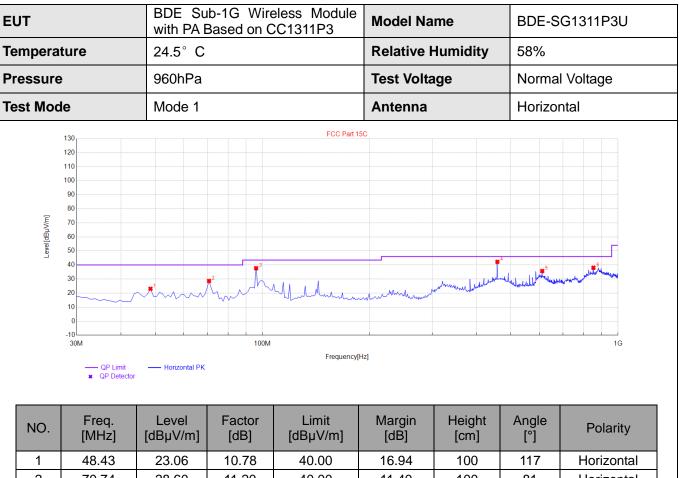

Radiated Emission from 30MHz to 1000MHz

NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
1	48.43	23.06	10.78	40.00	16.94	100	117	Horizontal
2	70.74	28.60	11.20	40.00	11.40	100	81	Horizontal
3	95.96	37.71	19.11	43.50	5.79	100	204	Horizontal
4	457.77	42.25	26.41	46.00	3.75	100	0	Horizontal
5	612	35.71	28.27	46.00	10.29	100	267	Horizontal
6	852.56	38.03	30.42	46.00	7.97	100	176	Horizontal

RESULT: PASS



EUT		BDE Sub-1G Wireless Module with PA Based on CC1311P3			Model N	Model Name BDE-SO		SG1311P3U	
Tempera	ture	24.5° C	;		Relative Humidity		58%		
Pressure	•	960hPa			Test Volt	age	Norma	al Voltage	
Test Mod	le	Mode 1			Antenna		Vertica	al	
	130			FCC Part 1	5C			·····	
	120								
110 100 90									
F	80								
Level[dBµV/m]	60								
Level[50								
	40 30	 1					* ⁴ 1	and the second	
	20	mm	Man when the man			and a manute the set of the set o			
	10				Mulu				
	-10								
	30M		100M	Frequency	Hz]			1G	
	QP Limit	Vertical PK		(logacito)					
	4 4 5 6 6								
	Freq.	Level	Factor	Limit	Margin	Height	Angle		
NO.	[MHz]	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity	
1	44.55	30.78	12.46	40.00	9.22	100	2	Vertical	
2	95.96	27.58	12.73	43.50	15.92	100	290	Vertical	
3	141.55	26.59	20.04	43.50	16.91	100	146	Vertical	
				46.00	13.94	100	2	Vertical	
4	491.72	32.06	23.34	40.00	13.94	100	<u> </u>	vontioar	
	491.72 564.47	32.06 36.07	25.47	46.00	9.93	100	352	Vertical	

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



EUT	BDE Sub-1G Wireless Module with PA Based on CC1311P3	Model Name	BDE-SG1311P3U			
Temperature	24.5° C	Relative Humidity	58%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 1	Antenna	Horizontal			

Radiated Emission Above 1GHz

Frequency	Meter Reading	Factor	Emission Level Limits		Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
1830.000 46.35 0.14 46.49 74 -27.51 peak									
1830.000 37.41 0.14 37.55 54 -16.45 AVG									
2745.000 40.15 2.36 42.51 74 -31.49									
2745.000 31.59 2.36 33.95 54 -20.05 AVG									
Remark:									
Factor = Antenna Factor + Cable Loss – Pre-amplifier.									

EUT	BDE Sub-1G Wireless Module with PA Based on CC1311P3	Model Name	BDE-SG1311P3U
Temperature	24.5° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

	Factor	Emission Level	Limits	Margin	Value Type				
(dBµV)	(dB) (dBµV/m) (dBµV/m) (dB)								
1830.000 46.37 0.14 46.51 74 -27.49 per									
37.51	0.14	37.65	54	-16.35	AVG				
41.05	74	-30.59	peak						
2745.000 32.94 2.36 35.3 54 -18.7 AVG									
Remark:									
-	46.37 37.51 41.05 32.94	46.37 0.14 37.51 0.14 41.05 2.36 32.94 2.36	46.37 0.14 46.51 37.51 0.14 37.65 41.05 2.36 43.41	46.37 0.14 46.51 74 37.51 0.14 37.65 54 41.05 2.36 43.41 74 32.94 2.36 35.3 54	46.37 0.14 46.51 74 -27.49 37.51 0.14 37.65 54 -16.35 41.05 2.36 43.41 74 -30.59 32.94 2.36 35.3 54 -18.7				

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin=Measure result-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



11. AC POWER LINE CONDUCTED EMISSION TEST

11.1 LIMITS OF LINE CONDUCTED EMISSION TEST


F errarian	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

11.2 MEASUREMENT SETUP (BLOCK DIAGRAM OF CONFIGURATION)

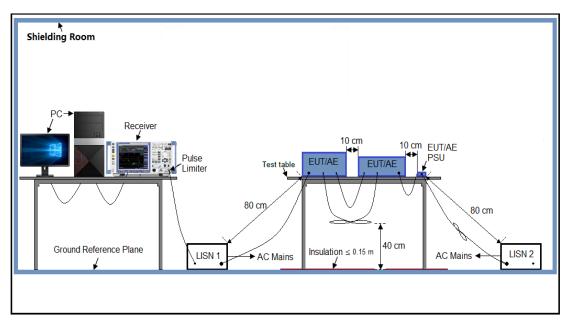



11.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 9V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 500hm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


11.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



11.5 MEASUREMENT RESULTS



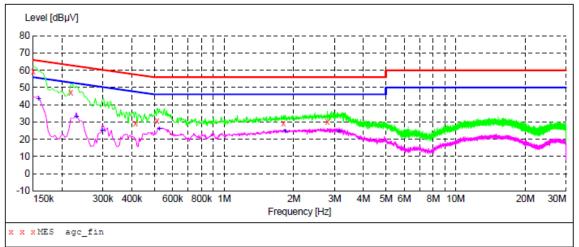

MEASUREMENT RESULT: "agc fin"

2022/12/9 16:03 Frequency Transd Limit Margin Line Level Detector dB dBµV dB MHz dBµV 6.9 6.7 0.150000 59.30 66 QP ь1 0.218000 47.20 6.4 63 15.7 QP ь1 0.414000 29.30 5.6 58 28.3 ь1 QP 30.50 5.4 25.5 0.514000 56 ь1 QP 29.00 6.3 56 1.806000 27.0 QP ь1 2.794000 30.30 6.5 56 25.7 QP ь1


MEASUREMENT RESULT: "agc fin2"

0.230000 33.10 6.4 52 19.3 AV L 0.298000 25.10 6.0 50 25.2 AV L 0.526000 25.80 5.4 46 20.2 AV L 1.838000 24.50 6.4 46 21.5 AV L	2	022/12/9 1	5:03					
0.230000 33.10 6.4 52 19.3 AV L 0.298000 25.10 6.0 50 25.2 AV L 0.526000 25.80 5.4 46 20.2 AV L 1.838000 24.50 6.4 46 21.5 AV L						-	Detector	Line
3.138000 24.60 6.5 46 21.4 AV L		0.230000 0.298000 0.526000 1.838000	33.10 25.10 25.80 24.50	6.4 6.0 5.4 6.4	52 50 46 46	19.3 25.2 20.2 21.5	AV AV AV AV	L1 L1 L1 L1 L1 L1

RESULT: PASS





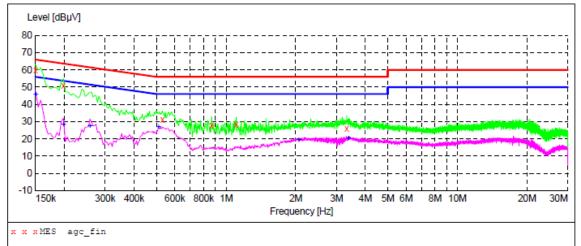

MEASUREMENT RESULT: "agc_fin"

2022/12/9 15:57

22/12/9 13:	57					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000	59.60	6.9	66	6.4	QP	N
0.198000	50.80	6.6	64	12.9	QP	N
0.530000	31.20	5.4	56	24.8	QP	N
0.866000	27.70	5.4	56	28.3	QP	N
1.106000	28.10	5.6	56	27.9	QP	N
3.322000	26.10	6.5	56	29.9	QP	N

MEASUREMENT RESULT: "agc_fin2"

2022/12/9 1	5:57					
Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000	45.80	6.9	56	10.2	AV	N
0.198000	28.10	6.6	54	25.6	AV	N
0.258000	27.50	6.2	52	24.0	AV	N
0.510000	26.80	5.4	46	19.2	AV	N
2.062000	19.50	6.5	46	26.5	AV	N
3.378000	20.20	6.5	46	25.8	AV	N

RESULT: PASS



APPENDIX I: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.:AGC02390221101AP02

APPENDIX II: PHOTOGRAPHS OF TEST EUT

Refer to the Report No.: AGC02390221101AP03

-----END OF REPORT-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.