


# **RF Exposure Evaluation Report**

Product Name : Automatic Wrist Blood Pressure MonitorModel No.: HL158VAFCC ID: 2ABTAHNL15VA1

Applicant : Health & Life Co. Ltd. Address : 9F., No. 186, Jian Yi Road, Zhonghe District, New Taipei City, Taiwan

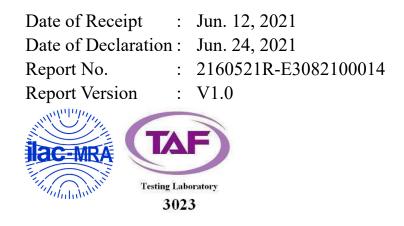

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.



Issued Date: Jun. 24, 2021 Report No.: 2160521R-E3082100014

DEKR/	4
-------	---

Product Name	Automatic Wrist Blood Pressure Monitor				
Applicant	Health & Life Co. Ltd.				
Address	9F., No. 186, Jian Yi Road, Zhonghe District, New Taipei City, Taiwan				
Manufacturer	Health & Life Co. Ltd.				
Model No.	HL158VA				
FCC ID.	2ABTAHNL15VA1				
Trade Name	Health & Life				
Applicable Standard	KDB 447498 D01 v06□Minimum test separation distance ≥ 20 cm☑For low power devices				
Test Result	Complied				
Documented By	Jinn Chen				
Tested By	( Senior Adm. Specialist / Jinn Chen ) : WENLEE				
Approved By	(Supervisor / Wen Lee) : (Manager / Tim Sung)				



## **Revision History**

Report No.	Version	Description	<b>Issued Date</b>
2160521R-E3082100014	V1.0	Initial issue of report.	Jun. 24, 2021



#### 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Automatic Wrist Blood Pressure Monitor
Trade Name	Health & Life
Model No.	HL158VA
FCC ID.	2ABTAHNL15VA1
Frequency Range	2402-2480MHz
Channel Number	V4.2: 40CH
Type of Modulation	V4.2: GFSK
Antenna Type	PCB Antenna
Antenna Gain	Refer to the table "Antenna List"

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ATL	LB-BLE-005	PCB Antenna	2.23 dBi for 2.4GHz

#### 2. **RF Exposure Evaluation**

#### 2.1. Standard Applicable

According to 1.1307 (b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

#### 2.2. Measurement Result:

According to KDB Publication 447498 D01, section 4.3.1, per the calculations of item 1 (Power(mW)/separation (mm)\*sqrt(f(GHz) $\leq$ 3.0), SAR is required as shown in the table below where calculated values are greater than 3.0:

Operation frequency = 2450MHz and antenna separation distance = 5mm

	Maximum peak output power		SAR Test	Calculated Threshold	
Frequency Band	Peak Gain: 2.23dBi		Exclusion Threshold	Value	
(MHz)	conducted	EIRP	EIRP		$(\leq 3.0 \text{ SAR is not})$
	(dBm)	(dBm)	(mW)	(mW)	required)
2402	2.87	5.1	3.24	10	1.003

Body SAR Test Exclusion Threshold = 10 mW

Note1: The SAR/MPE measurement is not necessary.

Note2: The maximum peak output power is refer to report No.: 2160521R-E3032110108 from the DEKRA.