

Test Report No.50130211 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50130211AppendixD)


Contents

Radiated Emissions, Fundamental and Band Edges.....	2
Spurious Emissions, TX Mode, 1-18G.....	12
Spurious Emissions, TX Mode, 18-26G.....	18
Spurious Emissions, TX Mode, 30M-1G	24
Spurious Emissions, TX Mode, 9 kHz - 30MHz.....	26

Radiated Emissions, Fundamental and Band Edges




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

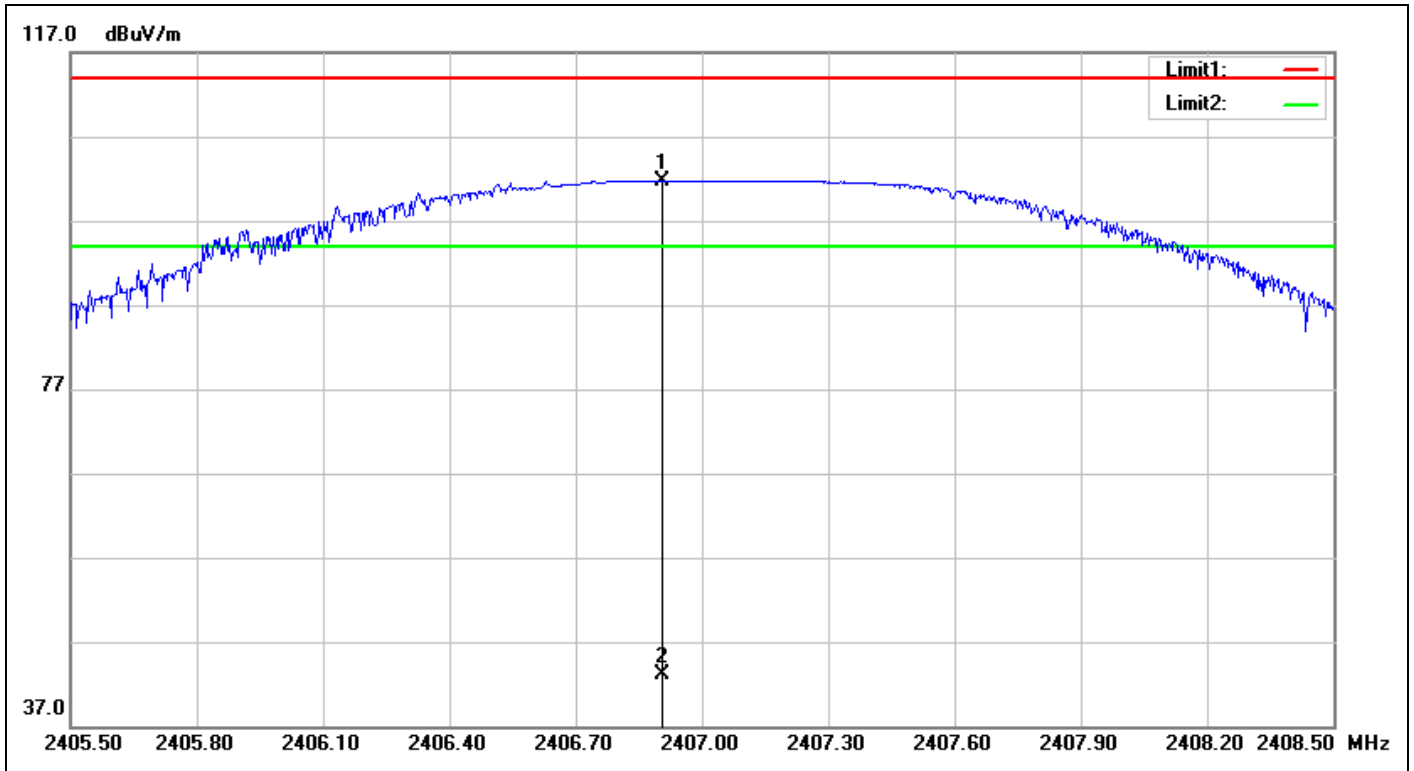


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC 15.249_2.4-2.5G_3m PK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 15:35:51
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2406.904	-8.07	109.87	101.80	114.00	-12.20	peak		0	
2	2406.904	-8.07	51.09	43.02	94.00	-50.98	AVG		0	

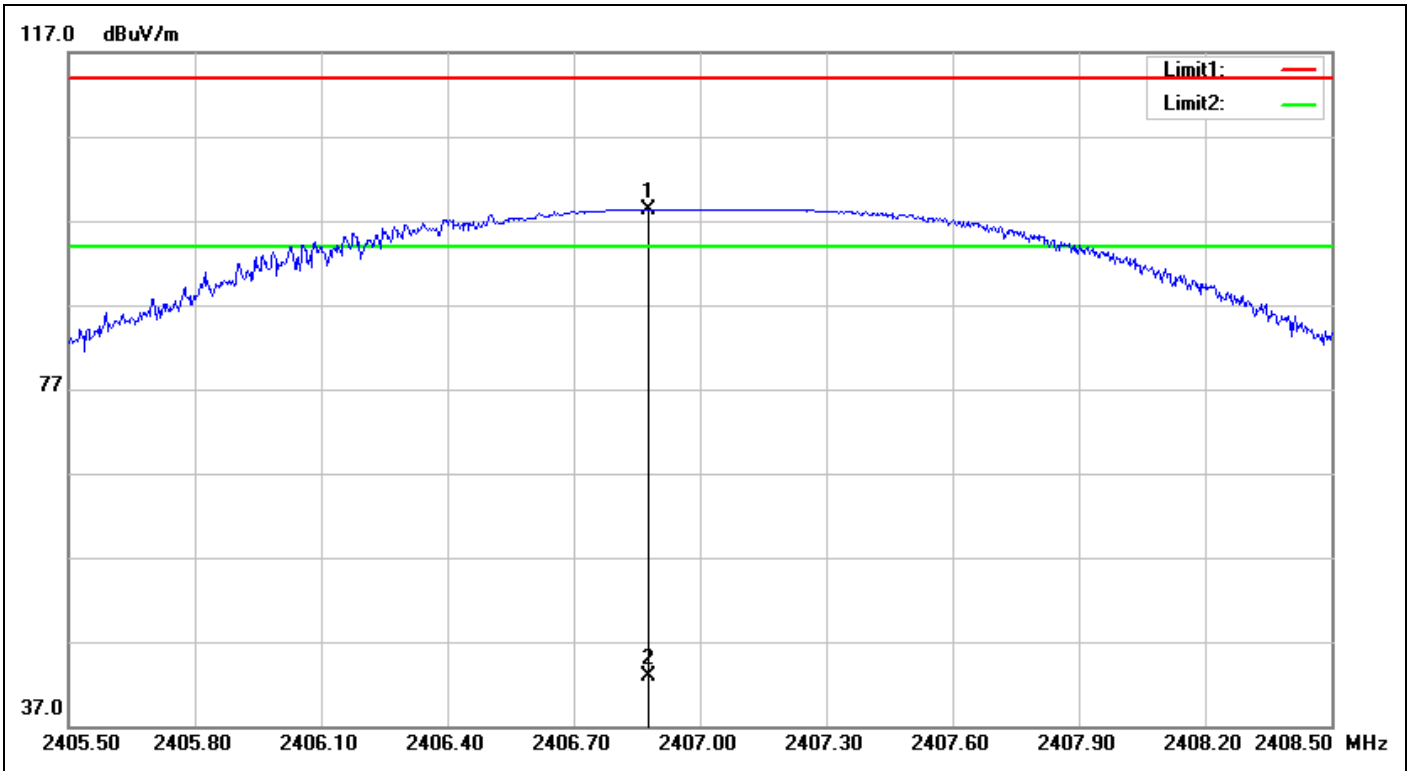


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC 15.249_2.4-2.5G_3m PK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 15:37:51
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2406.877	-8.07	106.46	98.39	114.00	-15.61	peak			
2	2406.877	-8.07	50.91	42.84	94.00	-51.16	AVG			

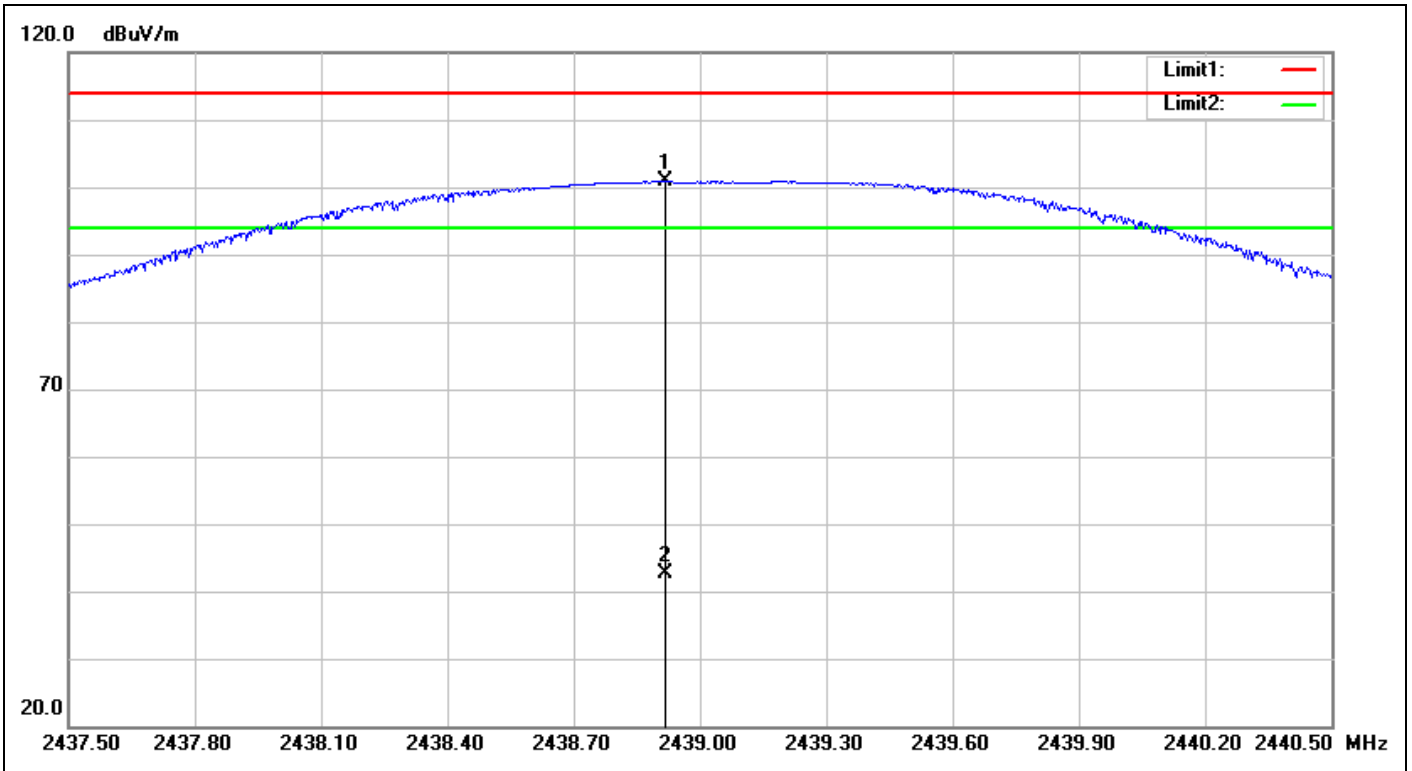


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC 15.249_2.4-2.5G_3m PK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/5 19:22:37
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2438.919	-8.06	108.83	100.77	114.00	-13.23	peak	219	247	
2	2438.919	-8.06	50.77	42.71	94.00	-51.29	AVG	219	247	

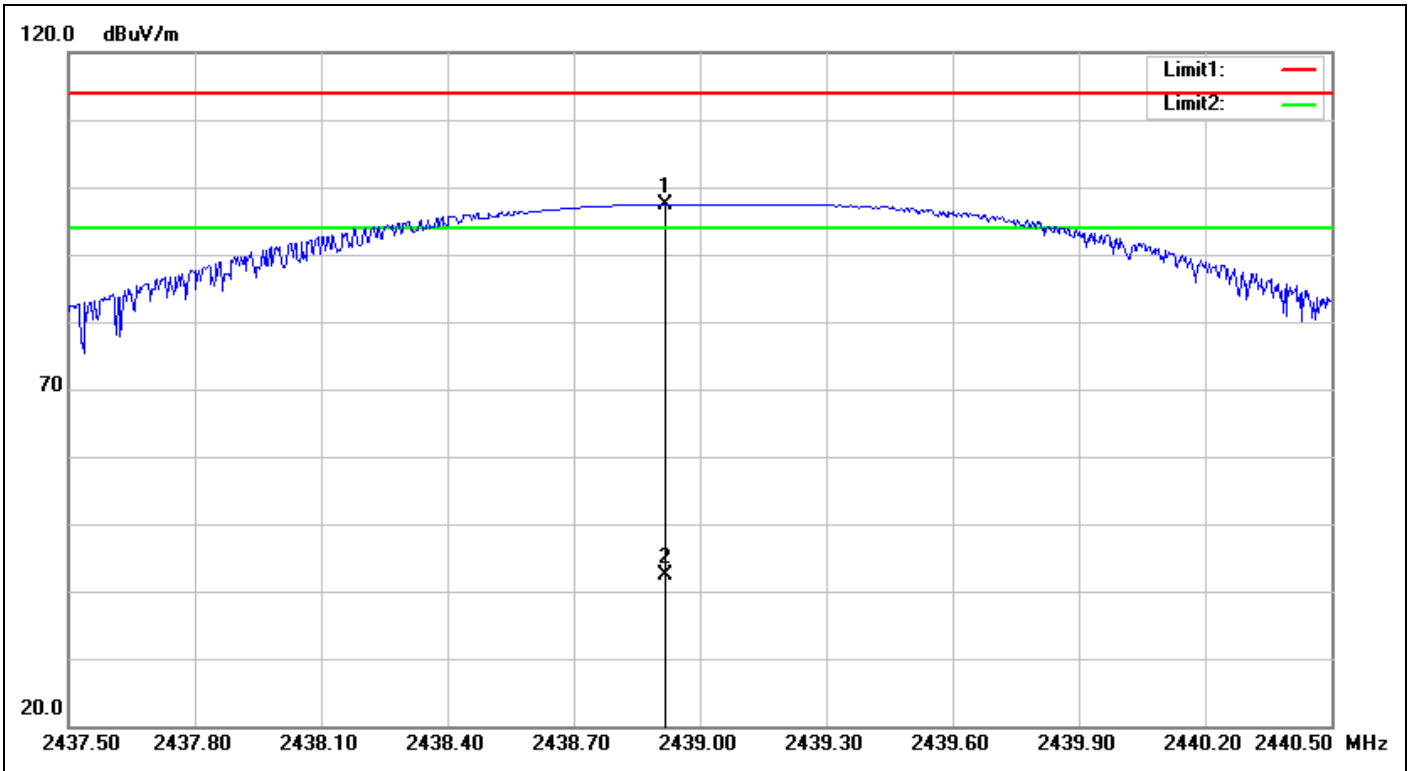


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC 15.249_2.4-2.5G_3m PK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/5 19:28:31
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2438.916	-8.06	105.46	97.40	114.00	-16.60	peak	187	90	
2	2438.916	-8.06	50.54	42.48	94.00	-51.52	AVG	187	90	

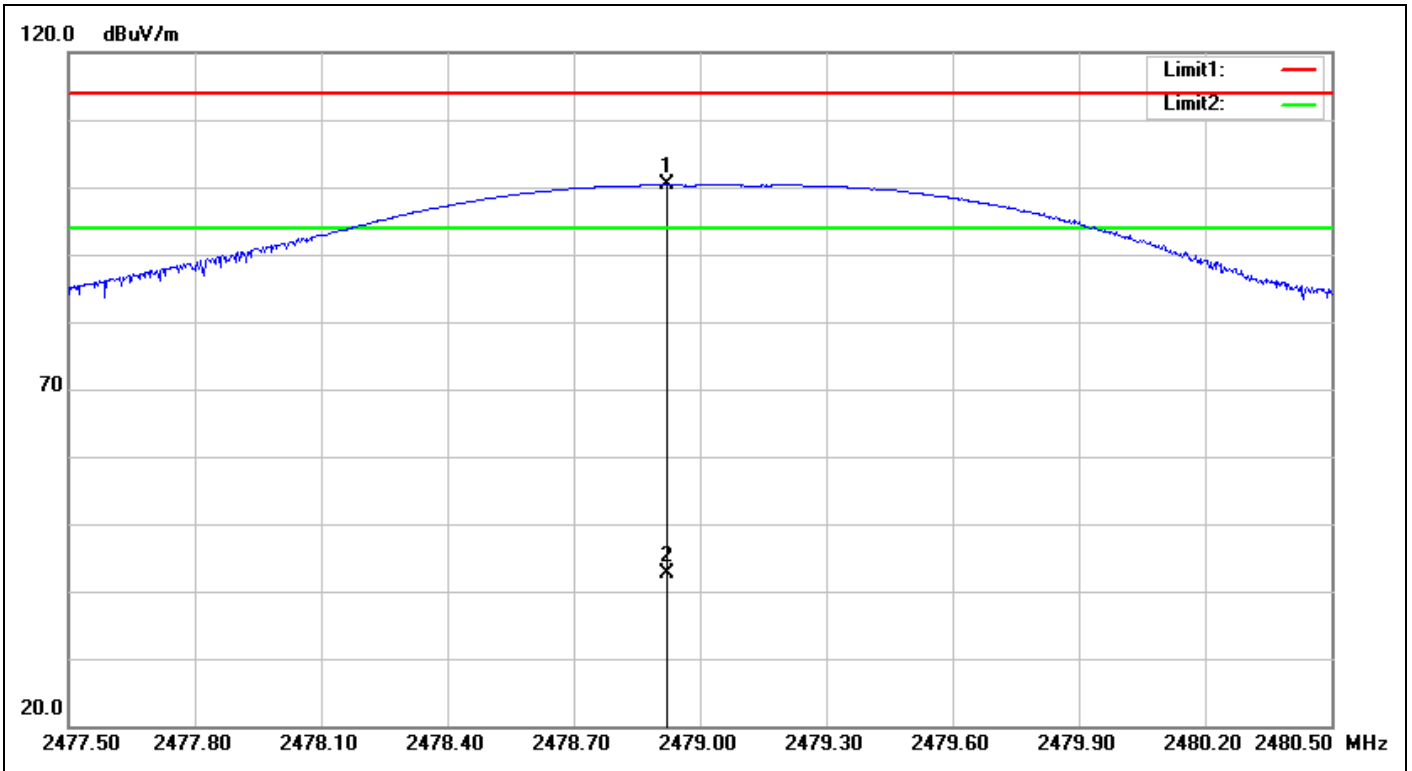

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC 15.249_2.4-2.5G_3m PK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/5 19:34:04
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2478.922	-8.06	108.34	100.28	114.00	-13.72	peak	246	247	
2	2478.922	-8.06	50.71	42.65	94.00	-51.35	AVG	246	247	


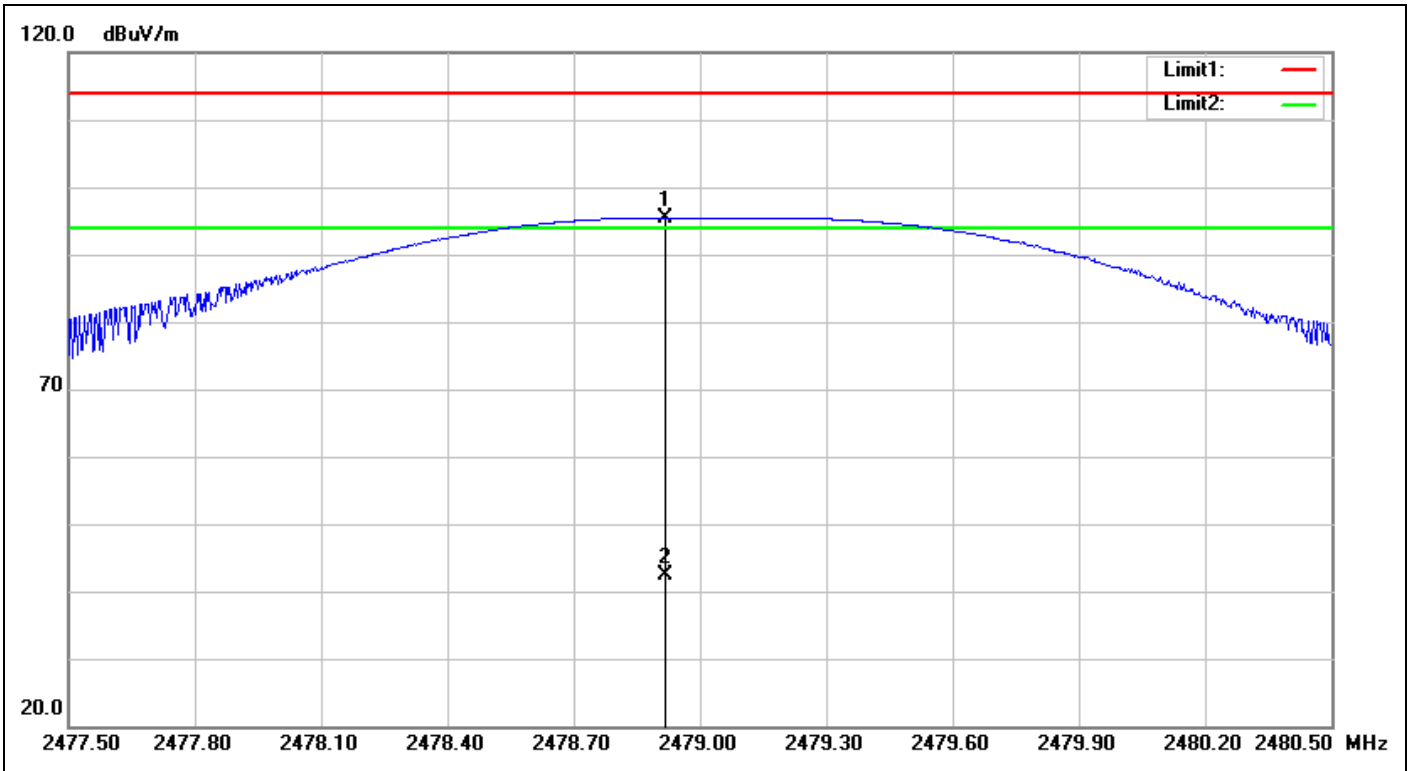


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC 15.249_2.4-2.5G_3m PK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/5 19:31:49
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	2478.916	-8.06	103.55	95.49	114.00	-18.51	peak	100	70	
2	2478.916	-8.06	50.50	42.44	94.00	-51.56	AVG	100	70	

Radiated Bandedge


Low Channel (Hor)

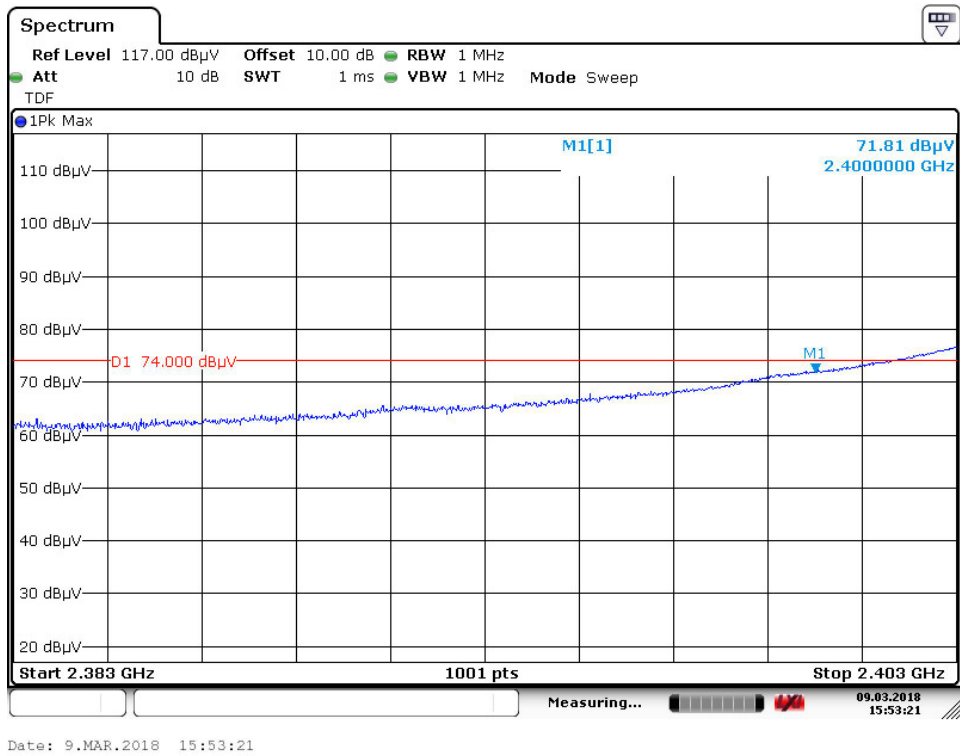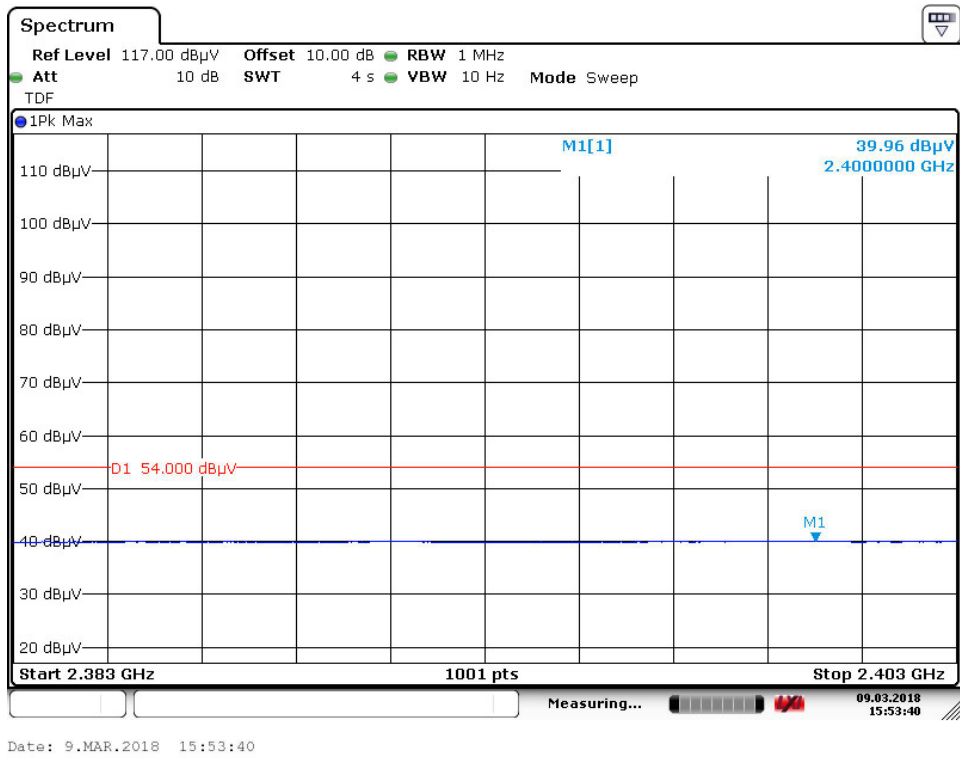

Low Channel (Ver)

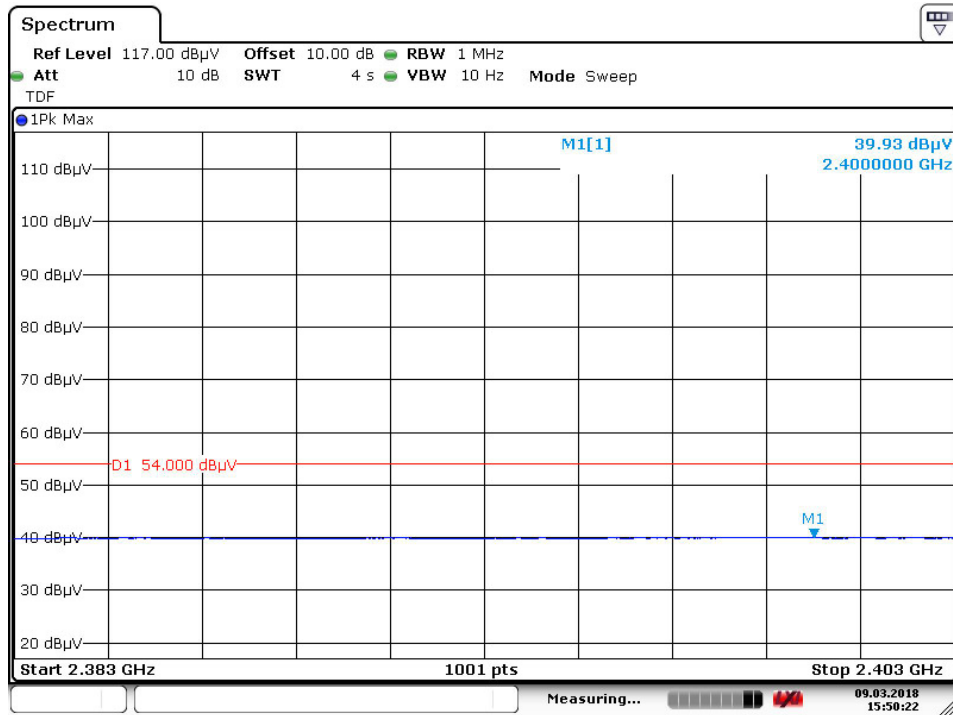



Date: 9.MAR.2018 15:50:22

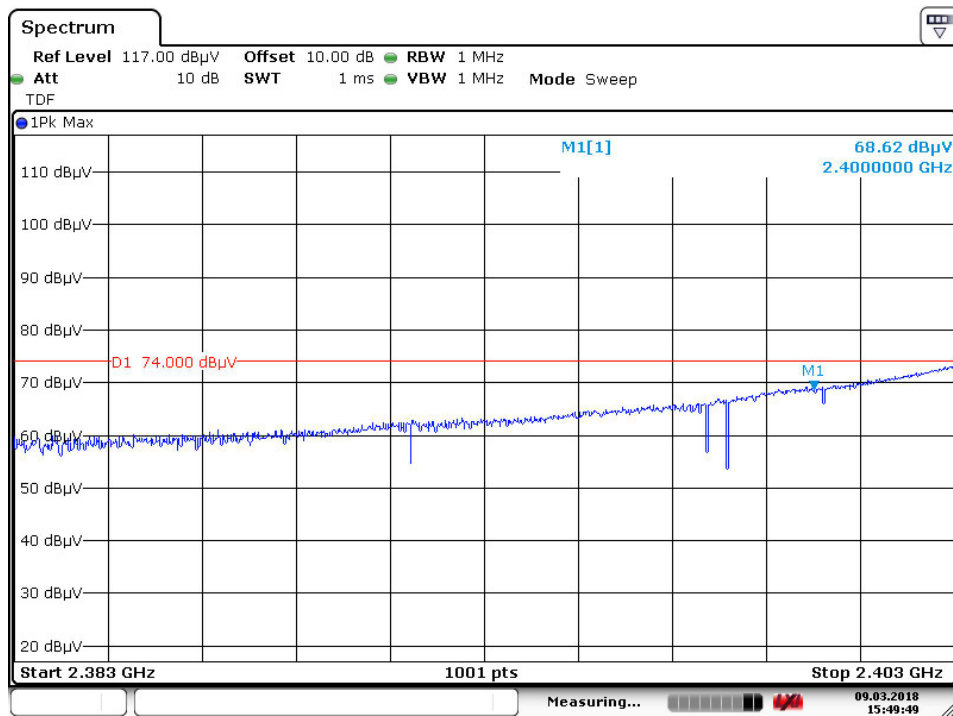



Date: 9.MAR.2018 15:49:48

Radiated Bandedge (GFSK)

High Channel (Hor)

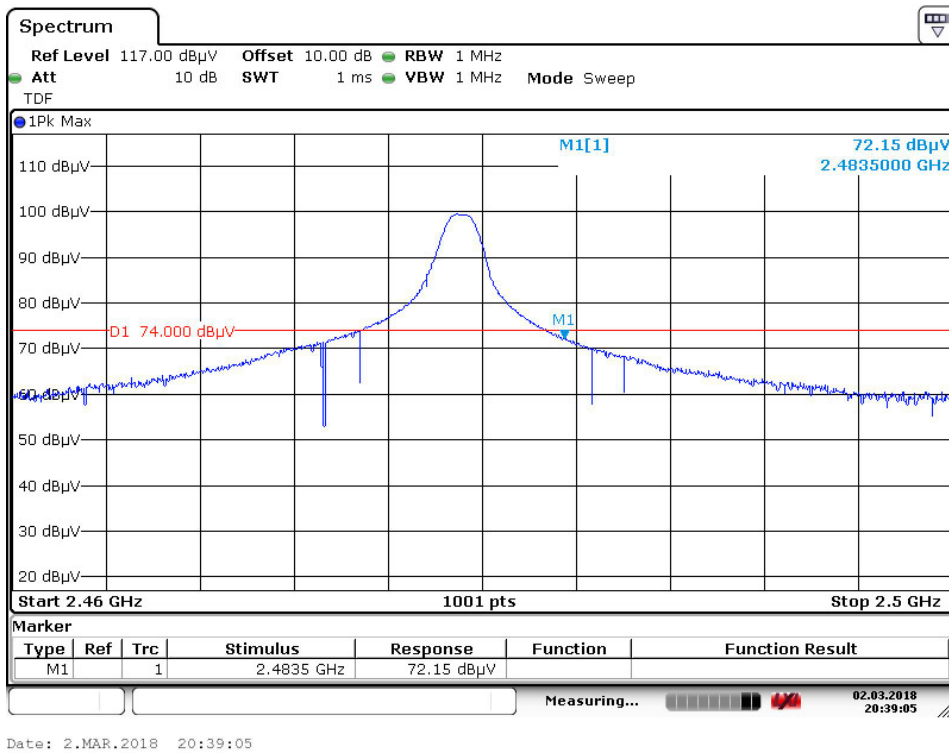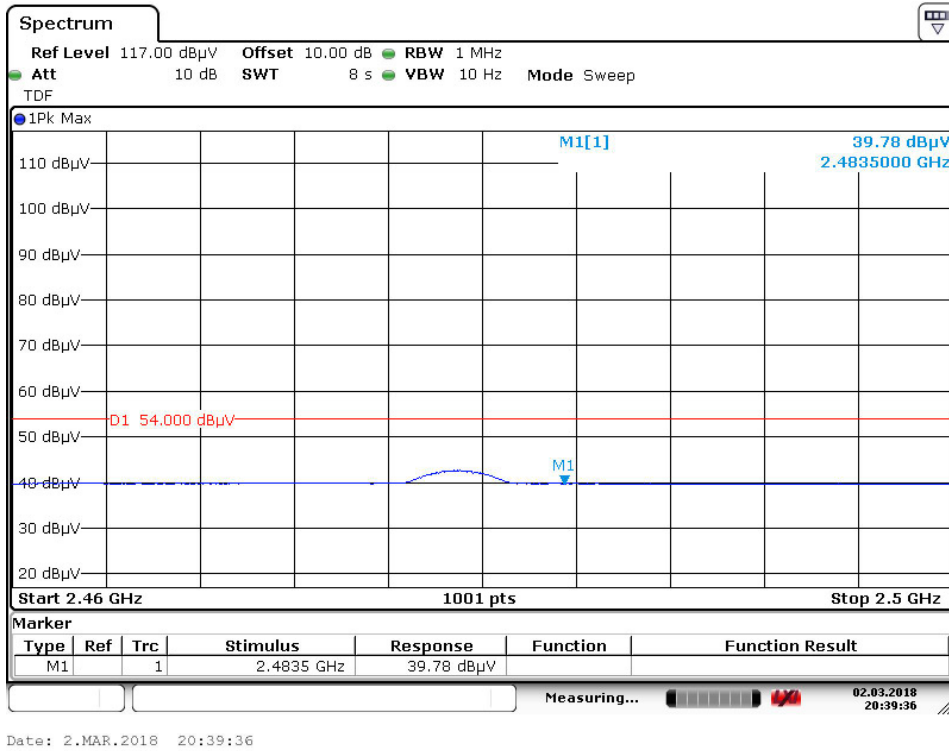


High Channel (Ver)

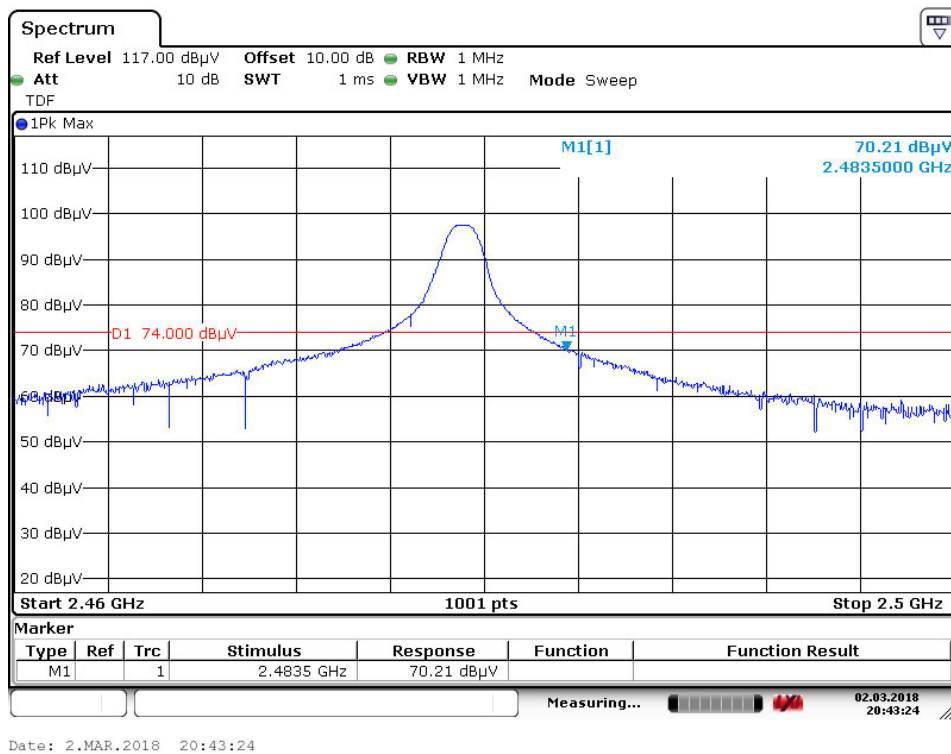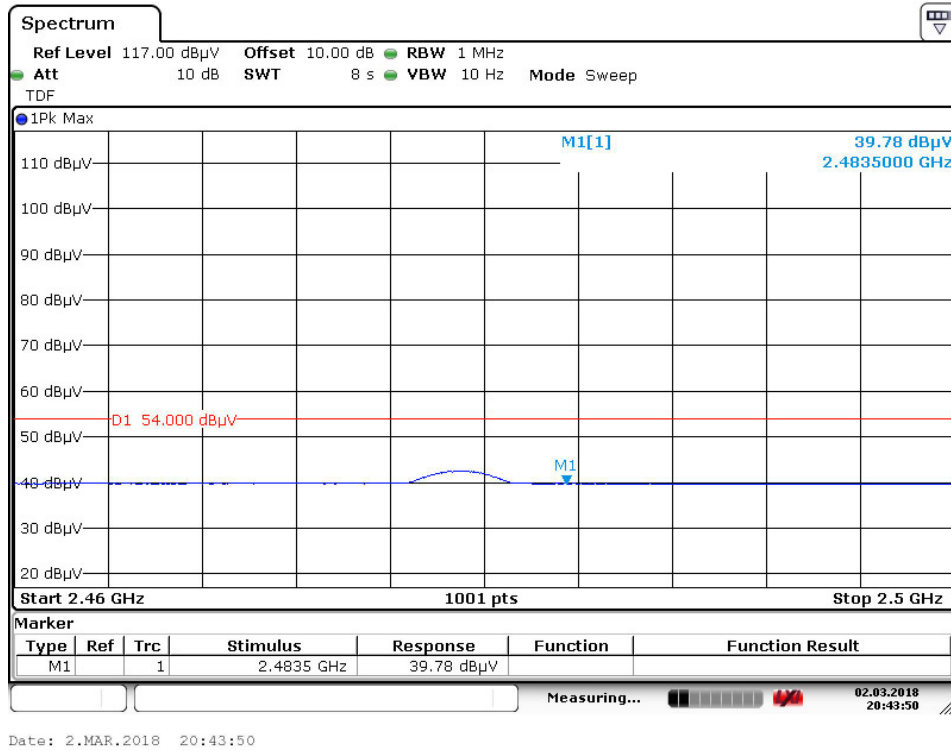

Spurious Emissions, TX Mode, 1-18G




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

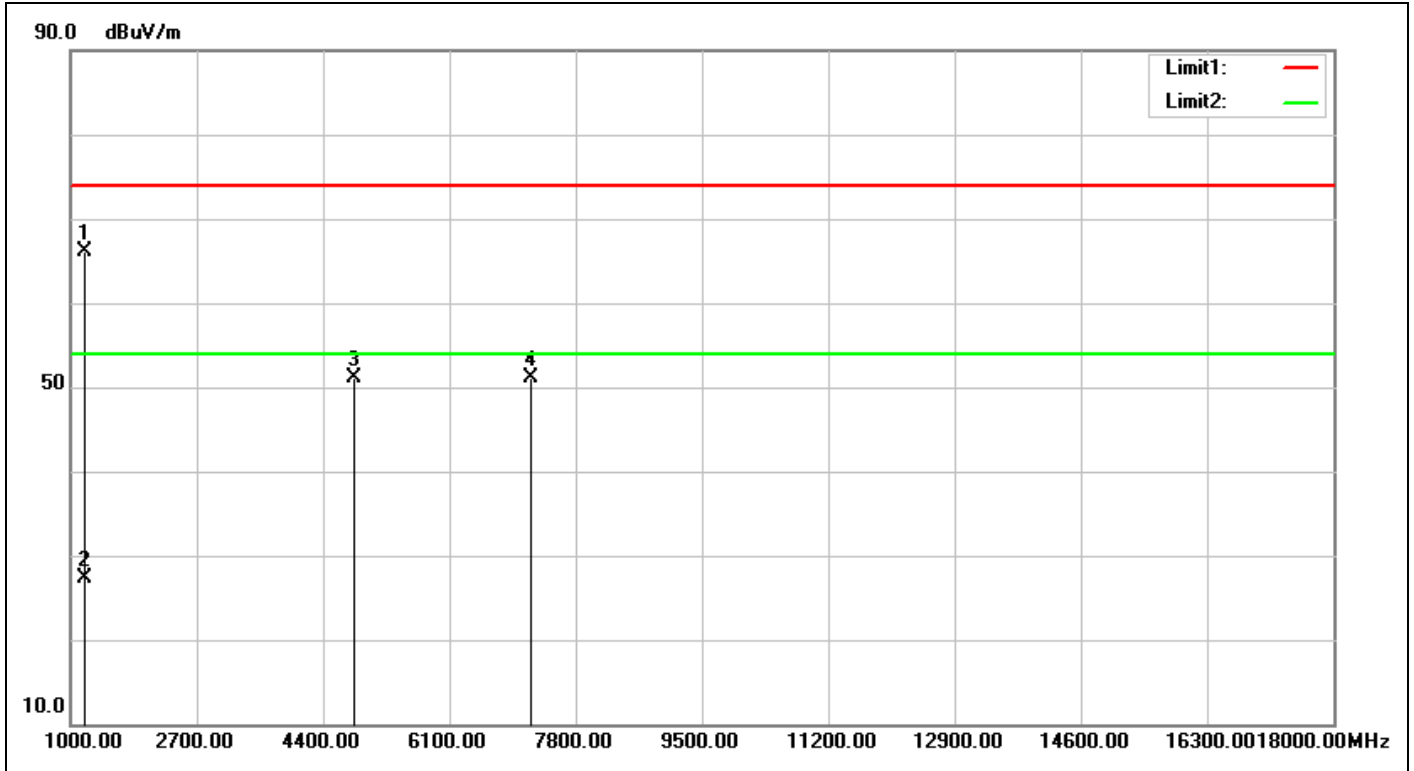


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 15:26:50
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1203.500	-10.04	76.10	66.06	74.00	-7.94	peak	100	351	
2	1203.500	-10.04	37.39	27.35	54.00	-26.65	AVG	100	351	
3	4808.000	-2.71	53.80	51.09	74.00	-22.91	peak	100	112	
4	7221.000	5.29	45.84	51.13	74.00	-22.87	peak		0	

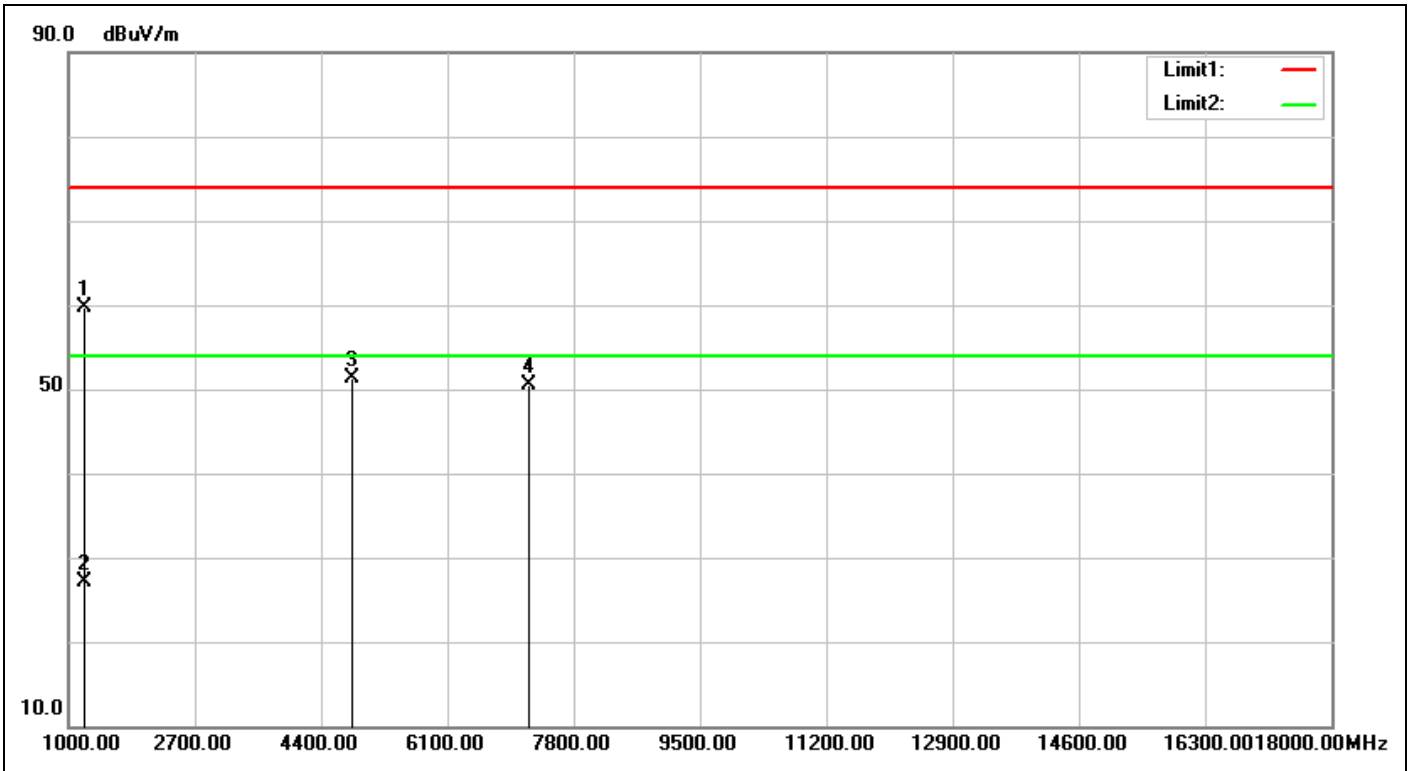


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 15:27:46
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1203.500	-10.04	69.75	59.71	74.00	-14.29	peak	100	310	
2	1203.500	-10.04	37.09	27.05	54.00	-26.95	AVG	100	310	
3	4808.000	-2.71	53.93	51.22	74.00	-22.78	peak	100	210	
4	7221.000	5.29	45.31	50.60	74.00	-23.40	peak			

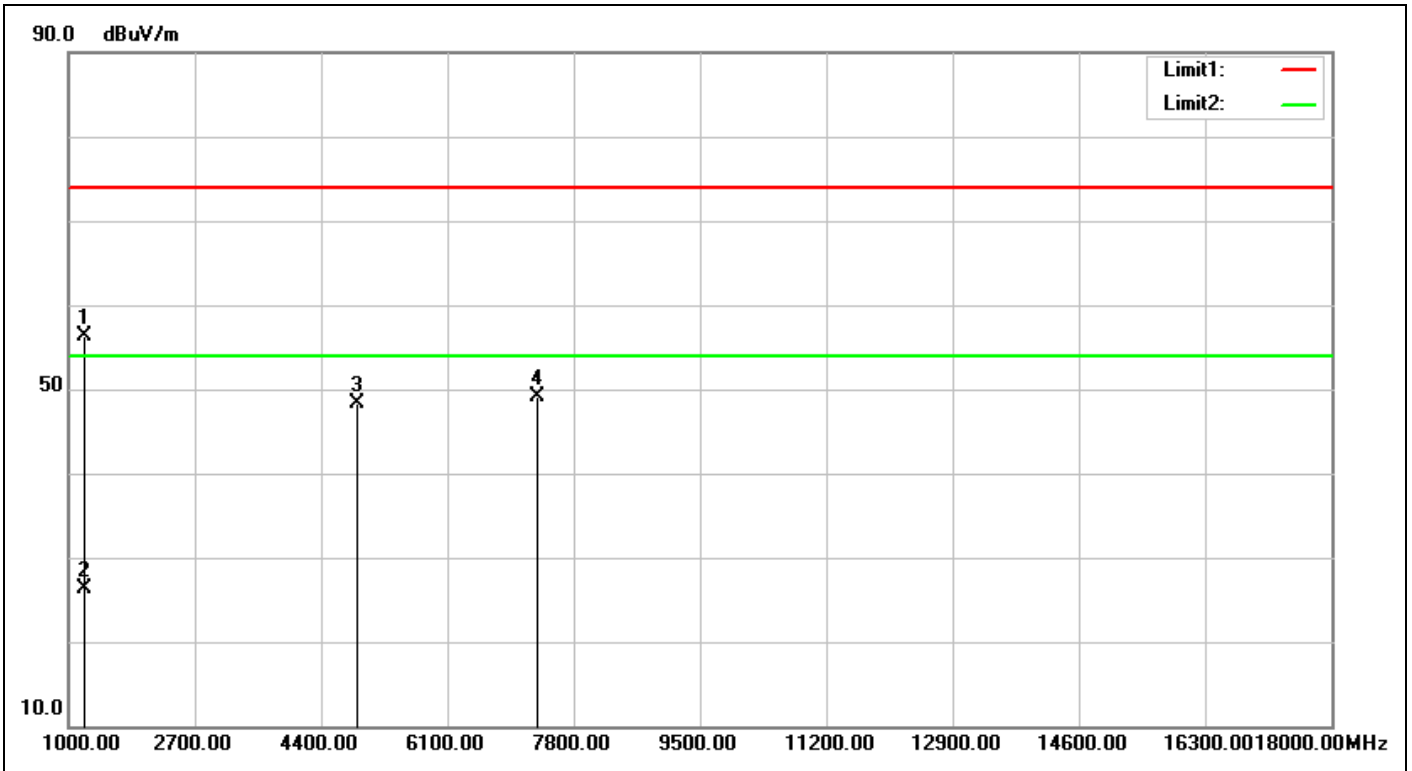


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/5 19:49:12
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1204.000	-10.04	66.25	56.21	74.00	-17.79	peak	100	195	
2	1204.000	-10.04	36.37	26.33	54.00	-27.67	AVG	100	195	
3	4878.000	-2.52	50.75	48.23	74.00	-25.77	peak	100	263	
4	7317.000	5.53	43.64	49.17	74.00	-24.83	peak			

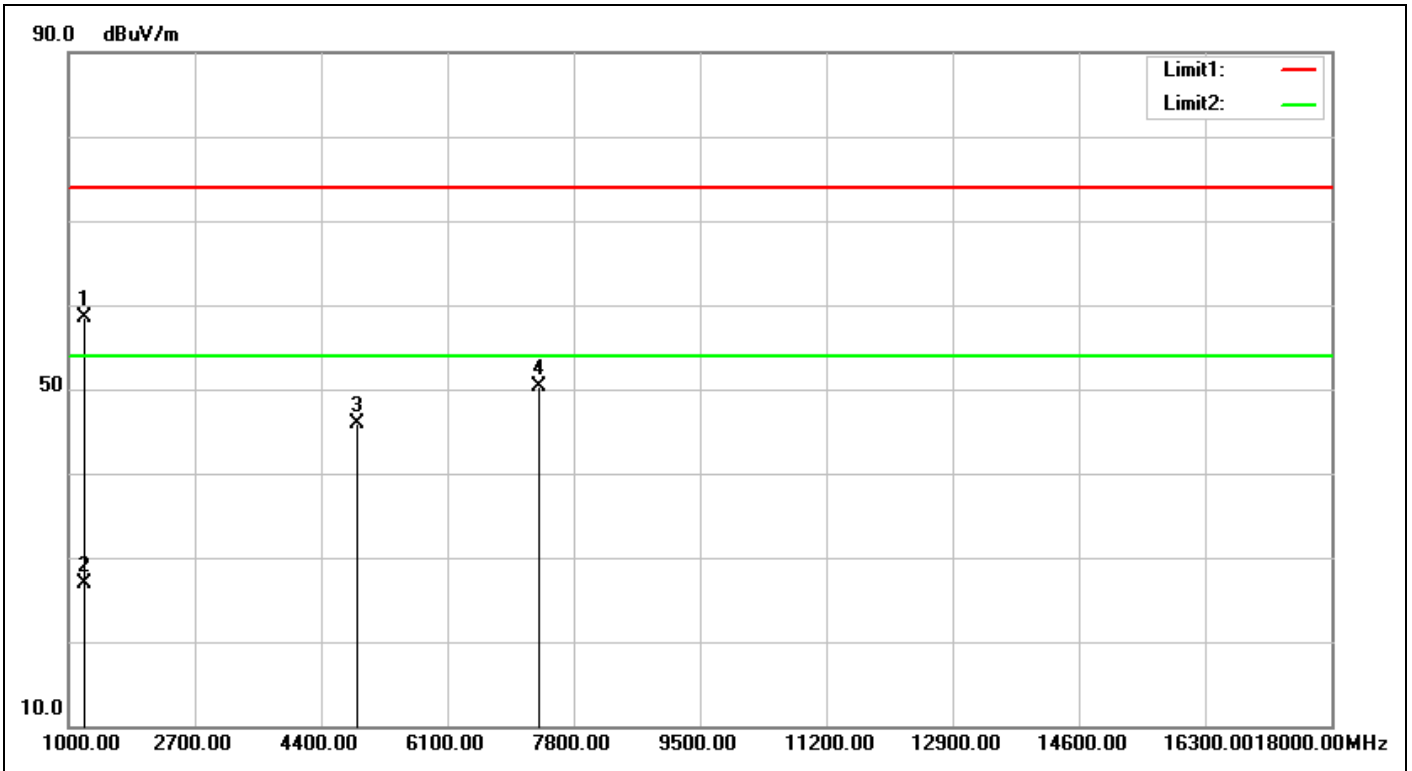


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/5 19:50:08
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1204.000	-10.04	68.54	58.50	74.00	-15.50	peak	100	235	
2	1204.000	-10.04	36.91	26.87	54.00	-27.13	AVG	100	235	
3	4878.000	-2.52	48.45	45.93	74.00	-28.07	peak			
4	7317.000	5.53	44.75	50.28	74.00	-23.72	peak			

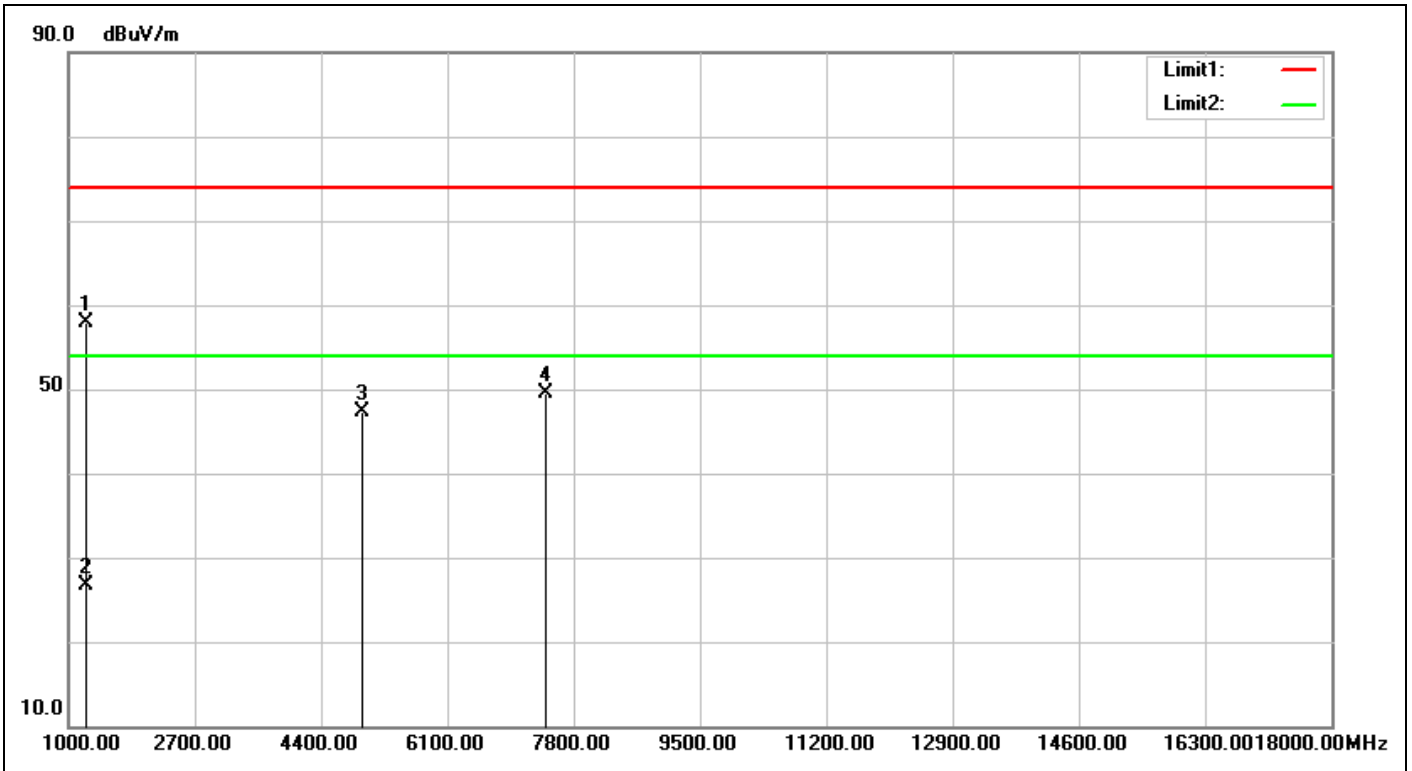

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/5 19:37:46
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1239.500	-10.10	68.10	58.00	74.00	-16.00	peak	100	360	
2	1239.500	-10.10	36.79	26.69	54.00	-27.31	AVG	100	360	
3	4958.000	-2.30	49.65	47.35	74.00	-26.65	peak		0	
4	7437.000	5.83	43.75	49.58	74.00	-24.42	peak		0	

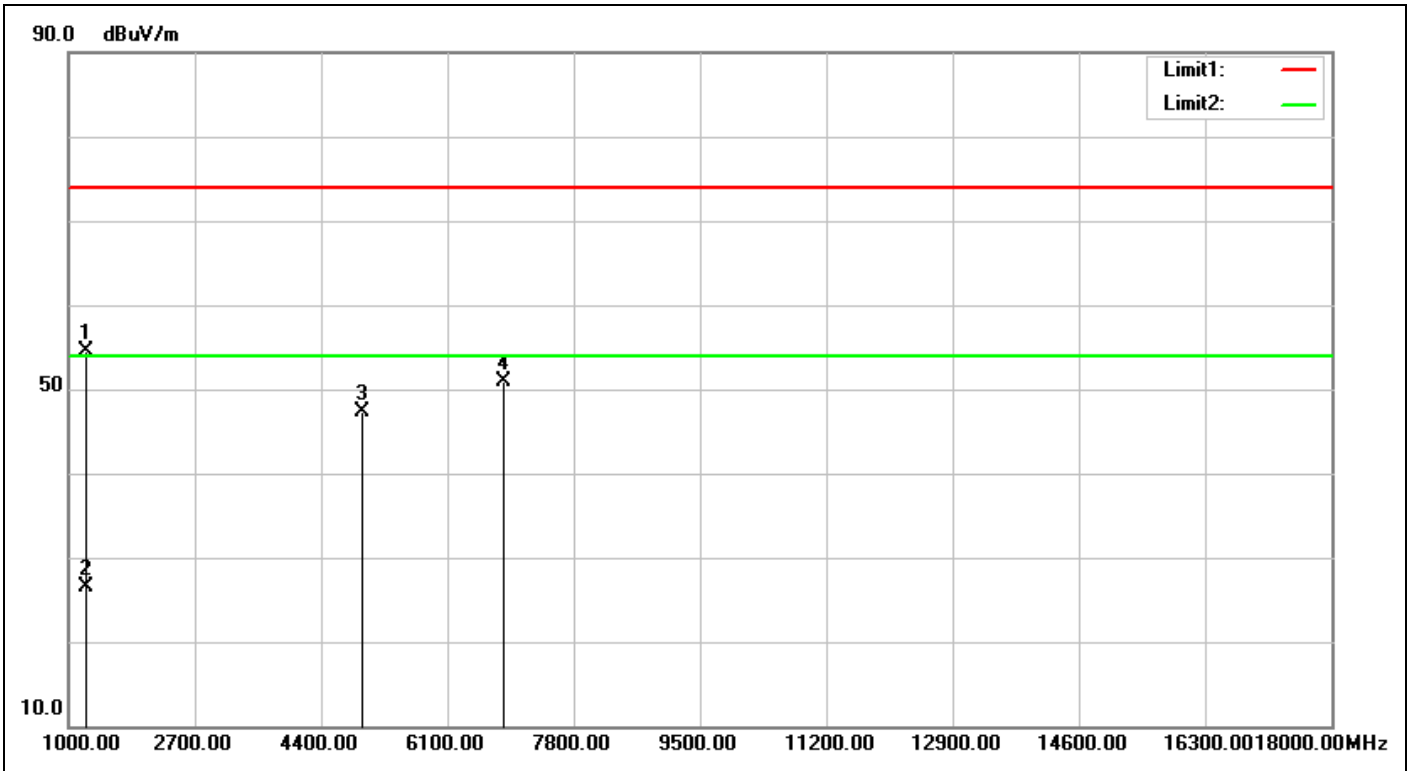

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/5 19:38:43
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1239.500	-10.10	64.67	54.57	74.00	-19.43	peak	100	253	
2	1239.500	-10.10	36.67	26.57	54.00	-27.43	AVG	100	253	
3	4958.000	-2.30	49.53	47.23	74.00	-26.77	peak	100	160	
4	6865.000	4.91	46.00	50.91	74.00	-23.09	peak	100	282	


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

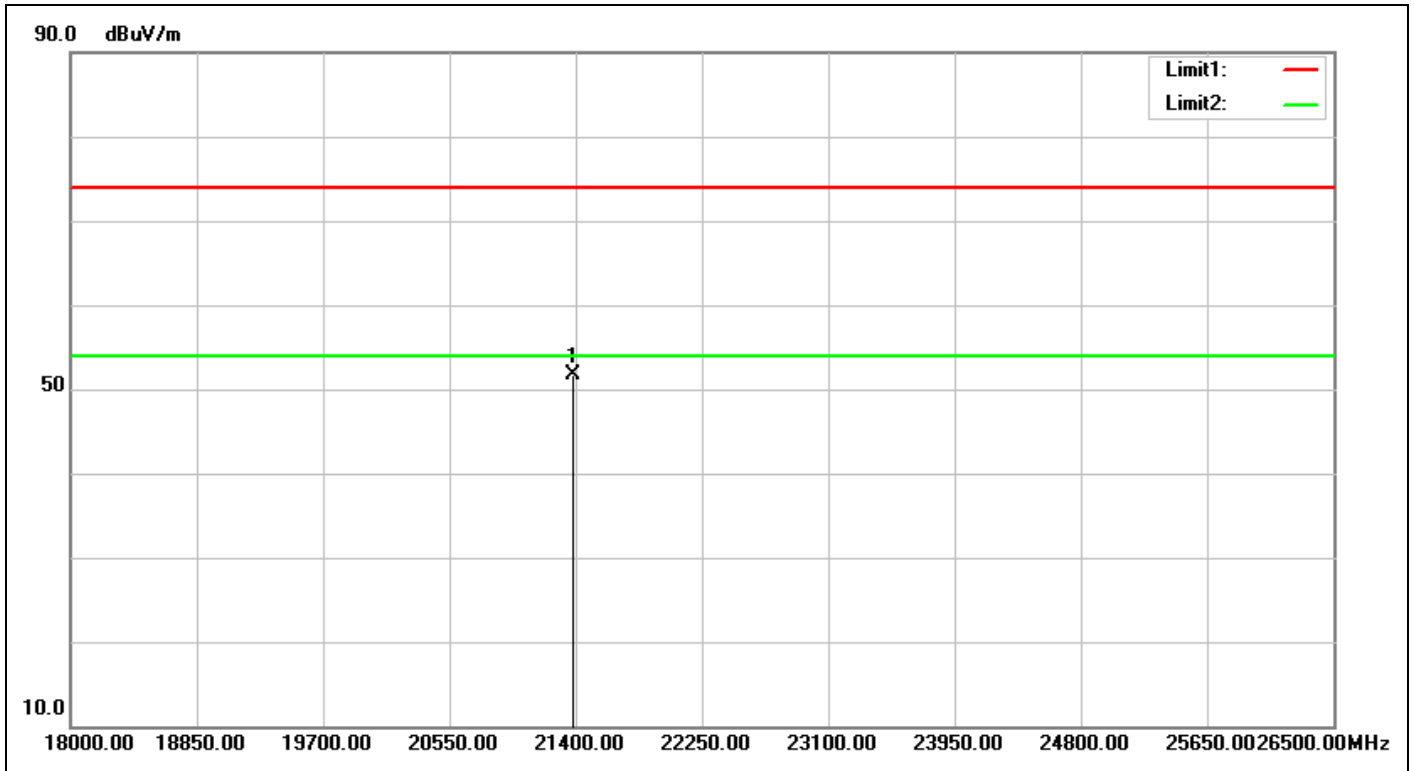


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 16:02:53
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21383.000	32.78	18.89	51.67	74.00	-22.33	peak			

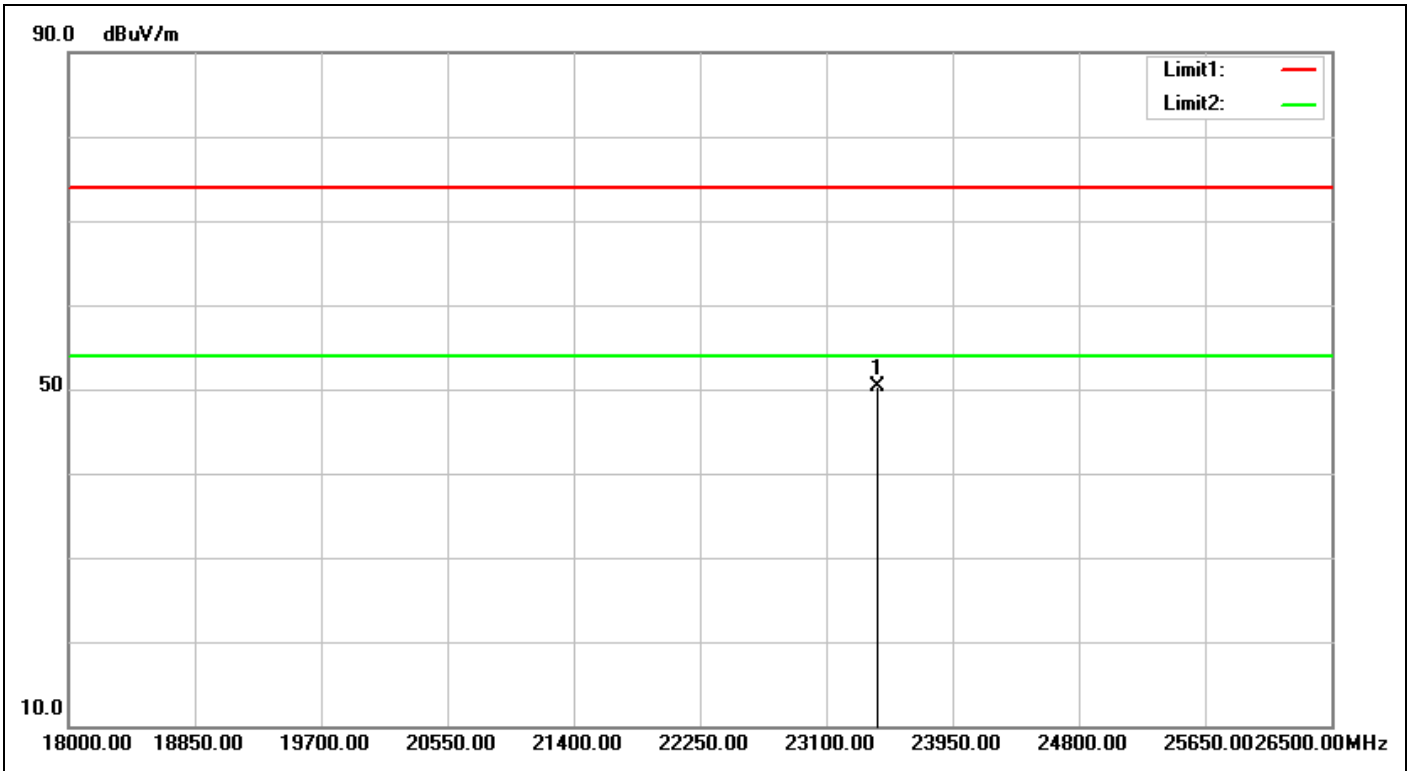


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 16:03:03
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23440.000	33.21	17.03	50.24	74.00	-23.76	peak			

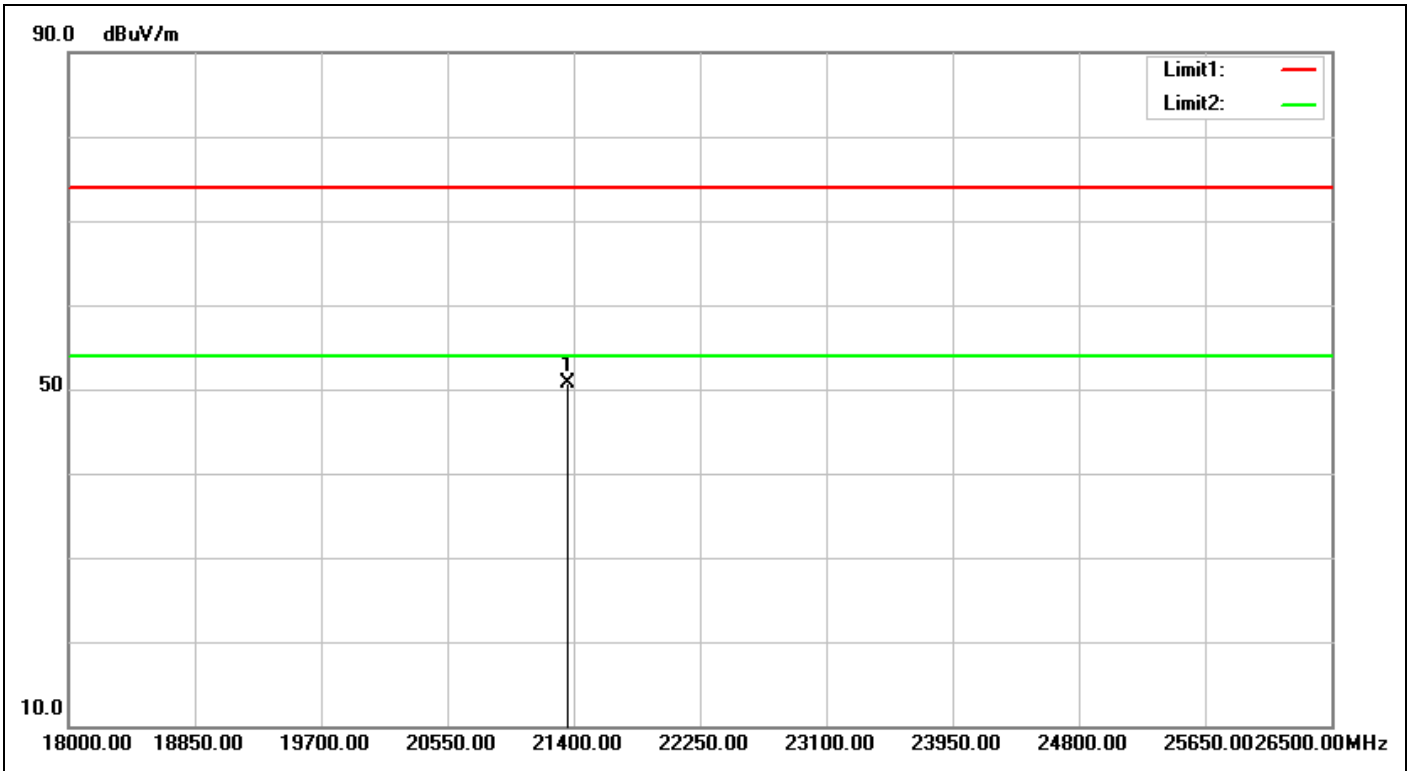


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/5 20:02:16
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21357.500	32.76	18.00	50.76	74.00	-23.24	peak			

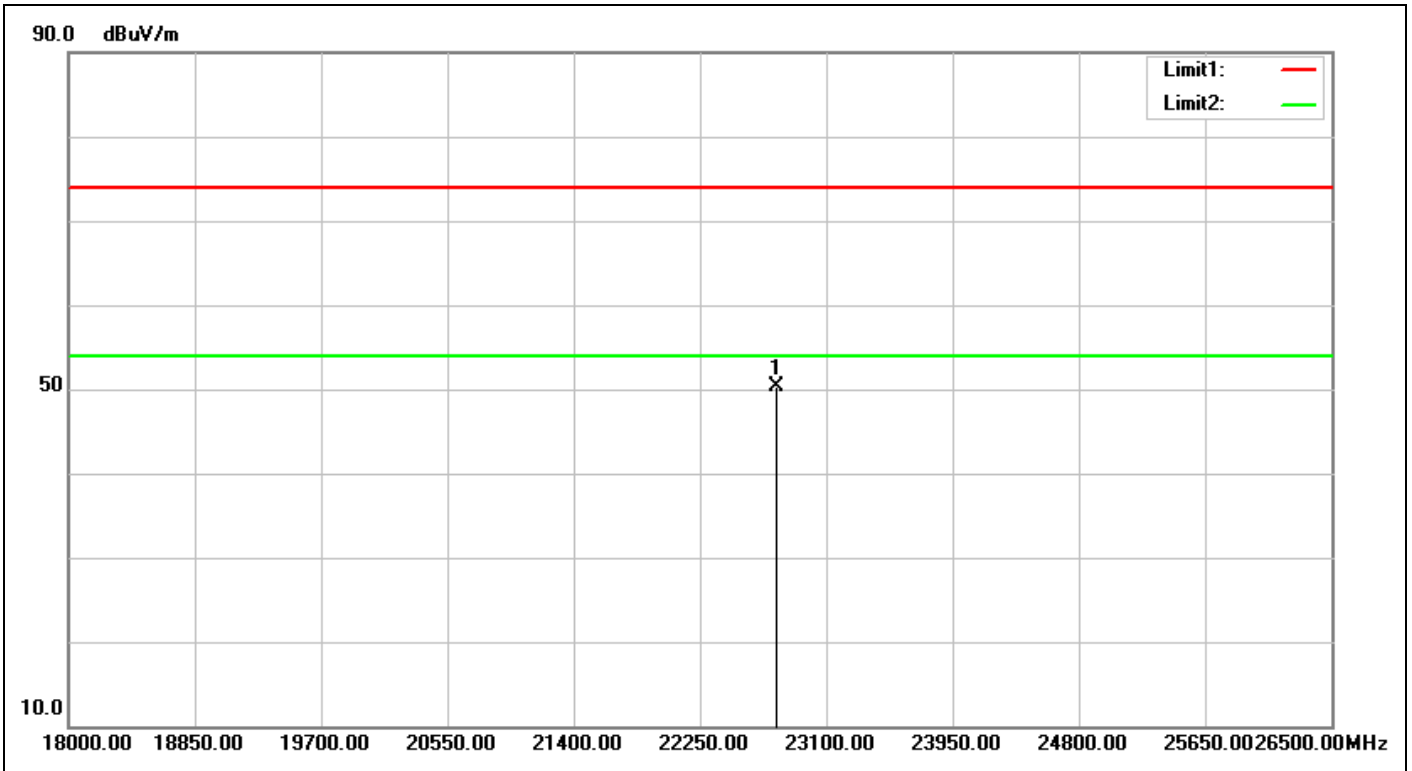


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/5 20:02:24
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22768.500	32.73	17.64	50.37	74.00	-23.63	peak			

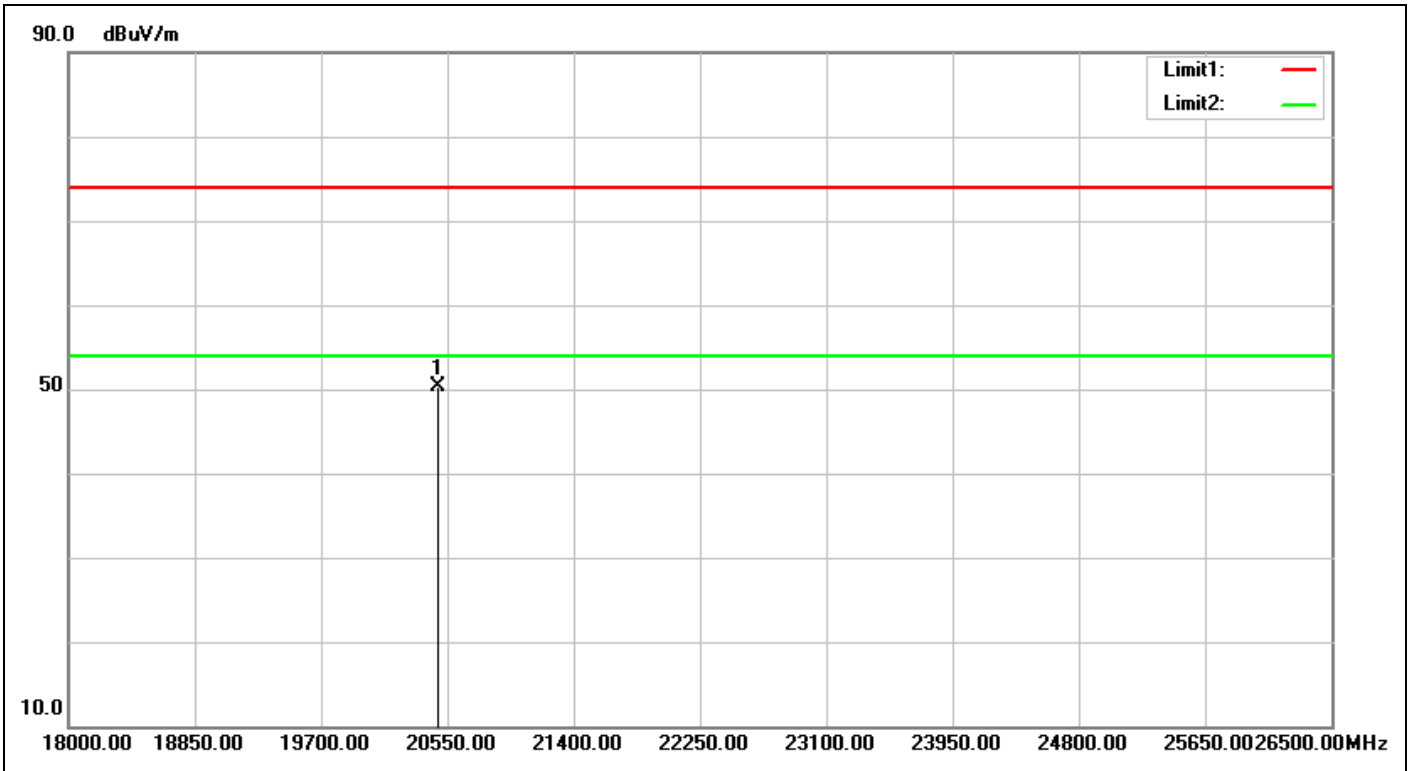

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/5 20:01:30
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	20490.500	31.40	18.96	50.36	74.00	-23.64	peak			

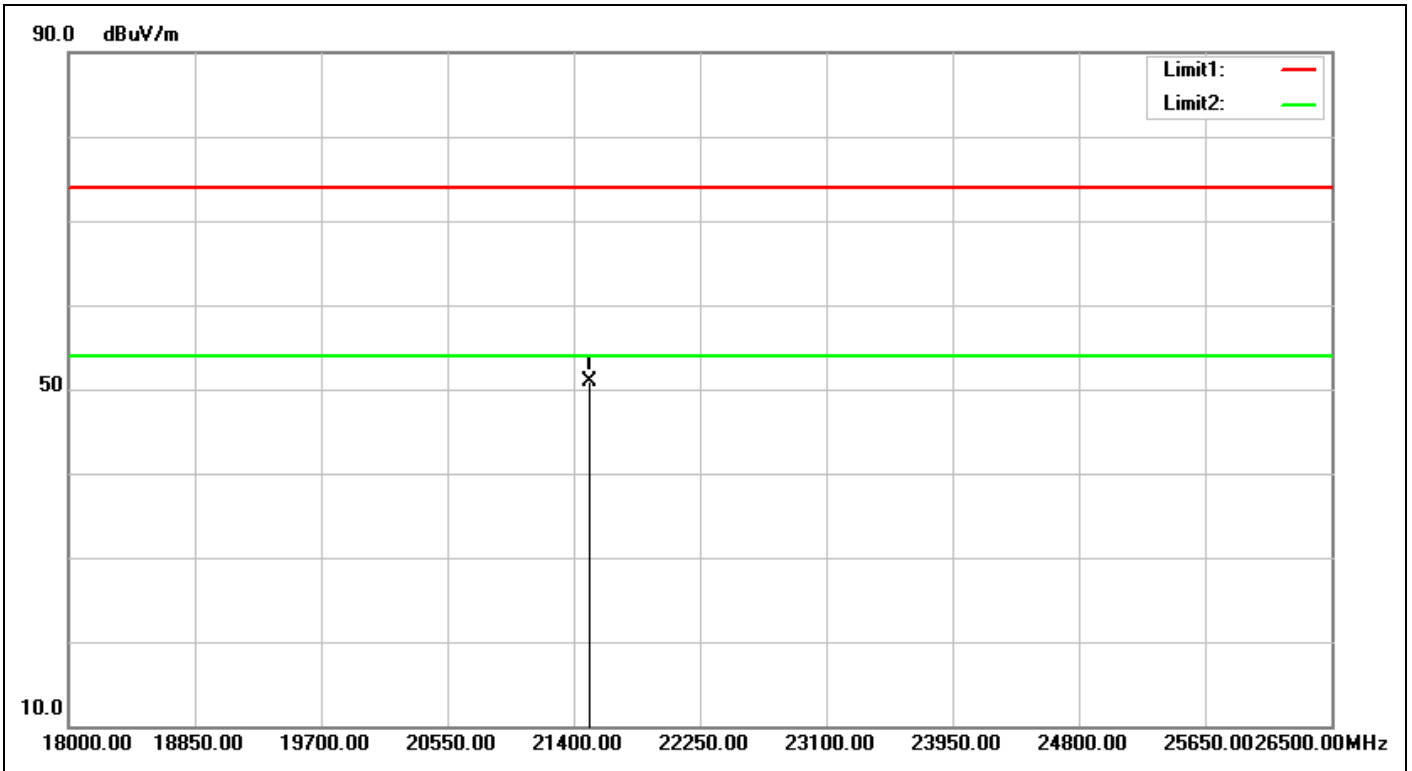

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/5 20:01:40
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	20(°C)/50%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21502.000	32.89	18.01	50.90	74.00	-23.10	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

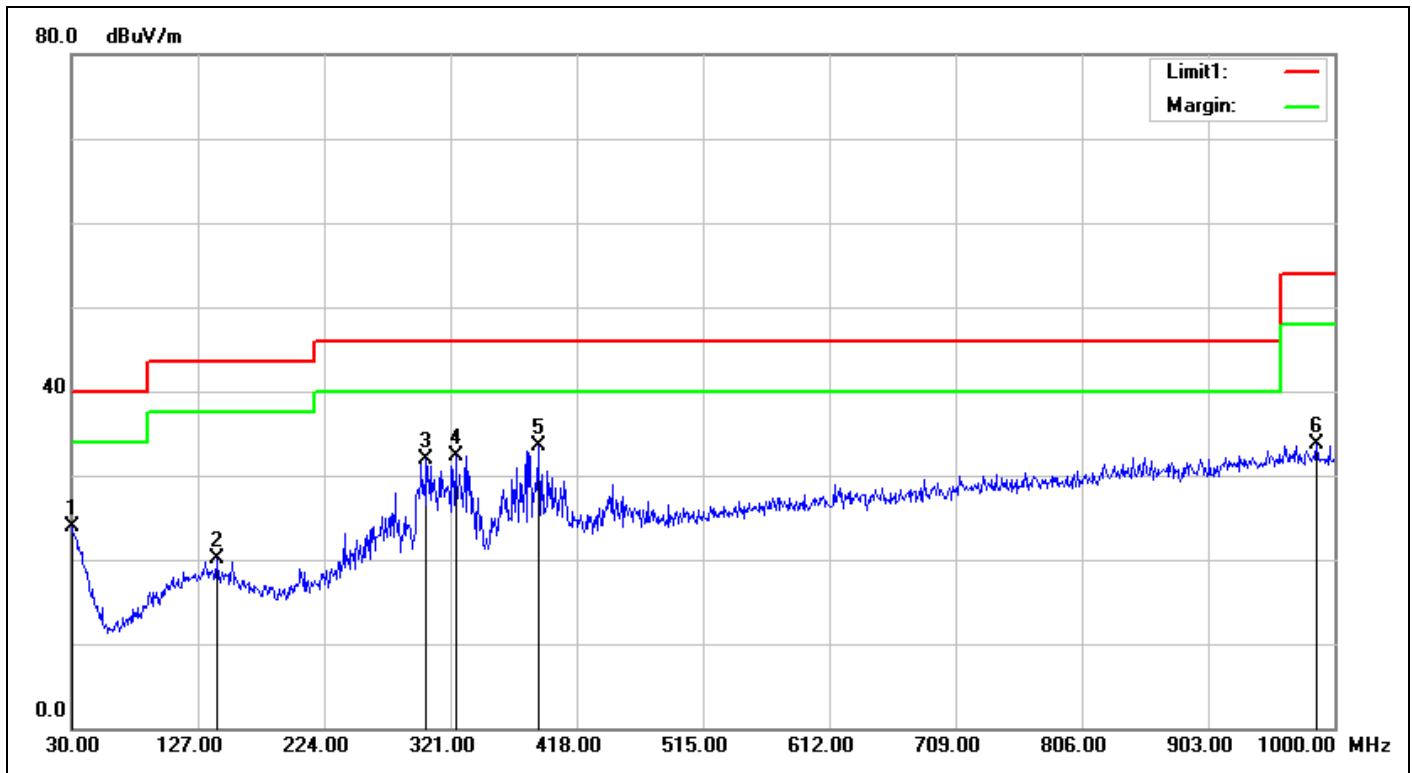

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 19:55:41
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.25	24.17	23.92	40.00	-16.08	QP	100	247	
2	141.5500	-7.06	27.26	20.20	43.50	-23.30	QP	100	266	
3	302.5699	-4.49	36.47	31.98	46.00	-14.02	QP	100	2	
4	324.8798	-3.95	36.34	32.39	46.00	-13.61	QP	100	188	
5	388.8999	-2.63	36.15	33.52	46.00	-12.48	QP	100	188	
6	986.4199	5.66	28.11	33.77	54.00	-20.23	QP	100	0	

Spurious Emissions, TX Mode, 30M-1G

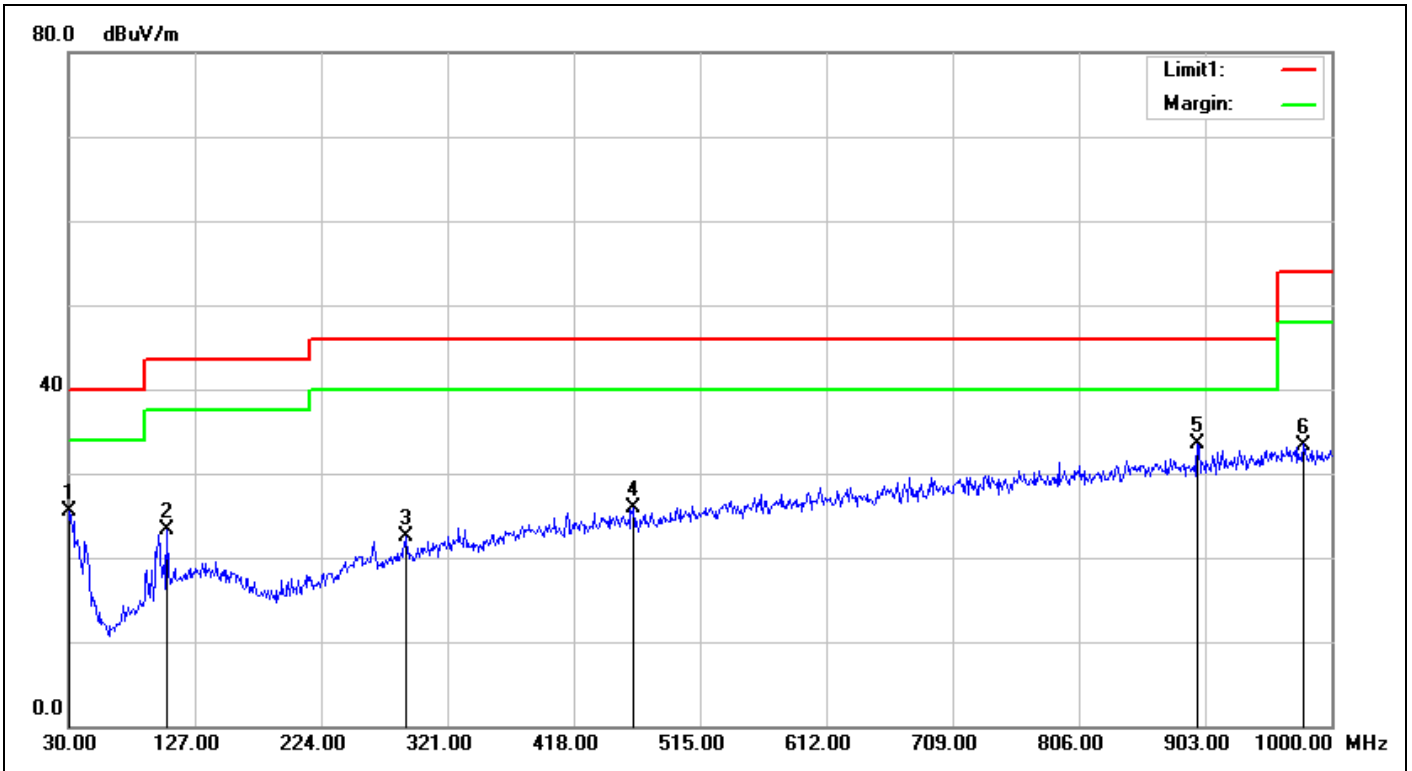

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 19:56:38
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.9700	-0.79	26.21	25.42	40.00	-14.58	QP	100	273	
2	105.6600	-8.77	31.99	23.22	43.50	-20.28	QP	100	107	
3	288.9900	-4.83	27.33	22.50	46.00	-23.50	QP	100	360	
4	463.5900	-1.71	27.55	25.84	46.00	-20.16	QP	100	359	
5	897.1800	4.04	29.43	33.47	46.00	-12.53	QP	100	351	
6	978.6600	5.63	27.77	33.40	54.00	-20.60	QP	100	125	


Spurious Emissions, TX Mode, 9 kHz - 30MHz



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

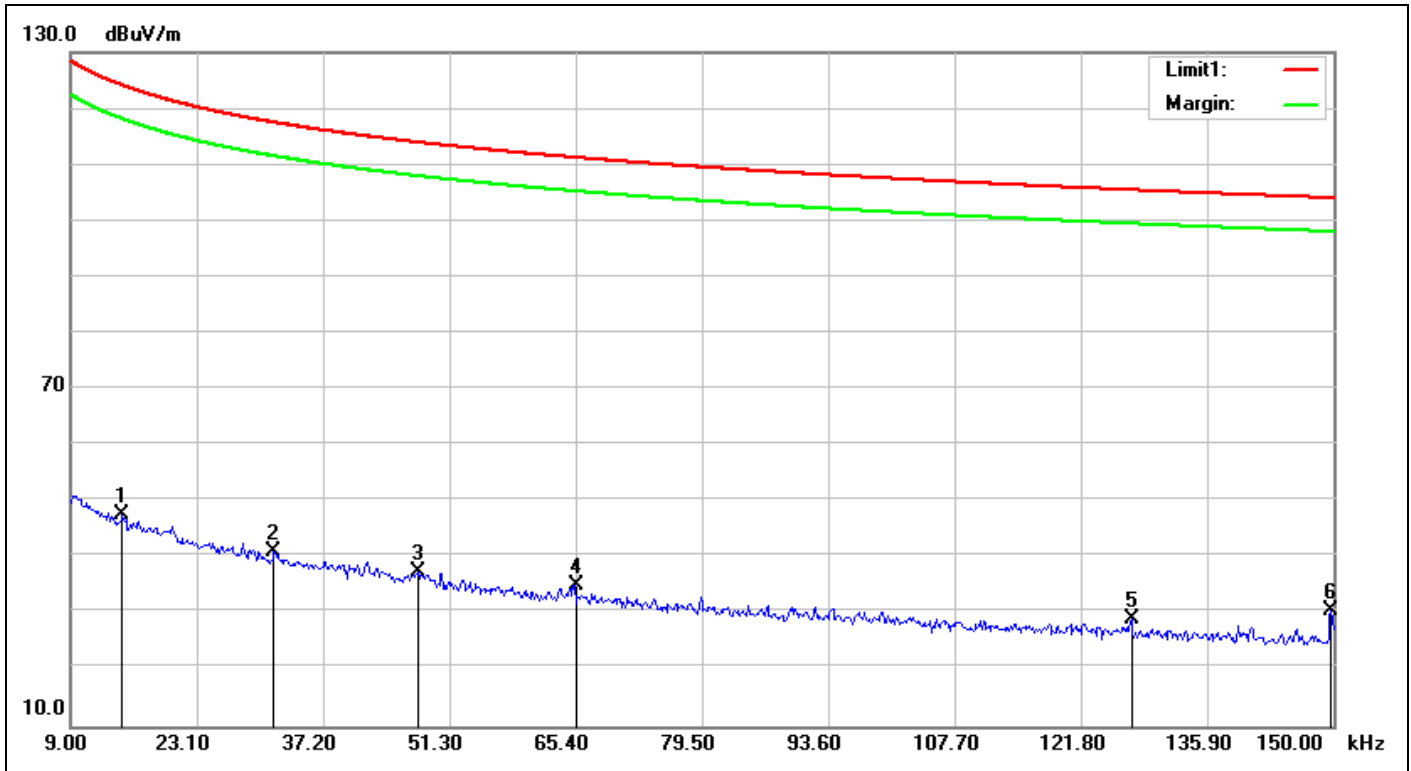

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/9 20:02:03
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0148	19.98	27.64	47.62	124.10	-76.48	QP	100	300	
2	0.0317	20.07	21.07	41.14	117.50	-76.36	QP	100	300	
3	0.0478	19.51	17.97	37.48	113.95	-76.47	QP	100	359	
4	0.0653	19.34	15.61	34.95	111.25	-76.30	QP	100	285	
5	0.1274	19.10	9.83	28.93	105.46	-76.53	QP	100	300	
6	0.1497	19.08	11.42	30.50	104.06	-73.56	QP	100	164	

Spurious Emissions, TX Mode, 9 kHz - 30MHz

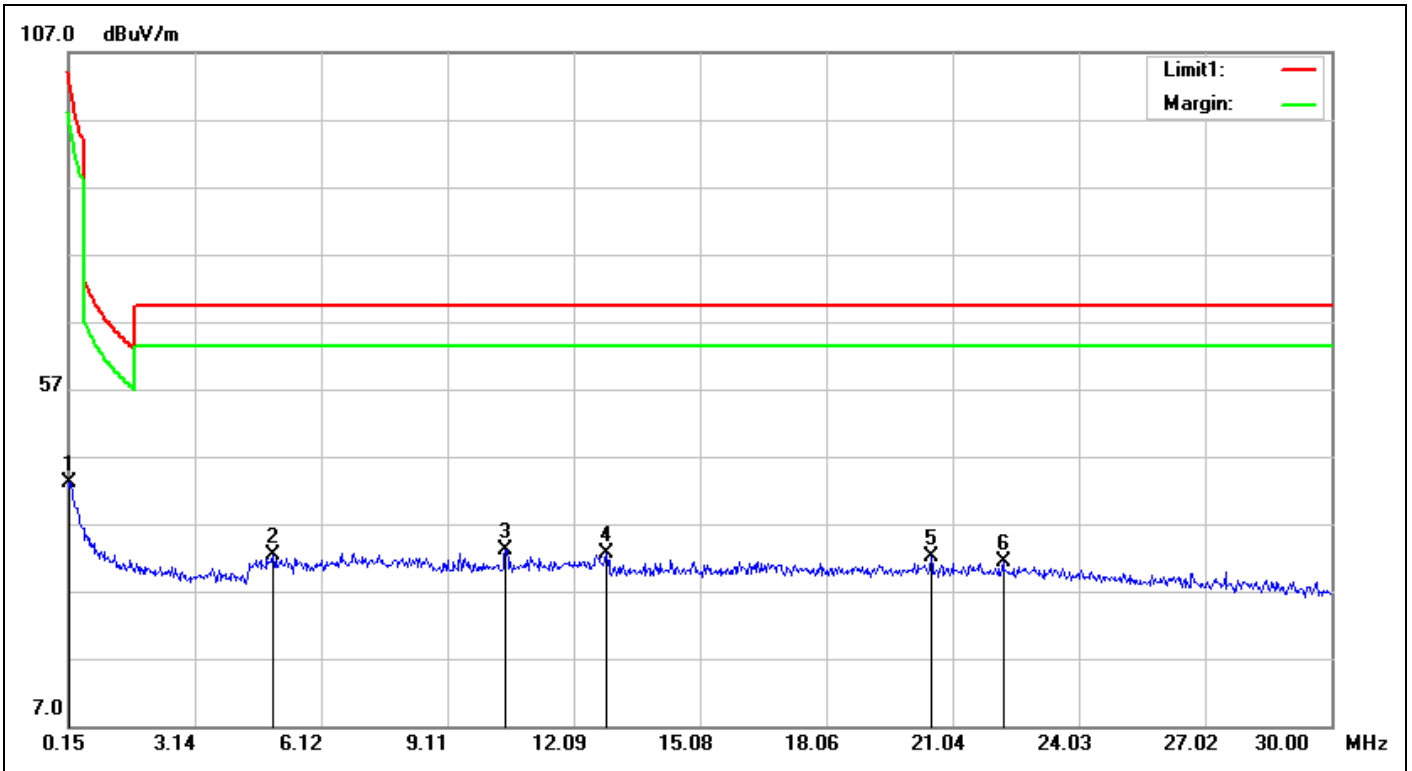

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/9 20:05:07
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-LG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	19.08	24.11	43.19	104.02	-60.83	QP	100	132	
2	4.9856	19.75	12.65	32.40	69.50	-37.10	QP	100	348	
3	10.4781	20.30	12.93	33.23	69.50	-36.27	QP	100	169	
4	12.8661	20.73	12.02	32.75	69.50	-36.75	QP	100	82	
5	20.5375	22.02	10.06	32.08	69.50	-37.42	QP	100	125	
6	22.2390	22.13	9.18	31.31	69.50	-38.19	QP	100	282	