

Test Report No.50130212 001

Appendix D: Radiated and Mains Spurious Emission Data

(File: 50130212AppendixD)

Contents

Radiated Emissions, Fundamental and Band Edges.....	2
Spurious Emissions, TX Mode, 1-18G.....	12
Spurious Emissions, TX Mode, 18-26G.....	18
Spurious Emissions, TX Mode, 30M-1G	24
Spurious Emissions, TX Mode, 9 kHz - 30MHz.....	26


Radiated Emissions, Fundamental and Band Edges



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

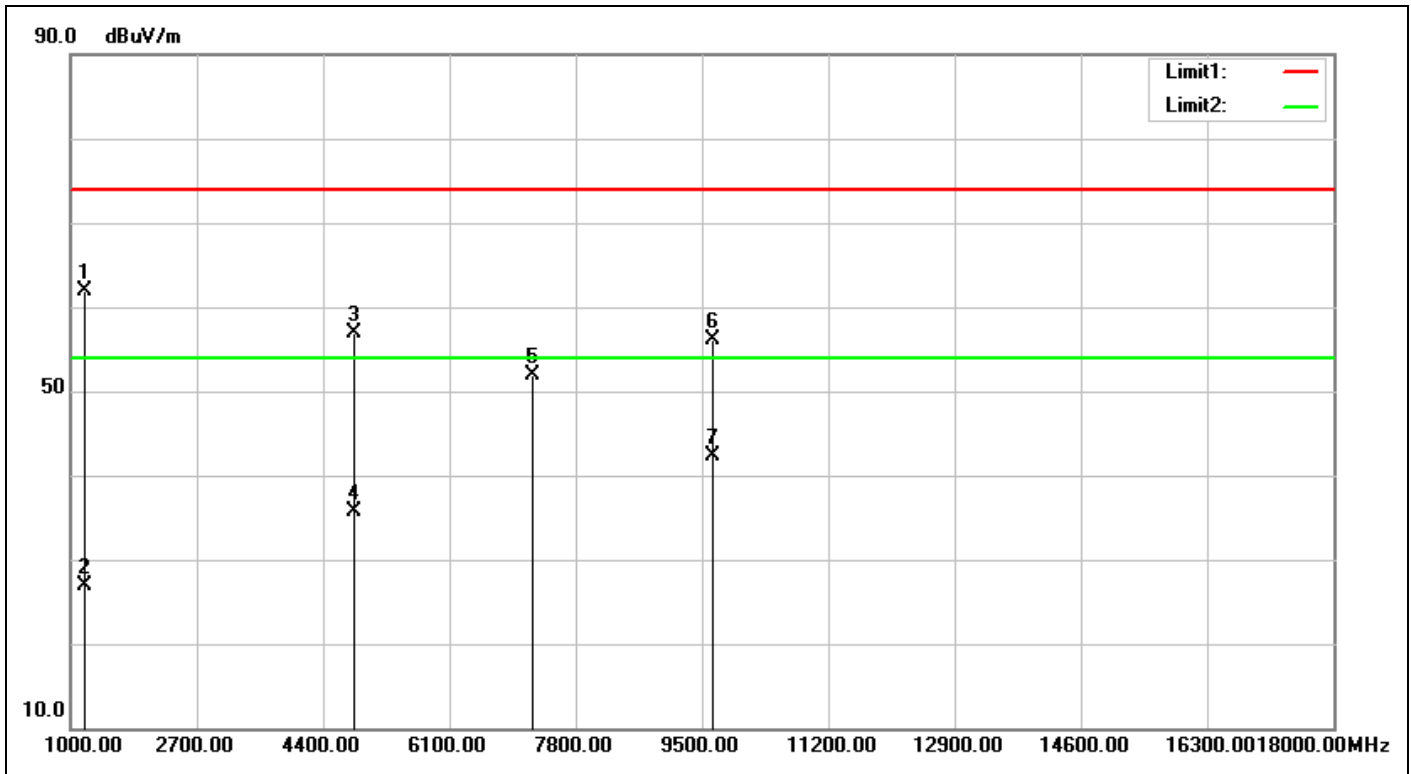


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 14:58:56
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1203.500	-10.04	71.90	61.86	74.00	-12.14	peak	100	288	
2	1203.500	-10.04	36.93	26.89	54.00	-27.11	AVG	100	288	
3	4814.000	-2.70	59.59	56.89	74.00	-17.11	peak	100	25	
4	4814.000	-2.70	38.33	35.63	54.00	-18.37	AVG	100	25	
5	7221.000	5.29	46.71	52.00	74.00	-22.00	peak		0	
6	9628.000	6.31	49.76	56.07	74.00	-17.93	peak	100	341	
7	9628.000	6.31	36.05	42.36	54.00	-11.64	AVG	100	341	

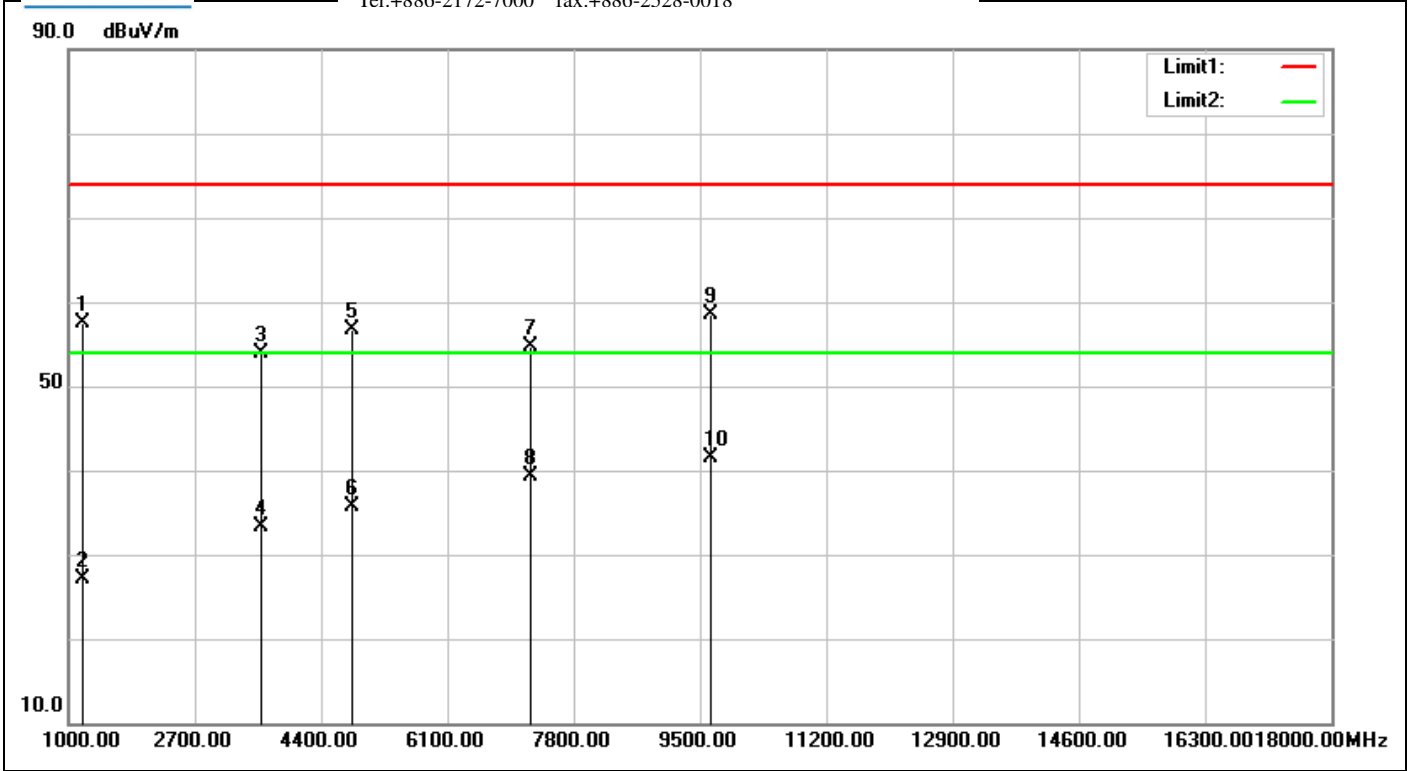


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 14:59:52
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1203.500	-10.04	67.48	57.44	74.00	-16.56	peak	100	54	
2	1203.500	-10.04	37.05	27.01	54.00	-26.99	AVG	100	54	
3	3610.500	-6.03	60.02	53.99	74.00	-20.01	peak	100	360	
4	3610.500	-6.03	39.24	33.21	54.00	-20.79	AVG	100	360	
5	4814.000	-2.70	59.42	56.72	74.00	-17.28	peak	100	351	
6	4814.000	-2.70	38.37	35.67	54.00	-18.33	AVG	100	351	
7	7221.000	5.29	49.40	54.69	74.00	-19.31	peak	100	360	
8	7221.000	5.29	34.06	39.35	54.00	-14.65	AVG	100	360	
9	9628.000	6.31	52.16	58.47	74.00	-15.53	peak	100	307	
10	9628.000	6.31	35.10	41.41	54.00	-12.59	AVG	100	307	

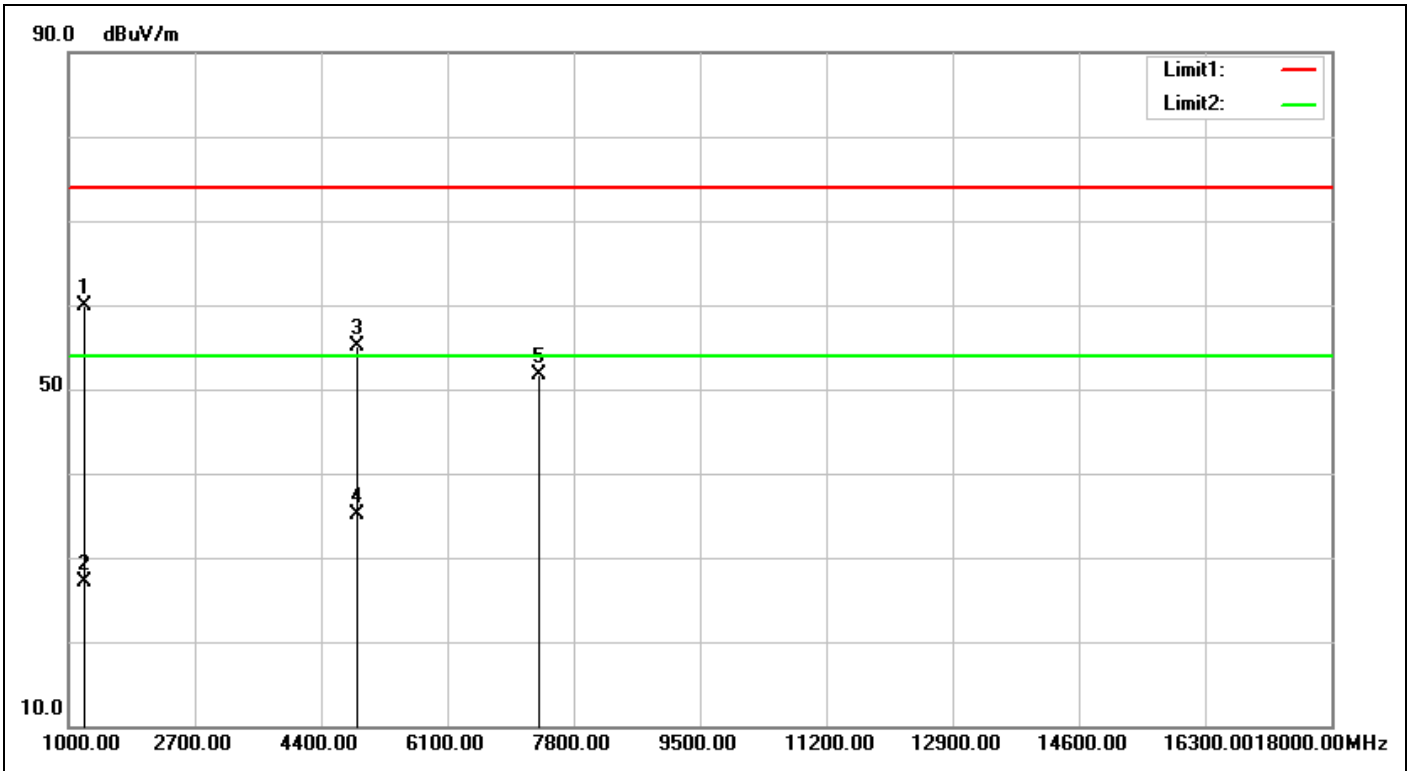


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 15:09:29
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1219.500	-10.06	69.92	59.86	74.00	-14.14	peak	100	301	
2	1219.500	-10.06	37.09	27.03	54.00	-26.97	AVG	100	301	
3	4878.000	-2.52	57.54	55.02	74.00	-18.98	peak	100	128	
4	4878.000	-2.52	37.61	35.09	54.00	-18.91	AVG	100	128	
5	7317.000	5.53	46.21	51.74	74.00	-22.26	peak			

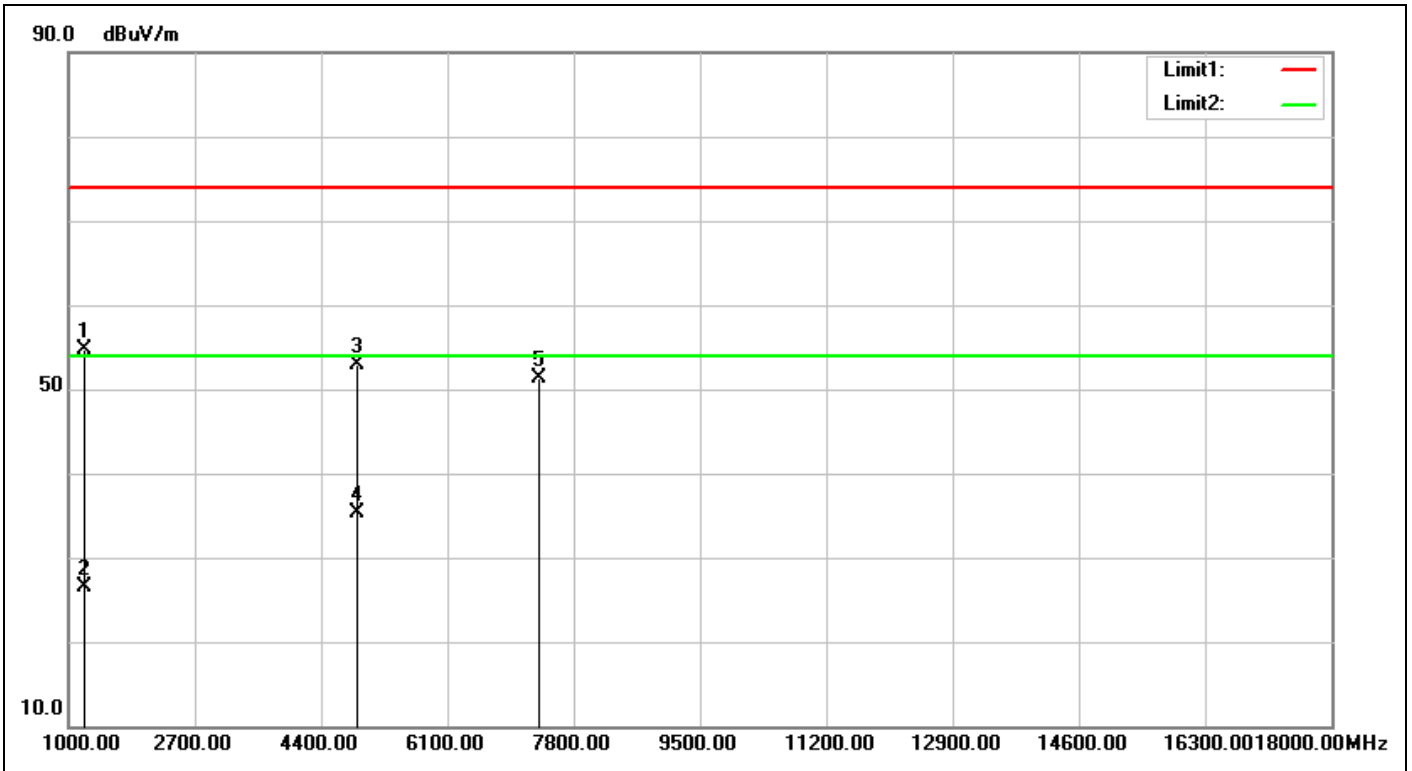


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 15:10:25
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1219.500	-10.06	64.84	54.78	74.00	-19.22	peak	100	104	
2	1219.500	-10.06	36.60	26.54	54.00	-27.46	AVG	100	104	
3	4878.000	-2.52	55.37	52.85	74.00	-21.15	peak	100	0	
4	4878.000	-2.52	37.73	35.21	54.00	-18.79	AVG	100	0	
5	7317.000	5.53	45.82	51.35	74.00	-22.65	peak			

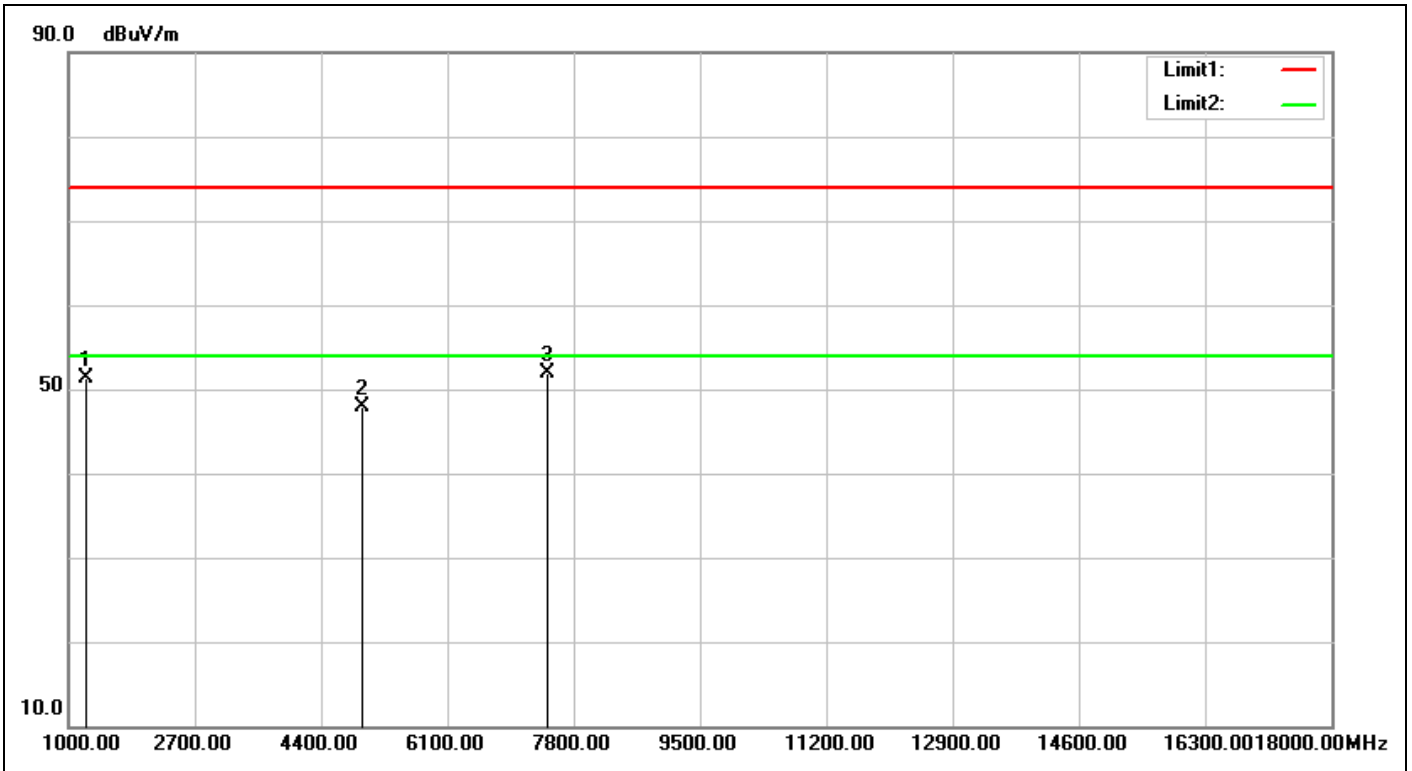

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 15:14:54
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1239.500	-10.10	61.46	51.36	74.00	-22.64	peak	100	238	
2	4958.000	-2.30	50.28	47.98	74.00	-26.02	peak			
3	7437.000	5.83	45.98	51.81	74.00	-22.19	peak			


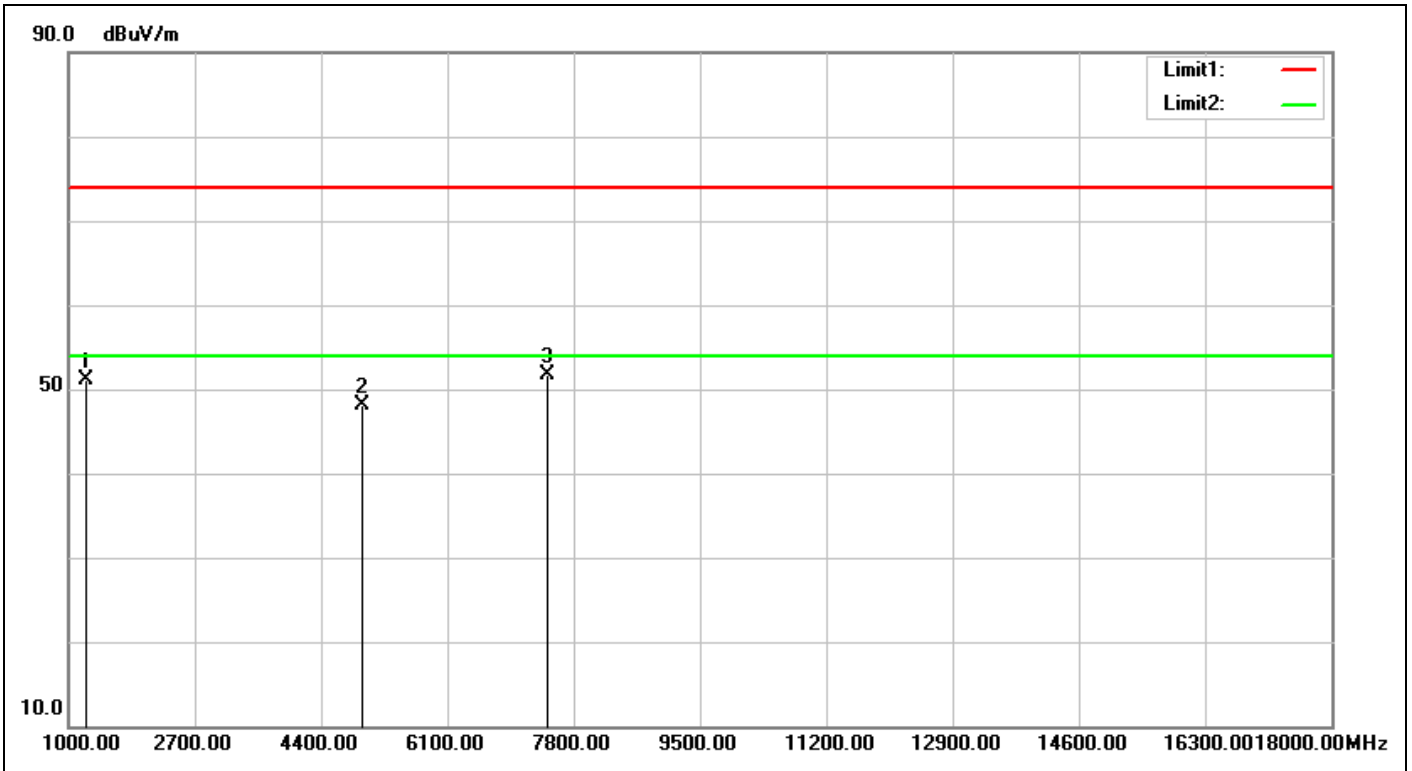


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 15:15:50
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			


No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1239.500	-10.10	61.18	51.08	74.00	-22.92	peak	100	97	
2	4958.000	-2.30	50.48	48.18	74.00	-25.82	peak			
3	7437.000	5.83	45.85	51.68	74.00	-22.32	peak			

Radiated Bandedge


Low Channel (Hor)

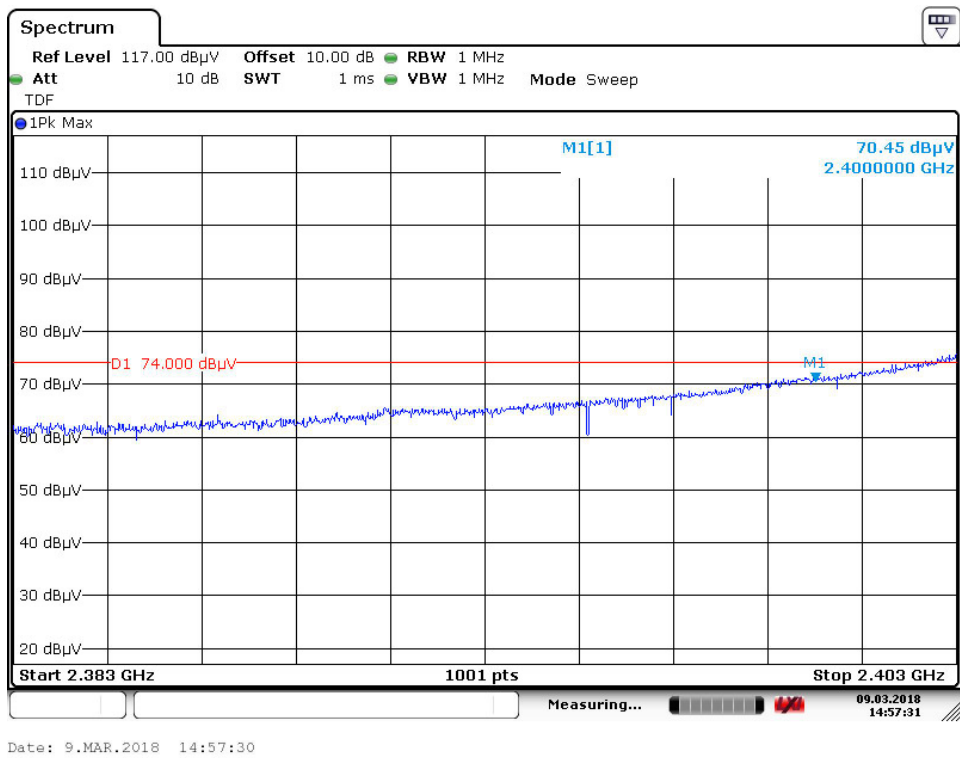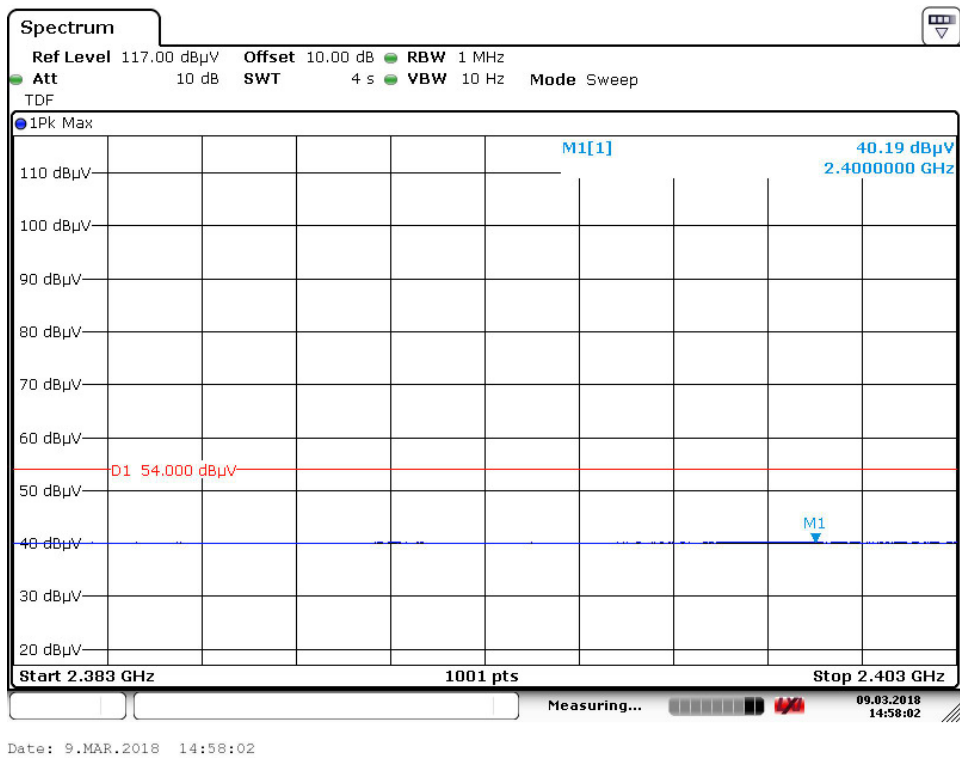

Low Channel (Ver)

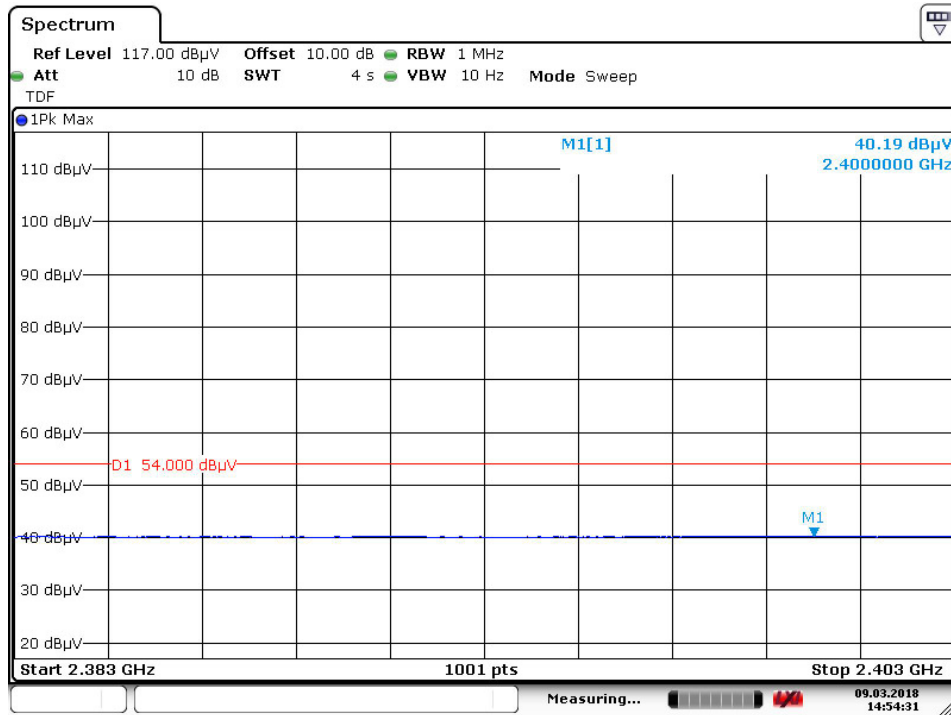



Date: 9.MAR.2018 14:54:31

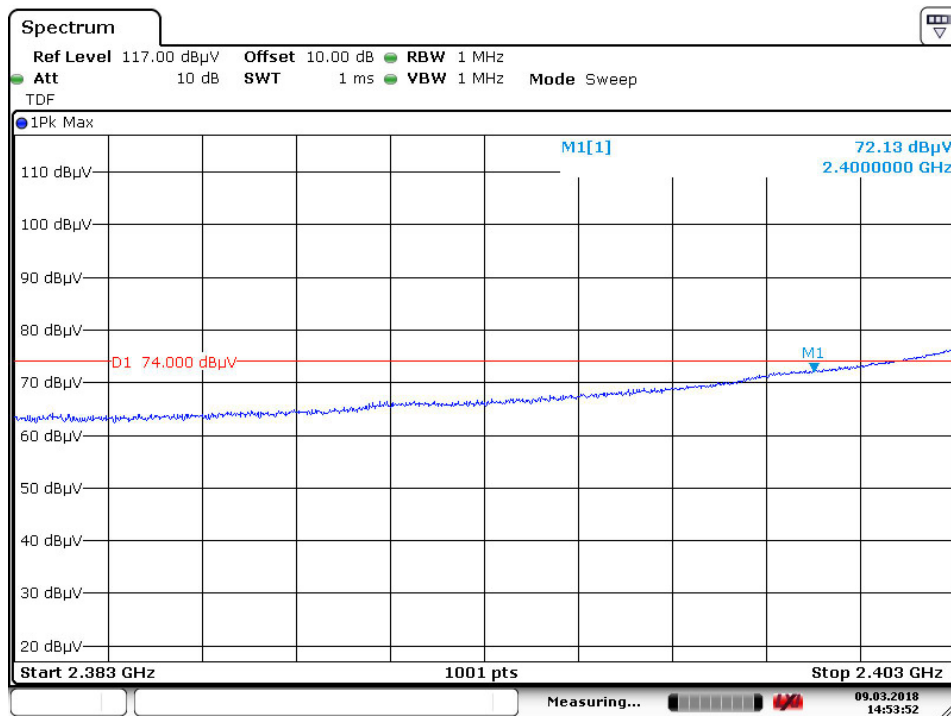



Date: 9.MAR.2018 14:53:51

Radiated Bandedge (GFSK)

High Channel (Hor)

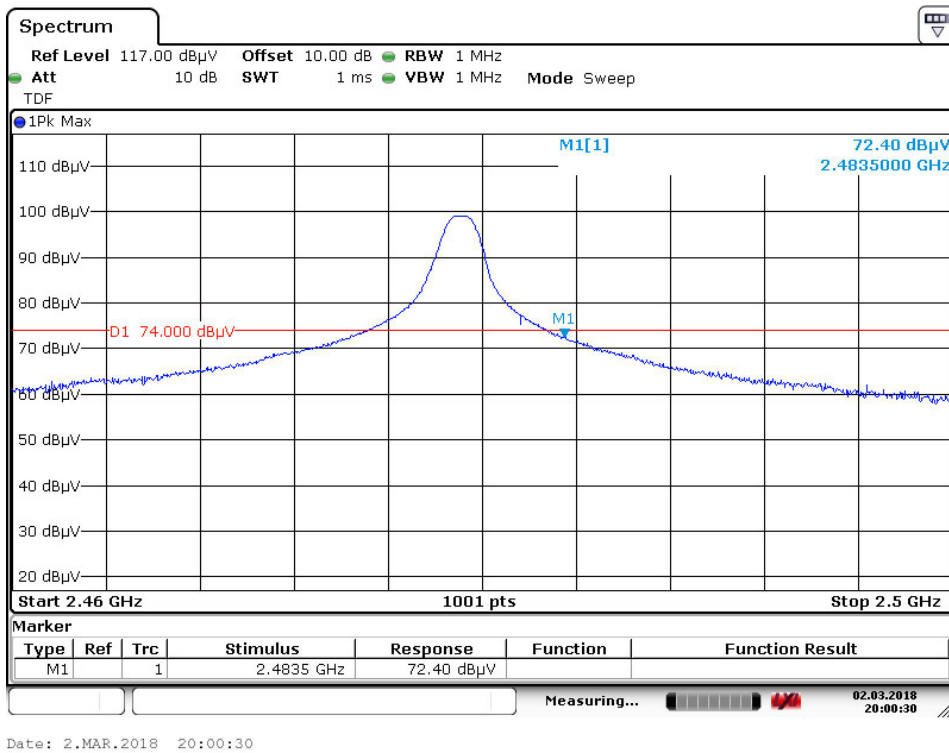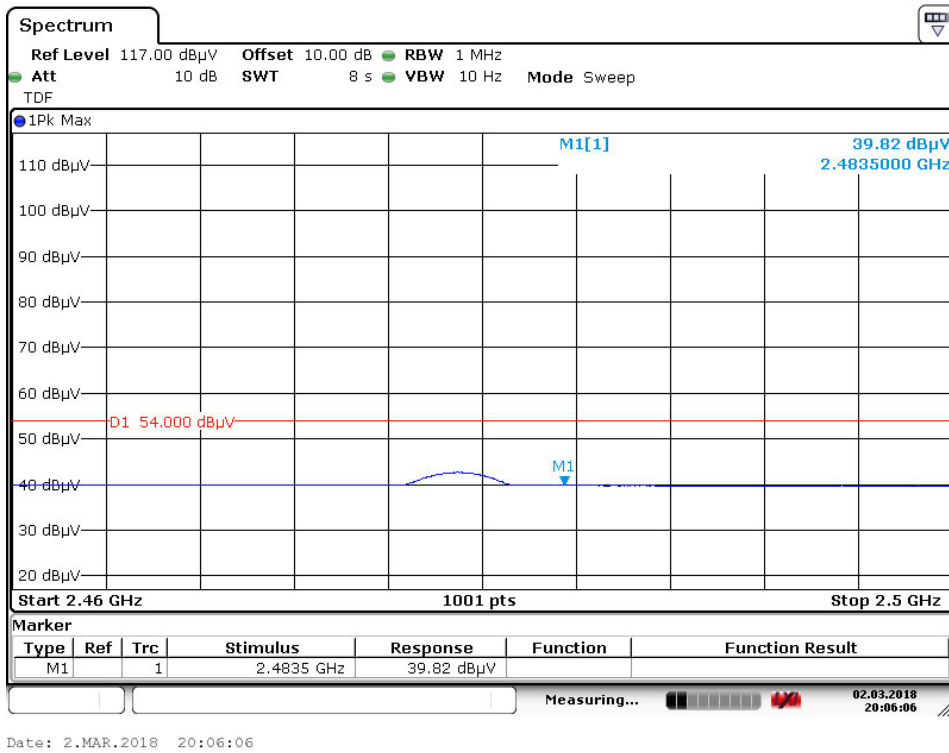

High Channel (Ver)

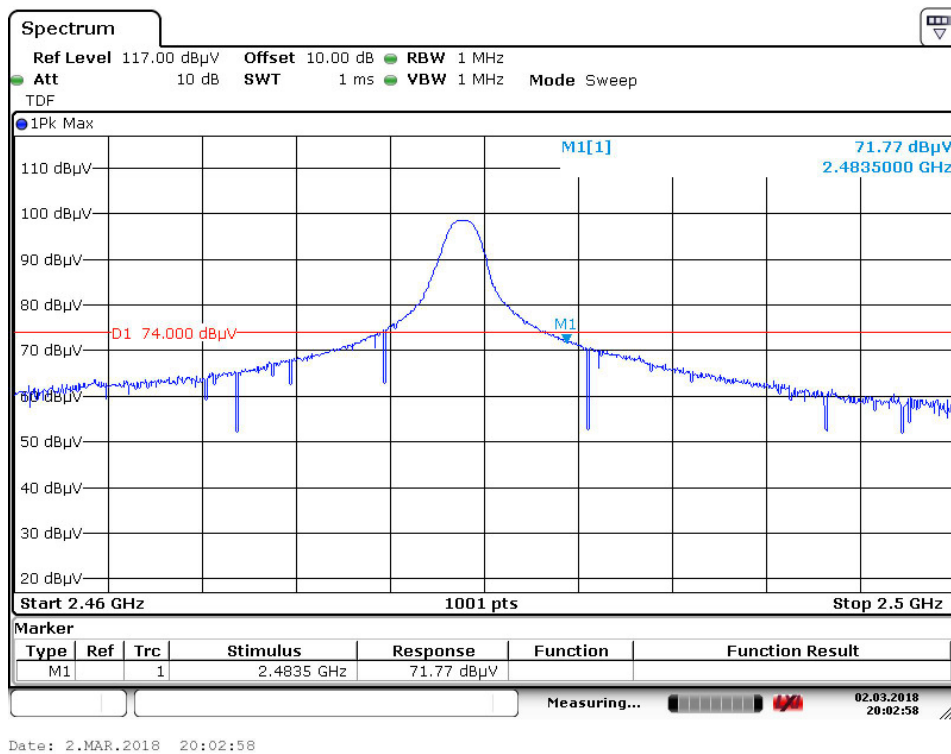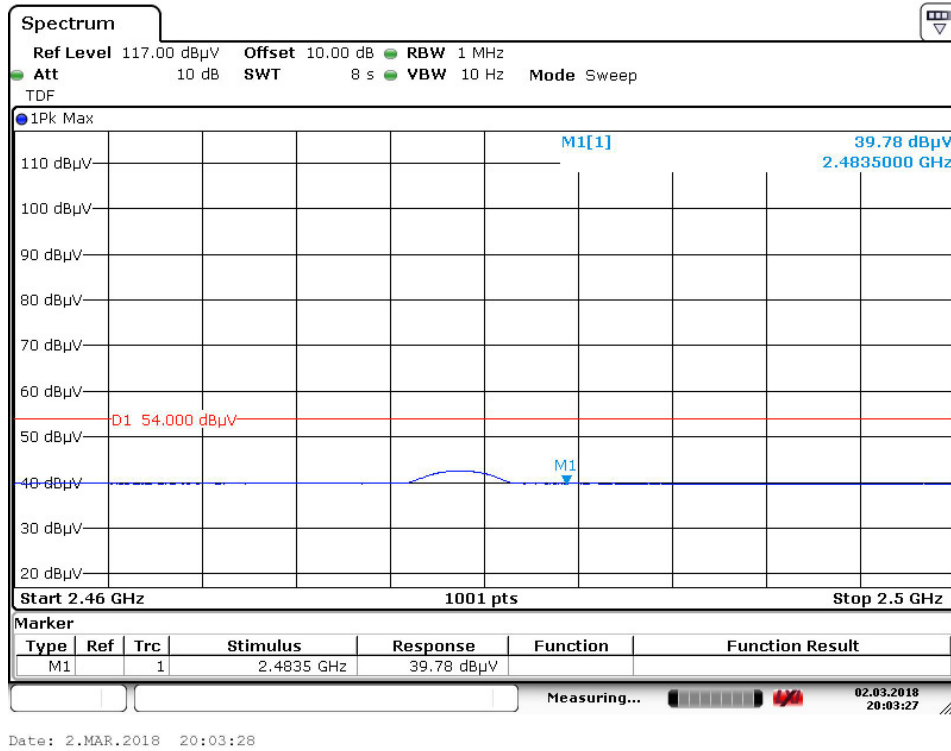


Spurious Emissions, TX Mode, 1-18G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

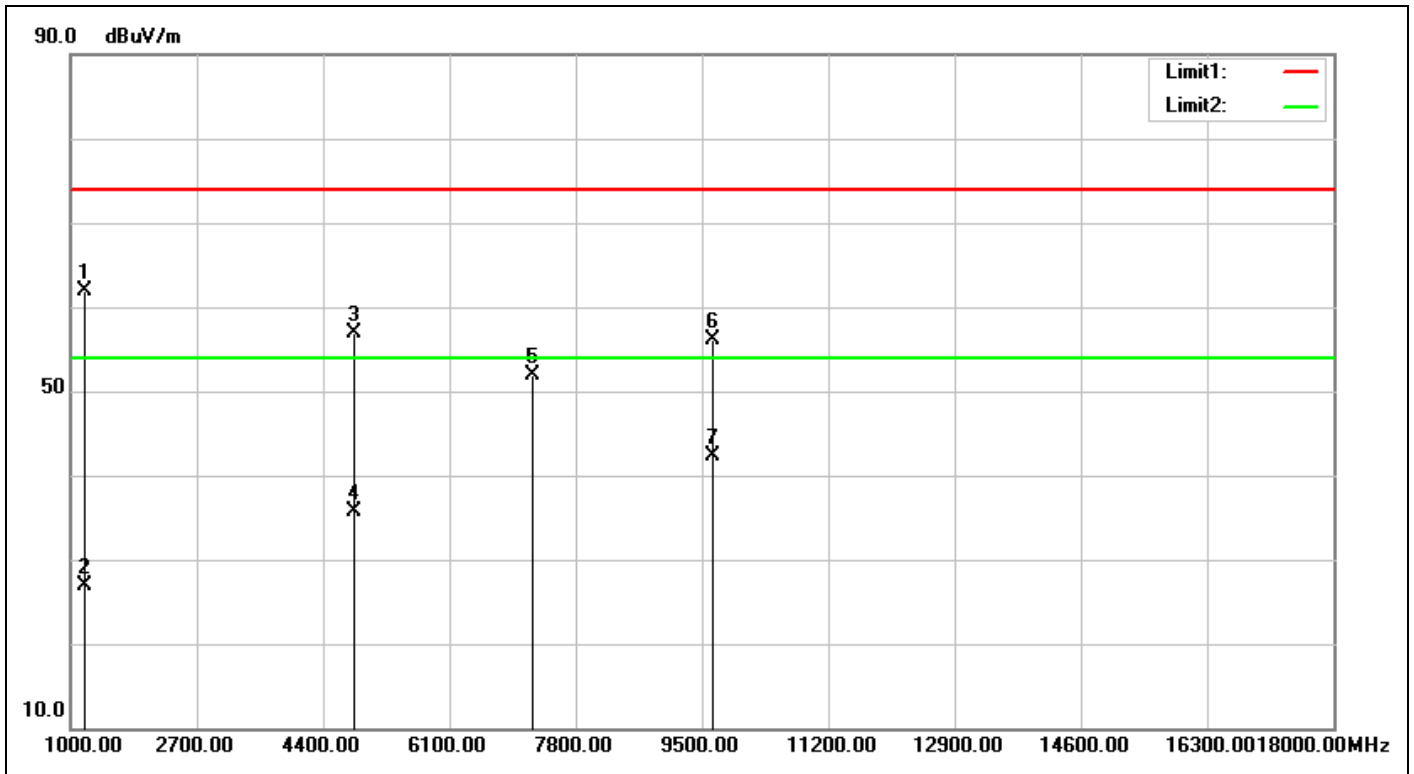


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 14:58:56
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1203.500	-10.04	71.90	61.86	74.00	-12.14	peak	100	288	
2	1203.500	-10.04	36.93	26.89	54.00	-27.11	AVG	100	288	
3	4814.000	-2.70	59.59	56.89	74.00	-17.11	peak	100	25	
4	4814.000	-2.70	38.33	35.63	54.00	-18.37	AVG	100	25	
5	7221.000	5.29	46.71	52.00	74.00	-22.00	peak		0	
6	9628.000	6.31	49.76	56.07	74.00	-17.93	peak	100	341	
7	9628.000	6.31	36.05	42.36	54.00	-11.64	AVG	100	341	

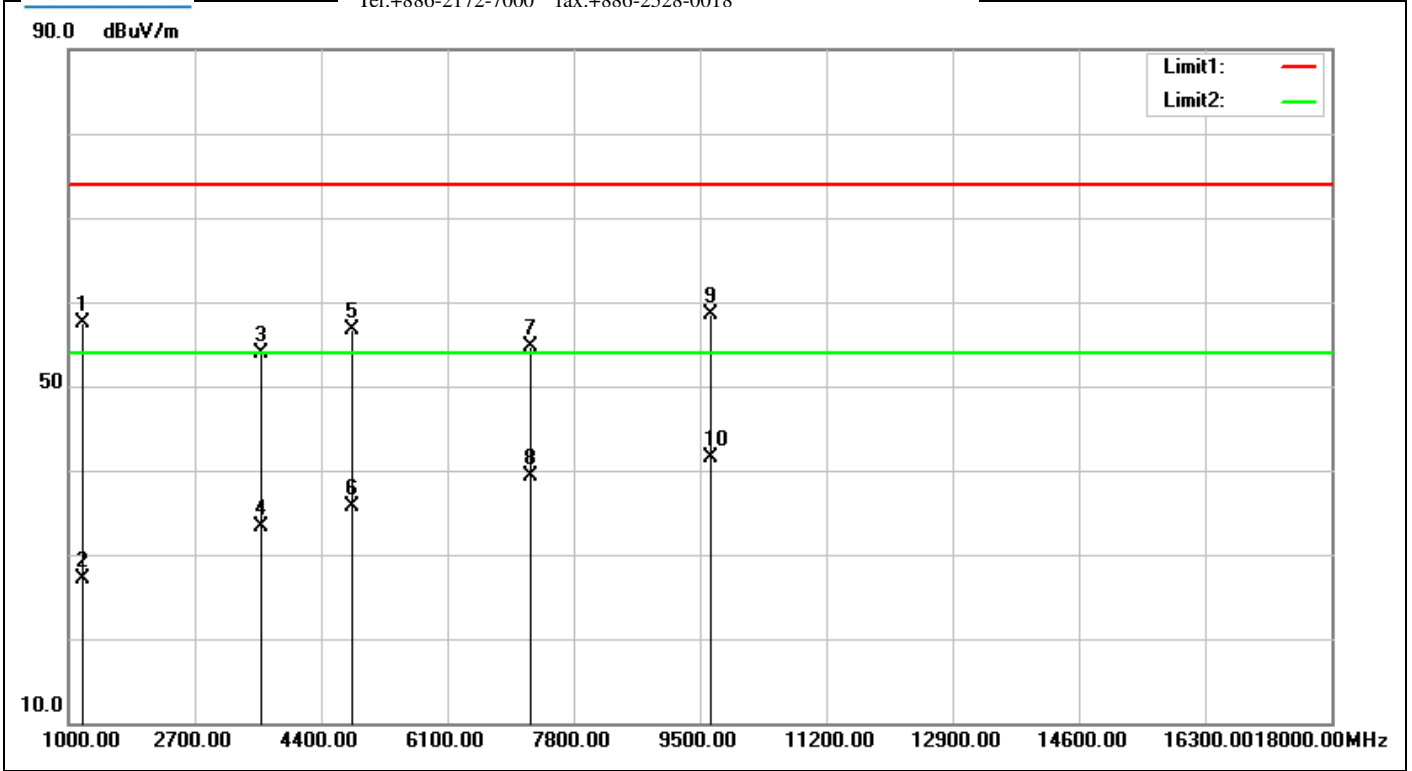


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 14:59:52
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1203.500	-10.04	67.48	57.44	74.00	-16.56	peak	100	54	
2	1203.500	-10.04	37.05	27.01	54.00	-26.99	AVG	100	54	
3	3610.500	-6.03	60.02	53.99	74.00	-20.01	peak	100	360	
4	3610.500	-6.03	39.24	33.21	54.00	-20.79	AVG	100	360	
5	4814.000	-2.70	59.42	56.72	74.00	-17.28	peak	100	351	
6	4814.000	-2.70	38.37	35.67	54.00	-18.33	AVG	100	351	
7	7221.000	5.29	49.40	54.69	74.00	-19.31	peak	100	360	
8	7221.000	5.29	34.06	39.35	54.00	-14.65	AVG	100	360	
9	9628.000	6.31	52.16	58.47	74.00	-15.53	peak	100	307	
10	9628.000	6.31	35.10	41.41	54.00	-12.59	AVG	100	307	

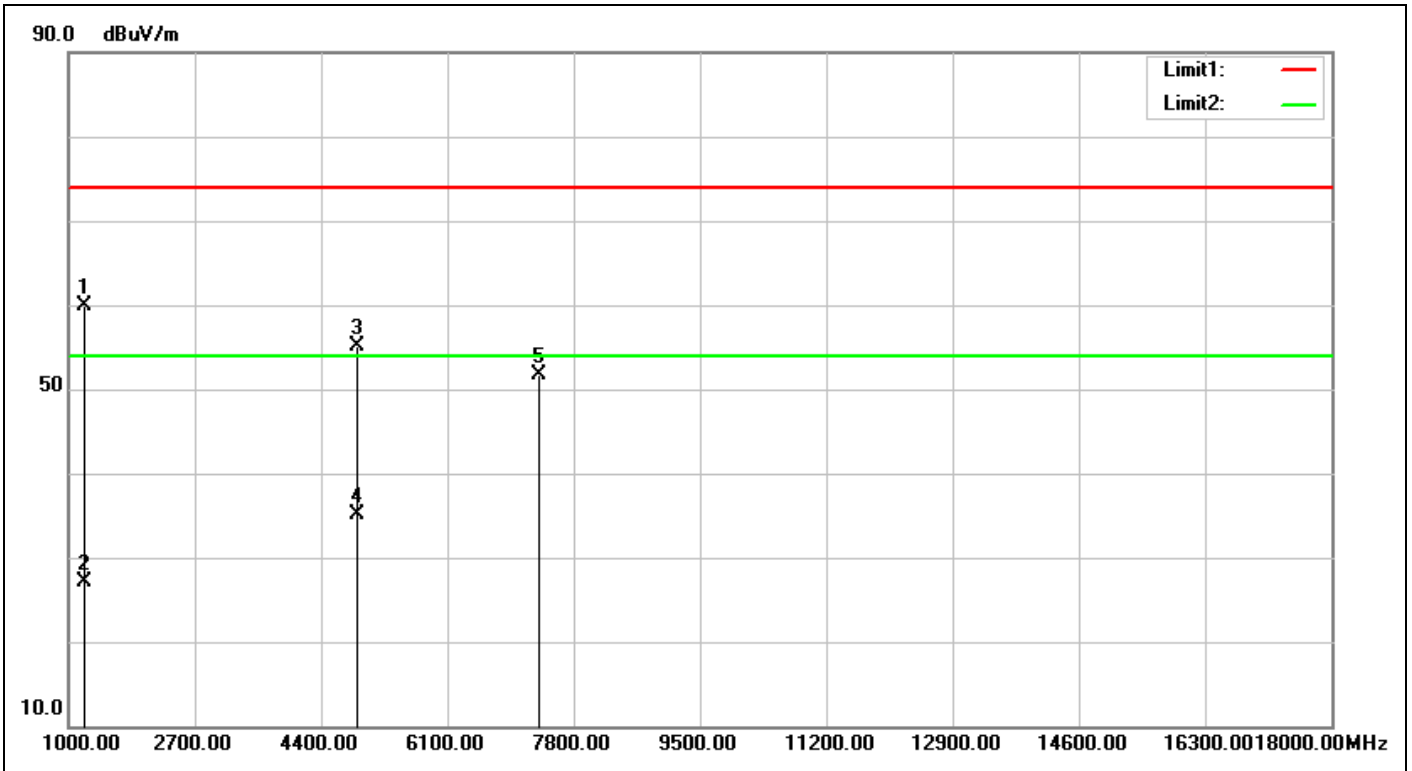


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 15:09:29
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1219.500	-10.06	69.92	59.86	74.00	-14.14	peak	100	301	
2	1219.500	-10.06	37.09	27.03	54.00	-26.97	AVG	100	301	
3	4878.000	-2.52	57.54	55.02	74.00	-18.98	peak	100	128	
4	4878.000	-2.52	37.61	35.09	54.00	-18.91	AVG	100	128	
5	7317.000	5.53	46.21	51.74	74.00	-22.26	peak			

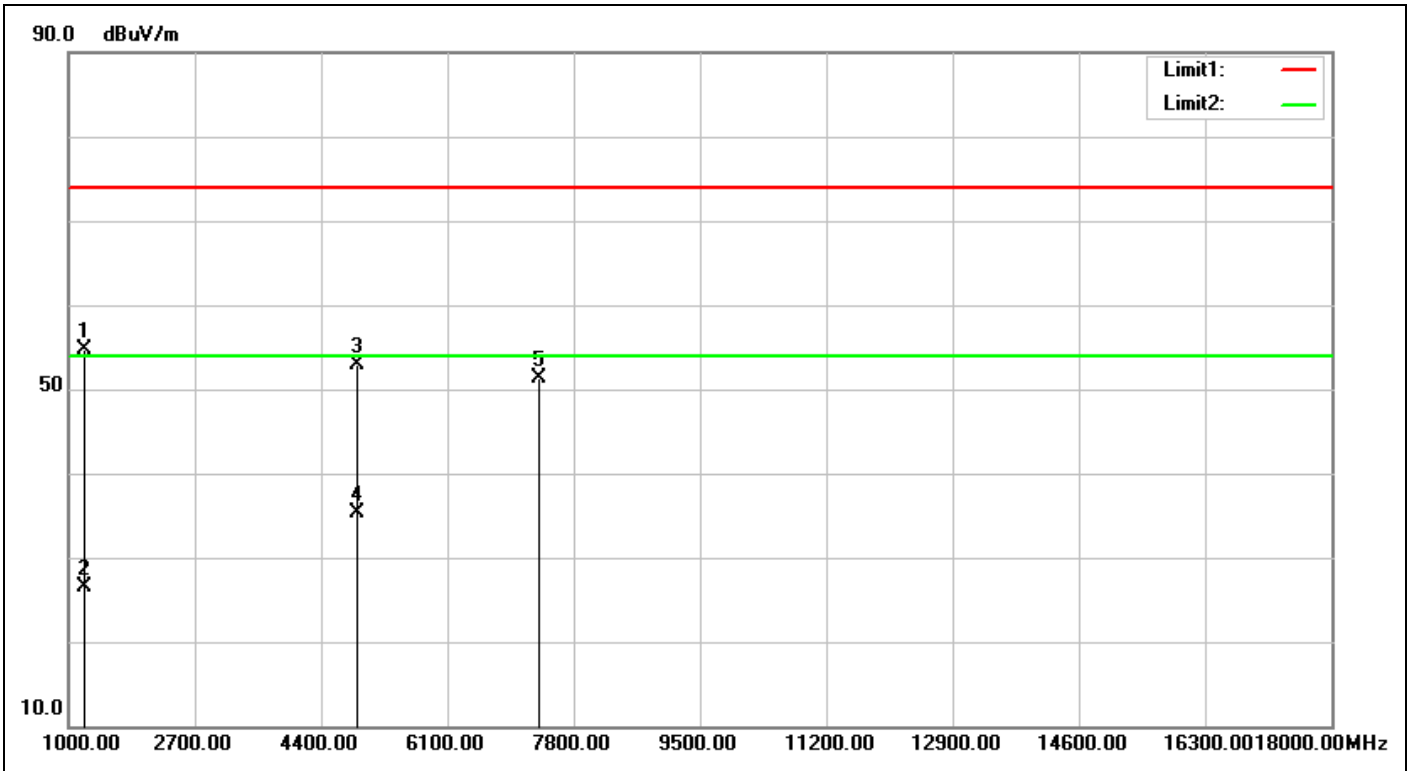


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 15:10:25
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1219.500	-10.06	64.84	54.78	74.00	-19.22	peak	100	104	
2	1219.500	-10.06	36.60	26.54	54.00	-27.46	AVG	100	104	
3	4878.000	-2.52	55.37	52.85	74.00	-21.15	peak	100	0	
4	4878.000	-2.52	37.73	35.21	54.00	-18.79	AVG	100	0	
5	7317.000	5.53	45.82	51.35	74.00	-22.65	peak			

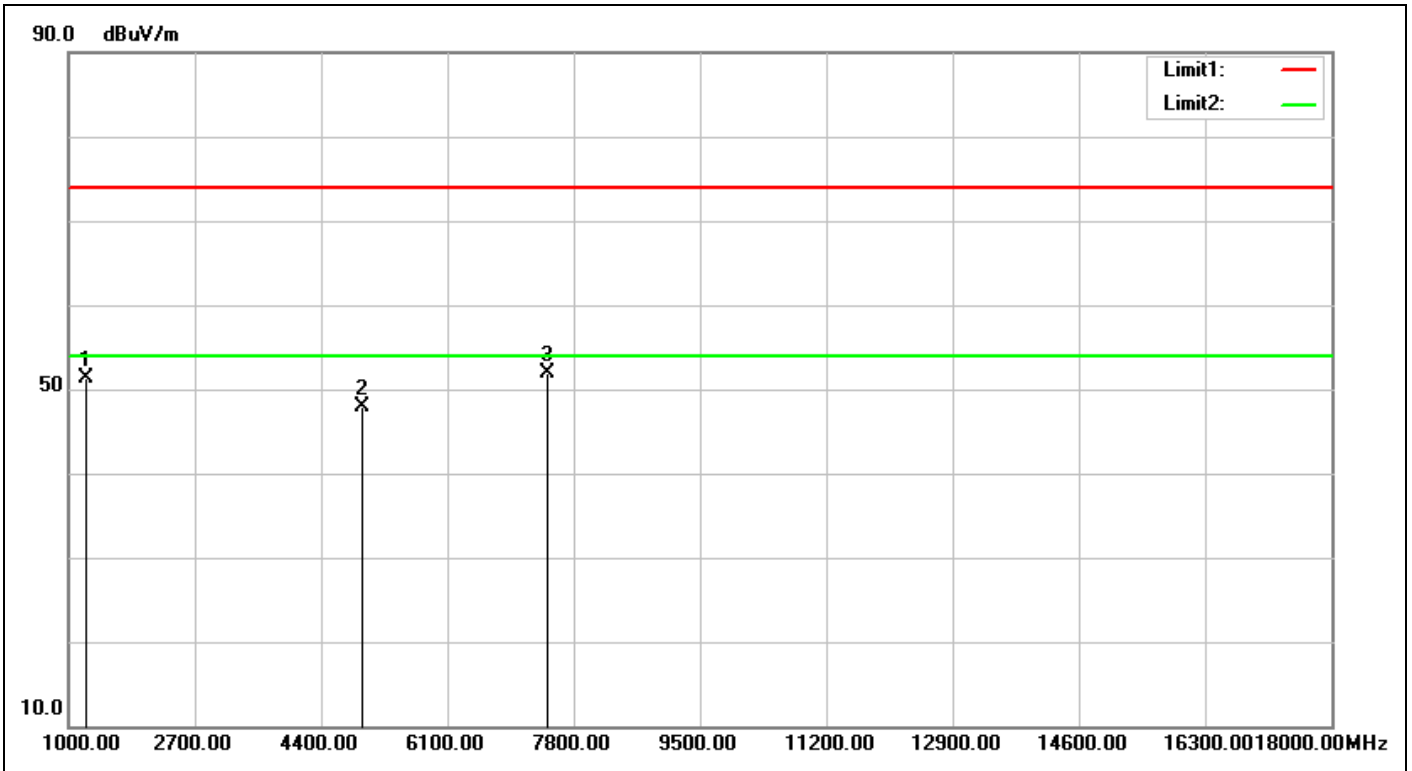

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 15:14:54
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1239.500	-10.10	61.46	51.36	74.00	-22.64	peak	100	238	
2	4958.000	-2.30	50.28	47.98	74.00	-26.02	peak			
3	7437.000	5.83	45.98	51.81	74.00	-22.19	peak			

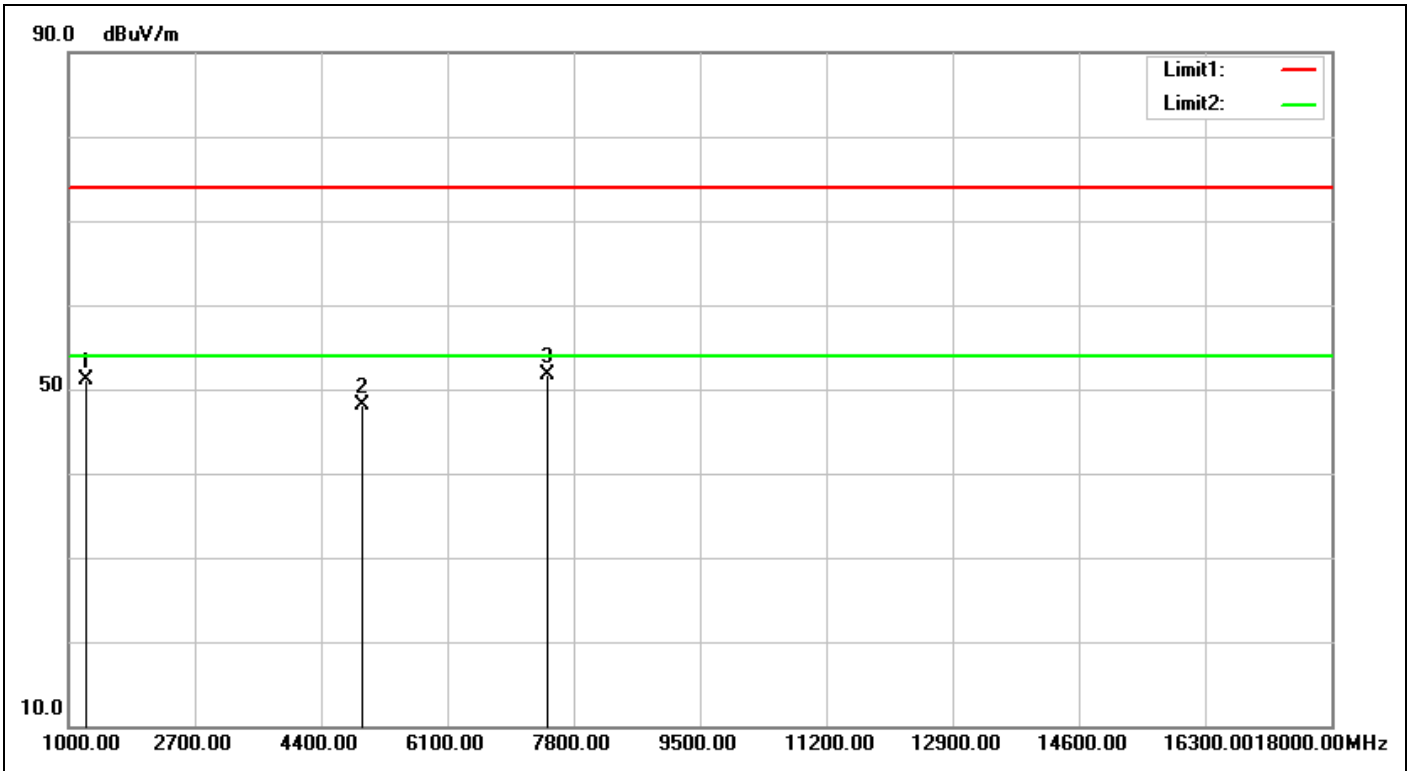

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 15:15:50
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	1239.500	-10.10	61.18	51.08	74.00	-22.92	peak	100	97	
2	4958.000	-2.30	50.48	48.18	74.00	-25.82	peak			
3	7437.000	5.83	45.85	51.68	74.00	-22.32	peak			


Spurious Emissions, TX Mode, 18-26G



TUV Rheinland Taiwan Ltd.


11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105

Tel:+886-2172-7000 fax:+886-2528-0018

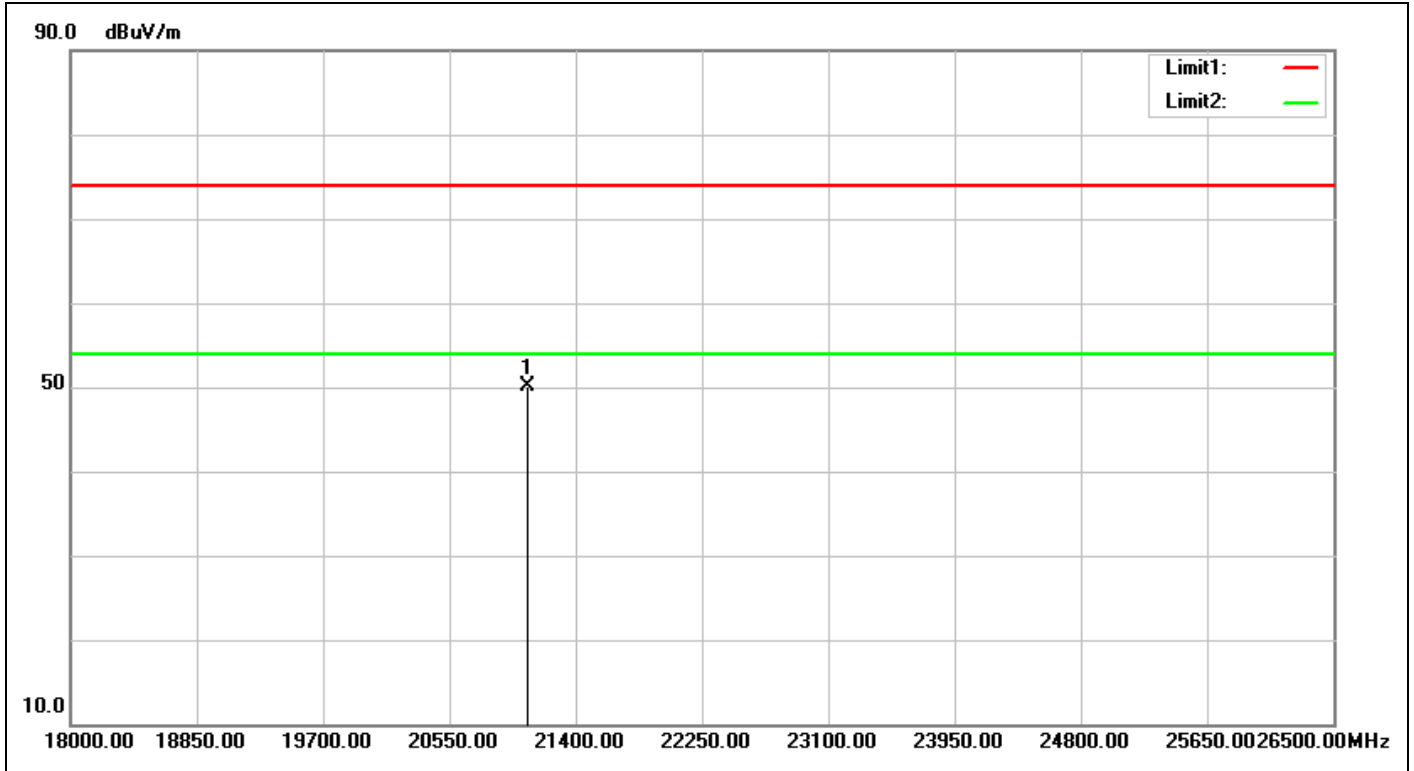


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 16:36:44
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21077.000	32.51	17.65	50.16	74.00	-23.84	peak		0	

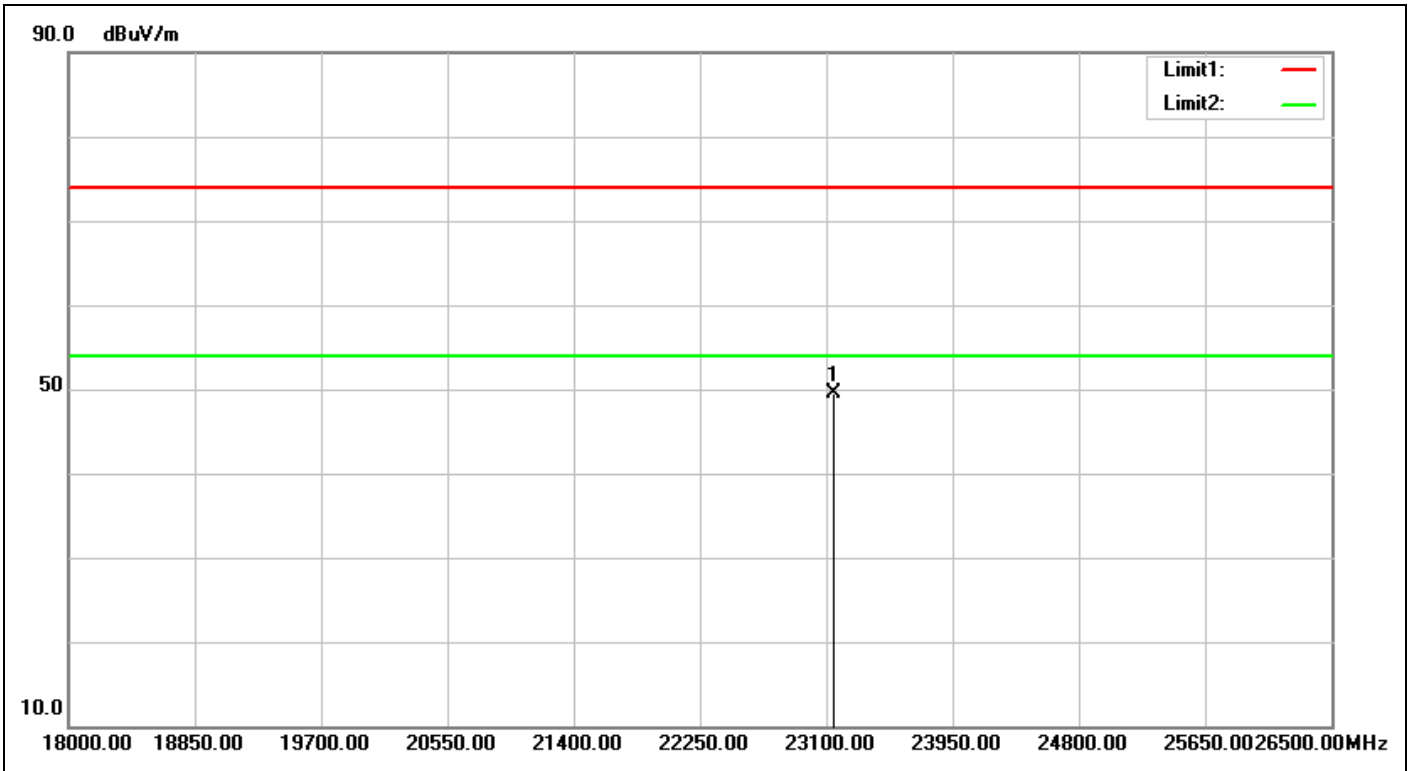


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 16:36:54
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2407-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	23151.000	32.95	16.65	49.60	74.00	-24.40	peak			

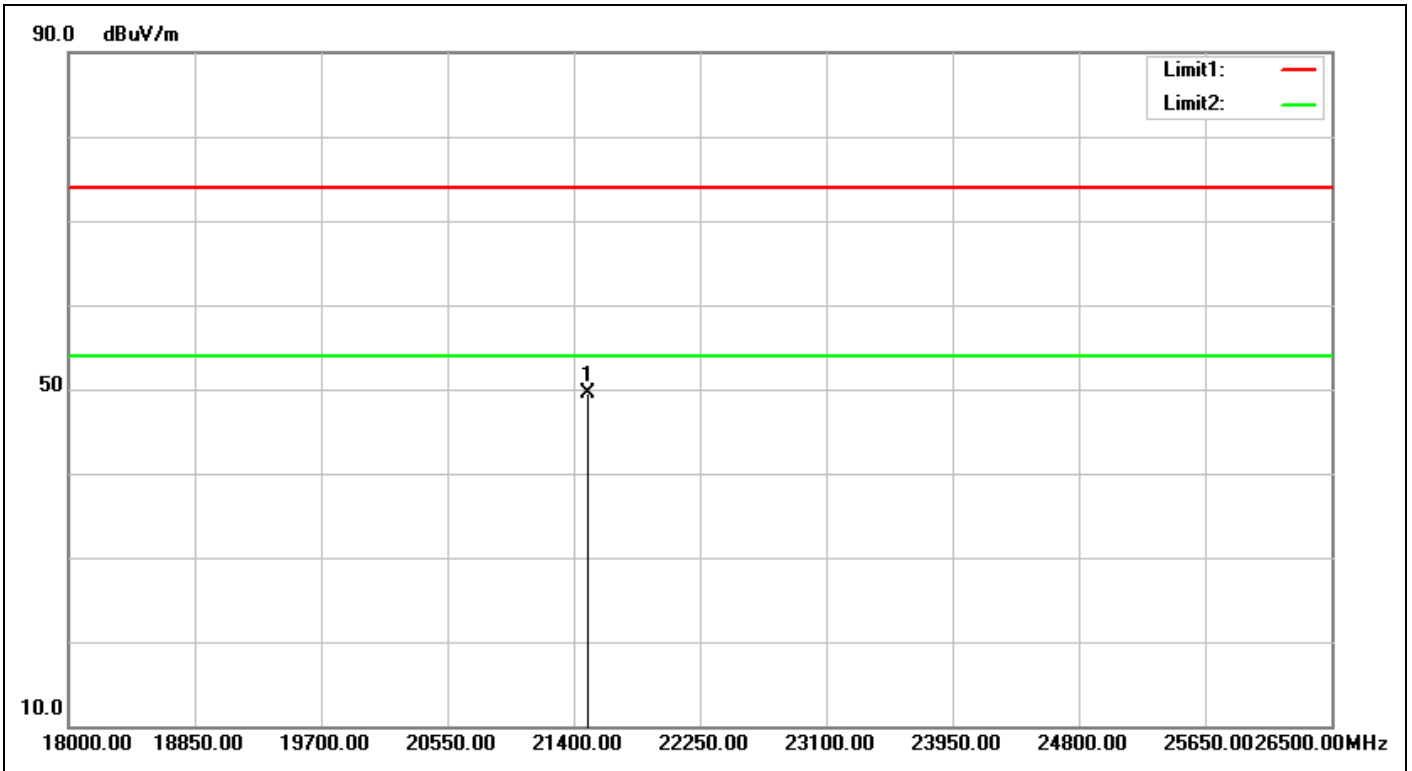


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 16:37:09
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	21493.500	32.89	16.57	49.46	74.00	-24.54	peak			

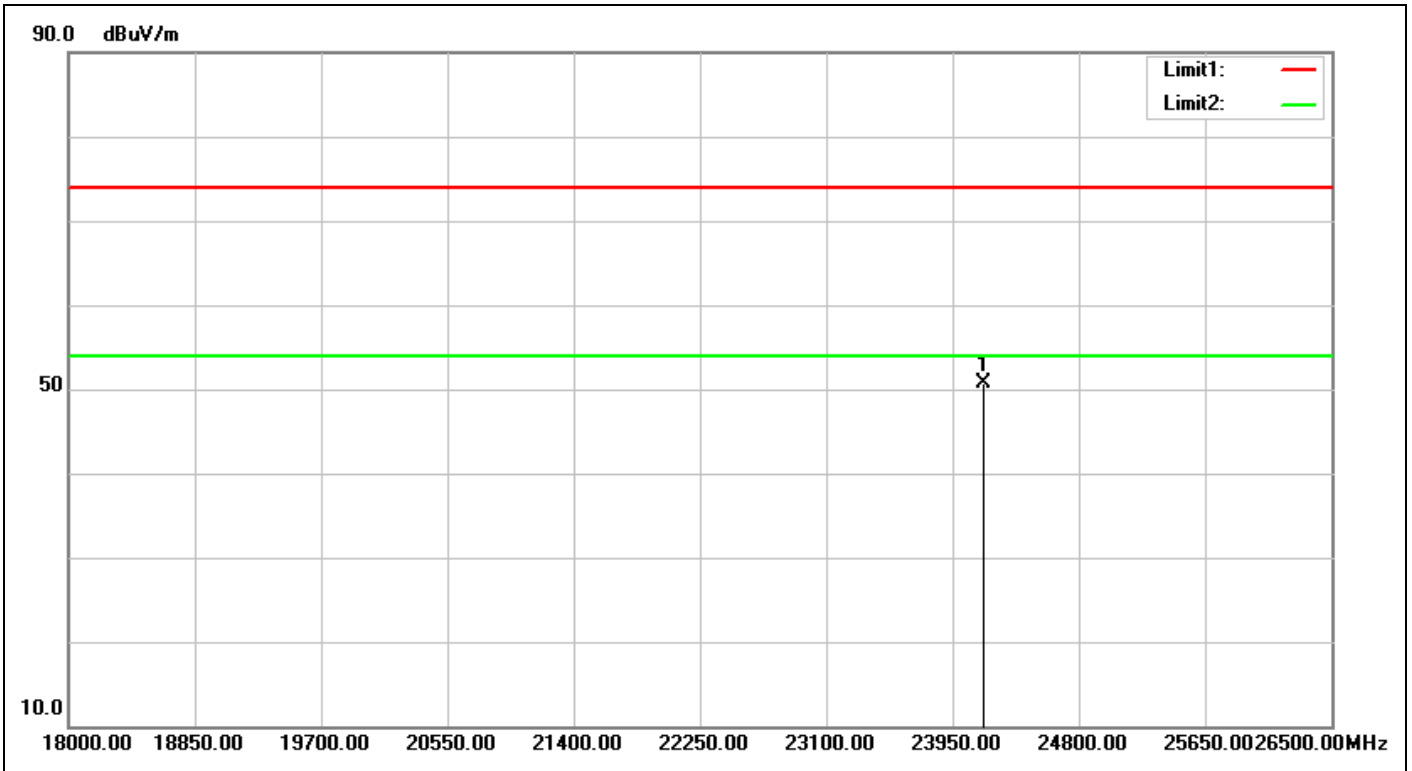


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 16:37:20
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	24162.500	33.02	17.61	50.63	74.00	-23.37	peak			

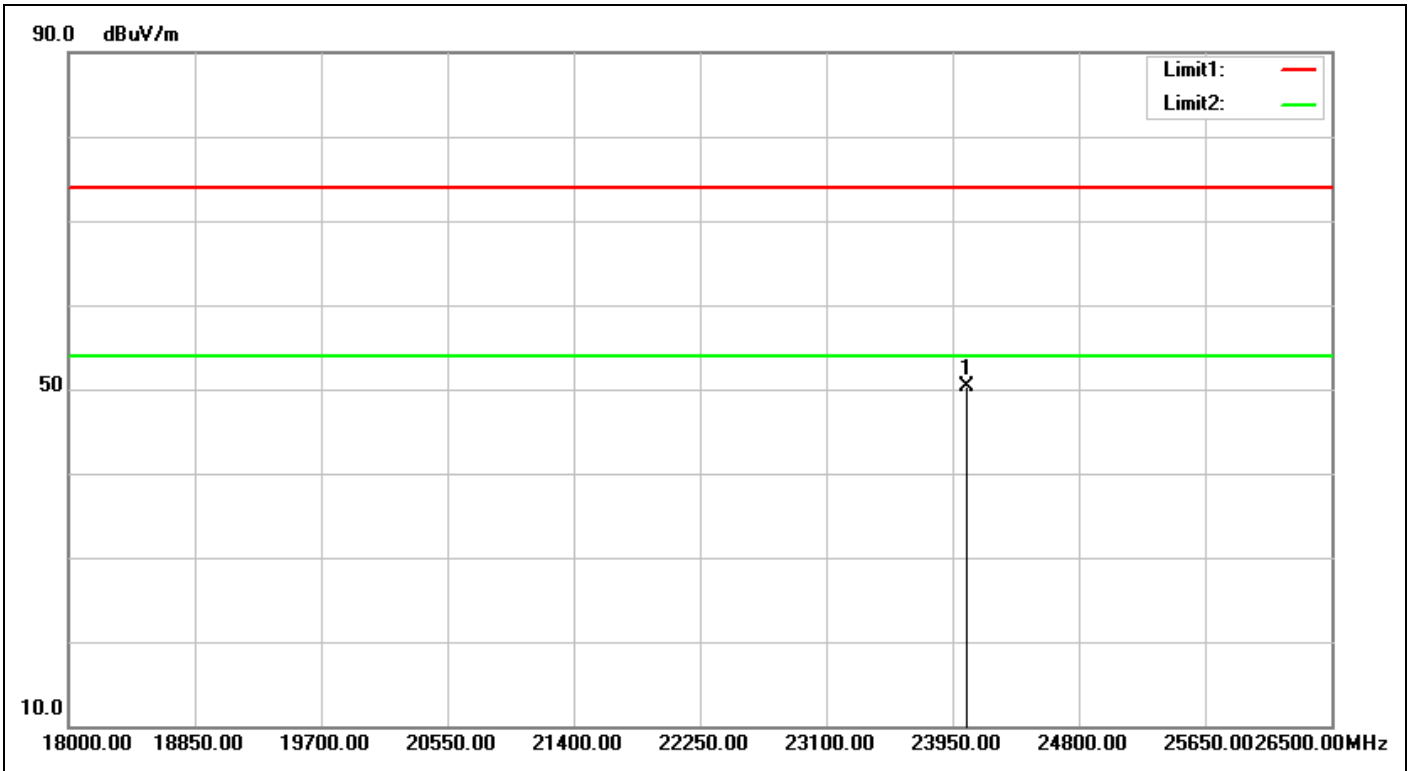

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 16:37:33
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	24043.500	32.96	17.38	50.34	74.00	-23.66	peak			

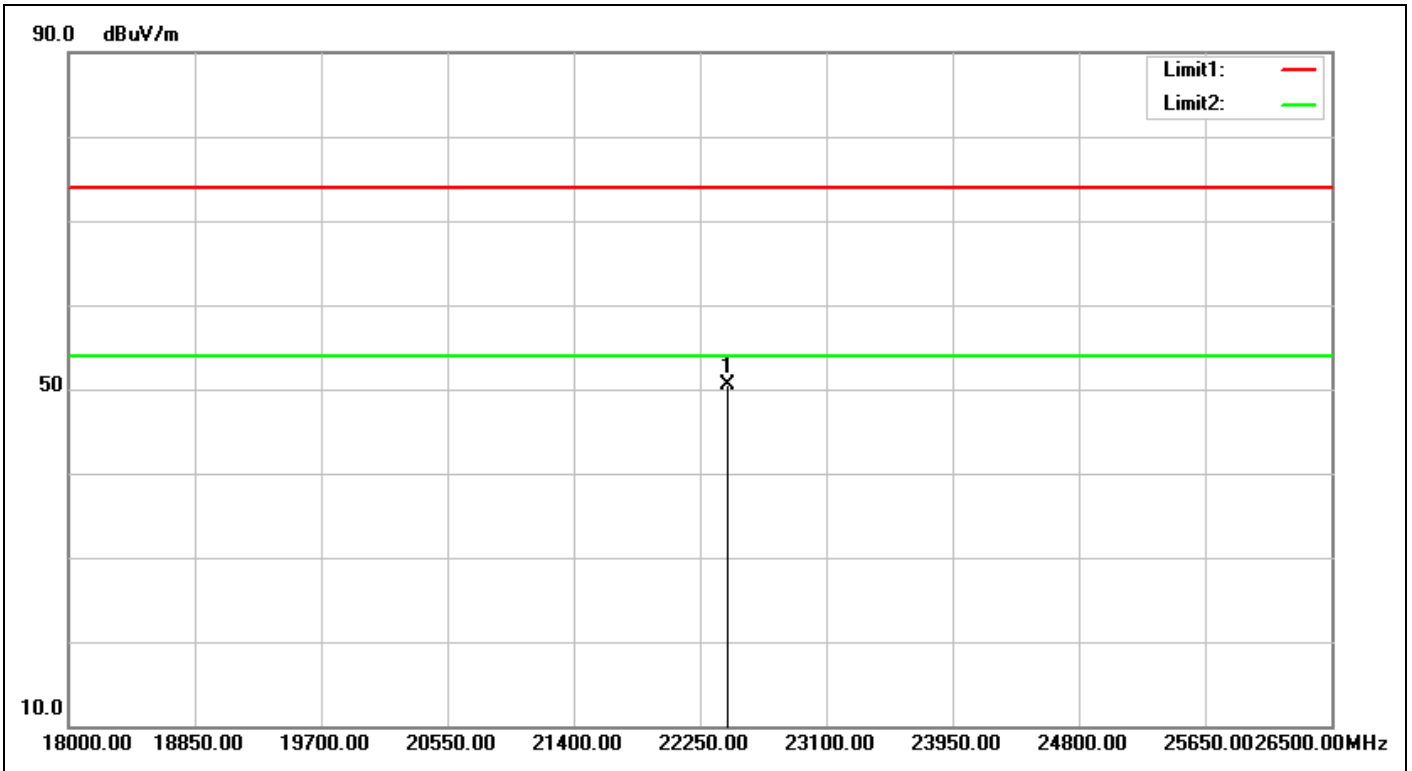

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Above 1G PEAK	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 16:37:44
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2479-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	22437.000	32.63	17.92	50.55	74.00	-23.45	peak			


Spurious Emissions, TX Mode, 30M-1G



TUV Rheinland Taiwan Ltd.

11F., No.758, Sec.4 Bade Road, Songshan Dist, Taipei City 105


Tel:+886-2172-7000 fax:+886-2528-0018

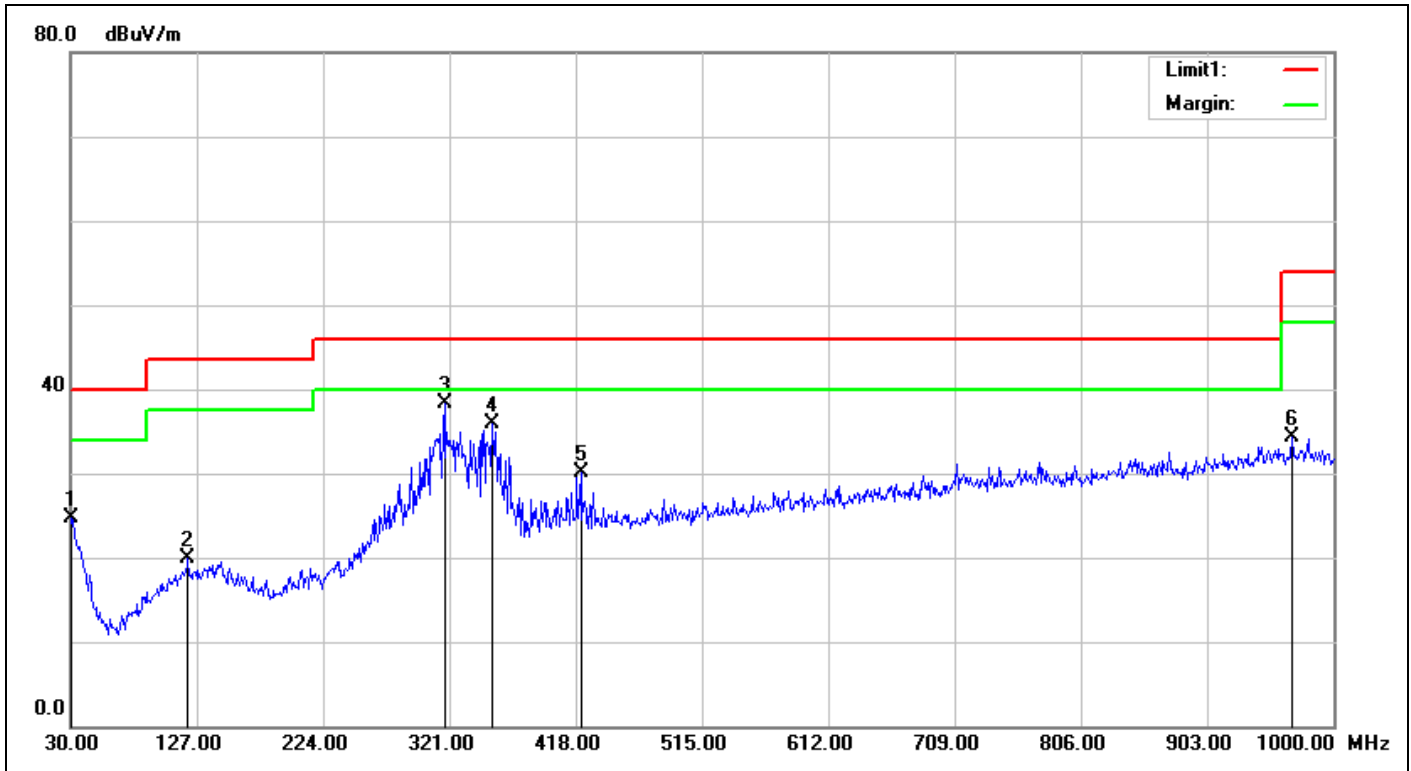

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Horizontal
Test item:	Radiation Emission	Test Time:	2018/3/9 19:43:34
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.9699	-0.79	25.56	24.77	40.00	-15.23	QP	100	360	
2	120.2099	-7.45	27.41	19.96	43.50	-23.54	QP	100	321	
3	317.1200	-4.14	42.43	38.29	46.00	-7.71	QP	100	154	
4	353.9800	-3.27	39.23	35.96	46.00	-10.04	QP	100	160	
5	421.8799	-2.21	32.25	30.04	46.00	-15.96	QP	100	360	
6	967.9900	5.58	28.67	34.25	54.00	-19.75	QP	100	291	

Spurious Emissions, TX Mode, 30M-1G

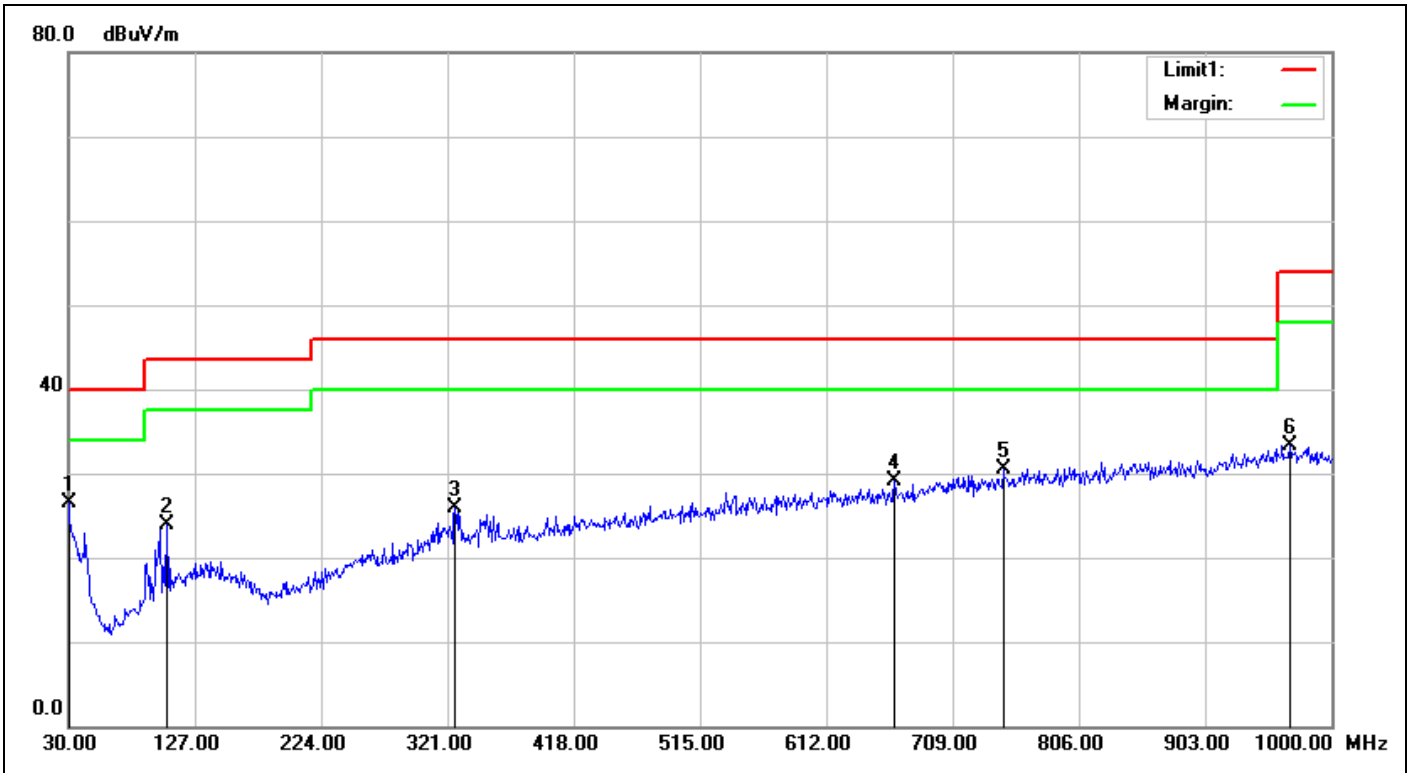


Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC Class B 3M Radiation	Ant. Polarization:	Vertical
Test item:	Radiation Emission	Test Time:	2018/3/9 19:44:30
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	30.0000	-0.25	26.70	26.45	40.00	-13.55	QP	100	348	
2	105.6600	-8.77	32.70	23.93	43.50	-19.57	QP	100	0	
3	326.8200	-3.91	29.80	25.89	46.00	-20.11	QP	100	216	
4	664.3800	0.73	28.38	29.11	46.00	-16.89	QP	100	359	
5	747.8000	2.32	28.12	30.44	46.00	-15.56	QP	100	207	
6	967.9900	5.58	27.78	33.36	54.00	-20.64	QP	100	38	

Spurious Emissions, TX Mode, 9 kHz - 30MHz




TUV Rheinland Taiwan Ltd.
 11F., No.758, Sec.4 Bade Road. Songshan Dist, Taipei City 105
 Tel:+886-2172-7000 fax:+886-2528-0018

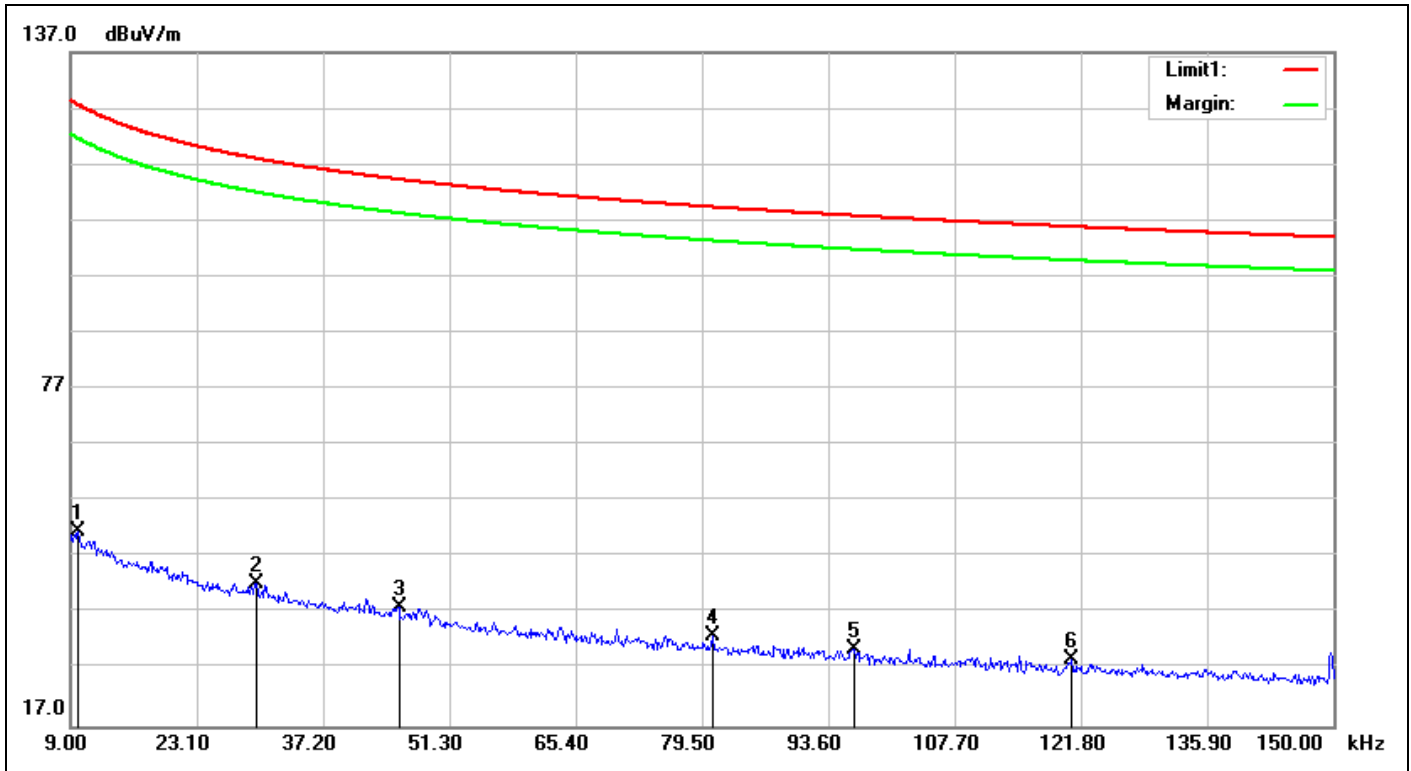

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/9 20:11:27
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.0098	19.86	31.73	51.59	127.67	-76.08	QP	100	12	
2	0.0297	20.13	22.24	42.37	118.07	-75.70	QP	100	337	
3	0.0457	19.58	18.72	38.30	114.34	-76.04	QP	100	228	
4	0.0808	19.25	13.91	33.16	109.40	-76.24	QP	100	96	
5	0.0966	19.15	11.63	30.78	107.86	-77.08	QP	100	223	
6	0.1208	19.11	9.79	28.90	105.92	-77.02	QP	100	316	

Spurious Emissions, TX Mode, 9 kHz - 30MHz

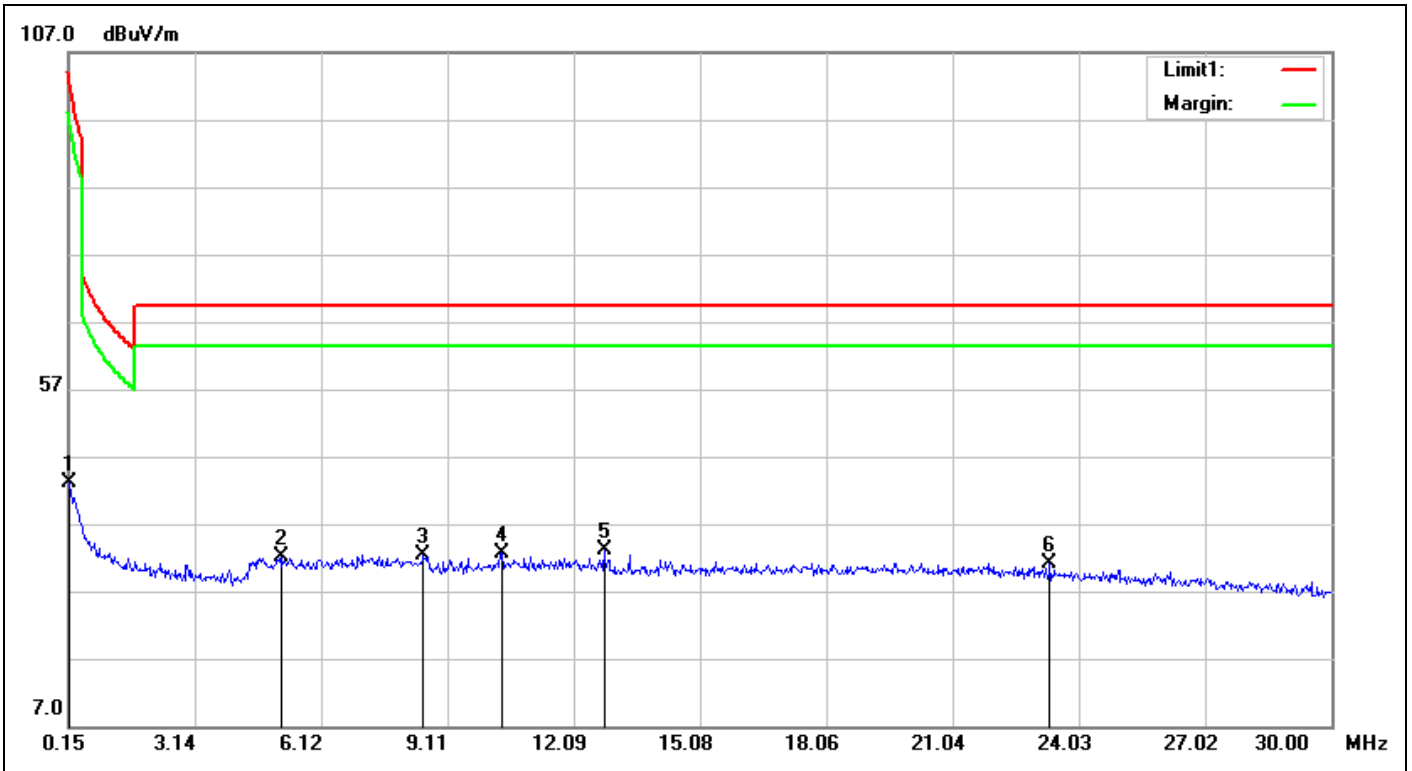

Service No.:	114073037	Test Distance:	3m
Test Standard:	FCC15.209_9k-1G_3m	Ant. Polarization:	
Test item:	Radiation Emission	Test Time:	2018/3/9 20:08:55
Applicant:	Beijing Noitom Technology Ltd.	Test Rating:	DC 1.5V
Product:	Noitom Hi5 VR Glove	Temp.(°C)/Hum.(%):	21.3(°C)/59%
Model No.:	NTM-Hi5-BE-RG-01	Test Engineer:	George Yang
Test Mode:	2439-TX		
Remark:			

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (°)	Remark
1	0.1500	19.08	24.12	43.20	104.02	-60.82	QP	100	94	
2	5.1946	19.78	12.31	32.09	69.50	-37.41	QP	100	146	
3	8.5379	20.08	12.20	32.28	69.50	-37.22	QP	100	229	
4	10.3886	20.29	12.38	32.67	69.50	-36.83	QP	100	0	
5	12.8063	20.72	12.35	33.07	69.50	-36.43	QP	100	55	
6	23.3435	22.21	8.86	31.07	69.50	-38.43	QP	100	52	