

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	50130210 001	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	114073037	Seite 1 von 29 <i>Page 1 of 29</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	15-Dec-2017		
<b>Auftraggeber:</b> <i>Client:</i>	Beijing Noitom Technology Ltd., 502, Tower A, 28 Xinjiekouwai Blvd, Beijing, China				
<b>Prüfgegenstand:</b> <i>Test item:</i>	Noitom Hi5 VR Glove				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	NTM-Hi5-TC-01				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Part 15C Test report				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.249				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	5-Jan-2018				
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A000678775-001 A000678775-003				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	1-Mar-2018 - 9-Mar-2018				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	EMC Laboratory Taipei				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TUV Rheinland Taiwan Ltd.				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass				
<b>geprüft von / tested by:</b>  15-Mar-2018 Brenda Chen/Project Engineer	<b>kontrolliert von / reviewed by:</b>  15-Mar-2018 Arvin Ho/Vice General Manager				
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>					
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
<p>* Legende: 1 = sehr gut      2 = gut      3 = befriedigend      4 = ausreichend      5 = mangelhaft  P(ass) = entspricht o.g. Prüfgrundlage(n)      Fail = entspricht nicht o.g. Prüfgrundlage(n)  N/A = nicht anwendbar      N/T = nicht getestet</p> <p>Legend: 1 = very good      2 = good      3 = satisfactory      4 = sufficient      5 = poor  P(ass) = passed a.m. test specification(s)      FFail = failed a.m. test specification(s)  N/A = not applicable      N/T = not tested</p>					
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>					

**Prüfbericht - Nr.:** 50130210 001  
*Test Report No.*

Seite 2 von 29  
*Page 2 of 29*

## TEST SUMMARY

### 5.1.1 ANTENNA REQUIREMENT

*RESULT: Passed*

### 5.1.2 FIELD STRENGTH OF FUNDAMENTAL

*RESULT: Passed*

### 5.1.3 99% BANDWIDTH

*RESULT: Passed*

### 5.1.4 SPURIOUS EMISSION

*RESULT: Passed*

### 5.2.1 CONDUCTED EMISSIONS LINE AND NEUTRAL

*RESULT: Passed*

### 6.1.1 ELECTROMAGNETIC FIELDS

*RESULT: Passed*

## Contents

1. GENERAL REMARKS .....	5
1.1 COMPLEMENTARY MATERIALS.....	5
2. TEST SITES .....	6
2.1 TEST LABORATORY .....	6
2.2 TEST FACILITY.....	6
2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	7
2.4 TRACEABILITY .....	8
2.5 CALIBRATION .....	8
2.6 MEASUREMENT UNCERTAINTY .....	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE .....	9
3.2 RATINGS AND SYSTEM DETAILS.....	9
3.3 INDEPENDENT OPERATION MODES.....	10
3.4 NOISE GENERATING AND NOISE SUPPRESSING PARTS .....	10
3.5 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION .....	11
4.2 TEST OPERATION AND TEST SOFTWARE.....	11
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....	11
4.4 COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	12
4.5 TEST SETUP DIAGRAM .....	12
5. TEST RESULTS .....	14
5.1 TRANSMITTER REQUIREMENT & TEST SUITES.....	14
5.1.1 Antenna Requirement .....	14
5.1.2 Field strength of fundamental.....	15
5.1.3 99% Bandwidth .....	18
5.1.4 Spurious Emission .....	21
5.2 MAINS CONDUCTED EMISSIONS .....	22
5.2.1 Conducted Emissions Line and Neutral.....	22
6. SAFETY HUMAN EXPOSURE .....	23
6.1 RADIO FREQUENCY EXPOSURE COMPLIANCE .....	23
6.1.1 Electromagnetic Fields .....	23

**Prüfbericht - Nr.: 50130210 001**  
*Test Report No.*

**Seite 4 von 29**  
*Page 4 of 29*

<b>7.</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>24</b>
<b>8.</b>	<b>LIST OF TABLES .....</b>	<b>29</b>
<b>9.</b>	<b>LIST OF PHOTOGRAPHS.....</b>	<b>29</b>

**Prüfbericht - Nr.:** 50130210 001  
*Test Report No.*

Seite 5 von 29  
*Page 5 of 29*

## 1. General Remarks

### 1.1 Complementary Materials

These attachments are integral parts of this test report. :

**Appendix P: Photo Documentation**

(File Name: 50130210APPENDIX P)

**Appendix D: Test Result of Radiated Emissions**

(File Name: 50130210APPENDIX D)

Test Specifications

The following standards were applied

**Table 1: Applied Standard and Test Levels**

Radio
FCC 47CFR Part 15: Subpart C Section 15.249 ANSI C63.10:2013

**Prüfbericht - Nr.:** 50130210 001  
*Test Report No.*

**Seite 6 von 29**  
*Page 6 of 29*

## 2. Test Sites

### 2.1 Test Laboratory

TUV Rheinland Taiwan Ltd.  
Taichung Branch Office

No.9, Lane 36, Minsheng Rd., Sec. 3, Daya District,  
Taichung City 428  
Taiwan (R.O.C.)

### 2.2 Test Facility

TUV Rheinland Taiwan Ltd.  
Taipei Office

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.  
Taipei City 105  
Taiwan (R.O.C.)

FCC Registration No.: 340738  
IC Canada Registration No.: 9465A-1  
TAF Accredited NCC Test Lab. No.:0759  
TAF ISO17025 Certification effective periods: 2013-Jul-1st to 2016-Jun-30th



**Testing Laboratory**  
**0759**

## 2.3 List of Test and Measurement Instruments

**Table 2: List of Test and Measurement Equipment**

<b>Kind of Equipment</b>	<b>Manu-facturer</b>	<b>Type</b>	<b>S/N</b>	<b>Last Calibration</b>	<b>Next Calibration</b>
Test Software	Farad	EZ EMC	Ver. TUV3A1	N/A	N/A
EMI Test Receiver	R&S	ESR 7	101549	2017/11/10	2018/11/10
Spectrum Analyzer	R&S	FSV 40	100921	2017/05/02	2018/05/01
Spectrum Analyzer	Agilent	N9010A	MY53470241	2017/05/23	2018/05/22
Preamplifier (30MHz -1GHz)	HP	8447F	2805A03335	2017/08/14	2018/08/14
Preamplifier (18 GHz -40 GHz)	COM-POWER	PAM-840	461257	2018/01/18	2019/01/18
Pre-Amplifier (1GHz~18GHz)	EM Electronics	EM01G18G	60558	2017/11/21	2018/11/21
Bilog Antenna	TESEQ	CBL6111D	29804	2017/08/18	2018/08/18
Horn Antenna	ETS-Lindgren	3117	201918	2017/08/18	2018/08/18
Horn Antenna (18GHz~40GHz)	COM-POWER	AH-840	101029	2017/11/28	2018/11/28
Loop Antenna	Schwarzbeck	FMZB 1513	1513-076	2017/06/14	2018/06/14
EMI Test Receiver	R&S	ESR 7	101549	2017/11/10	2018/11/10
Spectrum Analyzer	R&S	FSL3	101943	2015/09/07	2018/09/07
Temp. & Humid. Chamber	Giant Force	GCT-099-40-S	MAF0103-007	2017/03/09	2019/03/09
LISN (1 phase)	R&S	ENV216	101243	2017/06/18	2018/06/18
LISN	R&S	ENV216	101262	2017/06/22	2018/06/21

## 2.4 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

## 2.5 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.6 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are  $\pm 3\text{dB}$ .

**Table 3: Emission Measurement Uncertainty**

Parameter	Uncertainty
RF power, conducted	$\pm 1.5\text{ dB}$
Adjacent channel power	$\pm 3\text{ dB}$
Radiated emission of transmitter, valid up to 26 GHz	$\pm 6\text{ dB}$
Radiated emission of receiver, valid up to 26 GHz	$\pm 6\text{ dB}$
Temperature	$\pm 2\text{ }^{\circ}\text{C}$
Humidity	$\pm 10\text{ \%}$

## 3. General Product Information

### 3.1 Product Function and Intended Use

The EUT is a Noitom Hi5 VR Glove Transceiver. It contains a 2.4GHz module enabling the user to communicate data through a Wireless interface.  
For details refer to the User Guide, Data Sheet and Circuit Diagram.

### 3.2 Ratings and System Details

**Table 4: Basic Information of EUT**

Item	EUT information
Kind of Equipment	Noitom Hi5 VR Glove
Type Designation	NTM-Hi5-TC-01
FCC ID	2ABTR-HI5-TC-01

**Table 5: Technical Specification of EUT**

Technical Specification	Value
Operating Frequencies	2407~2479 MHz
Channel Spacing	2 MHz minimum
Channel number	15
Operation Voltage	5Vdc
Modulation	GFSK

### 3.3 Independent Operation Modes

Basic operation modes are:

- A. Transmitting
  - 1. Low channel
  - 2. Middle channel
  - 3. High channel

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.5 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum emission level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Setup for testing: Test samples are provided with a button which makes it possible to control them.

It was used to enable the operation modes listed in section 3.3 as appropriate.

Full test was applied on all test modes, but only worst case was shown.

### 4.3 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:


N/A

## 4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.


## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

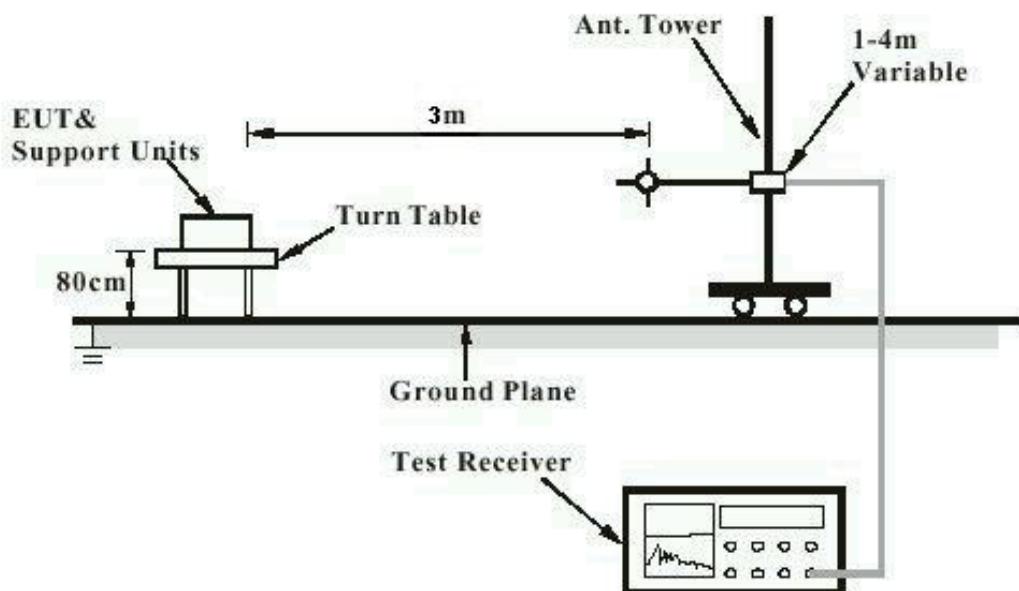

Note: Measurements above 1 GHz are done with a table height of 1.5m

**Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)**

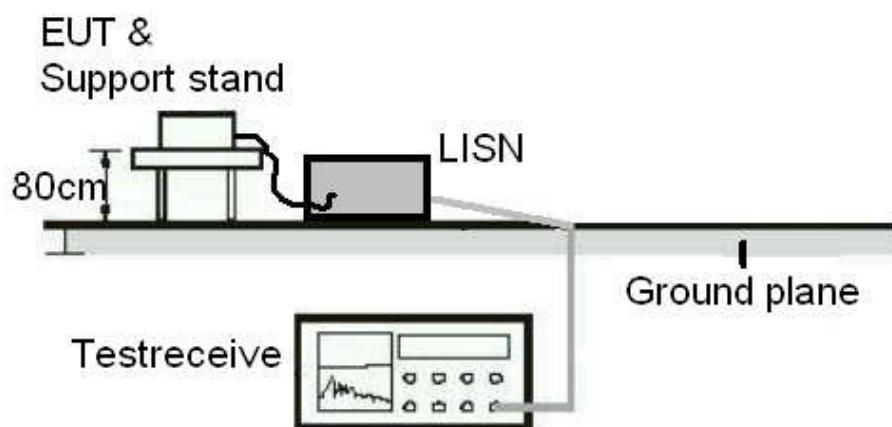

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:** **Passed**

Standard	:	LP0002(2018): 2.2
		Part 15.203 and RSS-Gen 7.1.4
Requirement	:	use of approved antennas only

The antenna is a Chip Antenna soldered to the PCB with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.

Refer to EUT photo for details.

### 5.1.2 Field strength of fundamental

**RESULT:****Passed**

Test standard	:	FCC Part 15.249(a), RSS-210 B.10 LP0002: 3.10.2(2)
Basic standard	:	ANSI C63.10:2013
Kind of test site	:	Semi-Anechoic Chamber

**Test setup**

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A
Atmospheric pressure	:	100-103 kPa

In the table below the maximum results found are reported.

For graphics of results of frequencies tested, please refer to Appendix D.

The EUT employs pulsed operation.

The pulse width is: 0.39 msec.

Pulse repetition interval:

The Tables below show calculated average values from the pulsed emissions measurement data, corrected with the worst case duty cycle factor over 1.960 msec.

The average values noted are calculated through the application of a duty cycle correction, according to part 15.35c

Duty cycle calculation:

$$\text{Duty cycle correction (dB)} = 20 \log (0.39 \text{ msec} / 1.960 \text{ msec}) = -14.02 \text{ dB. .}$$


## Produkte *Products*

**Prüfbericht - Nr.: 50130210 001**  
*Test Report No.*


Seite 16 von 29  
Page 16 of 29

## Test Plot pulse width

ON

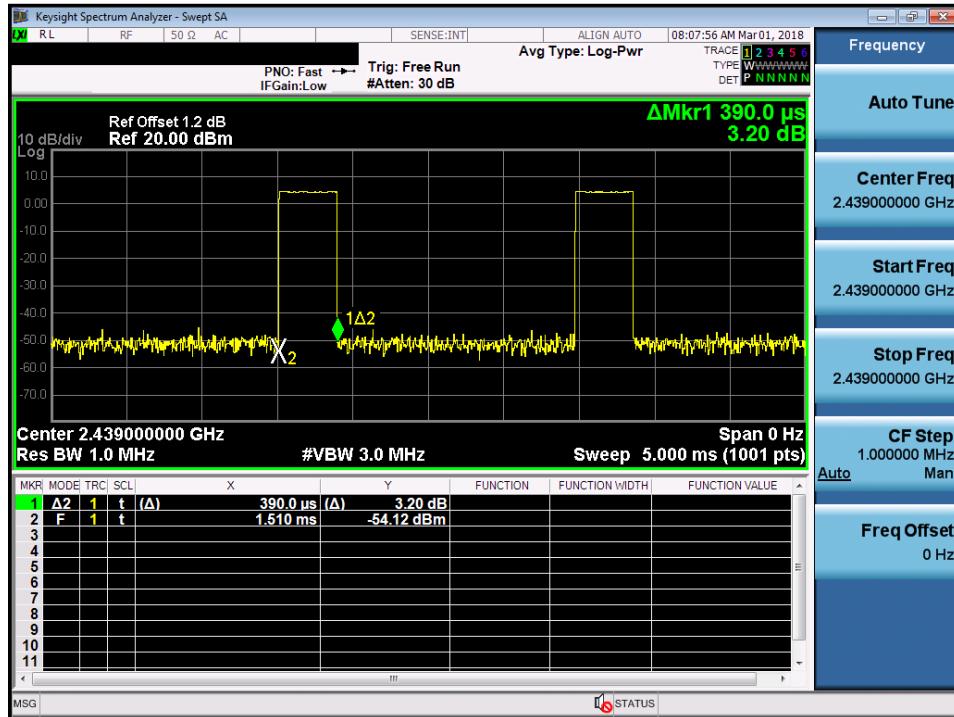

## ON+OFF

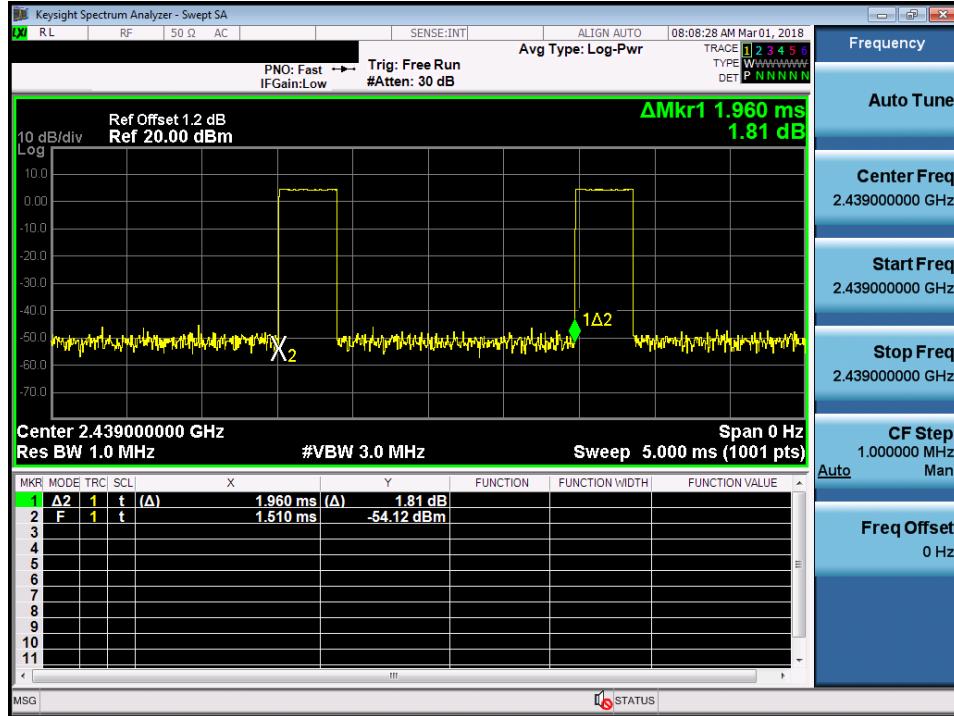

**Prüfbericht - Nr.: 50130210 001**  
*Test Report No.*Seite 17 von 29  
Page 17 of 29**Table 6: Test result of Field strength of fundamental**

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Antenna orientation	Detector or calculated value
2407	85.07	114	Horizontal	Peak
2407	71.05	94		Average
2407	87.85	114	Vertical	Peak
2407	73.83	94		Average
2439	85	114	Horizontal	Peak
2439	70.98	94		Average
2439	86.8	114	Vertical	Peak
2439	72.78	94		Average
2479	84.38	114	Horizontal	Peak
2479	70.36	94		Average
2479	87.33	114	Vertical	Peak
2479	73.31	94		Average

### 5.1.3 99% Bandwidth

**RESULT:****Passed**

Test standard : RSS-Gen  
Basic standard : ANSI C63.10:2013,  
Kind of test site : Semi-Anechoic Chamber

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A  
Ambient temperature : 22-26 °C  
Relative humidity : 50-65 %  
Atmospheric pressure : 100-103 kPa

**Table 7: Test result of 99% Bandwidth,**

Channel	Channel Frequency (MHz)	99% Bandwidth (kHz)
Low Channel	2407	748.57
Mid Channel	2439	787.53
High Channel	2479	752.61

## Prüfbericht - Nr.: 50130210 001

*Test Report No.*


Seite 19 von 29  
Page 19 of 29

### Test Plot of 99% Bandwidth

#### Low Channel




#### Middle Channel

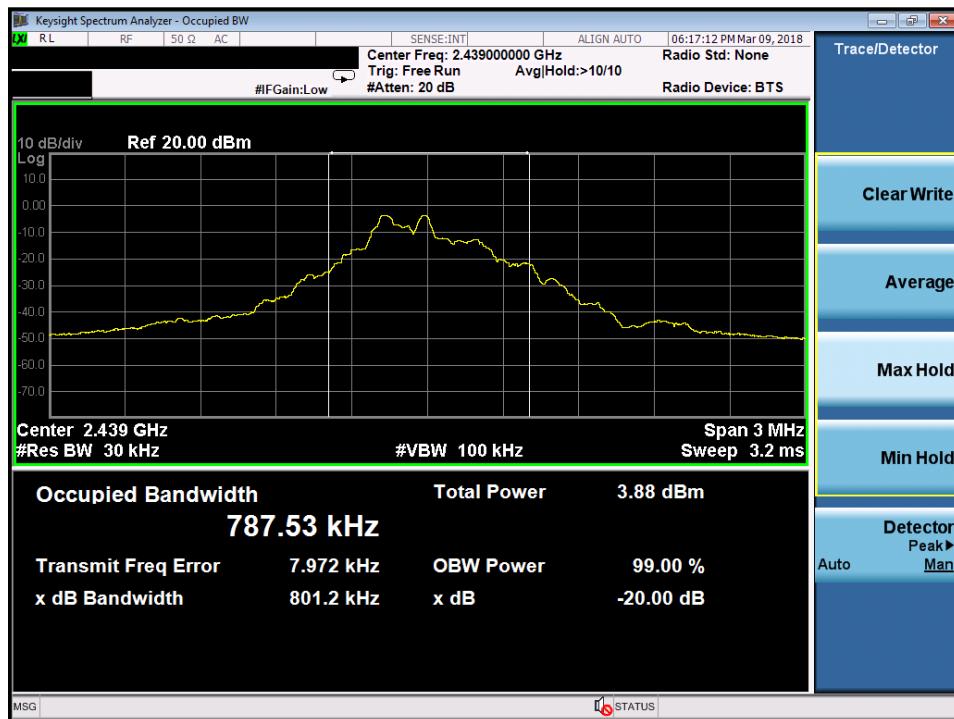

Prüfbericht - Nr.: 50130210 001  
Test Report No.Seite 20 von 29  
Page 20 of 29

## High Channel

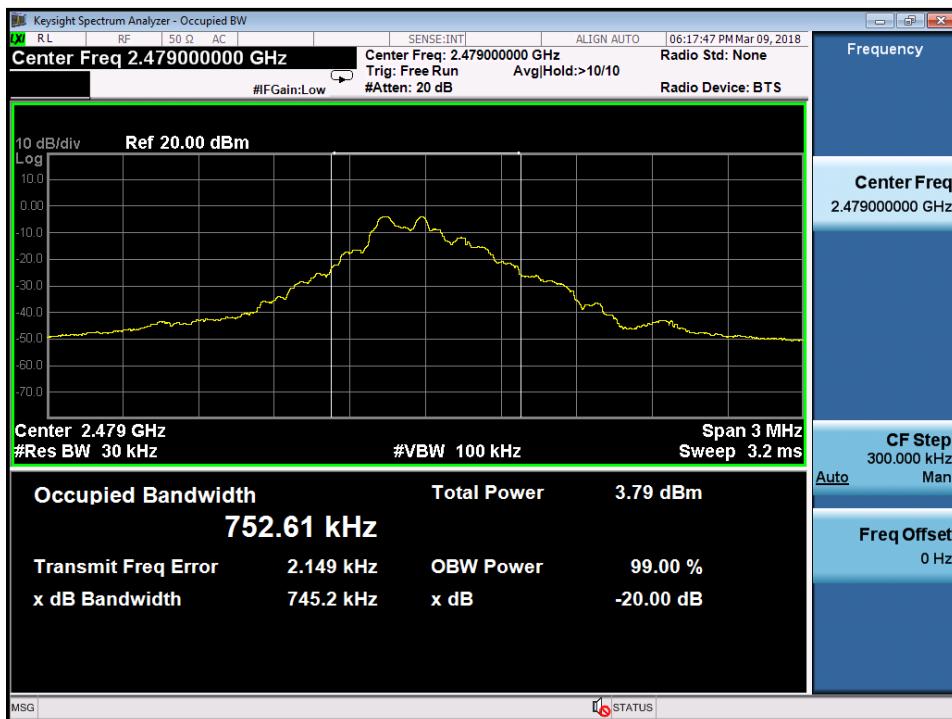

### 5.1.4 Spurious Emission

**RESULT:****Passed**

Test standard	:	FCC part 15.249(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 B.10(b), RSS-Gen 7.2.1
Basic standard	:	LP0002: 2.8
Limits	:	ANSI C63.10:2013
Kind of test site	:	Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a). Emission radiated outside the specified frequency bands must comply with the radiated emission limits specified in FCC 15.209(a) and FCC 15.249(a).

**Test setup**

Test Channel	:	Low/ Middle/ High
Operation mode	:	A

Remark: Testing was carried out within frequency range 30MHz to the tenth harmonic.

For details refer to Appendix D.

The Radiated Emissions testing was performed in the X, Y and Z axis orientation. The worst-case Axis orientation is recorded in this test report. Due to the small size of the product and that there are no inductive components of significant size, 9kHz to 30MHz frequency range is not tested based on technical judgment.

## 5.2 Mains Conducted Emissions

### 5.2.1 Conducted Emissions Line and Neutral

**RESULT:****Passed**

Test standard	:	FCC Part 15.207 FCC Part 15.107 RSS-Gen 7.2.4 LP0002: 2.3
Limits	:	Mains Conducted emissions as defined in above test standards must comply with the mains conducted emission limits specified
Kind of test site	:	Shielded Room

**Test setup**

Test Channel	:	Middle
Operation mode	:	Charging

Remark: For details refer to Appendix D.

## 6. Safety Human exposure

### 6.1 Radio Frequency Exposure Compliance

#### 6.1.1 Electromagnetic Fields

**RESULT:****Passed**

Test standard : FCC KDB Publication 447498 D01 v06  
RSS-102 issue 5, Table 1

FCC:

Since maximum peak output power of the transmitter is 0.00048 mW < 10mW, hence the EUT is excluded from SAR evaluation according to FCC KDB publication 447498: Mobile Portable RF Exposure

Canada:

Maximum conducted Average power: 0.00048 mW


Antenna Gain: x3.18 dBi -> x 2.08

-----  
Maximum Power available: 0.0009984 mW


Since maximum output power, either EIRP or conducted, of the transmitter < 4mW, hence the EUT is excluded from SAR evaluation according to Table 1 in RSS-102

## 7. Photographs of the Test Set-Up


**Photograph 1: Set-up for Radiated Emissions (Front View)**

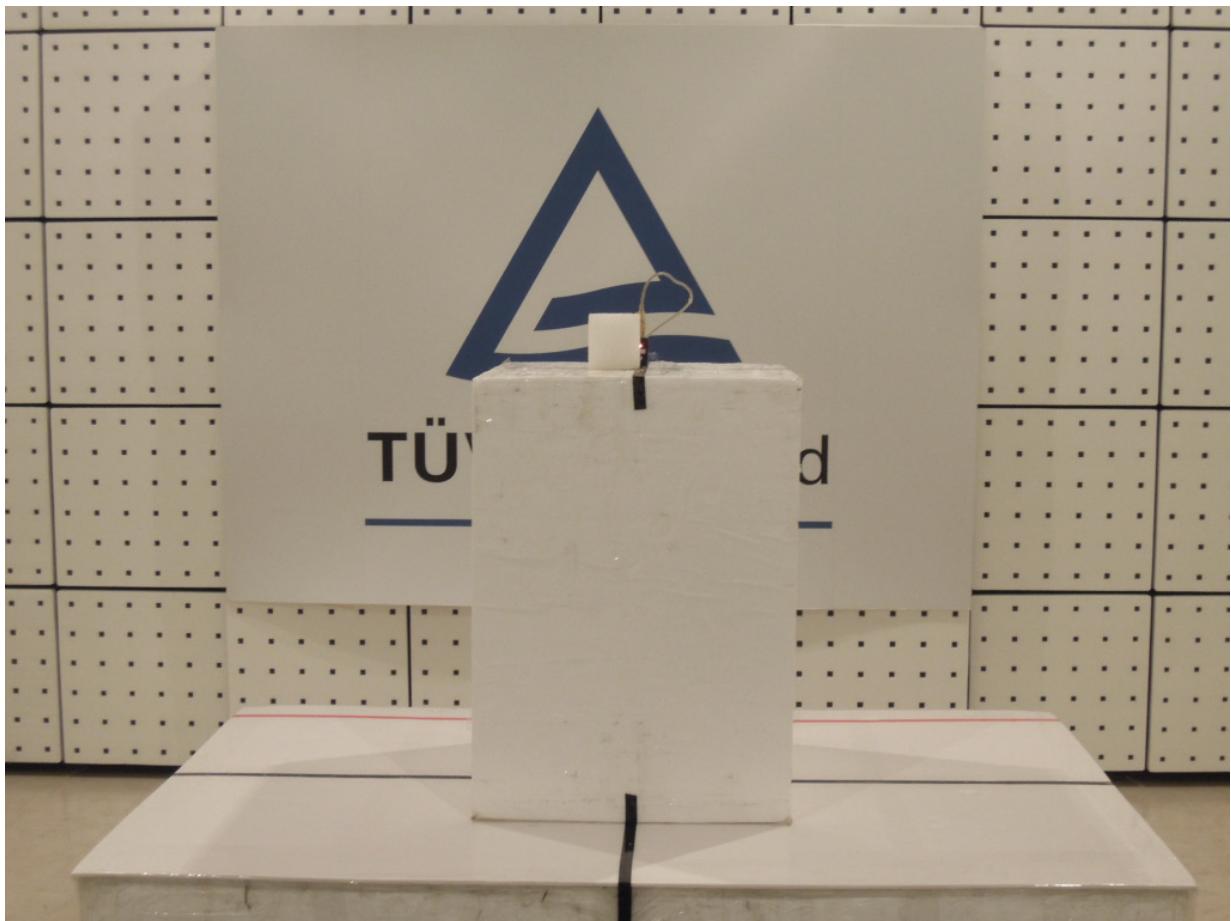

**Photograph 2: Set-up for Radiated Emissions (Back View 1)**

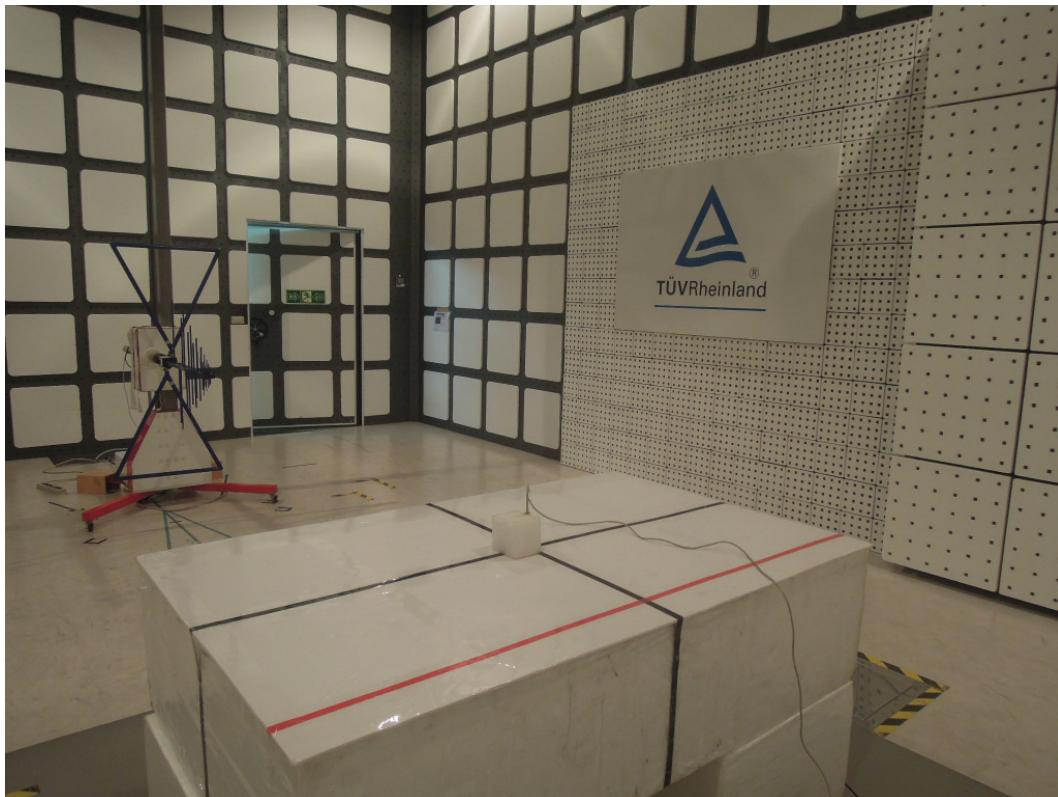


**Photograph 3: Set-up for Radiated Emissions (Back View 2)**

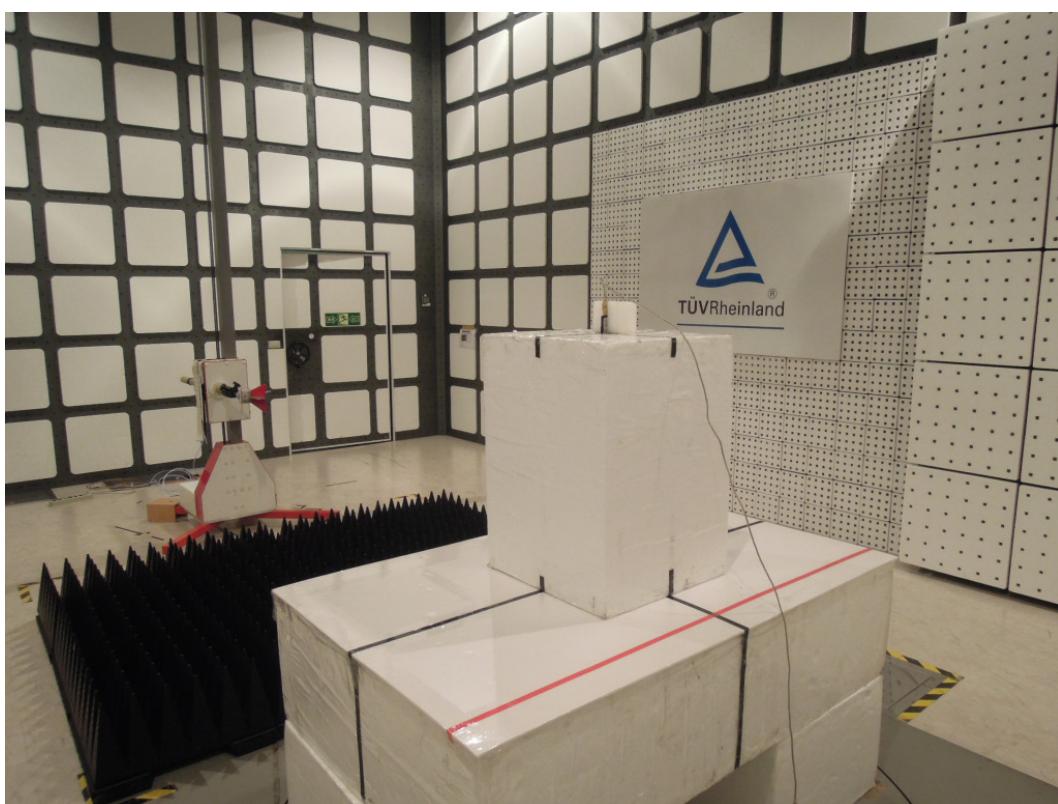


**Prüfbericht - Nr.: 50130210 001**  
*Test Report No.*

**Seite 26 von 29**  
*Page 26 of 29*


**Photograph 4: Set-up for Radiated Emissions (Back View 3)**

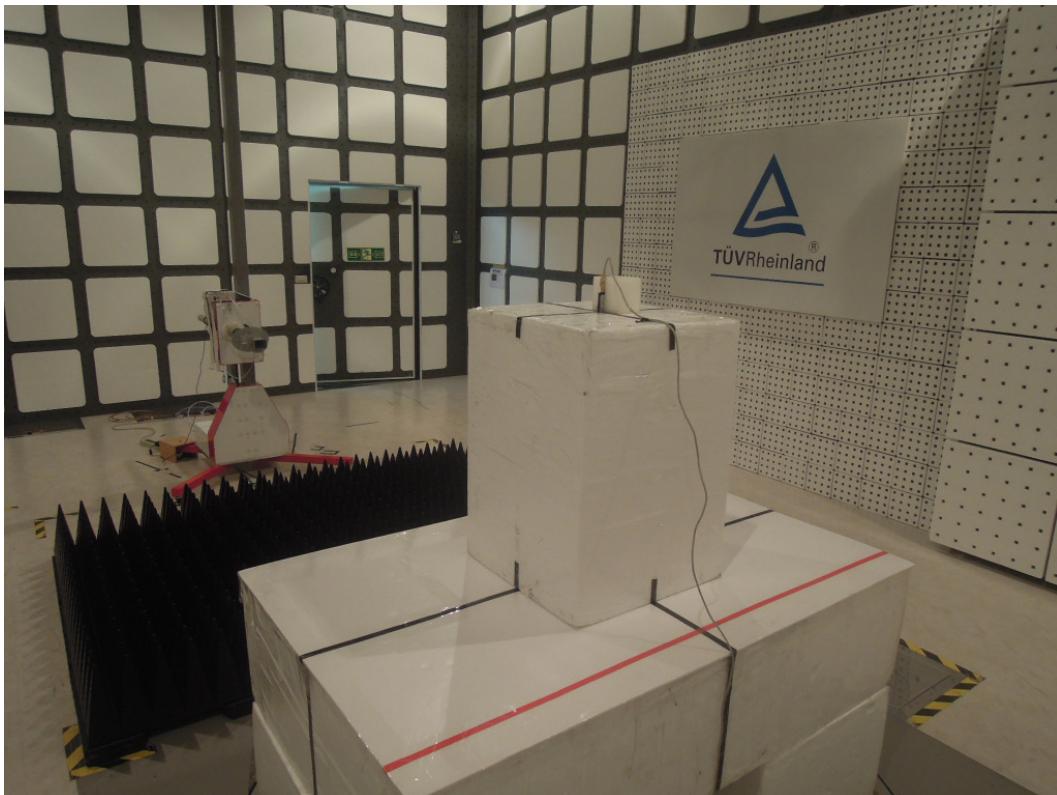


**Photograph 5: Set-up for Conducted testing**

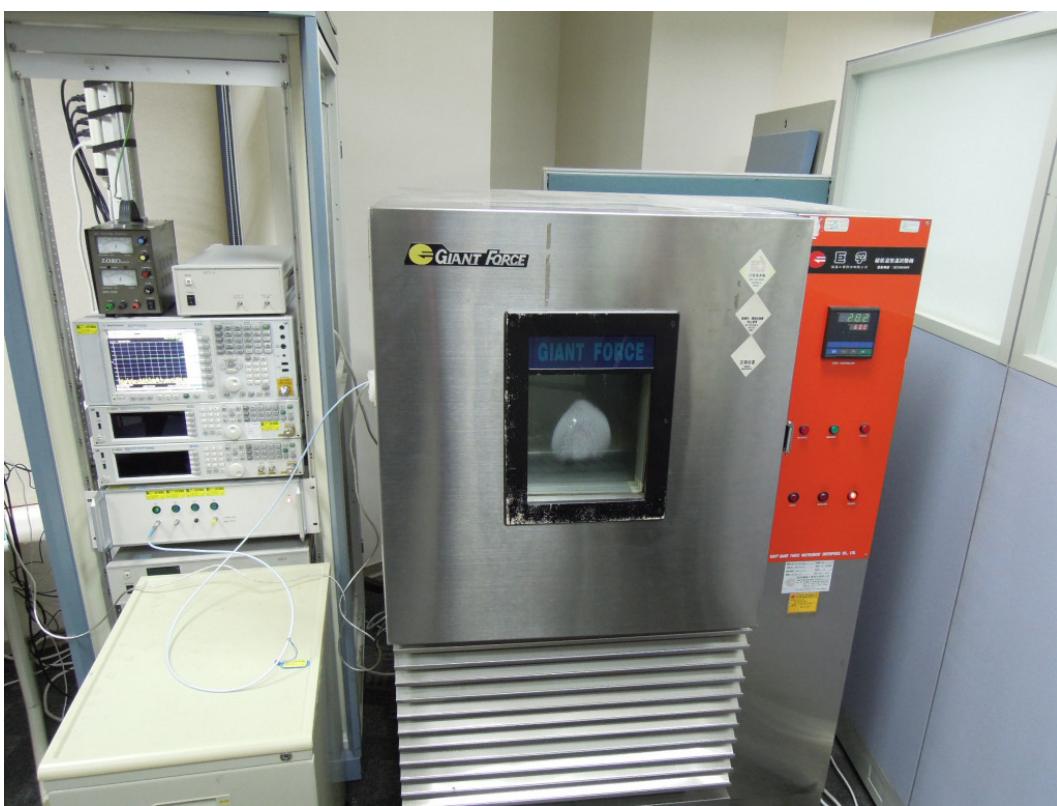

**Photograph 6: Set-up for Conducted testing**

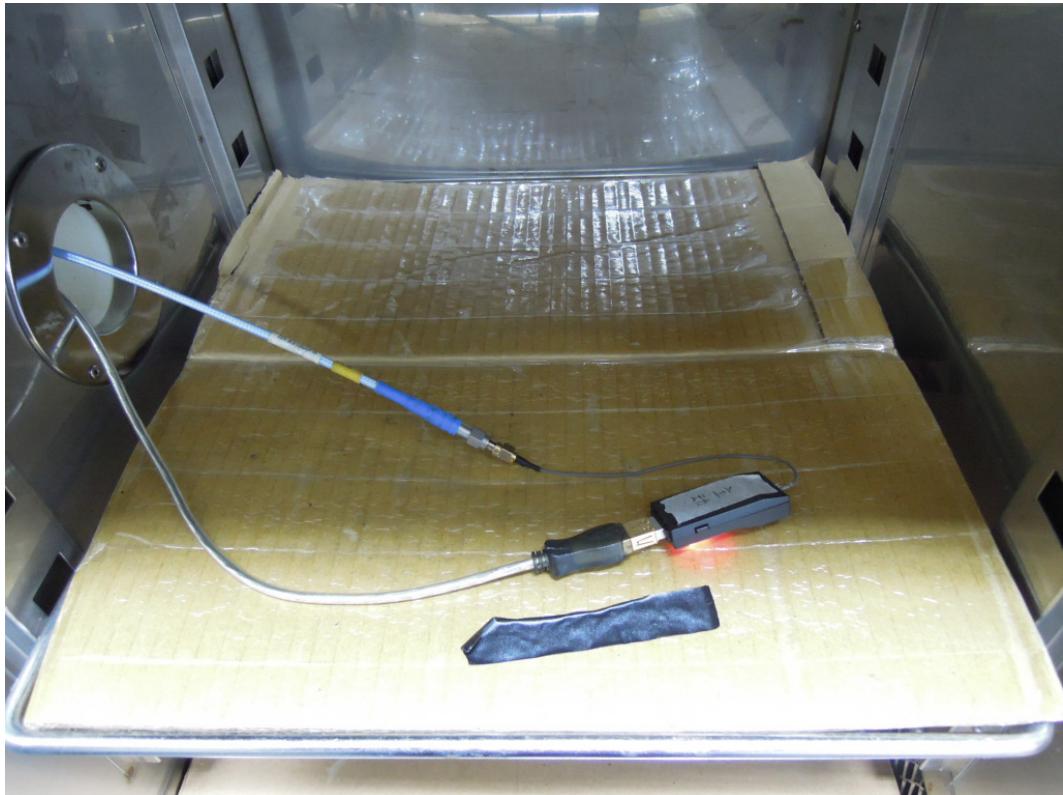

**Photograph 7: Set-up for Mains Conducted testing Back**

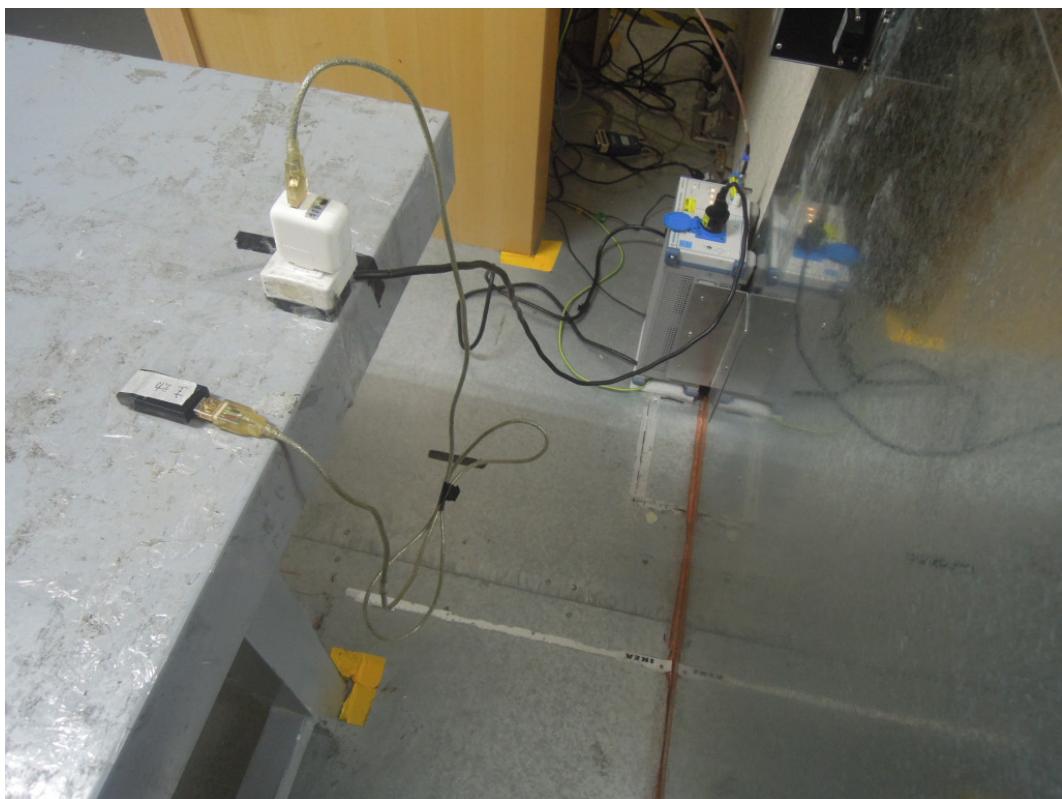

**Prüfbericht - Nr.: 50130210 001**  
*Test Report No.*

**Seite 28 von 29**  
*Page 28 of 29*

**Photograph 8: Set-up for Mains Conducted testing Front**



## 8. List of Tables

Table 1: Applied Standard and Test Levels .....	5
Table 2: List of Test and Measurement Equipment .....	7
Table 3: Emission Measurement Uncertainty.....	8
Table 4: Basic Information of EUT .....	9
Table 5: Technical Specification of EUT .....	9
Table 6: Test result of Field strength of fundamental.....	17
Table 7: Test result of 99% Bandwidth,.....	18

## 9. List of Photographs

Photograph 1: Set-up for Radiated Emissions (Front View) .....	24
Photograph 2: Set-up for Radiated Emissions (Back View 1).....	25
Photograph 3: Set-up for Radiated Emissions (Back View 2).....	25
Photograph 4: Set-up for Radiated Emissions (Back View 3).....	26
Photograph 5: Set-up for Conducted testing .....	26
Photograph 6: Set-up for Conducted testing .....	27
Photograph 7: Set-up for Mains Conducted testing Back .....	27
Photograph 8: Set-up for Mains Conducted testing Front.....	28