

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	17042940 001	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	164010483	Seite 1 von 24 <i>Page 1 of 24</i>													
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	14.01.2014														
<b>Auftraggeber:</b> <i>Client:</i>	Accent Advanced Systems SLU Bergueda 43 Local 18, Castellar del Vallès 08211, Spain																
<b>Prüfgegenstand:</b> <i>Test item:</i>	Bluetooth Low Energy Module																
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	USMART10																
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC Certification and Verification																
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209																
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	14.01.2014																
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A000039552-001																
<b>Prüfzeitraum:</b> <i>Testing period:</i>	15.03.2014 - 29.04.2014																
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Shenzhen Accurate Technology Co., Ltd.																
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.																
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass																
<b>geprüft von / tested by:</b> <i>Owen Tian</i>		<b>kontrolliert von / reviewed by:</b> <i>Winnie Hou</i>															
28.09.2014	Owen Tian / Senior Project Manager		30.09.2014	Winnie Hou / Technical Certifier													
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>												
<b>Sonstiges / Other:</b>																	
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>			Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>														
<p>* Legende: 1 = sehr gut      2 = gut      3 = befriedigend      4 = ausreichend      5 = mangelhaft      P(ass) = entspricht o.g. Prüfgrundlage(n)      F(ail) = entspricht nicht o.g. Prüfgrundlage(n)      N/A = nicht anwendbar      N/T = nicht getestet</p> <table> <tr> <td><b>Legend:</b></td> <td>1 = very good</td> <td>2 = good</td> <td>3 = satisfactory</td> <td>4 = sufficient</td> <td>5 = poor</td> </tr> <tr> <td></td> <td>P(ass) = passed a.m. test specification(s)</td> <td></td> <td>F(ail) = failed a.m. test specification(s)</td> <td>N/A = not applicable</td> <td>N/T = not tested</td> </tr> </table>						<b>Legend:</b>	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor		P(ass) = passed a.m. test specification(s)		F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
<b>Legend:</b>	1 = very good	2 = good	3 = satisfactory	4 = sufficient	5 = poor												
	P(ass) = passed a.m. test specification(s)		F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested												
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b></p> <p><i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>																	

**Prüfbericht - Nr.: 17042940 001**  
*Test Report No.*

Seite 2 von 24  
*Page 2 of 24*

## TEST SUMMARY

### 5.1.1 ANTENNA REQUIREMENT

*RESULT: Passed*

### 5.1.2 PEAK OUTPUT POWER

*RESULT: Passed*

### 5.1.3 CONDUCTED POWER SPECTRAL DENSITY

*RESULT: Passed*

### 5.1.4 -6dB BANDWIDTH

*RESULT: Passed*

### 5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100kHz BANDWIDTH

*RESULT: Passed*

### 5.1.6 SPURIOUS EMISSION

*RESULT: Passed*

## Contents

1.	GENERAL REMARKS .....	4
1.1	COMPLEMENTARY MATERIALS .....	4
2.	TEST SITES .....	4
2.1	TEST FACILITIES.....	4
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	5
2.3	TRACEABILITY .....	6
2.4	CALIBRATION .....	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	6
2.7	STATUS OF FACILITY USED FOR TESTING.....	6
3.	GENERAL PRODUCT INFORMATION .....	7
3.1	PRODUCT FUNCTION AND INTENDED USE.....	7
3.2	RATINGS AND SYSTEM DETAILS .....	7
3.3	INDEPENDENT OPERATION MODES .....	8
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS .....	8
3.5	SUBMITTED DOCUMENTS .....	8
4.	TEST SET-UP AND OPERATION MODES .....	9
4.1	PRINCIPLE OF CONFIGURATION SELECTION.....	9
4.2	TEST OPERATION AND TEST SOFTWARE .....	9
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....	9
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
4.5	TEST SETUP DIAGRAM .....	10
5.	TEST RESULTS .....	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES .....	12
5.1.1	Antenna Requirement .....	12
5.1.2	Peak Output Power.....	13
5.1.3	Conducted Power Spectral Density .....	14
5.1.4	-6dB Bandwidth.....	15
5.1.5	Conducted spurious emissions measured in 100kHz Bandwidth.....	16
5.1.6	Spurious Emission .....	21
6.	PHOTOGRAPHS OF THE TEST SET-UP .....	22
7.	LIST OF TABLES .....	24
8.	LIST OF PHOTOGRAPHS .....	24

**Prüfbericht - Nr.: 17042940 001**  
*Test Report No.*

Seite 4 von 24  
*Page 4 of 24*

## 1. General Remarks

### 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test Result

## 2. Test Sites

### 2.1 Test Facilities

Shenzhen Accurate Technology Co., Ltd.

F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China

FCC Registration No.: 752051

The tests at the test site have been conducted under the supervision of a TÜV engineer.

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
<b>Spurious emission and Radiated emission</b>				
Signal Generator	Rohde&Schwarz	SMT03	100059	2015-01-11
Voltage Probe	Rohde&Schwarz	URV5-Z2	100012	2015-01-11
Voltage Probe	Rohde&Schwarz	URV5-Z2	100013	2015-01-11
Field Probe	ETS	HI-6005	121578	2015-01-11
Power Amplifier	AR	250W1000A	335304	2015-01-11
Power Amplifier	MILMEGA	AS0860-75/45	1040084	2015-01-11
Power Meter	Rohde & Schwarz	NRVD	100041	2015-01-11
Broadband antenna	CHASE	CBL6111C	2576	N/A
Horn Antenna	AR	AT4002A	305754	N/A
<b>Radio Test Suite</b>				
Receiver	Rohde & Schwarz	ESCS30	100307	2015-01-11
<b>Conducted Emission</b>				
Test Receiver	Rohde & Schwarz	ESCS30	100307	2015-01-11
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2015-01-11
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100815	2015-01-11
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2015-01-11

**Prüfbericht - Nr.: 17042940 001**  
*Test Report No.*

Seite 6 von 24  
Page 6 of 24

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basics using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements are  $\pm 3\text{dB}$ .

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The Shenzhen Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port, Keyuan Rd., Science & Industry Park Nanshan District, Shenzhen 518057, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

## 3. General Product Information

### 3.1 Product Function and Intended Use

The EUT is a Bluetooth module with Bluetooth Core Specification Version 4.0, a Low Energy Core Configuration.

For details refer to the User Manual and Circuit Diagram.

### 3.2 Ratings and System Details

**Table 2: Rating of EUT**

Kind of Equipment:	Bluetooth Low Energy Module
Type Designation:	USMART10
FCC ID	2ABTTUSMART10

**Table 3: Technical Specification of EUT**

Technical Specification	Value
Operating Frequency band	2402 – 2480 MHz
Bluetooth Core Version	4.0 Single mode
Channel separation	2MHz
Extreme Temperature Range	-20°C to +55°C
Operation Voltage	DC 3V via CR2032 coin cell
Modulation	GFSK
Antenna Type	Internal Antenna, Non-User Replaceable
Antenna Gain	5.3dBi
RF Output Power	0.00384W (5.84dBm)

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth Transmitting
  - 1. Low channel
  - 2. Middle channel
  - 3. High channel
- B. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Technical Description
- Circuit Diagram
- Instruction Manual
- Rating Label

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003.

### 4.3 Special Accessories and Auxiliary Equipment

The EUT was tested with following accessories


Description	Manufacturer	Type	S/N
iPad	Apple	MD513CH/A	DMTK58A5F185

## 4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram


Diagram of Measurement Configuration for Radiation Test

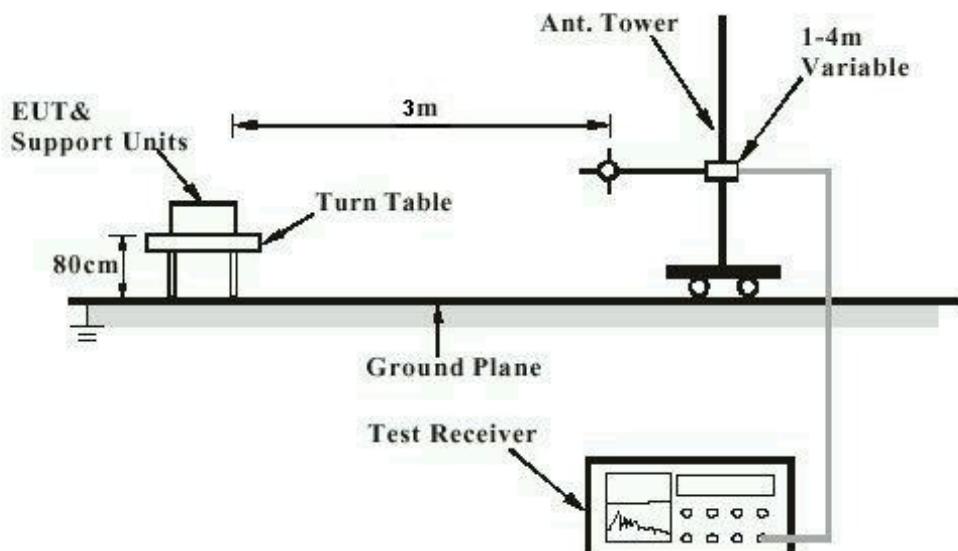


**Prüfbericht - Nr.:** 17042940 001  
*Test Report No.*

Seite 11 von 24  
*Page 11 of 24*

**Diagram of Measurement Equipment Configuration for Mains Conduction Measurement**

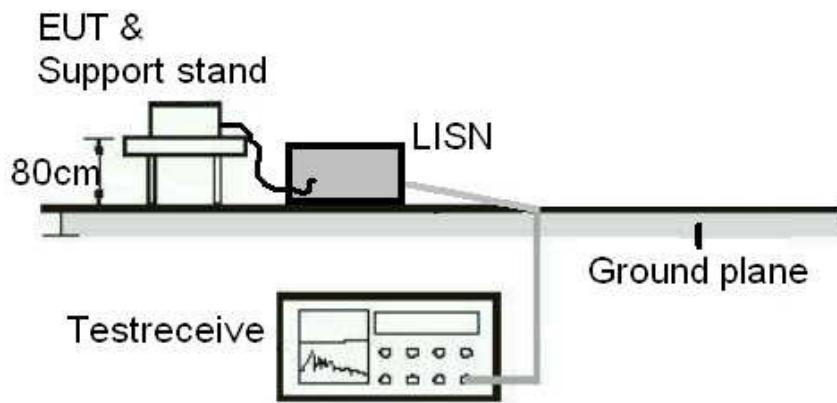

**Diagram of Measurement Equipment Configuration for Conducted Transmitter Measurement**

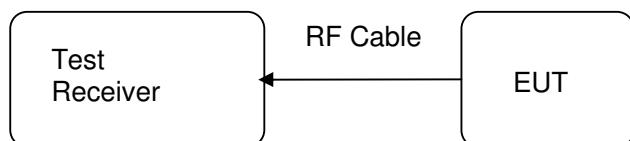

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Passed**

Test date	:	2014-03-15
Test standard	:	FCC Part 15.247(b)(4) and Part 15.203
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 5.3dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT photo for details.

Prüfbericht - Nr.: **17042940 001**  
Test Report No.Seite 13 von 24  
Page 13 of 24

### 5.1.2 Peak Output Power

**RESULT:****Passed**

Test date	:	2014-03-15
Test standard	:	FCC Part 15.247(b)(3)
Basic standard	:	ANSI C63.4: 2003
Limit	:	1 Watt
Kind of test site	:	Shielded room

**Test setup**

Test Channel	:	Low/ Middle/ High
Operation Mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

**Table 4: Test result of Peak Output Power**

Channel	Channel Frequency (MHz)	Peak Output Power		Limit (W)
		(dBm)	(W)	
Low Channel	2402	5.84	0.00384	1
Middle Channel	2440	5.30	0.00339	1
High Channel	2480	4.54	0.00284	1

**Prüfbericht - Nr.: 17042940 001**  
Test Report No.Seite 14 von 24  
Page 14 of 24

### 5.1.3 Conducted Power Spectral Density

**RESULT:****Passed**

Test date : 2014-03-15  
Test standard : FCC Part 15.247(e)  
Basic standard : ANSI C63.4: 2003  
Limit : 8dBm/3kHz  
Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A  
Ambient temperature : 25°C  
Relative humidity : 55%  
Atmospheric pressure : 101 kPa

**Table 5: Test result of Peak Output Power**

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
Low Channel	2402	-6.10	8
Middle Channel	2440	-6.23	8
High Channel	2480	-7.75	8

**Prüfbericht - Nr.:** 17042940 001  
*Test Report No.*

Seite 15 von 24  
*Page 15 of 24*

### 5.1.4 -6dB Bandwidth

#### RESULT:

**Passed**

Date of testing : 2014-03-15  
Test standard : FCC Part 15.247(a)(2)  
Basic standard : ANSI C63.4: 2003  
Kind of test site : Shielded room

#### Test setup

Test Channel : Low/ Middle/ High  
Operation Mode : A  
Ambient temperature : 25°C  
Relative humidity : 55%  
Atmospheric pressure : 101 kPa

**Table 6: Test result of -6dB Bandwidth**

Channel	Channel Frequency (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	732	500	Pass
Mid Channel	2440	640	500	Pass
High Channel	2480	702	500	Pass

**Prüfbericht - Nr.:** 17042940 001  
*Test Report No.*

Seite 16 von 24  
*Page 16 of 24*

### 5.1.5 Conducted spurious emissions measured in 100kHz Bandwidth

#### RESULT:

Passed

Date of testing	:	2014-03-15
Test standard	:	FCC part 15.247(d)
Basic standard	:	ANSI C63.4: 2003
Limit	:	20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	:	Shield room

#### Test setup

Test Channel	:	Low/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa



All emissions are more than 20dB below fundamental, details refer to following test plot, and compliance is achieved as well.

**Prüfbericht - Nr.: 17042940 001**  
Test Report No.

Seite 17 von 24  
Page 17 of 24

### Test Plot of 100kHz Bandwidth of Frequency Band Edge


#### Low Channel

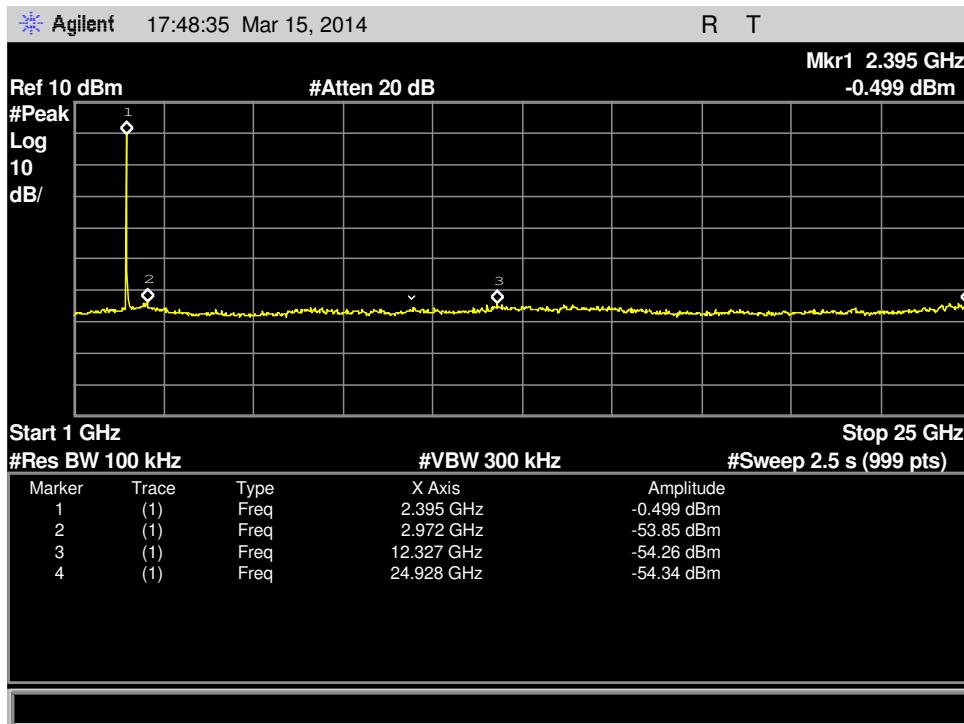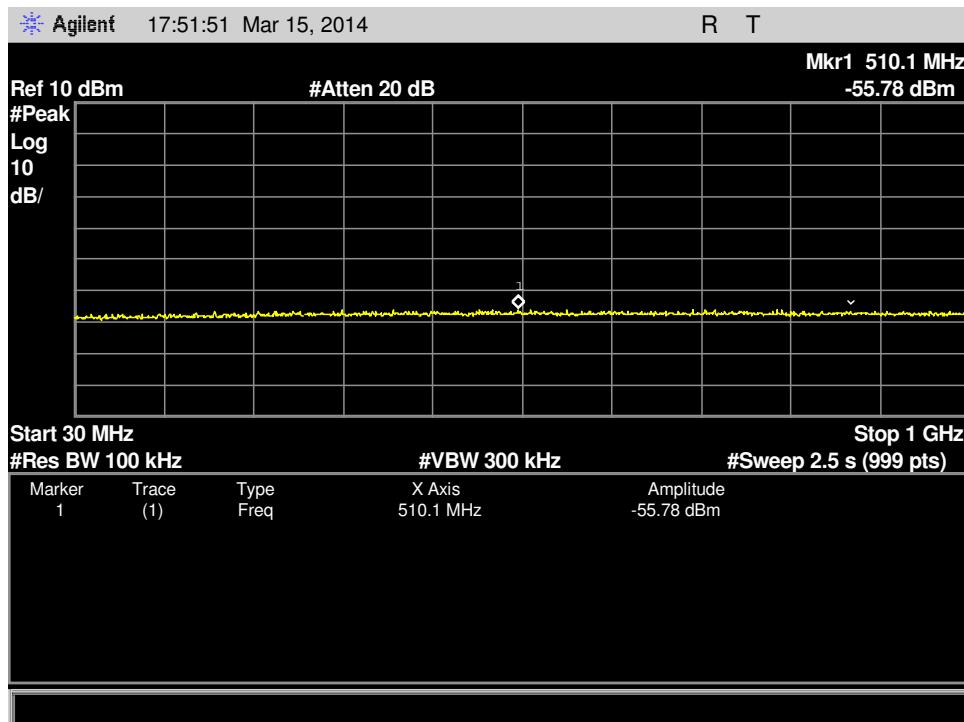

**Prüfbericht - Nr.: 17042940 001**  
Test Report No.


Seite 18 von 24  
Page 18 of 24

### Low Channel, Band Edge

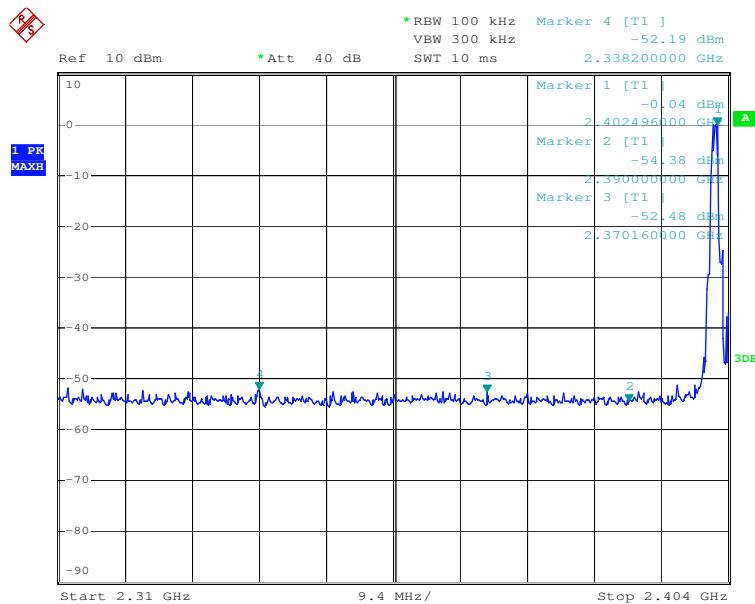


Date: 15.MAR.2014 17:07:55

### Middle Channel

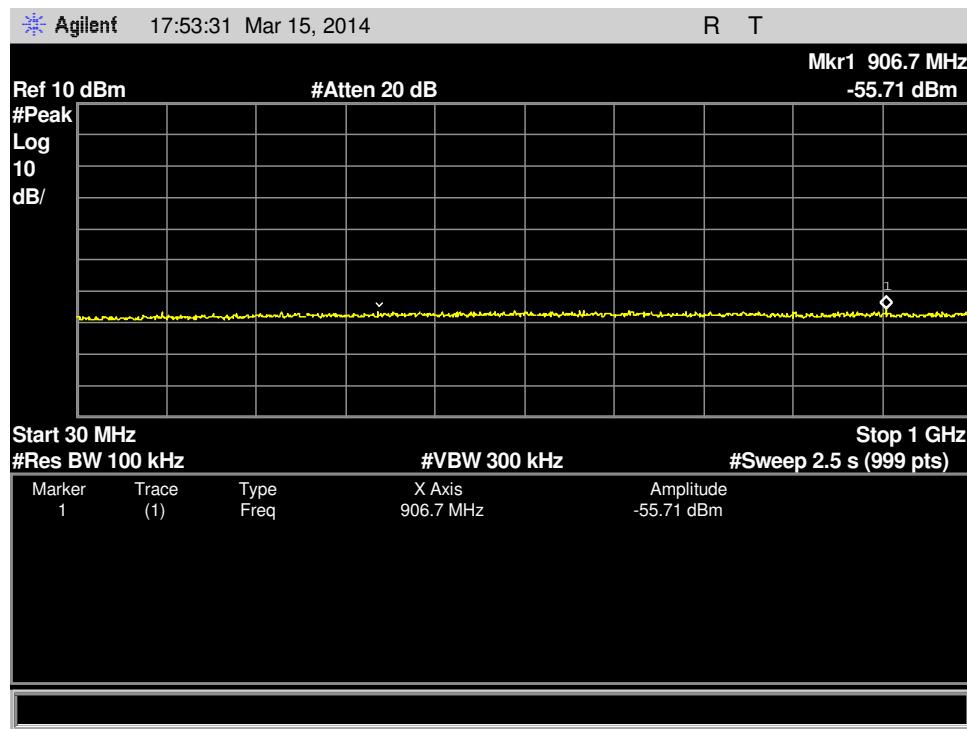


**Prüfbericht - Nr.: 17042940 001**  
Test Report No.

Seite 19 von 24  
Page 19 of 24

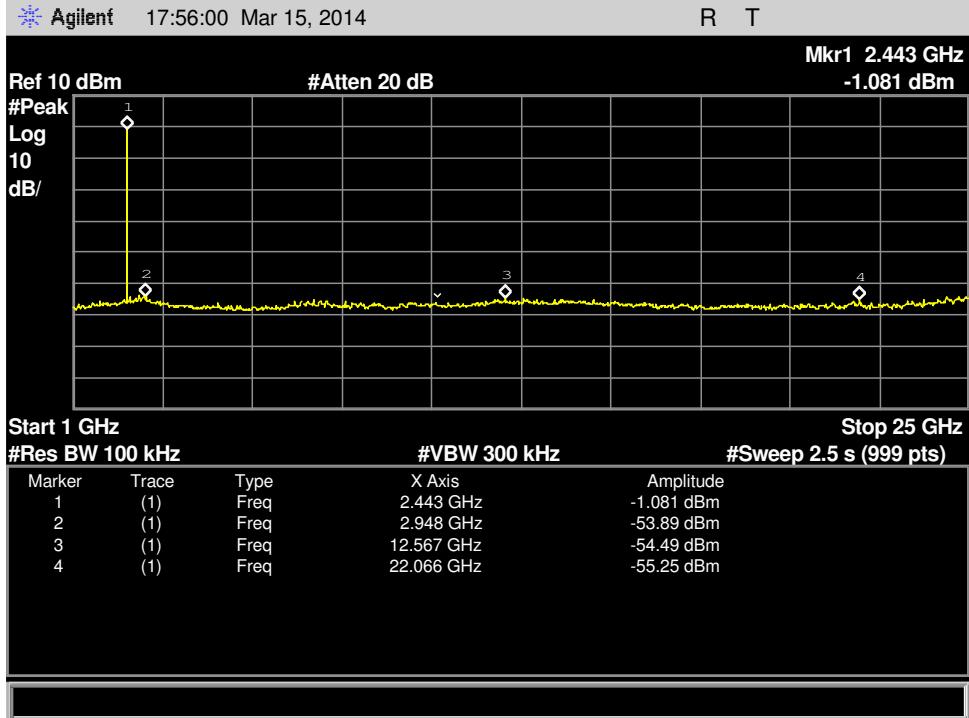


### High Channel

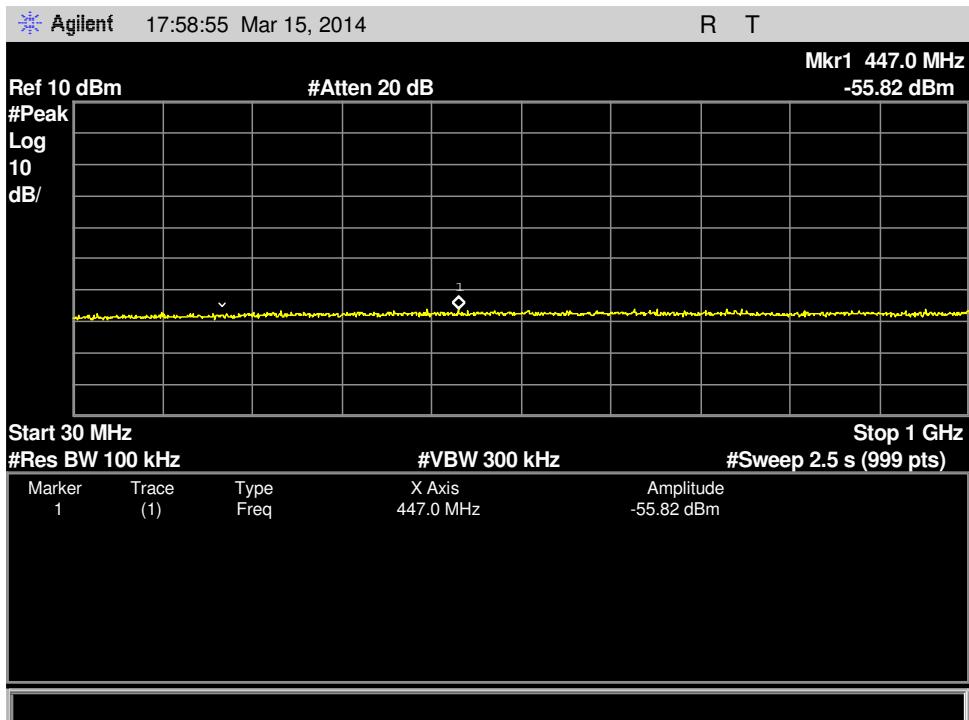


# Prüfbericht - Nr.: 17042940 001

Test Report No.

Seite 20 von 24  
Page 20 of 24

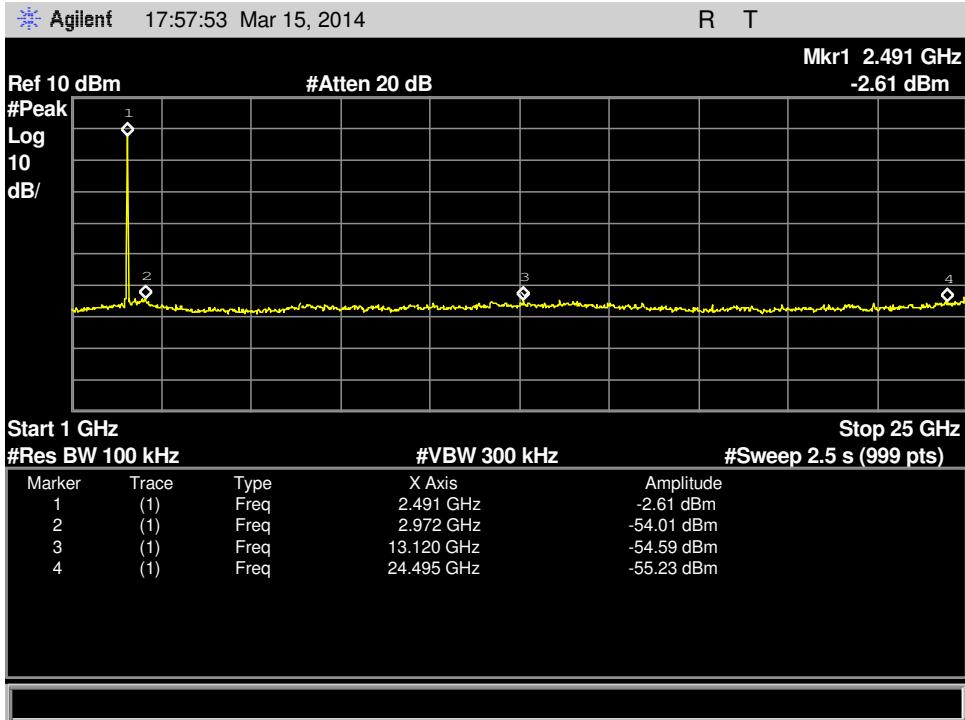

## High Channel, Band Edge

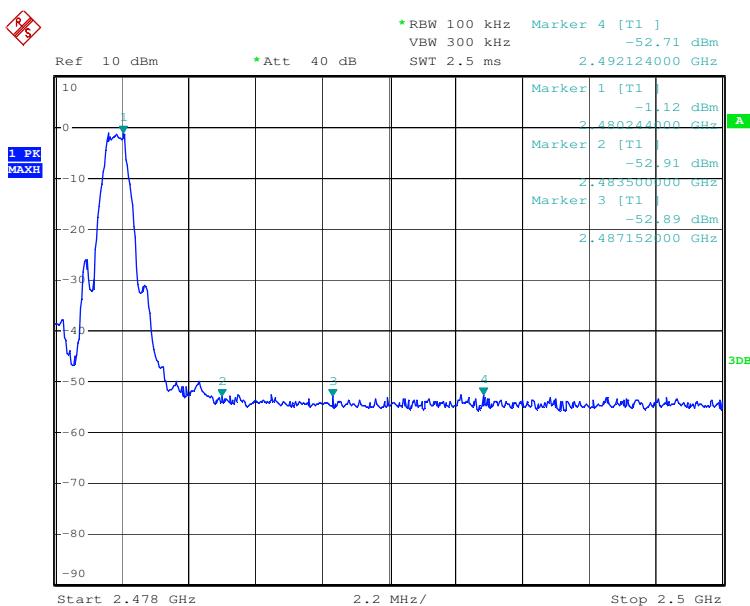

Date: 15.MAR.2014 17:05:51

**Prüfbericht - Nr.:** 17042940 001  
*Test Report No.*

Seite 21 von 24  
*Page 21 of 24*

### 5.1.6 Spurious Emission

**RESULT:****Passed**

Date of testing	:	2014-03-15 to 2014-03-16
Test standard	:	FCC part 15.247(d) FCC Part 15.205
Basic standard	:	ANSI C63.4: 2003
Limits	:	Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	:	3m Semi-Anechoic Chamber

**Test setup**

Test Channel	:	Low/ Middle/ High
Operation mode	:	A
Ambient temperature	:	25°C
Relative humidity	:	55%
Atmospheric pressure	:	101 kPa

**Remark:**

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test setup photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.


For details refer to Appendix 1.

**Prüfbericht - Nr.: 17042940 001**  
*Test Report No.*


**Seite 22 von 24**  
*Page 22 of 24*

## 6. Photographs of the Test Set-Up

**Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz)**

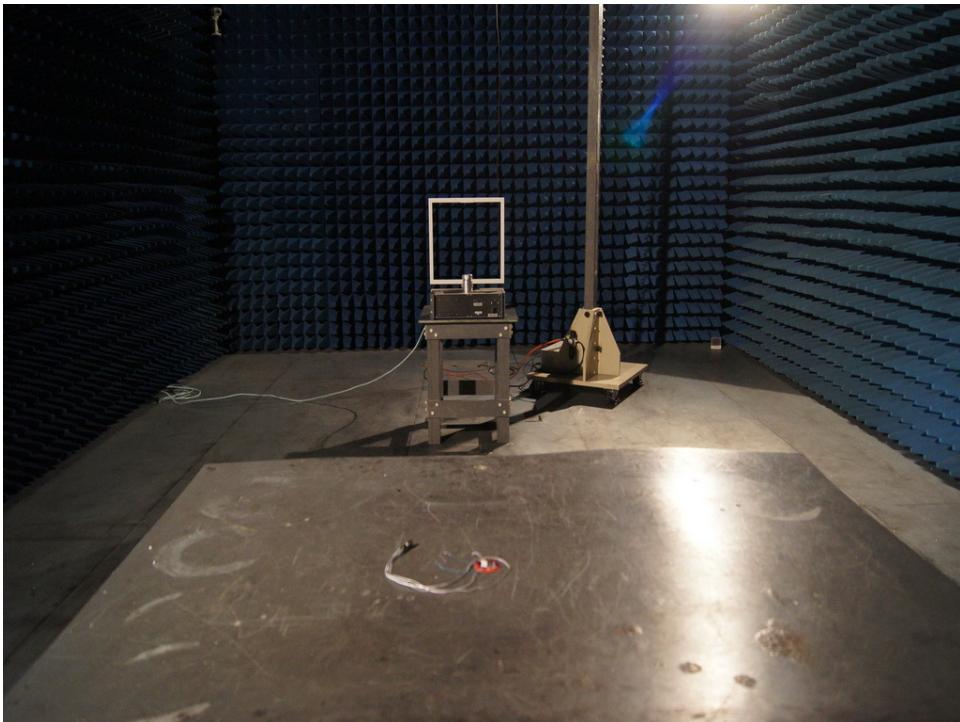


**Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz)**

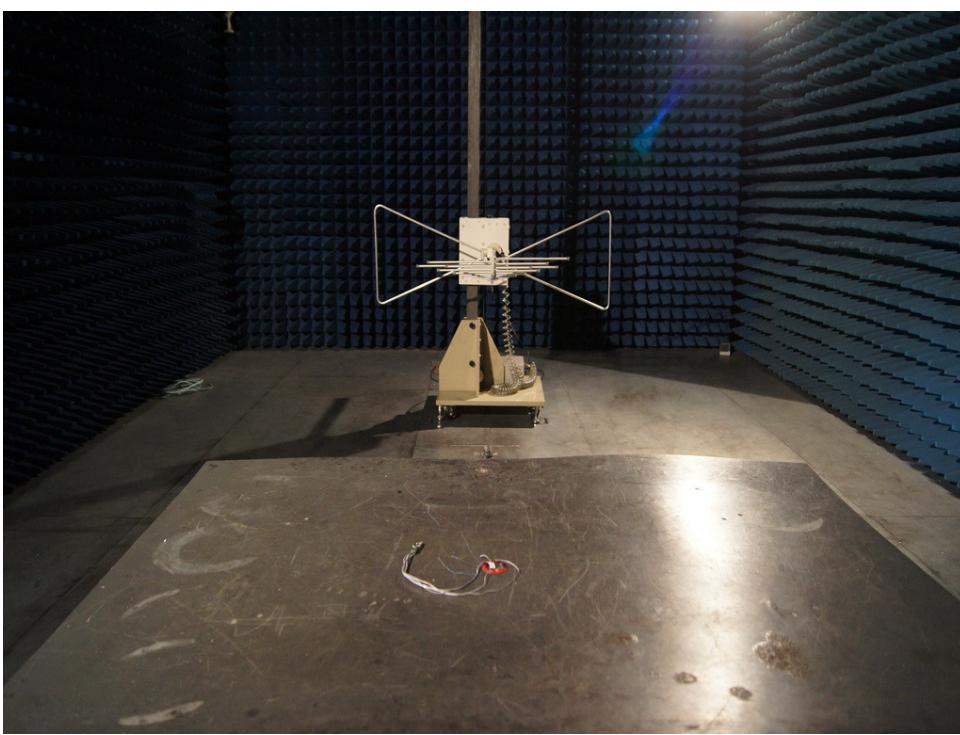


**Prüfbericht - Nr.: 17042940 001**  
*Test Report No.*

Seite 23 von 24  
*Page 23 of 24*

**Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz)**

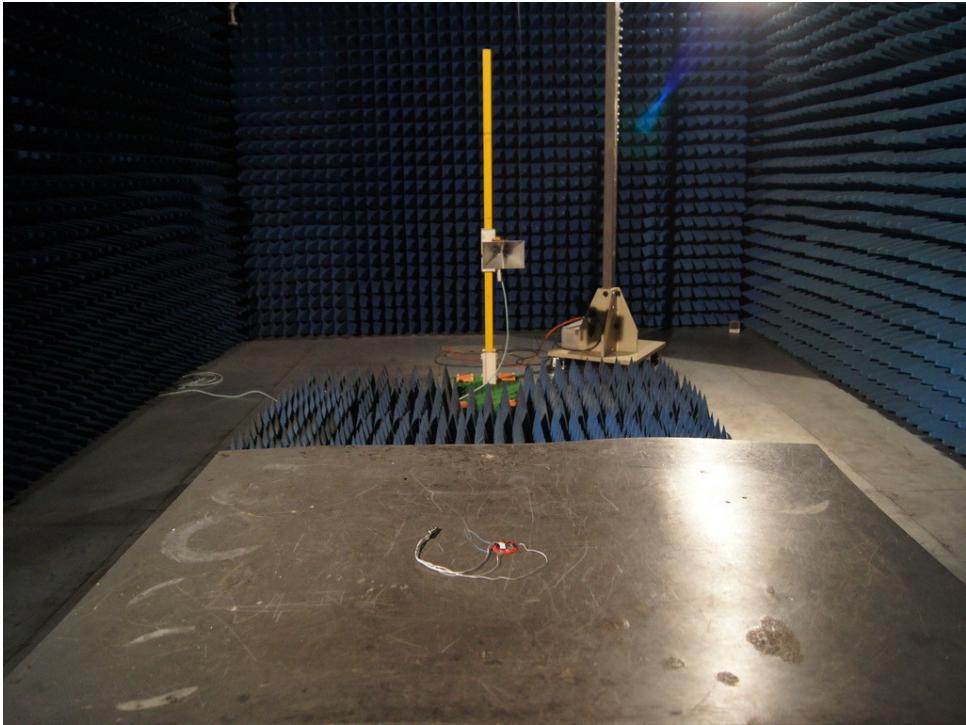

**Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz)**

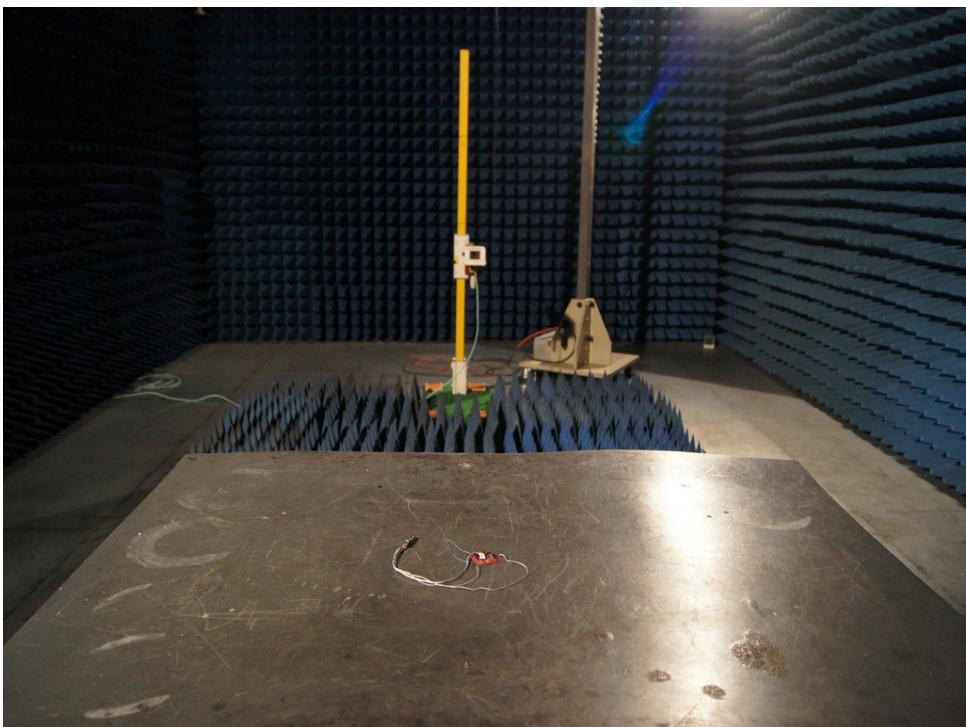

## 7. List of Tables

Table 1: List of Test and Measurement Equipment .....	5
Table 2: Rating of EUT .....	7
Table 3: Technical Specification of EUT .....	7
Table 4: Test result of Peak Output Power .....	13
Table 5: Test result of Peak Output Power .....	14
Table 6: Test result of -6dB Bandwidth .....	15


## 8. List of Photographs

Photograph 1: Set-up for Spurious Emissions (9kHz-30MHz) .....	22
Photograph 2: Set-up for Spurious Emissions (30MHz-1GHz) .....	22
Photograph 3: Set-up for Spurious Emissions (1GHz-18GHz) .....	23
Photograph 4: Set-up for Spurious Emissions (18GHz-26GHz) .....	23

## List of Figures


Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz) .....	2
Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz) .....	2
Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz) .....	3
Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz) .....	4
Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz – 18GHz) .....	5
Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz) .....	6
Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz – 25GHz) .....	7
Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz) .....	8
Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz) .....	9
Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz) .....	9
Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz) .....	10
Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz) .....	11
Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz) .....	12
Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz) .....	13
Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz) .....	14
Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz) .....	15
Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz) .....	16
Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz) .....	16
Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz) .....	17
Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz) .....	18
Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz – 18GHz) .....	19
Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz) .....	20
Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz – 25GHz) .....	21
Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz) .....	22
Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal .....	23
Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical .....	24
Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal .....	25
Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical .....	26

**Figure 1: Test figure of spurious emissions, mode A.1, Horizontal polarity (9kHz – 30MHz)**

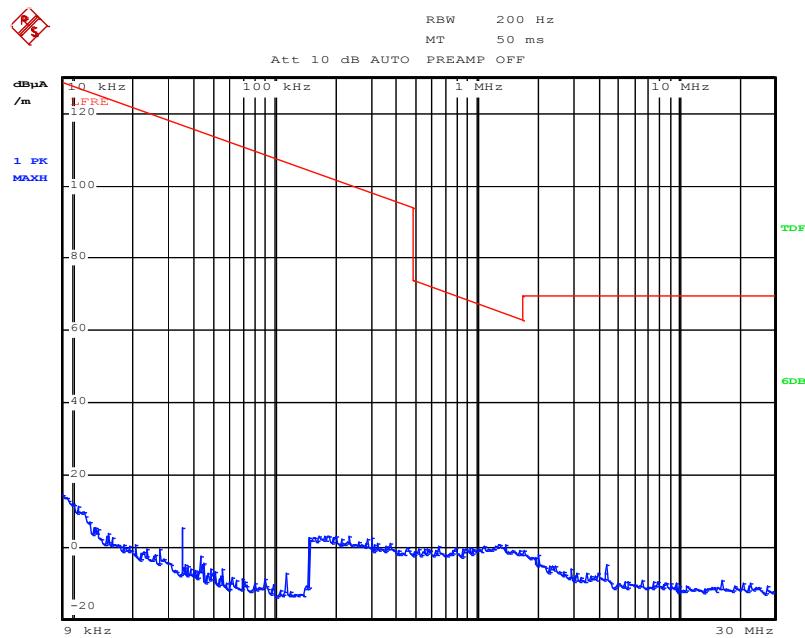

Date: 16.MAR.2014 11:31:42

**Figure 2: Test figure of spurious emissions, mode A.1, Vertical polarity (9kHz – 30MHz)**

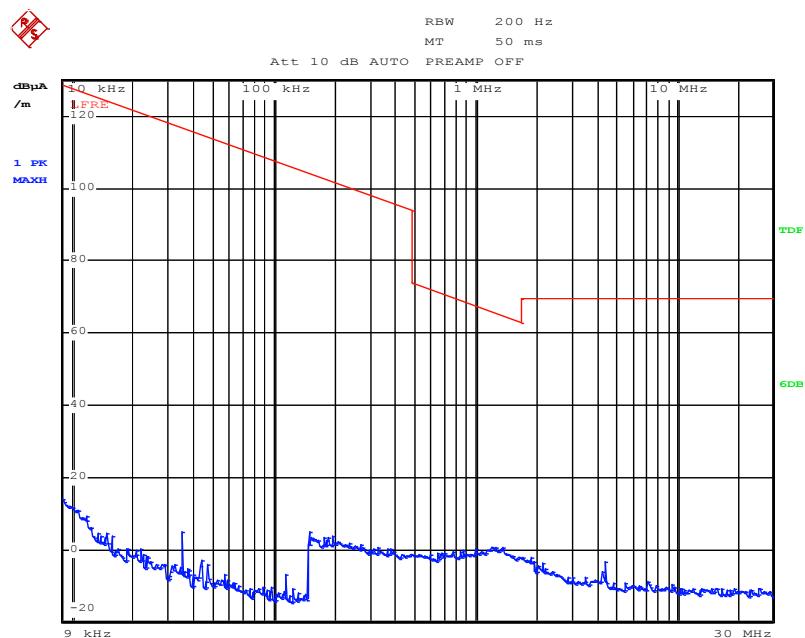

Date: 16.MAR.2014 11:33:54

**Figure 3: Test figure of spurious emissions, mode A.1, Horizontal polarity (30MHz – 1GHz)**



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290


Fax:+86-0755-26503396

Job No.: PHY #694	Polarization: Horizontal									
Standard: FCC Class B 3M Radiated	Power Source: DC 3V									
Test item: Radiation Test	Date: 14/03/16/									
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 10/58/42									
EUT: Buletooth Module	Engineer Signature: PEI									
Mode: TX 2402MHz	Distance: 3m									
Model: uSmart 10										
Manufacturer: Accent Advanced Systems SLU										
Note:										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	960.0000	23.20	2.37	25.57	46.00	-20.43	QP			

**Figure 4: Test figure of spurious emissions, mode A.1, Vertical polarity (30MHz – 1GHz)**

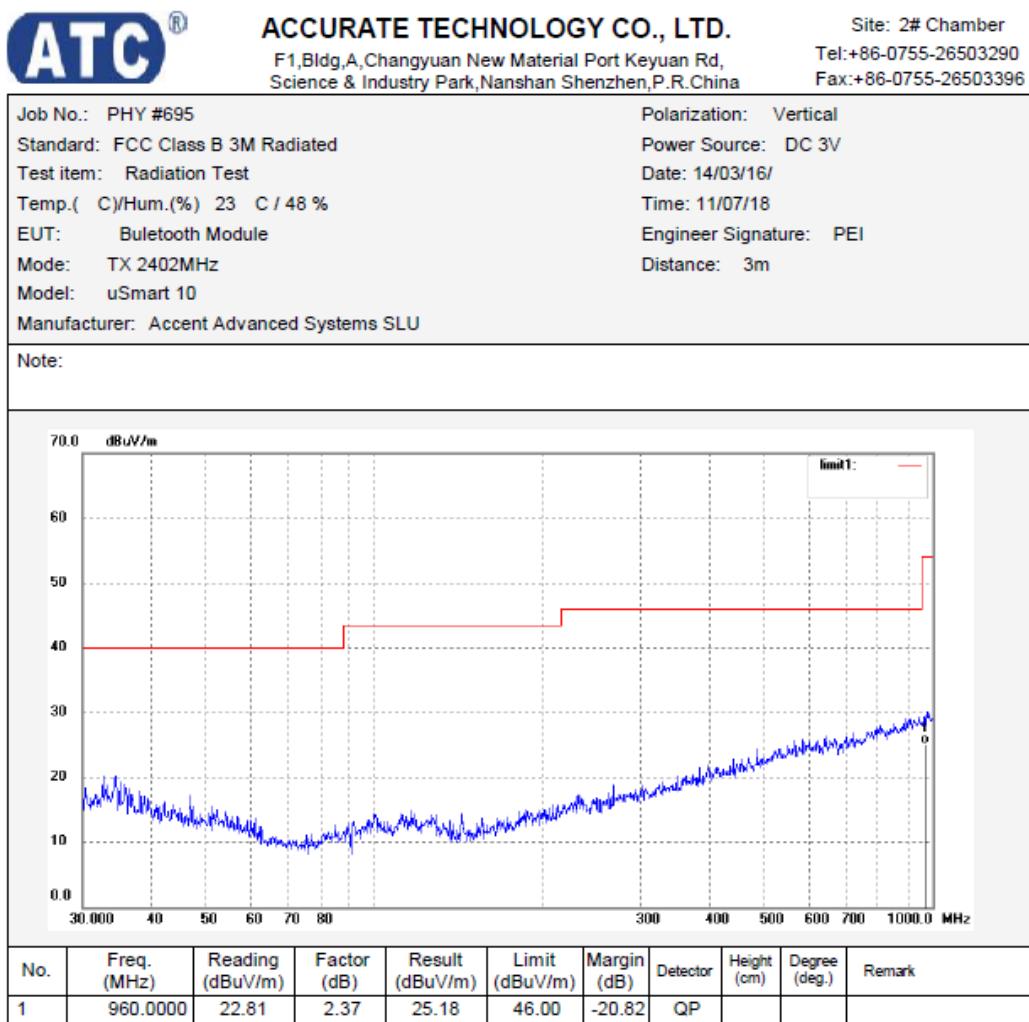

**Figure 5: Test figure of spurious emissions, mode A.1, Horizontal polarity (1GHz –18GHz)**

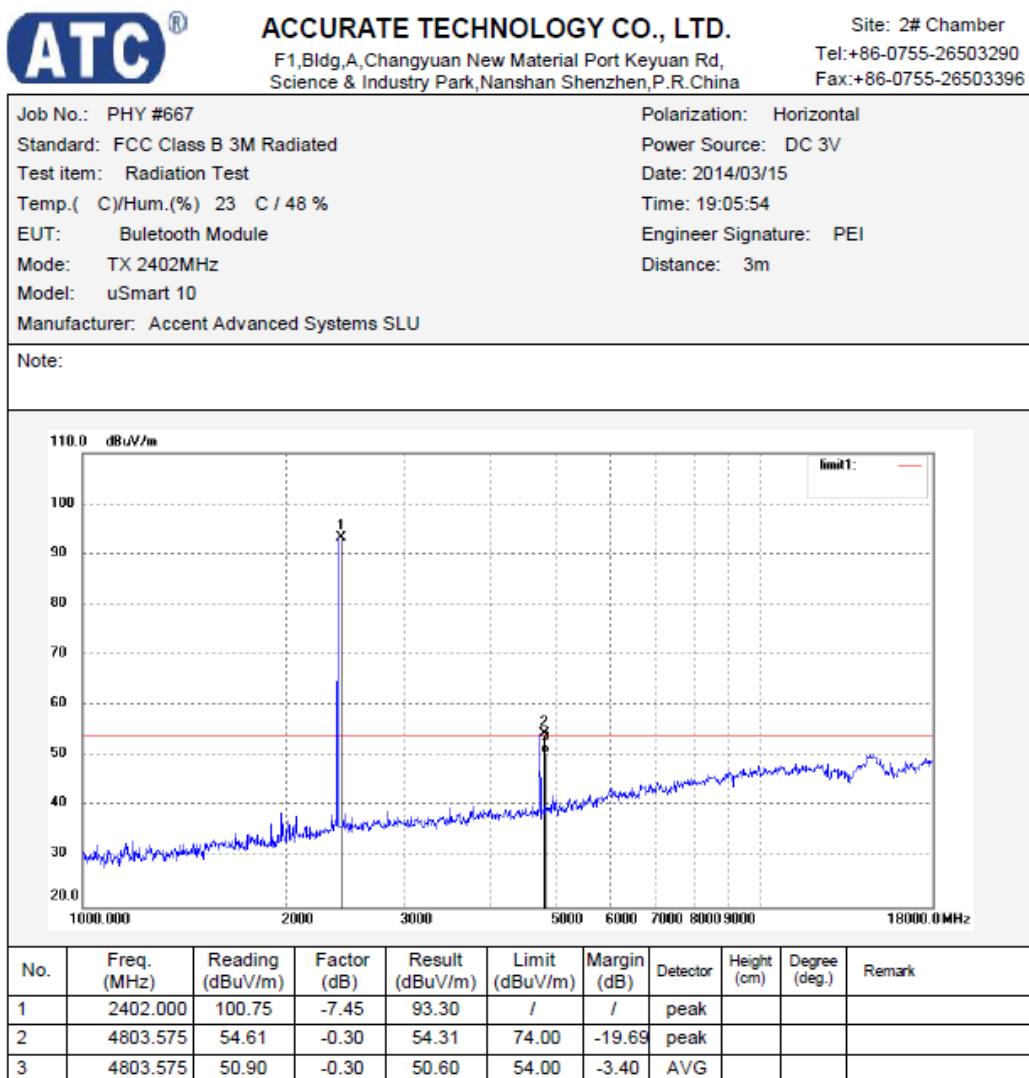

**Figure 6: Test figure of spurious emissions, mode A.1, Vertical polarity (1GHz – 18GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

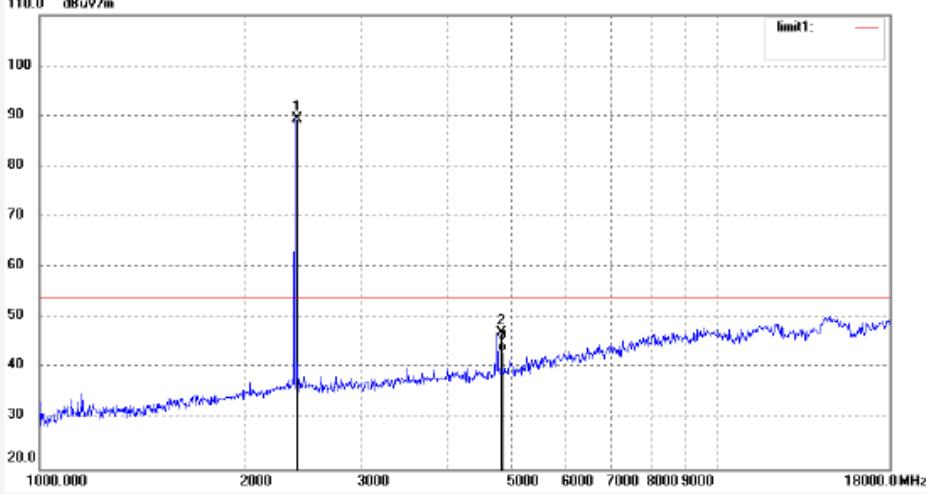Job No.: PHY #666	Polarization: Vertical									
Standard: FCC Class B 3M Radiated	Power Source: DC 3V									
Test item: Radiation Test	Date: 2014/03/15									
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 18:53:03									
EUT: Bluetooth Module	Engineer Signature: PEI									
Mode: TX 2402MHz	Distance: 3m									
Model: uSmart 10										
Manufacturer: Accent Advanced Systems SLU										
Note:										
										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	96.94	-7.45	89.49	/	/	peak			
2	4803.663	47.52	-0.30	47.22	74.00	-26.78	peak			
3	4803.663	43.60	-0.30	43.30	54.00	-10.70	AVG			

**Figure 7: Test figure of spurious emissions, mode A.1, Horizontal polarity (18GHz –25GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290


Fax:+86-0755-26503396

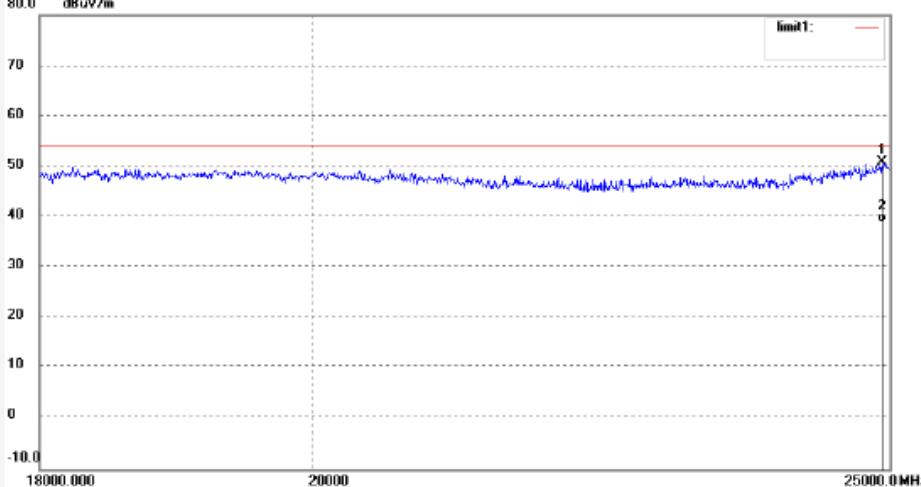Job No.: PHY #683	Polarization: Horizontal									
Standard: FCC Class B 3M Radiated	Power Source: DC 3V									
Test item: Radiation Test	Date: 2014/03/15									
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 21:57:16									
EUT: Buletooth Module	Engineer Signature: PEI									
Mode: TX 2402MHz	Distance: 3m									
Model: uSmart 10										
Manufacturer: Accent Advanced Systems SLU										
Note:										
										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24926.048	32.00	18.80	50.80	74.00	-23.20	peak			
2	24926.048	20.24	18.80	39.04	54.00	-14.96	AVG			

**Figure 8: Test figure of spurious emissions, mode A.1, Vertical polarity (18GHz – 25GHz)**

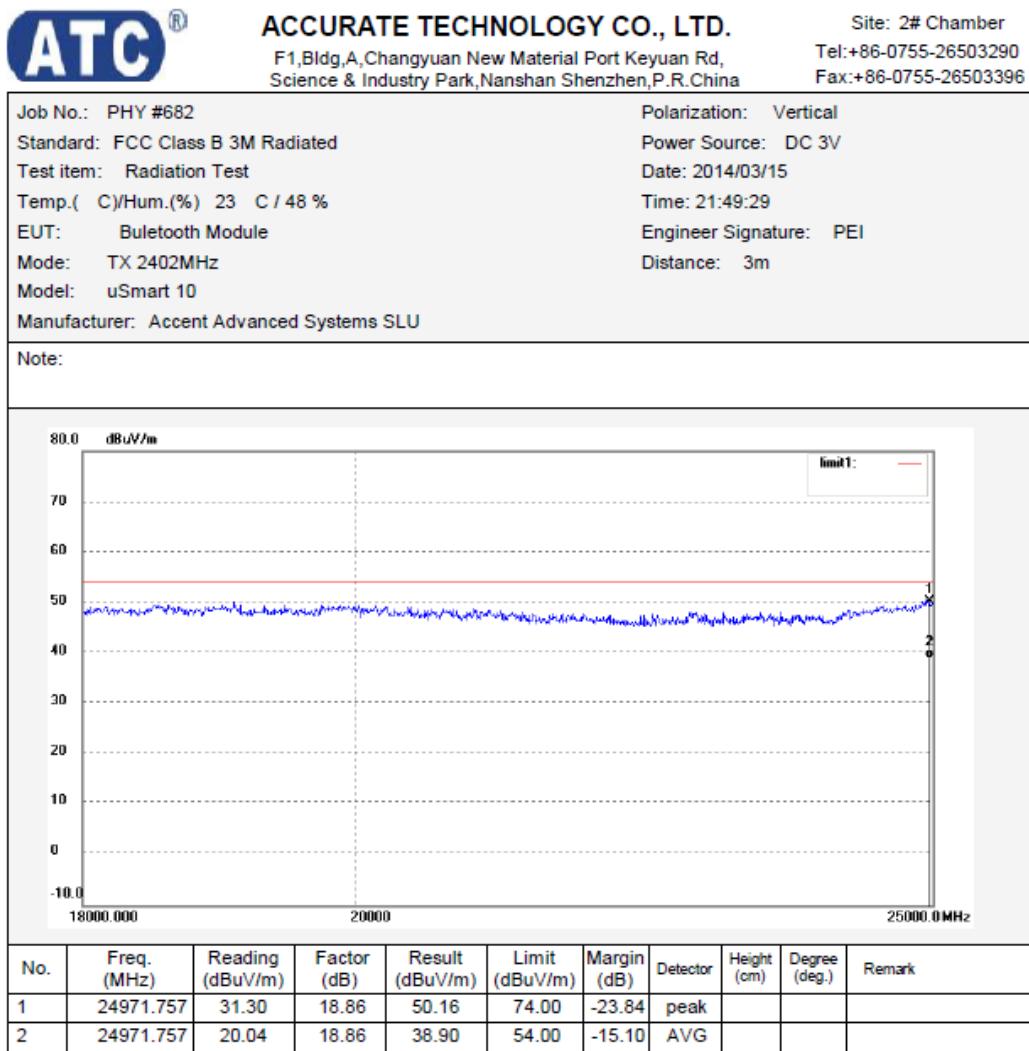


**Figure 9: Test figure of spurious emissions, mode A.2, Horizontal polarity (9kHz – 30MHz)**

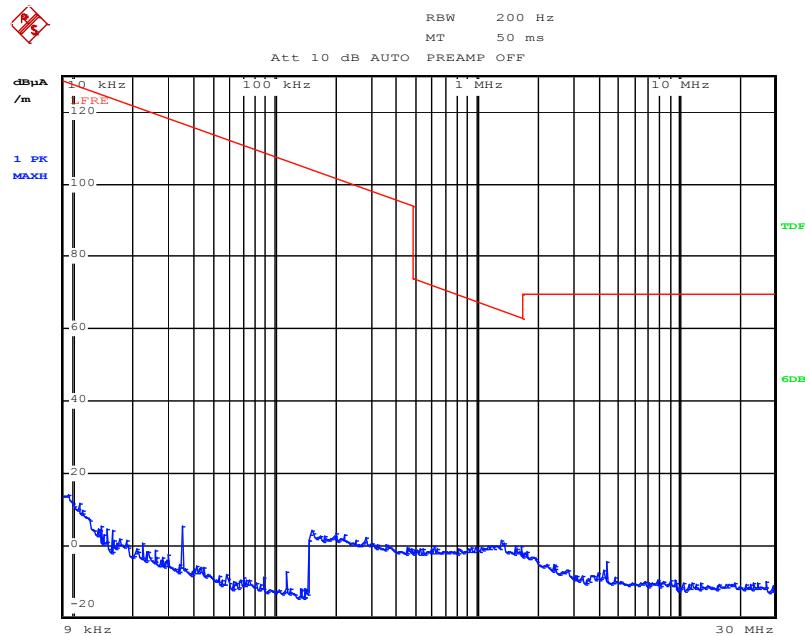


Date: 16.MAR.2014 11:38:29

**Figure 10: Test figure of spurious emissions, mode A.2, Vertical polarity (9kHz – 30MHz)**

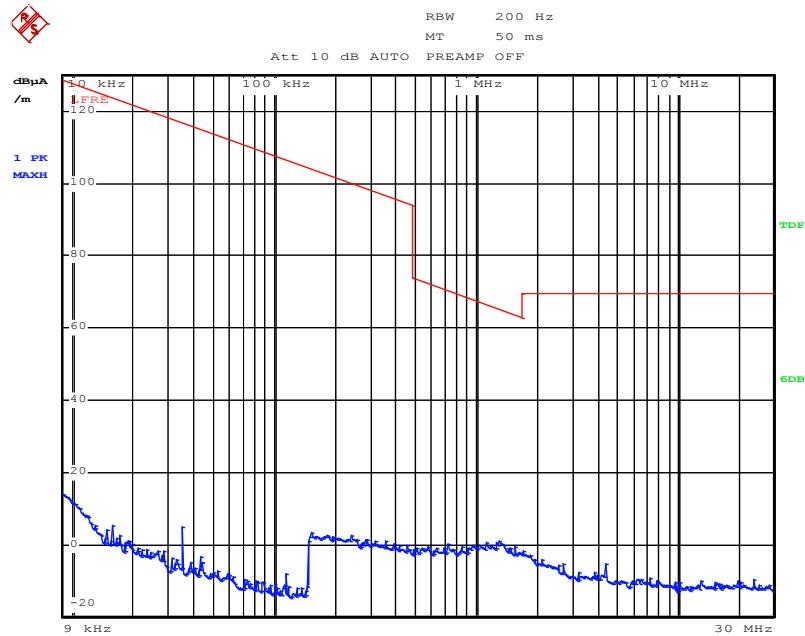

Date: 16.MAR.2014 11:40:52

**Figure 11: Test figure of spurious emissions, mode A.2, Horizontal polarity (30MHz – 1GHz)**

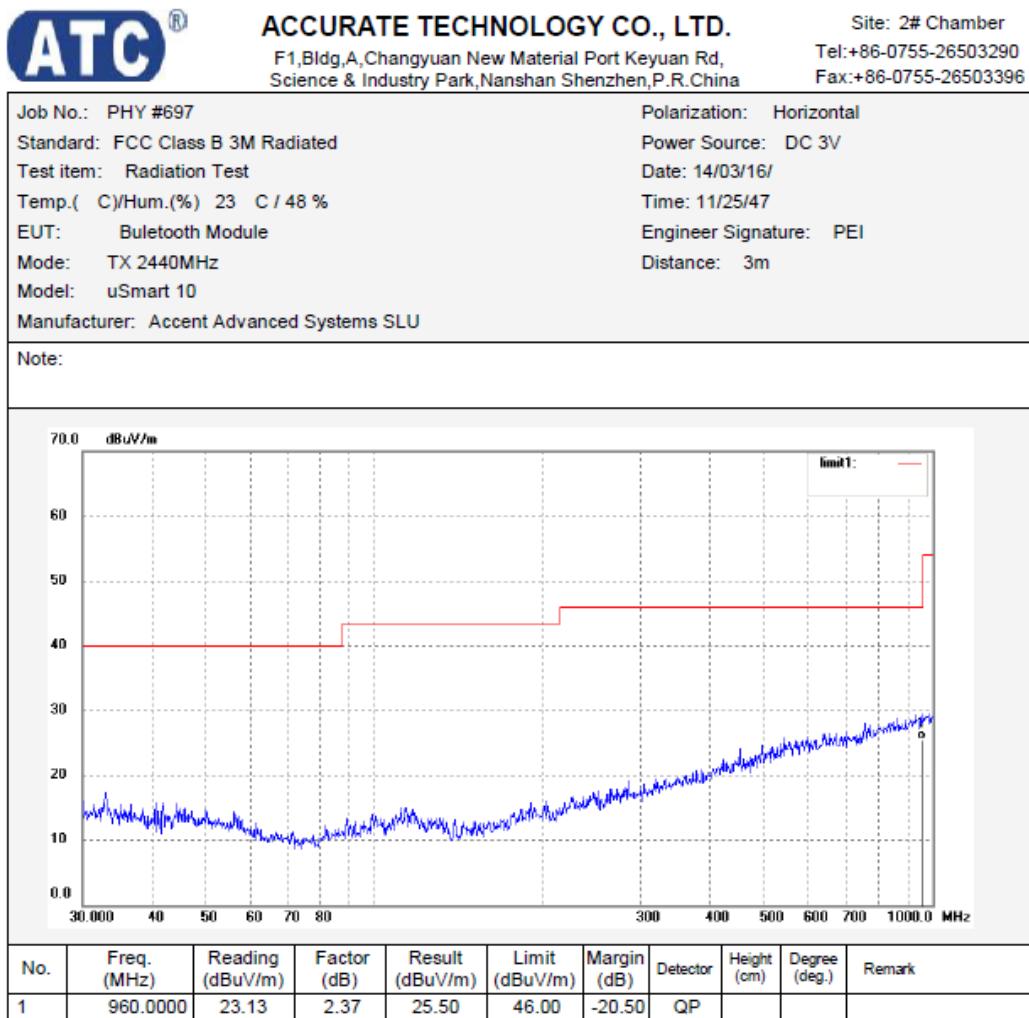

**Figure 12: Test figure of spurious emissions, mode A.2, Vertical polarity (30MHz – 1GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

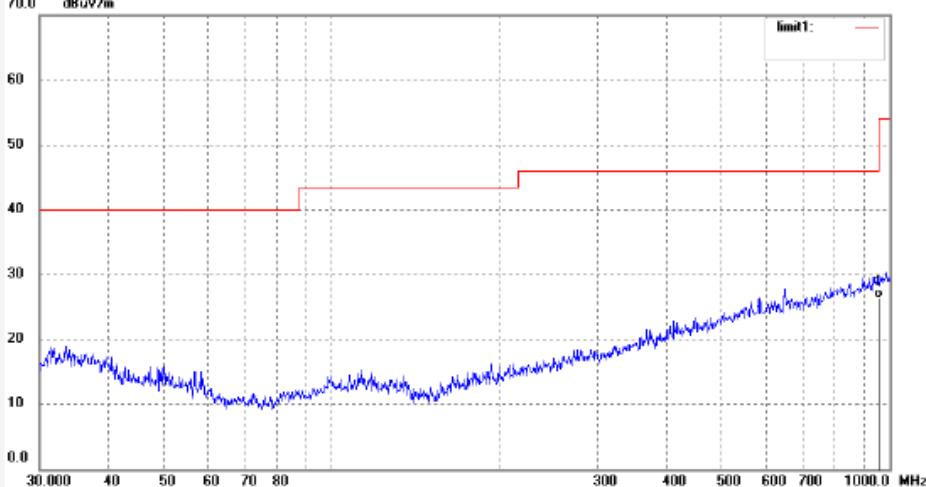Job No.: PHY #696	Polarization: Vertical									
Standard: FCC Class B 3M Radiated	Power Source: DC 3V									
Test item: Radiation Test	Date: 14/03/16/									
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 11/16/36									
EUT: Buletooth Module	Engineer Signature: PEI									
Mode: TX 2440MHz	Distance: 3m									
Model: uSmart 10										
Manufacturer: Accent Advanced Systems SLU										
Note:										
										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	962.0878	23.95	2.37	26.32	54.00	-27.68	QP			

**Figure 13: Test figure of spurious emissions, mode A.2, Horizontal polarity (1GHz – 18GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

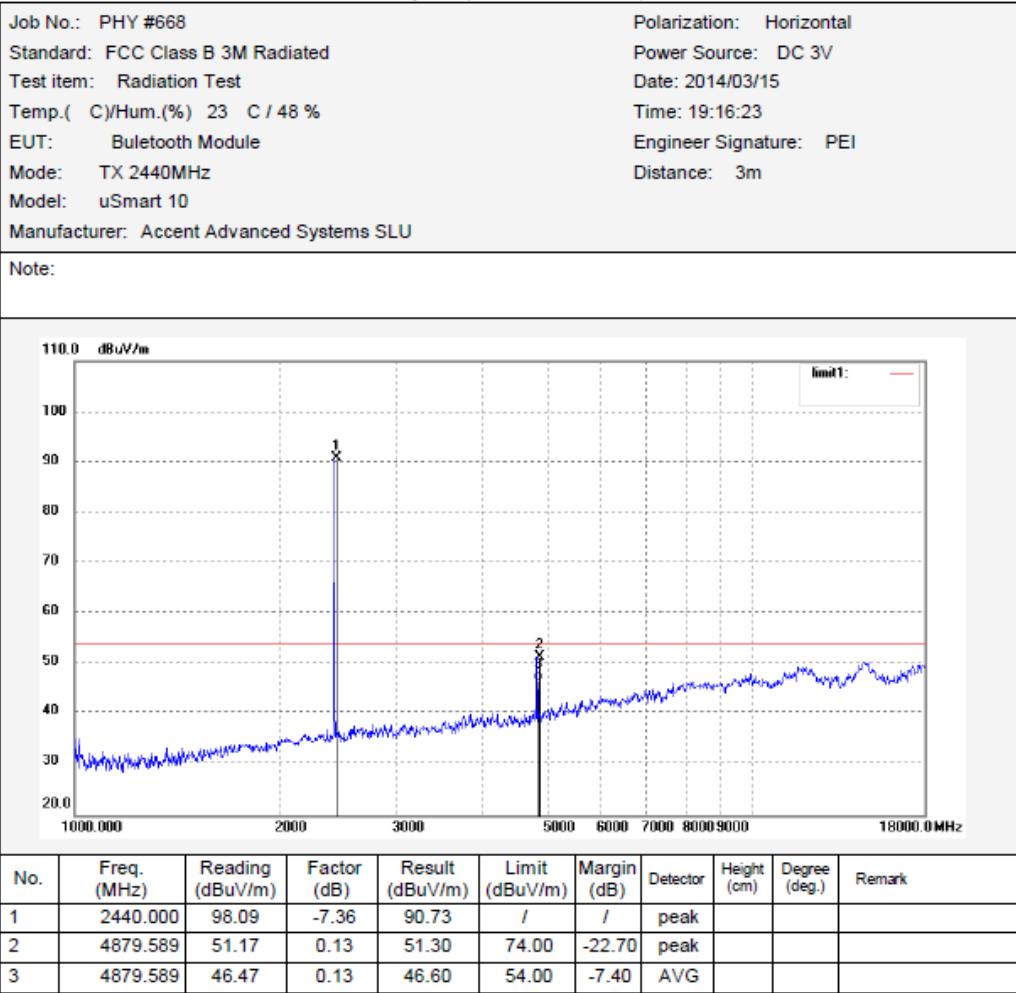

**Figure 14: Test figure of spurious emissions, mode A.2, Vertical polarity (1GHz – 18GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290


Fax:+86-0755-26503396

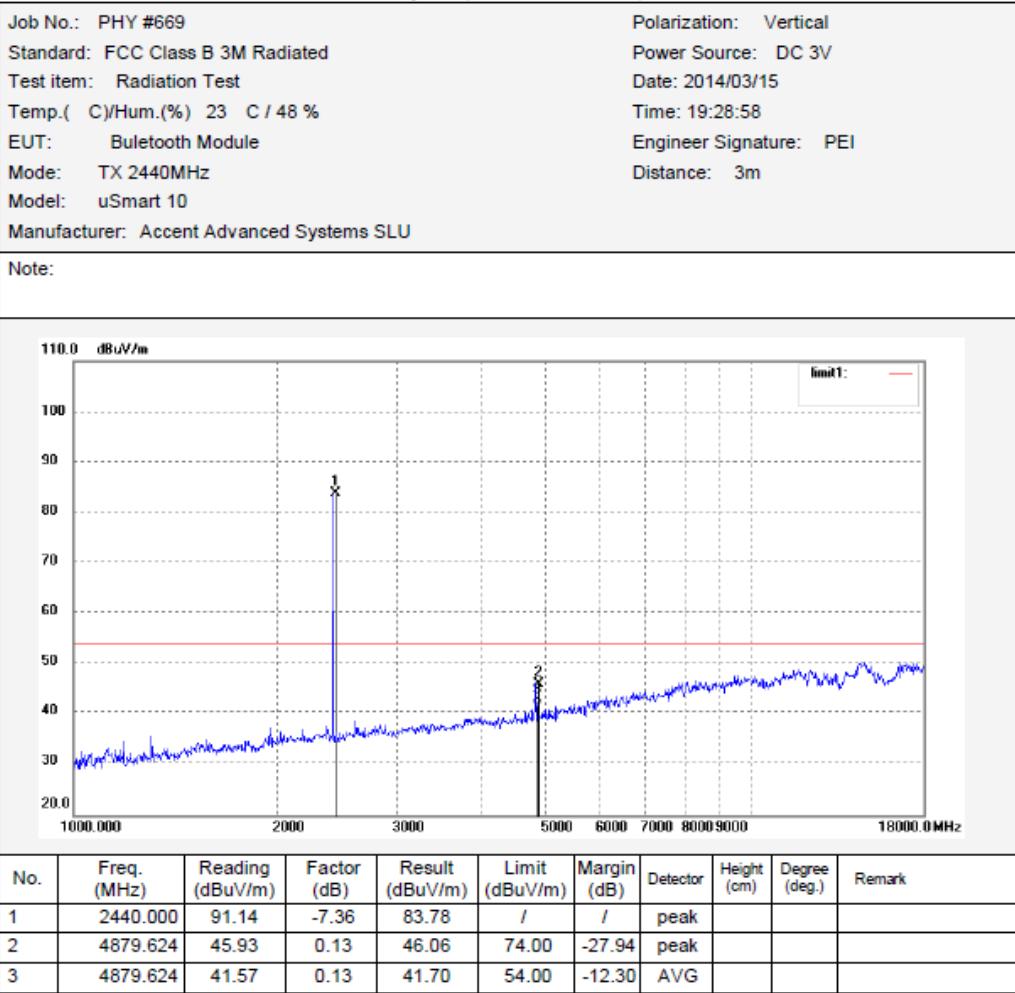


**Figure 15: Test figure of spurious emissions, mode A.2, Horizontal polarity (18GHz – 25GHz)**
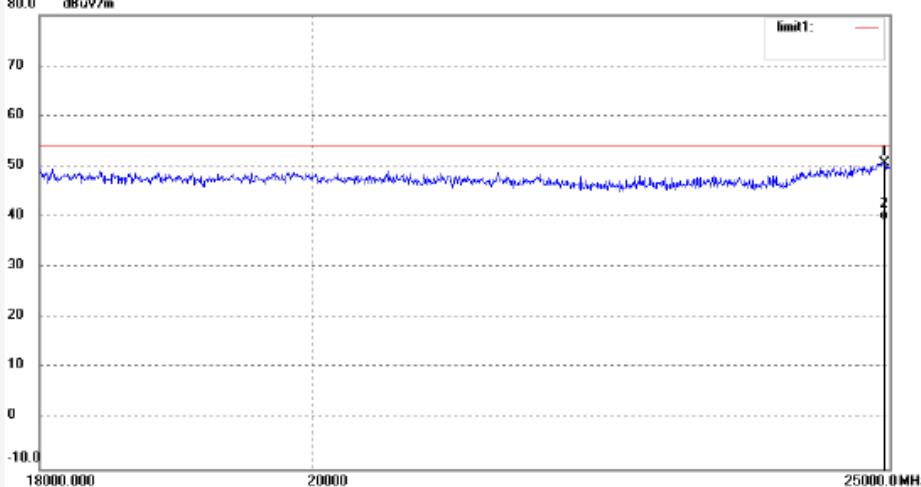
<b>ATC®</b>		ACCURATE TECHNOLOGY CO., LTD.		Site: 2# Chamber						
		F1,Bldg,A,Changyuan New Material Port Keyuan Rd, Science & Industry Park,Nanshan Shenzhen,P.R.China		Tel:+86-0755-26503290						
Job No.: PHY #684		Polarization: Horizontal		Fax:+86-0755-26503396						
Standard: FCC Class B 3M Radiated		Power Source: DC 3V								
Test item: Radiation Test		Date: 2014/03/15								
Temp.( C)/Hum.(%) 23 C / 48 %		Time: 22:08:43								
EUT: Buletooth Module		Engineer Signature: PEI								
Mode: TX 2440MHz		Distance: 3m								
Model: uSmart 10										
Manufacturer: Accent Advanced Systems SLU										
Note:										
										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	24950.674	31.92	18.83	50.75	74.00	-23.25	peak			
2	24950.674	20.53	18.83	39.36	54.00	-14.64	AVG			

**Figure 16: Test figure of spurious emissions, mode A.2, Vertical polarity (18GHz – 25GHz)**

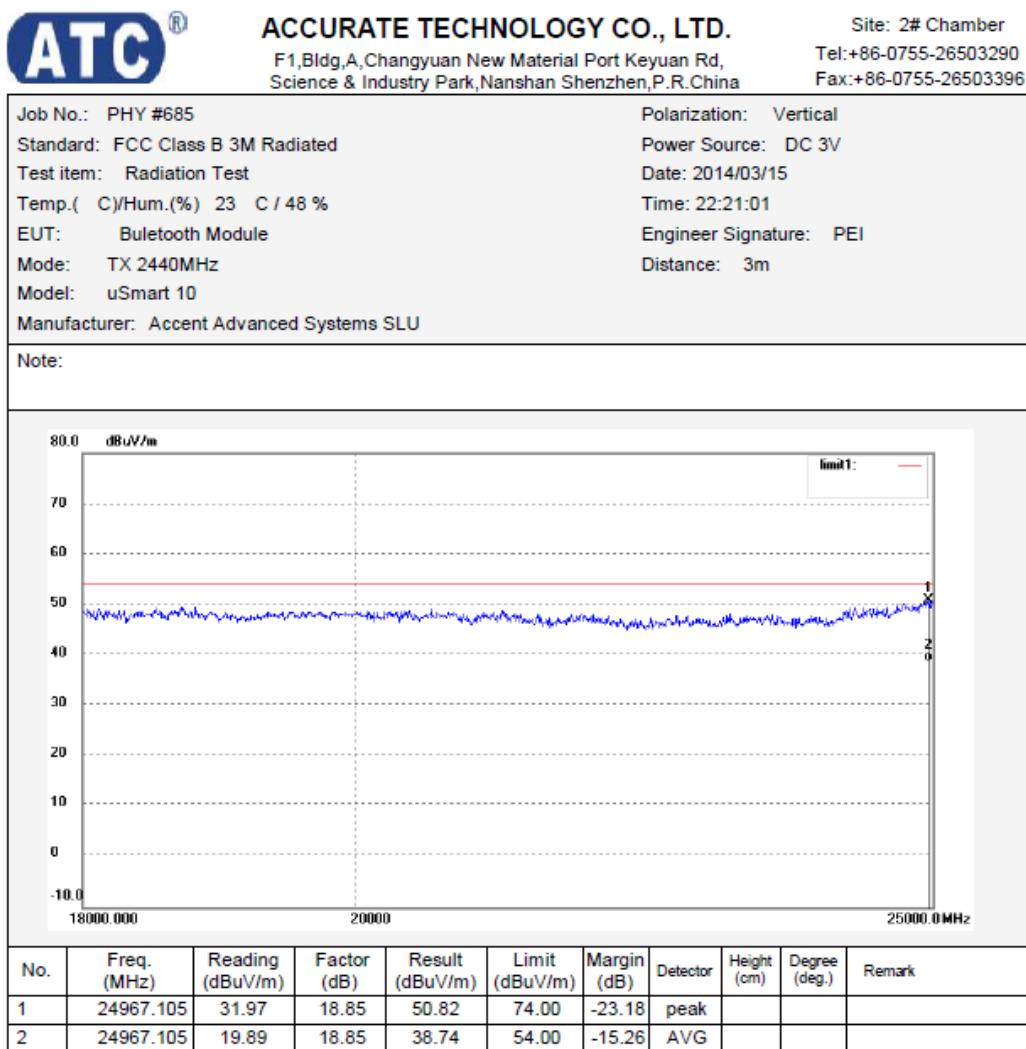


**Figure 17: Test figure of spurious emissions, mode A.3, Horizontal polarity (9kHz – 30MHz)**

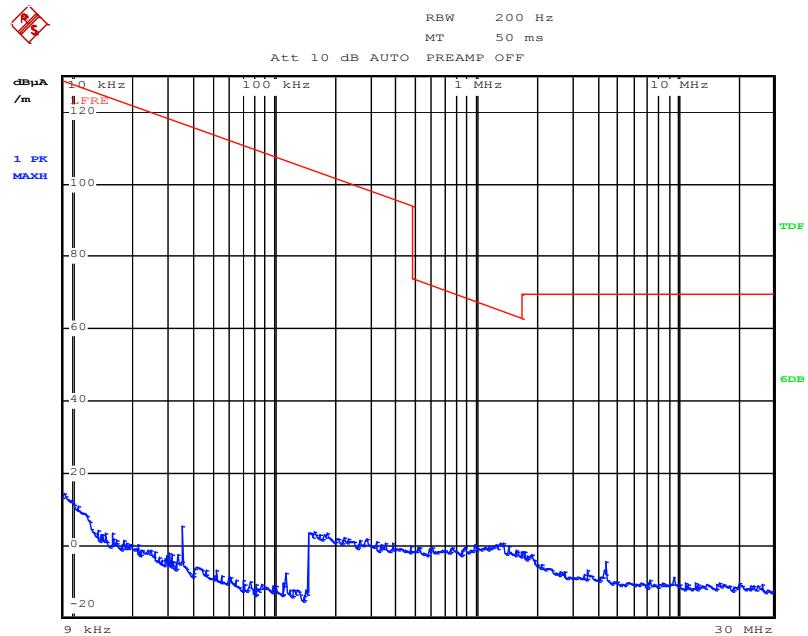


Date: 16.MAR.2014 11:50:21

**Figure 18: Test figure of spurious emissions, mode A.3, Vertical polarity (9kHz – 30MHz)**

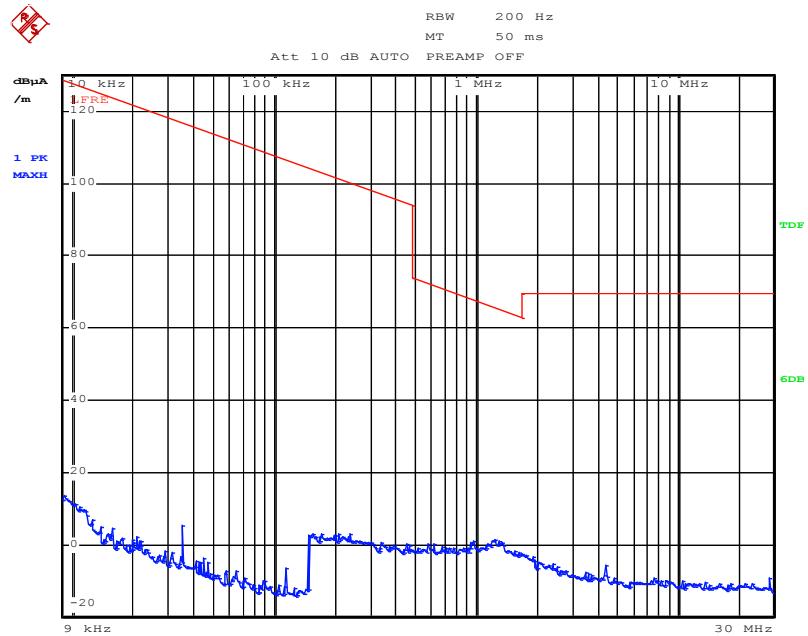

Date: 16.MAR.2014 11:48:03

**Figure 19: Test figure of spurious emissions, mode A.3, Horizontal polarity (30MHz – 1GHz)**

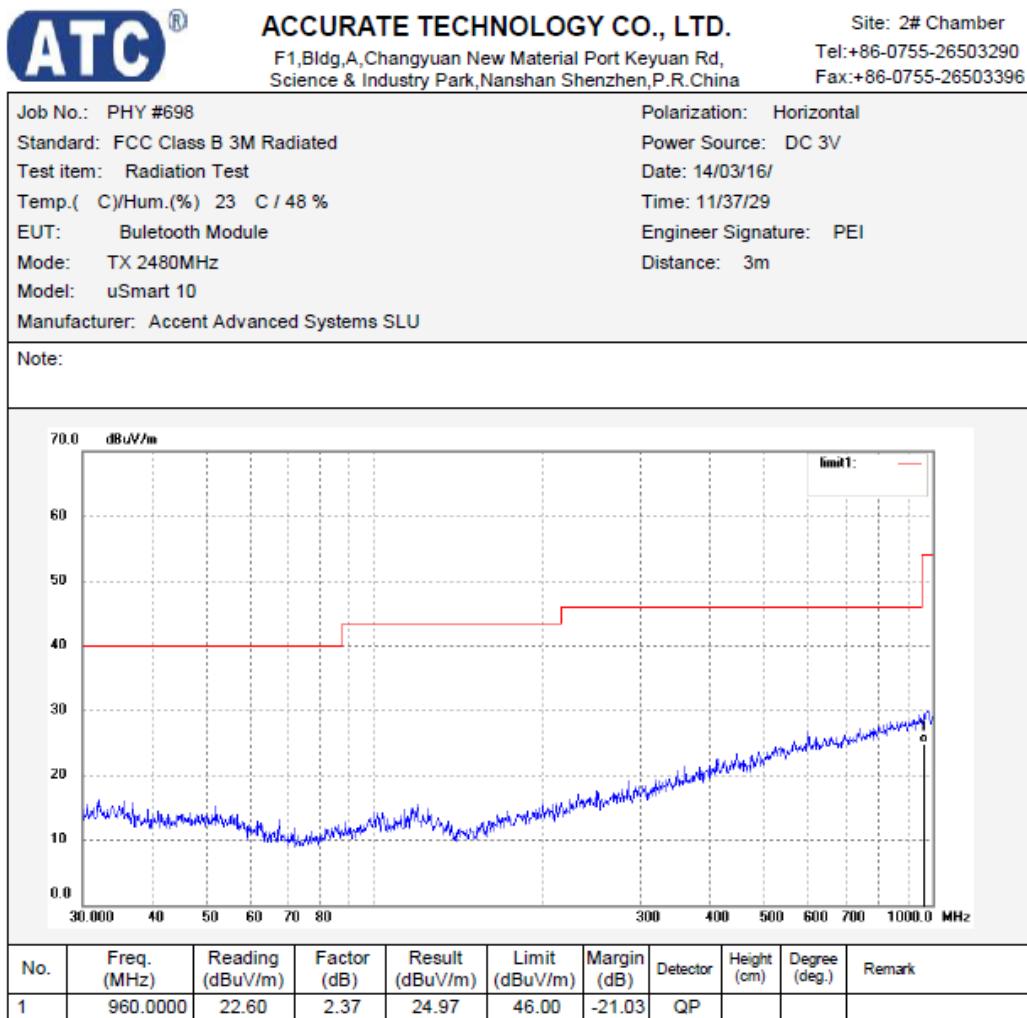

**Figure 20: Test figure of spurious emissions, mode A.3, Vertical polarity (30MHz – 1GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

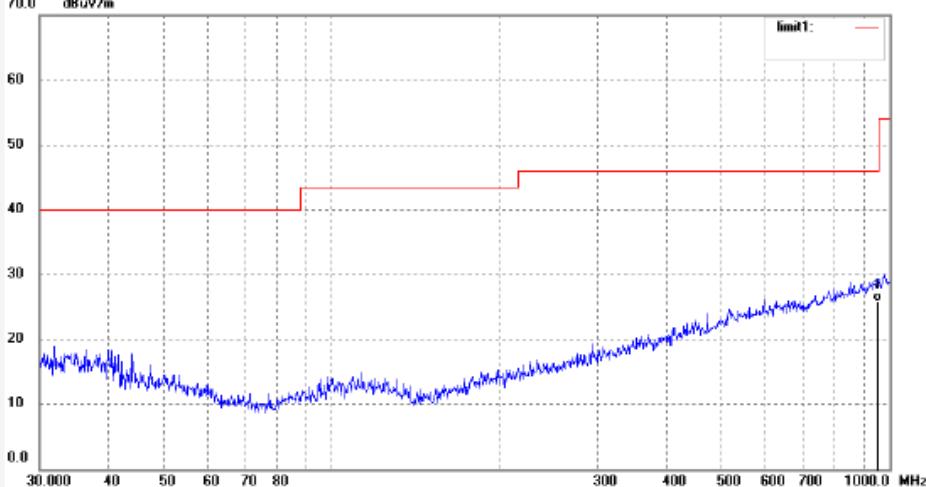Job No.: PHY #699	Polarization: Vertical									
Standard: FCC Class B 3M Radiated	Power Source: DC 3V									
Test item: Radiation Test	Date: 14/03/16/									
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 11/46/19									
EUT: Buletooth Module	Engineer Signature: PEI									
Mode: TX 2480MHz	Distance: 3m									
Model: uSmart 10										
Manufacturer: Accent Advanced Systems SLU										
Note:										
										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	960.0000	23.40	2.37	25.77	46.00	-20.23	QP			

**Figure 21: Test figure of spurious emissions, mode A.3, Horizontal polarity (1GHz –18GHz)**

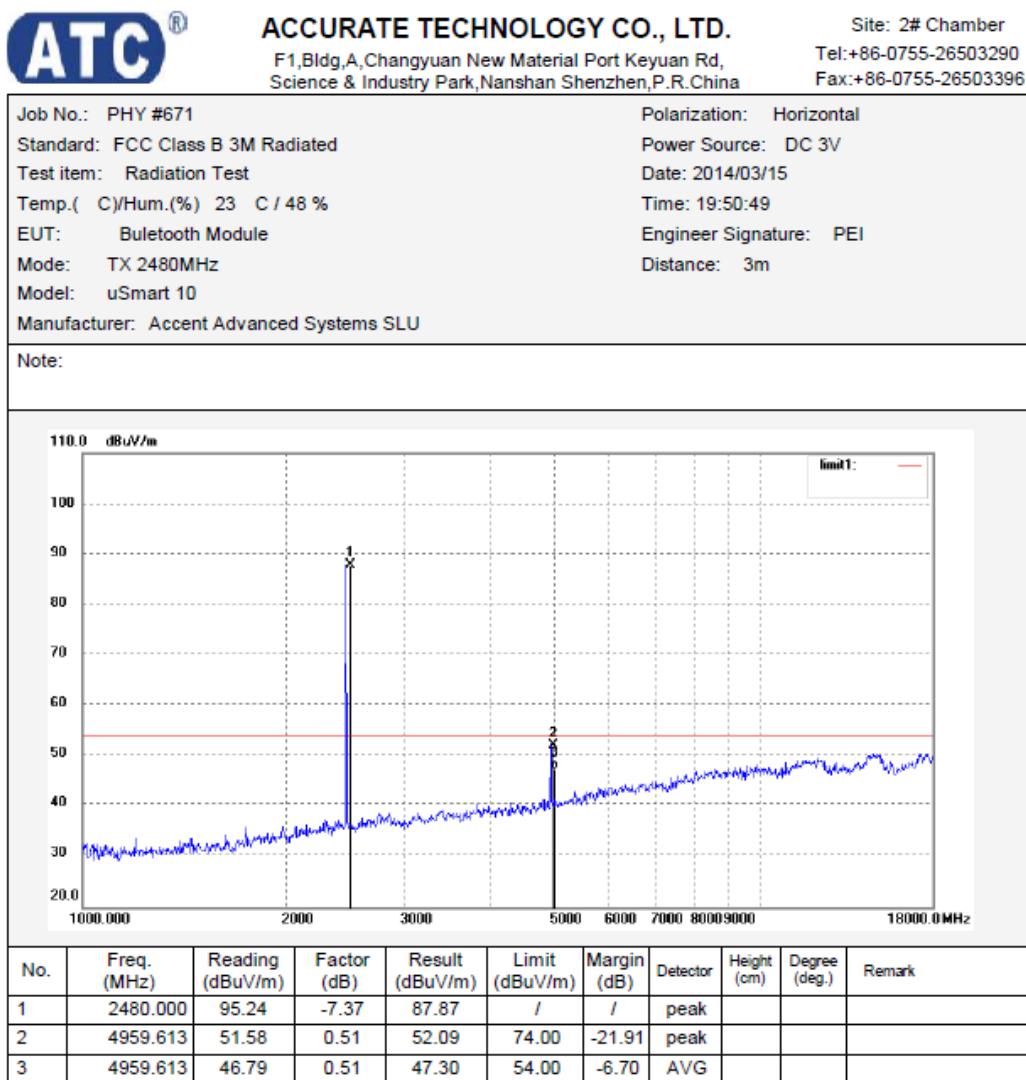

**Figure 22: Test figure of spurious emissions, mode A.3, Vertical polarity (1GHz – 18GHz)**




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290


Fax:+86-0755-26503396

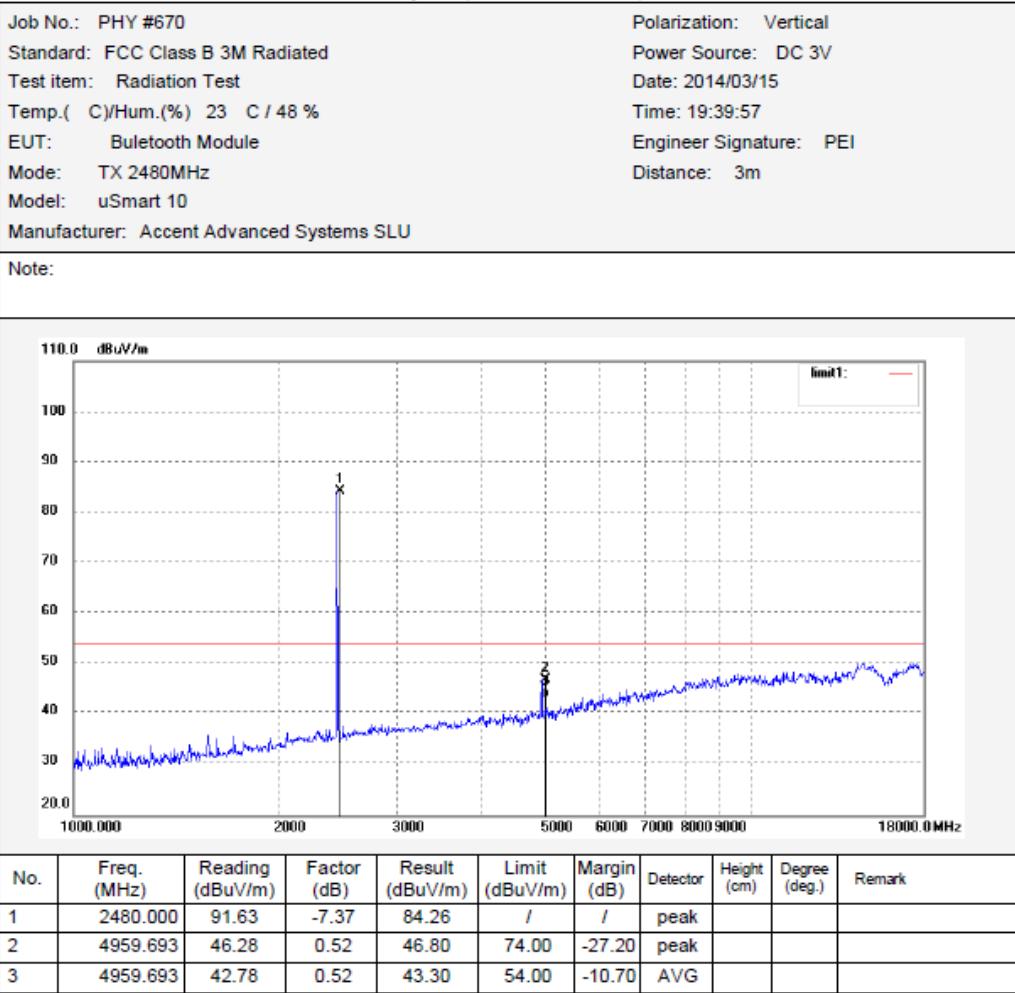


**Figure 23: Test figure of spurious emissions, mode A.3, Horizontal polarity (18GHz –25GHz)**

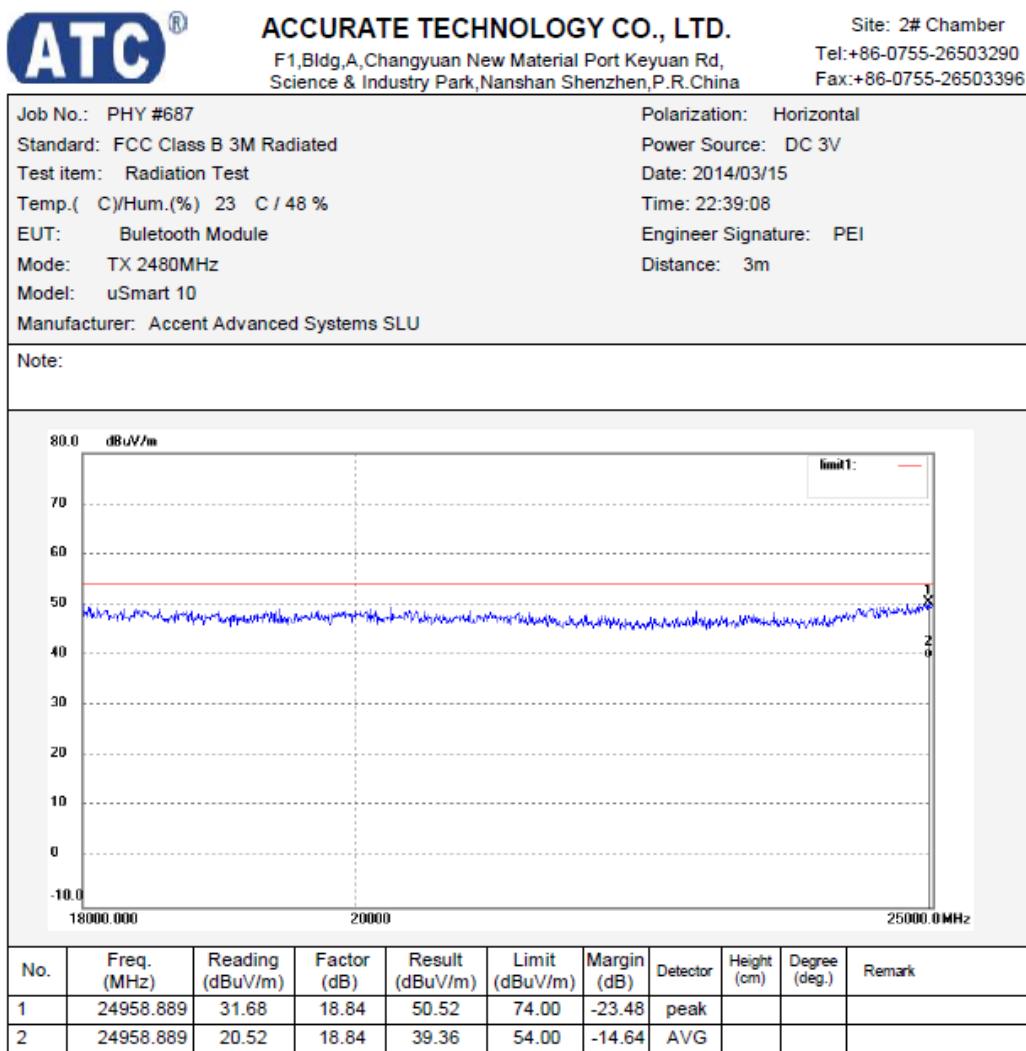

**Figure 24: Test figure of spurious emissions, mode A.3, Vertical polarity (18GHz – 25GHz)**

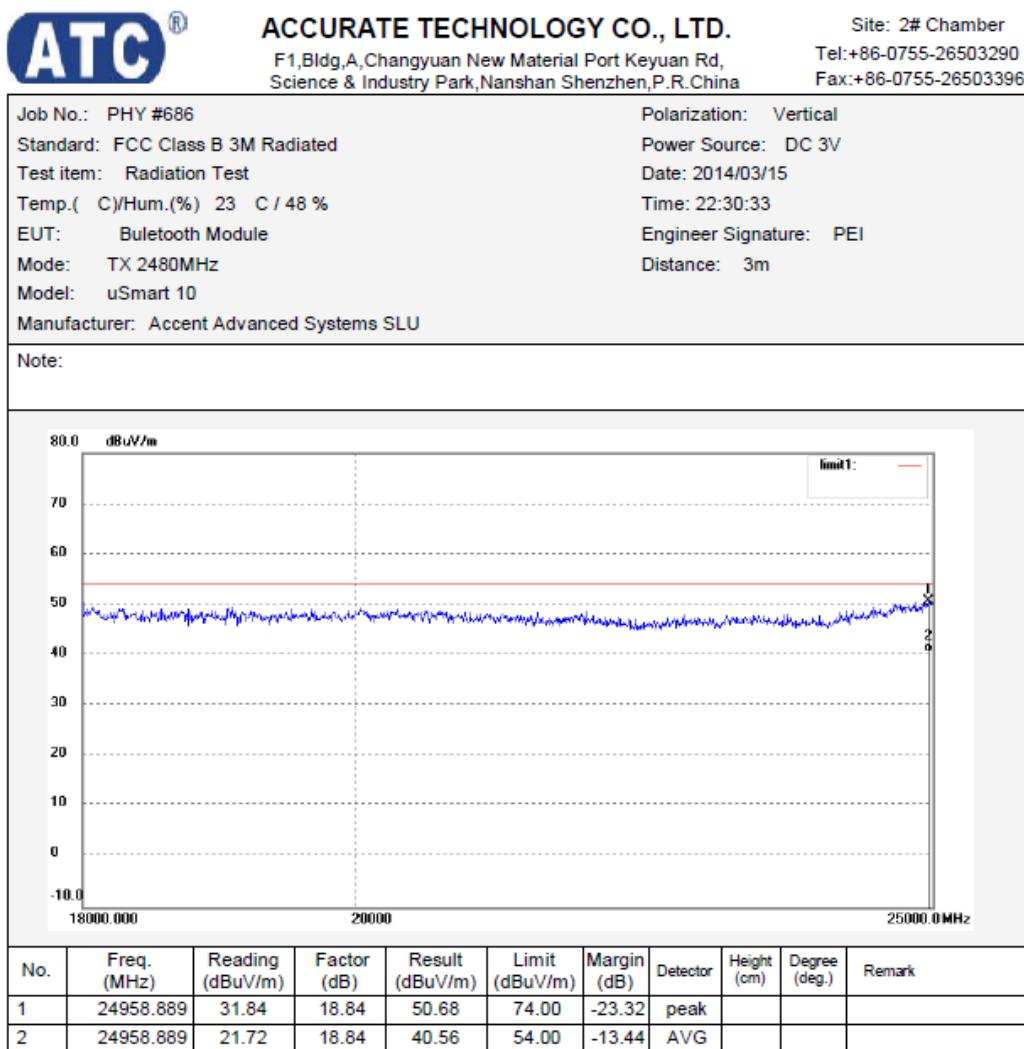

**Figure 25: Test figure of Radiated emissions in restricted bands, Mode A.1, Horizontal**

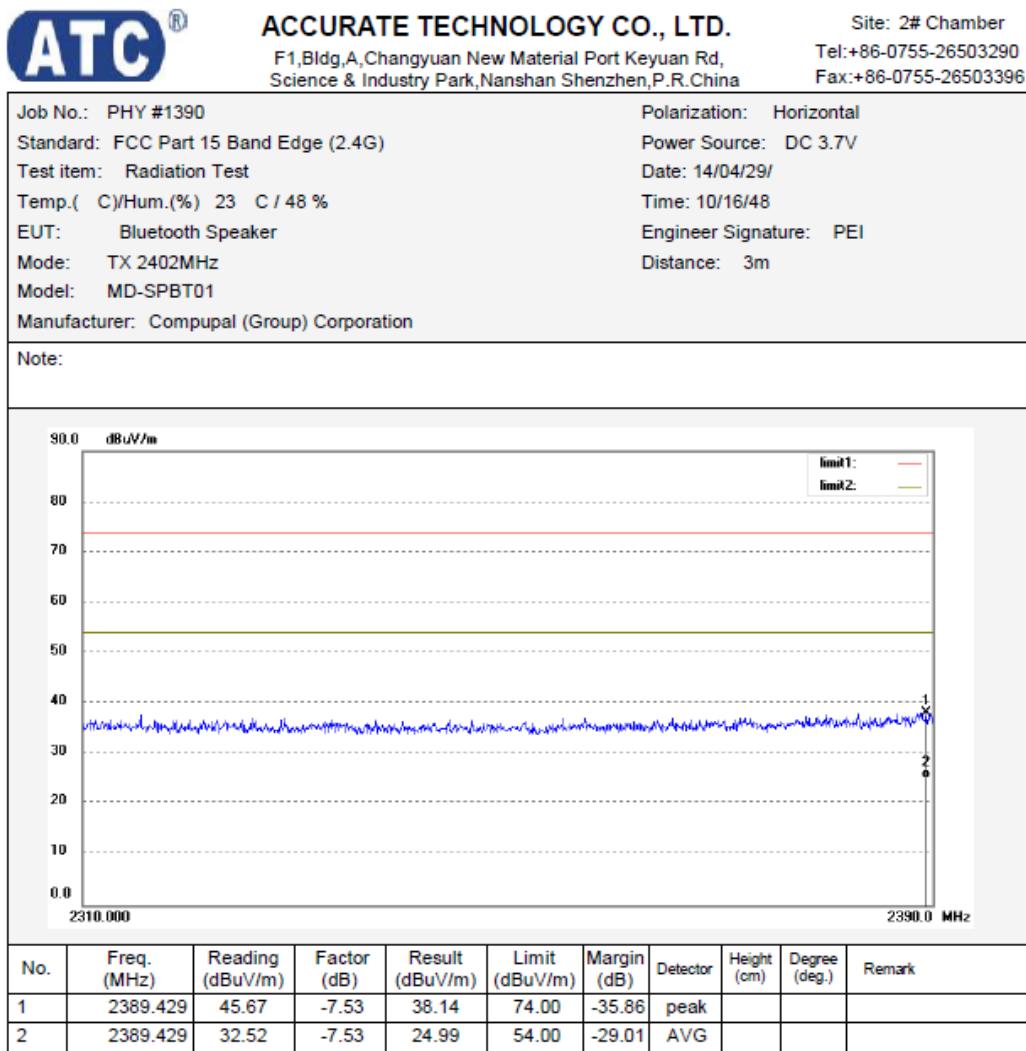

**Figure 26: Test figure of Radiated emissions in restricted bands, Mode A.1, Vertical**




**ACCURATE TECHNOLOGY CO., LTD.**

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 2# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

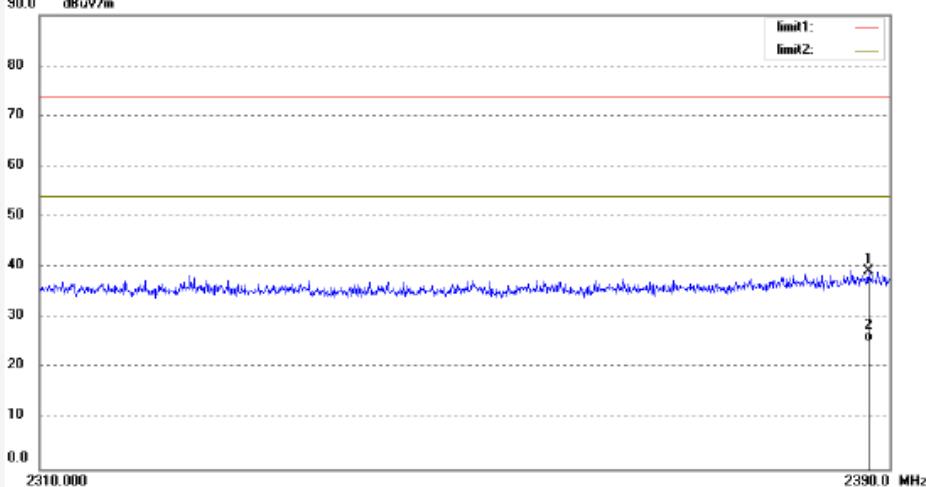Job No.: PHY #1389	Polarization: Vertical									
Standard: FCC Part 15 Band Edge (2.4G)	Power Source: DC 3.7V									
Test item: Radiation Test	Date: 14/04/29/									
Temp.( C)/Hum.(%) 23 C / 48 %	Time: 10/05/44									
EUT: Bluetooth Speaker	Engineer Signature: PEI									
Mode: TX 2402MHz	Distance: 3m									
Model: MD-SPBT01										
Manufacturer: Compupal (Group) Corporation										
Note:										
 <p>The graph plots dBuV/m on the Y-axis (0.0 to 90.0) against MHz on the X-axis (2310.000 to 2390.0 MHz). It shows a blue signal line fluctuating between approximately 30 and 40 dBuV/m. Two horizontal lines represent limits: a red line at ~74 dBuV/m labeled 'limit1' and a green line at ~54 dBuV/m labeled 'limit2'. A vertical line marks the measurement point at 2387.963 MHz. The graph includes a legend for 'Peak' and 'AVG'.</p>										
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2387.963	46.88	-7.54	39.34	74.00	-34.66	peak			
2	2387.963	32.96	-7.54	25.42	54.00	-28.58	AVG			

**Figure 27: Test figure of Radiated emissions in restricted bands, Mode A.3, Horizontal**

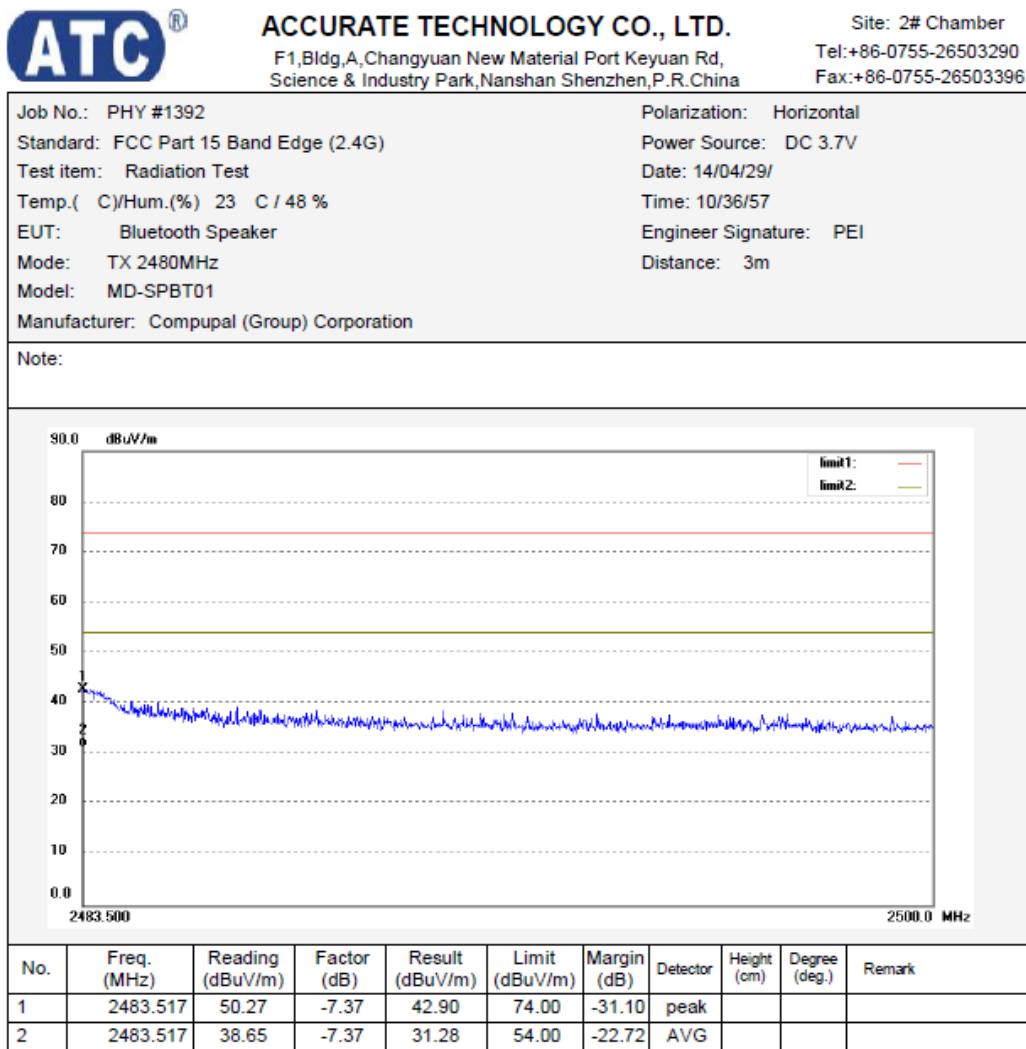

**Figure 28: Test figure of Radiated emissions in restricted bands, Mode A.3, Vertical**

