

RADIO TEST REPORT

For

SHENZHEN SAMHOO SCI&TECH CO.,LTD

Digital Two-Way Radio

Test Model: SPH6015

Prepared for : SHENZHEN SAMHOO SCI&TECH CO.,LTD
Address : Room 401, Building 2th, Huaqiangyun Industrial Park, Meixiu Road, Meilin, Futian District, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : April 07, 2016
Number of tested samples : 1
Serial number : Prototype
Date of Test : April 07, 2016 ~ May 10, 2016
Date of Report : Aug 02, 2016

RADIO TEST REPORT
FCC Part 90

Report Reference No. : **LCS1604070505E**

Date of Issue : Aug 02, 2016

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards
Partial application of Harmonised standards
Other standard testing method

Applicant's Name..... : **SHENZHEN SAMHOO SCI&TECH CO.,LTD**

Address : Room 401, Building 2th, Huaqiangyun Industrial Park, Meixiu
Road, Meilin, Futian District, Shenzhen, China

Test Specification

Standard : FCC Part 90/FCC Part 2/FCC Part 15B

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : **Digital Two-Way Radio**

Trade Mark..... : Samhoo

Test Model : SPH6015

Ratings : DC 7.4V by Lithium ion polymer battery(2250mAh)
Recharge Voltage: DC 12V/1A

Result : **Positive**

Compiled by:

Aking Jin

Aking Jin/ File administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

RADIO -- TEST REPORT

Test Report No. : LCS1604070505E	<u>Aug 02, 2016</u> Date of issue
---	--------------------------------------

Test Model.....	: SPH6015
EUT.....	: Digital Two-Way Radio
Applicant.....	: SHENZHEN SAMHOO SCI&TECH CO.,LTD
Address.....	: Room 401, Building 2th, Huaqiangyun Industrial Park, Meixiu Road, Meilin, Futian District, Shenzhen, China
Telephone.....	: +86-0755 8226 7833
Fax.....	: +86-0755 8226 3733
Manufacturer.....	: SHENZHEN SAMHOO SCI&TECH CO.,LTD
Address.....	: Room 401, Building 2th, Huaqiangyun Industrial Park, Meixiu Road, Meilin, Futian District, Shenzhen, China
Telephone.....	: +86-0755 8226 7833
Fax.....	: +86-0755 8226 3733
Factory.....	: SHENZHEN SAMHOO SCI&TECH CO.,LTD
Address.....	: Room 401, Building 2th, Huaqiangyun Industrial Park, Meixiu Road, Meilin, Futian District, Shenzhen, China
Telephone.....	: +86-0755 8226 7833
Fax.....	: +86-0755 8226 3733

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.
 It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-05-10	Initial Issue	Gavin Liang
01	2016-08-02	Revised as TCB comments	Gavin Liang

TABLE OF CONTENTS

Test Report Description	Page
1. GENERAL INFORMATION	6
1.1. PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2. OBJECTIVE	6
1.3. RELATED SUBMITTAL(S)/GRANT(S).....	6
1.4. DESCRIPTION OF TEST FACILITY	7
1.5. SUPPORT EQUIPMENT LIST	7
1.6. EXTERNAL I/O	7
1.7. MEASUREMENT UNCERTAINTY.....	7
1.8. TEST ENVIRONMENT	8
1.9. DESCRIPTION OF TEST MODES	8
2. SYSTEM TEST CONFIGURATION	9
2.1. JUSTIFICATION	9
2.2. EUT EXERCISE SOFTWARE	9
2.3. SPECIAL ACCESSORIES.....	9
2.4. BLOCK DIAGRAM/SCHEMATICS	9
2.5. EQUIPMENT MODIFICATIONS	9
2.6. CONFIGURATION OF TEST SETUP	9
3. SUMMARY OF TEST RESULT.....	10
4. TEST CONDITIONS AND RESULTS	11
4.1. CONDUCTED EMISSIONS TEST.....	11
4.2. OCCUPIED BANDWIDTH AND EMISSION MASK TEST.....	15
4.3. TRANSMITTER RADIATED SPURIOUS EMISSION	23
4.4. SPURIOUS EMISSION ON ANTENNA PORT	27
4.5. MODULATION CHARACTERISTICS	41
4.6. FREQUENCY STABILITY TEST.....	45
4.7. MAXIMUM TRANSMITTER POWER.....	47
4.8. TRANSMITTER FREQUENCY BEHAVIOR.....	54
5. LIST OF MEASURING EQUIPMENT	57

1. GENERAL INFORMATION

1.1. Product Description for Equipment Under Test (EUT)

EUT	: Digital Two-way Radio
Test Model	: SPH6015
Power Supply	: DC 7.4V by Lithium ion polymer battery(2250mAh) Recharged by DC 12V/1000mA
Hardware Version	: SPH6000V3.0
Software Version	: V1.02.01.006B
Frequency Range	: 136 MHz-174MHz
Channel Separation	: Analog Voice 12.5KHz Digital Voice/Data 12.5KHz Digital Data 12.5KHz
Modulation Type	: FM for Analog Voice 4FSK for Digital Voice/Digital Data 4FSK for Digital Data
Antenna Description	: External, 1.0dBi (Max)
GPS Receiver	:
Receive Frequency	: 1575.42MHz
Channel Number	: 1

Note: The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.

1.2. Objective

The tests were performed according to following standards:

[FCC Rules Part 90: 2015](#): PRIVATE LAND MOBILE RADIO SERVICES.

[47 CFR FCC Part 15 Subpart B: 2015](#) - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[TIA/EIA 603 D: June 2014](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

1.3. Related Submittal(s)/Grant(s)

No Related Submittals.

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

1.5. Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
XING YUAN ELECTRONICS CO.,LTD	Adapter	XY-1201000-E	--	FCC VOC
SHENZHEN SAMHOO SCI&TECH CO.,LTD	Adapter	DC100000	--	FCC VOC

1.6. External I/O

I/O Port Description	Quantity	Cable
Micro SD Card Slot	1	N/A
Accessory Jack	1	N/A
Battery Pole Piece	1	N/A

1.7. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.65 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

1.8. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

1.9. Description Of Test Modes

The EUT has been tested under typical operating condition and The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

EUT operation mode no.	Description of operation mode	Additional information
Op 1	FM+BW12.5KHz+TX	The equipment is set with FM modulation and 12.5KHz bandwidth at maximum rated power for transmitter, powered by DC 7.40V
Op 2	FM+BW12.5KHz+TX	The equipment is set with FM modulation and 12.5KHz bandwidth at minimum rated power for transmitter, powered by DC 7.40V
Op 3	4FSK+BW12.5KHz+TX	The equipment is set with 4FSK modulation and 12.5KHz bandwidth at maximum rated power for transmitter, powered by DC 7.40V
Op 4	4FSK+BW12.5KHz+TX	The equipment is set with 4FSK modulation and 12.5KHz bandwidth at minimum rated power for transmitter, powered by DC 7.40V
Op 5	FM+BW12.5KHz+RX (Standby)	The equipment is set with FM modulation and 12.5KHz bandwidth at Receiver/Standby mode, powered by DC 7.40V(or for charging mode for AC conducted emission)
Op 6	4FSK+BW12.5KHz+RX (Standby)	The equipment is set with 4FSK modulation and 12.5KHz bandwidth at Receiver/Standby mode, powered by DC 7.40V(or for charging mode for AC conducted emission)

Test frequency list

Modulation Type	Channel Separation	Test Channel	Test Frequency (MHz)
Analog/FM	12.5KHz	Ch1	150.825
		Ch2	158.55
		Ch3	173.3875
Digital/4FSK	12.5KHz	Ch4	150.825
		Ch5	158.55
		Ch6	173.3875

2. SYSTEM TEST CONFIGURATION

2.1. Justification

The system was configured for testing in engineering mode.

2.2. EUT Exercise Software

N/A.

2.3. Special Accessories

N/A.

2.4. Block Diagram/Schematics

Please refer to the related document.

2.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

2.6. Configuration of Test Setup

Please refer to the test setup photo.

3. SUMMARY OF TEST RESULT

Test specification clause	Test case	Verdict
FCC Part 15.107	Conducted Emission	PASS
FCC Part 90.205	Maximum Transmitter Power	PASS
FCC Part 90.207	Modulation Characteristic	PASS
FCC Part 90.209	Occupied Bandwidth	PASS
FCC Part 90.210	Emission Mask	PASS
FCC Part 90.213	Frequency Stability	PASS
FCC Part 90.214	Transmitter Frequency Behavior	PASS
FCC Part 90.210	Transmitter Radiated Spurious Emission	PASS
FCC Part 90.210	Spurious Emission On Antenna Port	PASS

Remark:

1. *The measurement uncertainty is not included in the test result.*

4. TEST CONDITIONS AND RESULTS


4.1. Conducted Emissions Test

TEST APPLICABLE

The EUT was tested according to ANSI C63.4 - 2014. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm / 50 u Henry as specified by section 5.1 of ANSI C63.4 - 2014. Cables and peripherals were moved to find the maximum emission levels for each frequency.

TEST CONFIGURATION

For AC Power

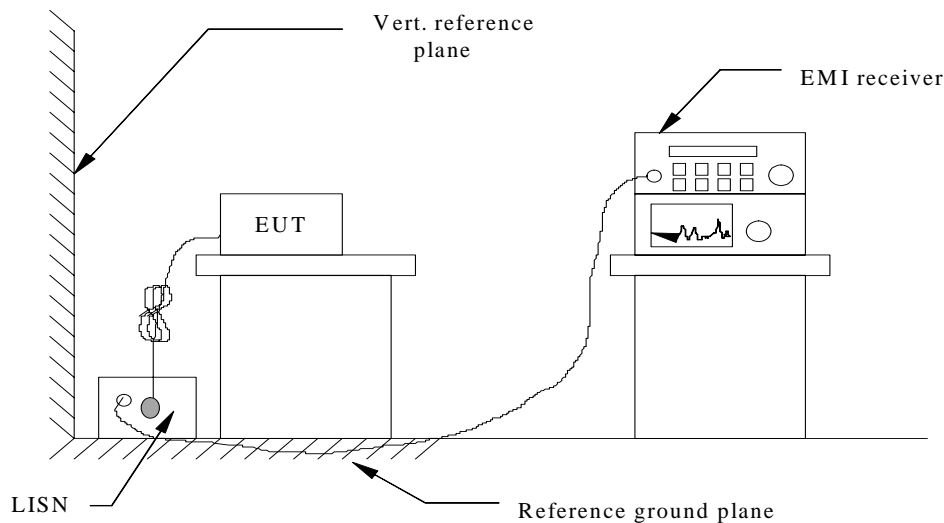

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2014.
- 2 Support equipment, if needed, was placed as per ANSI C63.4-2014.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2014.
- 4 If a EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 If a EUT received DC 13.60V power through an Impedance Stabilization Network (ISN) which supplied power source and was grounded to the ground plane.
- 6 All support equipments received AC power from a second LISN, if any.
- 7 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyser / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyser / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyser / Receiver.
- 8 Analyser / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 9 During the above scans, the emissions were maximized by cable manipulation.

Conducted Power Line Emission Limit

For intentional device, according to § 15.207(a) and RSS-Gen Section 7.2.4 for AC Power Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


TEST RESULTS

Remark:

1. We tested all Op 5 to Op 6, recorded worst case at Op 5.

Op 5


Test Result for Line Power Input AC 240V/50Hz

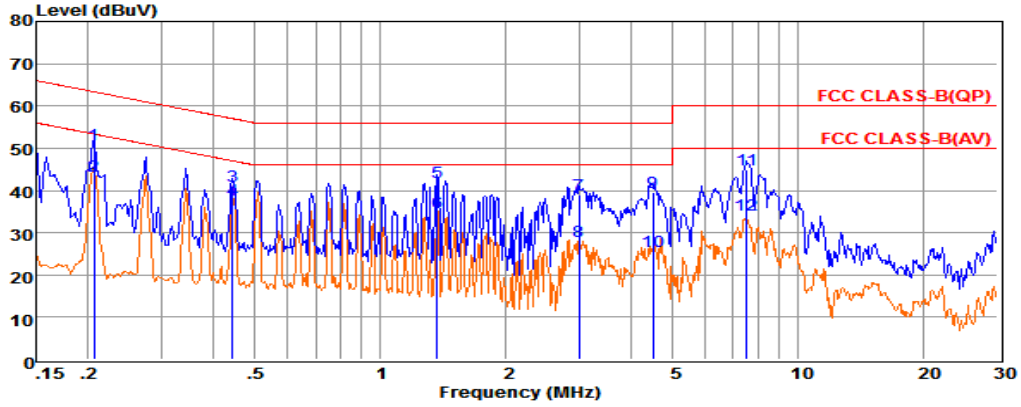

Env. Ins: 24*/56%
 Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.20614	31.13	9.59	0.03	10.00	50.75	63.36	-12.61	QP
2	0.20624	23.74	9.59	0.03	10.00	43.36	53.36	-10.00	Average
3	0.44208	21.25	9.62	0.04	10.00	40.91	57.02	-16.11	QP
4	0.44218	18.23	9.62	0.04	10.00	37.89	47.02	-9.13	Average
5	1.36654	22.13	9.63	0.05	10.00	41.81	56.00	-14.19	QP
6	1.36754	15.20	9.63	0.05	10.00	34.88	46.00	-11.12	Average
7	2.99346	19.30	9.64	0.06	10.00	39.00	56.00	-17.00	QP
8	2.99446	8.13	9.64	0.06	10.00	27.83	46.00	-18.17	Average
9	4.50145	19.76	9.66	0.06	10.00	39.48	56.00	-16.52	QP
10	4.50245	5.80	9.66	0.06	10.00	25.52	46.00	-20.48	Average
11	7.52580	25.07	9.70	0.07	10.00	44.84	60.00	-15.16	QP
12	7.52680	14.32	9.70	0.07	10.00	34.09	50.00	-15.91	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

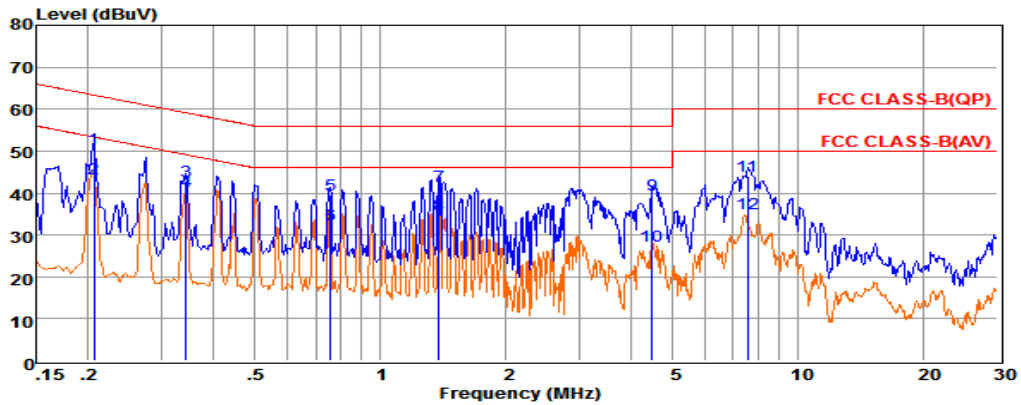


Env. Ins: 24*/56%
 Pol: LINE

	Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.20614	31.00	9.63	0.03	10.00	50.66	63.36	-12.70	QP
2	0.20624	23.77	9.63	0.03	10.00	43.43	53.36	-9.93	Average
3	0.34281	23.08	9.62	0.03	10.00	42.73	59.13	-16.40	QP
4	0.34291	20.68	9.62	0.03	10.00	40.33	49.13	-8.80	Average
5	0.75894	19.79	9.64	0.04	10.00	39.47	56.00	-16.53	QP
6	0.75904	12.63	9.64	0.04	10.00	32.31	46.00	-13.69	Average
7	1.38109	21.97	9.63	0.05	10.00	41.65	56.00	-14.35	QP
8	1.38209	15.13	9.63	0.05	10.00	34.81	46.00	-11.19	Average
9	4.47766	19.76	9.65	0.06	10.00	39.47	56.00	-16.53	QP
10	4.47866	7.72	9.65	0.06	10.00	27.43	46.00	-18.57	Average
11	7.56578	24.35	9.68	0.07	10.00	44.10	60.00	-15.90	QP
12	7.56678	15.21	9.68	0.07	10.00	34.96	50.00	-15.04	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


Test Result for Line Power Input AC 120V/60Hz

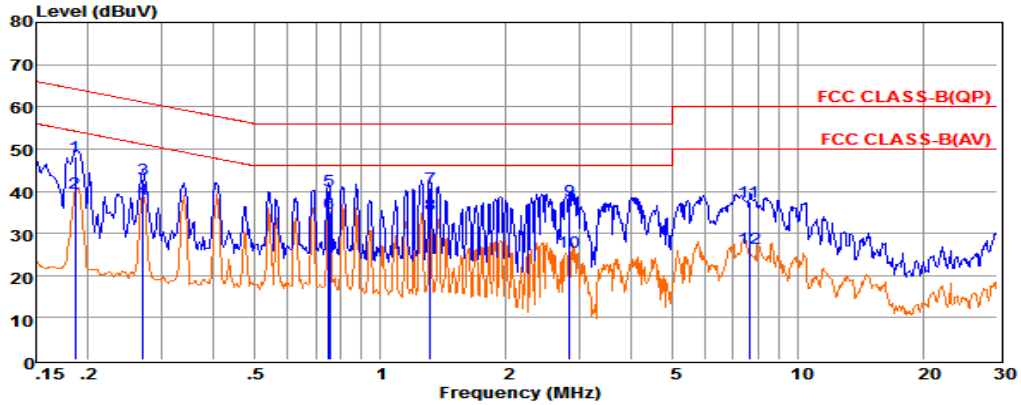

Env. Ins: 24*/56%
 Pol: LINE

	Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.18639	28.41	9.62	0.02	10.00	48.05	64.20	-16.15	QP
2	0.18649	19.98	9.62	0.02	10.00	39.62	54.19	-14.57	Average
3	0.27009	23.25	9.63	0.03	10.00	42.91	61.12	-18.21	QP
4	0.27019	18.39	9.63	0.03	10.00	38.05	51.11	-13.06	Average
5	0.75493	20.32	9.64	0.04	10.00	40.00	56.00	-16.00	QP
6	0.75503	15.05	9.64	0.04	10.00	34.73	46.00	-11.27	Average
7	1.31678	20.98	9.63	0.05	10.00	40.66	56.00	-15.34	QP
8	1.31778	14.83	9.63	0.05	10.00	34.51	46.00	-11.49	Average
9	2.83898	18.14	9.64	0.06	10.00	37.84	56.00	-18.16	QP
10	2.83998	6.00	9.64	0.06	10.00	25.70	46.00	-20.30	Average
11	7.64637	17.85	9.68	0.07	10.00	37.60	60.00	-22.40	QP
12	7.64737	6.83	9.68	0.07	10.00	26.58	50.00	-23.42	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

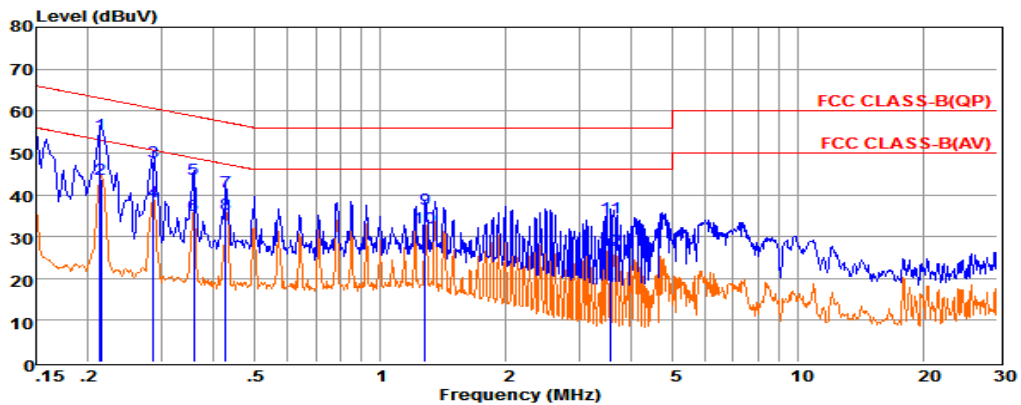

Env. Ins: 24*/56%
 Pol: NEUTRAL

	Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.21392	34.94	9.59	0.03	10.00	54.56	63.05	-8.49	QP
2	0.21402	24.19	9.59	0.03	10.00	43.81	53.05	-9.24	Average
3	0.28630	28.28	9.60	0.03	10.00	47.91	60.63	-12.72	QP
4	0.28640	18.84	9.60	0.03	10.00	38.47	50.63	-12.16	Average
5	0.35765	24.22	9.61	0.03	10.00	43.86	58.78	-14.92	QP
6	0.35775	15.59	9.61	0.03	10.00	35.23	48.78	-13.55	Average
7	0.42598	20.98	9.61	0.04	10.00	40.63	57.33	-16.70	QP
8	0.42608	15.85	9.61	0.04	10.00	35.50	47.33	-11.83	Average
9	1.28236	16.97	9.63	0.05	10.00	36.65	56.00	-19.35	QP
10	1.28336	12.46	9.63	0.05	10.00	32.14	46.00	-13.86	Average
11	3.56539	14.88	9.65	0.06	10.00	34.59	56.00	-21.41	QP
12	3.56639	7.00	9.65	0.06	10.00	26.71	46.00	-19.29	Average


Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

4.2. Occupied Bandwidth and Emission Mask Test

TEST APPLICABLE

- (a). Occupied Bandwidth: The EUT was connected to the audio signal generator and the spectrum analyser via the main RF connector, and through an appropriate attenuator. The EUT was controlled to transmit its maximum power. Then the bandwidth of 99% power can be measured by the spectrum analyser.
- (b). Emission Mask D, 12.5 kHz channel bandwidth equipment: For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the centre of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
 - (2) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
 - (3) On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

TEST CONFIGURATION

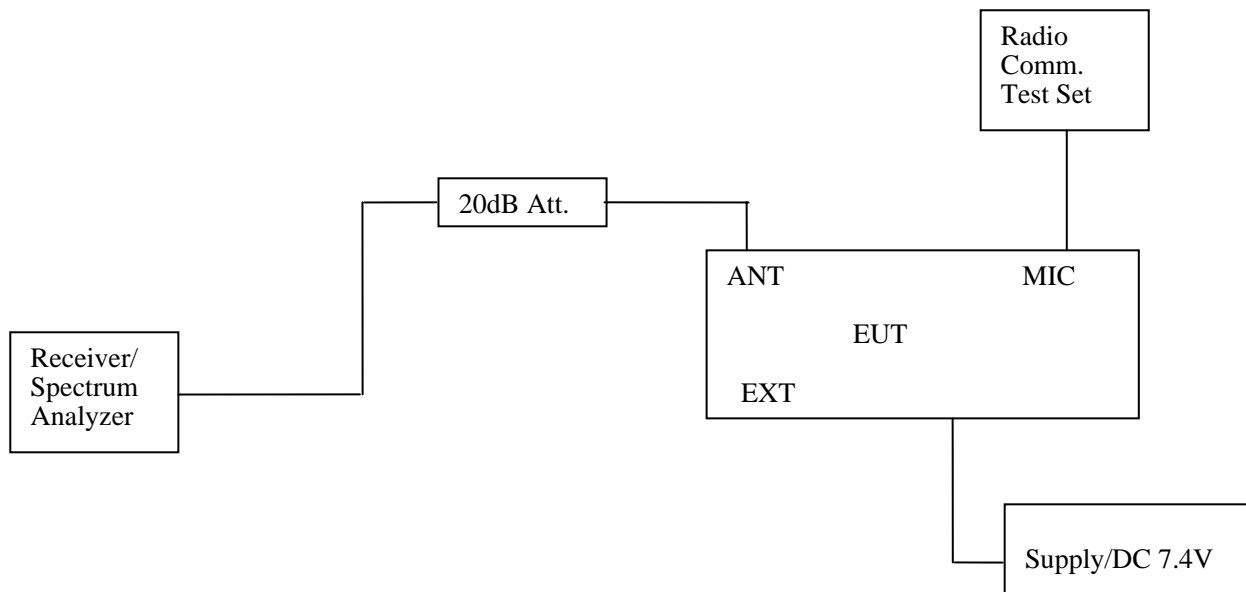

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 The EUT was modulated by 2.5 KHz Sine wave audio signal; the level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing)
- 3 Set EUT as normal operation.
- 4 Set SPA Centre Frequency = fundamental frequency, RBW=300Hz, VBW= 3 KHz, span =50 KHz.
- 5 Set SPA Max hold. Mark peak, Set 99% Occupied Bandwidth and 26dB Occupied Bandwidth.
- 6 Set SPA Centre Frequency=fundamental frequency, set =300Hz, VBW=1 KHz, span=50 KHz for 12.5 KHz channel spacing;

TEST RESULTS

Remark:


1. We tested Op 1 to Op 4, recorded worst case at Op 1 and Op 3.

4.2.1 Occupied Bandwidth

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)	
					99%	26dB
Analog/FM	12.5KHz	Op 1	Ch1	150.825	5.90	10.50
			Ch2	158.55	5.70	10.50
			Ch3	173.3875	5.70	10.40
Digital/4FSK	12.5KHz	Op 3	Ch4	150.825	7.40	9.70
			Ch5	158.55	7.40	9.60
			Ch6	173.3875	7.50	9.90
Limit			11.25KHz for 12.5KHz Channel Separation			
Test Results			PASS			


Plots of 99% and 26dB Bandwidth Measurement

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)		Limit (KHz)	Results
					99%	26dB		
FM	12.5 KHz	Op 1	Ch1	150.825	5.90	10.50	11.25	PASS

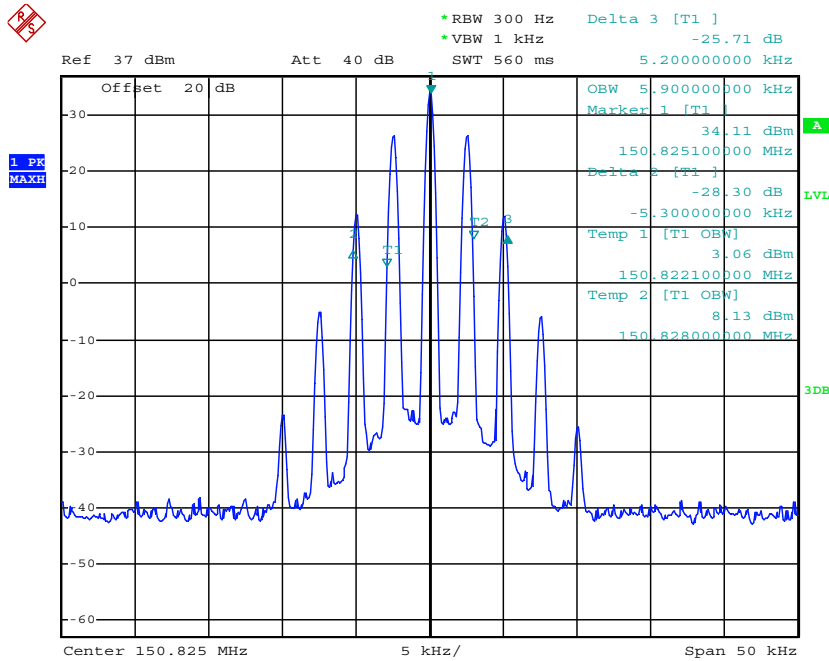


Date: 10.MAY.2016 23:05:43

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)		Limit (KHz)	Results
					99%	26dB		
FM	12.5 KHz	Op 1	Ch2	158.55	5.70	10.50	11.25	PASS

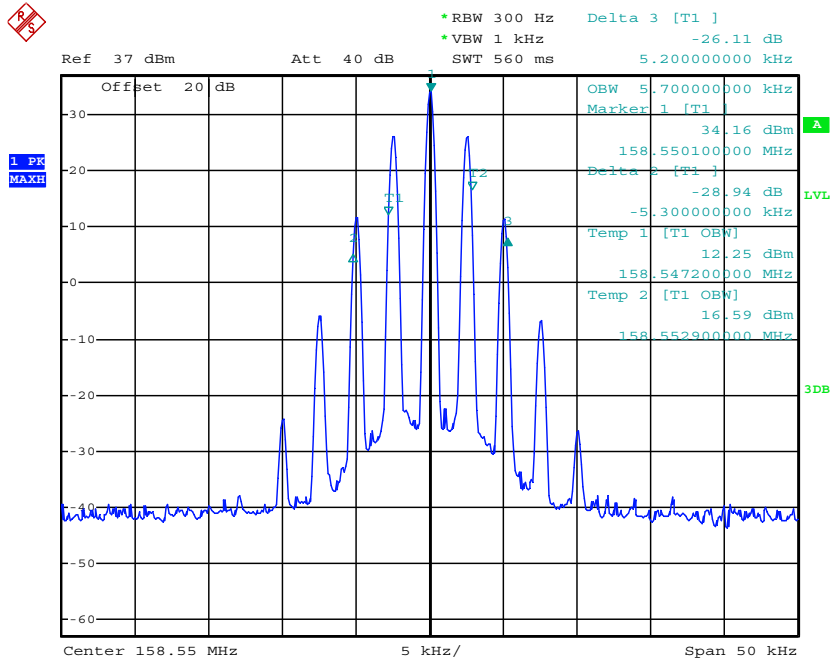


Date: 10.MAY.2016 23:07:30

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)		Limit (KHz)	Results
					99%	26dB		
FM	12.5 KHz	Op 1	Ch3	173.3875	5.70	10.40	11.25	PASS

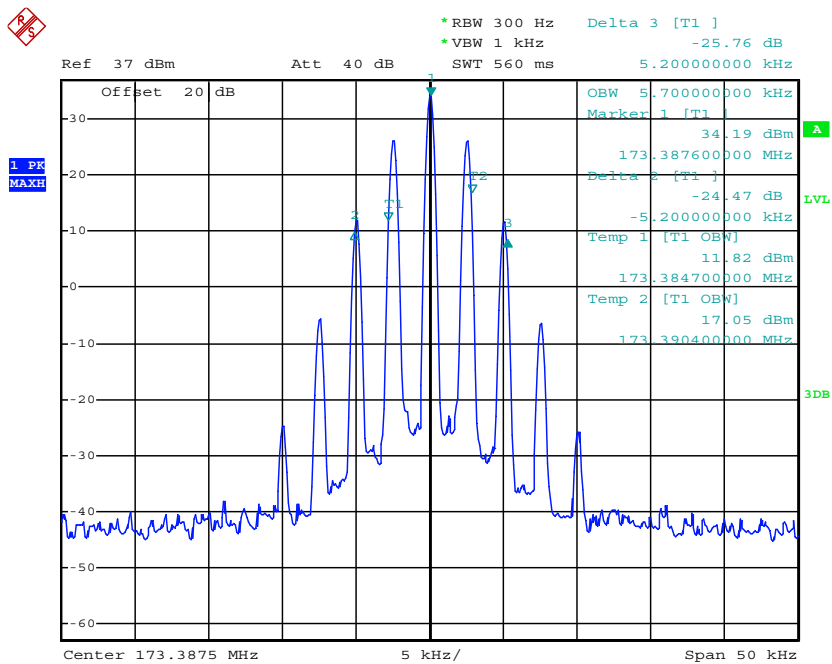


Date: 10.MAY.2016 23:19:13

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)		Limit (KHz)	Results
					99%	26dB		
4FSK	12.5 KHz	Op 3	Ch4	150.825	7.40	9.70	11.25	PASS

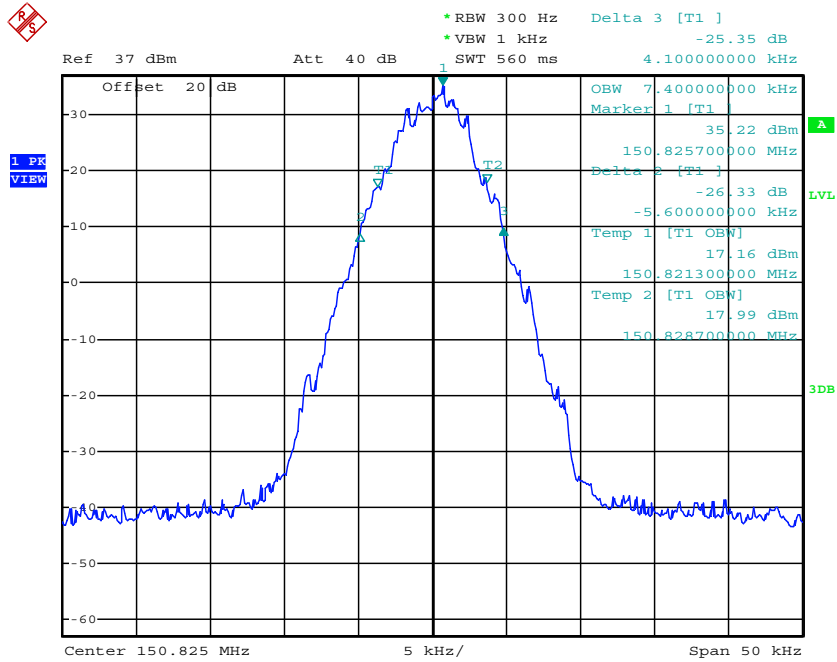


Date: 10.MAY.2016 22:49:35

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)		Limit (KHz)	Results
					99%	26dB		
4FSK	12.5 KHz	Op 3	Ch5	158.55	7.40	9.60	11.25	PASS

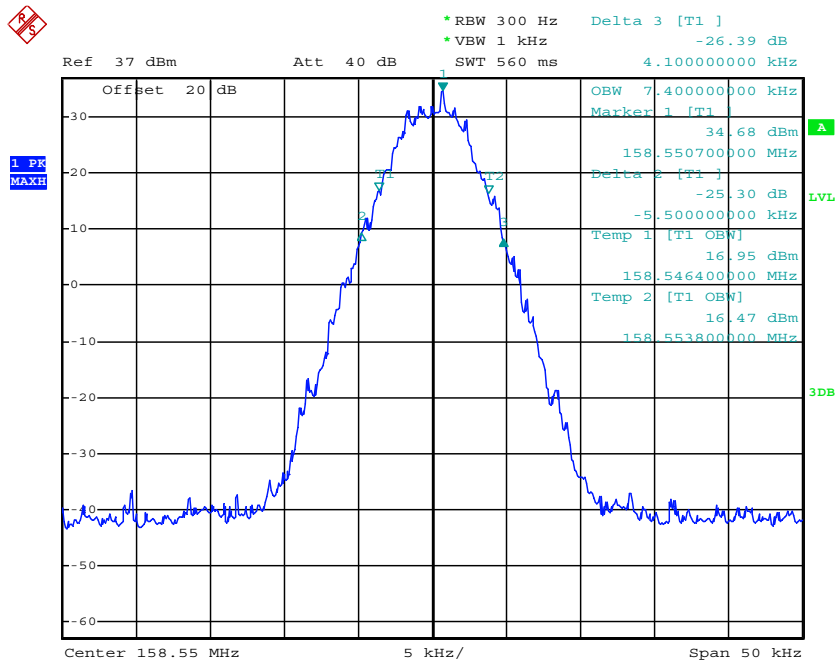

Date: 10.MAY.2016 22:52:16

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Occupied Bandwidth (KHz)		Limit (KHz)	Results
					99%	26dB		
4FSK	12.5 KHz	Op 3	Ch6	173.3875	7.50	9.90	11.25	PASS

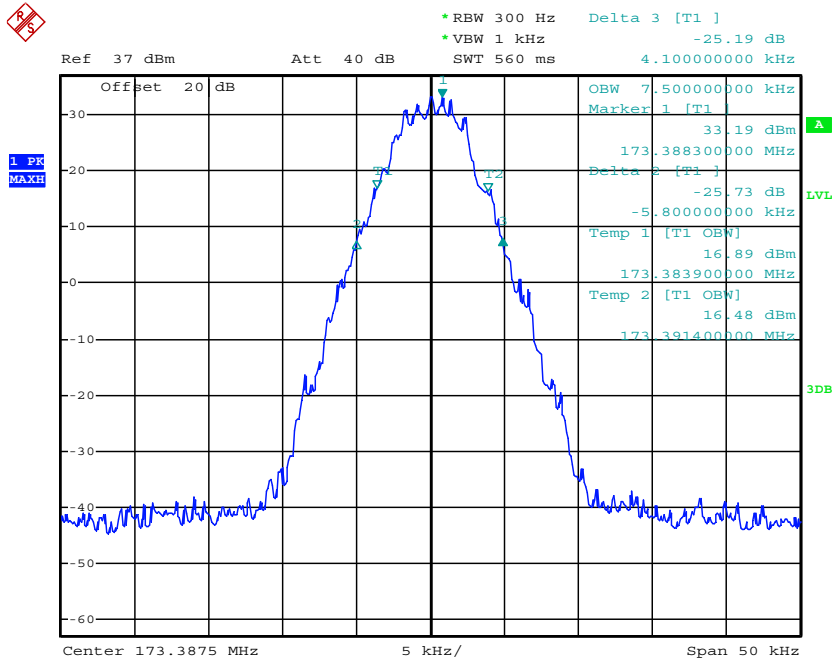

Date: 10.MAY.2016 22:59:01

4.2.2 Emission Mask

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)
Analog/FM	12.5 KHz	Op 1	Ch1	150.825	D	300
			Ch2	158.55	D	300
			Ch3	173.3875	D	300
Digital/4FSK	12.5 KHz	Op 3	Ch4	150.825	D	300
			Ch5	158.55	D	300
			Ch6	173.3875	D	300
Test Results			PASS			


Plots of Emission Mask Measurement

Referred as the attached plot hereinafter

Note: The Black curve represents unmodulated signal.


The Blue curve represents modulated signal.

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)	Audio Freq. (KHz)	Results
FM	12.5KHz	Op 1	Ch1	150.825	D	300	2.5	PASS

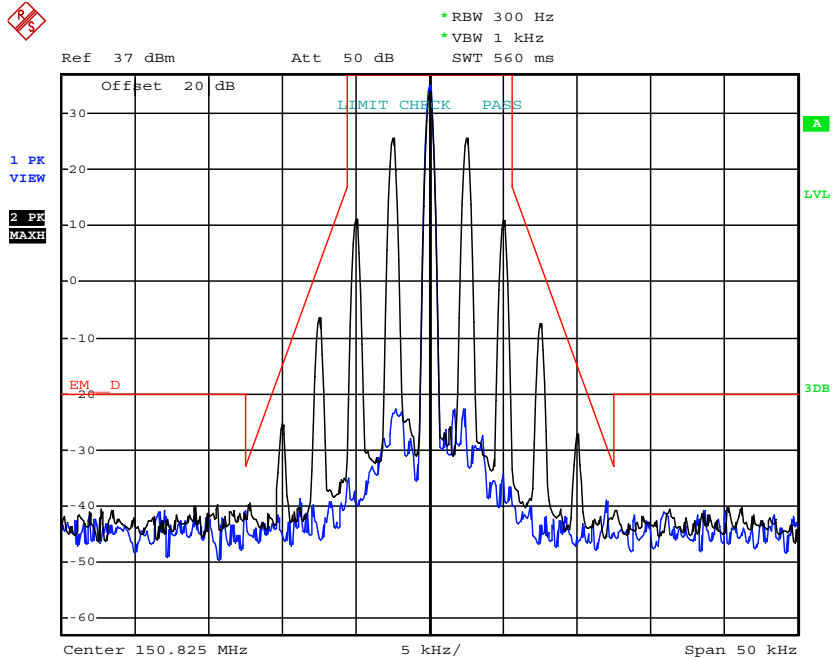


Date: 22.APR.2016 19:25:50

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)	Audio Freq. (KHz)	Results
FM	12.5KHz	Op 1	Ch2	158.55	D	300	2.5	PASS

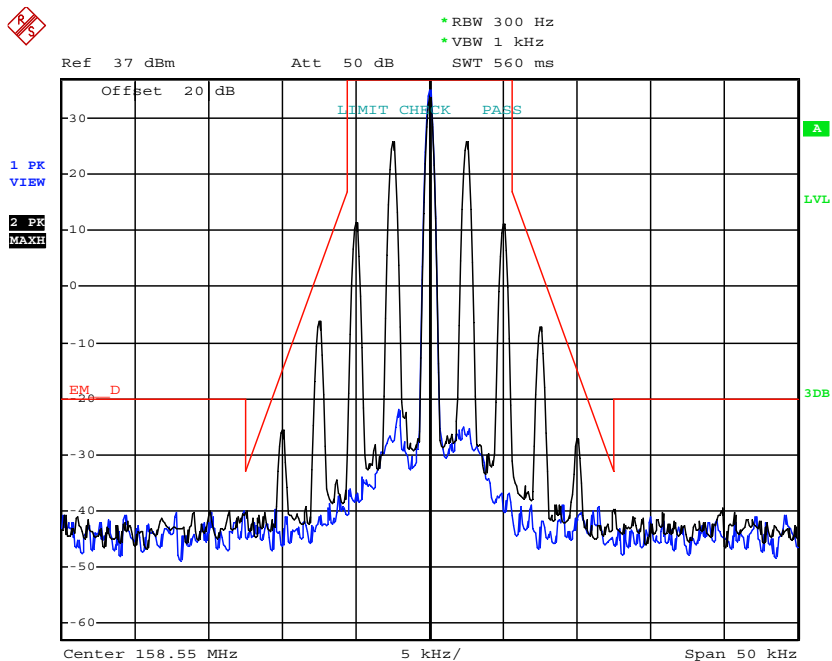


Date: 22.APR.2016 19:24:55

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)	Audio Freq. (KHz)	Results
FM	12.5KHz	Op 1	Ch3	173.3875	D	300	2.5	PASS

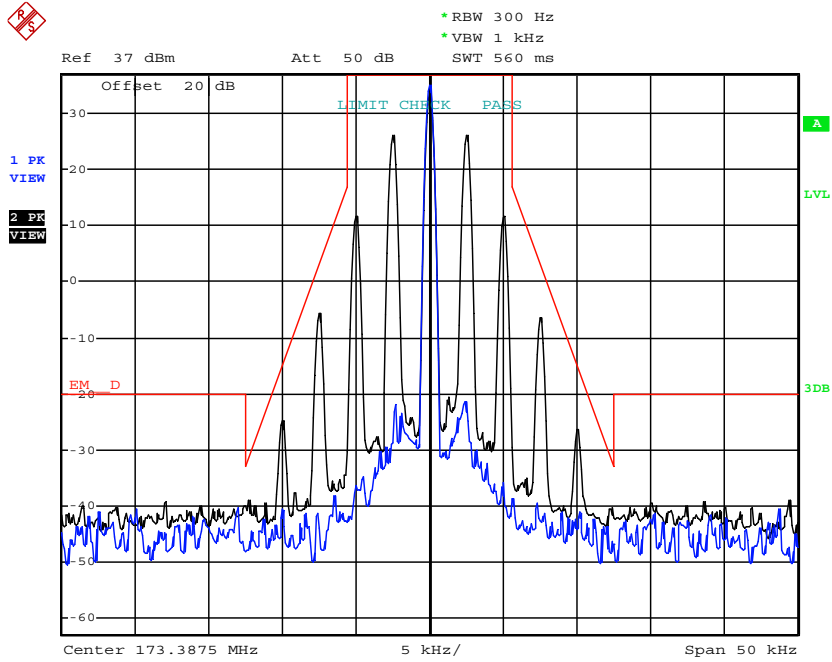


Date: 22.APR.2016 19:23:29

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)	Audio Freq. (KHz)	Results
4FSK	12.5KHz	Op 3	Ch4	150.825	D	300	/	PASS

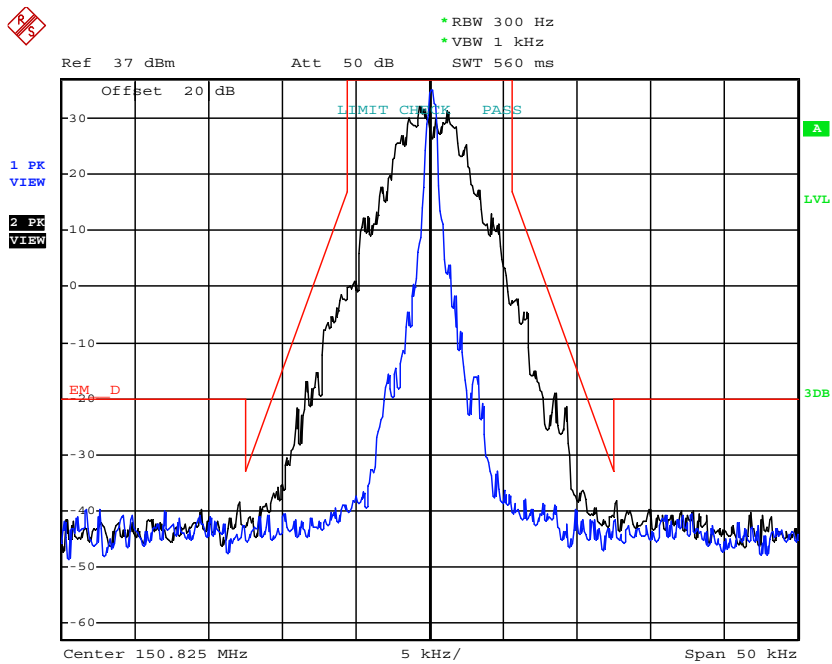


Date: 22.APR.2016 18:52:26

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)	Audio Freq. (KHz)	Results
4FSK	12.5KHz	Op 3	Ch5	158.55	D	300	/	PASS

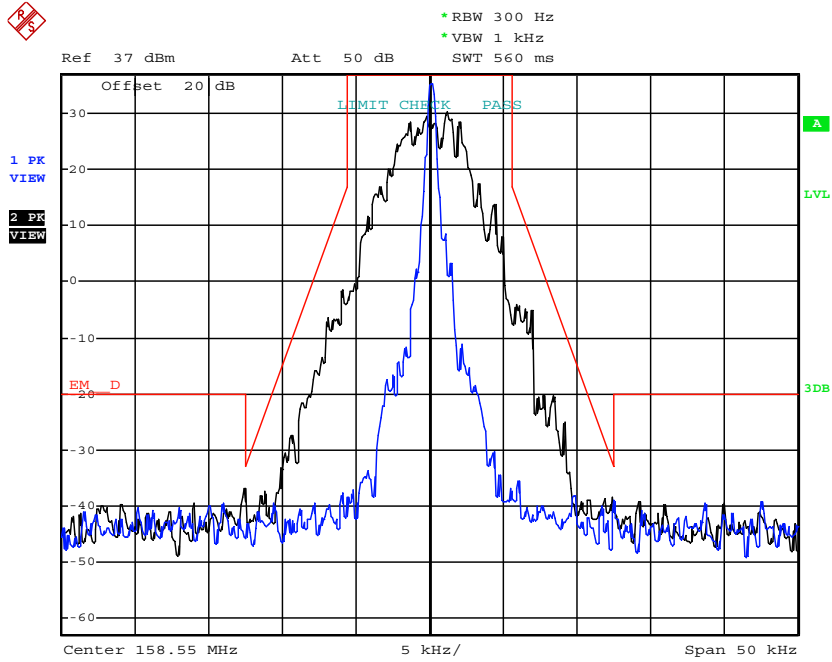

Date: 22.APR.2016 18:54:06

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Applicable Mask	RBW (Hz)	Audio Freq. (KHz)	Results
4FSK	12.5KHz	Op 3	Ch6	173.3875	D	300	/	PASS

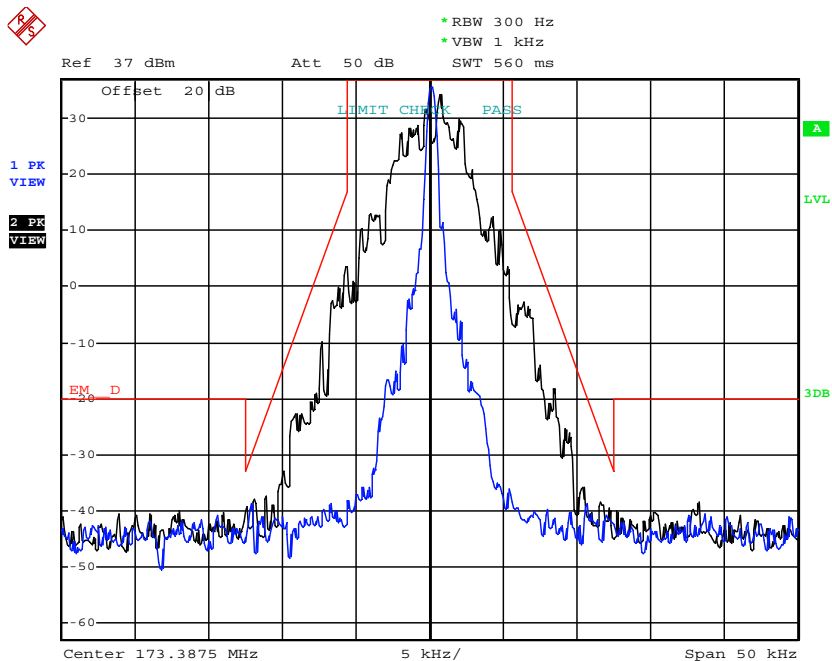

Date: 22.APR.2016 18:56:02

4.3. Transmitter Radiated Spurious Emission

TEST APPLICABLE


According to the TIA/EIA 603 test method, and according to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- 1 On any frequency removed from the centre of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- 2 On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27dB
- 3 On any frequency removed from the centre of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50+10 \log (P)$ dB or 70 dB, whichever is lesser attenuation.

For transmitters designed to transmit with 25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:

- 1 On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- 2 On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- 3 On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43+10 \log (P)$ dB.

TEST CONFIGURATION

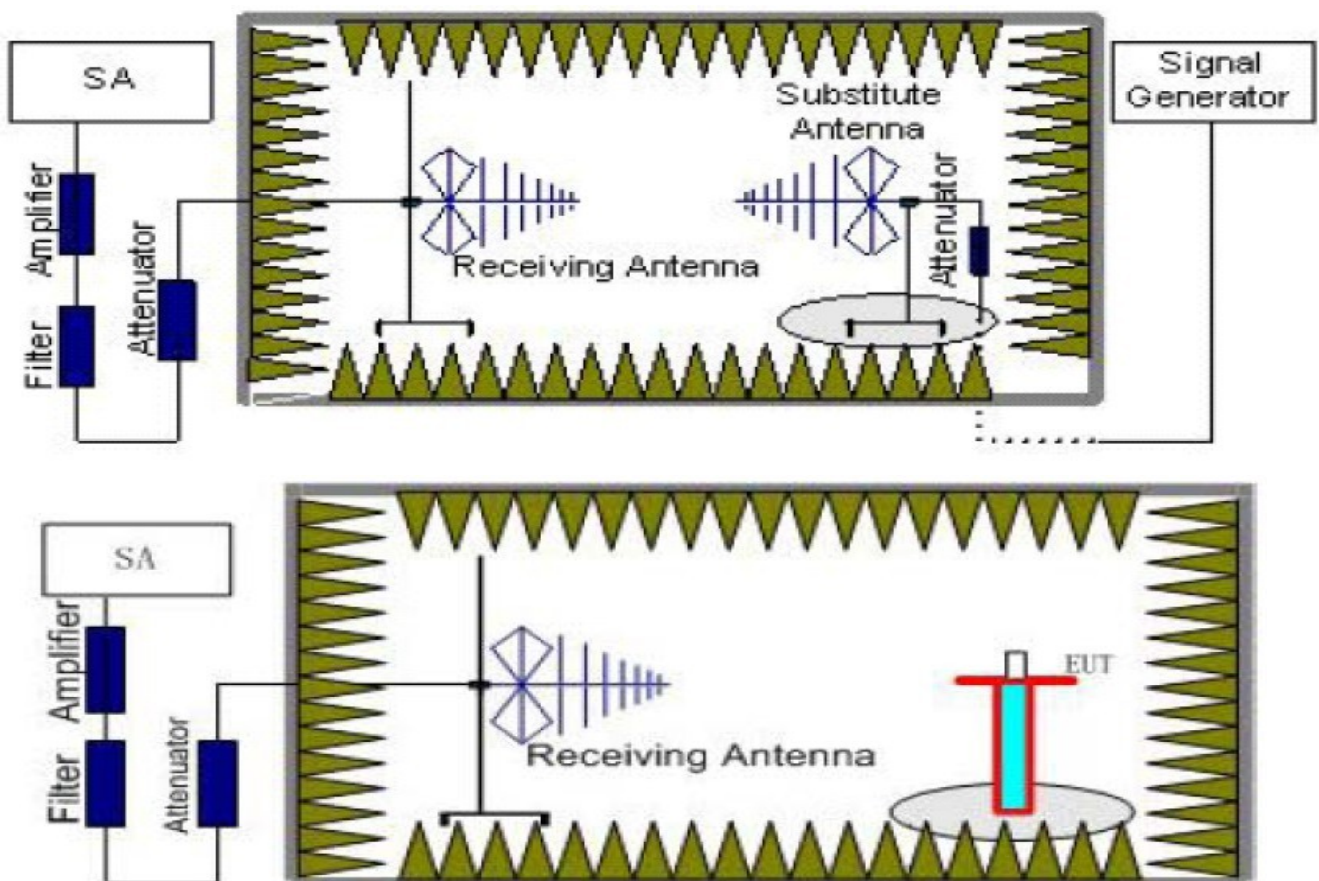

TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in six channels were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100 KHz, VBW=300 KHz for 30MHz to 1GHz, and the maximum value of the receiver should be recorded as (P_r).
4. The EUT shall be replaced by a substitution antenna. In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. An amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.
The measurement results are obtained as described below:
Power (EIRP) = P_{Mea} - P_{Ag} - P_{cl} - G_a
We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; the measurement results are amend as described below:
Power (EIRP) = P_{Mea} - P_{cl} - G_a
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

LIMIT

Modulation Type: FM

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 12:

For 12.5 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

High: 50 + 10 log (Pwatts) = 50 + 10 log (4.5) =56.53 dB

Low: 50 + 10 log (Pwatts) = 50 + 10 log (1.0) =50.00 dB

Note: In general, the worst case attenuation requirement shown above was applied.

Calculation: Limit (dBm) =EL-50-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 36.53 dBm for Rated High power level and 30.00 dBm for Rated Lower power level;

High: Limit (dBm) = $36.53 - 50 - 10 \log_{10}(4.5) = -20$ dBm

Low: Limit (dBm) = $30.00 - 50 - 10 \log_{10}(1.0) = -20$ dBm

Modulation Type: 4FSK

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 12:

For 12.5 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

High: $50 + 10 \log(P_{\text{watts}}) = 50 + 10 \log(4.5) = 56.53$ dB

Low: $50 + 10 \log(P_{\text{watts}}) = 50 + 10 \log(1.0) = 50.00$ dB

Note: In general, the worst case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = $EL - 50 - 10 \log_{10}(TP)$

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 36.53 dBm for Rated High power level and 30.00 dBm for Rated Lower power level;

High: Limit (dBm) = $36.53 - 50 - 10 \log_{10}(4.5) = -20$ dBm

Low: Limit (dBm) = $30.00 - 50 - 10 \log_{10}(1.0) = -20$ dBm

Note: 1. In general, the worst case attenuation requirement shown above was applied.

2. The measurement frequency range from 30 MHz to 5 GHz.

3. *** means that the emission level is too low to be measured or at least 20 dB down than the limit.

4. Radiated spurious tested ERP for below 1GHz and EIRP for above 1GHz.

TEST RESULTS

Remark:

1. We tested Op 1 to Op 4, recorded worst case at Op 1 and Op 3.

Modulation Type: FM							
Operation Mode: Op 1				Channel Separation: 12.5KHz			
Test Channel: Ch1				Test Frequency: 150.825MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
301.650	-51.03	0.87	6.42	2.15	-47.63	-20.00	H
452.475	-47.48	1.02	7.35	2.15	-43.30	-20.00	H
754.125	-58.27	1.10	8.26	2.15	-53.26	-20.00	H
...	H
301.650	-52.71	0.87	6.42	2.15	-49.31	-20.00	V
452.475	-48.80	1.02	7.35	2.15	-44.62	-20.00	V
754.125	-59.16	1.10	8.26	2.15	-54.15	-20.00	V
...	V

Modulation Type: FM							
Operation Mode: Op 1				Channel Separation: 12.5KHz			
Test Channel: Ch2				Test Frequency: 158.55MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
317.10	-50.89	0.92	6.80	2.15	-47.16	-20.00	H
475.65	-45.72	1.06	7.89	2.15	-41.04	-20.00	H
792.75	-57.44	1.12	8.12	2.15	-52.59	-20.00	H
...	H
317.10	-52.74	0.92	6.80	2.15	-49.01	-20.00	V
475.65	-45.33	1.06	7.89	2.15	-40.65	-20.00	V
792.75	-59.47	1.12	8.12	2.15	-54.62	-20.00	V
...	V

Modulation Type: FM							
Operation Mode: Op 1				Channel Separation:12.5KHz			
Test Channel: Ch3				Test Frequency: 173.3875MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
346.7750	-52.16	0.95	6.80	2.15	-48.46	-20.00	H
520.1625	-47.07	1.10	7.91	2.15	-42.41	-20.00	H
866.9375	-58.72	1.21	8.25	2.15	-53.83	-20.00	H
...	H
346.7750	-52.81	0.95	6.80	2.15	-49.11	-20.00	V
520.1625	-43.43	1.10	7.91	2.15	-38.77	-20.00	V
866.9375	-58.30	1.21	8.25	2.15	-53.41	-20.00	V
...	V

Modulation Type: 4FSK							
Operation Mode: Op 3				Channel Separation:12.5KHz			
Test Channel: Ch4				Test Frequency:150.825MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
301.650	-50.47	0.87	6.42	2.15	-47.07	-20.00	H
452.475	-43.53	1.02	7.35	2.15	-39.35	-20.00	H
754.125	-61.10	1.10	8.26	2.15	-56.09	-20.00	H
...	H
301.650	-50.90	0.87	6.42	2.15	-47.50	-20.00	V
452.475	-45.48	1.02	7.35	2.15	-41.30	-20.00	V
754.125	-59.14	1.10	8.26	2.15	-54.13	-20.00	V
...	V

Modulation Type: 4FSK							
Operation Mode: Op 3				Channel Separation:12.5KHz			
Test Channel: Ch5				Test Frequency: 158.55MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
317.10	-51.47	0.92	6.80	2.15	-47.74	-20.00	H
475.65	-46.34	1.06	7.89	2.15	-41.66	-20.00	H
792.75	-56.79	1.12	8.12	2.15	-51.94	-20.00	H
...	H
317.10	-52.86	0.92	6.80	2.15	-49.13	-20.00	V
475.65	-44.54	1.06	7.89	2.15	-39.86	-20.00	V
792.75	-57.65	1.12	8.12	2.15	-52.80	-20.00	V
...	V

Modulation Type: 4FSK							
Operation Mode: Op 3				Channel Separation:12.5KHz			
Test Channel: Ch6				Test Frequency: 173.3875MHz			
Frequency (MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Polarization
346.7750	-51.84	0.95	6.80	2.15	-48.14	-20.00	H
520.1625	-45.55	1.10	7.91	2.15	-40.89	-20.00	H
866.9375	-57.24	1.21	8.25	2.15	-52.35	-20.00	H
...	H
346.7750	-53.73	0.95	6.80	2.15	-50.03	-20.00	V
520.1625	-44.94	1.10	7.91	2.15	-40.28	-20.00	V
866.9375	-61.41	1.21	8.25	2.15	-56.52	-20.00	V
...	V

4.4. Spurious Emission on Antenna Port

TEST APPLICABLE


The same as Section 4.3

TEST PROCEDURE

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set to 100 kHz. Sufficient scans were taken to show any out of band emission up to 10th. Harmonic for the lower and the highest frequency range. Set RBW 1KHz, VBW 3KHz in the frequency band 9KHz to 150KHz, set RBW 10KHz, VBW 30 KHz in the frequency band 150KHz to 30 MHz, set RBW 100 kHz, VBW 300 kHz in the frequency band 30MHz to 1GHz, while set RBW=1MHz. VBW=3MHz from the 1GHz to 10th Harmonic.

The audio input was set to 0 to get the unmodulated carrier, the resulting picture is print out for each channel separation.

TEST CONFIGURATION

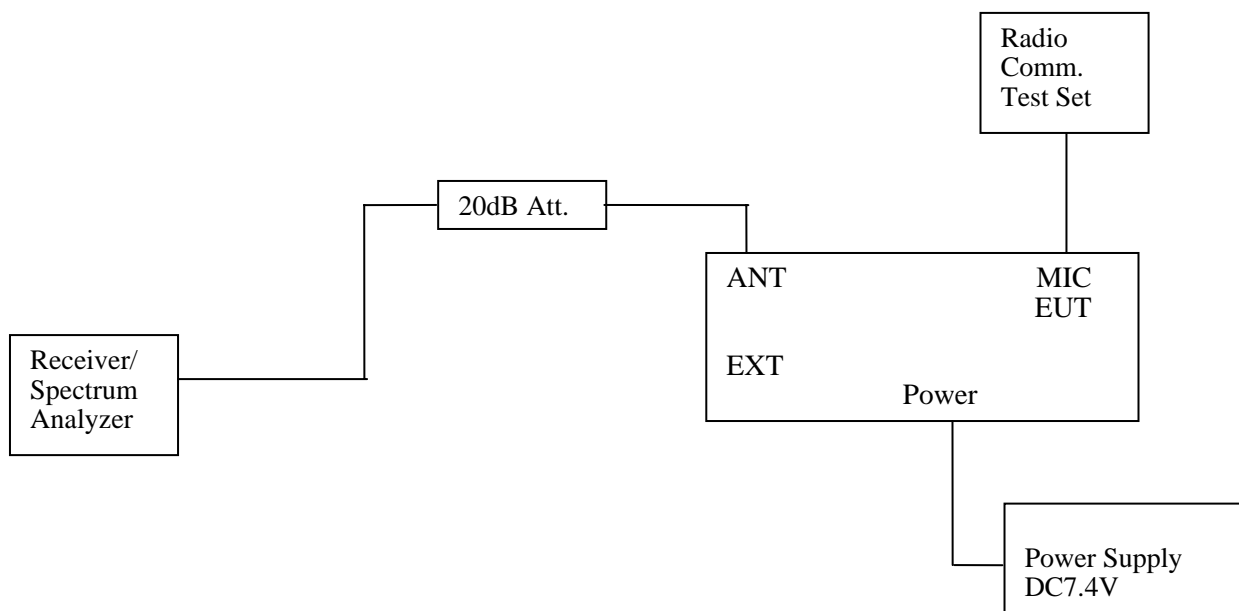

LIMIT

Modulation Type: FM

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 12:

For 12.5 kHz bandwidth:

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

High: $50 + 10 \log(P_{\text{watts}}) = 50 + 10 \log(4.5) = 56.53 \text{ dB}$

Low: $50 + 10 \log(P_{\text{watts}}) = 50 + 10 \log(1.0) = 50.00 \text{ dB}$

Note: In general, the worst case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = EL - 50 - 10 log₁₀ (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 36.53 dBm for Rated High power level and 30.00 dBm for Rated Lower power level;

High: Limit (dBm) = $36.02 - 50 - 10 \log_{10}(4.5) = -20$ dBm

Low: Limit (dBm) = $30.00 - 50 - 10 \log_{10}(1.0) = -20$ dBm

Modulation Type: 4FSK

FCC Part 22.359, 74.462, 80.211 and 90.210 and RSS Gen, RSS 119 Issue 12 (12.5 kHz Bandwidth only):

On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz at least:

High: $50 + 10 \log(P_{\text{watts}}) = 50 + 10 \log(4.5) = 56.53$ dB

Low: $50 + 10 \log(P_{\text{watts}}) = 50 + 10 \log(1.0) = 50.00$ dB

Note: In general, the worst case attenuation requirement shown above was applied.

Calculation: Limit (dBm) = $EL - 50 - 10 \log_{10}(TP)$

Notes: EL is the emission level of the Output Power expressed in dBm,

In this application, the EL is 36.53 dBm for Rated High power level and 30.00 dBm for Rated Lower power level;

High: Limit (dBm) = $36.02 - 50 - 10 \log_{10}(4.0) = -20$ dBm

Low: Limit (dBm) = $30.00 - 50 - 10 \log_{10}(1.0) = -20$ dBm

Note: 1. In general, the worst case attenuation requirement shown above was applied.


2. The measurement frequency range from 9 KHz to 2GHz.

TEST RESULTS


Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz	
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)
Op 1	Ch1	150.825	301.60	-28.08	1260.00	-33.87
	Ch2	158.55	317.12	-30.20	1210.00	-33.06
	Ch3	173.3875	346.22	-29.84	1168.00	-33.92
Op 3	Ch4	150.825	310.60	-27.97	1738.00	-33.54
	Ch5	158.55	476.20	-29.20	1246.00	-33.90
	Ch6	173.3875	346.22	-29.83	1406.00	-33.27
Limit			-20dBm for 12.5KHz Channel Separation			
Test Results			PASS			

Plots of Spurious Emission on Antenna Port Measurement

Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		Limit (dBm)
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)	
Op 1	Ch1	150.825	301.60	-28.08	1260.00	-33.87	-20.00

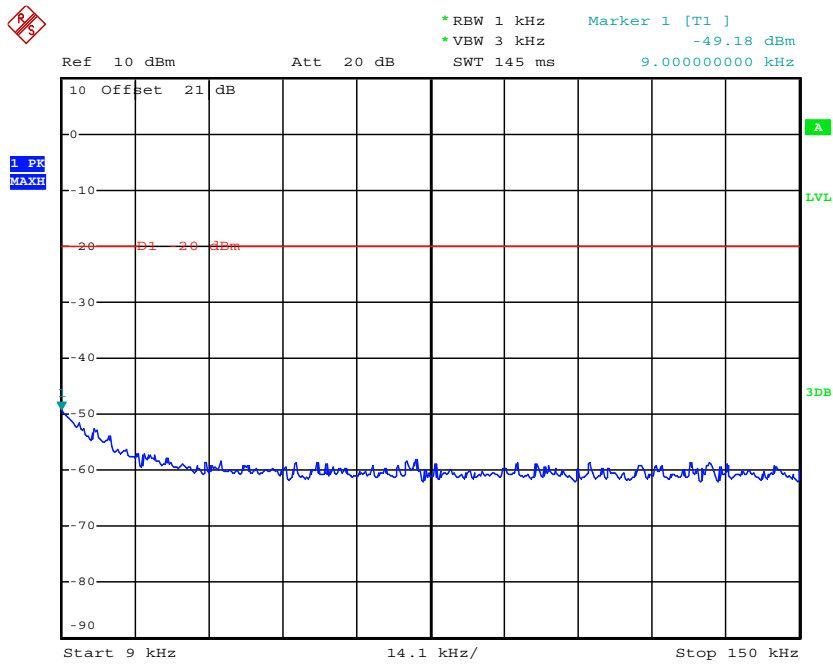


Date: 16.MAY.2016 12:36:36

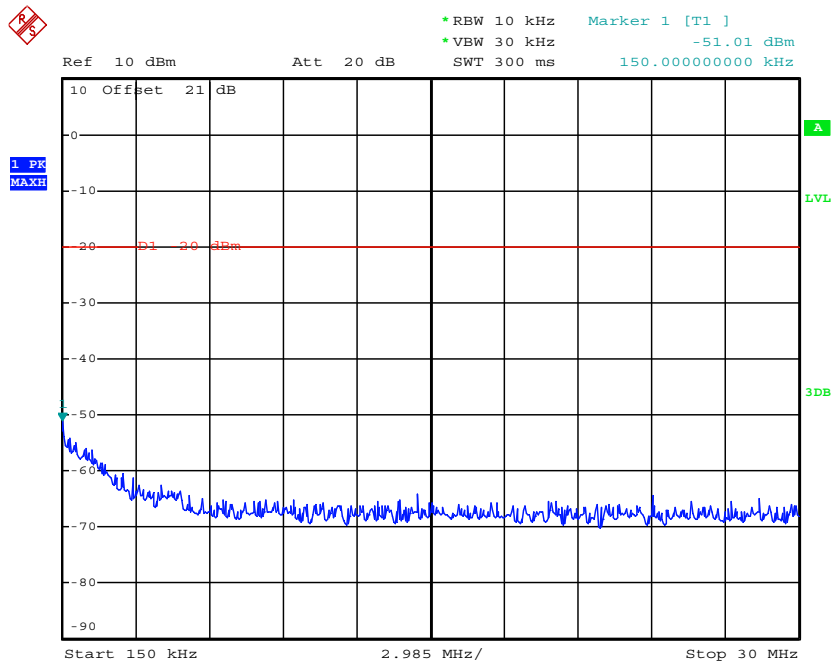


Date: 16.MAY.2016 12:42:33


Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		Limit (dBm)
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)	
Op 1	Ch2	158.55	317.12	-30.20	1210.00	-33.06	-20.00

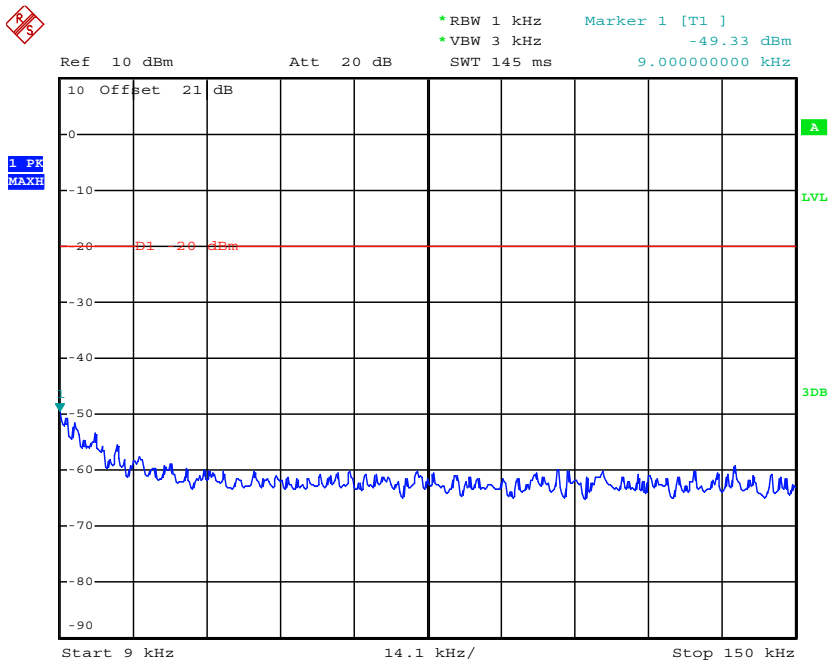


Date: 16.MAY.2016 12:39:34

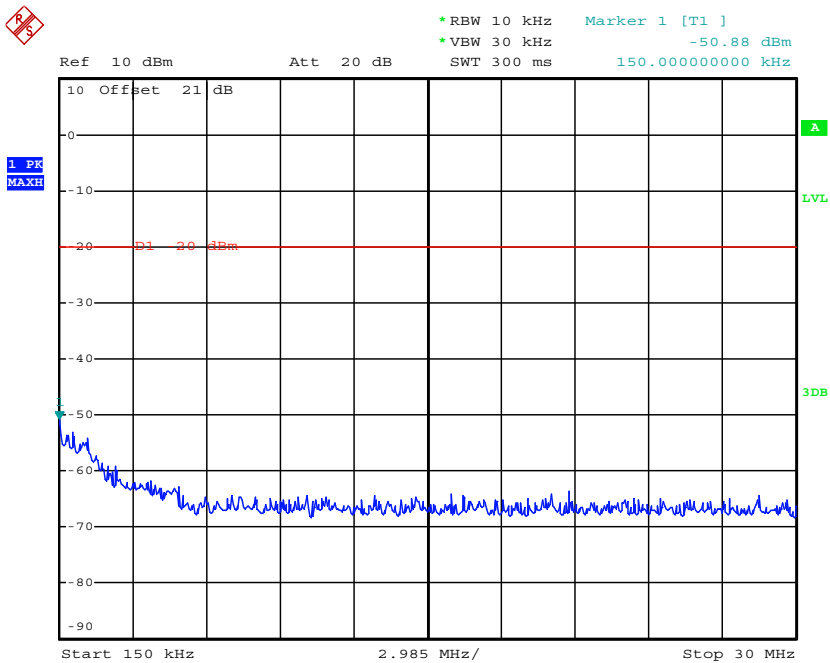

Date: 16.MAY.2016 12:42:52

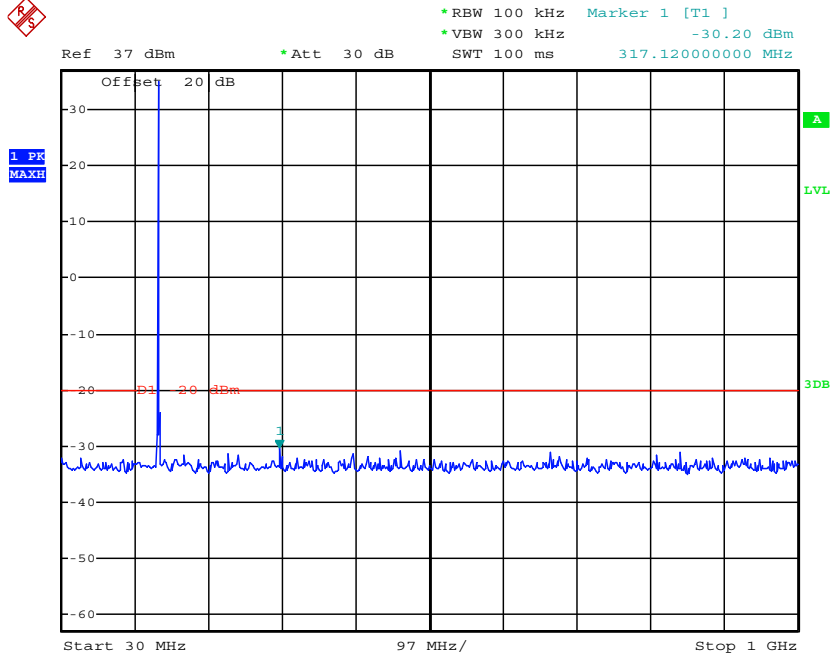


Date: 5.MAY.2016 19:10:40

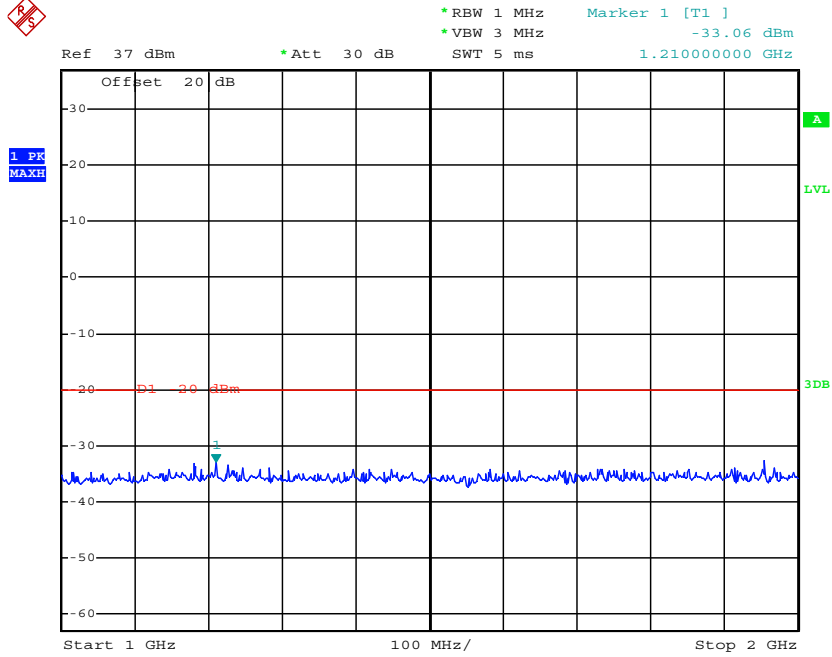


Date: 5.MAY.2016 19:10:18


Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		Limit (dBm)
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)	
Op 1	Ch3	173.3875	346.22	-29.84	1168.00	-33.92	-20.00

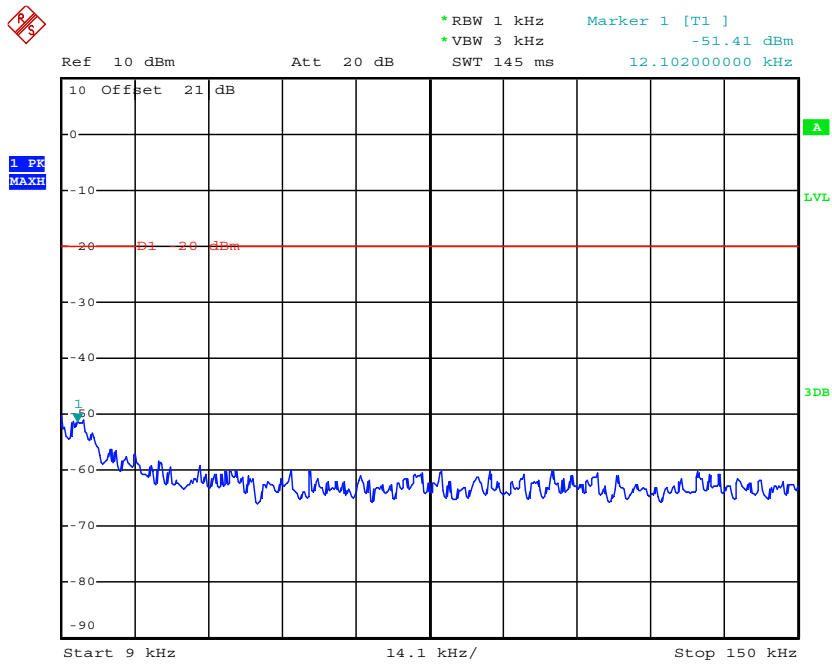


Date: 16.MAY.2016 12:39:59

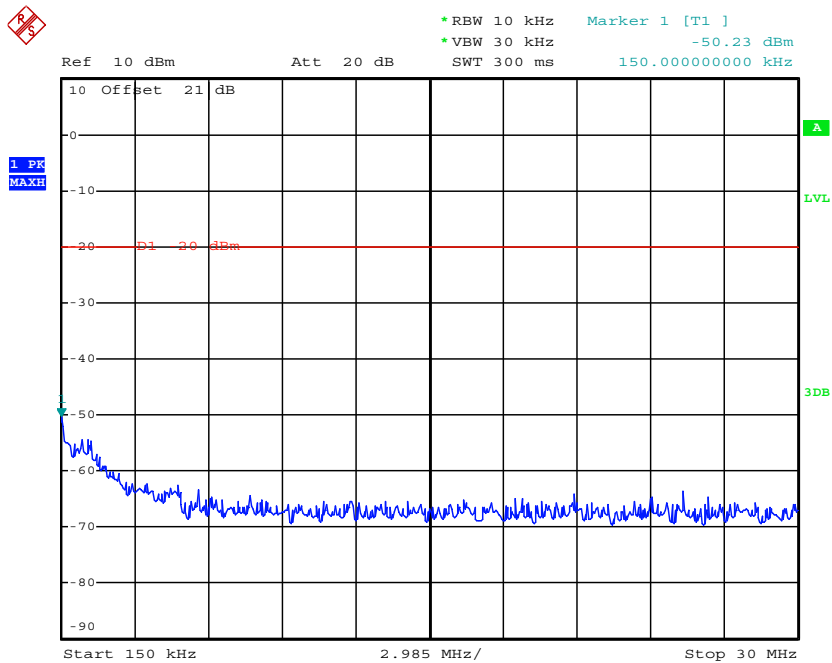

Date: 16.MAY.2016 12:47:42

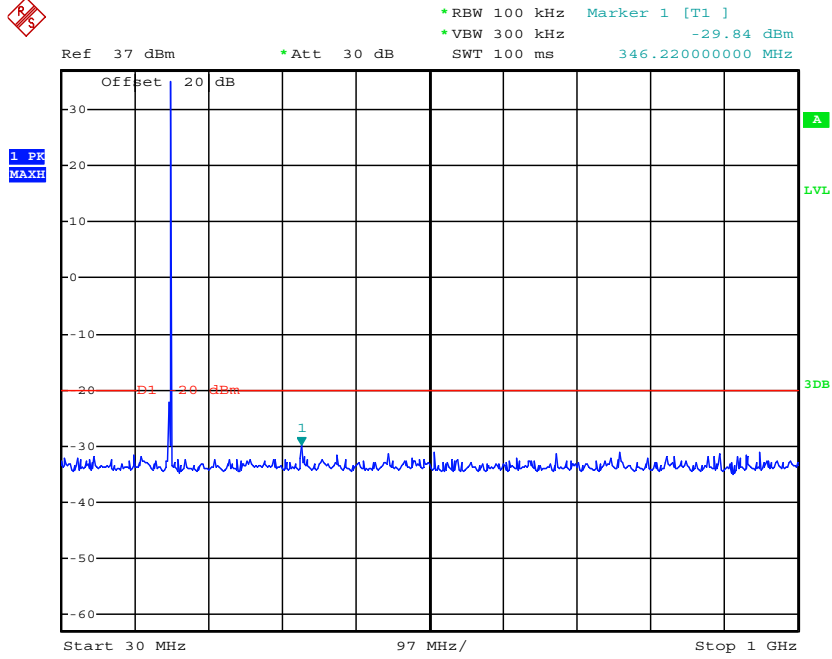


Date: 5.MAY.2016 19:25:26

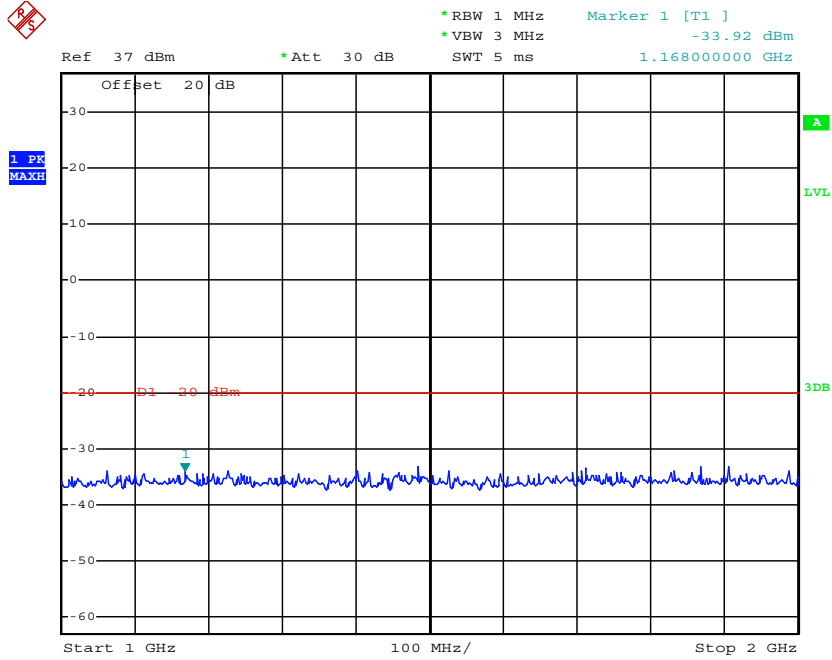


Date: 5.MAY.2016 19:25:01

Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		Limit (dBm)
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)	
Op 3	Ch4	150.825	310.60	-27.94	1738.00	-33.54	-20.00

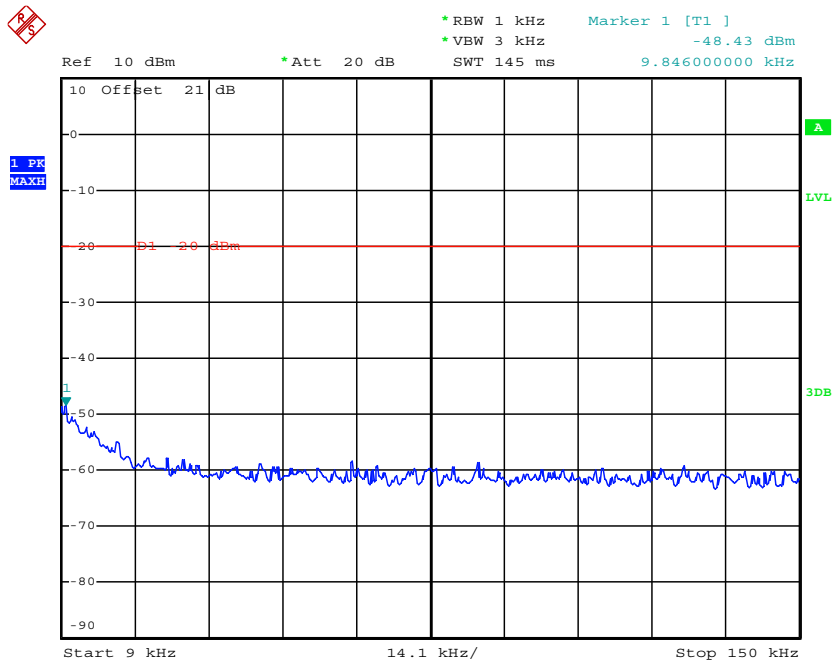


Date: 16.MAY.2016 20:11:01

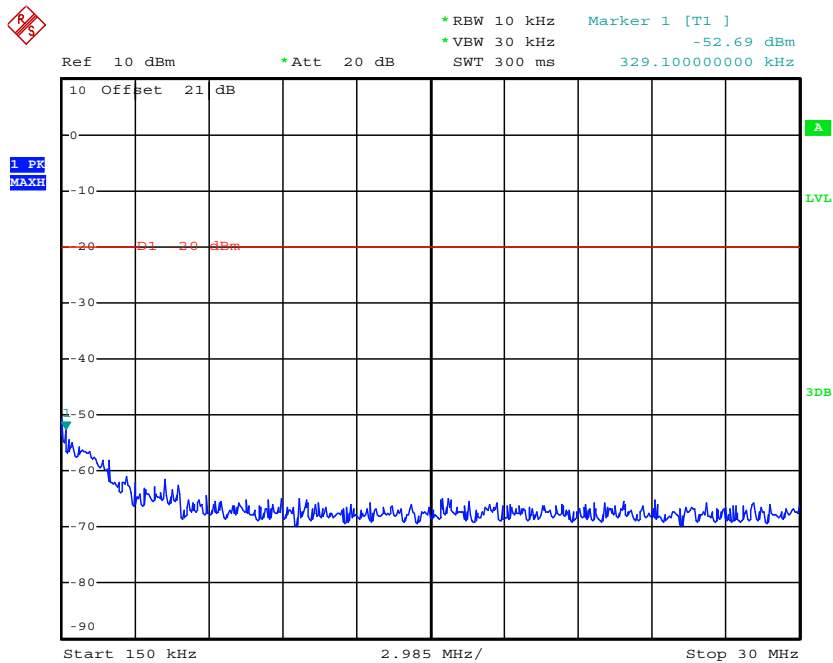

Date: 16.MAY.2016 20:18:27




Ref 37 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -27.94 dBm
*VBW 300 kHz SWT 100 ms 301.60000000 MHz

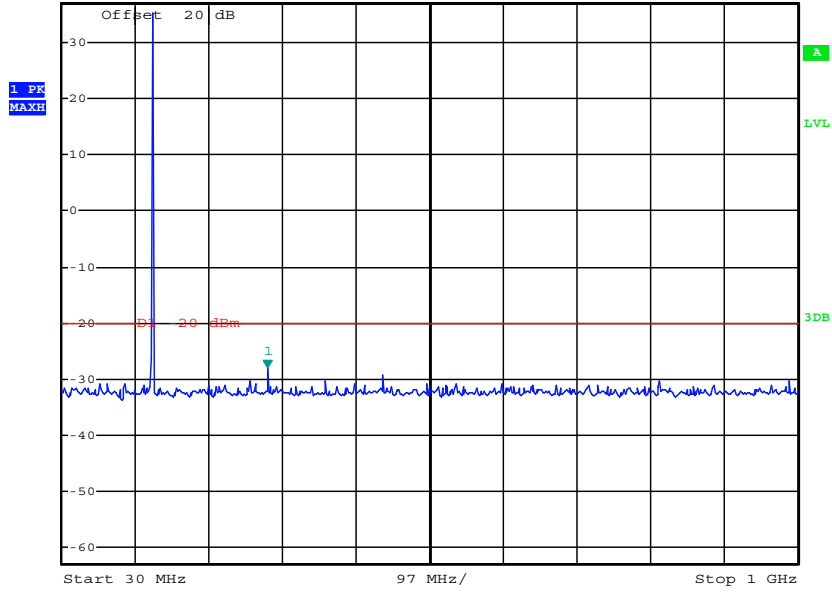

Date: 5.MAY.2016 18:31:33




Ref 37 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -33.54 dBm
*VBW 3 MHz SWT 5 ms 1.738000000 GHz

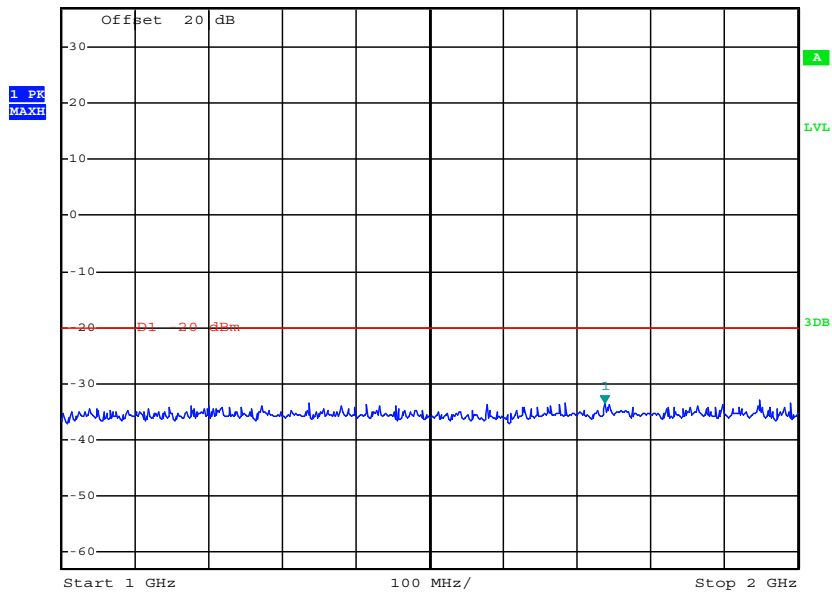


Date: 5.MAY.2016 18:32:13


Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		Limit (dBm)
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)	
Op 3	Ch5	158.55	476.20	-29.20	1246.00	-33.90	-20.00

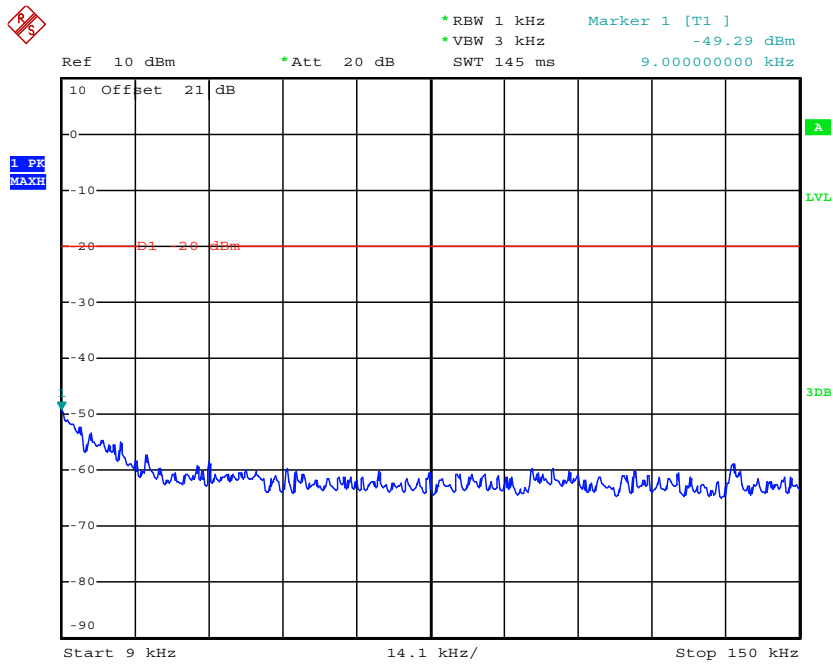


Date: 16.MAY.2016 20:11:14

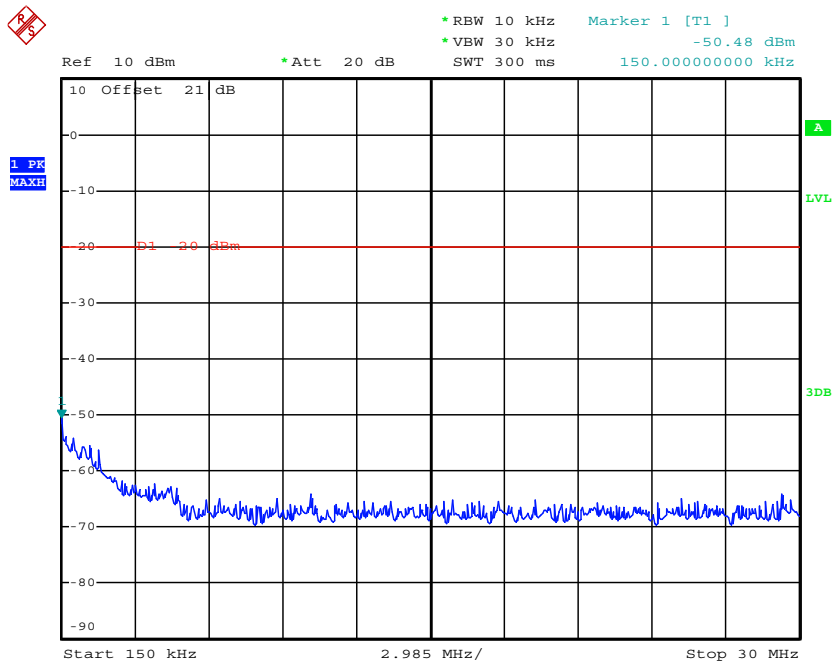

Date: 16.MAY.2016 20:18:17

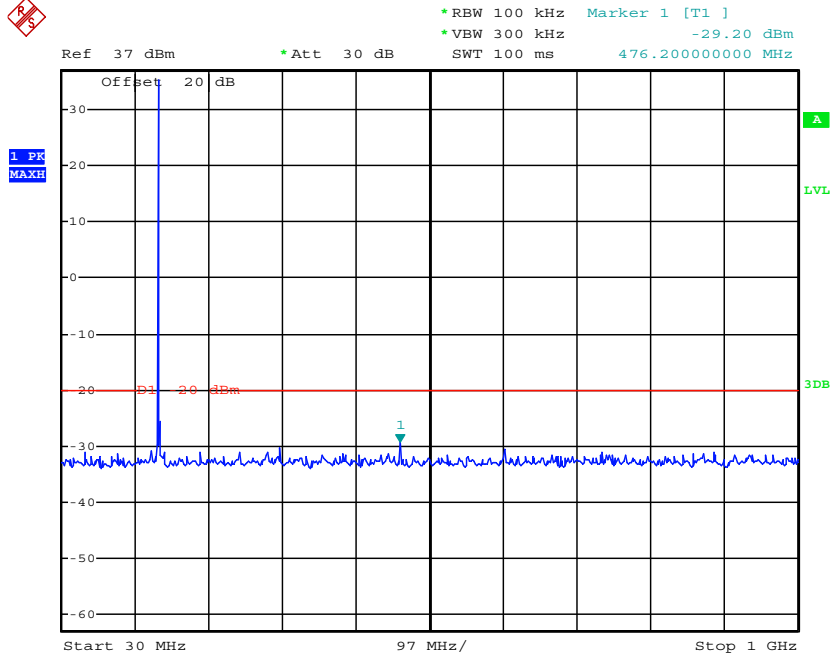


Date: 5.MAY.2016 18:36:05

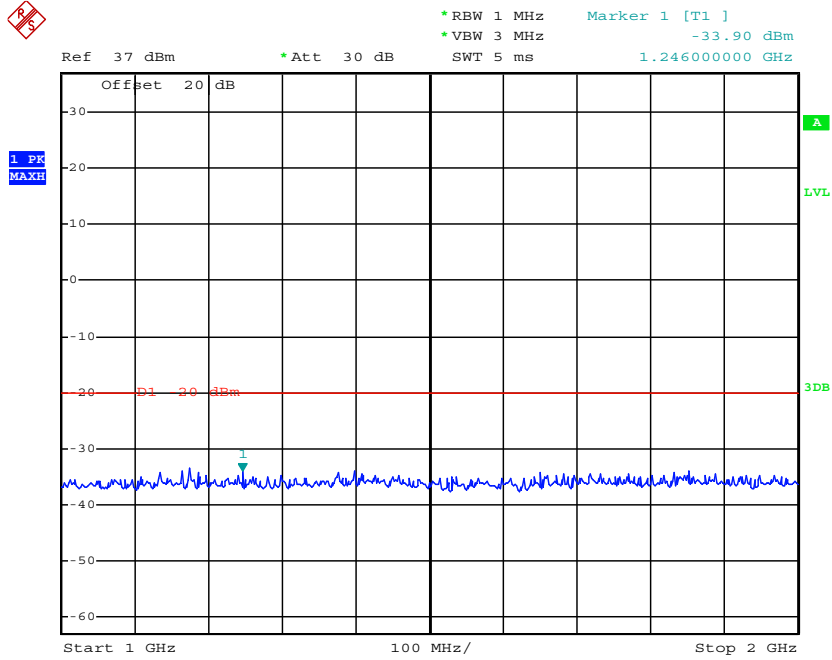


Date: 5.MAY.2016 18:36:23

Operation Mode	Test Channel	Test Frequency (MHz)	Maximum Conducted Spurious Emissions Below 1GHz		Maximum Conducted Spurious Emissions Above 1GHz		Limit (dBm)
			Frequency (MHz)	Data (dBm)	Frequency (MHz)	Data (dBm)	
Op 3	Ch6	173.3875	346.22	-29.83	1406.00	-33.27	-20.00

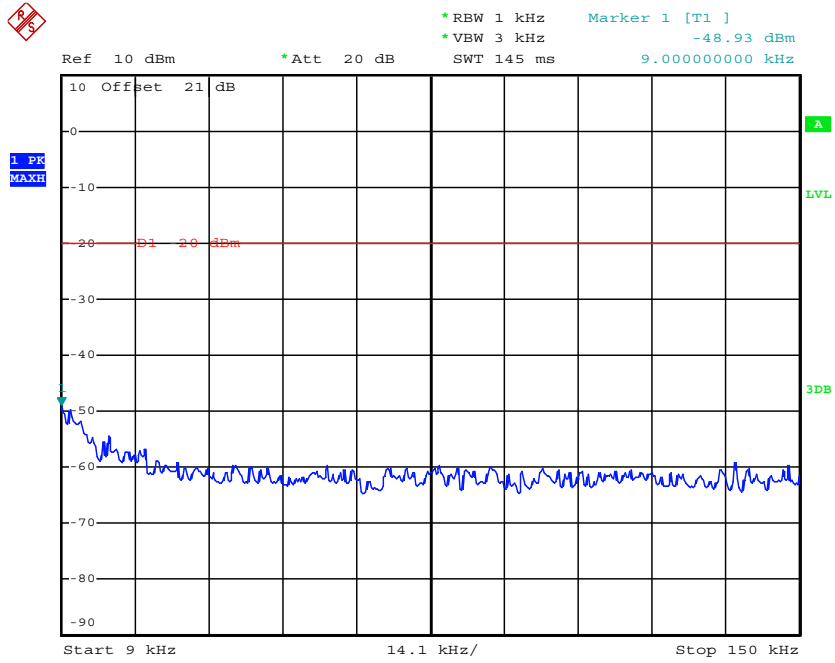


Date: 16.MAY.2016 20:11:29

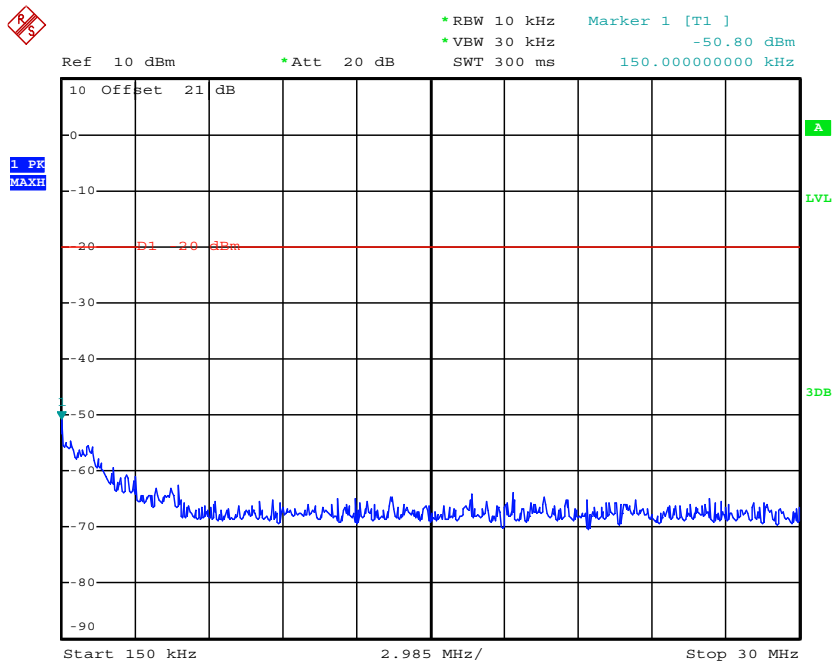

Date: 16.MAY.2016 20:18:07




Ref 37 dBm *Att 30 dB *RBW 100 kHz Marker 1 [T1] -29.83 dBm
*VBW 300 kHz SWT 100 ms 346.22000000 MHz

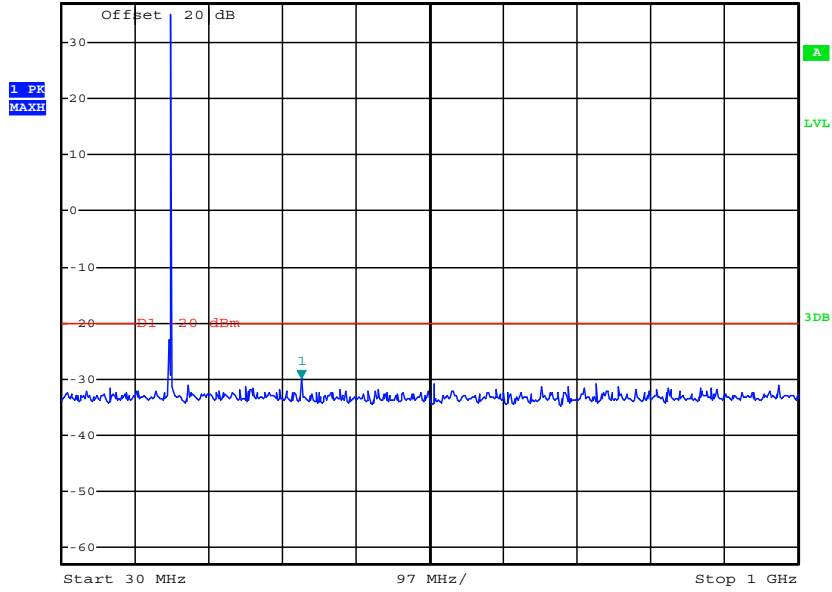

Date: 5.MAY.2016 18:40:30



Ref 37 dBm *Att 30 dB *RBW 1 MHz Marker 1 [T1] -33.27 dBm
*VBW 3 MHz SWT 5 ms 1.406000000 GHz

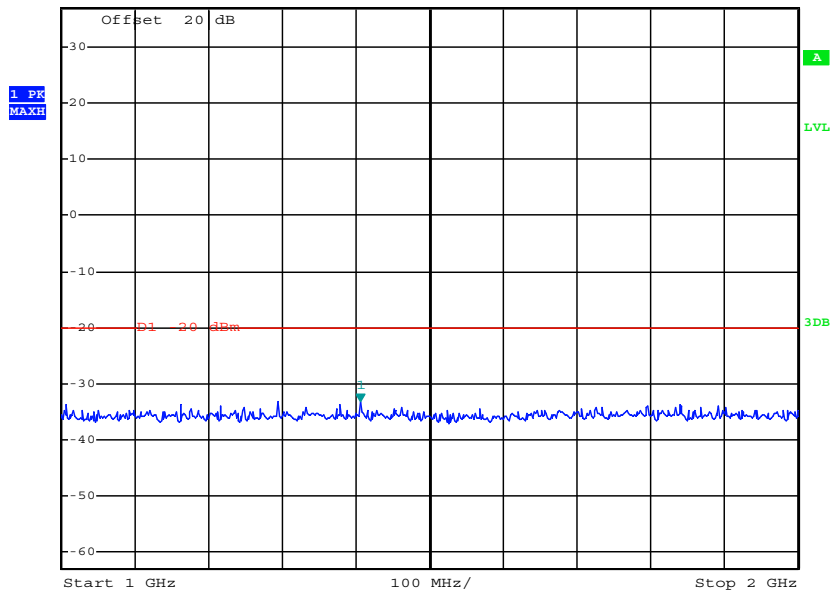

Date: 5.MAY.2016 18:40:48

4.5. Modulation Characteristics

TEST APPLICABLE

According to CFR47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

TEST PROCEDURE


Modulation Limit

- 1 Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1 KHz using this level as a reference (0dB) and vary the input level from -20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- 2 Repeat step 1 with input frequency changing to 300, 1004, 1500 and 2500Hz in sequence.

Audio Frequency Response

- 1 Configure the EUT as shown in figure 1.
- 2 Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0dB).
- 3 Vary the Audio frequency from 100 Hz to 3 KHz and record the frequency deviation.
- 4 Audio Frequency Response = $20\log_{10}$ (Deviation of test frequency/Deviation of 1 KHz reference).

TEST CONFIGURATION

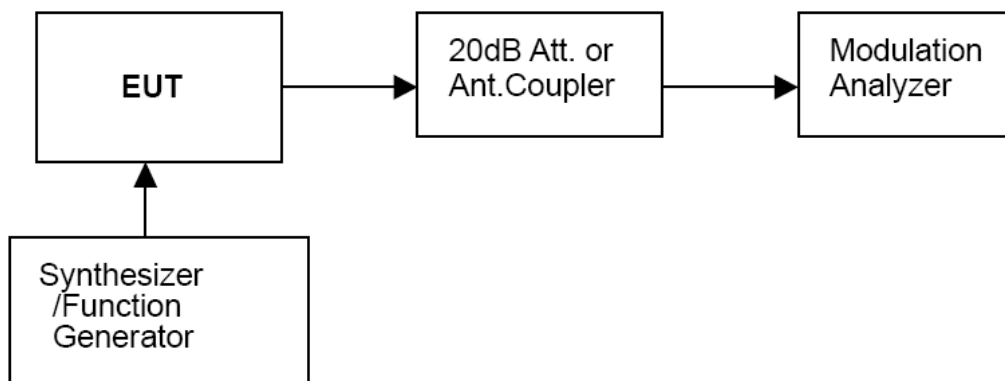

TEST RESULTS


Remark:

1. We tested Op 1 to Op 2 recorded worst case at Op 1.

Modulation Type: FM

12.5 KHz Channel Separation Op1

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1004 Hz (KHz)	Peak Freq. Deviation At 1500 Hz (KHz)	Peak Freq. Deviation At 2500 Hz (KHz)
-20	0.12	0.17	0.34	0.48
-15	0.20	0.33	0.52	0.79
-10	0.28	0.56	0.78	1.44
-5	0.52	0.91	1.53	2.06
0	0.69	1.64	1.96	2.23
+5	0.97	1.99	2.05	2.23
+10	1.16	2.06	2.23	2.23
+15	1.28	2.18	2.23	2.23
+20	1.43	2.18	2.23	2.23

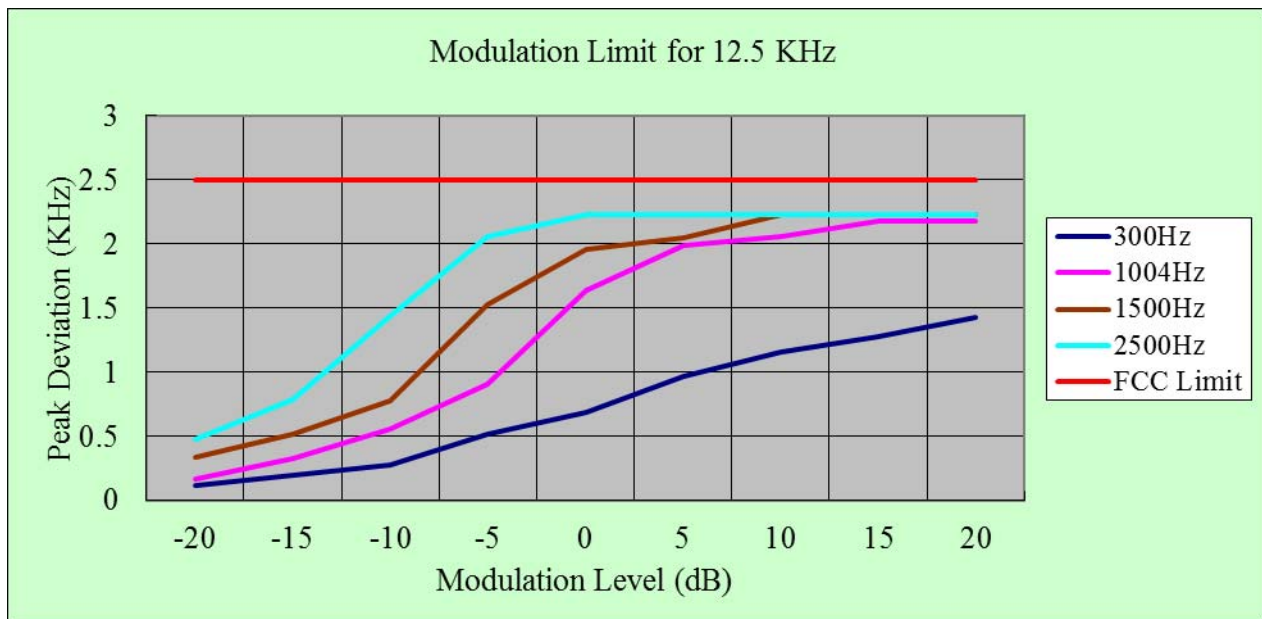

Modulation type: 4FSK

Channel bandwidth: 12.5 kHz

It is not applicable for devices which operate with the digitized voice/data modulation type.

b). Audio Frequency Response:

Rule Part No.: Part 2.1407(a) (b)

Method of Measurement:

The audio frequency response was measured in accordance with TIA/EIA Specification 603 with no exception. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 300-3000Hz shall be submitted and Audio Post Limiter Low Pass Filter Response from 3.0 KHz to 50KHz. However, the audio frequency response should test from 100Hz to 5.0 KHz according to FCC Part 90.

Modulation Type: FM

The audio frequency response curve is show below.


Test Audio Level (1 KHz and 20% maximum deviation) for 12.5 KHz channel separation is 2.75mV.

Note:

1. Not applicable to new standard. However, tests are conducted under FCC's recommendation.
2. The Audio Frequency Response is identical for 12.5 KHz channel separation

12.5 KHz Channel Separation Op1

Frequency (KHz)	Frequency Deviation (KHz)	1KHz Reference Deviation (KHz)	Audio Frequency Response (dB)
0.1	0.05	0.51	-20.17
0.2	0.05	0.51	-20.17
0.3	0.12	0.51	-12.57
0.4	0.18	0.51	-9.05
0.5	0.22	0.51	-7.30
0.6	0.28	0.51	-5.21
0.7	0.36	0.51	-3.03
0.8	0.43	0.51	-1.48
0.9	0.45	0.51	-1.09
1.0	0.51	0.51	0.00
1.2	0.59	0.51	1.27
1.4	0.67	0.51	2.37
1.6	0.74	0.51	3.23
1.8	0.81	0.51	4.02
2.0	0.88	0.51	4.74
2.2	1.02	0.51	6.02
2.4	1.09	0.51	6.60
2.6	1.16	0.51	7.14
2.7	1.19	0.51	7.36
2.8	1.25	0.51	7.79
3.0	1.29	0.51	8.06
3.5	1.29	0.51	8.06
4.0	0.05	0.51	-20.17
4.5	0.05	0.51	-20.17
5.0	0.05	0.51	-20.17

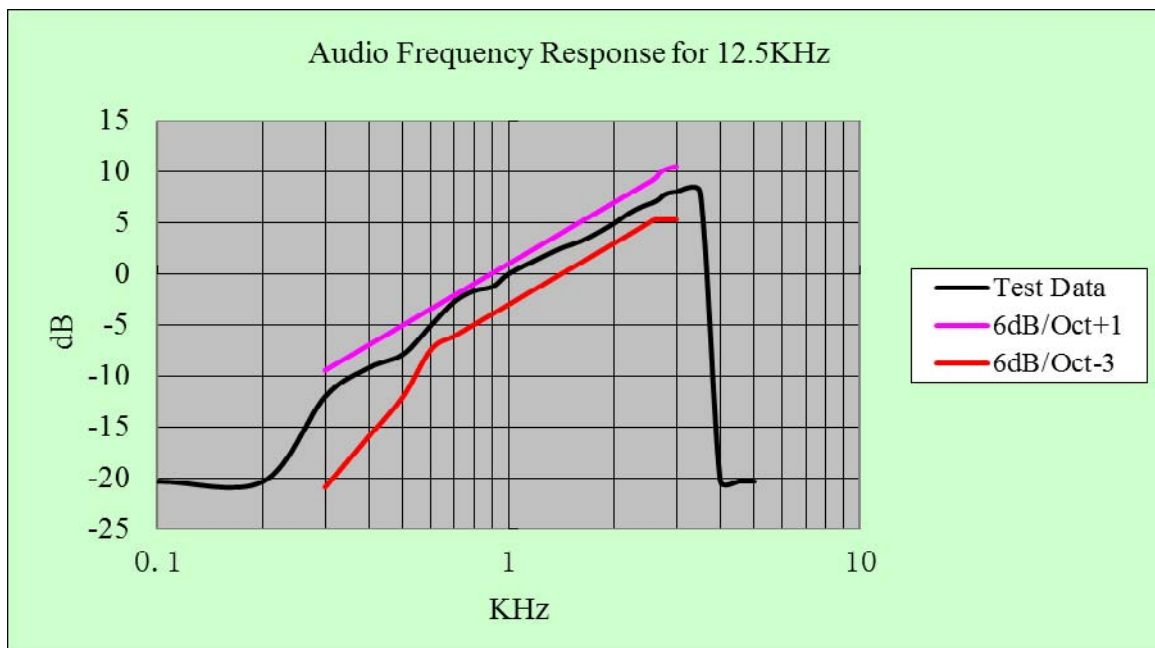

Modulation type: 4FSK

Channel bandwidth: 12.5 kHz

It is not applicable for devices which operate with the digitized voice/data modulation type.

4.6. Frequency Stability Test


TEST APPLICABLE

- 1 According to FCC Part 2 Section 2.1055 (a) (1), the frequency stability shall be measured with variation of ambient temperature from -30°C to +60°C centigrade.
- 2 According to FCC Part 2 Section 2.1055 (e) (2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- 3 Vary primary supply voltage from 85 to 115 percent of the nominal value.
- 4 According to §90.213, the frequency stability limit is 5.0 ppm for 12.5KHz channel separation

TEST PROCEDURE

The EUT was set in the climate chamber and connected to an external DC power supply. The RF output was directly connected to Spectrum Analyzer ESPI7. The coupling loss of the additional cables was recorded and taken in account for all the measurements. After temperature stabilization (approx. 20 min for each stage), the frequency for the lower, the middle and the highest frequency range was recorded. For Frequency stability Vs. Voltage the EUT was connected to a DC power supply and the voltage was adjusted in the required ranges. The result was recorded.

TEST CONFIGURATION

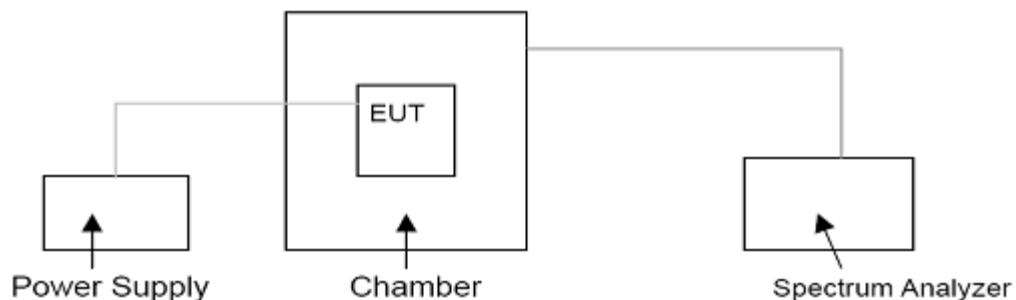

TEST LIMITS

According to 90.213, Transmitters used must have minimum frequency stability as specified in the following table.

Frequency Range (MHz)	Channel Bandwidth (KHz)	Frequency Tolerance (ppm)		
		Fixed and Base Stations	Mobile Stations	
			> 2 W	≤ 2 W
150-174 MHz	6.25	1.0	2.0	2.0
	12.5	2.5	5.0	5.0
	25	5.0	5.0	50.0*
421-512 MHz	6.25	0.5	1.0	1.0
	12.5	1.5	2.5	2.5
	25	2.5	5.0	5.0

- Stations operating in the 154.45 to 154.49 MHz or the 173.2 to 173.4 MHz bands must have a frequency stability of 5 ppm.
- Paging transmitters operating on paging-only frequencies must operate with frequency stability of 5 ppm in the 150-174 MHz band and 2.5 ppm in the 421-512 MHz band.

TEST RESULTS

Remark:

1. We tested Op 1 to Op 4, recorded worst case at Op 1 and Op 3.

Operation Mode	Channel Separation	Test conditions		Frequency error (ppm)		
		Voltage(V)	Temp(°C)	150.825	158.55	173.3875
Op1	12.5KHz	7.40 V	-30	1.32	1.20	1.21
			-20	0.70	0.87	0.78
			-10	0.78	0.67	0.68
			0	0.89	0.76	0.87
			10	0.86	0.78	0.79
			20	0.87	0.78	0.87
			30	0.67	0.76	0.87
			40	0.57	0.69	0.76
			50	0.76	0.69	0.87
			6.29 (85% Rated)	20	0.73	0.74
		8.51(115% Rated)	20	0.81	0.76	0.84
Limit			5.0 ppm			
Test Results			PASS			

Operation Mode	Channel Separation	Test conditions		Frequency error (ppm)		
		Voltage(V)	Temp(°C)	150.825	158.55	173.3875
Op3	12.5KHz	7.40 V	-30	1.32	1.11	1.00
			-20	0.67	0.69	0.73
			-10	0.76	0.78	0.82
			0	0.77	0.87	0.75
			10	0.72	0.66	0.76
			20	0.69	0.67	0.65
			30	0.77	0.78	0.77
			40	0.88	0.67	0.86
			50	1.01	1.22	1.11
			6.29 (85% Rated)	20	0.78	0.87
		8.51(115% Rated)	20	0.78	0.89	0.96
Limit			5.0 ppm			
Test Results			PASS			

4.7. Maximum Transmitter Power

TEST APPLICABLE

Per FCC Part 2.1046 and Part 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

Per RSS-119 Section 5.4 and 5.4.1: The output power shall be within ± 1.0 dB of the manufacturer's rated power. Typical transmitter output powers are 110 watts for base and/or fixed stations (paging transmitters excepted), and 30 watts for mobile stations. Higher powers may be certified, but it should be noted that mobile stations are normally only licensed up to 30 watts. See the SRSP relevant to the operating frequency for equipment power limits.

TEST PROCEDURE


Measurements shall be made to establish the radio frequency power delivered by the transmitter the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels.

The EUT connect to the Receiver through 20 dB attenuator.

Measurement with Spectrum Analyzer ESPI7 for conducted measurement, external power supply with 7.40 V stabilized supply voltage.

TEST CONFIGURATION

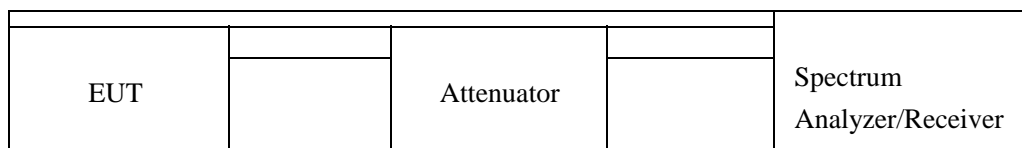


The EUT was directly connected to a RF Communication
Test set by a 20 dB attenuator

TEST RESULTS

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Test Results (dBm)
Analog/FM	12.5KHz	Op 1	Ch1	150.825	36.90
			Ch2	158.55	36.86
			Ch3	173.3875	36.88
		Op 2	Ch1	150.825	30.57
			Ch2	158.55	30.68
			Ch3	173.3875	30.33
Digital/4FSK	12.5KHz	Op 3	Ch4	150.825	36.94
			Ch5	158.55	36.88
			Ch6	173.3875	36.87
		Op 4	Ch4	150.825	30.69
			Ch5	158.55	30.67
			Ch6	173.3875	30.10
Limit	The limit is dependent upon the station's antenna HAAT and required service area.				
Test Results	PASS				


Plots of Transmitter Power Measurement

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
FM	12.5KHz	Op 1	Ch1	150.825	4.5	36.90	Varies	PASS

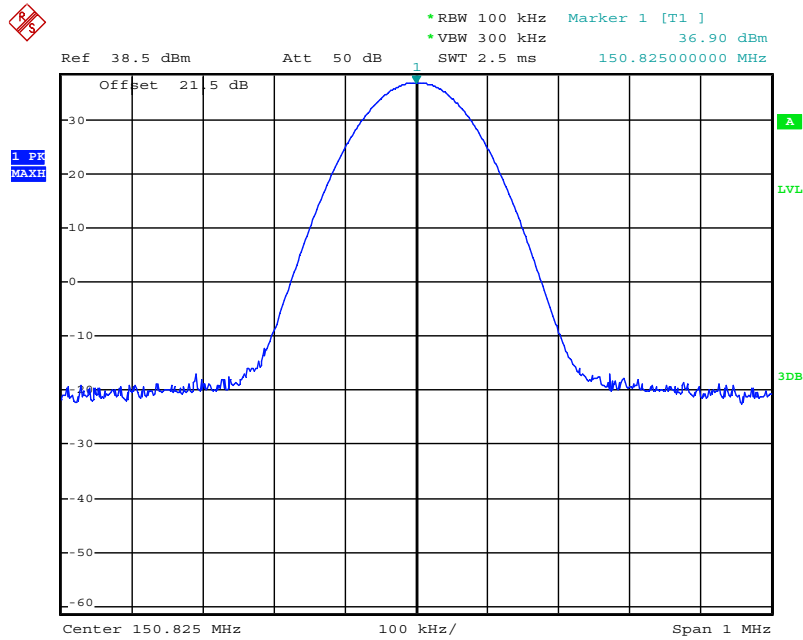


Date: 12.MAY.2016 00:04:42

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
FM	12.5KHz	Op 1	Ch2	158.55	4.5	36.86	Varies	PASS

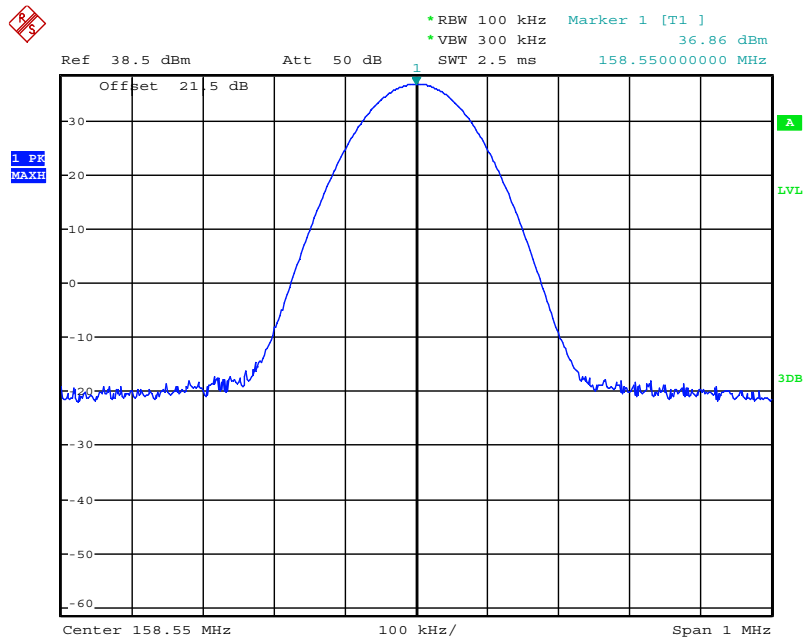


Date: 12.MAY.2016 00:06:23

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
FM	12.5KHz	Op 1	Ch3	173.3875	4.5	36.88	Varies	PASS

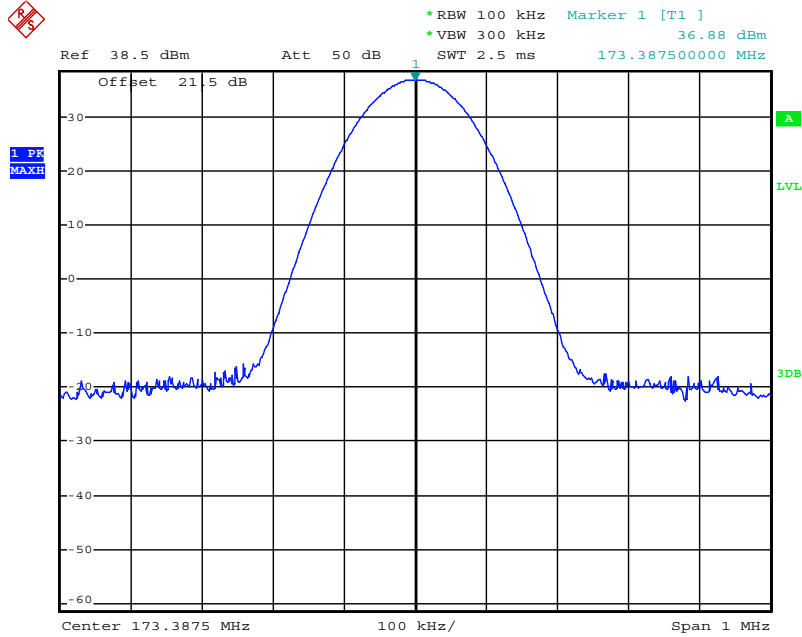


Date: 12.MAY.2016 00:10:27

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
FM	12.5KHz	Op 2	Ch1	150.825	1	30.57	Varies	PASS

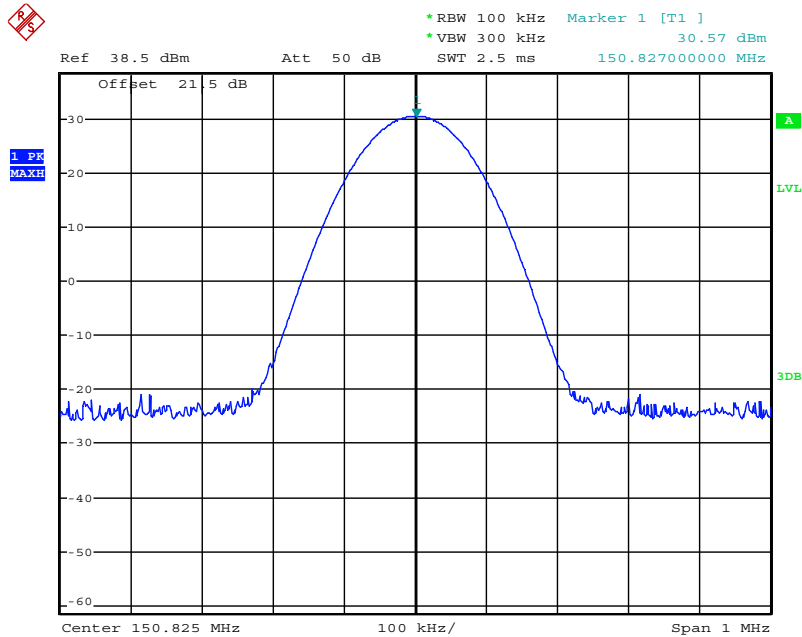


Date: 12.MAY.2016 00:04:52

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
FM	12.5KHz	Op 2	Ch2	158.55	1	30.68	Varies	PASS

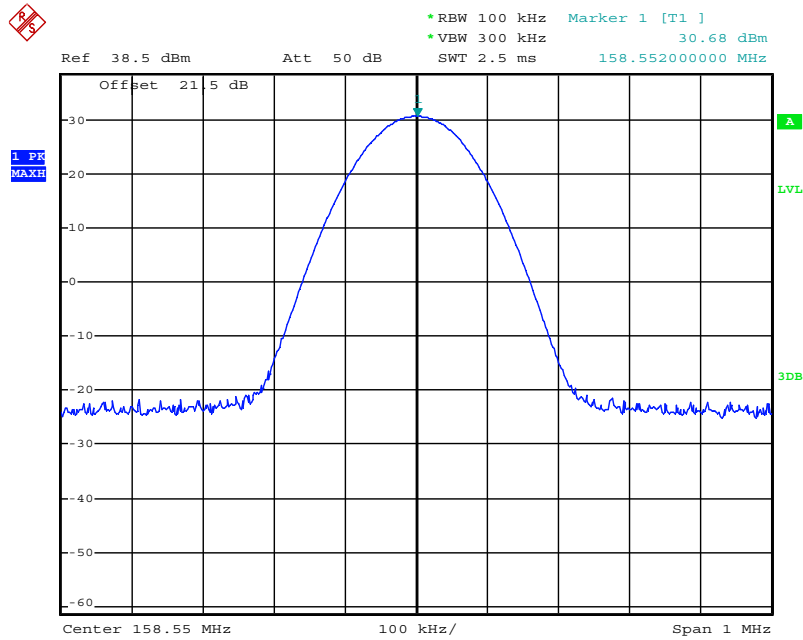


Date: 12.MAY.2016 00:05:43

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
FM	12.5KHz	Op 2	Ch3	173.3875	1	30.33	Varies	PASS

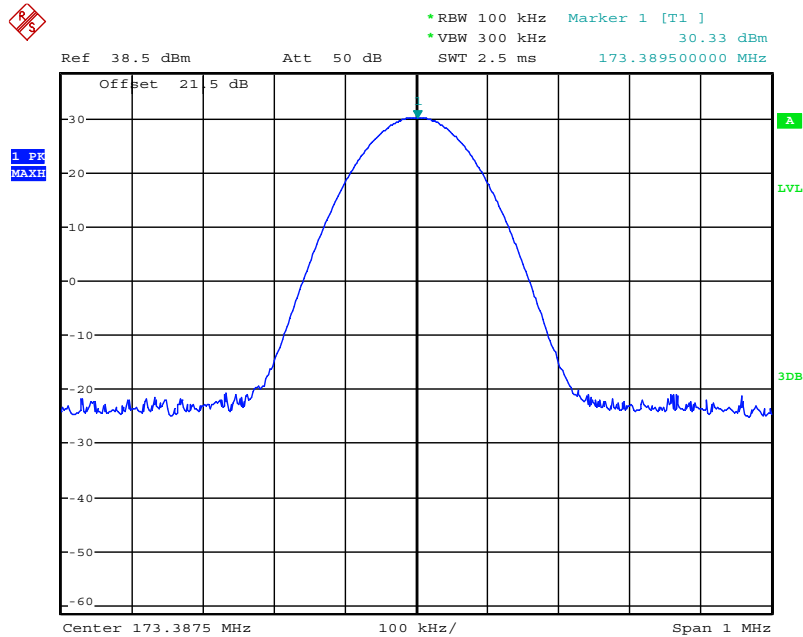


Date: 12.MAY.2016 00:10:13

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
4FSK	12.5KHz	Op 3	Ch4	150.825	4.5	36.94	Varies	PASS

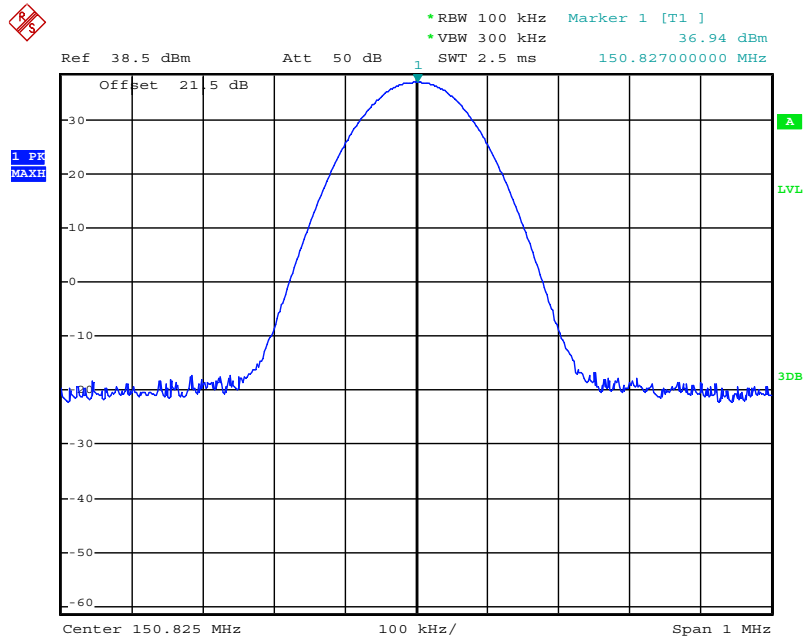


Date: 12.MAY.2016 00:01:18

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
4FSK	12.5KHz	Op 3	Ch5	158.55	4.5	36.88	Varies	PASS

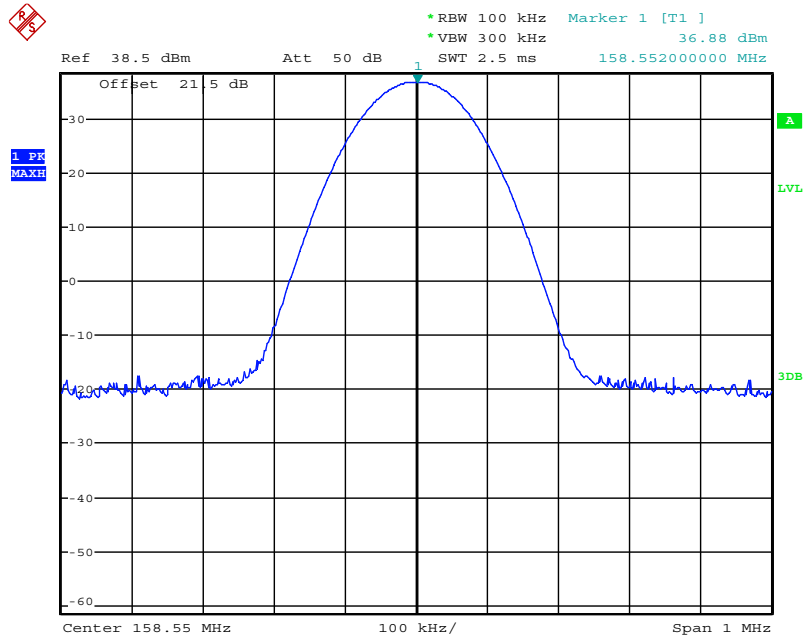


Date: 12.MAY.2016 00:02:20

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
4FSK	12.5KHz	Op 3	Ch6	173.3875	4.5	36.87	Varies	PASS

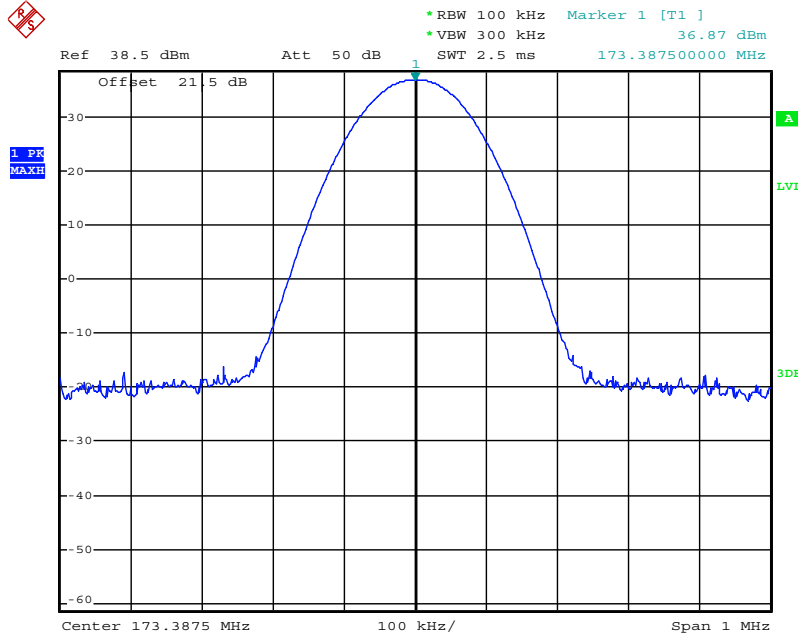


Date: 12.MAY.2016 00:03:35

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
4FSK	12.5KHz	Op 4	Ch4	150.825	1	30.69	Varies	PASS

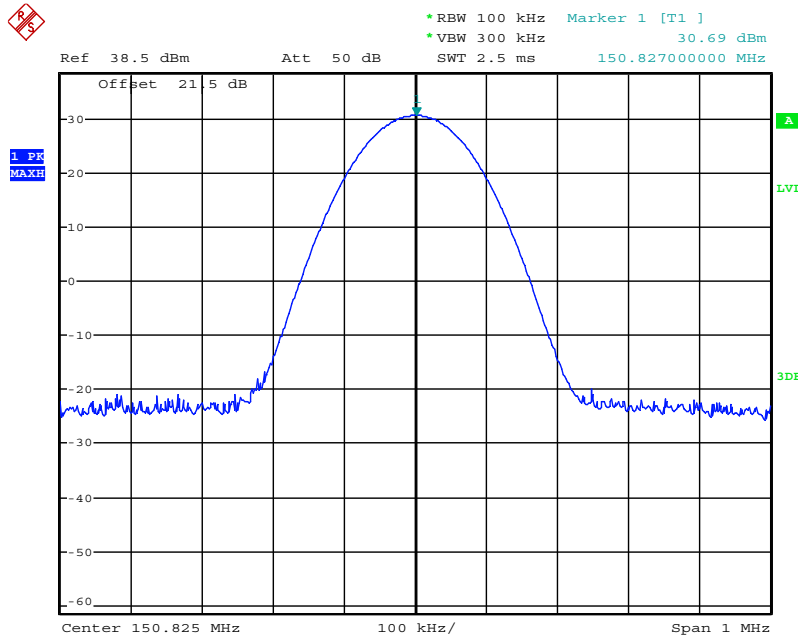


Date: 12.MAY.2016 00:01:38

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
4FSK	12.5KHz	Op 4	Ch5	158.55	1	30.67	Varies	PASS

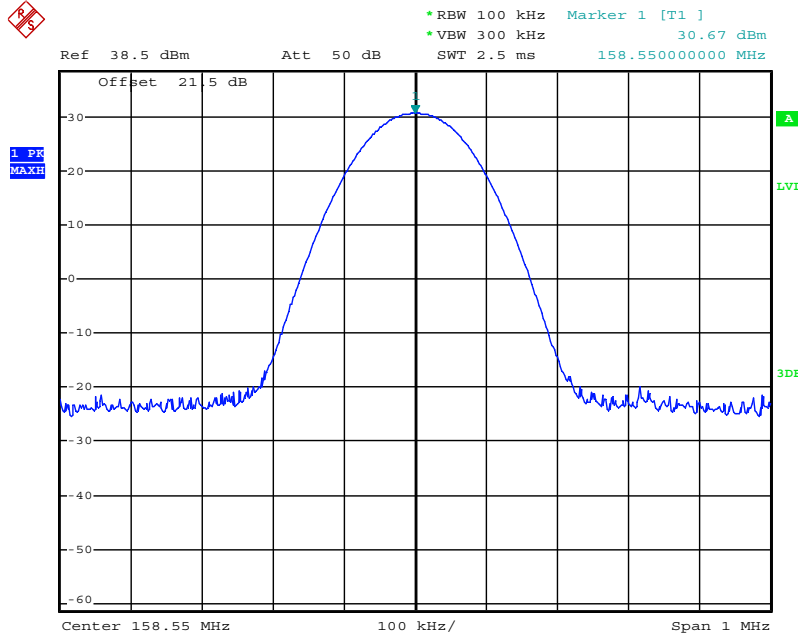

Date: 12.MAY.2016 00:02:09

Modulation Type	Channel Separation	Operation Mode	Test Channel	Test Frequency (MHz)	Rated Power (Watt)	Measurement (dBm)	Limit	Results
4FSK	12.5KHz	Op 4	Ch6	173.3875	1	30.10	Varies	PASS

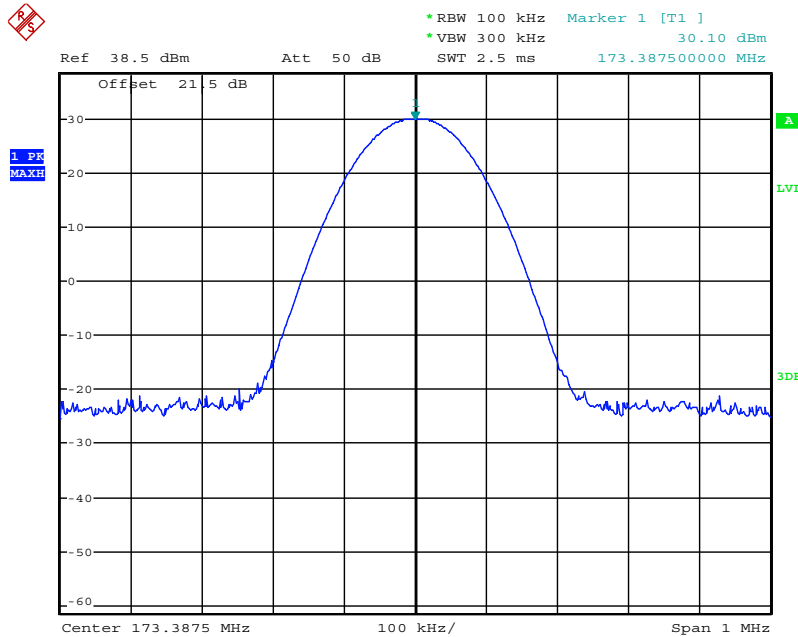

Date: 12.MAY.2016 00:03:26

4.8. Transmitter Frequency Behavior

TEST APPLICABLE


Section 90.214

Transient frequencies must be within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1, 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 KHz Channels			
t ₁ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
t ₂ ⁴	± 12.5 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 25.0 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 KHz Channels			
t ₁ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
t ₂ ⁴	± 6.25 KHz	20.0 ms	25.0 ms
t ₃ ⁴	± 12.5 KHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 KHz Channels			
t ₁ ⁴	±6.25 KHz	5.0 ms	10.0 ms
t ₂ ⁴	±3.125 KHz	20.0 ms	25.0 ms
t ₃ ⁴	±6.25 KHz	5.0 ms	10.0 ms

- t_{on} is the instant when a 1 KHz test signal is completely suppressed, including any capture time due to phasing.
t₁ is the time period immediately following t_{on}.
t₂ is the time period immediately following t₁.
t₃ is the time period from the instant when the transmitter is turned off until t_{off}.
t_{off} is the instant when the 1 KHz test signal starts to rise.
- During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in § 90.213.
- Difference between the actual transmitter frequency and the assigned transmitter frequency.
- If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

TEST CONFIGURATION

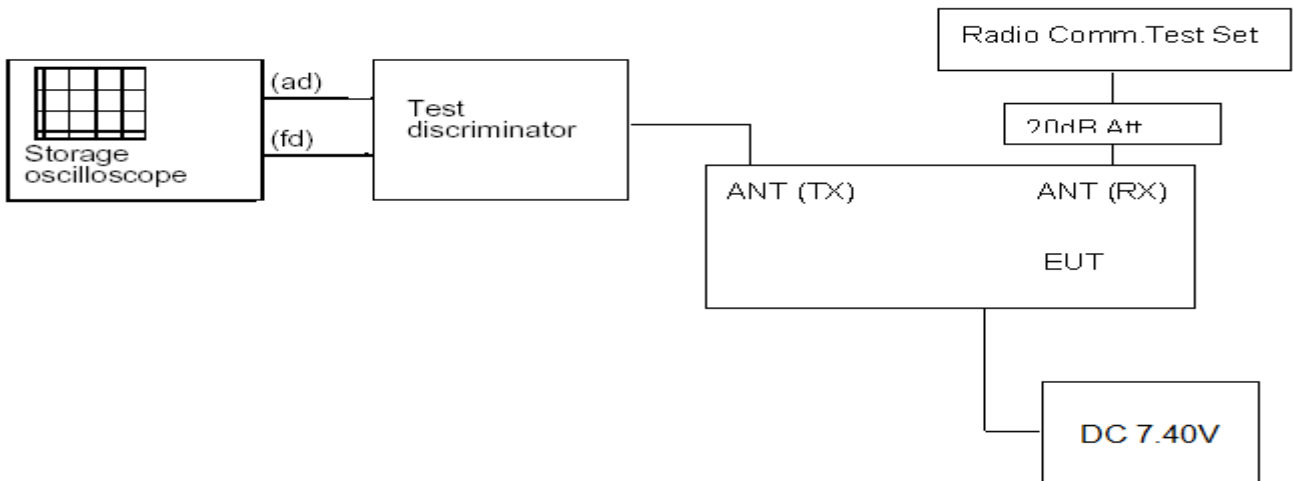

TEST PROCEDURE


According to TIA/EIA-603 2.2.19 requirement.

TEST RESULTS


Please refer to the following plots.

Modulation Type: FM

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation-----Off – On

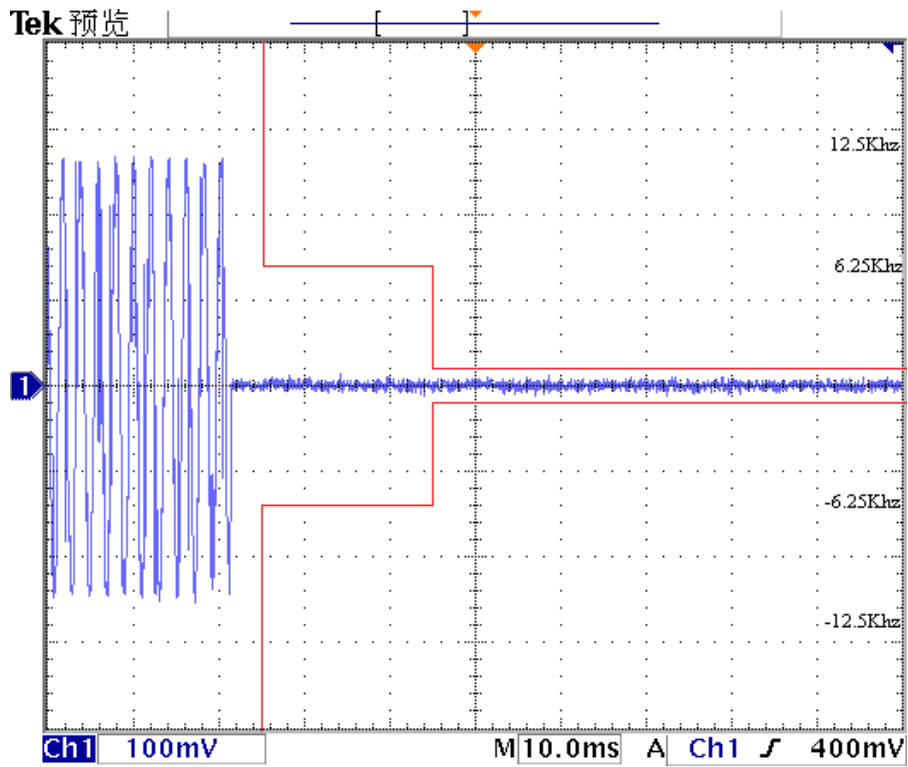


Transmitter Frequency Behavior @ 12.5 KHz Channel Separation-----On – Off

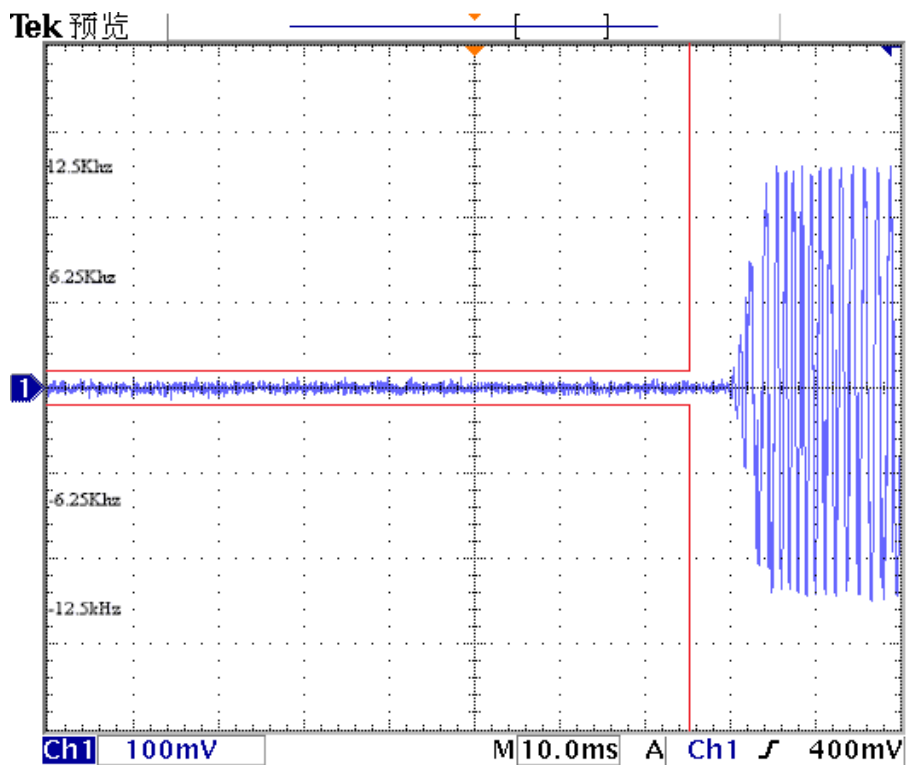


Modulation Type: 4FSK

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation-----Off – On

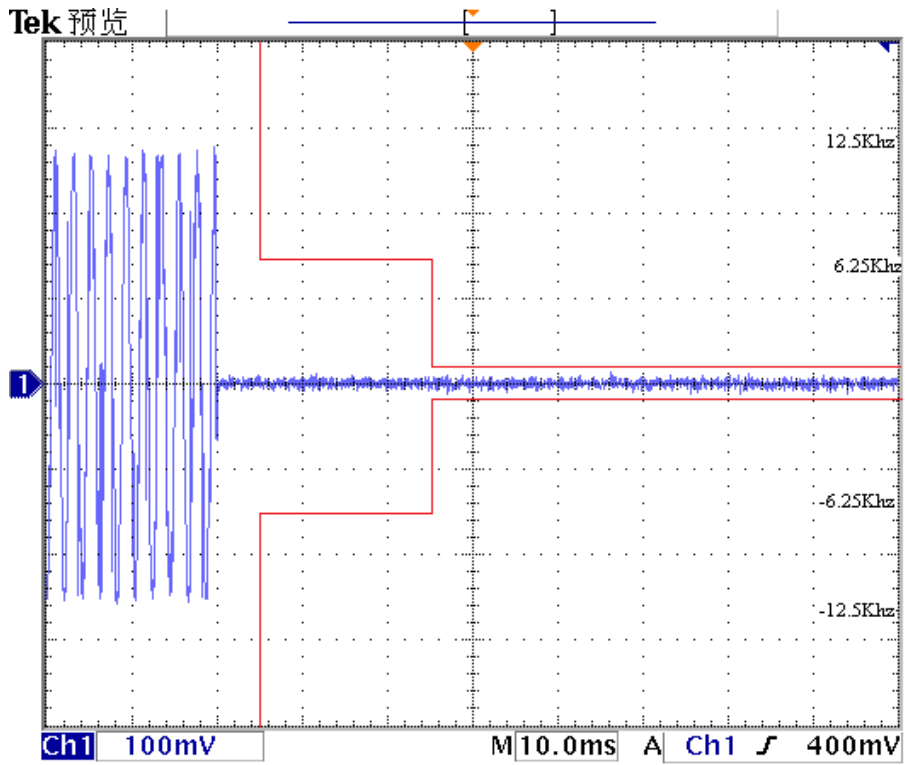

Transmitter Frequency Behavior @ 12.5 KHz Channel Separation-----On – Off

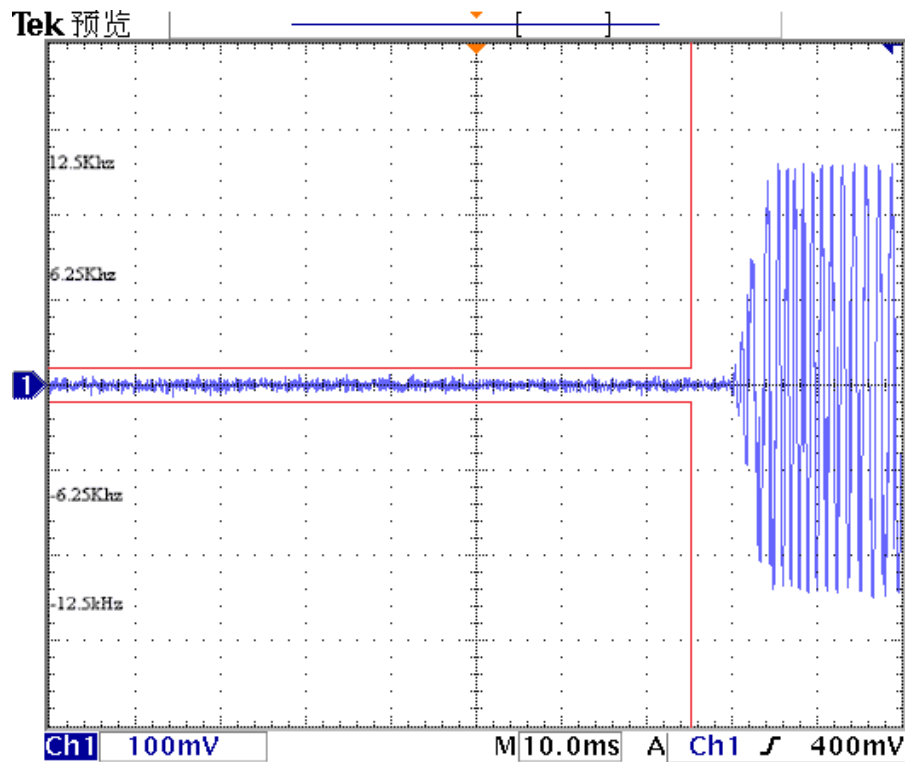

5. LIST OF MEASURING EQUIPMENT

AC Power Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date
Artificial Mains	MESS Tec	NNB-2/16Z	99079	June 18,2015
EMI Test Receiver	R&S	ESCS 30	100174	June 18,2015
EMI Test Software	Audix	E3	N/A	N/A
RF COMMUNICATION TEST SET	HP	8920A	3813A10245	June 19,2015

Modulation Characteristic				
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date
RF COMMUNICATION TEST SET	HP	8920A	3813A10245	June 19,2015

Frequency Stability				
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date
RF COMMUNICATION TEST SET	HP	8920A	3813A10245	June 19,2015
Signal Generator	Rohde&Schwarz	SMR40	10016	July 16, 2015
Climate Chamber	Giant Force	GTH-225-20-S	MAB0103-00	June 18,2015

Maximum Transmitter Power & Spurious Emission On Antenna Port & Occupied Bandwidth & Emission Mask				
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date
Receiver	Rohde&Schwarz	ESPI 7	125590	June 19,2015
RF COMMUNICATION TEST SET	HP	8920A	3813A10245	June 19,2015
High-Pass Filter	Anritsu	MP526B	6220875288	July 16, 2015
High-Pass Filter	Anritsu	MP526D	6220878442	July 16, 2015

Transient Frequency Behavior				
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date
Signal Generator	Rohde&Schwarz	SMR40	10016	July 16, 2015
Storage Oscilloscope	Tektronix	TDS3054B	B033154	July 17, 2015
RF COMMUNICATION TEST SET	HP	8920A	3813A10245	June 19,2015

Transmitter Radiated Spurious Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date
Receiver	Rohde&Schwarz	ESPI 7	125590	June 19,2015
EMI Test Software	Audix	E3	N/A	N/A
RF COMMUNICATION TEST SET	HP	8920A	3813A10245	June 19,2015
HORN ANTENNA	EMCO	3115	6741	June 10, 2015
HORN ANTENNA	EMCO	3115	6829	June 10, 2015
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	June 10, 2015
By-log Antenna	SCHWARZBECK	VULB9163	9163-498	May 29, 2016
High-Pass Filter	Anritsu	MP526B	6220875288	July 16, 2015
High-Pass Filter	Anritsu	MP526D	6220878442	July 16, 2015

The calibration interval was one year.

.....The End of Report.....