



FCC RF Test Report

APPLICANT : Gibi Technologies Incorporated
EQUIPMENT : PET location service provider
BRAND NAME : Gibi Technologies Incorporated
MODEL NAME : GIBI01
MARKETING NAME : GIBI
FCC ID : 2ABUGGIBI01
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)
CLASSIFICATION : PCS Licensed Transmitter (PCB)

The product was received on Feb. 13, 2014 and testing was completed on Apr. 25, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-328-4978
FCC ID : 2ABUGGIBI01

Page Number : 1 of 94
Report Issued Date : Jul. 29, 2014
Report Version : Rev. 01



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification subjective to this standard.....	6
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.7 Testing Location	7
1.8 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	10
2.4 Measurement Results Explanation Example	10
3 TEST RESULT	11
3.1 Conducted Output Power Measurement.....	11
3.2 Peak-to-Average Ratio	13
3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	27
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	32
3.5 Band Edge Measurement.....	52
3.6 Conducted Spurious Emission Measurement.....	59
3.7 Field Strength of Spurious Radiation Measurement	75
3.8 Frequency Stability Measurement.....	89
4 LIST OF MEASURING EQUIPMENT	93
5 UNCERTAINTY OF EVALUATION	94
APPENDIX A. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG421343	Rev. 01	Initial issue of report	Jul. 29, 2014

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	RSS-132 (5.4) RSS-133 (6.4)	Conducted Output Power	N/A	PASS	-
3.2	§24.232(d)	RSS-132 (5.4) RSS-133(6.4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.3	§22.913(a)(2)	RSS-132(5.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.3	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.4	§2.1049 §22.917(b) §24.238(b)	RSS-GEN(4.6.1) RSS-133(2.3)	Occupied Bandwidth	N/A	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Band Edge Measurement	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.6	§2.1051 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Conducted Spurious Emission	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.7	§2.1053 §22.917(a) §24.238(a)	RSS-132 (5.5) RSS-133 (6.5)	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 3.97 dB at 1673.000 MHz
3.8	§2.1055 §22.355 §24.235	RSS-132(5.3) RSS-133(6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Gibi Technologies Incorporated

2120 Camino De Los Robles. Menlo Park. CA 94025. USA

1.2 Manufacturer

Daviscomms (Malaysia) Sdn Bhd

Daviscomms (Malaysia) Sdn Bhd

Plot 18, Lorong Perusahaan Maju 1, Kawasan, Perusahaan Perai 4, 13600 Perai, Malaysia

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	PET location service provider
Brand Name	Gibi Technologies Incorporated
Model Name	GIBI01
Marketing Name	GIBI
FCC ID	2ABUGGIBI01
EUT supports Radios application	GSM/EGPRS/WCDMA/HSPA
HW Version	R02
SW Version	R01
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz
Maximum Output Power to Antenna	GSM850 : 32.83 dBm GSM1900 : 29.00 dBm WCDMA Band V : 24.35 dBm WCDMA Band II : 22.12 dBm
Antenna Type	PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	GSM850 GPRS class 8	GMSK	0.84	0.0239 ppm	246KGXW
Part 22	GSM850 EDGE class 8	8PSK	0.22	0.0191 ppm	248KG7W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK	0.10	0.0227 ppm	4M10F9W
Part 24	GSM1900 GPRS class 8	GMSK	0.58	0.0128 ppm	248KGXW
Part 24	GSM1900 EDGE class 8	8PSK	0.17	0.0149 ppm	254KG7W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK	0.11	0.0149 ppm	4M08F9W

1.7 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		IC Registration No.
	TH02-HY	03CH07-HY	4086B-1

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 22(H), 24(E)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 19000 MHz for GSM1900 and WCDMA Band II.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GPRS multi-slot class 8 mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,


RMC 12.2Kbps mode for WCDMA band II, only these modes were used for all tests.

Conducted Power Measurement Results:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GPRS class 8	32.78	32.83	32.74	29.00	28.93	28.88
GPRS class 10	29.85	29.96	29.85	25.91	25.82	25.77
GPRS class 11	28.16	28.19	28.08	24.30	24.24	24.18
GPRS class 12	26.99	27.02	26.93	23.07	22.98	22.93
EGPRS class 8	26.85	26.88	26.81	24.96	24.87	24.82
EGPRS class 10	24.02	24.05	23.93	22.12	22.02	21.96
EGPRS class 11	22.22	22.26	22.15	20.30	20.20	20.15
EGPRS class 12	21.06	21.09	20.96	19.13	19.03	18.97

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880.0	1907.6
RMC 12.2K	24.35	23.90	24.23	22.12	21.40	21.36
HSDPA Subtest-1	24.21	23.88	24.17	21.98	21.37	21.24
HSDPA Subtest-2	24.18	23.84	24.11	21.95	21.33	21.21
HSDPA Subtest-3	23.71	23.33	23.62	21.55	20.95	20.78
HSDPA Subtest-4	23.68	23.25	23.55	21.48	20.93	20.75
HSUPA Subtest-1	22.43	22.03	22.30	20.56	19.85	19.82
HSUPA Subtest-2	20.75	20.32	20.63	18.96	18.29	18.22
HSUPA Subtest-3	21.26	20.85	20.15	19.42	18.81	18.75
HSUPA Subtest-4	20.89	20.56	20.74	18.99	18.43	18.39
HSUPA Subtest-5	22.53	22.11	22.41	20.62	20.01	19.95

2.2 Connection Diagram of Test System

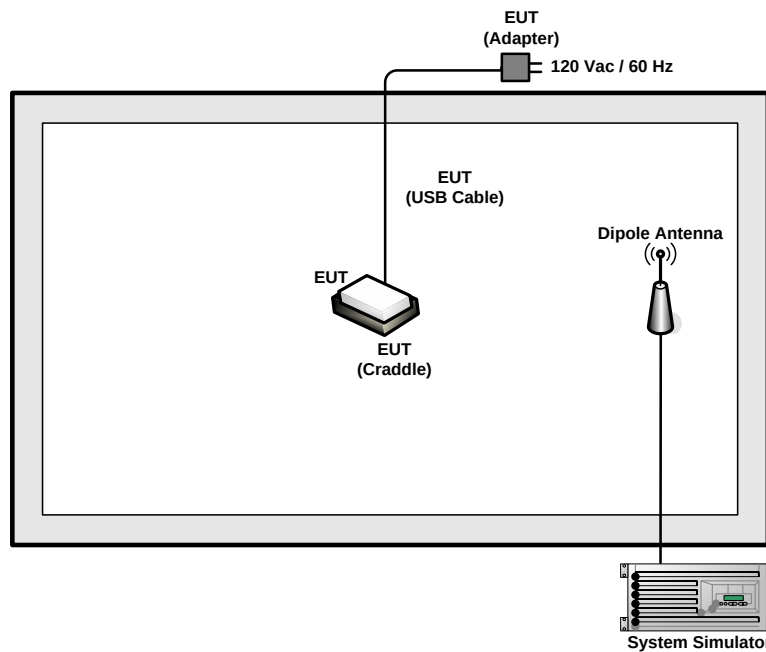



2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

3.1.4 Test Setup

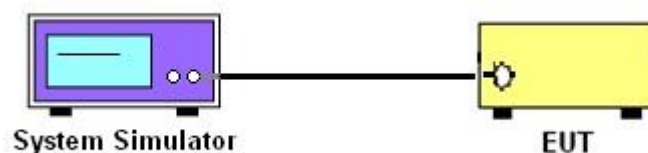

3.1.5 Test Result of Conducted Output Power

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Conducted Power (dBm)	32.78	32.83	32.74	26.85	26.88	26.81	24.35	23.90	24.23

PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Conducted Power (dBm)	29.00	28.93	28.88	24.96	24.87	24.82	22.12	21.40	21.36

3.2 Peak-to-Average Ratio

3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. For GSM/EGPRS operating modes:
 - a. Set EUT in maximum power output.
 - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
 - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
 - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
3. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.2.4 Test Setup

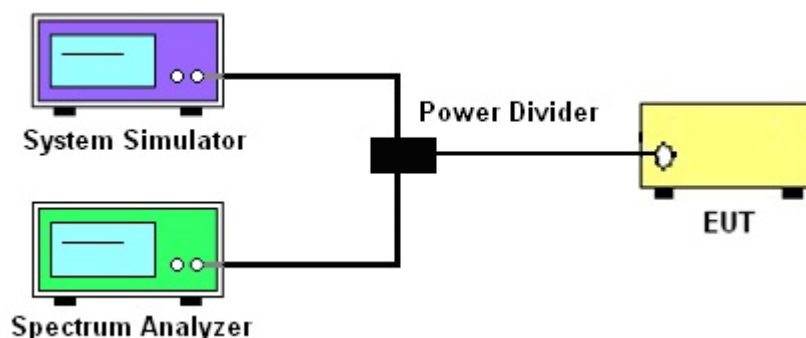

3.2.5 Test Result of Peak-to-Average Ratio

Cellular Band									
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)			WCDMA Band V (RMC 12.2Kbps)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	826.4	836.4	846.6
Peak-to-Average Ratio (dB)	0.26	0.20	0.21	2.65	2.58	2.59	3.04	3.16	3.08


PCS Band									
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)			WCDMA Band II (RMC 12.2Kbps)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	1852.4	1880	1907.6
Peak-to-Average Ratio (dB)	0.24	0.23	0.27	2.70	2.68	2.59	2.76	2.76	3.00




3.2.6 Test Result (Plots) of Peak-to-Average Ratio

Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

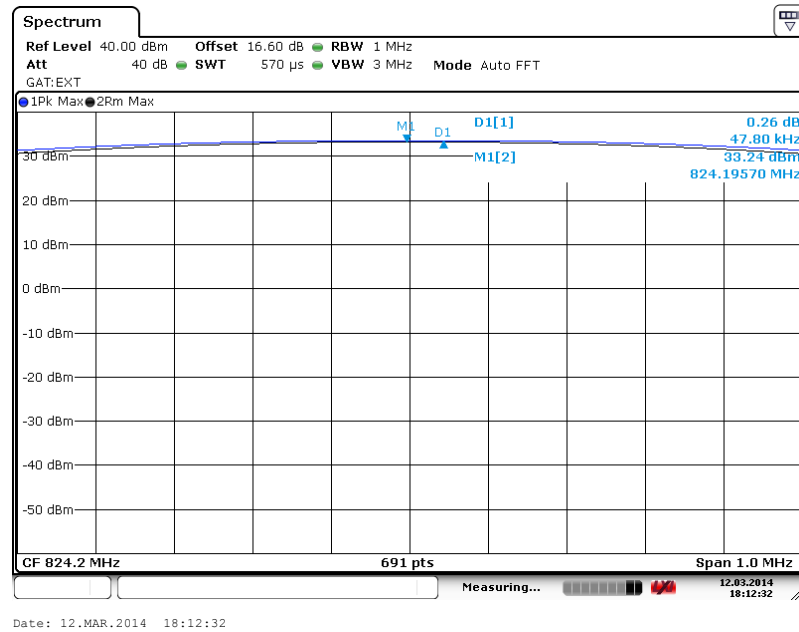


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

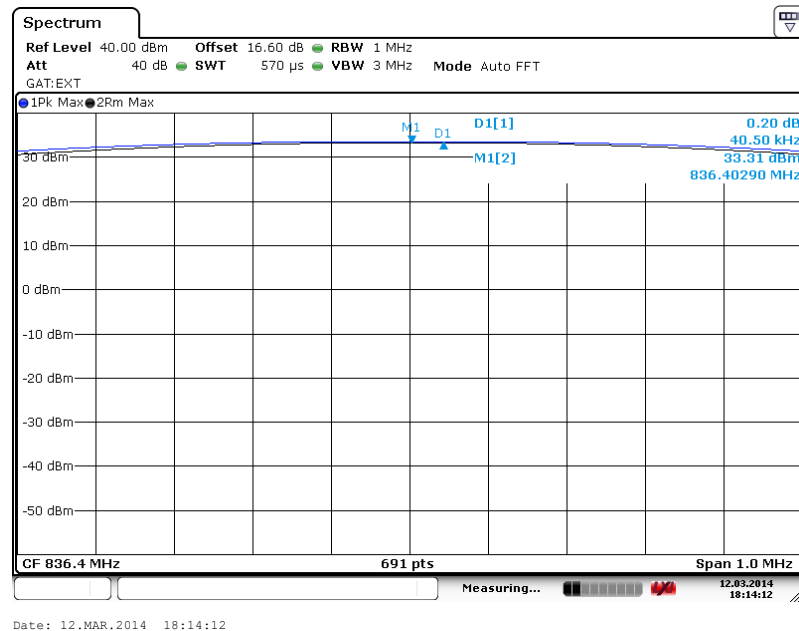




Peak-to-Average Ratio on Channel 251 (848.8 MHz)

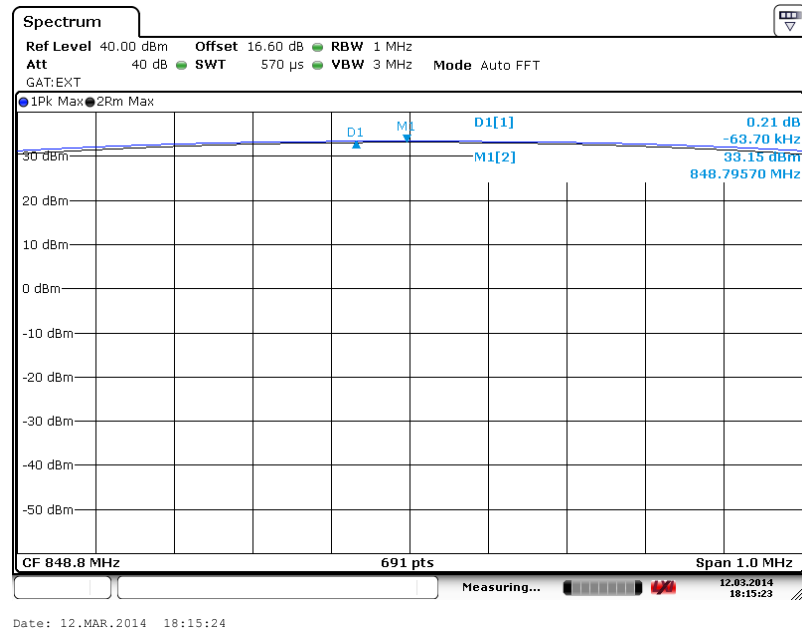




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Peak-to-Average Ratio on Channel 128 (824.2 MHz)

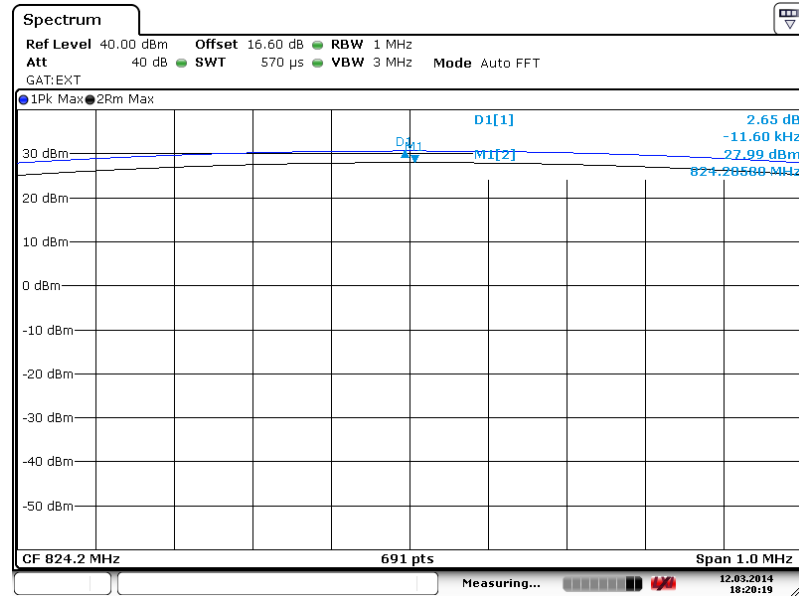

Date: 12.MAR.2014 18:20:20


Peak-to-Average Ratio on Channel 189 (836.4 MHz)

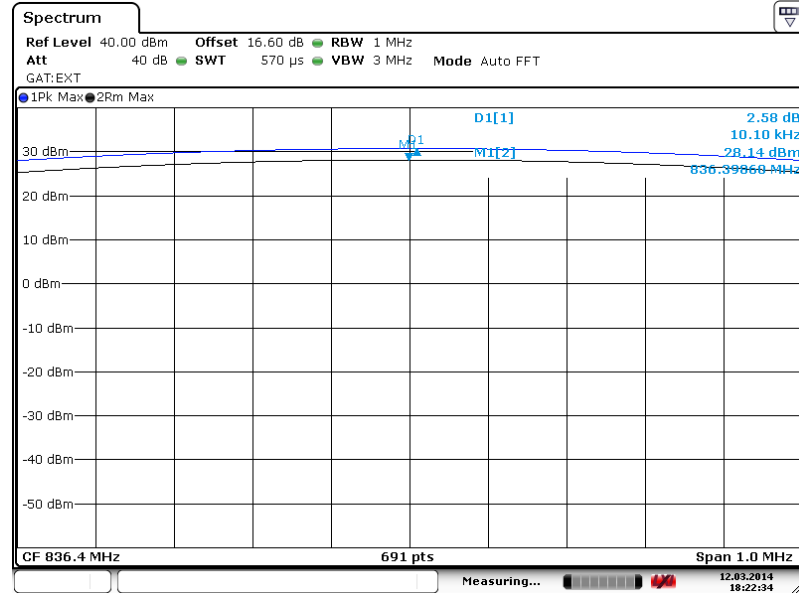

Date: 12.MAR.2014 18:22:34



Peak-to-Average Ratio on Channel 251 (848.8 MHz)

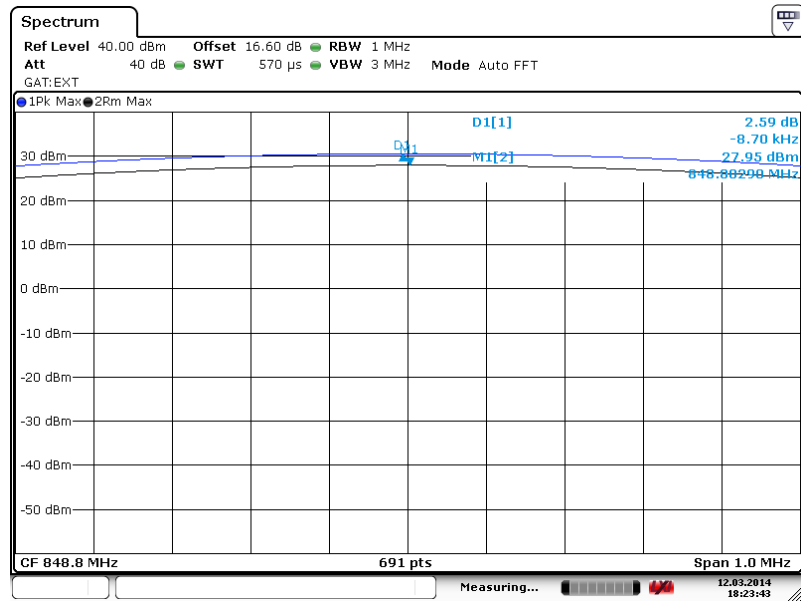


Date: 12.MAR.2014 18:23:44




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

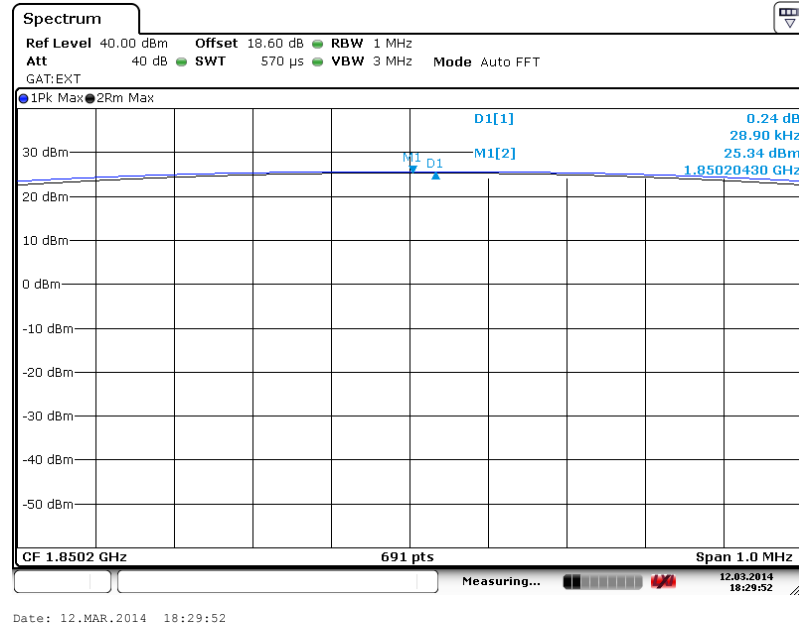


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

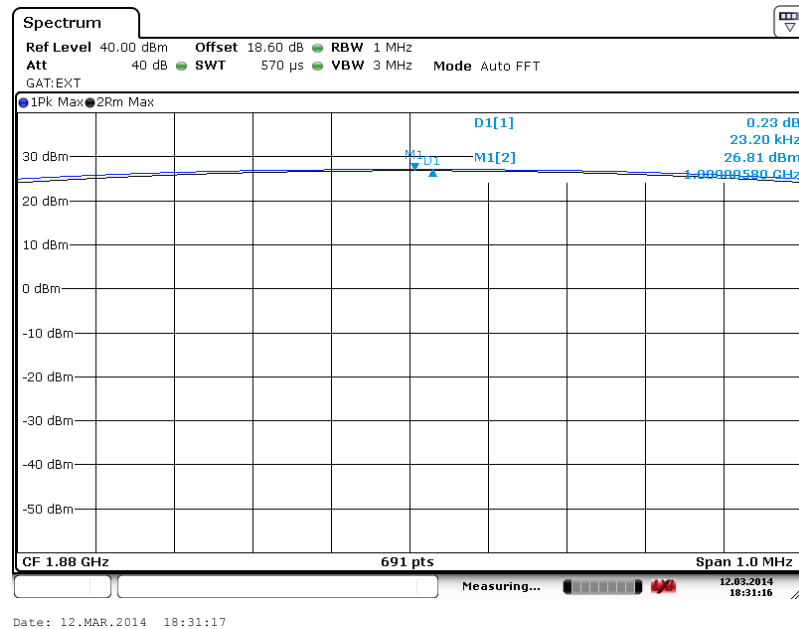



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

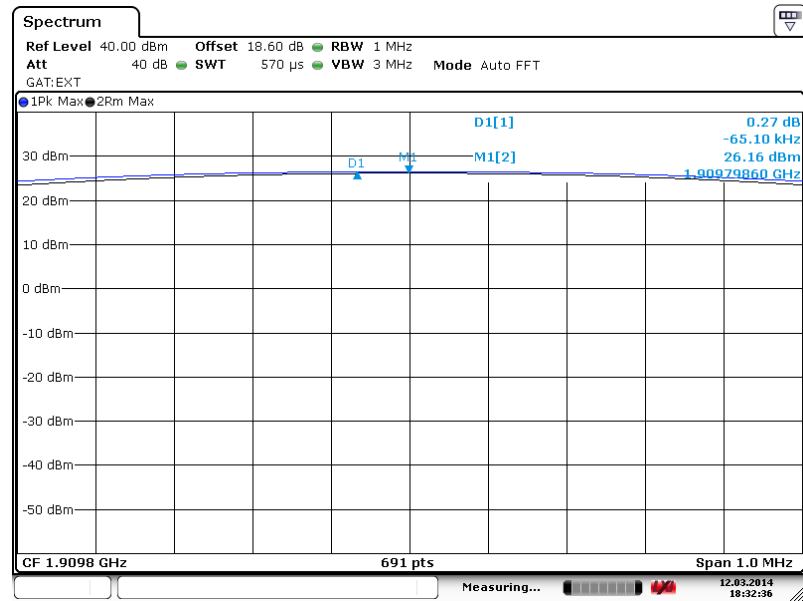


Date: 12.MAR.2014 18:32:36




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

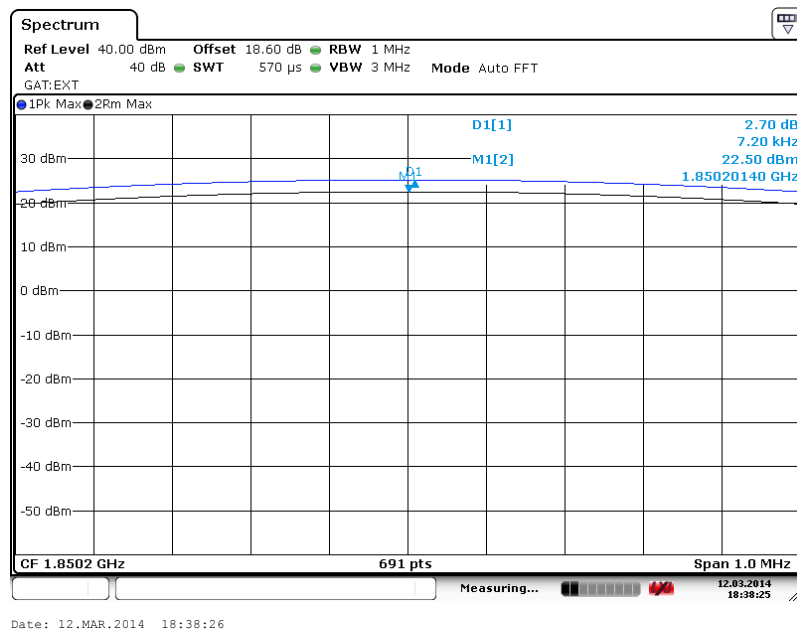


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

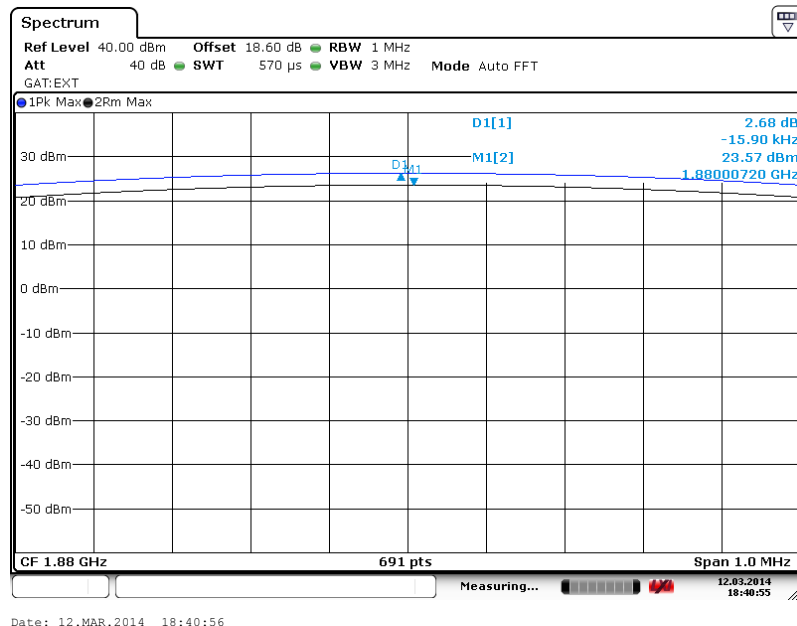




Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

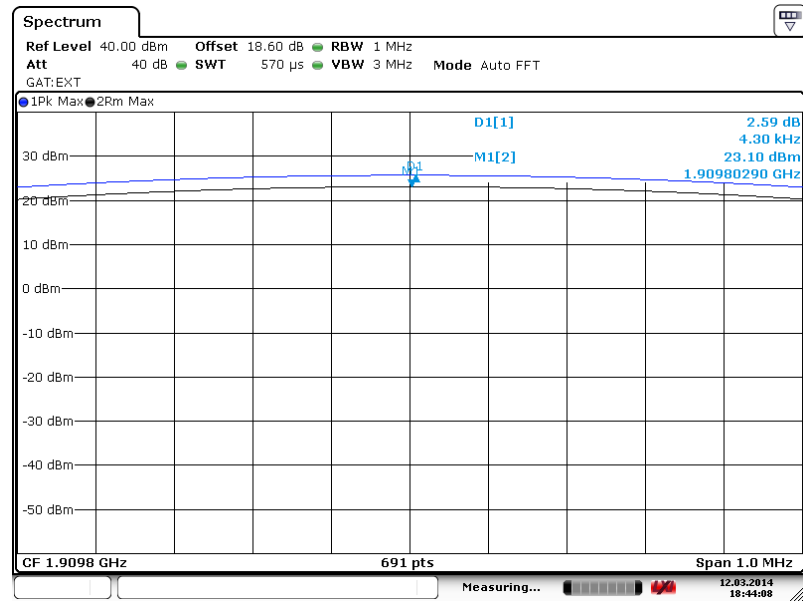




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 4132 (826.4 MHz)

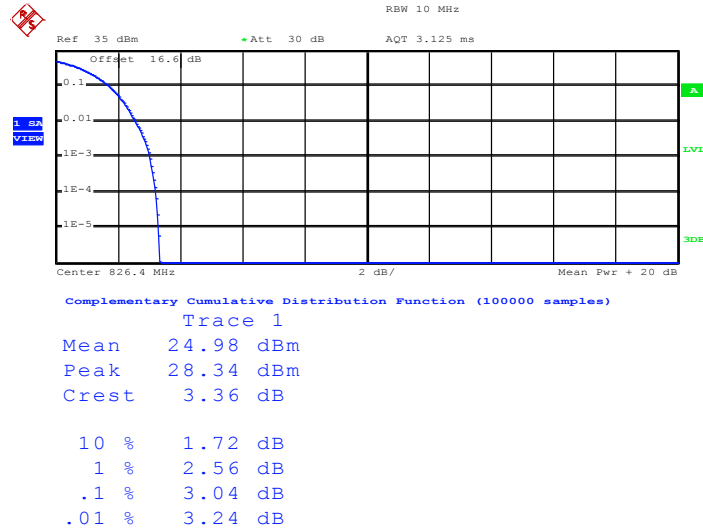

Date: 12.MAR.2014 15:06:43


Peak-to-Average Ratio on Channel 4182 (836.4 MHz)

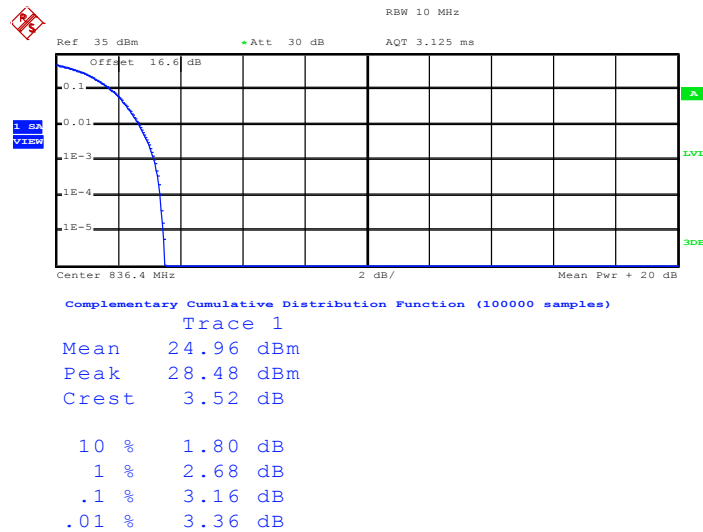

Date: 12.MAR.2014 15:07:18



Peak-to-Average Ratio on Channel 4233 (846.6 MHz)

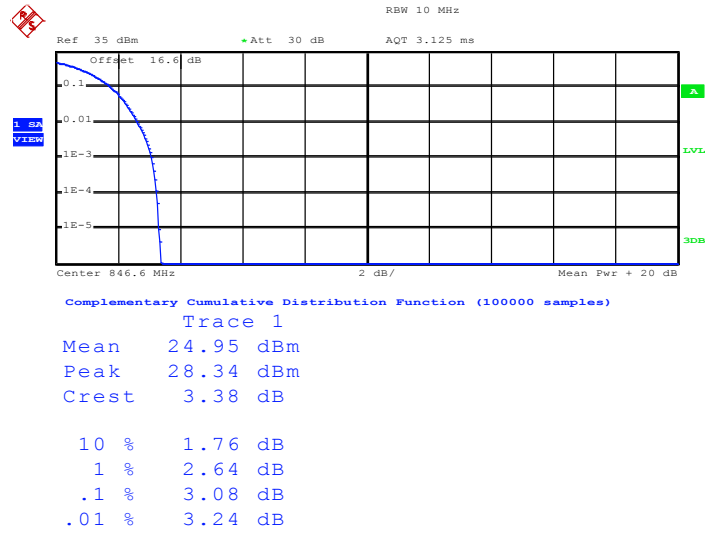


Date: 12.MAR.2014 15:08:06




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Peak-to-Average Ratio on Channel 9262 (1852.4 MHz)

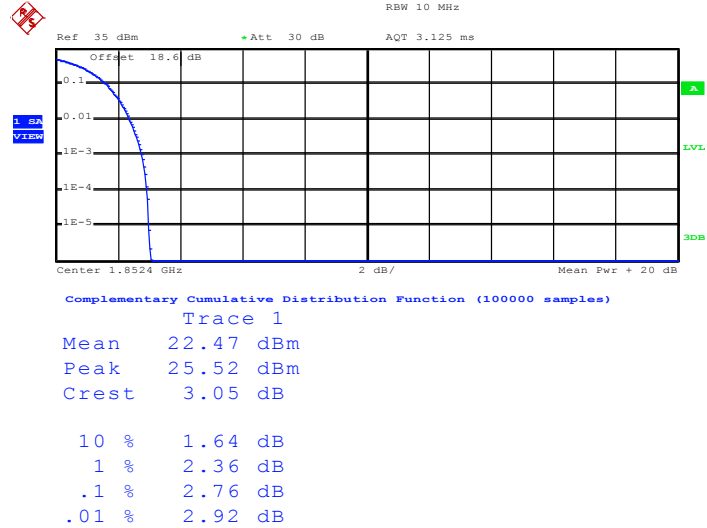

Date: 12.MAR.2014 14:27:38


Peak-to-Average Ratio on Channel 9400 (1880.0 MHz)

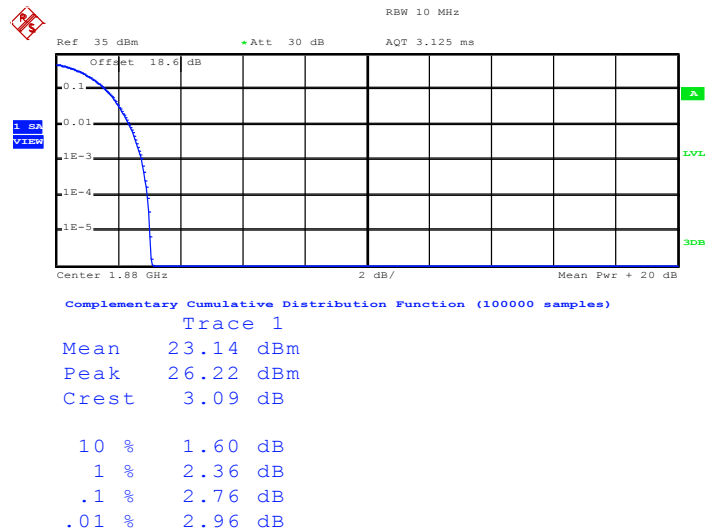

Date: 12.MAR.2014 14:28:27



Peak-to-Average Ratio on Channel 9538 (1907.6 MHz)

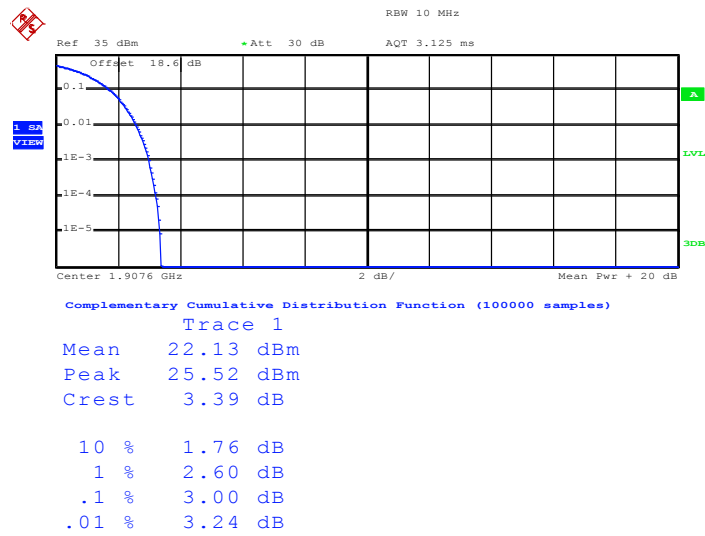

Date: 12.MAR.2014 14:29:29

3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.3.4 Test Setup

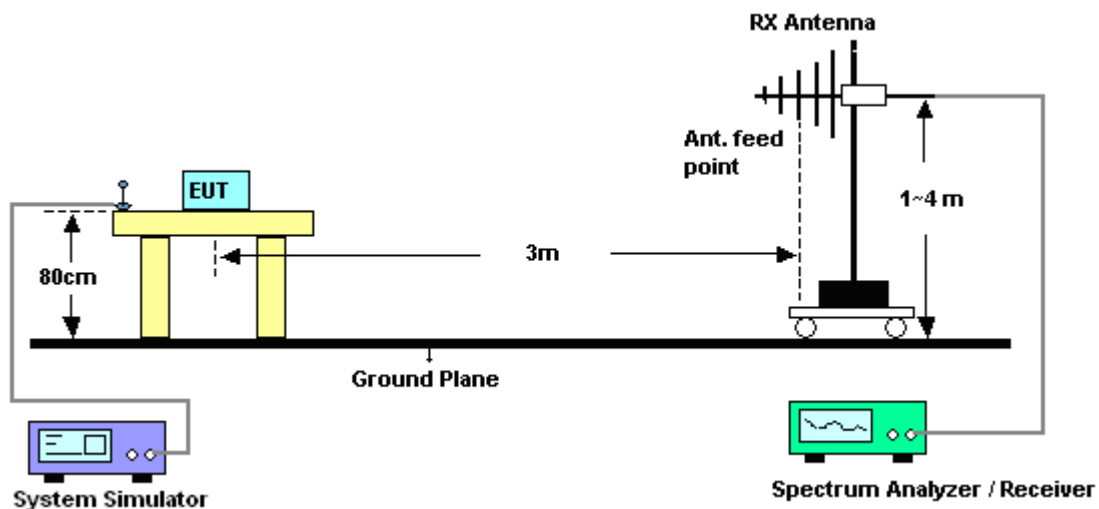

3.3.5 Test Result of ERP

GSM850 (GPRS class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-1.13	32.00	28.72	0.74
836.4	-1.24	32.06	28.67	0.74
848.8	-1.37	32.76	29.24	0.84
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-4.88	34.43	27.40	0.55
836.4	-4.97	34.01	26.89	0.49
848.8	-5.48	33.56	25.93	0.39

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE class 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-7.32	32.00	22.53	0.18
836.4	-7.40	32.06	22.51	0.18
848.8	-7.28	32.76	23.33	0.22
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-10.92	34.43	21.36	0.14
836.4	-11.13	34.01	20.73	0.12
848.8	-11.53	33.56	19.88	0.10

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-10.69	32.02	19.18	0.08
836.40	-10.08	32.06	19.83	0.10
846.60	-11.05	32.55	19.35	0.09
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.40	-14.57	34.34	17.62	0.06
836.40	-13.92	34.01	17.94	0.06
846.60	-14.89	33.62	16.58	0.05

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.3.6 Test Result of EIRP

GSM1900 (GPRS class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-12.27	39.88	27.61	0.58
1880.0	-13.50	39.74	26.24	0.42
1909.8	-13.44	39.91	26.47	0.44
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-19.36	40.08	20.72	0.12
1880.0	-19.54	40.35	20.81	0.12
1909.8	-21.02	40.01	18.99	0.08

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE class 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-17.46	39.88	22.42	0.17
1880.0	-18.24	39.74	21.50	0.14
1909.8	-19.15	39.91	20.76	0.12
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-24.50	40.08	15.58	0.04
1880.0	-25.22	40.35	15.13	0.03
1909.8	-25.94	40.01	14.07	0.03

* EIRP = LVL (dBm) + Correction Factor (dB)



WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-19.62	39.96	20.34	0.11
1880.00	-20.43	39.74	19.31	0.09
1907.60	-21.63	39.97	18.34	0.07
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.40	-24.90	40.10	15.20	0.03
1880.00	-26.07	40.35	14.28	0.03
1907.60	-26.20	40.69	14.49	0.03

* EIRP = LVL (dBm) + Correction Factor (dB)

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.

3.4.4 Test Setup

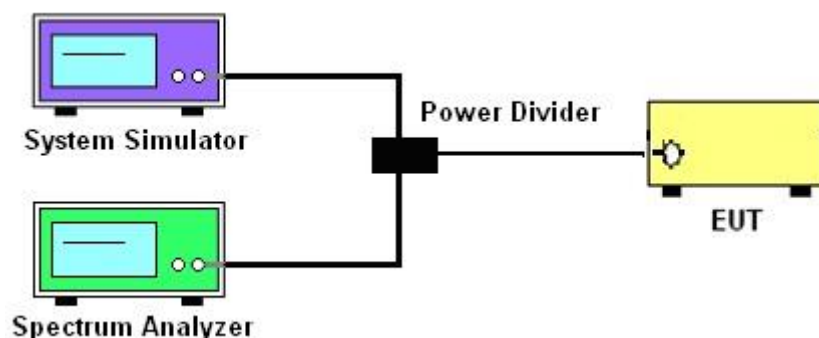

3.4.5 Test Result of Occupied Bandwidth and 26dB Bandwidth

Cellular Band						
Modes	GSM850 (GPRS class 8)			GSM850 (EDGE class 8)		
Channel	128 (Low)	189 (Mid)	251 (High)	128 (Low)	189 (Mid)	251 (High)
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
99% OBW (kHz)	244.00	246.00	242.00	248.00	246.00	244.00
26dB BW (kHz)	314.00	316.00	314.00	310.00	300.00	302.00

PCS Band						
Modes	GSM1900 (GPRS class 8)			GSM1900 (EDGE class 8)		
Channel	512 (Low)	661 (Mid)	810 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8
99% OBW (kHz)	248.00	244.00	246.00	244.00	246.00	254.00
26dB BW (kHz)	314.00	318.00	318.00	312.00	312.00	312.00


Cellular Band			
Modes	WCDMA Band V (RMC 12.2Kbps)		
Channel	4132 (Low)	4182 (Mid)	4233 (High)
Frequency (MHz)	826.4	836.4	846.6
99% OBW (MHz)	4.08	4.10	4.06
26dB BW (MHz)	4.62	4.60	4.60

PCS Band			
Modes	WCDMA Band II (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)
Frequency (MHz)	1852.4	1880	1907.6
99% OBW (MHz)	4.08	4.08	4.06
26dB BW (MHz)	4.64	4.64	4.62

3.4.6 Test Result (Plots) of Occupied Bandwidth and 26dB Bandwidth


Band :	GSM 850	Test Mode :	GPRS class 8 Link (GMSK)
---------------	---------	--------------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

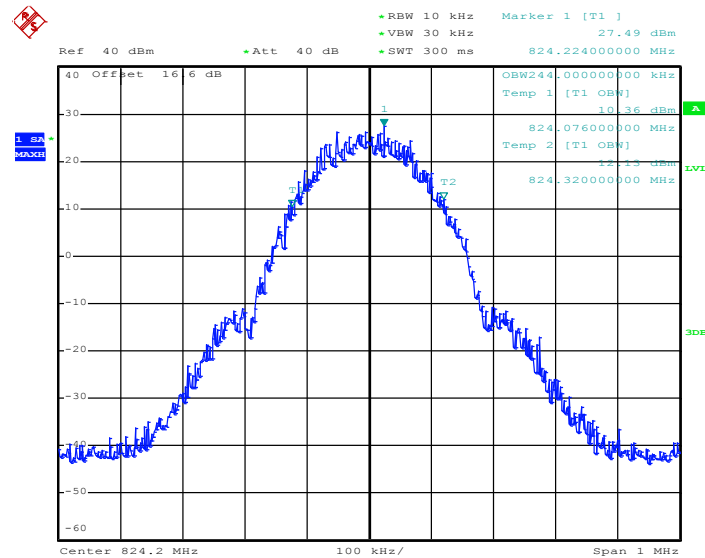

Date: 12.MAR.2014 09:58:18


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

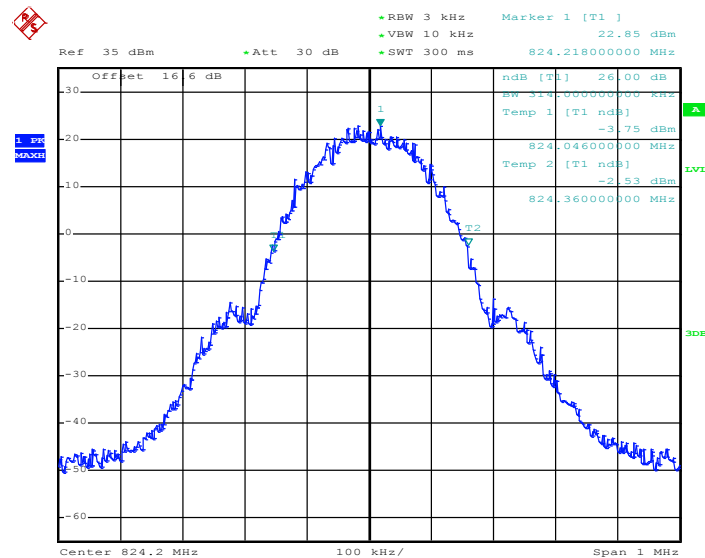

Date: 12.MAR.2014 09:53:57




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

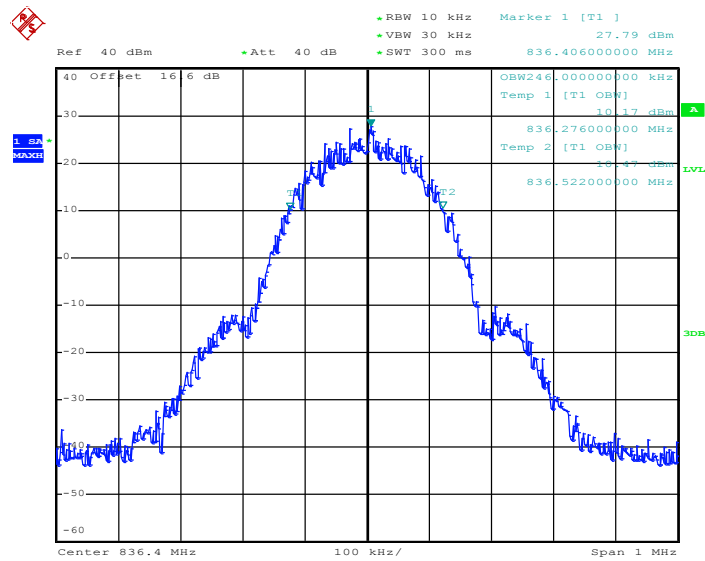

Date: 12.MAR.2014 09:57:03


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

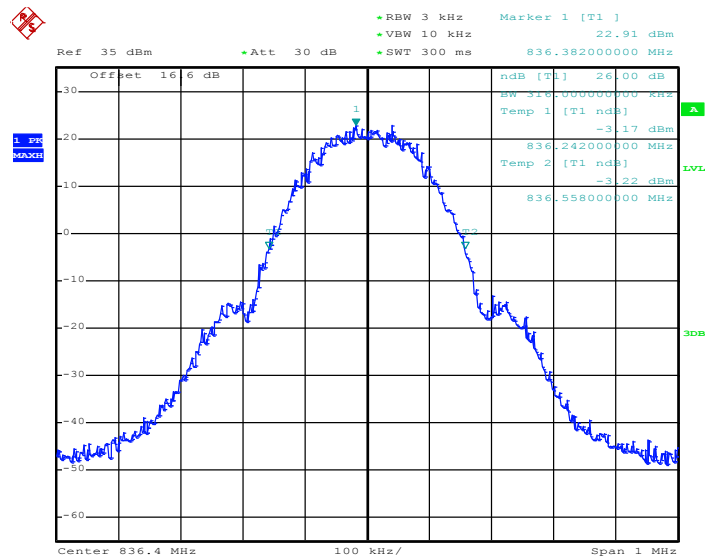

Date: 12.MAR.2014 09:52:15




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

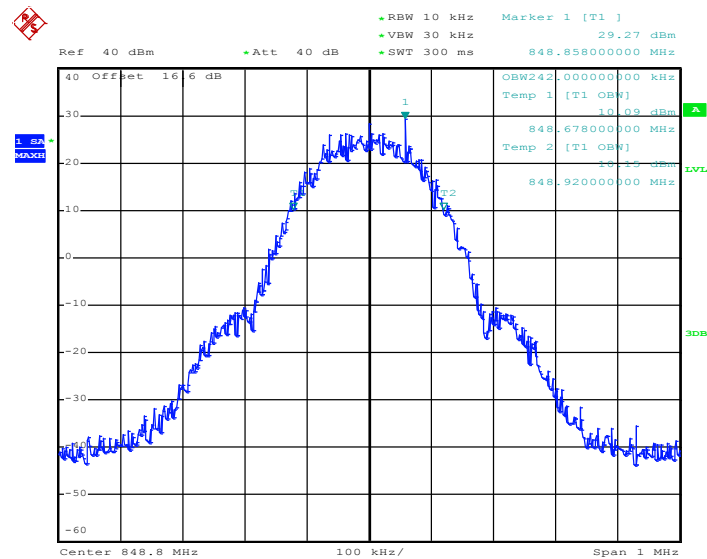

Date: 12.MAR.2014 09:57:31

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

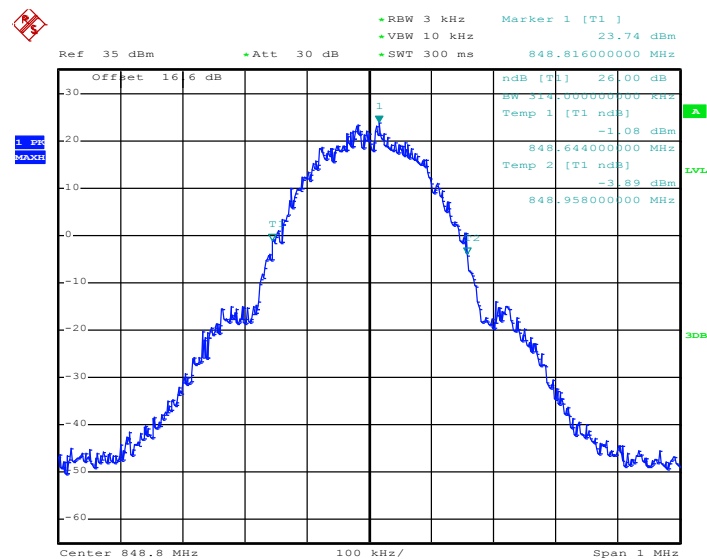


Date: 12.MAR.2014 09:52:44




Band :	GSM 850	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

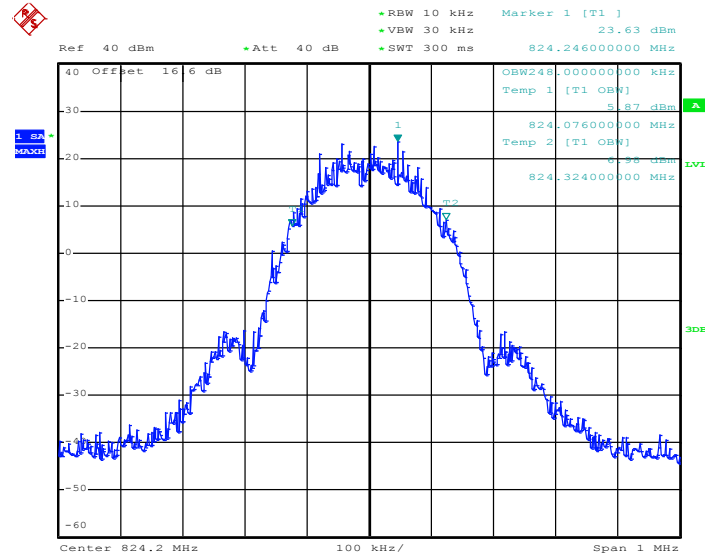

Date: 12.MAR.2014 10:42:15


26dB Bandwidth Plot on Channel 128 (824.2 MHz)

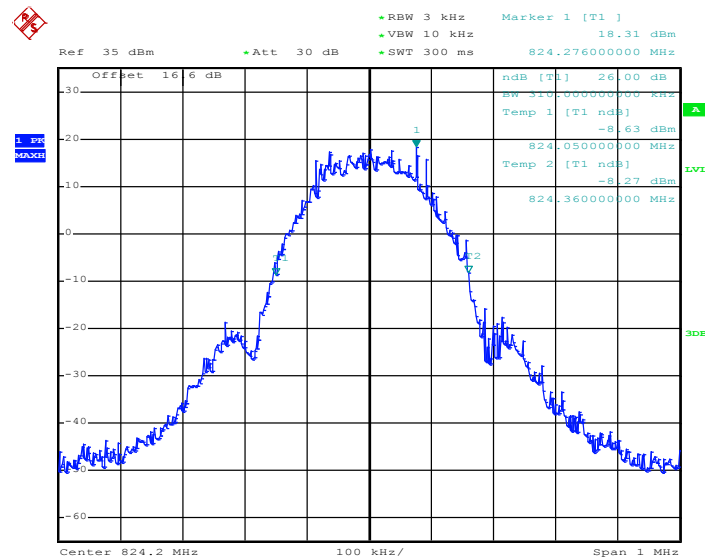

Date: 12.MAR.2014 10:37:13




99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

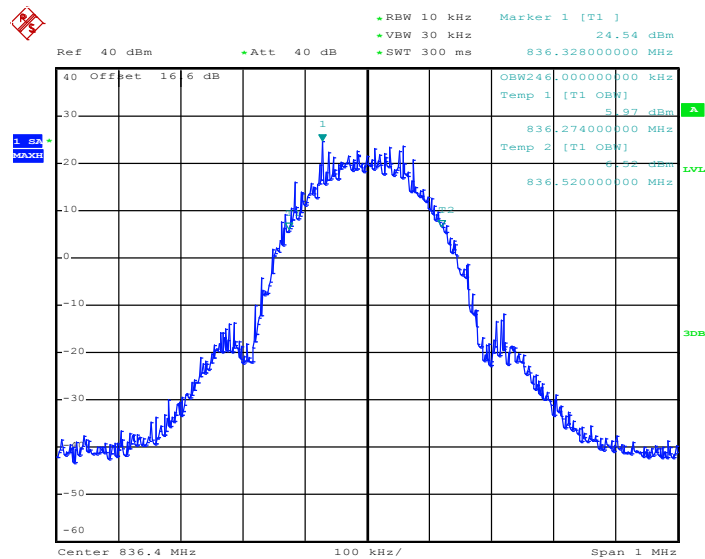

Date: 12.MAR.2014 10:46:41


26dB Bandwidth Plot on Channel 189 (836.4 MHz)

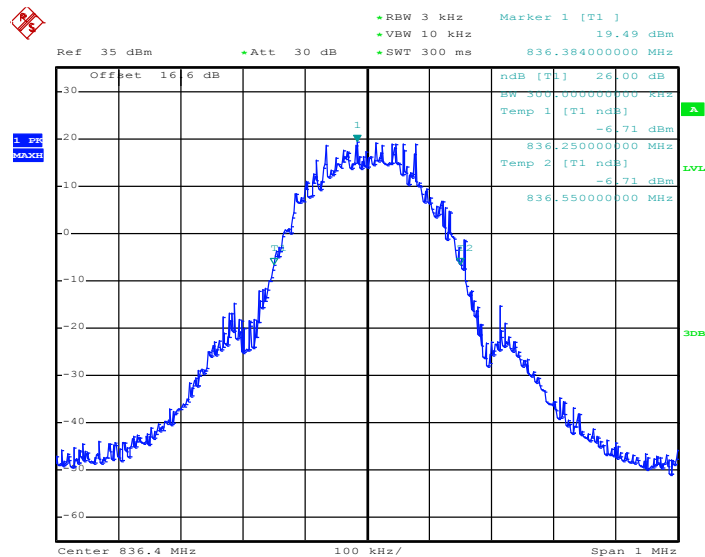

Date: 12.MAR.2014 10:30:37




99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

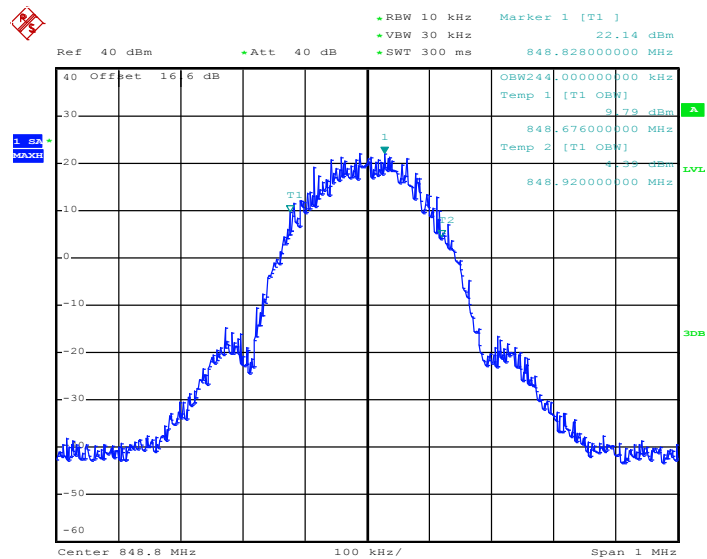

Date: 12.MAR.2014 10:45:15

26dB Bandwidth Plot on Channel 251 (848.8 MHz)

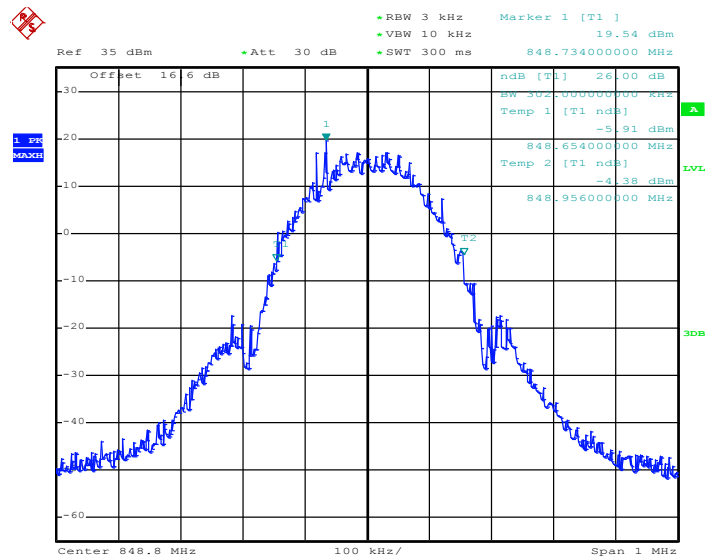


Date: 12.MAR.2014 10:31:06




Band :	GSM 1900	Test Mode :	GPRS class 8 Link (GMSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

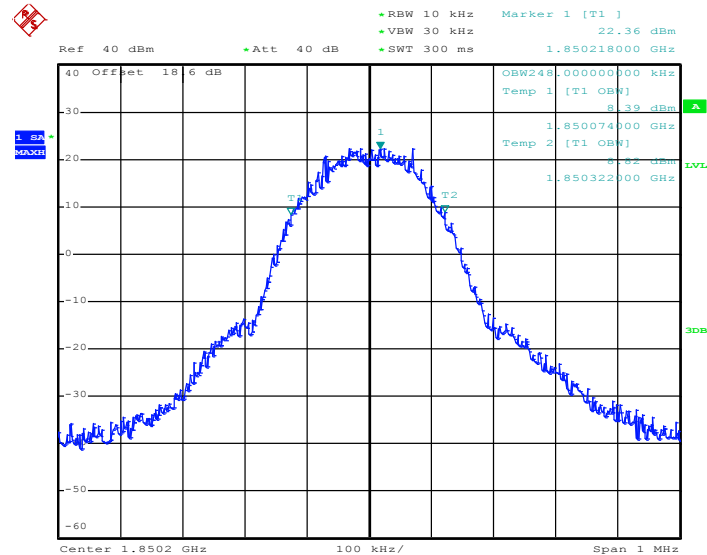

Date: 12.MAR.2014 11:36:11


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

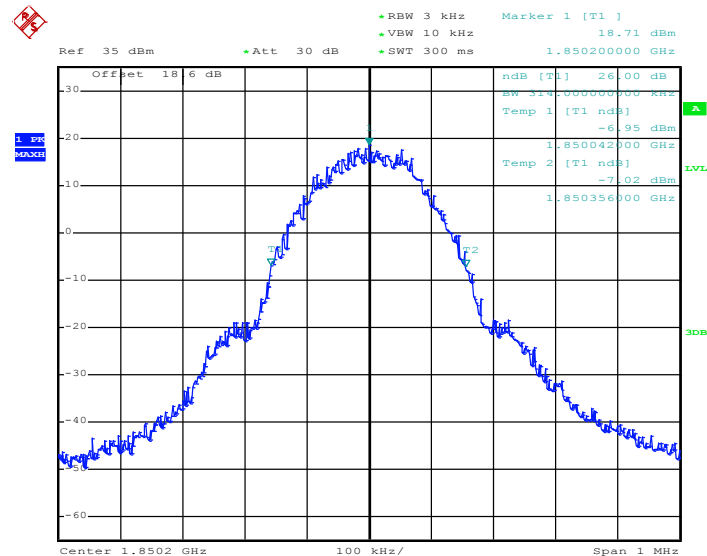

Date: 12.MAR.2014 11:28:46




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

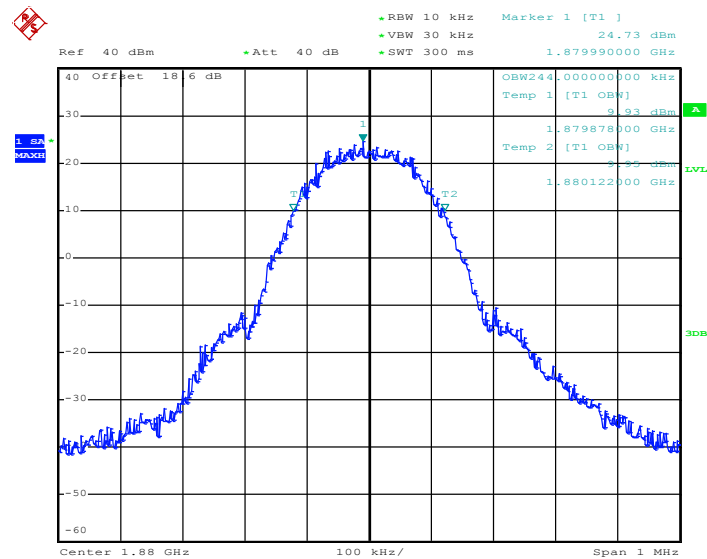

Date: 12.MAR.2014 11:37:38


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

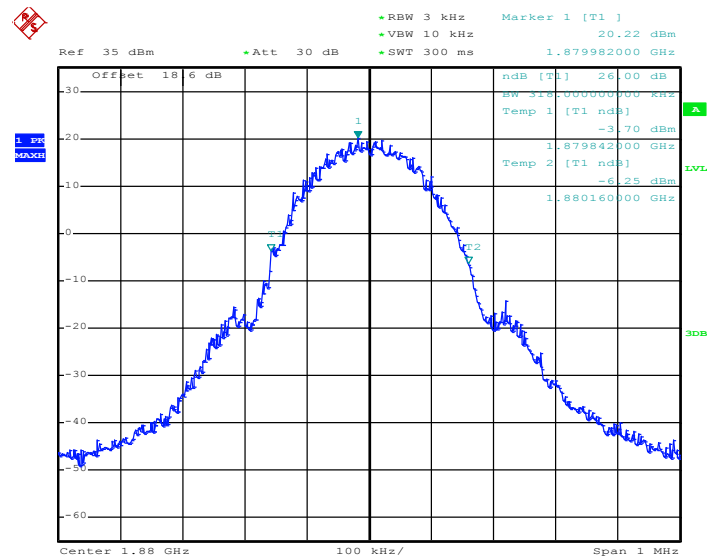

Date: 12.MAR.2014 11:29:14




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

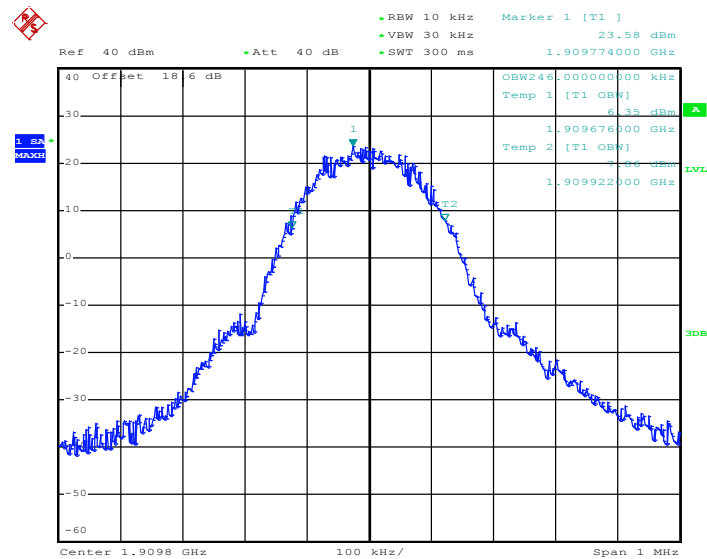

Date: 12.MAR.2014 11:34:29

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

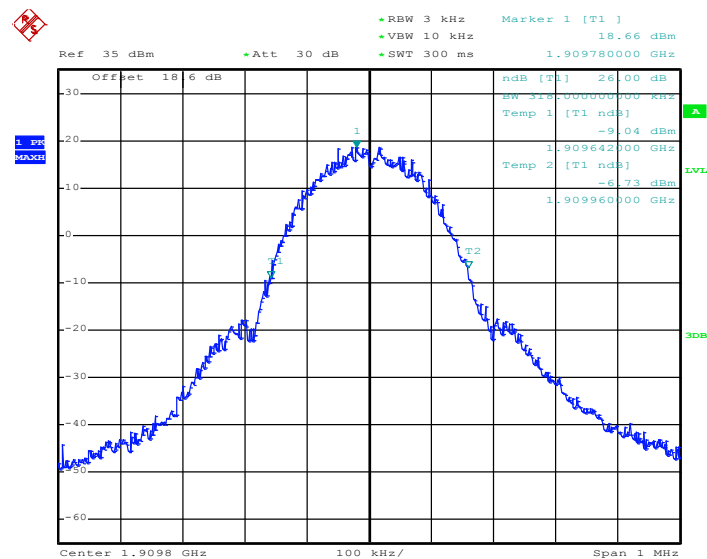


Date: 12.MAR.2014 11:29:43




Band :	GSM 1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	----------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

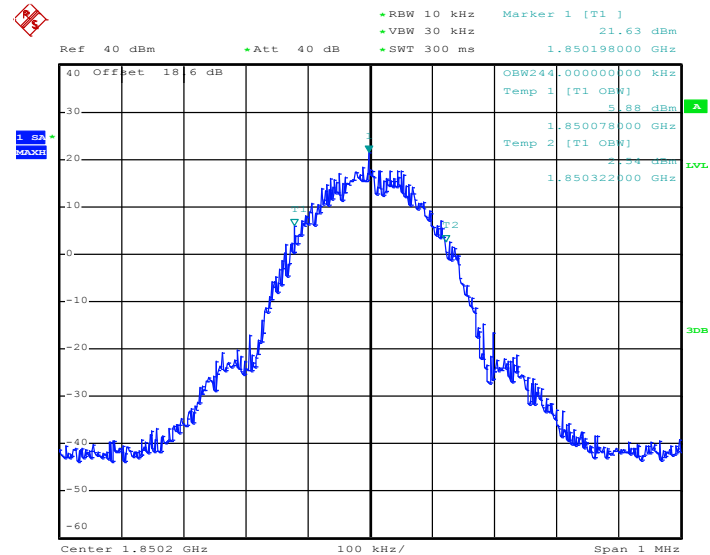

Date: 12.MAR.2014 13:45:11


26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

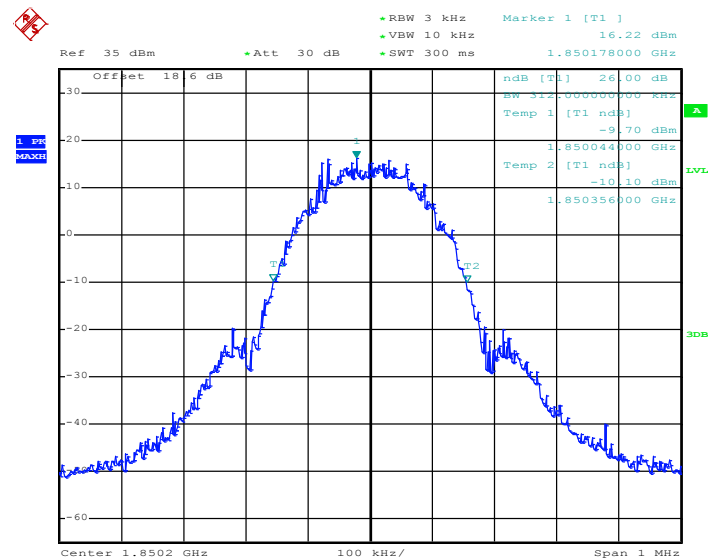

Date: 12.MAR.2014 13:42:34




99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

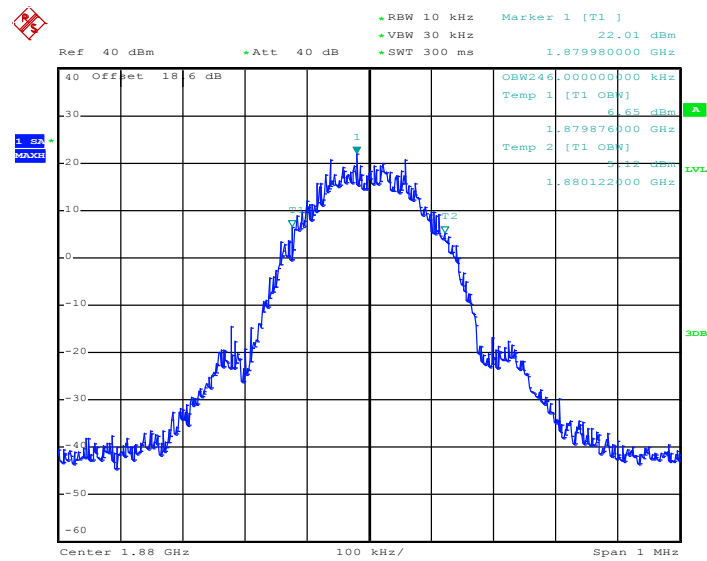

Date: 12.MAR.2014 13:45:40


26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

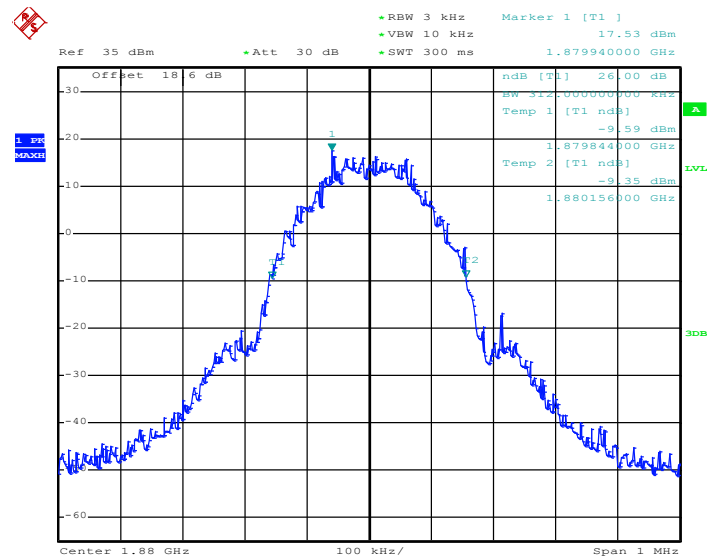

Date: 12.MAR.2014 13:40:10




99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

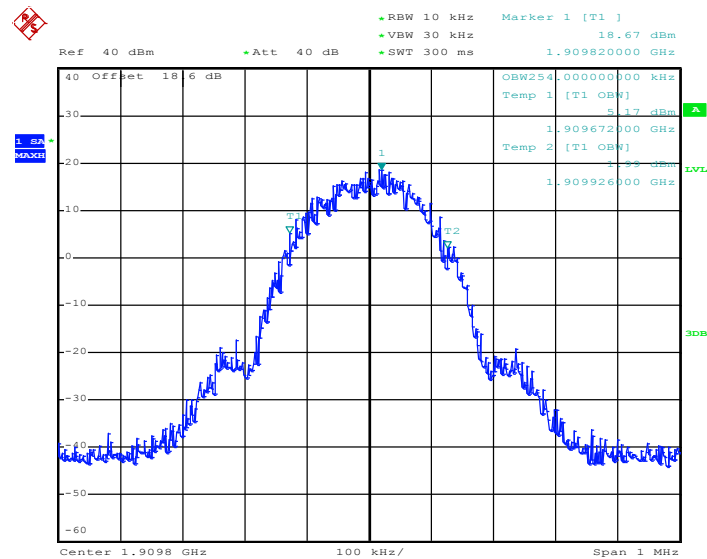

Date: 12.MAR.2014 13:46:08

26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

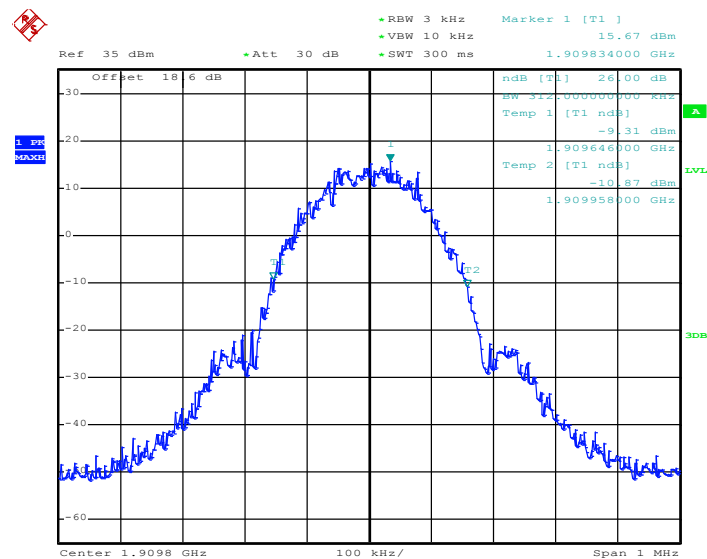


Date: 12.MAR.2014 13:40:39




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 4132 (826.4 MHz)

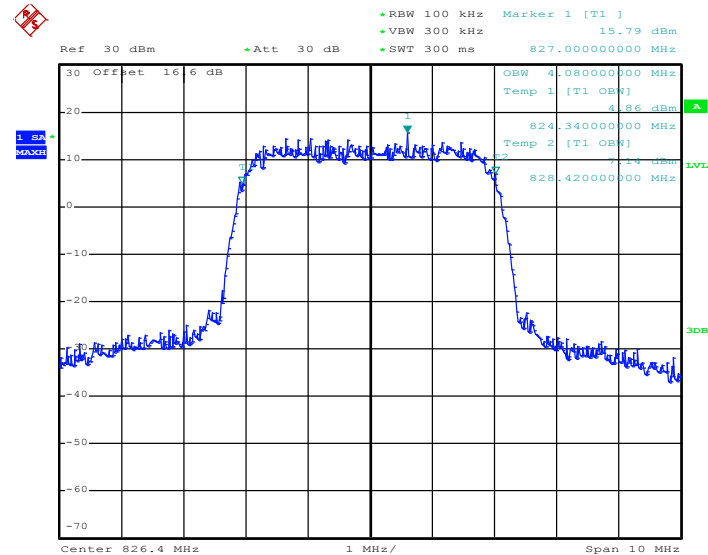

Date: 12.MAR.2014 14:54:15


26dB Bandwidth Plot on Channel 4132 (826.4 MHz)

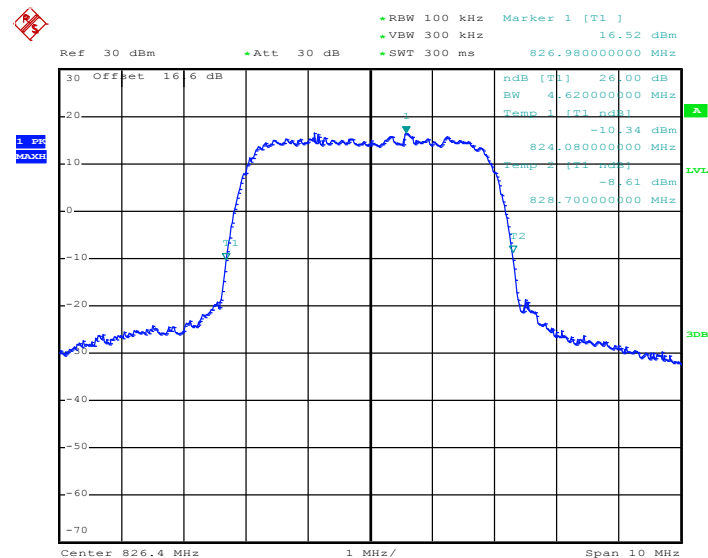

Date: 12.MAR.2014 14:52:28




99% Occupied Bandwidth Plot on Channel 4182 (836.4 MHz)

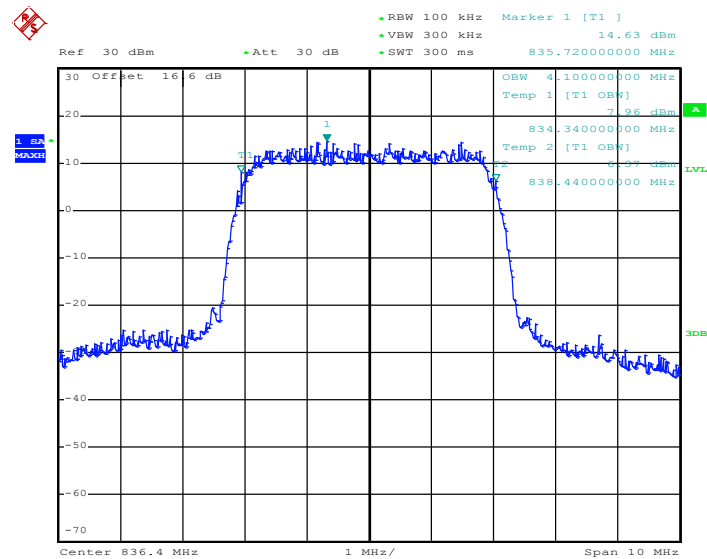

Date: 12.MAR.2014 14:54:43


26dB Bandwidth Plot on Channel 4182 (836.4 MHz)

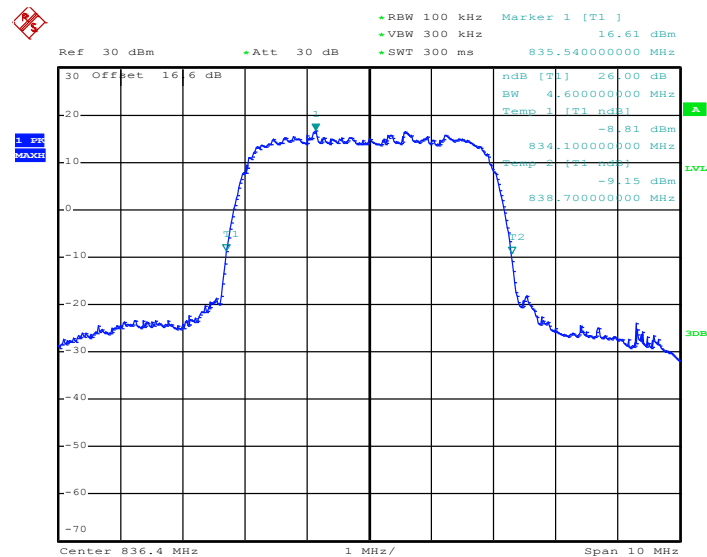

Date: 12.MAR.2014 14:52:57




99% Occupied Bandwidth Plot on Channel 4233 (846.6 MHz)

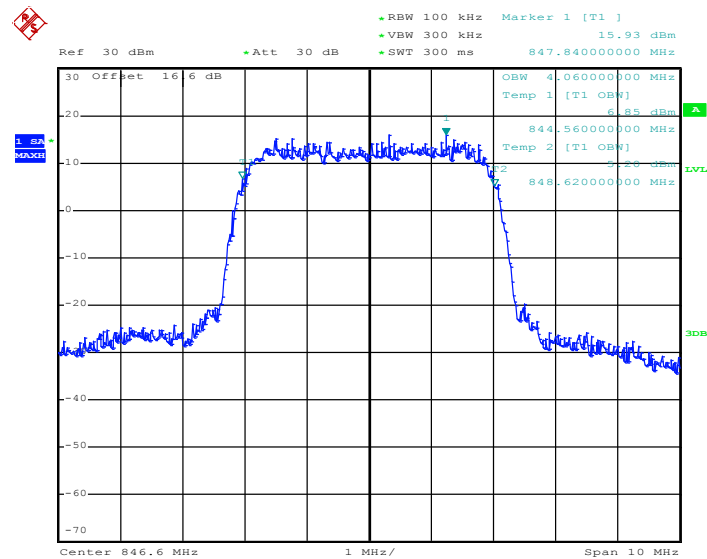

Date: 12.MAR.2014 14:55:12

26dB Bandwidth Plot on Channel 4233 (846.6 MHz)

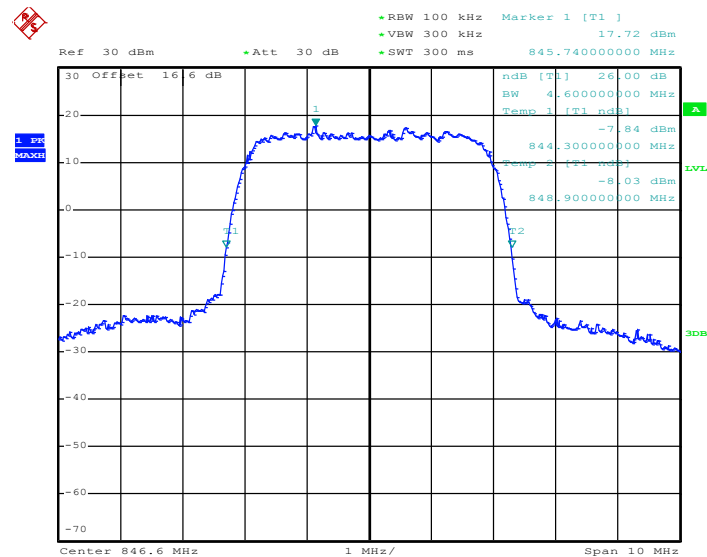


Date: 12.MAR.2014 14:53:25




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

99% Occupied Bandwidth Plot on Channel 9262 (1852.4 MHz)

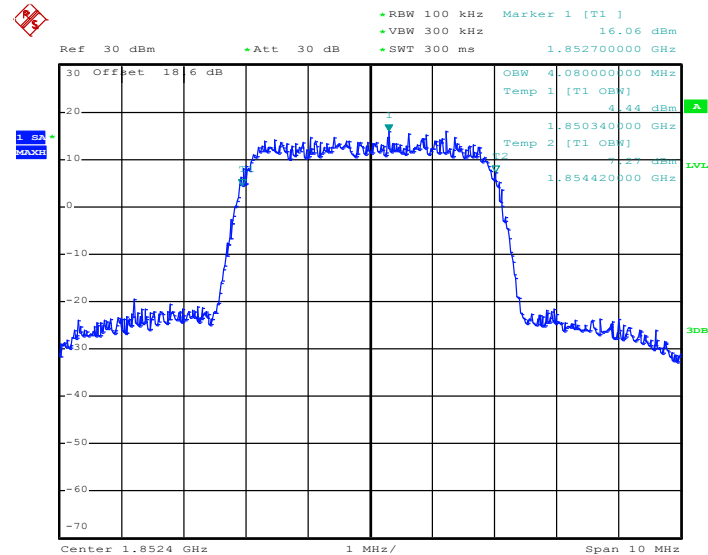

Date: 12.MAR.2014 14:14:21


26dB Bandwidth Plot on Channel 9262 (1852.4 MHz)

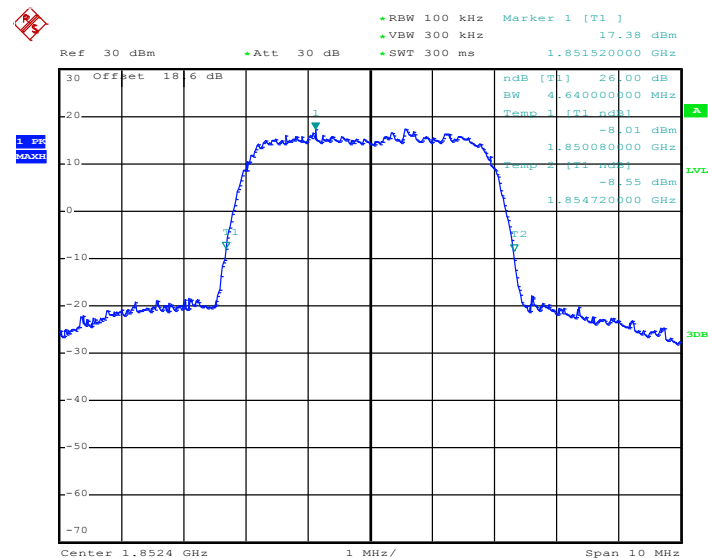

Date: 12.MAR.2014 14:12:38




99% Occupied Bandwidth Plot on Channel 9400 (1880.0 MHz)

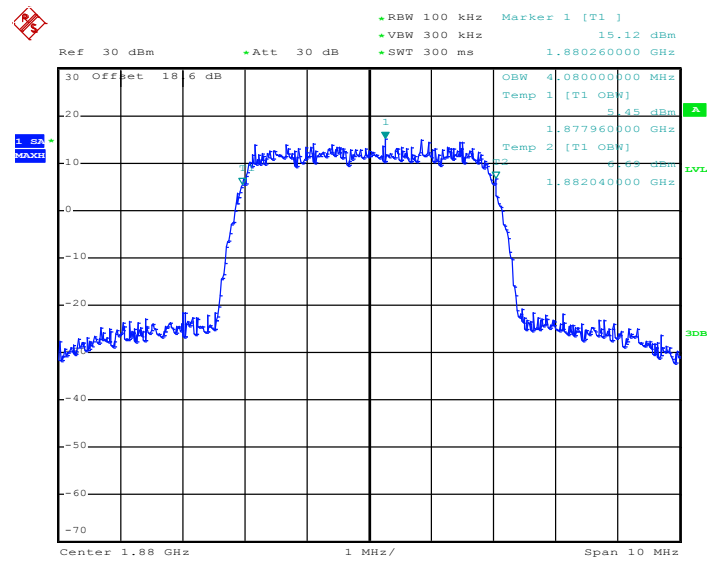

Date: 12.MAR.2014 14:14:50


26dB Bandwidth Plot on Channel 9400 (1880.0 MHz)

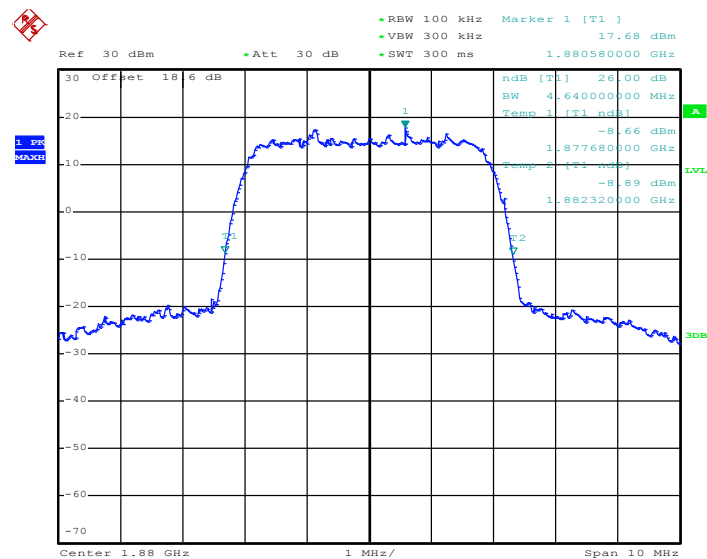

Date: 12.MAR.2014 14:13:06




99% Occupied Bandwidth Plot on Channel 9538 (1907.6 MHz)

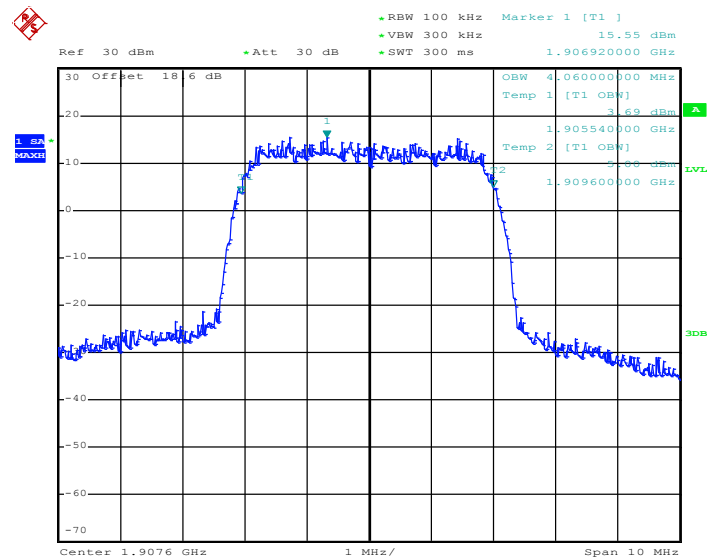

Date: 12.MAR.2014 14:15:18

26dB Bandwidth Plot on Channel 9538 (1907.6 MHz)

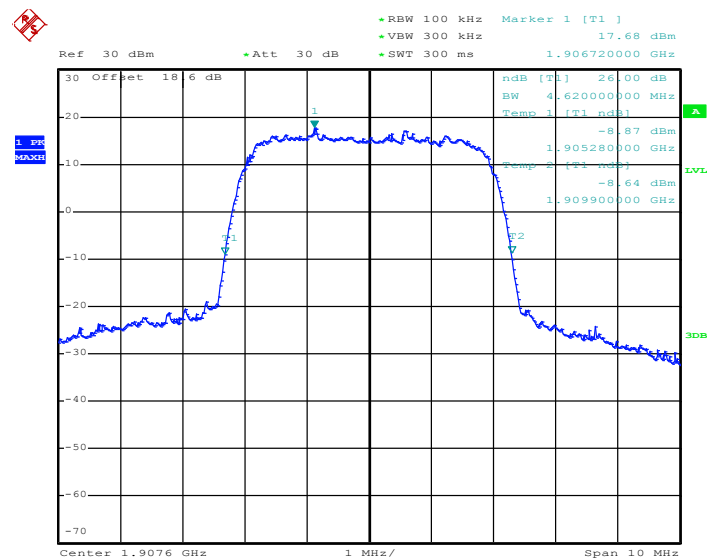

Date: 12.MAR.2014 14:13:35

3.5 Band Edge Measurement

3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$


3.5.4 Test Setup

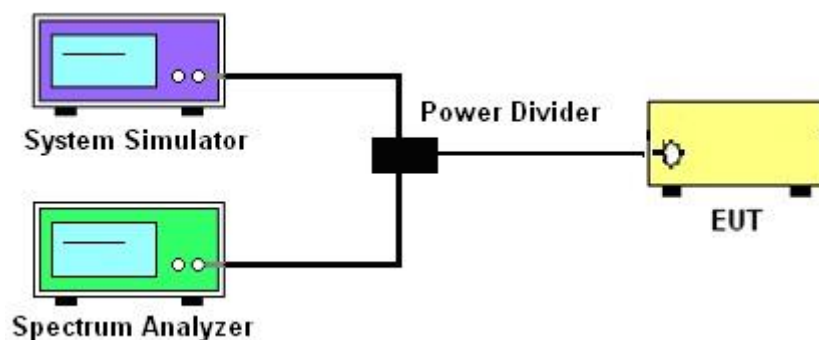

3.5.5 Test Result (Plots) of Conducted Band Edge


Band :	GSM850	Test Mode :	GPRS class 8 Link (GMSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

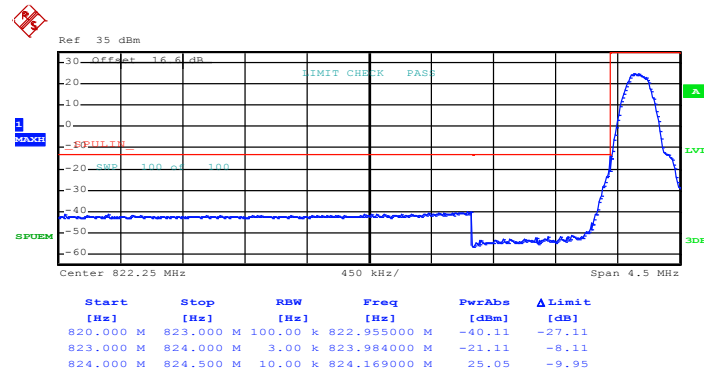

Date: 12.MAR.2014 10:06:08

Higher Band Edge Plot on Channel 251 (848.8 MHz)

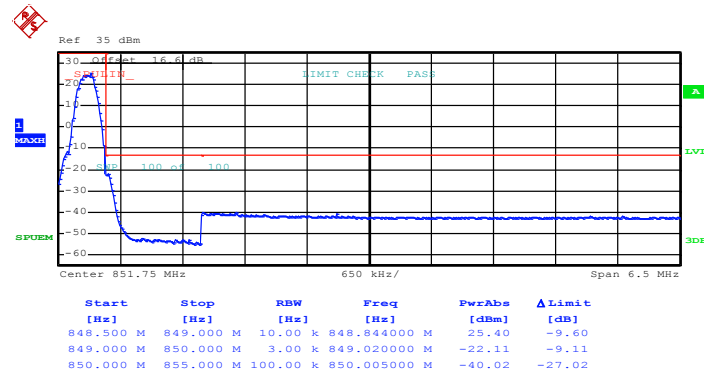


Date: 12.MAR.2014 10:03:27




Band :	GSM850	Test Mode :	EDGE class 8 Link (8PSK)
--------	--------	-------------	--------------------------

Lower Band Edge Plot on Channel 128 (824.2 MHz)

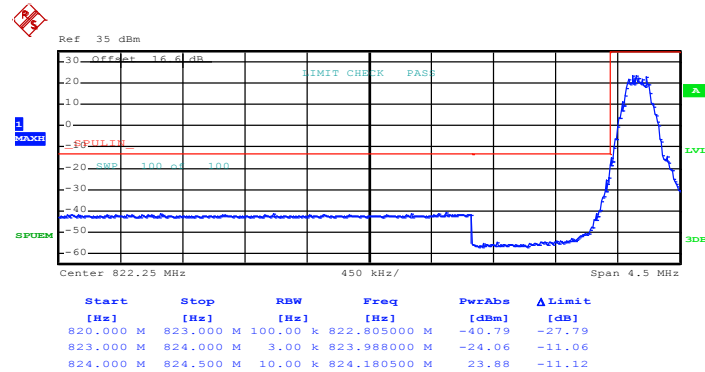

Date: 12.MAR.2014 10:52:17

Higher Band Edge Plot on Channel 251 (848.8 MHz)

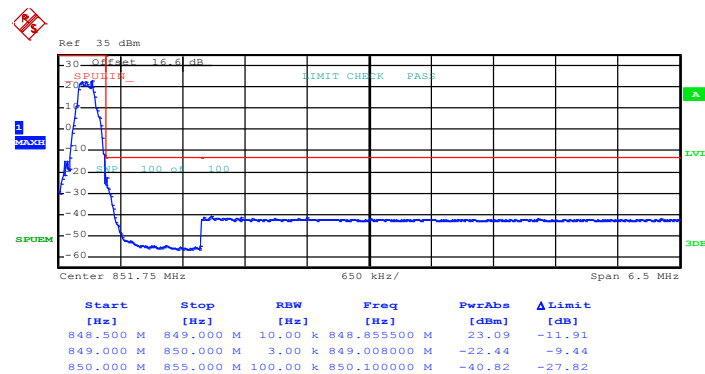


Date: 12.MAR.2014 10:49:39



Band : GSM1900


Test Mode : GPRS class 8 Link (GMSK)

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

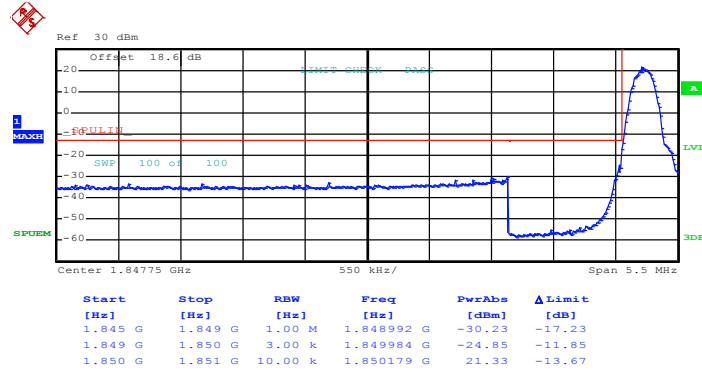

Date: 12.MAR.2014 11:44:12

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

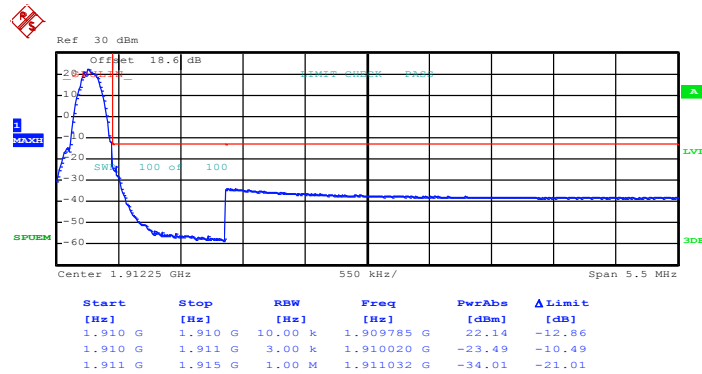


Date: 12.MAR.2014 11:40:28




Band :	GSM1900	Test Mode :	EDGE class 8 Link (8PSK)
--------	---------	-------------	--------------------------

Lower Band Edge Plot on Channel 512 (1850.2 MHz)

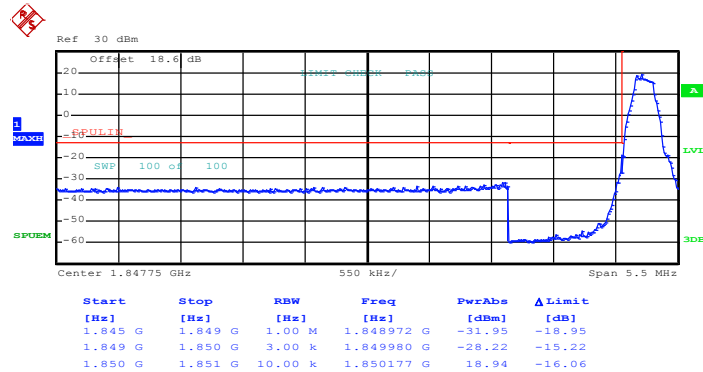

Date: 12.MAR.2014 13:53:16

Higher Band Edge Plot on Channel 810 (1909.8 MHz)

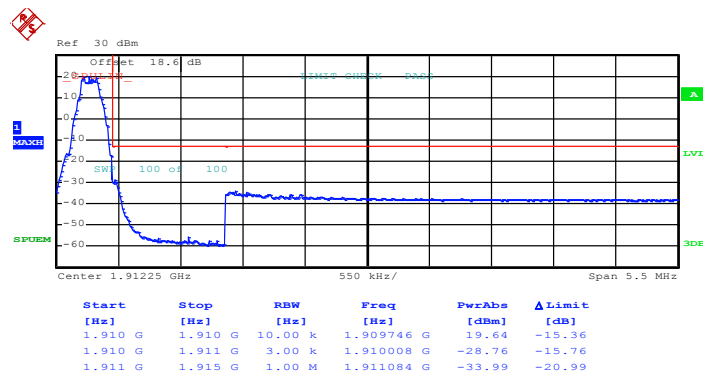


Date: 12.MAR.2014 13:50:38




Band :	WCDMA Band V	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	--------------	-------------	--------------------------

Lower Band Edge Plot on Channel 4132 (826.4 MHz)

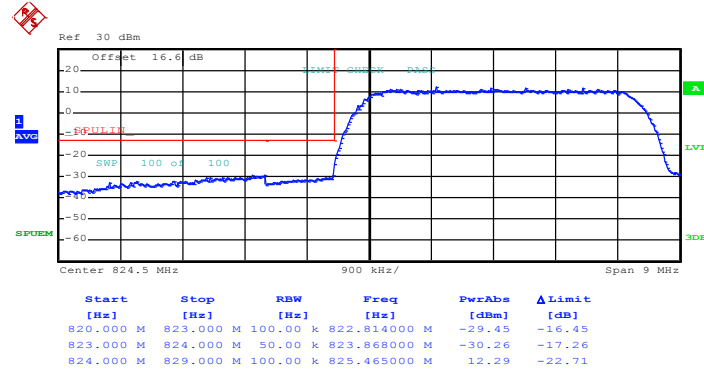

Date: 12.MAR.2014 15:04:02

Higher Band Edge Plot on Channel 4233 (846.6 MHz)

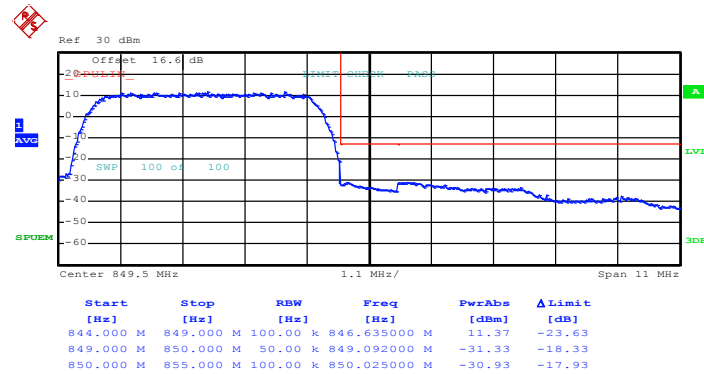


Date: 12.MAR.2014 15:01:00




Band :	WCDMA Band II	Test Mode :	RMC 12.2Kbps Link (QPSK)
--------	---------------	-------------	--------------------------

Lower Band Edge Plot on Channel 9262 (1852.4 MHz)

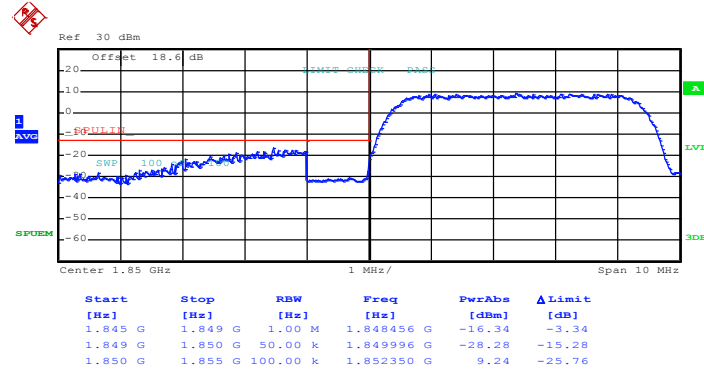

Date: 12.MAR.2014 14:23:12

Higher Band Edge Plot on Channel 9538 (1907.6 MHz)

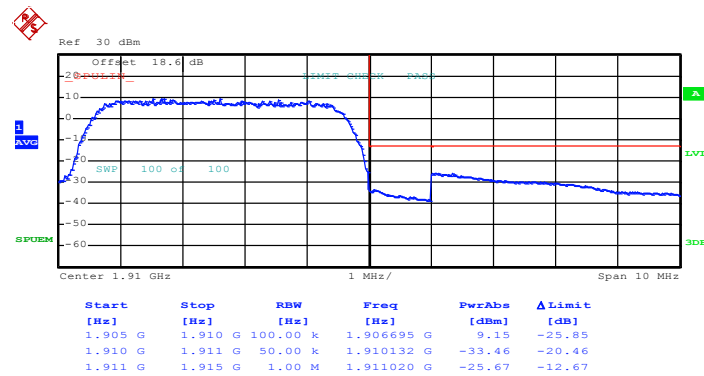

Date: 12.MAR.2014 14:19:08

3.6 Conducted Spurious Emission Measurement

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures


1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

3.6.4 Test Setup

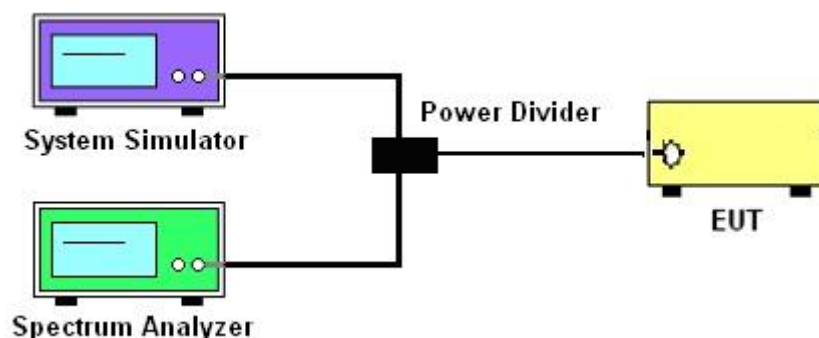


3.6.5 Test Result (Plots) of Conducted Spurious Emission


Band :	GSM850	Channel :	CH189
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	836.4 MHz

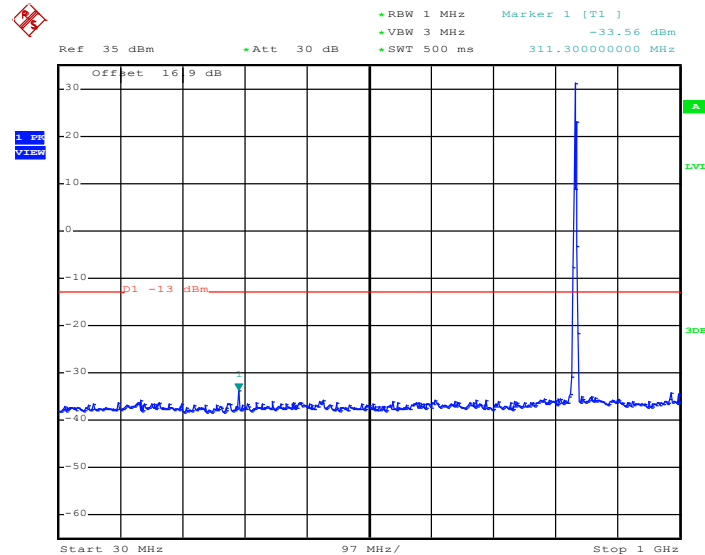Conducted Spurious Emission Plot between 30MHz ~ 1GHz


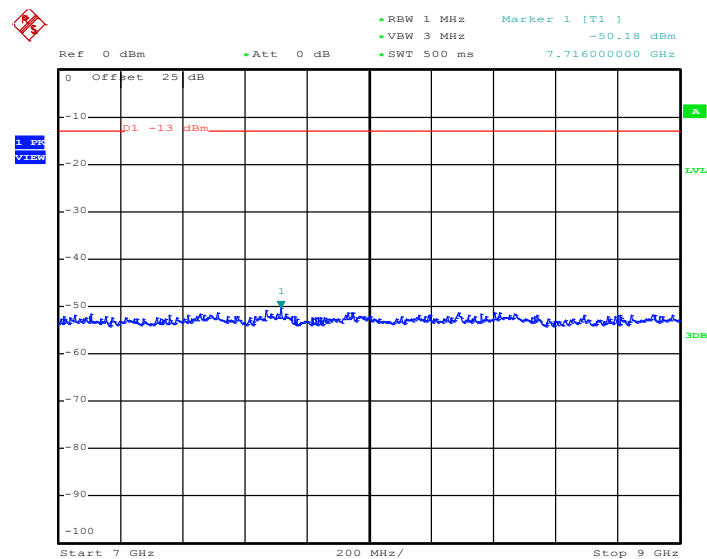
Date: 12.MAR.2014 10:09:41

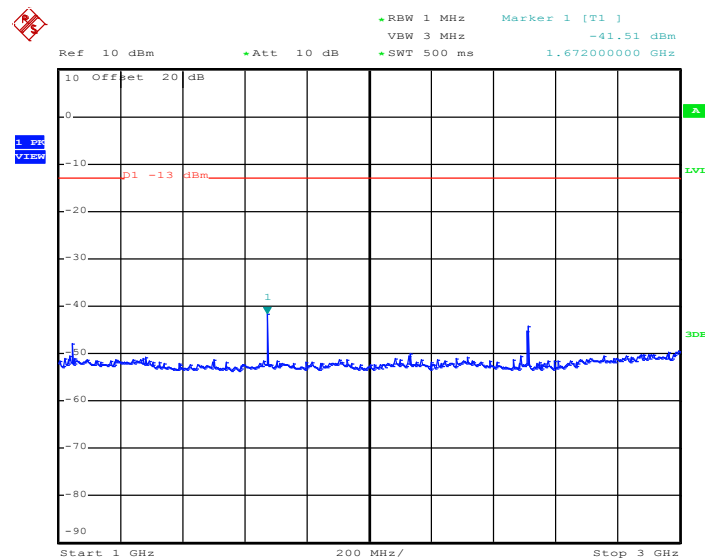Conducted Spurious Emission Plot between 1GHz ~ 3GHz


Date: 12.MAR.2014 10:10:53

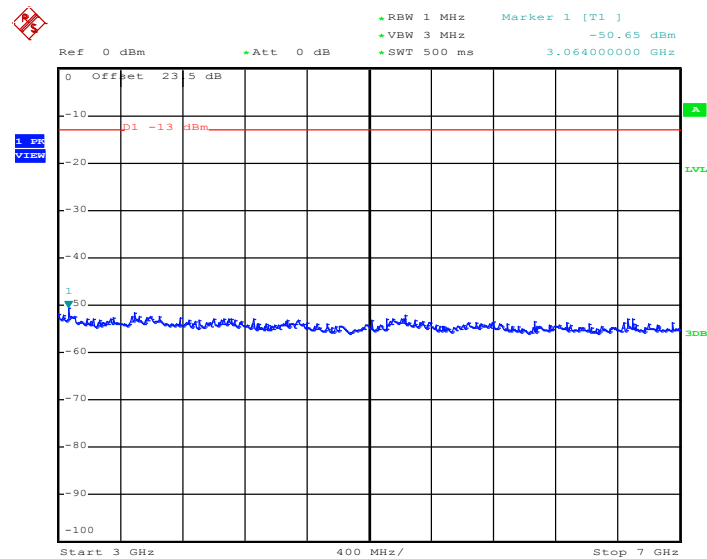Conducted Spurious Emission Plot between 3GHz ~ 7GHz


Date: 12.MAR.2014 10:10:05


Conducted Spurious Emission Plot between 7GHz ~ 9GHz


Date: 12.MAR.2014 10:10:13




Band :	GSM850	Channel :	CH189
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

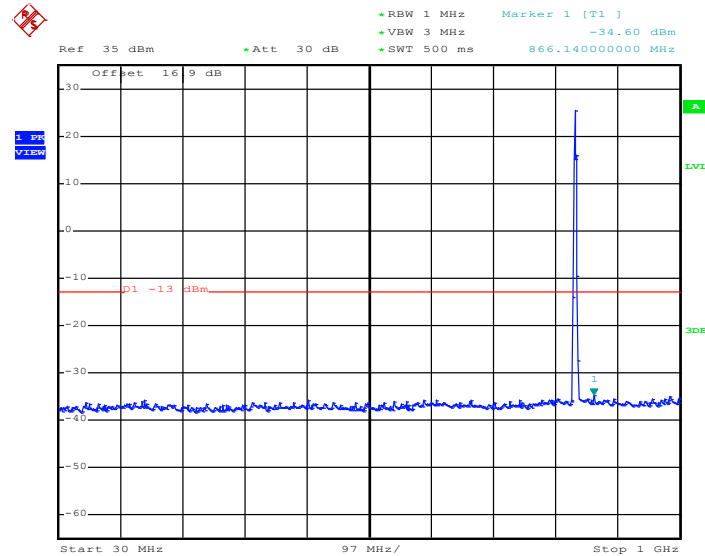

Date: 12.MAR.2014 11:01:32


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

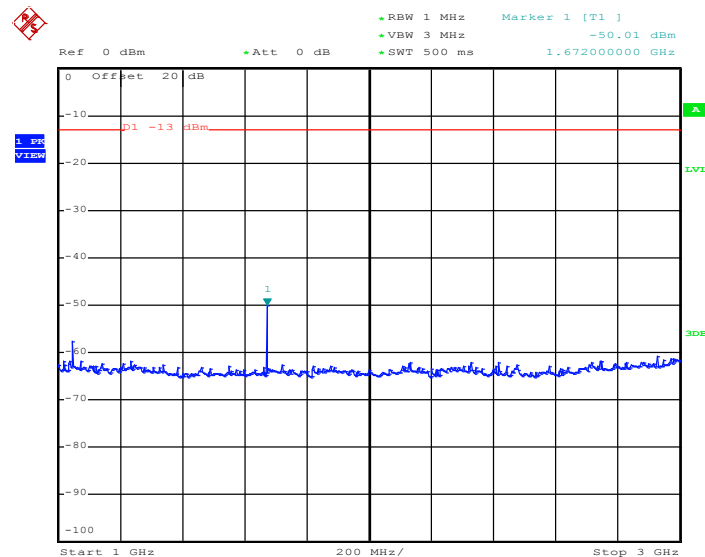

Date: 12.MAR.2014 11:01:43




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

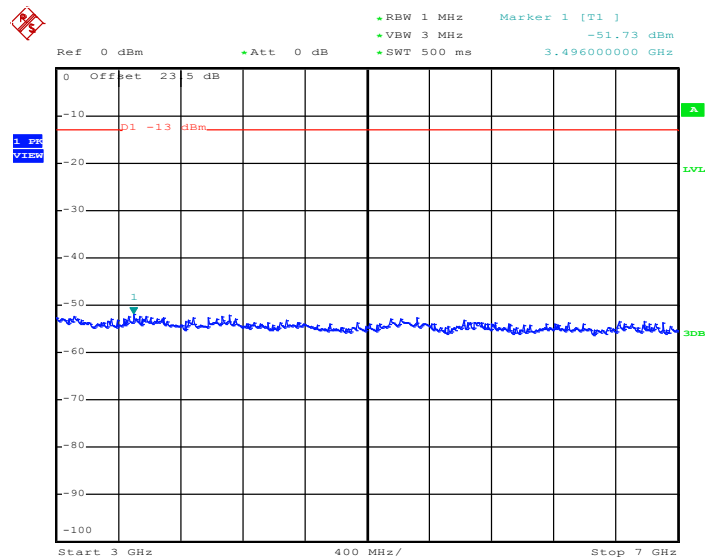

Date: 12.MAR.2014 11:01:51


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

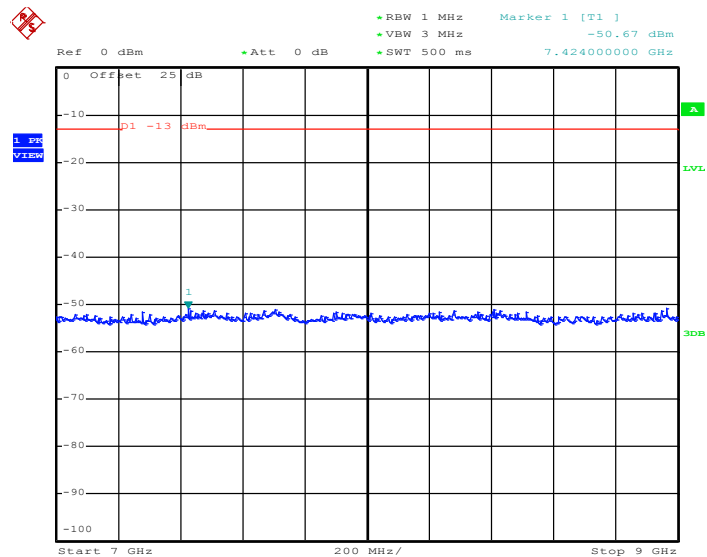

Date: 12.MAR.2014 11:02:00


Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS class 8 Link (GMSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

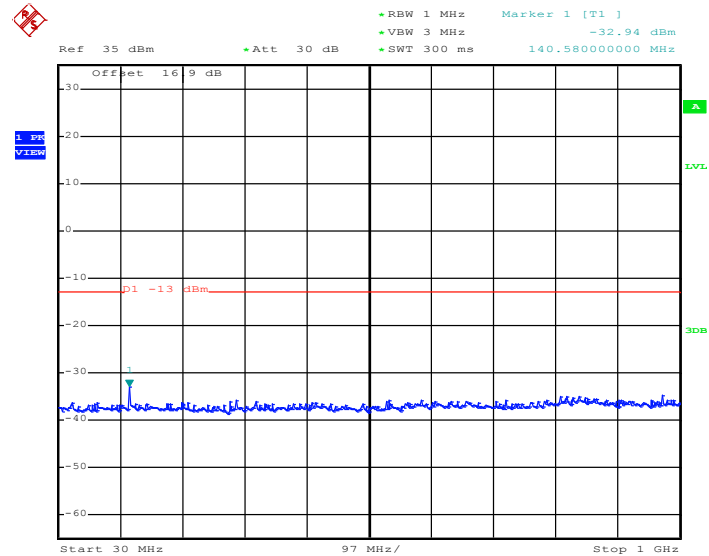

Date: 12.MAR.2014 11:47:30


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

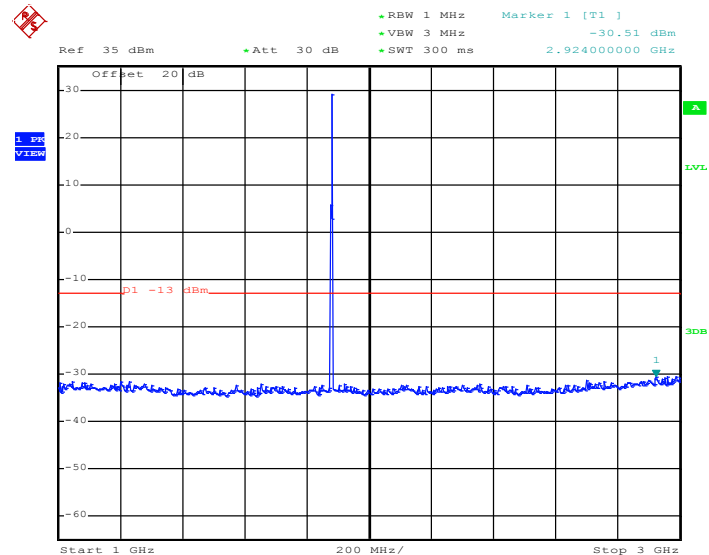

Date: 12.MAR.2014 11:47:38




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

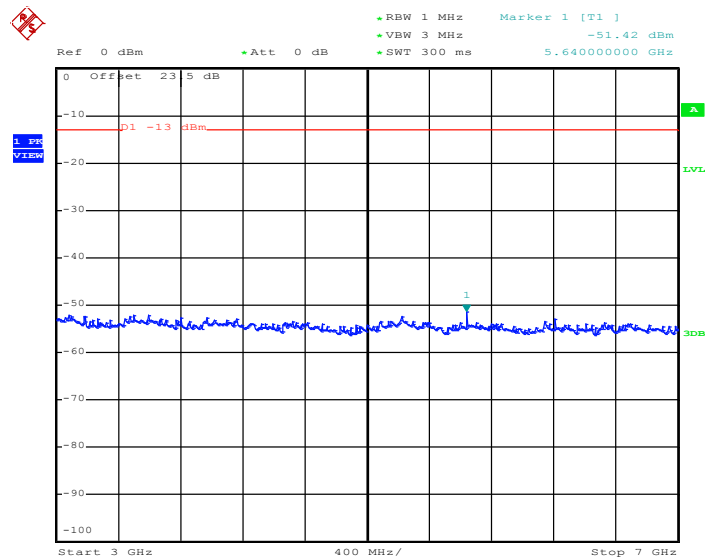

Date: 12.MAR.2014 11:47:50


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

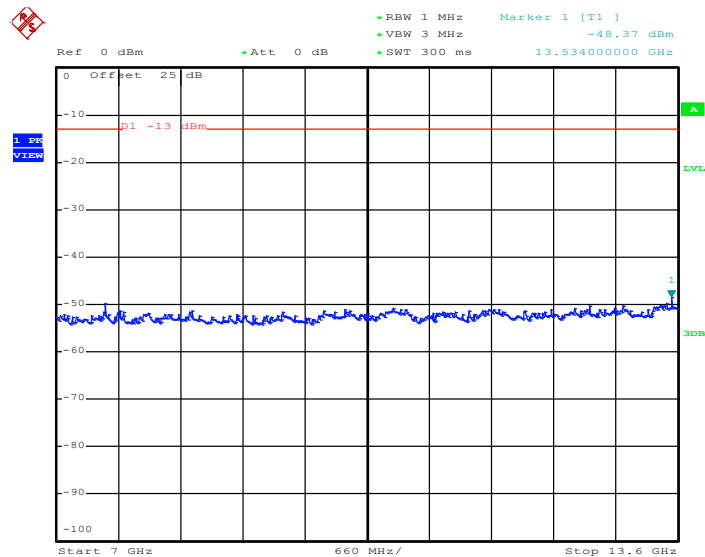

Date: 12.MAR.2014 11:47:58




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

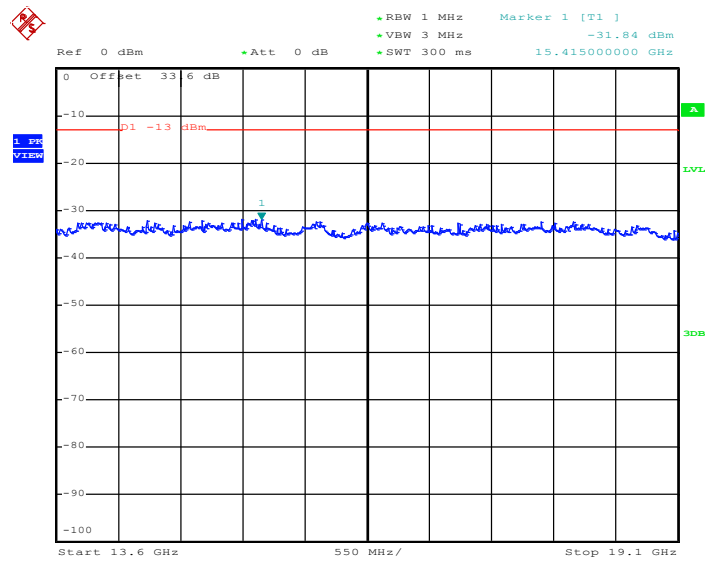


Date: 12.MAR.2014 11:48:07




Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE class 8 Link (8PSK)	Frequency :	1880.0 MHz

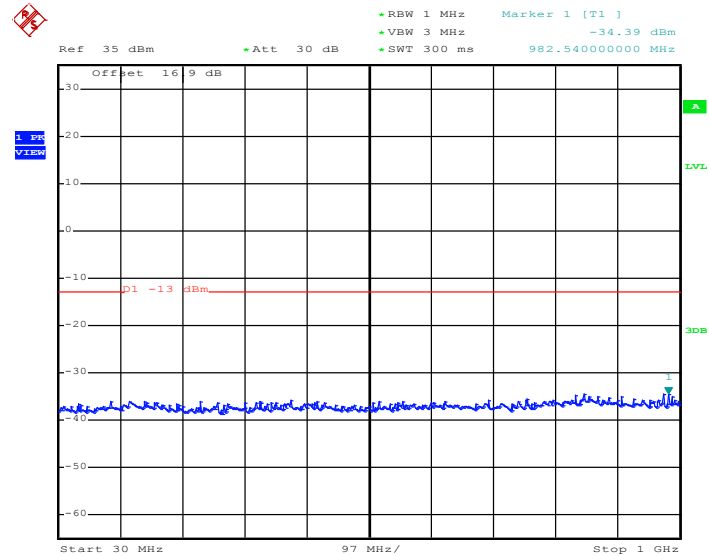Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 12.MAR.2014 13:56:36

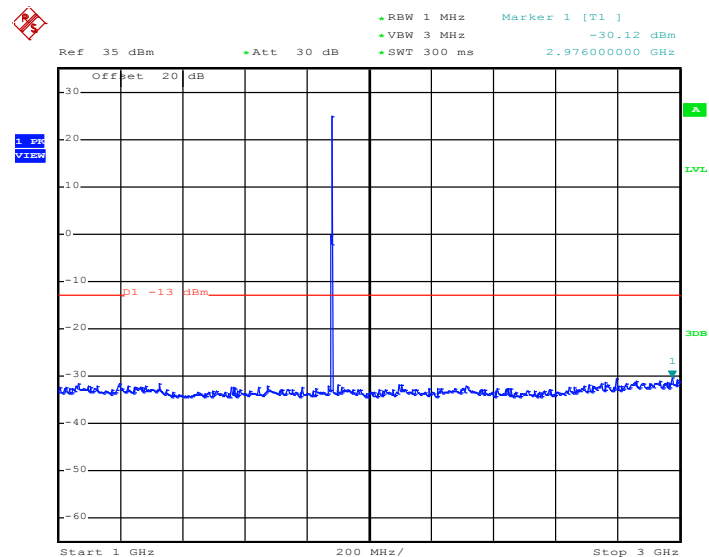Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 12.MAR.2014 13:56:44

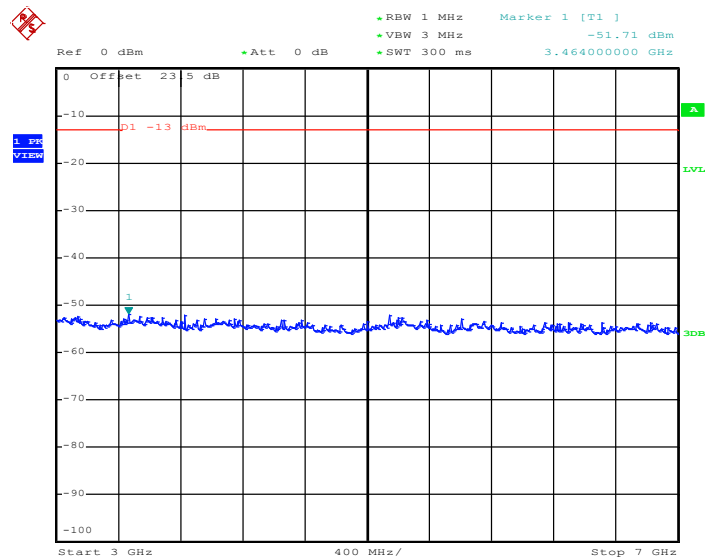Conducted Spurious Emission Plot between 3GHz ~ 7GHz


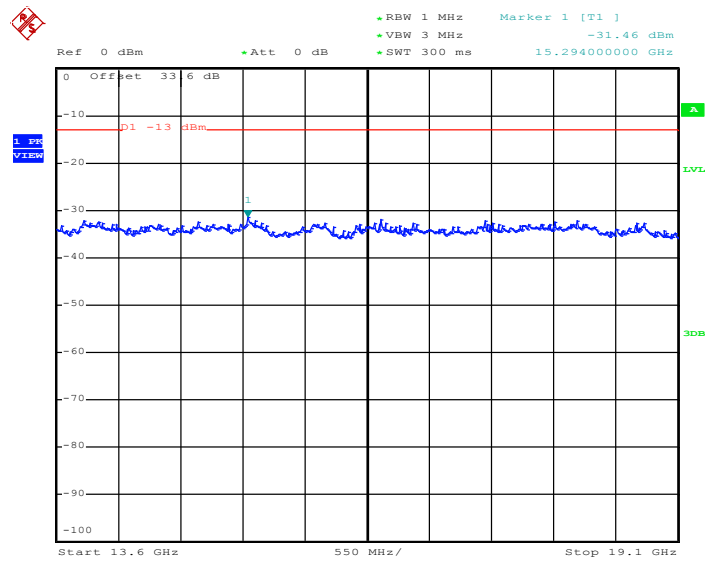
Date: 12.MAR.2014 13:56:57

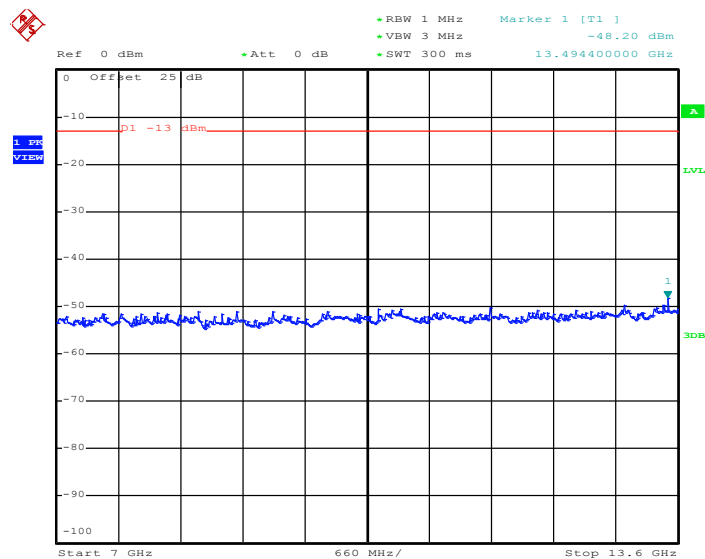Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz


Date: 12.MAR.2014 13:57:05




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz



Date: 12.MAR.2014 13:57:13


Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	836.4 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz

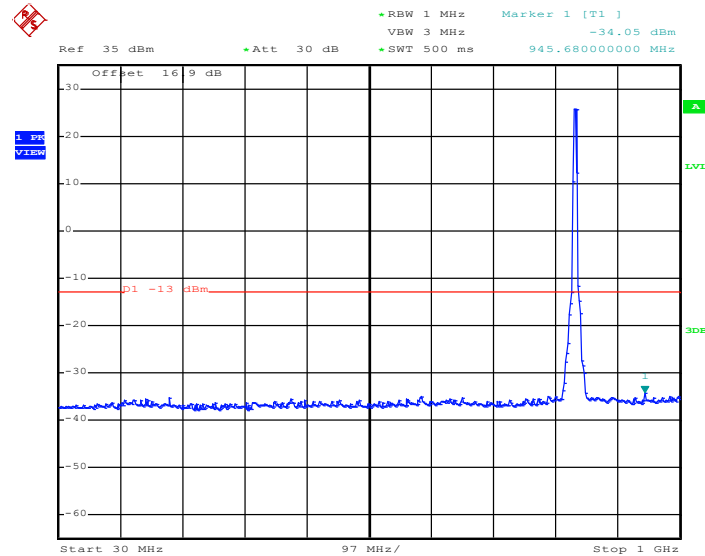


Date: 12.MAR.2014 15:27:46


Conducted Spurious Emission Plot between 1GHz ~ 3GHz

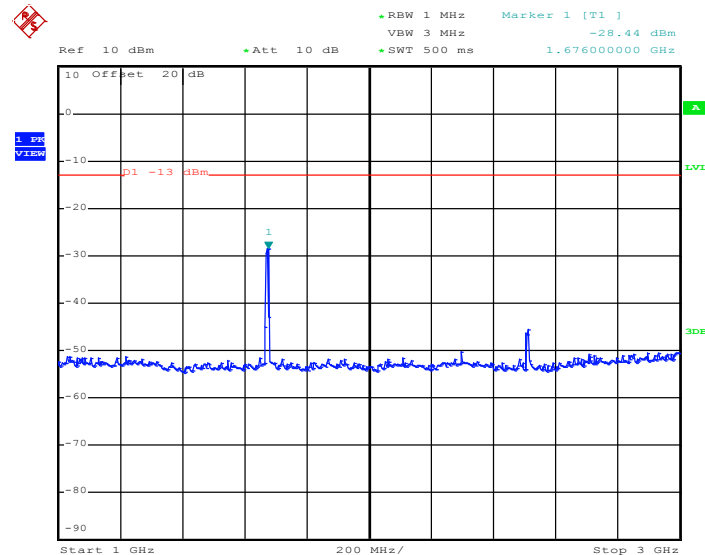

Date: 12.MAR.2014 15:27:52

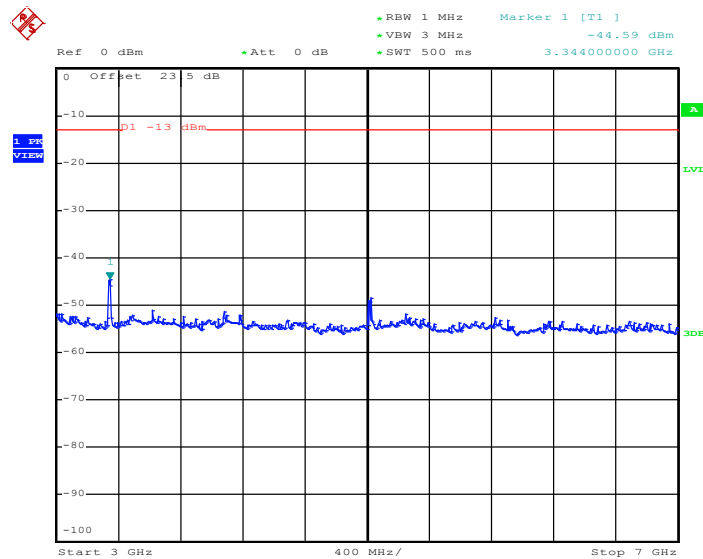Conducted Spurious Emission Plot between 3GHz ~ 7GHz


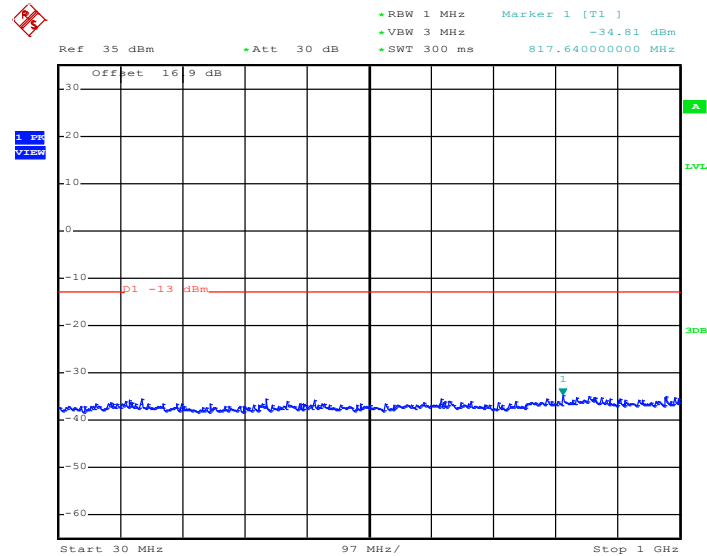
Date: 12.MAR.2014 15:27:43

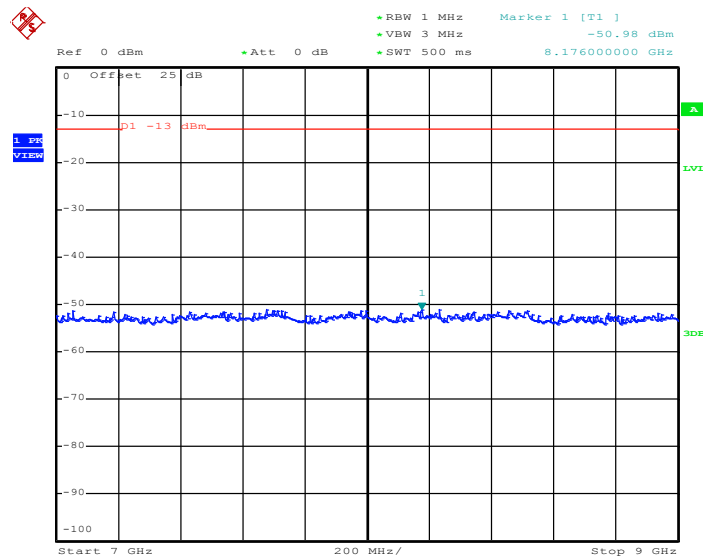Conducted Spurious Emission Plot between 7GHz ~ 9GHz


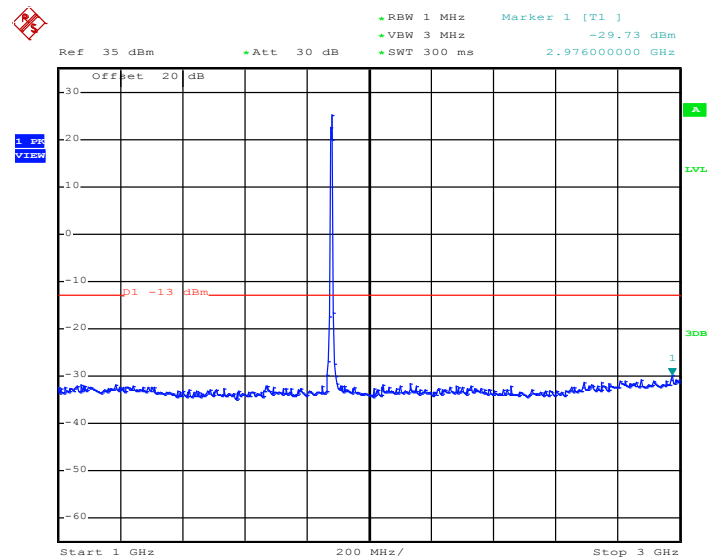
Date: 12.MAR.2014 15:27:51



Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link (QPSK)	Frequency :	1880.0 MHz

Conducted Spurious Emission Plot between 30MHz ~ 1GHz


Date: 12.MAR.2014 14:32:08

Conducted Spurious Emission Plot between 1GHz ~ 3GHz

Date: 12.MAR.2014 14:32:17




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

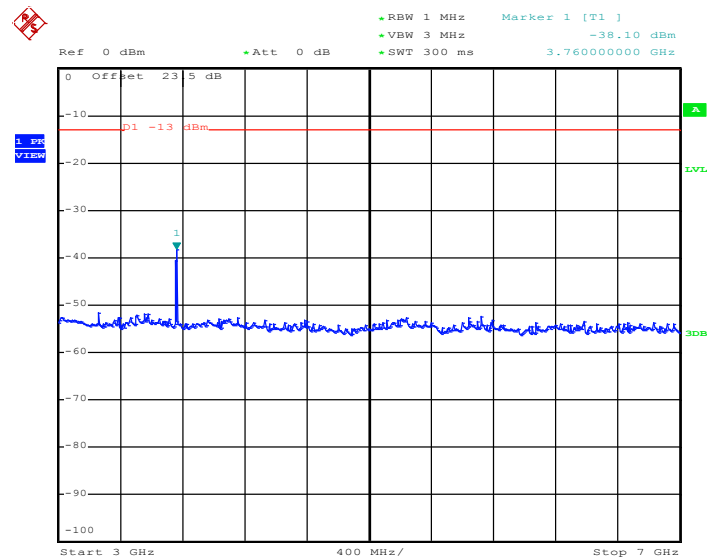

Date: 12.MAR.2014 14:32:28


Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

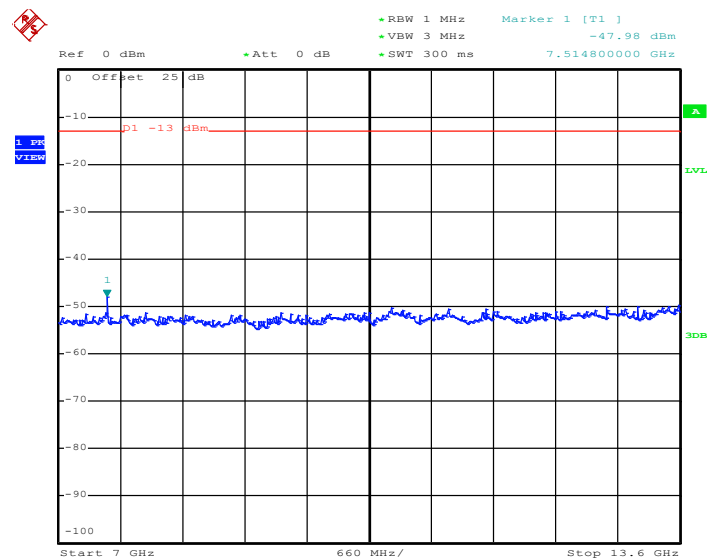

Date: 12.MAR.2014 14:32:37



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

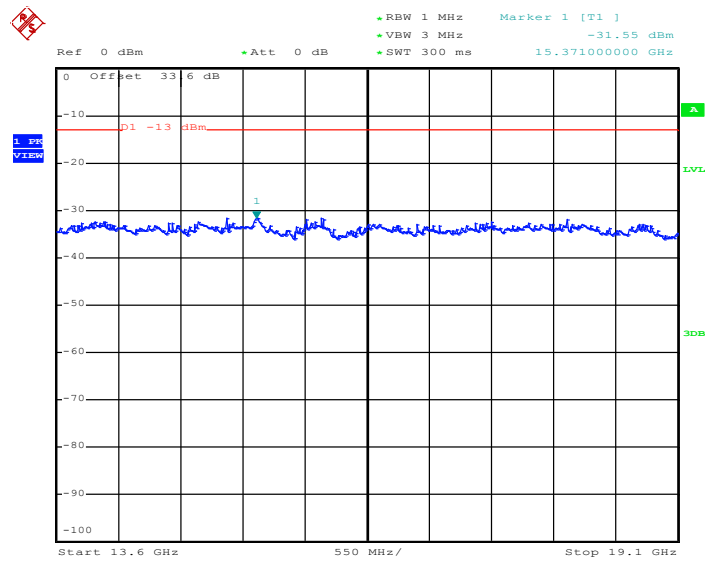

Date: 12.MAR.2014 14:32:45



3.7 Field Strength of Spurious Radiation Measurement

3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$
$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$
$$= -13\text{dBm}.$$

3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

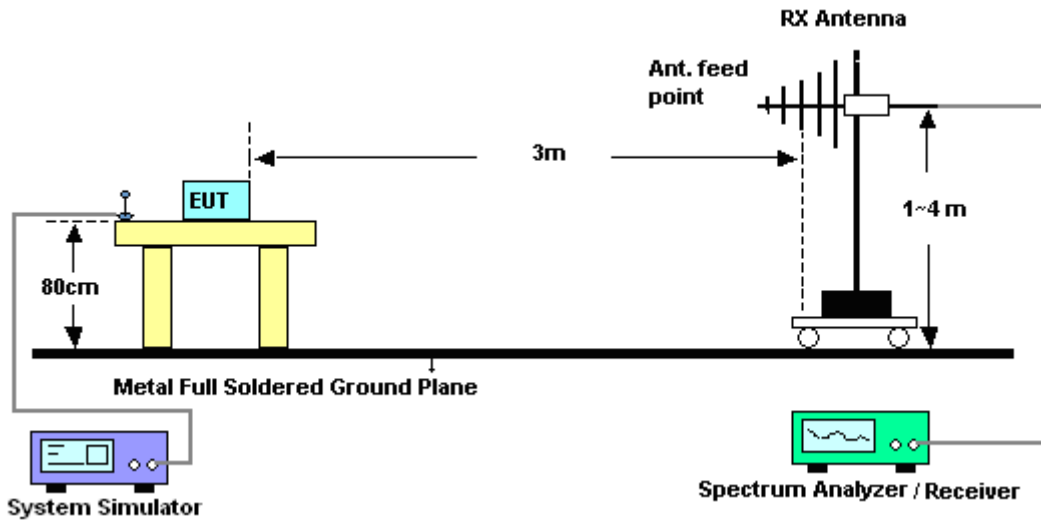


For radiated emissions above 1GHz

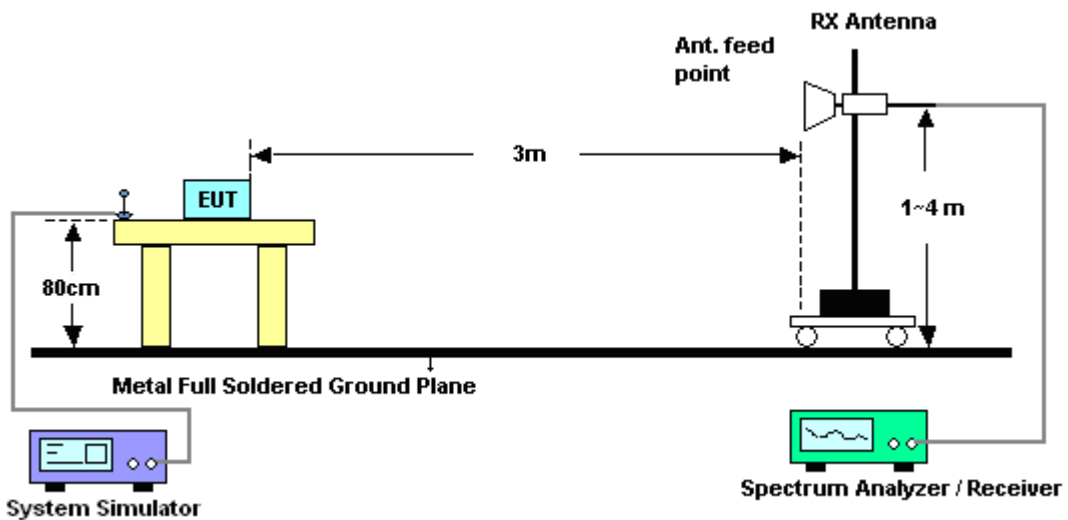

3.7.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

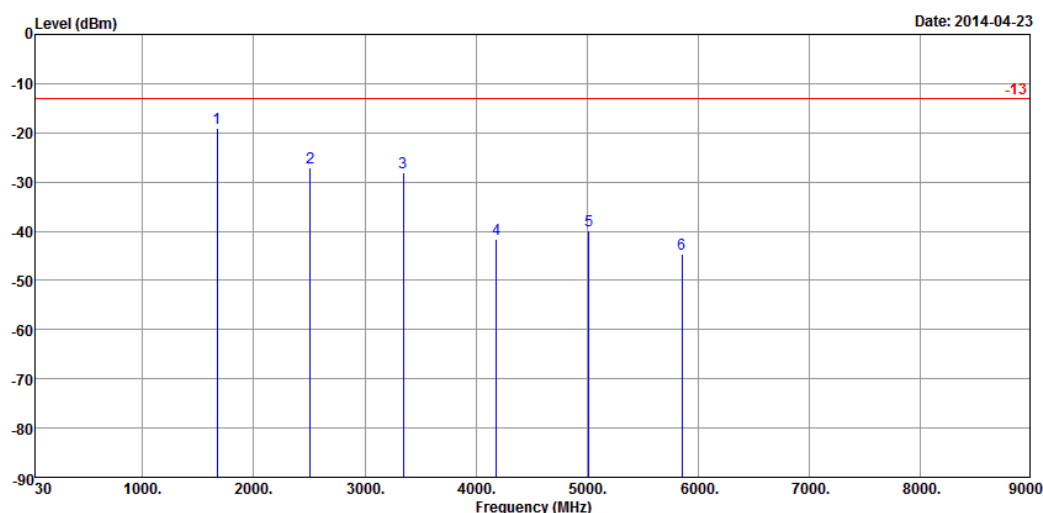


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 421343

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-19.17	-13	-6.17	-25.87	-23.56	4.49792	8.89	H	Pass
2509	-26.99	-13	-13.99	-36.98	-32.29	5.70772	11.00	H	Pass
3346	-27.99	-13	-14.99	-40.74	-33.05	6.970775	12.03	H	Pass
4183	-41.64	-13	-28.64	-57.57	-46.18	8.12762	12.66	H	Pass
5019	-39.85	-13	-26.85	-58.99	-44.07	8.49736	12.72	H	Pass
5855	-44.73	-13	-31.73	-65.37	-48.83	9.09941	13.20	H	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

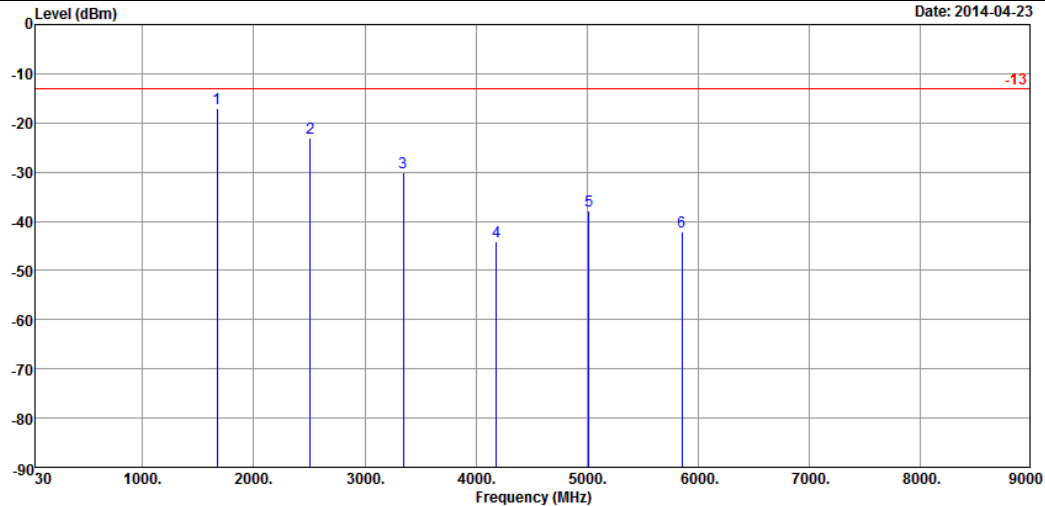


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 421343

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-16.97	-13	-3.97	-22.69	-21.36	4.49792	8.89	V	Pass
2509	-23.09	-13	-10.09	-34.6	-28.39	5.70772	11.00	V	Pass
3346	-30.05	-13	-17.05	-42.73	-35.11	6.970775	12.03	V	Pass
4183	-44.08	-13	-31.08	-59.59	-48.62	8.12762	12.66	V	Pass
5020	-37.79	-13	-24.79	-56.07	-42.01	8.49736	12.72	V	Pass
5855	-42.24	-13	-29.24	-62.47	-46.34	9.09941	13.20	V	Pass



Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

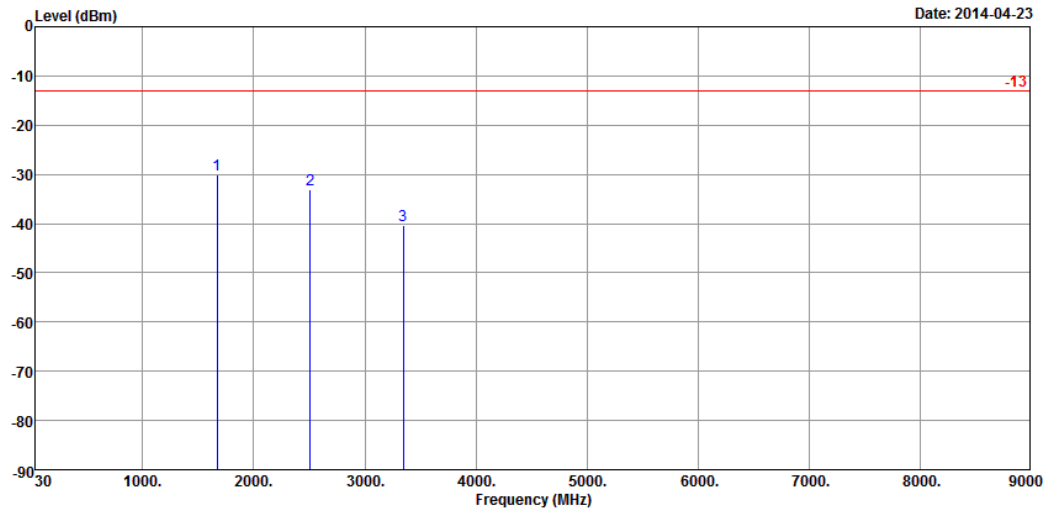


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 421.343

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-30.20	-13	-17.20	-36.93	-34.59	4.49792	8.89	H	Pass
2509	-33.12	-13	-20.12	-43.31	-38.42	5.70772	11.00	H	Pass
3346	-40.32	-13	-27.32	-53.31	-45.38	6.970775	12.03	H	Pass




Band :	GSM850	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

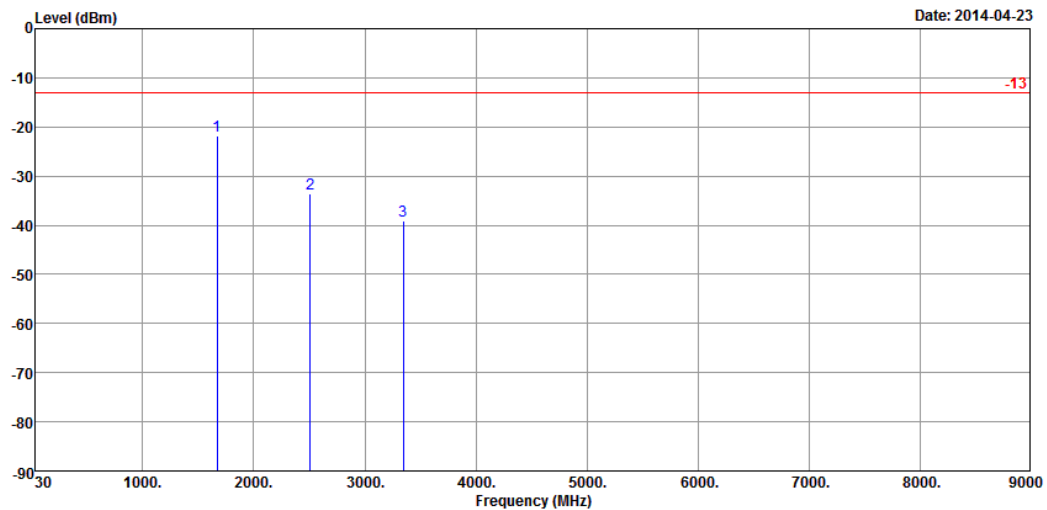

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-21.86	-13	-8.86	-27.48	-26.25	4.49792	8.89	V	Pass
2509	-33.71	-13	-20.71	-45.24	-39.01	5.70772	11.00	V	Pass
3346	-39.12	-13	-26.12	-51.68	-44.18	6.970775	12.03	V	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

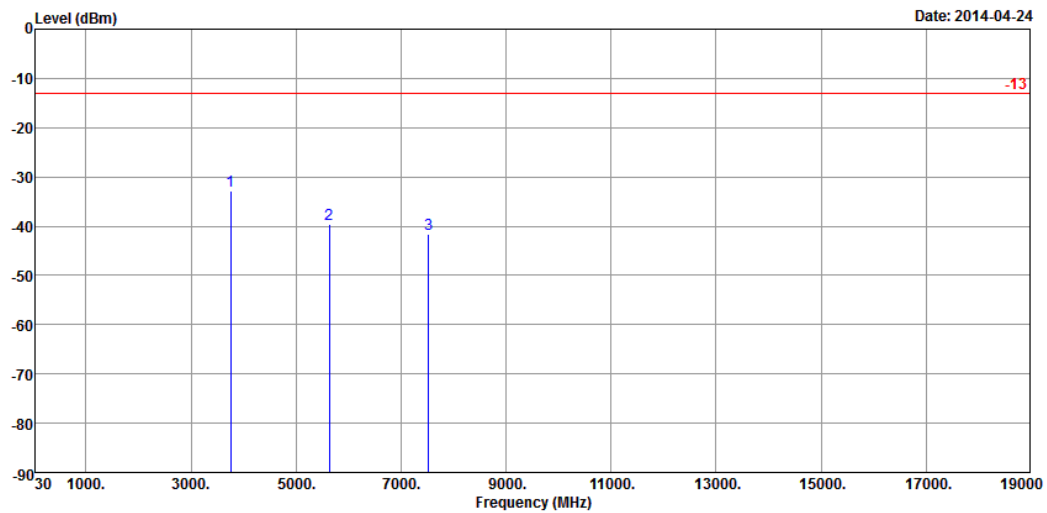


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 421343

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-32.75	-13	-19.75	-47.62	-37.83	7.4802	12.56	H	Pass
5640	-39.67	-13	-26.67	-59.89	-44.06	8.80968	13.20	H	Pass
7520	-41.52	-13	-28.52	-65.98	-43.12	9.597	11.20	H	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	GPRS class 8 Link (GMSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

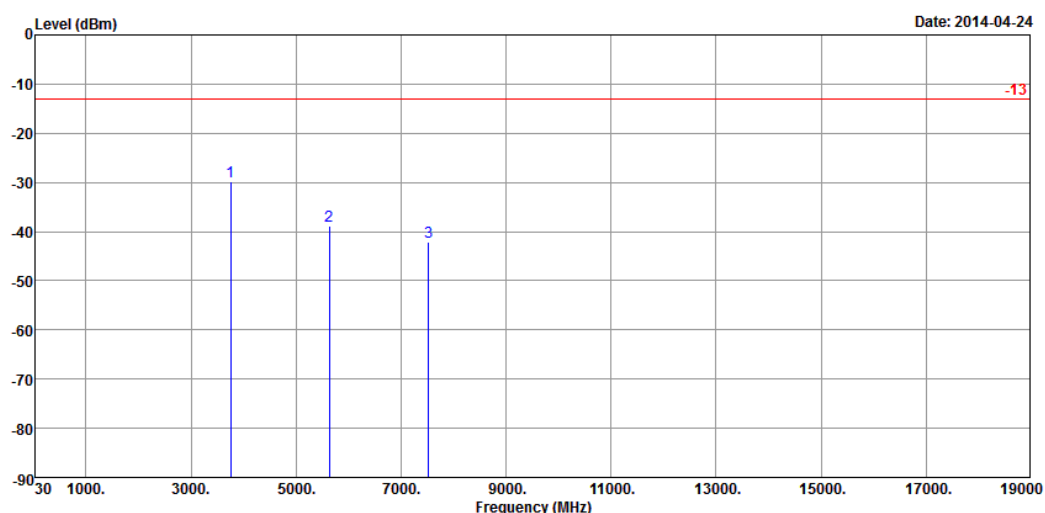


Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 421343

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-29.74	-13	-16.74	-44.68	-34.82	7.4802	12.56	V	Pass
5640	-38.76	-13	-25.76	-57.84	-43.15	8.80968	13.20	V	Pass
7520	-42.19	-13	-29.19	-65.61	-43.79	9.597	11.20	V	Pass



Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

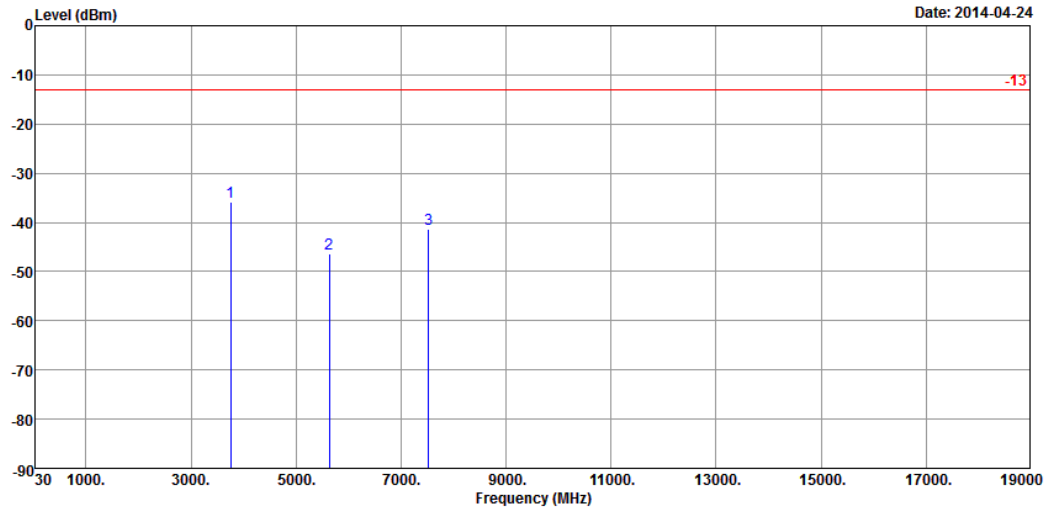


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 421343

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-35.88	-13	-22.88	-50.74	-40.96	7.4802	12.56	H	Pass
5640	-46.34	-13	-33.34	-66.65	-50.73	8.80968	13.20	H	Pass
7520	-41.29	-13	-28.29	-65.78	-42.89	9.597	11.20	H	Pass




Band :	GSM1900	Temperature :	22~24°C
Test Mode :	EDGE class 8 Link (8PSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

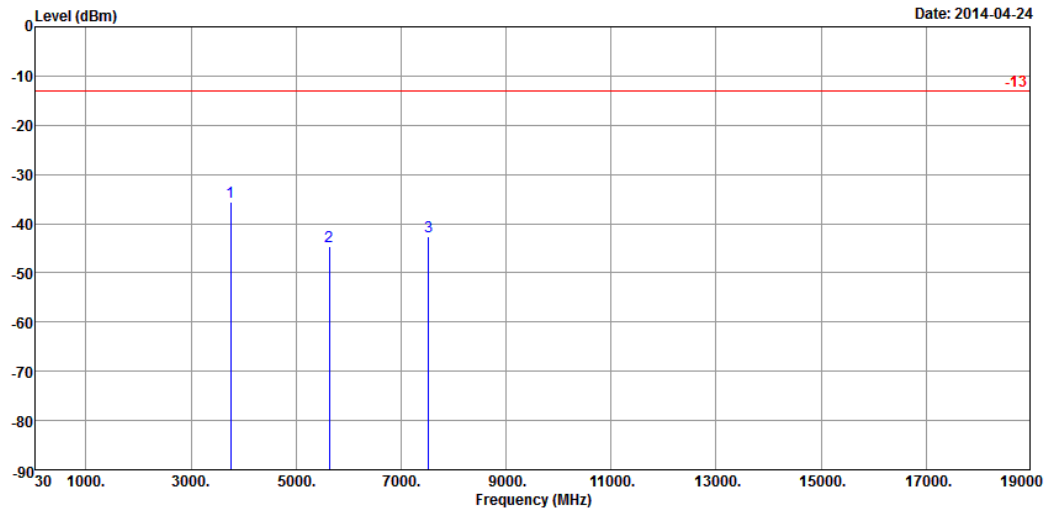

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-35.57	-13	-22.57	-50.56	-40.65	7.4802	12.56	V	Pass
5640	-44.63	-13	-31.63	-63.58	-49.02	8.80968	13.20	V	Pass
7520	-42.67	-13	-29.67	-66.11	-44.27	9.597	11.20	V	Pass



Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line..		

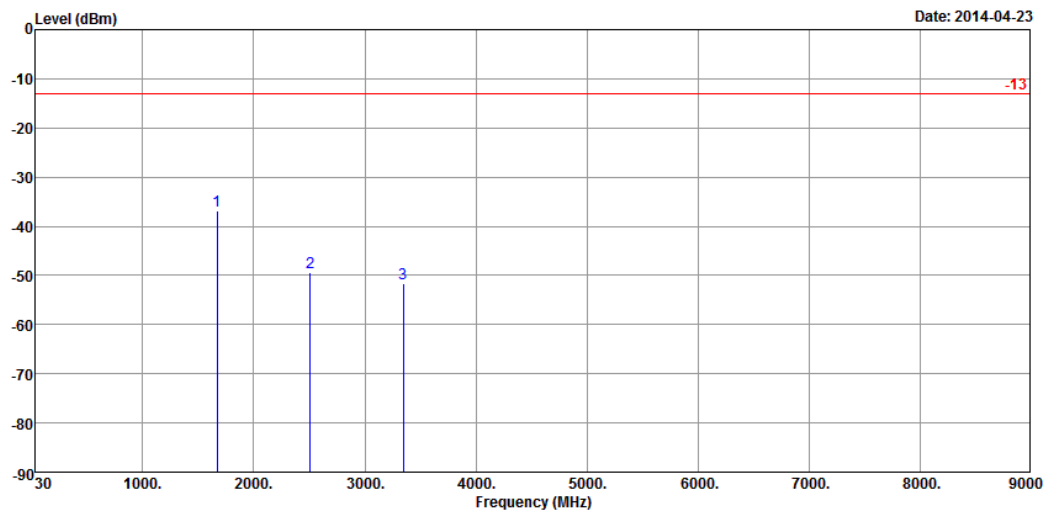


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 421343

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-36.77	-13	-23.77	-43.49	-41.16	4.49792	8.89	H	Pass
2510	-49.51	-13	-36.51	-59.61	-54.81	5.70772	11.00	H	Pass
3346	-51.56	-13	-38.56	-64.39	-56.62	6.970775	12.03	H	Pass




Band :	WCDMA Band V	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

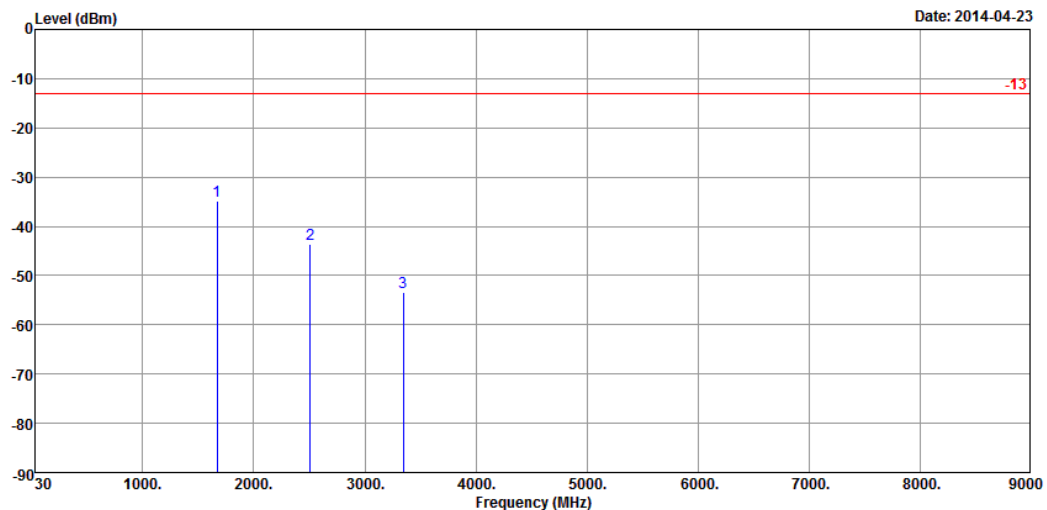

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1673	-34.76	-13	-21.76	-40.47	-39.15	4.49792	8.89	V	Pass
2510	-43.63	-13	-30.63	-55.22	-48.93	5.70772	11.00	V	Pass
3346	-53.30	-13	-40.30	-66.01	-58.36	6.970775	12.03	V	Pass



Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

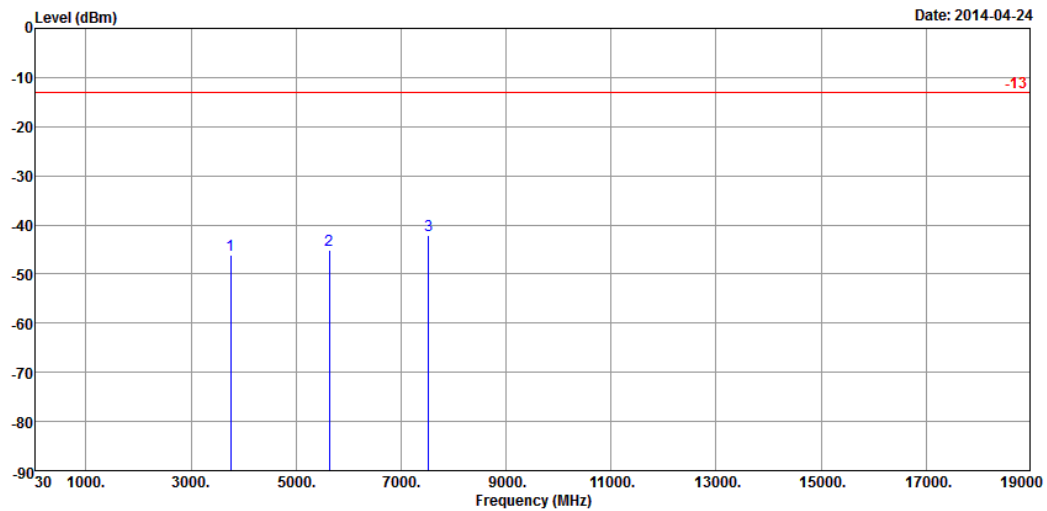


Site : 03CH07-HY
Condition : -13 EIRP_140314_H HORIZONTAL
Project : 421343

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3761	-46.15	-13	-33.15	-61.04	-51.23	7.4802	12.56	H	Pass
5641	-45.08	-13	-32.08	-65.28	-49.47	8.80968	13.20	H	Pass
7520	-42.16	-13	-29.16	-66.64	-43.76	9.597	11.20	H	Pass



Band :	WCDMA Band II	Temperature :	22~24°C
Test Mode :	RMC 12.2Kbps Link (QPSK)	Relative Humidity :	47~49%
Test Engineer :	Marlboro Hsu	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

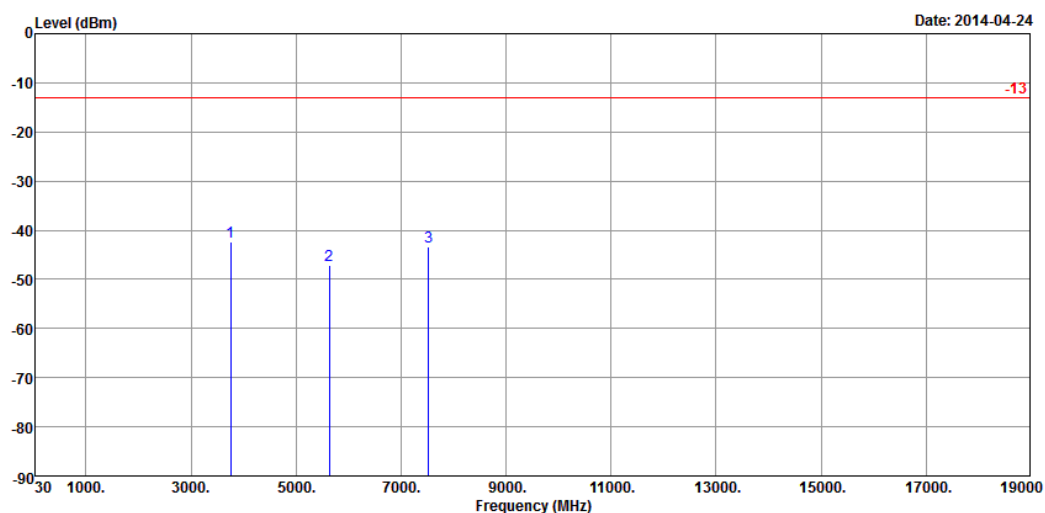

Site : 03CH07-HY
Condition : -13 EIRP_140314_V VERTICAL
Project : 421343

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3761	-42.45	-13	-29.45	-57.32	-47.53	7.4802	12.56	V	Pass
5639	-47.22	-13	-34.22	-66.21	-51.61	8.80968	13.20	V	Pass
7520	-43.42	-13	-30.42	-66.79	-45.02	9.597	11.20	V	Pass

3.8 Frequency Stability Measurement

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.8.5 Test Setup

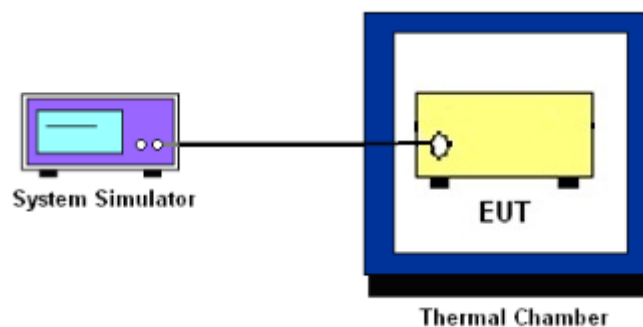

3.8.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0239	0.0191	PASS
40	0.0203	0.0143	
30	0.0179	0.0167	
20	0.0167	0.0120	
10	0.0143	0.0132	
0	0.0155	0.0155	
-10	0.0191	0.0143	
-20	0.0179	0.0167	
-30	0.0227	0.0179	

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	GPRS class 8	EDGE class 8	Result
	Deviation (ppm)	Deviation (ppm)	
50	0.0122	0.0138	PASS
40	0.0096	0.0112	
30	0.0101	0.0117	
20	0.0085	0.0101	
10	0.0080	0.0085	
0	0.0074	0.0096	
-10	0.0090	0.0122	
-20	0.0106	0.0128	
-30	0.0128	0.0149	



Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5	Frequency :	836.4 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0191	PASS
40	0.0132	
30	0.0143	
20	0.0120	
10	0.0108	
0	0.0096	
-10	0.0155	
-20	0.0179	
-30	0.0227	

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5	Frequency :	1880.0 MHz

Temperature (°C)	RMC 12.2Kbps	Result
	Deviation (ppm)	
50	0.0149	PASS
40	0.0122	
30	0.0112	
20	0.0080	
10	0.0096	
0	0.0117	
-10	0.0085	
-20	0.0106	
-30	0.0138	

3.8.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS class 8	4.20	0.0203	2.5	PASS
		3.80	0.0167		
		BEP	0.0179		
	EDGE class 8	4.20	0.0167		
		3.80	0.0167		
		BEP	0.0155		
GSM 1900 CH661	GPRS class 8	4.20	0.0074		
		3.80	0.0085		
		BEP	0.0080		
	EDGE class 8	4.20	0.0117		
		3.80	0.0096		
		BEP	0.0122		
WCDMA Band V CH4182	RMC 12.2Kbps	4.20	0.0120		
		3.80	0.0096		
		BEP	0.0108		
WCDMA Band II CH9400	RMC 12.2Kbps	4.20	0.0090		
		3.80	0.0085		
		BEP	0.0112		

Note:

1. Normal Voltage = 4.20V.
2. Battery End Point (BEP) = 3.40 V.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
System Simulator	Rohde & Schwarz	CMU200	117995	N/A	Aug. 01, 2013	Mar. 12, 2014	Jul. 31, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 07, 2013	Mar. 12, 2014	Jun. 06, 2014	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-9307 01	N/A	Jul. 19, 2013	Mar. 12, 2014	Jul. 18, 2014	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101067	9KHz ~ 30GHz	Feb. 10, 2014	Apr. 23, 2014 ~ Apr. 25, 2014	Feb. 09, 2015	Radiation (03CH07-HY)
Bilog Antenna	Schaffner	CBL6111C	2726	30MHz ~ 1GHz	Oct. 10, 2013	Apr. 23, 2014 ~ Apr. 25, 2014	Oct. 09, 2014	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	75962	1GHz~18GHz	Aug. 22, 2013	Apr. 23, 2014 ~ Apr. 25, 2014	Aug. 21, 2014	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	30MHz~1GHz	Mar. 17, 2014	Apr. 23, 2014 ~ Apr. 25, 2014	Mar. 16, 2015	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A023 62	1 GHz~26.5 GHz	Nov. 29, 2013	Apr. 23, 2014 ~ Apr. 25, 2014	Nov. 28, 2014	Radiation (03CH07-HY)
Turn Table	ChainTek	ChainTek 3000	N/A	0 ~ 360 degree	N/A	Apr. 23, 2014 ~ Apr. 25, 2014	N/A	Radiation (03CH07-HY)
Antenna Mast	ChainTek	M-400-0	114/80006 04/L	N/A	N/A	Apr. 23, 2014 ~ Apr. 25, 2014	N/A	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170 251	15GHz- 40GHz	Oct. 03, 2013	Apr. 23, 2014 ~ Apr. 25, 2014	Oct. 02, 2014	Radiation (03CH07-HY)



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.50
--	------