

TEST REPORT

Reference No...... : WTS16S0961091-1E V1
FCC ID : 2ABV4-A600
Applicant..... : Southern Telecom Inc.
Address..... : 14-C 53rd Street Brooklyn, NY 11232 United states
Manufacturer : Southern Telecom Inc.
Address..... : 14-C 53rd Street Brooklyn, NY 11232 United states
Product Name..... : Mobile Phone
Model No...... : A600, UW6009K
Brand..... : Polaroid
Standards..... : FCC CFR47 Part 15.247:2015
Date of Receipt sample : Sep. 20, 2016
Date of Test : Sep. 21 – Oct. 13, 2016
Date of Issue..... : Oct. 31, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious emissions	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	Complies
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 REPORT REVISION HISTORY	5
5 GENERAL INFORMATION	6
5.1 GENERAL DESCRIPTION OF E.U.T.	6
5.2 DETAILS OF E.U.T.	6
5.3 CHANNEL LIST	8
5.4 TEST MODE	8
5.5 TEST FACILITY.....	8
6 EQUIPMENT USED DURING TEST	9
6.1 EQUIPMENTS LIST	9
6.2 DESCRIPTION OF SUPPORT UNITS	10
6.3 MEASUREMENT UNCERTAINTY	10
6.4 TEST EQUIPMENT CALIBRATION	10
7 CONDUCTED EMISSION	11
7.1 E.U.T. OPERATION	11
7.2 EUT SETUP.....	11
7.3 MEASUREMENT DESCRIPTION	11
7.4 CONDUCTED EMISSION TEST RESULT	12
8 RADIATED SPURIOUS EMISSIONS	14
8.1 EUT OPERATION.....	14
8.2 TEST SETUP	15
8.3 SPECTRUM ANALYZER SETUP	16
8.4 TEST PROCEDURE	17
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	17
8.6 SUMMARY OF TEST RESULTS	18
9 CONDUCTED SPURIOUS EMISSIONS	22
9.1 TEST PROCEDURE	22
9.2 TEST RESULT	23
10 BAND EDGE MEASUREMENT	33
10.1 TEST PROCEDURE.....	33
10.2 TEST RESULT	34
11 20 DB BANDWIDTH MEASUREMENT	46
11.1 TEST PROCEDURE.....	46
11.2 TEST RESULT	46
12 MAXIMUM PEAK OUTPUT POWER	52
12.1 TEST PROCEDURE.....	52
12.2 TEST RESULT	52
13 HOPPING CHANNEL SEPARATION	58
13.1 TEST PROCEDURE.....	58
13.2 TEST RESULT	58
14 NUMBER OF HOPPING FREQUENCY	64

14.1	TEST PROCEDURE.....	64
14.2	TEST RESULT	64
15	DWELL TIME	66
15.1	TEST PROCEDURE.....	66
15.2	TEST RESULT	66
16	ANTENNA REQUIREMENT	72
17	RF EXPOSURE.....	73

4 Report Revision History

Report No.	Report Version	Description	Issue Date
WTS16S0961091-1E	NONE	Original	Oct. 14, 2016
WTS16S0961091-1E V1	V1	Version 1	Oct. 31, 2016

5 General Information

5.1 General Description of E.U.T.

Product Name	: Mobile Phone
Model No.	: A600, UW6009K
Model Description	: Only the model names are different.
GSM Band(s)	: GSM 850/900/1800/1900MHz
GPRS/EGPRS Class	: 12
WCDMA Band(s)	: FDD Band II/IV/V
LTE Bnad(s)	:N/A
Wi-Fi Specification	: 2.4G: 802.11b/g/n HT20 HT40
Bluetooth Version	: Bluetooth v4.0 with BLE
GPS	: Support
NFC	: N/A
Hardware Version	: AL_T56_MB_V10
Software Version	: Polaroid_Phone_20160913
Storage Location	: Internal Storage

5.2 Details of E.U.T.

Operation Frequency	: GSM/GPRS/EGPRS 850: 824~849MHz PCS/GPRS/EGPRS 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band IV: 1710~1755MHz WCDMA Band V: 824~849MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power	: GSM 850: 32.95dBm PCS1900: 29.99dBm WCDMA Band II: 22.52dBm WCDMA Band IV: 22.29dBm WCDMA Band V: 22.36dBm WiFi(2.4G): 9.44dBm Bluetooth: 4.73dBm
Type of Modulation	: GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: QPSK, BPSK WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK

Antenna installation	: GSM/WCDMA: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain	: GSM 850: 0.5dBi PCS1900: 0.2dBi WCDMA Band II: 0.1dBi WCDMA Band IV: 0.1dBi WCDMA Band V: 0.5dBi WiFi(2.4G): 1.0dBi Bluetooth: 1.0dBi
Technical Data	: Battery DC 3.7V, 2500mAh DC 5V, 1.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.3A)
Adapter	: Manufacture: Shenzhen BOYE ELECTRONIC TECHNOLOGY Co.,LTD. Model No.: BY120501000

5.3 Channel List

Normal

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

5.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests; the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

5.5 Test Facility

The test facility has a test site registered with the following organizations:

- IC – Registration No.: 7760A**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Apr.18,2016	Apr.17,2017
2.	LISN	R&S	ENV216	101215	Apr.18,2016	Apr.17,2017
3.	Cable	Top	TYPE16(3.5M)	-	Apr.18,2016	Apr.17,2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Apr.18,2016	Apr.17,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Apr.18,2016	Apr.17,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Apr.18,2016	Apr.17,2017
4.	Cable	LARGE	RF300	-	Apr.18,2016	Apr.17,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Apr.18,2016	Apr.17,2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Apr.18,2016	Apr.17,2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Apr.18,2016	Apr.17,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2016	Apr.17,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2016	Mar.16,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.18,2016	Apr.17,2017
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.18,2016	Apr.17,2017
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.18,2016	Apr.17,2017
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.18,2016	Apr.17,2017

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Apr.18,2016	Apr.17,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Apr.18,2016	Apr.17,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Apr.18,2016	Apr.17,2017

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

7.1 E.U.T. Operation

Operating Environment :


Temperature:	22.8 °C
Humidity:	52.6 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in BT link mode, the test data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

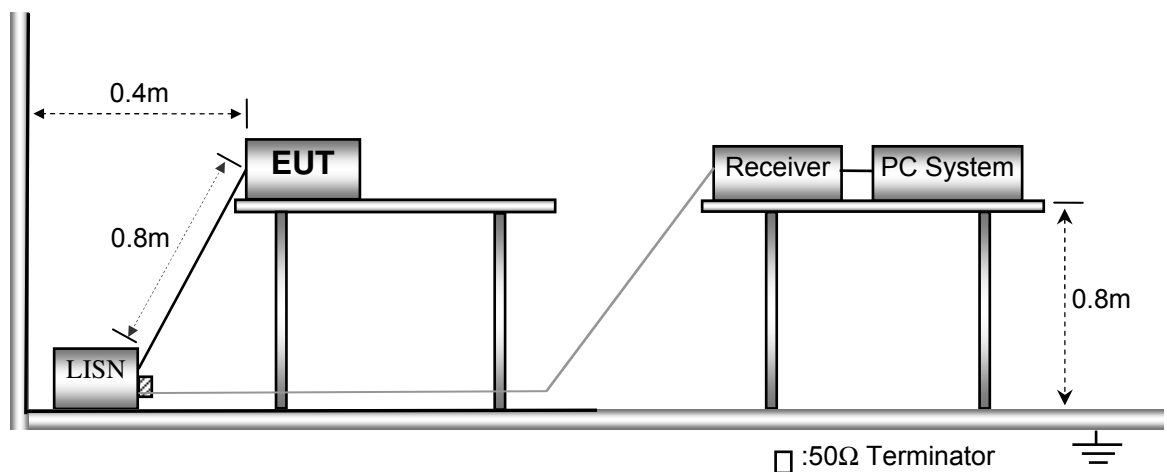


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

Live line:

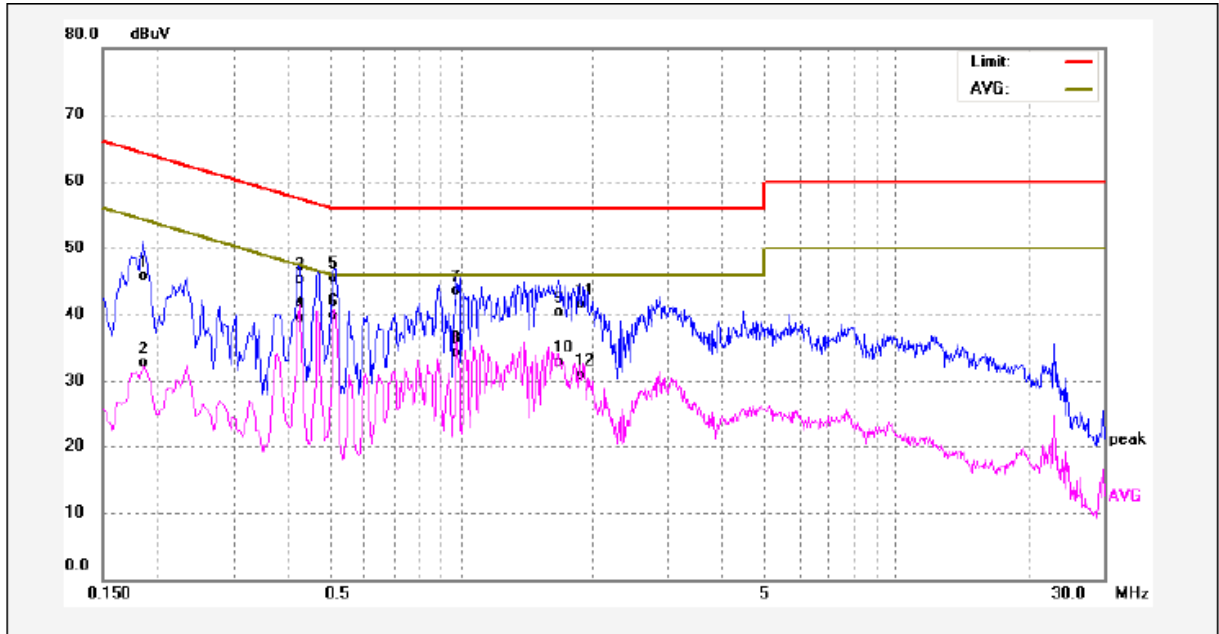

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1860	35.37	10.27	45.64	64.21	-18.57	QP	
2	0.1860	22.37	10.27	32.64	54.21	-21.57	AVG	
3	0.4260	34.99	10.26	45.25	57.33	-12.08	QP	
4	0.4260	29.17	10.26	39.43	47.33	-7.90	AVG	
5	0.5100	35.23	10.26	45.49	56.00	-10.51	QP	
6	0.5100	29.71	10.26	39.97	46.00	-6.03	AVG	
7	0.9740	33.11	10.39	43.50	56.00	-12.50	QP	
8	0.9740	23.97	10.39	34.36	46.00	-11.64	AVG	
9	1.6780	29.94	10.44	40.38	56.00	-15.62	QP	
10	1.6780	22.37	10.44	32.81	46.00	-13.19	AVG	
11	1.8620	31.06	10.46	41.52	56.00	-14.48	QP	
12	1.8620	20.53	10.46	30.99	46.00	-15.01	AVG	

Neutral line:

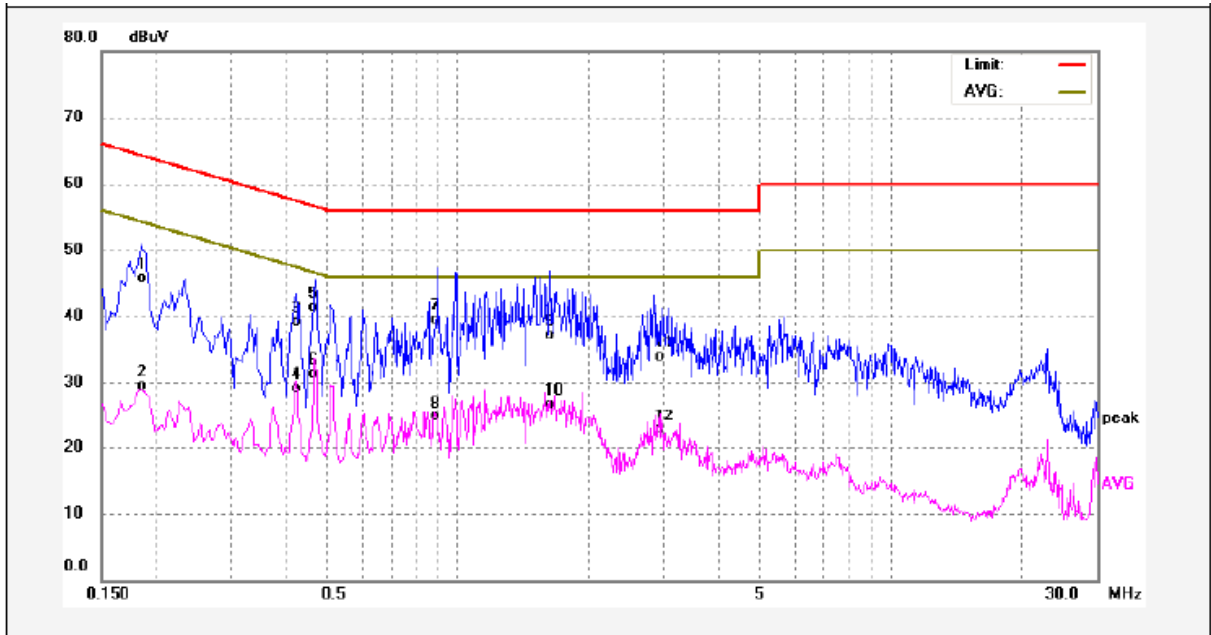

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1860	35.50	10.27	45.77	64.21	-18.44	QP	
2	0.1860	19.22	10.27	29.49	54.21	-24.72	AVG	
3	0.4220	28.89	10.27	39.16	57.41	-18.25	QP	
4	0.4220	18.88	10.27	29.15	47.41	-18.26	AVG	
5	0.4660	31.04	10.26	41.30	56.58	-15.28	QP	
6	0.4660	21.08	10.26	31.34	46.58	-15.24	AVG	
7	0.8980	29.05	10.38	39.43	56.00	-16.57	QP	
8	0.8980	14.33	10.38	24.71	46.00	-21.29	AVG	
9	1.6300	26.64	10.44	37.08	56.00	-18.92	QP	
10	1.6300	16.33	10.44	26.77	46.00	-19.23	AVG	
11	2.9260	23.36	10.50	33.86	56.00	-22.14	QP	
12	2.9260	12.26	10.50	22.76	46.00	-23.24	AVG	

8 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :


Temperature: 23.5 °C

Humidit

8.2 Test Setup


The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.

The test setup for emission measurement below 30MHz.

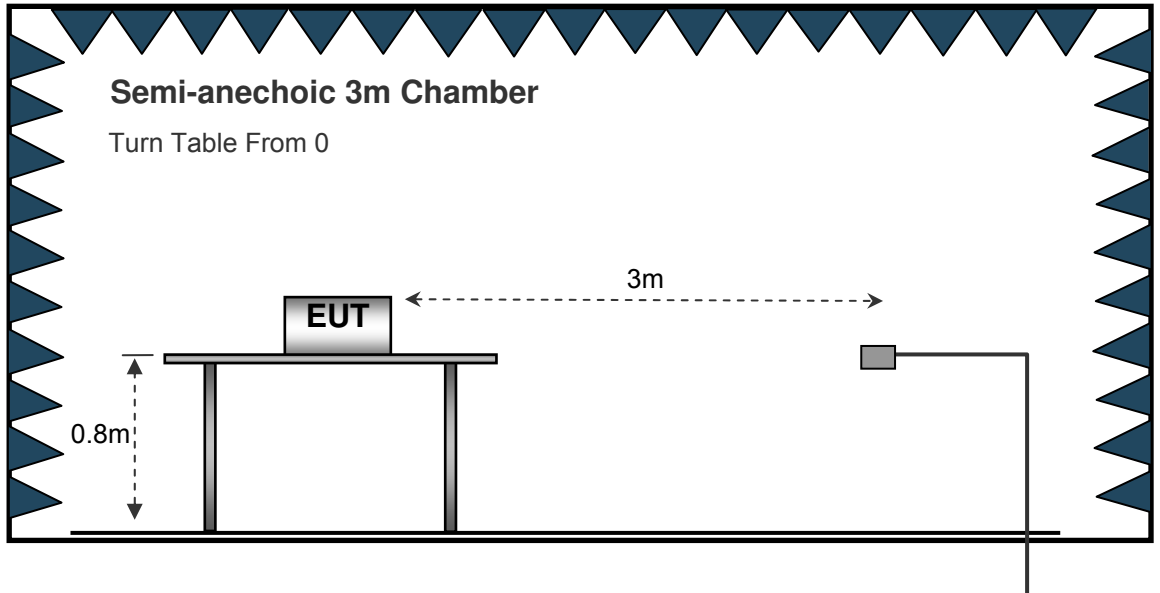

The test setup for emission measurement from 30 MHz to 1 GHz.

The test setup for emission measurement above 1 GHz.

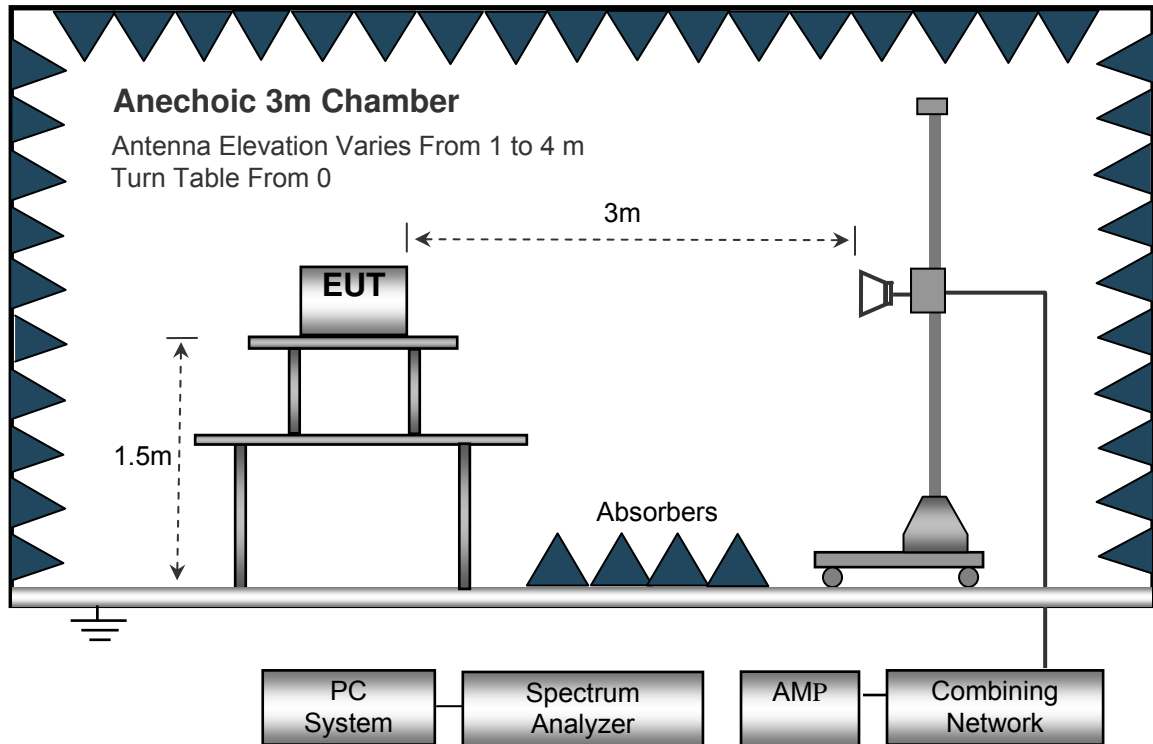

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 9KHz~30MHz


Remark: only the worst data (GFSK modulation mode) were reported.

Frequency (MHz)	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
6.325	24.63	QP	21.84	40.00	6.47	29.54	-23.07
8.341	25.61	QP	21.02	40.00	6.63	29.54	-22.91
26.254	22.39	QP	20.55	40.00	2.94	29.54	-26.60

Test Frequency: 30MHz ~ 18GHz


Remark: only the worst data (GFSK modulation mode Low Channel) were reported.

Low Channel - Horizontal

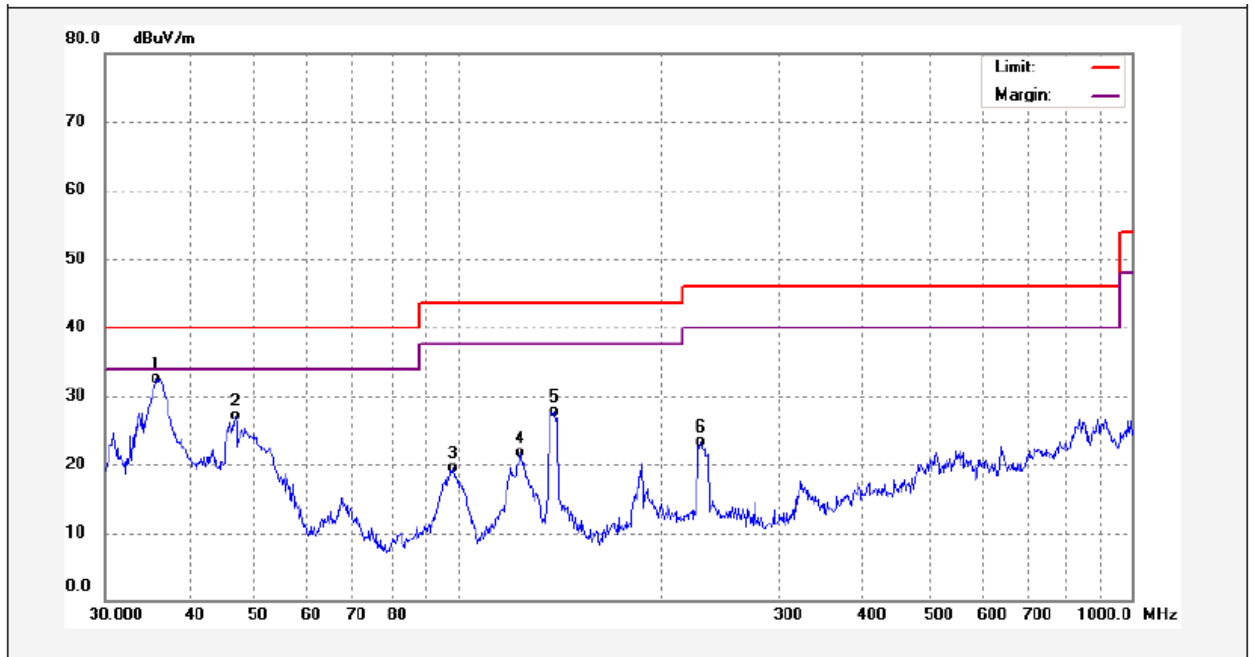

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	35.7490	47.66	-15.11	32.55	40.00	-7.45	QP	
2	46.8303	41.99	-14.88	27.11	40.00	-12.89	QP	
3	98.4866	34.44	-14.97	19.47	43.50	-24.03	QP	
4	123.6985	35.56	-13.89	21.67	43.50	-21.83	QP	
5	139.3613	40.95	-13.22	27.73	43.50	-15.77	QP	
6	230.0985	37.80	-14.53	23.27	46.00	-22.73	QP	

Low Channel – Vertical

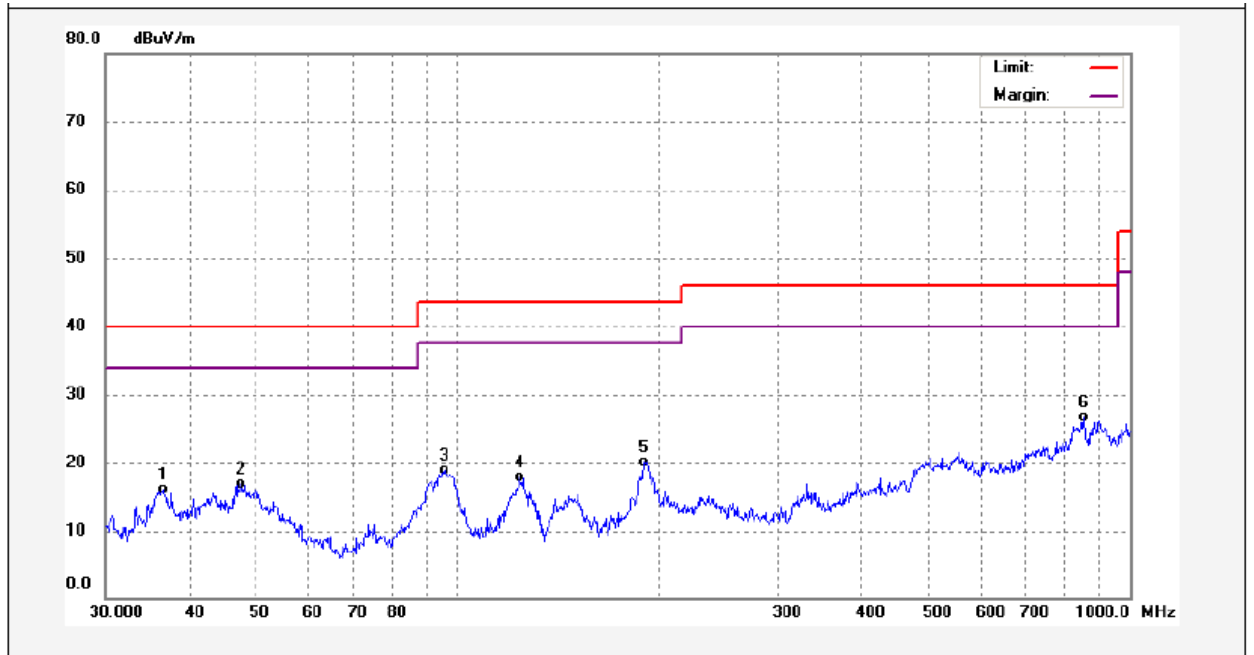


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	36.5092	31.47	-15.29	16.18	40.00	-23.82	QP	
2	47.6586	32.47	-15.58	16.89	40.00	-23.11	QP	
3	95.7622	40.04	-21.18	18.86	43.50	-24.64	QP	
4	123.6985	31.88	-14.06	17.82	43.50	-25.68	QP	
5	189.7385	37.23	-17.07	20.16	43.50	-23.34	QP	
6	854.0247	30.62	-3.88	26.74	46.00	-19.26	QP	

Test Frequency: Above 1GHz


Remark: only the worst data (8DPSK modulation mode Low Channel) were reported

Low Channel - Horizontal

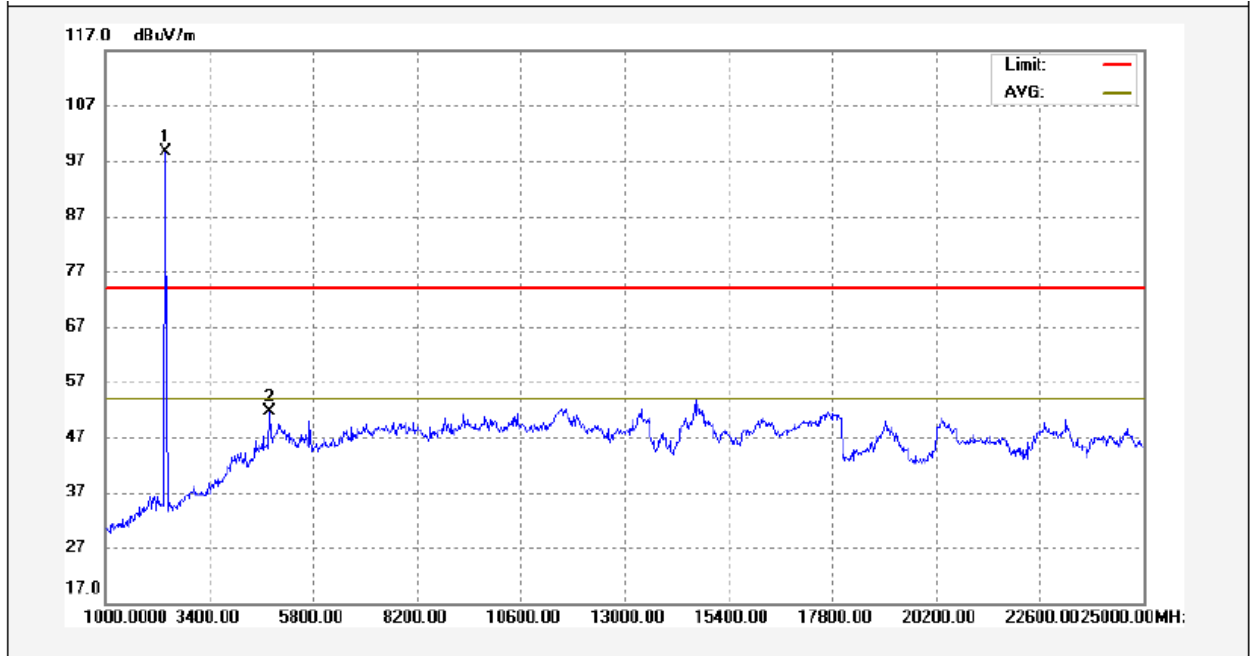

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.500	113.84	-15.24	98.60				
2	4792.000	54.23	-2.50	51.73	74.00	-22.27	peak	

Low Channel – Vertical

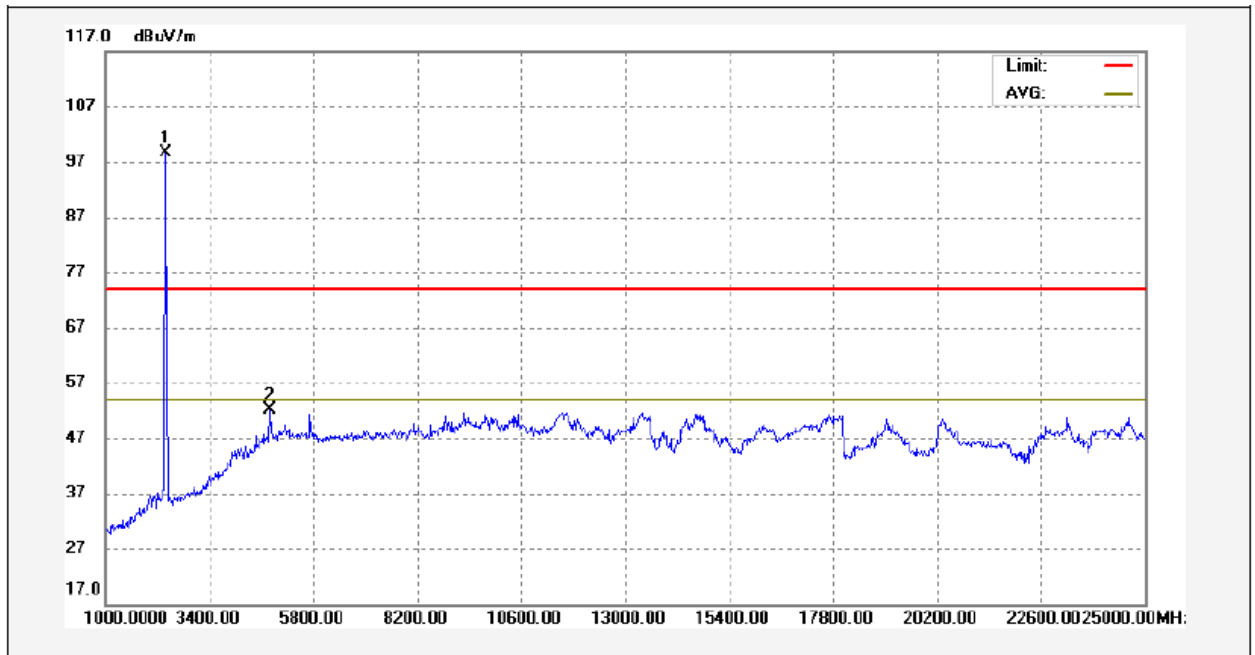

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.400	113.84	-15.24	98.60				
2	4792.000	54.73	-2.50	52.23	74.00	-21.77	peak	

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10

Test Result: PASS

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

9.2 Test Result


9KHz - 30MHz

GFSK


Low Channel

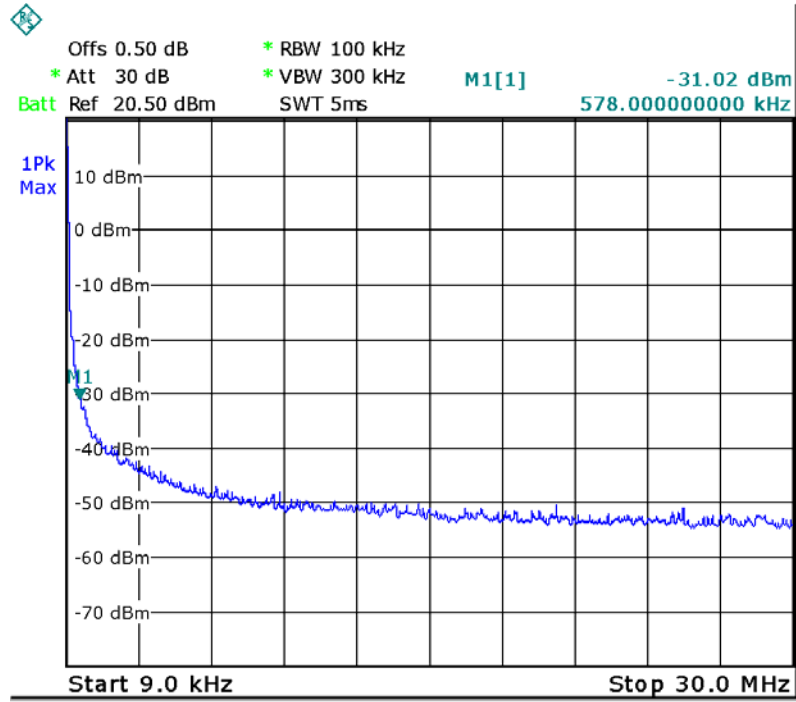

Middle Channel

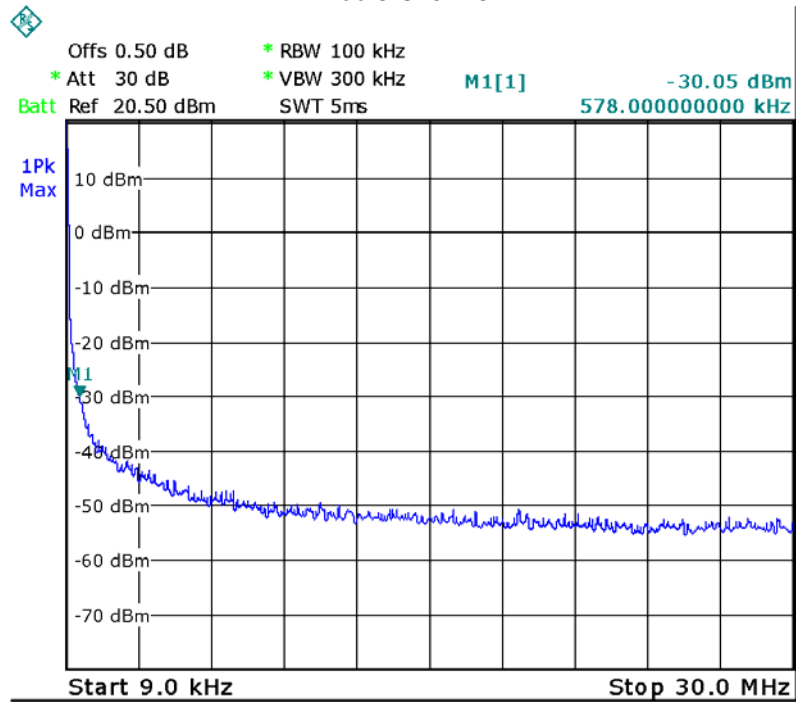


High Channel

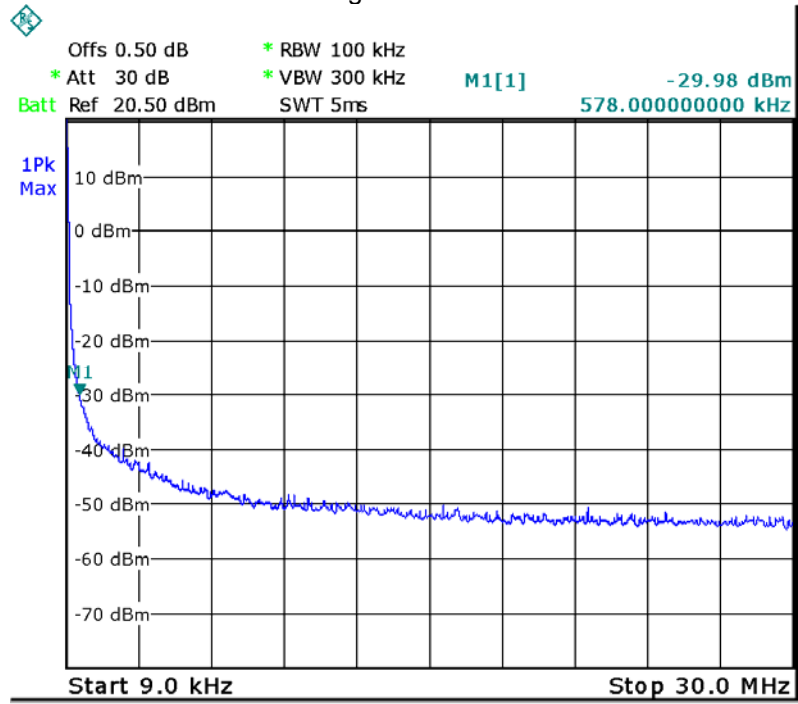


Pi/4DQPSK


Low Channel

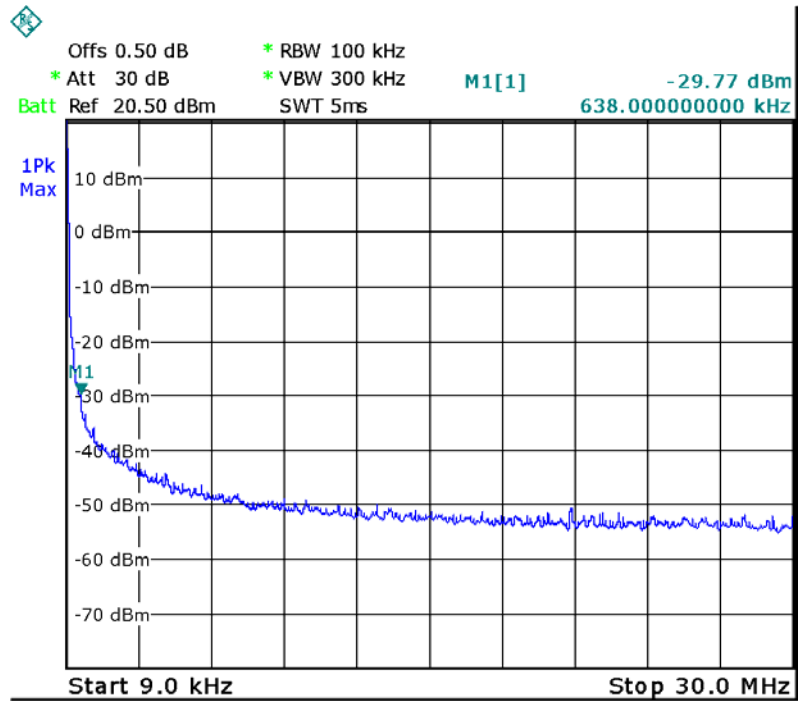

Middle Channel

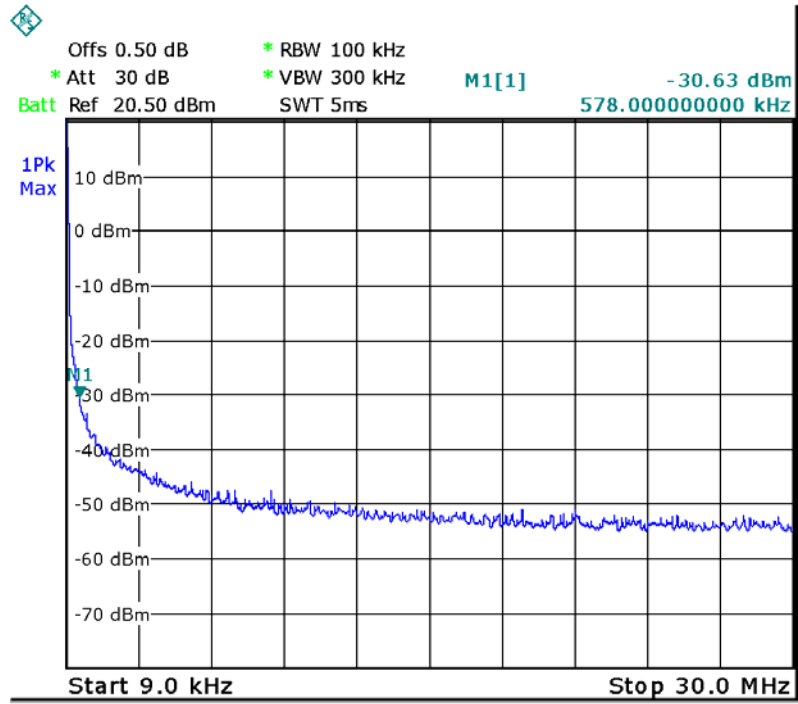


High Channel

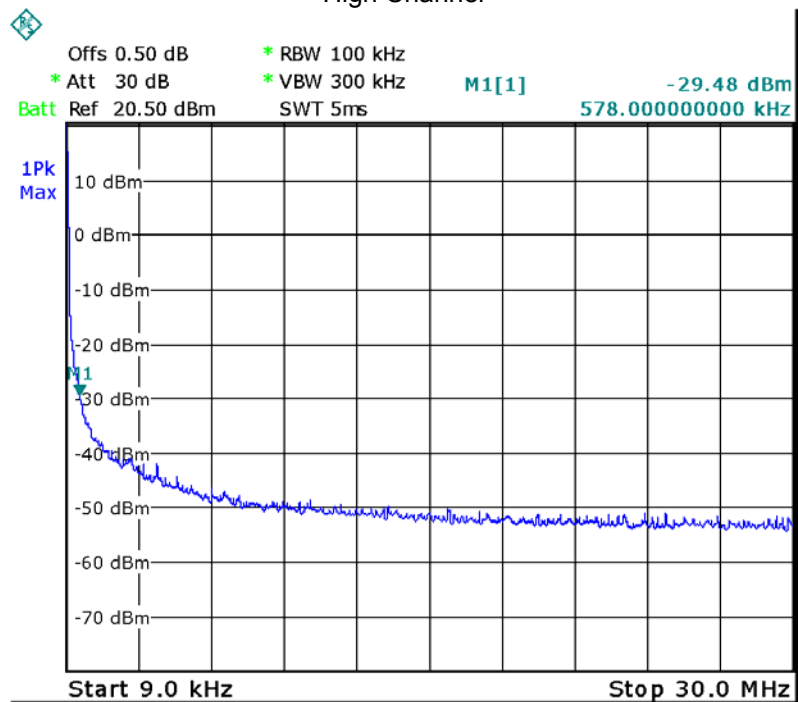



8DPSK

Low Channel

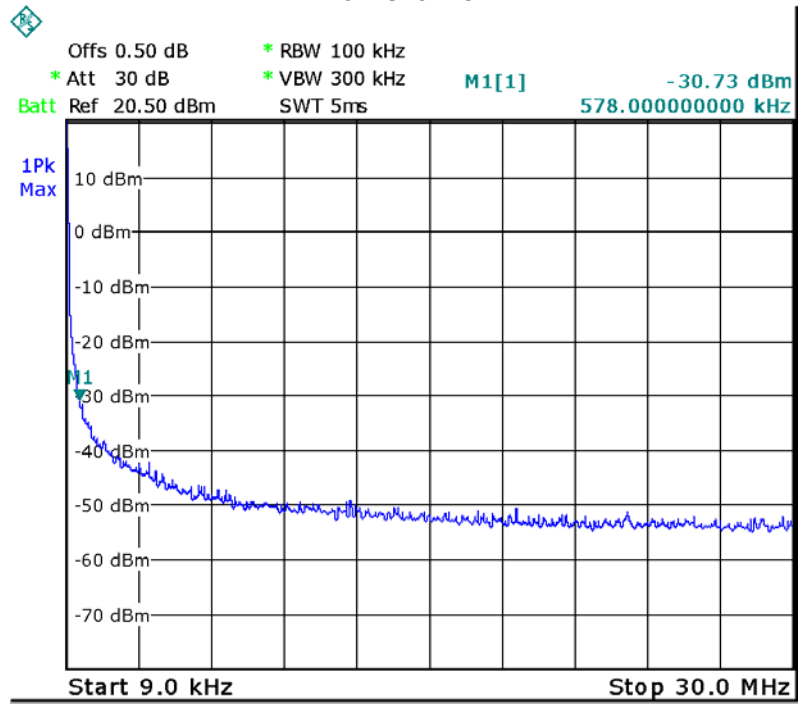


Middle Channel

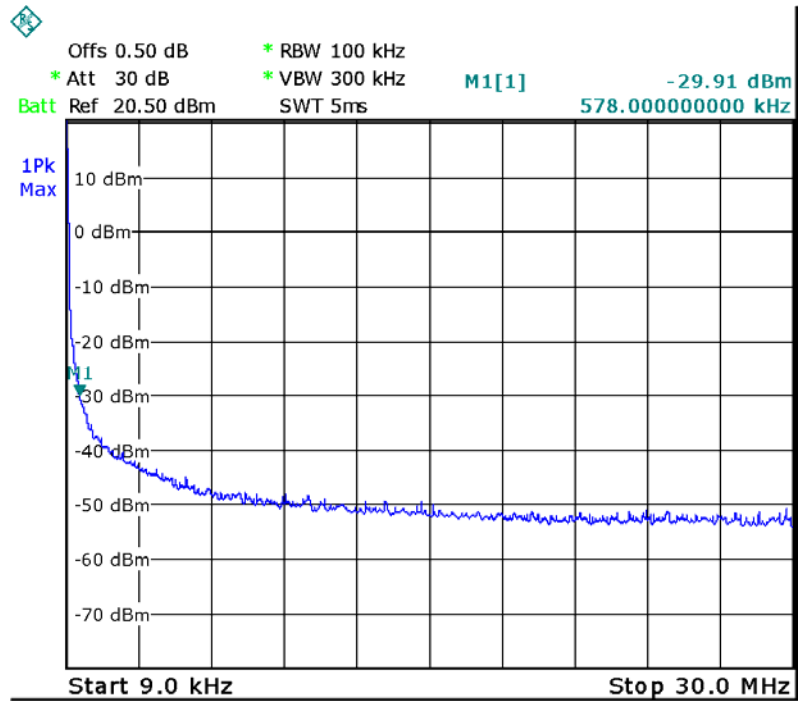

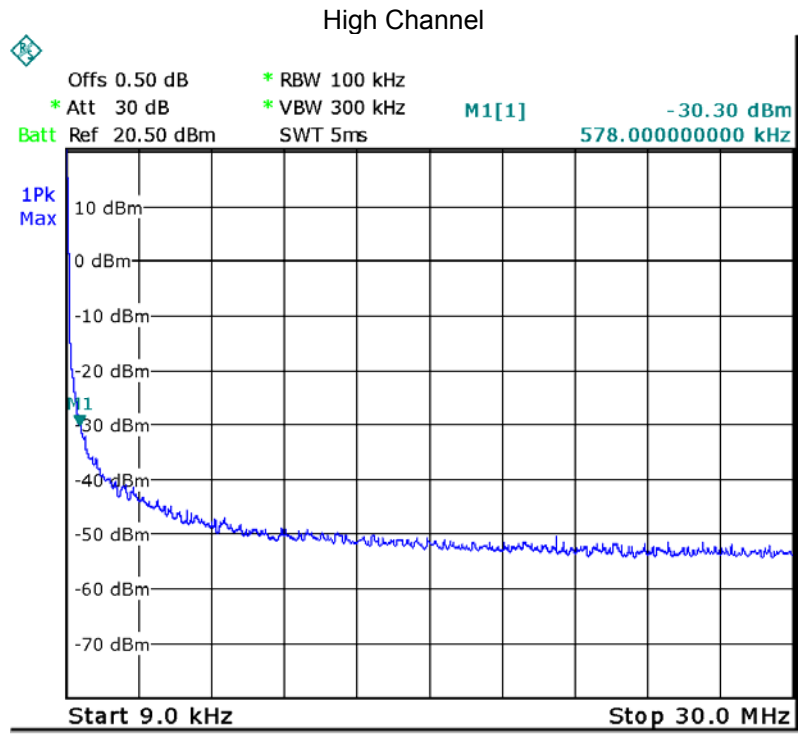


30MHz – 25GHz
GFSK Low Channel

Fundamental

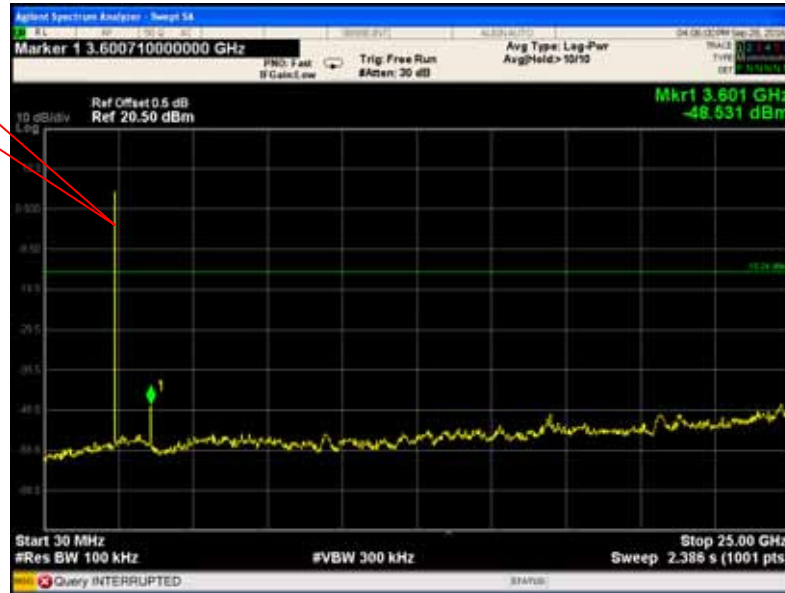


GFSK Middle Channel

Fundamental

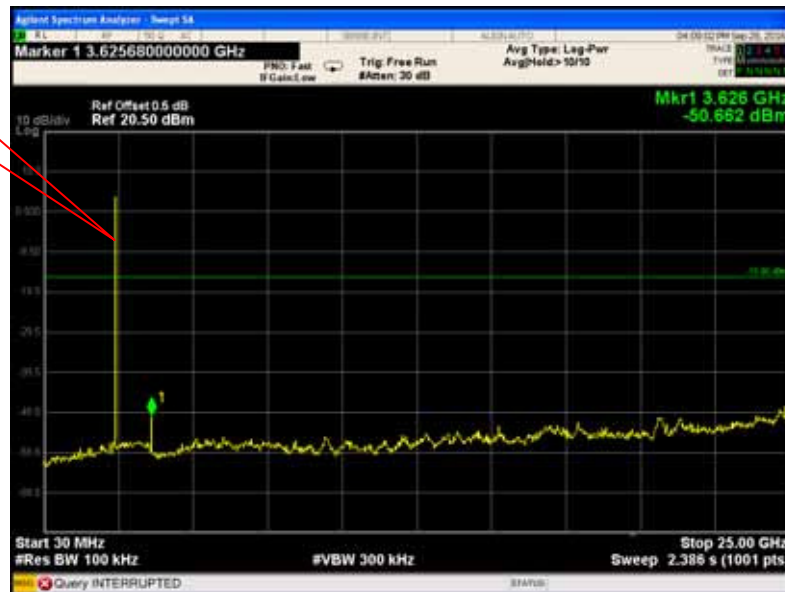


GFSK High Channel

Fundamental

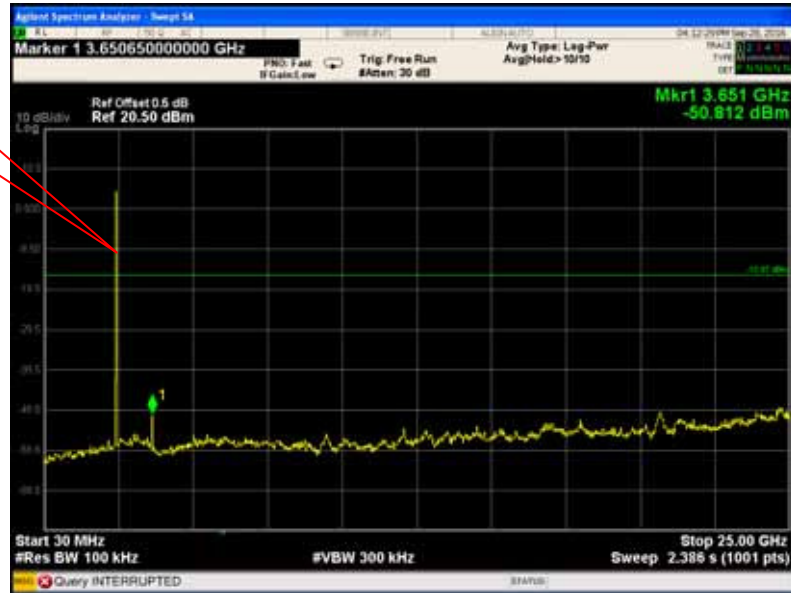

Pi/4 DQPSK Low Channel

Fundamental

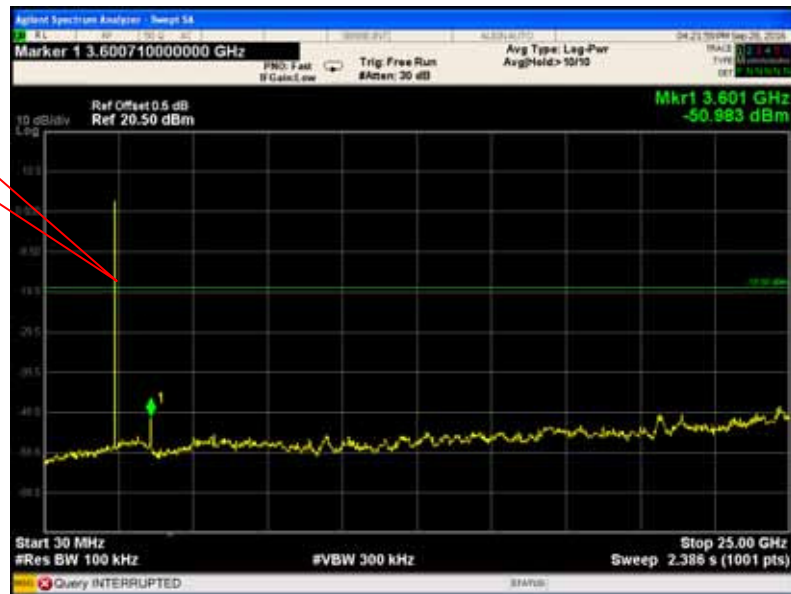

Pi/4 DQPSK Middle Channel

Fundamental




Pi/4 DQPSK High Channel

Fundamental




8DPSK Low Channel

Fundamental

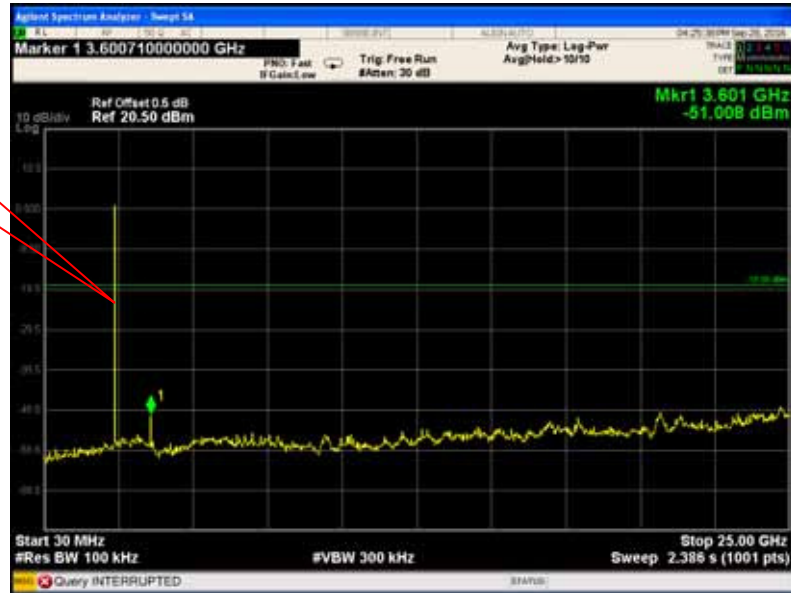


8DPSK Middle Channel

Fundamental

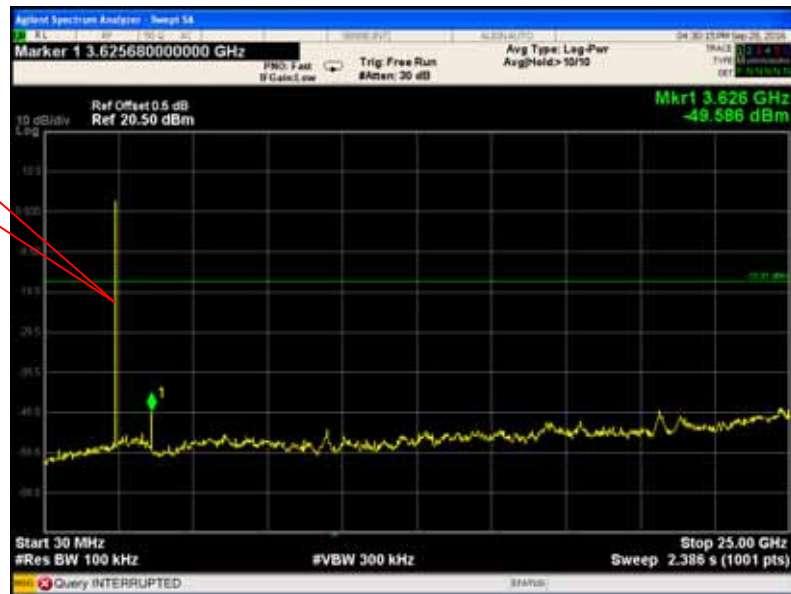

8DPSK High Channel

Fundamental

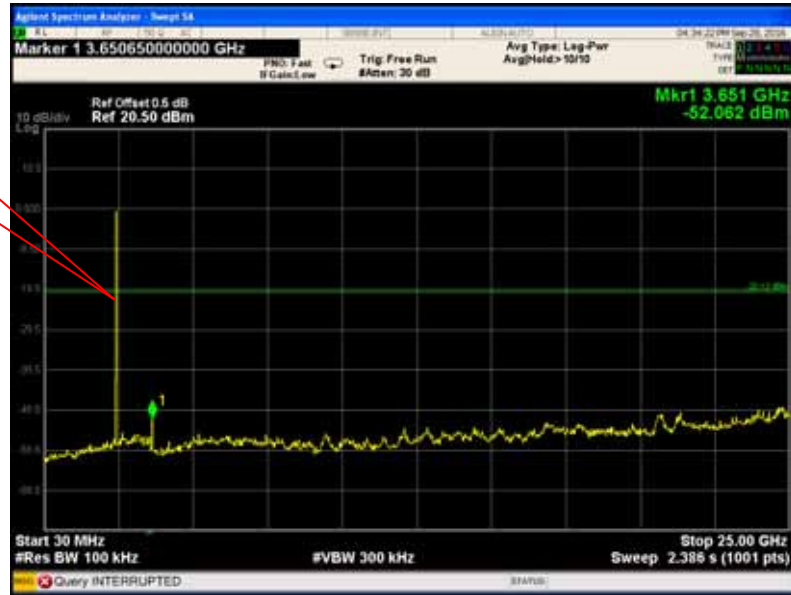

10 Band Edge Measurement



Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

10.2 Test Result


Test plots

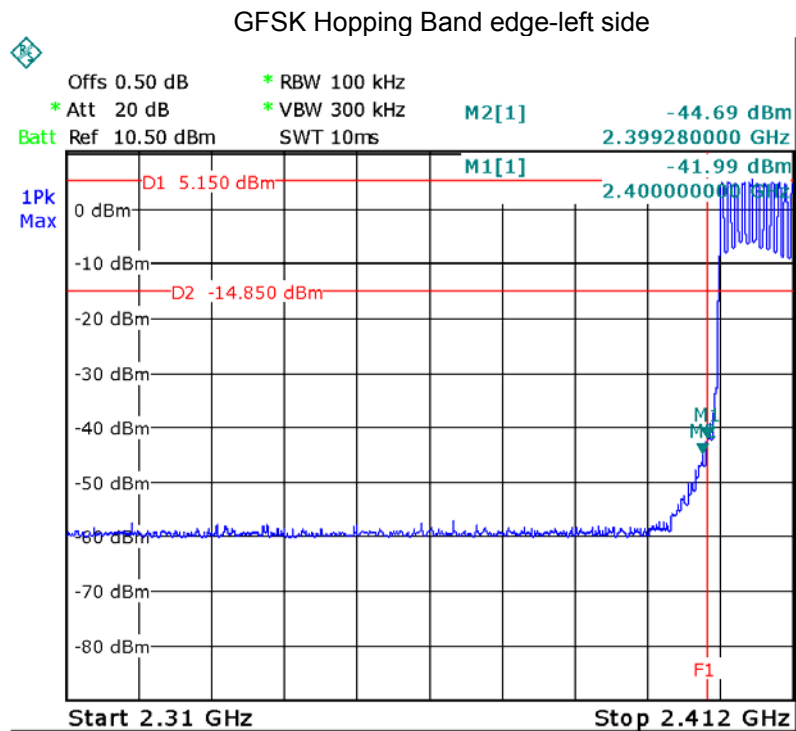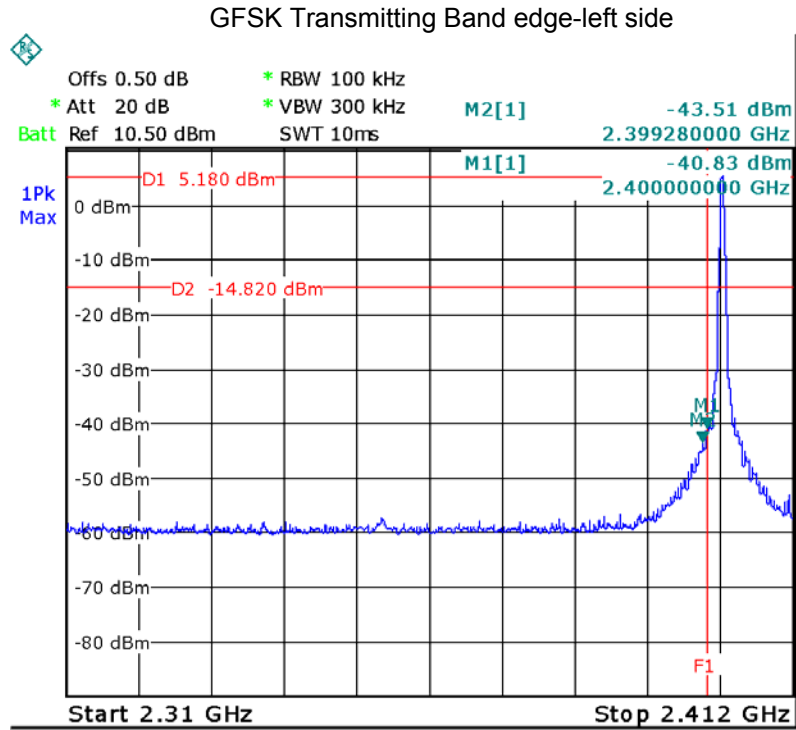


GFSK Transmitting Band edge-right side

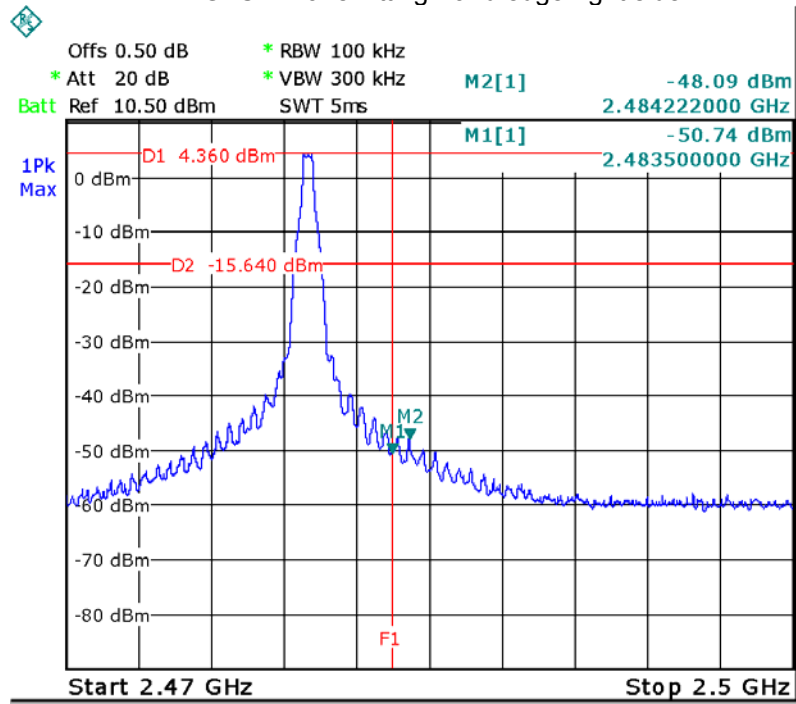


GFSK Hopping Band edge-right side

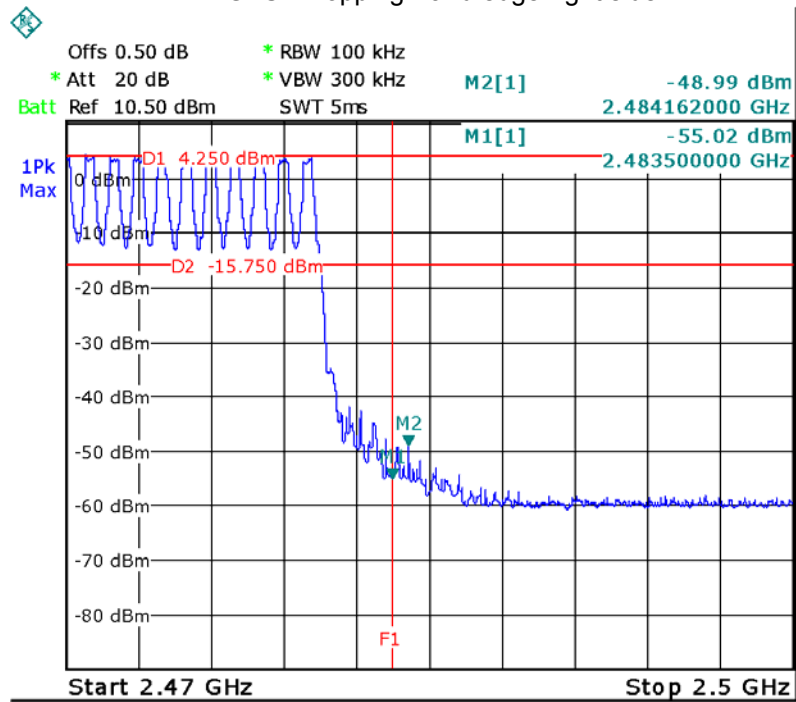


Pi/4 DQPSK Transmitting Band edge-left side

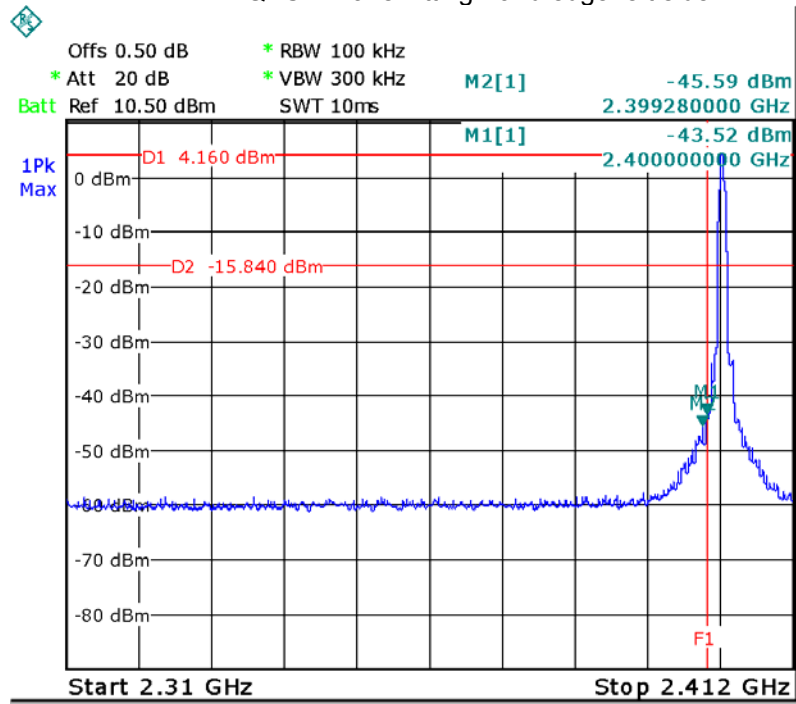


Pi/4 DQPSK Hopping Band edge-left side


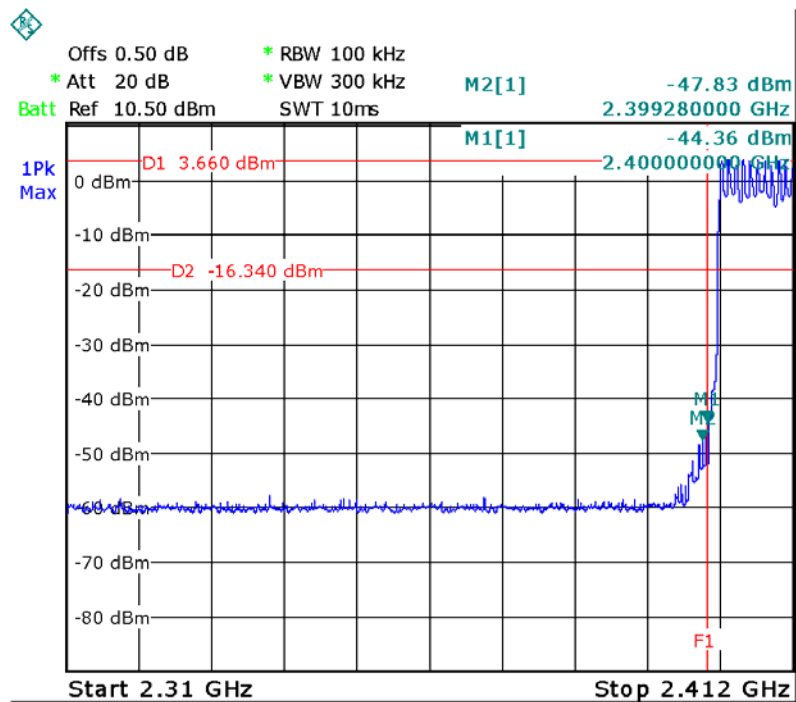




Pi/4 DQPSK Transmitting Band edge-right side

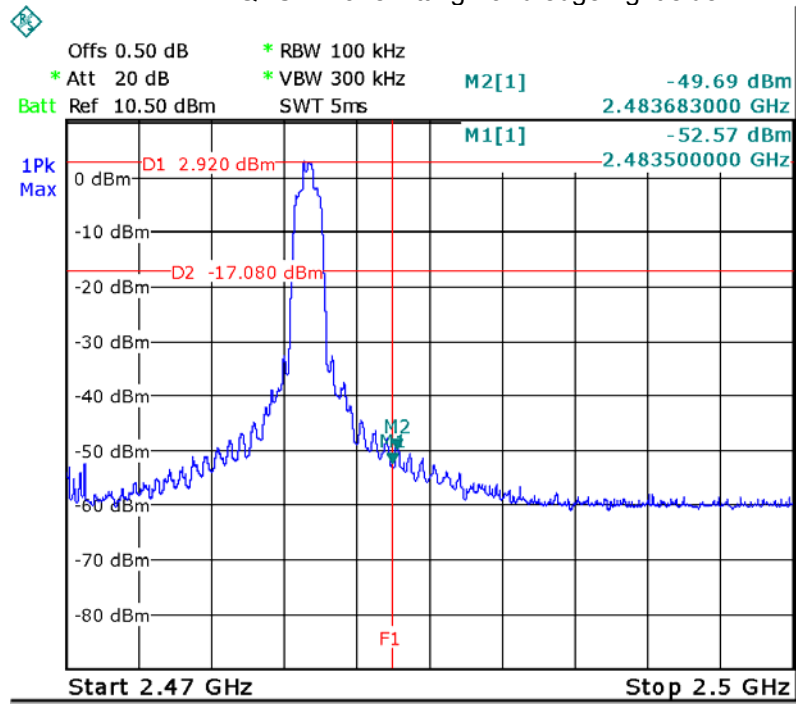


Pi/4 DQPSK Hopping Band edge-right side

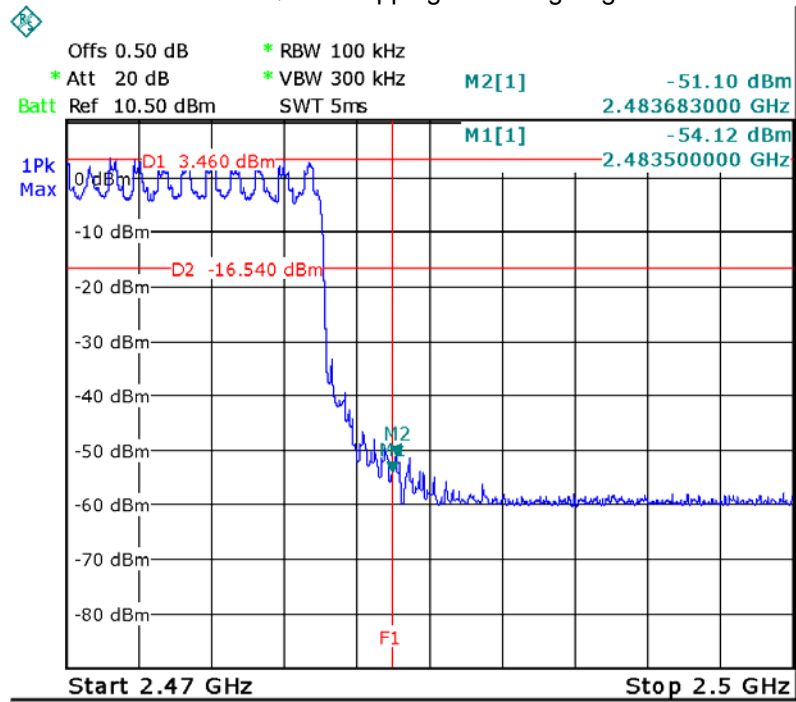

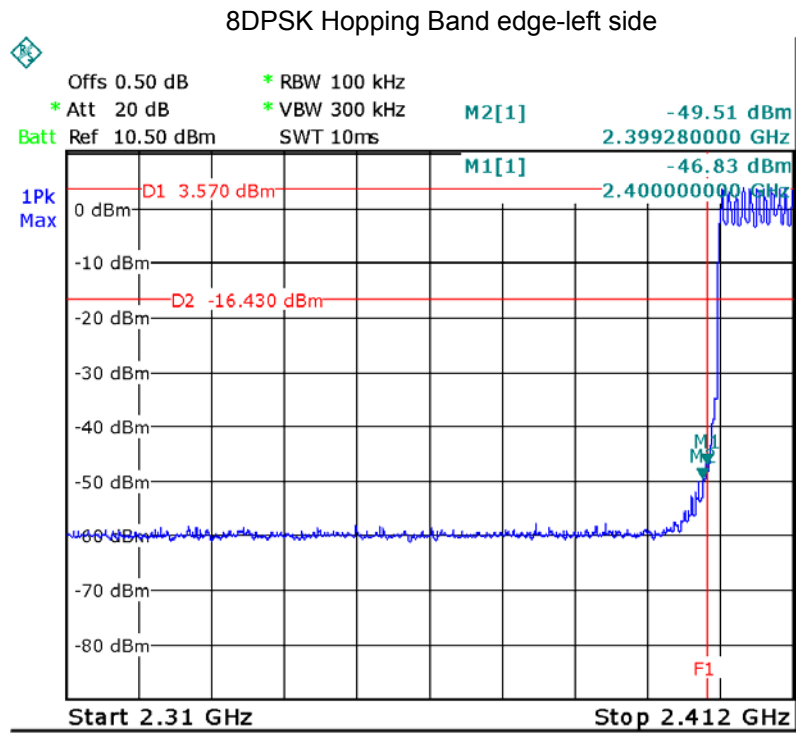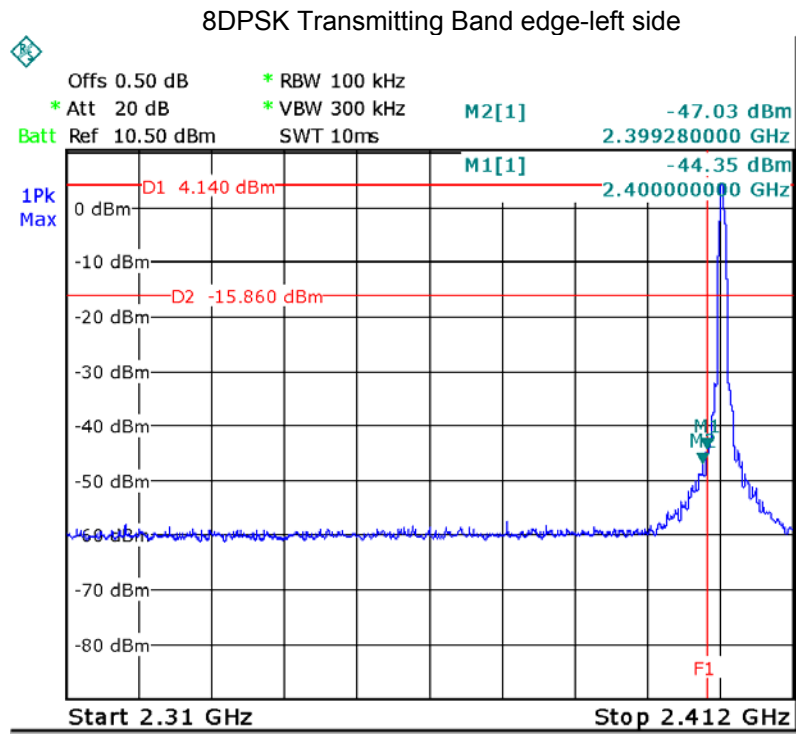

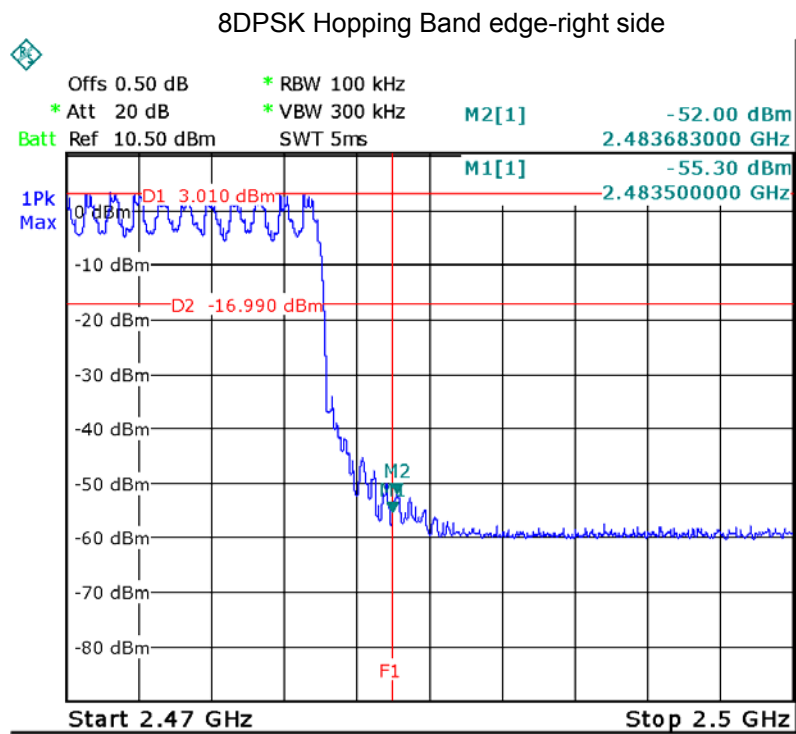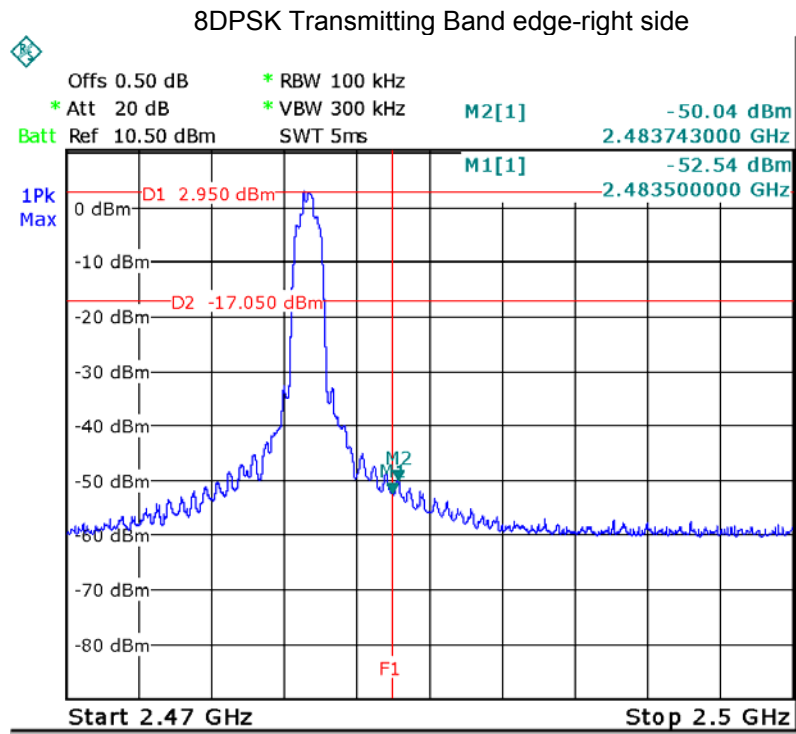


GFSK Transmitting Band edge-left side Horizontal

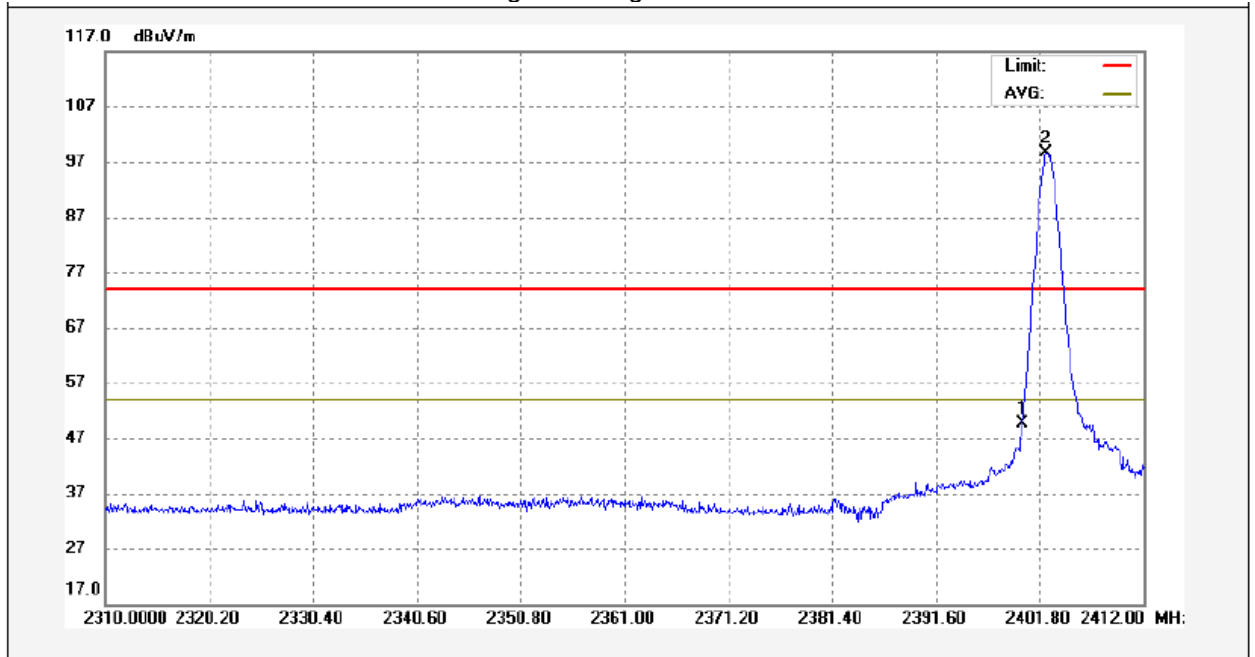


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	64.94	-15.24	49.70	74.00	-24.30	peak	
2	2402.412	113.99	-15.24	98.75	74.00	24.75	peak	

GFSK Transmitting Band edge-left side Vertical

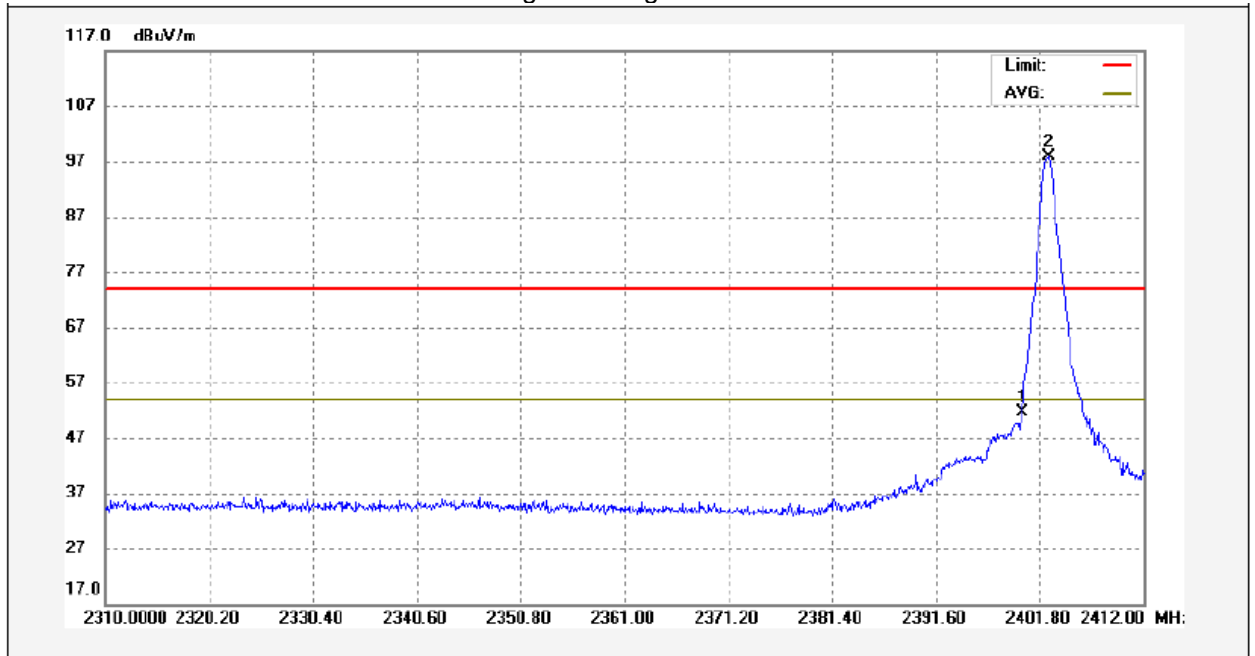


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	66.94	-15.24	51.70	74.00	-22.30	peak	
2	2402.616	113.05	-15.24	97.81	74.00	23.81	peak	

GFSK Transmitting Band edge-right side Horizontal

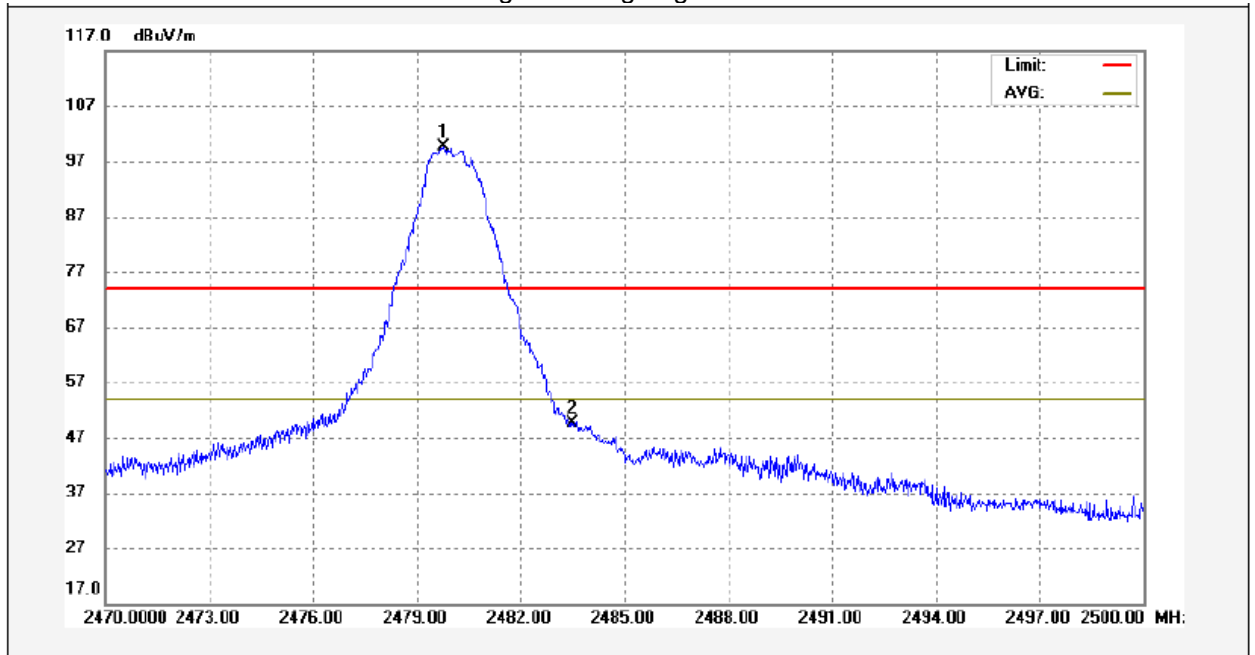


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.780	115.10	-15.38	99.72	74.00	25.72	peak	
2	2483.500	65.01	-15.39	49.62	74.00	-24.38	peak	

GFSK Transmitting Band edge-right side Vertical

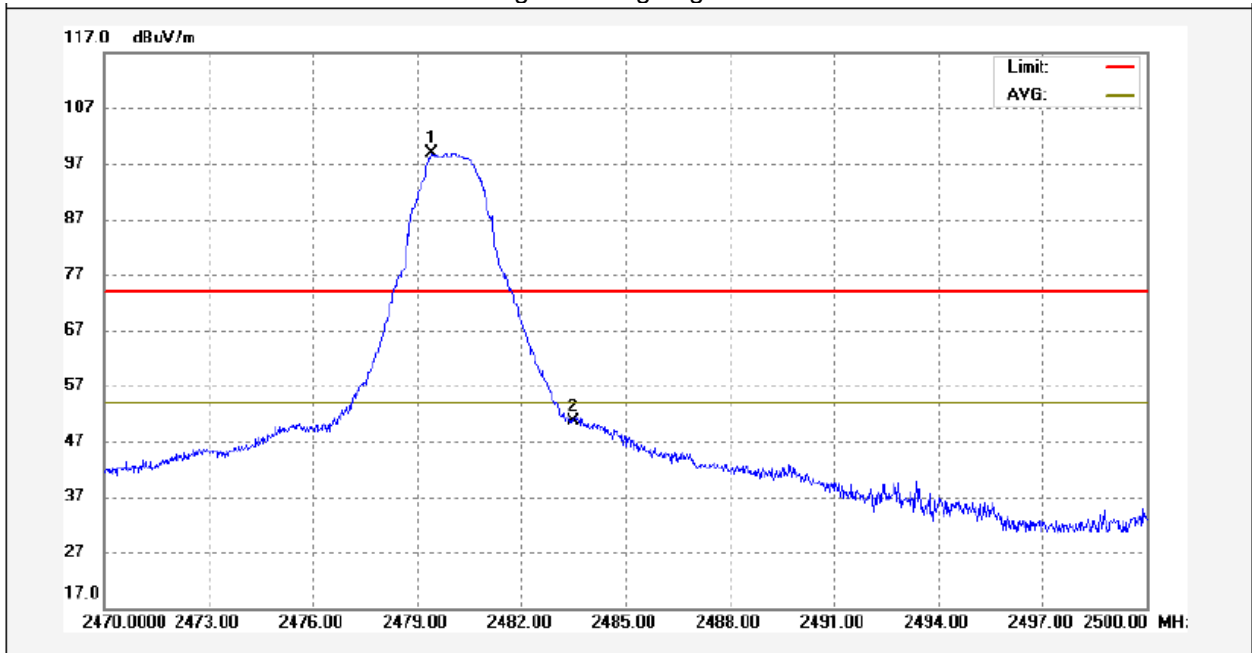


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.420	114.37	-15.38	98.99	74.00	24.99	peak	
2	2483.500	65.98	-15.39	50.59	74.00	-23.41	peak	

Pi/4 DQPSK Transmitting Band edge-left side Horizontal

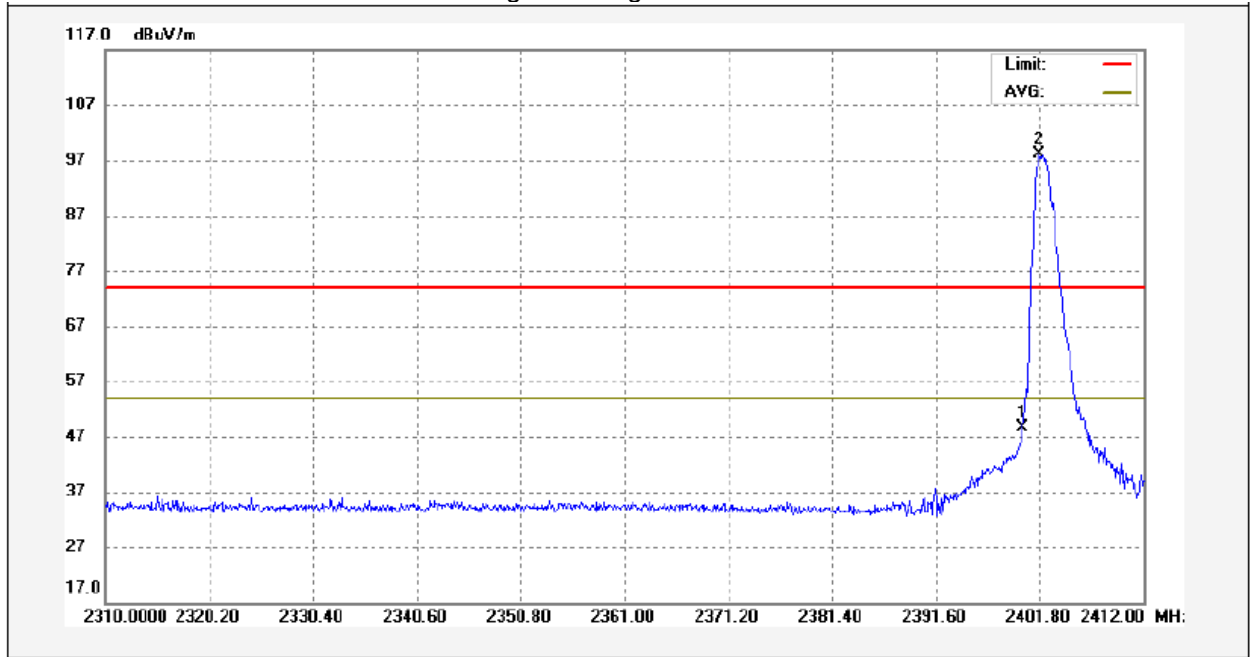


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	63.82	-15.24	48.58	74.00	-25.42	peak	
2	2401.698	113.25	-15.23	98.02	74.00	24.02	peak	

Pi/4 DQPSK Transmitting Band edge-left side Vertical

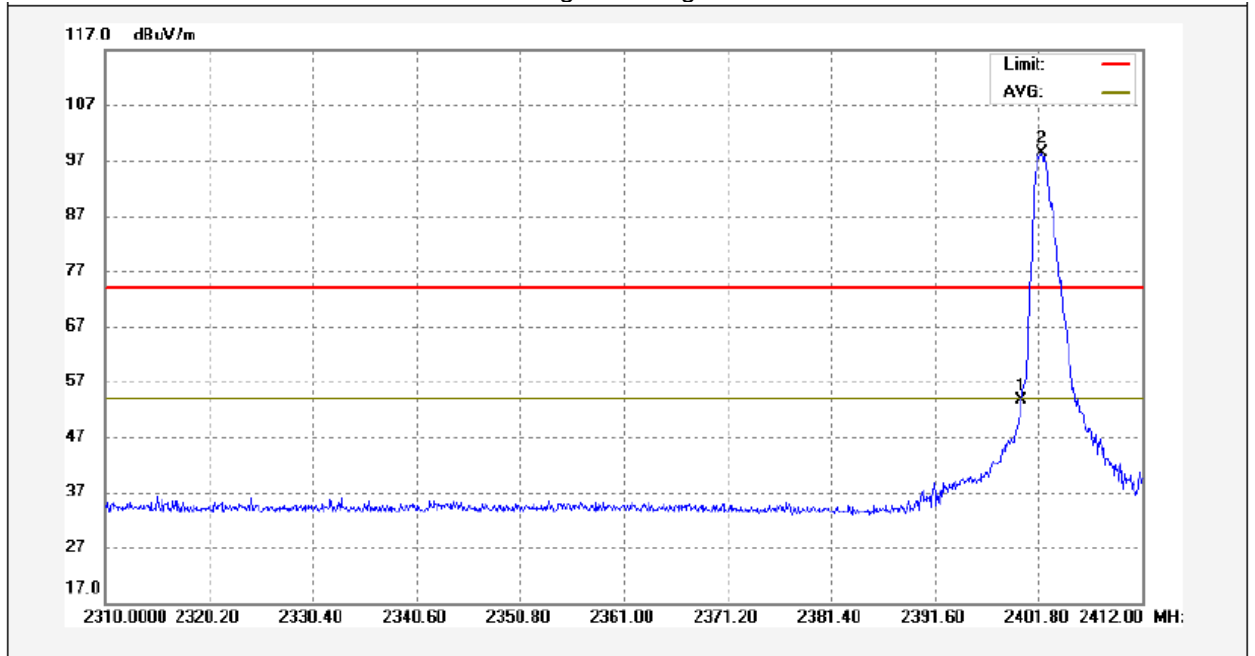


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	68.82	-15.24	53.58	74.00	-20.42	peak	
2	2402.106	113.59	-15.24	98.35	74.00	24.35	peak	

Pi/4 DQPSK Transmitting Band edge-right side Horizontal

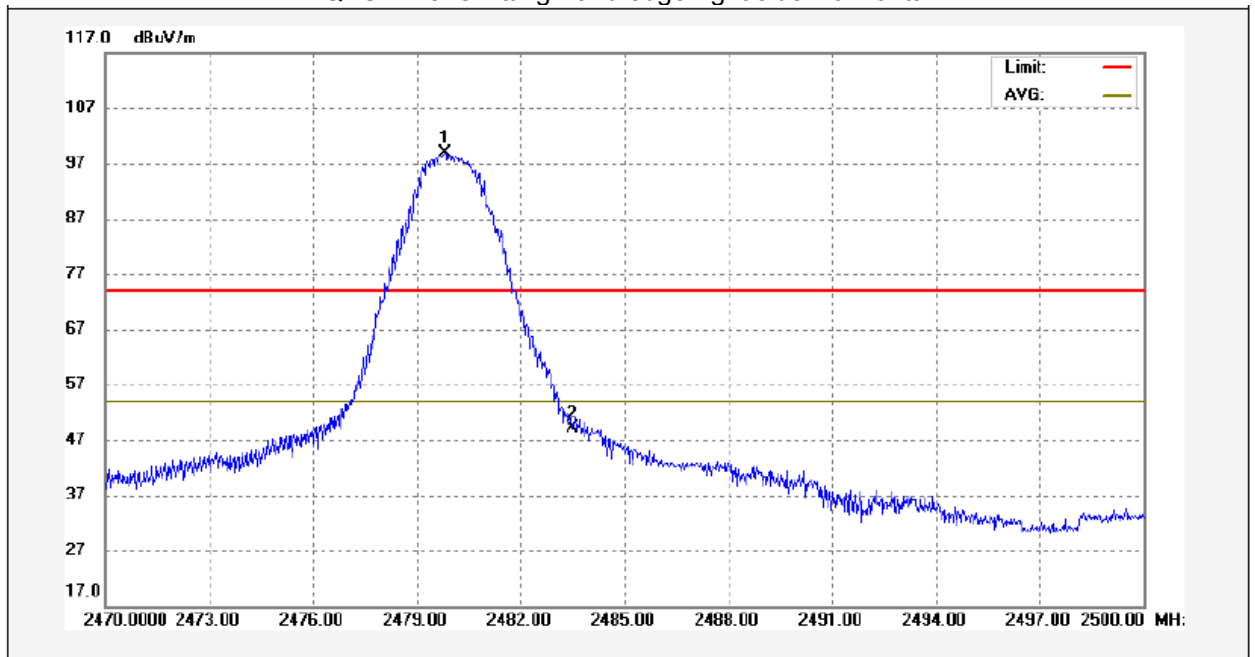


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.810	114.23	-15.38	98.85	74.00	24.85	peak	
2	2483.500	64.42	-15.39	49.03	74.00	-24.97	peak	

Pi/4 DQPSK Transmitting Band edge-right side Vertical

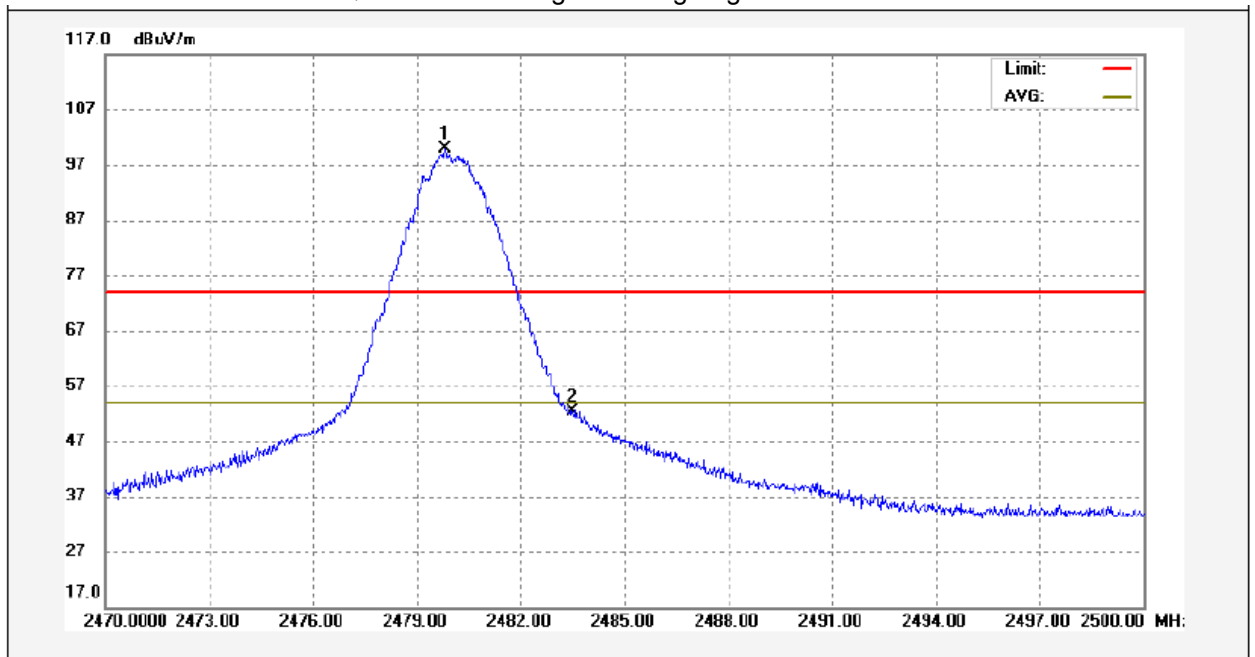


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.810	115.14	-15.38	99.76	74.00	25.76	peak	
2	2483.500	67.65	-15.39	52.26	74.00	-21.74	peak	

8DPSK Transmitting Band edge-left side Horizontal

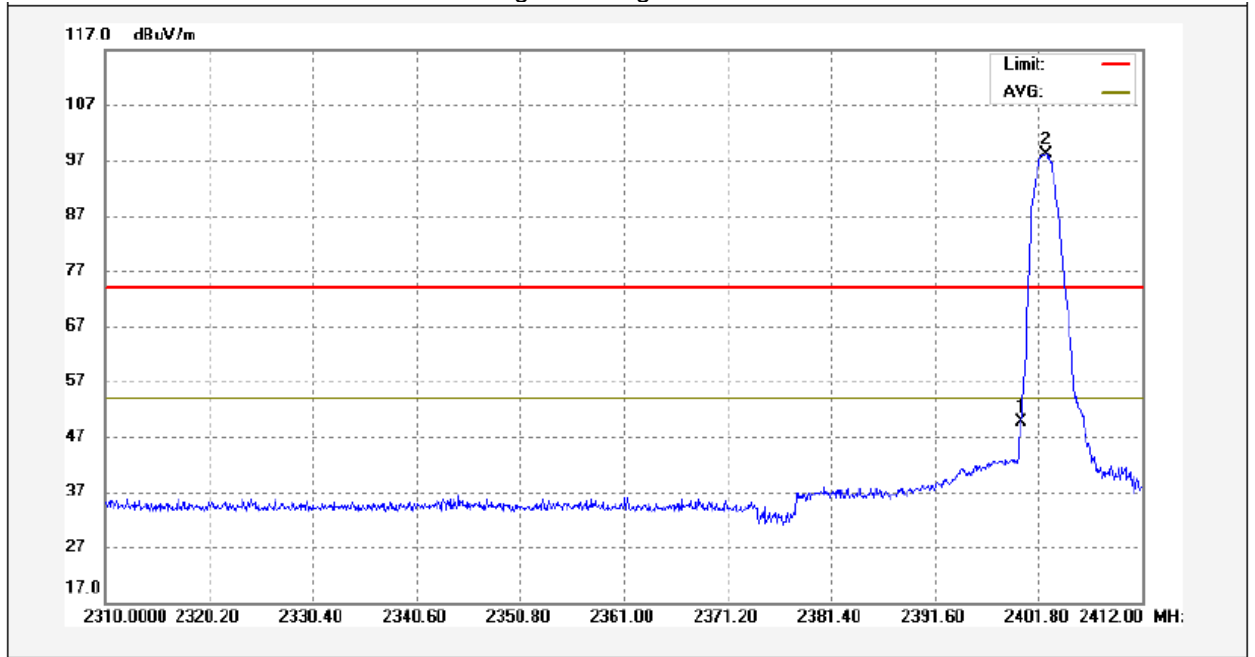


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	64.90	-15.24	49.66	74.00	-24.34	peak	
2	2402.514	113.45	-15.24	98.21	74.00	24.21	peak	

8DPSK Transmitting Band edge-left side Vertical

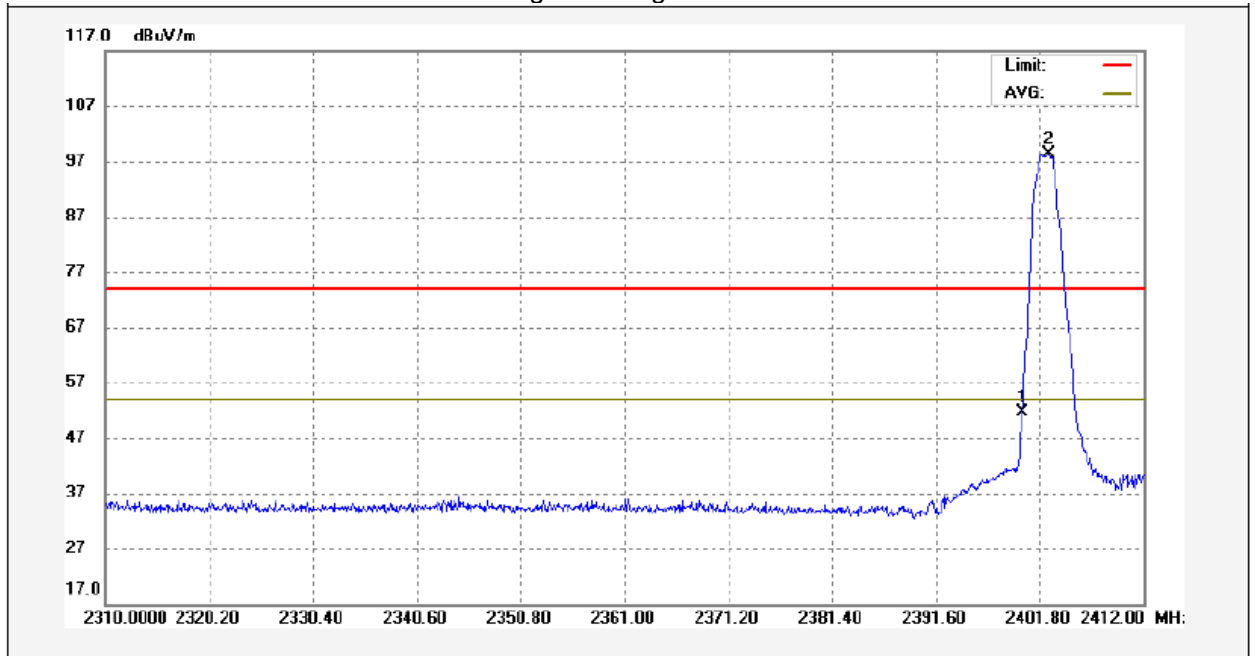


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	66.90	-15.24	51.66	74.00	-22.34	peak	
2	2402.718	113.60	-15.24	98.36	74.00	24.36	peak	

8DPSK Transmitting Band edge-right side Horizontal

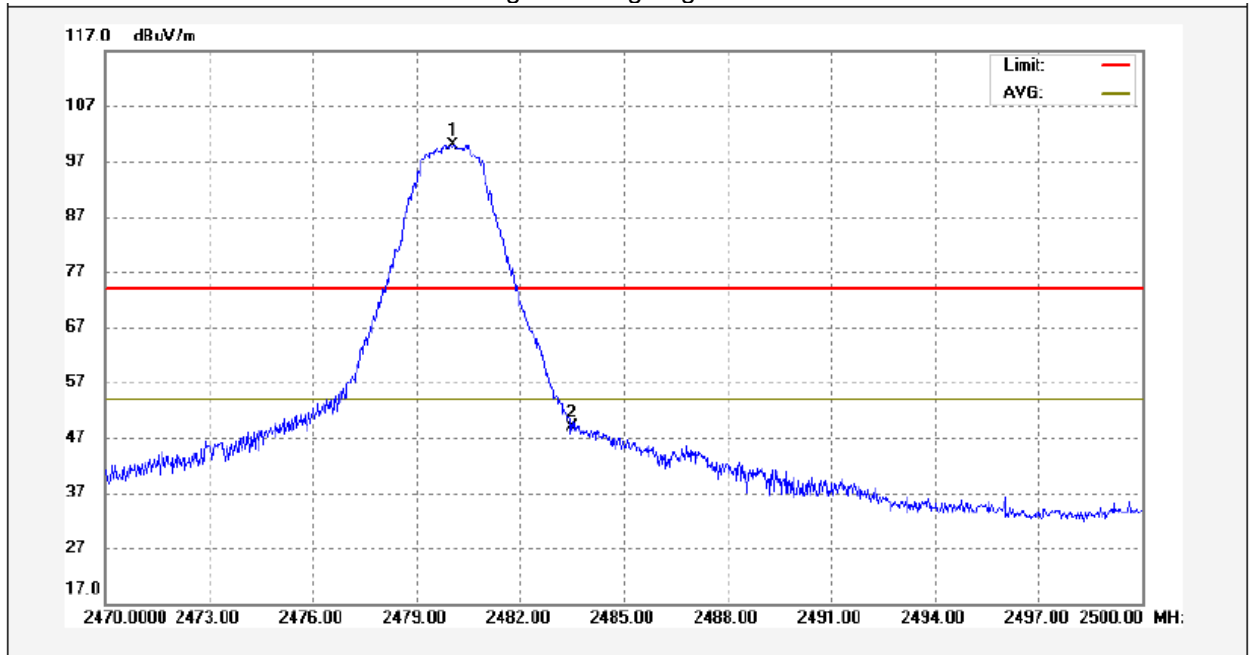

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.050	115.37	-15.38	99.99	74.00	25.99	peak	
2	2483.500	64.25	-15.39	48.86	74.00	-25.14	peak	

8DPSK Transmitting Band edge-right side Vertical

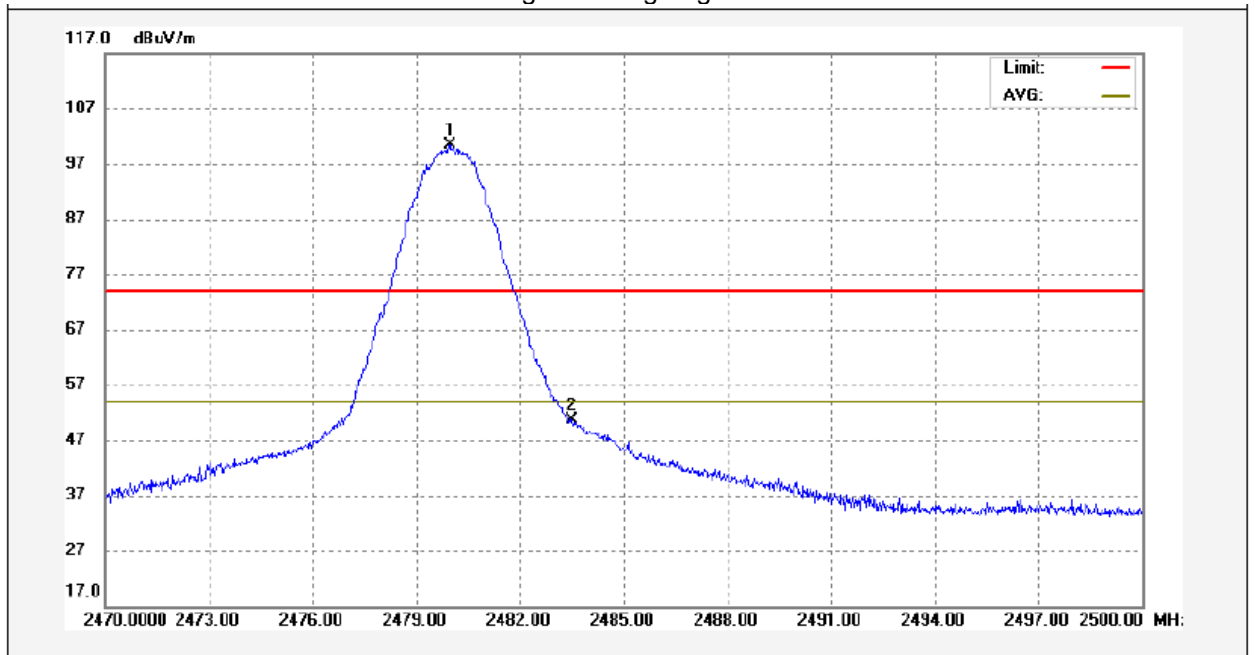

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.960	115.80	-15.38	100.42	74.00	26.42	peak	
2	2483.500	65.92	-15.39	50.53	74.00	-23.47	peak	

11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10

Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

11.2 Test Result


Modulation	Test Channel	Bandwidth(MHz)
GFSK	Low	0.928
GFSK	Middle	0.928
GFSK	High	0.928
Pi/4 DQPSK	Low	1.252
Pi/4 DQPSK	Middle	1.252
Pi/4 DQPSK	High	1.252
8DPSK	Low	1.264
8DPSK	Middle	1.264
8DPSK	High	1.264

Test plots


GFSK Low Channel

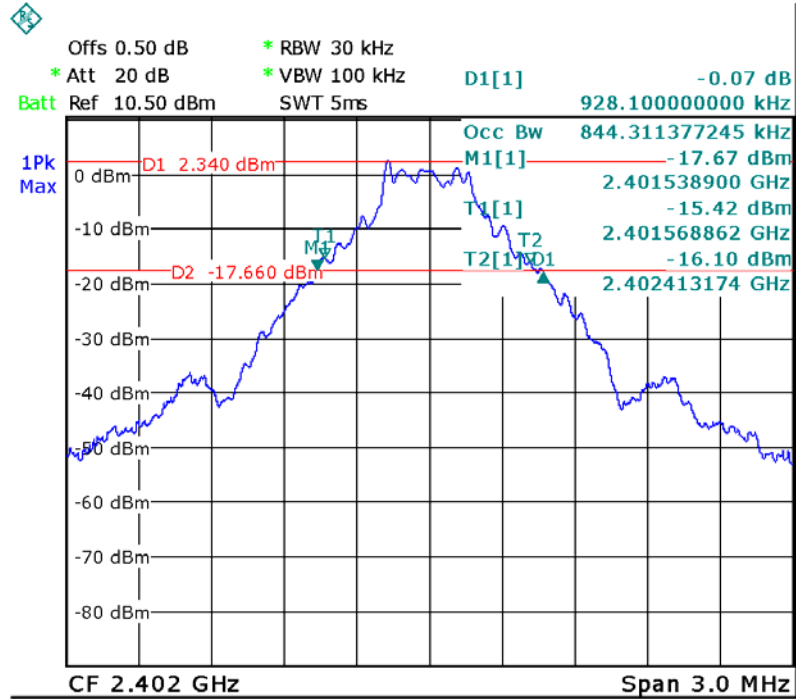


GFSK Middle Channel

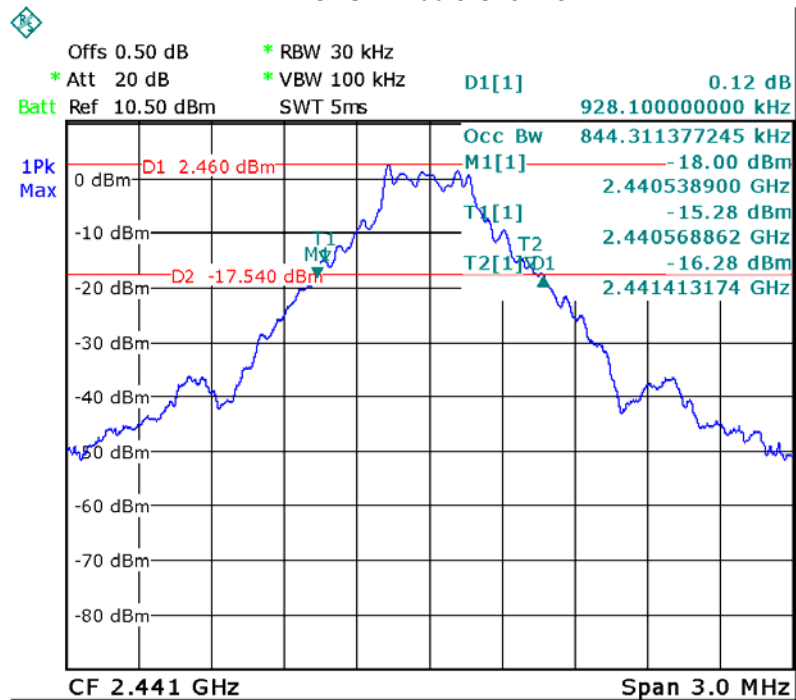


GFSK High Channel

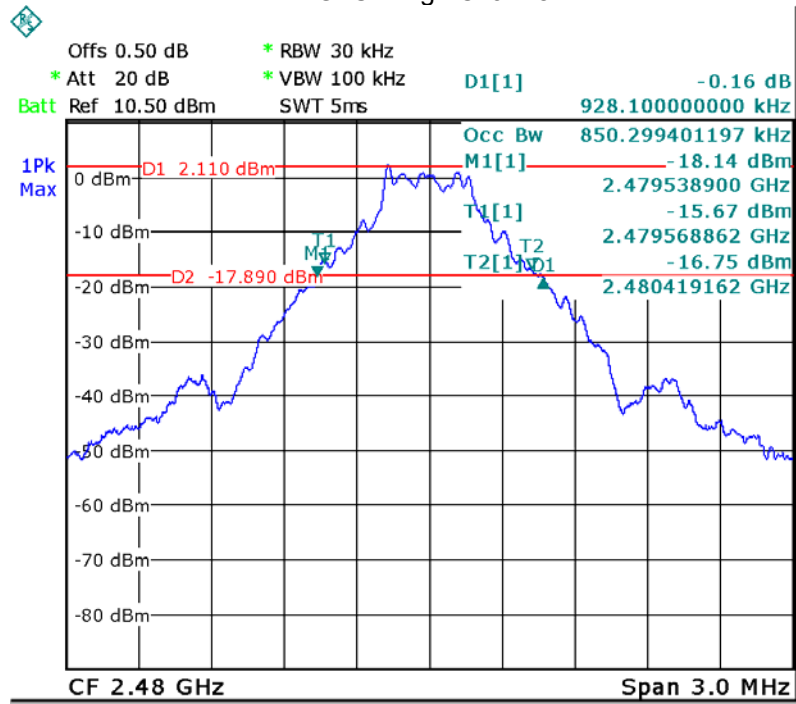


Pi/4 DQPSK Low Channel

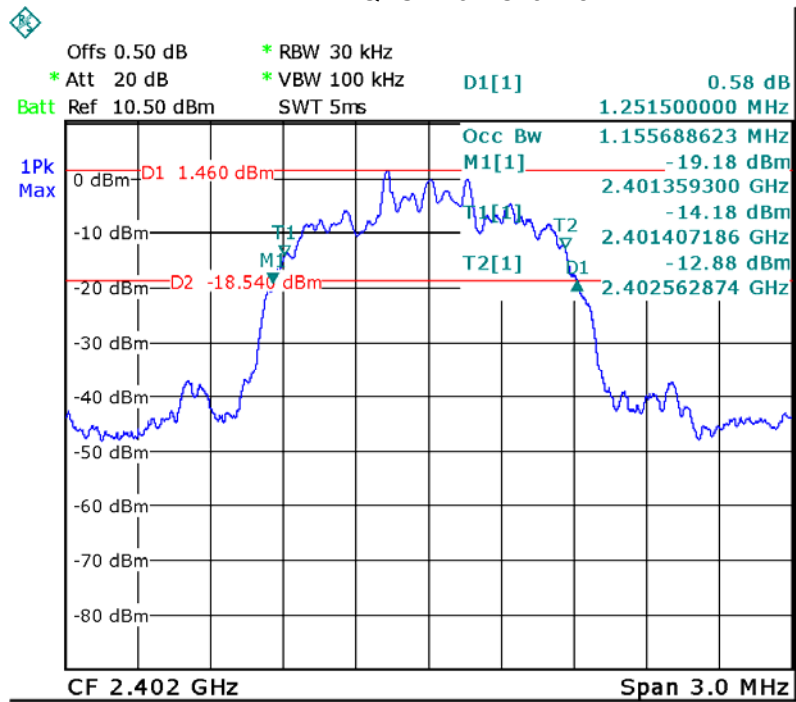


Pi/4 DQPSK Middle Channel

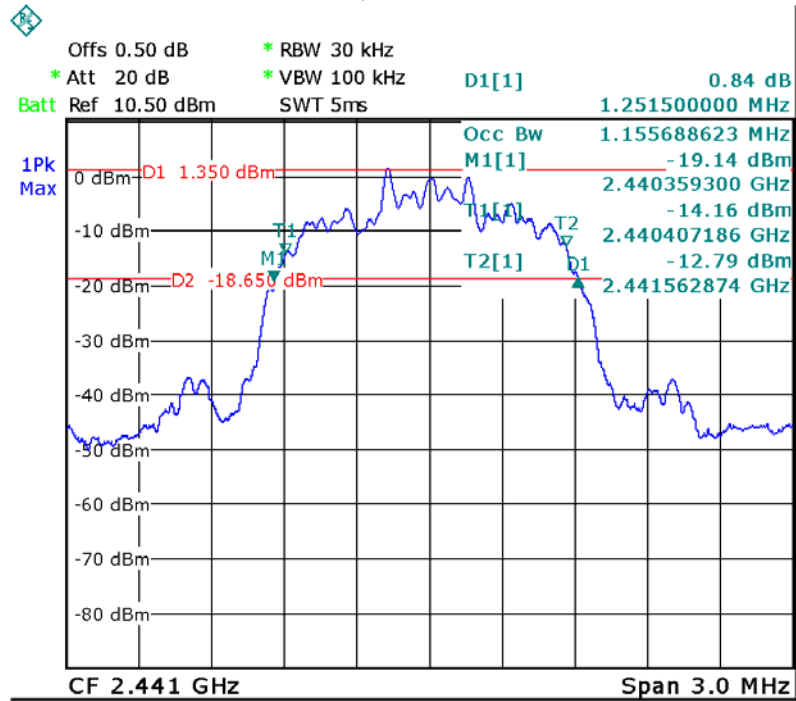


Pi/4 DQPSK High Channel

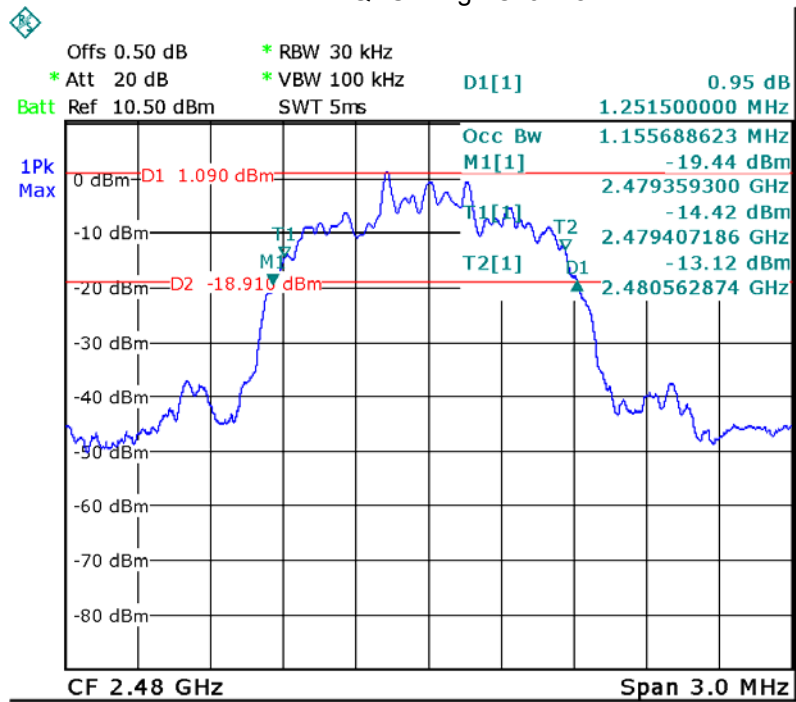


8DPSK Low Channel

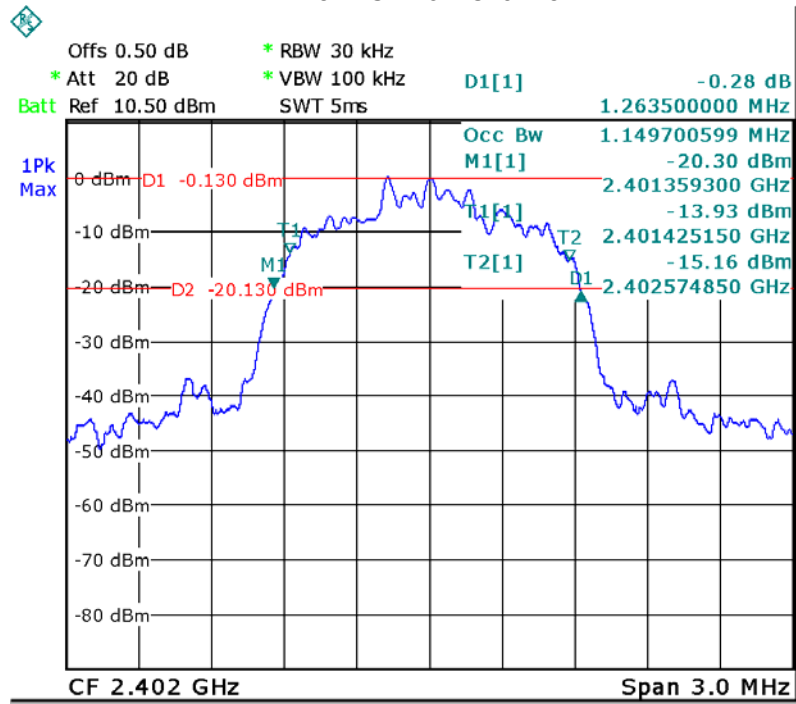

8DPSK Middle Channel

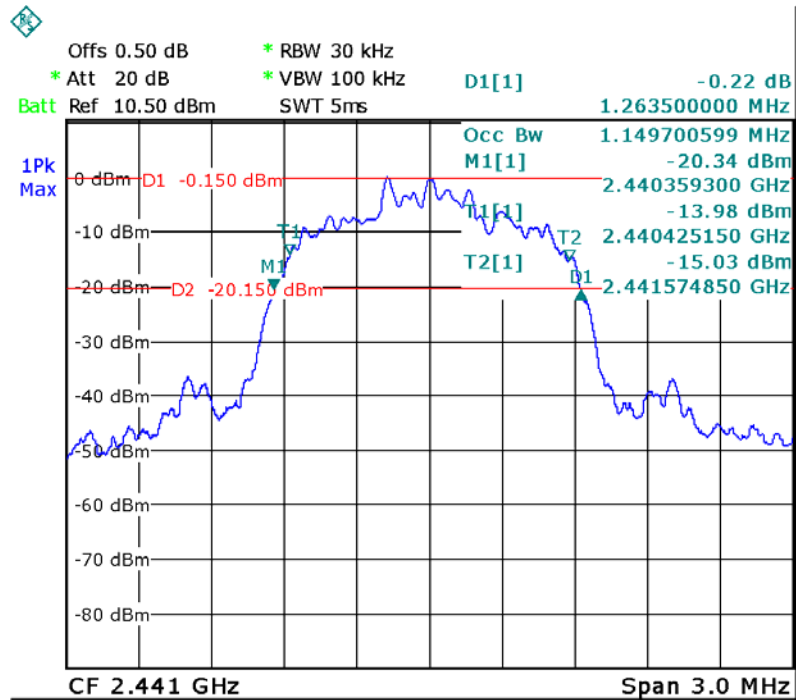

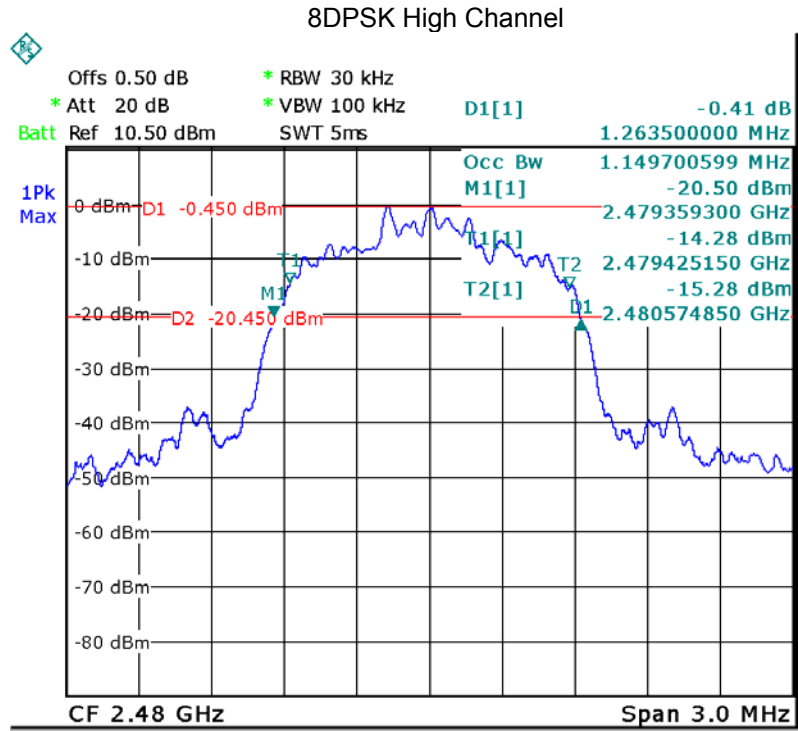

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
Test mode:	Test in fixing frequency transmitting mode.

12.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.///

12.2 Test Result


Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Low	4.73	30
GFSK	Middle	4.47	30
GFSK	High	4.14	30
Pi/4 DQPSK	Low	4.52	21
Pi/4 DQPSK	Middle	4.26	21
Pi/4 DQPSK	High	3.91	21
8DPSK	Low	4.67	21
8DPSK	Middle	4.44	21
8DPSK	High	4.08	21



Test plots



GFSK Low Channel

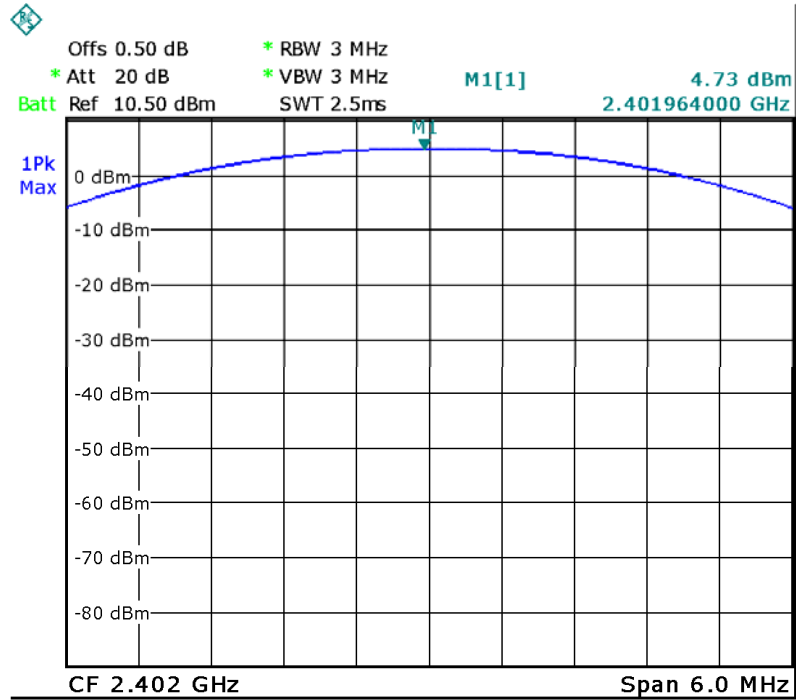


GFSK Middle Channel

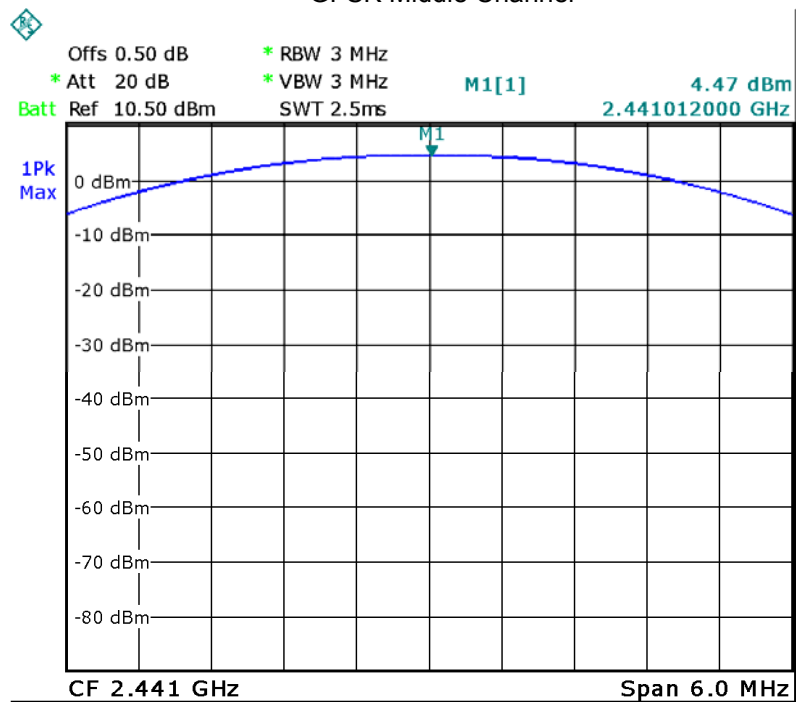

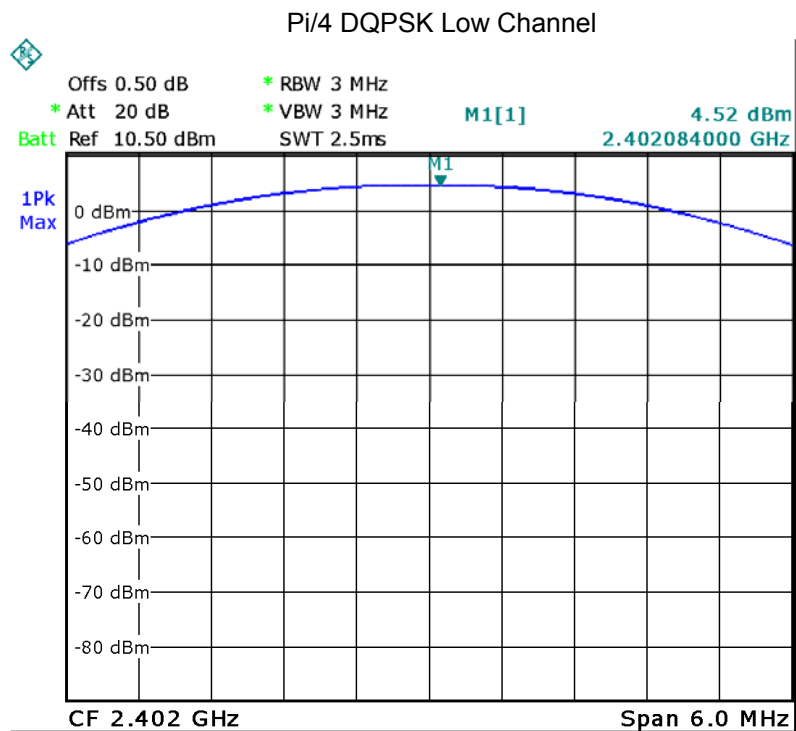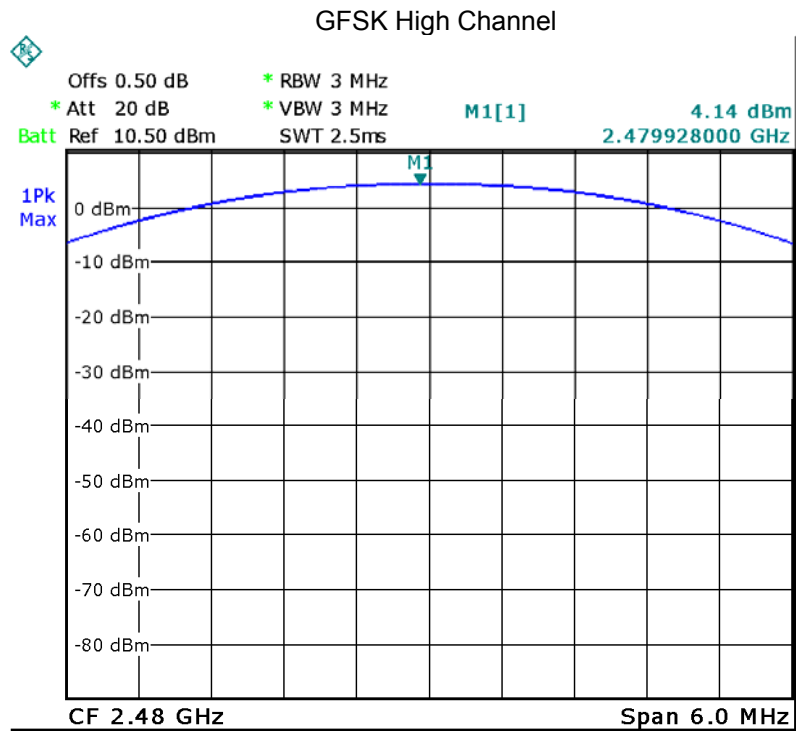


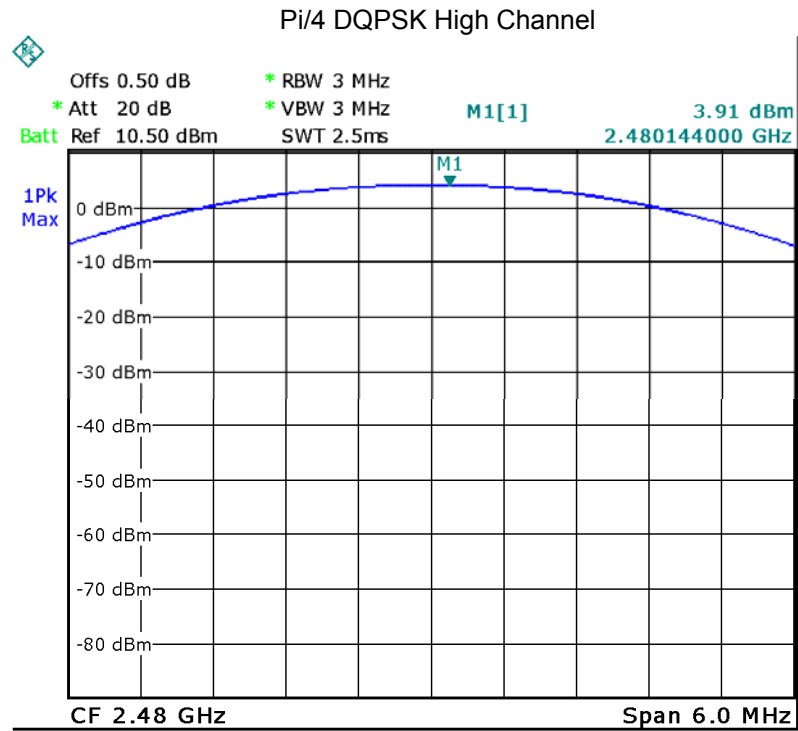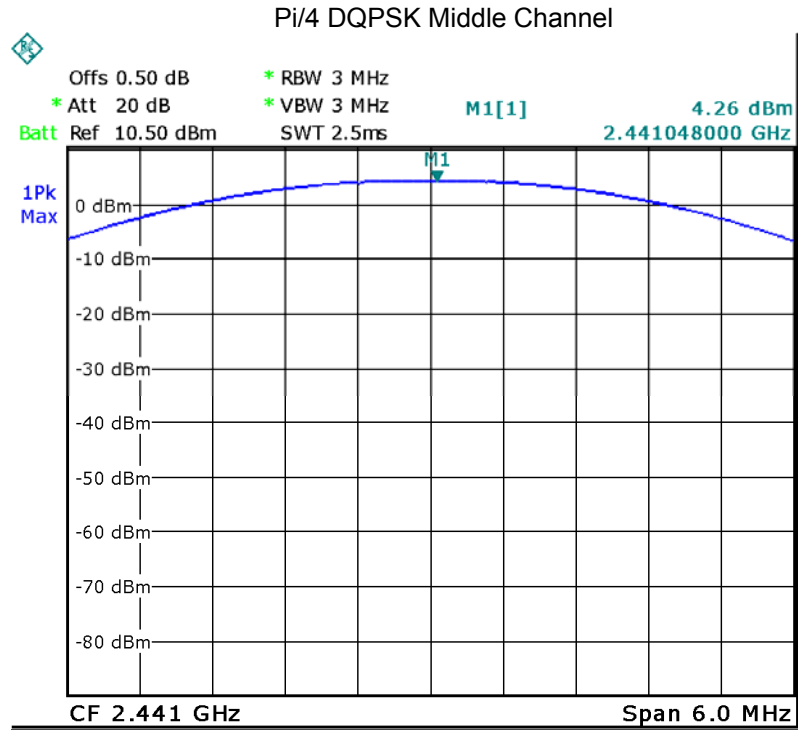


8DPSK Low Channel

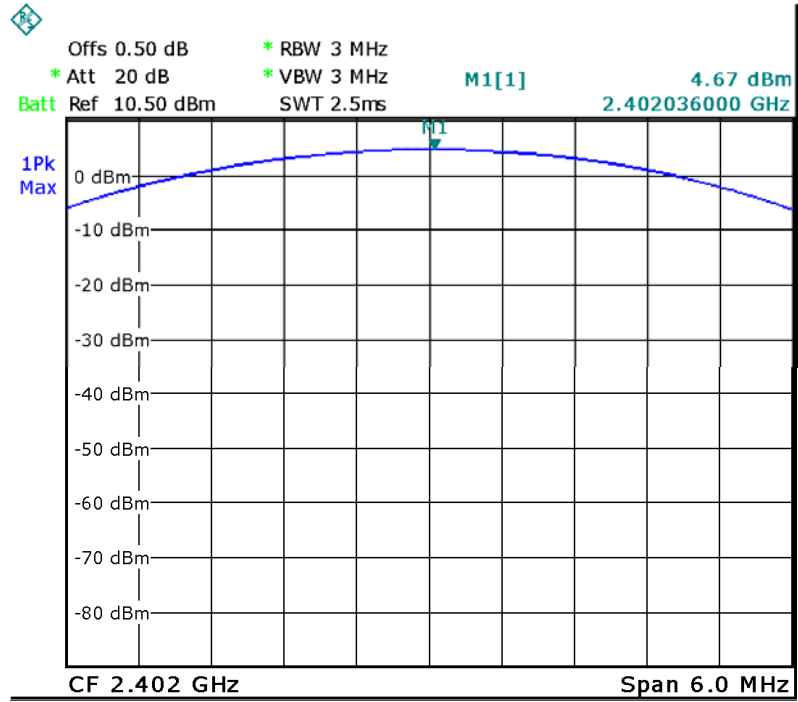

8DPSK Middle Channel

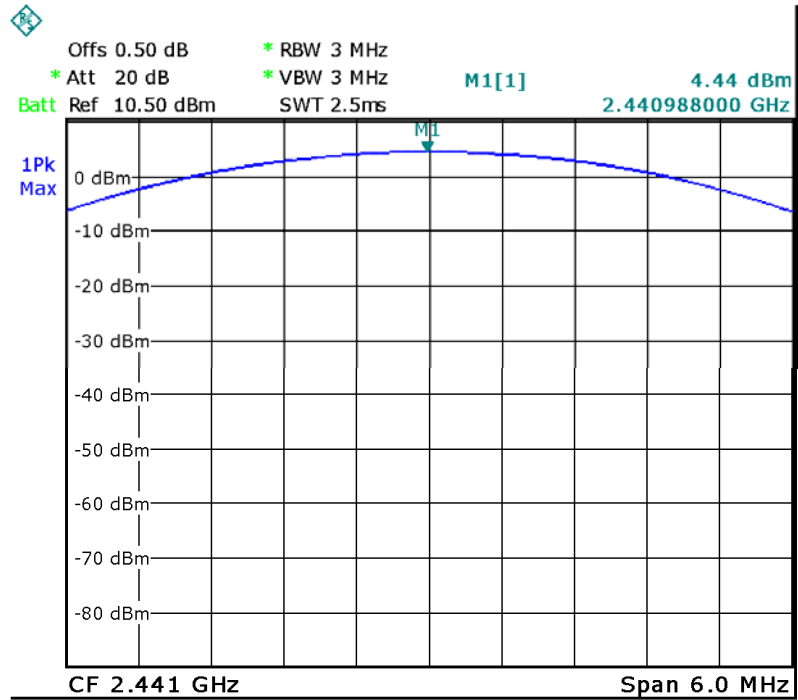

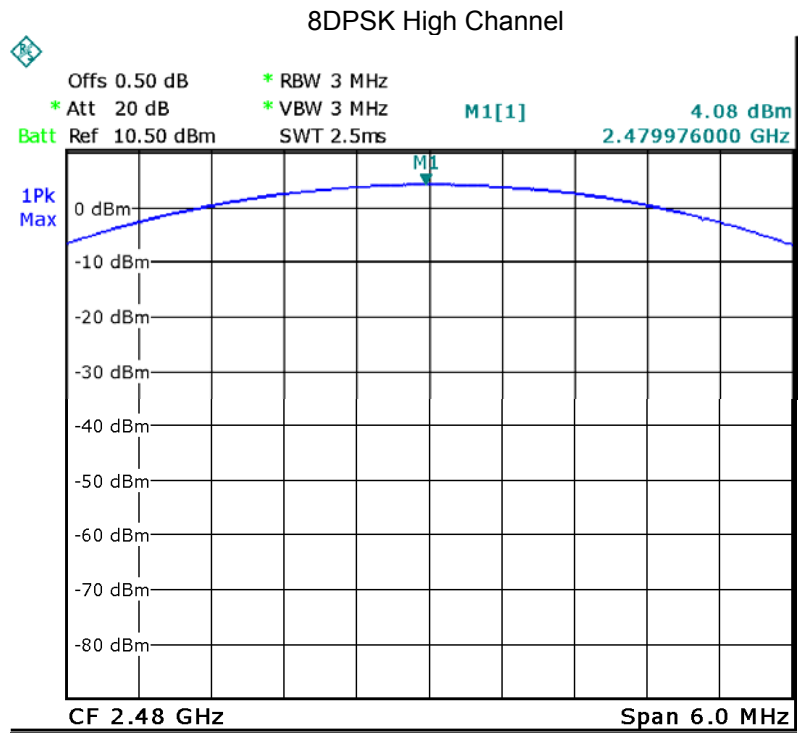

13 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

13.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
Pi/4 DQPSK	Low	1.000	PASS
Pi/4 DQPSK	Middle	1.000	PASS
Pi/4 DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS

Test plots


GFSK Low Channel

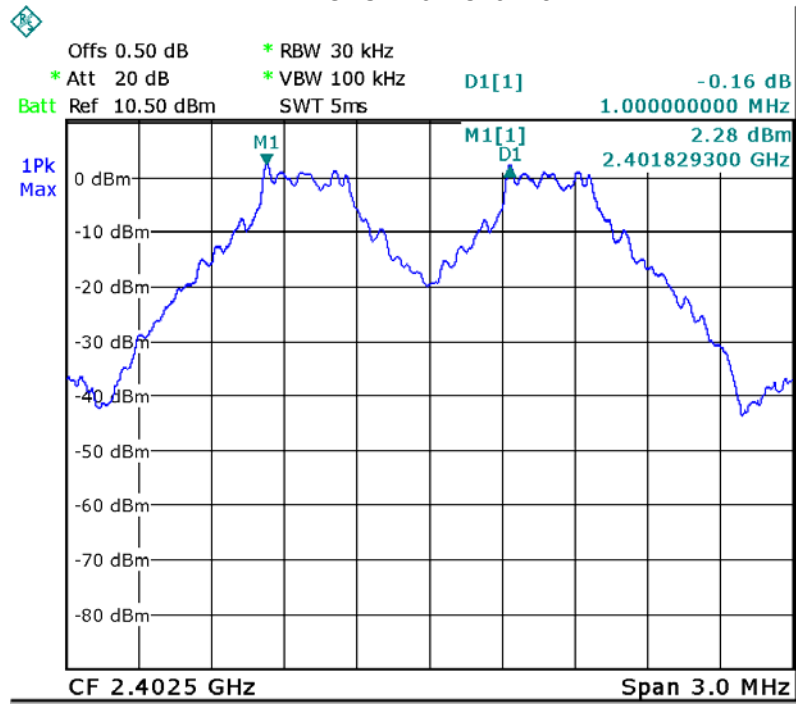


GFSK Middle Channel

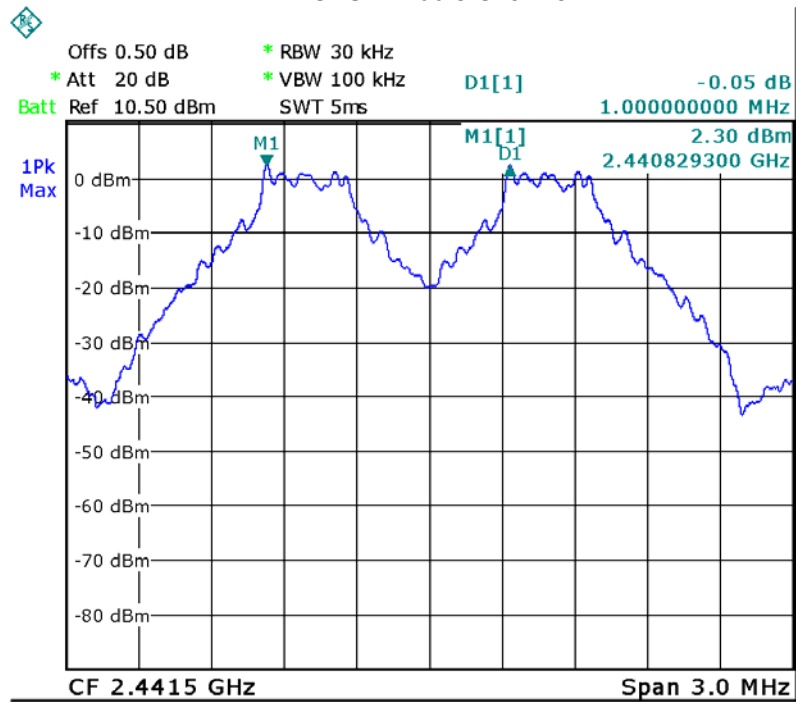


GFSK High Channel

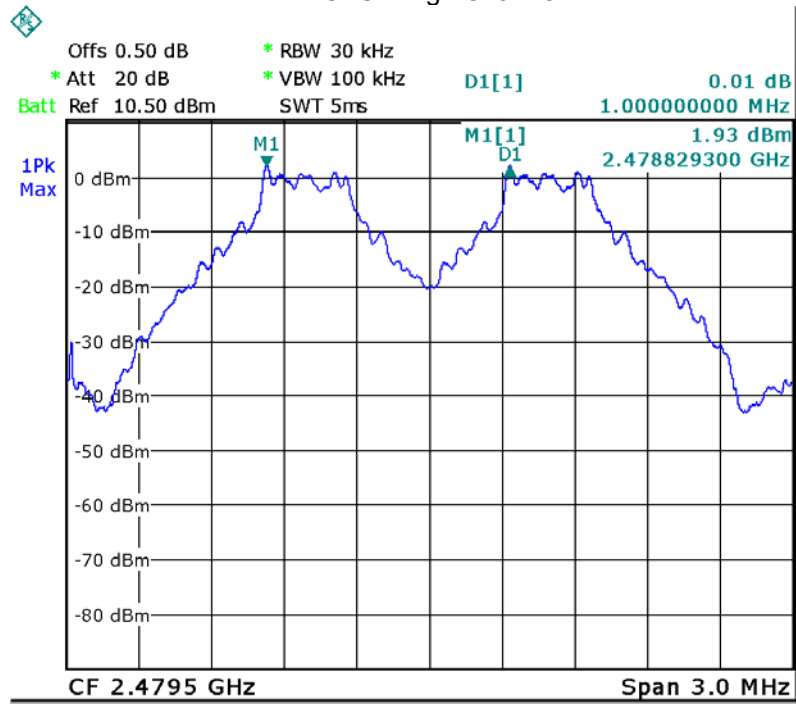


Pi/4 DQPSK Low Channel

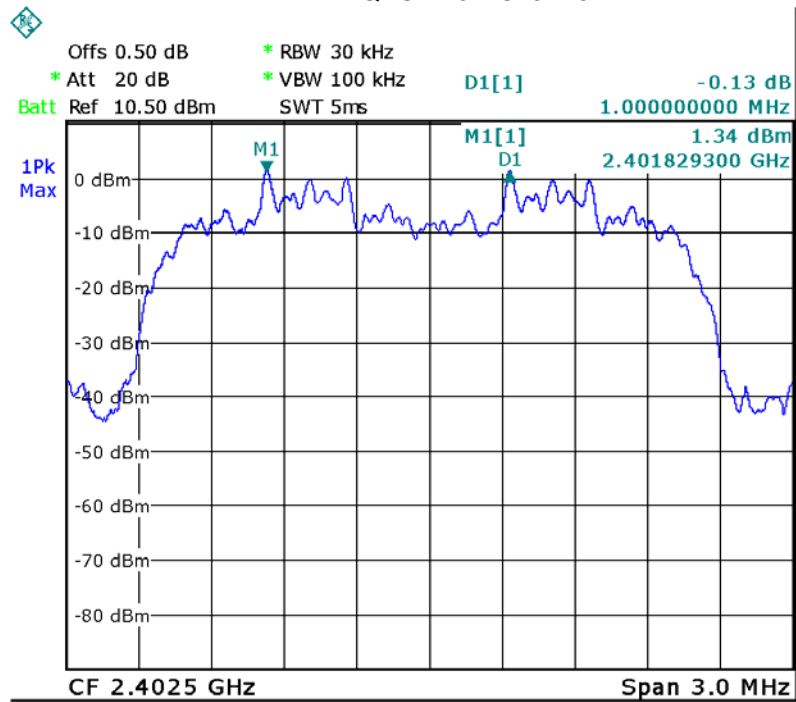


Pi/4 DQPSK Middle Channel

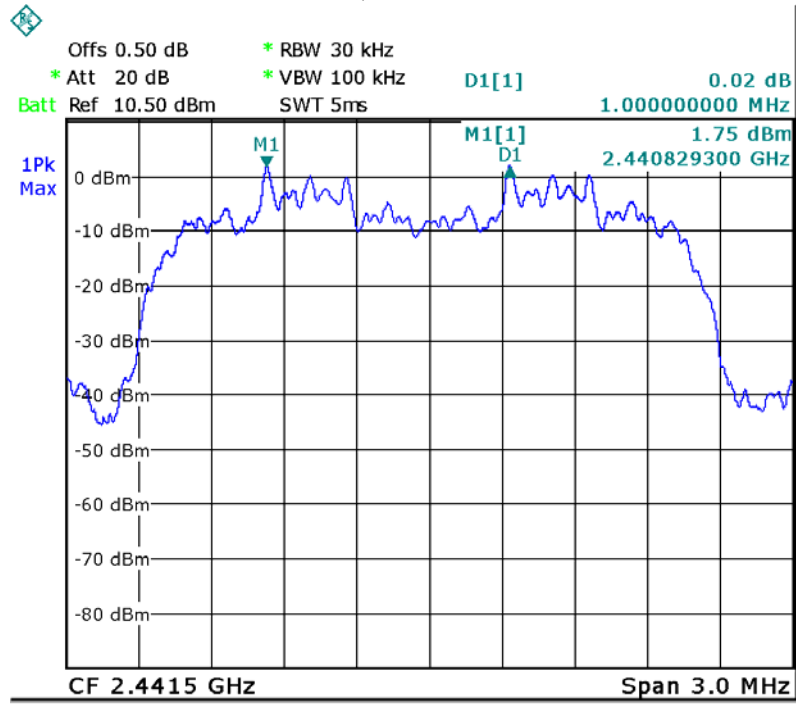


Pi/4 DQPSK High Channel

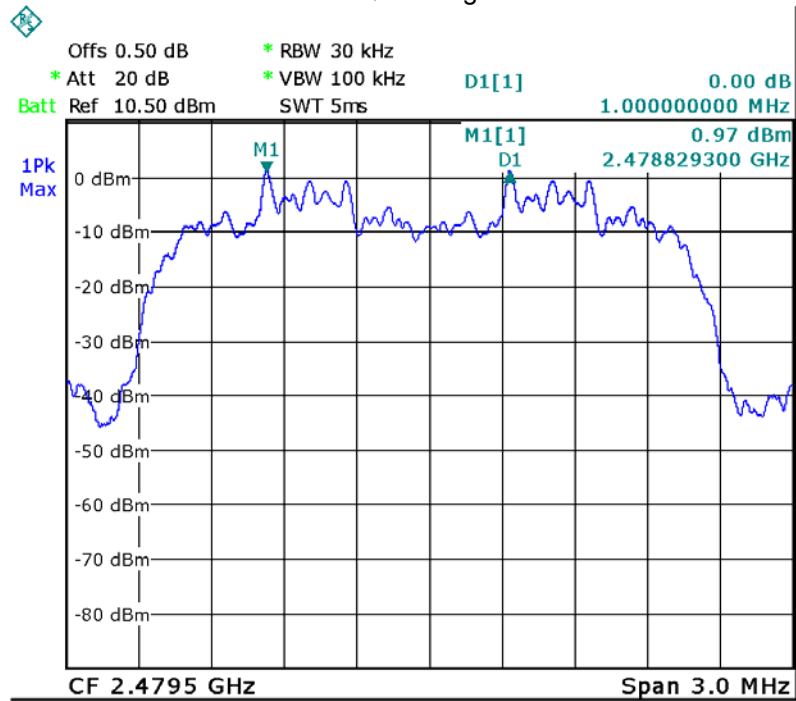


8DPSK Low Channel

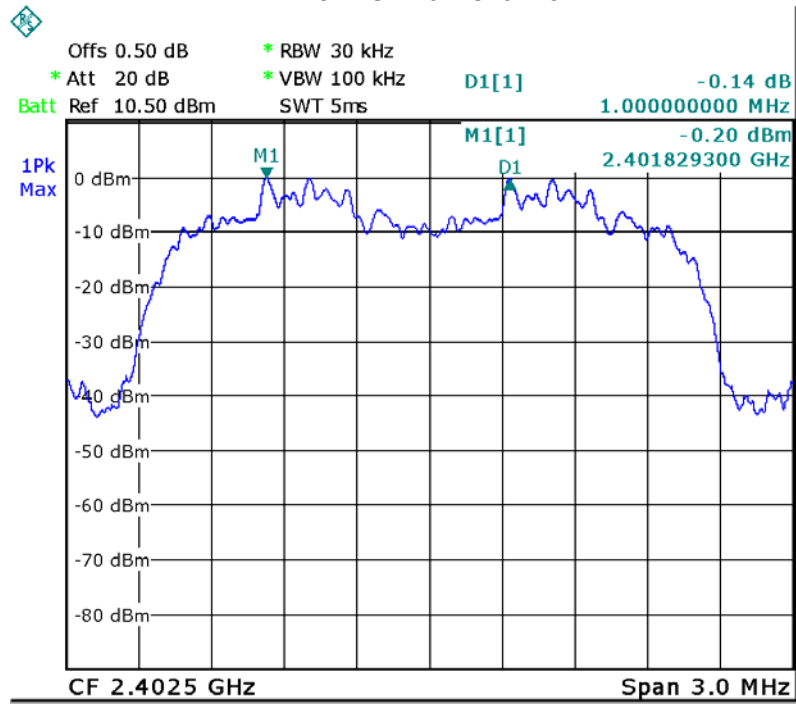

8DPSK Middle Channel

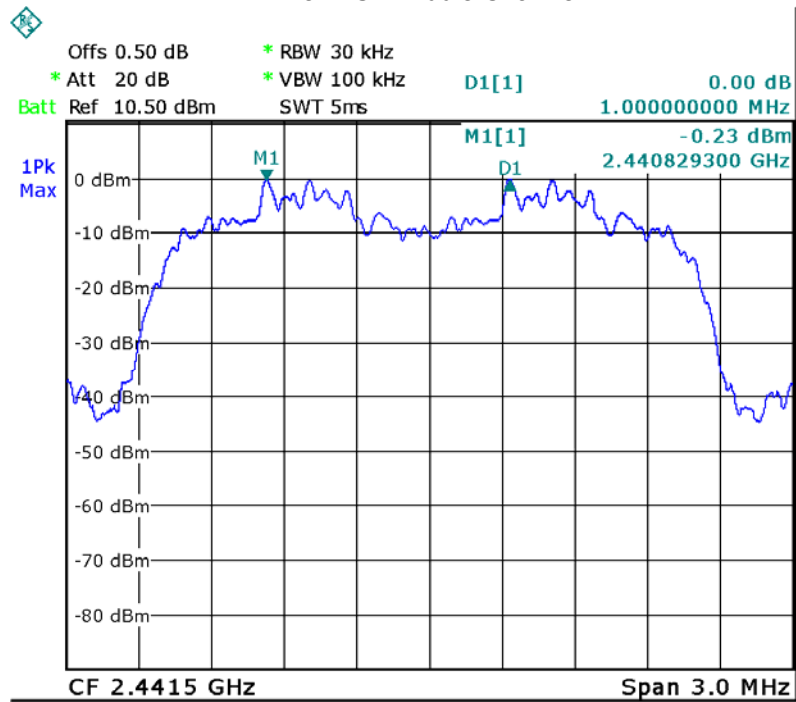

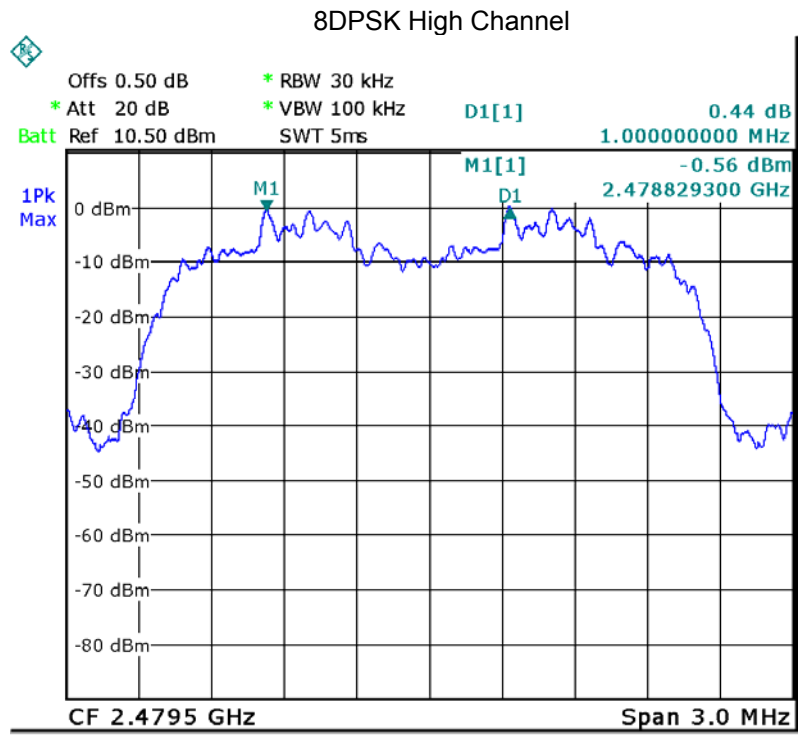


14 Number of Hopping Frequency

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.


14.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;


14.2 Test Result

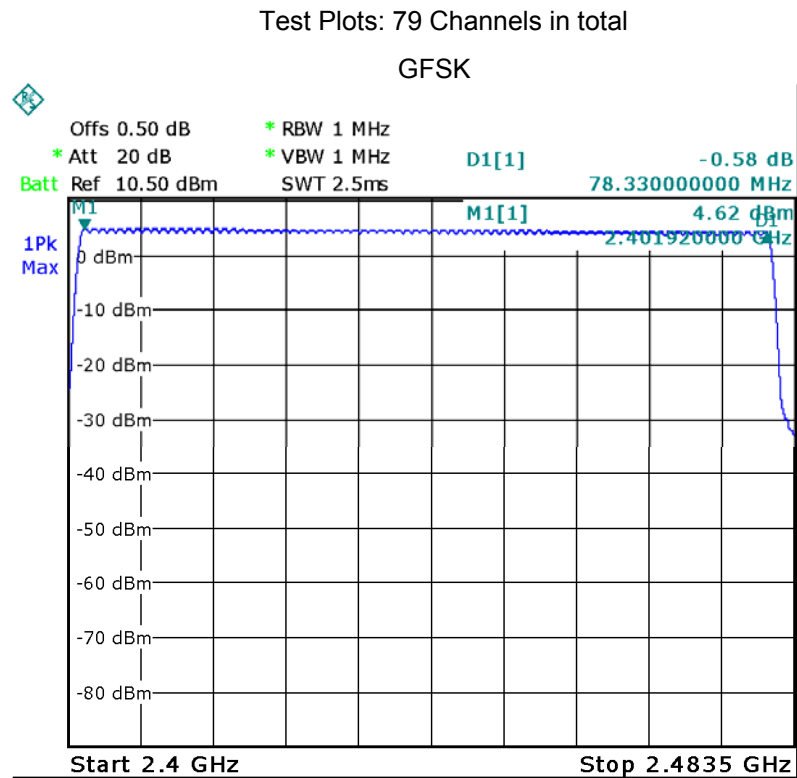

Pi/4 DQPSK

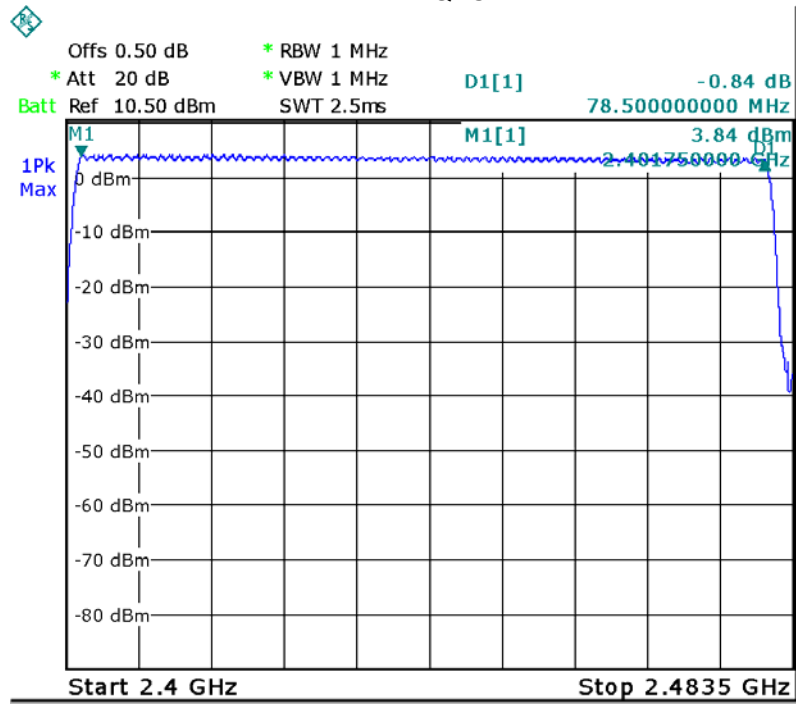

8DPSK

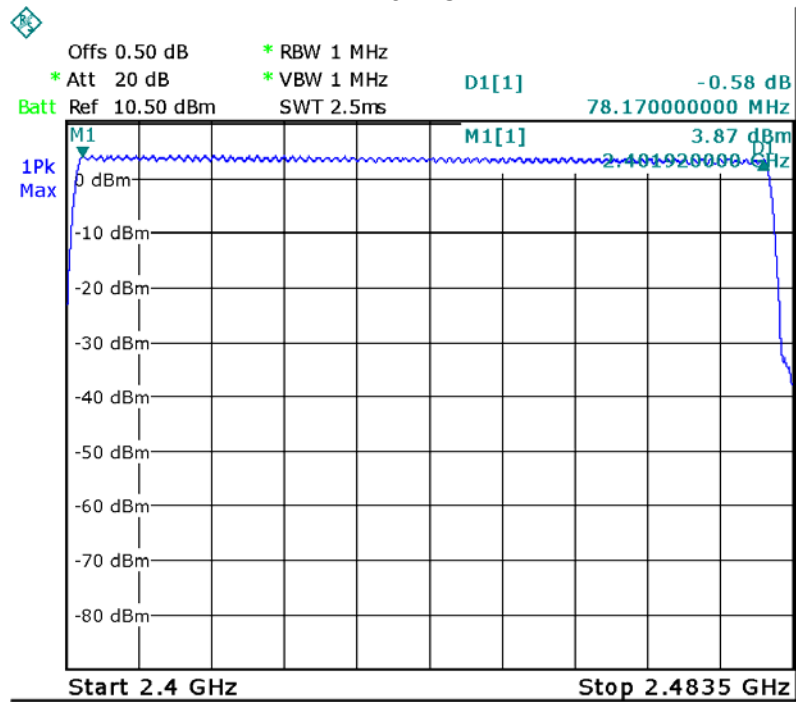

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).


DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time.	

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.872	0.306	0.4
		middle	2.872	0.306	0.4
		High	2.872	0.306	0.4
Pi/4DQPSK	DH5	Low	2.872	0.306	0.4
		middle	2.872	0.306	0.4
		High	2.872	0.306	0.4
8DPSK	DH5	Low	2.872	0.306	0.4
		middle	2.872	0.306	0.4
		High	2.872	0.306	0.4


Remark: only the worst data were recorded.


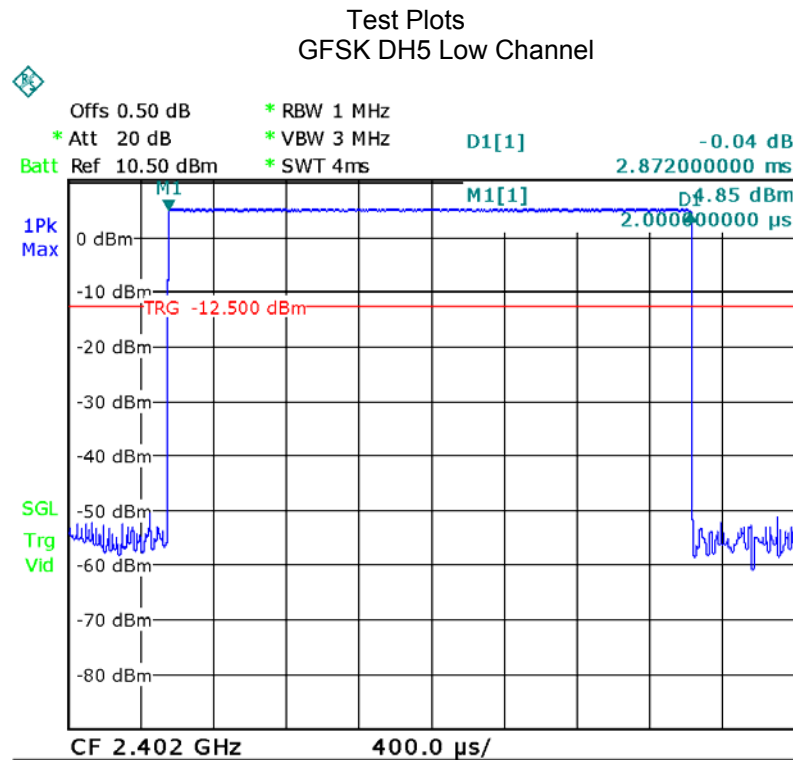


GFSK DH5 Middle Channel

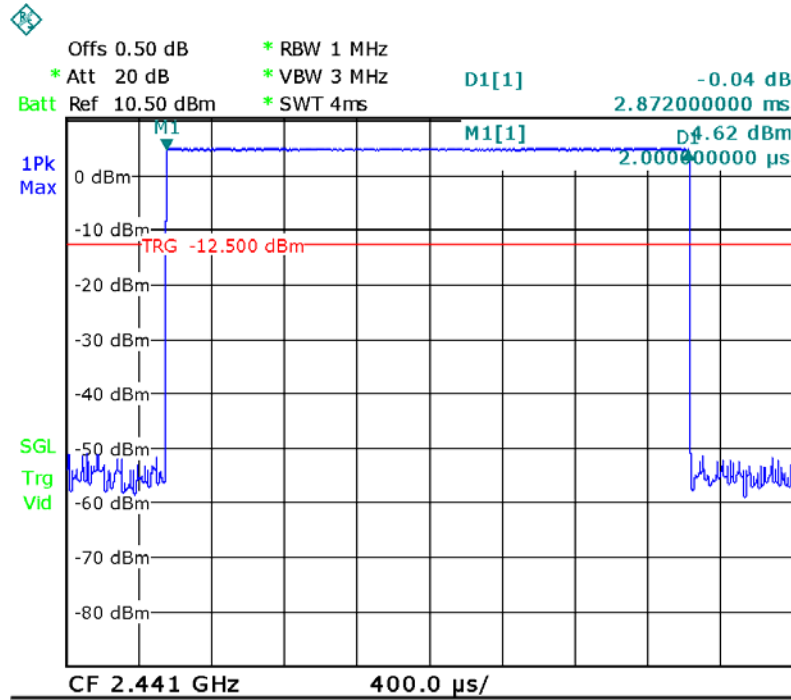


GFSK DH5 High Channel

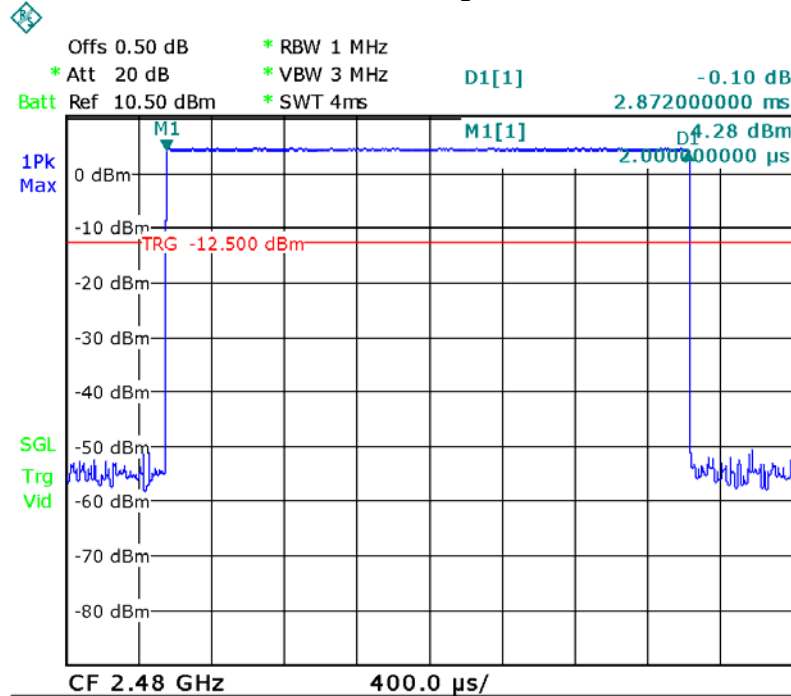


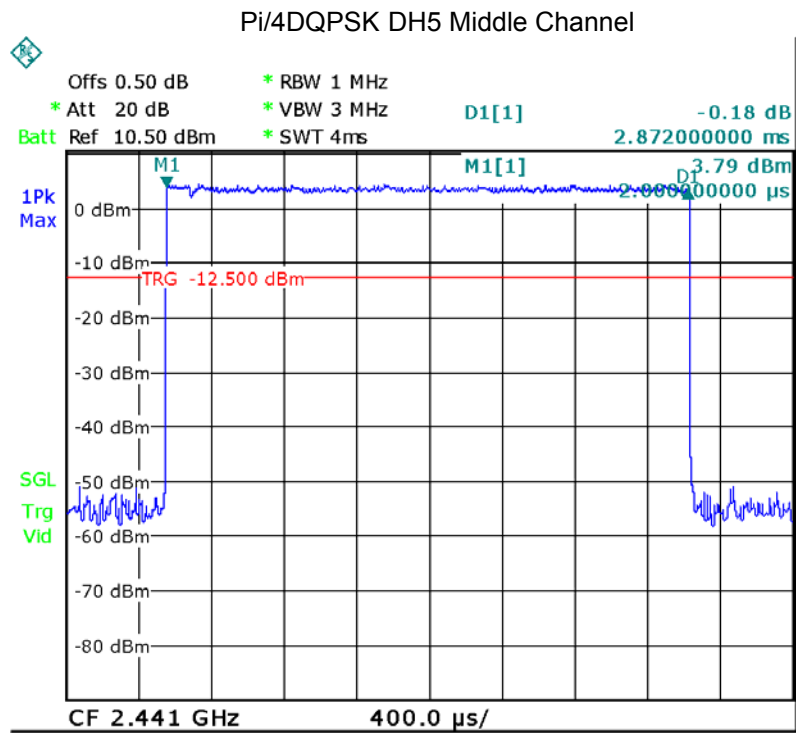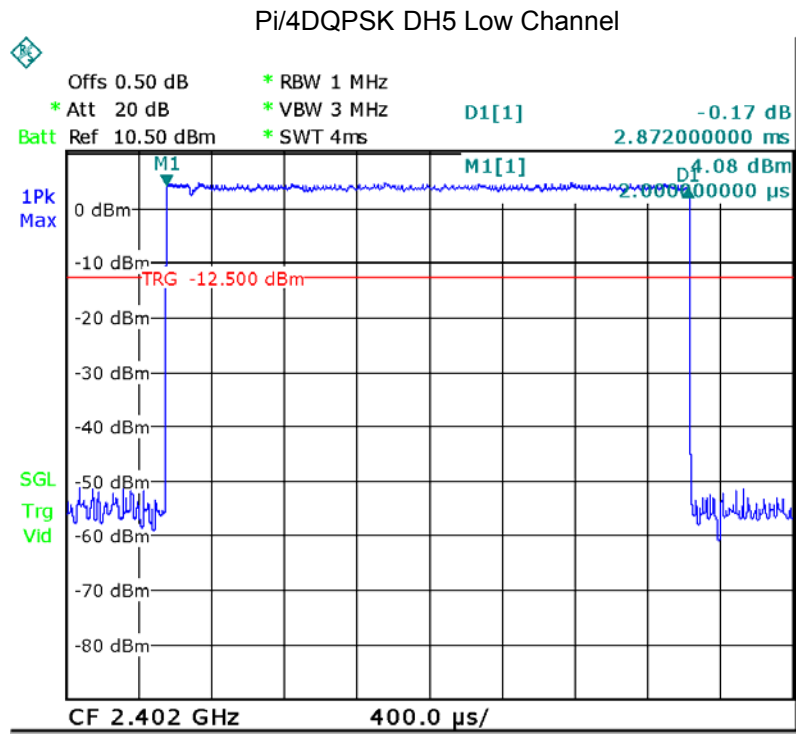


Pi/4DQPSK DH5 High Channel

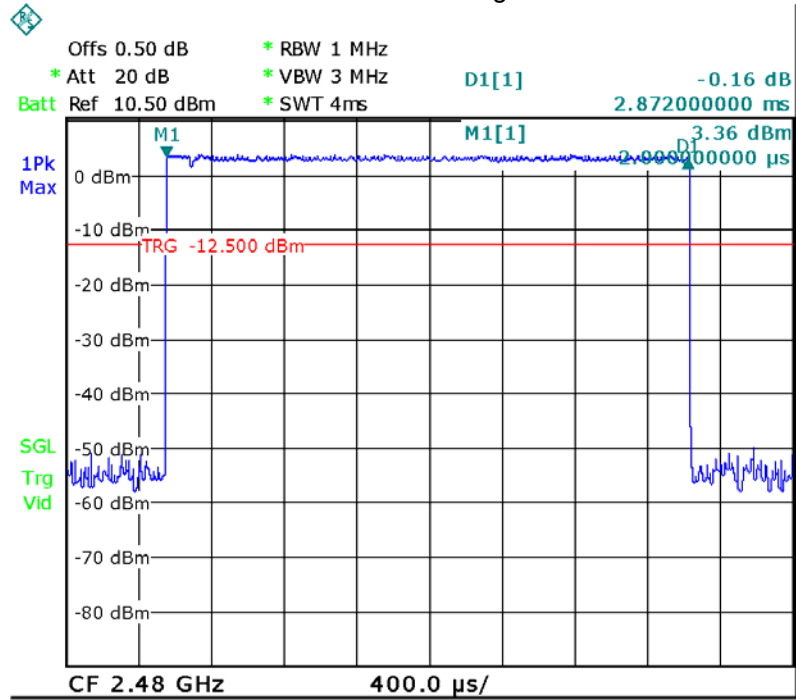


8DPSK DH5 Low Channel

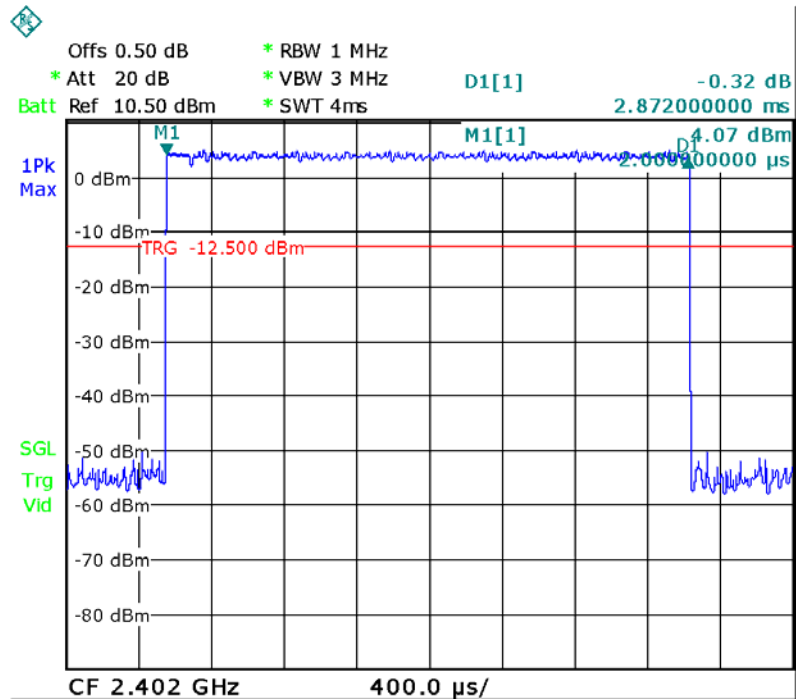

8DPSK DH5 Middle Channel

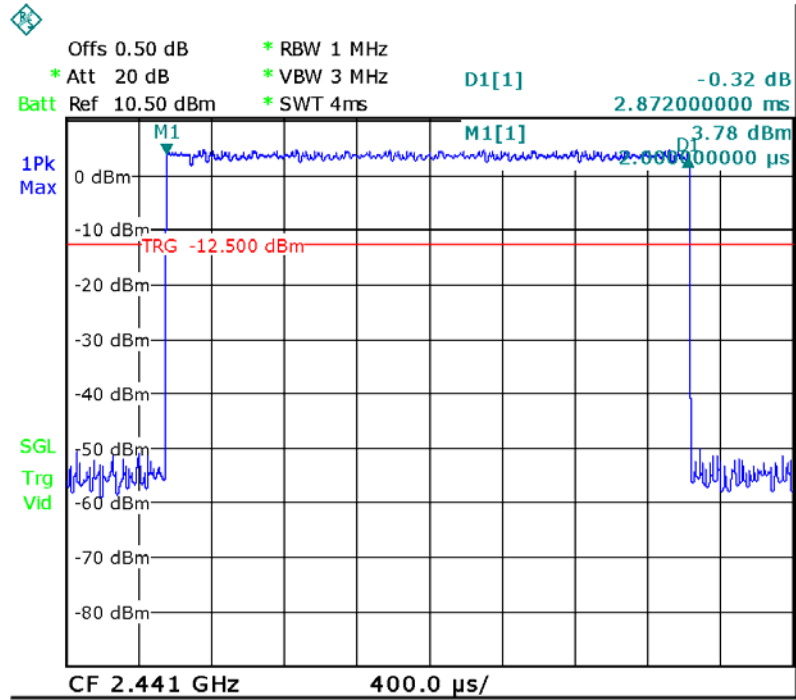

8DPSK DH5 High Channel

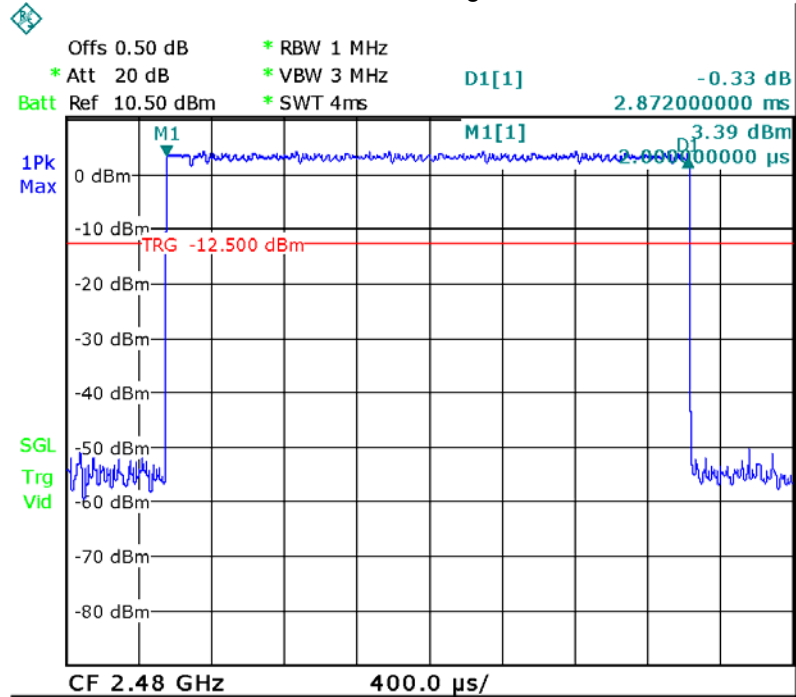

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna, fulfil the requirement of this section.

17 RF Exposure

Remark: refer to SAR test report: WTS16S0961090E

=====**End of Report**=====