


Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6535MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

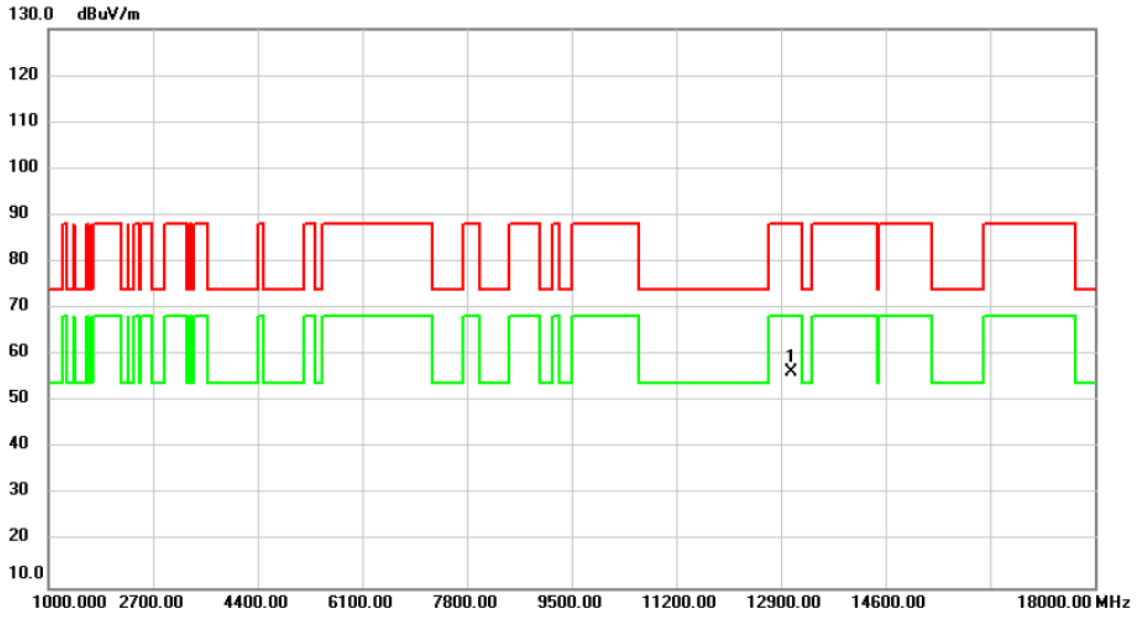


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13070.00	48.49	7.82	56.31	88.20	-31.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6695MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

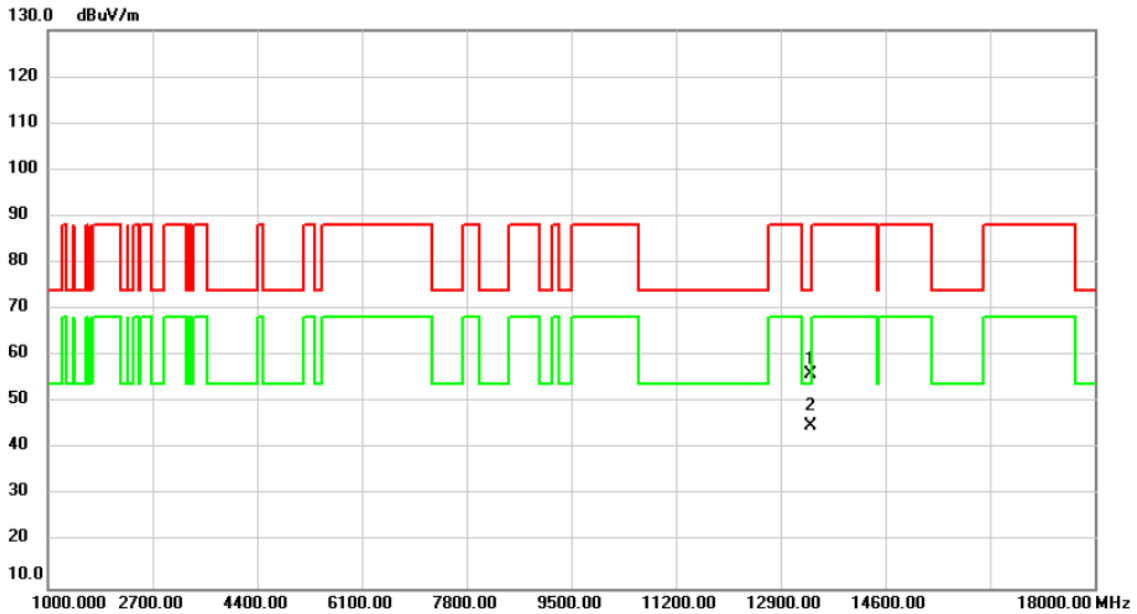


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		13390.00	48.70	7.25	55.95	74.00	-18.05	peak	
2	*	13390.00	37.63	7.25	44.88	54.00	-9.12	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6695MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

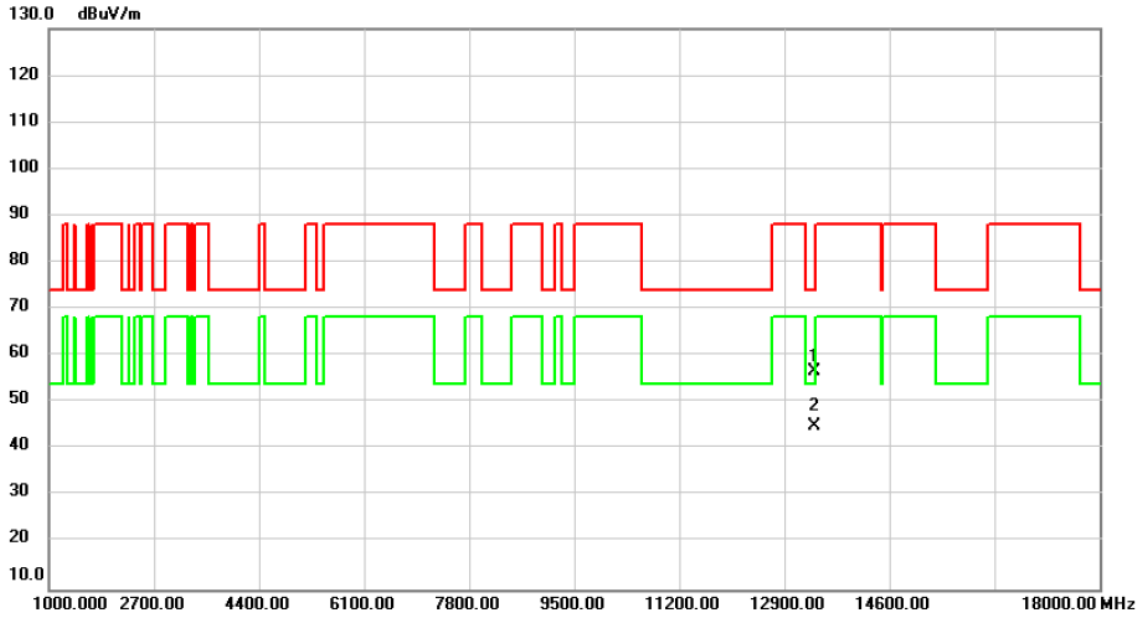


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		13390.00	49.47	7.25	56.72	74.00	-17.28	peak	
2	*	13390.00	37.69	7.25	44.94	54.00	-9.06	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6855MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

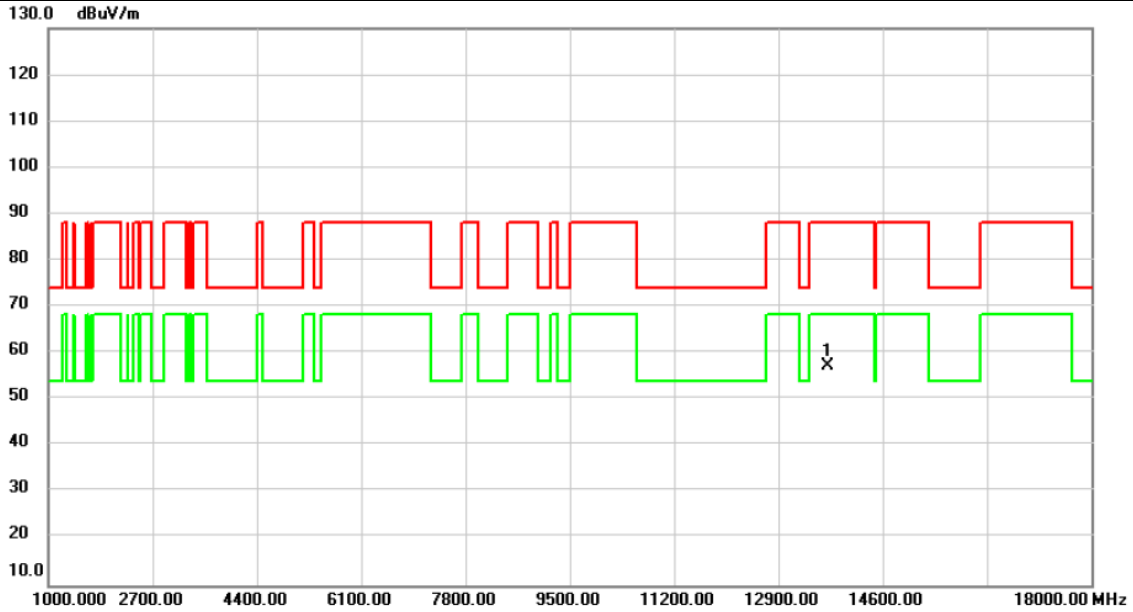


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13710.00	50.04	7.29	57.33	88.20	-30.87	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6855MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

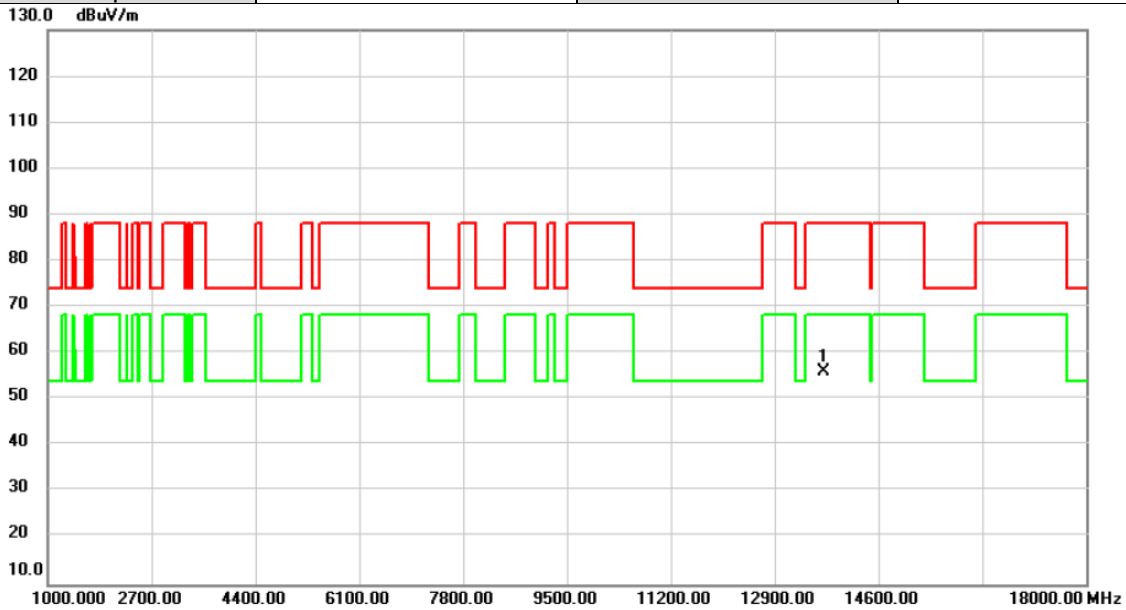


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13710.00	48.70	7.29	55.99	88.20	-32.21	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6875MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

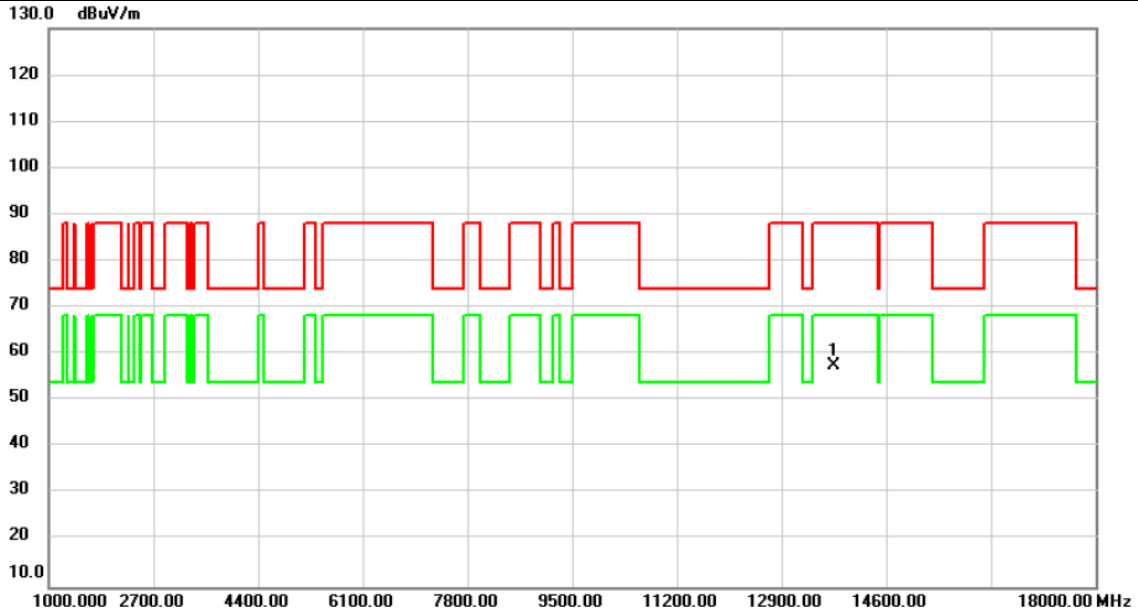


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13750.00	50.22	7.33	57.55	88.20	-30.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6875MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

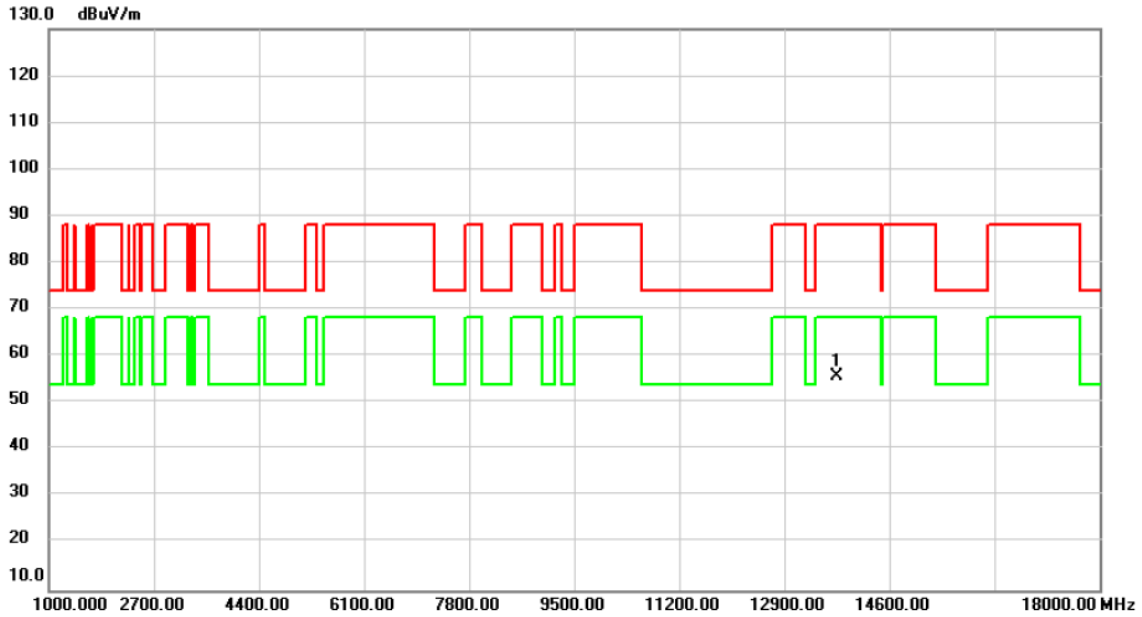


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13750.00	48.55	7.33	55.88	88.20	-32.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6995MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

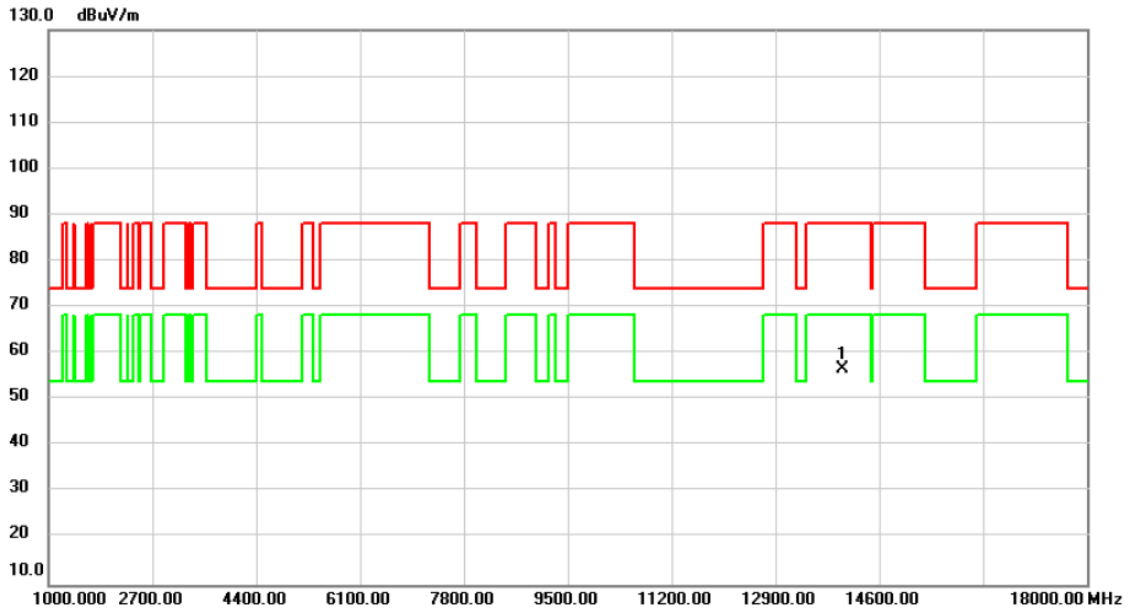


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13990.00	49.10	7.62	56.72	88.20	-31.48	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	6995MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

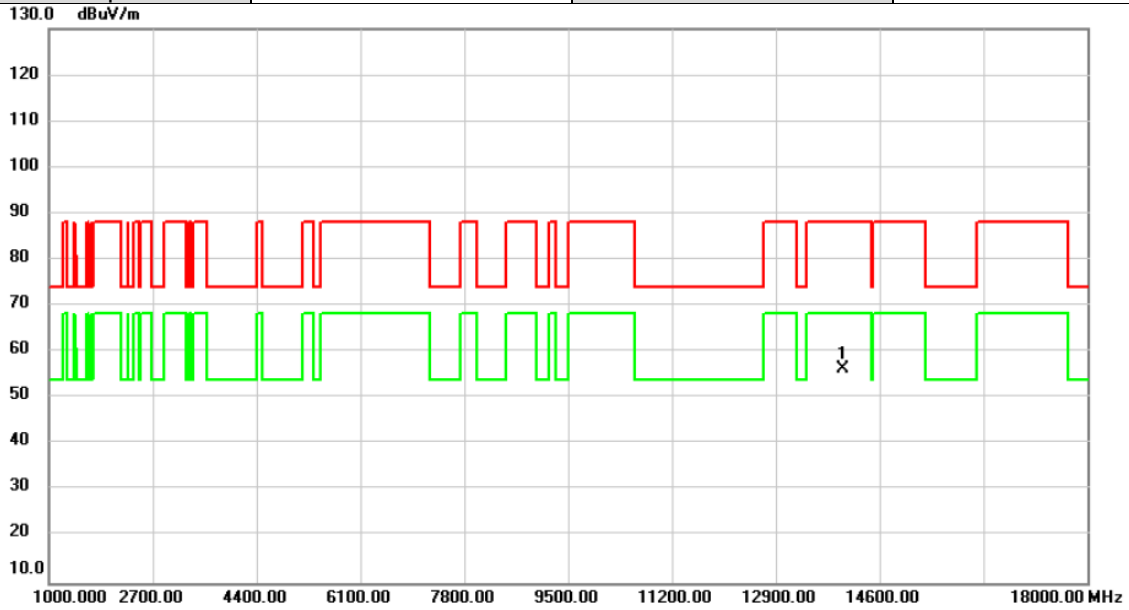


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13990.00	48.58	7.62	56.20	88.20	-32.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	7095MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

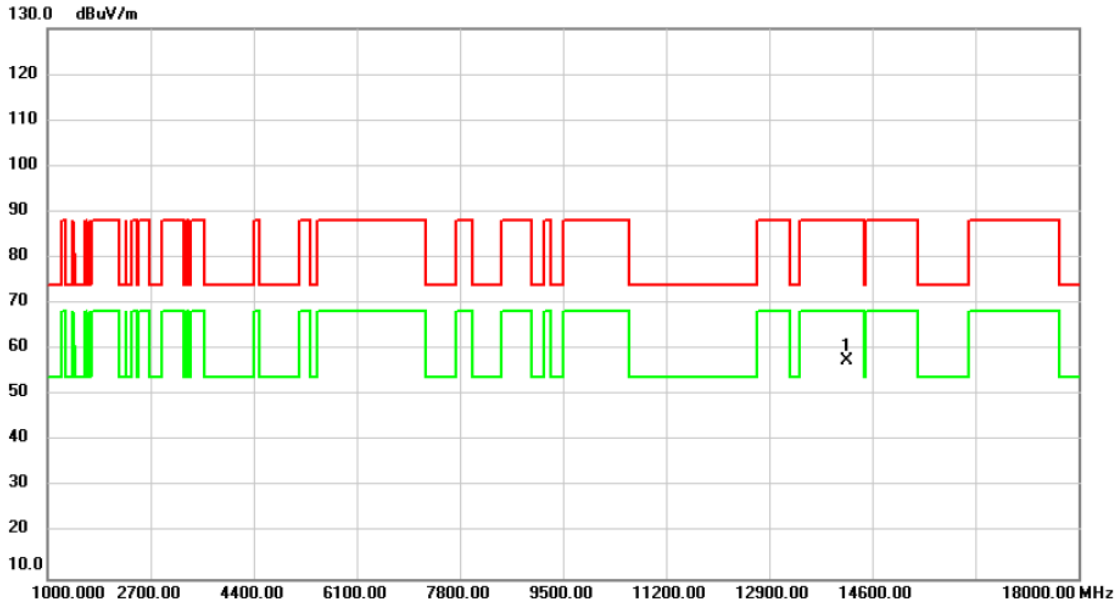


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14190.00	49.85	7.68	57.53	88.20	-30.67	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	7095MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

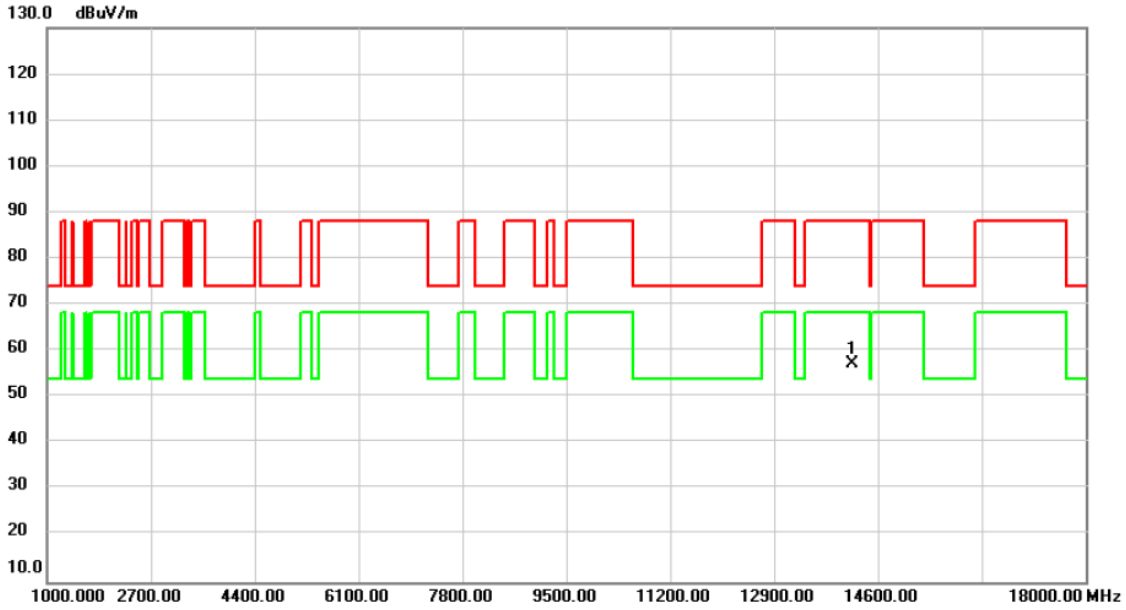


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14190.00	49.60	7.68	57.28	88.20	-30.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	7115MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

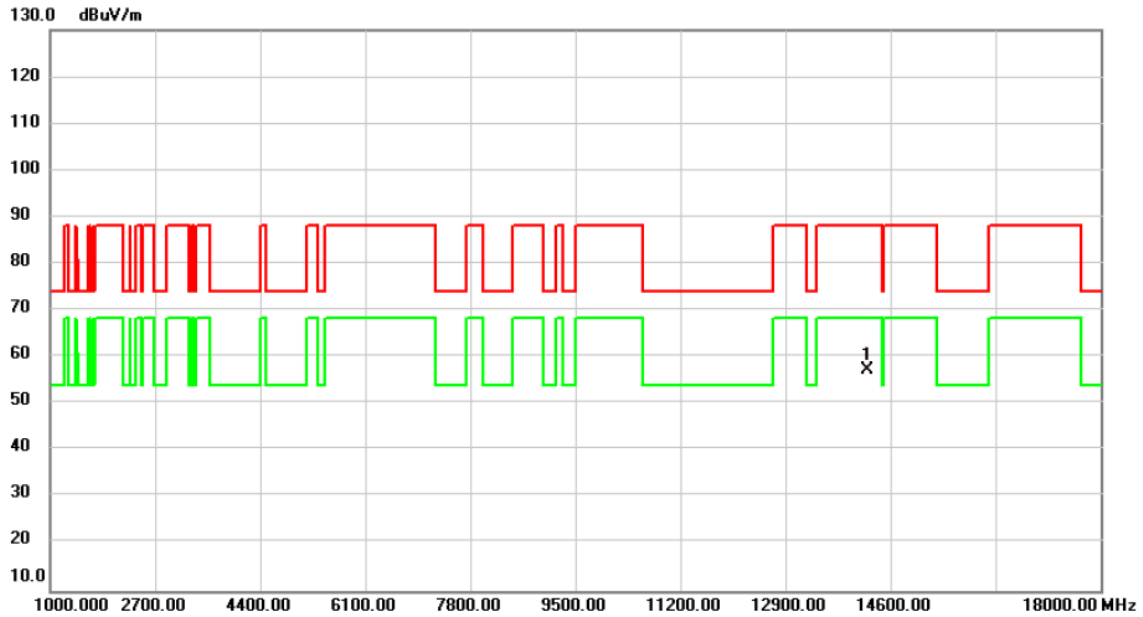


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14230.00	49.68	7.70	57.38	88.20	-30.82	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/20
Test Frequency	7115MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

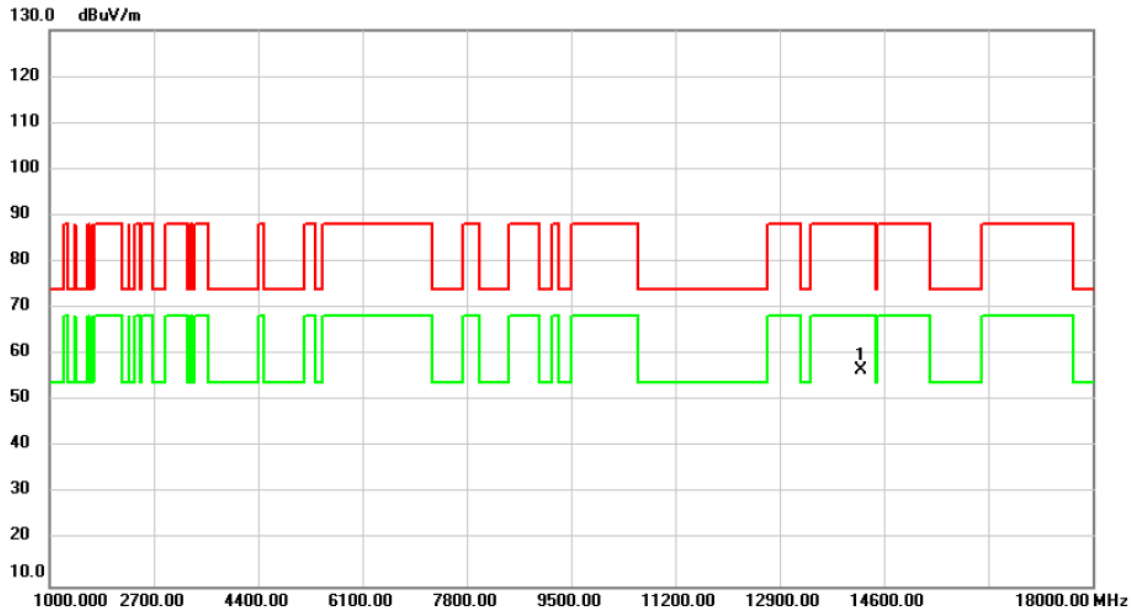


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14230.00	49.03	7.70	56.73	88.20	-31.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5965MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

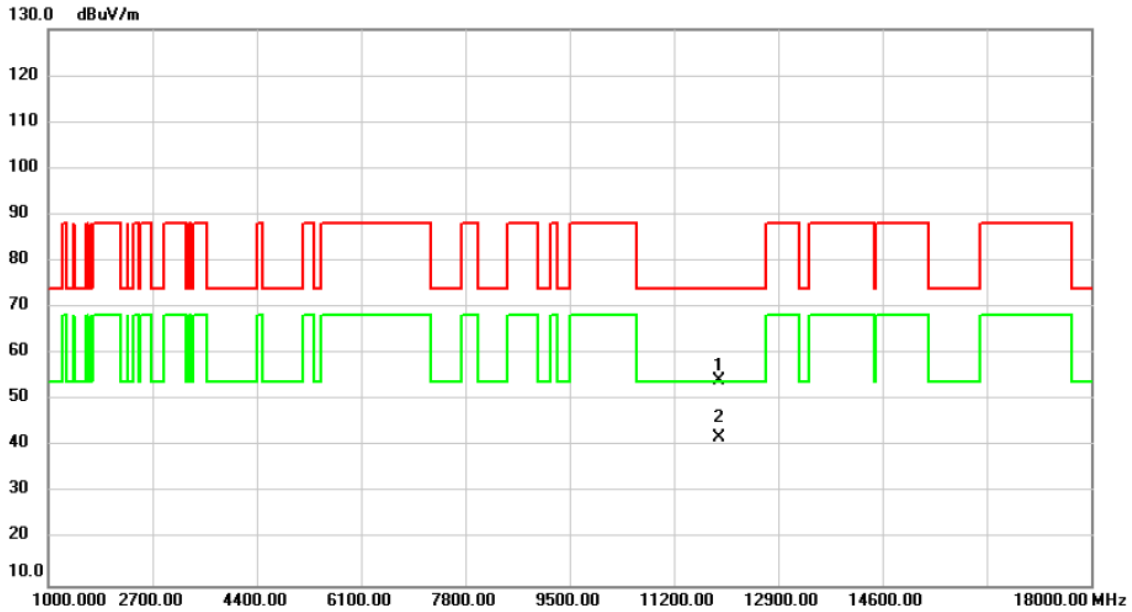


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11930.00	47.92	6.48	54.40	74.00	-19.60	peak	
2	*	11930.00	35.56	6.48	42.04	54.00	-11.96	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	5965MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

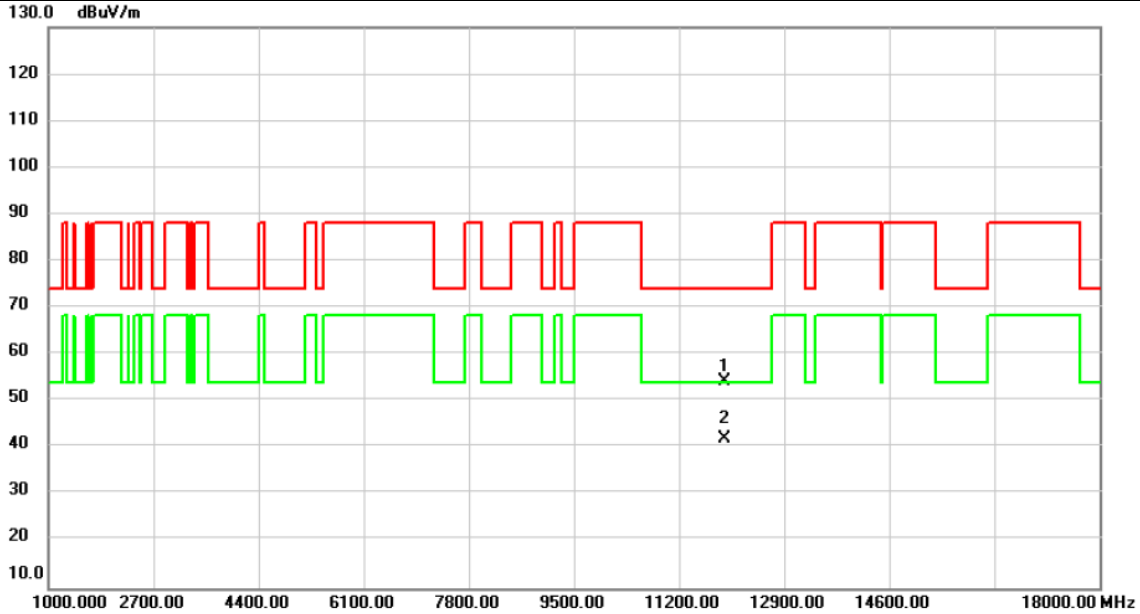


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11930.00	47.78	6.48	54.26	74.00	-19.74	peak	
2	*	11930.00	35.50	6.48	41.98	54.00	-12.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6165MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

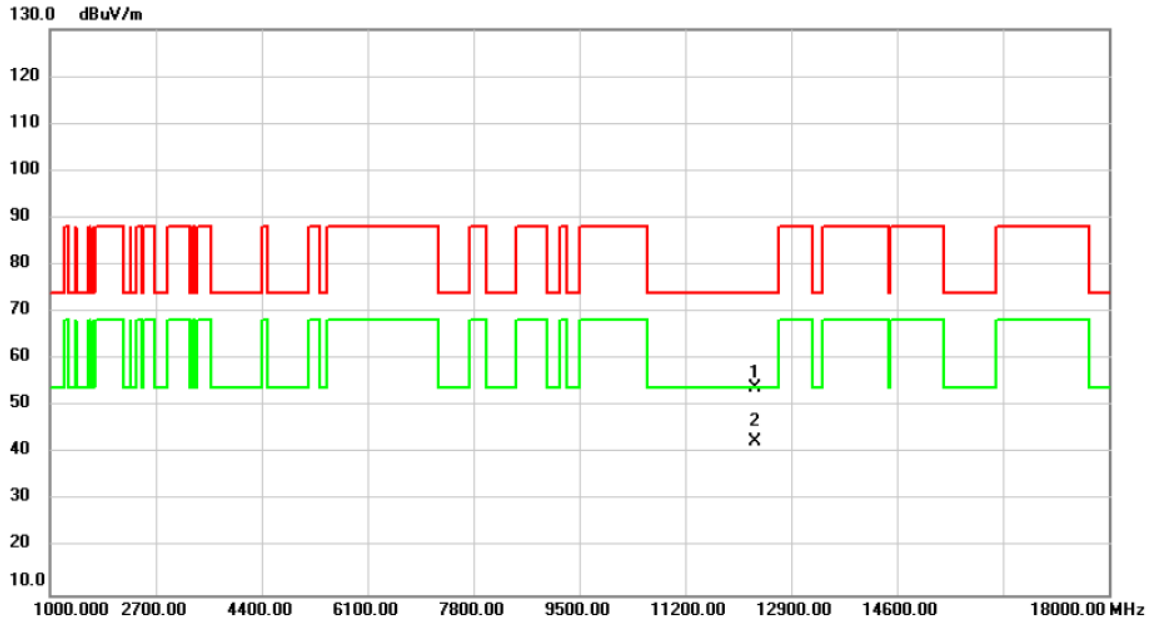


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12330.00	47.10	6.91	54.01	74.00	-19.99	peak	
2	*	12330.00	35.78	6.91	42.69	54.00	-11.31	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6165MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

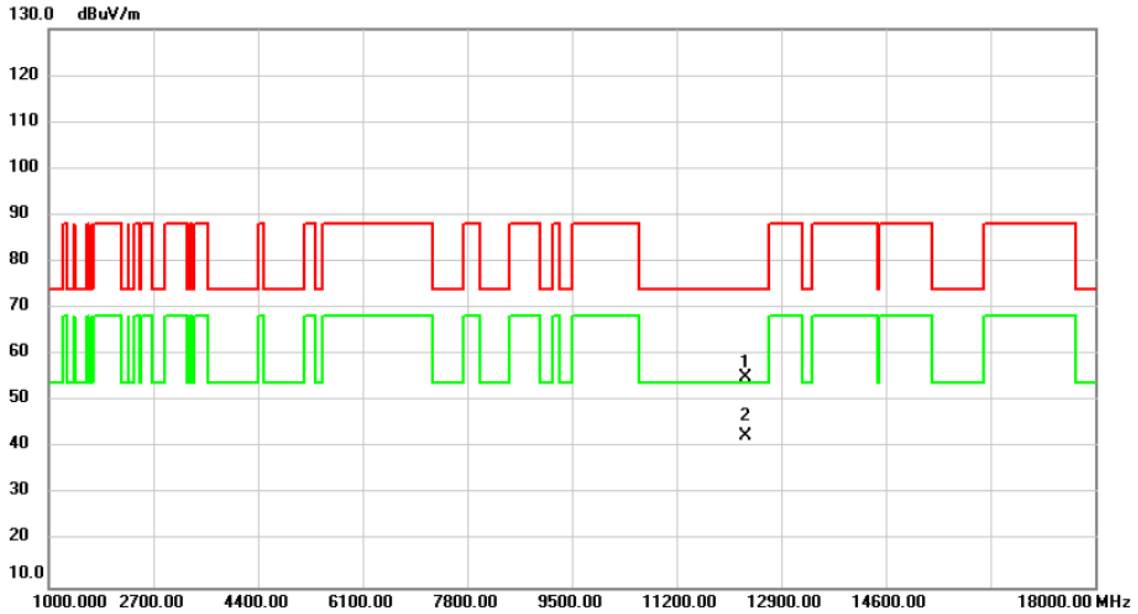


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12330.00	48.28	6.91	55.19	74.00	-18.81	peak	
2	*	12330.00	35.72	6.91	42.63	54.00	-11.37	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6405MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

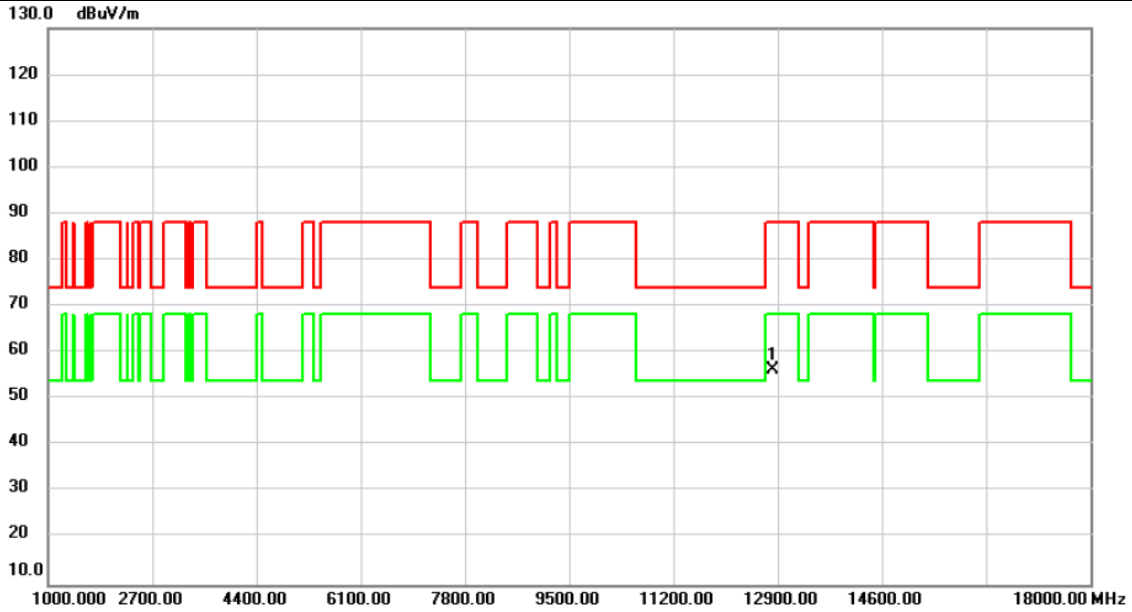


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12810.00	48.76	7.65	56.41	88.20	-31.79	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6405MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

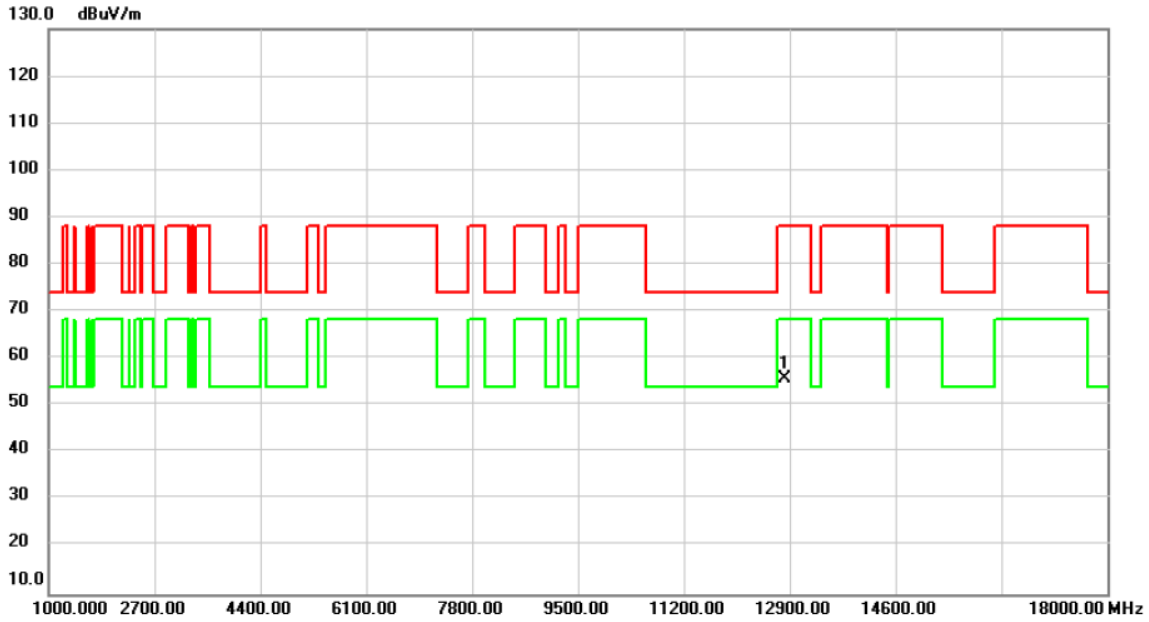


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12810.00	48.01	7.65	55.66	88.20	-32.54	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6445MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

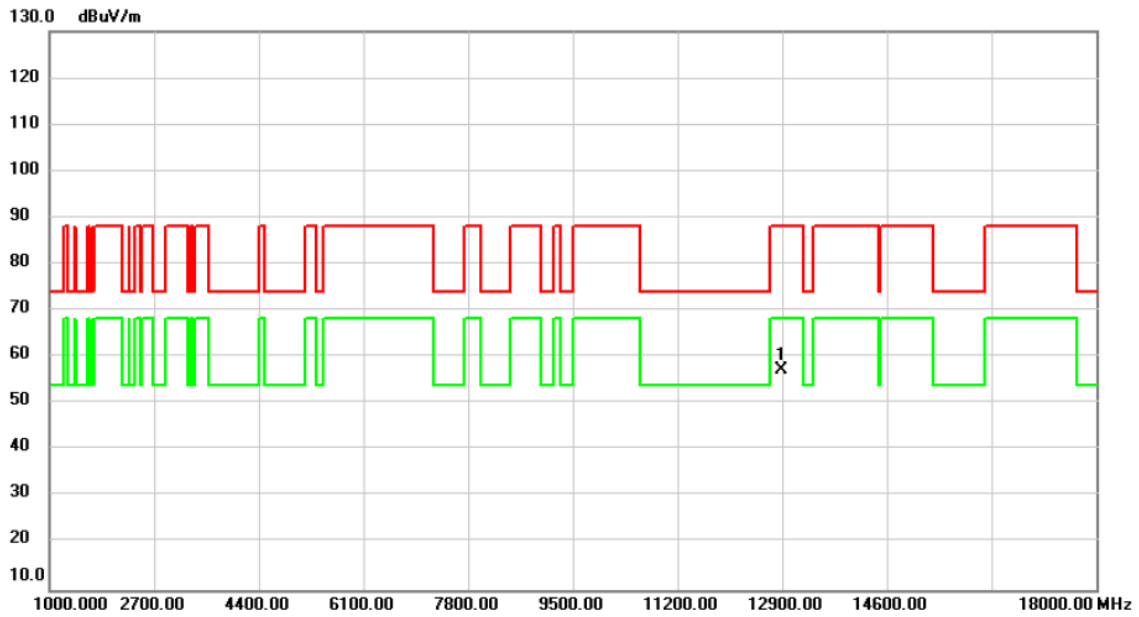


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12890.00	49.54	7.78	57.32	88.20	-30.88	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6445MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

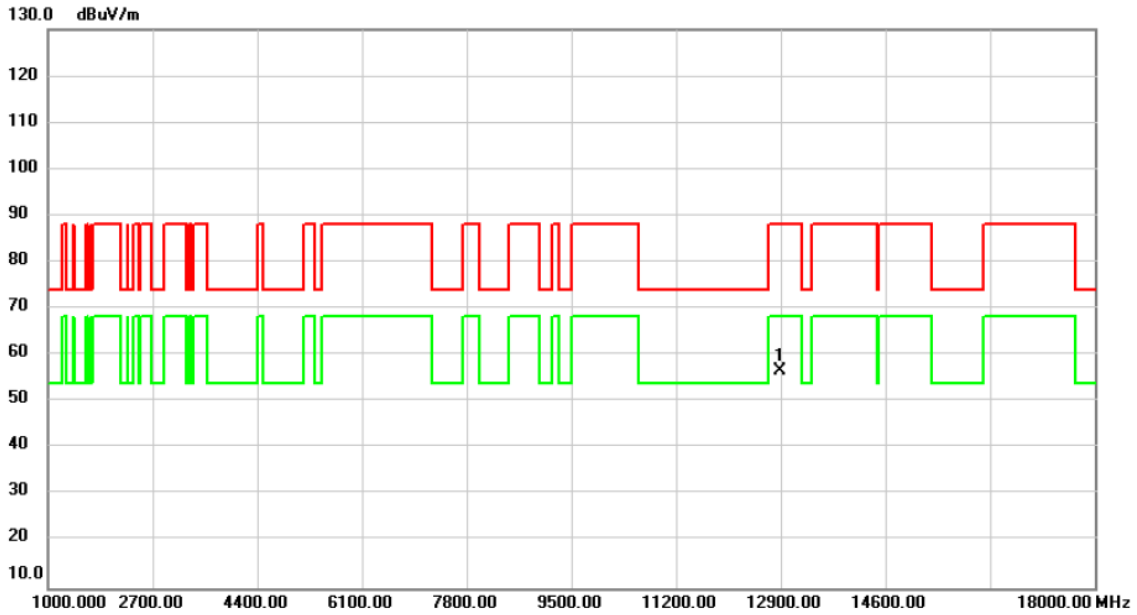


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12890.00	48.94	7.78	56.72	88.20	-31.48	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6485MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

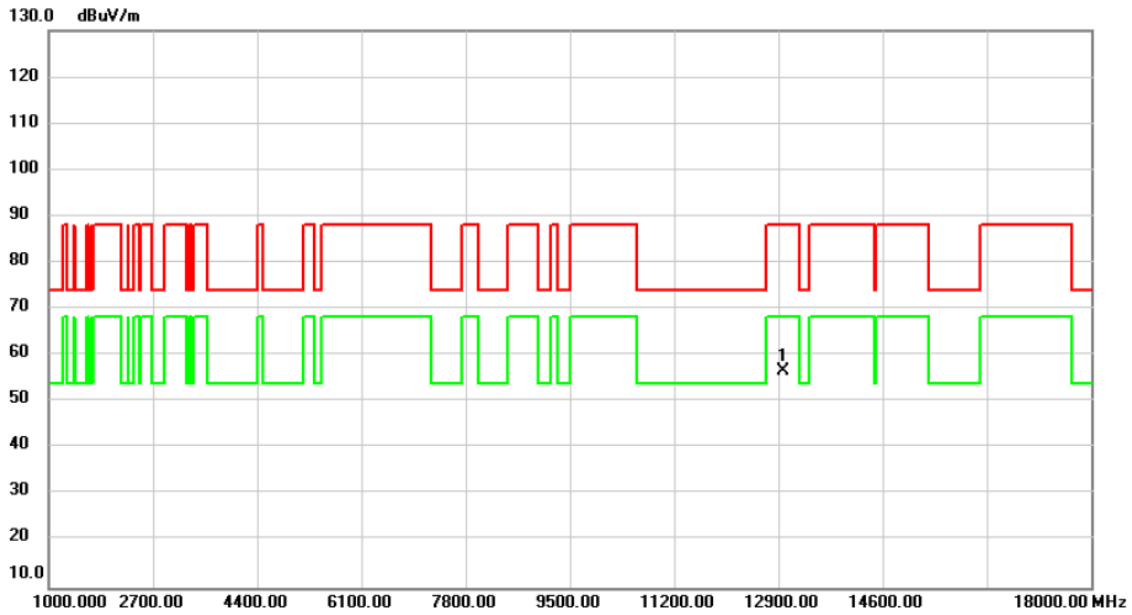


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12970.00	48.83	7.91	56.74	88.20	-31.46	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6485MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

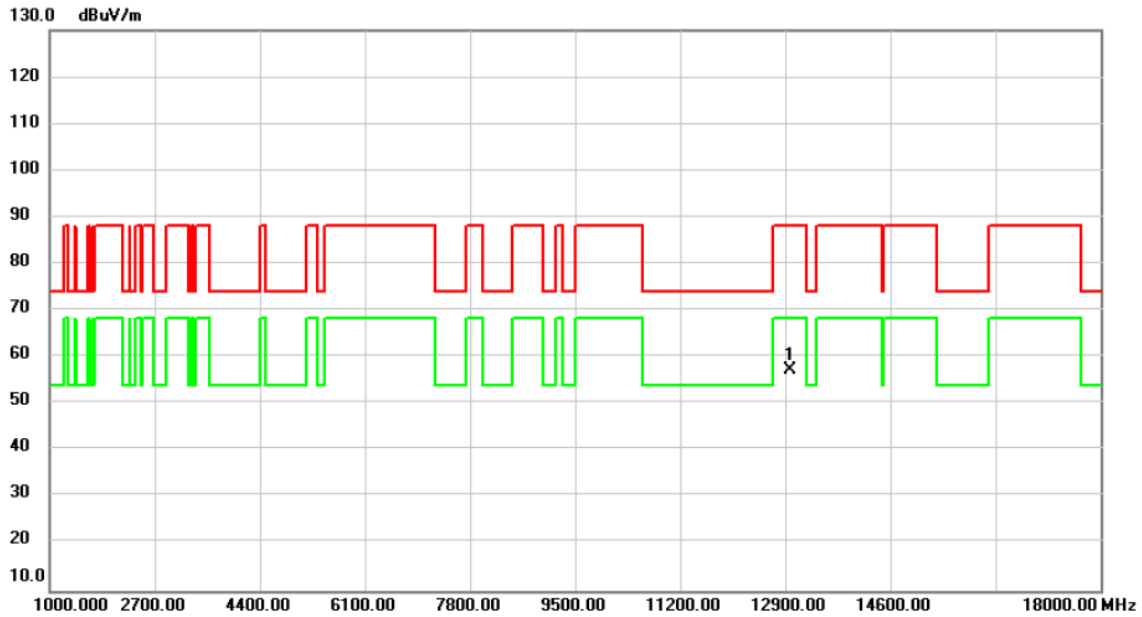


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12970.00	49.29	7.91	57.20	88.20	-31.00	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6525MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

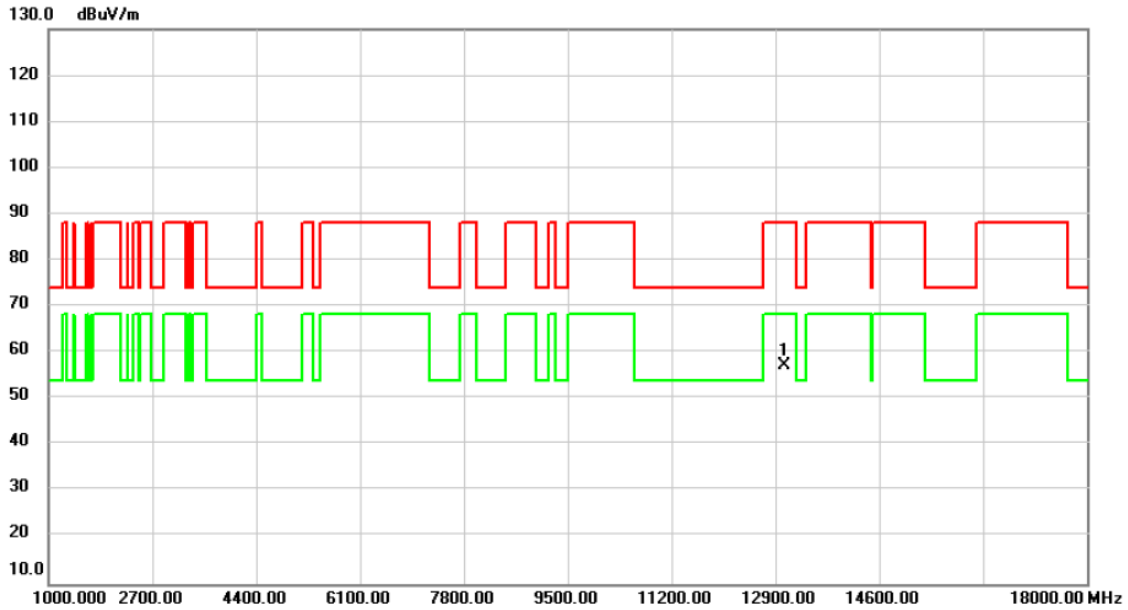


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13050.00	49.37	7.86	57.23	88.20	-30.97	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6525MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

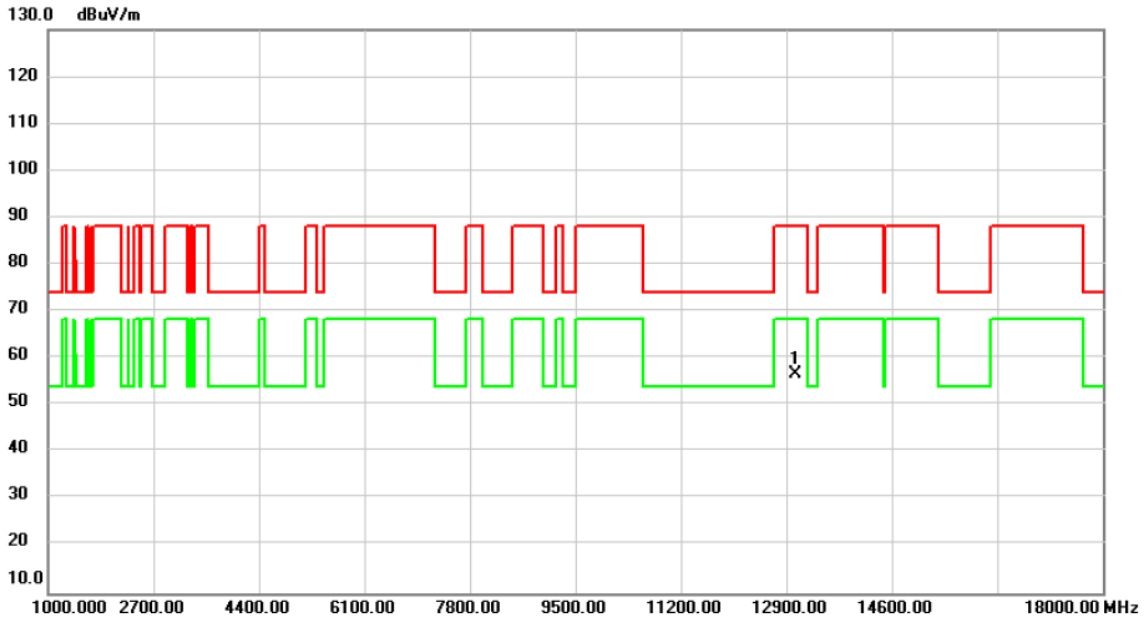


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13050.00	48.84	7.86	56.70	88.20	-31.50	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6565MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

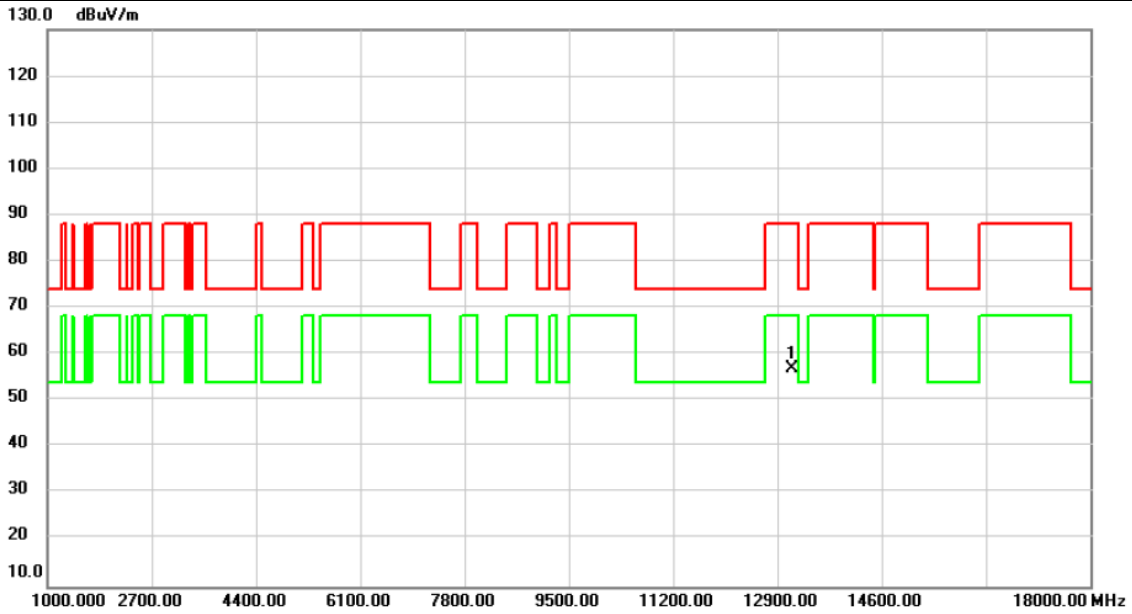


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13130.00	49.16	7.72	56.88	88.20	-31.32	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6565MHz	Polarization	Horizontal
Temp	21°C	Hum.	64%

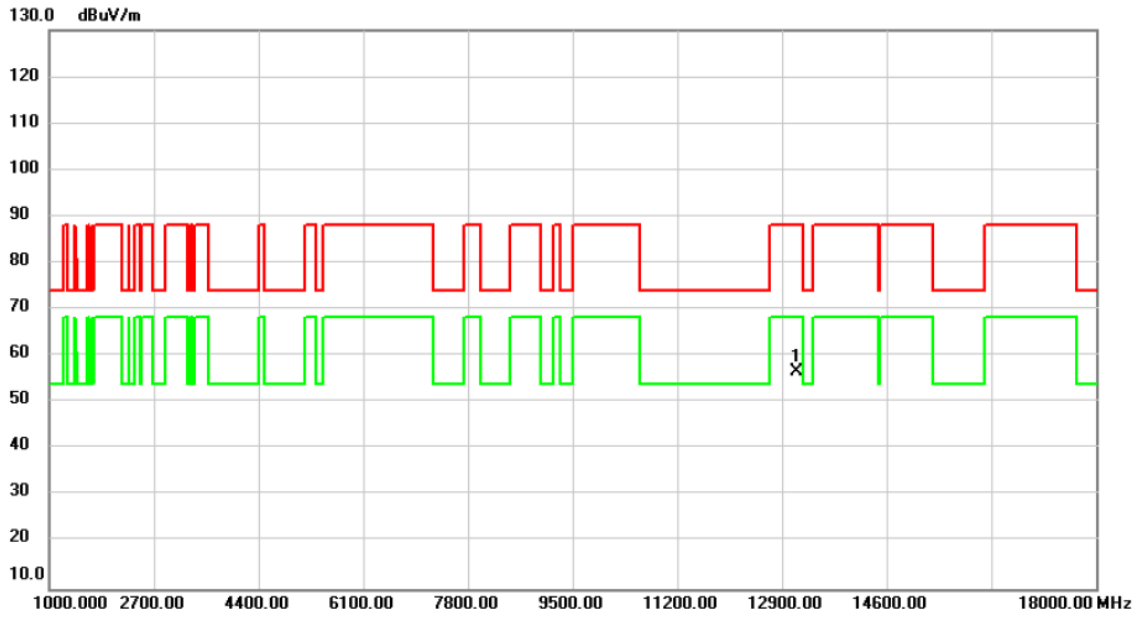


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13130.00	48.80	7.72	56.52	88.20	-31.68	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6685MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

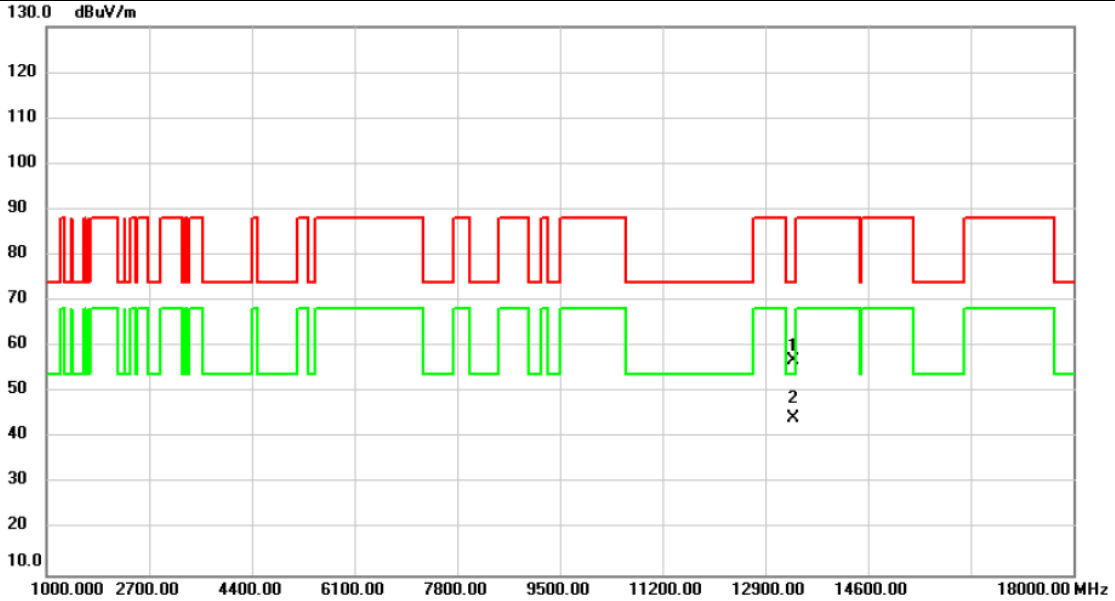


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	13370.00	49.66	7.28	56.94	74.00	-17.06	peak	
2 *	13370.00	37.22	7.28	44.50	54.00	-9.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6685MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

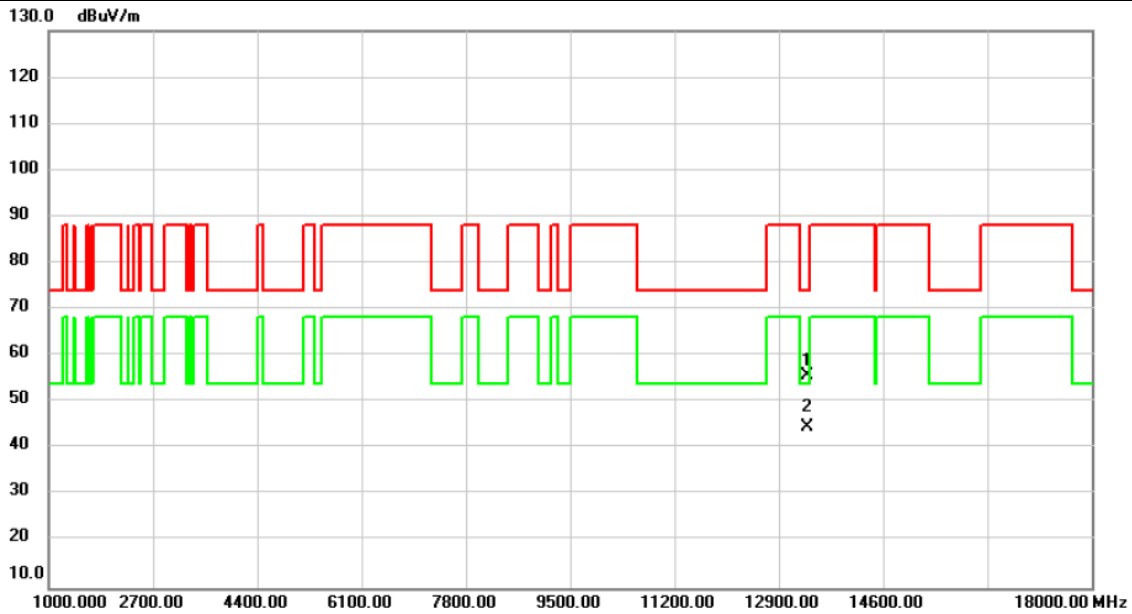


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13370.00	48.62	7.28	55.90	74.00	-18.10	peak	
2	*	13370.00	37.29	7.28	44.57	54.00	-9.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6845MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

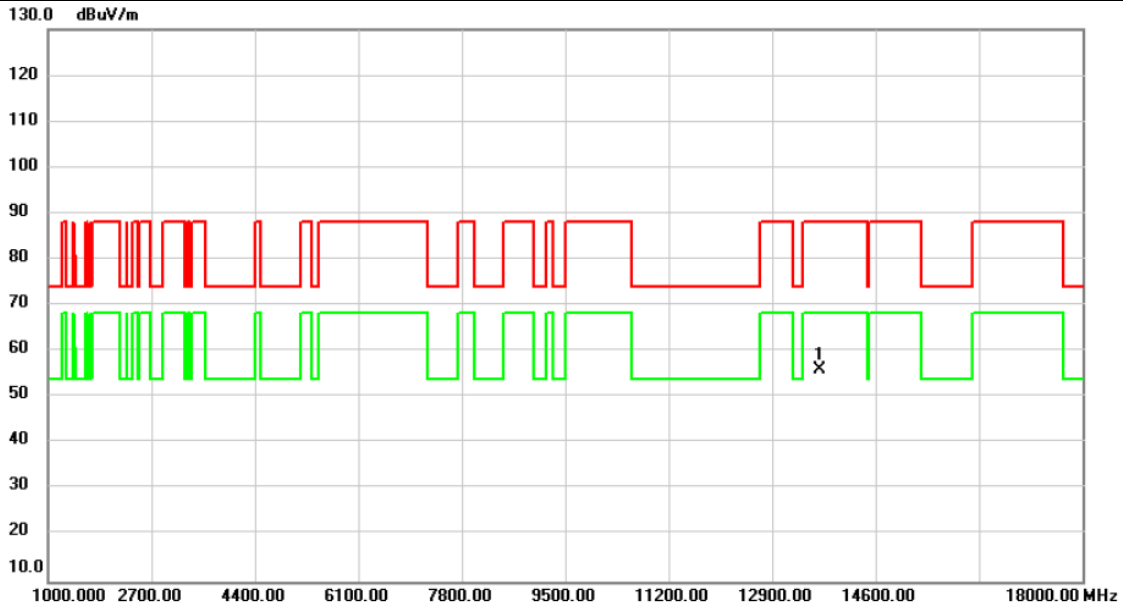


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13690.00	48.89	7.27	56.16	88.20	-32.04	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6845MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

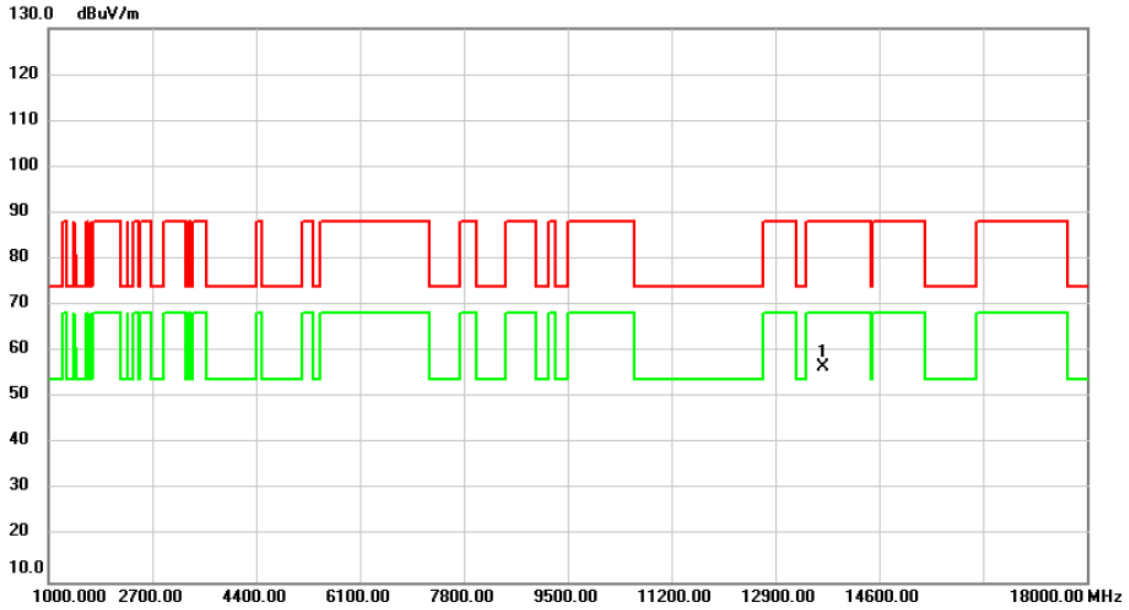


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13690.00	49.35	7.27	56.62	88.20	-31.58	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6885MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

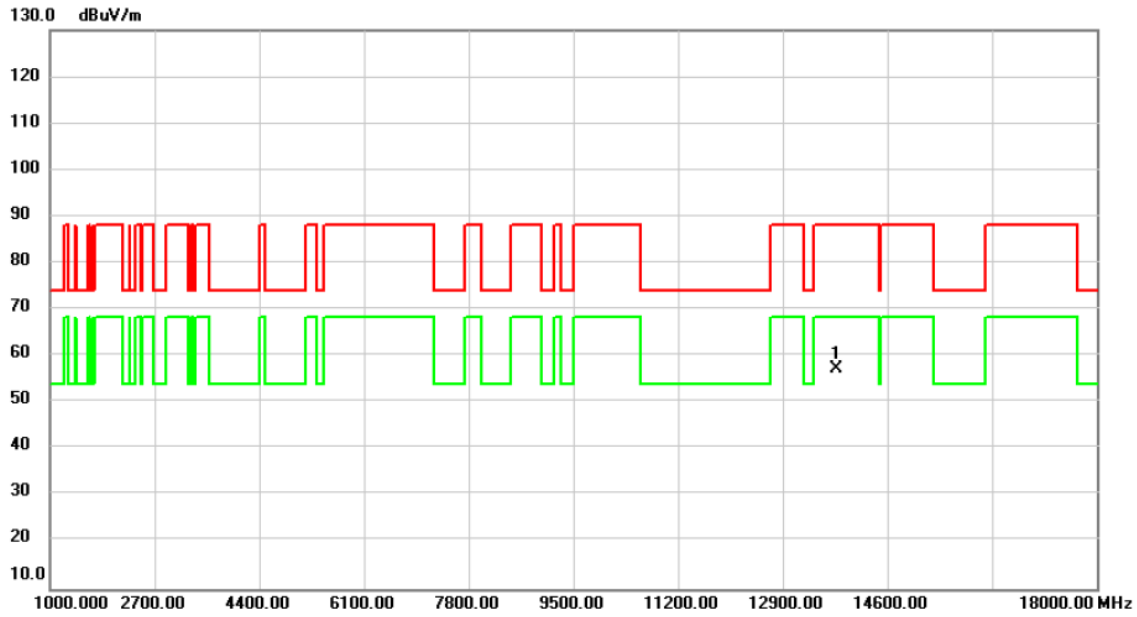


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13770.00	49.74	7.37	57.11	88.20	-31.09	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	6885MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

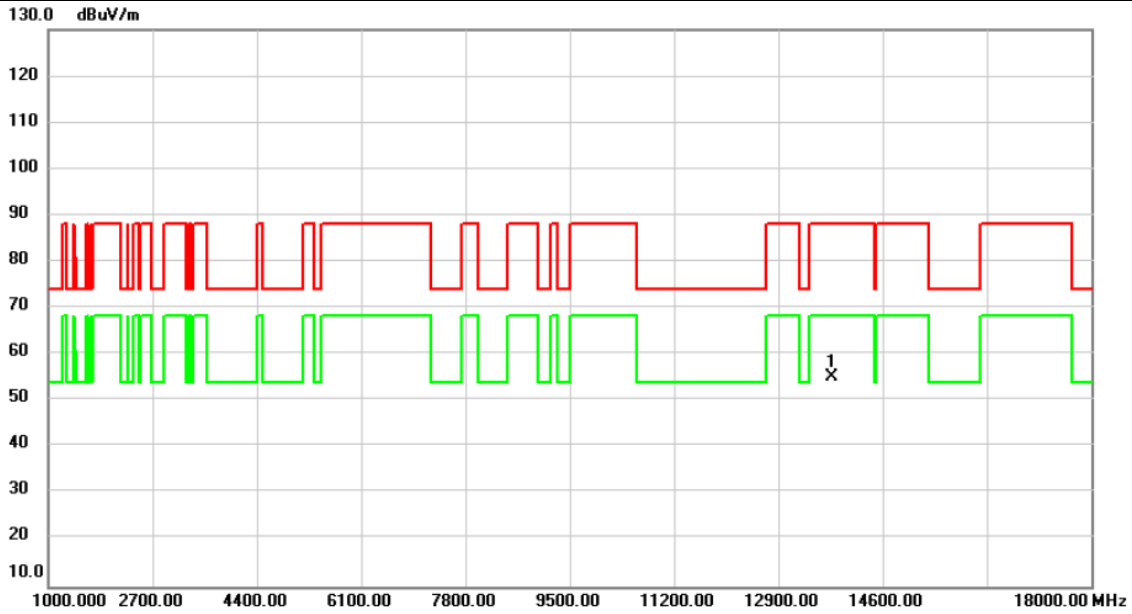


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13770.00	47.72	7.37	55.09	88.20	-33.11	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	7085MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

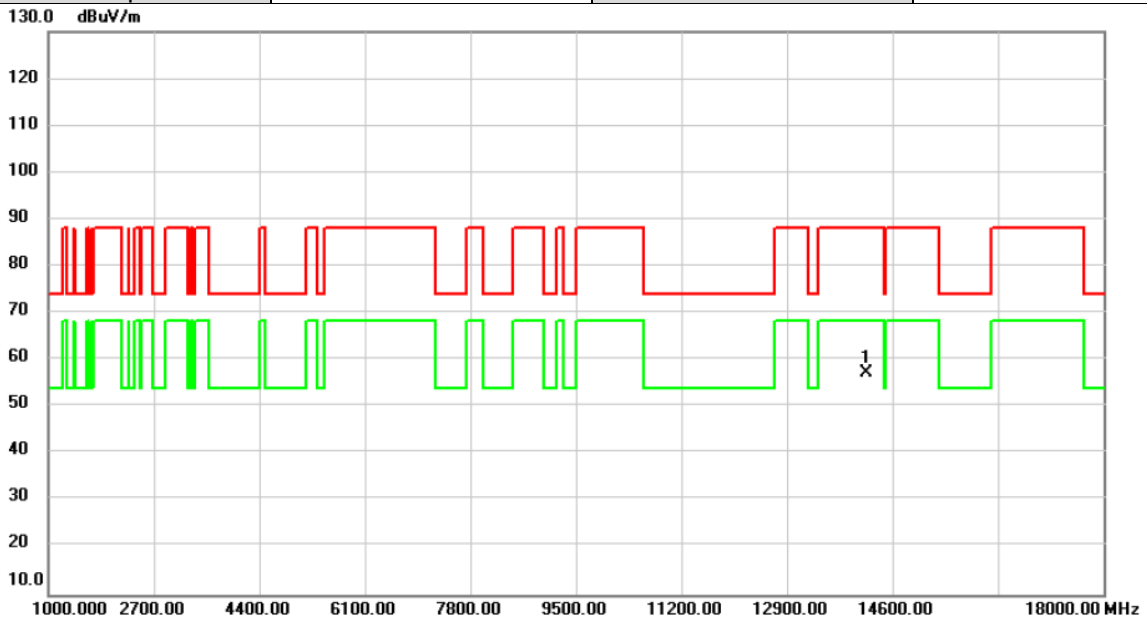


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14170.00	49.65	7.68	57.33	88.20	-30.87	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2023/11/20
Test Frequency	7085MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

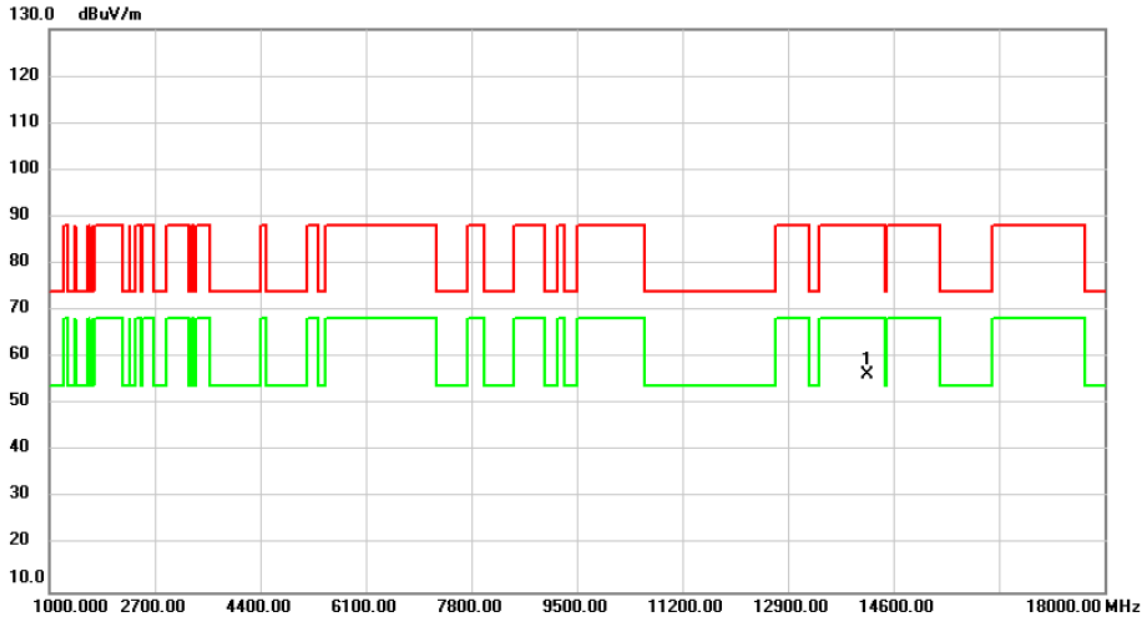


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14170.00	48.60	7.68	56.28	88.20	-31.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5985MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

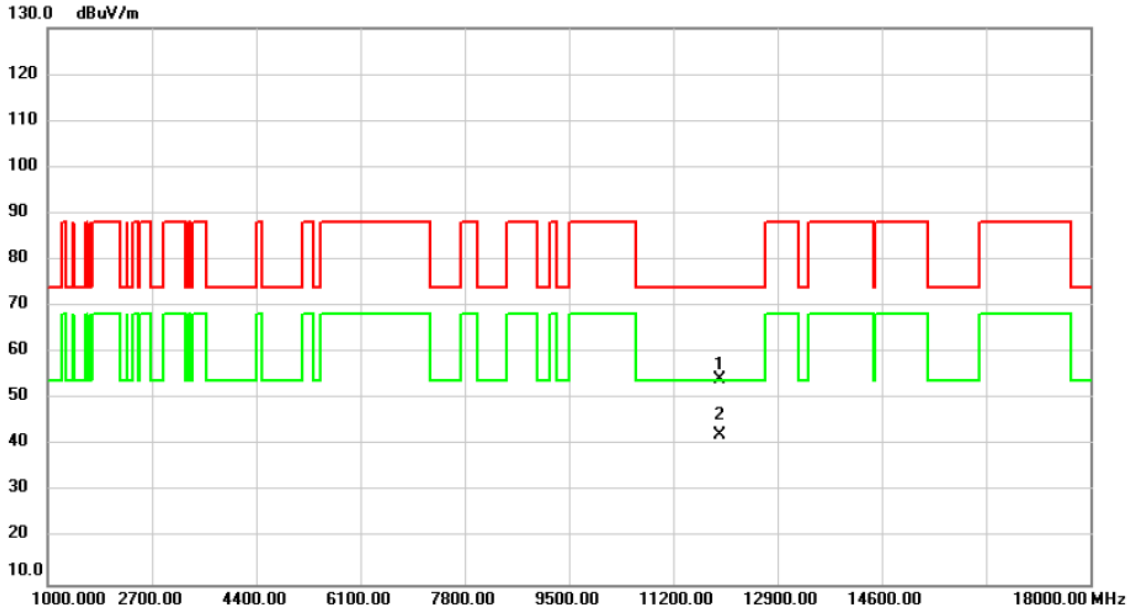


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11970.00	47.67	6.45	54.12	74.00	-19.88	peak	
2	*	11970.00	35.78	6.45	42.23	54.00	-11.77	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	5985MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

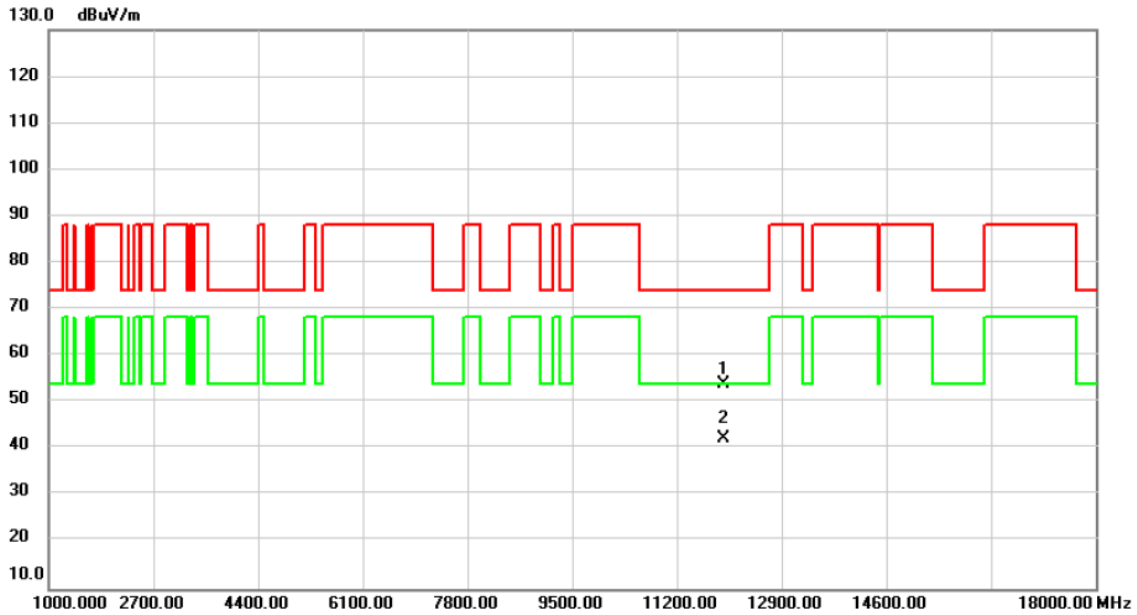


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		11970.00	47.39	6.45	53.84	74.00	-20.16	peak	
2	*	11970.00	35.72	6.45	42.17	54.00	-11.83	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6145MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

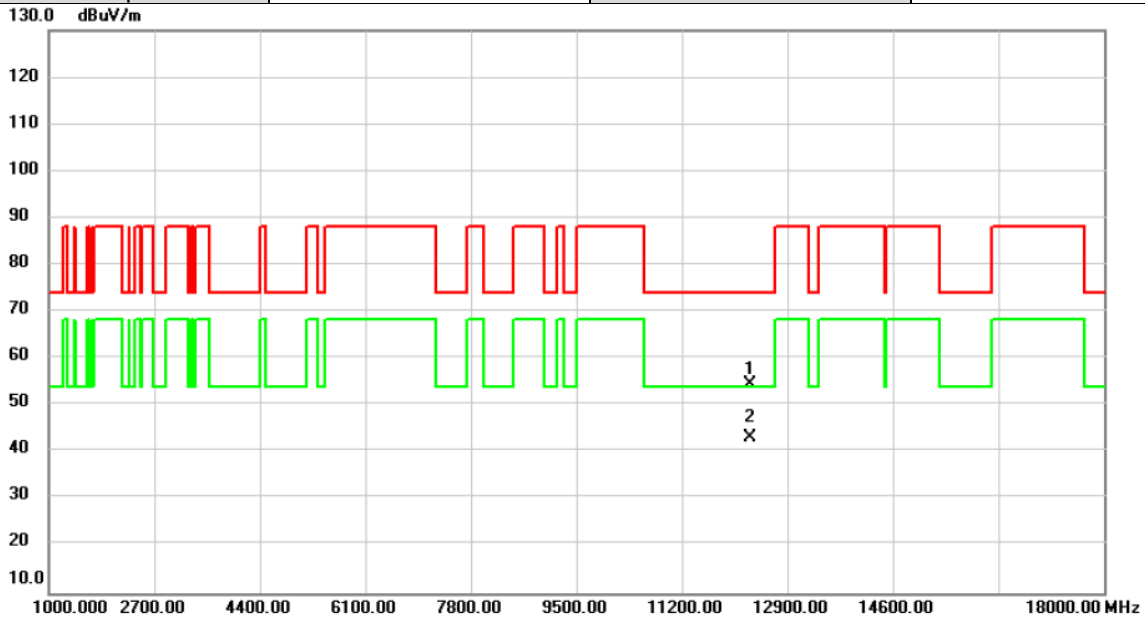


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12290.00	47.70	6.86	54.56	74.00	-19.44	peak	
2	*	12290.00	36.16	6.86	43.02	54.00	-10.98	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6145MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

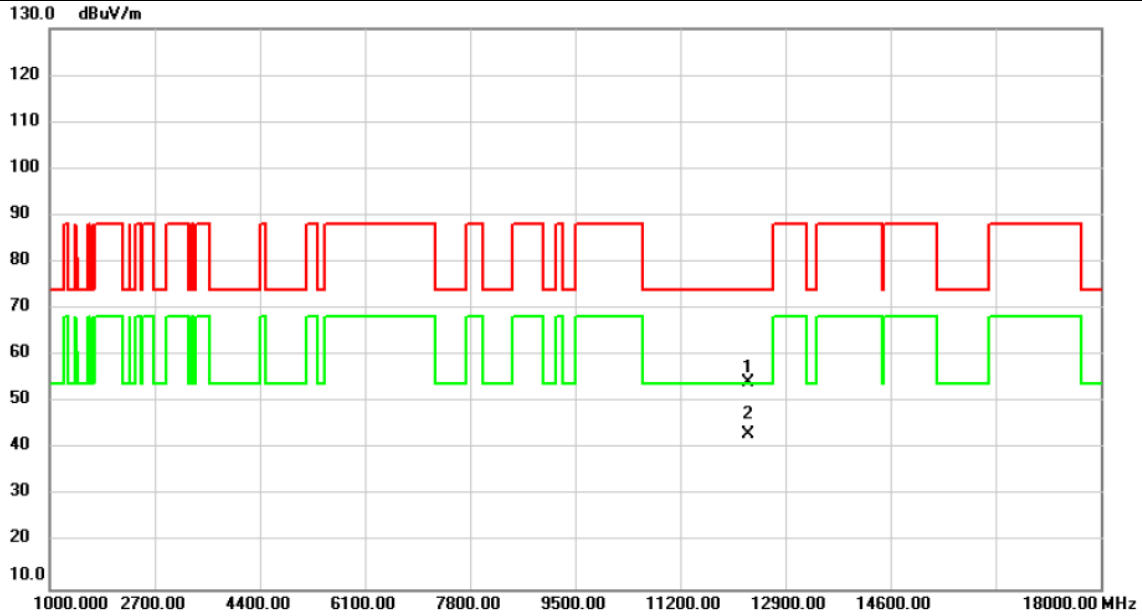


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12290.00	47.48	6.86	54.34	74.00	-19.66	peak	
2	*	12290.00	36.18	6.86	43.04	54.00	-10.96	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6385MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

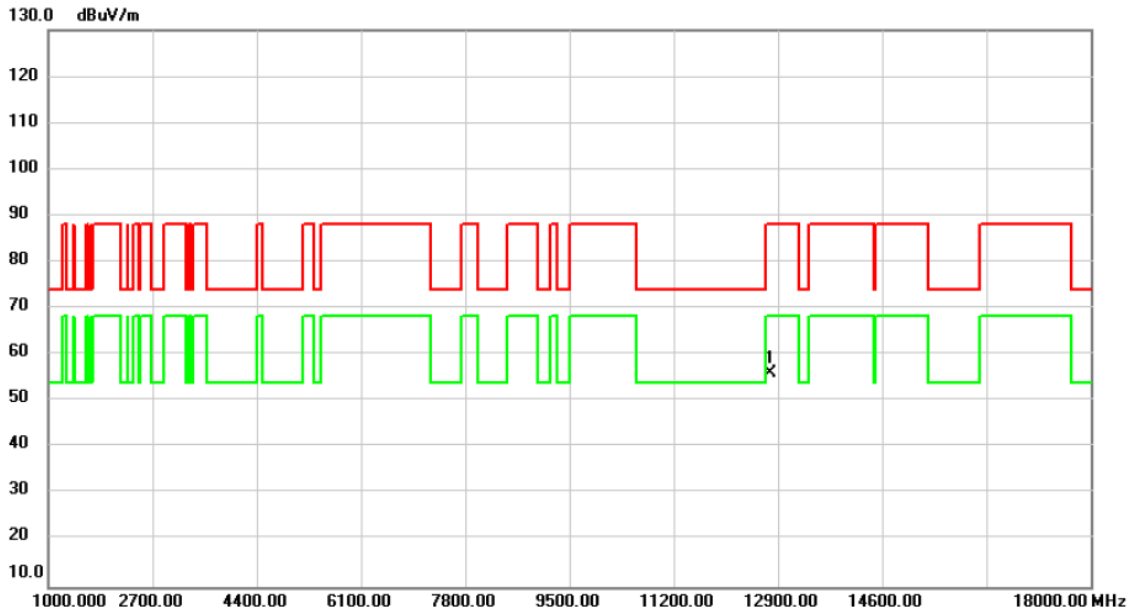


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12770.00	48.35	7.59	55.94	88.20	-32.26	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6385MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

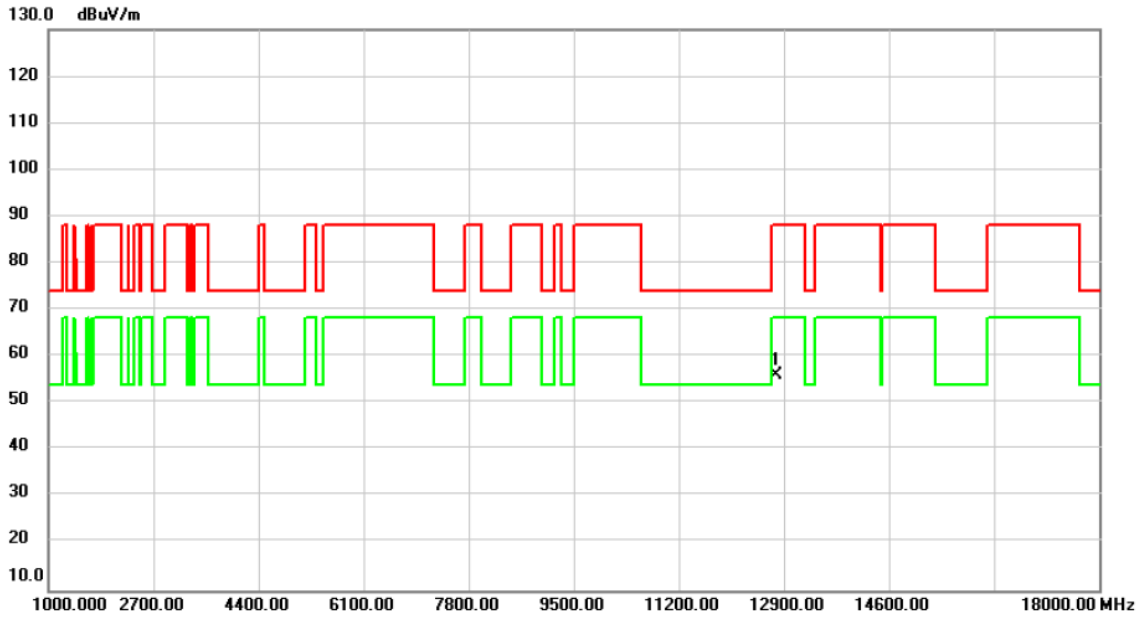


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	12770.00	48.57	7.59	56.16	88.20	-32.04	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6465MHz	Polarization	Vertical
Temp	21°C	Hum.	64%

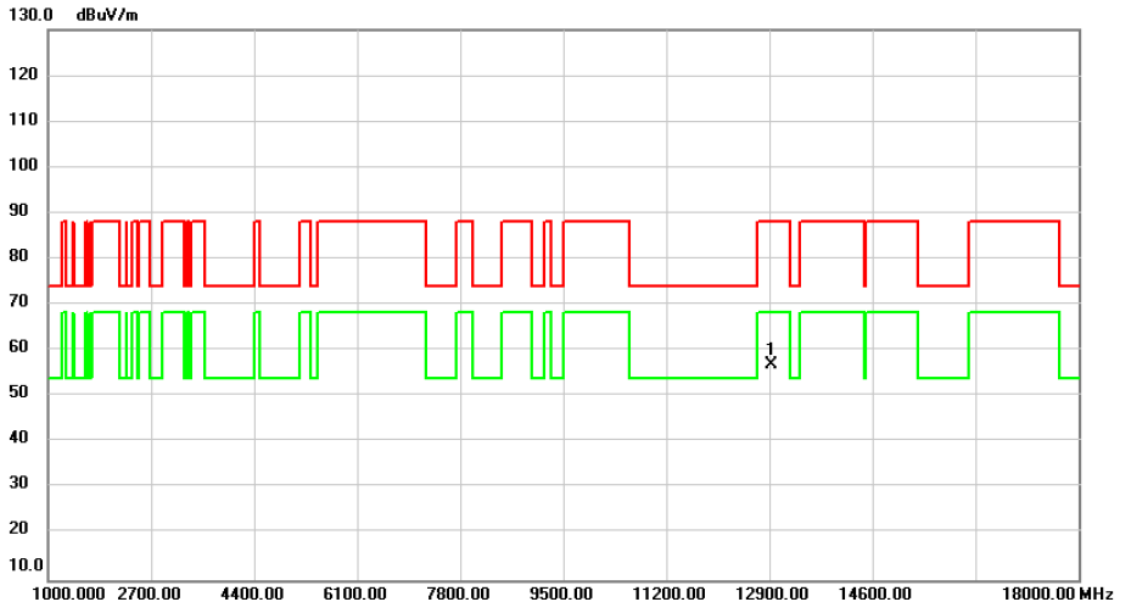


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12930.00	49.01	7.84	56.85	88.20	-31.35	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6465MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

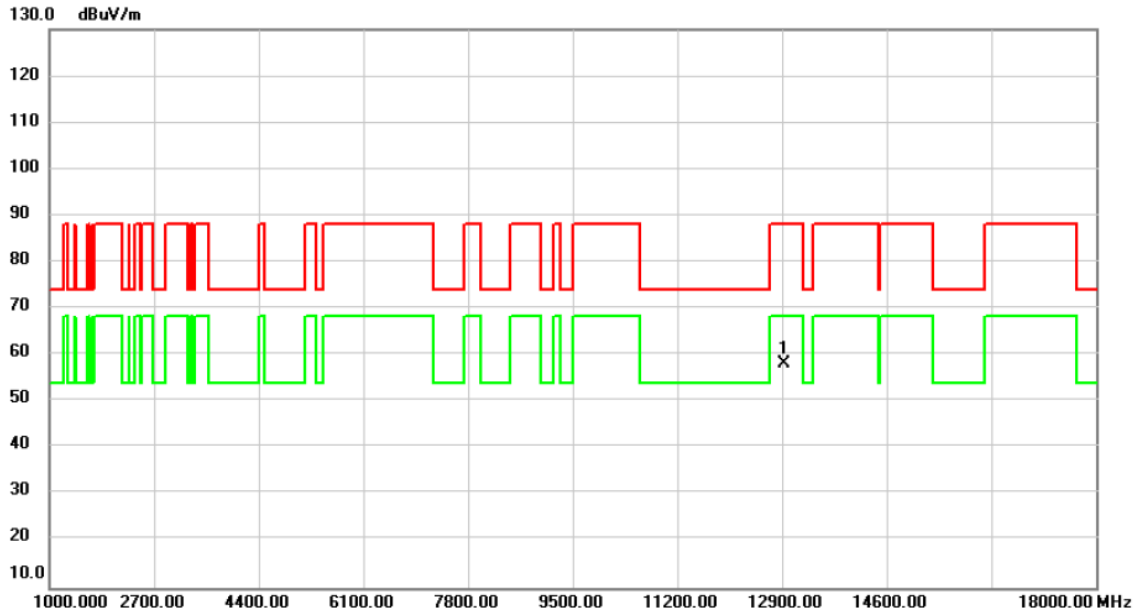


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	12930.00	50.43	7.84	58.27	88.20	-29.93	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6545MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

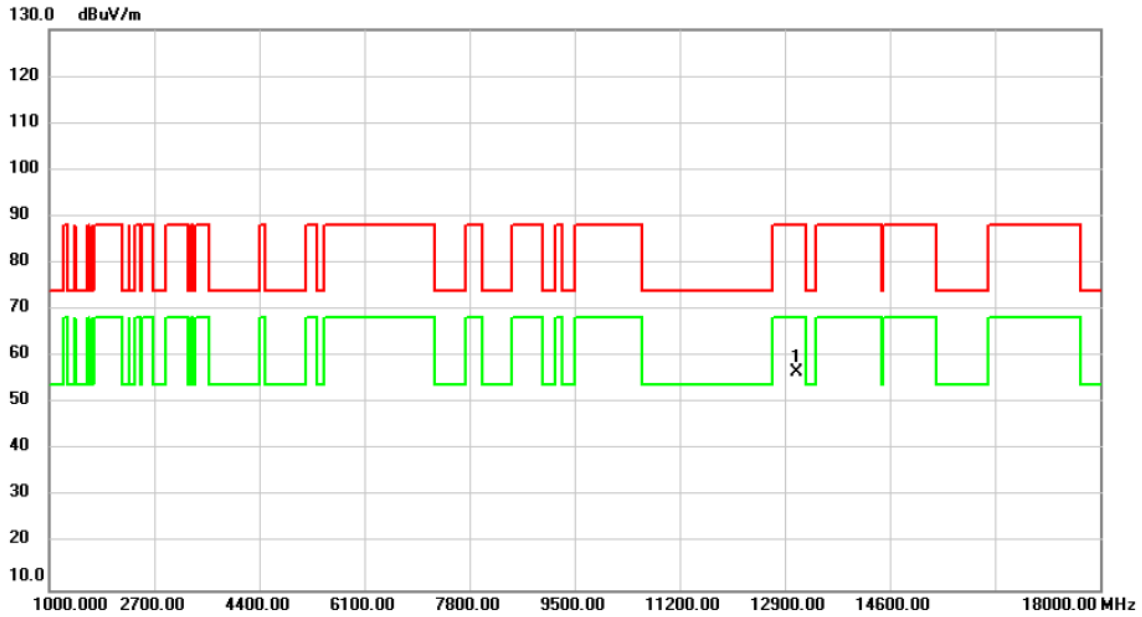


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13090.00	48.90	7.79	56.69	88.20	-31.51	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6545MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

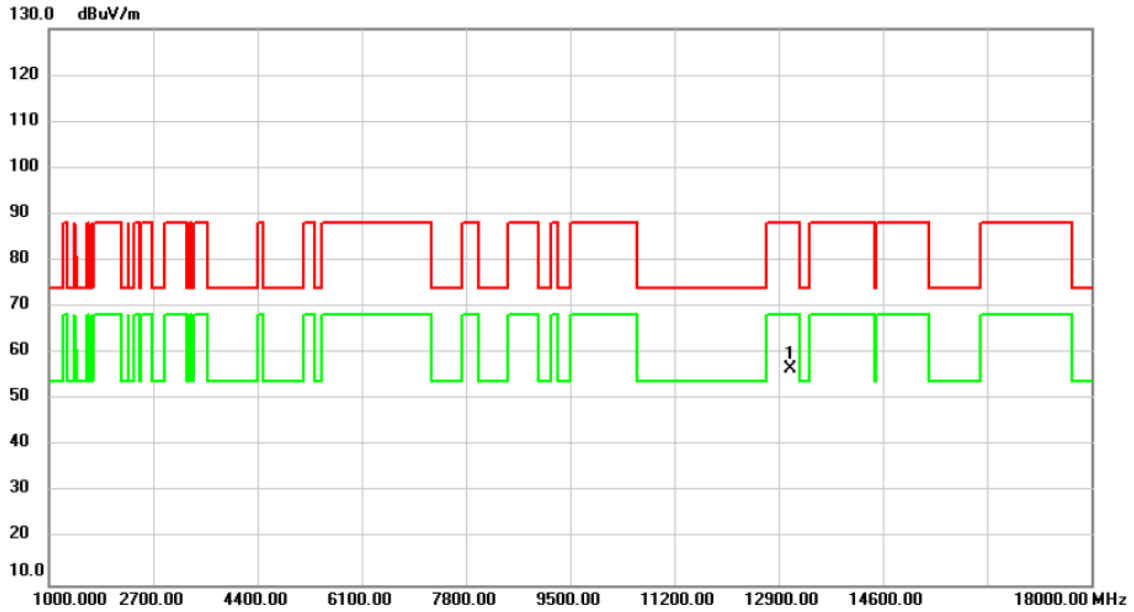


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13090.00	48.79	7.79	56.58	88.20	-31.62	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6625MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

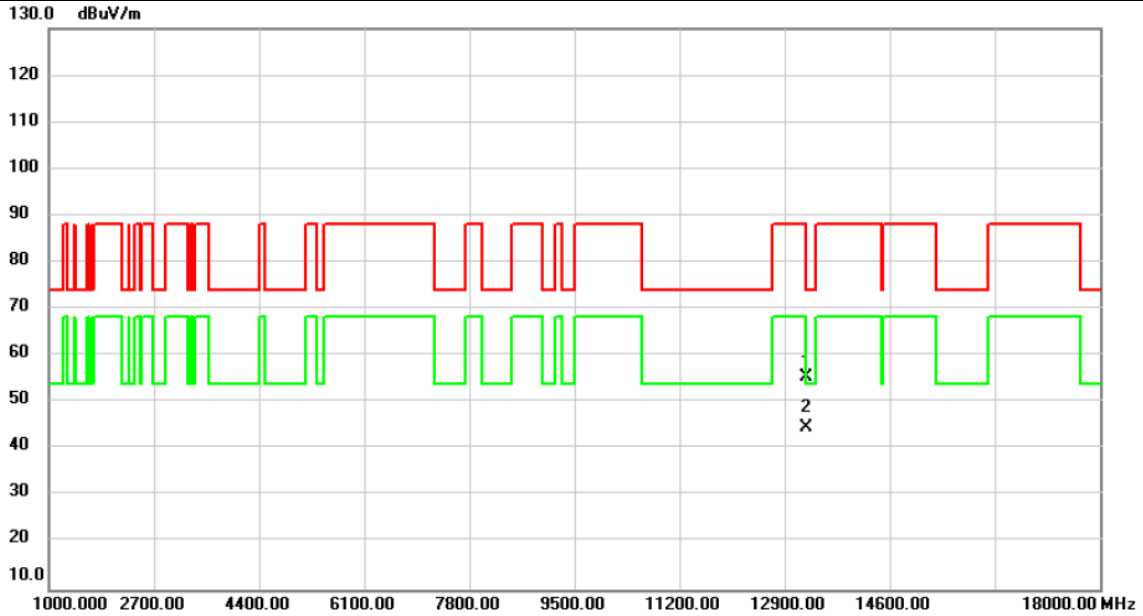


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13250.00	47.97	7.49	55.46	74.00	-18.54	peak	
2	*	13250.00	37.18	7.49	44.67	54.00	-9.33	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6625MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

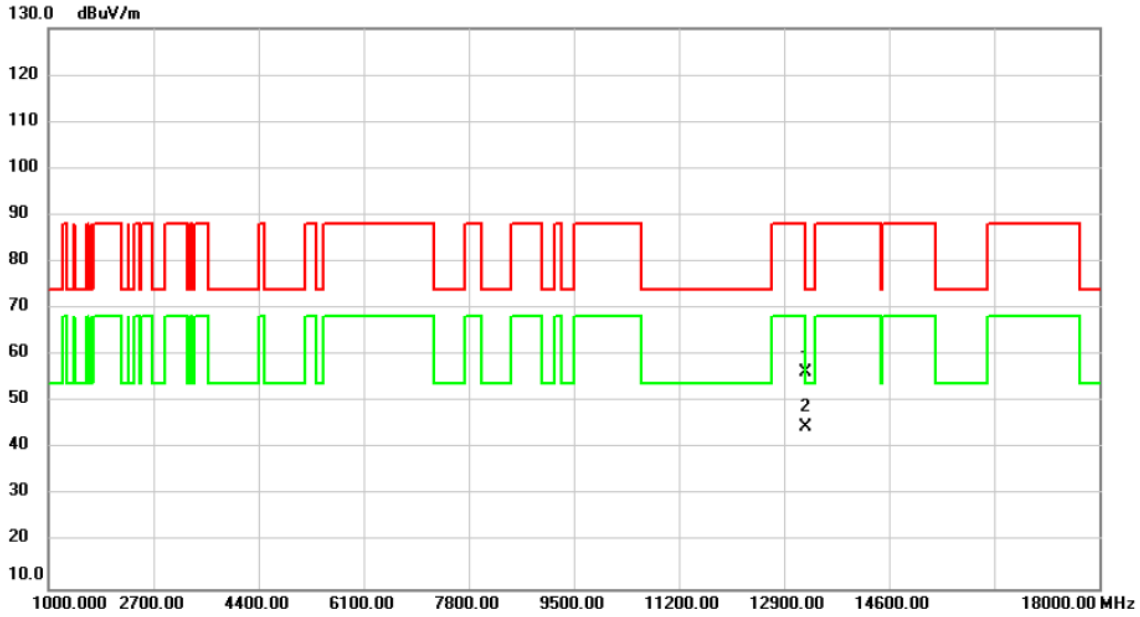


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		13250.00	48.99	7.49	56.48	74.00	-17.52	peak	
2	*	13250.00	37.09	7.49	44.58	54.00	-9.42	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6785MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

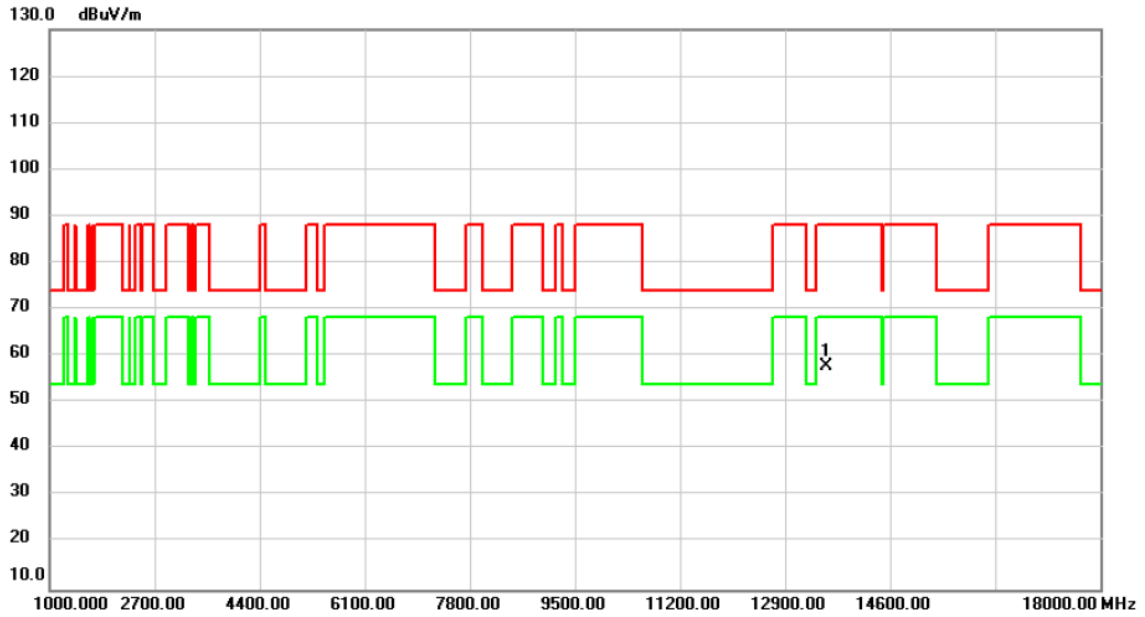


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13570.00	50.61	7.13	57.74	88.20	-30.46	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6785MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

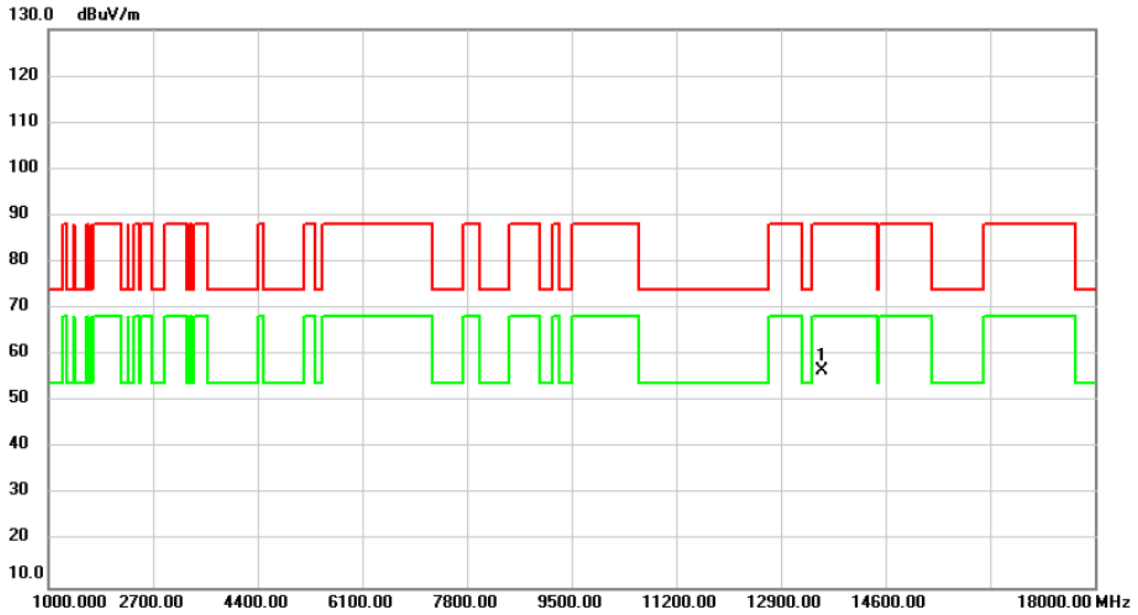


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13570.00	49.38	7.13	56.51	88.20	-31.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6865MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

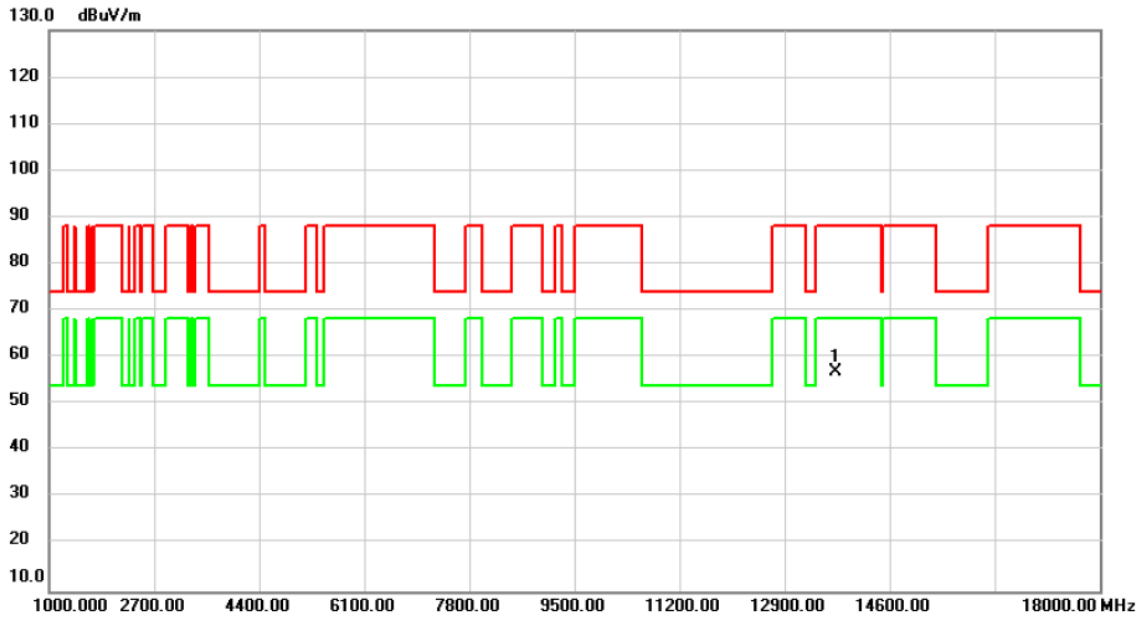


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13730.00	49.59	7.31	56.90	88.20	-31.30	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6865MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

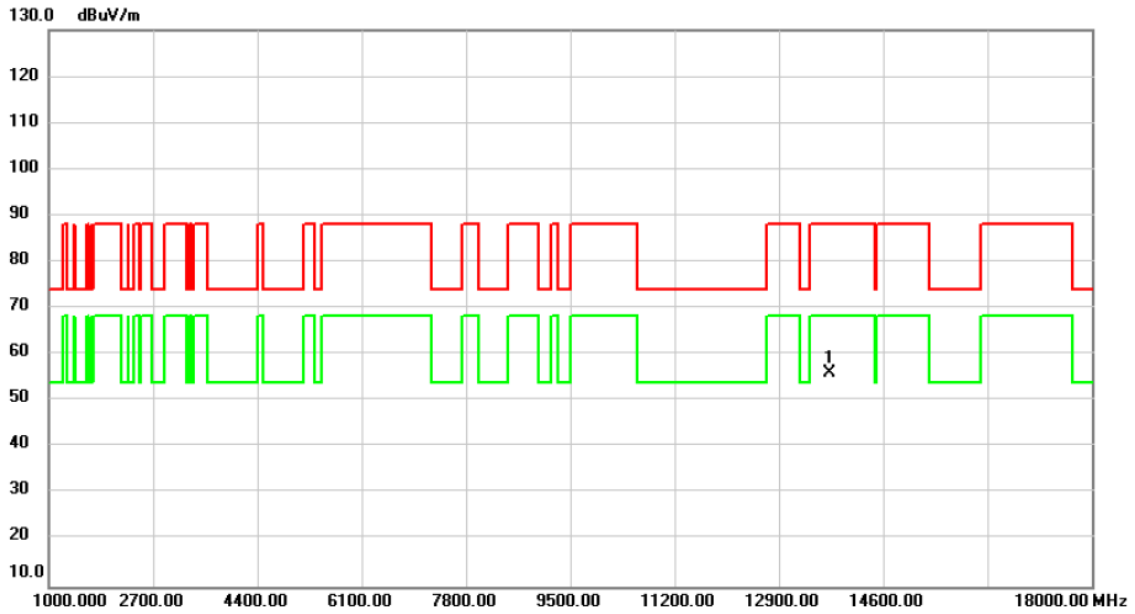


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13730.00	48.83	7.31	56.14	88.20	-32.06	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6945MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

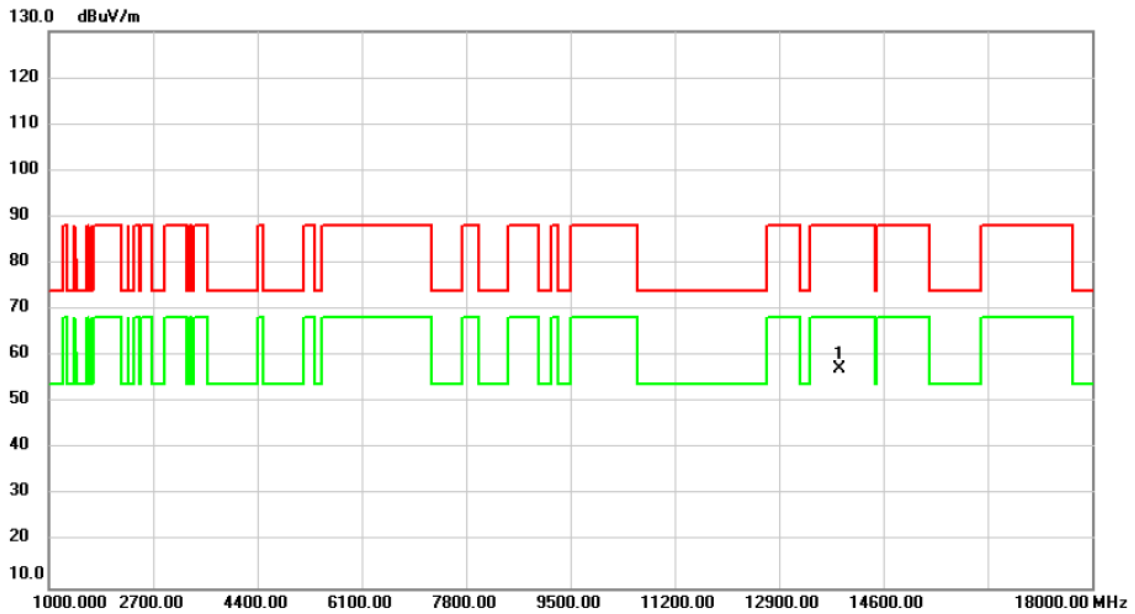


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13890.00	49.67	7.51	57.18	88.20	-31.02	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	6945MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

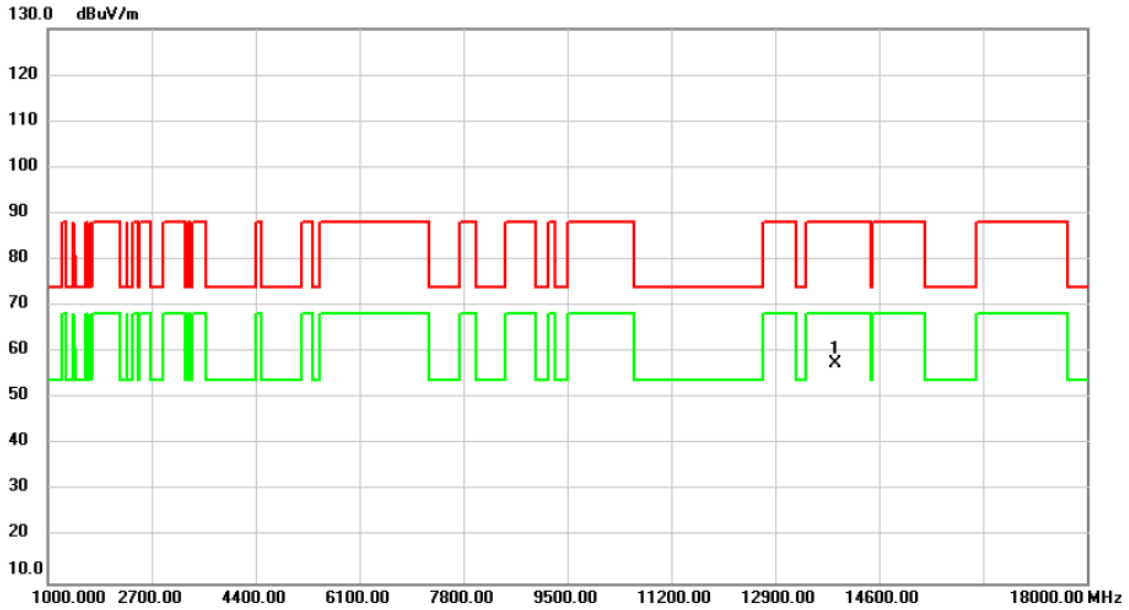


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13890.00	50.13	7.51	57.64	88.20	-30.56	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	7025MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

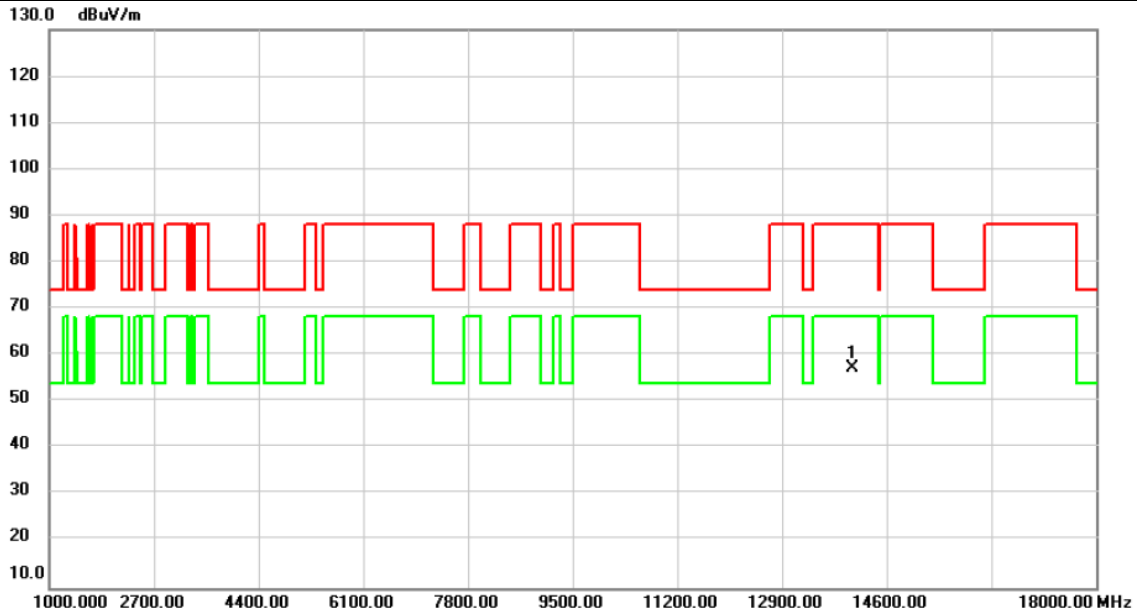


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14050.00	49.48	7.65	57.13	88.20	-31.07	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2023/11/20
Test Frequency	7025MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

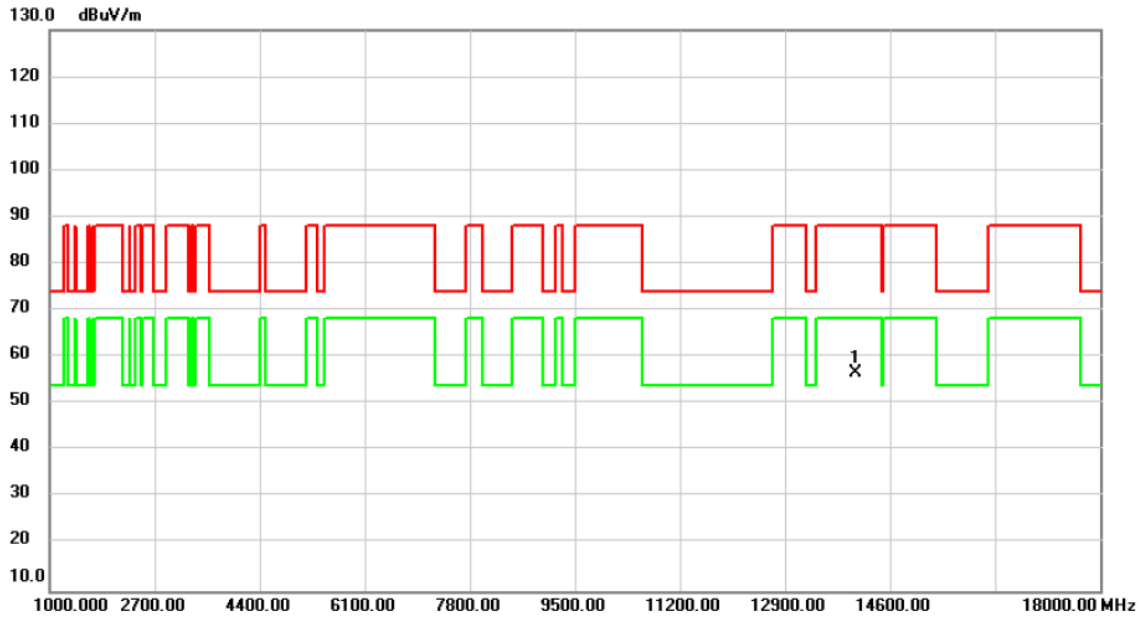


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	14050.00	49.09	7.65	56.74	88.20	-31.46	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6025MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

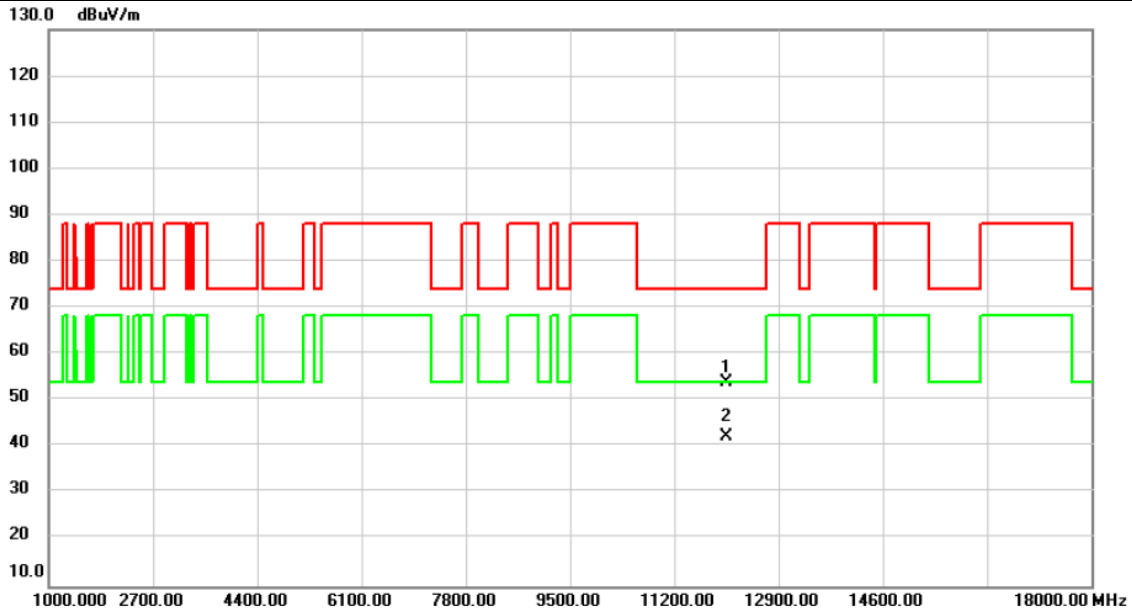


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		12050.00	47.37	6.50	53.87	74.00	-20.13	peak	
2	*	12050.00	35.70	6.50	42.20	54.00	-11.80	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6025MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

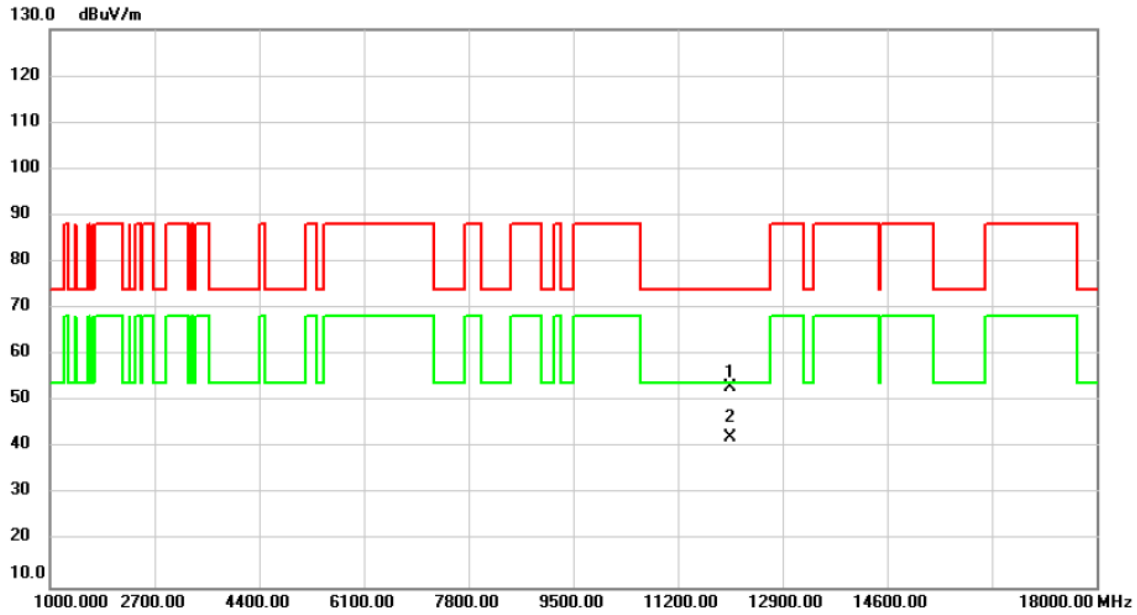


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12050.00	46.54	6.50	53.04	74.00	-20.96	peak	
2	*	12050.00	35.81	6.50	42.31	54.00	-11.69	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6345MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

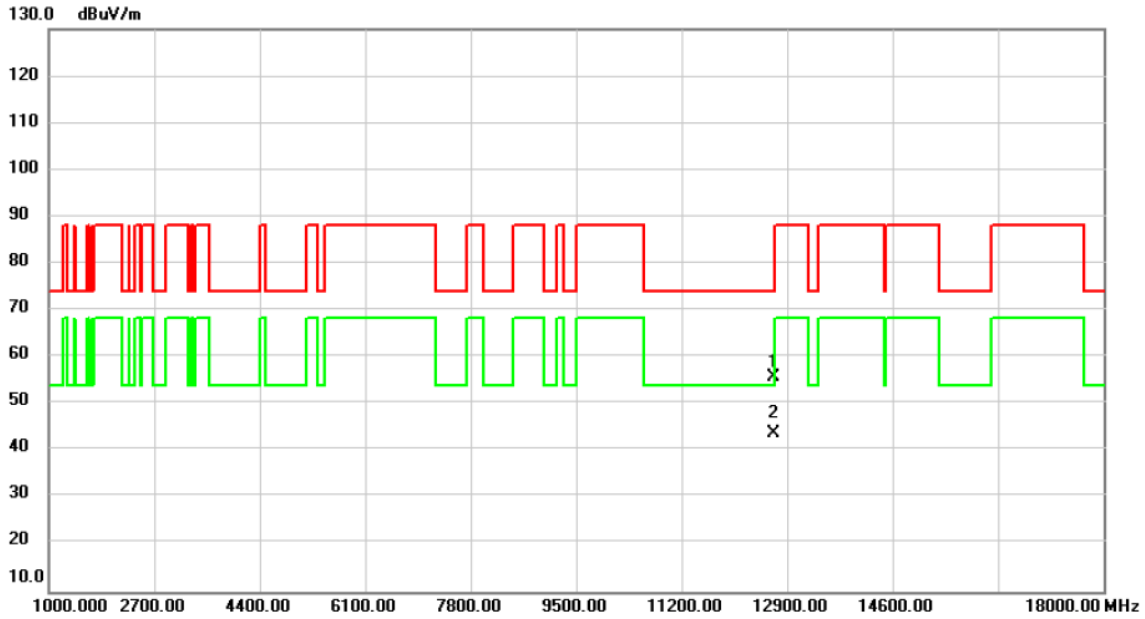


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12690.00	48.27	7.46	55.73	74.00	-18.27	peak	
2	*	12690.00	36.29	7.46	43.75	54.00	-10.25	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6345MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

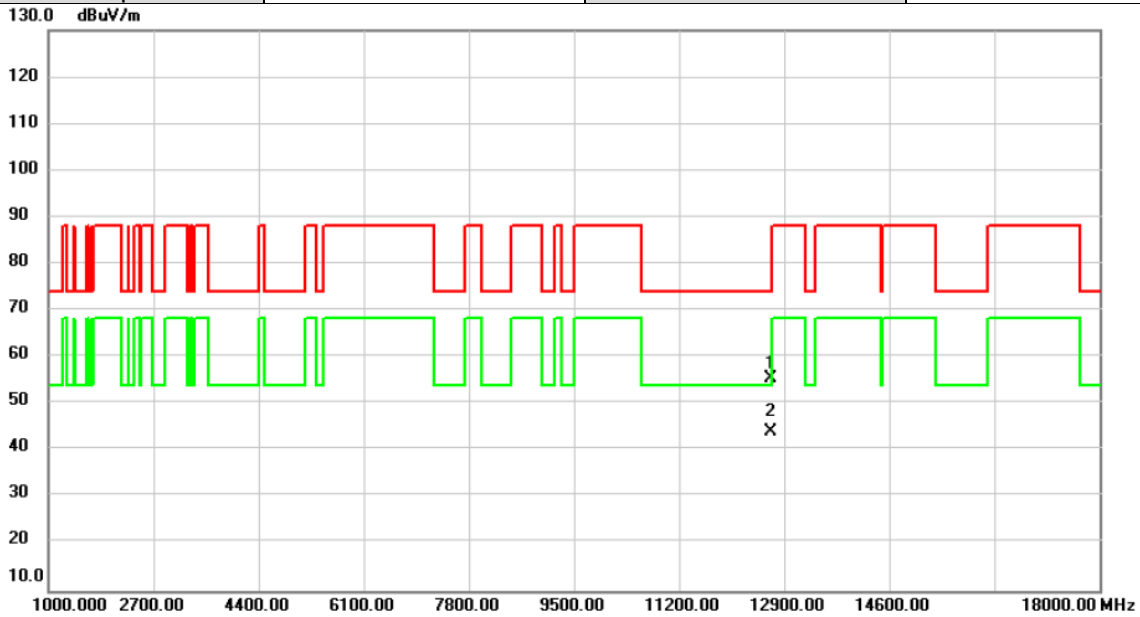


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		12690.00	48.13	7.46	55.59	74.00	-18.41	peak	
2	*	12690.00	36.46	7.46	43.92	54.00	-10.08	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6505MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

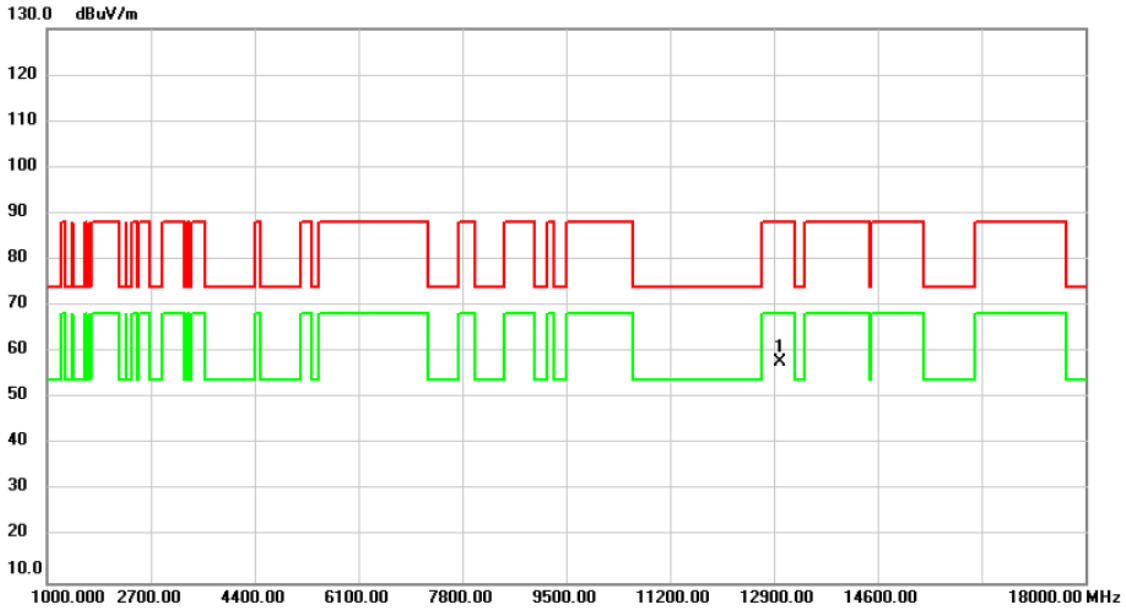


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13010.00	49.83	7.93	57.76	88.20	-30.44	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6505MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

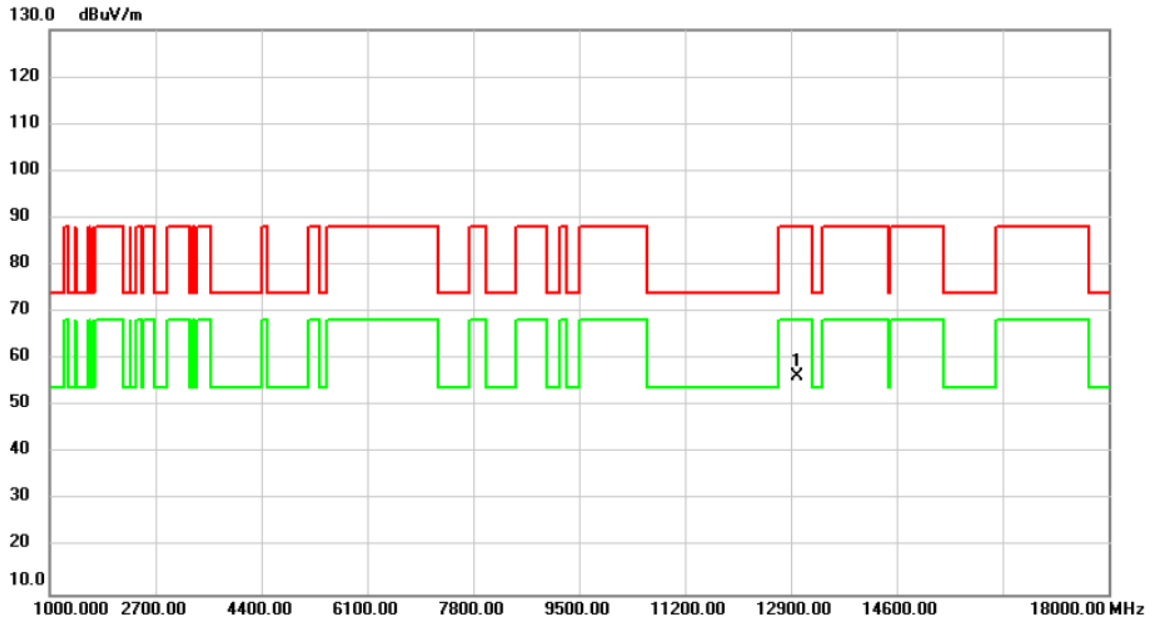


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13010.00	48.30	7.93	56.23	88.20	-31.97	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6665MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

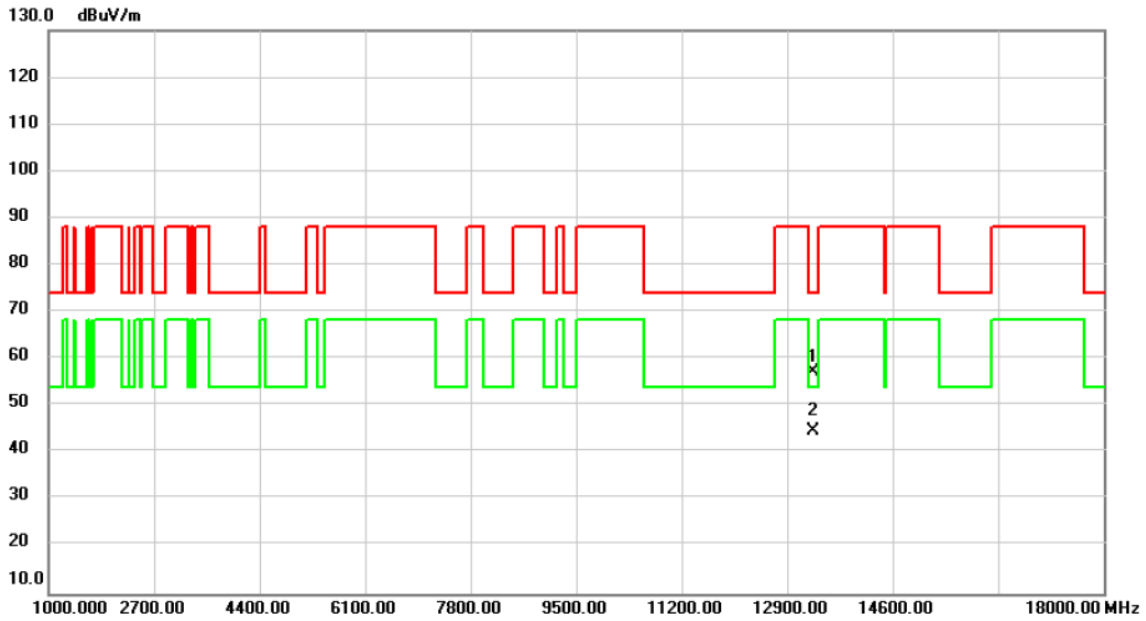


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		13330.00	49.78	7.35	57.13	74.00	-16.87	peak	
2	*	13330.00	37.22	7.35	44.57	54.00	-9.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6665MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

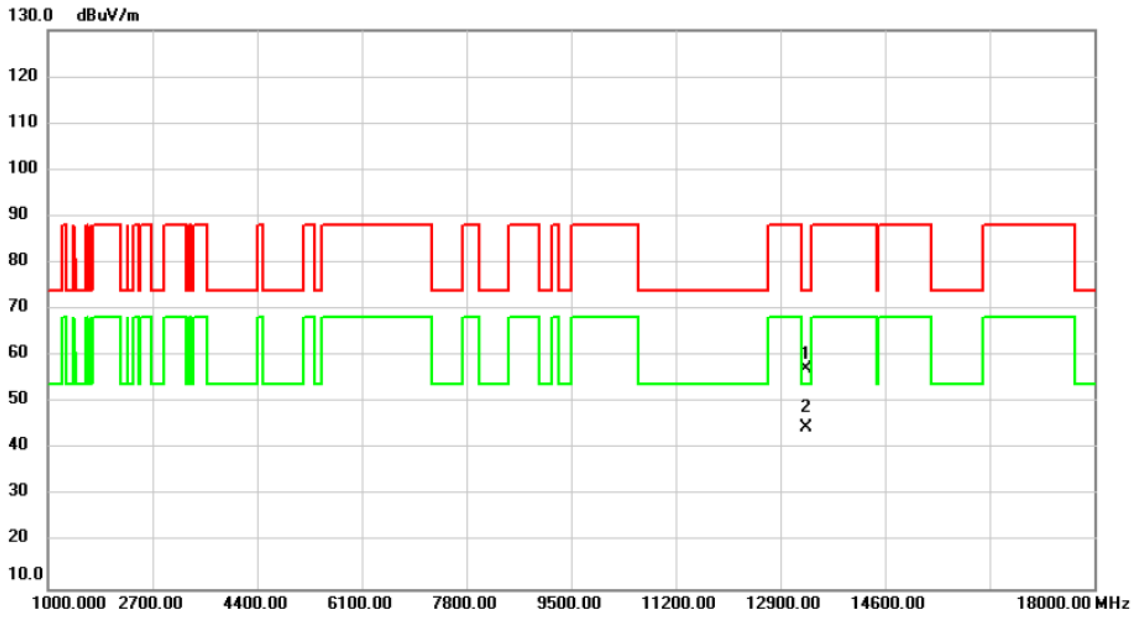


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		13330.00	49.83	7.35	57.18	74.00	-16.82	peak	
2	*	13330.00	37.16	7.35	44.51	54.00	-9.49	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6985MHz	Polarization	Vertical
Temp	21°C	Hum.	55%

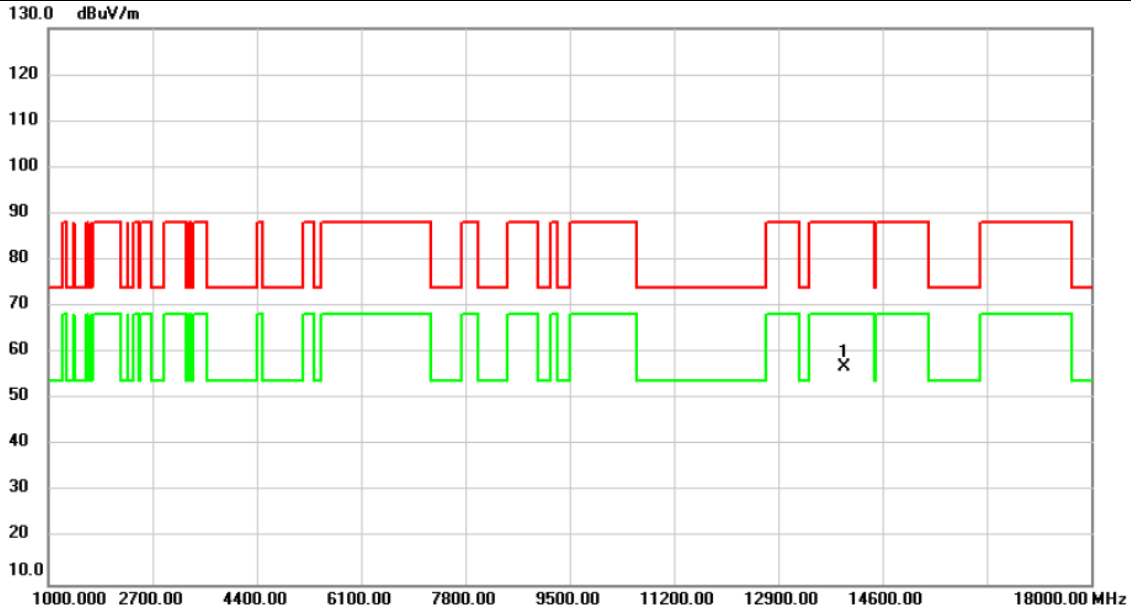


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13970.00	49.42	7.59	57.01	88.20	-31.19	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Test Mode	IEEE 802.11ax (HE160)	Test Date	2023/11/20
Test Frequency	6985MHz	Polarization	Horizontal
Temp	21°C	Hum.	55%

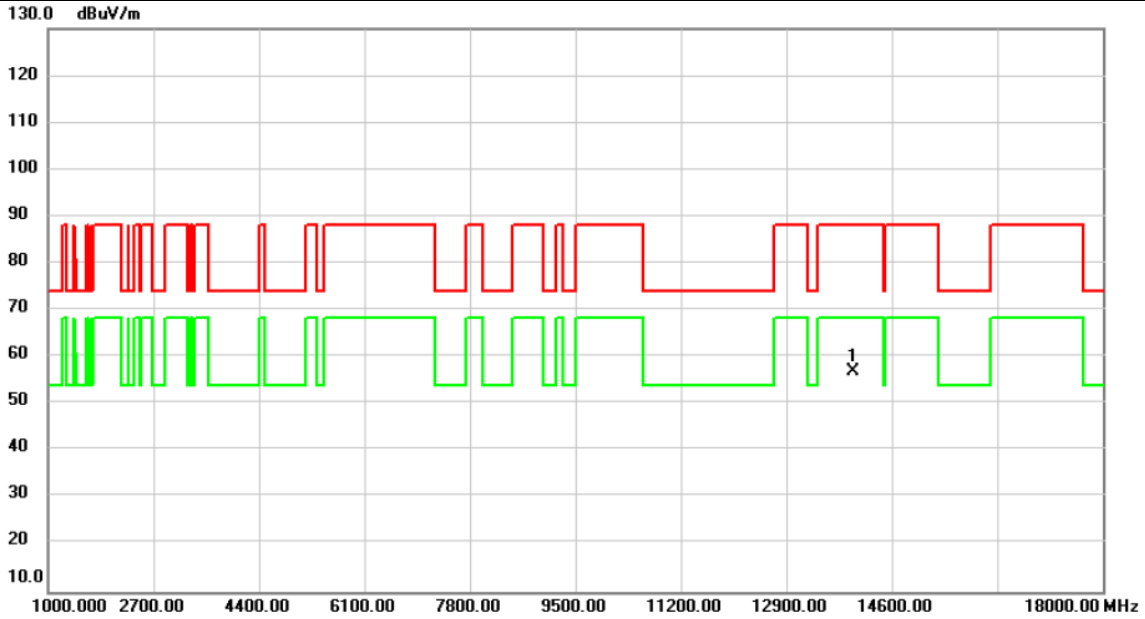


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	13970.00	49.25	7.59	56.84	88.20	-31.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/10
Test Frequency	6695MHz	Polarization	Vertical
Temp	21°C	Hum.	58%

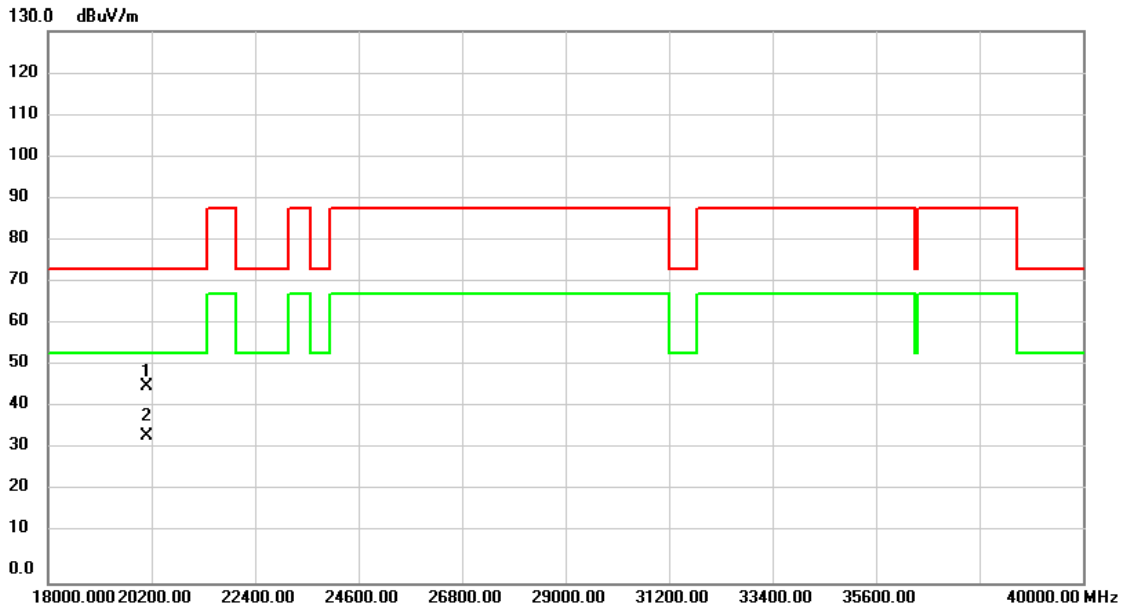


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		20085.00	54.51	-8.23	46.28	74.00	-27.72	peak	
2	*	20085.00	42.76	-8.23	34.53	54.00	-19.47	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2023/11/10
Test Frequency	6695MHz	Polarization	Horizontal
Temp	21°C	Hum.	58%

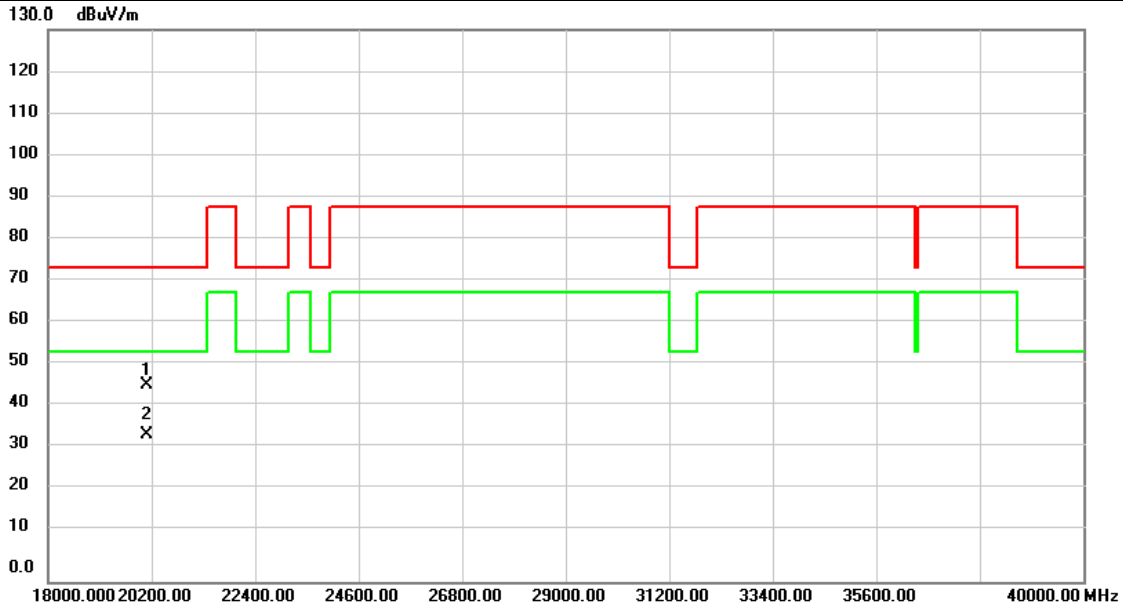

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		20085.00	54.55	-8.23	46.32	74.00	-27.68	peak	
2	*	20085.00	42.89	-8.23	34.66	54.00	-19.34	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX D    MAXIMUM E.I.R.P.

Test Mode	IEEE 802.11ax (HE20)_Antenna 1	Tested Date	2023/11/16~11/30
-----------	--------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5955	1.39	0.0014	4.39	0.0027	24	0.2512	Pass
6175	1.37	0.0014	4.37	0.0027	24	0.2512	Pass
6415	1.38	0.0014	4.38	0.0027	24	0.2512	Pass
6435	1.45	0.0014	4.45	0.0028	24	0.2512	Pass
6475	1.41	0.0014	4.41	0.0028	24	0.2512	Pass
6515	1.42	0.0014	4.42	0.0028	24	0.2512	Pass
6535	0.72	0.0012	3.72	0.0024	24	0.2512	Pass
6695	0.73	0.0012	3.73	0.0024	24	0.2512	Pass
6855	0.65	0.0012	3.65	0.0023	24	0.2512	Pass
6875	0.63	0.0012	3.63	0.0023	24	0.2512	Pass
6995	0.64	0.0012	3.64	0.0023	24	0.2512	Pass
7095	0.67	0.0012	3.67	0.0023	24	0.2512	Pass
7115	-9.53	0.0001	-6.53	0.0002	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE20)_Antenna 2	Tested Date	2023/11/16~11/30
-----------	--------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5955	1.46	0.0014	4.46	0.0028	24	0.2512	Pass
6175	1.41	0.0014	4.41	0.0028	24	0.2512	Pass
6415	1.42	0.0014	4.42	0.0028	24	0.2512	Pass
6435	1.41	0.0014	4.41	0.0028	24	0.2512	Pass
6475	1.38	0.0014	4.38	0.0027	24	0.2512	Pass
6515	1.41	0.0014	4.41	0.0028	24	0.2512	Pass
6535	0.67	0.0012	3.67	0.0023	24	0.2512	Pass
6695	0.60	0.0011	3.6	0.0023	24	0.2512	Pass
6855	0.69	0.0012	3.69	0.0023	24	0.2512	Pass
6875	0.73	0.0012	3.73	0.0024	24	0.2512	Pass
6995	0.62	0.0012	3.62	0.0023	24	0.2512	Pass
7095	0.64	0.0012	3.64	0.0023	24	0.2512	Pass
7115	-10.07	0.0001	-7.07	0.0002	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE20)_Total	Tested Date	2023/11/16~11/30
-----------	----------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5955	4.44	0.0028	7.44	0.0055	24	0.2512	Pass
6175	4.40	0.0028	7.40	0.0055	24	0.2512	Pass
6415	4.41	0.0028	7.41	0.0055	24	0.2512	Pass
6435	4.44	0.0028	7.44	0.0055	24	0.2512	Pass
6475	4.41	0.0028	7.41	0.0055	24	0.2512	Pass
6515	4.43	0.0028	7.43	0.0055	24	0.2512	Pass
6535	3.71	0.0023	6.71	0.0047	24	0.2512	Pass
6695	3.68	0.0023	6.68	0.0047	24	0.2512	Pass
6855	3.68	0.0023	6.68	0.0047	24	0.2512	Pass
6875	3.69	0.0023	6.69	0.0047	24	0.2512	Pass
6995	3.64	0.0023	6.64	0.0046	24	0.2512	Pass
7095	3.67	0.0023	6.67	0.0046	24	0.2512	Pass
7115	-6.78	0.0002	-3.78	0.0004	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE40)_Antenna 1	Tested Date	2023/11/16~11/30
-----------	--------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5965	4.69	0.0029	7.69	0.0059	24	0.2512	Pass
6165	4.70	0.0030	7.70	0.0059	24	0.2512	Pass
6405	4.65	0.0029	7.65	0.0058	24	0.2512	Pass
6445	4.69	0.0029	7.69	0.0059	24	0.2512	Pass
6485	4.69	0.0030	7.69	0.0059	24	0.2512	Pass
6525	4.65	0.0029	7.65	0.0058	24	0.2512	Pass
6565	3.92	0.0025	6.92	0.0049	24	0.2512	Pass
6685	3.96	0.0029	6.96	0.0050	24	0.2512	Pass
6845	3.94	0.0030	6.94	0.0049	24	0.2512	Pass
6885	3.91	0.0029	6.91	0.0049	24	0.2512	Pass
7085	3.97	0.0029	6.97	0.0050	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE40)_Antenna 2	Tested Date	2023/11/16~11/30
-----------	--------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5965	4.74	0.0030	7.74	0.0059	24	0.2512	Pass
6165	4.64	0.0029	7.64	0.0058	24	0.2512	Pass
6405	4.71	0.0030	7.71	0.0059	24	0.2512	Pass
6445	4.63	0.0029	7.63	0.0058	24	0.2512	Pass
6485	4.72	0.0030	7.72	0.0059	24	0.2512	Pass
6525	4.68	0.0029	7.68	0.0059	24	0.2512	Pass
6565	3.98	0.0025	6.98	0.0050	24	0.2512	Pass
6685	3.92	0.0025	6.92	0.0049	24	0.2512	Pass
6845	3.96	0.0025	6.96	0.0050	24	0.2512	Pass
6885	3.92	0.0025	6.92	0.0049	24	0.2512	Pass
7085	3.91	0.0025	6.91	0.0049	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE40)_Total	Tested Date	2023/11/16~11/30
-----------	----------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5965	7.73	0.0059	10.73	0.0118	24	0.2512	Pass
6165	7.68	0.0059	10.68	0.0117	24	0.2512	Pass
6405	7.69	0.0059	10.69	0.0117	24	0.2512	Pass
6445	7.67	0.0058	10.67	0.0117	24	0.2512	Pass
6485	7.72	0.0059	10.72	0.0118	24	0.2512	Pass
6525	7.68	0.0059	10.68	0.0117	24	0.2512	Pass
6565	6.96	0.0050	9.96	0.0099	24	0.2512	Pass
6685	6.95	0.0050	9.95	0.0099	24	0.2512	Pass
6845	6.96	0.0050	9.96	0.0099	24	0.2512	Pass
6885	6.93	0.0049	9.93	0.0098	24	0.2512	Pass
7085	6.95	0.0050	9.95	0.0099	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE80)_Antenna 1	Tested Date	2023/11/16~11/30
-----------	--------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5985	7.13	0.0052	10.13	0.0103	24	0.2512	Pass
6145	7.24	0.0053	10.24	0.0106	24	0.2512	Pass
6385	7.22	0.0053	10.22	0.0105	24	0.2512	Pass
6465	7.15	0.0052	10.15	0.0104	24	0.2512	Pass
6545	7.17	0.0052	10.17	0.0104	24	0.2512	Pass
6625	6.46	0.0044	9.46	0.0088	24	0.2512	Pass
6785	6.41	0.0044	9.41	0.0087	24	0.2512	Pass
6865	6.42	0.0044	9.42	0.0087	24	0.2512	Pass
6945	6.41	0.0044	9.41	0.0087	24	0.2512	Pass
7025	6.49	0.0045	9.49	0.0089	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE80)_Antenna 2	Tested Date	2023/11/16~11/30
-----------	--------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5985	7.14	0.0052	10.14	0.0103	24	0.2512	Pass
6145	7.19	0.0052	10.19	0.0104	24	0.2512	Pass
6385	7.16	0.0052	10.16	0.0104	24	0.2512	Pass
6465	7.16	0.0052	10.16	0.0104	24	0.2512	Pass
6545	7.20	0.0052	10.20	0.0105	24	0.2512	Pass
6625	6.42	0.0044	9.42	0.0087	24	0.2512	Pass
6785	6.45	0.0044	9.45	0.0088	24	0.2512	Pass
6865	6.47	0.0044	9.47	0.0089	24	0.2512	Pass
6945	6.45	0.0044	9.45	0.0088	24	0.2512	Pass
7025	6.48	0.0044	9.48	0.0089	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE80) _Total	Tested Date	2023/11/16~11/30
-----------	-----------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
5985	10.15	0.0104	13.15	0.0207	24	0.2512	Pass
6145	10.23	0.0105	13.23	0.0210	24	0.2512	Pass
6385	10.20	0.0105	13.20	0.0209	24	0.2512	Pass
6465	10.17	0.0104	13.17	0.0207	24	0.2512	Pass
6545	10.20	0.0105	13.20	0.0209	24	0.2512	Pass
6625	9.45	0.0088	12.45	0.0176	24	0.2512	Pass
6785	9.44	0.0088	12.44	0.0175	24	0.2512	Pass
6865	9.46	0.0088	12.46	0.0176	24	0.2512	Pass
6945	9.44	0.0088	12.44	0.0175	24	0.2512	Pass
7025	9.50	0.0089	12.50	0.0178	24	0.2512	Pass



Test Mode	IEEE 802.11ax (HE160)_Antenna 1	Tested Date	2023/11/16~11/30
-----------	---------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
6025	9.92	0.0098	12.92	0.0196	24	0.2512	Pass
6345	9.91	0.0098	12.91	0.0195	24	0.2512	Pass
6505	9.91	0.0098	12.91	0.0195	24	0.2512	Pass
6665	9.16	0.0082	12.16	0.0164	24	0.2512	Pass
6985	9.14	0.0082	12.14	0.0164	24	0.2512	Pass

Test Mode	IEEE 802.11ax (HE160)_Antenna 2	Tested Date	2023/11/16~11/30
-----------	---------------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
6025	9.92	0.0098	12.92	0.0196	24	0.2512	Pass
6345	9.94	0.0099	12.94	0.0197	24	0.2512	Pass
6505	9.90	0.0098	12.90	0.0195	24	0.2512	Pass
6665	9.22	0.0084	12.22	0.0167	24	0.2512	Pass
6985	9.13	0.0082	12.13	0.0163	24	0.2512	Pass


Test Mode	IEEE 802.11ax (HE160)_Total	Tested Date	2023/11/16~11/30
-----------	-----------------------------	-------------	------------------

Test Frequency (MHz)	Conducted AVG Power + Duty Factor (dBm)	Conducted AVG Power + Duty Factor (W)	E.I.R.P. (dBm)	E.I.R.P. (W)	E.I.R.P. Limit (dBm)	E.I.R.P. Limit (W)	Result
6025	12.93	0.0196	15.93	0.0392	24	0.2512	Pass
6345	12.94	0.0197	15.94	0.0393	24	0.2512	Pass
6505	12.92	0.0196	15.92	0.0391	24	0.2512	Pass
6665	12.20	0.0166	15.20	0.0331	24	0.2512	Pass
6985	12.15	0.0164	15.15	0.0327	24	0.2512	Pass


## **APPENDIX E    CONTENTION-BASED PROTOCOL**

Test Mode UNII-5, UNII-6, UNII-7, UNII-8


### Incumbent Signal (AWGN) Frequency: 6025 MHz

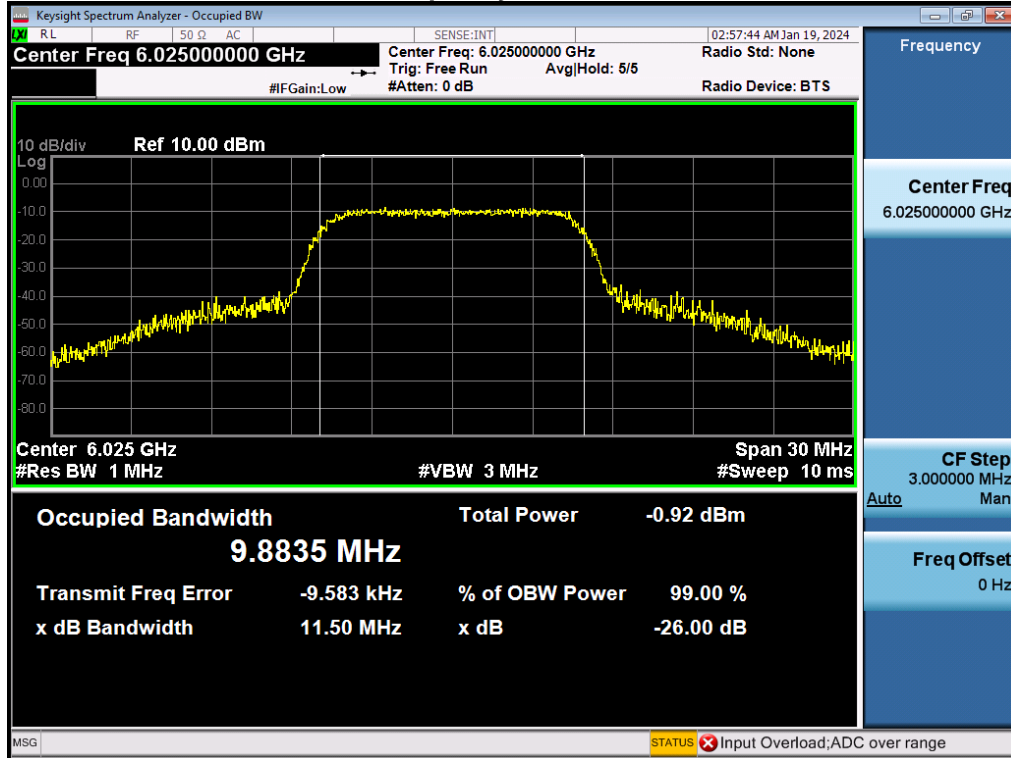


### Frequency: 5950 MHz

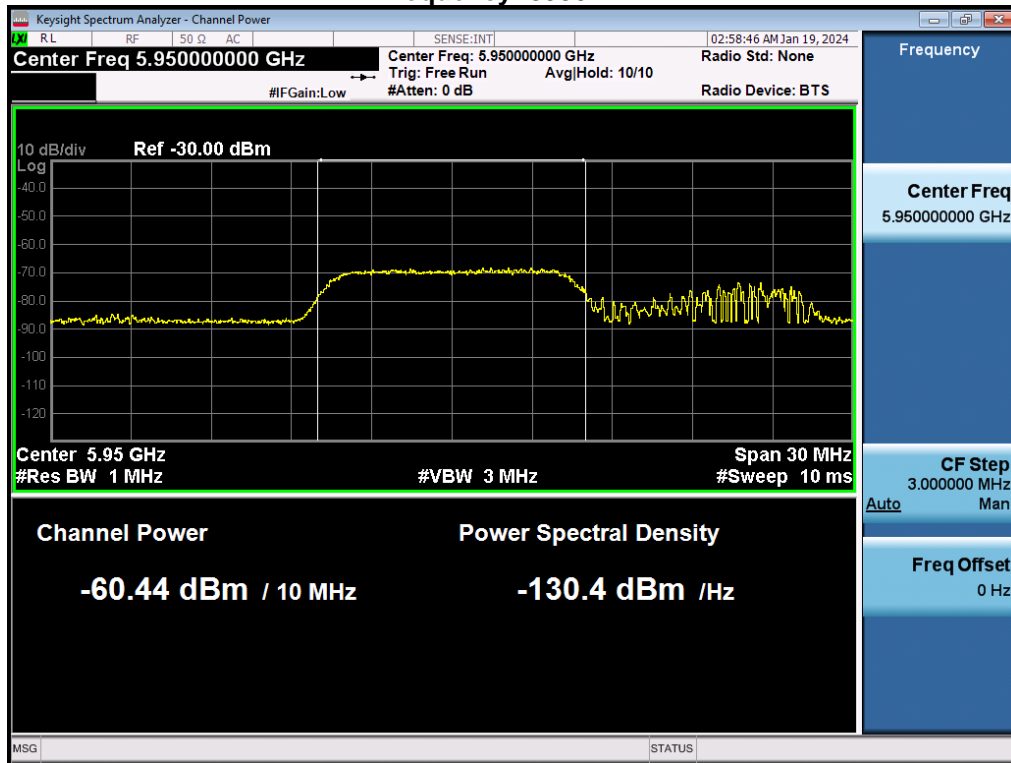


### Frequency: 6025 MHz

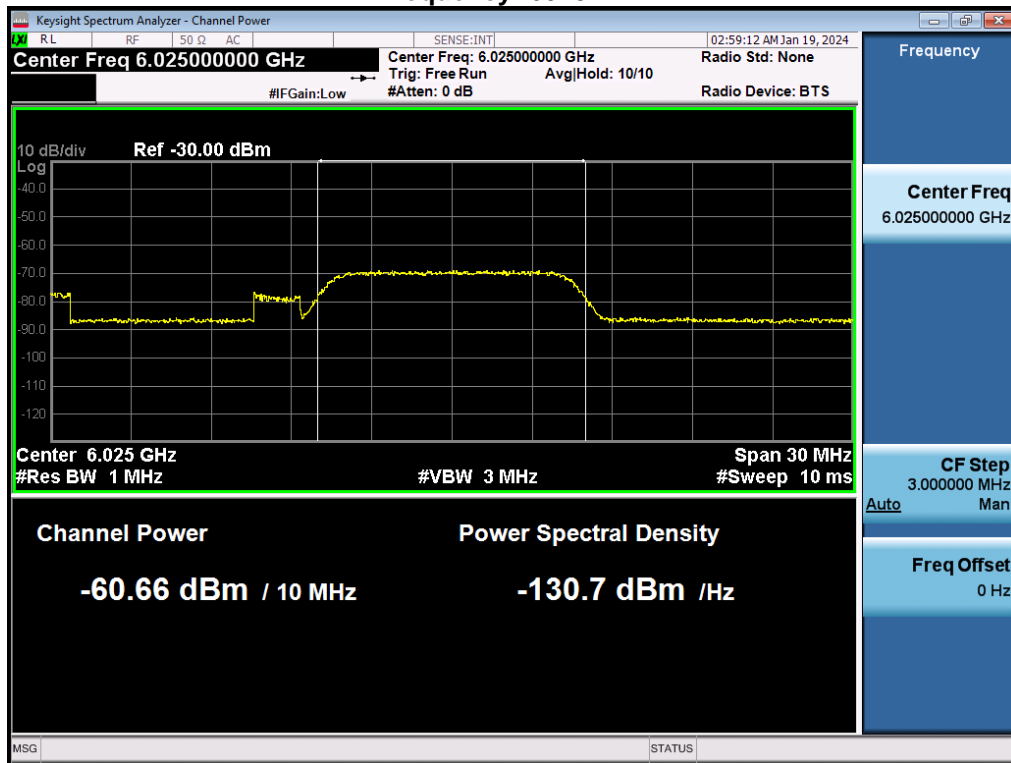


### Frequency: 6100 MHz

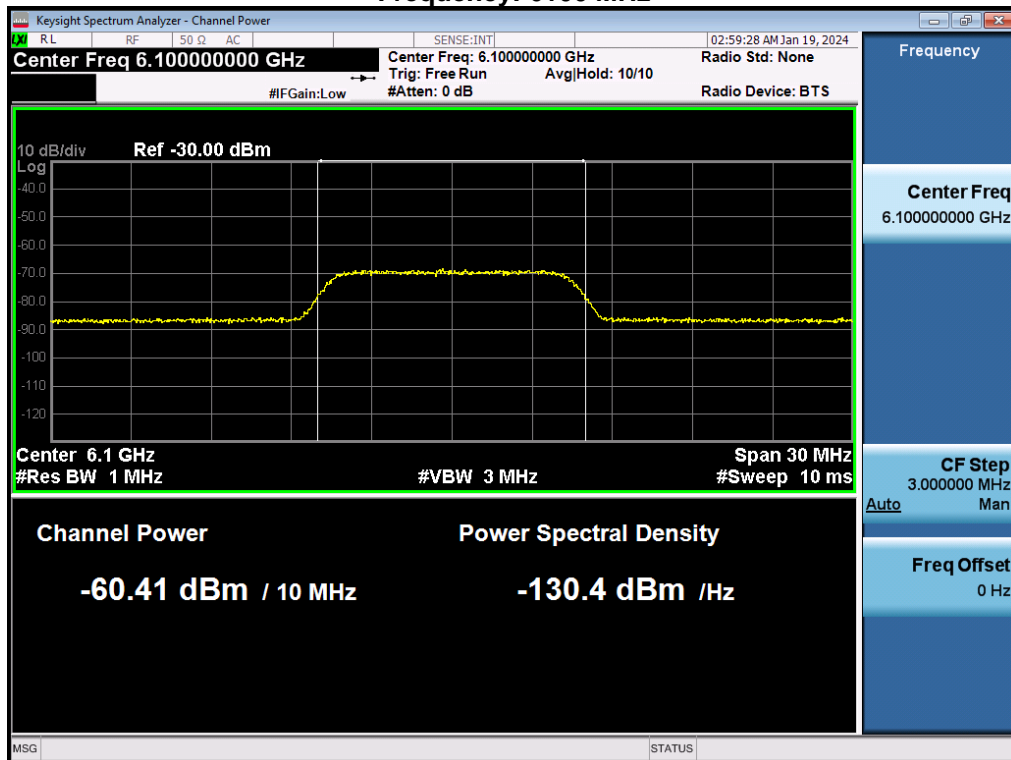


### Frequency: 6175 MHz

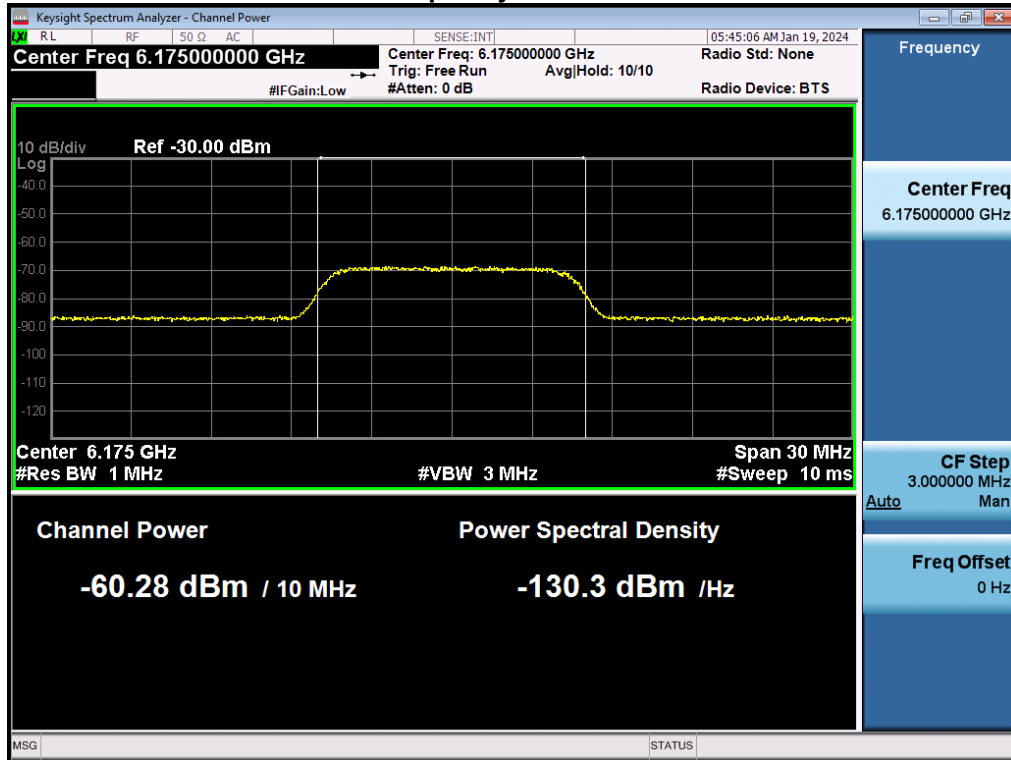


### Frequency: 6430 MHz

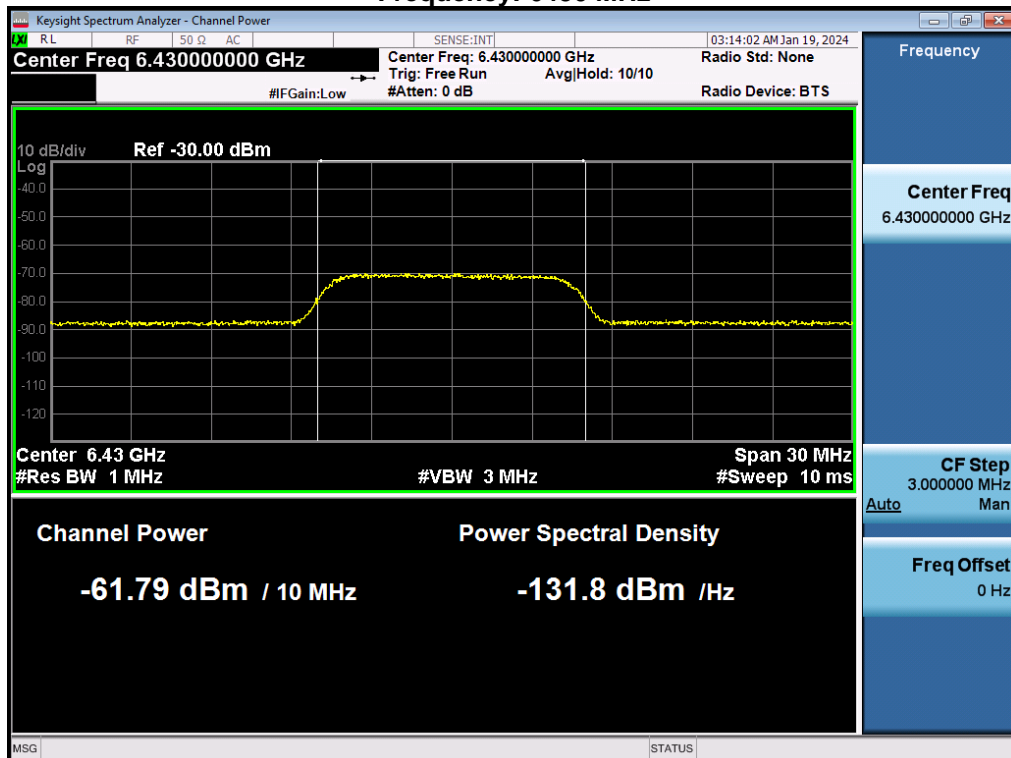


### Frequency: 6475 MHz

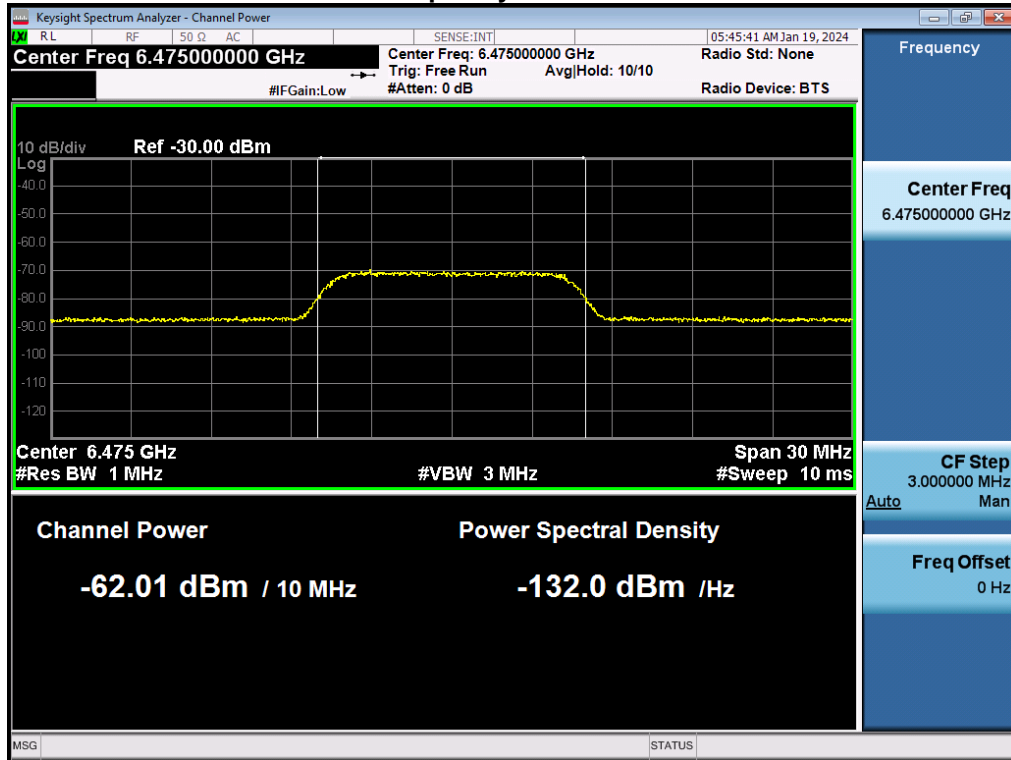


### Frequency: 6505 MHz

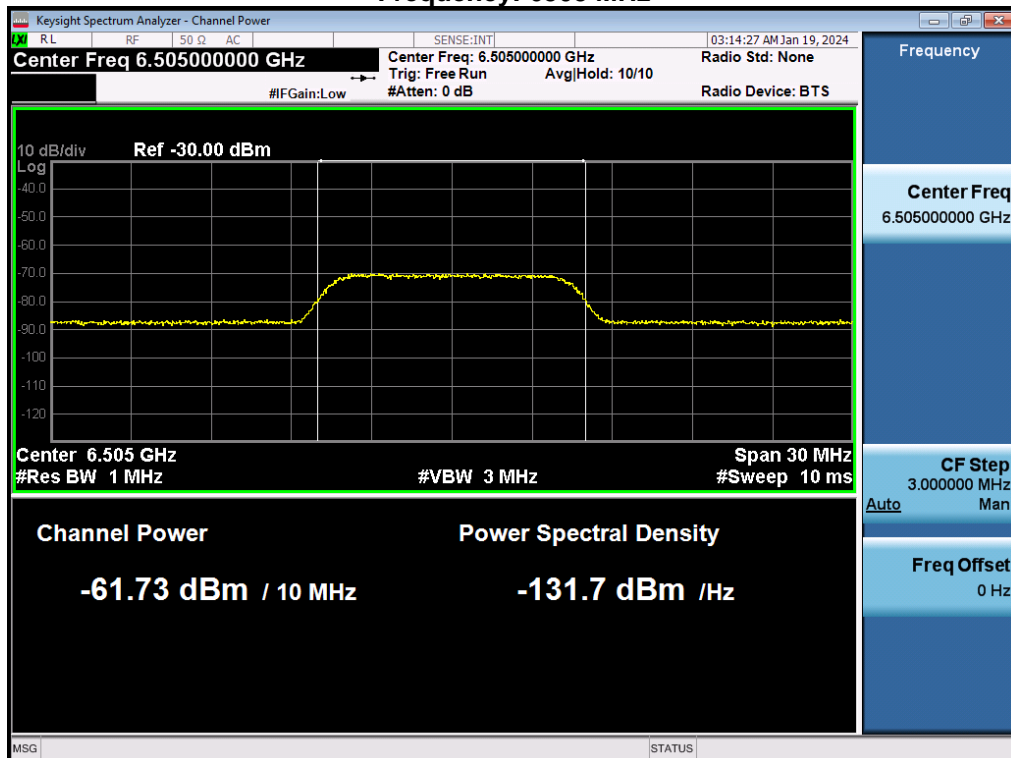


### Frequency: 6580 MHz

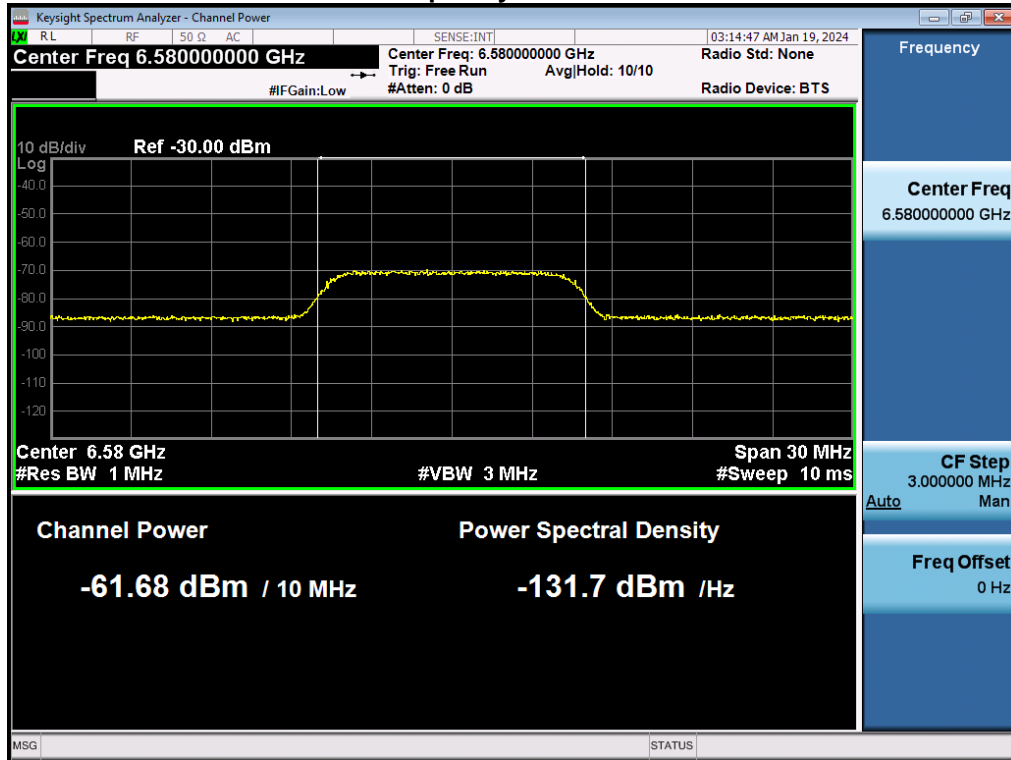


### Frequency: 6590 MHz

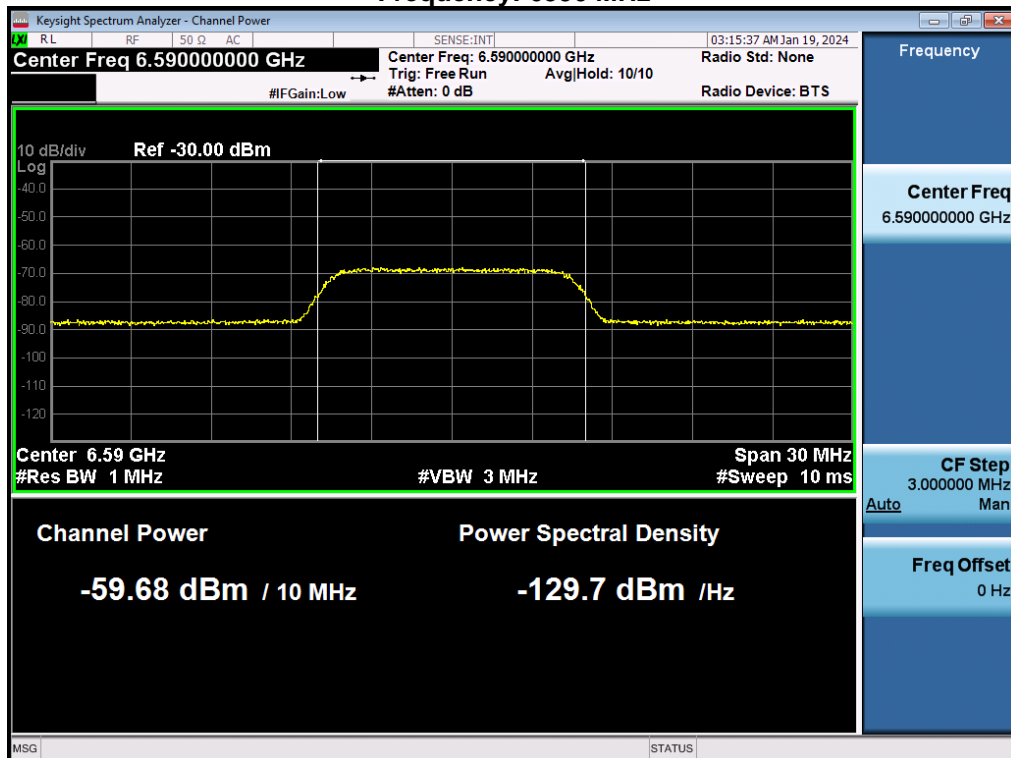

### Frequency: 6665 MHz

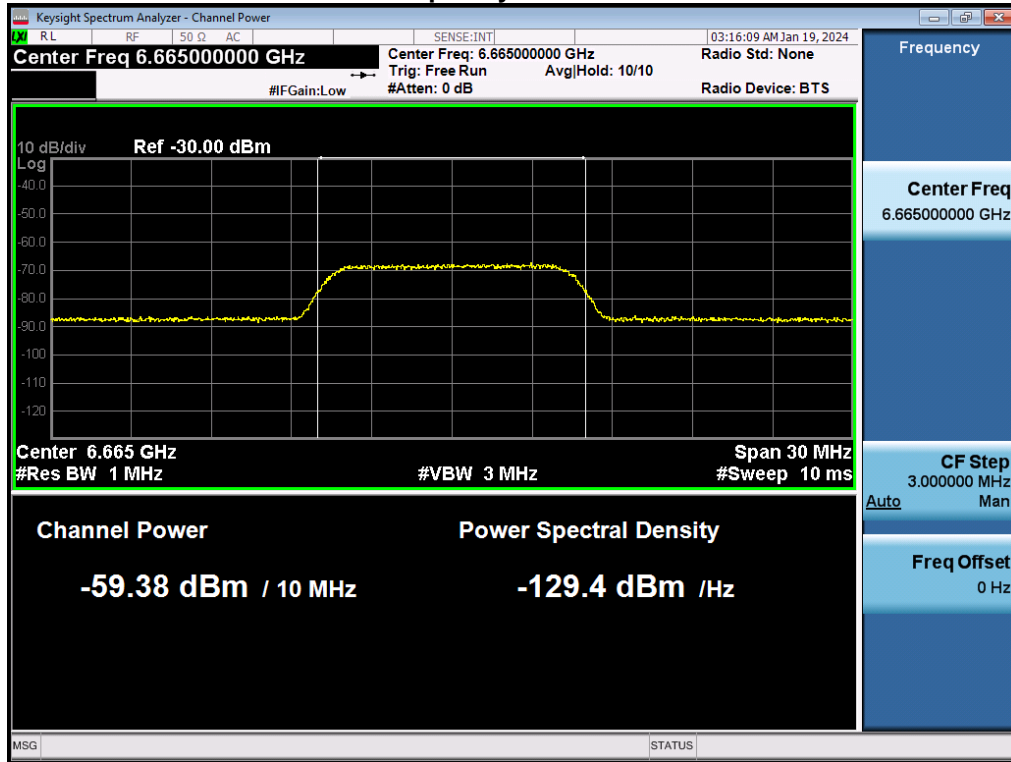


### Frequency: 6695 MHz

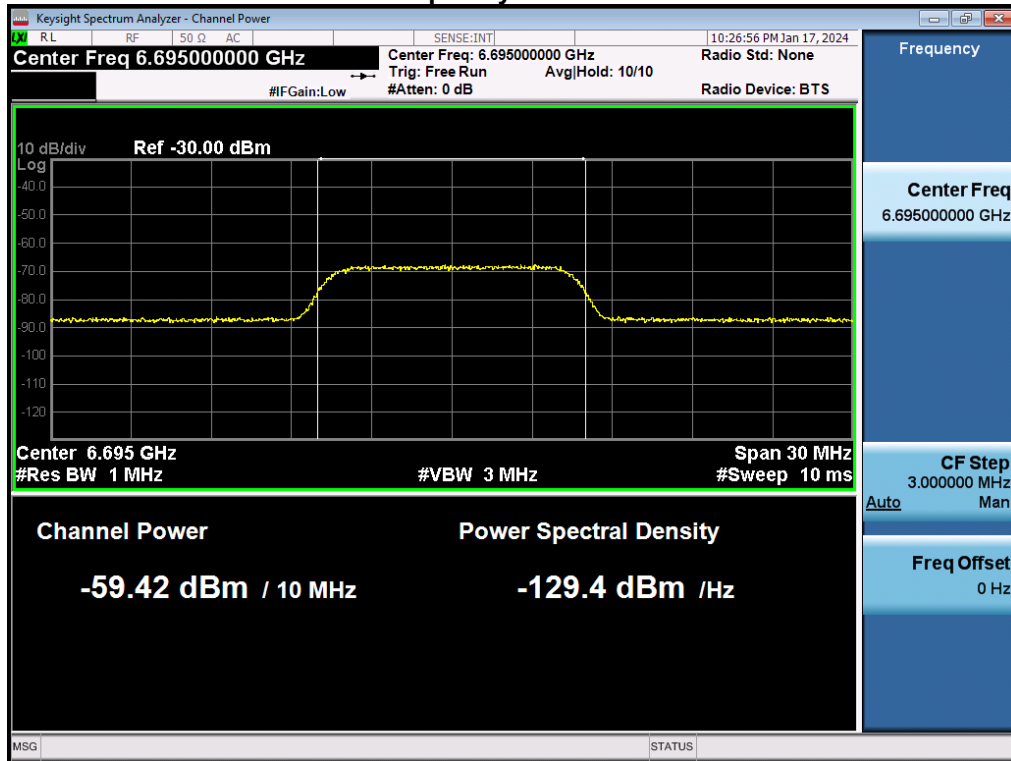





### Frequency: 6740 MHz

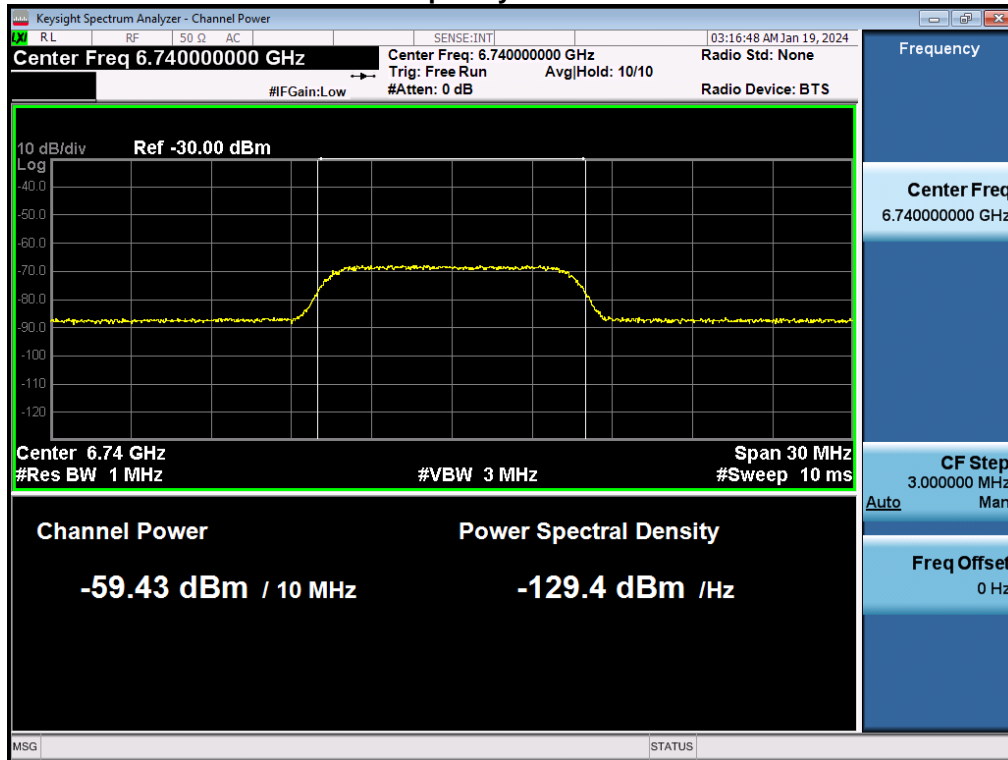


### Frequency: 6910 MHz

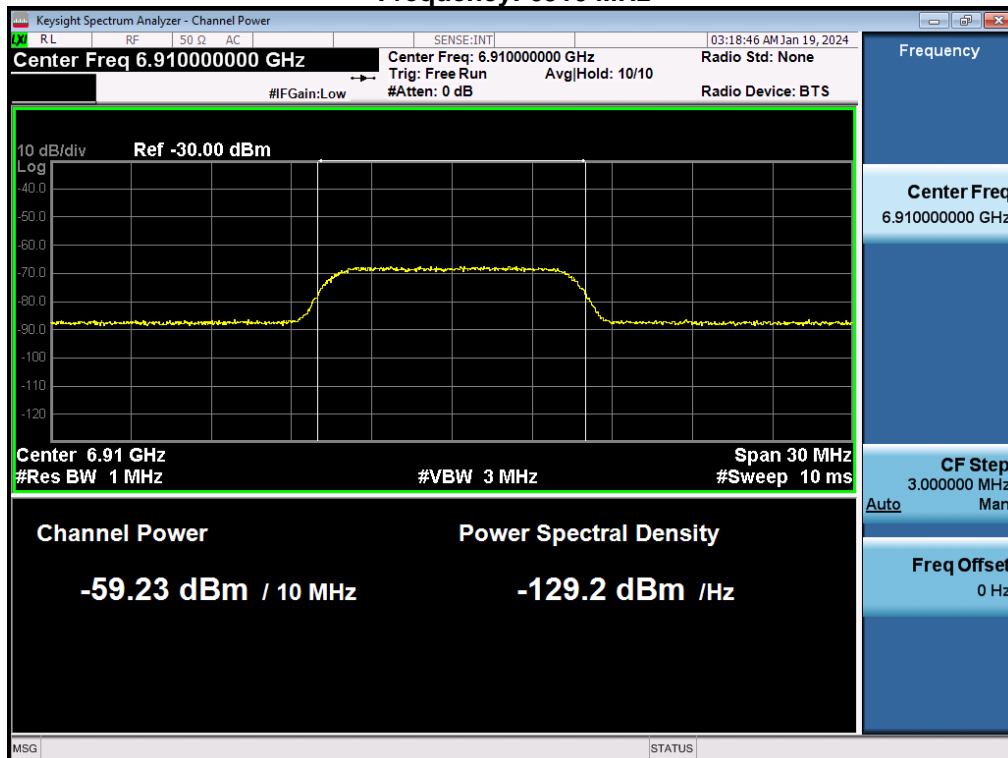

### Frequency: 6985 MHz

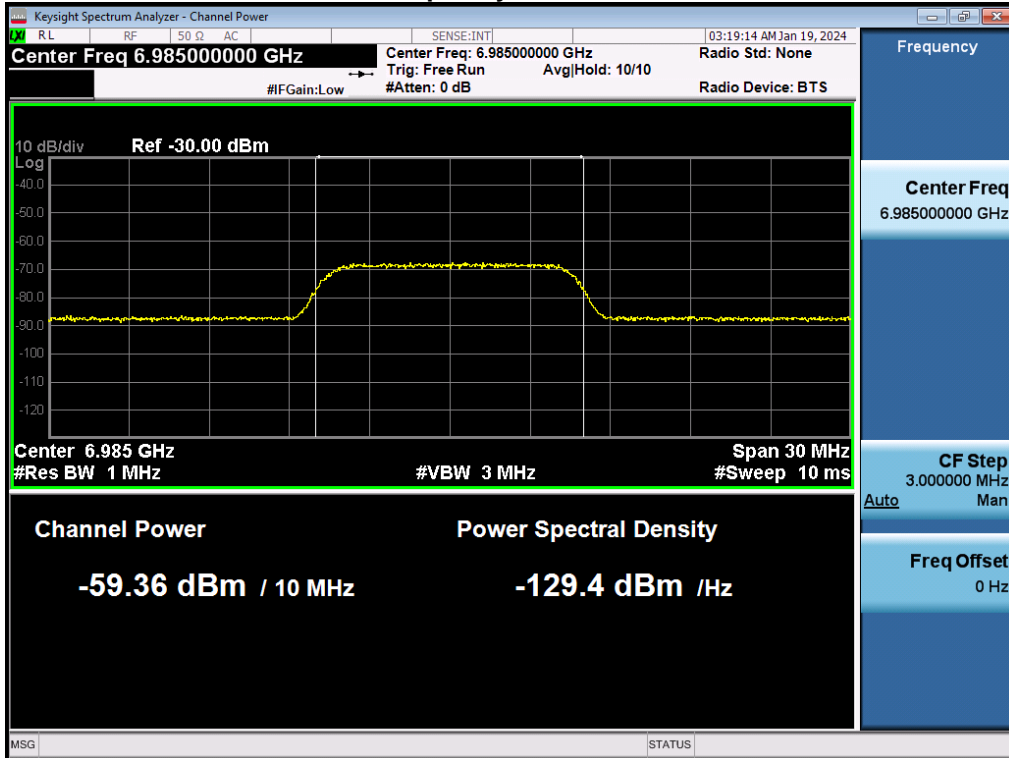

### Frequency: 6985 MHz

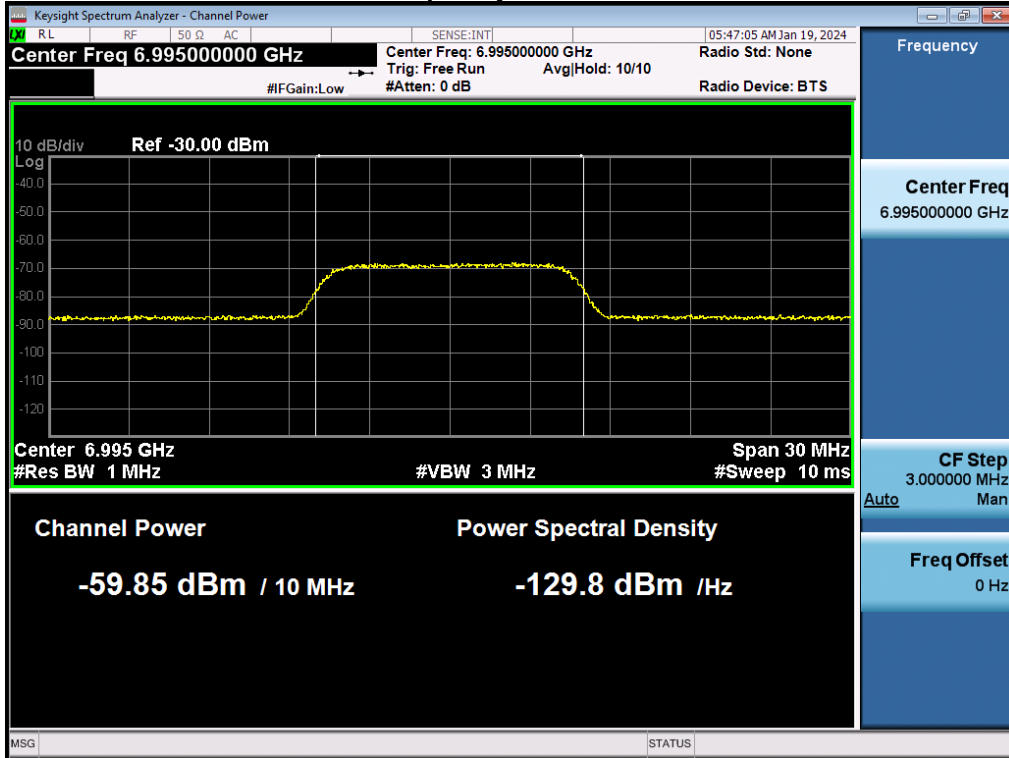


## Frequency: 7060 MHz




**Detection power level and detection probability**

	Test Mode	Bandwidth (MHz)	Channel	Frequency (MHz)	interference Frequency (MHz)	Detection power level (dBm)	Detection Power Limit (dBm)	Number of Times	Number of Detected	Detection Probability	Detection Probability Limit	Test Result
UNII-5	802.11ax	20	45	6175	6175	-60.28	-60.20	10	10	100%	90%	Pass
					5950	-60.44	-60.20	10	10	100%	90%	Pass
	802.11ax	160	15	6025	6025	-60.66	-60.20	10	9	90%	90%	Pass
					6100	-60.41	-60.20	10	10	100%	90%	Pass
UNII-6	802.11ax	20	105	6475	6475	-62.01	-61.60	10	10	100%	90%	Pass
					6430	-61.79	-61.60	10	10	100%	90%	Pass
	802.11ax	160	111	6505	6505	-61.73	-61.60	10	10	100%	90%	Pass
					6580	-61.68	-61.60	10	10	100%	90%	Pass
UNII-7	802.11ax	20	149	6695	6695	-59.42	-59.30	10	10	100%	90%	Pass
					6590	-59.68	-59.30	10	10	100%	90%	Pass
	802.11ax	160	143	6665	6665	-59.38	-59.30	10	9	90%	90%	Pass
					6740	-59.43	-59.30	10	10	100%	90%	Pass
UNII-8	802.11ax	20	209	6995	6995	-59.85	-59.20	10	10	100%	90%	Pass
					6910	-59.23	-59.20	10	10	100%	90%	Pass
	802.11ax	160	207	6985	6985	-59.36	-59.20	10	10	100%	90%	Pass
					7060	-59.89	-59.20	10	9	90%	90%	Pass


## Contention-Based Protocol EUT Channel: CH45 Incumbent Signal Frequency: 6175 MHz

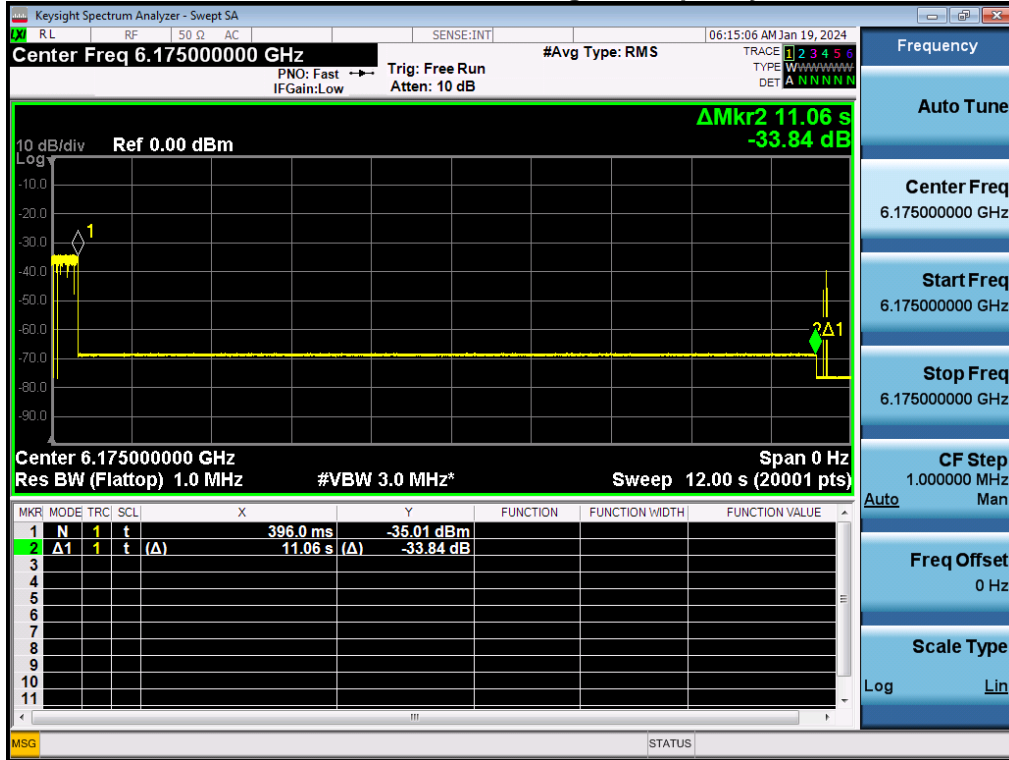


## EUT Channel: CH105 Incumbent Signal Frequency: 6475 MHz

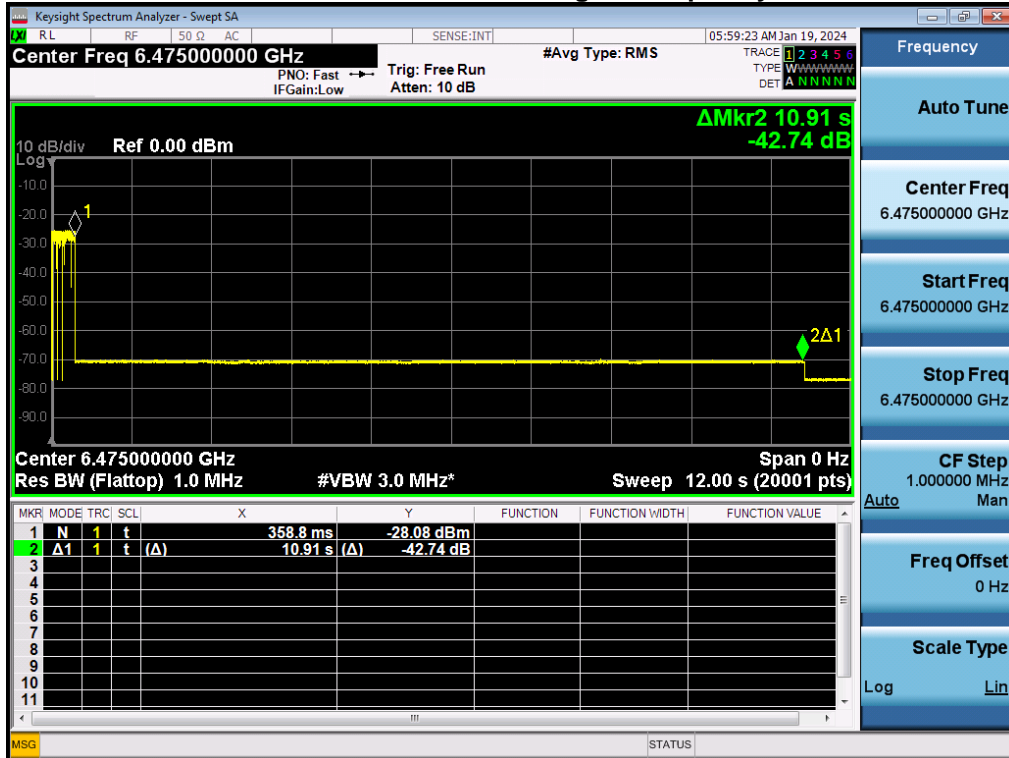


### EUT Channel: CH149 Incumbent Signal Frequency: 6695 MHz

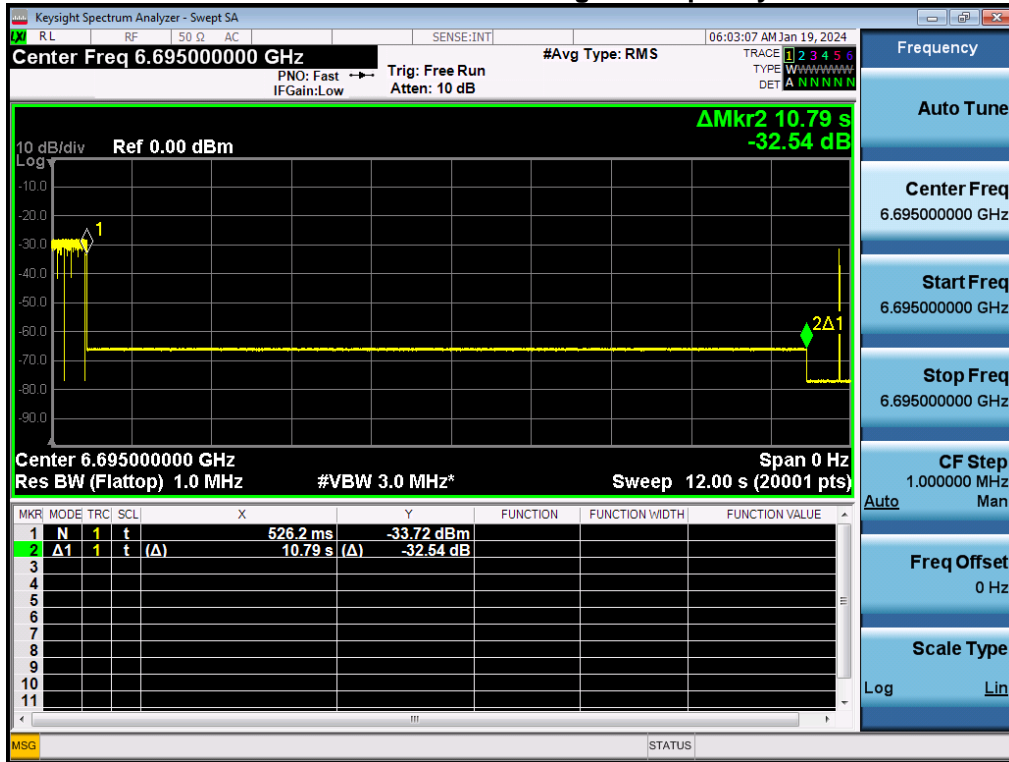


### EUT Channel: CH209 Incumbent Signal Frequency: 6995 MHz

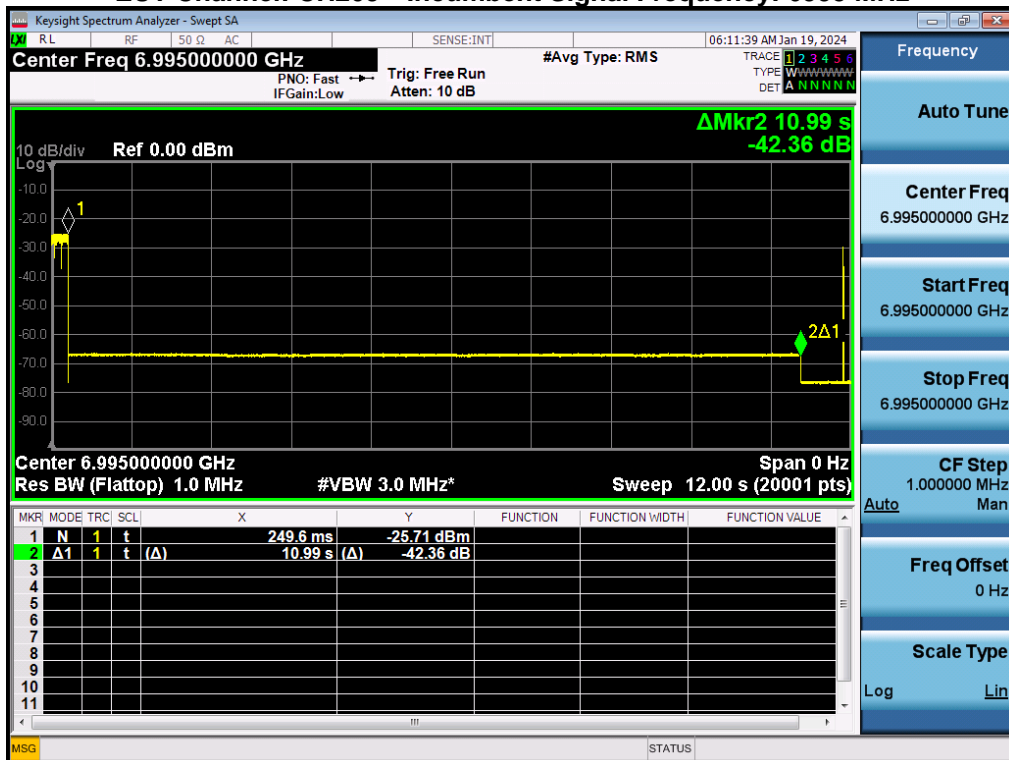


### EUT Channel: CH15 Incumbent Signal Frequency: 5950 MHz

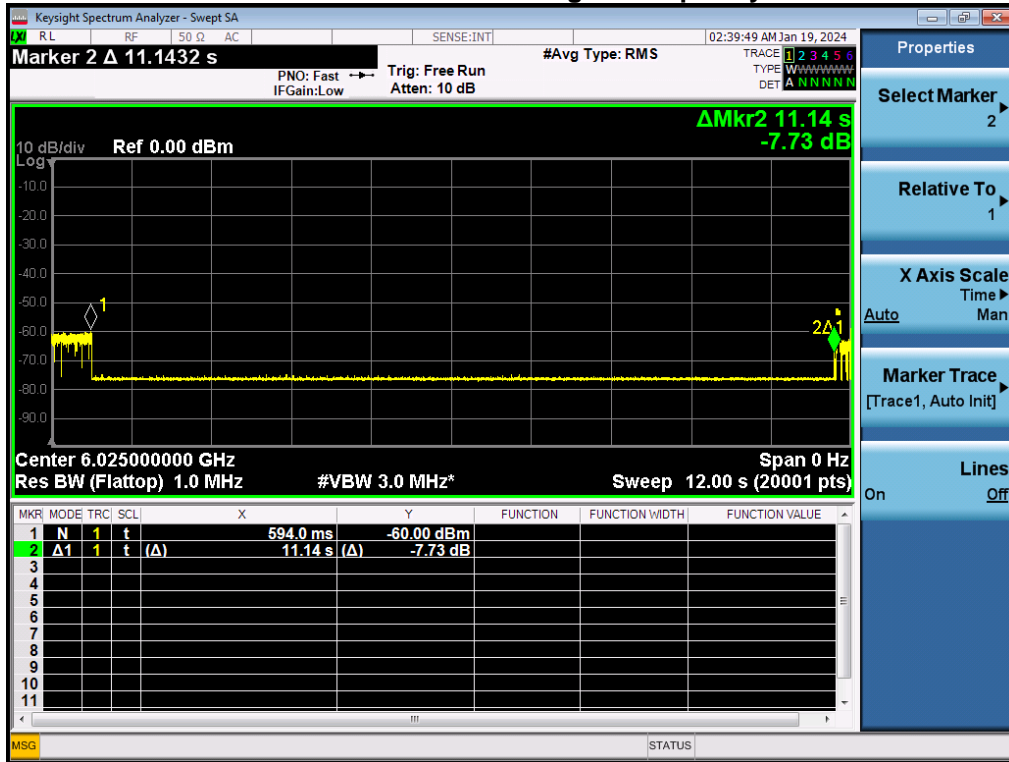


### EUT Channel: CH15 Incumbent Signal Frequency: 6025 MHz

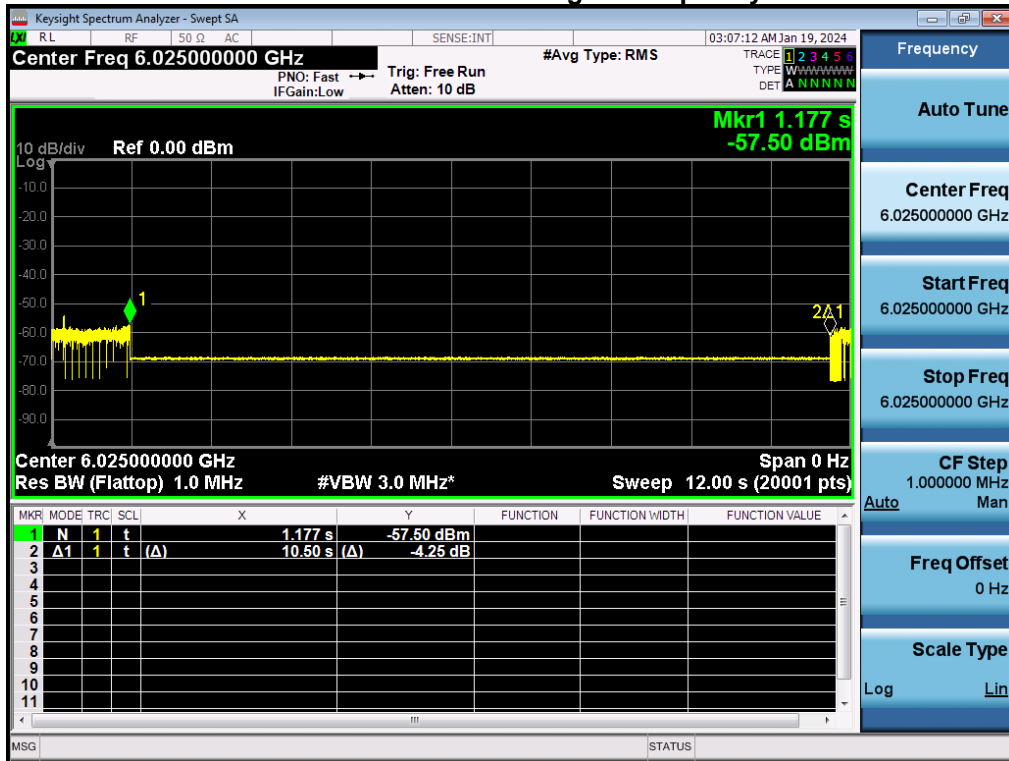

### EUT Channel: CH15 Incumbent Signal Frequency: 6100 MHz

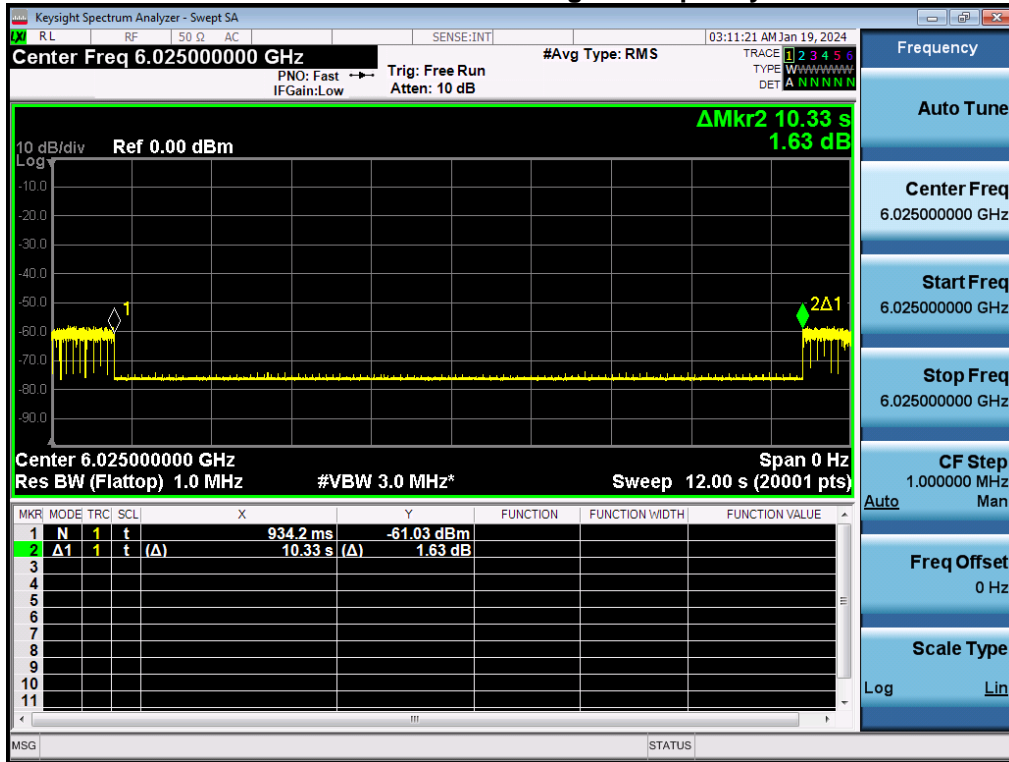


### EUT Channel: CH111 Incumbent Signal Frequency: 6430 MHz

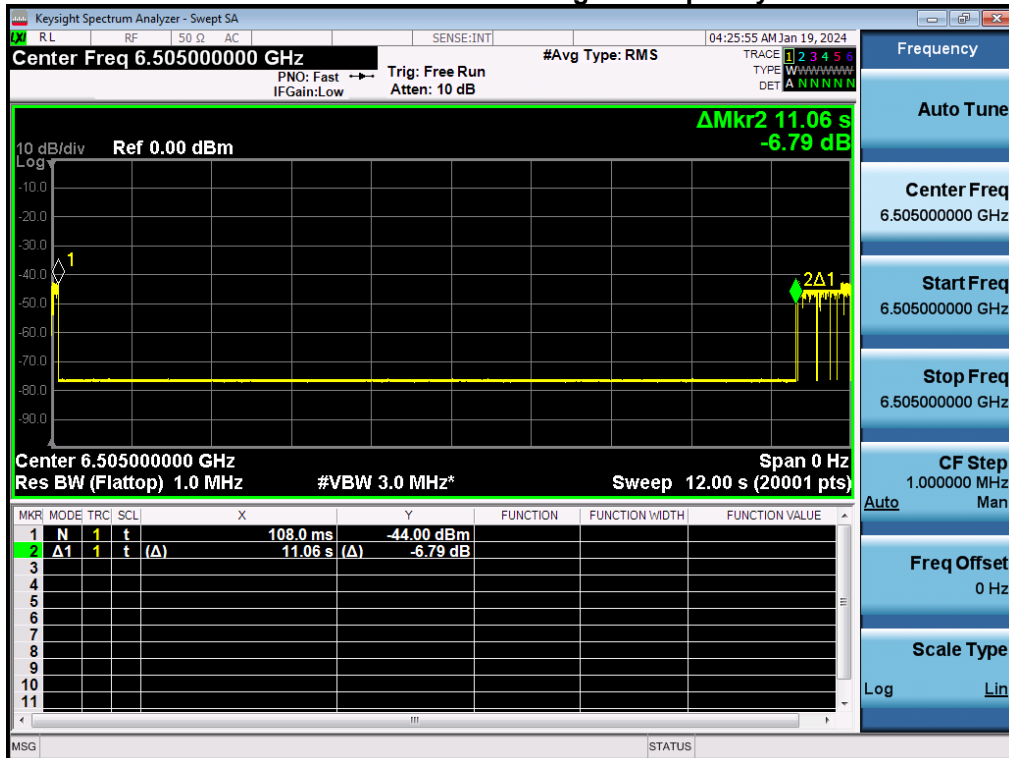





### EUT Channel: CH111 Incumbent Signal Frequency: 6505 MHz

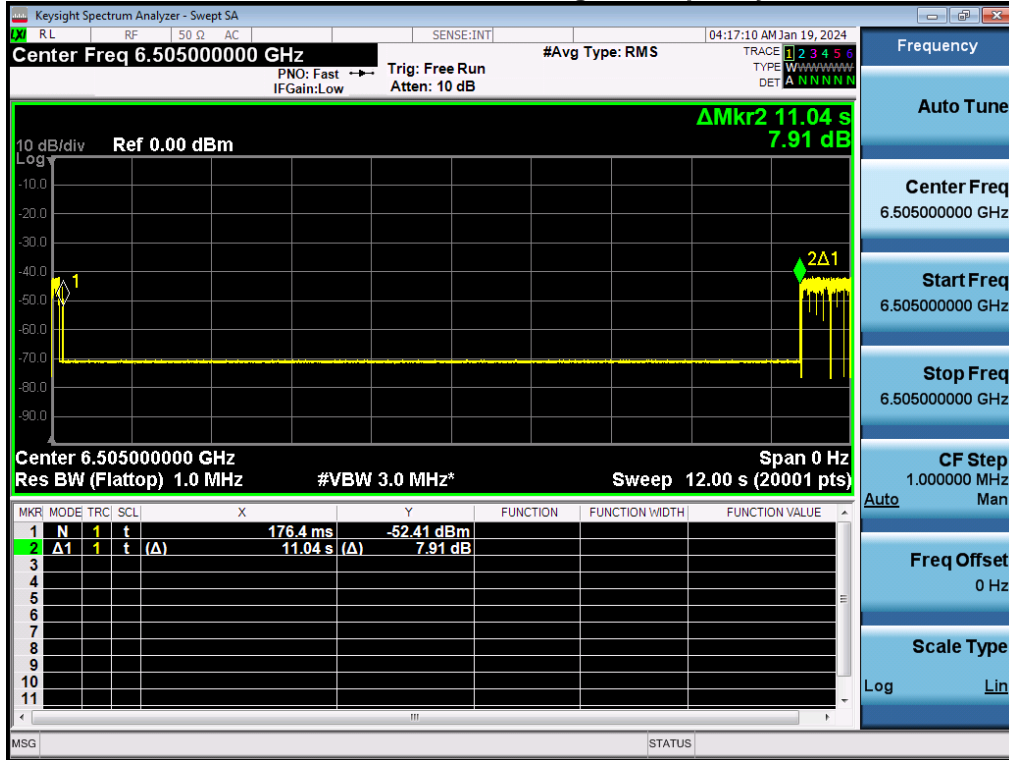


### EUT Channel: CH111 Incumbent Signal Frequency: 6580 MHz

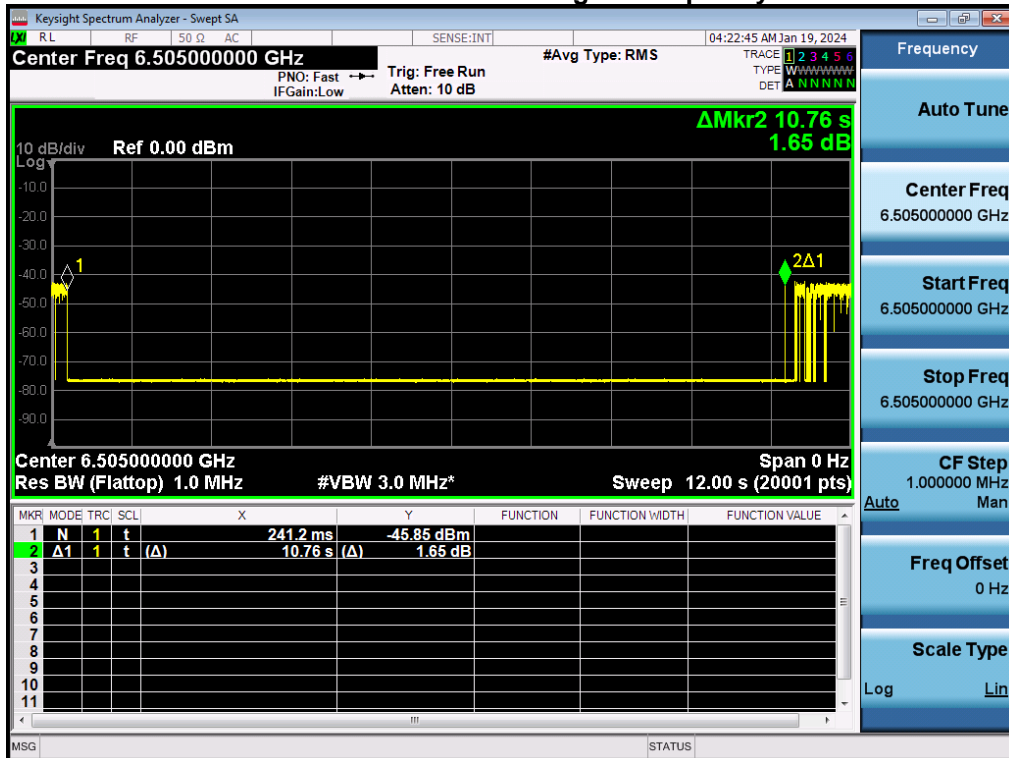


### EUT Channel: CH143 Incumbent Signal Frequency: 6590 MHz

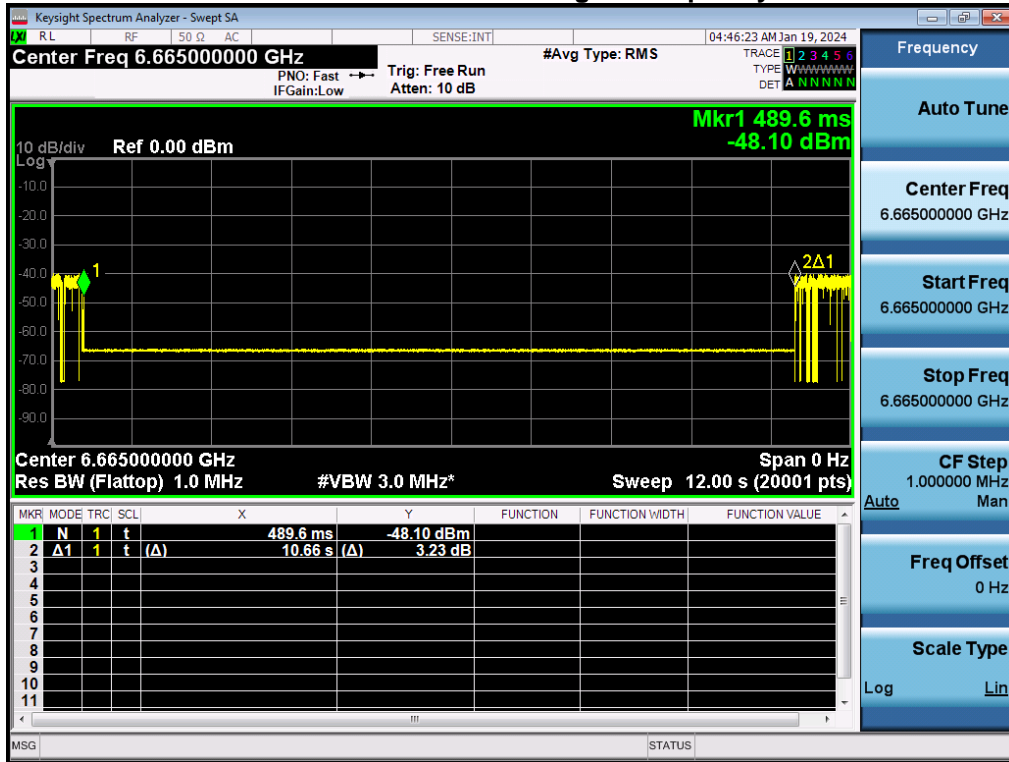


### EUT Channel: CH143 Incumbent Signal Frequency: 6665 MHz

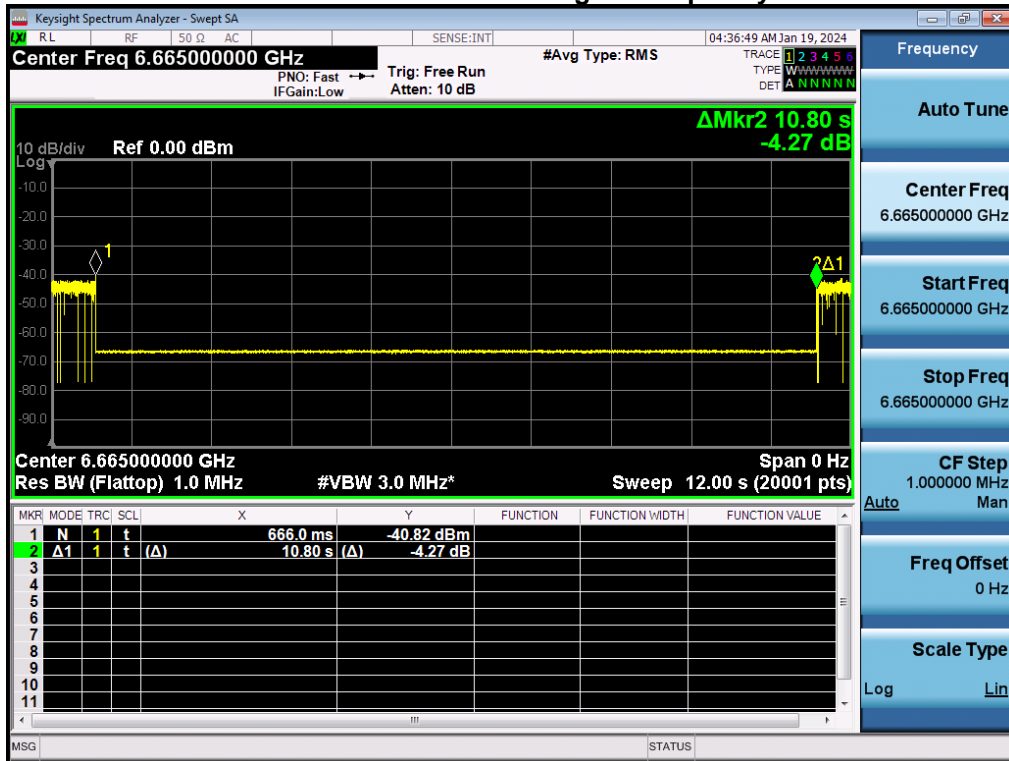


## EUT Channel: CH143 Incumbent Signal Frequency: 6740 MHz

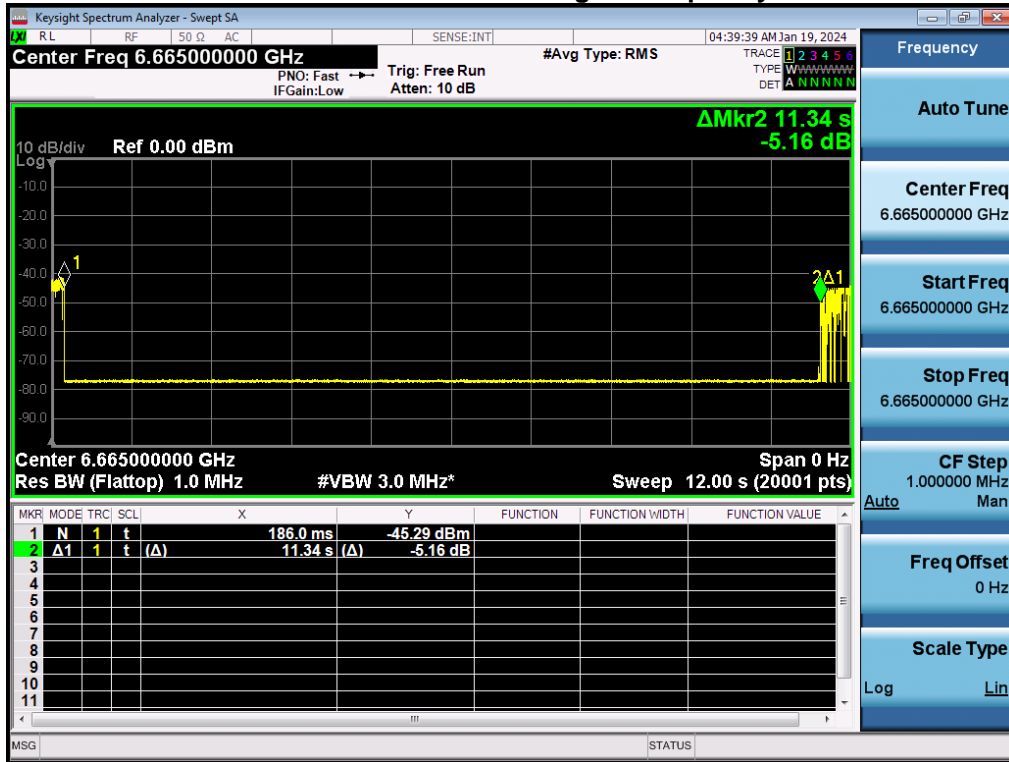


## EUT Channel: CH207 Incumbent Signal Frequency: 6910 MHz

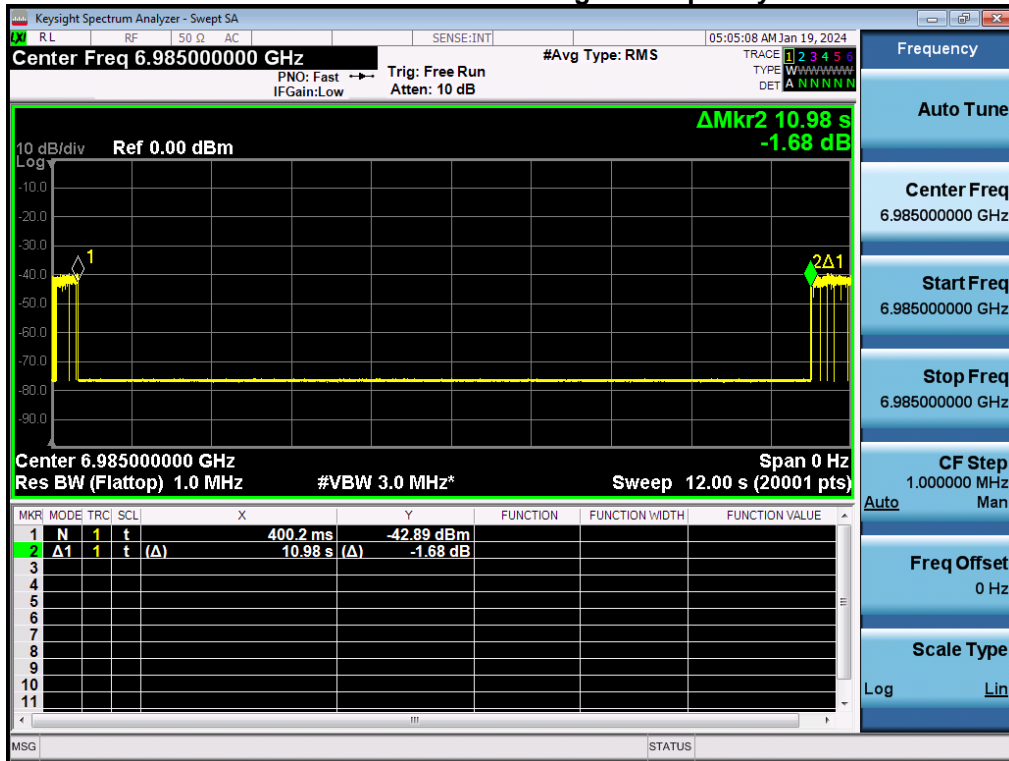

### EUT Channel: CH207 Incumbent Signal Frequency: 6985 MHz

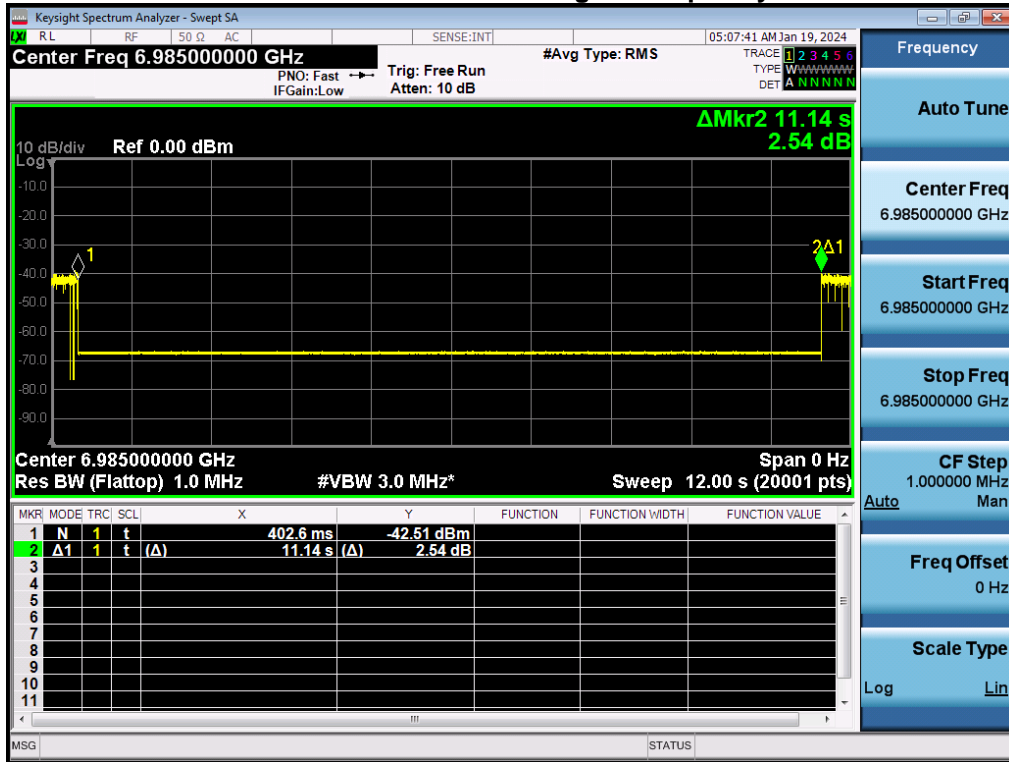

### EUT Channel: CH207 Incumbent Signal Frequency: 7060 MHz

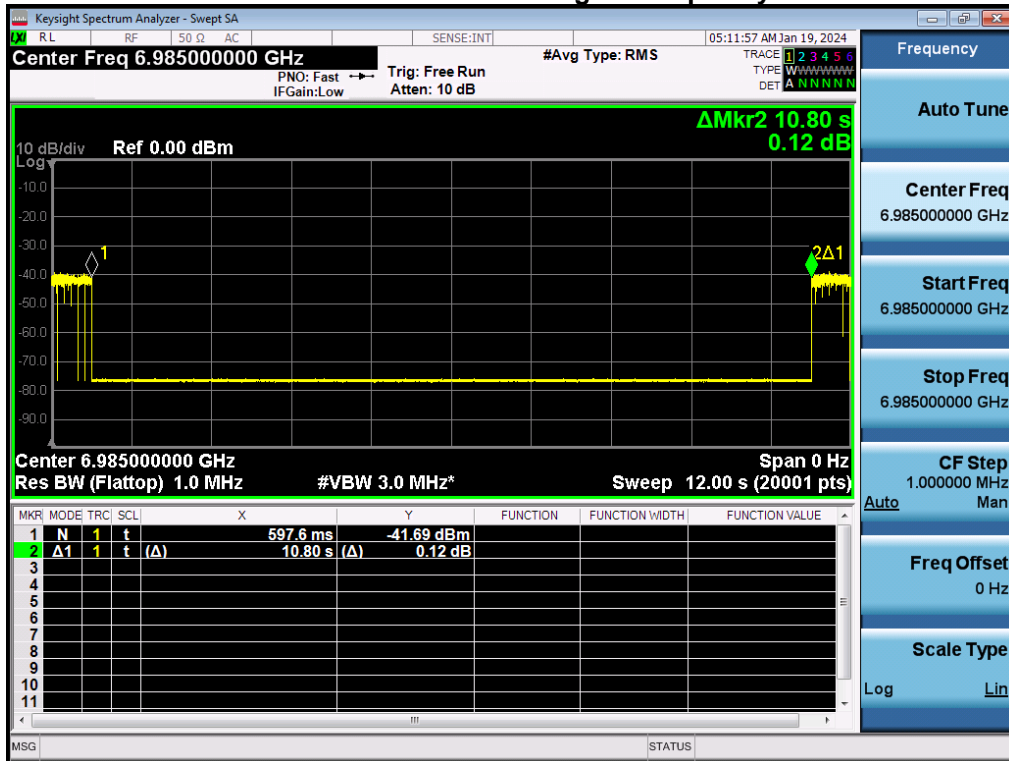

End of Test Report